



Test Report

AIR-CAP3702P-A-K9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102087P

IC: 2461B-102087P

Also covers:

AIR-CAP3702P-D-K9,

AIR-CAP3702P-N-K9,

AIR-CAP3702P-Z-K9,

5150-5250 MHz

Against the following Specifications:

CFR47 Part 15.407

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	5
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES	5
2.5 EQUIPMENT ASSESSED (EUT).....	5
2.6 EUT DESCRIPTION	6
THE FOLLOWING ANTENNAS ARE SUPPORTED BY THIS PRODUCT SERIES.....	7
SECTION 4: SAMPLE DETAILS.....	8
APPENDIX A: EMISSION TEST RESULTS	ERROR! BOOKMARK NOT DEFINED.
TARGET MAXIMUM CHANNEL POWER	ERROR! BOOKMARK NOT DEFINED.
99% AND 26dB BANDWIDTH.....	ERROR! BOOKMARK NOT DEFINED.
PEAK OUTPUT POWER	ERROR! BOOKMARK NOT DEFINED.
POWER SPECTRAL DENSITY	ERROR! BOOKMARK NOT DEFINED.
CONDUCTED SPURIOUS EMISSIONS	ERROR! BOOKMARK NOT DEFINED.
CONDUCTED BANDEDGE	ERROR! BOOKMARK NOT DEFINED.
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	ERROR! BOOKMARK NOT DEFINED.
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	ERROR! BOOKMARK NOT DEFINED.



Section 1: Overview

1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.407 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V-3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



22.2 Date of testing

22-May-2013 to 5-June-2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-SAP3702P-A-K9 Cisco Aironet 802.11ac Dual Band Access Point



2.6 EUT Description

The 3700 Series Cisco Aironet 802.11ac Dual Band Access Points support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps
Non HT/VHT-20, Two Antennas, 6 to 54 Mbps
Non HT/VHT-20, Three Antennas, 6 to 54 Mbps
Non HT/VHT-20, Four Antennas, 6 to 54 Mbps

Non HT/VHT-20 Beam Forming, Two Antennas, 6 to 54 Mbps
Non HT/VHT-20 Beam Forming, Three Antennas, 6 to 54 Mbps
Non HT/VHT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7, m0.1 to m9.1
HT/VHT-20, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-20, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-20, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-20 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-20 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-20 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-20 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-20 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-20 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps
Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps
Non HT/VHT-40 Duplicate, Three Antennas, 6-54 Mbps
Non HT/VHT-40 Duplicate, Four Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7, m0.1 to m9.1
HT/VHT-40, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-40, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-40, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-40 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-40 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-40 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-40 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-40 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-40 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3



Non VHT-80 Duplicate, One Antenna, 6-54 Mbps
Non VHT-80 Duplicate, Two Antennas, 6-54 Mbps
Non VHT-80 Duplicate, Three Antennas, 6-54 Mbps
Non VHT-80 Duplicate, Four Antennas, 6-54 Mbps

VHT-80, One Antenna, M0 to M7, m0.1 to m9.1
VHT-80, Two Antennas, M0 to M15, m0.1 to m9.2
VHT-80, Three Antennas, M0 to M23, m0.1 to m9.3
VHT-80, Four Antennas, M0 to M23, m0.1 to m9.3

VHT-80 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
VHT-80 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
VHT-80 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

VHT-80 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
VHT-80 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
VHT-80 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

The following antennas are supported by this product series.

The data included in this report represent the antennas in **bold** below.

Part Number	Antenna Type	Antenna Gain (dBi)
AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4
AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4
AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4
AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4
AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4
AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6
AIR-ANT2513P4M-N	Dual-resonant cross-pol "directional" antenna (4-pack)	13 / 13
AIR-ANT2534V4C-R	Dual-resonant ceiling mount omni (4-pack)	3 / 4



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-SAP3702P-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All tests in this report were performed as described in FCC KDB 662911 D01



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5180	5240
Non HT-20, 6 to 54 Mbps	13	14
Non HT-20 Beam Forming, 6 to 54 Mbps	12	12
HT-20, M0 to M23, M0.1 to M9.3	14	14
HT-20 STBC, M0 to M7, M0.1 to M9.1	14	14
HT-20 Beam Forming, M0 to M23, M0.1 to M9.3	14	14
	5180/5200	5220/5240
Non HT-40 Duplicate, 6 to 54 Mbps	16	17
HT-40, M0 to M23, M0.1 to M9.3	16	17
HT-40 STBC, M0 to M7, M0.1 to M9.1	16	17
HT-40 Beam Forming, M0 to M23, M0.1 to M9.3	16	17
	5180/5200/5220/5240	
Non HT-80 Duplicate, 6 to 54 Mbps	16	
HT-80, M0 to M23, M0.1 to M9.3	16	
HT-80 STBC, M0 to M7, M0.1 to M9.1	16	
HT-80 Beam Forming, M0 to M23, M0.1 to M9.3	16	



99% and 26dB Bandwidth

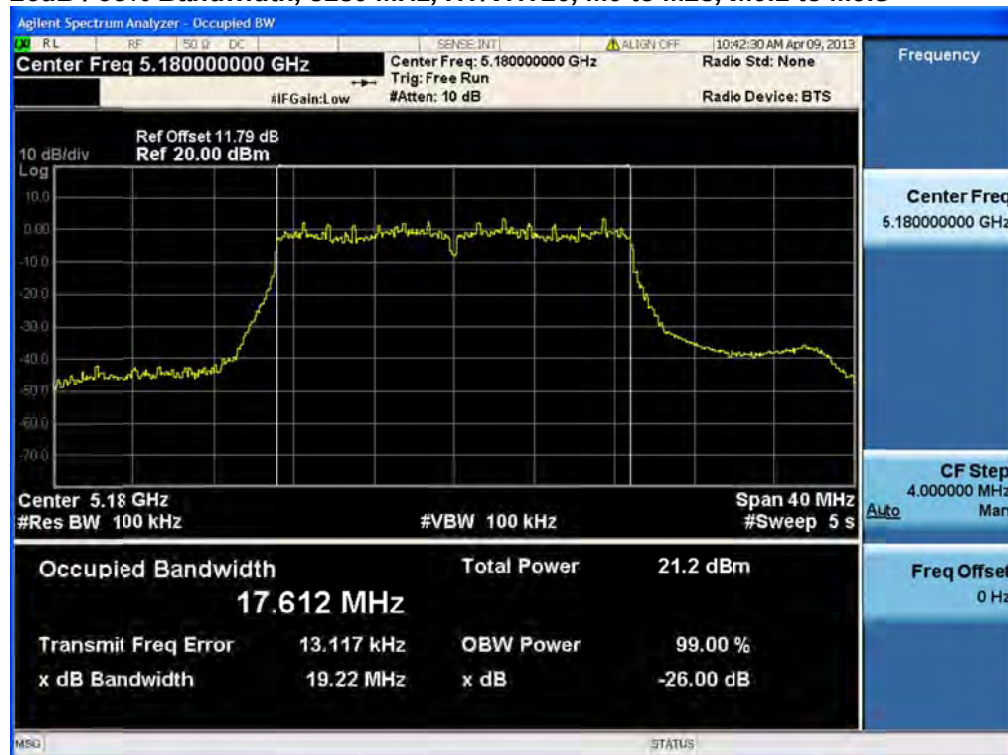
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

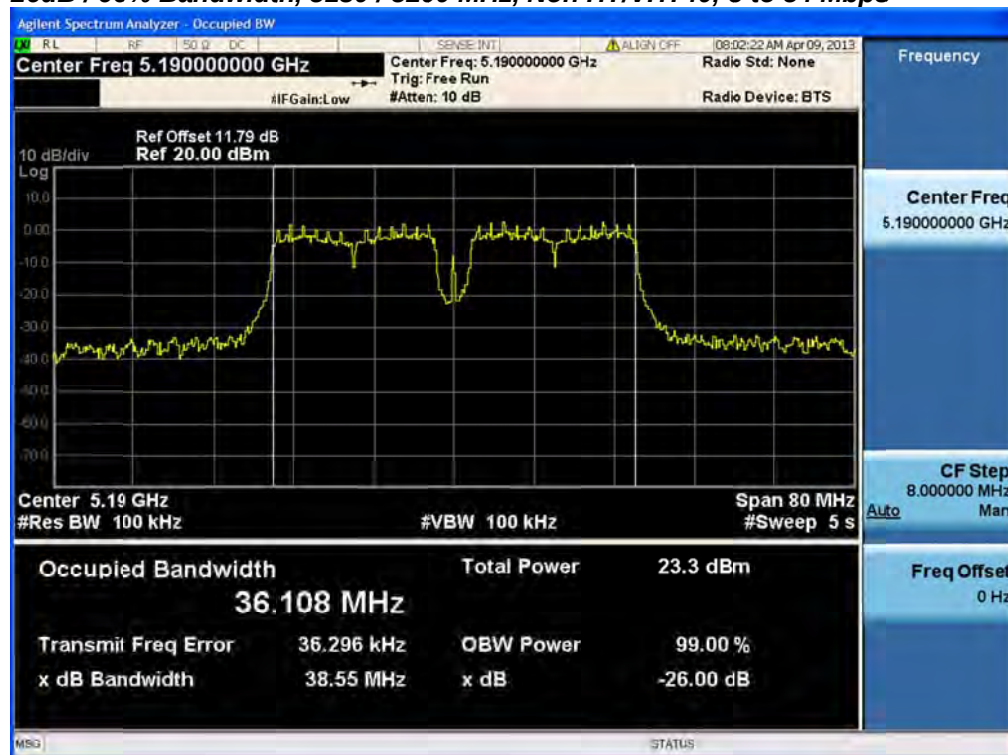
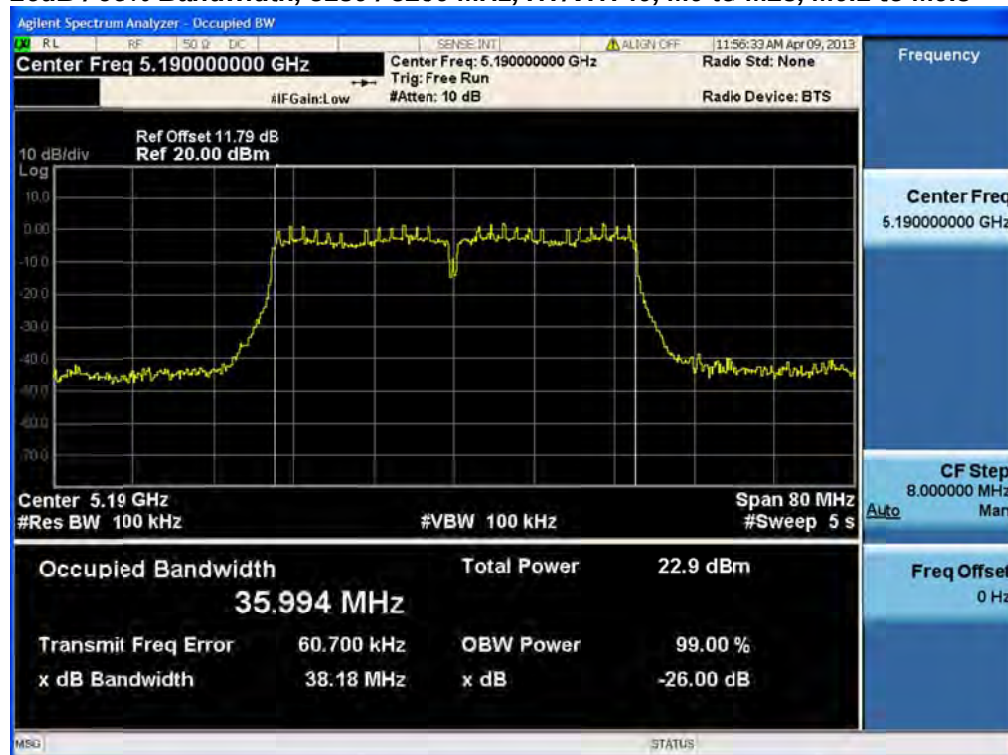
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single

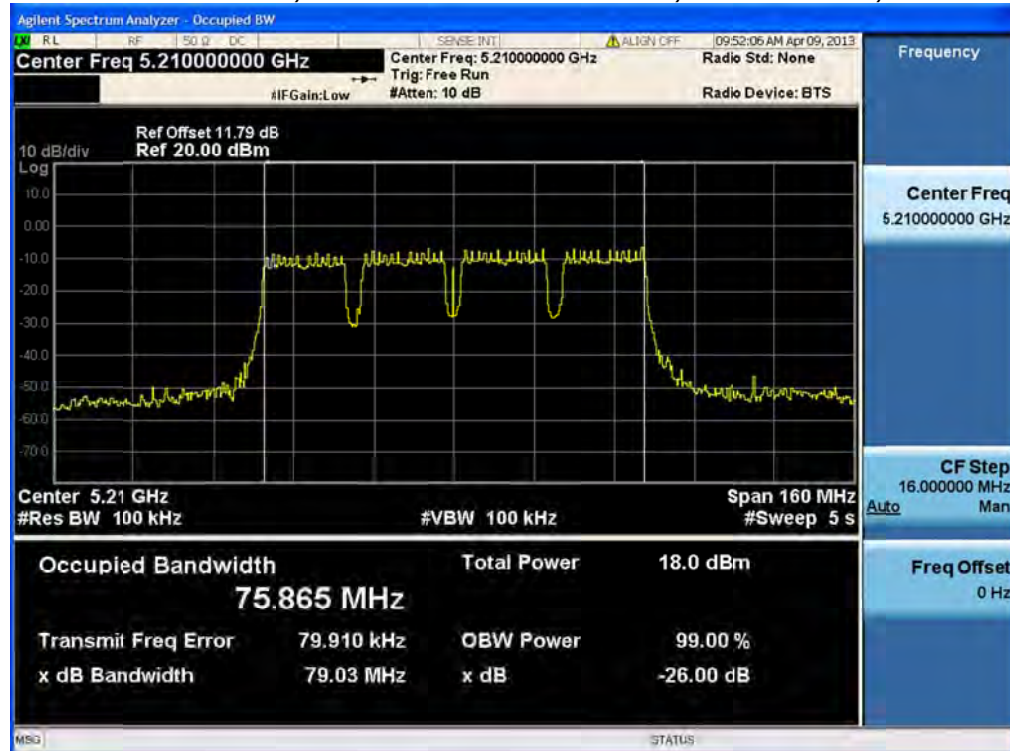
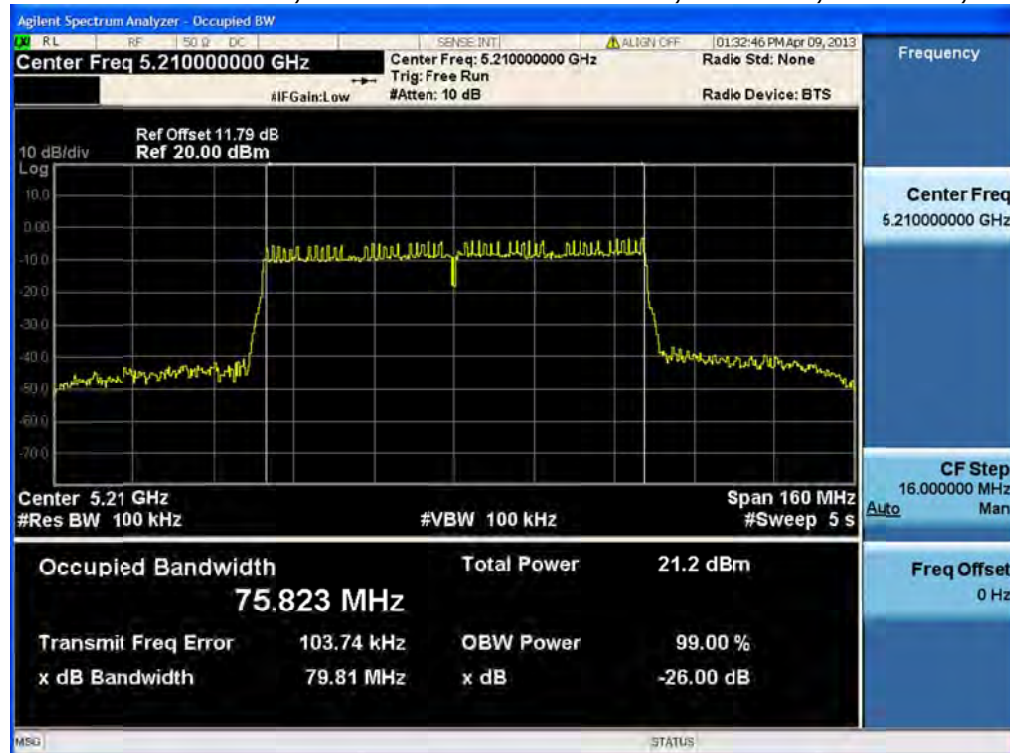
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

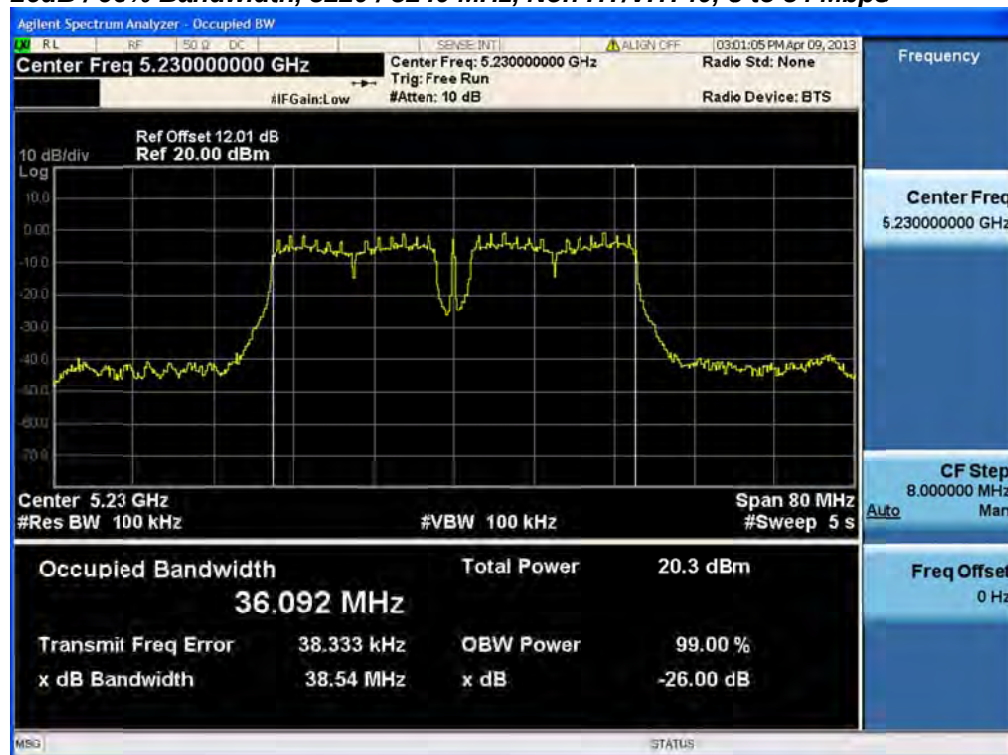
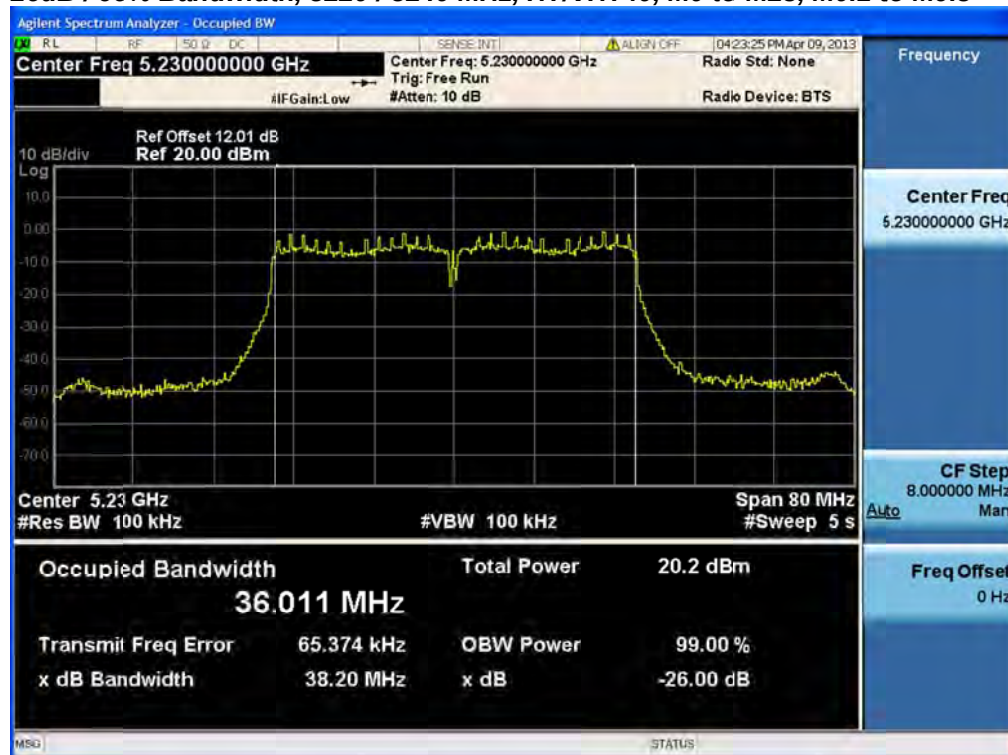


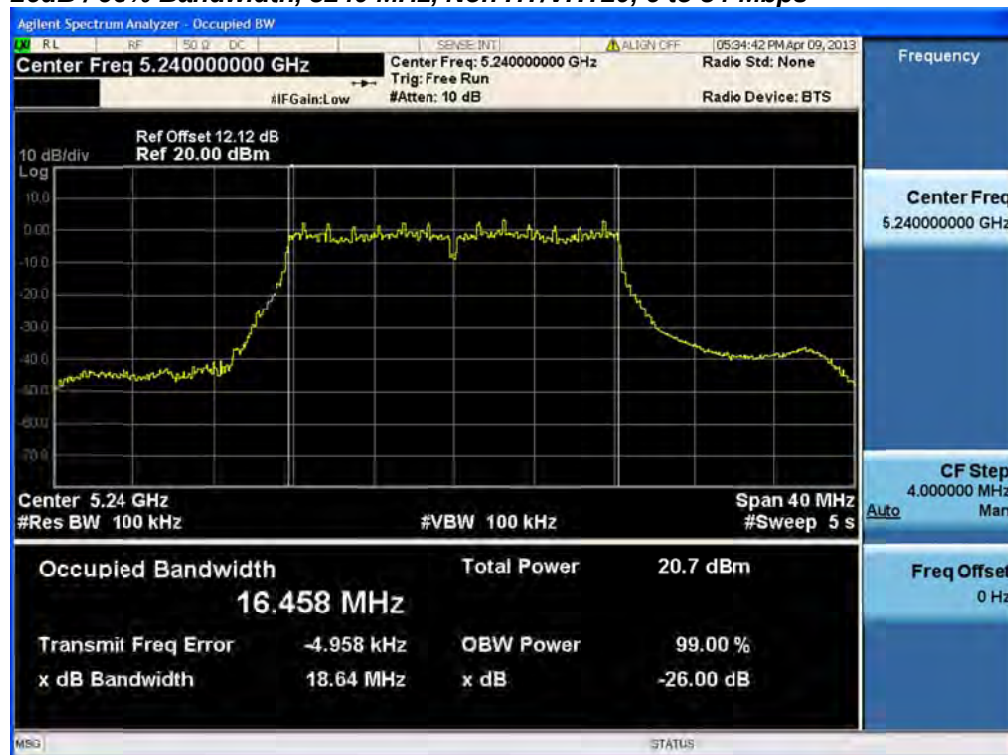
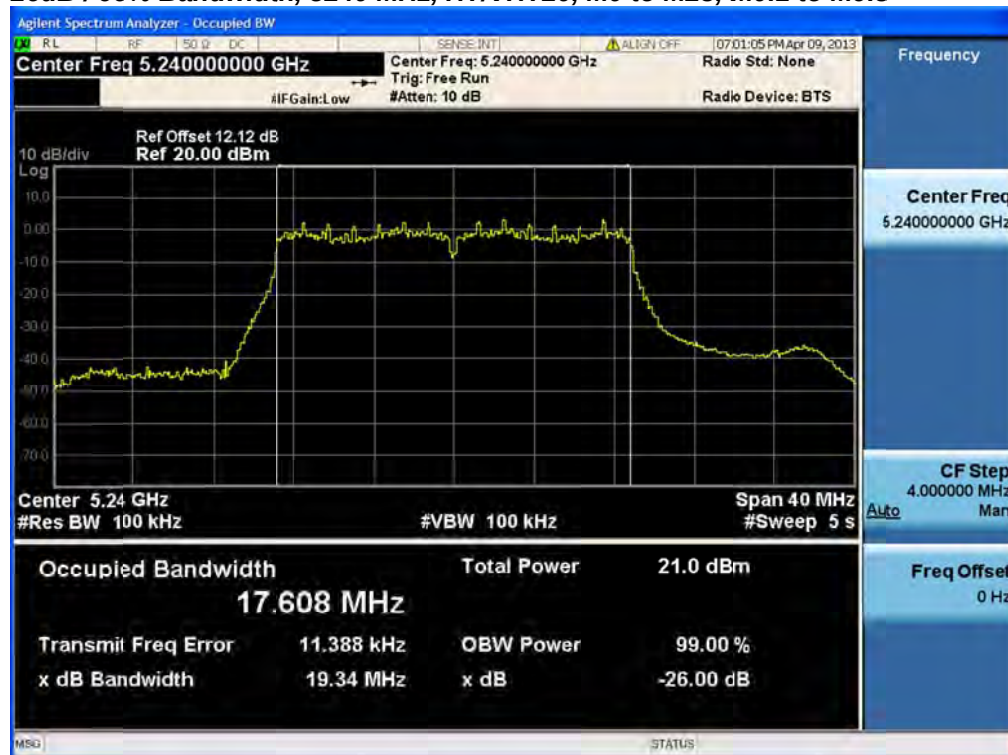
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT/VHT20, 6 to 54 Mbps	6	<u>18.6</u>	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	<u>19.2</u>	17.6
5180/5200	Non HT/VHT40, 6 to 54 Mbps	6	<u>38.4</u>	36.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	<u>38.2</u>	36
5180/5200 5220/5240	Non HT/VHT80, 6 to 54 Mbps	6	<u>79</u>	75.8
	HT/VHT80, M0 to M23, M0.1 to M9.3	m0x1	<u>79.8</u>	75.8
5220/5240	Non HT/VHT40, 6 to 54 Mbps	6	<u>38.5</u>	36.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	<u>38.2</u>	36
5240	Non HT/VHT20, 6 to 54 Mbps	6	<u>18.6</u>	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	<u>19.3</u>	17.6

26dB / 99% Bandwidth, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5180 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3**

26dB / 99% Bandwidth, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5180 / 5200 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3**

26dB / 99% Bandwidth, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**26dB / 99% Bandwidth, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3**

26dB / 99% Bandwidth, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5220 / 5240 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3**

26dB / 99% Bandwidth, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5240 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3**



Peak Output Power

15.407: For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The smallest 26dB bandwidth for all channels is 18.6 MHz. The maximum conducted output power is calculated as $4\text{dBm} + 10 \cdot \log(18.6\text{MHz}) = 16.7\text{dBm}$

The maximum supported antenna gain is 5dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Power Spectral Density

15.407: For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 5dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.



Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=99 % BW from 99% Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power. Perform a Marker Peak Search function, and record this value as the Power Spectral Density.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>13.4</u>				13.4	16.7	3.3
	Non HT/VHT20, 6 to 54 Mbps	2	5	<u>8.7</u>	<u>8.6</u>			11.7	16.7	5.0
	Non HT/VHT20, 6 to 54 Mbps	3	5	<u>4.8</u>	<u>4.5</u>	<u>5.1</u>		9.6	16.7	7.1
	Non HT/VHT20, 6 to 54 Mbps	4	5	<u>2.8</u>	<u>2.5</u>	<u>3.1</u>	<u>3.0</u>	8.9	16.7	7.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>8.7</u>	<u>8.6</u>			11.7	14.7	3.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>4.8</u>	<u>4.5</u>	<u>5.1</u>		9.6	12.9	3.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>2.8</u>	<u>2.5</u>	<u>3.1</u>	<u>3.0</u>	8.9	11.7	2.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>14.4</u>				14.4	16.83	2.4
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	5	<u>8.6</u>	<u>8.6</u>			11.6	16.86	5.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>10.5</u>	<u>10.6</u>			13.6	16.88	3.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	5	<u>5.7</u>	<u>5.7</u>	<u>6.2</u>		10.6	16.88	6.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	5	<u>8.6</u>	<u>8.6</u>	<u>9.0</u>		13.5	16.88	3.4
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>9.5</u>	<u>9.6</u>	<u>10.0</u>		14.5	16.88	2.4
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	5	<u>2.9</u>	<u>2.6</u>	<u>3.2</u>	<u>3.1</u>	9.0	16.86	7.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	5	<u>5.7</u>	<u>5.7</u>	<u>6.2</u>	<u>5.9</u>	11.9	16.86	5.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	<u>7.6</u>	<u>7.7</u>	<u>8.1</u>	<u>7.9</u>	13.8	16.86	3.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>8.6</u>	<u>8.6</u>			11.6	14.86	3.2
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>10.5</u>	<u>10.6</u>			13.6	16.88	3.3
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>5.7</u>	<u>5.7</u>	<u>6.2</u>		10.6	13.08	2.4
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>8.6</u>	<u>8.6</u>	<u>9.0</u>		13.5	16.08	2.6
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>9.5</u>	<u>9.6</u>	<u>10.0</u>		14.5	16.88	2.4
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>2.9</u>	<u>2.6</u>	<u>3.2</u>	<u>3.1</u>	9.0	11.86	2.9
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>5.7</u>	<u>5.7</u>	<u>6.2</u>	<u>5.9</u>	11.9	14.86	3.0
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>7.6</u>	<u>7.7</u>	<u>8.1</u>	<u>7.9</u>	13.8	16.66	2.8
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>10.5</u>	<u>10.6</u>			13.6	16.88	3.3
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>8.6</u>	<u>8.6</u>	<u>9.0</u>		13.5	16.88	3.4
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>5.7</u>	<u>5.7</u>	<u>6.2</u>	<u>5.9</u>	11.9	16.86	5.0



5180/5200	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>16.3</u>				16.3	17	0.7
	Non HT/VHT40, 6 to 54 Mbps	2	5	<u>11.8</u>	<u>12.2</u>			15.0	17	2.0
	Non HT/VHT40, 6 to 54 Mbps	3	5	<u>8.2</u>	<u>8.1</u>	<u>8.5</u>		13.0	17	4.0
	Non HT/VHT40, 6 to 54 Mbps	4	5	<u>5.1</u>	<u>4.8</u>	<u>5.6</u>	<u>5.3</u>	11.2	17	5.8
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>15.8</u>				15.8	17	1.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	5	<u>11.7</u>	<u>12.0</u>			14.9	17	2.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>12.7</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	5	<u>8.0</u>	<u>8.0</u>	<u>8.3</u>		12.9	17	4.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	5	<u>10.9</u>	<u>10.9</u>	<u>11.3</u>		15.8	17	1.2
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>10.9</u>	<u>10.9</u>	<u>11.3</u>		15.8	17	1.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	5	<u>6.0</u>	<u>5.9</u>	<u>6.5</u>	<u>6.4</u>	12.2	17	4.8
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	5	<u>8.9</u>	<u>8.9</u>	<u>9.2</u>	<u>8.9</u>	15.0	17	2.0
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>9.9</u>	<u>9.9</u>	<u>10.3</u>	<u>9.9</u>	16.0	17	1.0
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>10.9</u>	<u>10.9</u>			13.9	15	1.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>12.7</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>7.0</u>	<u>7.0</u>	<u>7.7</u>		12.0	13.2	1.2
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>9.9</u>	<u>9.9</u>	<u>10.3</u>		14.8	16.2	1.4
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>10.9</u>	<u>10.9</u>	<u>11.3</u>		15.8	17	1.2
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>4.9</u>	<u>4.8</u>	<u>5.5</u>	<u>5.3</u>	11.2	12	0.8
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>8.0</u>	<u>8.0</u>	<u>8.3</u>	<u>8.2</u>	14.1	15	0.9
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>9.9</u>	<u>9.9</u>	<u>10.3</u>	<u>9.9</u>	16.0	16.8	0.8
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>12.7</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>10.9</u>	<u>10.9</u>	<u>11.3</u>		15.8	17	1.2
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>8.9</u>	<u>8.9</u>	<u>9.2</u>	<u>8.9</u>	15.0	17	2.0
5180/5200/5220/5240	Non HT/VHT80, 6 to 54 Mbps	1	5	<u>16.5</u>				16.5	17	0.5
	Non HT/VHT80, 6 to 54 Mbps	2	5	<u>13.1</u>	<u>13.4</u>			16.3	17	0.7
	Non HT/VHT80, 6 to 54 Mbps	3	5	<u>11.2</u>	<u>11.4</u>	<u>11.7</u>		16.2	17	0.8
	Non HT/VHT80, 6 to 54 Mbps	4	5	<u>9.1</u>	<u>9.3</u>	<u>9.7</u>	<u>9.5</u>	15.4	17	1.6
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	5	<u>15.6</u>				15.6	17	1.4
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	5	<u>12.6</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	5	<u>12.6</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	5	<u>10.9</u>	<u>11.1</u>	<u>11.4</u>		15.9	17	1.1
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	5	<u>10.9</u>	<u>11.1</u>	<u>11.4</u>		15.9	17	1.1
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	5	<u>10.9</u>	<u>11.1</u>	<u>11.4</u>		15.9	17	1.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	5	<u>9.0</u>	<u>9.0</u>	<u>9.4</u>	<u>9.2</u>	15.2	17	1.8
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	5	<u>9.9</u>	<u>10.0</u>	<u>10.4</u>	<u>10.1</u>	16.1	17	0.9
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	5	<u>9.9</u>	<u>10.0</u>	<u>10.4</u>	<u>10.1</u>	16.1	17	0.9
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>10.9</u>	<u>11.1</u>			14.0	15	1.0
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>12.6</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>7.0</u>	<u>7.0</u>	<u>7.4</u>		11.9	13.2	1.3



	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>9.9</u>	<u>10.0</u>	<u>10.4</u>		14.9	16.2	1.3
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>10.9</u>	<u>11.1</u>	<u>11.4</u>		15.9	17	1.1
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>5.0</u>	<u>5.1</u>	<u>5.4</u>	<u>5.4</u>	11.2	12	0.8
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>8.0</u>	<u>8.1</u>	<u>8.4</u>	<u>8.4</u>	14.2	15	0.8
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>9.9</u>	<u>10.0</u>	<u>10.4</u>	<u>10.1</u>	16.1	16.8	0.7
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>12.6</u>	<u>13.1</u>			15.9	17	1.1
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>10.9</u>	<u>11.1</u>	<u>11.4</u>		15.9	17	1.1
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>9.9</u>	<u>10.0</u>	<u>10.4</u>	<u>10.1</u>	16.1	17	0.9
5220/5240	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>16.8</u>				16.8	17	0.2
	Non HT/VHT40, 6 to 54 Mbps	2	5	<u>11.4</u>	<u>11.9</u>			14.7	17	2.3
	Non HT/VHT40, 6 to 54 Mbps	3	5	<u>7.7</u>	<u>8.0</u>	<u>7.9</u>		12.6	17	4.4
	Non HT/VHT40, 6 to 54 Mbps	4	5	<u>5.4</u>	<u>5.6</u>	<u>6.3</u>	<u>5.8</u>	11.8	17	5.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>16.5</u>				16.5	17	0.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	5	<u>11.3</u>	<u>11.9</u>			14.6	17	2.4
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>13.3</u>	<u>14.0</u>			16.7	17	0.3
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	5	<u>8.5</u>	<u>9.0</u>	<u>8.9</u>		13.6	17	3.4
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	5	<u>11.3</u>	<u>11.9</u>	<u>11.8</u>		16.4	17	0.6
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>11.3</u>	<u>11.9</u>	<u>11.8</u>		16.4	17	0.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	5	<u>5.5</u>	<u>5.8</u>	<u>6.2</u>	<u>6.0</u>	11.9	17	5.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	5	<u>8.5</u>	<u>9.0</u>	<u>8.9</u>	<u>8.8</u>	14.8	17	2.2
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>10.4</u>	<u>11.0</u>	<u>10.9</u>	<u>10.6</u>	16.8	17	0.2
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>11.3</u>	<u>11.9</u>			14.6	15	0.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>13.3</u>	<u>14.0</u>			16.7	17	0.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>7.8</u>	<u>8.0</u>	<u>8.2</u>		12.8	13.2	0.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>10.4</u>	<u>11.0</u>	<u>10.9</u>		15.5	16.2	0.7
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>11.3</u>	<u>11.9</u>	<u>11.8</u>		16.4	17	0.6
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>5.5</u>	<u>5.8</u>	<u>6.2</u>	<u>6.0</u>	11.9	12	0.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>8.5</u>	<u>9.0</u>	<u>8.9</u>	<u>8.8</u>	14.8	15	0.2
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>10.4</u>	<u>11.0</u>	<u>10.9</u>	<u>10.6</u>	16.8	16.8	0.0
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>13.3</u>	<u>14.0</u>			16.7	17	0.3
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>11.3</u>	<u>11.9</u>	<u>11.8</u>		16.4	17	0.6
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>8.5</u>	<u>9.0</u>	<u>8.9</u>	<u>8.8</u>	14.8	17	2.2



5240	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>14.0</u>				14.0	16.7	2.7
	Non HT/VHT20, 6 to 54 Mbps	2	5	<u>8.6</u>	<u>9.1</u>			11.9	16.7	4.8
	Non HT/VHT20, 6 to 54 Mbps	3	5	<u>4.5</u>	<u>5.0</u>	<u>5.1</u>		9.6	16.72	7.1
	Non HT/VHT20, 6 to 54 Mbps	4	5	<u>2.6</u>	<u>3.1</u>	<u>3.1</u>	<u>3.0</u>	9.0	16.7	7.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>8.6</u>	<u>9.1</u>			11.9	14.7	2.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>4.5</u>	<u>5.0</u>	<u>5.1</u>		9.6	12.92	3.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>2.6</u>	<u>3.1</u>	<u>3.1</u>	<u>3.0</u>	9.0	11.7	2.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>14.0</u>				14.0	16.86	2.9
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	5	<u>8.5</u>	<u>8.9</u>			11.7	16.88	5.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>10.2</u>	<u>10.8</u>			13.5	16.83	3.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	5	<u>5.4</u>	<u>5.9</u>	<u>6.0</u>		10.5	16.88	6.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	5	<u>8.5</u>	<u>8.9</u>	<u>8.7</u>		13.5	16.88	3.4
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>9.3</u>	<u>9.8</u>	<u>9.8</u>		14.4	16.88	2.5
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	5	<u>2.4</u>	<u>2.8</u>	<u>3.0</u>	<u>2.9</u>	8.8	16.88	8.1
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	5	<u>5.4</u>	<u>5.9</u>	<u>6.0</u>	<u>5.9</u>	11.8	16.88	5.1
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	<u>7.5</u>	<u>8.0</u>	<u>8.0</u>	<u>7.7</u>	13.8	16.88	3.1
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>8.5</u>	<u>8.9</u>			11.7	14.88	3.2
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>10.2</u>	<u>10.8</u>			13.5	16.83	3.3
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>5.4</u>	<u>5.9</u>	<u>6.0</u>		10.5	13.08	2.5
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>8.5</u>	<u>8.9</u>	<u>8.7</u>		13.5	16.08	2.6
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>9.3</u>	<u>9.8</u>	<u>9.8</u>		14.4	16.88	2.5
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>2.4</u>	<u>2.8</u>	<u>3.0</u>	<u>2.9</u>	8.8	11.88	3.1
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>5.4</u>	<u>5.9</u>	<u>6.0</u>	<u>5.9</u>	11.8	14.88	3.1
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>7.5</u>	<u>8.0</u>	<u>8.0</u>	<u>7.7</u>	13.8	16.68	2.9
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>10.2</u>	<u>10.8</u>			13.5	16.83	3.3
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>8.5</u>	<u>8.9</u>	<u>8.7</u>		13.5	16.88	3.4
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>5.4</u>	<u>5.9</u>	<u>6.0</u>	<u>5.9</u>	11.8	16.88	5.1



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>3.0</u>				3.0	4.0	1.0
	Non HT/VHT20, 6 to 54 Mbps	2	8	<u>-1.7</u>	<u>-1.8</u>			1.3	2.0	0.7
	Non HT/VHT20, 6 to 54 Mbps	3	10	<u>-5.5</u>	<u>-5.6</u>	<u>-5.1</u>		-0.6	0.2	0.9
	Non HT/VHT20, 6 to 54 Mbps	4	11	<u>-7.5</u>	<u>-7.9</u>	<u>-7.4</u>	<u>-7.3</u>	-1.5	-1.0	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>-1.7</u>	<u>-1.8</u>			1.3	2.0	0.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>-5.5</u>	<u>-5.6</u>	<u>-5.1</u>		-0.6	0.2	0.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>-7.5</u>	<u>-7.9</u>	<u>-7.4</u>	<u>-7.3</u>	-1.5	-1.0	0.5
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>4.0</u>				4.0	4.0	0.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	8	<u>-2.2</u>	<u>-1.8</u>			1.0	2.0	1.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>-0.2</u>	<u>-0.1</u>			2.9	4.0	1.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	10	<u>-4.9</u>	<u>-4.8</u>	<u>-4.4</u>		0.1	0.2	0.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	7	<u>-2.2</u>	<u>-1.8</u>	<u>-1.6</u>		2.9	3.2	0.3
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>-1.0</u>	<u>-1.0</u>	<u>-0.6</u>		3.9	4.0	0.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	11	<u>-7.9</u>	<u>-8.0</u>	<u>-7.7</u>	<u>-7.7</u>	-1.8	-1.0	0.8
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	8	<u>-4.9</u>	<u>-4.8</u>	<u>-4.4</u>	<u>-4.8</u>	1.3	2.0	0.7
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	6	<u>-3.1</u>	<u>-3.0</u>	<u>-2.7</u>	<u>-2.6</u>	3.2	3.8	0.6
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-2.2</u>	<u>-1.8</u>			1.0	2.0	1.0
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-0.2</u>	<u>-0.1</u>			2.9	4.0	1.1
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-4.9</u>	<u>-4.8</u>	<u>-4.4</u>		0.1	0.2	0.2
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-2.2</u>	<u>-1.8</u>	<u>-1.6</u>		2.9	3.2	0.3
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-1.0</u>	<u>-1.0</u>	<u>-0.6</u>		3.9	4.0	0.1
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-7.9</u>	<u>-8.0</u>	<u>-7.7</u>	<u>-7.7</u>	-1.8	-1.0	0.8
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-4.9</u>	<u>-4.8</u>	<u>-4.4</u>	<u>-4.8</u>	1.3	2.0	0.7
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-3.1</u>	<u>-3.0</u>	<u>-2.7</u>	<u>-2.6</u>	3.2	3.8	0.6
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-0.2</u>	<u>-0.1</u>			2.9	4.0	1.1
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	7	<u>-2.2</u>	<u>-1.8</u>	<u>-1.6</u>		2.9	3.2	0.3
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	8	<u>-4.9</u>	<u>-4.8</u>	<u>-4.4</u>	<u>-4.8</u>	1.3	2.0	0.7



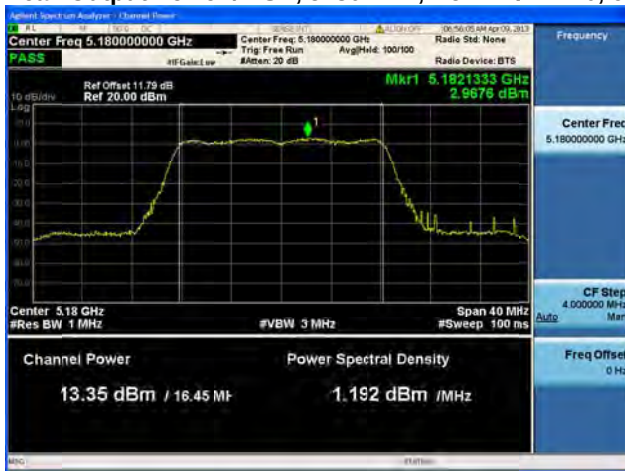
5180/5200	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>3.0</u>				3.0	4.0	1.0
	Non HT/VHT40, 6 to 54 Mbps	2	8	<u>-1.4</u>	<u>-1.3</u>			1.7	2.0	0.3
	Non HT/VHT40, 6 to 54 Mbps	3	10	<u>-5.1</u>	<u>-4.8</u>	<u>-4.6</u>		-0.1	0.2	0.3
	Non HT/VHT40, 6 to 54 Mbps	4	11	<u>-8.1</u>	<u>-8.6</u>	<u>-6.9</u>	<u>-7.3</u>	-1.7	-1.0	0.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>2.4</u>				2.4	4.0	1.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	8	<u>-1.8</u>	<u>-1.3</u>			1.5	2.0	0.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>-0.6</u>	<u>-0.3</u>			2.6	4.0	1.4
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	10	<u>-5.3</u>	<u>-5.8</u>	<u>-5.5</u>		-0.8	0.2	1.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	7	<u>-2.4</u>	<u>-2.2</u>	<u>-2.3</u>		2.5	3.2	0.8
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>-2.4</u>	<u>-2.2</u>	<u>-2.3</u>		2.5	4.0	1.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	11	<u>-7.5</u>	<u>-7.7</u>	<u>-7.1</u>	<u>-7.1</u>	-1.3	-1.0	0.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	8	<u>-4.5</u>	<u>-4.5</u>	<u>-4.4</u>	<u>-4.4</u>	1.6	2.0	0.4
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	6	<u>-3.6</u>	<u>-3.8</u>	<u>-3.3</u>	<u>-3.5</u>	2.5	3.8	1.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-2.4</u>	<u>-2.2</u>			0.7	2.0	1.3
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-0.6</u>	<u>-0.3</u>			2.6	4.0	1.4
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-6.4</u>	<u>-6.6</u>	<u>-6.1</u>		-1.6	0.2	1.8
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-3.6</u>	<u>-3.8</u>	<u>-3.3</u>		1.2	3.2	2.0
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-2.4</u>	<u>-2.2</u>	<u>-2.3</u>		2.5	4.0	1.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-8.5</u>	<u>-8.3</u>	<u>-8.2</u>	<u>-8.1</u>	-2.3	-1.0	1.2
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-5.3</u>	<u>-5.8</u>	<u>-5.5</u>	<u>-5.4</u>	0.5	2.0	1.5
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-3.6</u>	<u>-3.8</u>	<u>-3.3</u>	<u>-3.5</u>	2.5	3.8	1.3
5180/5200/5220/5240	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-0.6</u>	<u>-0.3</u>			2.6	4.0	1.4
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	7	<u>-2.4</u>	<u>-2.2</u>	<u>-2.3</u>		2.5	3.2	0.8
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	8	<u>-4.5</u>	<u>-4.5</u>	<u>-4.4</u>	<u>-4.4</u>	1.6	2.0	0.4
	Non HT/VHT80, 6 to 54 Mbps	1	5	<u>0.2</u>				0.2	4.0	3.8
	Non HT/VHT80, 6 to 54 Mbps	2	8	<u>-3.4</u>	<u>-2.6</u>			0.0	2.0	2.0
	Non HT/VHT80, 6 to 54 Mbps	3	10	<u>-5.3</u>	<u>-4.8</u>	<u>-5.0</u>		-0.3	0.2	0.5
	Non HT/VHT80, 6 to 54 Mbps	4	11	<u>-7.5</u>	<u>-6.9</u>	<u>-7.1</u>	<u>-7.1</u>	-1.1	-1.0	0.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	5	<u>-1.6</u>				-1.6	4.0	5.6
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	8	<u>-4.5</u>	<u>-3.2</u>			-0.8	2.0	2.8
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	5	<u>-4.5</u>	<u>-3.2</u>			-0.8	4.0	4.8
5180/5200/5220/5240	HT/VHT80, M0 to M7, M0.1 to M9.1	3	10	<u>-6.2</u>	<u>-5.7</u>	<u>-5.8</u>		-1.1	0.2	1.4
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	7	<u>-6.2</u>	<u>-5.7</u>	<u>-5.8</u>		-1.1	3.2	4.4
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	5	<u>-6.2</u>	<u>-5.7</u>	<u>-5.8</u>		-1.1	4.0	5.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	11	<u>-8.1</u>	<u>-7.9</u>	<u>-7.4</u>	<u>-7.9</u>	-1.8	-1.0	0.8

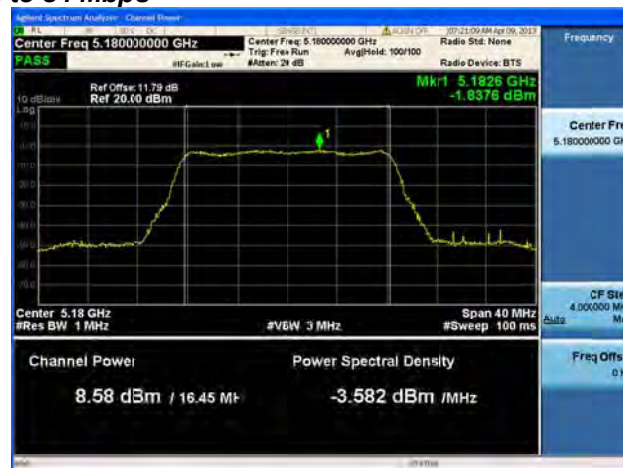


	HT/VHT80, M8 to M15, M0.2 to M9.2	4	8	<u>-7.2</u>	<u>-6.8</u>	<u>-6.9</u>	<u>-7.1</u>	-1.0	2.0	3.0
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	6	<u>-7.2</u>	<u>-6.8</u>	<u>-6.9</u>	<u>-7.1</u>	-1.0	3.8	4.7
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-6.2</u>	<u>-5.7</u>			-2.9	2.0	4.9
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-4.5</u>	<u>-3.2</u>			-0.8	4.0	4.8
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-10.2</u>	<u>-9.7</u>	<u>-9.7</u>		-5.1	0.2	5.3
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-7.2</u>	<u>-6.8</u>	<u>-6.9</u>		-2.2	3.2	5.4
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-6.2</u>	<u>-5.7</u>	<u>-5.8</u>		-1.1	4.0	5.1
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-12.1</u>	<u>-11.5</u>	<u>-11.8</u>	<u>-11.6</u>	-5.7	-1.0	4.7
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-9.1</u>	<u>-8.6</u>	<u>-8.5</u>	<u>-8.8</u>	-2.7	2.0	4.7
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-7.2</u>	<u>-6.8</u>	<u>-6.9</u>	<u>-7.1</u>	-1.0	3.8	4.7
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-4.5</u>	<u>-3.2</u>			-0.8	4.0	4.8
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	7	<u>-6.2</u>	<u>-5.7</u>	<u>-5.8</u>		-1.1	3.2	4.4
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	8	<u>-7.2</u>	<u>-6.8</u>	<u>-6.9</u>	<u>-7.1</u>	-1.0	2.0	3.0
5220/5240	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>3.4</u>				3.4	4.0	0.6
	Non HT/VHT40, 6 to 54 Mbps	2	8	<u>-1.9</u>	<u>-0.9</u>			1.6	2.0	0.4
	Non HT/VHT40, 6 to 54 Mbps	3	10	<u>-5.6</u>	<u>-5.4</u>	<u>-5.4</u>		-0.7	0.2	0.9
	Non HT/VHT40, 6 to 54 Mbps	4	11	<u>-7.8</u>	<u>-7.7</u>	<u>-7.0</u>	<u>-7.7</u>	-1.5	-1.0	0.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>2.8</u>				2.8	4.0	1.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	8	<u>-2.3</u>	<u>-2.0</u>			0.9	2.0	1.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>-0.4</u>	<u>0.6</u>			3.1	4.0	0.9
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	10	<u>-5.3</u>	<u>-4.7</u>	<u>-4.8</u>		-0.2	0.2	0.4
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	7	<u>-2.3</u>	<u>-2.0</u>	<u>-1.7</u>		2.8	3.2	0.5
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>-2.3</u>	<u>-2.0</u>	<u>-1.7</u>		2.8	4.0	1.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	11	<u>-8.5</u>	<u>-8.0</u>	<u>-7.6</u>	<u>-7.6</u>	-1.9	-1.0	0.9
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	8	<u>-5.3</u>	<u>-4.7</u>	<u>-4.8</u>	<u>-4.7</u>	1.2	2.0	0.8
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	6	<u>-2.8</u>	<u>-2.3</u>	<u>-2.7</u>	<u>-3.2</u>	3.3	3.8	0.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-2.3</u>	<u>-2.0</u>			0.9	2.0	1.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-0.4</u>	<u>0.6</u>			3.1	4.0	0.9
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-5.6</u>	<u>-5.6</u>	<u>-5.5</u>		-0.8	0.2	1.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-2.8</u>	<u>-2.3</u>	<u>-2.7</u>		2.2	3.2	1.1
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-2.3</u>	<u>-2.0</u>	<u>-1.7</u>		2.8	4.0	1.2
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-8.5</u>	<u>-8.0</u>	<u>-7.6</u>	<u>-7.6</u>	-1.9	-1.0	0.9



	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-5.3</u>	<u>-4.7</u>	<u>-4.8</u>	<u>-4.7</u>	1.2	2.0	0.8
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-2.8</u>	<u>-2.3</u>	<u>-2.7</u>	<u>-3.2</u>	3.3	3.8	0.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-0.4</u>	<u>0.6</u>			3.1	4.0	0.9
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	7	<u>-2.3</u>	<u>-2.0</u>	<u>-1.7</u>		2.8	3.2	0.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	8	<u>-5.3</u>	<u>-4.7</u>	<u>-4.8</u>	<u>-4.7</u>	1.2	2.0	0.8
5240	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>3.6</u>				3.6	4.0	0.4
	Non HT/VHT20, 6 to 54 Mbps	2	8	<u>-1.8</u>	<u>-1.2</u>			1.5	2.0	0.5
	Non HT/VHT20, 6 to 54 Mbps	3	10	<u>-6.0</u>	<u>-5.4</u>	<u>-5.2</u>		-0.7	0.2	1.0
	Non HT/VHT20, 6 to 54 Mbps	4	11	<u>-7.9</u>	<u>-7.4</u>	<u>-6.8</u>	<u>-6.8</u>	-1.2	-1.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>-1.8</u>	<u>-1.2</u>			1.5	2.0	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>-6.0</u>	<u>-5.4</u>	<u>-5.2</u>		-0.7	0.2	1.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>-7.9</u>	<u>-7.4</u>	<u>-6.8</u>	<u>-6.8</u>	-1.2	-1.0	0.2
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>3.7</u>				3.7	4.0	0.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	8	<u>-2.0</u>	<u>-1.6</u>			1.2	2.0	0.8
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>-0.1</u>	<u>0.6</u>			3.3	4.0	0.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	10	<u>-4.8</u>	<u>-4.5</u>	<u>-4.6</u>		0.1	0.2	0.1
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	7	<u>-2.0</u>	<u>-1.6</u>	<u>-1.7</u>		3.0	3.2	0.2
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>-1.2</u>	<u>-0.6</u>	<u>-0.6</u>		4.0	4.0	0.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	11	<u>-7.9</u>	<u>-7.8</u>	<u>-7.5</u>	<u>-7.5</u>	-1.7	-1.0	0.6
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	8	<u>-4.8</u>	<u>-4.5</u>	<u>-4.6</u>	<u>-4.6</u>	1.4	2.0	0.6
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	6	<u>-2.3</u>	<u>-2.4</u>	<u>-2.3</u>	<u>-2.8</u>	3.6	3.8	0.2
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-2.0</u>	<u>-1.6</u>			1.2	2.0	0.8
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-0.1</u>	<u>0.6</u>			3.3	4.0	0.7
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-4.8</u>	<u>-4.5</u>	<u>-4.6</u>		0.1	0.2	0.1
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-2.0</u>	<u>-1.6</u>	<u>-1.7</u>		3.0	3.2	0.2
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-1.2</u>	<u>-0.6</u>	<u>-0.6</u>		4.0	4.0	0.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-7.9</u>	<u>-7.8</u>	<u>-7.5</u>	<u>-7.5</u>	-1.7	-1.0	0.6
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-4.8</u>	<u>-4.5</u>	<u>-4.6</u>	<u>-4.6</u>	1.4	2.0	0.6
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-2.3</u>	<u>-2.4</u>	<u>-2.3</u>	<u>-2.8</u>	3.6	3.8	0.2
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-0.1</u>	<u>0.6</u>			3.3	4.0	0.7
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	7	<u>-2.0</u>	<u>-1.6</u>	<u>-1.7</u>		3.0	3.2	0.2
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	8	<u>-4.8</u>	<u>-4.5</u>	<u>-4.6</u>	<u>-4.6</u>	1.4	2.0	0.6

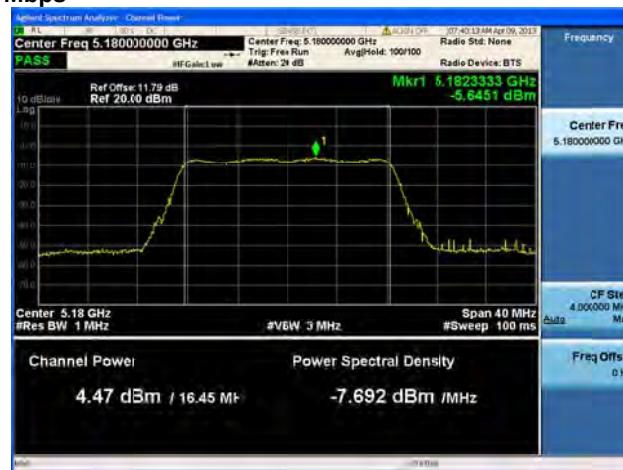
Peak Output Power / PSD, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A**

Peak Output Power / PSD, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B**

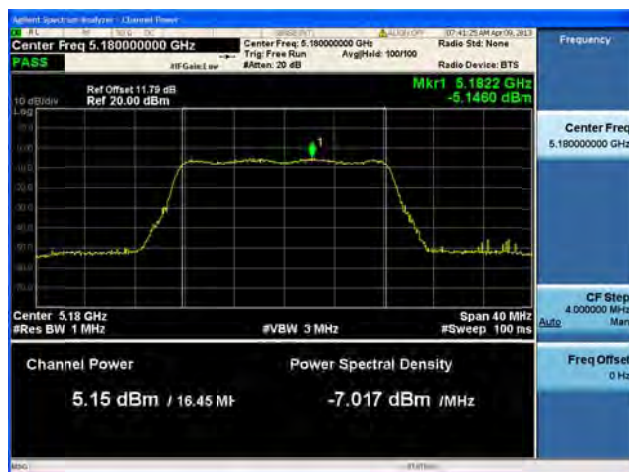
Peak Output Power / PSD, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps



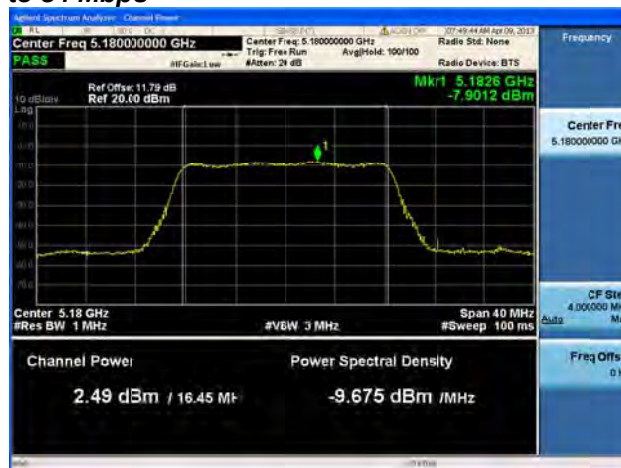
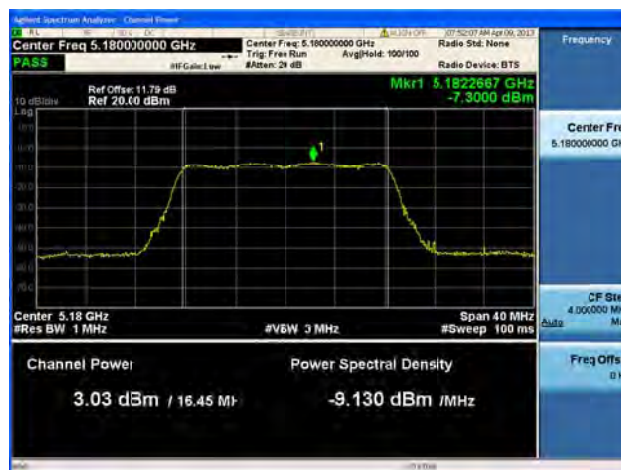
Antenna A

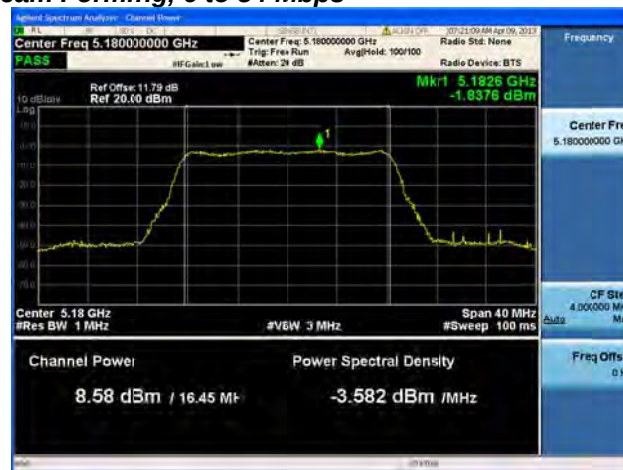


Antenna B



Antenna C

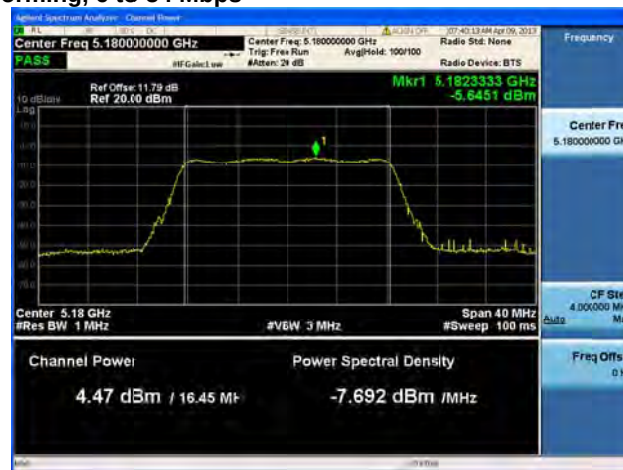
Peak Output Power / PSD, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

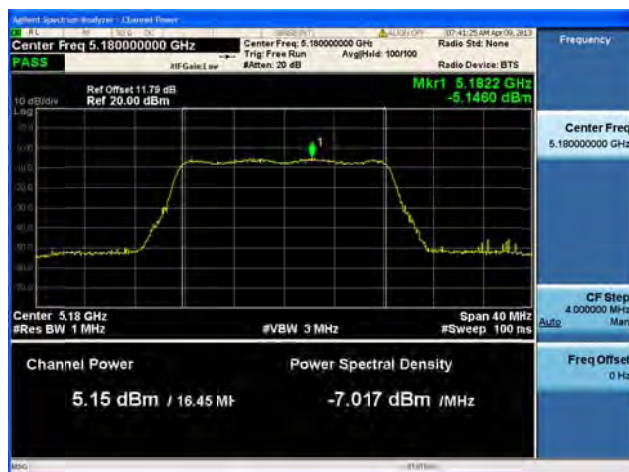
Peak Output Power / PSD, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

Peak Output Power / PSD, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Power Spectral Density / Channel Power

Center Freq 5.180000000 GHz
Ref Offset 11.79 dB
Ref 20.00 dBm

Center Freq: 5.180000000 GHz
Trig: Free Run
Avg/MHz: 100/100
Radio Std: None
Radio Device: BTS

Frequency

Center Freq: 5.180000000 GHz

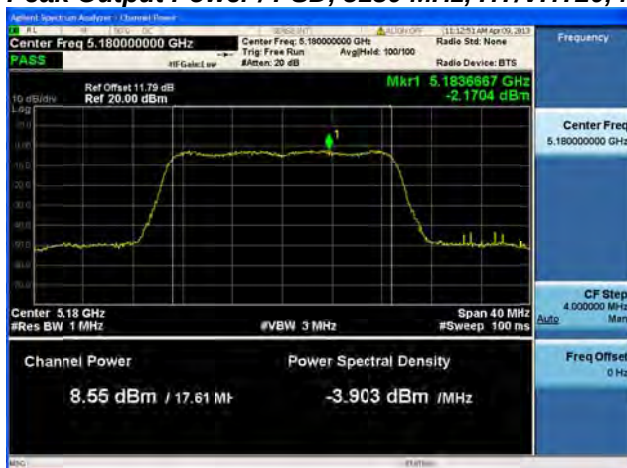
CF Step: 4.000000 MHz
Auto

Channel Power: 14.45 dBm / 17.61 MHz

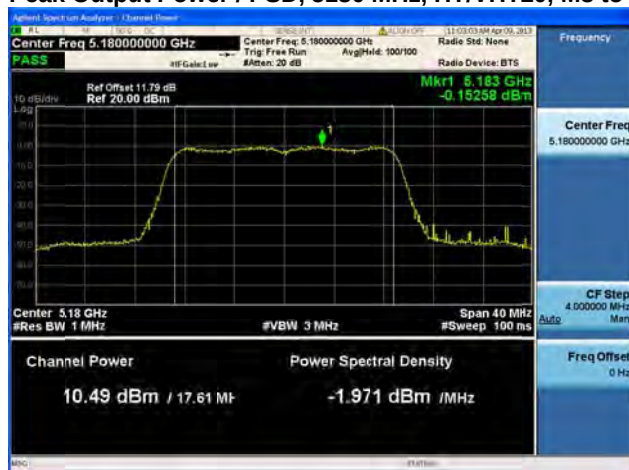
Power Spectral Density: 1.980 dBm / MHz

Freq Offset: 0 Hz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2



Antenna A

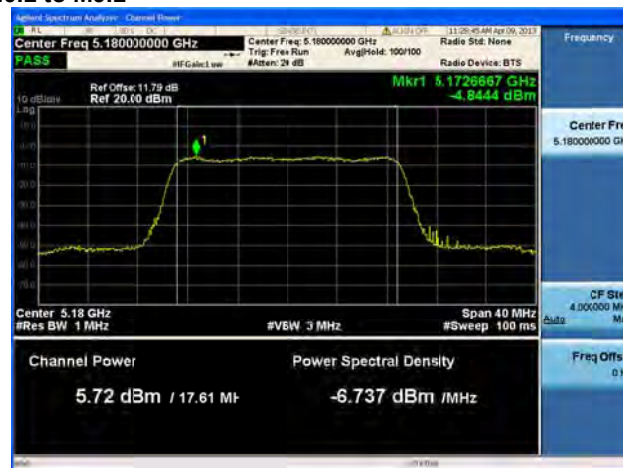


Antenna B

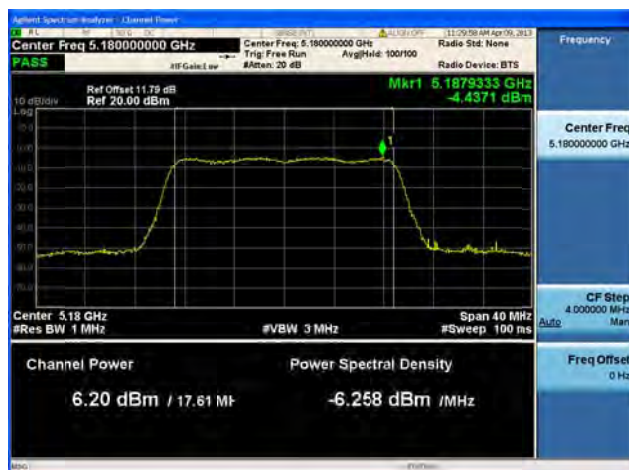
Peak Output Power / PSD, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



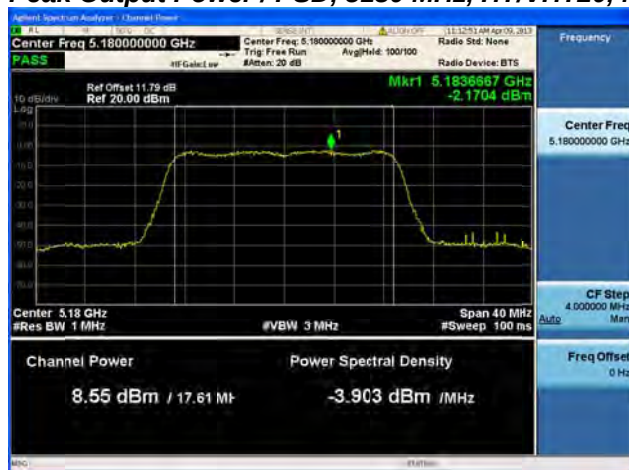
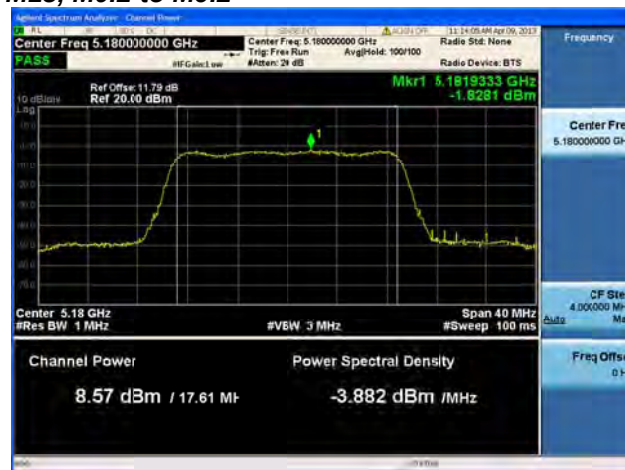
Antenna A

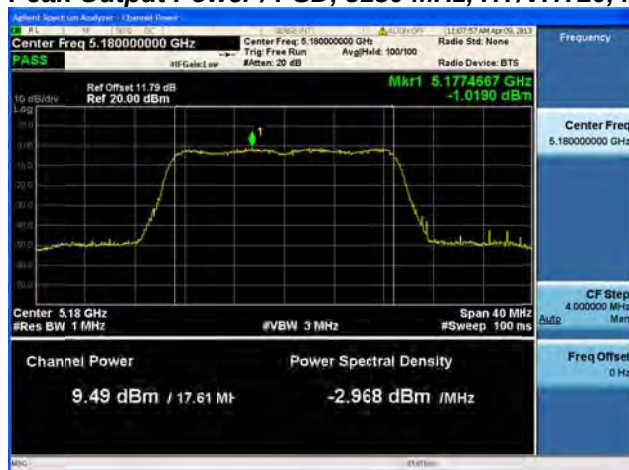


Antenna B



Antenna C

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

Ref Offst: 11.75 dB
Ref: 20.00 dBm

Center Freq: 5.18 GHz
#Res BW: 1 MHz
#VBW: 3 MHz
Span: 40 MHz
#Sweep: 100 ms

Channel Power: 2.92 dBm / 17.61 MHz
Power Spectral Density: -9.532 dBm / MHz

Center Freq: 5.180000000 GHz
Span: 40 MHz

Advanced Spectrum Analyser - Channel Browser

1. ML 1. SPAN: 3 MHz 11:43:20 AM Apr 09, 2013

Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Radio Std: None

PASS #FF Gate: Low Trig: Freq Run AvgHold: 100/100

Mkr1 5.1874667 GHz -7.9950 dBm

Ref Offset: 11.79 dB Ref Z0.0 dBm

10 dB/div

5.18 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 40 MHz

#Sweep 100 ms

Channel Power

Power Spectral Density

2.56 dBm / 17.61 MHz

-9.893 dBm / MHz

Frequency

Center Freq 5.18000000 GHz

CF Step 4.000000 MHz

CF Step 4.000000 MHz

Freq Offset 0 MHz

Channel Power

Power Spectral Density

3.21 dBm / 17.61 MHz

-9.252 dBm / MHz

Center Freq 5.18000000 GHz

Ref Offset 11.79 dB

Ref 20.00 dBm

Mkr1 5.1723333 GHz

-7.7420 dBm

Center Freq: 5.18000000 GHz

Trig: Free Run

Avg/Mode: 100/100

Radio Device: BTS

CF Step: 4.000000 MHz

Auto

Freq Offset: 0 Hz

Agilent Spectrum Analyzer Channel Filter

Center Freq 5.18000000 GHz

PASS

Ref Offset: 11.79 dB

Ref 20.00 dBm

Center Freq: 5.180000000 GHz

Trig: Free Run

Avg/Mode: 100/100

Radio Stn: None

Radio Device: BTS

Mkr1 5.1875333 GHz

-7.6702 dBm

Center Freq: 5.18000000 GHz

CF Step: 4.000000 MHz

Span 40 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms

Channel Power

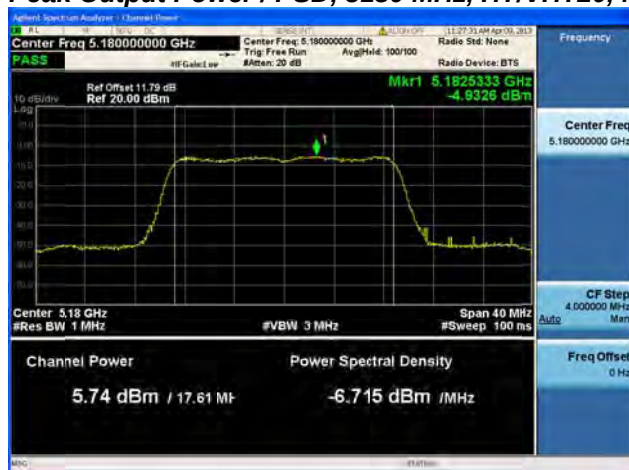
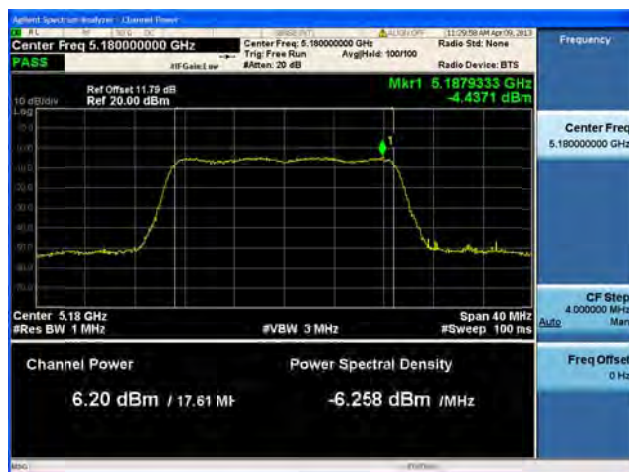
Power Spectral Density

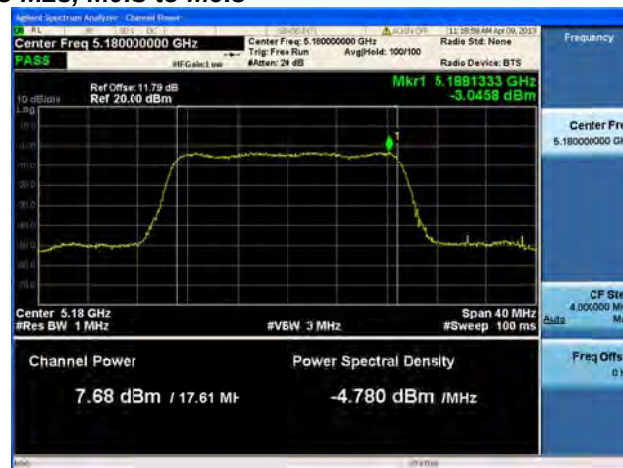
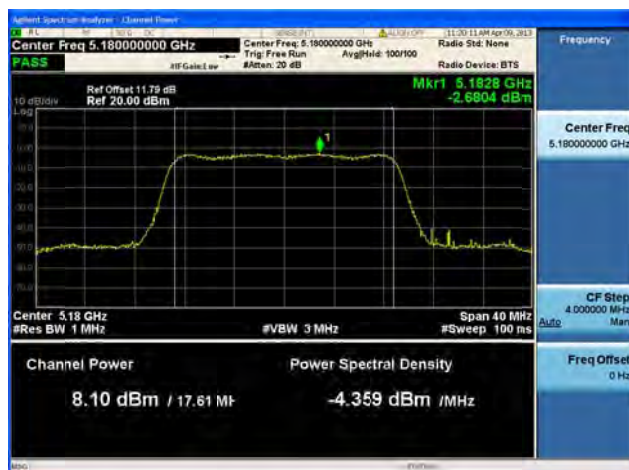
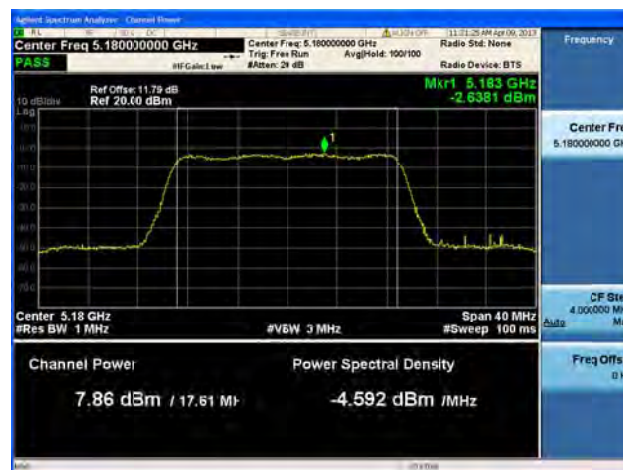
3.08 dBm / 17.61 MHz

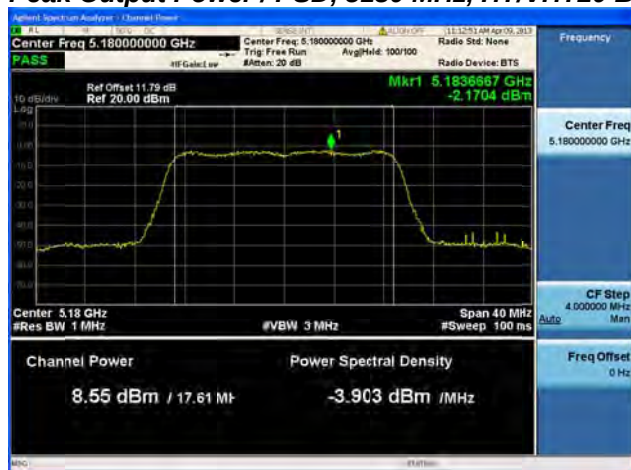
-9.380 dBm / MHz

Freq Offset: 0 MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Ref Offset 11.79 dB
Ref 20.00 dBm

Center Freq 5.18 GHz
#Res BW 1 MHz
#VBW 3 MHz
#Sweep 100 ms

Channel Power
10.49 dBm / 17.61 MHz

Power Spectral Density
-1.971 dBm / MHz

Center Freq
5.180000000 GHz

CF Step
4.000000 MHz

Frequency
5.180000000 GHz

Spectrum Analyzer - Channel Power

11:04:18 AM Apr 06, 2013

Center Freq 5.180000000 GHz

Radio Std: None

PASS

RF Gain: Low

Trig: Free Run

AvgMode: 100/100

Radio Device: BTS

Ref Offset: 11.79 dB

Ref Z0.00 dBm

Mkr1 5.187667 GHz -0.053784 dBm

10.61 dBm / 17.61 MHz

Center 5.18 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 40 MHz

#Sweep 100 ms

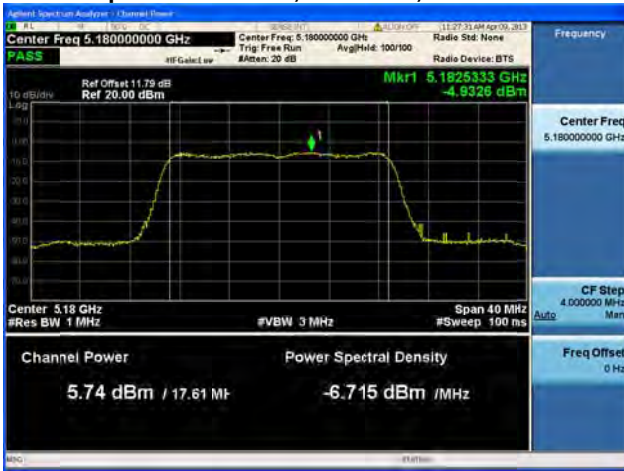
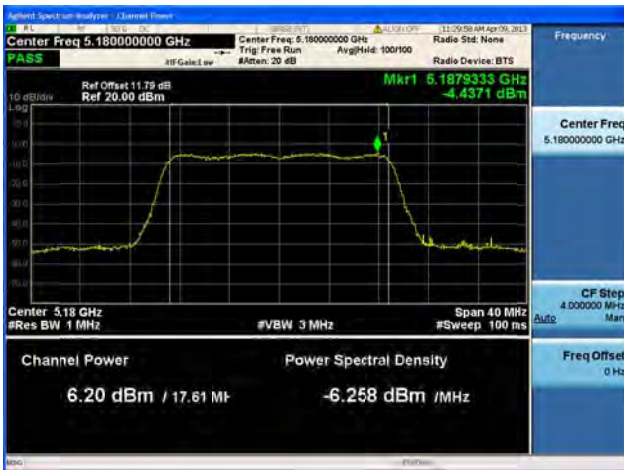
Channel Power

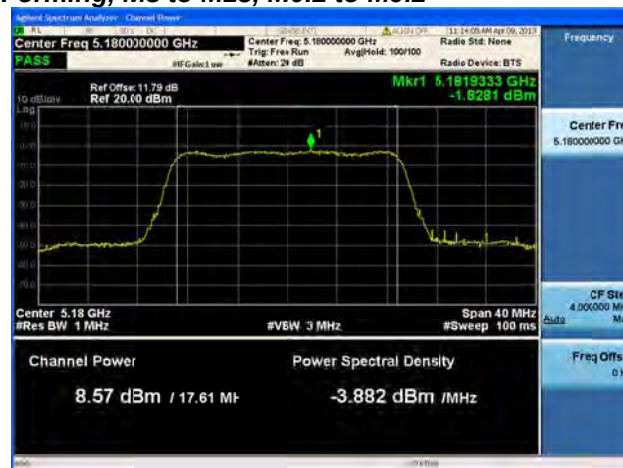
Power Spectral Density

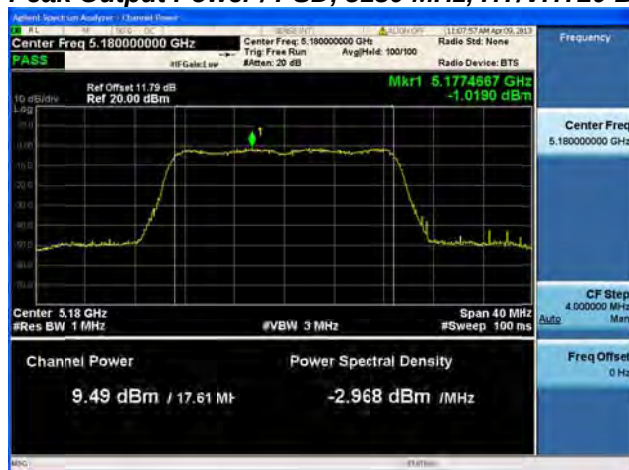
10.61 dBm / 17.61 MHz

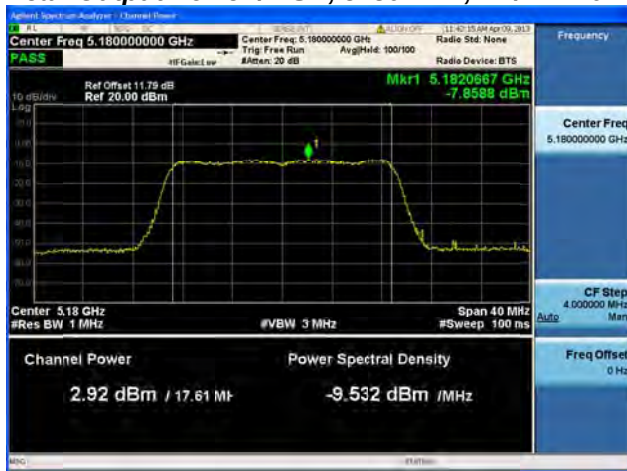
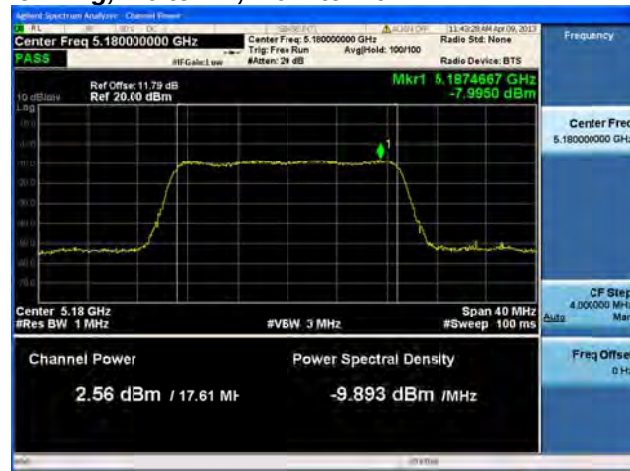
-1.842 dBm / MHz

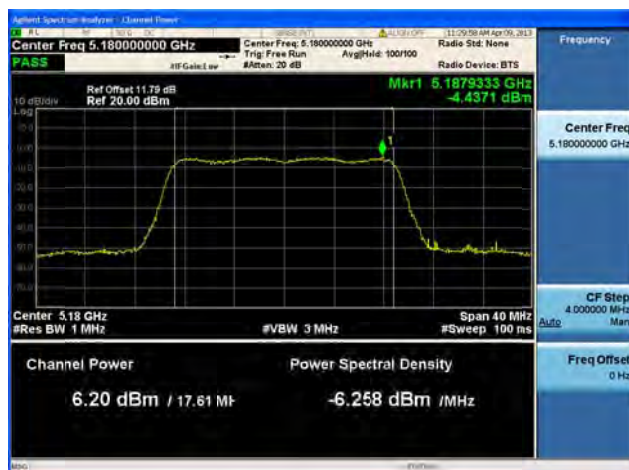
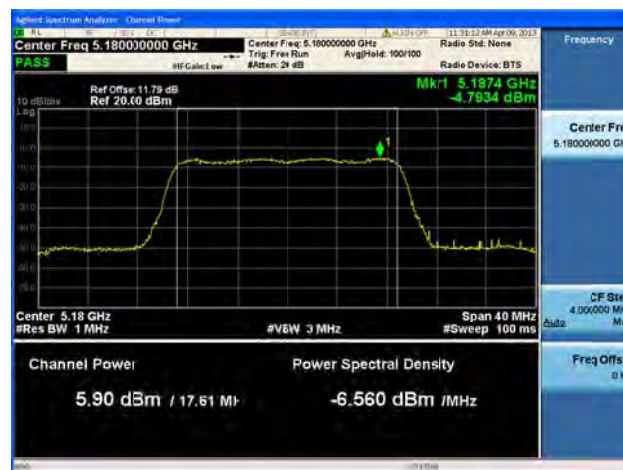
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

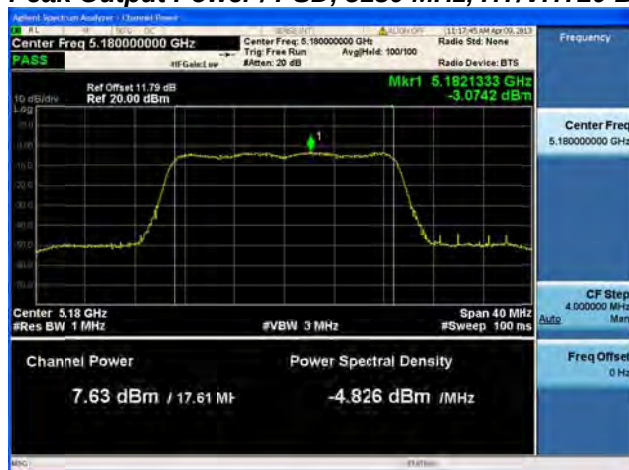
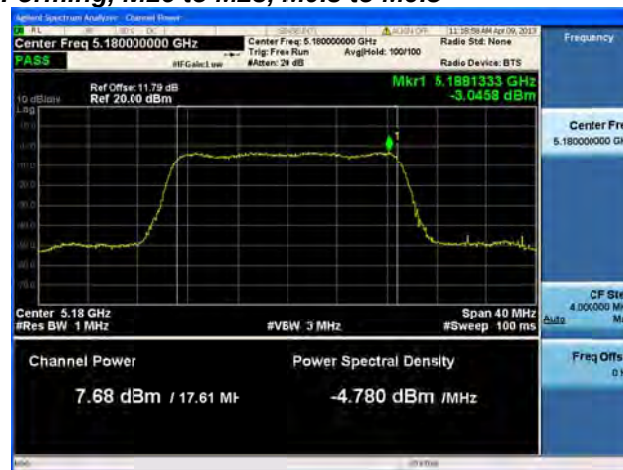
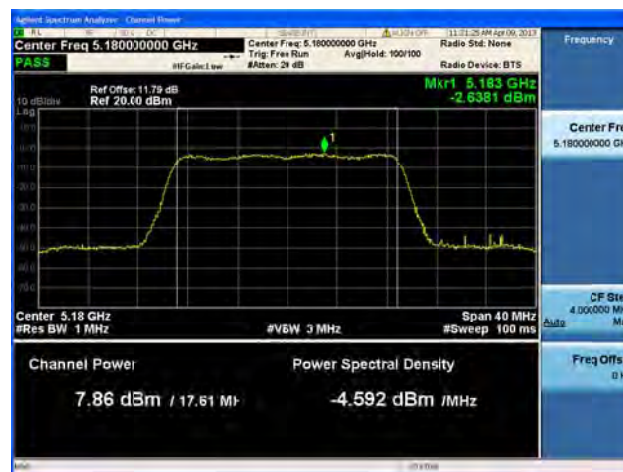
**Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B****Antenna C**

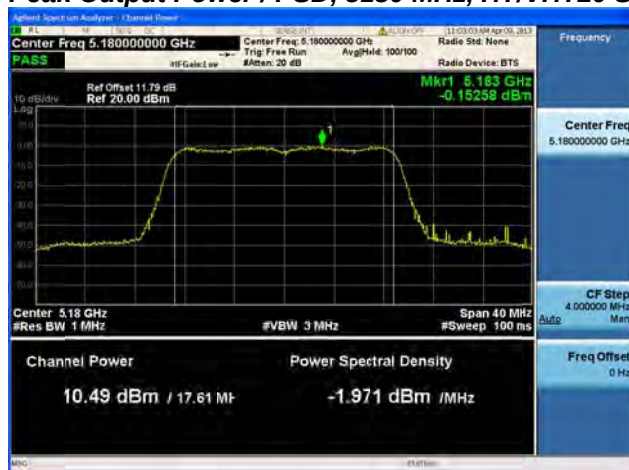
Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

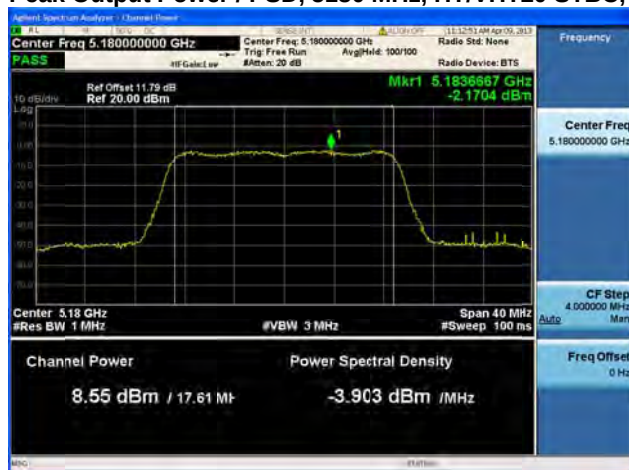
Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



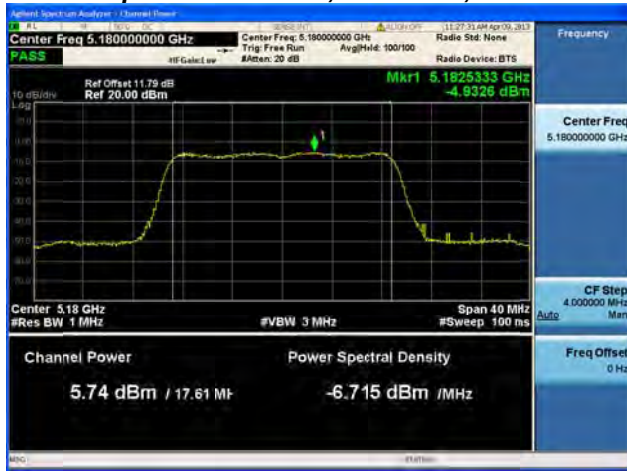
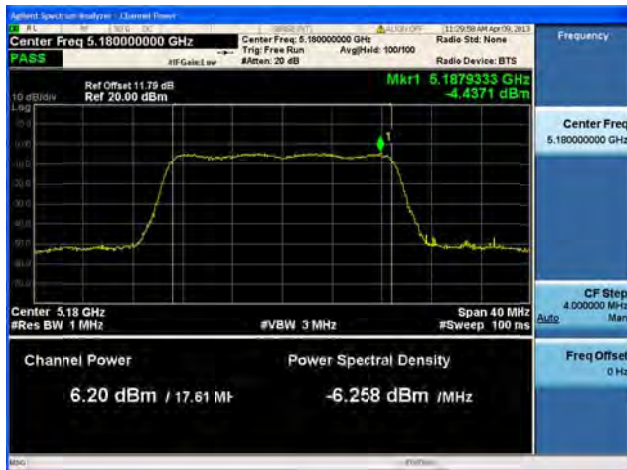
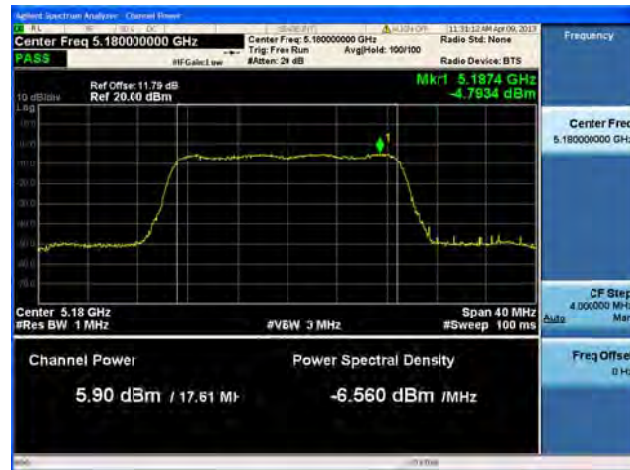
Antenna A



Antenna B



Antenna C

**Peak Output Power / PSD, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B****Antenna C****Antenna D**

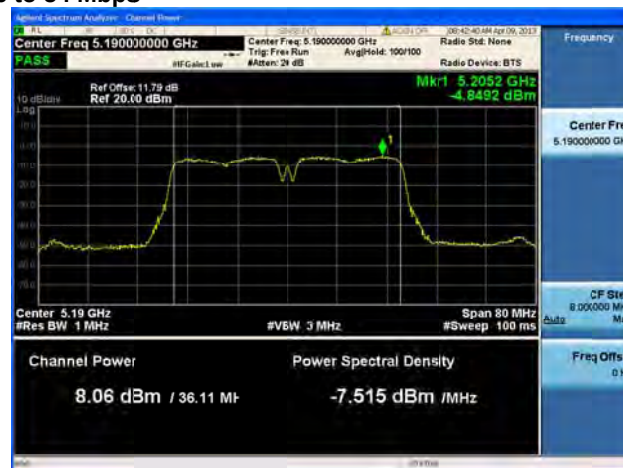
Peak Output Power / PSD, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A**

Peak Output Power / PSD, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps



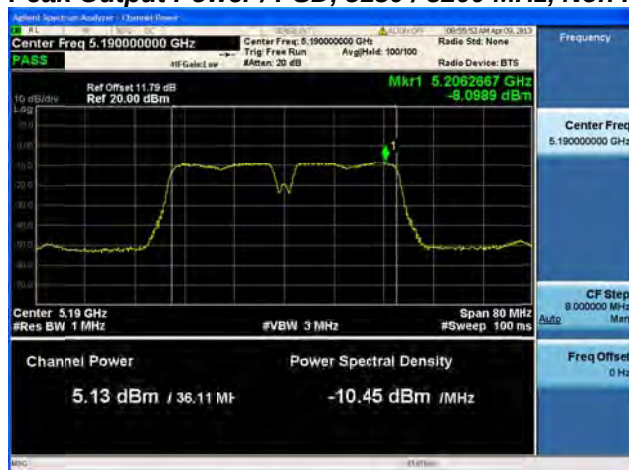
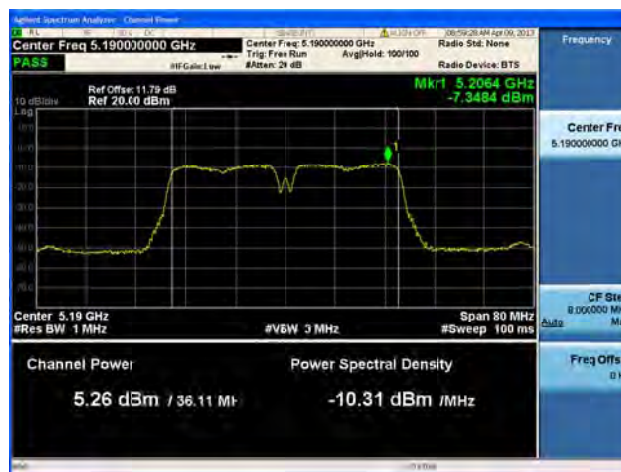
Antenna A



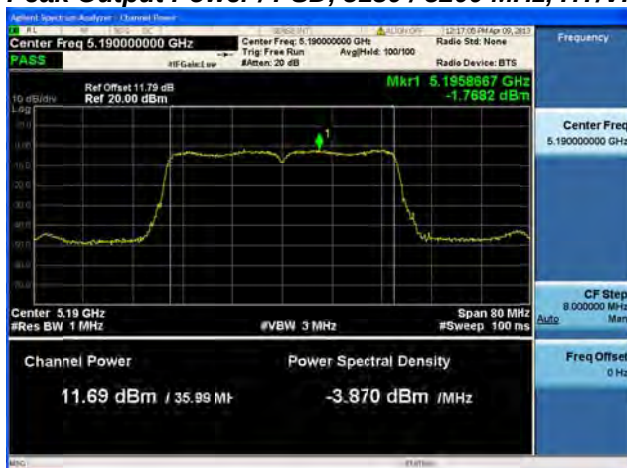
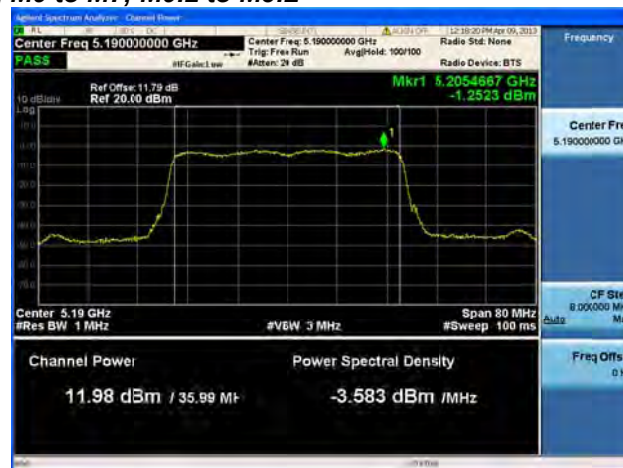
Antenna B



Antenna C

Peak Output Power / PSD, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

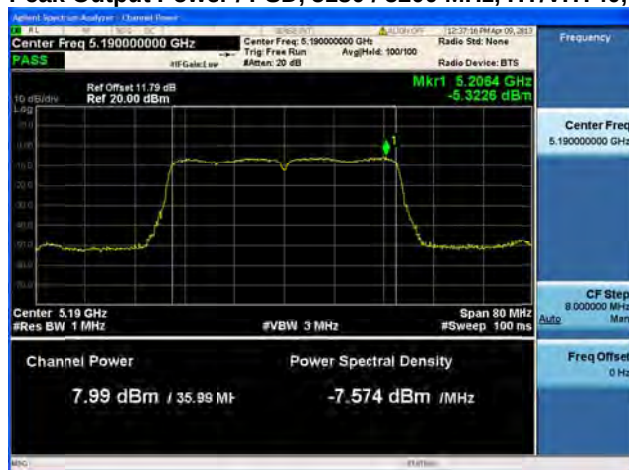


Antenna A

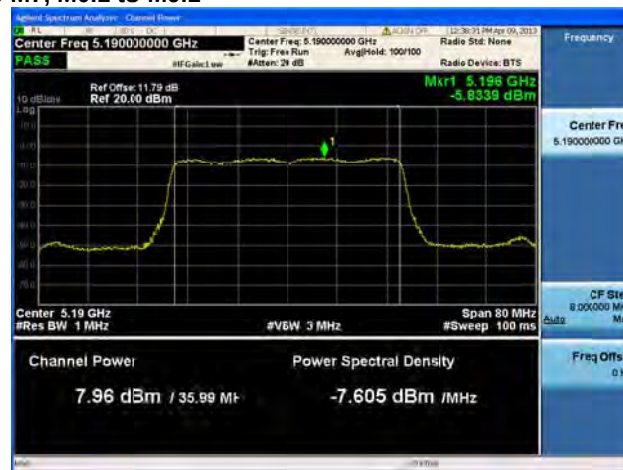


Antenna B

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1



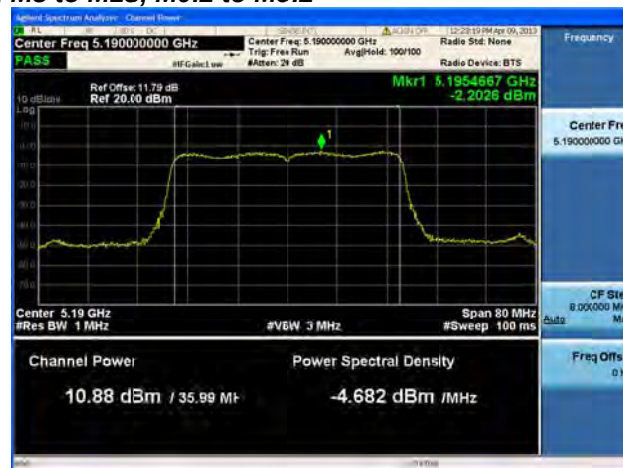
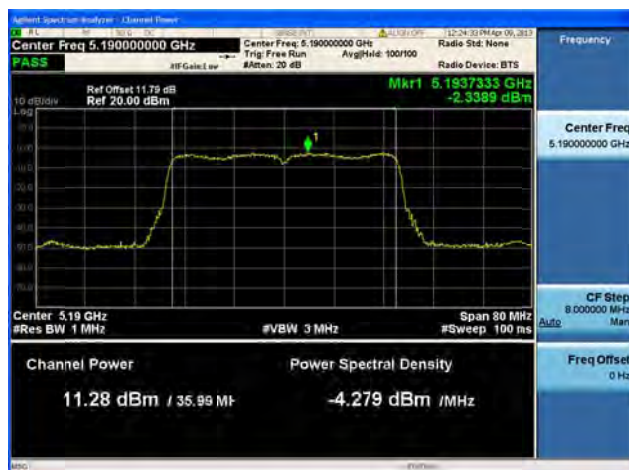
Antenna A

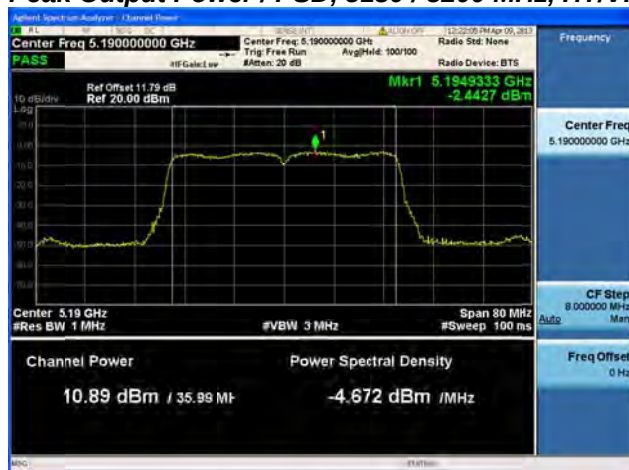
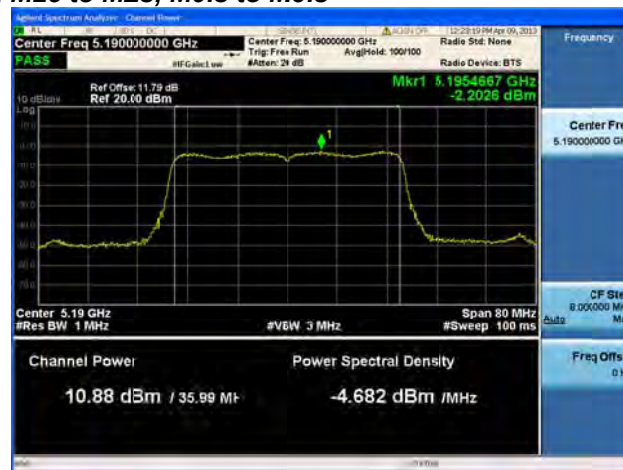


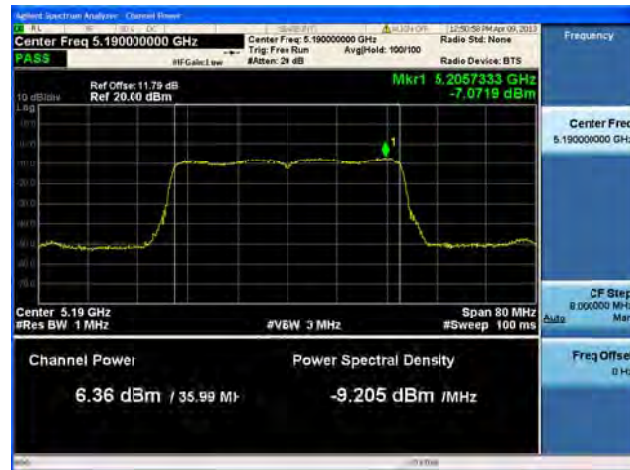
Antenna B

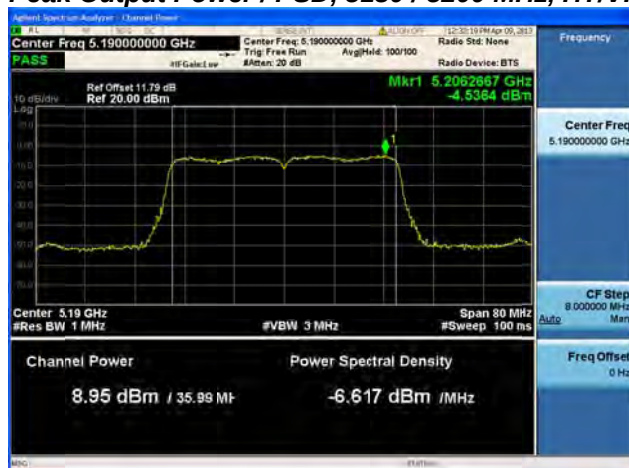
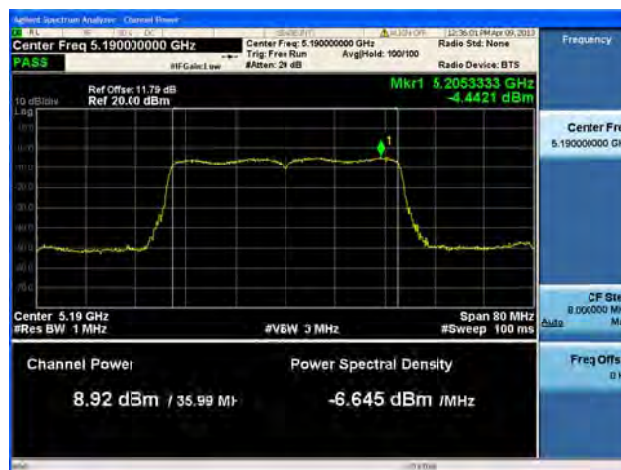


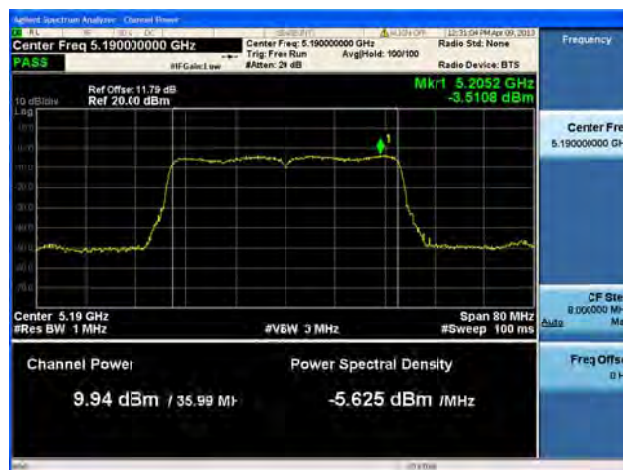
Antenna C

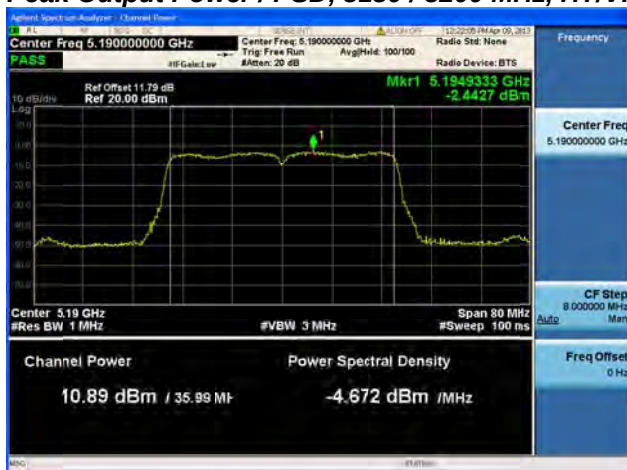
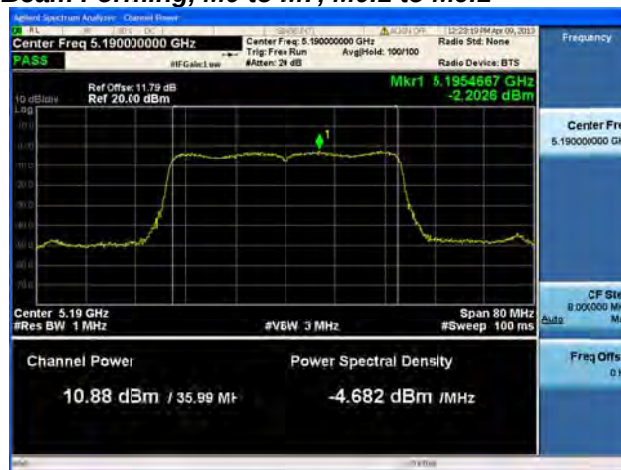
Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

**Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

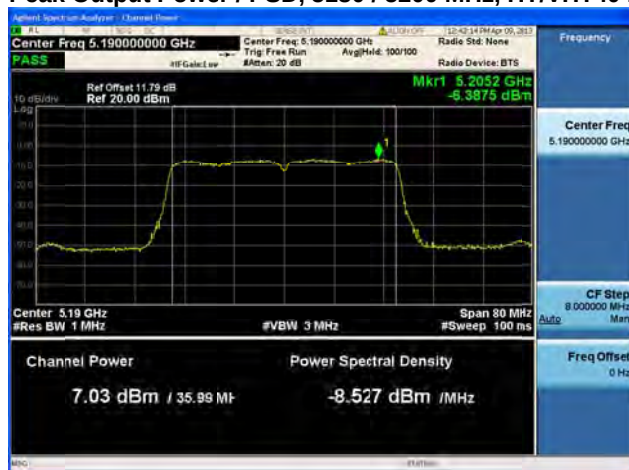


Antenna A

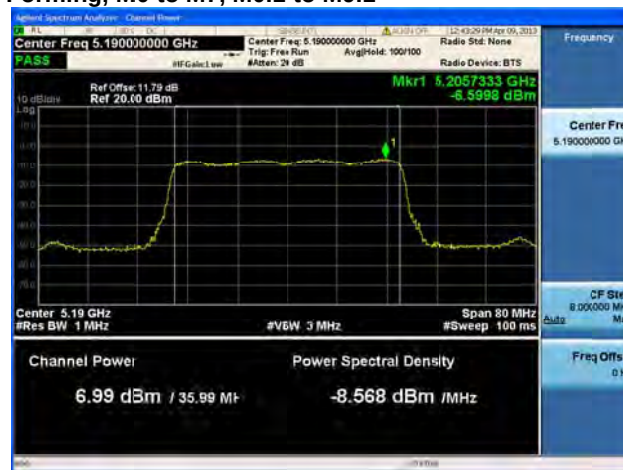


Antenna B

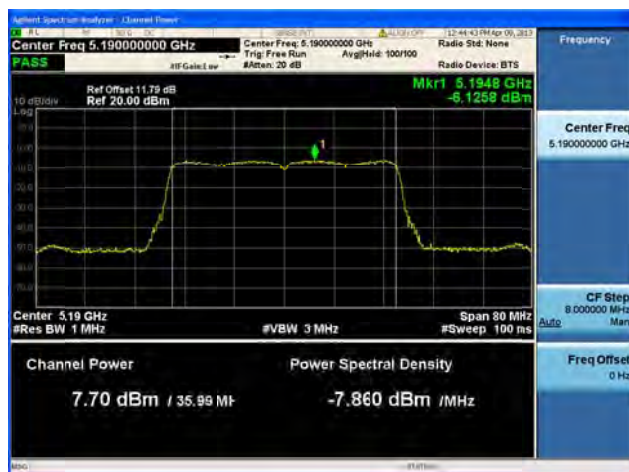
Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A

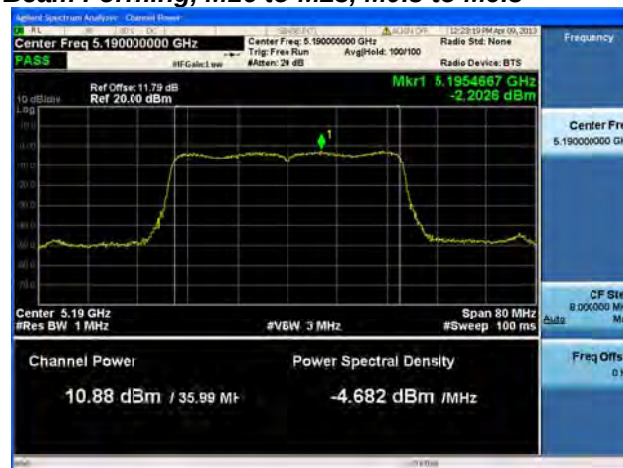
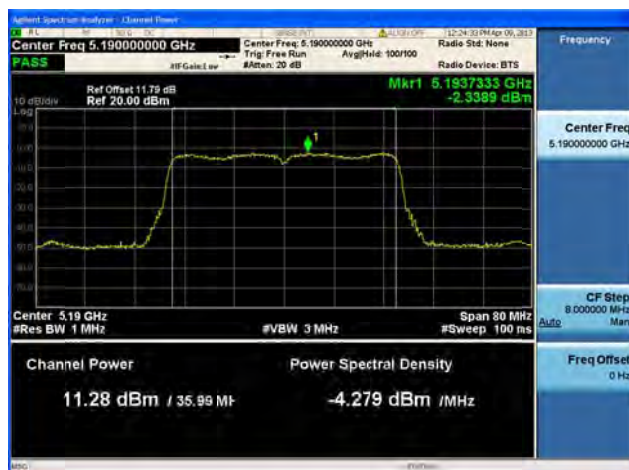


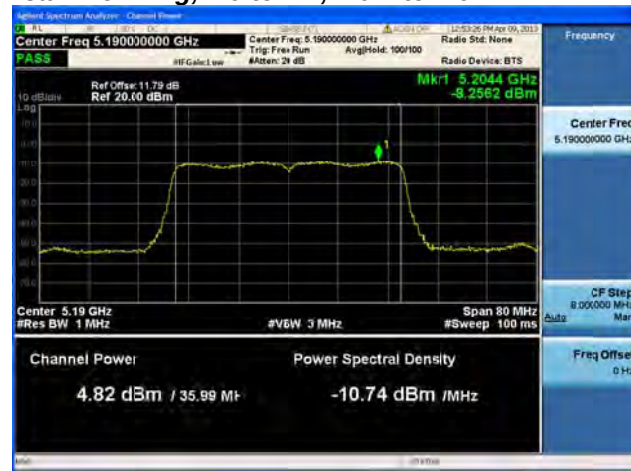
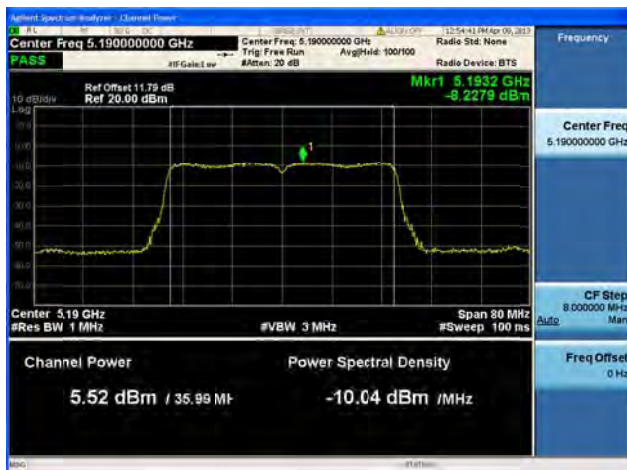
Antenna B

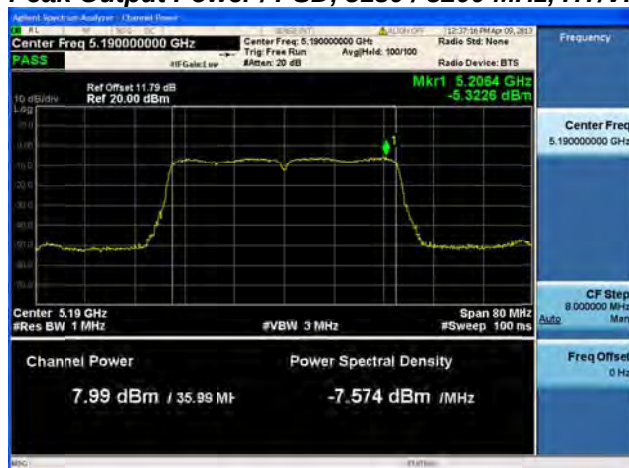
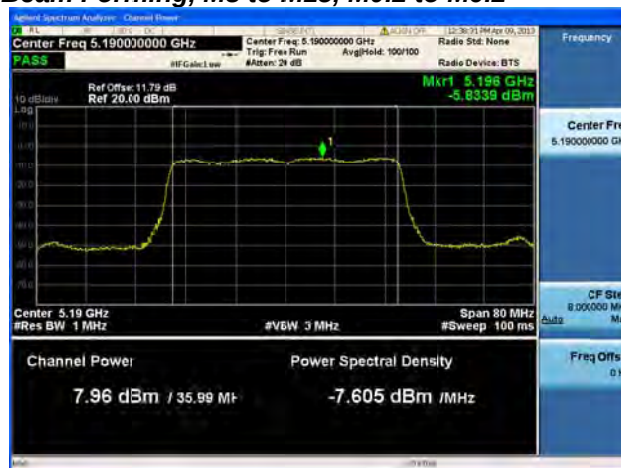
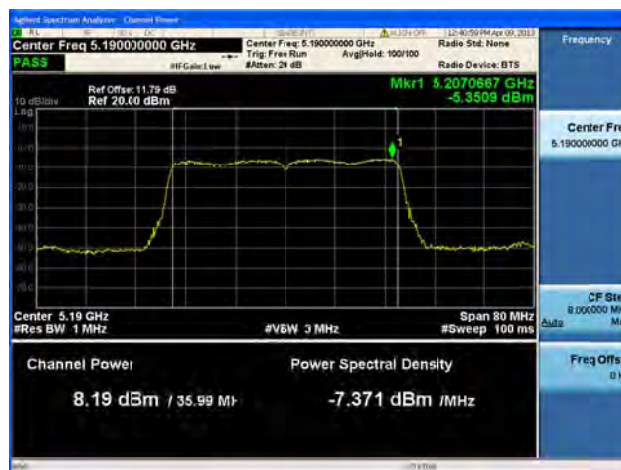


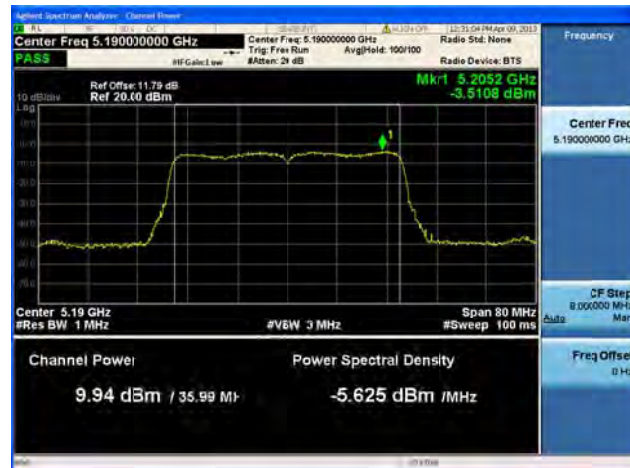
Antenna C

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

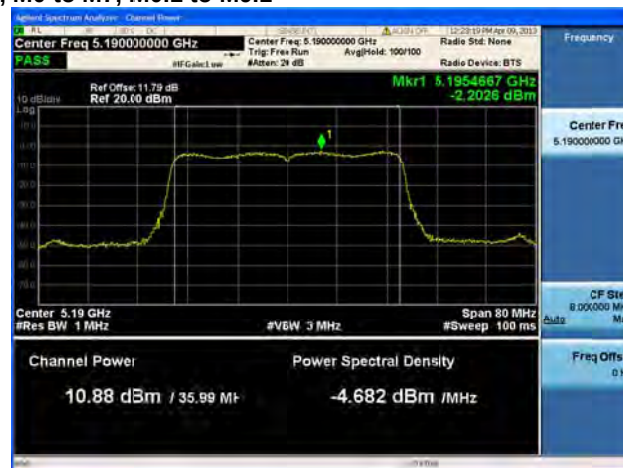
Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

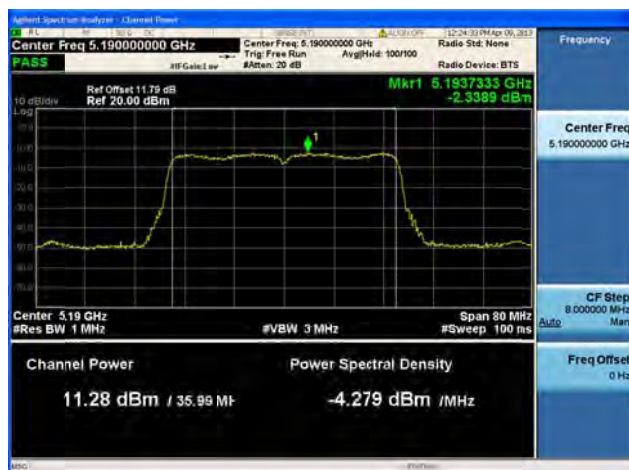
Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1



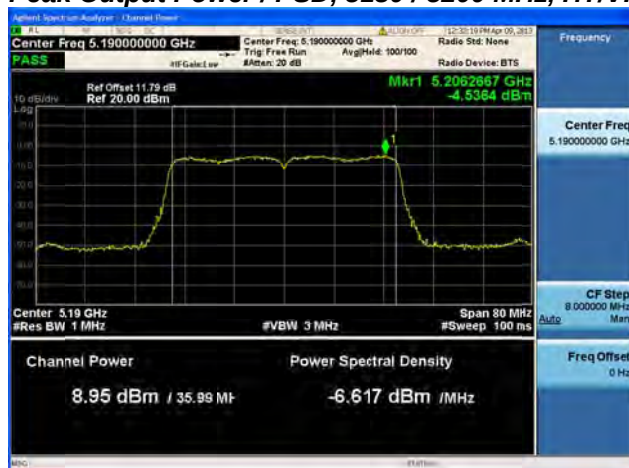
Antenna A



Antenna B

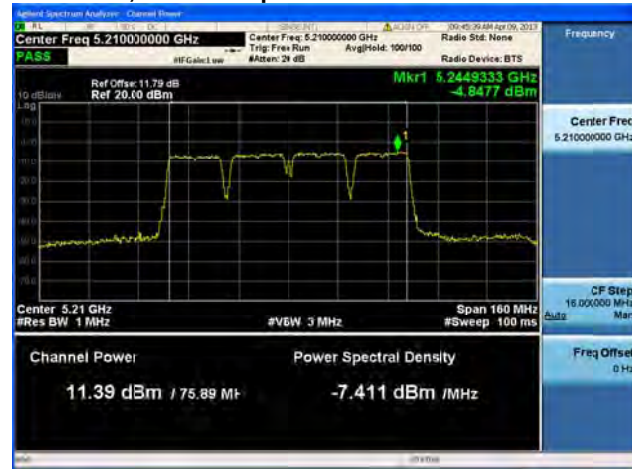


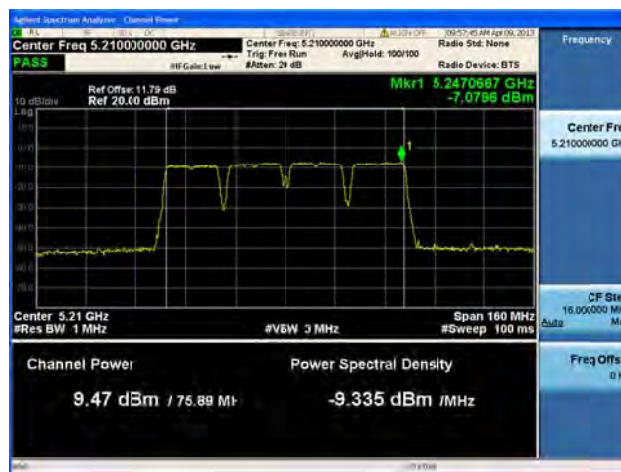
Antenna C

Peak Output Power / PSD, 5180 / 5200 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**Antenna A**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**Antenna A****Antenna B**

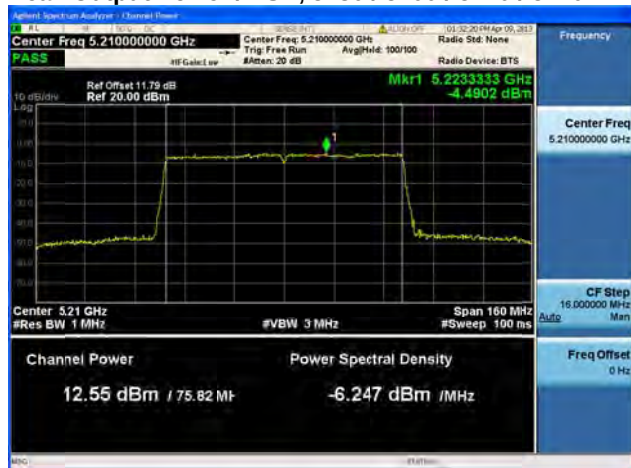
Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1**Antenna A**

**Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2



Antenna A

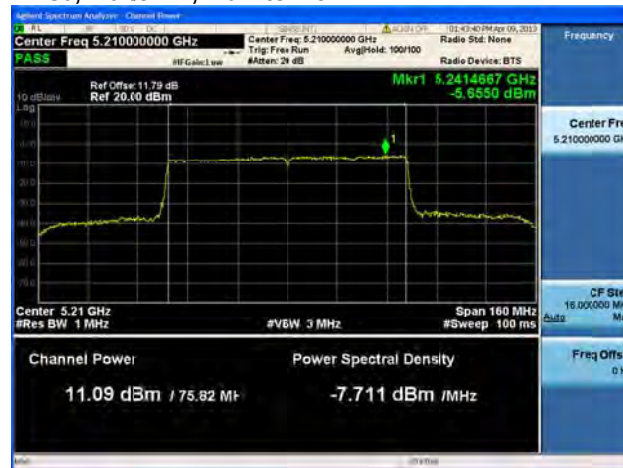


Antenna B

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1



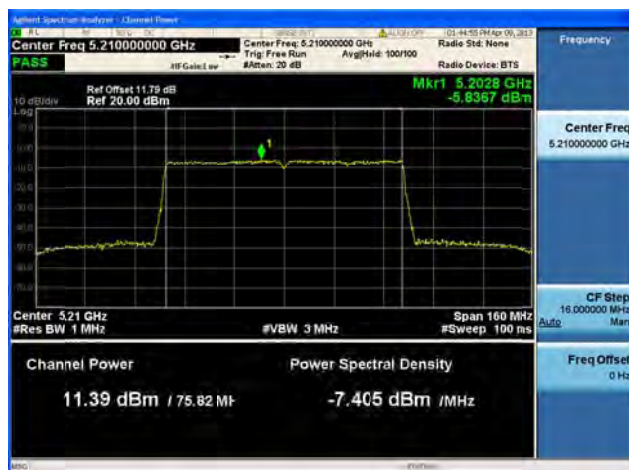
Antenna A



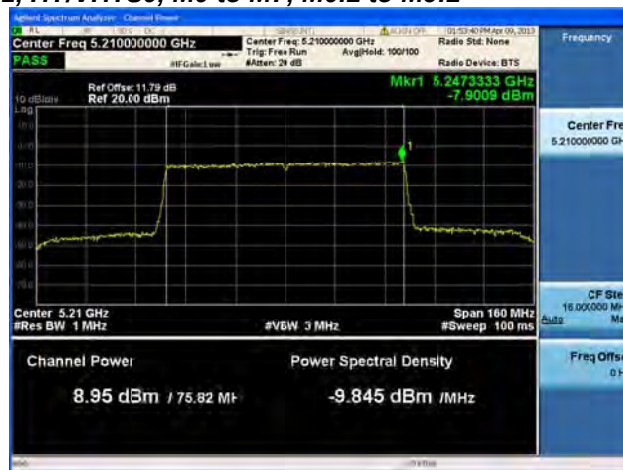
Antenna B

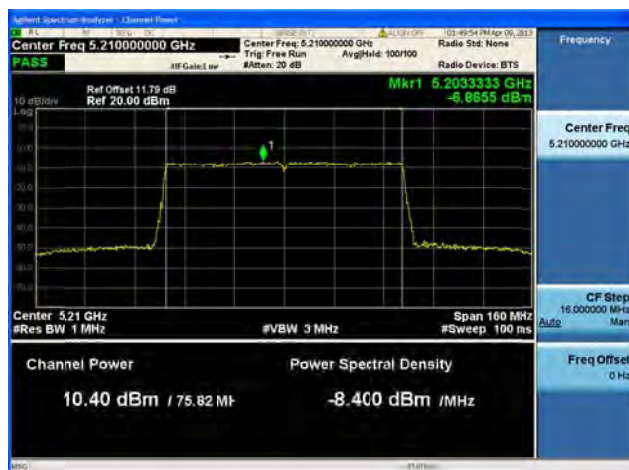
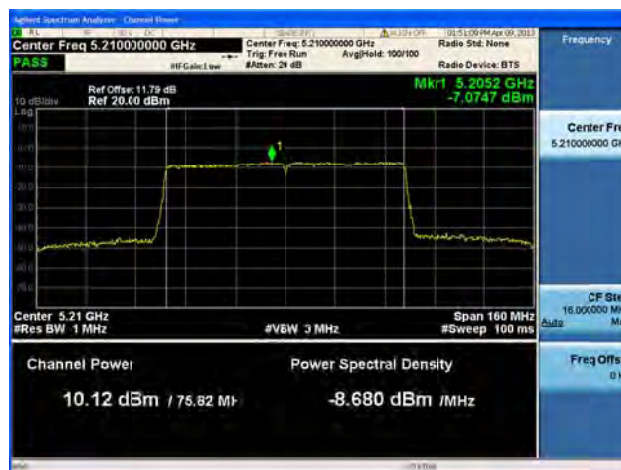


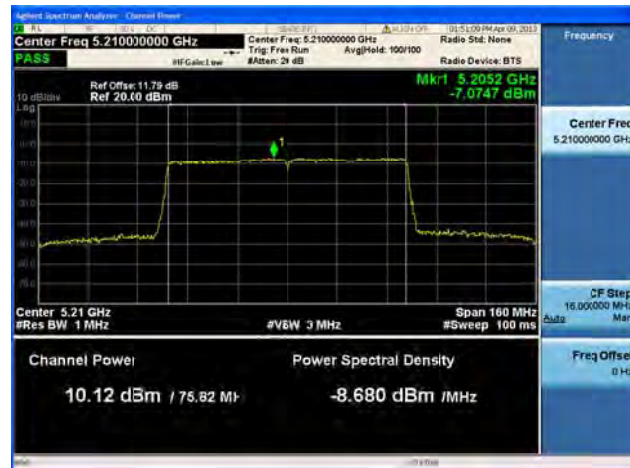
Antenna C

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

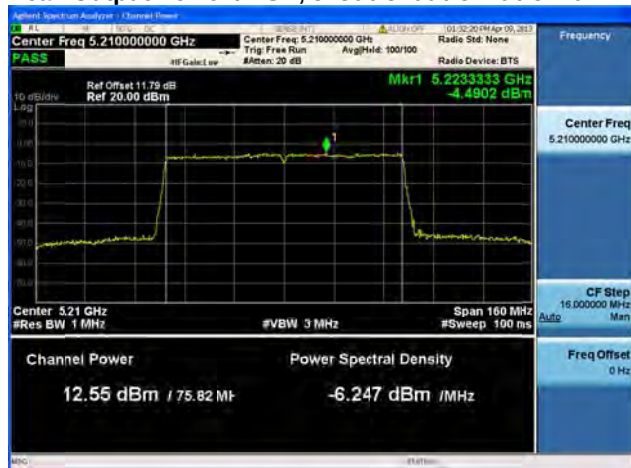
Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

**Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2****Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A

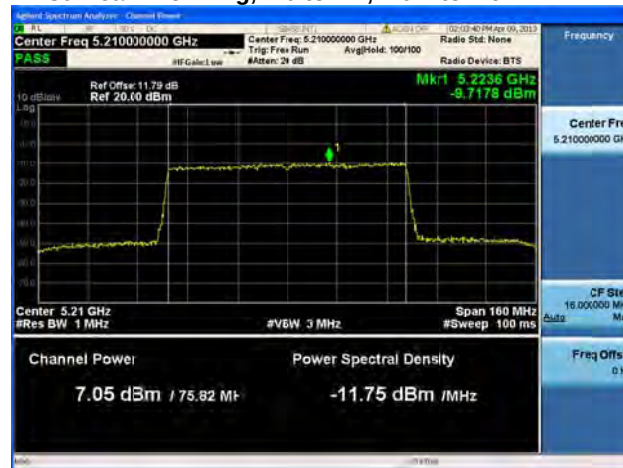


Antenna B

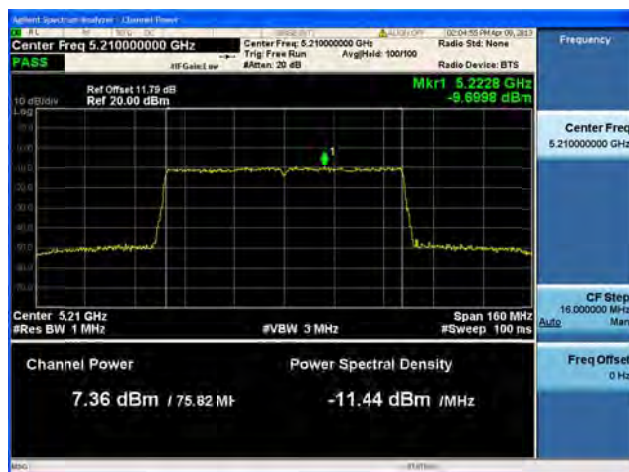
Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1



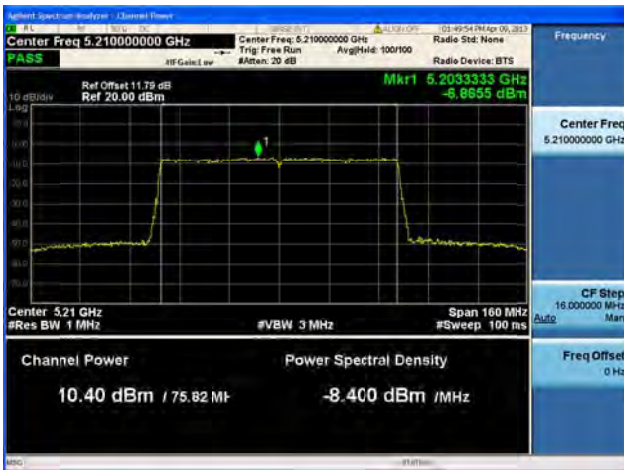
Antenna A



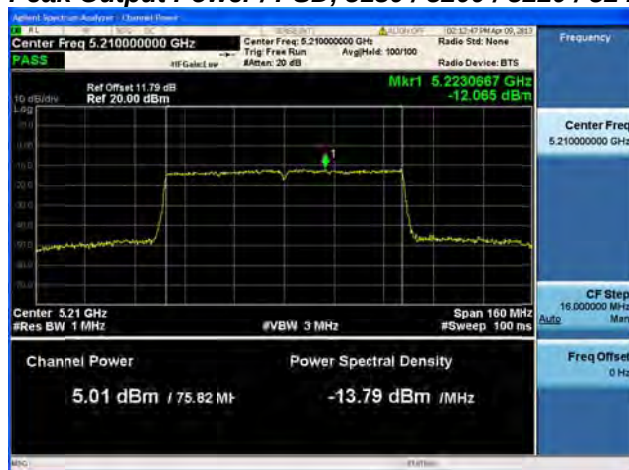
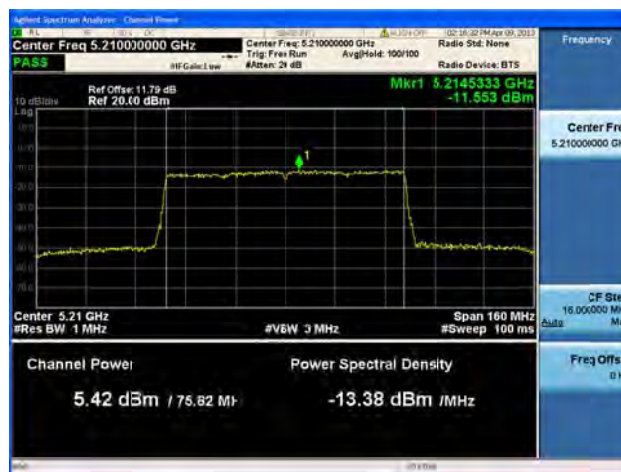
Antenna B

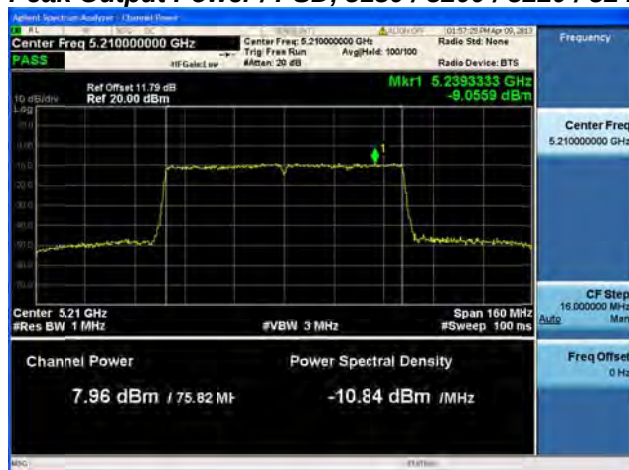
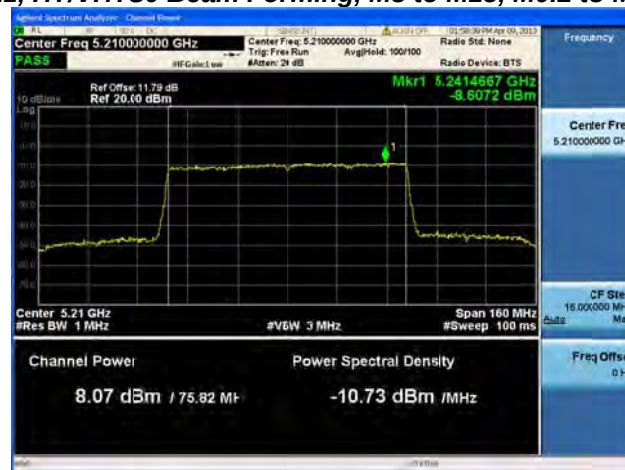
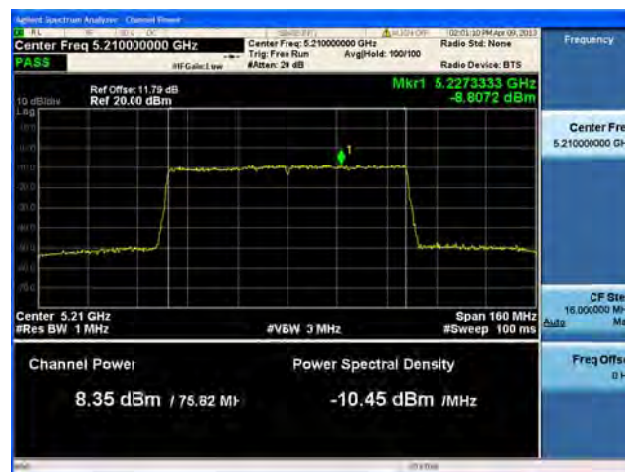


Antenna C

**Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2****Antenna A****Antenna B****Antenna C**

**Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3****Antenna A****Antenna B****Antenna C**

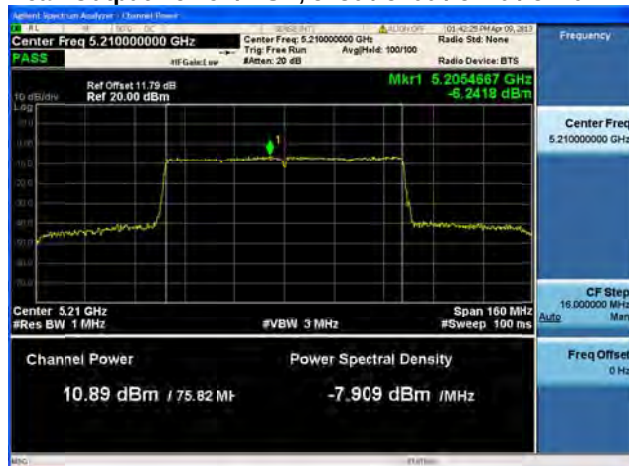
Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

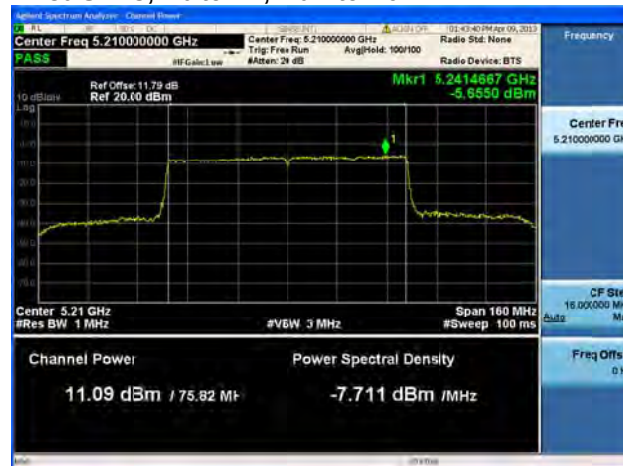
Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1



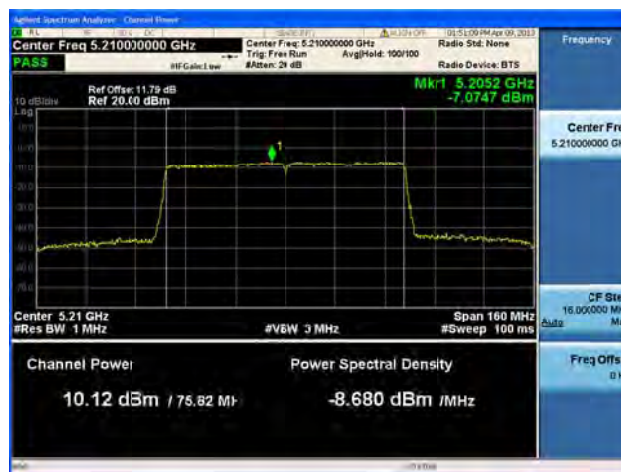
Antenna A



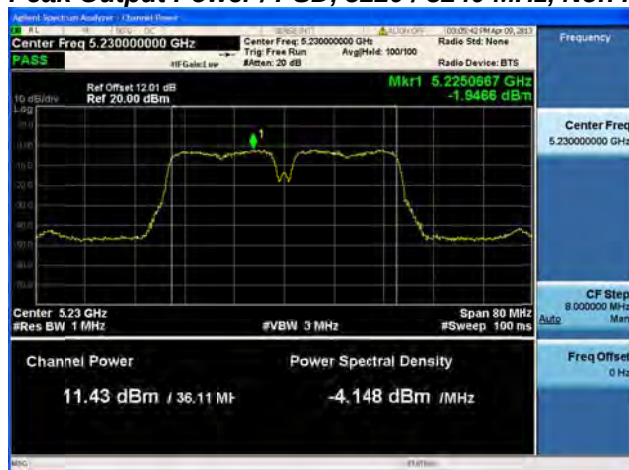
Antenna B



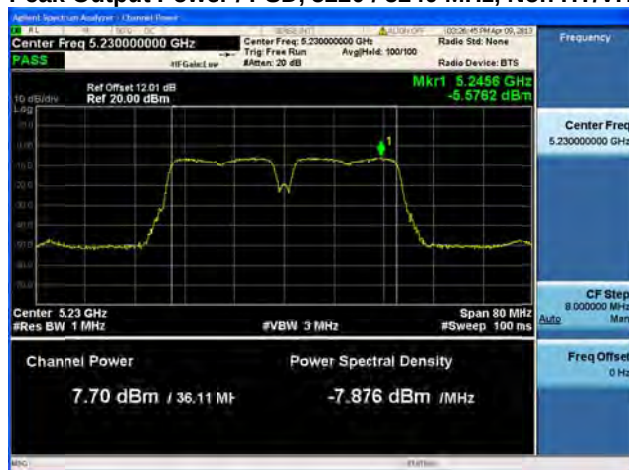
Antenna C

Peak Output Power / PSD, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A**

Peak Output Power / PSD, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power / PSD, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps



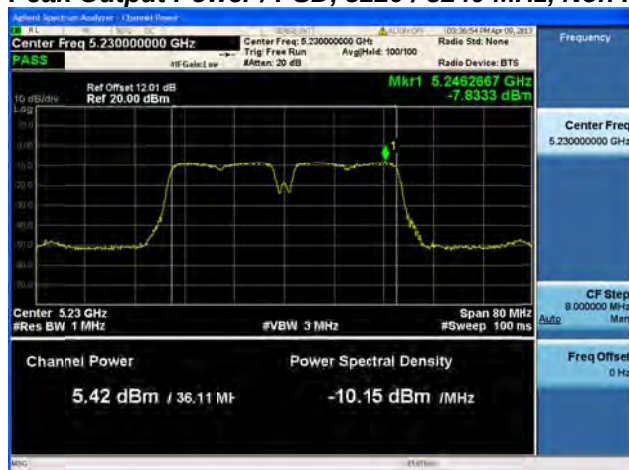
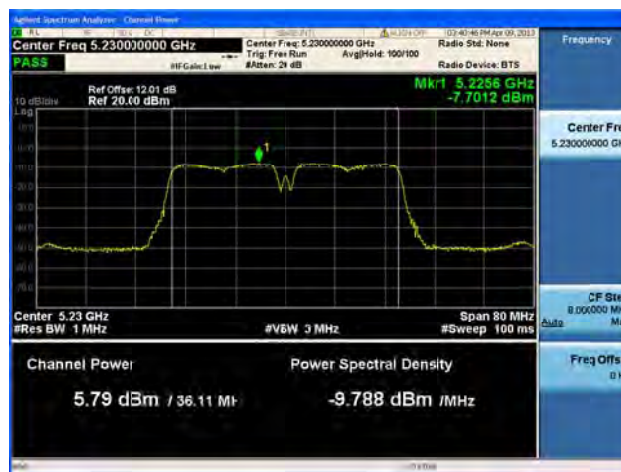
Antenna A



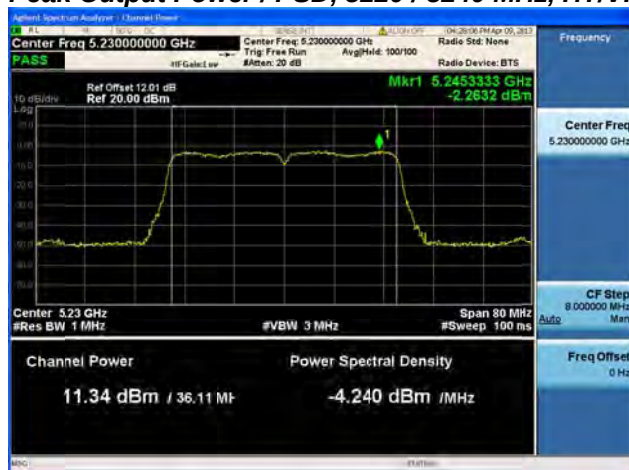
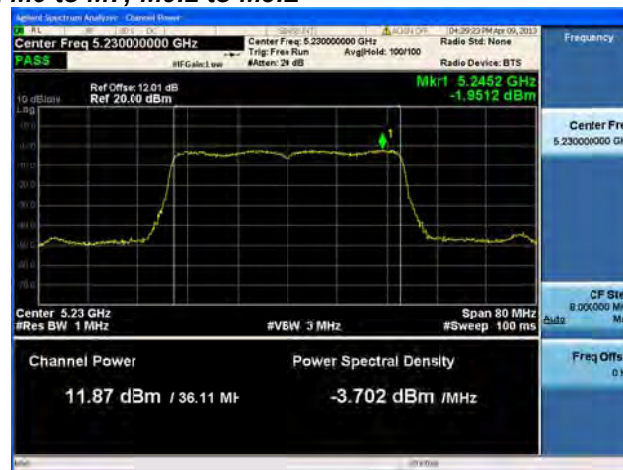
Antenna B



Antenna C

Peak Output Power / PSD, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2



Antenna A

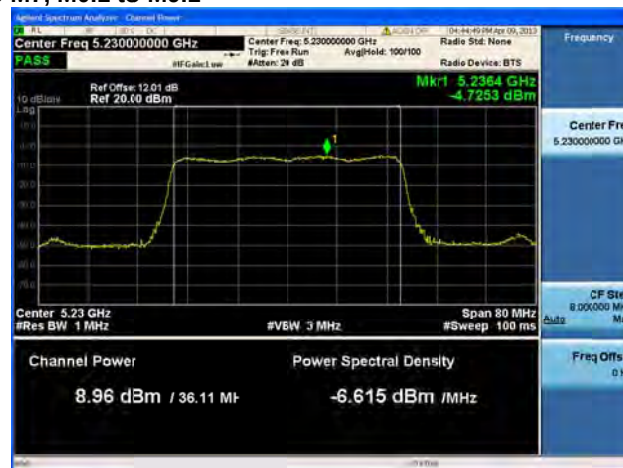


Antenna B

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1



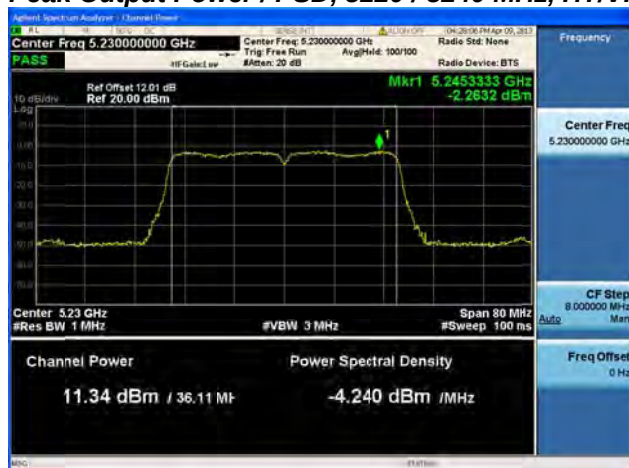
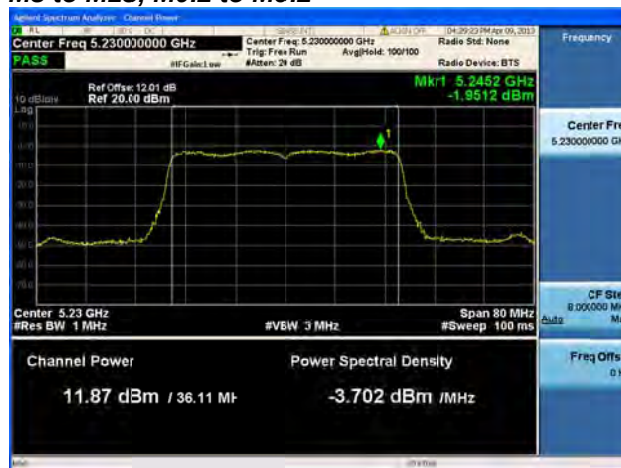
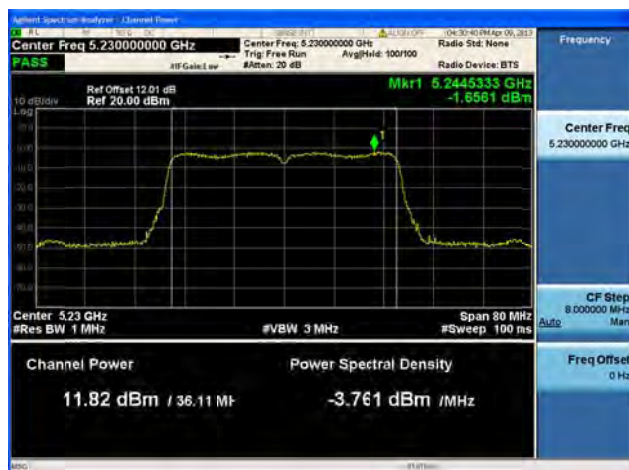
Antenna A

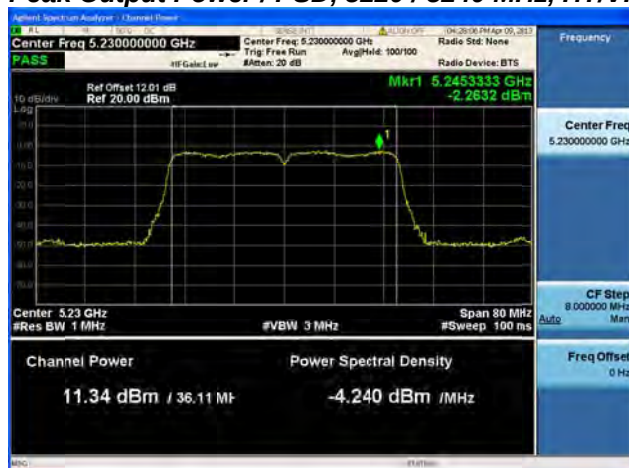
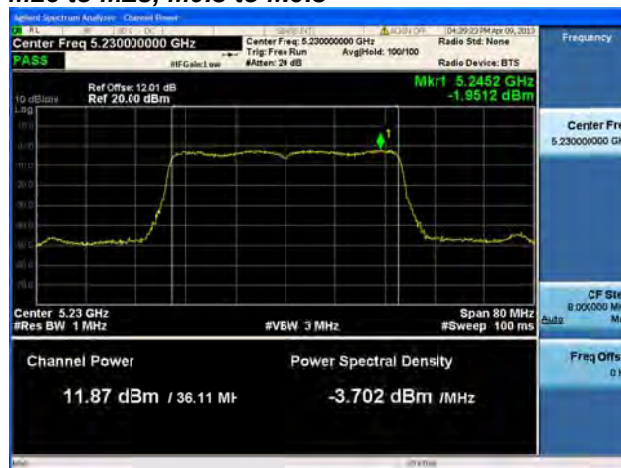
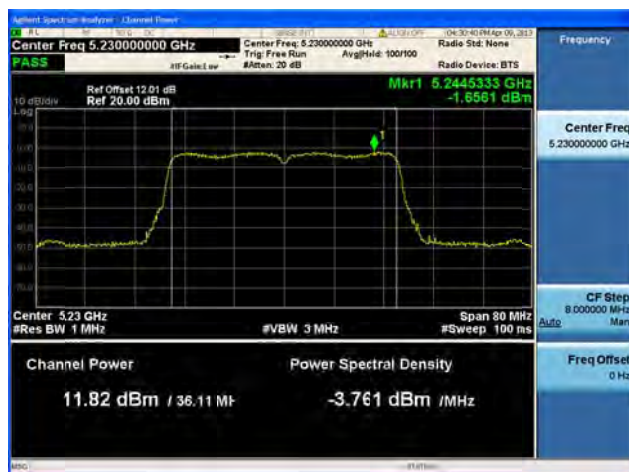


Antenna B

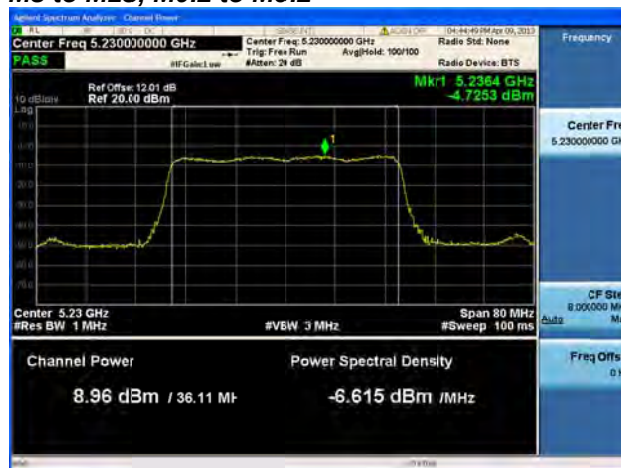


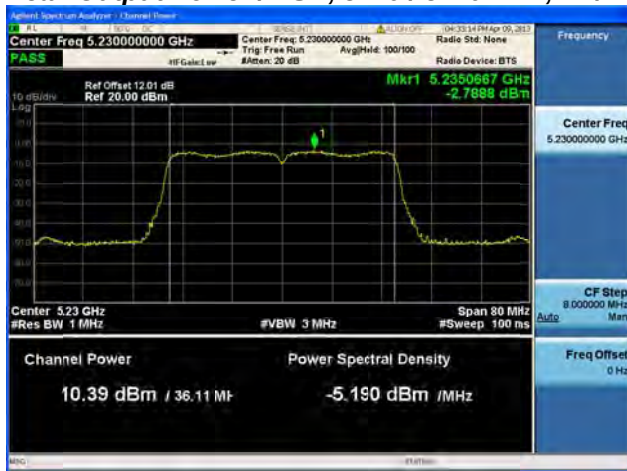
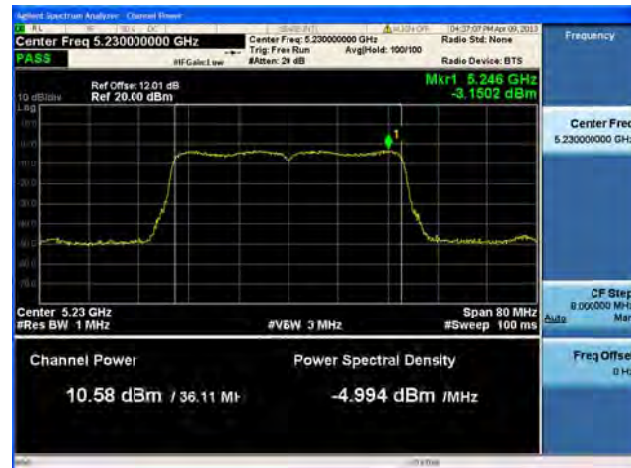
Antenna C

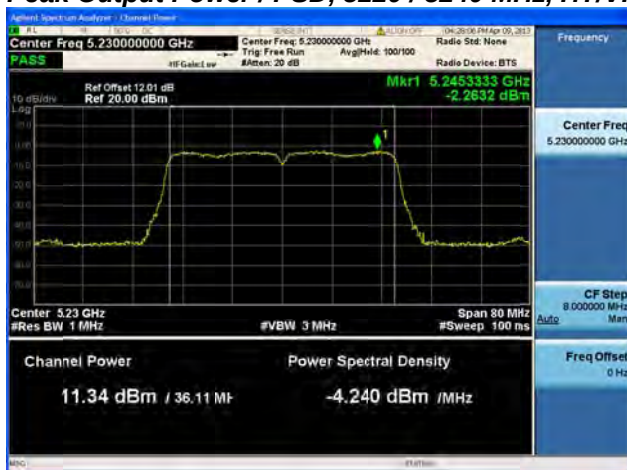
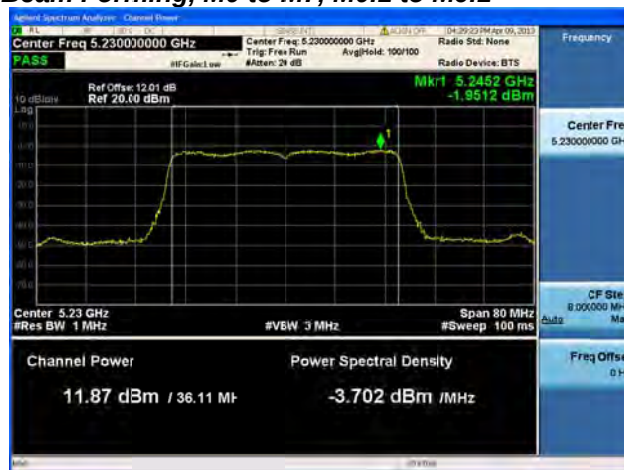
Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

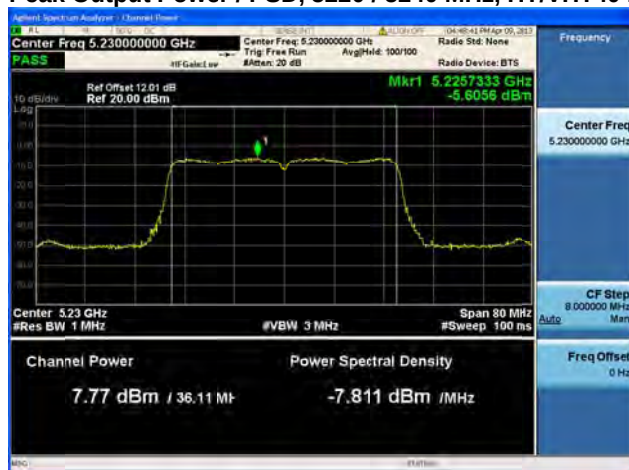


Antenna A

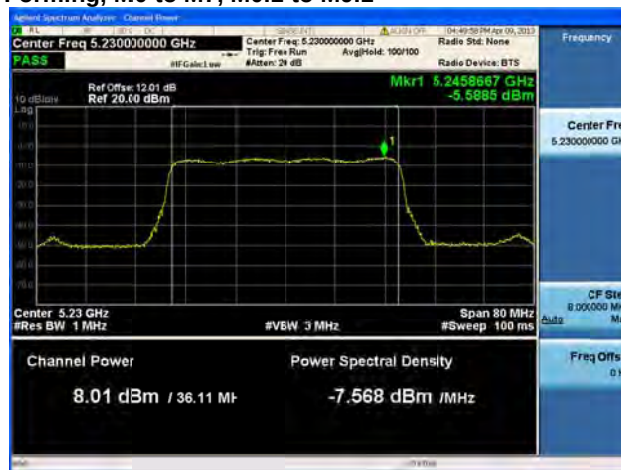


Antenna B

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1



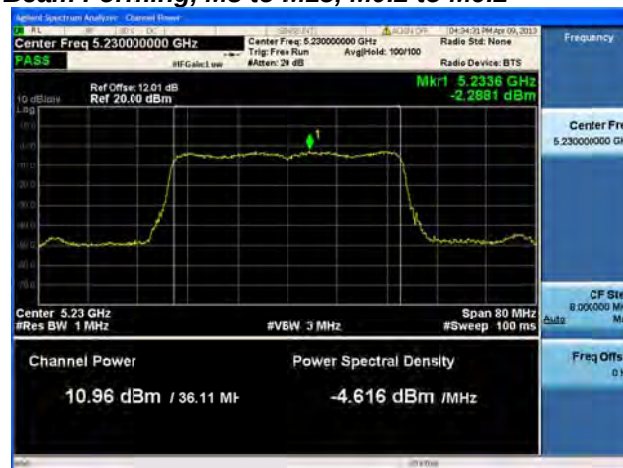
Antenna A

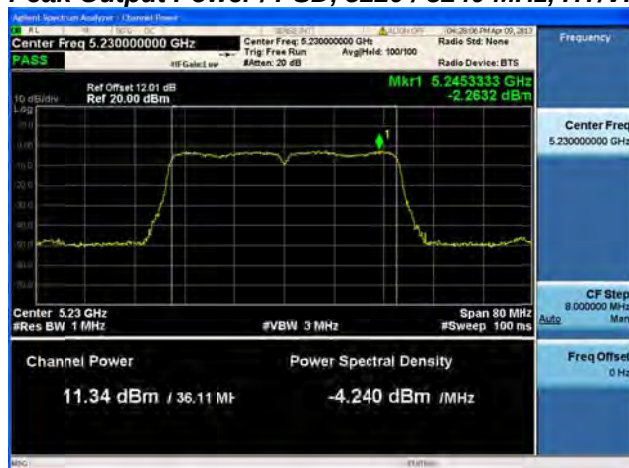
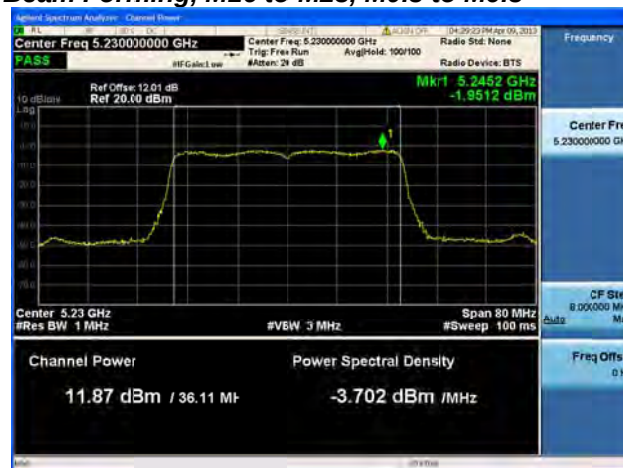
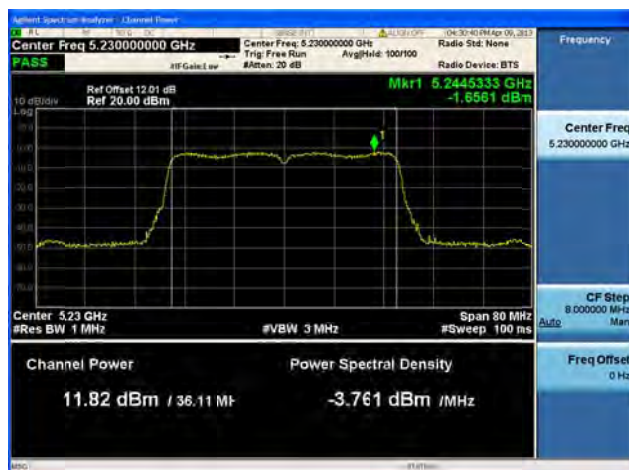


Antenna B

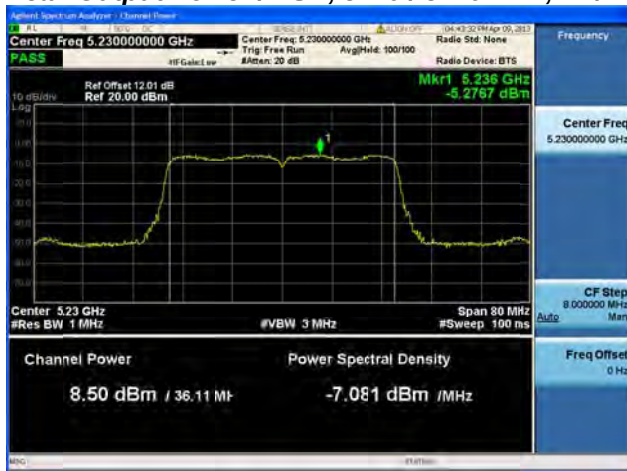
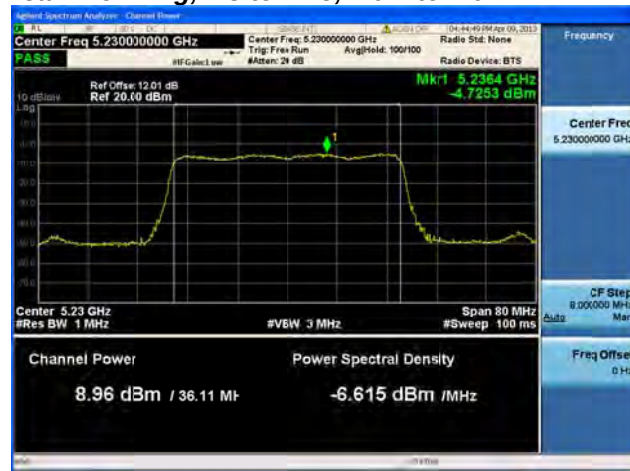


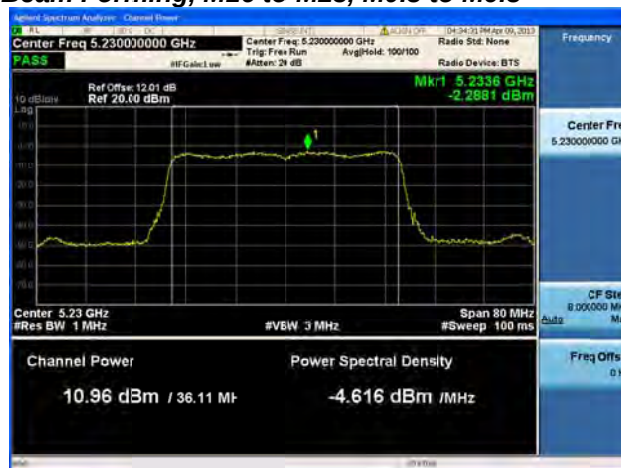
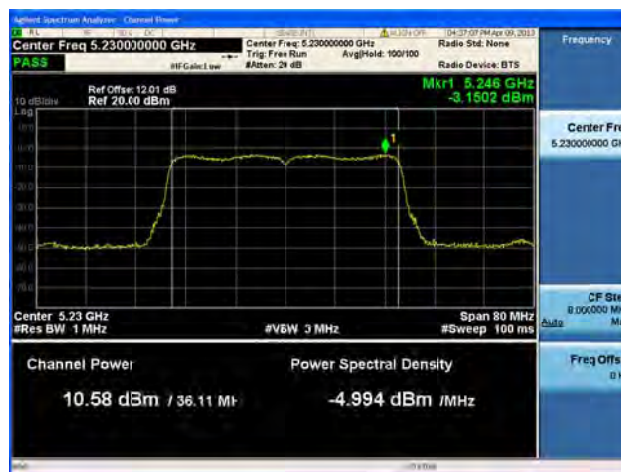
Antenna C

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

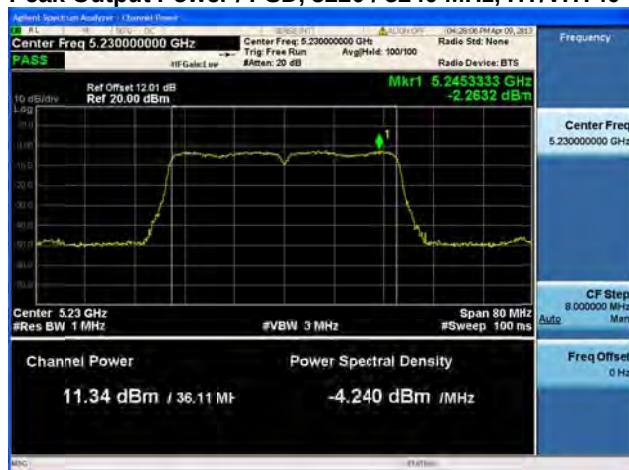
Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

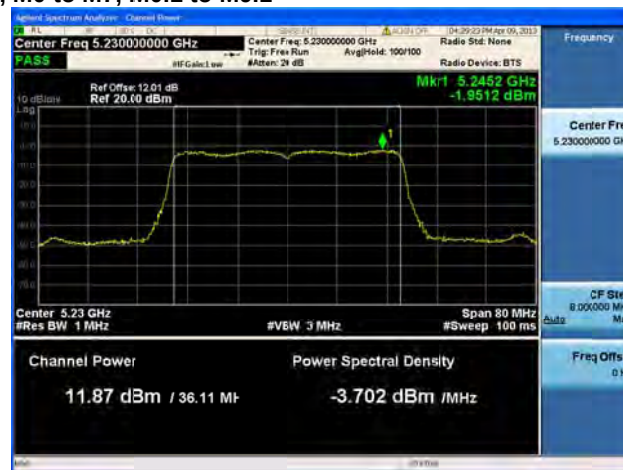
Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

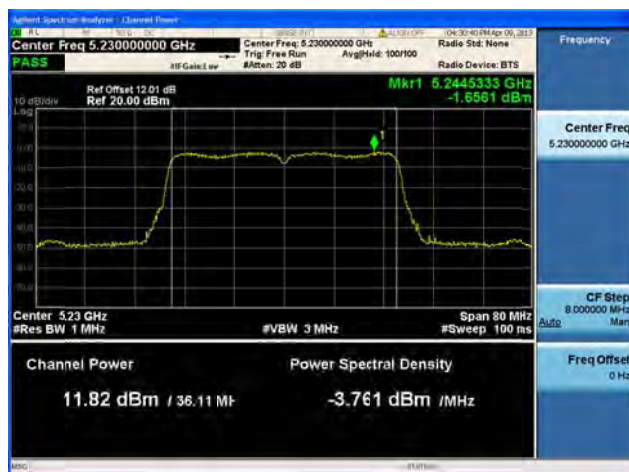
Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1



Antenna A

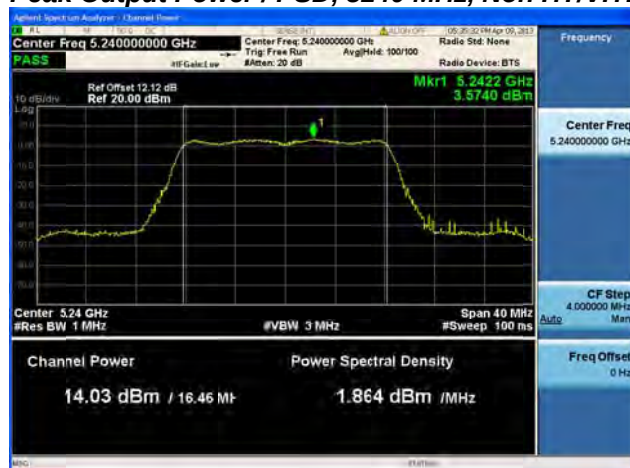


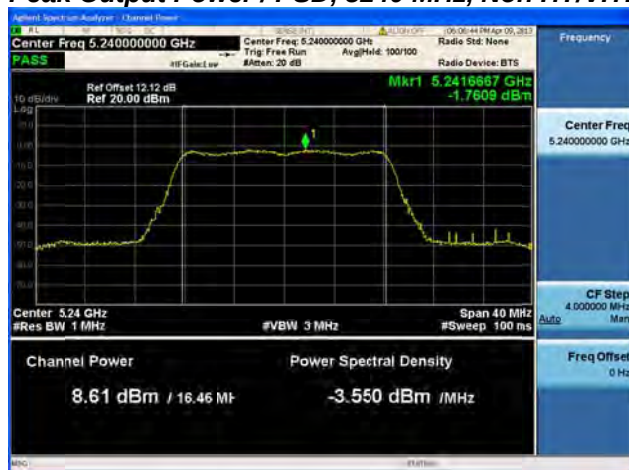
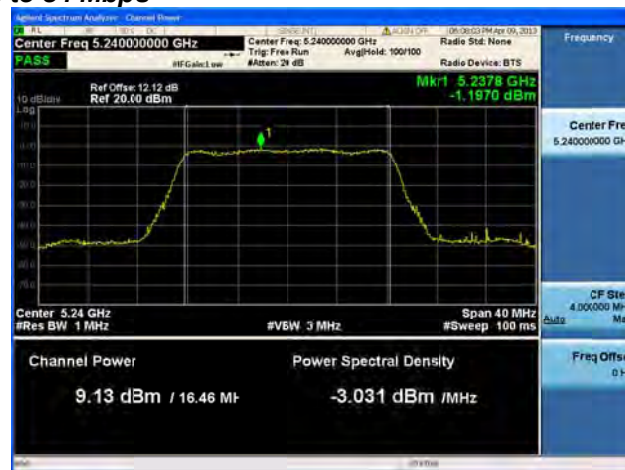
Antenna B



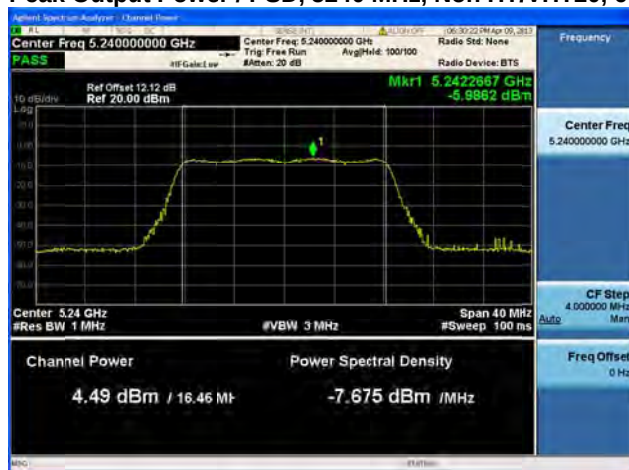
Antenna C

Peak Output Power / PSD, 5220 / 5240 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

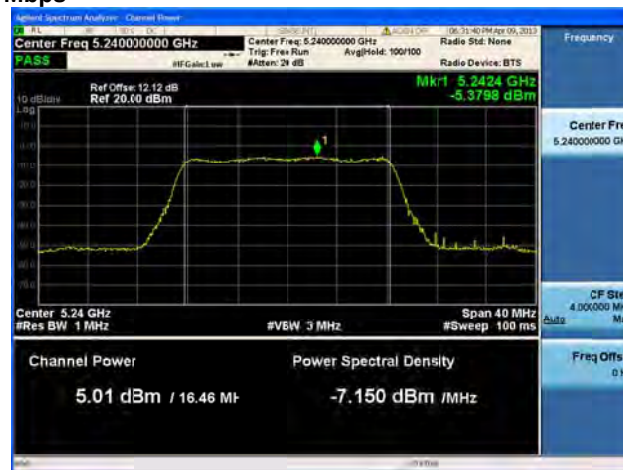
Peak Output Power / PSD, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A**

Peak Output Power / PSD, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B**

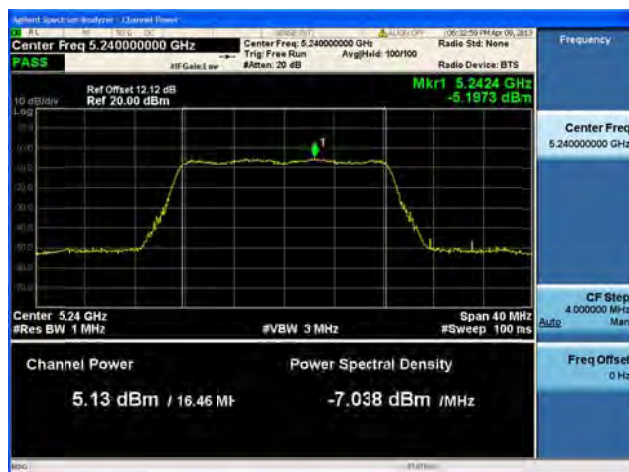
Peak Output Power / PSD, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps



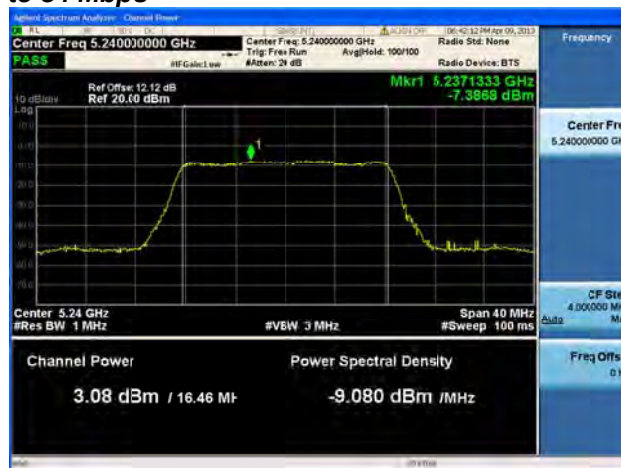
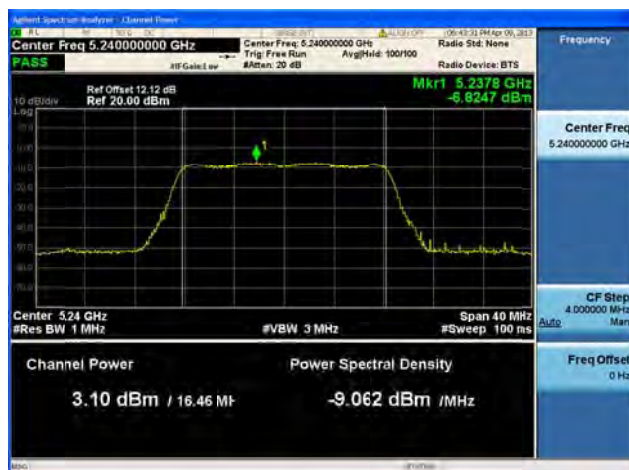
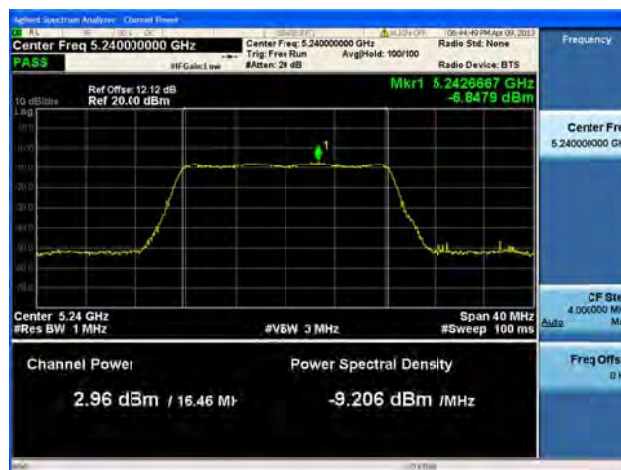
Antenna A

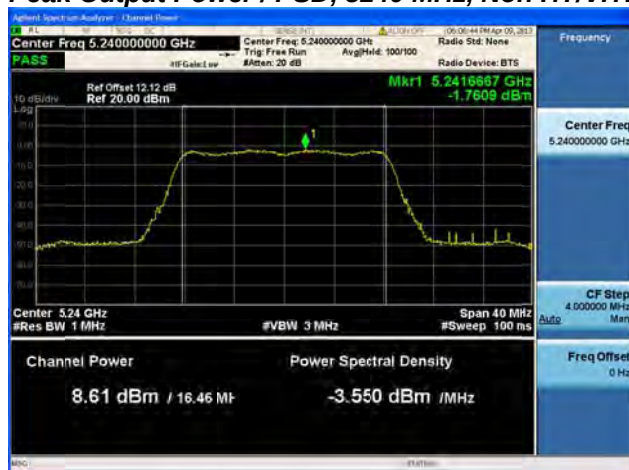


Antenna B



Antenna C

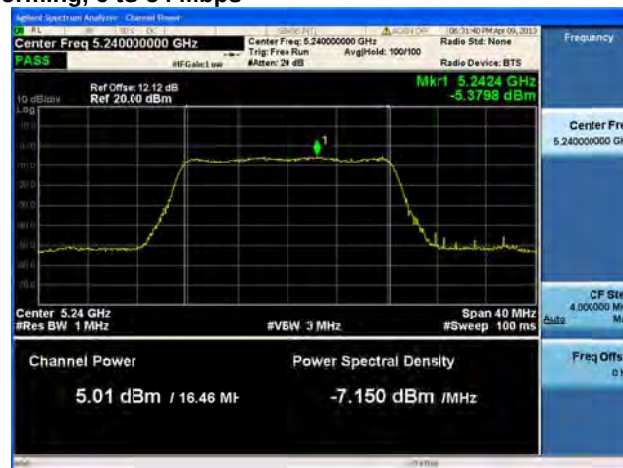
Peak Output Power / PSD, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

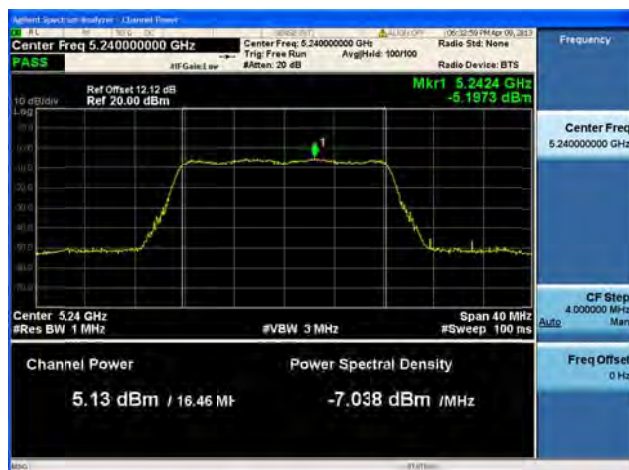
Peak Output Power / PSD, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



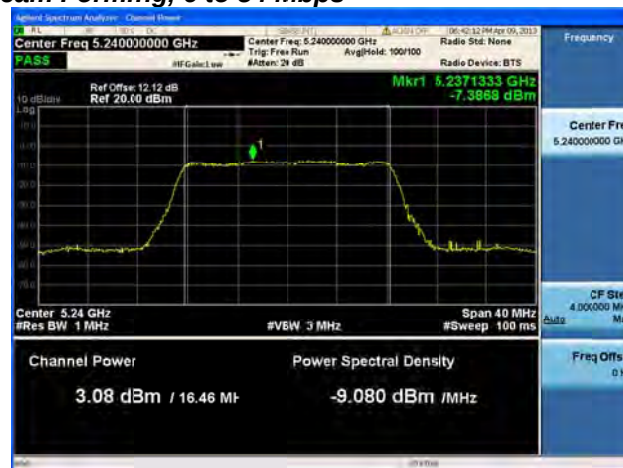
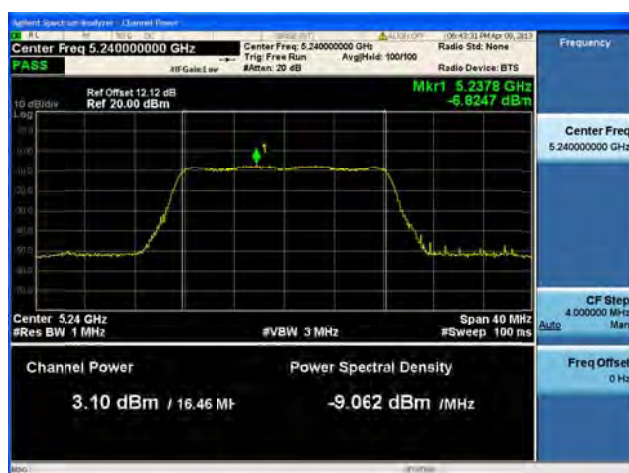
Antenna A

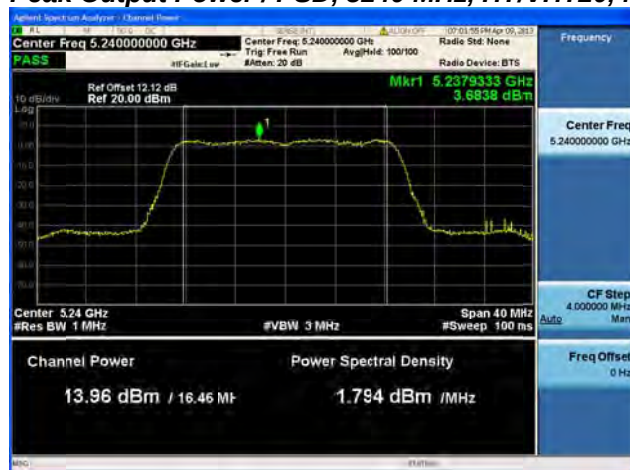


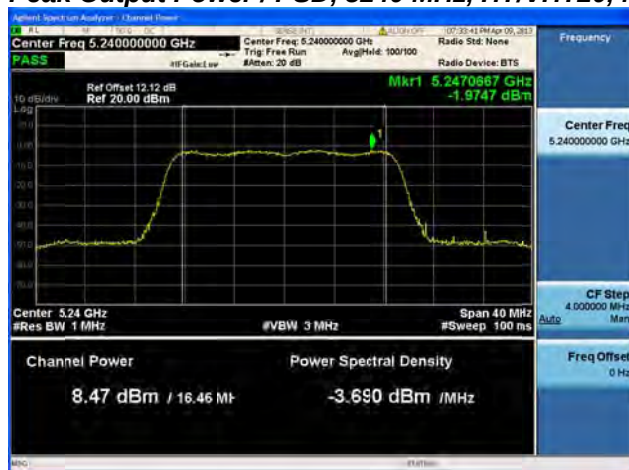
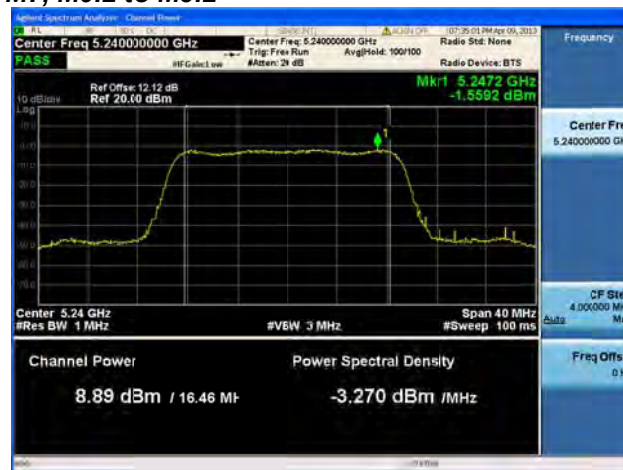
Antenna B



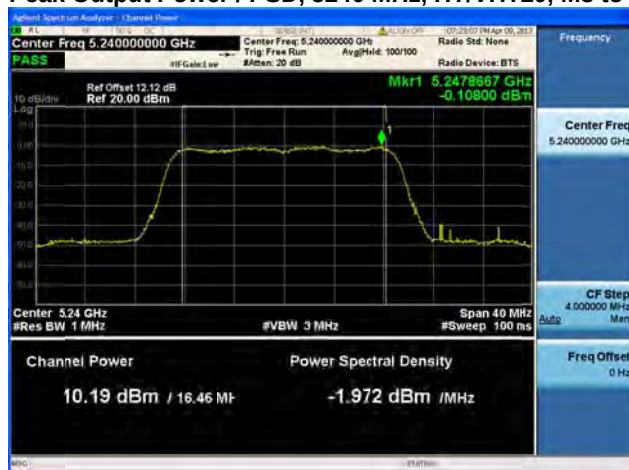
Antenna C

Peak Output Power / PSD, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1**Antenna A**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

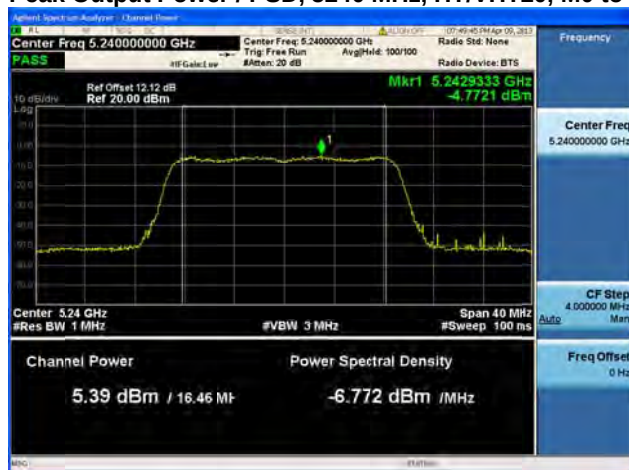


Antenna A

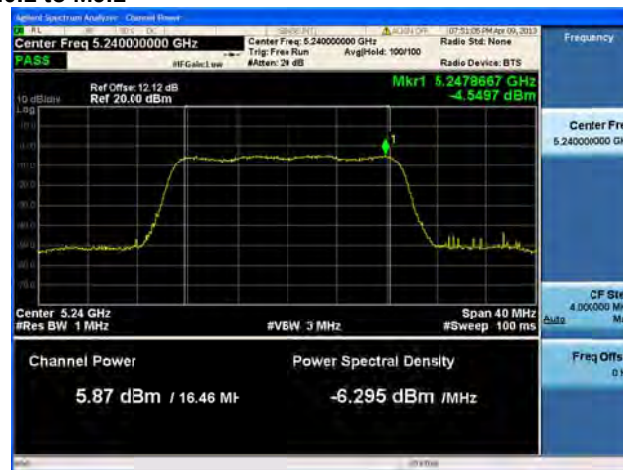


Antenna B

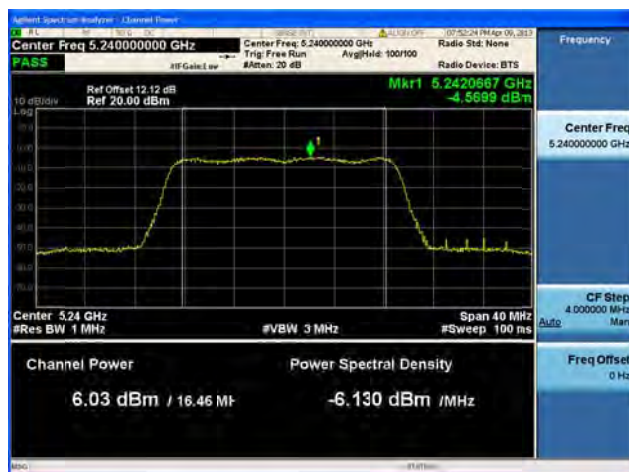
Peak Output Power / PSD, 5240 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



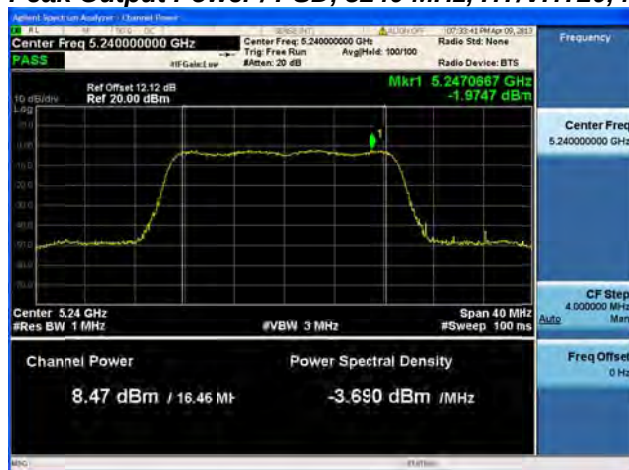
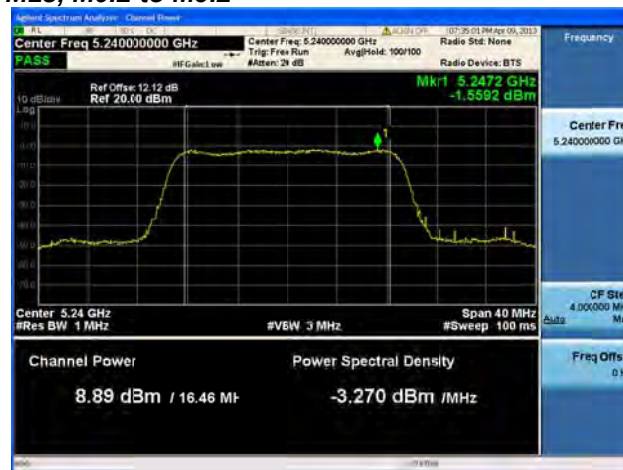
Antenna A

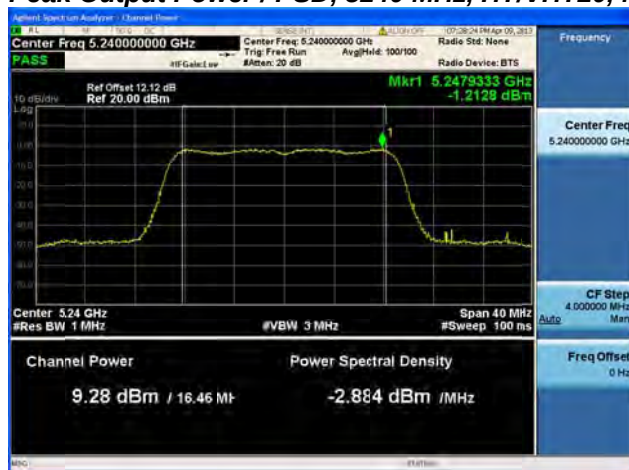
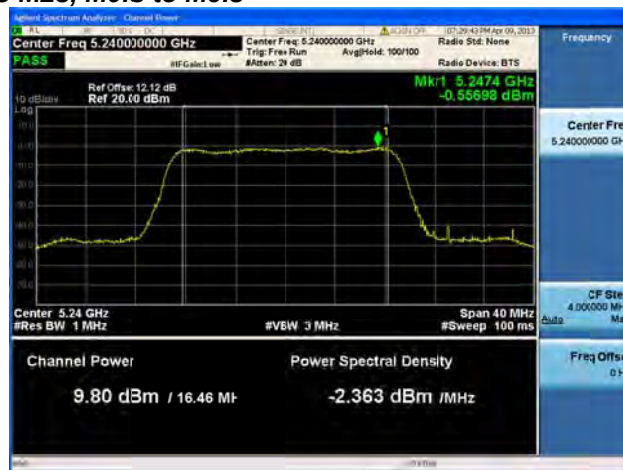
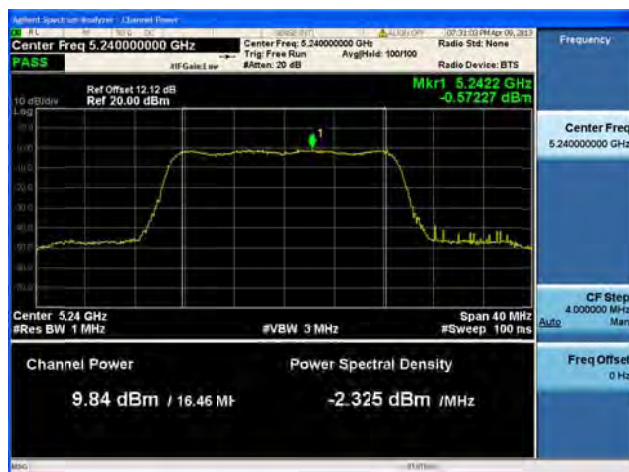


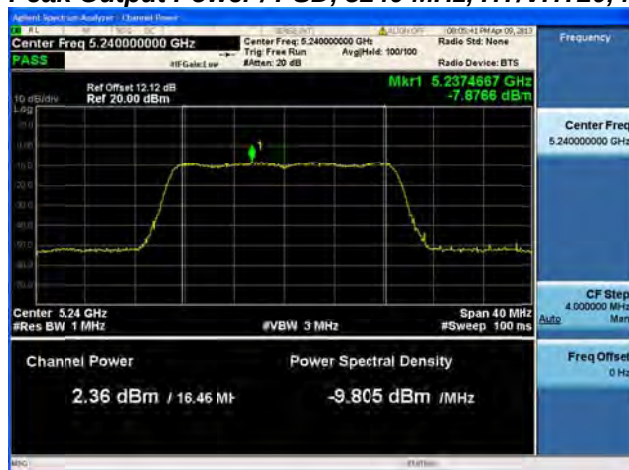
Antenna B

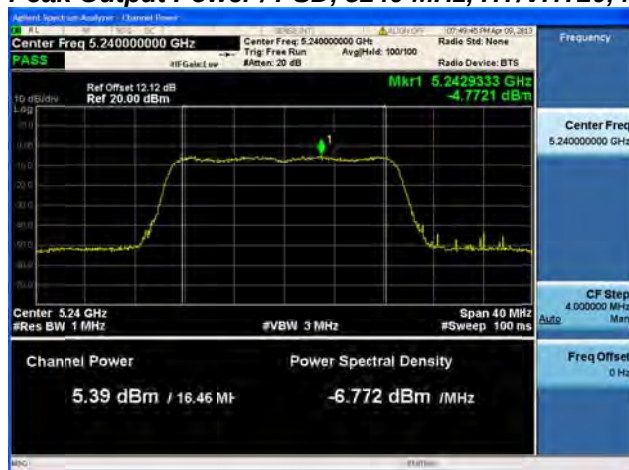
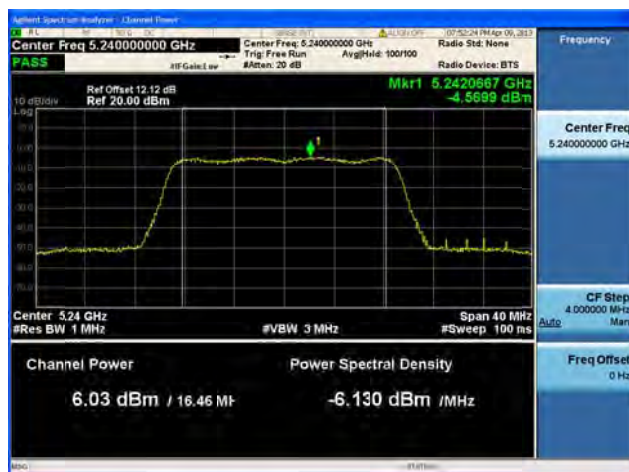


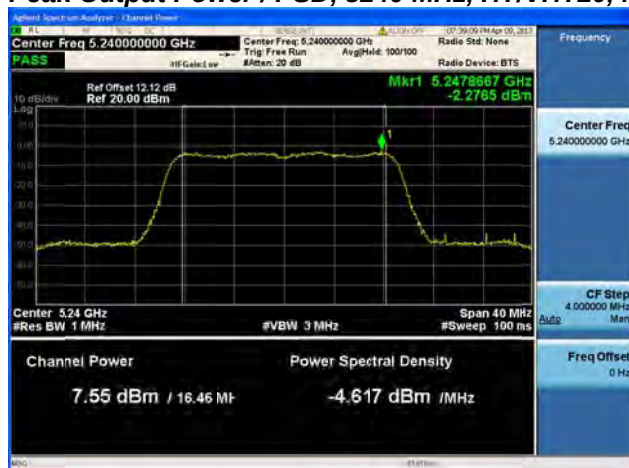
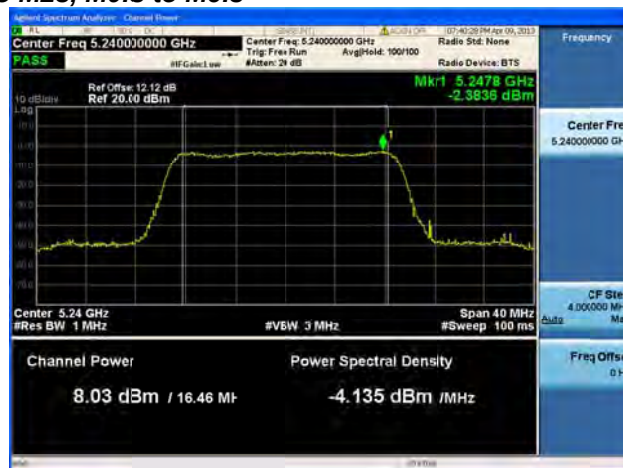
Antenna C

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

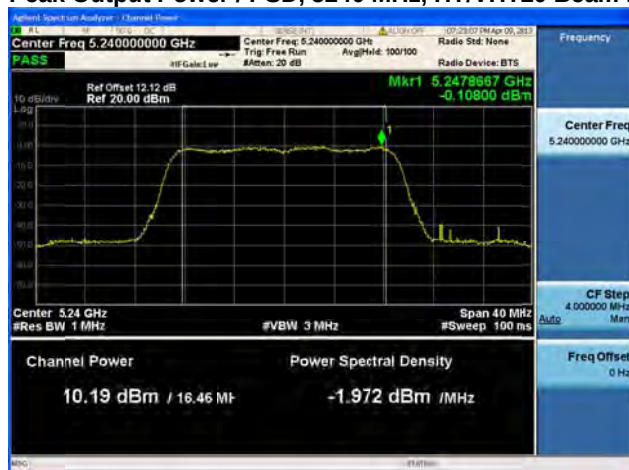
Peak Output Power / PSD, 5240 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

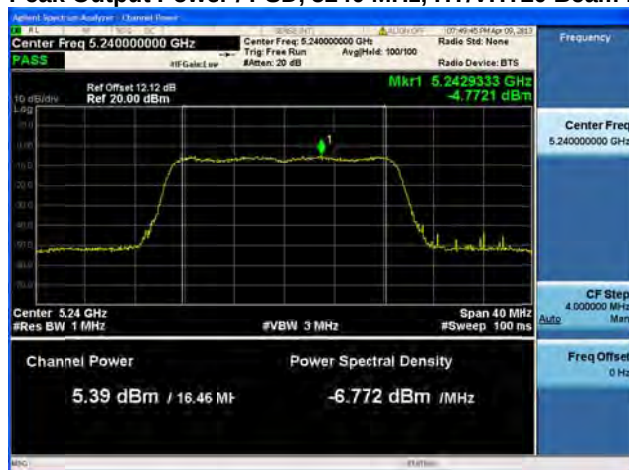


Antenna A

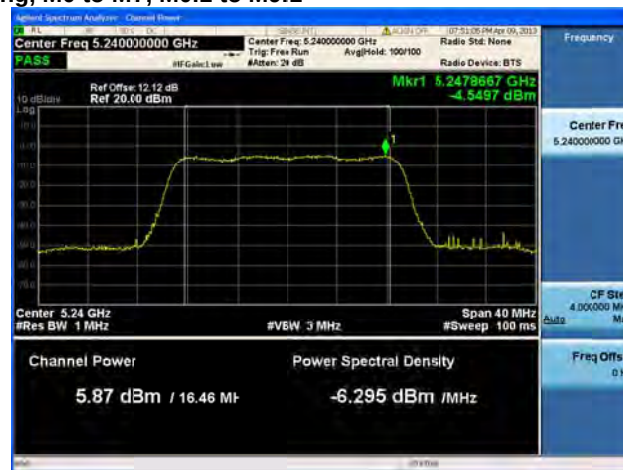


Antenna B

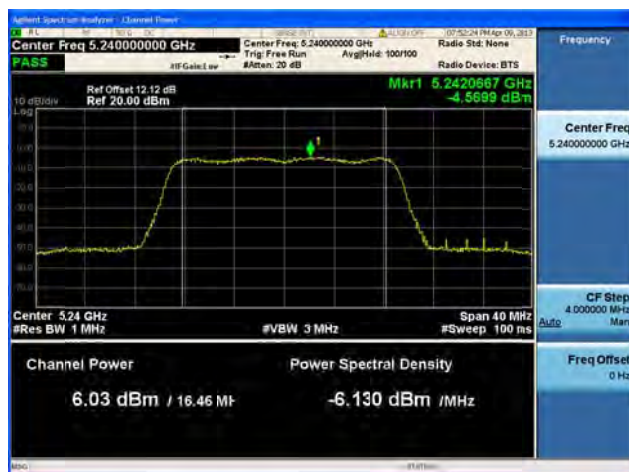
Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



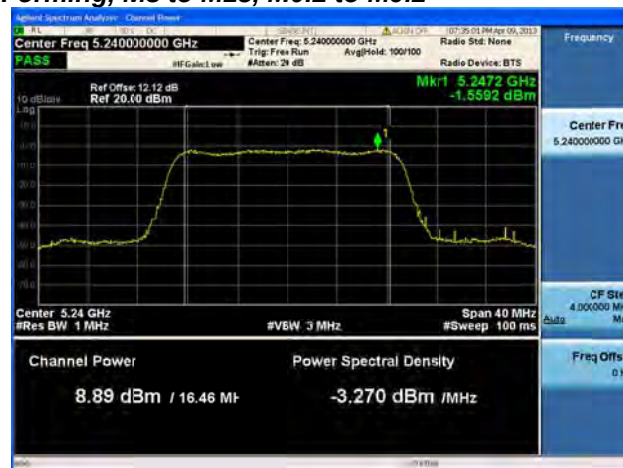
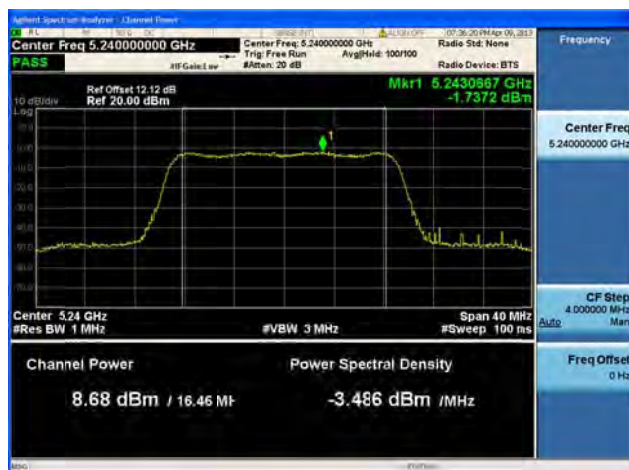
Antenna A

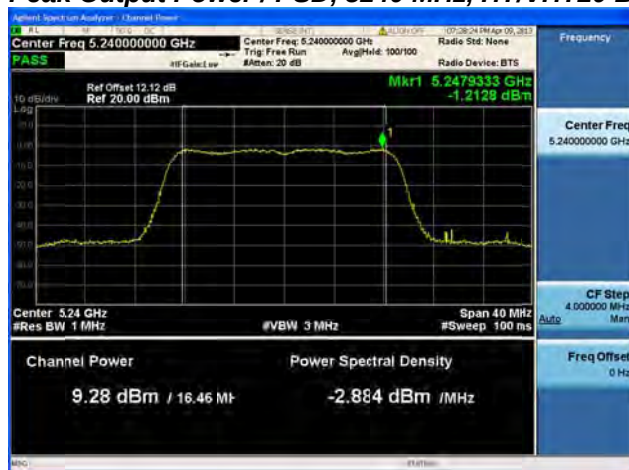
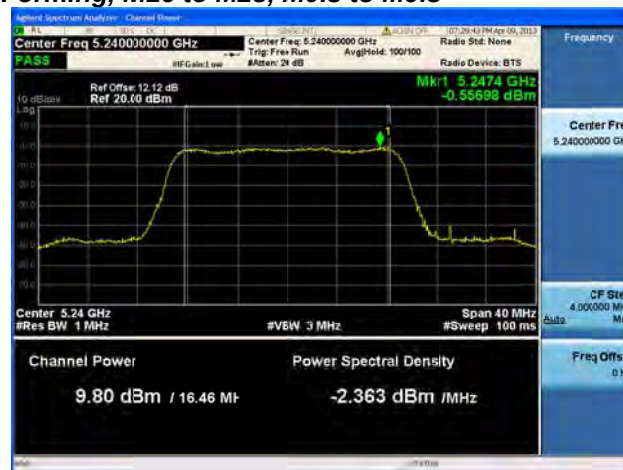
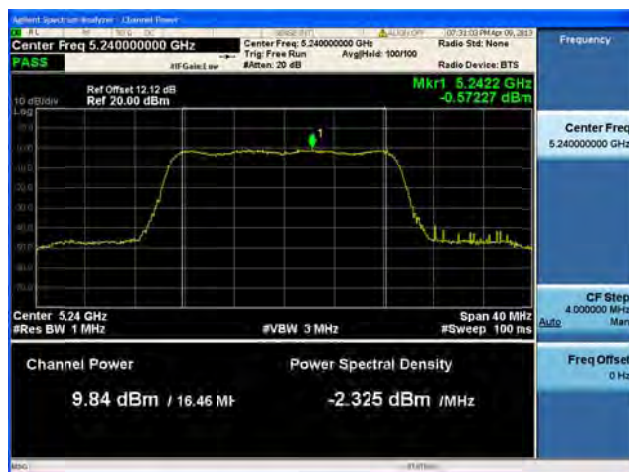


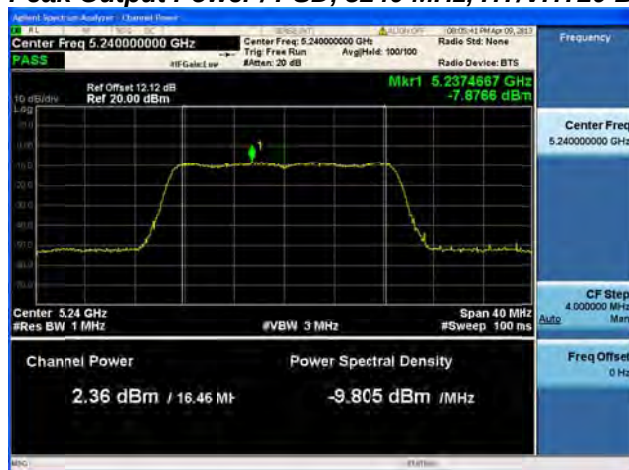
Antenna B

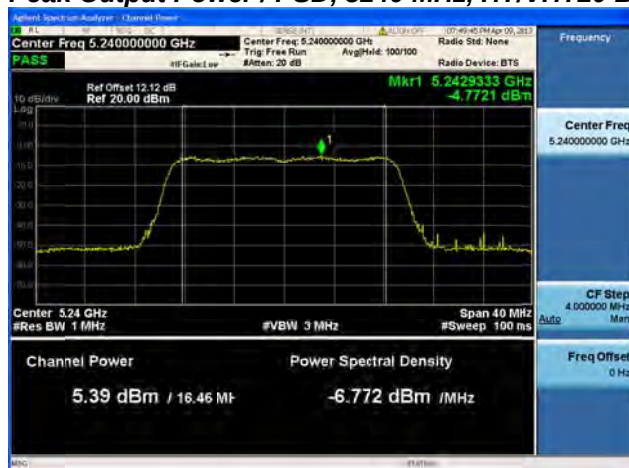
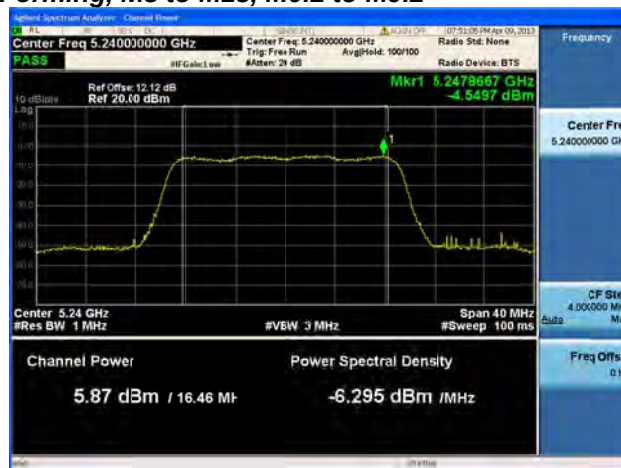
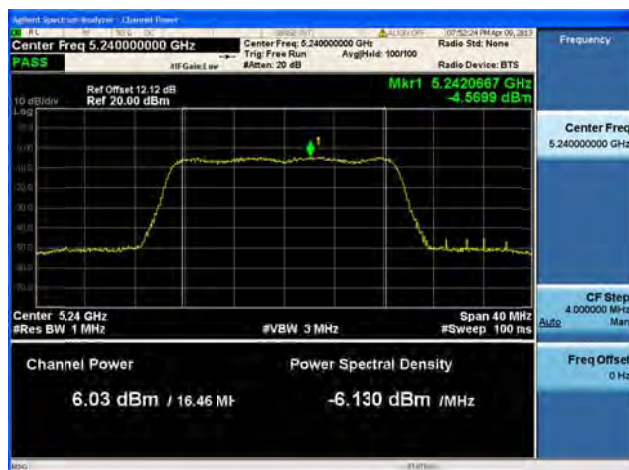


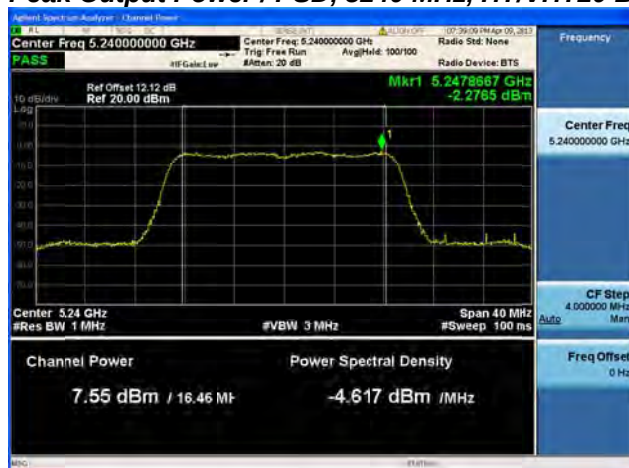
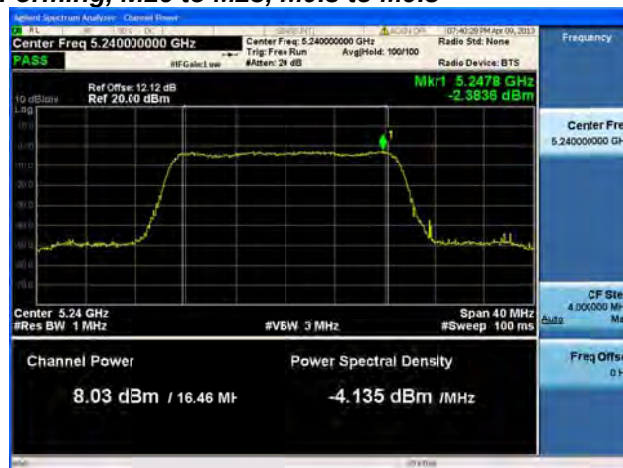
Antenna C

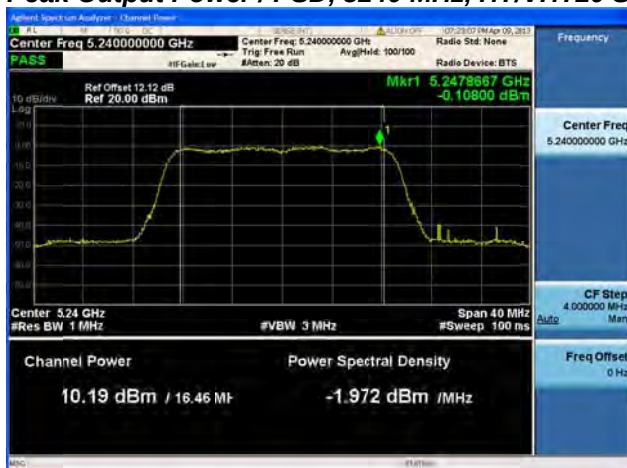
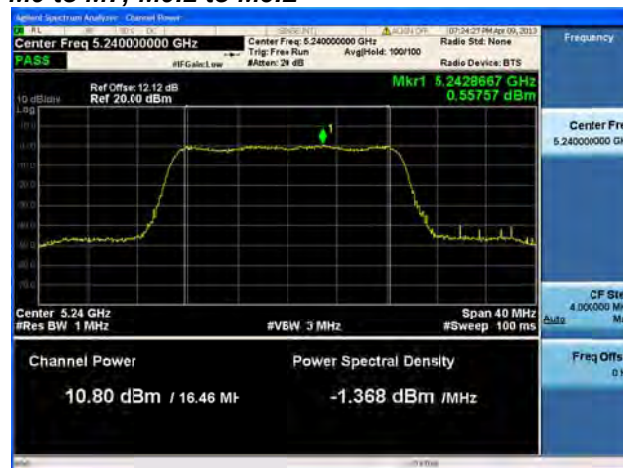
Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

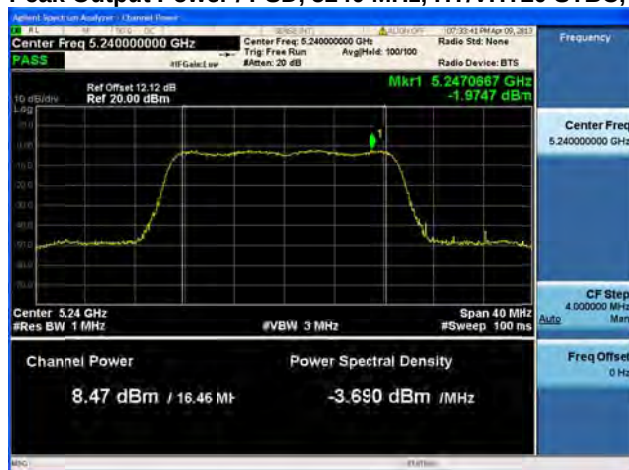
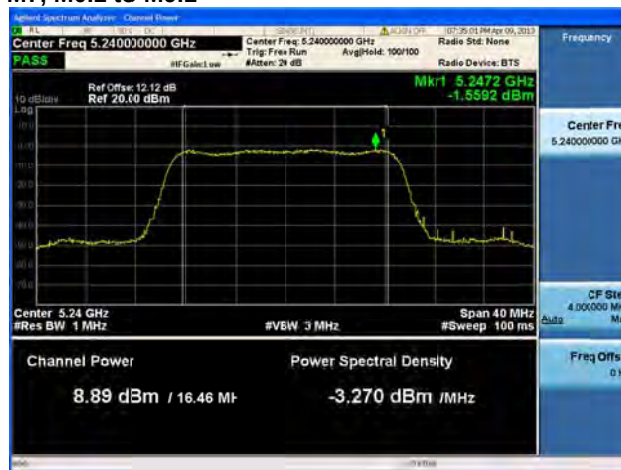
Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

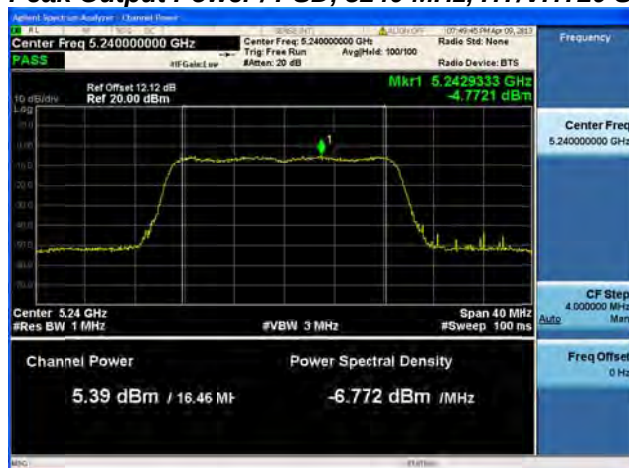
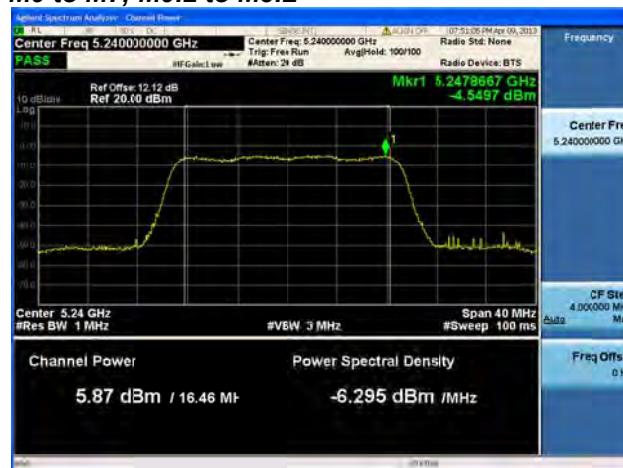
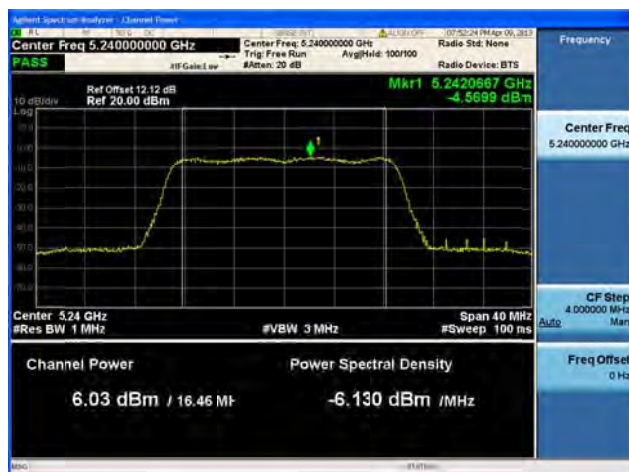
Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C**

Peak Output Power / PSD, 5240 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**



Conducted Spurious Emissions

15.407: For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.

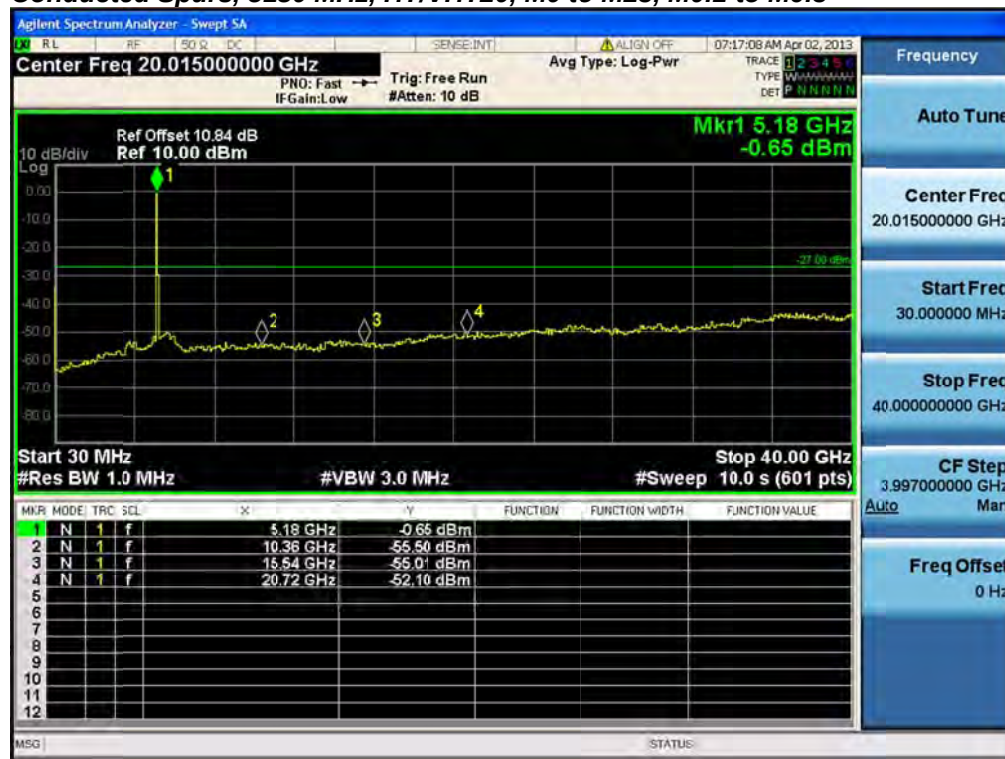
Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

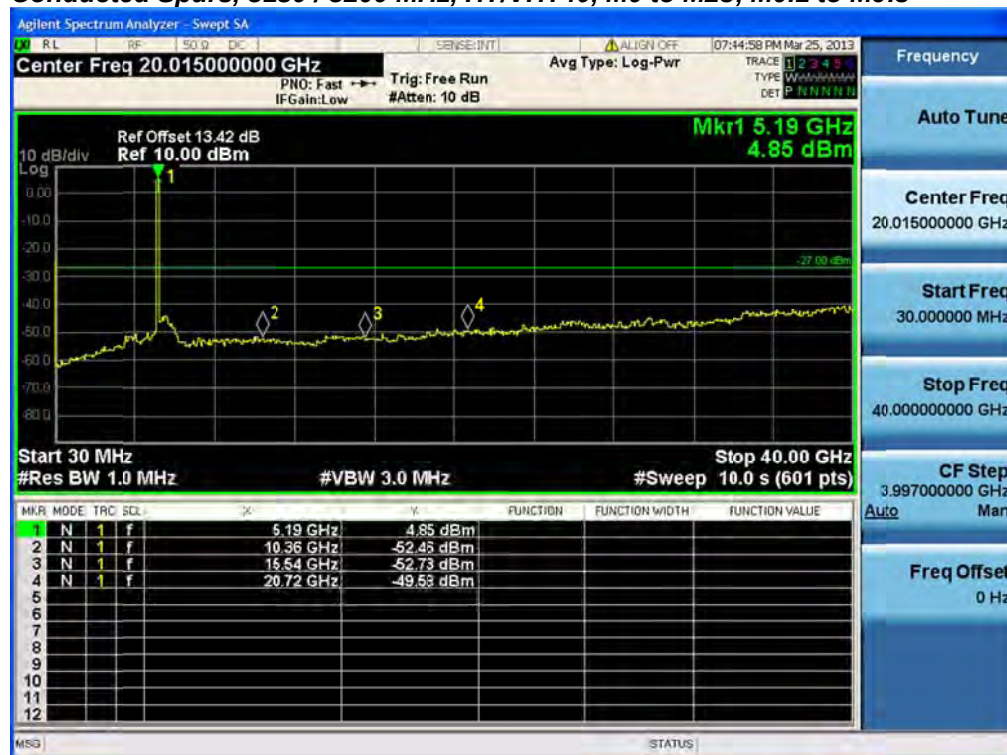
Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	10 s
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Peak
Trace:	Single
Marker:	Peak

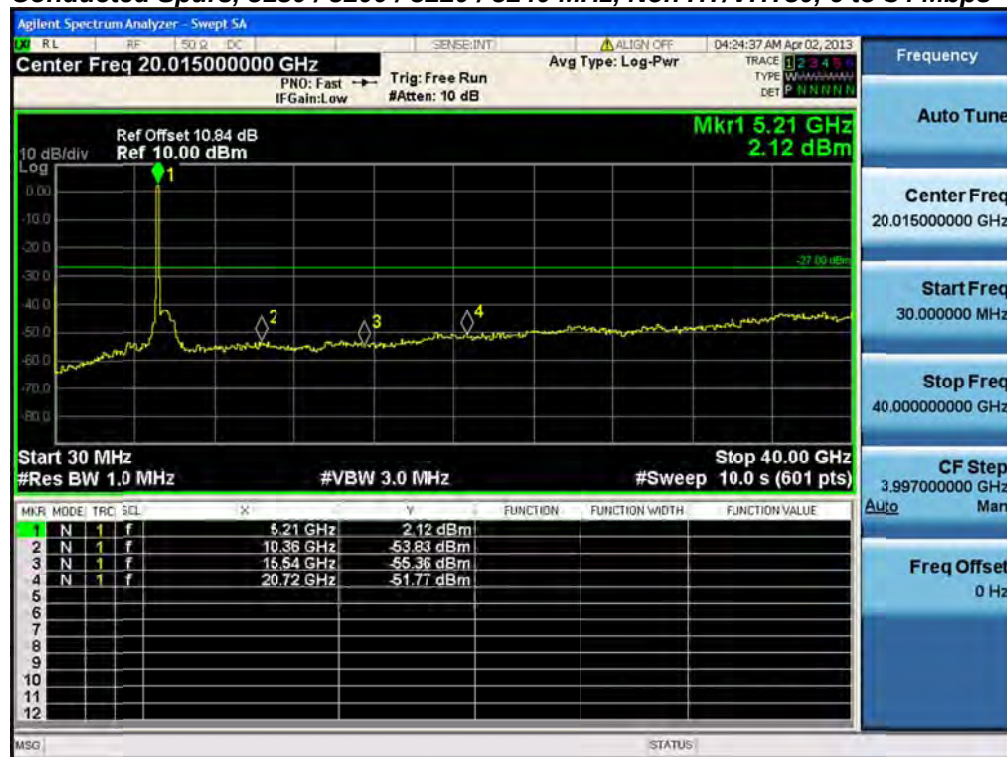
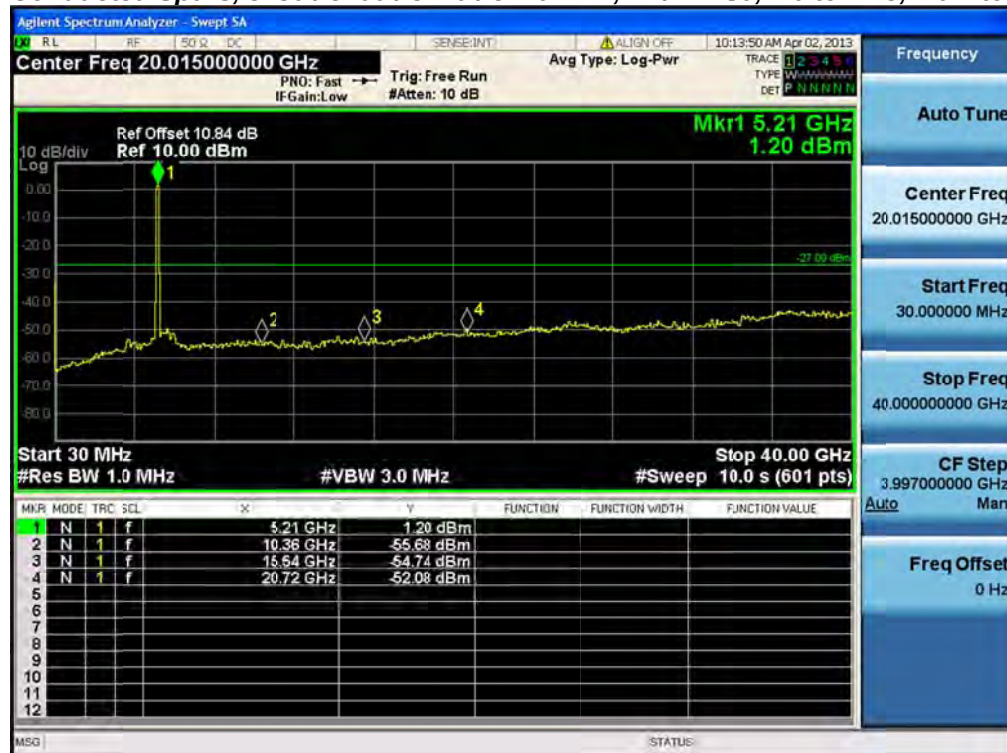
Record the marker waveform peak to spur difference



Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spurs Delta (MHz)	Limit (kHz)	Margin (MHz)
5180	Non HT/VHT20, 6 to 54 Mbps	2	11	<u>-51.9</u>	-37.9
	HT/VHT20, M0 to M23, M0.1 to M9.3	4	5	<u>-52.1</u>	-41.1
5180/5200	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>-52.1</u>	-47.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	3	5	<u>-49.6</u>	-39.8
5180/5200 5220/5240	Non HT/VHT80, 6 to 54 Mbps	1	5	<u>-51.8</u>	-46.8
	HT/VHT80, M0 to M23, M0.1 to M9.3	4	5	<u>-52.1</u>	-41.1
5220/5240	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>-52.5</u>	-47.5
	HT/VHT40, M0 to M23, M0.1 to M9.3	4	5	<u>-52.3</u>	-41.3
5240	Non HT/VHT20, 6 to 54 Mbps	2	11	<u>-52.2</u>	-38.2
	HT/VHT20, M0 to M23, M0.1 to M9.3	2	8	<u>-51.9</u>	-40.9

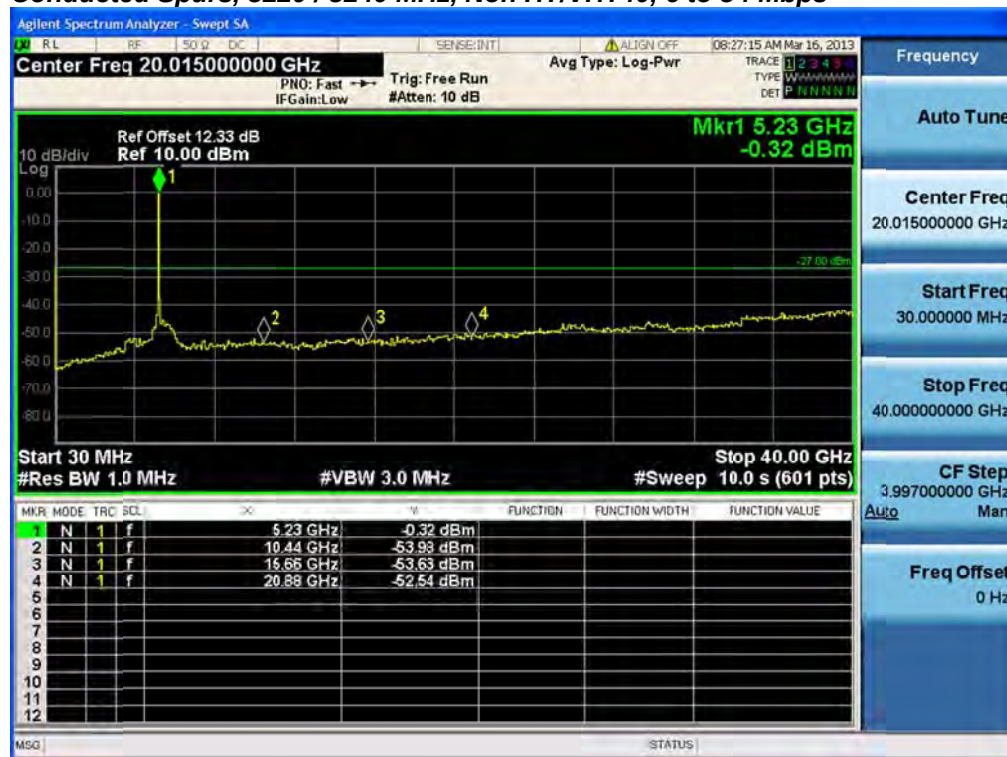
Conducted Spurs, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Conducted Spurs, 5180 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3**

Conducted Spurs, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**Conducted Spurs, 5180 / 5200 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3**

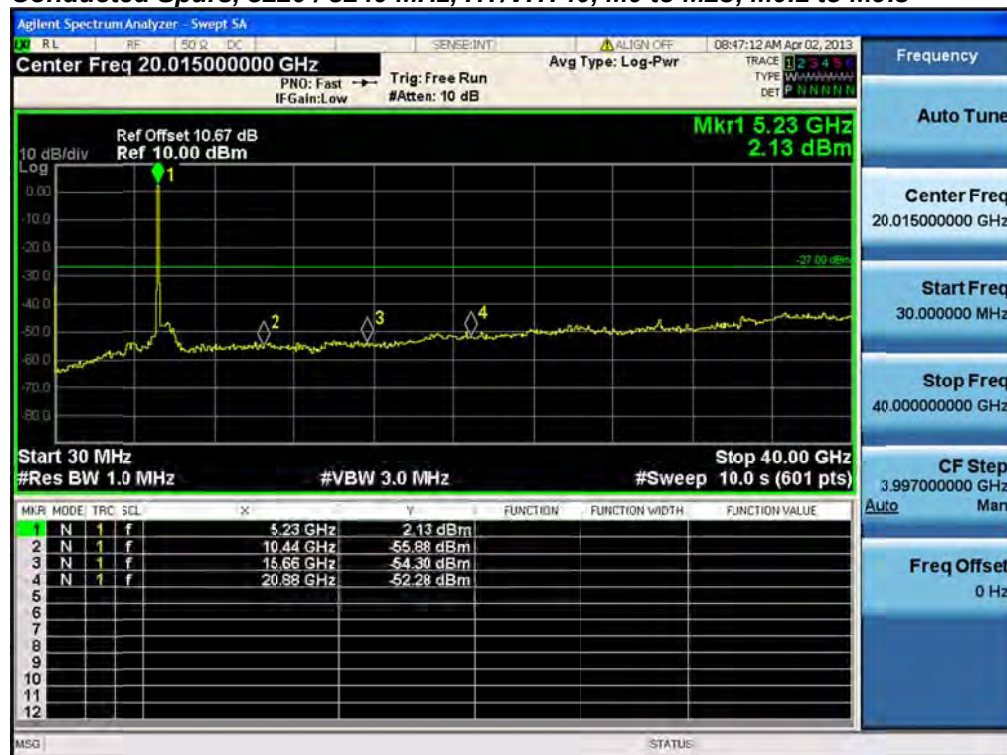
Conducted Spurs, 5180 / 5200 / 5220 / 5240 MHz, Non HT/VHT80, 6 to 54 Mbps**Conducted Spurs, 5180 / 5200 / 5220 / 5240 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3**

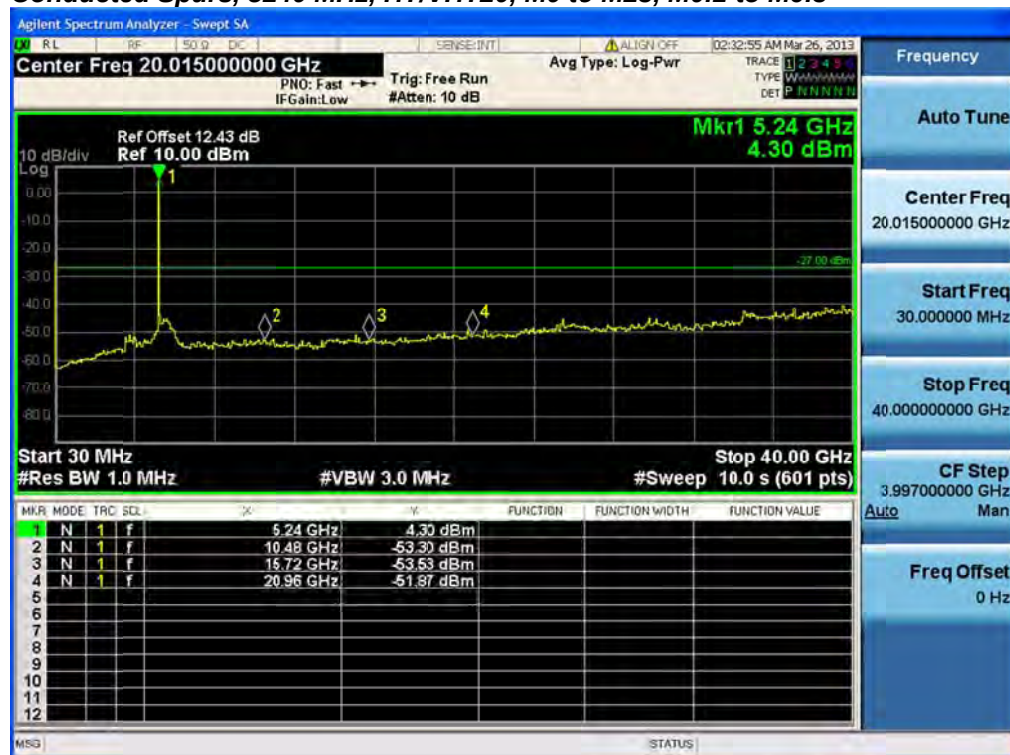


Conducted Spurs, 5220 / 5240 MHz, Non HT/VHT40, 6 to 54 Mbps



Conducted Spurs, 5220 / 5240 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3



Conducted Spurs, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**Conducted Spurs, 5240 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3**



Conducted Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.
Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV @3m)
2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

This report represents the worst case data for all supported operating modes and antennas.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>-65.5</u>				-60.5	-41.25	19.3
	Non HT/VHT20, 6 to 54 Mbps	2	5	<u>-71.7</u>	<u>-73.5</u>			-64.5	-41.25	23.2
	Non HT/VHT20, 6 to 54 Mbps	3	5	<u>-73.1</u>	<u>-76.5</u>	<u>-73.9</u>		-64.5	-41.25	23.3
	Non HT/VHT20, 6 to 54 Mbps	4	5	<u>-73.0</u>	<u>-76.7</u>	<u>-73.9</u>	<u>-75.0</u>	-63.4	-41.25	22.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>-71.7</u>	<u>-73.5</u>			-61.5	-41.25	20.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>-73.1</u>	<u>-76.5</u>	<u>-73.9</u>		-59.7	-41.25	18.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>-73.0</u>	<u>-76.7</u>	<u>-73.9</u>	<u>-75.0</u>	-57.4	-41.25	16.2
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>-63.5</u>				-58.5	-41.25	17.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	5	<u>-71.3</u>	<u>-73.4</u>			-64.2	-41.25	23.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>-70.1</u>	<u>-73.1</u>			-63.3	-41.25	22.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	5	<u>-72.3</u>	<u>-74.7</u>	<u>-73.7</u>		-63.7	-41.25	22.4
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	5	<u>-71.3</u>	<u>-73.4</u>	<u>-71.6</u>		-62.2	-41.25	21.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>-70.7</u>	<u>-73.1</u>	<u>-71.3</u>		-61.8	-41.25	20.6
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	5	<u>-73.1</u>	<u>-76.6</u>	<u>-73.6</u>	<u>-74.9</u>	-63.3	-41.25	22.1
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	5	<u>-72.3</u>	<u>-74.7</u>	<u>-73.7</u>	<u>-73.9</u>	-62.5	-41.25	21.3
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	<u>-71.8</u>	<u>-73.6</u>	<u>-71.8</u>	<u>-73.6</u>	-61.6	-41.25	20.3
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-71.3</u>	<u>-73.4</u>			-61.2	-41.25	20.0
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-70.1</u>	<u>-73.1</u>			-63.3	-41.25	22.1
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-72.3</u>	<u>-74.7</u>	<u>-73.7</u>		-58.9	-41.25	17.6
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-71.3</u>	<u>-73.4</u>	<u>-71.6</u>		-60.4	-41.25	19.2
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-70.7</u>	<u>-73.1</u>	<u>-71.3</u>		-61.8	-41.25	20.6
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-73.1</u>	<u>-76.6</u>	<u>-73.6</u>	<u>-74.9</u>	-57.3	-41.25	16.1
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-72.3</u>	<u>-74.7</u>	<u>-73.7</u>	<u>-73.9</u>	-59.5	-41.25	18.3
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-71.8</u>	<u>-73.6</u>	<u>-71.8</u>	<u>-73.6</u>	-60.4	-41.25	19.1
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-70.1</u>	<u>-73.1</u>			-63.3	-41.25	22.1
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-71.8</u>	<u>-73.6</u>	<u>-71.8</u>		-62.6	-41.25	21.3
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-72.3</u>	<u>-74.7</u>	<u>-73.7</u>	<u>-73.9</u>	-62.5	-41.25	21.3



5180/5200	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>-46.8</u>				-41.8	-41.25	0.5
	Non HT/VHT40, 6 to 54 Mbps	2	5	<u>-56.2</u>	<u>-61.4</u>			-50.1	-41.25	8.8
	Non HT/VHT40, 6 to 54 Mbps	3	5	<u>-63.3</u>	<u>-68.4</u>	<u>-66.0</u>		-55.6	-41.25	14.4
	Non HT/VHT40, 6 to 54 Mbps	4	5	<u>-64.4</u>	<u>-69.0</u>	<u>-68.0</u>	<u>-67.5</u>	-55.8	-41.25	14.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>-52.7</u>				-47.7	-41.25	6.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	5	<u>-57.8</u>	<u>-64.2</u>			-51.9	-41.25	10.7
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>-57.0</u>	<u>-61.9</u>			-50.8	-41.25	9.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	5	<u>-63.6</u>	<u>-68.2</u>	<u>-65.8</u>		-55.7	-41.25	14.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	5	<u>-62.7</u>	<u>-67.1</u>	<u>-65.3</u>		-54.9	-41.25	13.6
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>-62.7</u>	<u>-67.1</u>	<u>-65.3</u>		-54.9	-41.25	13.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	5	<u>-64.1</u>	<u>-70.5</u>	<u>-70.9</u>	<u>-67.3</u>	-56.3	-41.25	15.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	5	<u>-63.3</u>	<u>-67.8</u>	<u>-65.7</u>	<u>-66.6</u>	-54.5	-41.25	13.3
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>-62.9</u>	<u>-67.3</u>	<u>-65.5</u>	<u>-66.3</u>	-54.2	-41.25	12.9
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-62.7</u>	<u>-67.1</u>			-53.4	-41.25	12.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-57.0</u>	<u>-61.9</u>			-50.8	-41.25	9.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-63.8</u>	<u>-68.4</u>	<u>-67.9</u>		-51.6	-41.25	10.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-62.9</u>	<u>-67.3</u>	<u>-65.5</u>		-53.3	-41.25	12.0
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-62.7</u>	<u>-67.1</u>	<u>-65.3</u>		-54.9	-41.25	13.6
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-69.1</u>	<u>-73.0</u>	<u>-71.0</u>	<u>-69.2</u>	-53.3	-41.25	12.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-63.6</u>	<u>-68.2</u>	<u>-65.8</u>	<u>-66.9</u>	-51.8	-41.25	10.5
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-62.9</u>	<u>-67.3</u>	<u>-65.5</u>	<u>-66.3</u>	-53.0	-41.25	11.7
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-57.0</u>	<u>-61.9</u>			-50.8	-41.25	9.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-62.7</u>	<u>-67.1</u>	<u>-65.3</u>		-54.9	-41.25	13.6
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-63.3</u>	<u>-67.8</u>	<u>-65.7</u>	<u>-66.6</u>	-54.5	-41.25	13.3
5180/5200/5220/5240	Non HT/VHT80, 6 to 54 Mbps	1	5	<u>-50.2</u>				-45.2	-41.25	4.0
	Non HT/VHT80, 6 to 54 Mbps	2	5	<u>-57.3</u>	<u>-59.9</u>			-50.4	-41.25	9.1
	Non HT/VHT80, 6 to 54 Mbps	3	5	<u>-60.1</u>	<u>-64.1</u>	<u>-58.0</u>		-50.3	-41.25	9.1
	Non HT/VHT80, 6 to 54 Mbps	4	5	<u>-64.6</u>	<u>-66.6</u>	<u>-60.8</u>	<u>-66.5</u>	-52.9	-41.25	11.7
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	5	<u>-54.0</u>				-49.0	-41.25	7.8
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	5	<u>-62.0</u>	<u>-62.4</u>			-54.2	-41.25	12.9
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	5	<u>-62.0</u>	<u>-62.4</u>			-54.2	-41.25	12.9
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	5	<u>-57.9</u>	<u>-55.4</u>	<u>-62.8</u>		-48.0	-41.25	6.7
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	5	<u>-57.9</u>	<u>-55.4</u>	<u>-62.8</u>		-48.0	-41.25	6.7
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	5	<u>-57.9</u>	<u>-55.4</u>	<u>-62.8</u>		-48.0	-41.25	6.7
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	5	<u>-63.6</u>	<u>-61.2</u>	<u>-66.1</u>	<u>-66.0</u>	-52.7	-41.25	11.5
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	5	<u>-61.0</u>	<u>-58.2</u>	<u>-63.9</u>	<u>-64.0</u>	-50.1	-41.25	8.8
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	5	<u>-61.0</u>	<u>-58.2</u>	<u>-63.9</u>	<u>-64.0</u>	-50.1	-41.25	8.8
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-57.9</u>	<u>-55.4</u>			-45.5	-41.25	4.2
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-62.0</u>	<u>-62.4</u>			-54.2	-41.25	12.9
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-66.8</u>	<u>-66.5</u>	<u>-68.2</u>		-52.5	-41.25	11.3



HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-61.0</u>	<u>-58.2</u>	<u>-63.9</u>		-48.9	-41.25	7.6
HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-57.9</u>	<u>-55.4</u>	<u>-62.8</u>		-48.0	-41.25	6.7
HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-62.8</u>	<u>-60.4</u>	<u>-67.9</u>	<u>-67.7</u>	-46.5	-41.25	5.3
HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-65.1</u>	<u>-63.8</u>	<u>-66.6</u>	<u>-68.2</u>	-51.6	-41.25	10.4
HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-61.0</u>	<u>-58.2</u>	<u>-63.9</u>	<u>-64.0</u>	-48.9	-41.25	7.6
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-62.0</u>	<u>-62.4</u>			-54.2	-41.25	12.9
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-57.9</u>	<u>-55.4</u>	<u>-62.8</u>		-48.0	-41.25	6.7
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-61.0</u>	<u>-58.2</u>	<u>-63.9</u>	<u>-64.0</u>	-50.1	-41.25	8.8



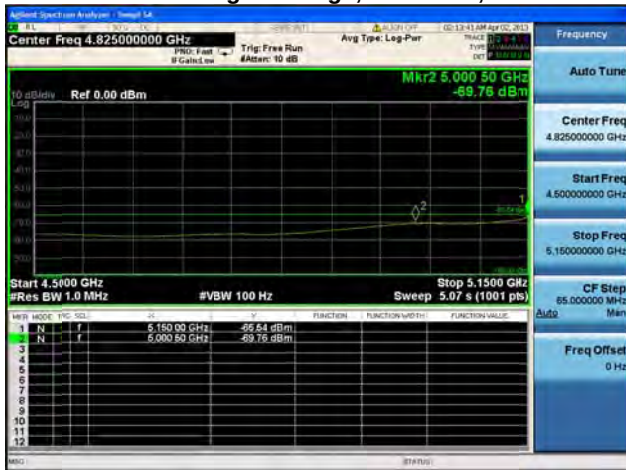
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	<u>-56.4</u>				-51.4	-21.25	30.2
	Non HT/VHT20, 6 to 54 Mbps	2	5	<u>-64.5</u>	<u>-66.0</u>			-57.2	-21.25	35.9
	Non HT/VHT20, 6 to 54 Mbps	3	5	<u>-66.6</u>	<u>-66.2</u>	<u>-66.3</u>		-56.6	-21.25	35.3
	Non HT/VHT20, 6 to 54 Mbps	4	5	<u>-65.3</u>	<u>-66.9</u>	<u>-64.9</u>	<u>-65.3</u>	-54.5	-21.25	33.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	<u>-64.5</u>	<u>-66.0</u>			-54.2	-21.25	32.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	<u>-66.6</u>	<u>-66.2</u>	<u>-66.3</u>		-51.8	-21.25	30.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	<u>-65.3</u>	<u>-66.9</u>	<u>-64.9</u>	<u>-65.3</u>	-48.5	-21.25	27.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	5	<u>-49.2</u>				-44.2	-21.25	23.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	5	<u>-62.9</u>	<u>-64.4</u>			-55.6	-21.25	34.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	5	<u>-59.8</u>	<u>-65.2</u>			-53.7	-21.25	32.4
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	5	<u>-62.4</u>	<u>-63.5</u>	<u>-65.9</u>		-53.9	-21.25	32.7
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	5	<u>-62.9</u>	<u>-64.4</u>	<u>-64.3</u>		-54.0	-21.25	32.8
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	5	<u>-62.0</u>	<u>-67.1</u>	<u>-61.3</u>		-53.0	-21.25	31.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	5	<u>-66.4</u>	<u>-66.8</u>	<u>-67.6</u>	<u>-66.0</u>	-55.6	-21.25	34.4
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	5	<u>-62.4</u>	<u>-64.7</u>	<u>-65.9</u>	<u>-61.7</u>	-52.3	-21.25	31.1
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	<u>-64.5</u>	<u>-65.3</u>	<u>-64.3</u>	<u>-65.7</u>	-53.9	-21.25	32.6
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-62.9</u>	<u>-64.4</u>			-52.6	-21.25	31.3
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-59.8</u>	<u>-65.2</u>			-53.7	-21.25	32.4
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-62.4</u>	<u>-63.5</u>	<u>-65.9</u>		-49.1	-21.25	27.9
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-62.9</u>	<u>-64.4</u>	<u>-64.3</u>		-52.2	-21.25	31.0
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-62.0</u>	<u>-67.1</u>	<u>-61.3</u>		-53.0	-21.25	31.8
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-66.4</u>	<u>-66.8</u>	<u>-67.6</u>	<u>-66.0</u>	-49.6	-21.25	28.4
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-62.4</u>	<u>-64.7</u>	<u>-65.9</u>	<u>-61.7</u>	-49.3	-21.25	28.1
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-64.5</u>	<u>-65.3</u>	<u>-64.3</u>	<u>-65.7</u>	-52.7	-21.25	31.4
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-59.8</u>	<u>-65.2</u>			-53.7	-21.25	32.4
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-62.9</u>	<u>-64.4</u>	<u>-64.3</u>		-54.0	-21.25	32.8
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-62.4</u>	<u>-64.7</u>	<u>-65.9</u>	<u>-61.7</u>	-52.3	-21.25	31.1

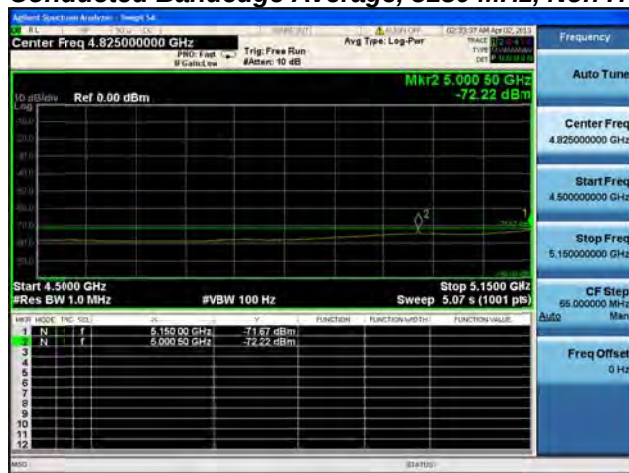
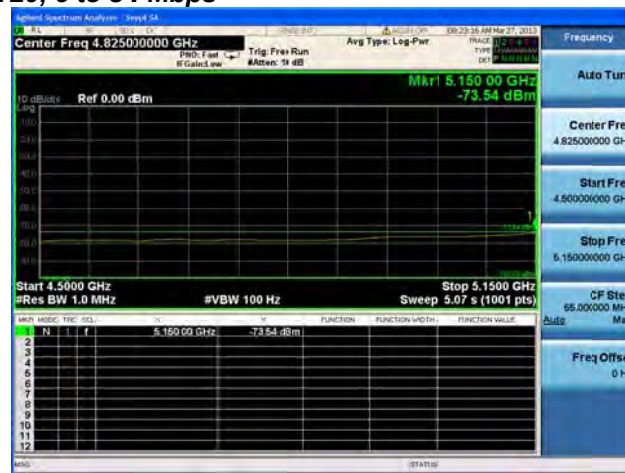


5180/5200	Non HT/VHT40, 6 to 54 Mbps	1	5	<u>-40.5</u>				-35.5	-21.25	14.3
	Non HT/VHT40, 6 to 54 Mbps	2	5	<u>-42.9</u>	<u>-53.9</u>			-37.6	-21.25	16.3
	Non HT/VHT40, 6 to 54 Mbps	3	5	<u>-58.3</u>	<u>-62.9</u>	<u>-61.0</u>		-50.5	-21.25	29.3
	Non HT/VHT40, 6 to 54 Mbps	4	5	<u>-58.5</u>	<u>-63.3</u>	<u>-62.1</u>	<u>-60.8</u>	-49.8	-21.25	28.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	5	<u>-43.6</u>				-38.6	-21.25	17.4
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	5	<u>-49.8</u>	<u>-55.5</u>			-43.8	-21.25	22.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	5	<u>-49.8</u>	<u>-55.3</u>			-43.7	-21.25	22.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	5	<u>-58.1</u>	<u>-62.4</u>	<u>-60.3</u>		-50.1	-21.25	28.9
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	5	<u>-53.7</u>	<u>-62.3</u>	<u>-57.4</u>		-46.8	-21.25	25.5
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	5	<u>-53.7</u>	<u>-62.3</u>	<u>-57.4</u>		-46.8	-21.25	25.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	5	<u>-57.0</u>	<u>-62.9</u>	<u>-65.9</u>	<u>-59.1</u>	-49.0	-21.25	27.7
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	5	<u>-58.1</u>	<u>-62.7</u>	<u>-59.2</u>	<u>-60.5</u>	-48.8	-21.25	27.5
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>-57.3</u>	<u>-62.7</u>	<u>-58.9</u>	<u>-58.9</u>	-48.0	-21.25	26.8
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-53.7</u>	<u>-62.3</u>			-45.1	-21.25	23.9
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-49.8</u>	<u>-55.3</u>			-43.7	-21.25	22.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-56.1</u>	<u>-60.3</u>	<u>-57.0</u>		-42.9	-21.25	21.6
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-57.3</u>	<u>-62.7</u>	<u>-58.9</u>		-47.5	-21.25	26.3
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-53.7</u>	<u>-62.3</u>	<u>-57.4</u>		-46.8	-21.25	25.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-63.9</u>	<u>-66.1</u>	<u>-63.3</u>	<u>-58.4</u>	-44.9	-21.25	23.7
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-57.9</u>	<u>-62.4</u>	<u>-60.3</u>	<u>-59.5</u>	-45.7	-21.25	24.5
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-57.3</u>	<u>-62.7</u>	<u>-58.9</u>	<u>-58.9</u>	-46.8	-21.25	25.6
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-49.8</u>	<u>-55.3</u>			-43.7	-21.25	22.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-53.7</u>	<u>-62.3</u>	<u>-57.4</u>		-46.8	-21.25	25.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-58.1</u>	<u>-62.7</u>	<u>-59.2</u>	<u>-60.5</u>	-48.8	-21.25	27.5
5180/5200/5220/5240	Non HT/VHT80, 6 to 54 Mbps	1	5	<u>-29.8</u>				-24.8	-21.25	3.6
	Non HT/VHT80, 6 to 54 Mbps	2	5	<u>-46.0</u>	<u>-49.8</u>			-39.5	-21.25	18.2
	Non HT/VHT80, 6 to 54 Mbps	3	5	<u>-48.2</u>	<u>-50.6</u>	<u>-54.6</u>		-40.6	-21.25	19.4
	Non HT/VHT80, 6 to 54 Mbps	4	5	<u>-56.1</u>	<u>-54.0</u>	<u>-54.2</u>	<u>-59.7</u>	-44.5	-21.25	23.2
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	5	<u>-40.7</u>				-35.7	-21.25	14.5
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	5	<u>-53.4</u>	<u>-50.3</u>			-43.6	-21.25	22.3
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	5	<u>-53.4</u>	<u>-50.3</u>			-43.6	-21.25	22.3
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	5	<u>-46.7</u>	<u>-47.4</u>	<u>-52.3</u>		-38.4	-21.25	17.2
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	5	<u>-46.7</u>	<u>-47.4</u>	<u>-52.3</u>		-38.4	-21.25	17.2
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	5	<u>-46.7</u>	<u>-47.4</u>	<u>-52.3</u>		-38.4	-21.25	17.2
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	5	<u>-49.4</u>	<u>-51.3</u>	<u>-58.6</u>	<u>-55.9</u>	-41.4	-21.25	20.2
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	5	<u>-49.4</u>	<u>-48.1</u>	<u>-58.4</u>	<u>-53.3</u>	-39.8	-21.25	18.6
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	5	<u>-49.4</u>	<u>-48.1</u>	<u>-58.4</u>	<u>-53.3</u>	-39.8	-21.25	18.6
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	8	<u>-46.7</u>	<u>-47.4</u>			-36.0	-21.25	14.8
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	5	<u>-53.4</u>	<u>-50.3</u>			-43.6	-21.25	22.3
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	10	<u>-57.9</u>	<u>-57.6</u>	<u>-59.2</u>		-43.6	-21.25	22.4

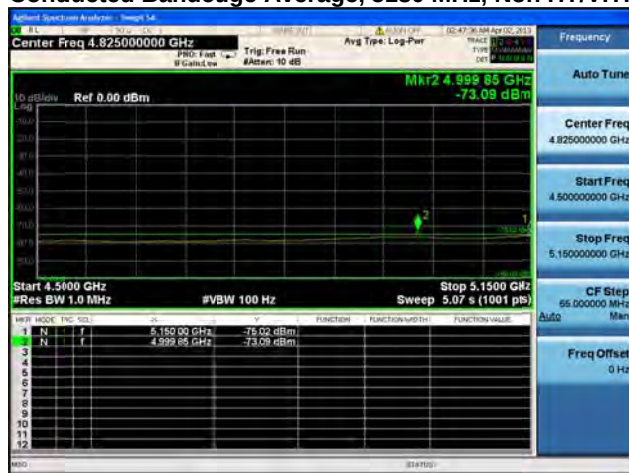


HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	7	<u>-49.4</u>	<u>-48.1</u>	<u>-58.4</u>		-38.7	-21.25	17.4
HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	5	<u>-46.7</u>	<u>-47.4</u>	<u>-52.3</u>		-38.4	-21.25	17.2
HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	11	<u>-51.6</u>	<u>-50.5</u>	<u>-55.4</u>	<u>-56.3</u>	-35.8	-21.25	14.5
HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	8	<u>-50.8</u>	<u>-54.4</u>	<u>-59.8</u>	<u>-61.6</u>	-40.6	-21.25	19.4
HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	6	<u>-49.4</u>	<u>-48.1</u>	<u>-58.4</u>	<u>-53.3</u>	-38.6	-21.25	17.4
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	5	<u>-53.4</u>	<u>-50.3</u>			-43.6	-21.25	22.3
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	5	<u>-46.7</u>	<u>-47.4</u>	<u>-52.3</u>		-38.4	-21.25	17.2
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	5	<u>-49.4</u>	<u>-48.1</u>	<u>-58.4</u>	<u>-53.3</u>	-39.8	-21.25	18.6

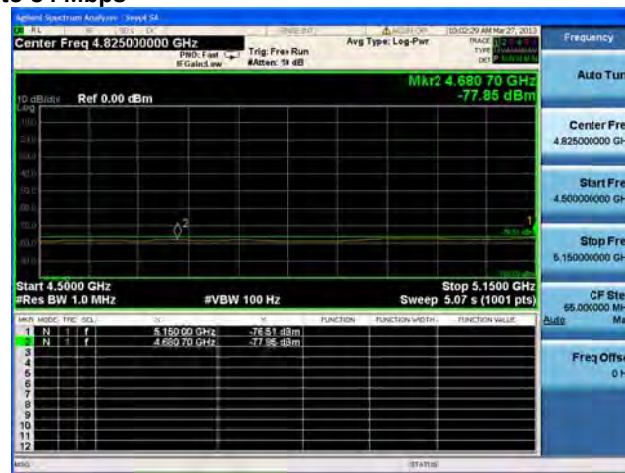
**Conducted Bandedge Average, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps****Antenna A**

Conducted Bandedge Average, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B**

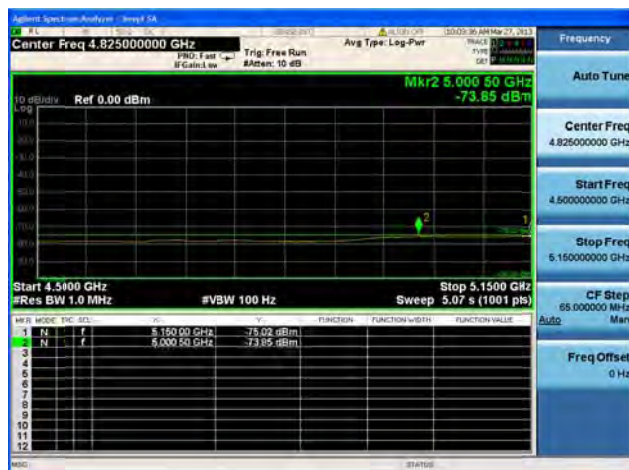
Conducted Bandedge Average, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps



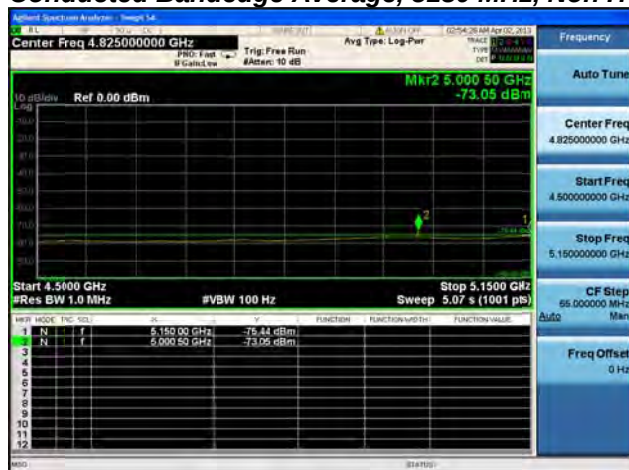
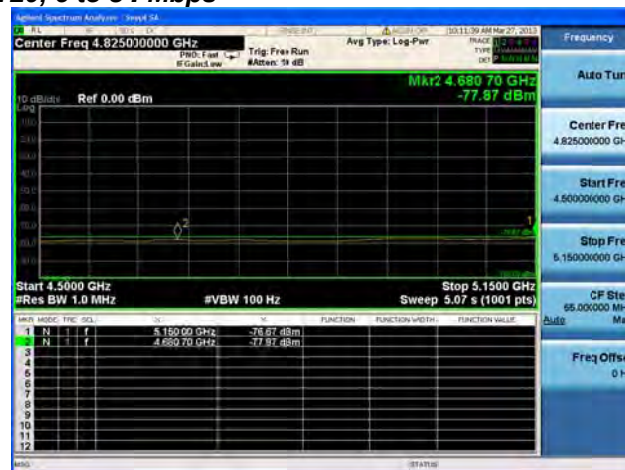
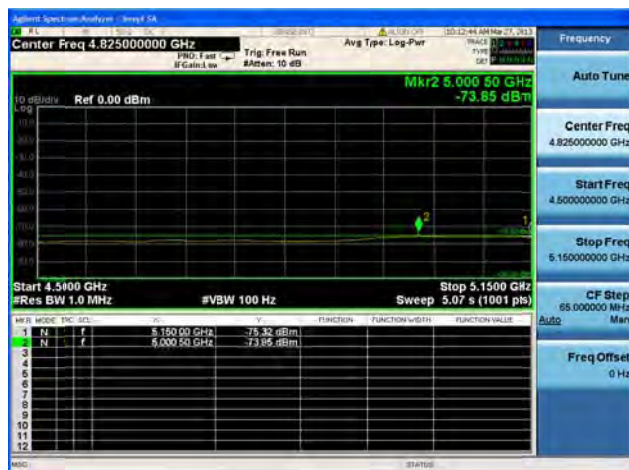
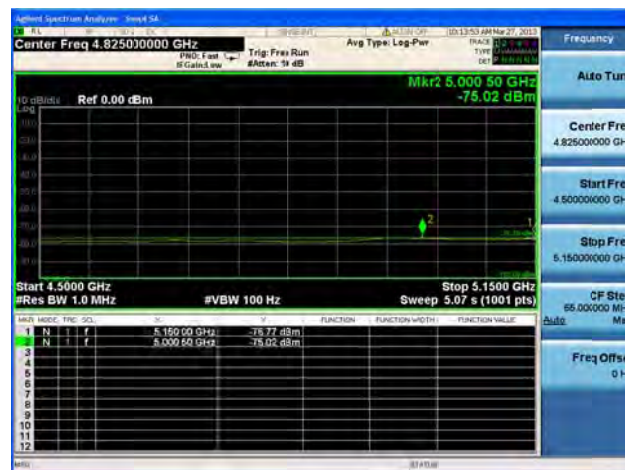
Antenna A

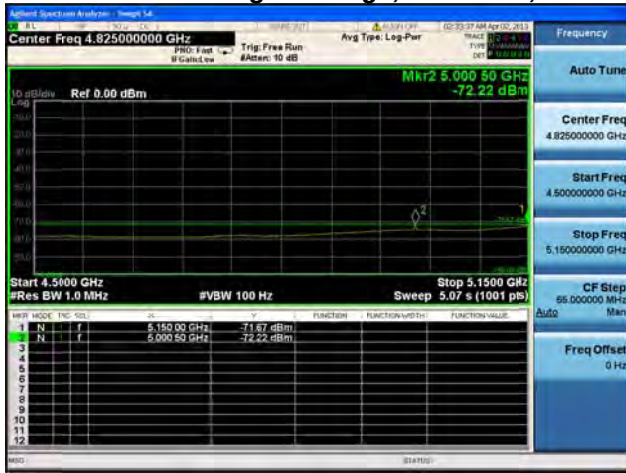
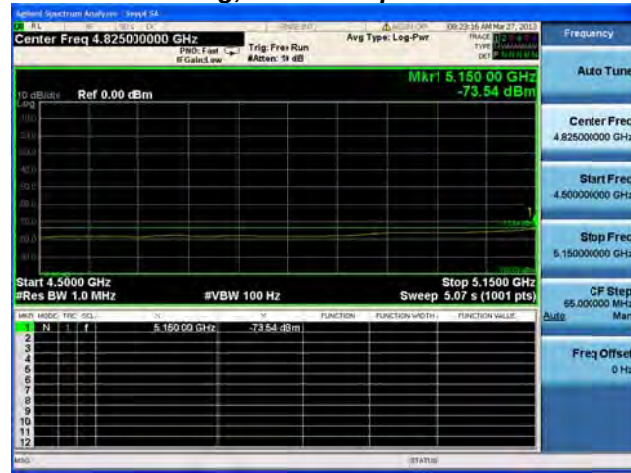


Antenna B

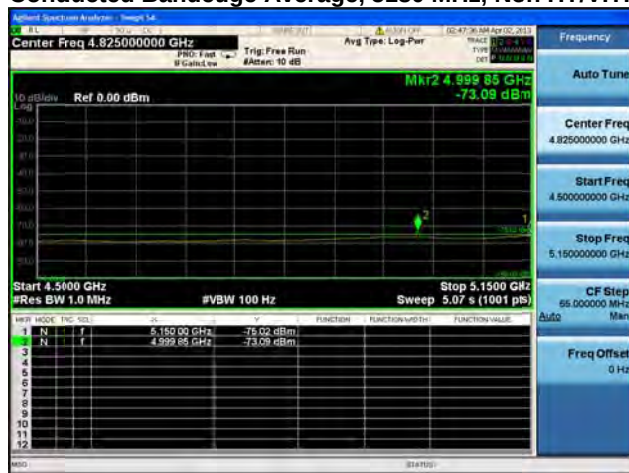


Antenna C

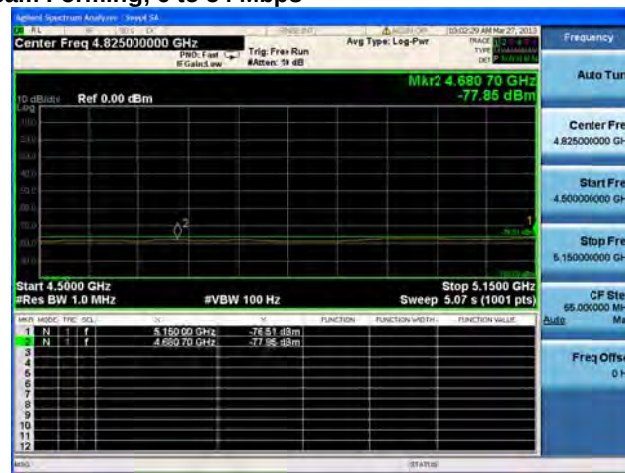
Conducted Bandedge Average, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

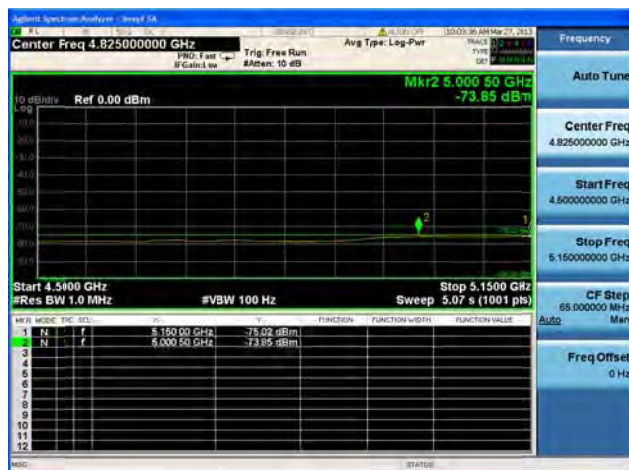
Conducted Bandedge Average, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



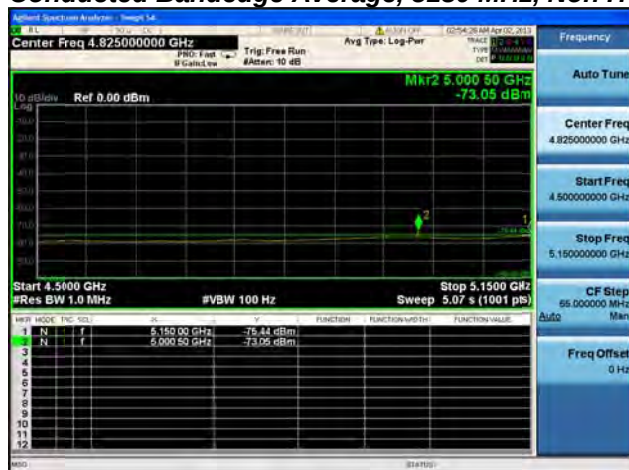
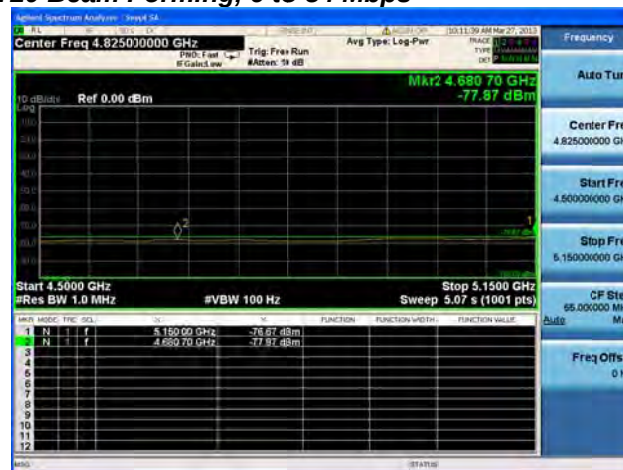
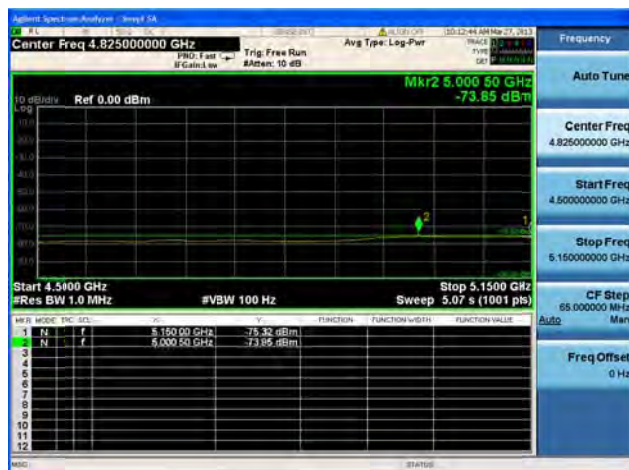
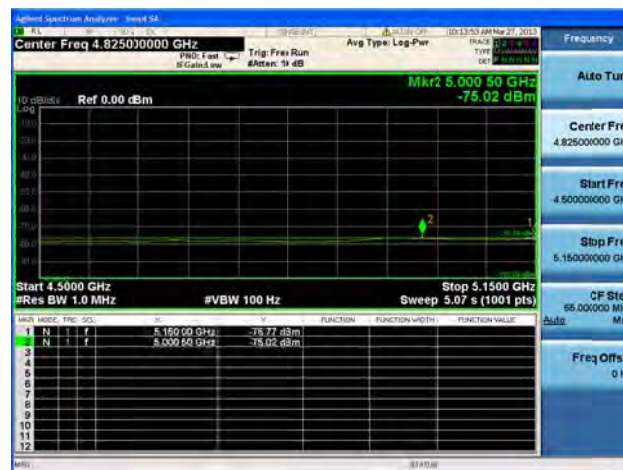
Antenna A

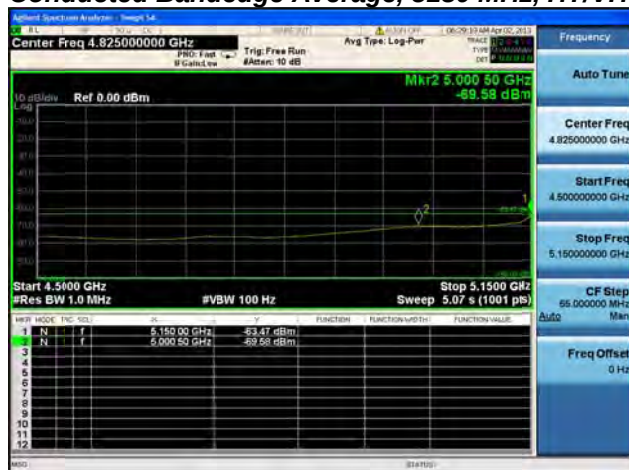


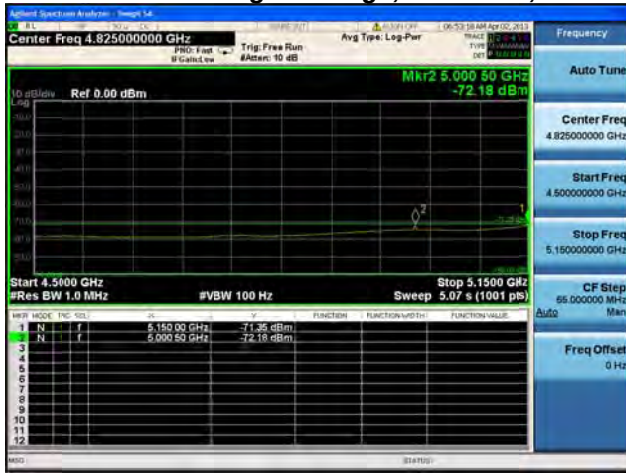
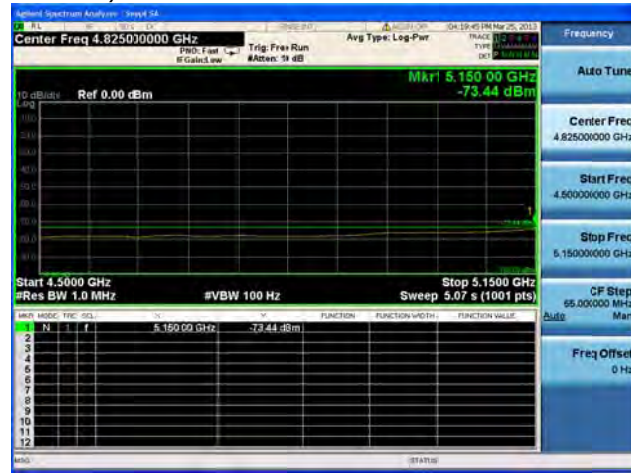
Antenna B



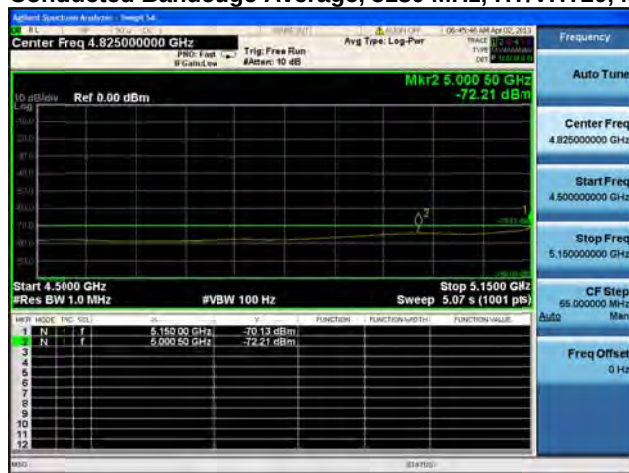
Antenna C

Conducted Bandedge Average, 5180 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

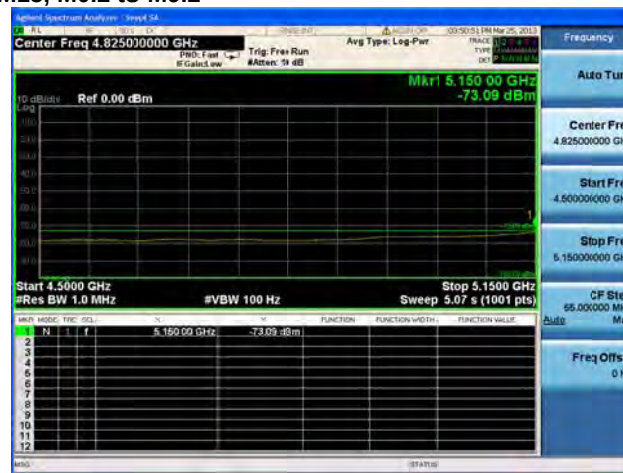
Conducted Bandedge Average, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1**Antenna A**

**Conducted Bandedge Average, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B**

Conducted Bandedge Average, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

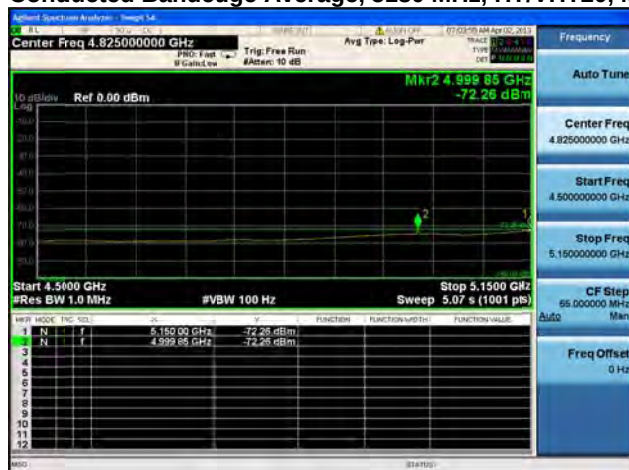


Antenna A

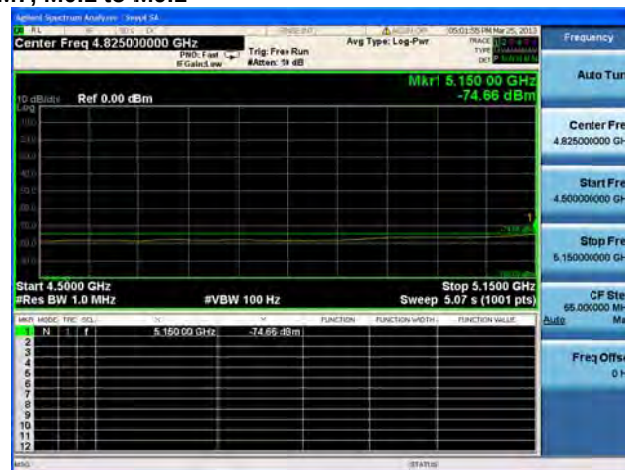


Antenna B

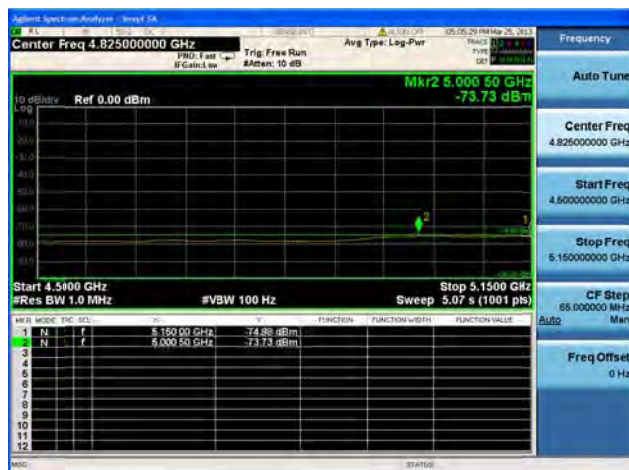
Conducted Bandedge Average, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



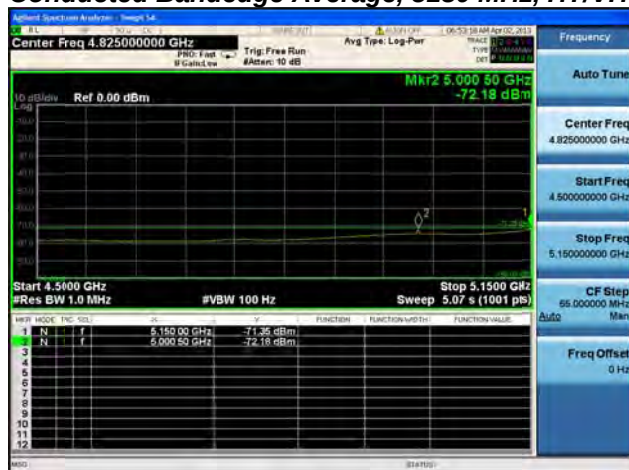
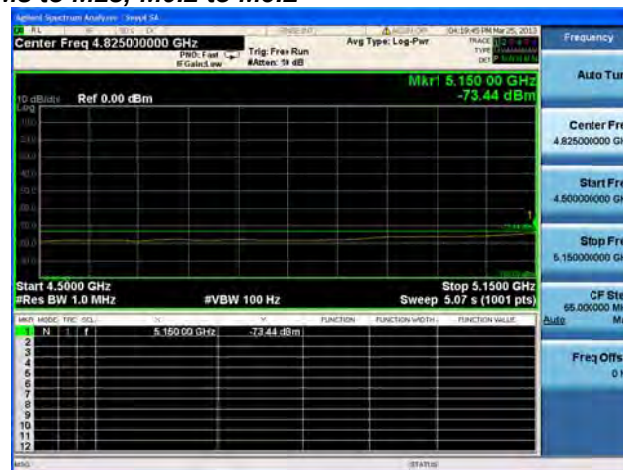
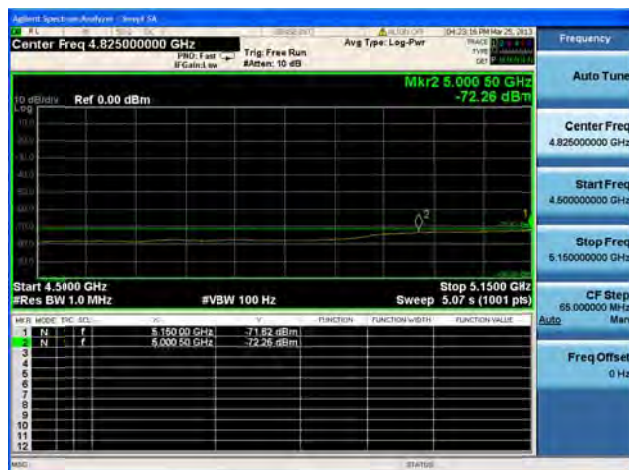
Antenna A

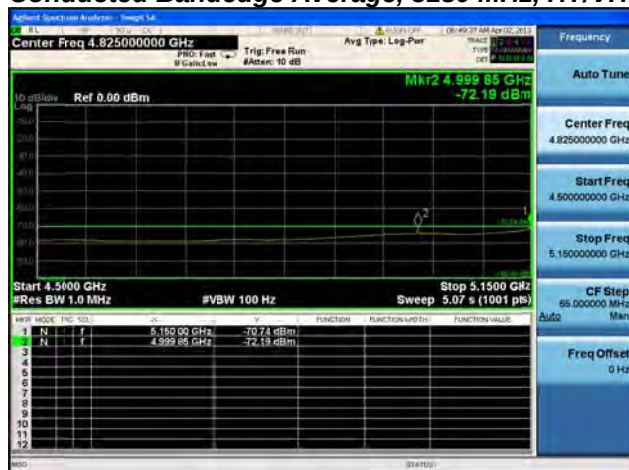
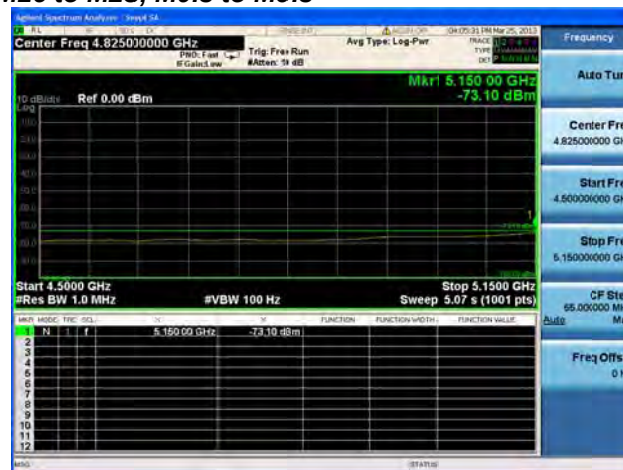
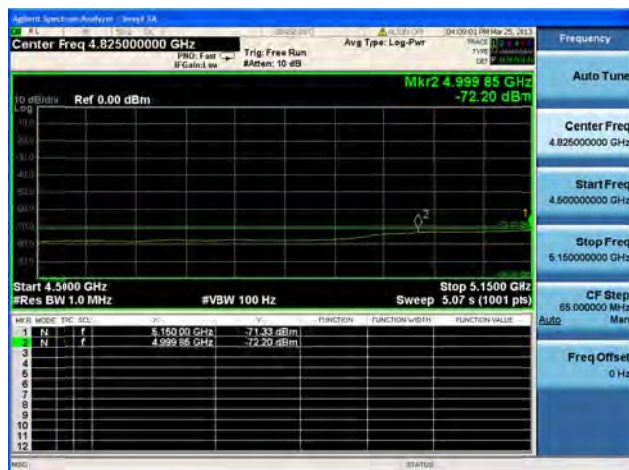


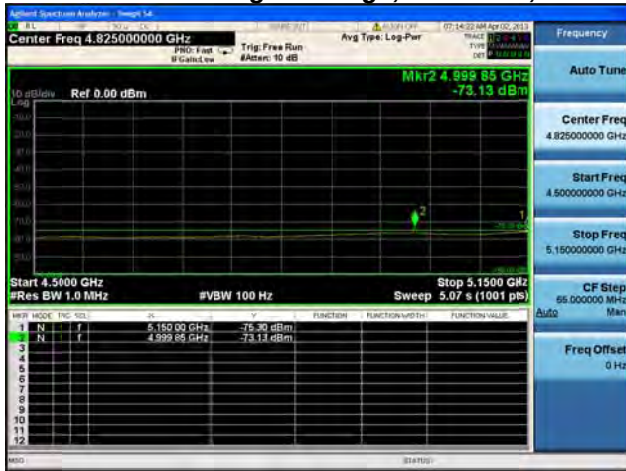
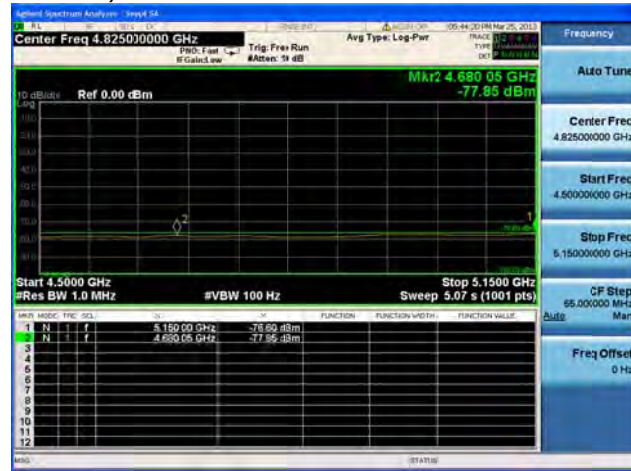
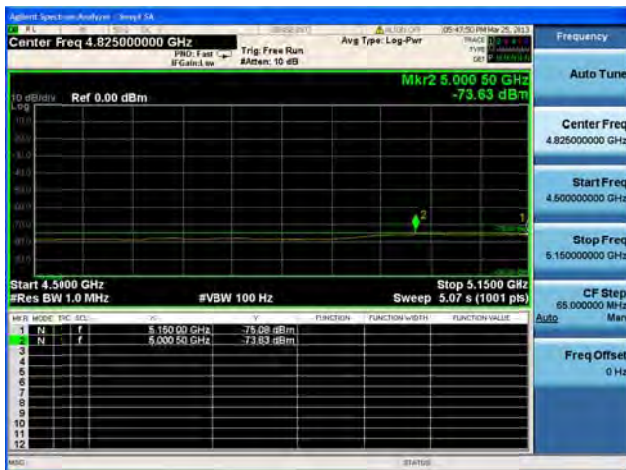
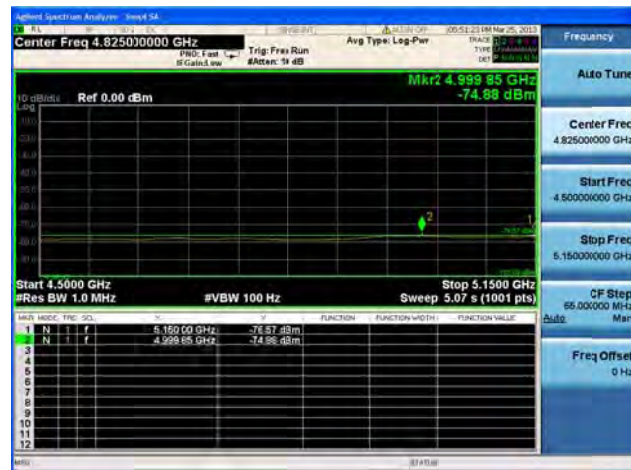
Antenna B

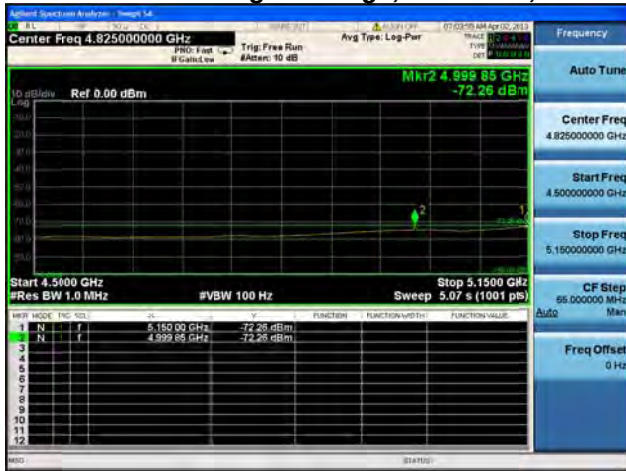
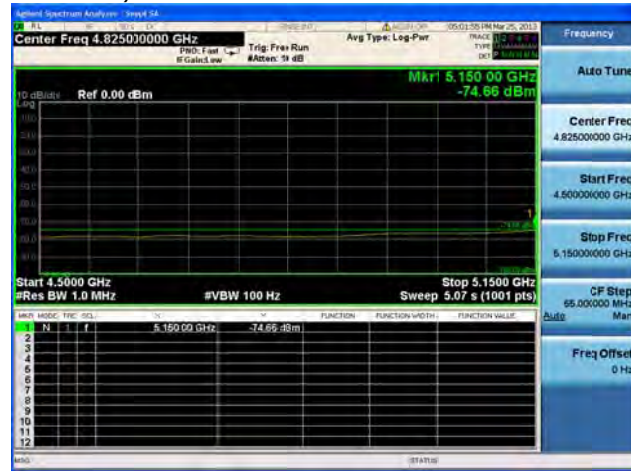
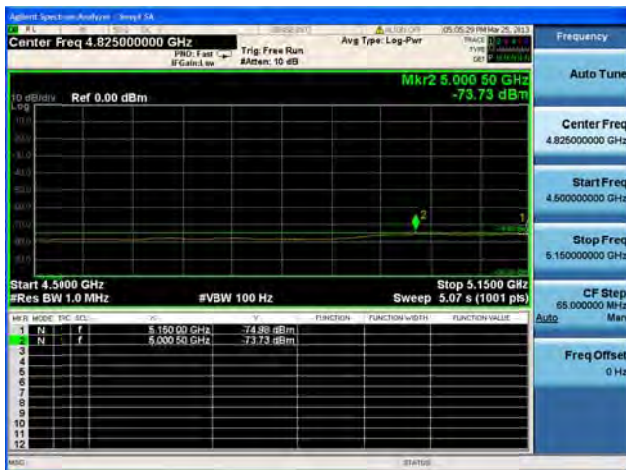
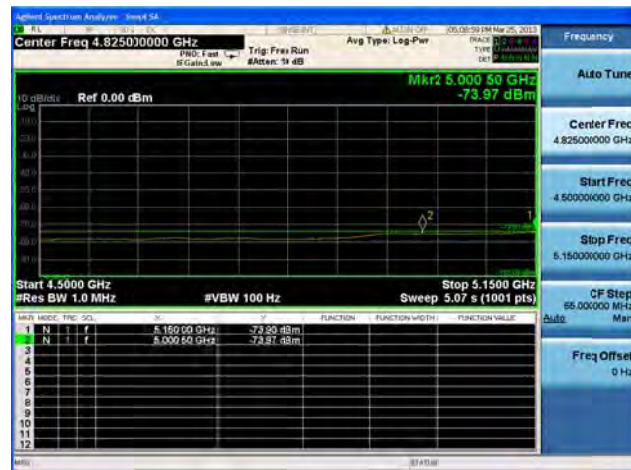


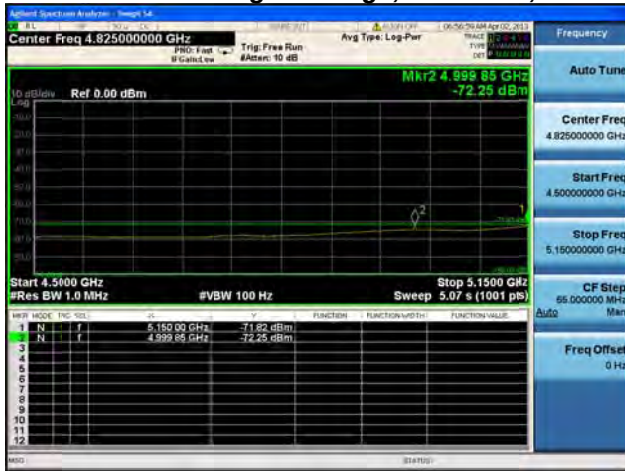
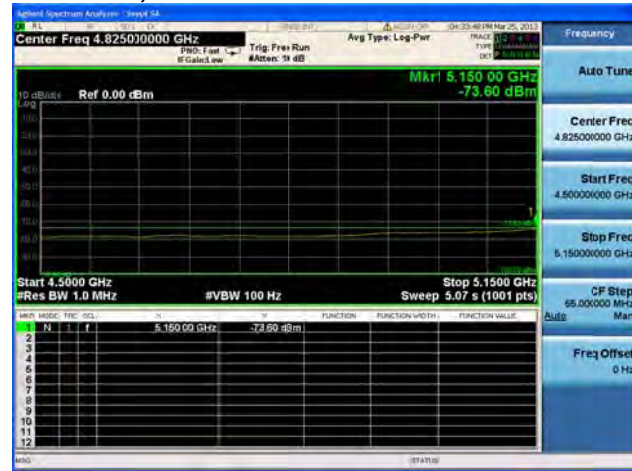
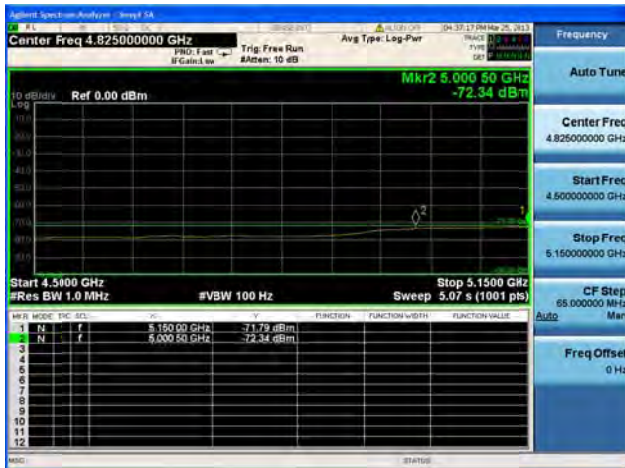
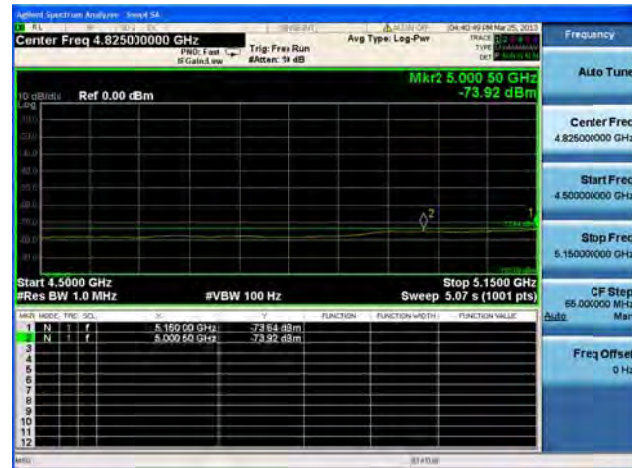
Antenna C

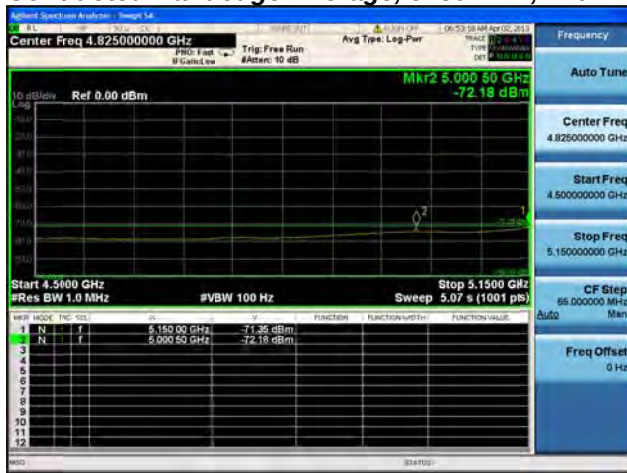
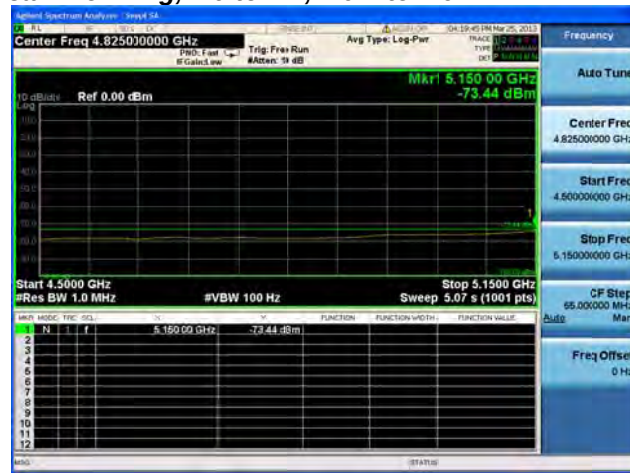
Conducted Bandedge Average, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 5180 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**Antenna A****Antenna B****Antenna C**

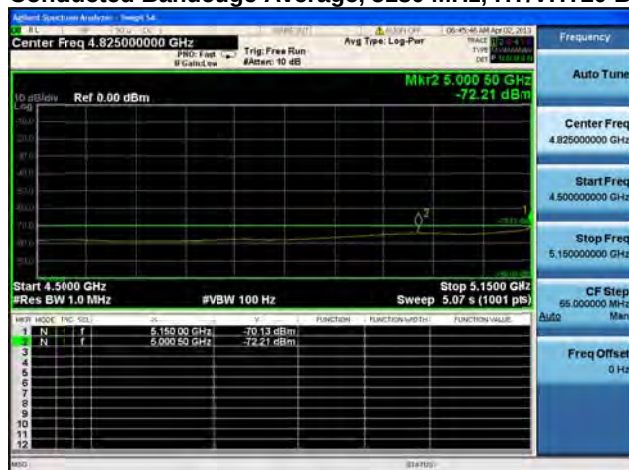
**Conducted Bandedge Average, 5180 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 5180 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2****Antenna A****Antenna B****Antenna C****Antenna D**

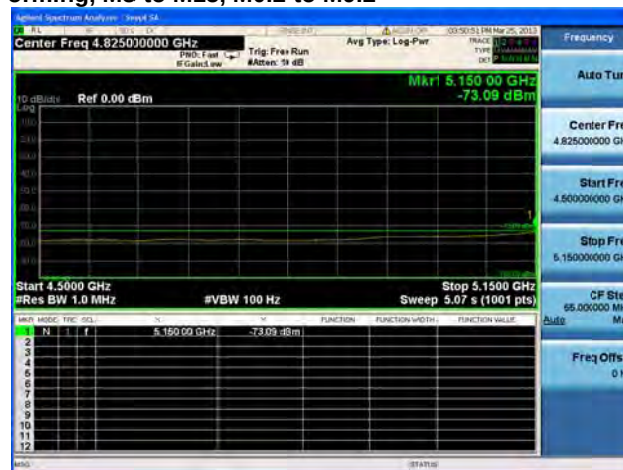
**Conducted Bandedge Average, 5180 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3****Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B**

Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

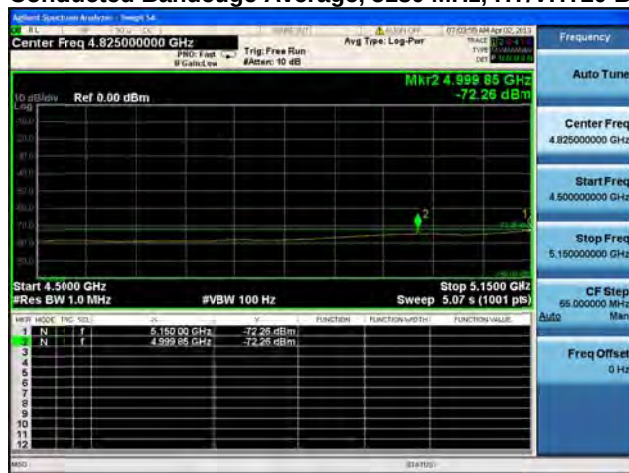


Antenna A

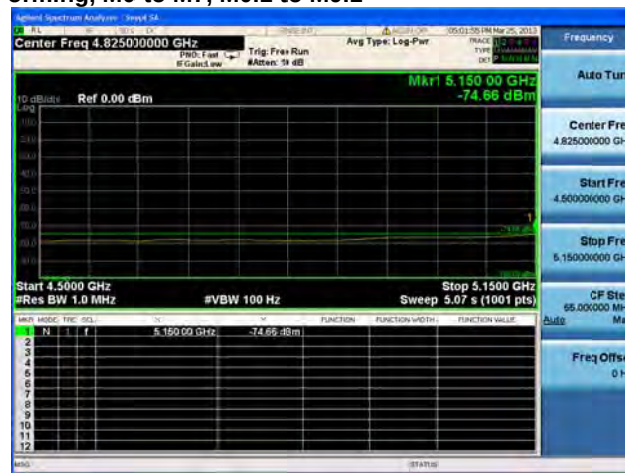


Antenna B

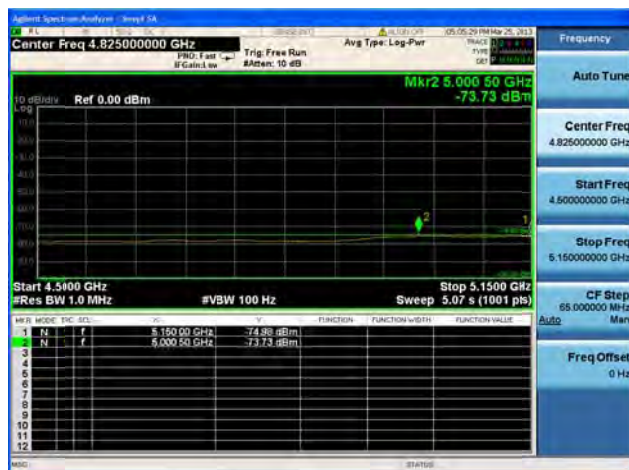
Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



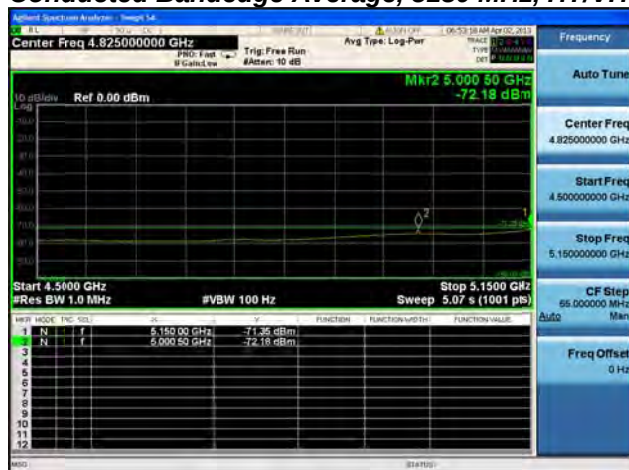
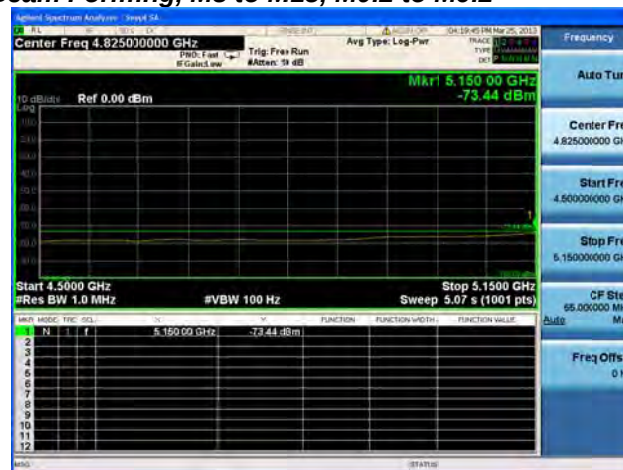
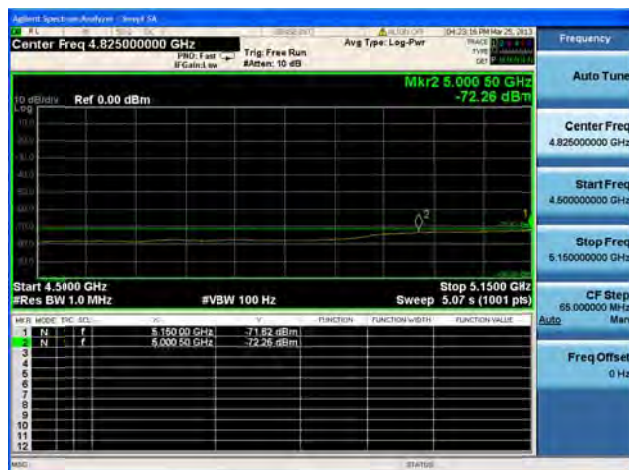
Antenna A

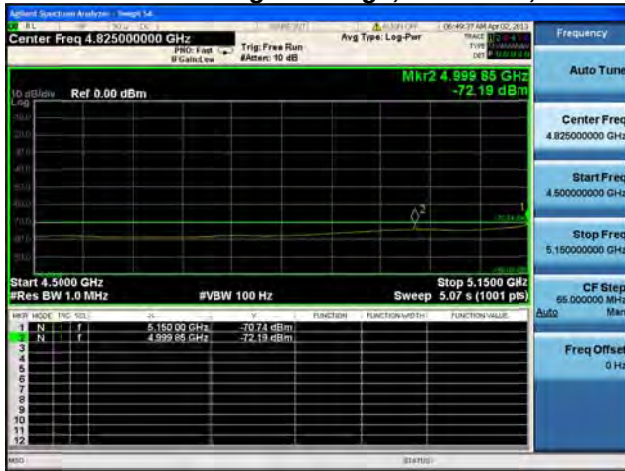
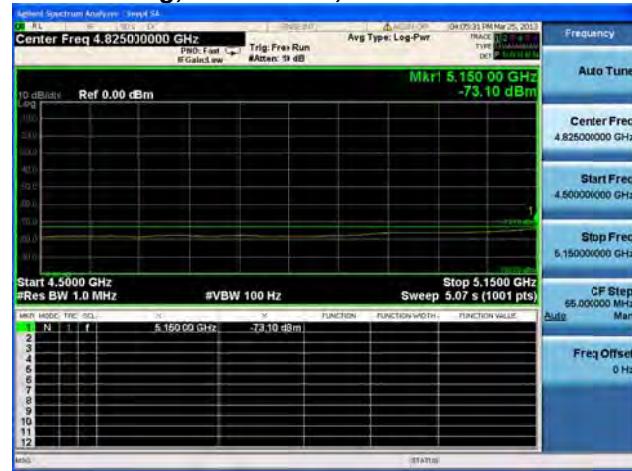
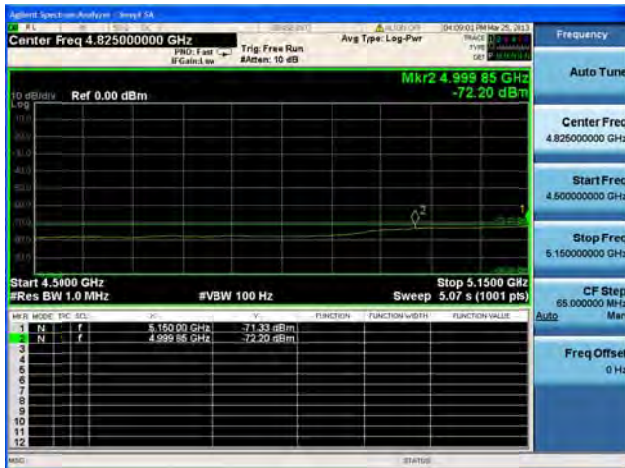


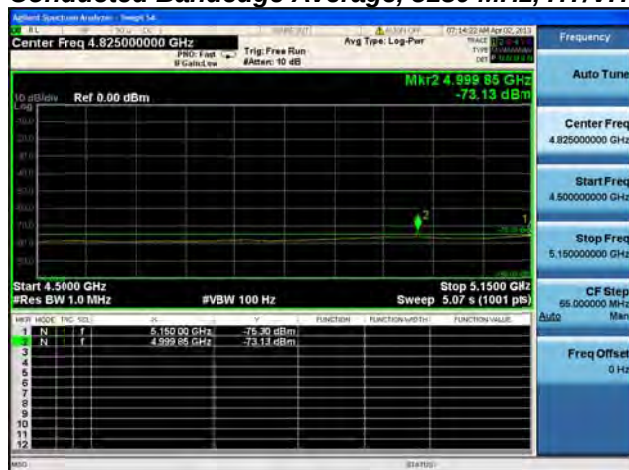
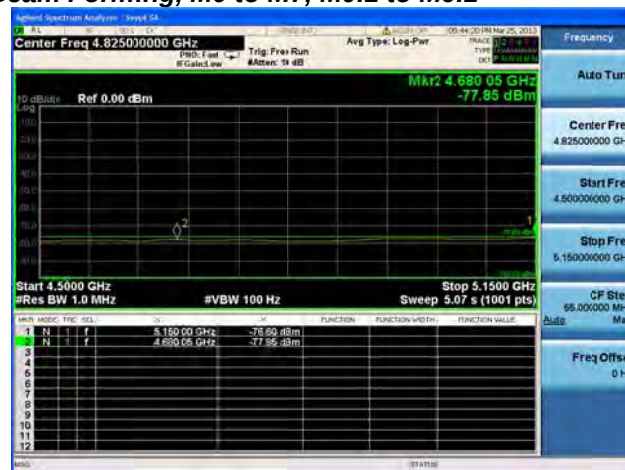
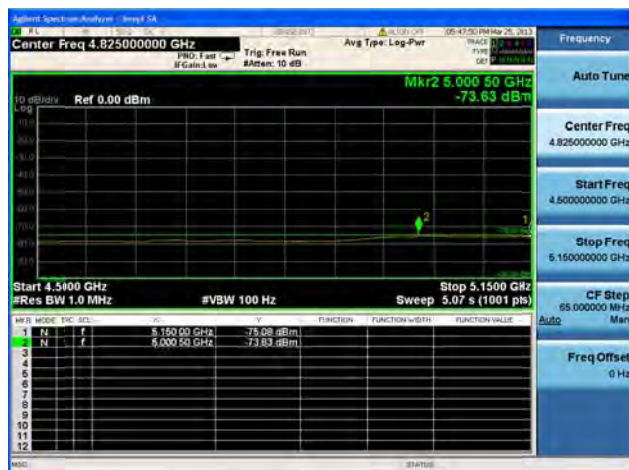
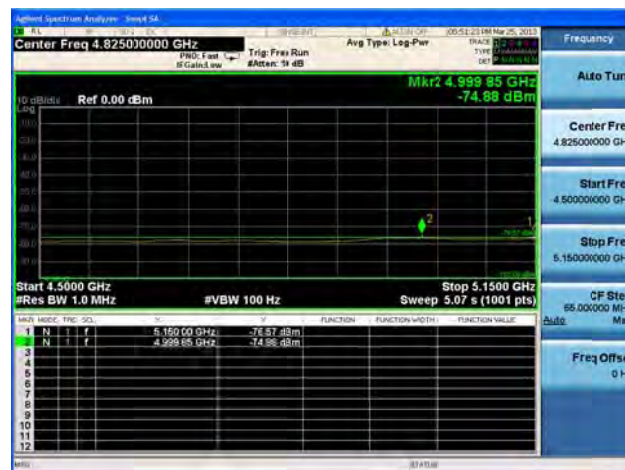
Antenna B

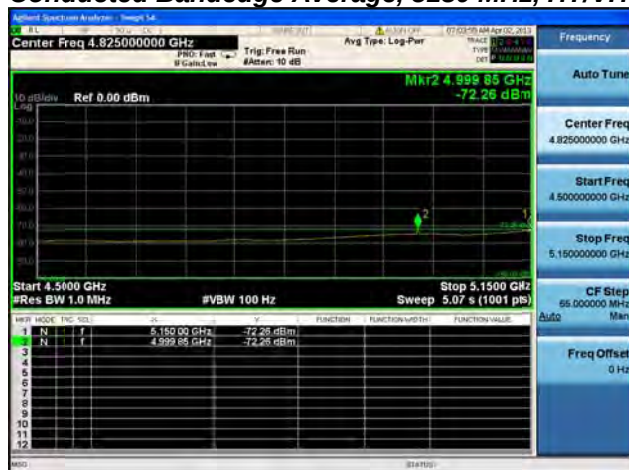
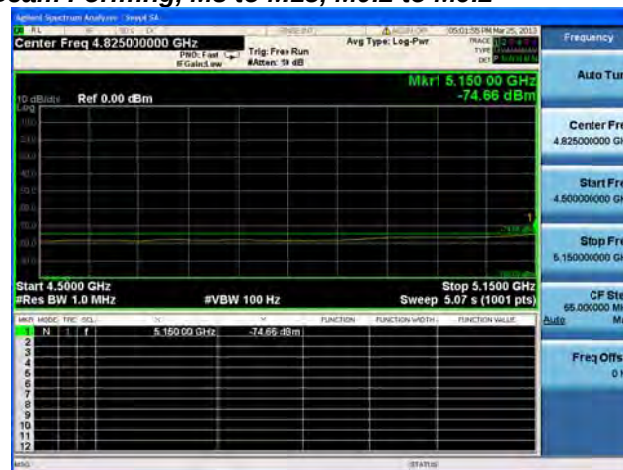
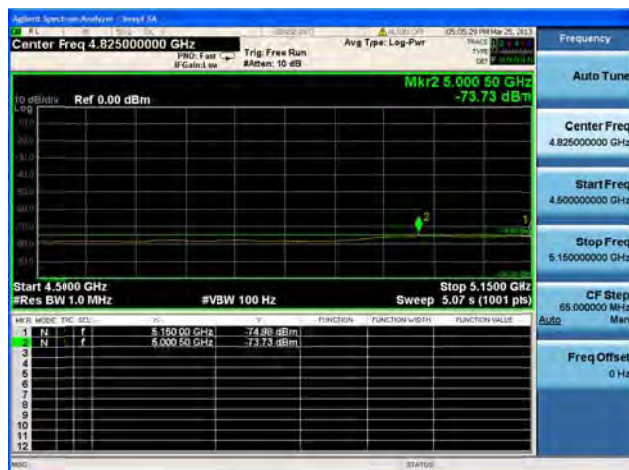
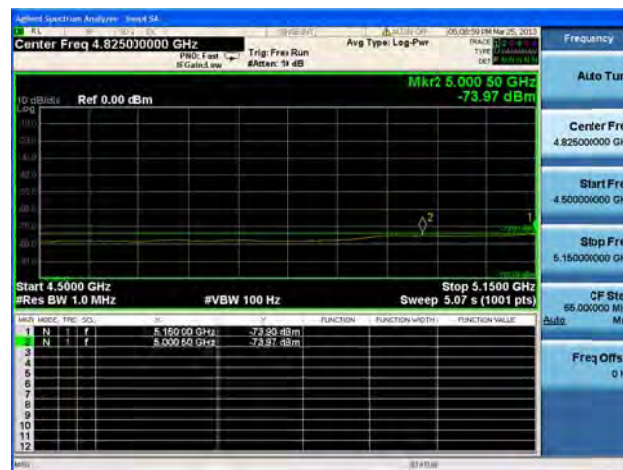


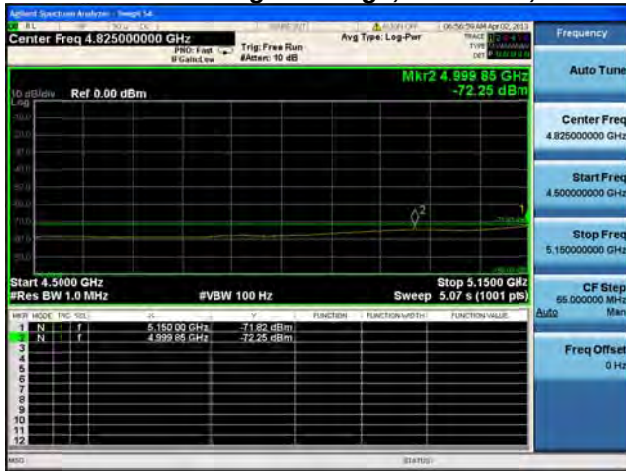
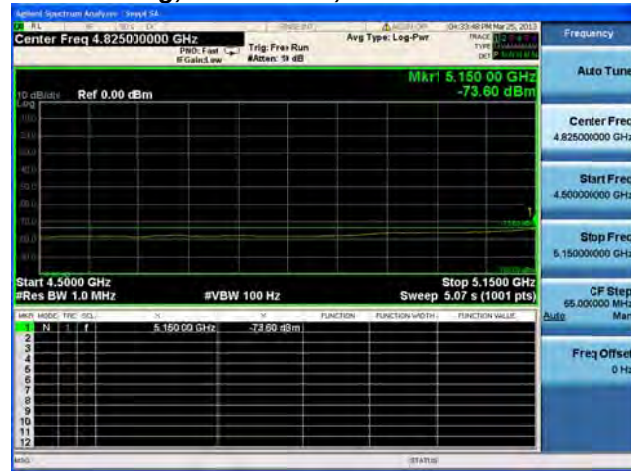
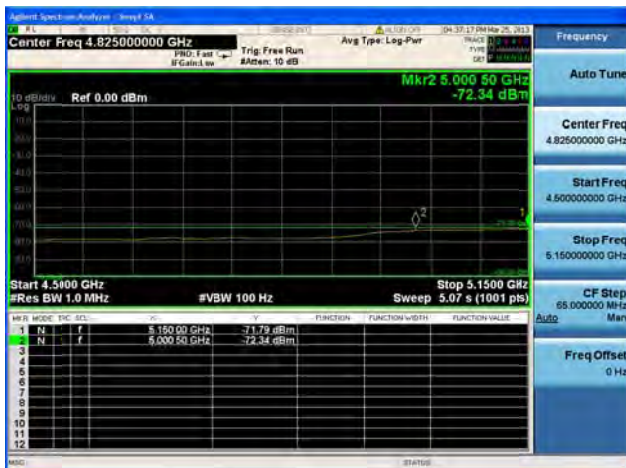
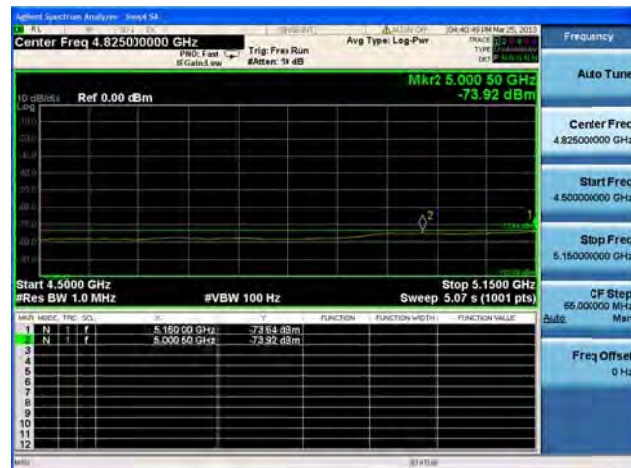
Antenna C

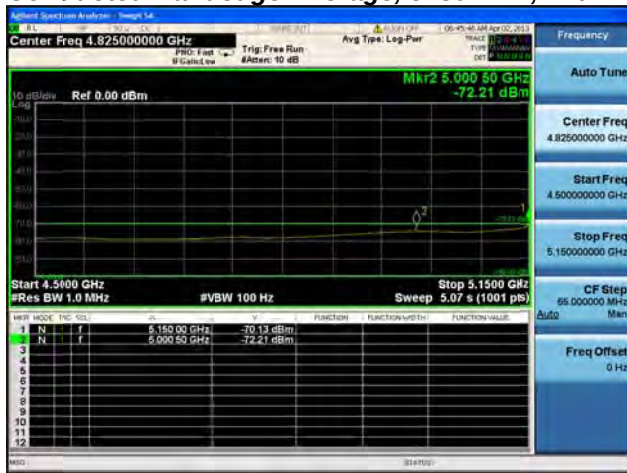
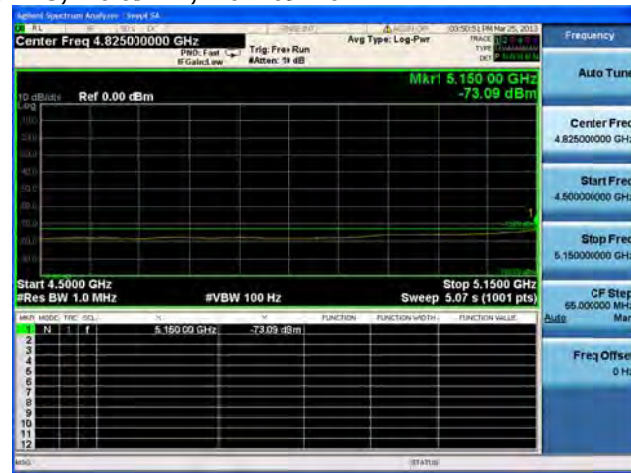
Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C**

**Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3****Antenna A****Antenna B****Antenna C**

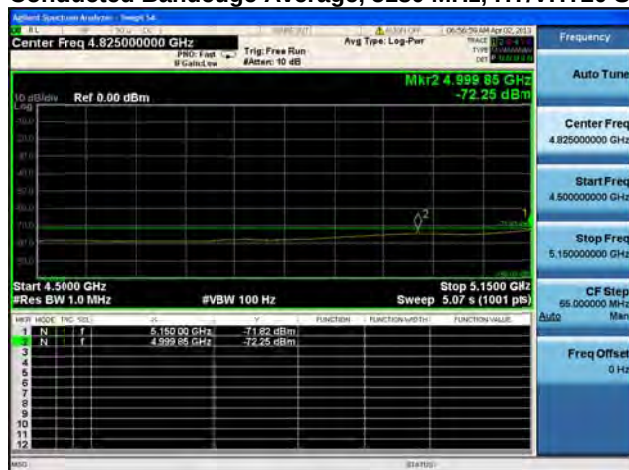
Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2**Antenna A****Antenna B****Antenna C****Antenna D**

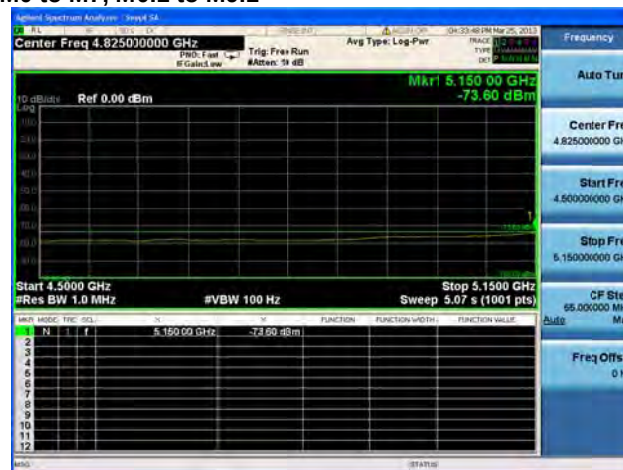
**Conducted Bandedge Average, 5180 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3****Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B**

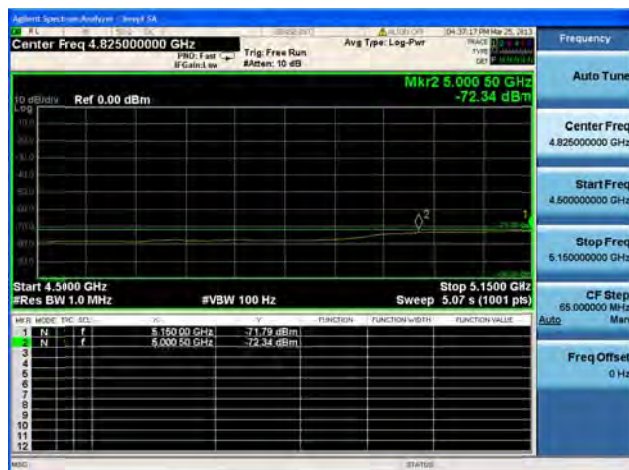
Conducted Bandedge Average, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



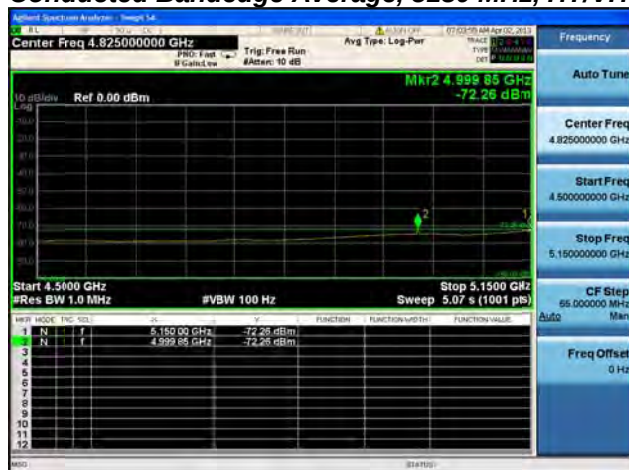
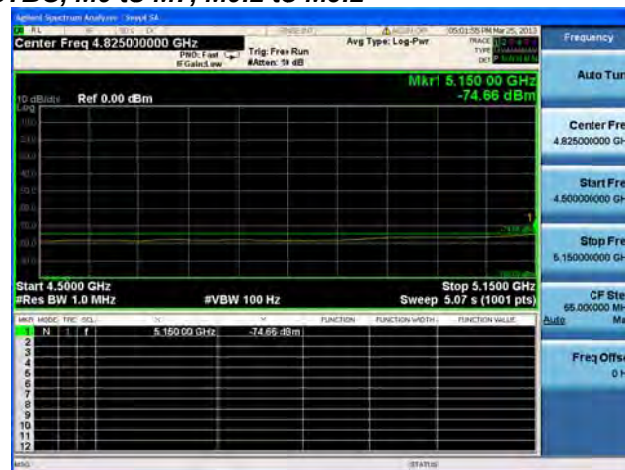
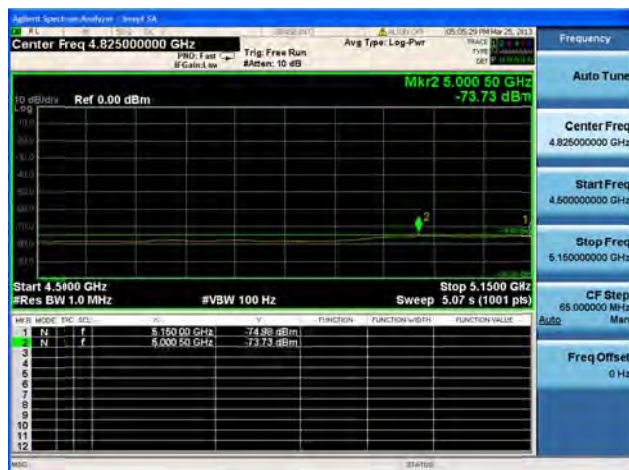
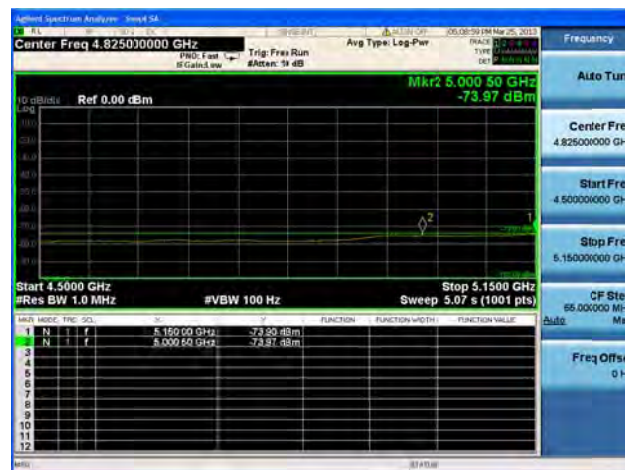
Antenna A

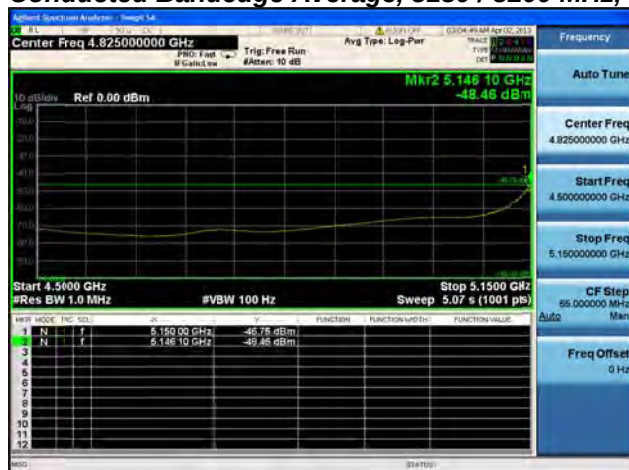


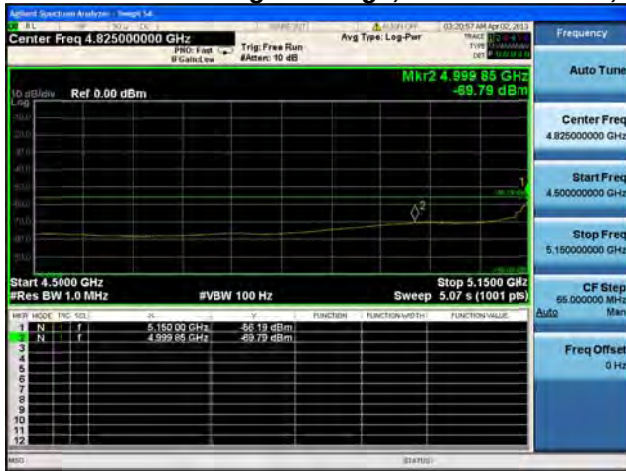
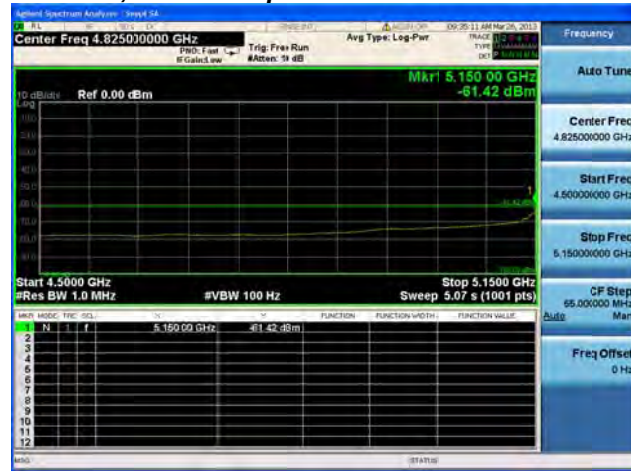
Antenna B



Antenna C

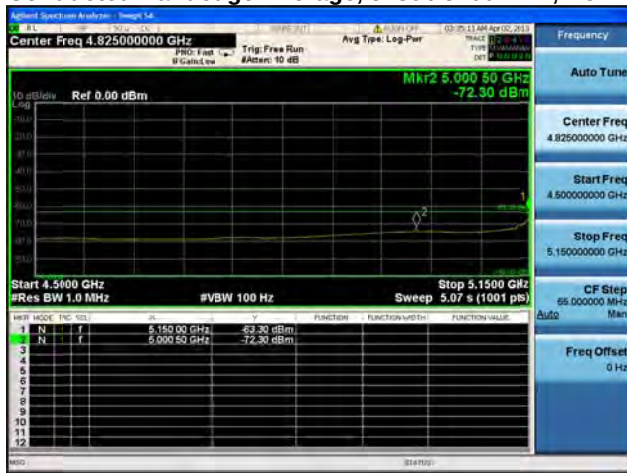
Conducted Bandedge Average, 5180 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps**Antenna A**

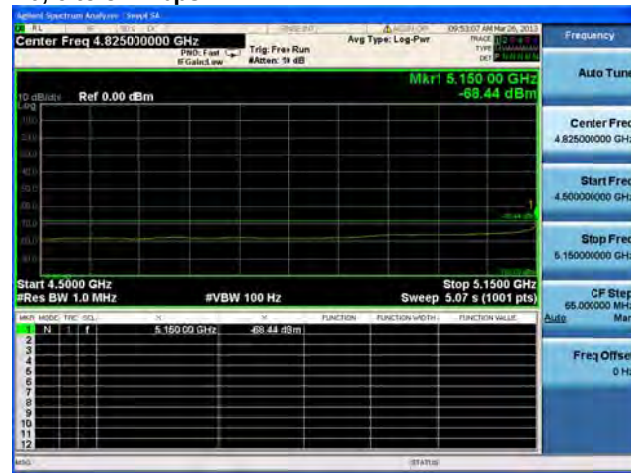
**Conducted Bandedge Average, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps****Antenna A****Antenna B**



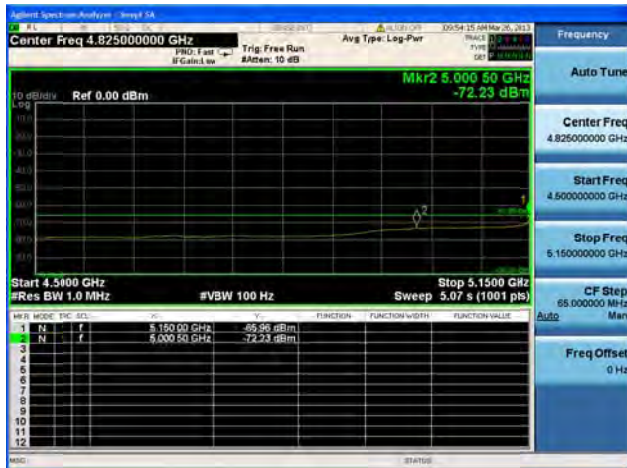
Conducted Bandedge Average, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps



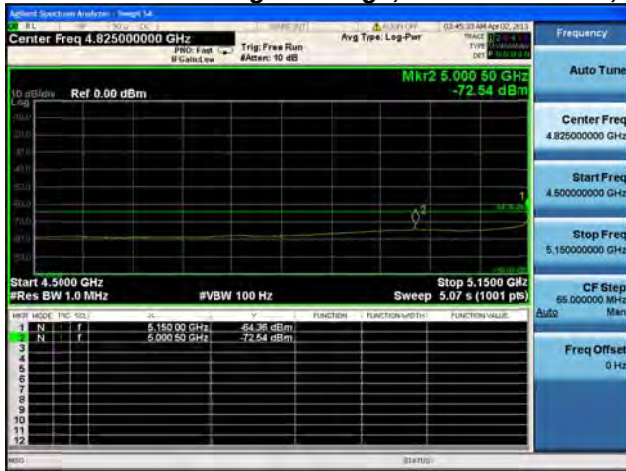
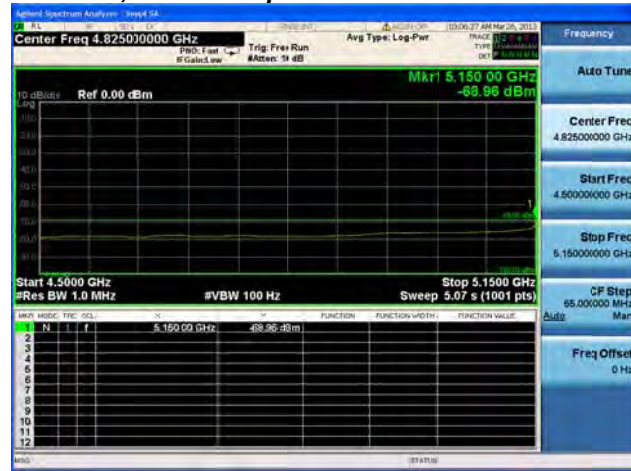
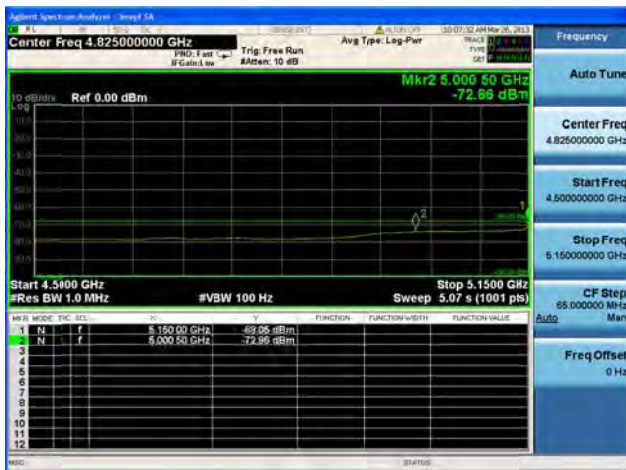
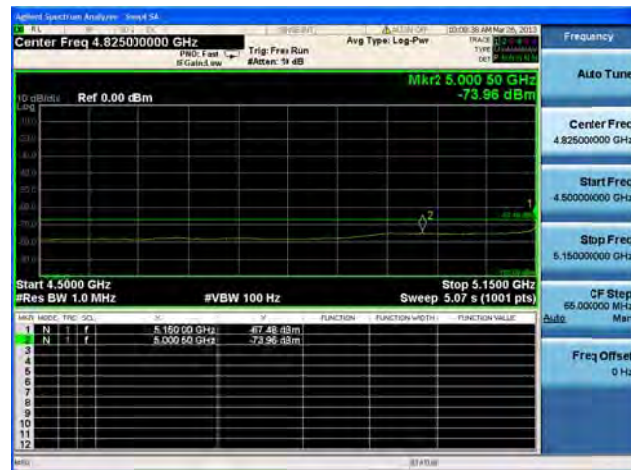
Antenna A

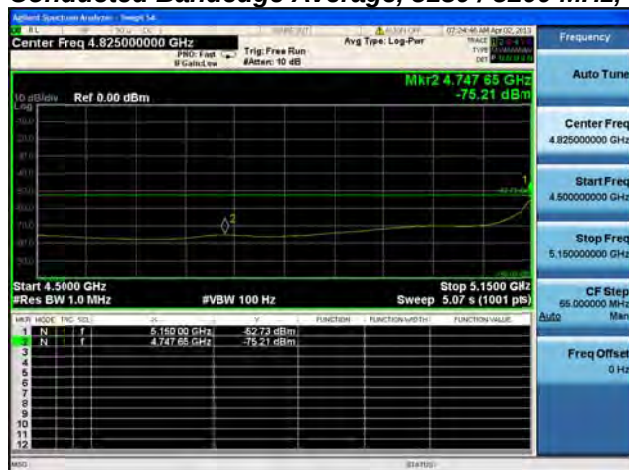


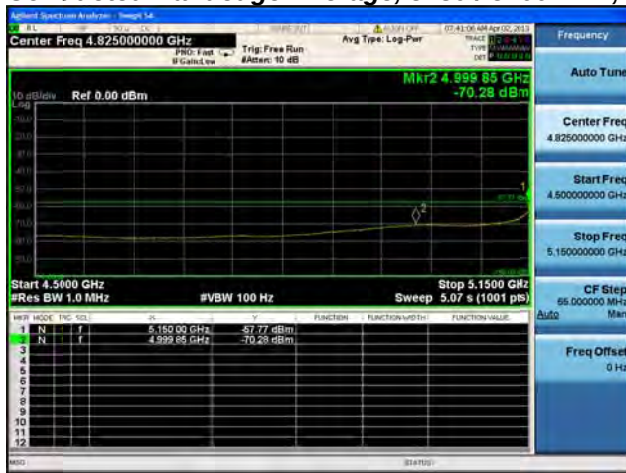
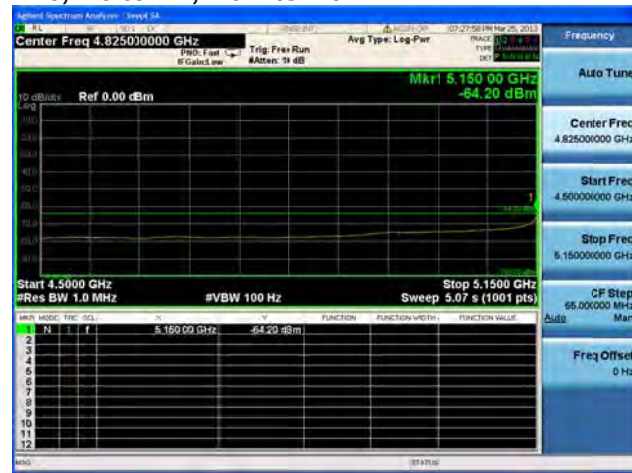
Antenna B

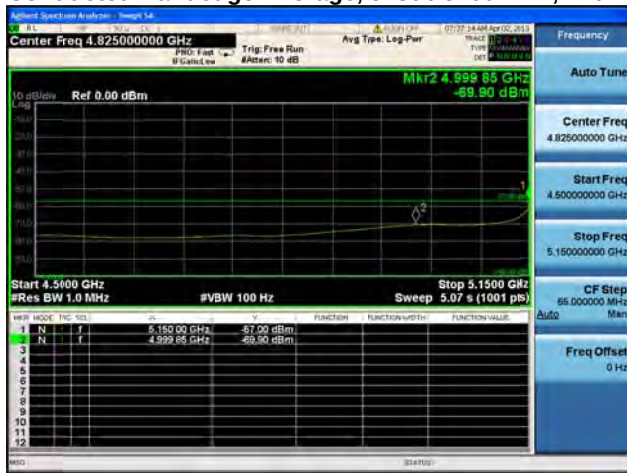
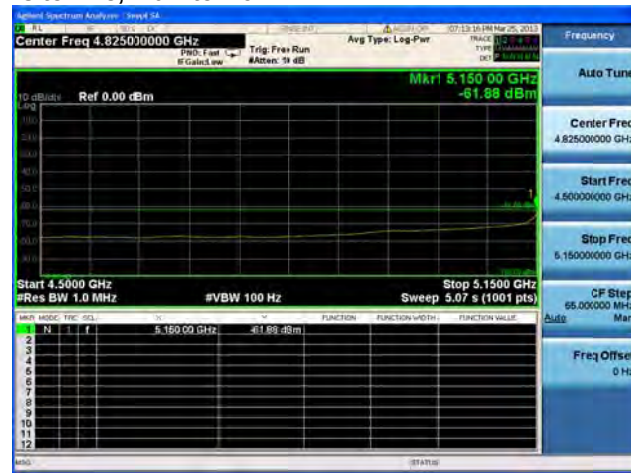


Antenna C

**Conducted Bandedge Average, 5180 / 5200 MHz, Non HT/VHT40, 6 to 54 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**Antenna A**

**Conducted Bandedge Average, 5180 / 5200 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1****Antenna A****Antenna B**

**Conducted Bandedge Average, 5180 / 5200 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2****Antenna A****Antenna B**