



**Test Report**  
**AIR-CAP1532E-A-K9**

**FCC ID: LDK102089P**  
**IC: 2461B-102089P**

**Also Covers:**

**AIR-CAP1532E-D-K9**

**AIR-CAP1532E-N-K9**

**AIR-CAP1532E-T-K9**

**AIR-CAP1532E-Z-K9**

**5250-5350 MHz**

**Antenna Gain = 14 dBi**

**Against the following Specifications:**

**CFR47 Part 15.407**

**RSS210**

**LP0002**

**Cisco Systems**

**170 West Tasman Drive**

**San Jose, CA 95134**

Test Engineer

Date

*[Signature]*  
11/21/13



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

<b>SECTION 1: OVERVIEW .....</b>	<b>2</b>
1.1 TEST SUMMARY .....	2
<b>SECTION 2: ASSESSMENT INFORMATION .....</b>	<b>3</b>
2.1 GENERAL .....	3
2.2 DATE OF TESTING.....	4
2.3 REPORT ISSUE DATE .....	4
2.4 TESTING FACILITIES .....	4
2.5 EQUIPMENT ASSESSED (EUT).....	4
2.6 EUT DESCRIPTION .....	5
<b>SECTION 4: SAMPLE DETAILS.....</b>	<b>6</b>
<b>APPENDIX A:     EMISSION TEST RESULTS.....</b>	<b>7</b>
TARGET MAXIMUM CHANNEL POWER .....	7
99% AND 26dB BANDWIDTH.....	8
PEAK OUTPUT POWER .....	13
POWER SPECTRAL DENSITY .....	13
PEAK EXCURSION .....	35
CONDUCTED SPURIOUS EMISSIONS .....	40
CONDUCTED BANDEDGE .....	81
<b>APPENDIX B CONDUCTED TEST SETUP .....</b>	<b>119</b>
R	



## Section 1: Overview

### 1.1 Test Summary

**samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:**

Emission	Immunity
CFR47 Part 15.407 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

#### Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



## **Section 2: Assessment Information**

### **2.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

\*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

**This report must not be reproduced except in full, without written approval of Cisco Systems.**



## **2.2 Date of testing**

31-October-2013

## **2.3 Report Issue Date**

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

## **2.4 Testing facilities**

This assessment was performed by:

### **Testing Laboratory**

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

### **Test Engineers**

Bud Chiller

## **2.5 Equipment Assessed (EUT)**

AIR-CAP1532E-A-K9



## 2.6 EUT Description

The AIR-CAP1530 Series Cisco Aironet 802.11ac Radio Modules support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps  
Non HT/VHT-20, Two Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7  
HT/VHT-20, Two Antennas, M0 to M15

HT/VHT-20 STBC, Two Antennas, M0 to M7

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps  
Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7  
HT/VHT-40, Two Antennas, M0 to M15

HT/VHT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.  
The data included in this report represent the worst case data for the 14 dBi antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
<b>5 GHz</b>	AIR-ANT5180V-N	Single Band Omni	8
	AIR-ANT5114P2M-N	Single Band, Directional Patch	14
<b>2.4/5 GHz</b>	AIR-ANT2547V-N=	Dual-band Omni	4/7
	AIR-ANT2547VG-N=	Dual-band Omni, Gray	4/7
	AIR-ANT2588P3M-N=	Dual-band/Dual Polarized Directional, Patch	8/8



## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

### 4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1532E-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	

### 4.2 System Details

System #	Description	Samples
1	EUT	S01, S02,

### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

**Appendix A: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

**Target Maximum Channel Power**

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5280	5320
Non HT-20, 6 to 54 Mbps	12	12
HT-20, M0 to M15	12	12
HT-20 STBC, M0 to M7	12	12
	5310	
Non HT-40, 6 to 54 Mbps	12	
HT-40, M0 to M15	12	
HT-40 STBC, M0 to M7	12	





## 99% and 26dB Bandwidth

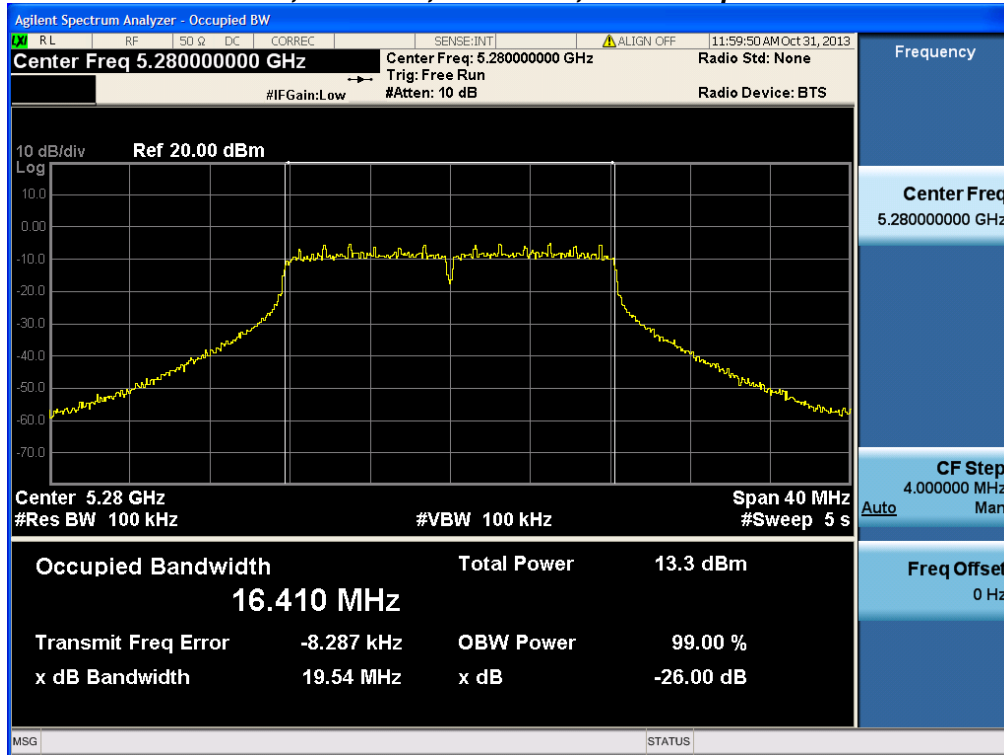
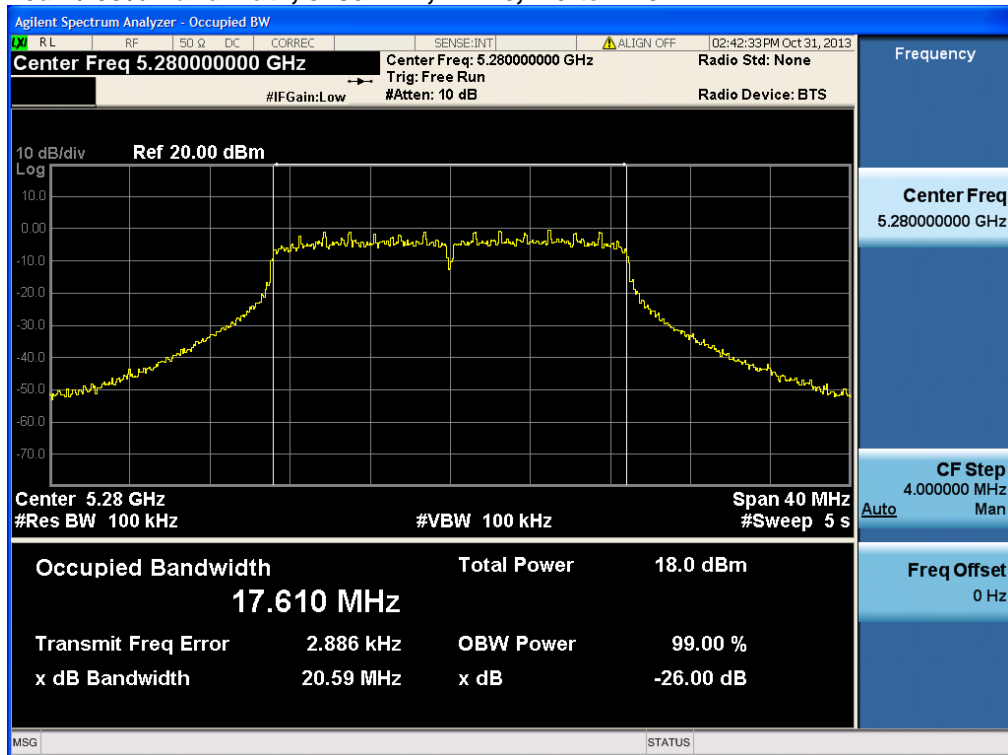
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

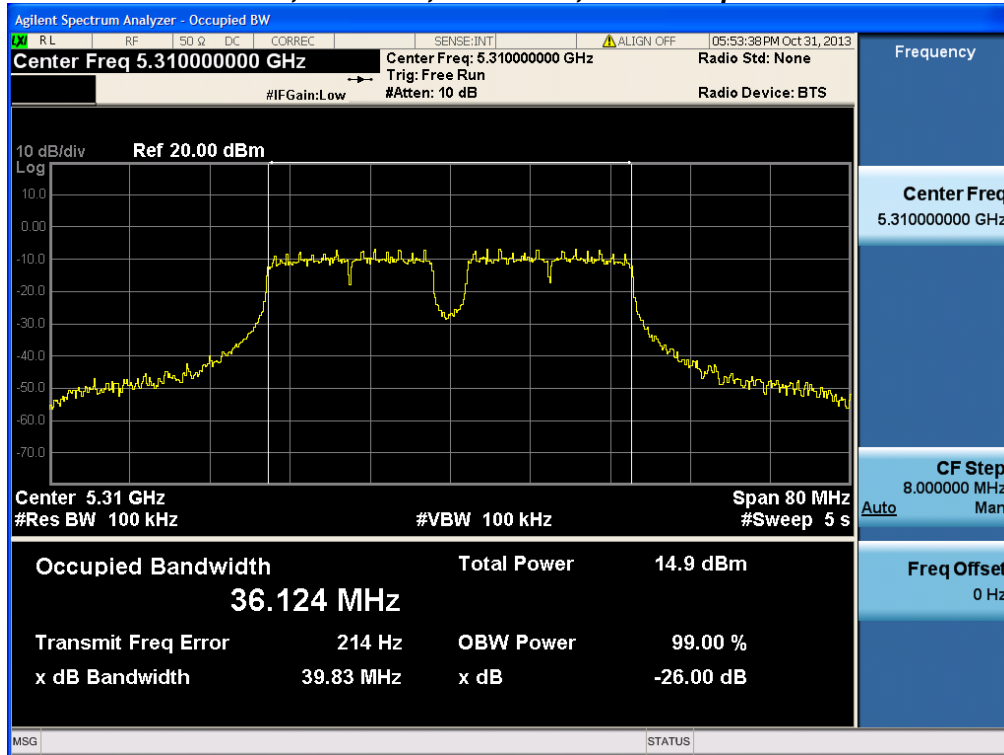
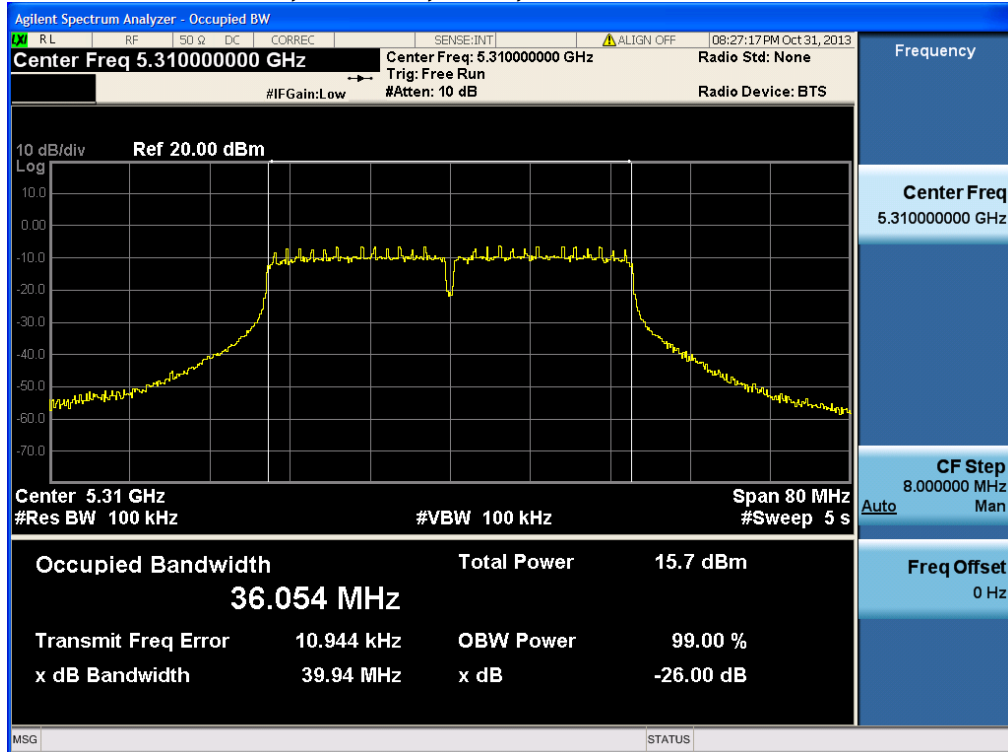
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single

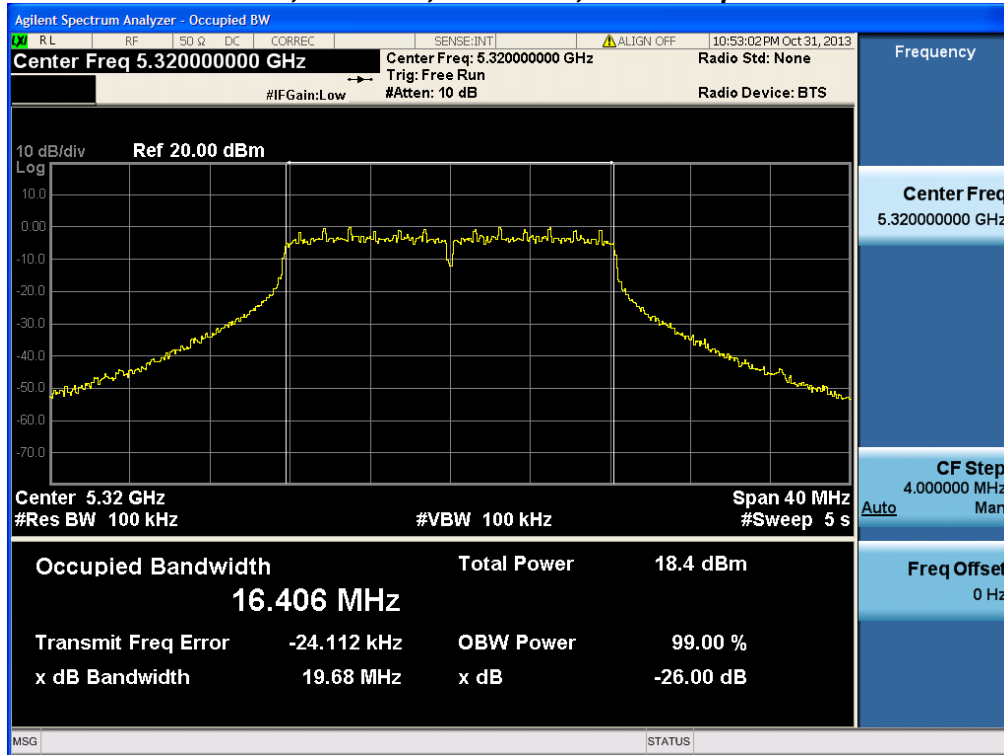
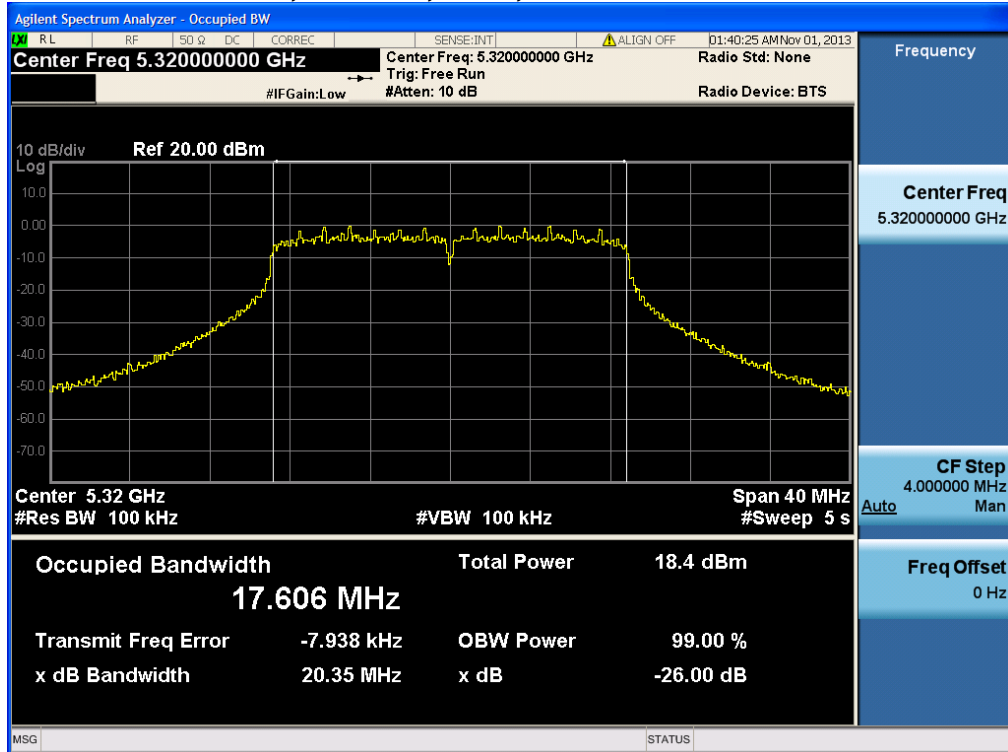
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:



Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5280	Non HT-20, 6 to 54 Mbps	6	19.5	16.4
	HT-20, M0 to M15	m0	20.6	17.6
5310	Non HT-40, 6 to 54 Mbps	6	39.8	36.1
	HT-40, M0 to M23	m0	39.9	36.1
5320	Non HT-20, 6 to 54 Mbps	6	19.7	16.4
	HT-20, M0 to M15	m0	20.3	17.6

**26dB / 99% Bandwidth, 5280 MHz, Non HT-20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5280 MHz, HT-20, M0 to M15**

**26dB / 99% Bandwidth, 5310 MHz, Non HT-40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5310 MHz, HT-40, M0 to M23**

**26dB / 99% Bandwidth, 5320 MHz, Non HT-20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5320 MHz, HT-20, M0 to M15**



## Peak Output Power

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The smallest 26dB bandwidth for all channels is 20.4 MHz. The maximum conducted output power is calculated as  $11\text{dBm} + 10 \cdot \log(20.4\text{MHz}) = 24\text{dBm}$

This report covers antennas with 14 dBi gain. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

## Power Spectral Density

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

This report covers antennas with 14 dBi gain. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “Measure and add  $10 \log(N)$  dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity  $10 \log(4)$  (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.



Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=99% BW from 99% Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power. Perform a Marker Peak Search function, and record this value as the Power Spectral Density.



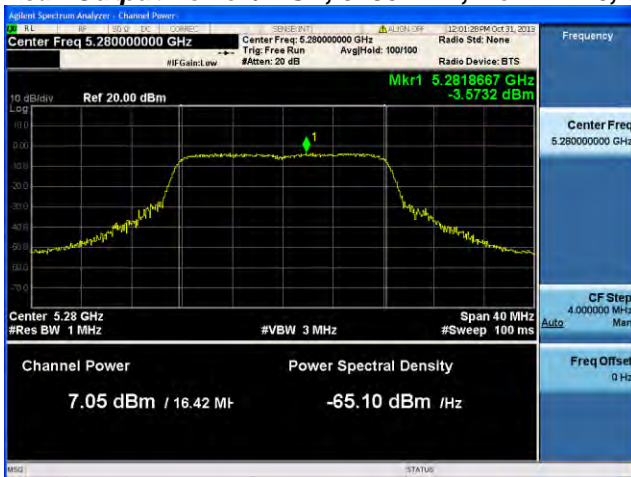
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	11.6		11.6	16	4.4
	Non HT-20, 6 to 54 Mbps	2	14	7.0	7.5	10.3	16	5.7
	HT-20, M0 to M7	1	14	11.5		11.5	16	4.5
	HT-20, M0 to M7	2	14	6.8	7.2	10.0	16	6.0
	HT-20, M8 to M15	2	14	8.9	9.3	12.1	16	3.9
	HT-20 STBC, M0 to M7	2	14	8.9	9.3	12.1	16	3.9
5310	Non HT-40, 6 to 54 Mbps	1	14	10.4		10.4	16	5.6
	Non HT-40, 6 to 54 Mbps	2	14	8.3	9.1	11.7	16	4.3
	HT-40, M0 to M7	1	14	11.6		11.6	16	4.4
	HT-40, M0 to M7	2	14	9.0	9.8	12.4	16	3.6
	HT-40, M8 to M15	2	14	9.0	9.8	12.4	16	3.6
	HT-40 STBC, M0 to M7	2	14	9.0	9.8	12.4	16	3.6
5320	Non HT-20, 6 to 54 Mbps	1	14	12.1		12.1	16	3.9
	Non HT-20, 6 to 54 Mbps	2	14	6.3	7.0	9.7	16	6.3
	HT-20, M0 to M7	1	14	11.8		11.8	16	4.2
	HT-20, M0 to M7	2	14	7.0	7.8	10.4	16	5.6
	HT-20, M8 to M15	2	14	9.0	9.7	12.4	16	3.6
	HT-20 STBC, M0 to M7	2	14	9.0	9.7	12.4	16	3.6





Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	2.7		2.7	3.0	0.3
	Non HT-20, 6 to 54 Mbps	2	17	-3.6	-3.2	-0.4	0.0	0.4
	HT-20, M0 to M7	1	14	2.2		2.2	3.0	0.8
	HT-20, M0 to M7	2	17	-3.5	-3.5	-0.5	0.0	0.5
	HT-20, M8 to M15	2	14	-0.6	0.0	2.7	3.0	0.3
	HT-20 STBC, M0 to M7	2	14	-0.6	0.0	2.7	3.0	0.3
5310	Non HT-40, 6 to 54 Mbps	1	14	0.0		0.0	3.0	3.0
	Non HT-40, 6 to 54 Mbps	2	17	-4.4	-3.6	-1.0	0.0	1.0
	HT-40, M0 to M7	1	14	-0.9		-0.9	3.0	3.9
	HT-40, M0 to M7	2	17	-3.8	-3.4	-0.6	0.0	0.6
	HT-40, M8 to M15	2	14	-3.8	-3.4	-0.6	3.0	3.6
	HT-40 STBC, M0 to M7	2	14	-3.8	-3.4	-0.6	3.0	3.6
5320	Non HT-20, 6 to 54 Mbps	1	14	2.0		2.0	3.0	1.0
	Non HT-20, 6 to 54 Mbps	2	17	-4.1	-3.5	-0.8	0.0	0.8
	HT-20, M0 to M7	1	14	1.4		1.4	3.0	1.6
	HT-20, M0 to M7	2	17	-3.6	-2.8	-0.2	0.0	0.2
	HT-20, M8 to M15	2	14	-1.5	-0.9	1.8	3.0	1.2
	HT-20 STBC, M0 to M7	2	14	-1.5	-0.9	1.8	3.0	1.2

**Peak Output Power / PSD, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Peak Output Power / PSD, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

**Peak Output Power / PSD, 5280 MHz, HT-20, M0 to M7****Antenna A**

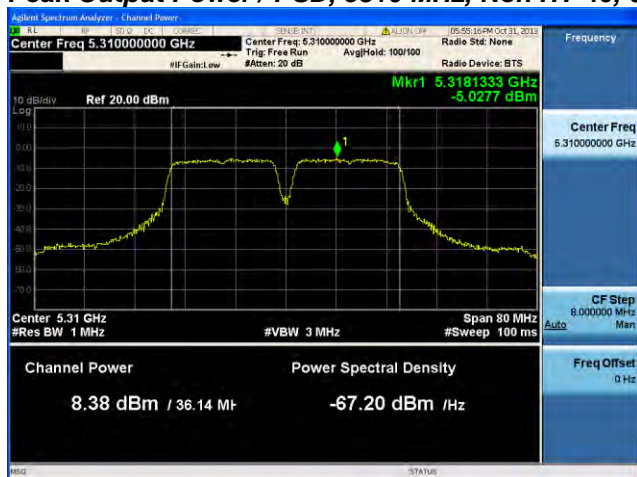
**Peak Output Power / PSD, 5280 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

**Peak Output Power / PSD, 5280 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

**Peak Output Power / PSD, 5280 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**

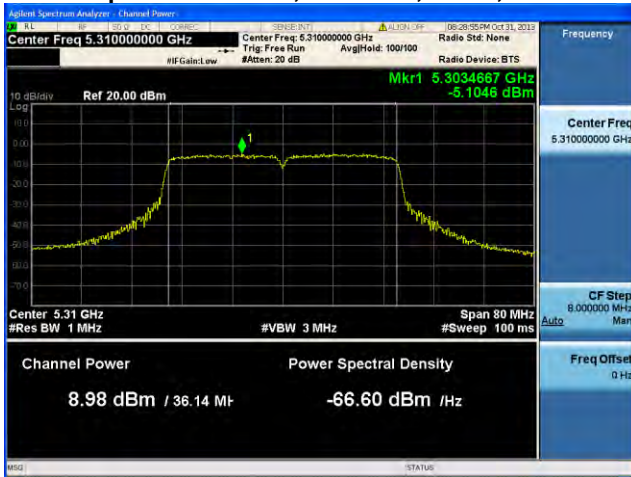
**Peak Output Power / PSD, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**



**Peak Output Power / PSD, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

**Peak Output Power / PSD, 5310 MHz, HT-40, M0 to M7****Antenna A**

**Peak Output Power / PSD, 5310 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

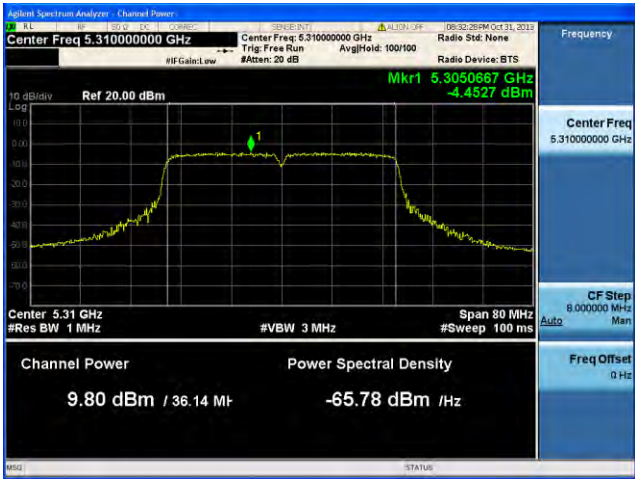
**Peak Output Power / PSD, 5310 MHz, HT-40, M8 to M15****Antenna A****Antenna B**



Peak Output Power / PSD, 5310 MHz, HT-40 STBC, M0 to M7

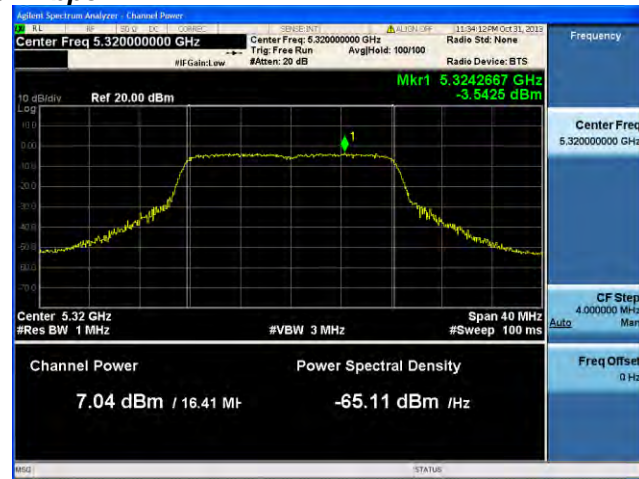


Antenna A



Antenna B

**Peak Output Power / PSD, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Peak Output Power / PSD, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**



**Peak Output Power / PSD, 5320 MHz, HT-20, M0 to M7****Antenna A**



**Peak Output Power / PSD, 5320 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



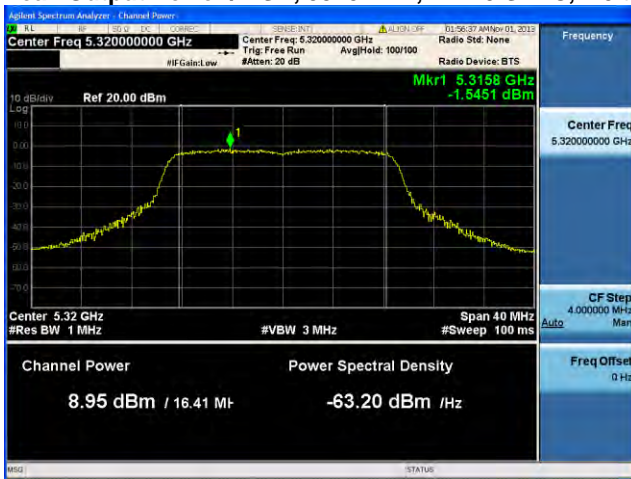
## Peak Output Power / PSD, 5320 MHz, HT-20, M8 to M15



Antenna A



Antenna B

**Peak Output Power / PSD, 5320 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**



## Peak Excursion

15.407: The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be  $\leq 13$  dB for all frequencies across the emission bandwidth.

Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be  $\leq 13$  dB for all frequencies across the emission bandwidth.

### 1st Trace: (Peak)

Set Span to encompass the entire emission bandwidth of the signal.

RBW = 1 MHz, VBW = 3 MHz

Detector = Peak

Sweep = Auto

Trace 1 = Max-hold

Ref Level Offset = correct for attenuator and cable loss

Ref Level = 20dBm

Atten = 10dBm

### 2nd Trace: (Average)

Trace 2 = clear right

Detector = Sample

Avg/VBW type = Pwr(RMS)

Average = 100

Sweep = single

### Set marker Deltas

Trace 1 & Peak search

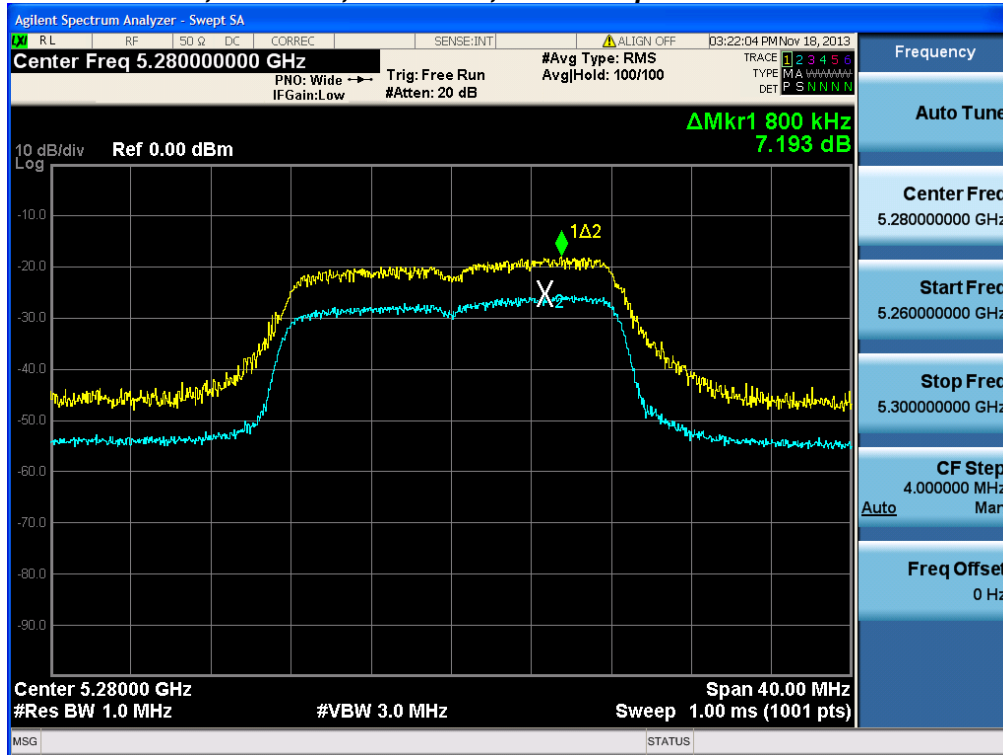
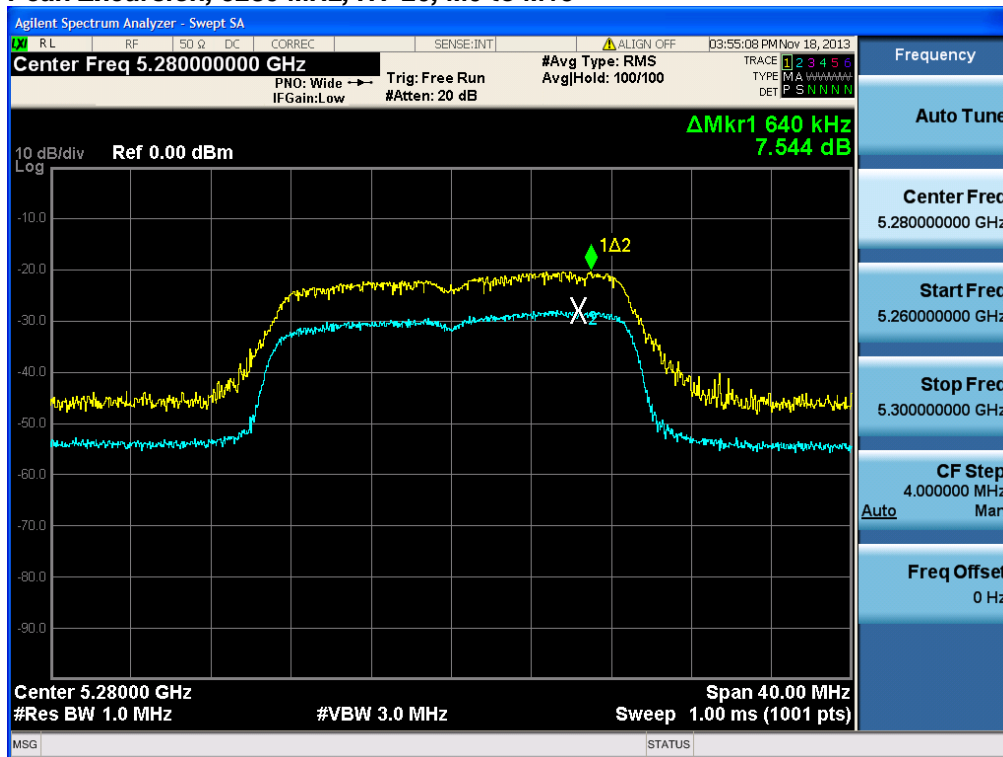
Marker Delta

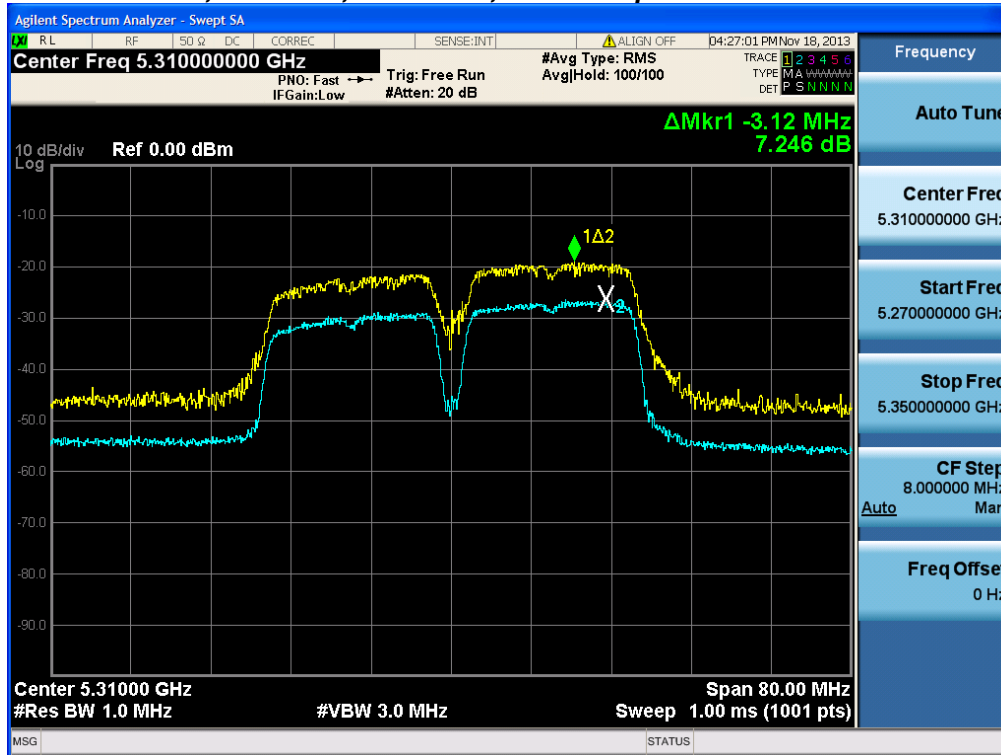
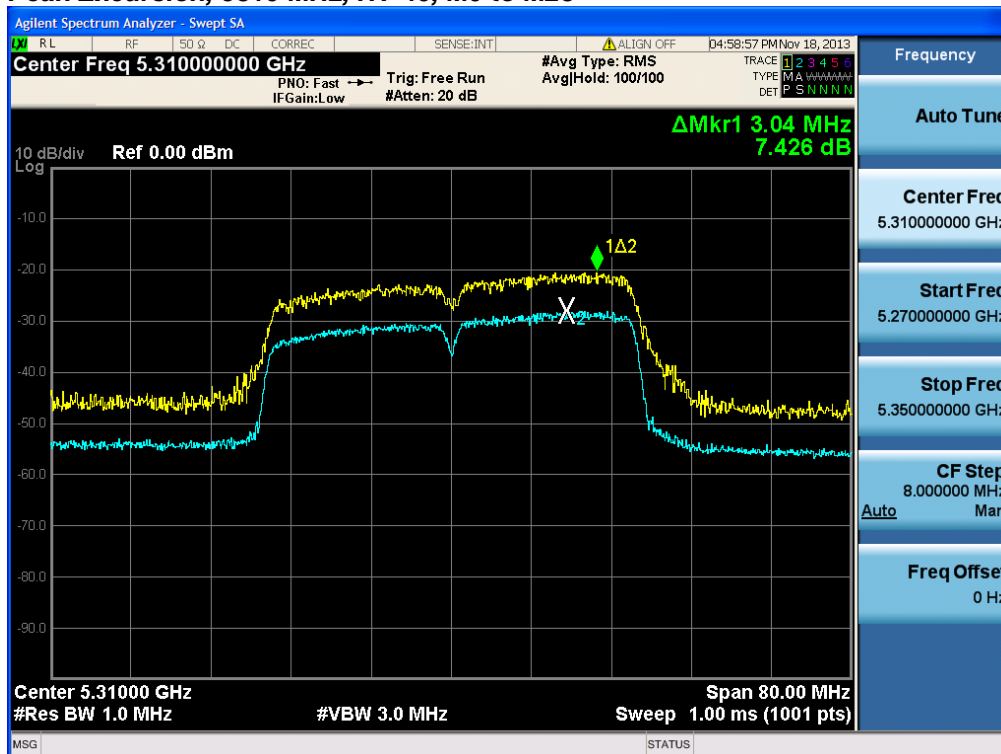
Trace 2 & Peak search

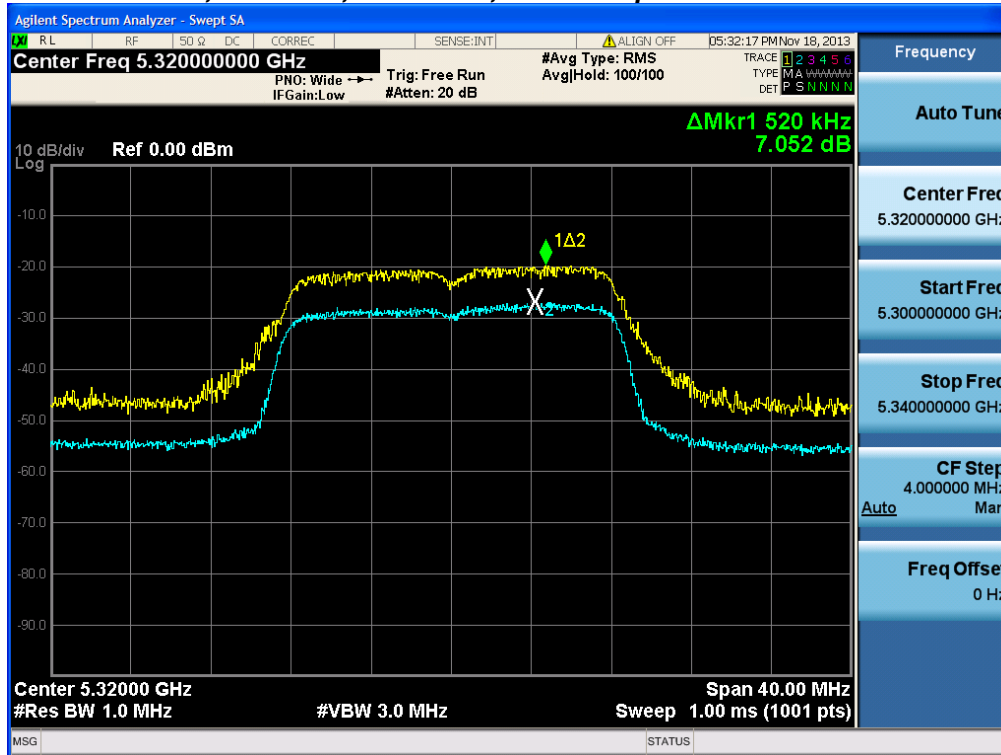
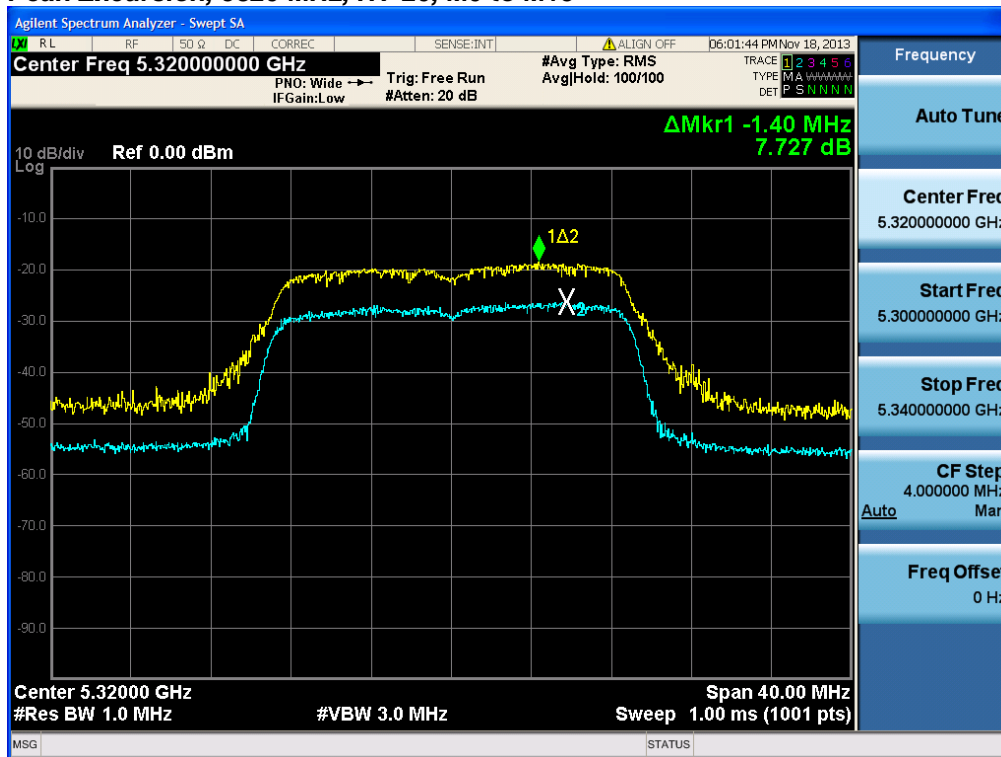
Record the difference between the Peak and Average Markers



Frequency (MHz)	Mode	Data Rate (Mbps)	Peak Excursion (dB)	Limit (dBm/MHz)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	6	7.1	13	5.9
	HT-20, M0 to M15	m0	7.2	13	5.8
5310	Non HT-40, 6 to 54 Mbps	6	7.4	13	5.6
	HT-40, M0 to M23	m0	7	13	6.0
5320	Non HT-20, 6 to 54 Mbps	6	7.2	13	5.8
	HT-20, M0 to M15	m0	7.2	13	5.8

**Peak Excursion, 5280 MHz, Non HT-20, 6 to 54 Mbps****Peak Excursion, 5280 MHz, HT-20, M0 to M15**

**Peak Excursion, 5310 MHz, Non HT-40, 6 to 54 Mbps****Peak Excursion, 5310 MHz, HT-40, M0 to M23**

**Peak Excursion, 5320 MHz, Non HT-20, 6 to 54 Mbps****Peak Excursion, 5320 MHz, HT-20, M0 to M15**





## Conducted Spurious Emissions

15.407: For transmitters operating in the 5.25-5.35 and 5.47-5.725 GHz band: all emissions outside of the 5.25-5.35 and 5.47-5.725 GHz bands shall not exceed an EIRP of -27dBm/MHz.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	10 s
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Peak
Trace:	Single
Marker:	Peak

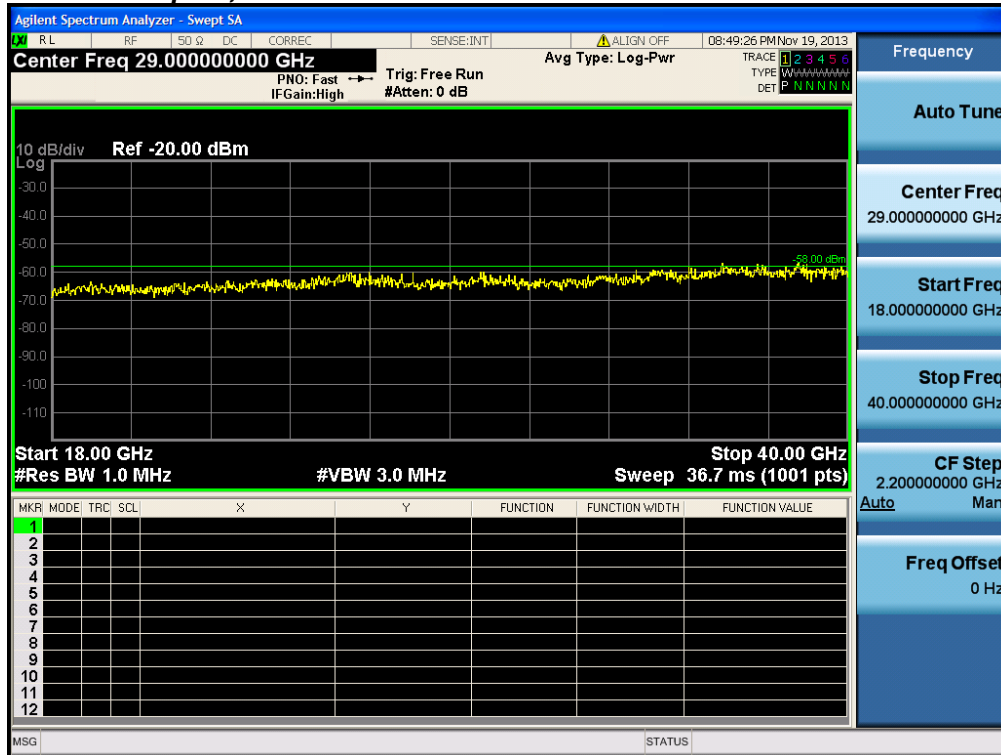
Record the marker waveform peak to spur difference



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	-75.1		-61.1	-41.25	19.9
	Non HT-20, 6 to 54 Mbps	2	14	-74.9	-74.9	-57.9	-41.25	16.6
	HT-20, M0 to M7	1	14	-75.1		-61.1	-41.25	19.9
	HT-20, M0 to M7	2	14	-75.0	-74.8	-57.9	-41.25	16.6
	HT-20, M8 to M15	2	14	-74.9	-75.0	-57.9	-41.25	16.7
	HT-20 STBC, M0 to M7	2	14	-74.9	-75.0	-57.9	-41.25	16.7
5310	Non HT-40, 6 to 54 Mbps	1	14	-74.8		-60.8	-41.25	19.6
	Non HT-40, 6 to 54 Mbps	2	14	-75.0	-75.1	-58.0	-41.25	16.8
	HT-40, M0 to M7	1	14	-74.9		-60.9	-41.25	19.7
	HT-40, M0 to M7	2	14	-75.2	-74.8	-58.0	-41.25	16.7
	HT-40, M8 to M15	2	14	-75.2	-74.8	-58.0	-41.25	16.7
	HT-40 STBC, M0 to M7	2	14	-75.2	-74.8	-58.0	-41.25	16.7
5320	Non HT-20, 6 to 54 Mbps	1	14	-74.7		-60.7	-41.25	19.5
	Non HT-20, 6 to 54 Mbps	2	14	-75.1	-74.7	-57.9	-41.25	16.6
	HT-20, M0 to M7	1	14	-74.8		-60.8	-41.25	19.6
	HT-20, M0 to M7	2	14	-74.9	-75.0	-57.9	-41.25	16.7
	HT-20, M8 to M15	2	14	-74.9	-75.0	-57.9	-41.25	16.7
	HT-20 STBC, M0 to M7	2	14	-74.9	-75.0	-57.9	-41.25	16.7



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	-79.8		-65.8	-27	38.8
	Non HT-20, 6 to 54 Mbps	2	14	-78.3	-77.5	-60.9	-27	33.9
	HT-20, M0 to M7	1	14	-78.5		-64.5	-27	37.5
	HT-20, M0 to M7	2	14	-78.4	-78.8	-61.6	-27	34.6
	HT-20, M8 to M15	2	14	-77.8	-79.0	-61.3	-27	34.3
	HT-20 STBC, M0 to M7	2	14	-77.8	-79.0	-61.3	-27	34.3
5310	Non HT-40, 6 to 54 Mbps	1	14	-76.6		-62.6	-27	35.6
	Non HT-40, 6 to 54 Mbps	2	14	-78.0	-78.8	-61.4	-27	34.4
	HT-40, M0 to M7	1	14	-78.6		-64.6	-27	37.6
	HT-40, M0 to M7	2	14	-77.9	-79.4	-61.6	-27	34.6
	HT-40, M8 to M15	2	14	-77.9	-79.4	-61.6	-27	34.6
	HT-40 STBC, M0 to M7	2	14	-77.9	-79.4	-61.6	-27	34.6
5320	Non HT-20, 6 to 54 Mbps	1	14	-78.9		-64.9	-27	37.9
	Non HT-20, 6 to 54 Mbps	2	14	-77.8	-79.6	-61.6	-27	34.6
	HT-20, M0 to M7	1	14	-78.1		-64.1	-27	37.1
	HT-20, M0 to M7	2	14	-78.2	-78.2	-61.2	-27	34.2
	HT-20, M8 to M15	2	14	-76.1	-77.4	-59.7	-27	32.7
	HT-20 STBC, M0 to M7	2	14	-76.1	-77.4	-59.7	-27	32.7

**Conducted Spurs, All Antennas**

**Conducted Spurs Average, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Conducted Spurs Average, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

**Conducted Spurs Average, 5280 MHz, HT-20, M0 to M7****Antenna A**

**Conducted Spurs Average, 5280 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



**Conducted Spurs Average, 5280 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

**Conducted Spurs Average, 5280 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**

**Conducted Spurs Average, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**

**Conducted Spurs Average, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

**Conducted Spurs Average, 5310 MHz, HT-40, M0 to M7****Antenna A**

**Conducted Spurs Average, 5310 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

**Conducted Spurs Average, 5310 MHz, HT-40, M8 to M15****Antenna A****Antenna B**



**Conducted Spurs Average, 5310 MHz, HT-40 STBC, M0 to M7****Antenna A****Antenna B**



**Conducted Spurs Average, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Conducted Spurs Average, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

**Conducted Spurs Average, 5320 MHz, HT-20, M0 to M7****Antenna A**

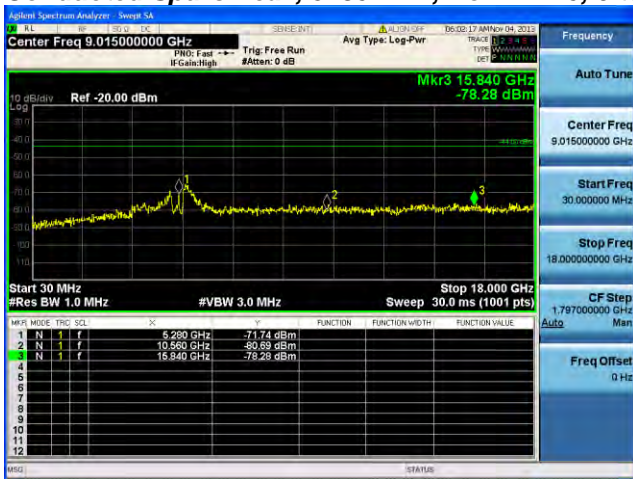
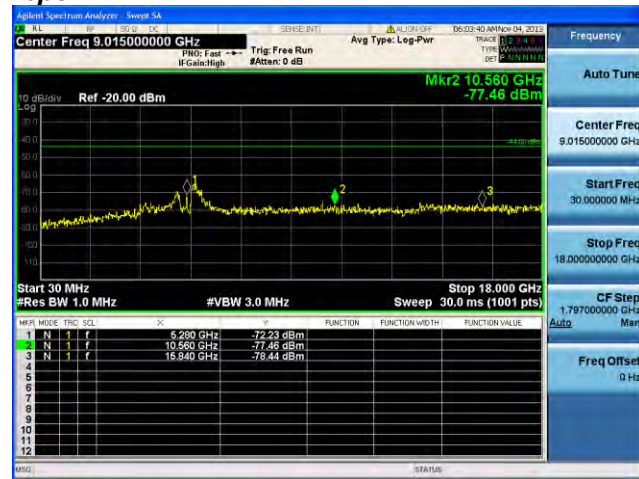
**Conducted Spurs Average, 5320 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

**Conducted Spurs Average, 5320 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

**Conducted Spurs Average, 5320 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**

**Conducted Spurs Peak, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

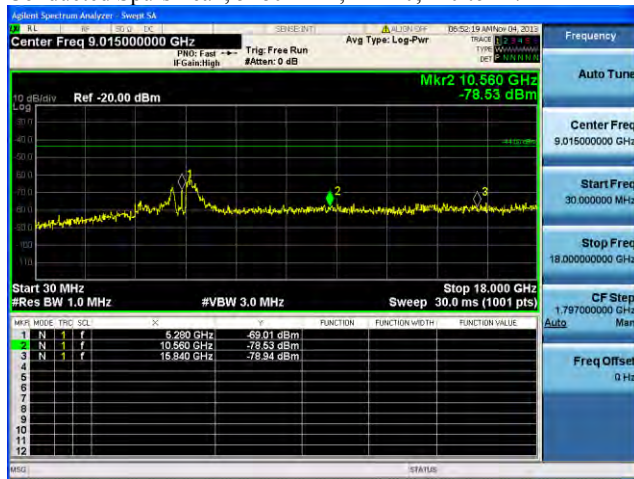


**Conducted Spurs Peak, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

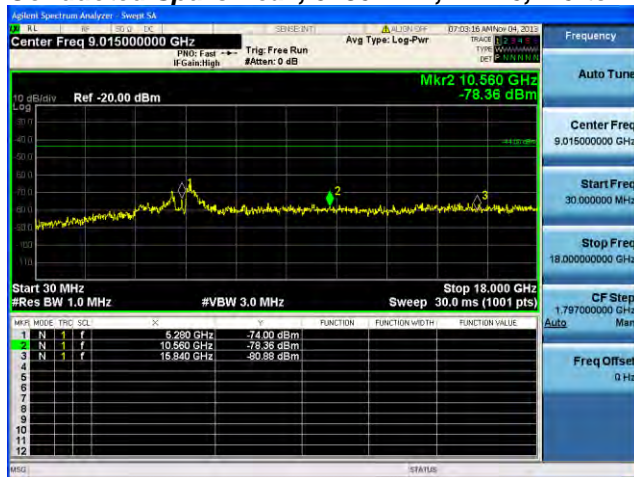
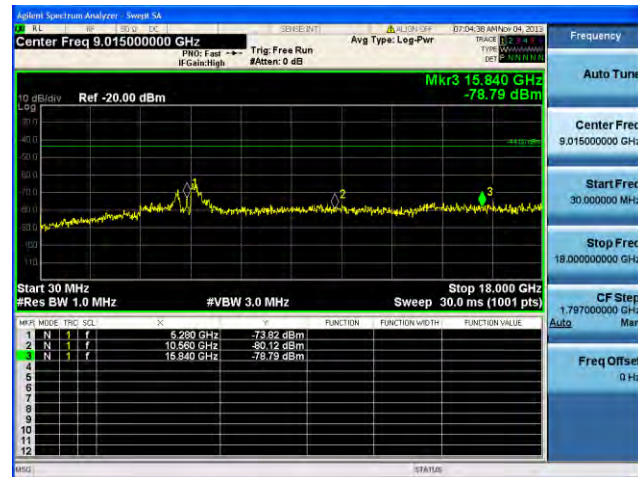




## Conducted Spurs Peak, 5280 MHz, HT-20, M0 to M7

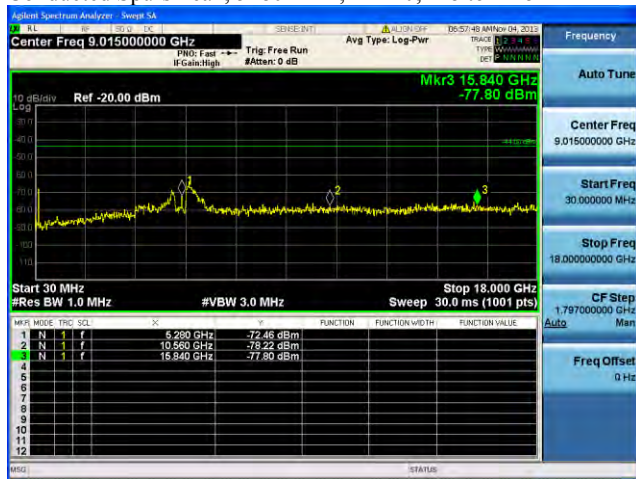


Antenna A

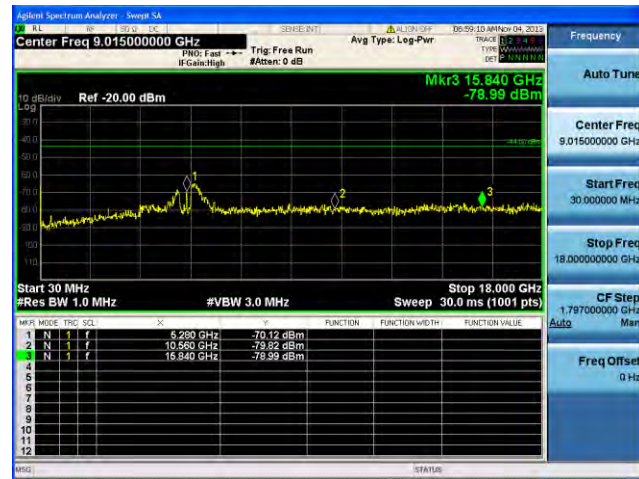
**Conducted Spurs Peak, 5280 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



## Conducted Spurs Peak, 5280 MHz, HT-20, M8 to M15



Antenna A



Antenna B



## Conducted Spurs Peak, 5280 MHz, HT-20 STBC, M0 to M7



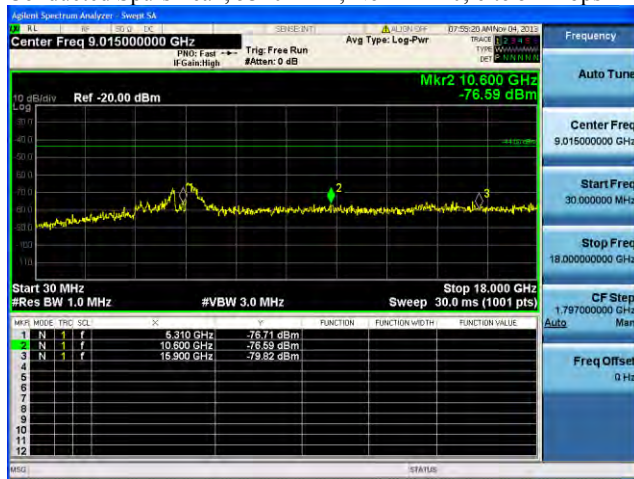
Antenna A



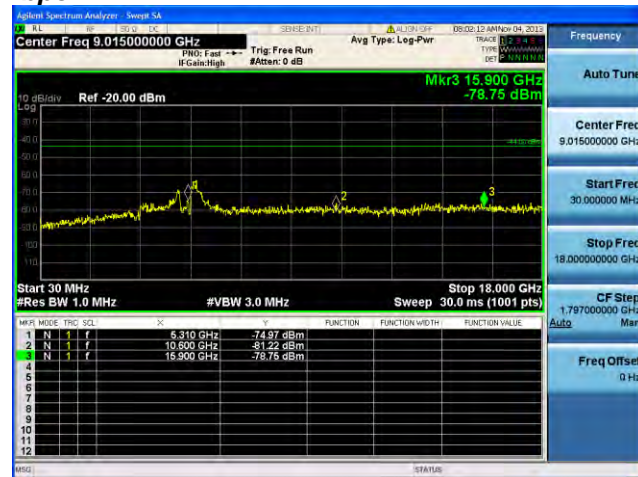
Antenna B



## Conducted Spurs Peak, 5310 MHz, Non HT-40, 6 to 54 Mbps

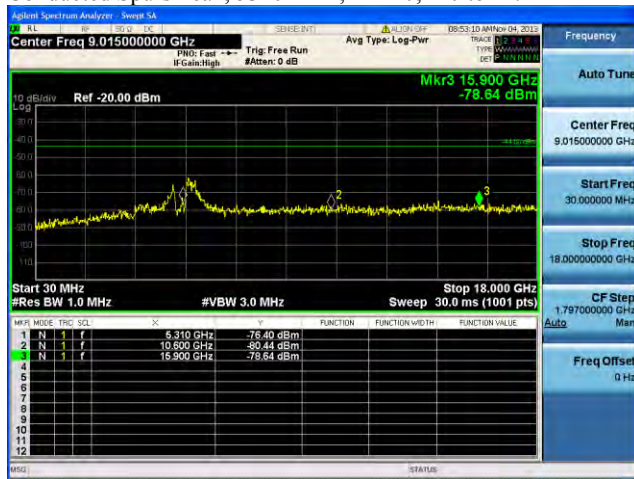


Antenna A

**Conducted Spurs Peak, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

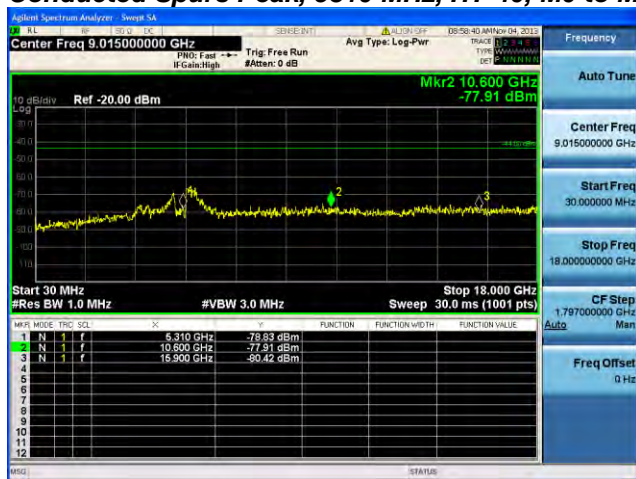
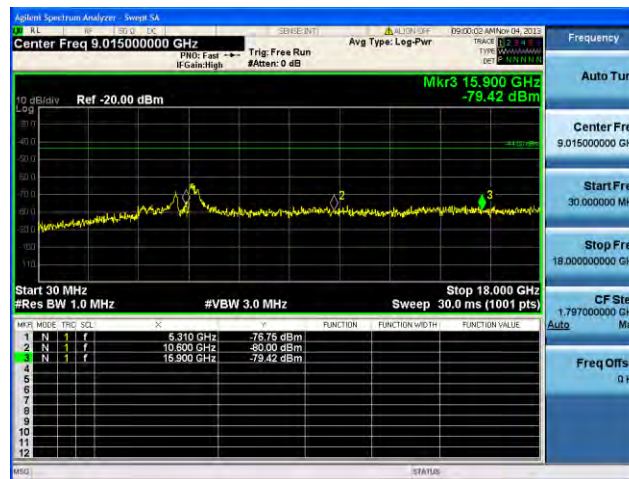


## Conducted Spurs Peak, 5310 MHz, HT-40, M0 to M7



Antenna A

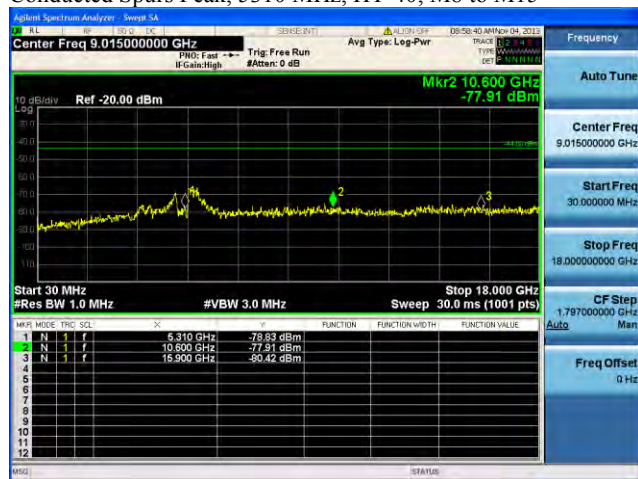


**Conducted Spurs Peak, 5310 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

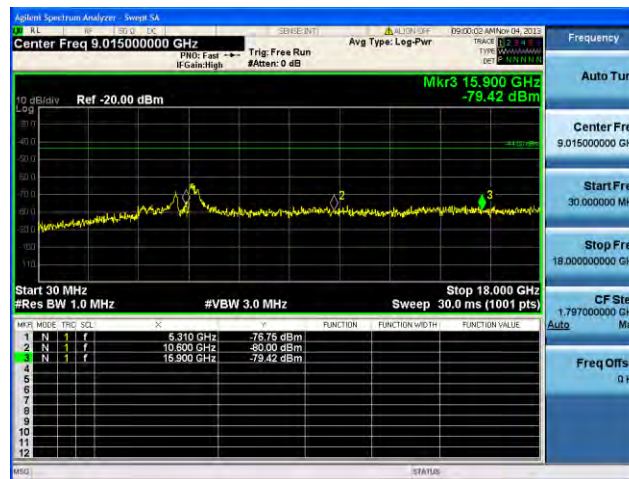




## Conducted Spurs Peak, 5310 MHz, HT-40, M8 to M15



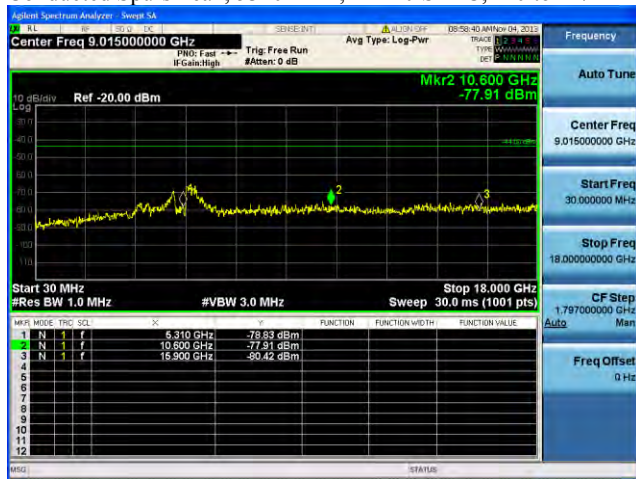
Antenna A



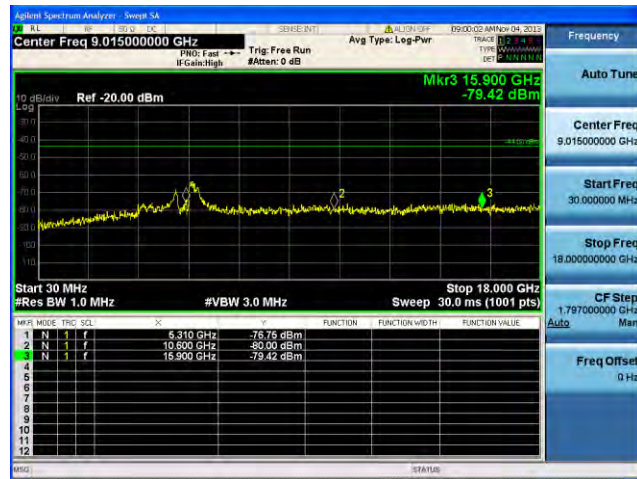
Antenna B



## Conducted Spurs Peak, 5310 MHz, HT-40 STBC, M0 to M7



Antenna A



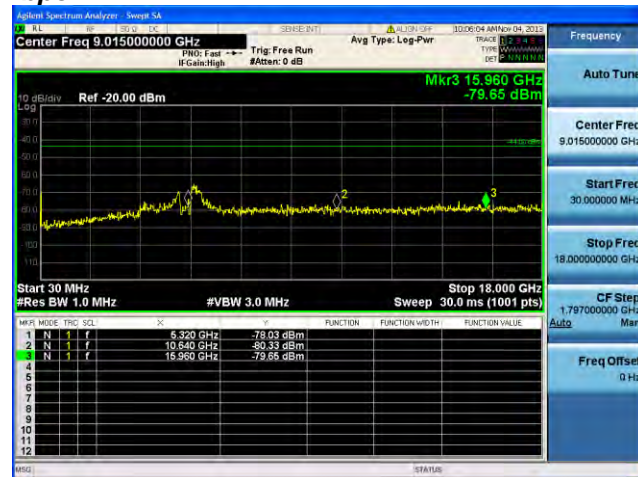
Antenna B



## Conducted Spurs Peak, 5320 MHz, Non HT-20, 6 to 54 Mbps

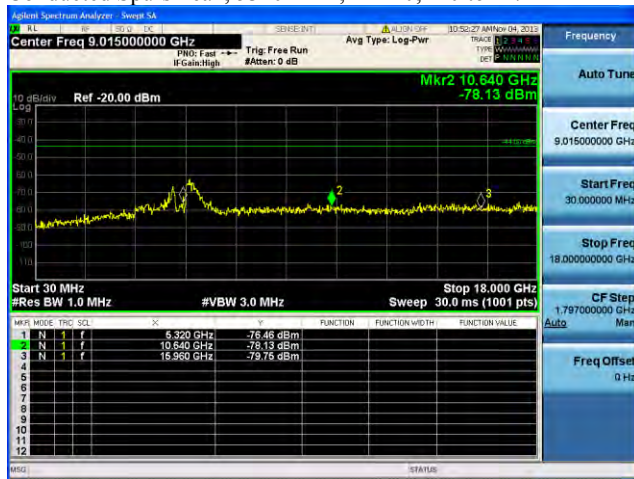


Antenna A

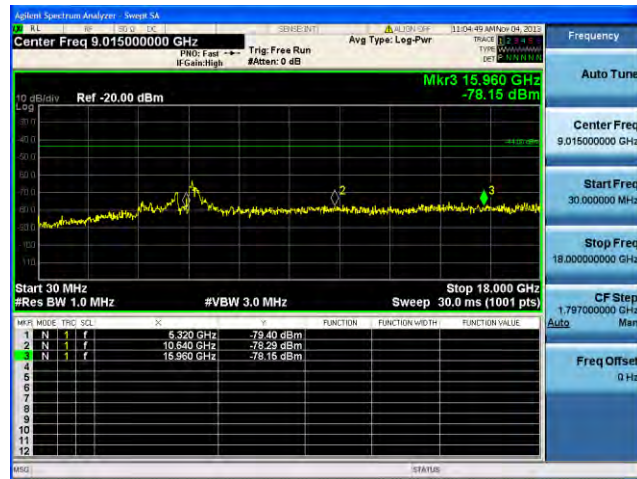
**Conducted Spurs Peak, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**



## Conducted Spurs Peak, 5320 MHz, HT-20, M0 to M7



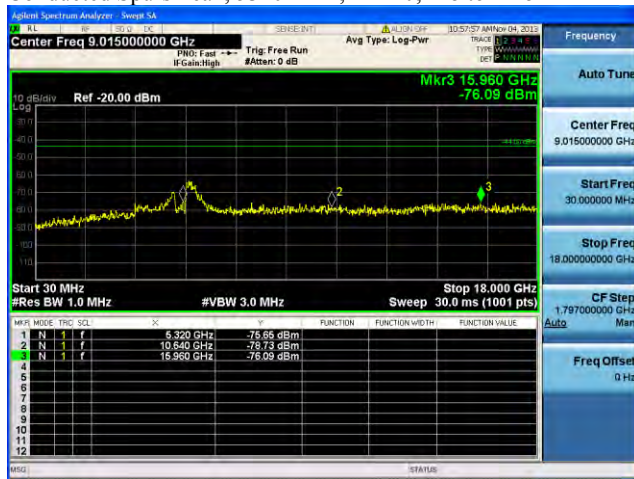
Antenna A

**Conducted Spurs Peak, 5320 MHz, HT-20, M0 to M7****Antenna A****Antenna B**





## Conducted Spurs Peak, 5320 MHz, HT-20, M8 to M15



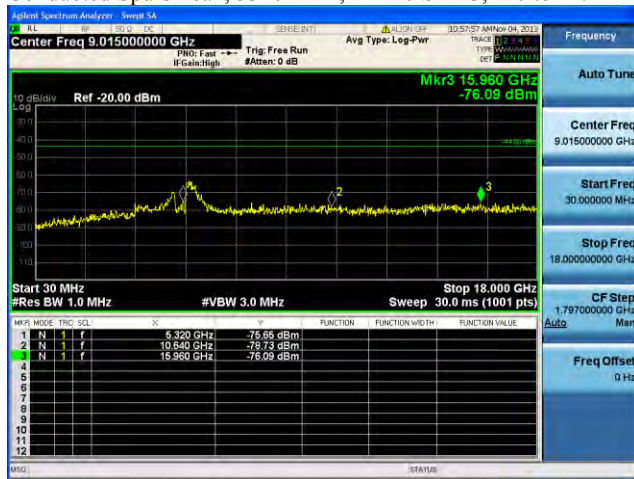
Antenna A



Antenna B



## Conducted Spurs Peak, 5320 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B





## Conducted Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots:     1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV @3m)  
                      2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

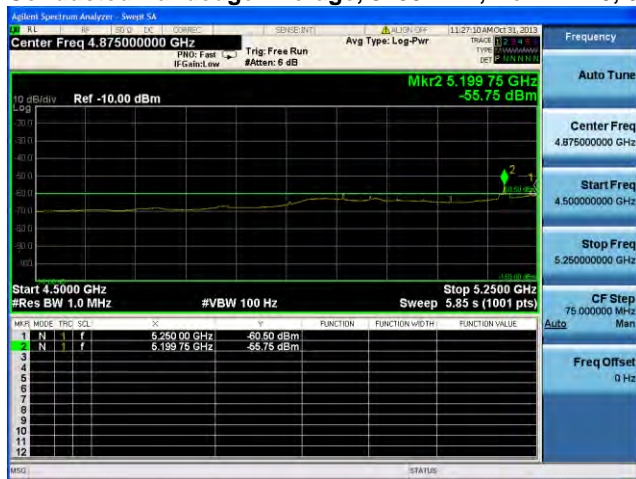
This report represents the worst case data for all supported operating modes and antennas.

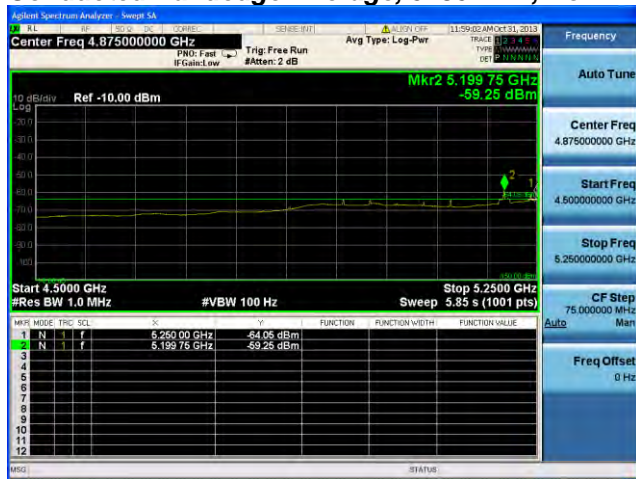
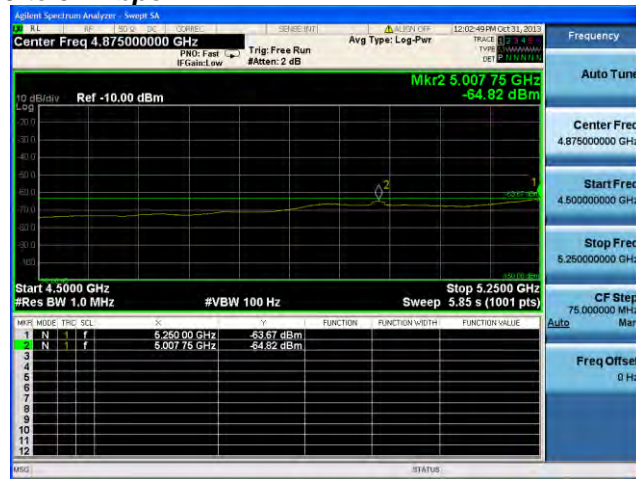


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	-55.8		-41.8	-41.25	0.6
	Non HT-20, 6 to 54 Mbps	2	14	-59.2	-63.7	-43.9	-41.25	2.6
	HT-20, M0 to M7	1	14	-56.0		-42.0	-41.25	0.8
	HT-20, M0 to M7	2	14	-59.2	-63.5	-43.8	-41.25	2.6
	HT-20, M8 to M15	2	14	-58.2	-62.2	-42.7	-41.25	1.5
	HT-20 STBC, M0 to M7	2	14	-58.2	-62.2	-42.7	-41.25	1.5
5310	Non HT-40, 6 to 54 Mbps	1	14	-57.0		-43.0	-41.25	1.8
	Non HT-40, 6 to 54 Mbps	2	14	-59.0	-57.7	-41.3	-41.25	0.1
	HT-40, M0 to M7	1	14	-55.9		-41.9	-41.25	0.7
	HT-40, M0 to M7	2	14	-59.5	-57.4	-41.3	-41.25	0.1
	HT-40, M8 to M15	2	14	-59.5	-57.4	-41.3	-41.25	0.1
	HT-40 STBC, M0 to M7	2	14	-59.5	-57.4	-41.3	-41.25	0.1
5320	Non HT-20, 6 to 54 Mbps	1	14	-57.5		-43.5	-41.25	2.3
	Non HT-20, 6 to 54 Mbps	2	14	-61.8	-63.7	-45.6	-41.25	4.4
	HT-20, M0 to M7	1	14	-57.6		-43.6	-41.25	2.3
	HT-20, M0 to M7	2	14	-60.5	-62.8	-44.5	-41.25	3.2
	HT-20, M8 to M15	2	14	-58.7	-60.9	-42.7	-41.25	1.4
	HT-20 STBC, M0 to M7	2	14	-58.7	-60.9	-42.7	-41.25	1.4



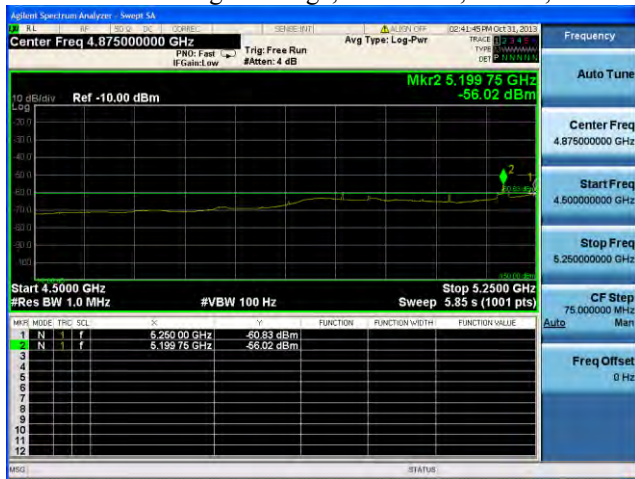
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20, 6 to 54 Mbps	1	14	-46.5		-32.5	-21.25	11.3
	Non HT-20, 6 to 54 Mbps	2	14	-47.5	-47.4	-30.4	-21.25	9.2
	HT-20, M0 to M7	1	14	-46.8		-32.8	-21.25	11.6
	HT-20, M0 to M7	2	14	-47.1	-48.0	-30.5	-21.25	9.3
	HT-20, M8 to M15	2	14	-47.6	-47.6	-30.6	-21.25	9.3
	HT-20 STBC, M0 to M7	2	14	-47.6	-47.6	-30.6	-21.25	9.3
5310	Non HT-40, 6 to 54 Mbps	1	14	-39.1		-25.1	-21.25	3.9
	Non HT-40, 6 to 54 Mbps	2	14	-39.8	-38.5	-22.1	-21.25	0.8
	HT-40, M0 to M7	1	14	-44.6		-30.6	-21.25	9.4
	HT-40, M0 to M7	2	14	-46.7	-47.3	-30.0	-21.25	8.7
	HT-40, M8 to M15	2	14	-46.7	-47.3	-30.0	-21.25	8.7
	HT-40 STBC, M0 to M7	2	14	-46.7	-47.3	-30.0	-21.25	8.7
5320	Non HT-20, 6 to 54 Mbps	1	14	-45.6		-31.6	-21.25	10.4
	Non HT-20, 6 to 54 Mbps	2	14	-48.6	-51.2	-32.7	-21.25	11.4
	HT-20, M0 to M7	1	14	-46.3		-32.3	-21.25	11.1
	HT-20, M0 to M7	2	14	-47.6	-51.0	-32.0	-21.25	10.7
	HT-20, M8 to M15	2	14	-46.3	-48.0	-30.1	-21.25	8.8
	HT-20 STBC, M0 to M7	2	14	-46.3	-48.0	-30.1	-21.25	8.8

**Conducted Bandedge Average, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

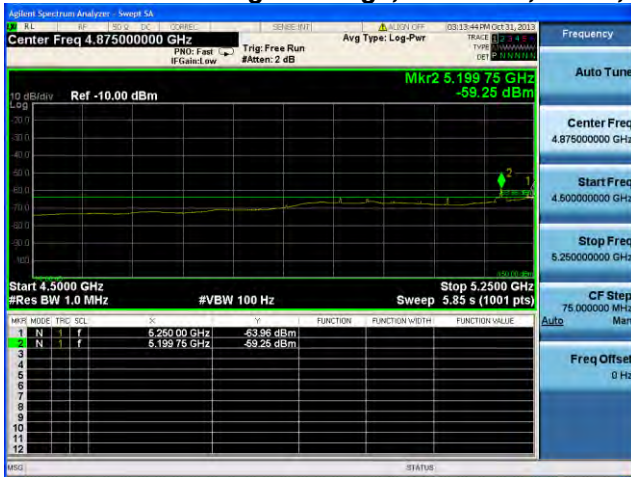
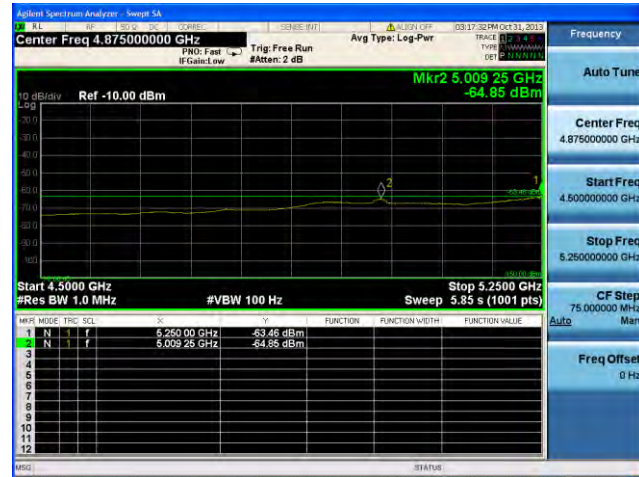
**Conducted Bandedge Average, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**



## Conducted Bandedge Average, 5280 MHz, HT-20, M0 to M7

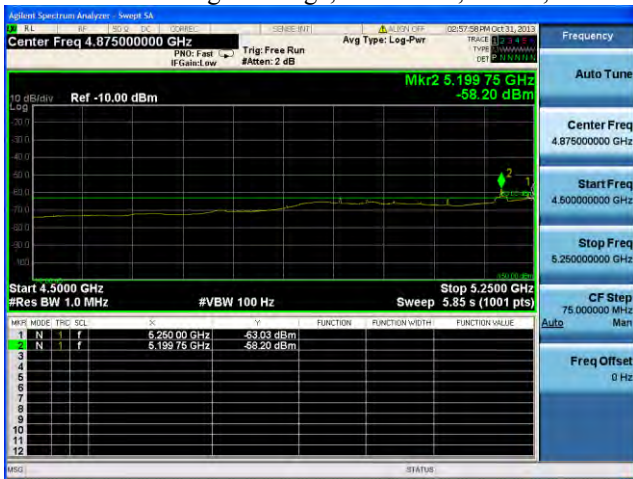


## Antenna A

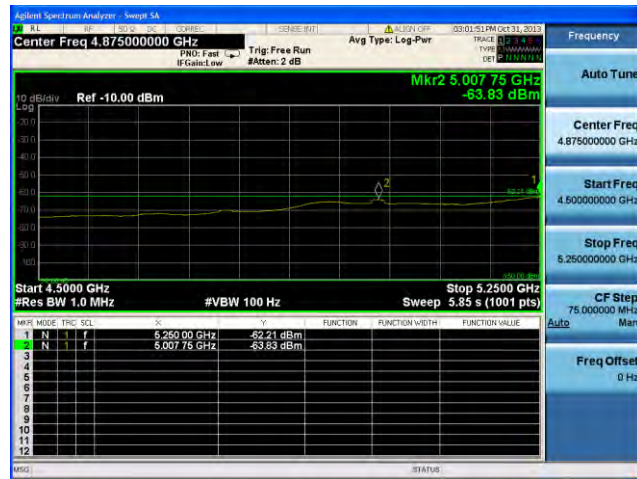
**Conducted Bandedge Average, 5280 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



## Conducted Bandedge Average, 5280 MHz, HT-20, M8 to M15



Antenna A

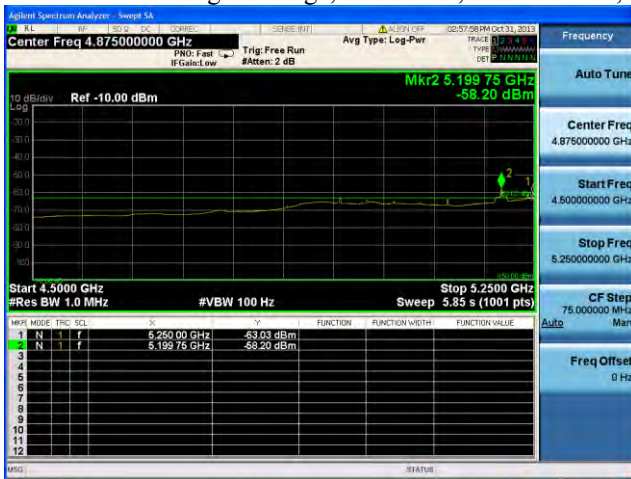


Antenna B

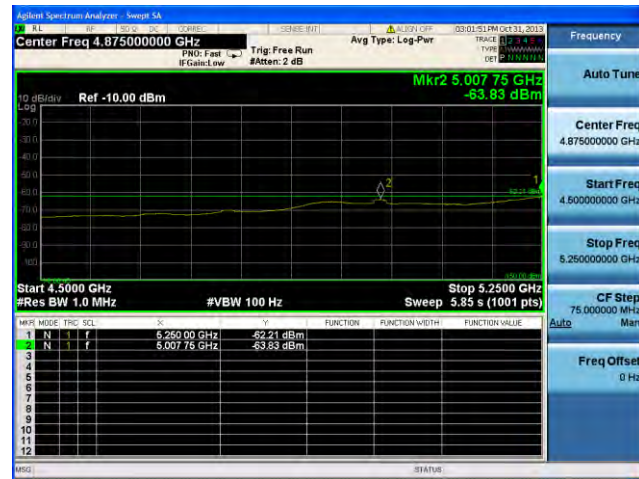




## Conducted Bandedge Average, 5280 MHz, HT-20 STBC, M0 to M7



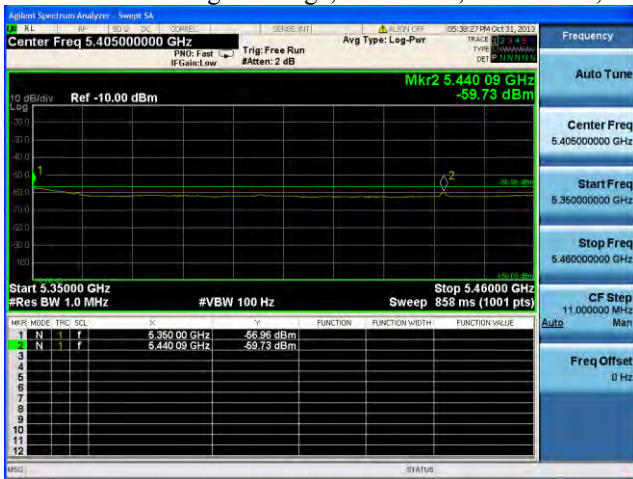
Antenna A



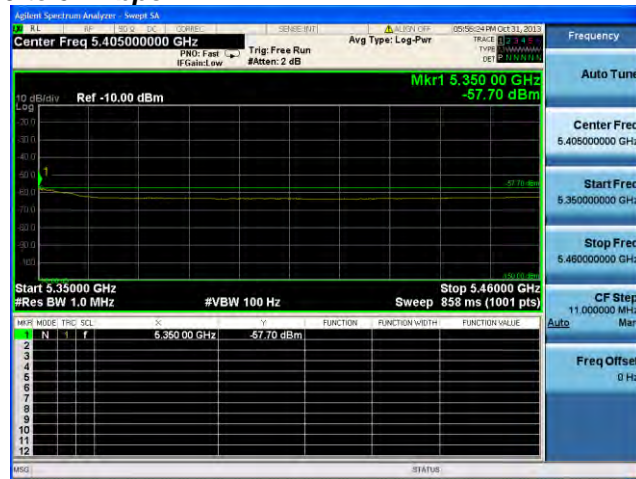
Antenna B



Conducted Bandedge Average, 5310 MHz, Non HT-40, 6 to 54 Mbps

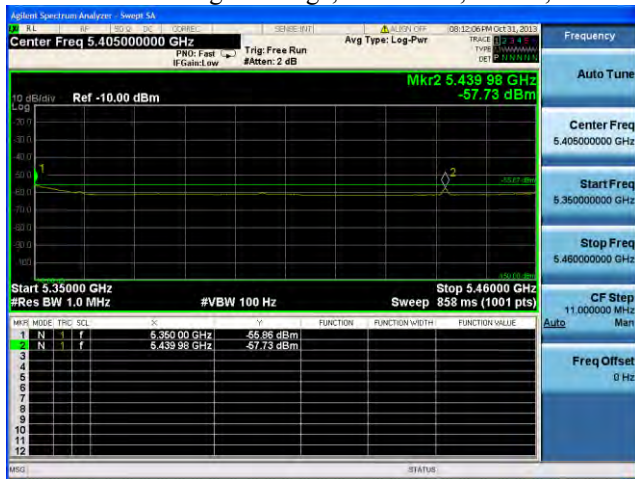


Antenna A

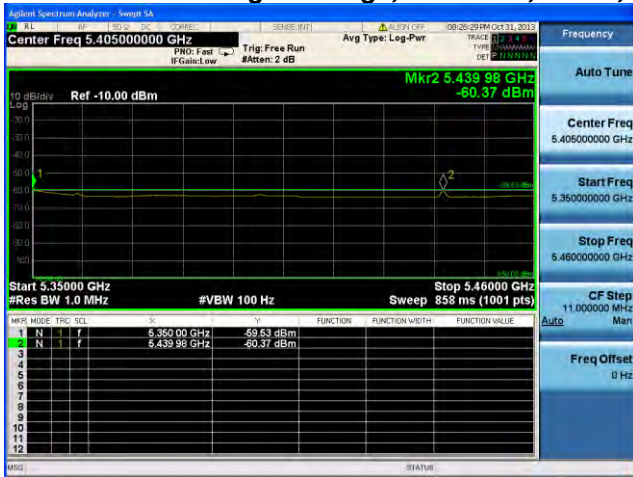
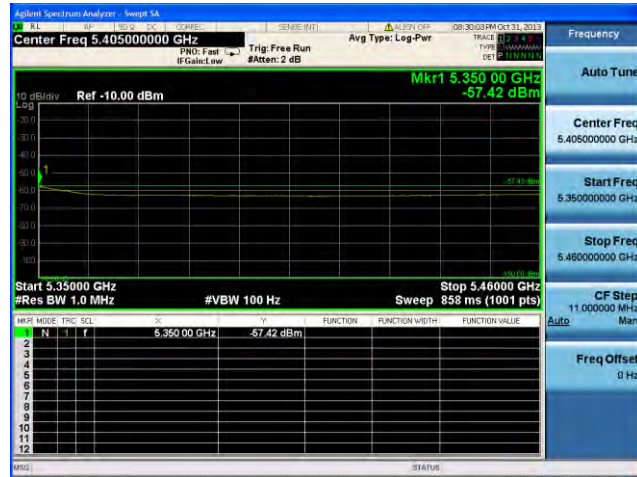
**Conducted Bandedge Average, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**



## Conducted Bandedge Average, 5310 MHz, HT-40, M0 to M7

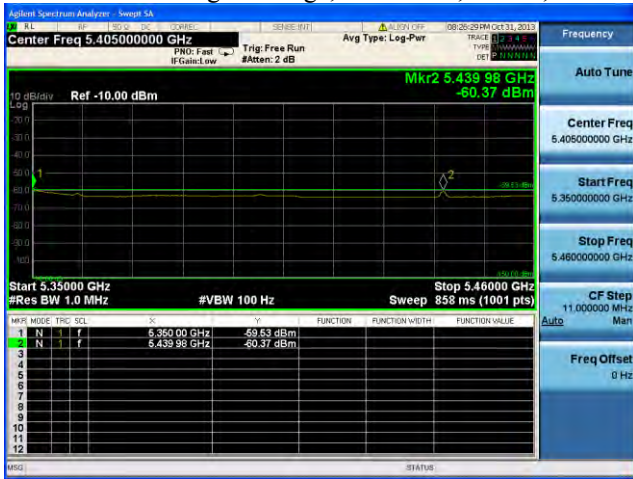


Antenna A

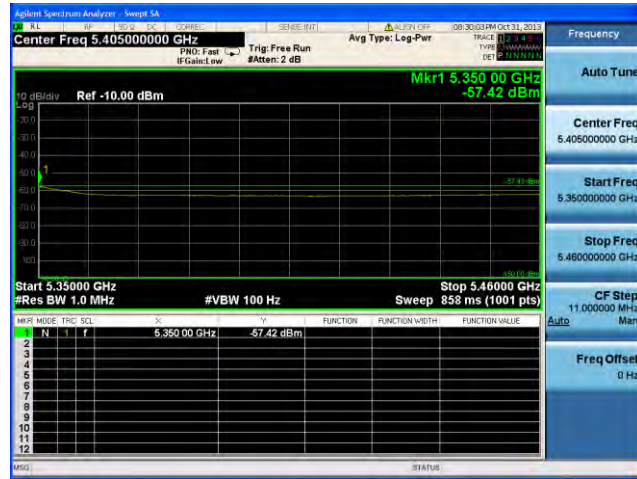
**Conducted Bandedge Average, 5310 MHz, HT-40, M0 to M7****Antenna A****Antenna B**



## Conducted Bandedge Average, 5310 MHz, HT-40, M8 to M15



Antenna A

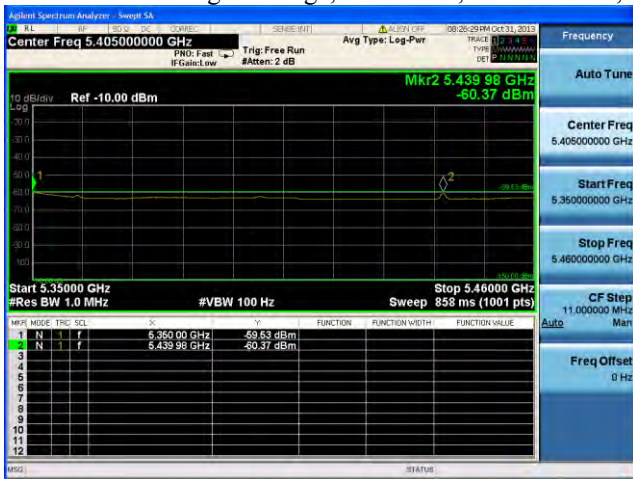


Antenna B

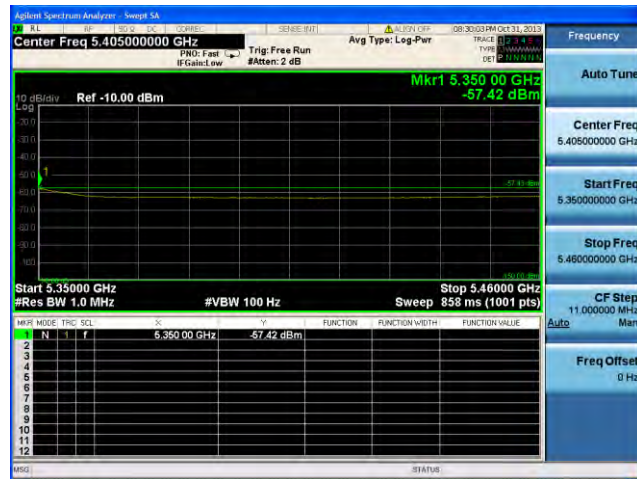




Conducted Bandedge Average, 5310 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B

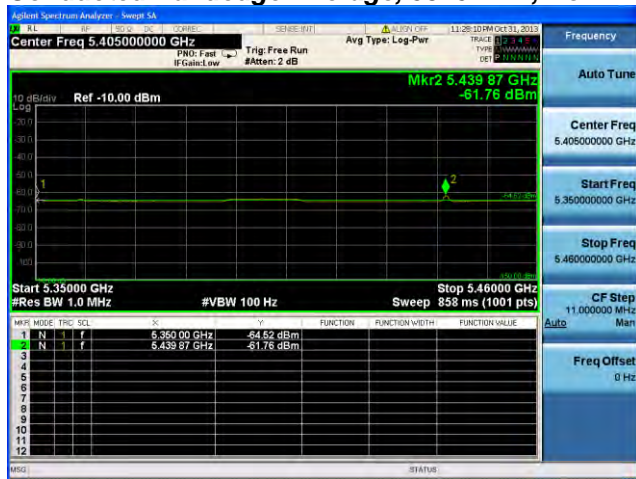
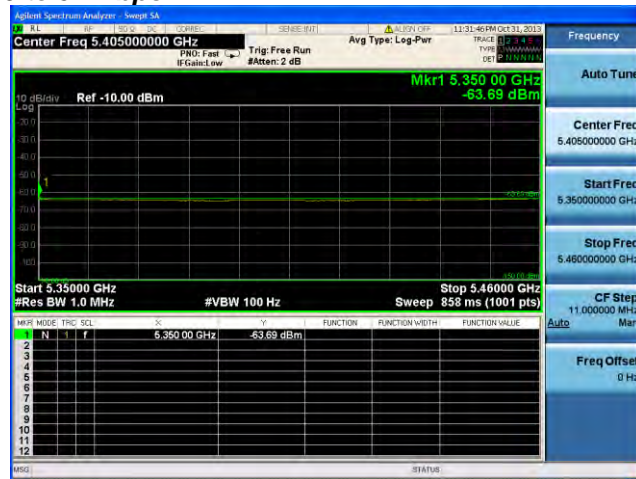


Conducted Bandedge Average, 5320 MHz, Non HT-20, 6 to 54 Mbps



**Antenna A**



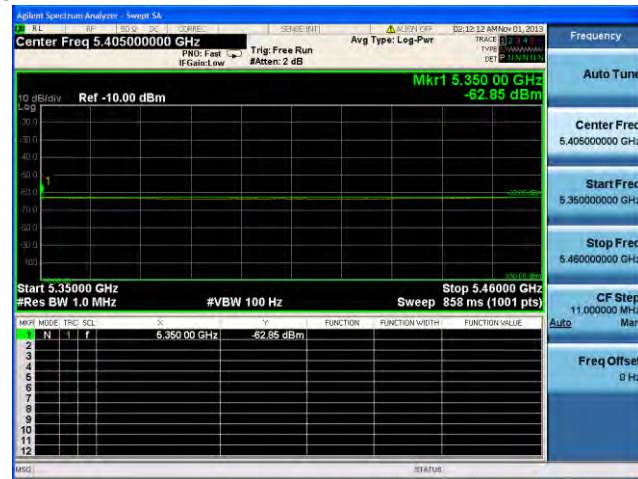
**Conducted Bandedge Average, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**



Conducted Bandedge Average, 5320 MHz, HT-20, M0 to M7



Antenna A

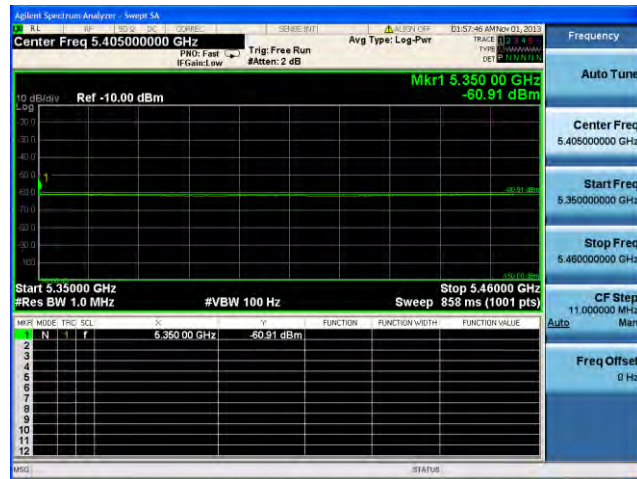
**Conducted Bandedge Average, 5320 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



## Conducted Bandedge Average, 5320 MHz, HT-20, M8 to M15



Antenna A



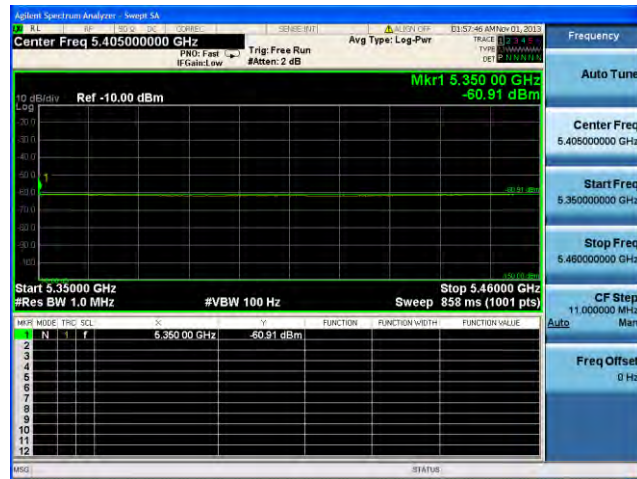
Antenna B



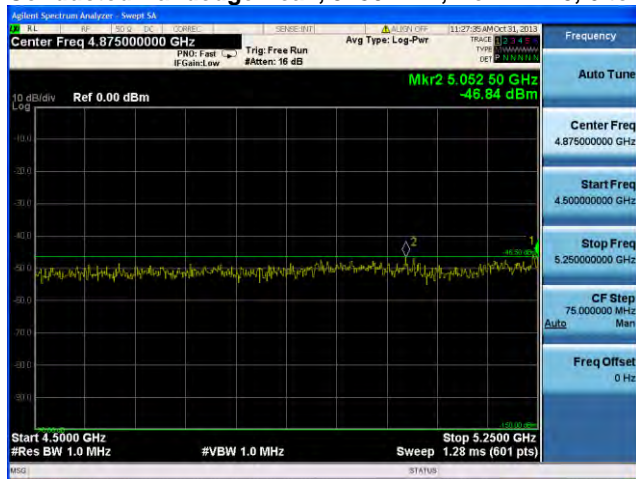
## Conducted Bandedge Average, 5320 MHz, HT-20 STBC, M0 to M7

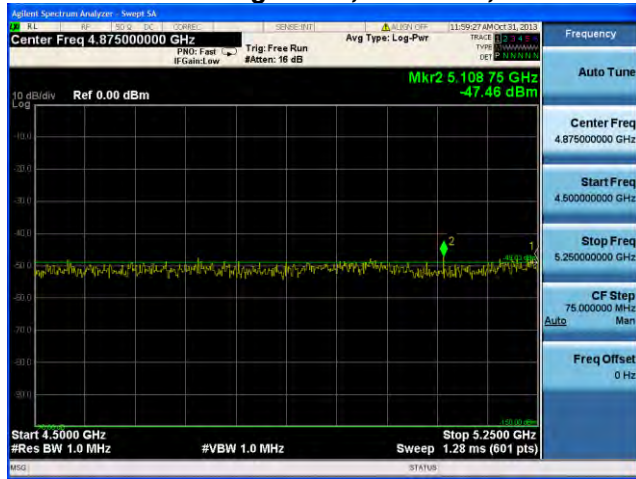
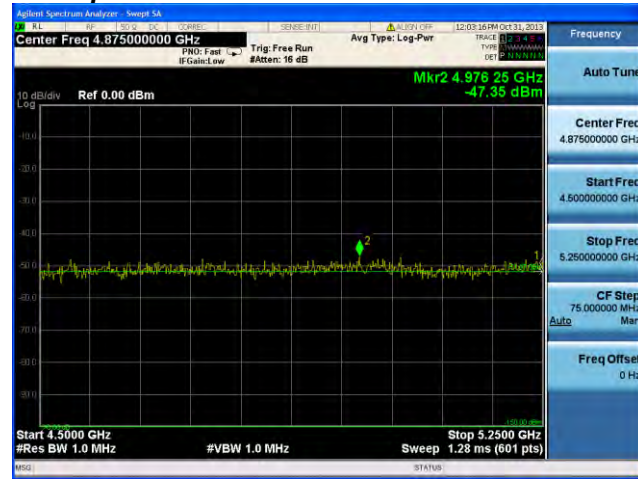


Antenna A

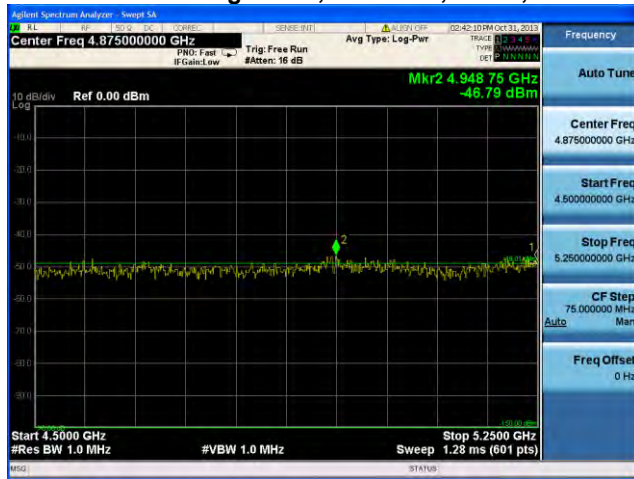


Antenna B

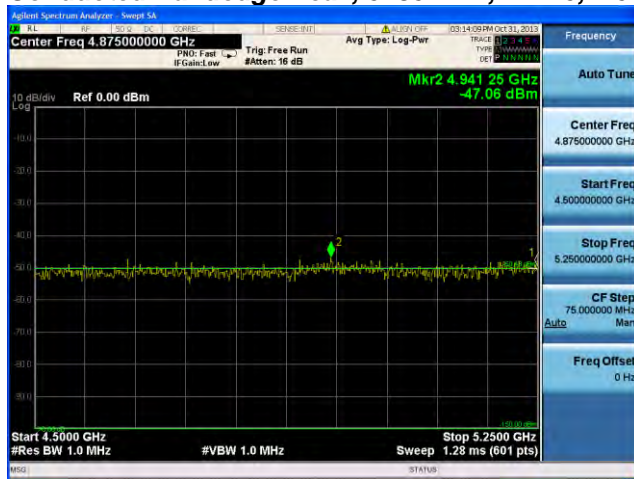
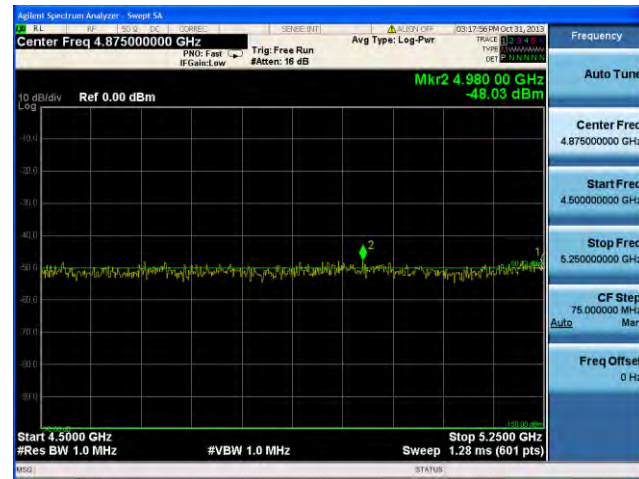
**Conducted Bandedge Peak, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

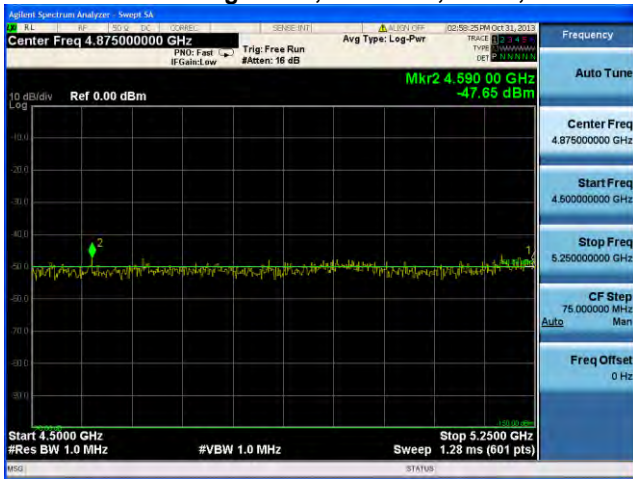
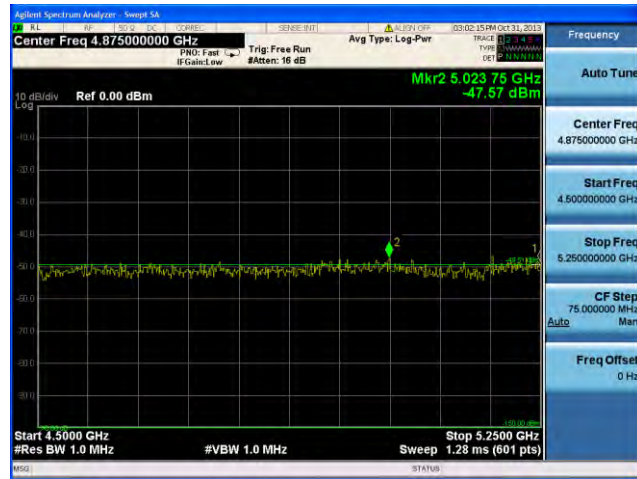
**Conducted Bandedge Peak, 5280 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

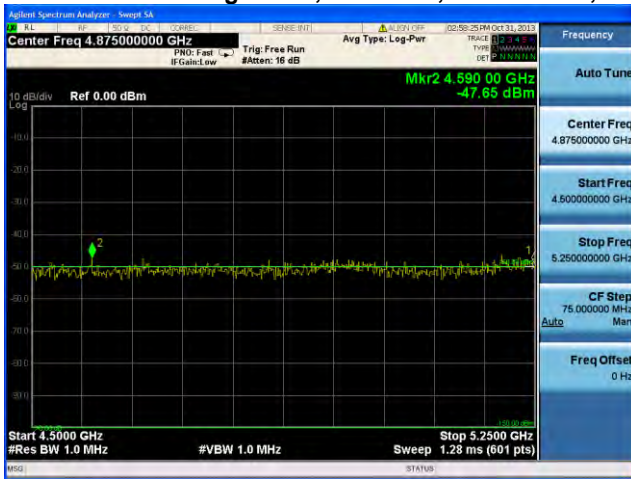
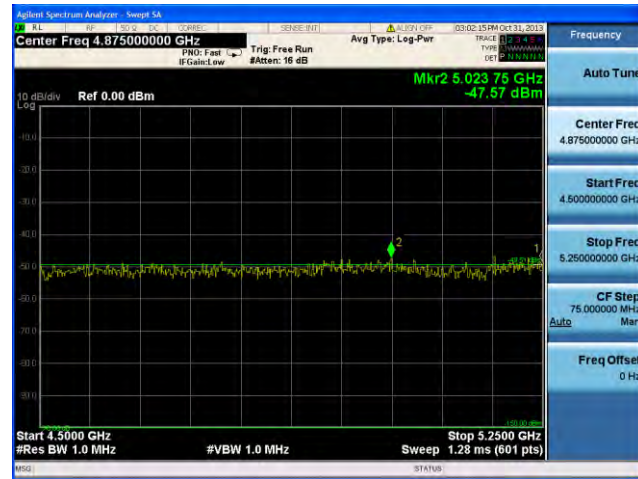


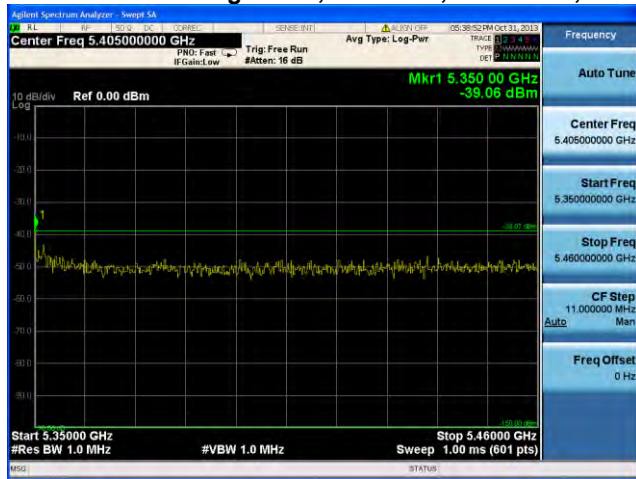
**Conducted Bandedge Peak, 5280 MHz, HT-20, M0 to M7****Antenna A**

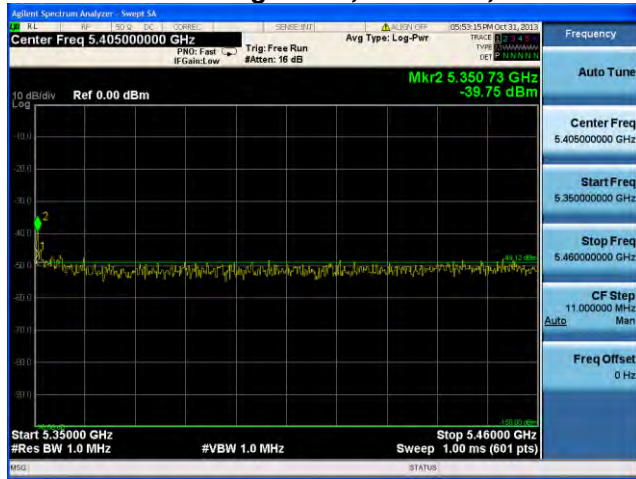
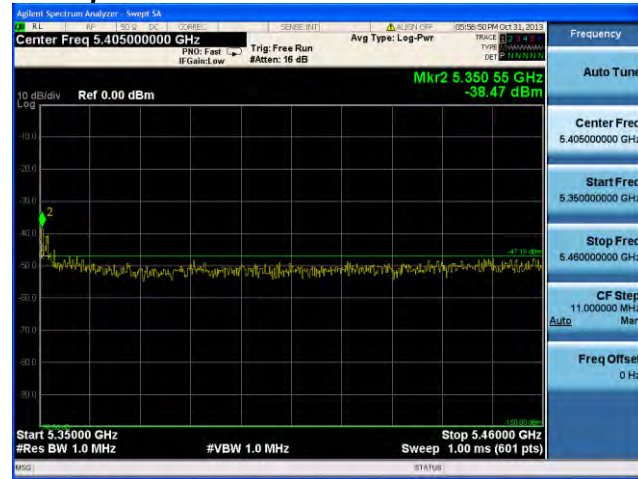


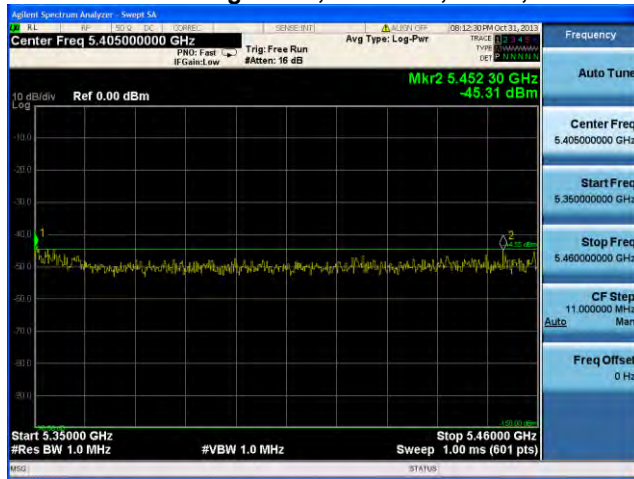
**Conducted Bandedge Peak, 5280 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

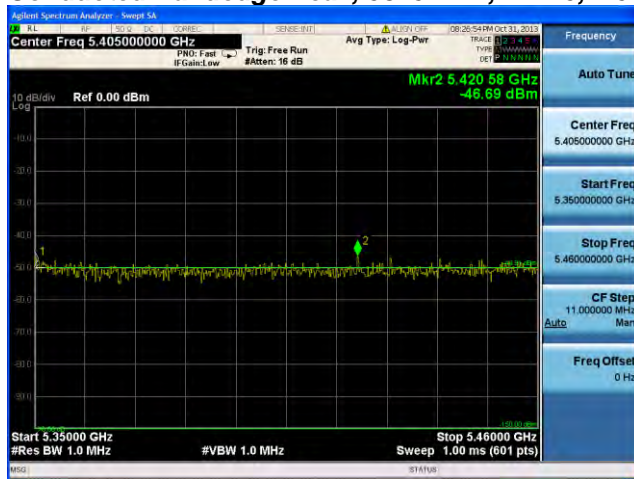
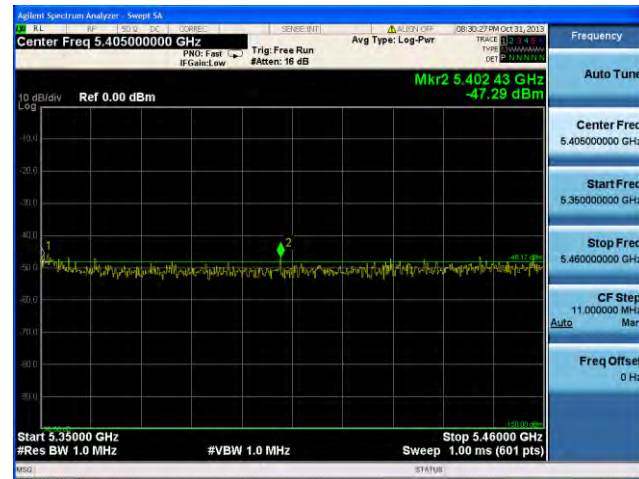
**Conducted Bandedge Peak, 5280 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

**Conducted Bandedge Peak, 5280 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**

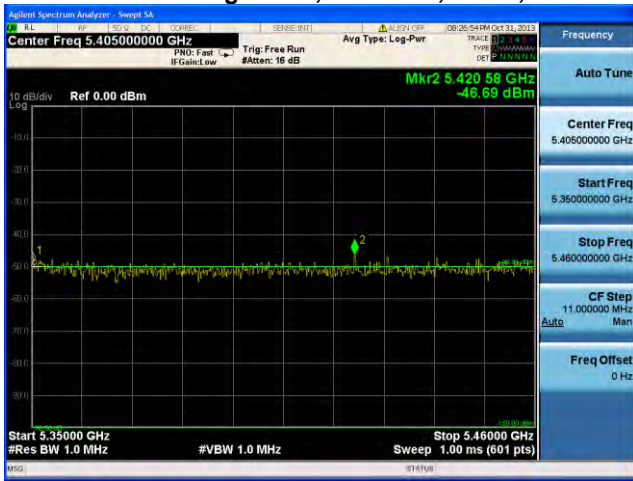
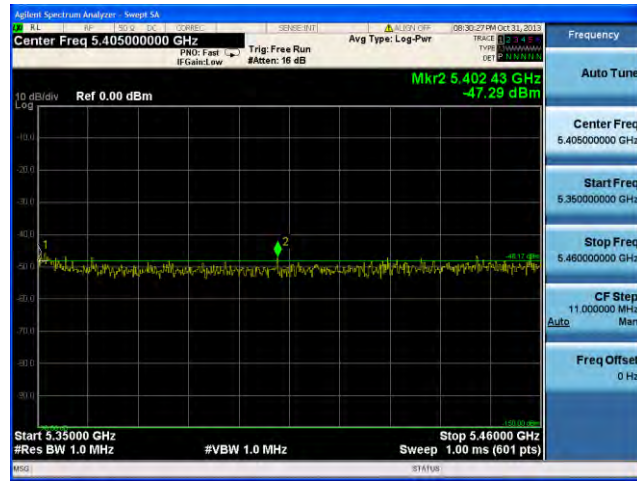
**Conducted Bandedge Peak, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**

**Conducted Bandedge Peak, 5310 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

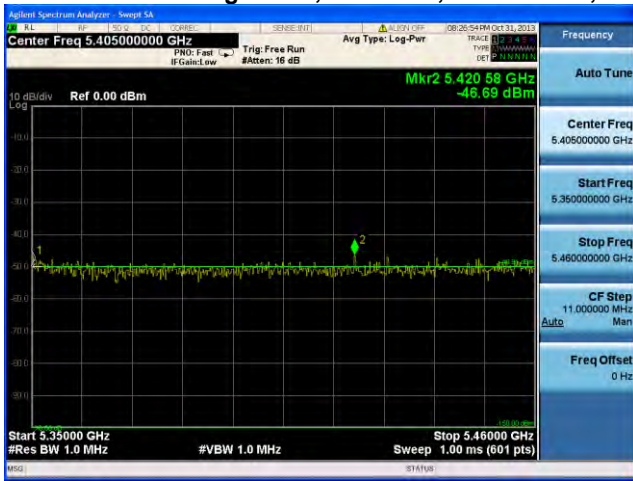
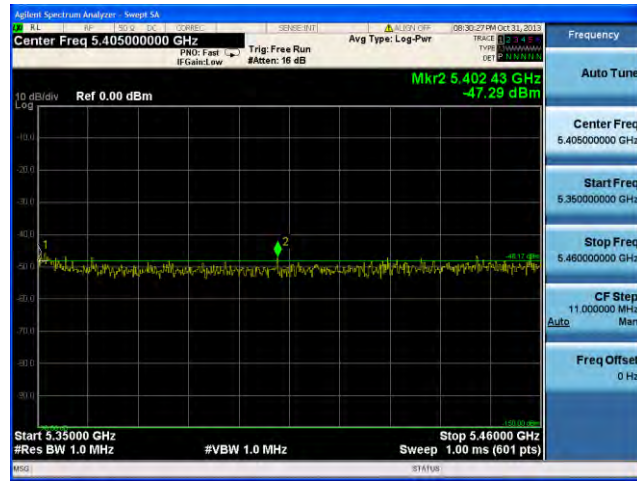
**Conducted Bandedge Peak, 5310 MHz, HT-40, M0 to M7****Antenna A**

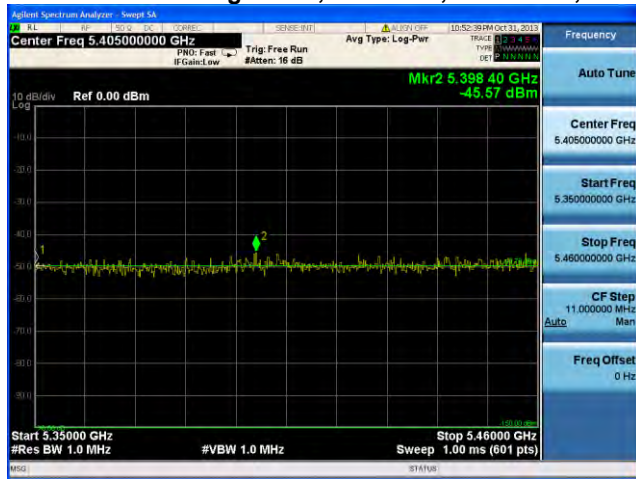
**Conducted Bandedge Peak, 5310 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

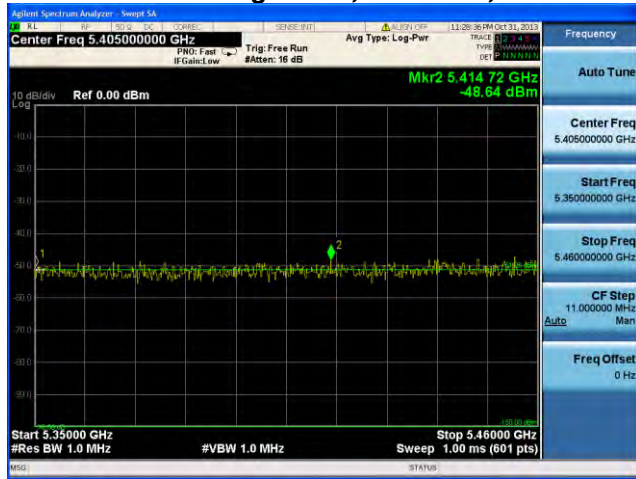
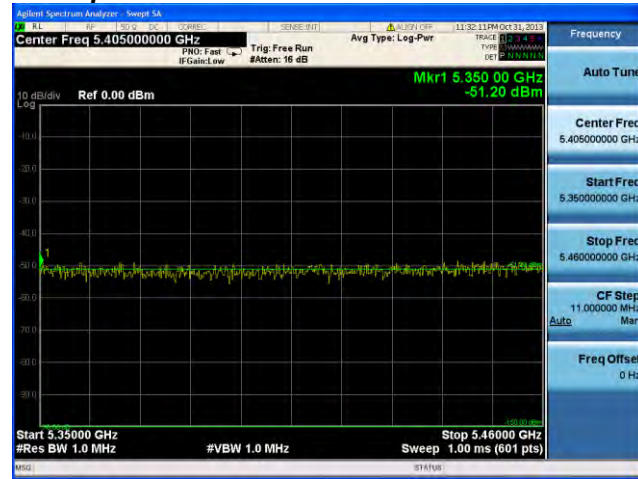


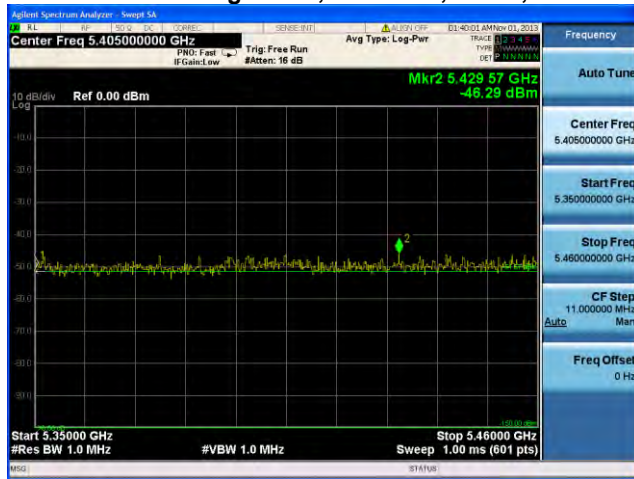
**Conducted Bandedge Peak, 5310 MHz, HT-40, M8 to M15****Antenna A****Antenna B**

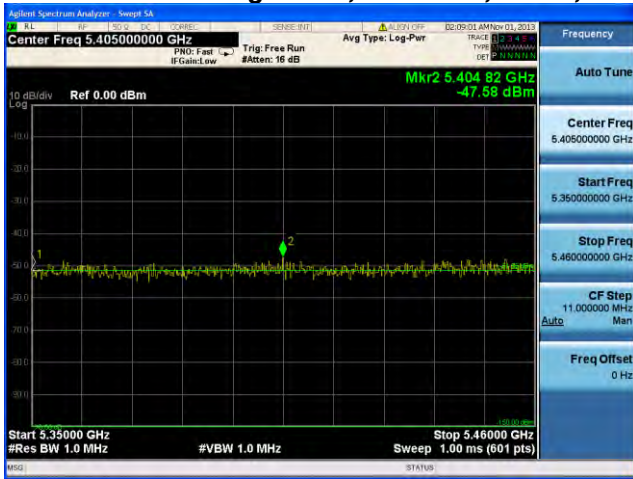
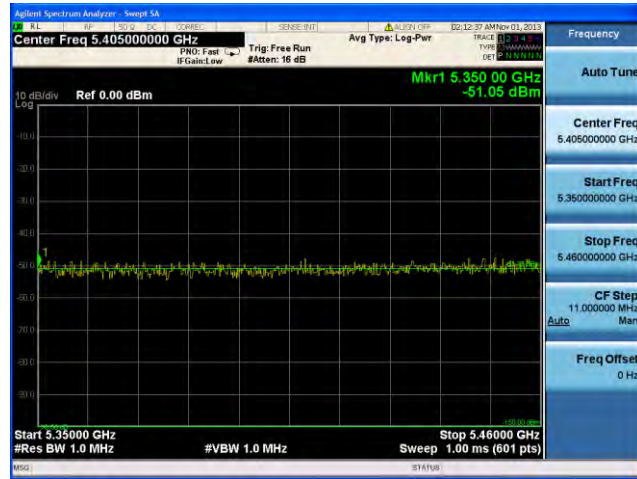


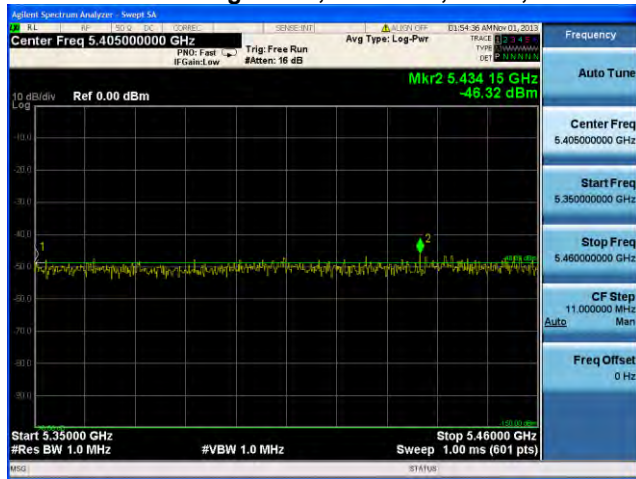
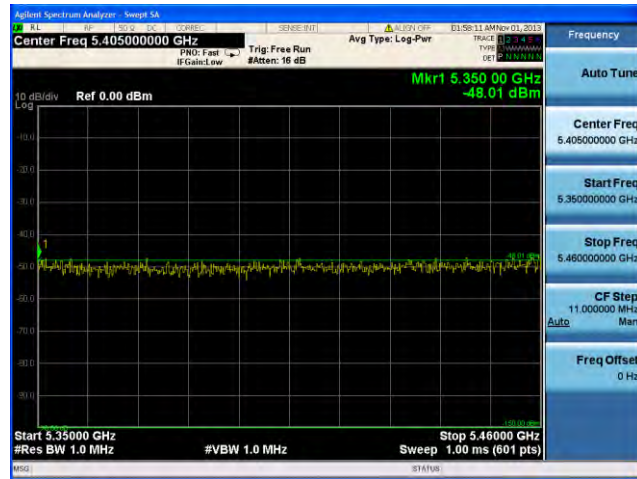
**Conducted Bandedge Peak, 5310 MHz, HT-40 STBC, M0 to M7****Antenna A****Antenna B**

**Conducted Bandedge Peak, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Conducted Bandedge Peak, 5320 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

**Conducted Bandedge Peak, 5320 MHz, HT-20, M0 to M7****Antenna A**

**Conducted Bandedge Peak, 5320 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

**Conducted Bandedge Peak, 5320 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Keysight Spectrum Analyzer - Setup SA

Center Freq 5.40500000 GHz

Span 10 MHz

Res BW 1.0 MHz

Sweep 1.0 ms (601 pts)

Auto Tune

Center Freq 5.40500000 GHz

Start Freq 5.35000000 GHz

Stop Freq 5.46000000 GHz

CF Step 11.000000 MHz

Freq Offset 0 Hz

Auto

Man

Trace 1

Trace 2

Trace 3

Trace 4

Trace 5

Trace 6

Trace 7

Trace 8

Trace 9

Trace 10

Trace 11

Trace 12

Trace 13

Trace 14

Trace 15

Trace 16

Trace 17

Trace 18

Trace 19

Trace 20

Trace 21

Trace 22

Trace 23

Trace 24

Trace 25

Trace 26

Trace 27

Trace 28

Trace 29

Trace 30

Trace 31

Trace 32

Trace 33

Trace 34

Trace 35

Trace 36

Trace 37

Trace 38

Trace 39

Trace 40

Trace 41

Trace 42

Trace 43

Trace 44

Trace 45

Trace 46

Trace 47

Trace 48

Trace 49

Trace 50

Trace 51

Trace 52

Trace 53

Trace 54

Trace 55

Trace 56

Trace 57

Trace 58

Trace 59

Trace 60

Trace 61

Trace 62

Trace 63

Trace 64

Trace 65

Trace 66

Trace 67

Trace 68

Trace 69

Trace 70

Trace 71

Trace 72

Trace 73

Trace 74

Trace 75

Trace 76

Trace 77

Trace 78

Trace 79

Trace 80

Trace 81

Trace 82

Trace 83

Trace 84

Trace 85

Trace 86

Trace 87

Trace 88

Trace 89

Trace 90

Trace 91

Trace 92

Trace 93

Trace 94

Trace 95

Trace 96

Trace 97

Trace 98

Trace 99

Trace 100

Trace 101

Trace 102

Trace 103

Trace 104

Trace 105

Trace 106

Trace 107

Trace 108

Trace 109

Trace 110

Trace 111

Trace 112

Trace 113

Trace 114

Trace 115

Trace 116

Trace 117

Trace 118

Trace 119

Trace 120

Trace 121

Trace 122

Trace 123

Trace 124

Trace 125

Trace 126

Trace 127

Trace 128

Trace 129

Trace 130

Trace 131

Trace 132

Trace 133

Trace 134

Trace 135

Trace 136

Trace 137

Trace 138

Trace 139

Trace 140

Trace 141

Trace 142

Trace 143

Trace 144

Trace 145

Trace 146

Trace 147

Trace 148

Trace 149

Trace 150

Trace 151

Trace 152

Trace 153

Trace 154

Trace 155

Trace 156

Trace 157

Trace 158

Trace 159

Trace 160

Trace 161

Trace 162

Trace 163

Trace 164

Trace 165

Trace 166

Trace 167

Trace 168

Trace 169

Trace 170

Trace 171

Trace 172

Trace 173

Trace 174

Trace 175

Trace 176

Trace 177

Trace 178

Trace 179

Trace 180

Trace 181

Trace 182

Trace 183

Trace 184

Trace 185

Trace 186

Trace 187

Trace 188

Trace 189

Trace 190

Trace 191

Trace 192

Trace 193

Trace 194

Trace 195

Trace 196

Trace 197

Trace 198

Trace 199

Trace 200

Trace 201

Trace 202

Trace 203

Trace 204

Trace 205

Trace 206

Trace 207

Trace 208

Trace 209

Trace 210

Trace 211

Trace 212

Trace 213

Trace 214

Trace 215

Trace 216

Trace 217

Trace 218

Trace 219

Trace 220

Trace 221

Trace 222

Trace 223

Trace 224

Trace 225

Trace 226

Trace 227

Trace 228

Trace 229

Trace 230

Trace 231

Trace 232

Trace 233

Trace 234

Trace 235

Trace 236

Trace 237

Trace 238

Trace 239

Trace 240

Trace 241

Trace 242

Trace 243

Trace 244

Trace 245

Trace 246

Trace 247

Trace 248

Trace 249

Trace 250

Trace 251

Trace 252

Trace 253

Trace 254

Trace 255

Trace 256

Trace 257

Trace 258

Trace 259

Trace 260

Trace 261

Trace 262

Trace 263

Trace 264

Trace 265

Trace 266

Trace 267

Trace 268

Trace 269

Trace 270

Trace 271

Trace 272

Trace 273

Trace 274

Trace 275

Trace 276

Trace 277

Trace 278

Trace 279

Trace 280

Trace 281

Trace 282

Trace 283

Trace 284

Trace 285

Trace 286

Trace 287

Trace 288

Trace 289

Trace 290

Trace 291

Trace 292

Trace 293

Trace 294

Trace 295

Trace 296

Trace 297

Trace 298

Trace 299

Trace 300

Trace 301

Trace 302

Trace 303

Trace 304

Trace 305

Trace 306

Trace 307

Trace 308

Trace 309

Trace 310

Trace 311

Trace 312

Trace 313

Trace 314

Trace 315

Trace 316

Trace 317

Trace 318

Trace 319

Trace 320

Trace 321

Trace 322

Trace 323

Trace 324

Trace 325

Trace 326

Trace 327

Trace 328

Trace 329

Trace 330

Trace 331

Trace 332

Trace 333

Trace 334

Trace 335

Trace 336

Trace 337

Trace 338

Trace 339

Trace 340

Trace 341

Trace 342

Trace 343

Trace 344

Trace 345

Trace 346

[illegible]

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.  
Cisco Systems, Inc. Company Confidential