

APPROVAL SHEET

RFANT Series – RoHS Compliance

MULTILAYER CERAMIC ANTENNA

Halogens Free Product

2.4 GHz ISM Band RF Application

P/N: RFANT3216120A5T


*Contents in this sheet are subject to change without prior notice.

FEATURES

1. Surface Mounted Devices with a small dimension of 3.2 X 1.6 X1.2 mm³ meet future miniaturization trend.
2. LTCC process
3. High stability in Temperature / Humidity Change

APPLICATIONS

1. 2.4GHz ISM band RF applications
2. Bluetooth, Wireless, HomeRF

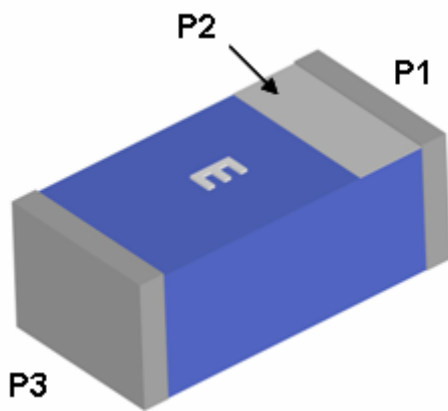CONSTRUCTION

PIN	Connection
1	Feeding
2	Identification Mark
3	Soldering terminal

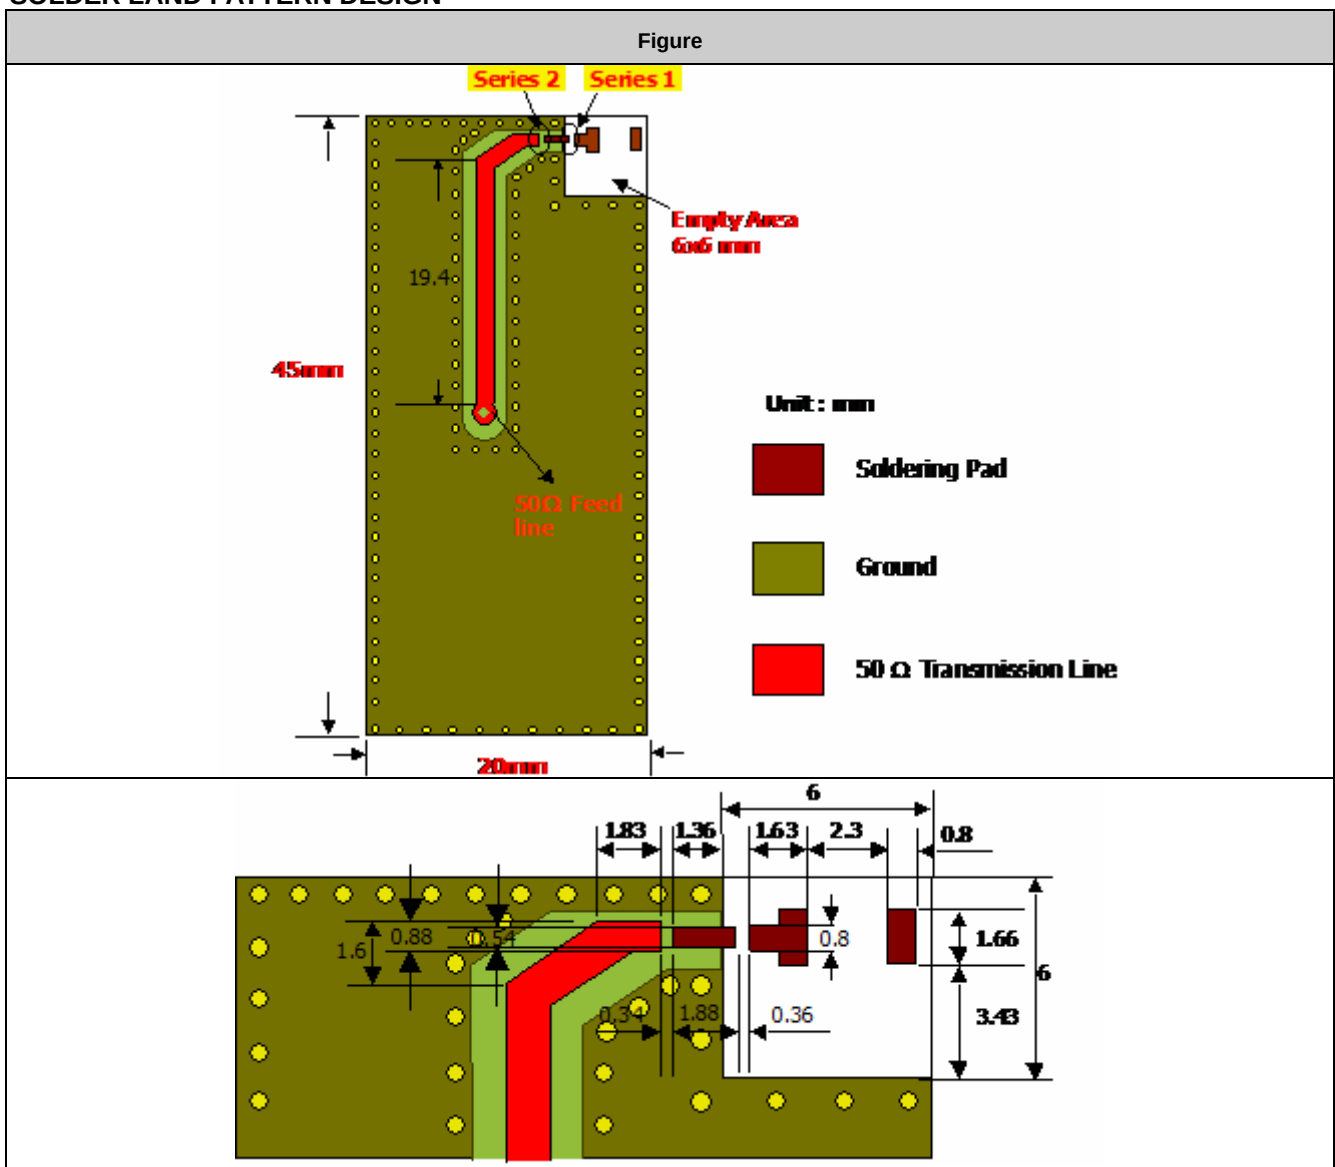
DIMENSIONS

Figure	Symbol	Dimension (mm)
	L	3.20 ± 0.20
	W	1.60 ± 0.10
	T	1.20 ± 0.10
	A	0.25 ± 0.15


ELECTRICAL CHARACTERISTICS

RFANT3216120A5T		Specification
Working Frequency Range		2450 ± 50 MHz
Fc (GHz)		2.9
Gain (dBi)		2 (Typical)
VSWR		2 max.
Matching component value	Series 1	6.8nH
	Series 2	-
Power Capacity		3 W max.
Maximum Input Power		5 Watts for 5 minutes
Operation Temperature		-40°C ~ +85°C
Polarization		Linear
Azimuth Beamwidth		Omni-directional


* This frequency must be adjusted to 2.45GHz with matching circuit.

SOLDER LAND PATTERN DESIGN

Antenna on Test Board (Thickness 1.2mm)

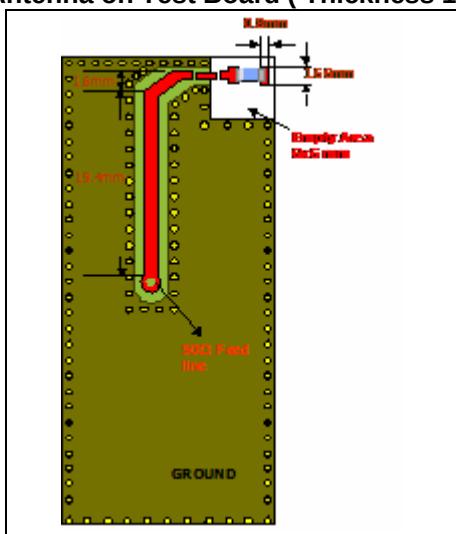

Antenna S11 on Test Board

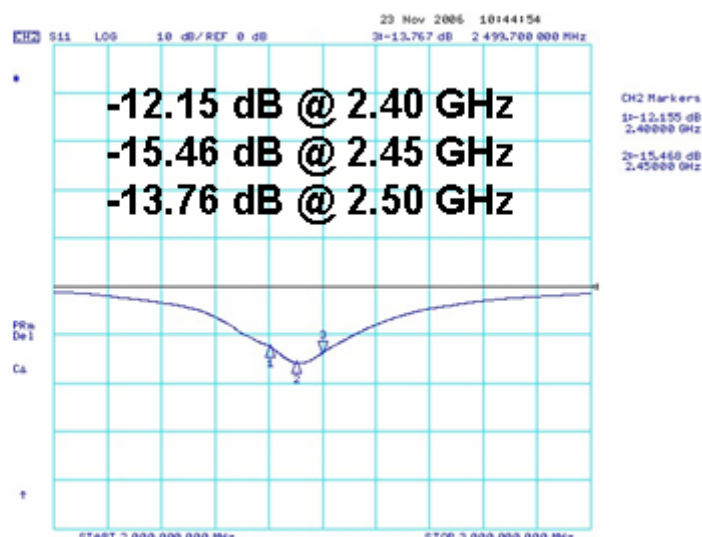


Antenna VSWR on Test Board



RADIATION PATTERN

Radiation Pattern and Gain were dependent on measurement board design. The specification of RFANT3216120A5T antenna was measured based on the PCB size and installation position as shown in the below figure Test Board

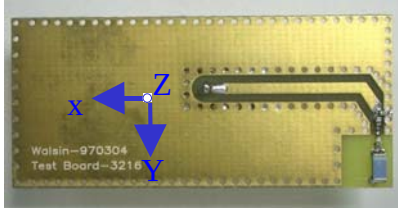

	Vertical	Horizontal
Y - Z Plane Average Gain= 0.948 dBi	Peak Gain = 2.93dBi Average Gain = 0.60dBi	Peak Gain= -5.60dBi Average Gain=-10.19dBi
X - Z Plane Average Gain= -2.147 dBi	Peak Gain= -4.98 dBi Average Gain= -9.68dBi	Peak Gain= 1.61 dBi Average Gain= -2.99 dBi
X - Y Plane Average Gain= -2.810 dBi	Peak Gain= -3.79 dBi Average Gain= -8.89dBi	Peak Gain= 0.77 dBi Average Gain= -4.04 dBi

RELIABILITY TEST

Test item	Test condition / Test method	Specification
Solderability JIS C 0050-4.6 JESD22-B102D	*Solder bath temperature : $235 \pm 5^{\circ}\text{C}$ *Immersion time : 2 ± 0.5 sec Solder : Sn3Ag0.5Cu for lead-free	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
Leaching (Resistance to dissolution of metallization) IEC 60068-2-58	*Solder bath temperature : $260 \pm 5^{\circ}\text{C}$ *Leaching immersion time : 30 ± 0.5 sec Solder : SN63A	Loss of metallization on the edges of each electrode shall not exceed 25%.
Resistance to soldering heat JIS C 0050-5.4	*Preheating temperature : $120 \sim 150^{\circ}\text{C}$, 1 minute. *Solder temperature : $270 \pm 5^{\circ}\text{C}$ *Immersion time : 10 ± 1 sec Solder : Sn3Ag0.5Cu for lead-free Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-40 \sim 85^{\circ}\text{C}$. Loss of metallization on the edges of each electrode shall not exceed 25%.
Drop Test JIS C 0044 Customer's specification.	*Height : 75 cm *Test Surface : Rigid surface of concrete or steel. *Times : 6 surfaces for each units ; 2 times for each side.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-40 \sim 85^{\circ}\text{C}$.
Vibration JIS C 0040	*Frequency : 10Hz~55Hz~10Hz(1min) *Total amplitude : 1.5mm *Test times : 6hrs.(Two hrs each in three mutually perpendicular directions)	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-40 \sim 85^{\circ}\text{C}$.
Adhesive Strength of Termination JIS C 0051- 7.4.3	*Pressurizing force : 5N(≤ 0603) ; 10N(>0603) *Test time : 10 ± 1 sec	No remarkable damage or removal of the termination.
Bending test JIS C 0051- 7.4.1	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm/s per second until the deflection becomes 1mm/s and then pressure shall be maintained for 5 ± 1 sec. Measurement to be made after keeping at room temperature for 24 ± 2 hours	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-40 \sim 85^{\circ}\text{C}$.

Temperature cycle JIS C 0025	1. 30±3 minutes at -40°C±3°C, 2. 10~15 minutes at room temperature, 3. 30±3 minutes at +85°C±3°C, 4. 10~15 minutes at room temperature, Total 100 continuous cycles Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 85°C.
High temperature JIS C 0021	*Temperature : 85°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 85°C.
Humidity (steady conditions) JIS C 0022	*Humidity : 90% to 95% R.H. *Temperature : 40±2°C *Time : 1000+24/-0 hrs. Measurement to be made after keeping at room temperature for 24±2 hrs ※ 500hrs measuring the first data then 1000hrs data	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 85°C.
Low temperature JIS C 0020	*Temperature : -40°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 85°C.

SOLDERING CONDITION

Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 2

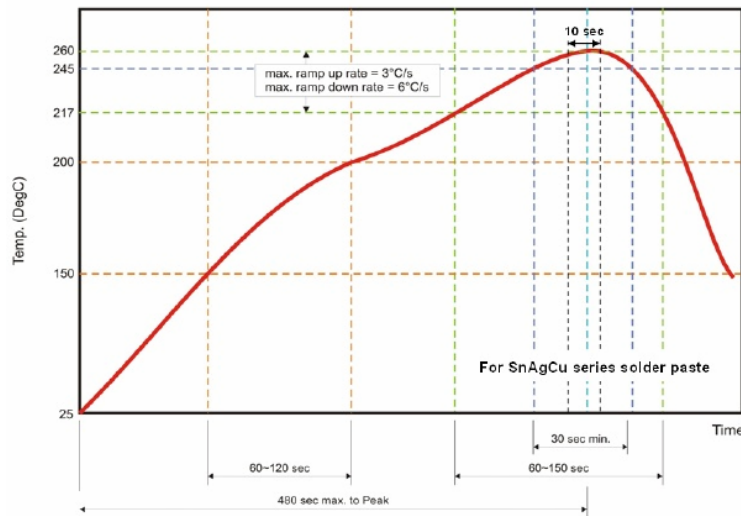



Fig 2. Infrared soldering profile

ORDERING CODE

RF	ANT	321612	0	A	5	T
Walsin RF device	Product code ANT : Antenna	Dimension code Per 2 digits of Length, Width, Thickness : e.g. : 321612 = Length 32, Width 16, Thickness 12	Unit of dimension 0 : 0.1 mm 1 : 1.0 mm	Application A : 2.4GHz ISM Band	Specification Design Code	Packing T : 7" Reeled


Minimum Ordering Quantity: 2000 pcs per reel.

PACKAGING

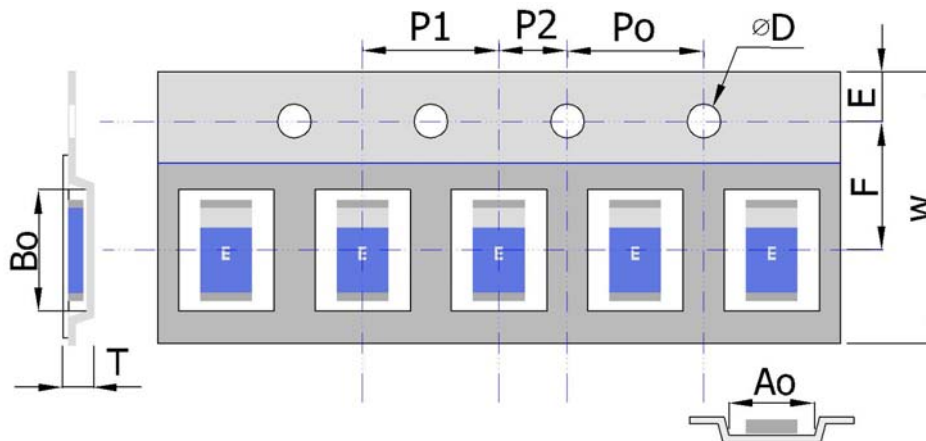

Plastic Tape specifications (unit :mm)

Index	Ao	B0	ΦD	T	W
Dimension (mm)	1.81± 0.10	3.42 ± 0.10	1.55 ± 0.05	1.26 ± 0.10	8.20 +0.10 -0.30
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10

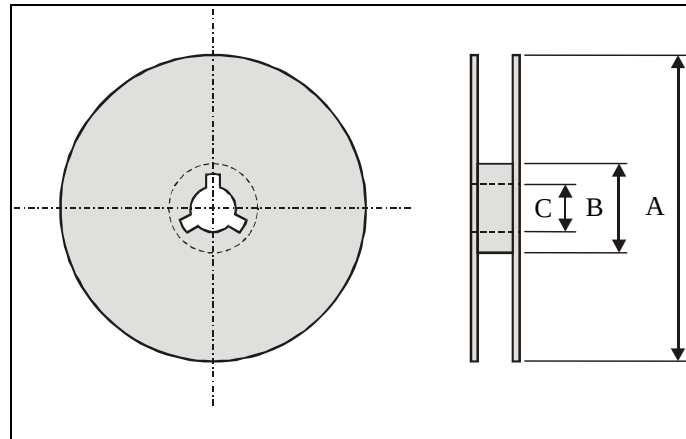Reel dimensions

Index	A	B	C
Dimension (mm)	Φ178	Φ60.0	Φ13.5

Typing Quantity: 2000 pieces per 7" reel

CAUTION OF HANDLING**Limitation of Applications**

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

Storage condition

- (1) Products should be used in 6 months from the day of WAL SIN outgoing inspection.
- (2) Storage environment condition.
 - Products should be storage in the warehouse on the following conditions.
 - Temperature : +5 to +40℃
 - Humidity : 30 to 70% relative humidity
 - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
 - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
 - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
 - Products should be storage under the airtight packaged condition.

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2065140001](#)
Status: **Active**
Overview: Internet of Things (IoT) Antennas: Wi-Fi, Bluetooth, Zigbee
Description: 2.4GHz / 5GHz SMT Ceramic Antenna, 4.00mm by 3.00mm

Documents:
[Drawing \(PDF\)](#) [Application Specification 2065140001-001 \(PDF\)](#)
[3D Model](#) [Packaging Specification 2065140001-001 \(PDF\)](#)
[3D Model \(PDF\)](#) [Datasheet \(PDF\)](#)
[HFSS Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification 2065140001-000 \(PDF\)](#)

General
Product Family Antennas
Series [206514](#)
Component Type Surface Mount Device Antenna
Function Signal
Overview Internet of Things (IoT) Antennas: Wi-Fi, Bluetooth, Zigbee

Product Name 2.4/5GHz Ceramic SMT Antenna
Protocol BLE, BT, Thread, Wi-Fi, Wireless Hart, Zigbee
Type Wi-Fi Antenna
UPC 191130127795

Physical
Cable Length N/A
Length 4.00mm
Mounting Style Surface Mount
Net Weight 0.139/g
Packaging Type Embossed Tape on Reel
Polarization Linear
Radiation Pattern Omnidirectional
Thickness 4.00mm
Width 3.00mm

Electrical
Band#1 F_End (MHz) 2483.5
Band#1 F_Start (MHz) 2400
Band#2 F_End (MHz) 5850
Band#2 F_Start (MHz) 5150
Electrical Connectivity SMD
Peak Gain (dBi) 3.5 @ 2.4 GHz, 6.2 @ 5 GHz
Return Loss - S11 (dB) < -5, < -8
Total Efficiency >75%

Material Info

Reference - Drawing Numbers
Application Specification 2065140001-001
Packaging Specification 2065140001-001
Product Specification 2065140001-000
Sales Drawing 2065140001-000



Series image - Reference only

EU ELV
Not Relevant

EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2021)4569-DC (8 July 2021)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[206514](#) Series

Mouser Electronics


Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:


[Molex:](#)

[206514-0001](#)

HF Antenna
Specifications

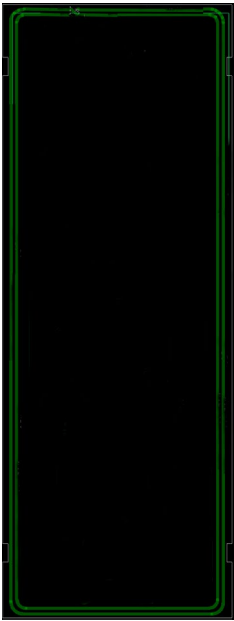

Frequency	13.56mHz
Turns	3
Dimensions	39 mm x 74.50 mm
Inductance	800 uH

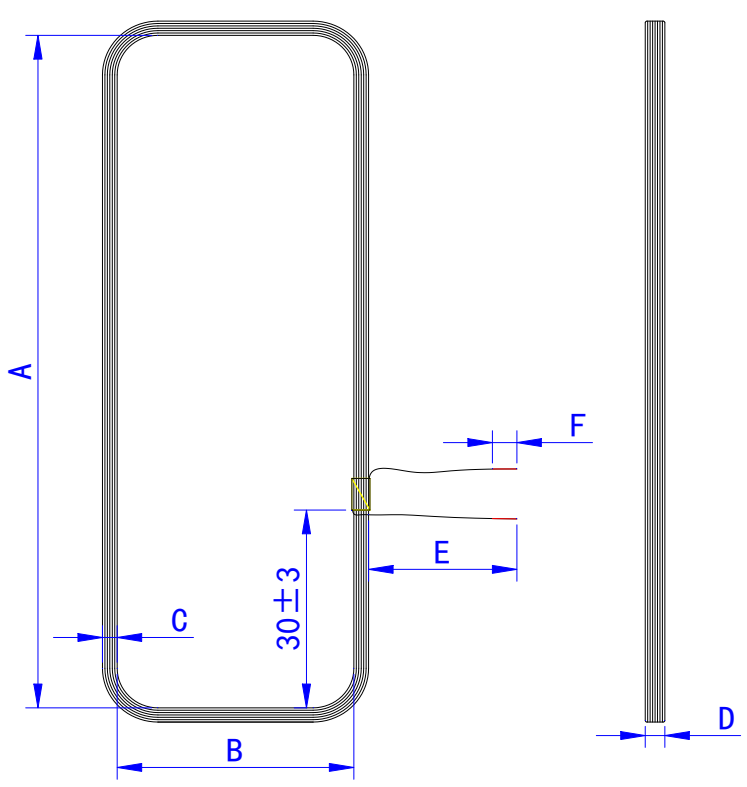	Specification								
product		SL600	material	0.2			winding direction, CCW		
COIL			spec.	85X29X0.2X720UH					
1. Specification, unit, mm									
item	turns	L 125KHZ/1V	A	B	C	D	E	F	
standard	68TS	720UH	85	29	1.8	2.5	30	4	
tolerance	REF	±5%	±0.8	±0.8	±0.5	MAX	±2	±1	
sample date	68TS	720UH	60.05	34.00	2.5	2.5	20	4	
2. Drawing shows: unit, mm									
									
Approval									
			Customer approval						