

惠州硕贝德无线科技股份有限公司

Huizhou Speed Wireless Technology Co.,Ltd

Specifications For Main+WIFI Antenna of Project E7-Europe

Customer/ Project		E7	Frequency Band		700MHz~960MHz 1410MHz-2690MHz 2400MHZ-2500MHz		
SCT P/N		F-0Y-31-0116-001-K0	Version		V3.0		
Date		20230329					
		SPEED					
Chaokad	RF	TXJ	Designed RF		JZP		
Checked	ME	Nick	by ME		Nick		
by	QC		Remark				
Customer							
Date							
Confirmed by		RF					
		ME					
Remark							

www.speed-hz.com

Revised Records

Date	Revision version	Change Description	Author
2023.02.16	V1.0	Initial version	JZP
2023.03.17	V2.0	Update version	JZP
2023.03.29	V3.0	Update version	JZP

www.speed-hz.com

Contents

1	Project overview	4
2	Antenna Specification	5
3	Test Environment	6
4	Test Results	7
	4.1 VSWR	7
	4.2 Passive Efficiency and Gain	8
5	Structure Diagram	9

www.speed-hz.com

1 Project Overview

This document is the specifications of the E7 with Main+WiFi antenna. The supported frequency band is 700~960MHz,

1410~2690MHz , 2400MHz-2500MHz

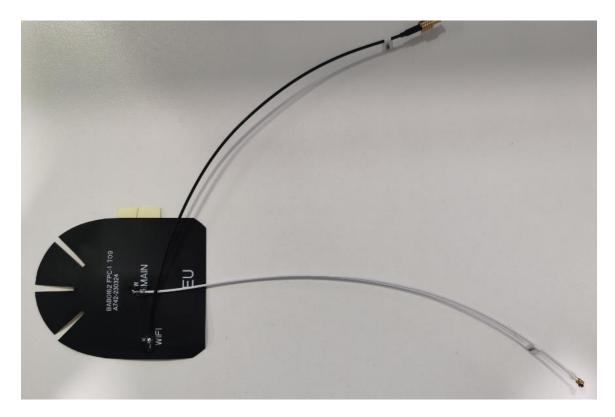


Figure 1 Antenna picture

www.speed-hz.com

2 Antenna Specification

Antenna Form	FPC+cable		
	700MHz~960MHz		
Working Bands			
	1410MHz~2690MHz+2400MHz-2500MHz		
Peak Gain	LF:0.58dbi HF:4.91dbi		
Efficency	LF>20% HF>35%		
VSWR	<3		
Impedance	50ohm		
Polarization	Linear polarization		
A/R	N/A		
Radiation Pattern	Omnidirectional		
Feed Mode	Cable		
power capacity	33dBm		
Size(L*W*H)			
Weight	N/A		
Operating temperature	-30 °C to +80 °C		
Storage temperature	-30 °C to +80 °C		

www.speed-hz.com

3 Test Environment

The measuring equipment for antenna return loss, voltage standing wave ratio and isolation is Keysight E5071C vector network analyzer. As shown below:



Figure 2 Keysight E5071C vector network analyzer

The efficiency, gain, and pattern of the antenna are all tested in a dark room at Satimo, France. The darkroom uses 64 probes to electronically scan the antenna's radiation performance, collect data, and then analyze and organize it through a computer, which can provide antenna testing in the 400MHz to 8.5GHz frequency.



Figure 3 Satimo Darkroom

www.speed-hz.com

4 Test Results

4.1 Return Loss



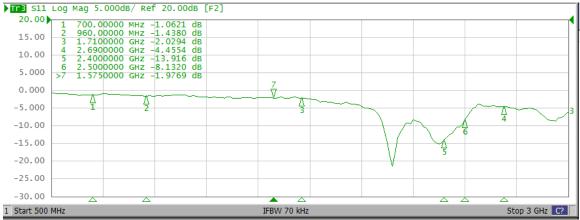


Figure 4 Return Loss

www.speed-hz.com

4.2 Passive Efficency and Gain

	MAIN ANT			MAIN ANT			MAIN ANT	
Freq. (MHz)	Efficiency	Gain. dBi	Freq. (MHz)	Efficiency	Gain. dBi	Freq. (MHz)	Efficiency	Gain. dBi
700	28%	0. 29	1410	70%	3. 35	2070	61%	2.99
710	35%	0.54	1430	68%	3. 13	2090	60%	3.38
720	40%	-0.01	1450	67%	2.91	2110	58%	3. 52
730	44%	-0.75	1470	65%	2. 63	2130	55%	3.45
740	44%	-0. 25	1490	64%	2. 22	2150	53%	3.30
750	43%	0.58	1510	64%	2.06	2170	50%	2.93
760	38%	0.24	1530	66%	2. 26	2190	50%	2.48
770	31%	-1. 25	1550	68%	2. 41	2210	53%	2. 32
780	30%	-1. 13	1570	69%	2.60	2230	60%	3. 26
790	31%	-2. 32	1590	67%	2.73	2250	62%	3. 31
800	29%	-1.36	1610	69%	2.98	2270	62%	2.80
810	25%	-1.55	1630	68%	2.97	2290	60%	2. 57
824	23%	-2.46	1650	66%	2. 69	2310	60%	2.67
830	22%	-2.80	1670	65%	2. 57	2330	62%	2. 61
840	21%	-2.77	1690	59%	2. 61	2350	63%	3. 26
850	21%	-3. 20	1710	53%	2. 26	2370	63%	3.63
860	20%	-3. 23	1730	49%	1.92	2390	62%	3.99
870	21%	-2. 66	1750	49%	1.53	2410	60%	4. 46
880	22%	-2. 25	1770	53%	1.66	2430	59%	4. 91
894	23%	-2.05	1790	58%	1.83	2450	55%	4.60
900	25%	-1. 69	1810	64%	2. 41	2470	52%	3.68
910	27%	-0.98	1830	62%	2.90	2490	51%	2.81
920	28%	-0. 52	1850	59%	3. 13	2510	51%	2.77
930	29%	-0. 15	1870	51%	2. 55	2530	52%	3. 16
940	30%	0.12	1890	43%	2. 10	2550	51%	3. 21
950	29%	0.16	1910	41%	2. 85	2570	52%	3.39
960	29%	0.14	1930	37%	2, 97	2590	52%	3.50
			1950	36%	1. 92	2610	53%	3.38
			1970	46%	2. 32	2630	53%	3. 21
			1990	52%	2.98	2650	53%	3. 28
			2010	57%	3, 52	2670	53%	3.42
			2030	59%	3. 26	2690	55%	3.64
			2050	60%	2.66			

19 (mm.)	VIFI ANT				
Freq. (Mz)	Efficiency	Gain. dBi			
2400	52%	2. 77			
2410	50%	2. 44			
2420	48%	2. 31			
2430	45%	2. 20			
2440	44%	2. 14			
2450	42%	2. 01			
2460	40%	1. 98			
2470	41%	1. 75			
2480	40%	1.66			
2490	38%	1. 54			
2500	37%	1.51			

www.speed-hz.com

