




# FCC RADIO TEST REPORT

FCC ID : HLZA24008  
Equipment : Tablet PC  
Brand Name : acer  
Model Name : A24008  
Marketing Name : Acer Iconia X12, X12-11  
Applicant : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
New Taipei City 22181, Taiwan (R.O.C)  
Manufacturer : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
New Taipei City 22181, Taiwan (R.O.C)  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Sep. 19, 2024 and testing was performed from Sep. 27, 2024 to Oct. 15, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	14
3.5 Radiated Band Edges and Spurious Emission Measurement .....	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
<b>4 List of Measuring Equipment .....</b>	<b>22</b>
<b>5 Measurement Uncertainty .....</b>	<b>23</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission Test Data</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



## History of this test report

Report No.	Version	Description	Issue Date
FR491901B	01	Initial issue of report	Oct. 30, 2024

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	9.94 dB under the limit at 954.41 MHz
3.6	15.207	AC Conducted Emission	Pass	15.38 dB under the limit at 0.61 MHz
3.7	15.203	Antenna Requirement	Pass	-

### Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

### Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Avis Chuang**

**Report Producer: Mila Chen**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature
<b>General Specs</b> Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.
<b>Antenna Type</b> WLAN: FPC Antenna Bluetooth: FPC Antenna GPS / Glonass / BDS / Galileo: FPC Antenna

Antenna information
<b>2400 MHz ~ 2483.5 MHz</b> Peak Gain (dBi)      -1.67

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

SKU LIST				
Model	SKU1_8G+128G	SKU2_8G+128G	SKU3_8G+256G	SKU4_8G+256G
<b>CPU</b>	MTK MT8781N	MTK MT8781N	MTK MT8781N	MTK MT8781N
<b>LCM</b>	EDO 12.6", EC60QBC71.A	EDO 12.6", EC60QBC71.A	EDO 12.6", EC60QBC71.A	EDO 12.6", EC60QBC71.A
<b>UMCP</b>	Spectek SMVUM17YZZCD91SK SM, 8+128GB	KEYMOS KU16B6XOBFM-DBF, 8+128GB	Spectek SMVUM181ZZCDA1SK PR, 8+256GB	KEYMOS KU21S6XOBFM-DDF, 8+256GB
<b>Battery</b>	UTL U28100115PV/1S2P/10 000mAh 3.8V	UTL U28100115PV/1S2P/10 000mAh 3.8V	UTL U28100115PV/1S2P/10 000mAh 3.8V	UTL U28100115PV/1S2P/10 000mAh 3.8V
<b>Wifi / Bluetooth</b>	MTK MT6631	MTK MT6631	MTK MT6631	MTK MT6631
<b>Front Camera</b>	Zhuocheng OV08D10, 8MP	Zhuocheng OV08D10, 8MP	Zhuocheng OV08D10, 8MP	Zhuocheng OV08D10, 8MP
<b>Rear Camera</b>	Zhuocheng OV13B10, 13MP	Zhuocheng OV13B10, 13MP	Zhuocheng OV13B10, 13MP	Zhuocheng OV13B10, 13MP
<b>Adapter</b>	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

### 1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	<b>Sporton Site No.</b>
	TH05-HY, CO07-HY, 03CH20-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
<b>AC Conducted Emission</b>	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + Earphone + USB Cable (Charging from AC Adapter) + Battery for SKU3_8G+256G
<b>Remark:</b> <ol style="list-style-type: none"> <li>For Radiated Test Cases, the tests were performed with SKU3_8G+256G.</li> <li>For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li> <li>Bluetooth-LE 2Mbps does not support primary advertising channels; it does not support channel 00 and channel 39.</li> </ol>	



## 2.3 Connection Diagram of Test System



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded 1.8m	N/A
5.	Earphone	Moto	SJYN1181B	N/A	N/A	Unshielded, 1.25m

## 2.5 EUT Operation Test Setup

The RF test items, make the EUT (SW: Acer\_AV0U0\_X12-11\_RV00RB03\_EEA\_GEN1) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup



### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup



#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

#### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup



#### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

#### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated test below 30MHz

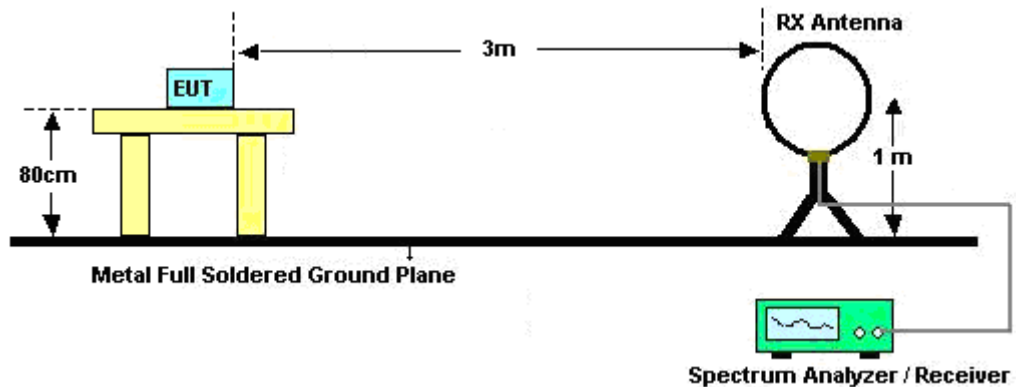


For radiated test from 30MHz to 1GHz

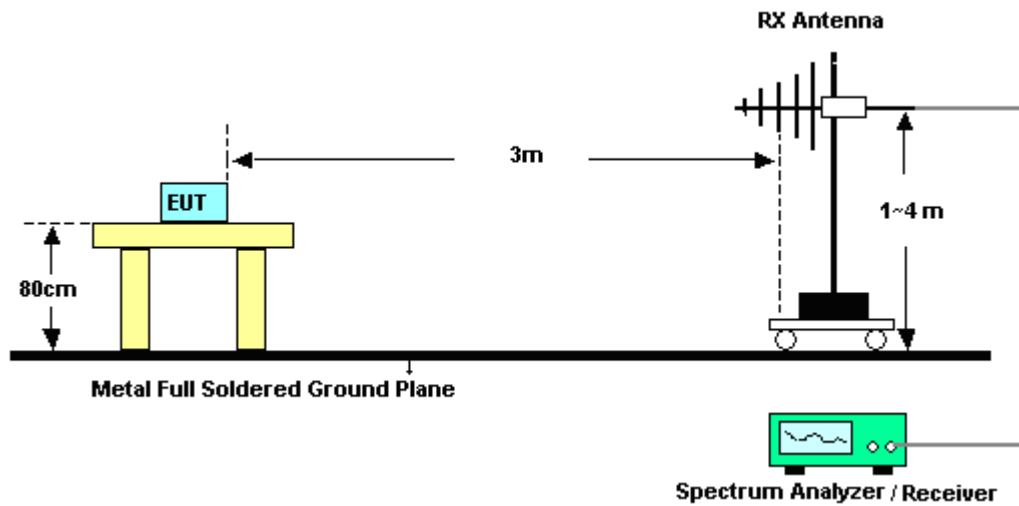

For radiated test from 1GHz to 18GHz

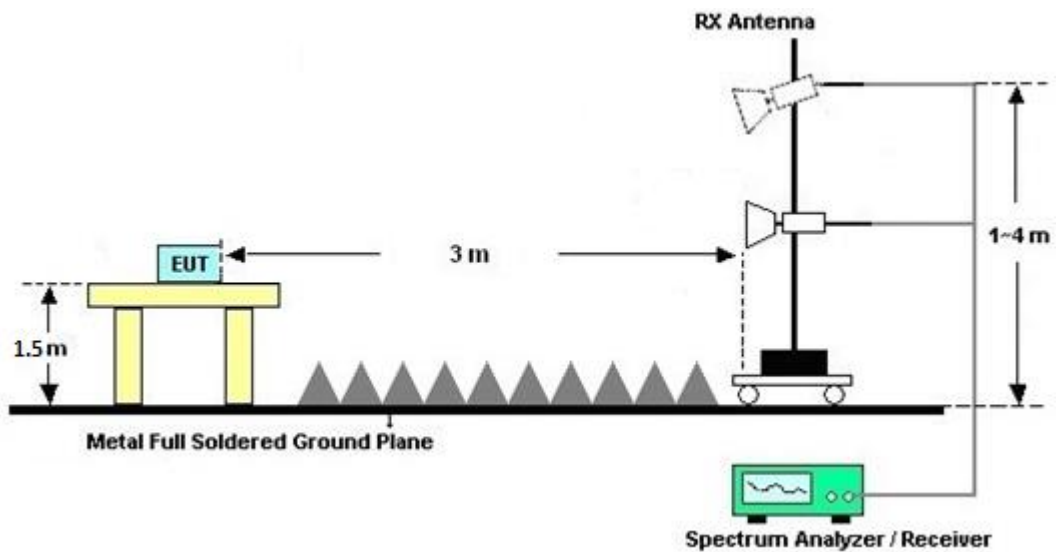

For radiated test above 18GHz

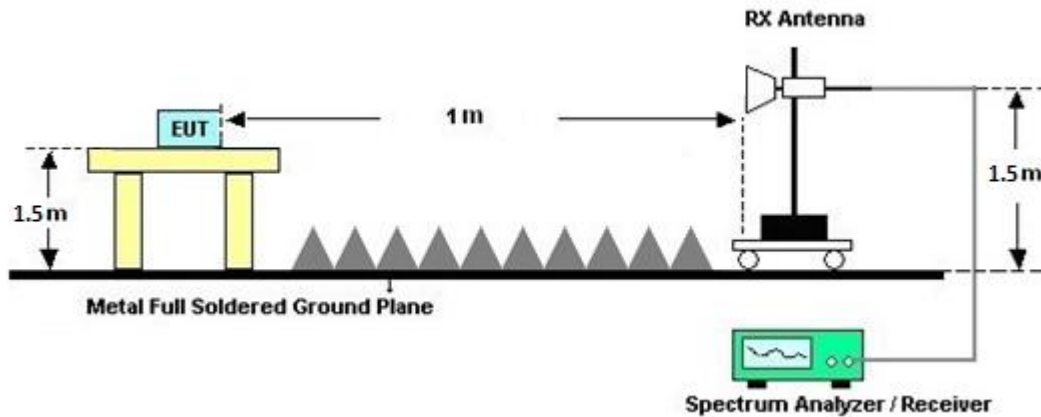

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

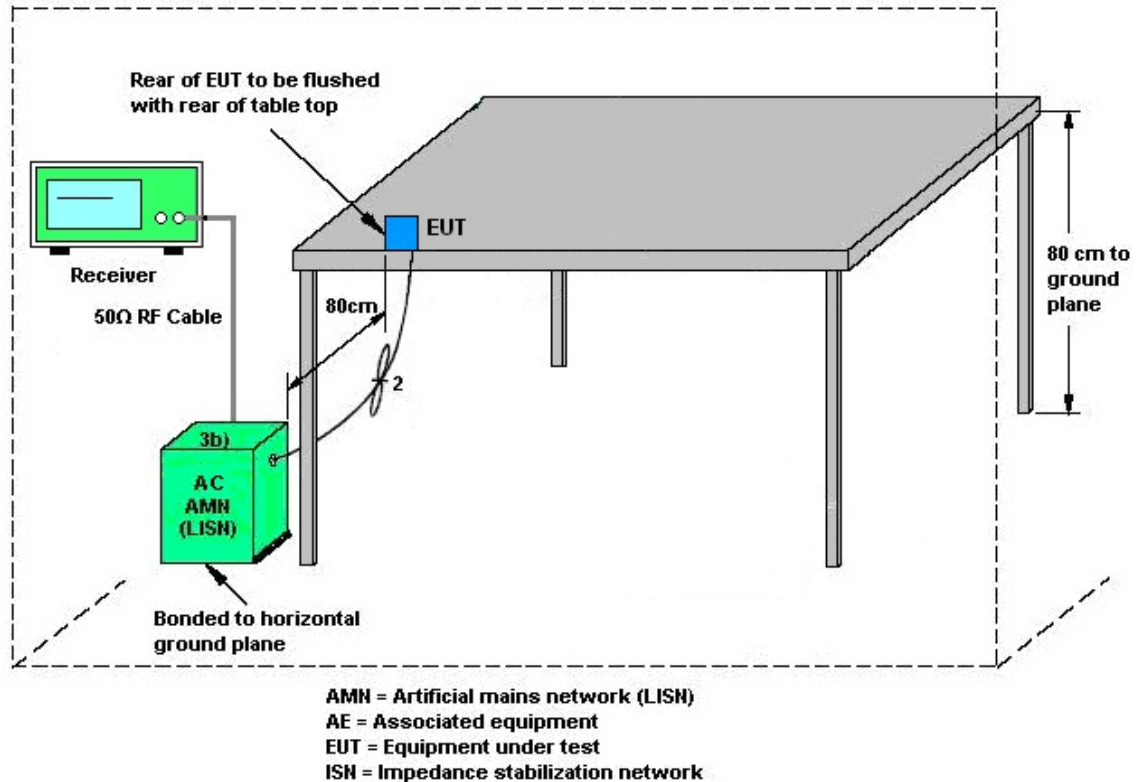

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.7.2 Antenna Anti-Replacement Construction**

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Sep. 27, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Sep. 27, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Sep. 27, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Sep. 27, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Sep. 27, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Sep. 27, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESC17	100724	9kHz~7GHz	Feb. 20, 2024	Sep. 27, 2024	Feb. 19, 2025	Conduction (CO07-HY)
EMI Test Receiver	Keysight	N9038B	MY62210111	N/A	Sep. 03, 2024	Oct. 07, 2024~ Oct. 13, 2024	Sep. 02, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Oct. 07, 2024~ Oct. 13, 2024	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Oct. 07, 2024~ Oct. 13, 2024	May 26, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Oct. 07, 2024~ Oct. 13, 2024	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Oct. 07, 2024~ Oct. 13, 2024	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Oct. 07, 2024~ Oct. 13, 2024	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 12, 2023	Oct. 07, 2024~ Oct. 13, 2024	Dec. 11, 2024	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	55606 & 08	30MHz~1GHz	Oct. 20, 2023	Oct. 07, 2024~ Oct. 13, 2024	Oct. 19, 2024	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz~18GHz	Oct. 30, 2023	Oct. 07, 2024~ Oct. 13, 2024	Oct. 29, 2024	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Oct. 07, 2024~ Oct. 13, 2024	Jun. 23, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz~1000MHz	Jan. 01, 2024	Oct. 07, 2024~ Oct. 13, 2024	Dec. 31, 2024	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 13, 2023	Oct. 07, 2024~ Oct. 13, 2024	Nov. 12, 2024	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 17, 2024	Oct. 07, 2024~ Oct. 13, 2024	Jan. 16, 2025	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Oct. 07, 2024~ Oct. 13, 2024	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Oct. 07, 2024~ Oct. 13, 2024	N/A	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Oct. 03, 2024~ Oct. 15, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Oct. 03, 2024~ Oct. 15, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Oct. 03, 2024~ Oct. 15, 2024	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Oct. 03, 2024~ Oct. 15, 2024	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240920	N/A	Conducted Other Test Item	N/A	Oct. 03, 2024~ Oct. 15, 2024	N/A	Conducted (TH05-HY)

## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
--	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.4 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5 dB
--	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6 dB
--	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4 dB
--	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2024/10/3~2024/10/15	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.030	0.697	0.50	Pass
BLE	1Mbps	1	19	2440	1.030	0.688	0.50	Pass
BLE	1Mbps	1	39	2480	1.029	0.686	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.50	30.00	-1.67	3.83	36.00	Pass
BLE	1Mbps	1	19	2440	6.30	30.00	-1.67	4.63	36.00	Pass
BLE	1Mbps	1	39	2480	5.70	30.00	-1.67	4.03	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2404	4.31	-10.05	-1.67	8.00	Pass
BLE	1Mbps	1	19	2440	4.94	-9.42	-1.67	8.00	Pass
BLE	1Mbps	1	39	2478	4.50	-9.91	-1.67	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.055	1.163	0.50	Pass
BLE	2Mbps	1	19	2440	2.054	1.168	0.50	Pass
BLE	2Mbps	1	38	2478	2.051	1.167	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	5.80	30.00	-1.67	4.13	36.00	Pass
BLE	2Mbps	1	19	2440	6.30	30.00	-1.67	4.63	36.00	Pass
BLE	2Mbps	1	38	2478	5.70	30.00	-1.67	4.03	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	4.43	-11.94	-1.67	8.00	Pass
BLE	2Mbps	1	19	2440	4.86	-11.55	-1.67	8.00	Pass
BLE	2Mbps	1	38	2478	4.35	-12.05	-1.67	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

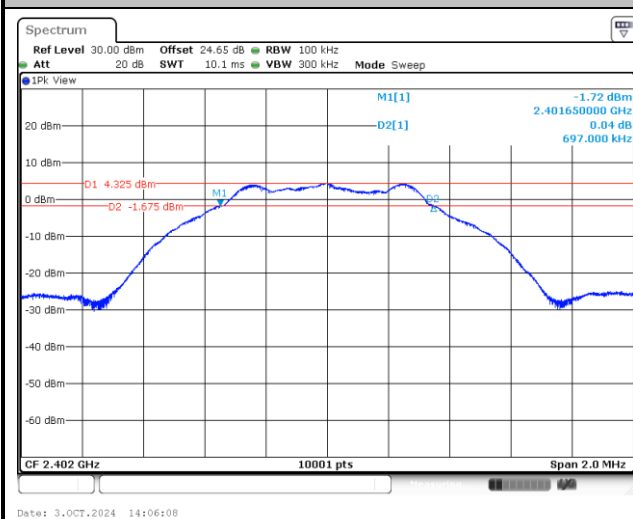

6 dB Bandwidth Plot on Channel 19

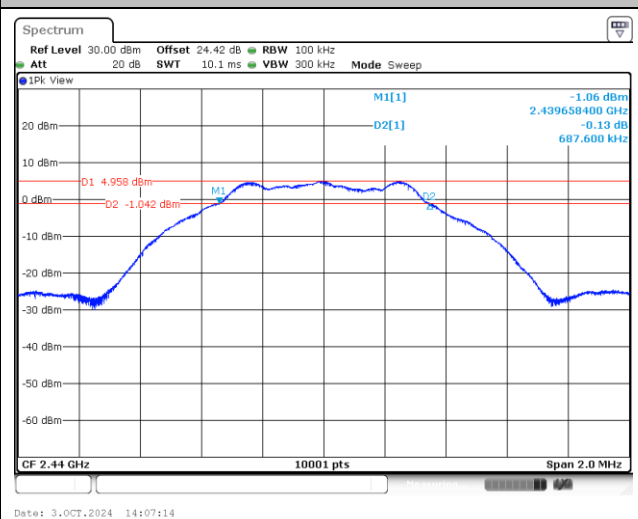


6 dB Bandwidth Plot on Channel 39

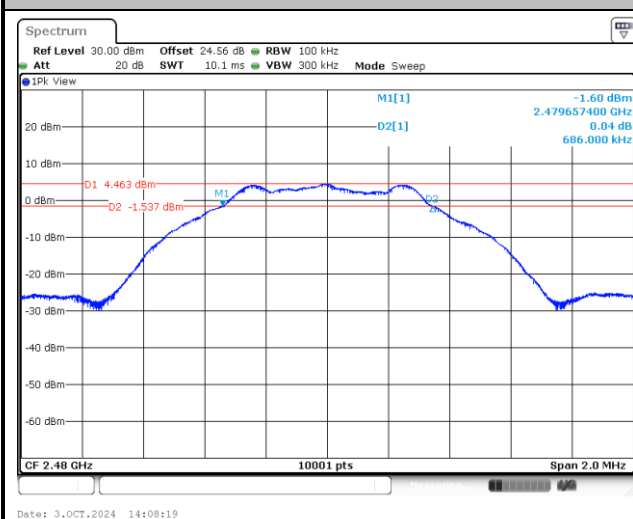




&lt;2Mbps&gt;


6 dB Bandwidth Plot on Channel 01

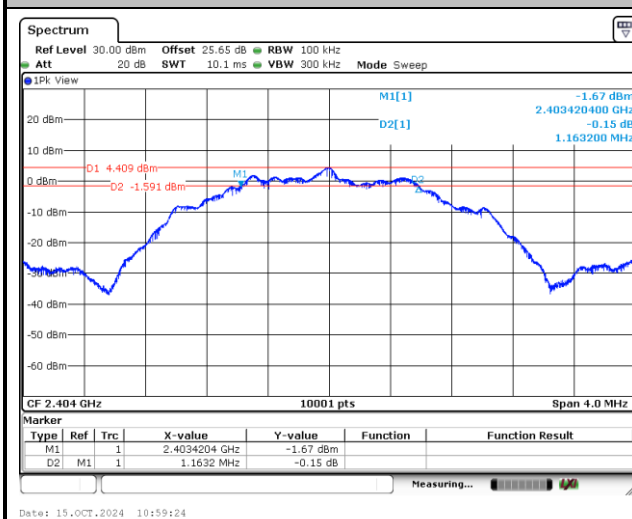

6 dB Bandwidth Plot on Channel 19



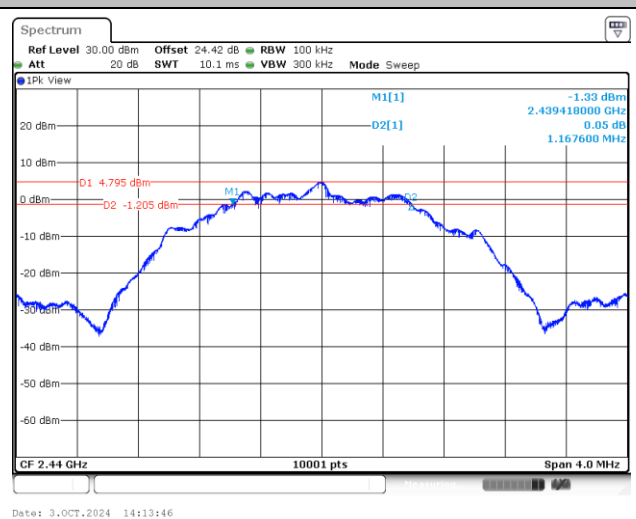


6 dB Bandwidth Plot on Channel 38

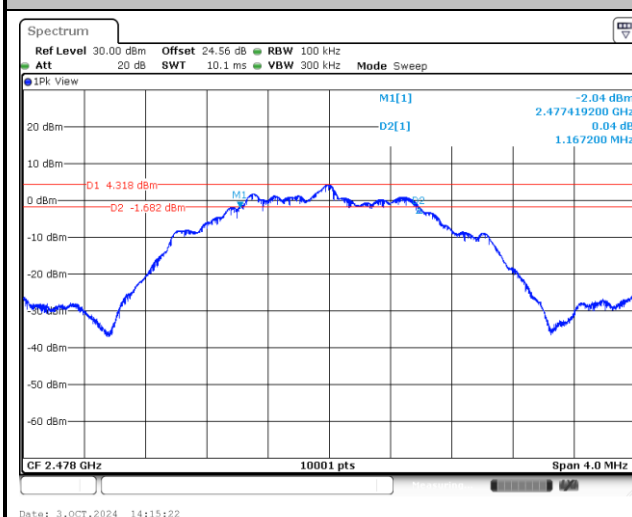

**99% Occupied Bandwidth**


&lt;1Mbps&gt;

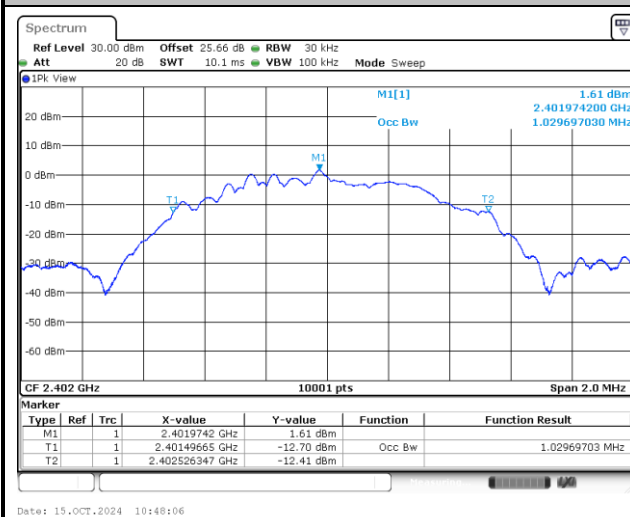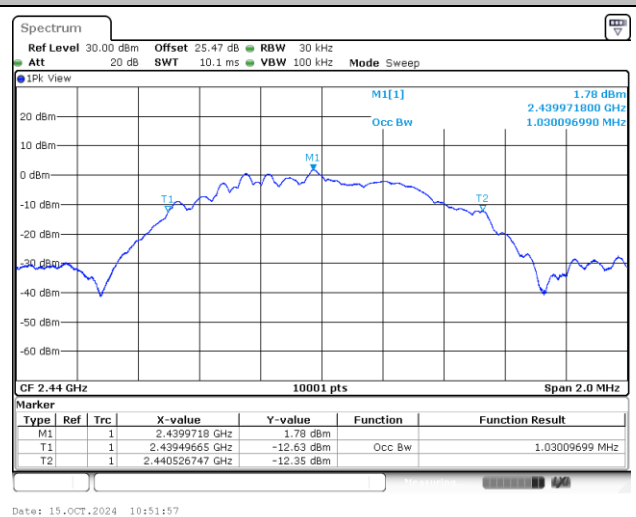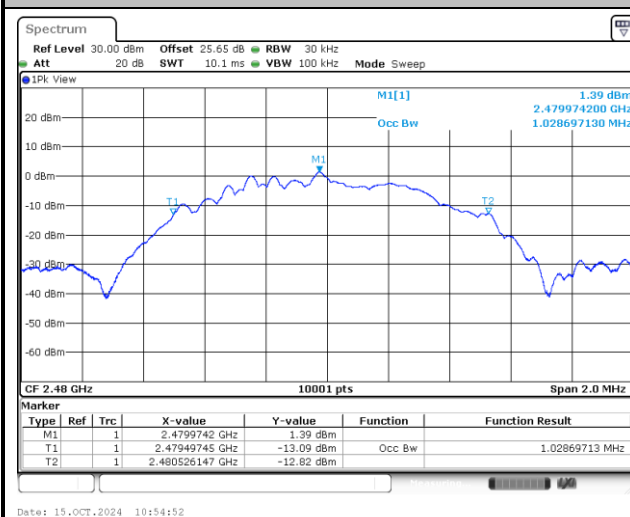**99% Occupied Bandwidth Plot on Channel 00****99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




&lt;2Mbps&gt;


99% Occupied Bandwidth Plot on Channel 01

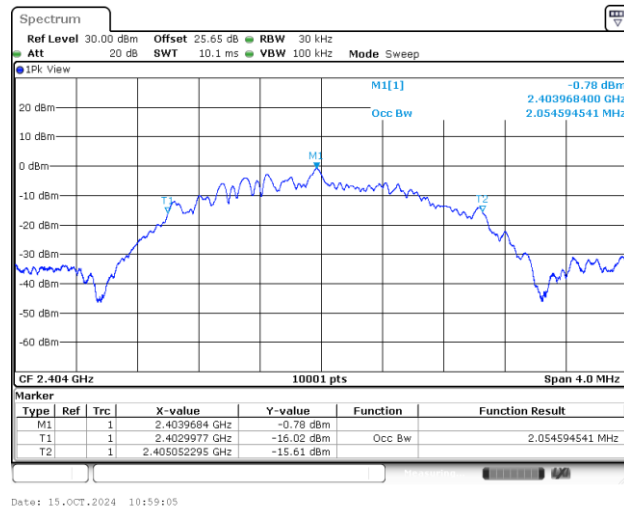

99% Occupied Bandwidth Plot on Channel 19



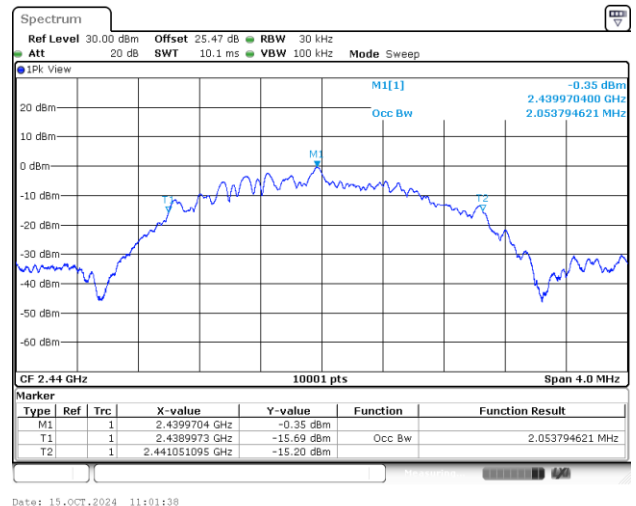


99% Occupied Bandwidth Plot on Channel 38

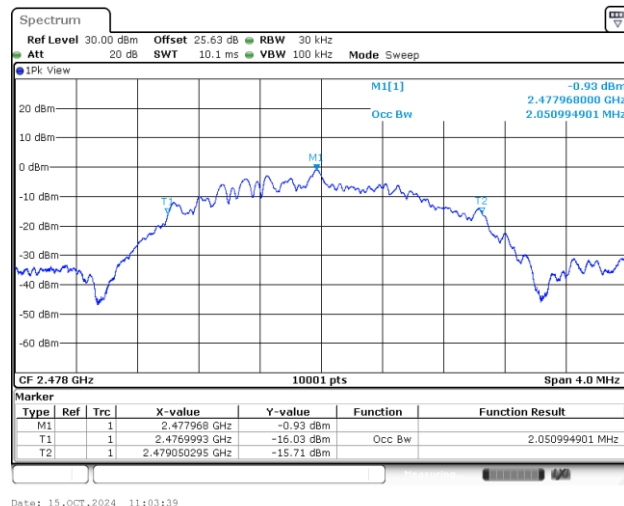

**Power Spectral Density (dBm/3kHz)**


&lt;1Mbps&gt;

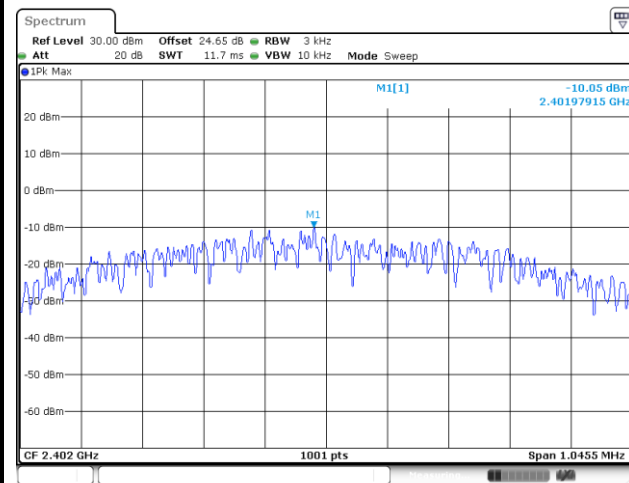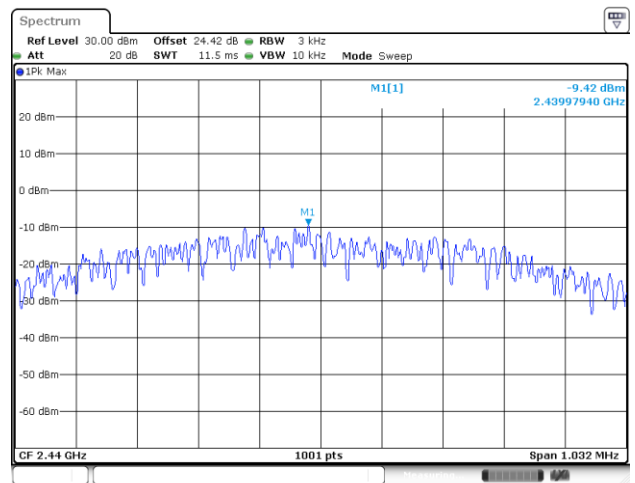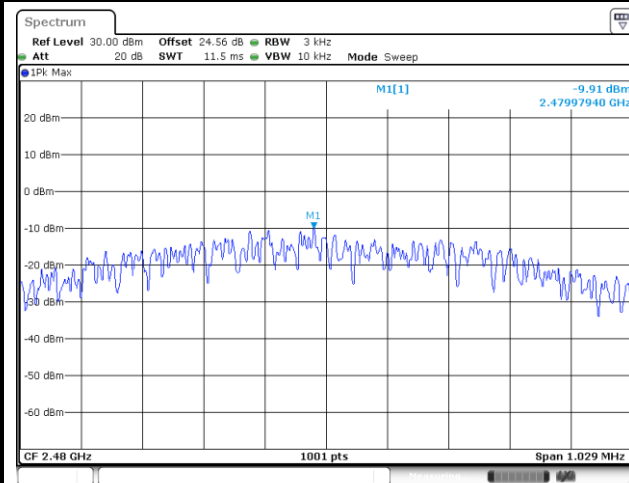**Power Density (dBm/3kHz) Plot Channel 00****Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




&lt;2Mbps&gt;


Power Density (dBm/3kHz) Plot Channel 01

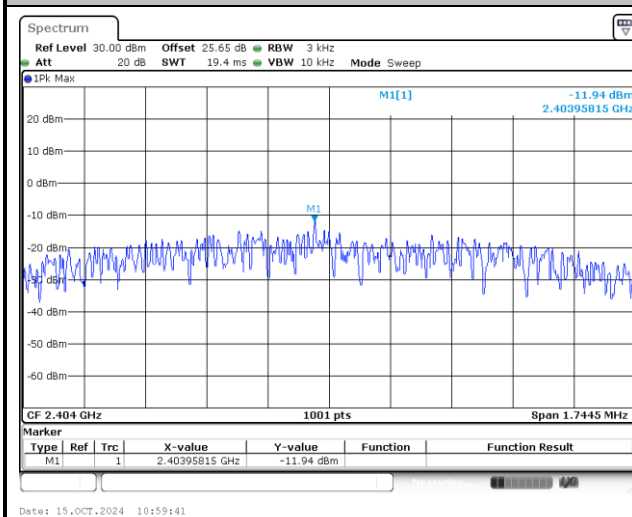

Power Density (dBm/3kHz) Plot Channel 19




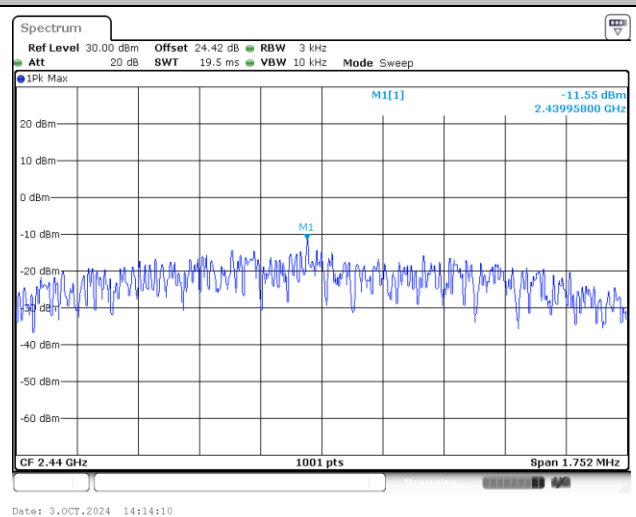


Power Density (dBm/3kHz) Plot Channel 38

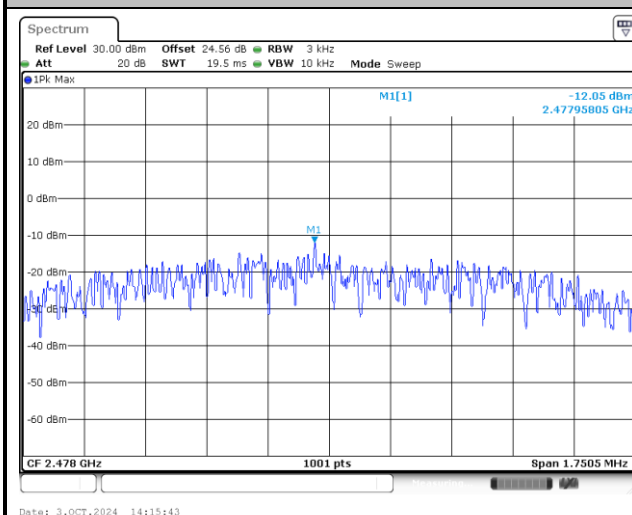

**Band Edge and Conducted Spurious Emission**

&lt;1Mbps&gt;

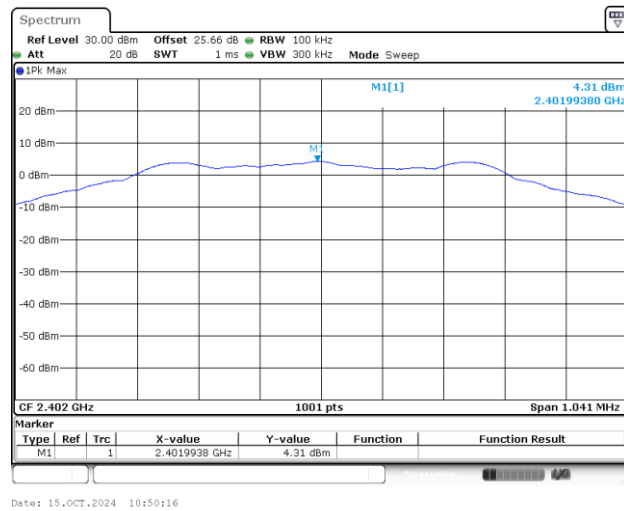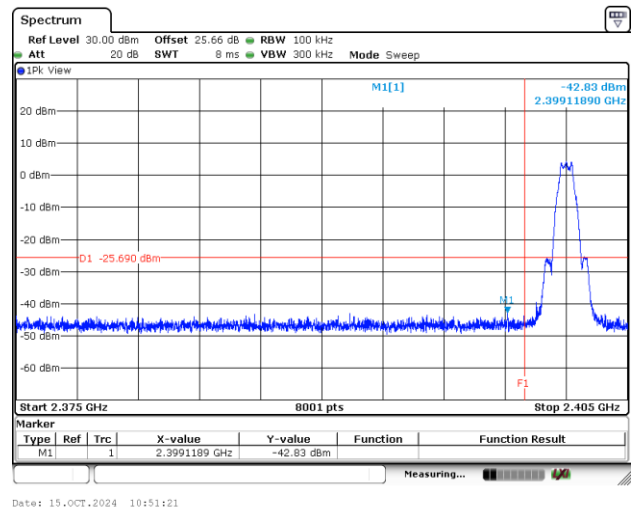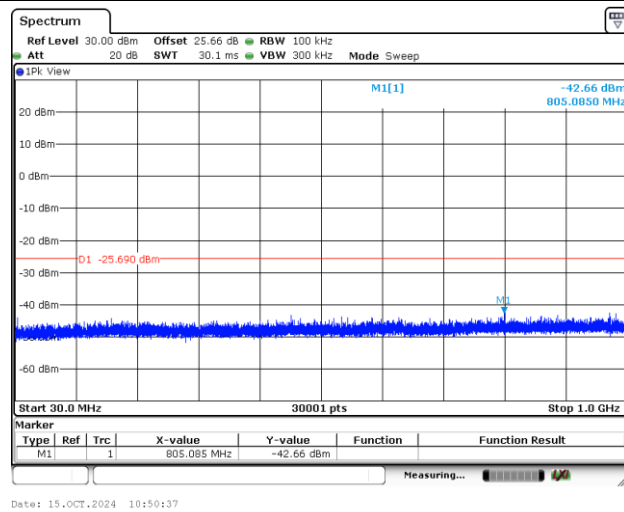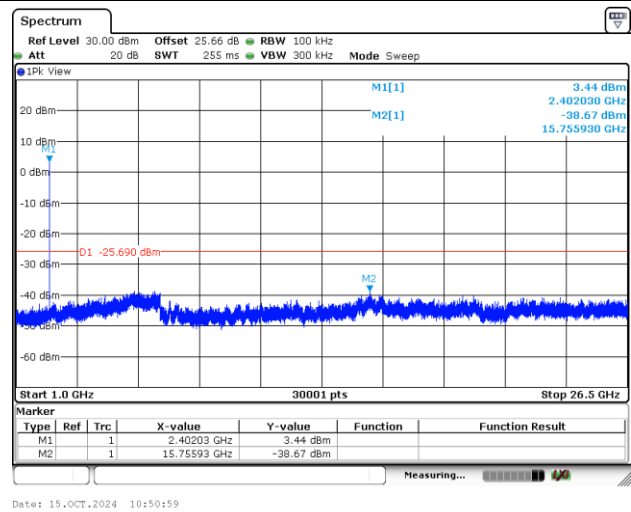
**Channel 00****100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**






## Channel 19

## 100kHz PSD reference Level Plot

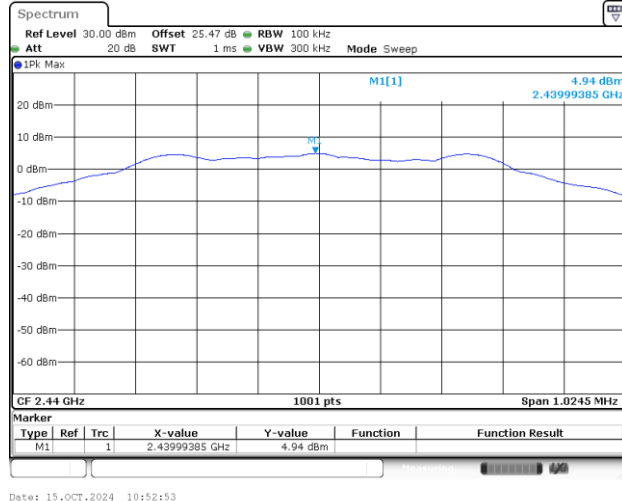


## Mid Channel Plot

## Spurious Emission 30MHz~1GHz Plot

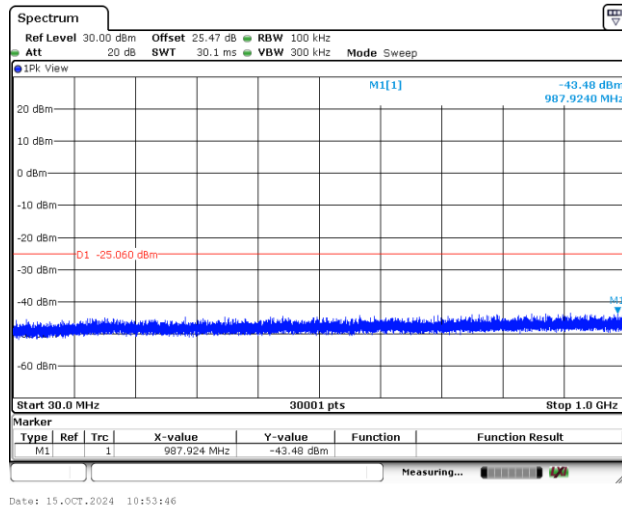


## Spurious Emission 1GHz~26.5GHz Plot

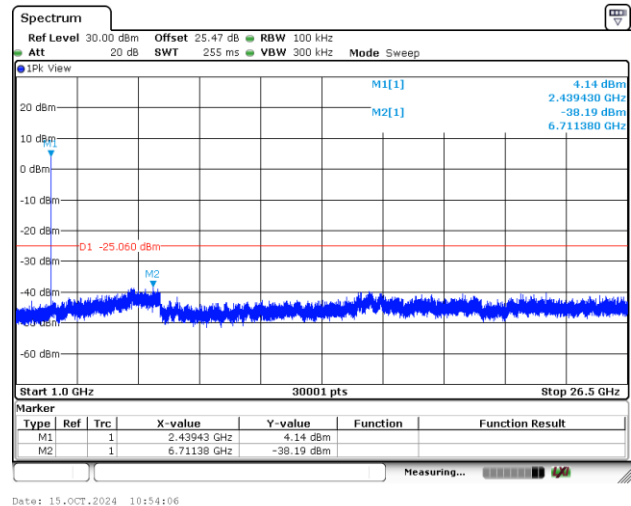




## Channel 39


## 100kHz PSD reference Level Plot

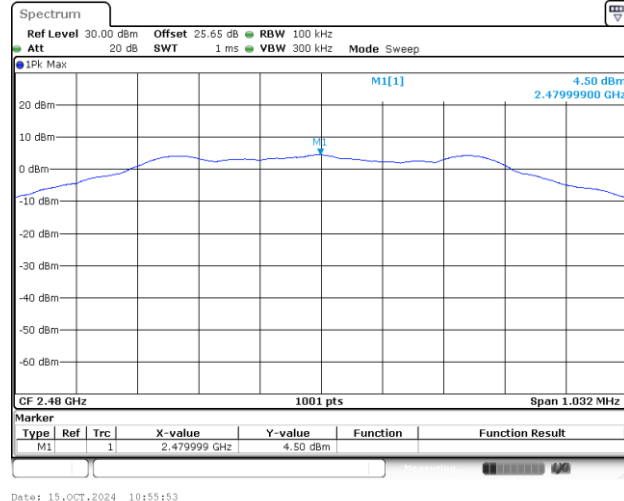


## High Channel Plot

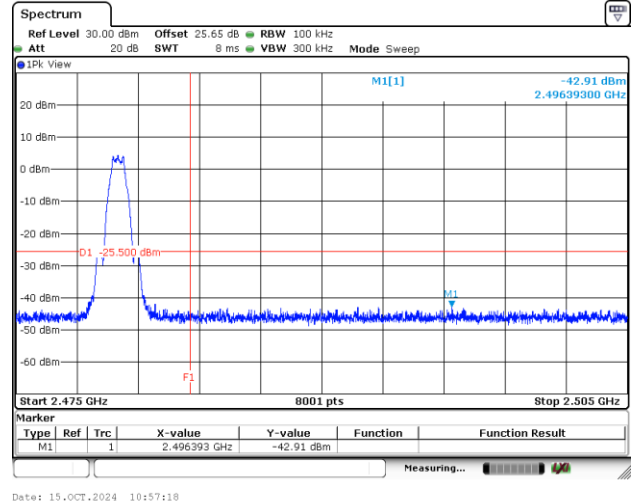

## Spurious Emission 30MHz~1GHz Plot

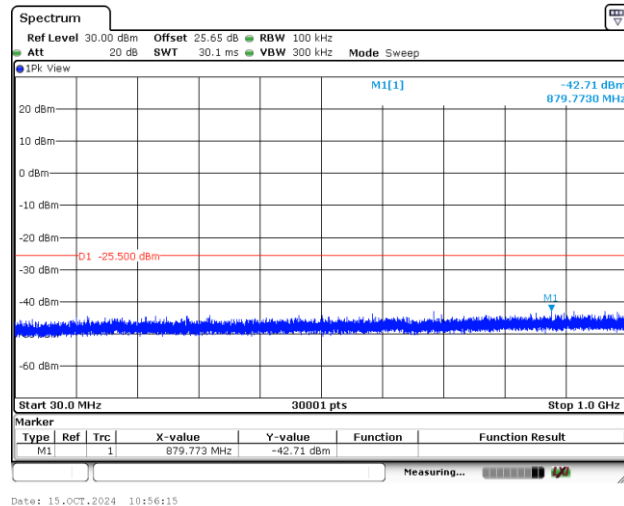


## Spurious Emission 1GHz~26.5GHz Plot

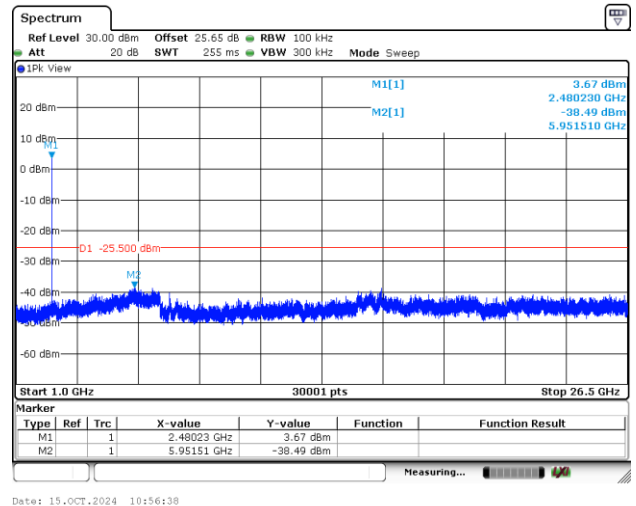




&lt;2Mbps&gt;

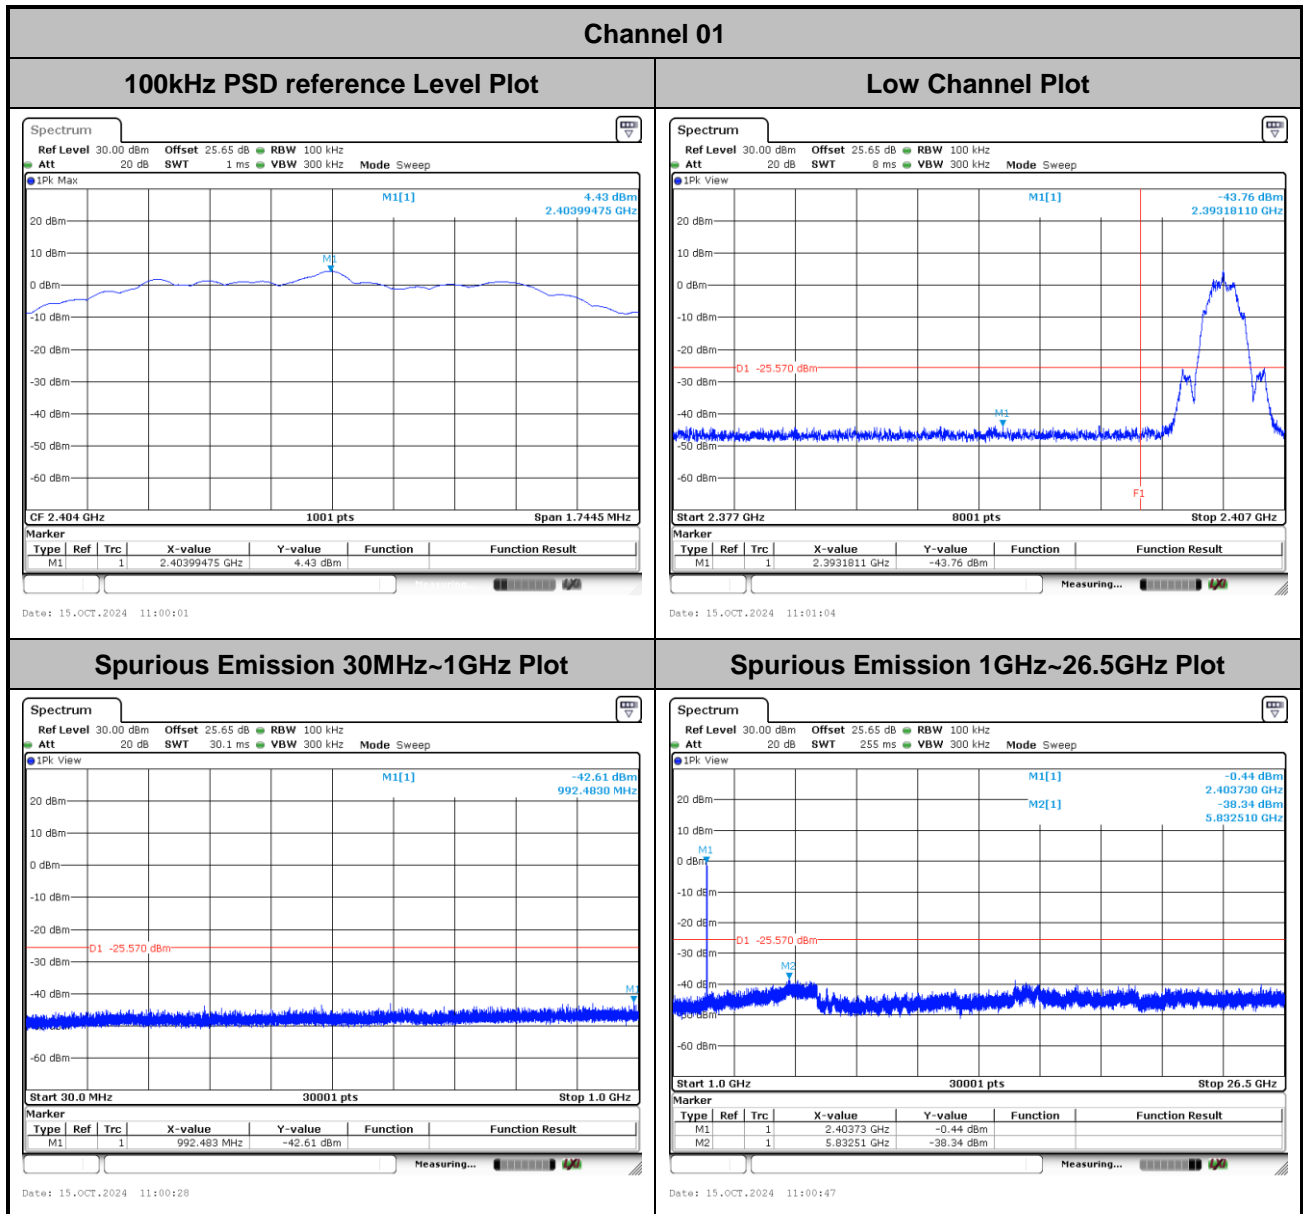


## Channel 19

### 100kHz PSD reference Level Plot

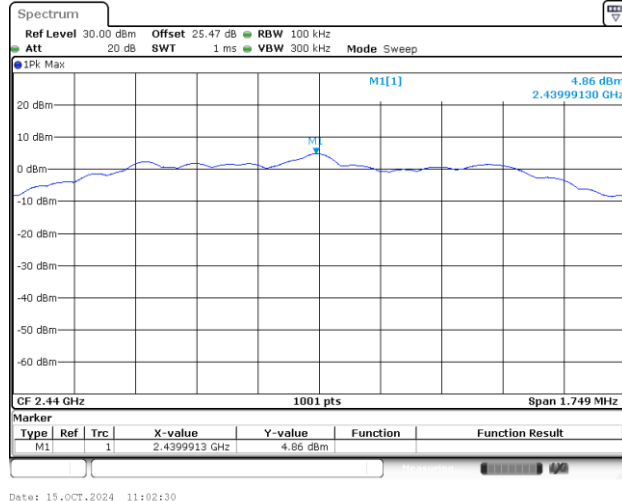


### Mid Channel Plot

### Spurious Emission 30MHz~1GHz Plot

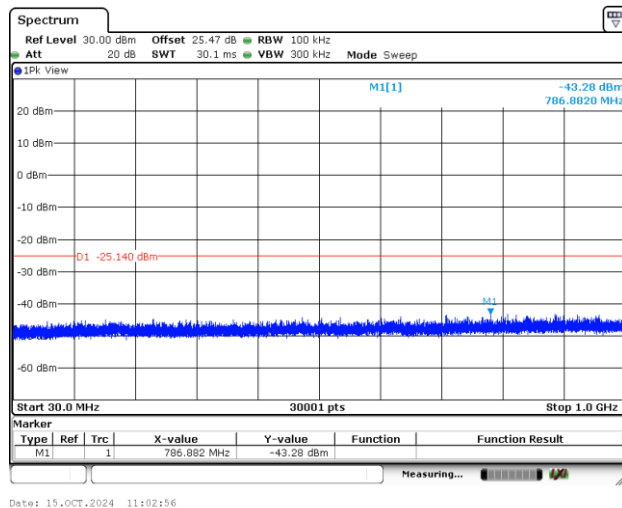


### Spurious Emission 1GHz~26.5GHz Plot

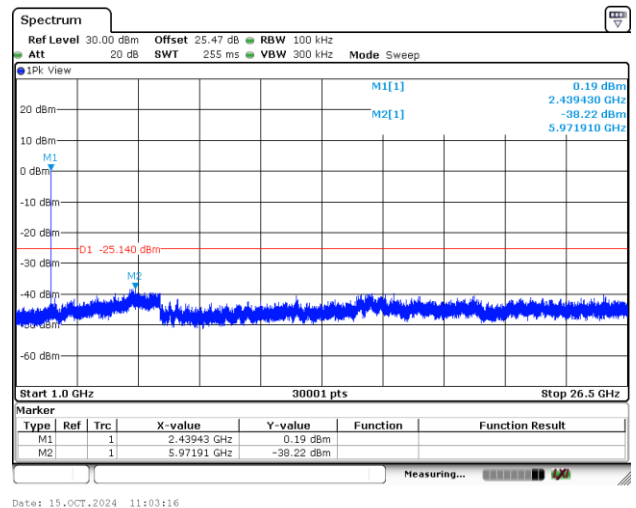


### Channel 38


#### 100kHz PSD reference Level Plot

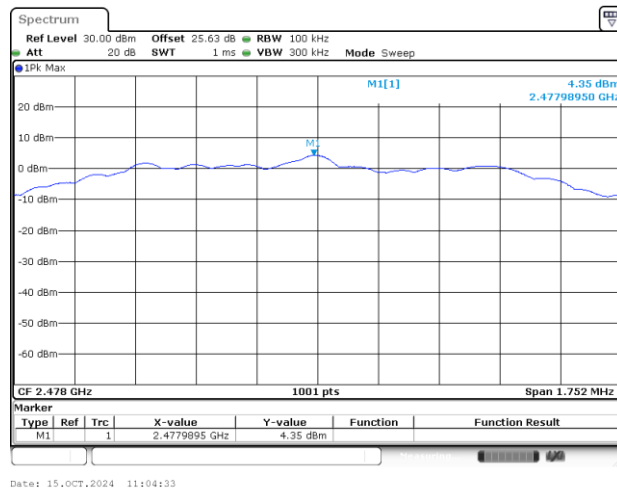


#### Low Channel Plot

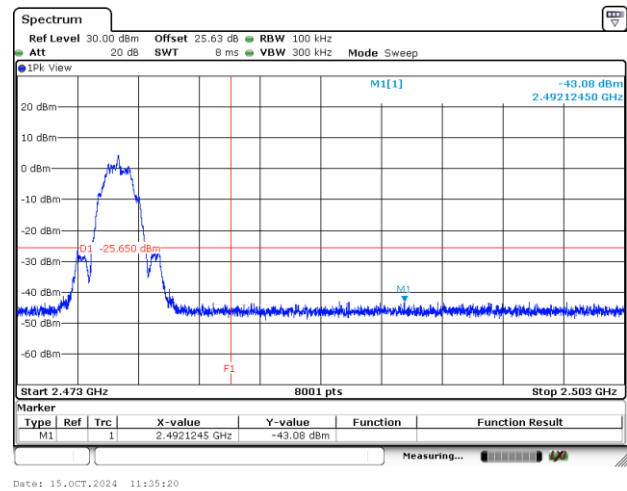

#### Spurious Emission 30MHz~1GHz Plot

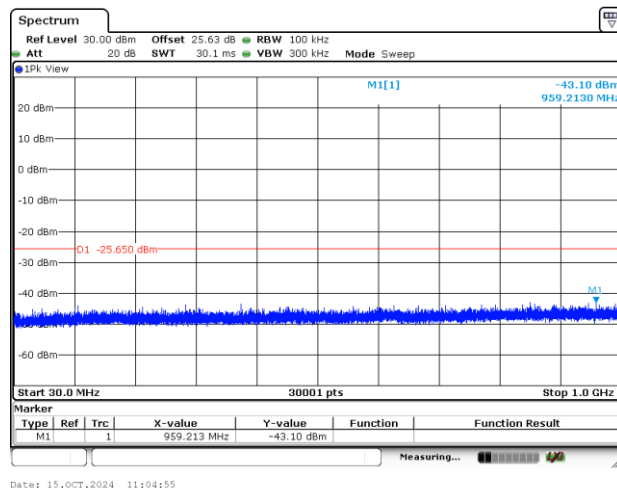

#### Spurious Emission 1GHz~26.5GHz Plot

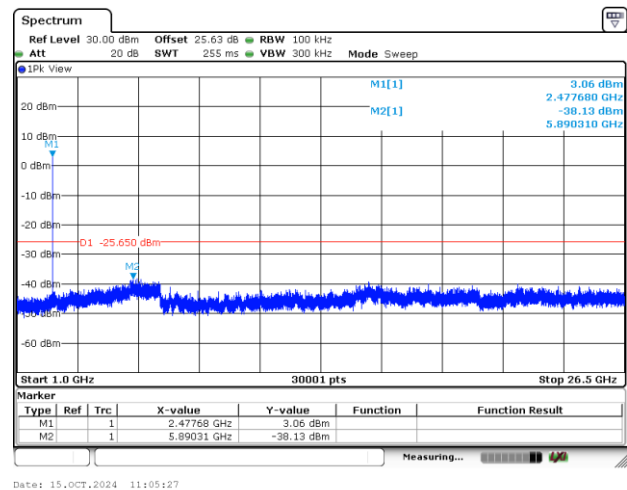



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	23.6~26.8°C
		Relative Humidity :	42.3~54.7%

EUT Information

Report NO :  
Test Mode :  
Test Voltage :  
Phase :

491901  
Mode 1  
120Vac/60Hz  
Line

Full Spectrum

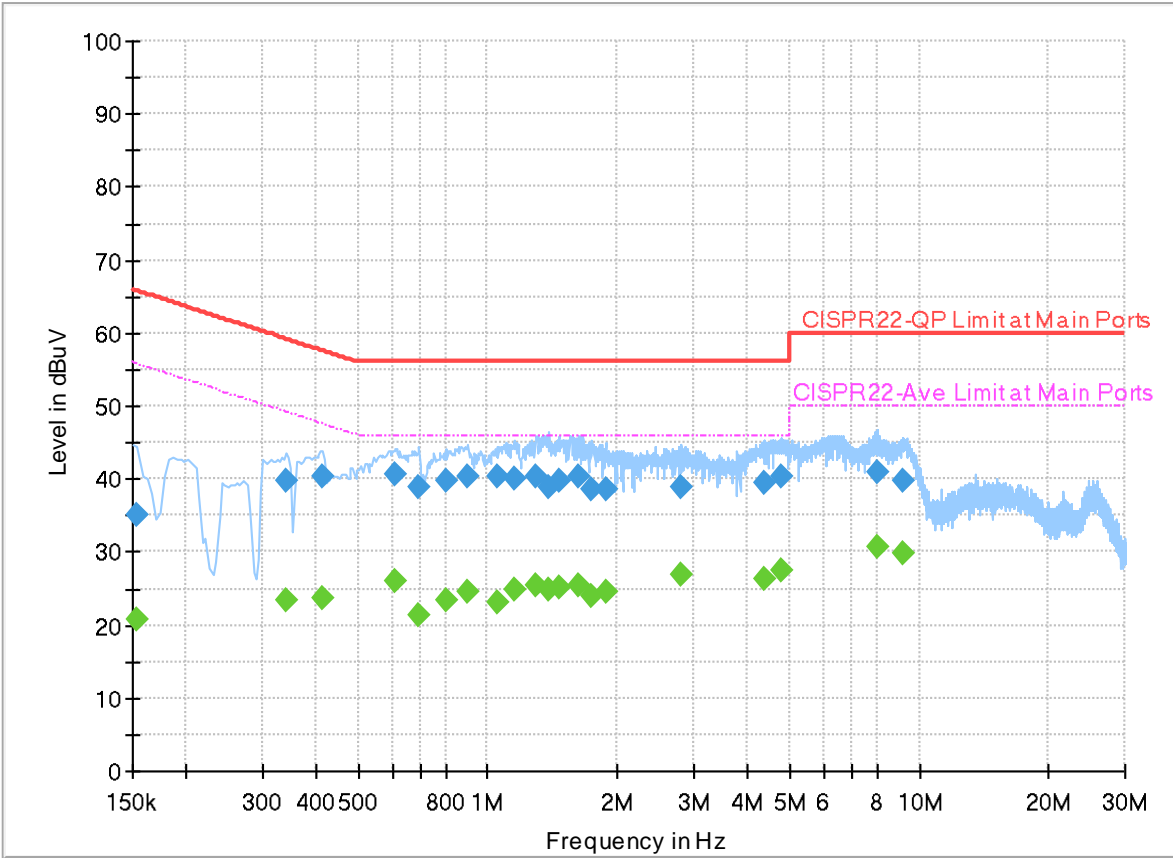

Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.154000	---	20.67	55.78	35.11	L1	FLO	19.9
0.154000	35.16	---	65.78	30.62	L1	FLO	19.9
0.342000	---	23.42	49.16	25.74	L1	FLO	19.9
0.342000	39.88	---	59.16	19.28	L1	FLO	19.9
0.414000	---	23.68	47.57	23.89	L1	FLO	19.9
0.414000	40.46	---	57.57	17.11	L1	FLO	19.9
0.610000	---	26.13	46.00	19.87	L1	FLO	19.9
0.610000	40.62	---	56.00	15.38	L1	FLO	19.9
0.694000	---	21.37	46.00	24.63	L1	FLO	19.9
0.694000	38.83	---	56.00	17.17	L1	FLO	19.9
0.798000	---	23.25	46.00	22.75	L1	FLO	19.9
0.798000	39.77	---	56.00	16.23	L1	FLO	19.9
0.898000	---	24.45	46.00	21.55	L1	FLO	19.9
0.898000	40.30	---	56.00	15.70	L1	FLO	19.9
1.054000	---	23.02	46.00	22.98	L1	FLO	19.9
1.054000	40.28	---	56.00	15.72	L1	FLO	19.9
1.150000	---	24.77	46.00	21.23	L1	FLO	19.9
1.150000	40.04	---	56.00	15.96	L1	FLO	19.9
1.298000	---	25.56	46.00	20.44	L1	FLO	19.9

1.298000	40.34	---	56.00	15.66	L1	FLO	19.9
1.390000	---	24.86	46.00	21.14	L1	FLO	19.9
1.390000	38.93	---	56.00	17.07	L1	FLO	19.9
1.458000	---	25.21	46.00	20.79	L1	FLO	19.9
1.458000	39.86	---	56.00	16.14	L1	FLO	19.9
1.622000	---	25.49	46.00	20.51	L1	FLO	19.9
1.622000	40.23	---	56.00	15.77	L1	FLO	19.9
1.746000	---	24.10	46.00	21.90	L1	FLO	19.9
1.746000	38.52	---	56.00	17.48	L1	FLO	19.9
1.874000	---	24.46	46.00	21.54	L1	FLO	19.9
1.874000	38.73	---	56.00	17.27	L1	FLO	19.9
2.814000	---	26.82	46.00	19.18	L1	FLO	20.0
2.814000	38.80	---	56.00	17.20	L1	FLO	20.0
4.366000	---	26.42	46.00	19.58	L1	FLO	20.0
4.366000	39.41	---	56.00	16.59	L1	FLO	20.0
4.786000	---	27.41	46.00	18.59	L1	FLO	20.0
4.786000	40.23	---	56.00	15.77	L1	FLO	20.0
7.986000	---	30.84	50.00	19.16	L1	FLO	20.0
7.986000	40.96	---	60.00	19.04	L1	FLO	20.0
9.150000	---	29.76	50.00	20.24	L1	FLO	20.1
9.150000	39.68	---	60.00	20.32	L1	FLO	20.1




EUT Information

Report NO :  
Test Mode :  
Test Voltage :  
Phase :

491901  
Mode 1  
120Vac/60Hz  
Neutral

Full Spectrum

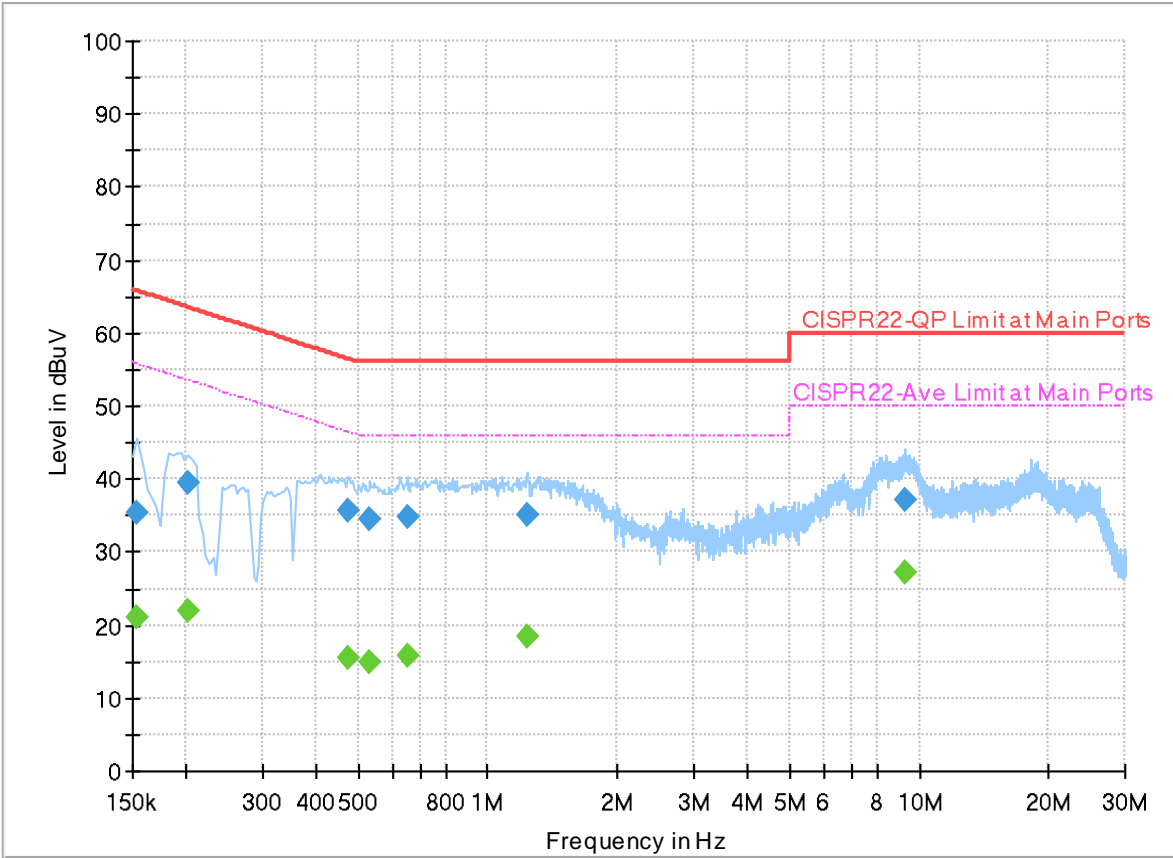

Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.154000	---	21.13	55.78	34.65	N	FLO	19.9
0.154000	35.36	---	65.78	30.42	N	FLO	19.9
0.202000	---	21.96	53.53	31.57	N	FLO	19.9
0.202000	39.49	---	63.53	24.04	N	FLO	19.9
0.474000	---	15.43	46.44	31.01	N	FLO	19.9
0.474000	35.75	---	56.44	20.69	N	FLO	19.9
0.534000	---	14.78	46.00	31.22	N	FLO	19.9
0.534000	34.38	---	56.00	21.62	N	FLO	19.9
0.650000	---	15.76	46.00	30.24	N	FLO	19.9
0.650000	34.91	---	56.00	21.09	N	FLO	19.9
1.230000	---	18.41	46.00	27.59	N	FLO	19.9
1.230000	35.00	---	56.00	21.00	N	FLO	19.9
9.226000	---	27.29	50.00	22.71	N	FLO	20.1
9.226000	37.15	---	60.00	22.85	N	FLO	20.1



## Appendix C. Radiated Spurious Emission Test Data

<b>Test Engineer :</b>	John Chuang, David Dai, and Sam Chou	<b>Temperature :</b>	19.8~23.4°C
		<b>Relative Humidity :</b>	64.9~70.5%

### Note symbol

-L	Low channel location
-R	High channel location



&lt;1Mbps&gt;





**C1.1. Radiated Spurious Emission Test Modes**

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE GSKF	39	2480	1Mbps	-	-





**C1.2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE GSKF	00	2369.16	40.01	54.00	-13.99	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	00	4804.00	44.33	74.00	-29.67	H	Peak	Pass	-	Harmonic
2	Bluetooth-LE GSKF	19	2488.48	40.35	54.00	-13.65	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	19	7320.00	38.98	54.00	-15.02	V	Avg.	Pass	-	Harmonic
3	Bluetooth-LE GSKF	39	2483.72	40.41	54.00	-13.59	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	39	7440.00	47.45	74.00	-26.55	H	Peak	Pass	-	Harmonic

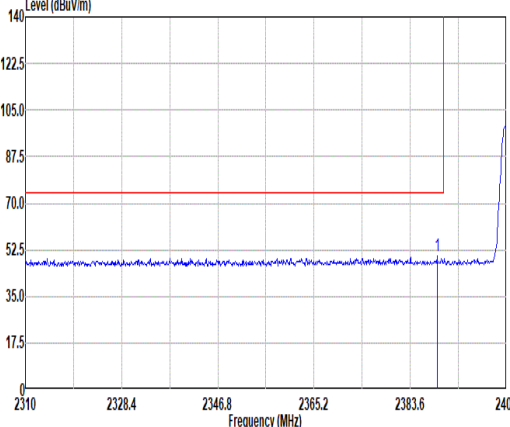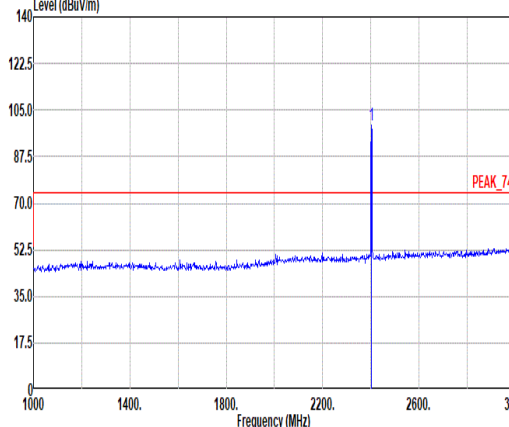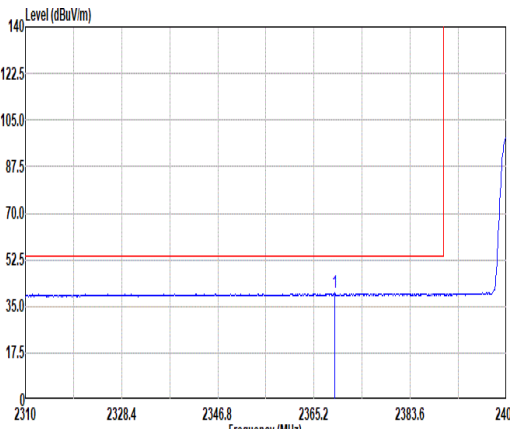
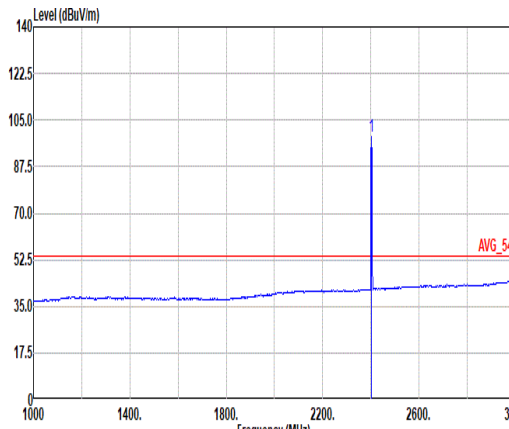


		1																																																				
Mode	Band Edge																																																					
	2400-2483.5_Bluetooth-LE GSKF_CH00_2402MHz																																																					
ANT	1																																																					
Pol.	Horizontal																																																					
Peak																																																						
	<div>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.75</td><td>50.03</td><td>74.00</td><td>-23.97</td><td>40.59</td><td>27.31</td><td>8.69</td><td>36.24</td><td>9.68</td><td>111</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2388.75	50.03	74.00	-23.97	40.59	27.31	8.69	36.24	9.68	111		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
1	2388.75	50.03	74.00	-23.97	40.59	27.31	8.69	36.24	9.68	111																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
Fundamental																																																						
	<div>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.30</td><td>-----</td><td>-----</td><td>89.74</td><td>27.42</td><td>8.71</td><td>36.25</td><td>9.68</td><td>111</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2402.00	99.30	-----	-----	89.74	27.42	8.71	36.25	9.68	111		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
1	2402.00	99.30	-----	-----	89.74	27.42	8.71	36.25	9.68	111																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
Avg.																																																						
	<div>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.16</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>30.63</td><td>27.29</td><td>8.65</td><td>36.24</td><td>9.68</td><td>111</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2369.16	40.01	54.00	-13.99	30.63	27.29	8.65	36.24	9.68	111		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
1	2369.16	40.01	54.00	-13.99	30.63	27.29	8.65	36.24	9.68	111																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
AVERAGE																																																						
	<div>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>98.73</td><td>-----</td><td>-----</td><td>89.17</td><td>27.42</td><td>8.71</td><td>36.25</td><td>9.68</td><td>111</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2402.00	98.73	-----	-----	89.17	27.42	8.71	36.25	9.68	111		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
1	2402.00	98.73	-----	-----	89.17	27.42	8.71	36.25	9.68	111																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												

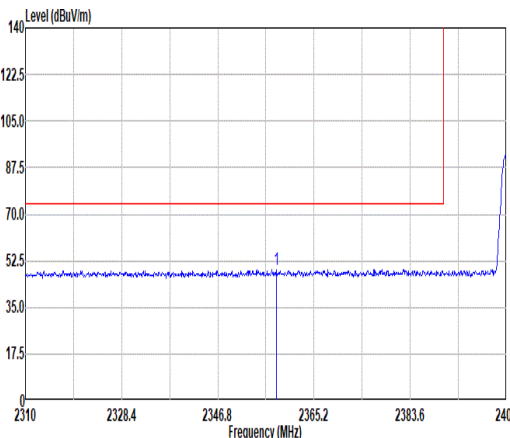
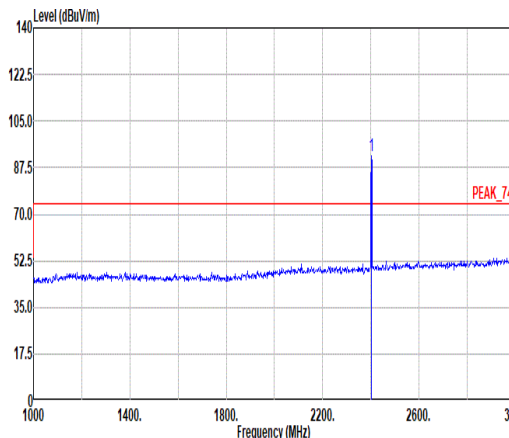
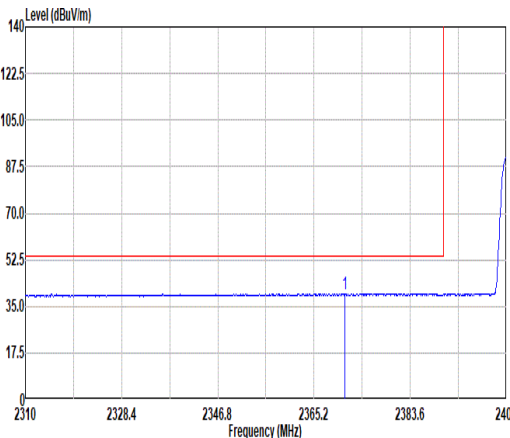
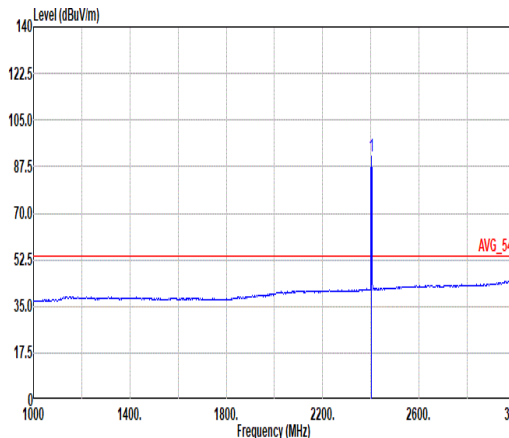


Mode	1																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE GSKF_CH00_2402MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<div><p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2358.02</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>40.02</td><td>27.18</td><td>8.63</td><td>36.23</td><td>9.68</td><td>400</td><td>40 PEAK</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.02	49.28	74.00	-24.72	40.02	27.18	8.63	36.23	9.68	400	40 PEAK	<div><p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.04</td><td>-----</td><td>-----</td><td>82.48</td><td>27.42</td><td>8.71</td><td>36.25</td><td>9.68</td><td>400</td><td>40 PEAK</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.04	-----	-----	82.48	27.42	8.71	36.25	9.68	400	40 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2358.02	49.28	74.00	-24.72	40.02	27.18	8.63	36.23	9.68	400	40 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2402.00	92.04	-----	-----	82.48	27.42	8.71	36.25	9.68	400	40 PEAK																																																																													
Avg.	<div><p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2371.09</td><td>39.85</td><td>54.00</td><td>-14.15</td><td>30.44</td><td>27.31</td><td>8.66</td><td>36.24</td><td>9.68</td><td>400</td><td>40 AVERAGE</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2371.09	39.85	54.00	-14.15	30.44	27.31	8.66	36.24	9.68	400	40 AVERAGE	<div><p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.45</td><td>-----</td><td>-----</td><td>81.89</td><td>27.42</td><td>8.71</td><td>36.25</td><td>9.68</td><td>400</td><td>40 AVERAGE</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.45	-----	-----	81.89	27.42	8.71	36.25	9.68	400	40 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2371.09	39.85	54.00	-14.15	30.44	27.31	8.66	36.24	9.68	400	40 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2402.00	91.45	-----	-----	81.89	27.42	8.71	36.25	9.68	400	40 AVERAGE																																																																													



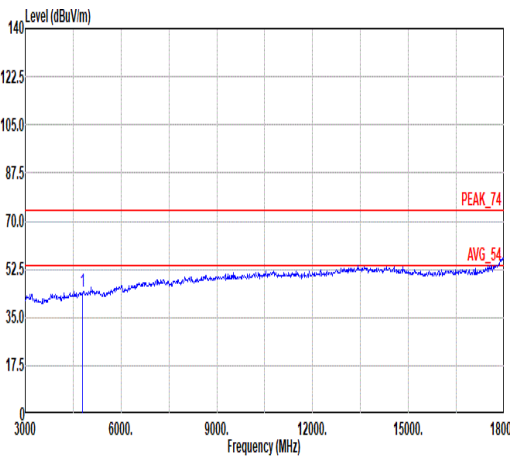
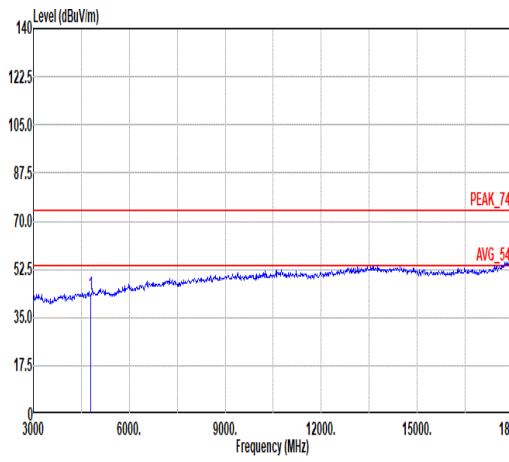


Mode	1																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth-LE GSKF_CH00_2402MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg.																																																																																																	
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>36.54</td><td>32.03</td><td>12.43</td><td>37.50</td><td>0.83</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.33	74.00	-29.67	36.54	32.03	12.43	37.50	0.83	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>35.71</td><td>32.03</td><td>12.43</td><td>37.50</td><td>0.83</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.50	74.00	-30.50	35.71	32.03	12.43	37.50	0.83	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4804.00	44.33	74.00	-29.67	36.54	32.03	12.43	37.50	0.83	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4804.00	43.50	74.00	-30.50	35.71	32.03	12.43	37.50	0.83	--	PEAK																																																																																						

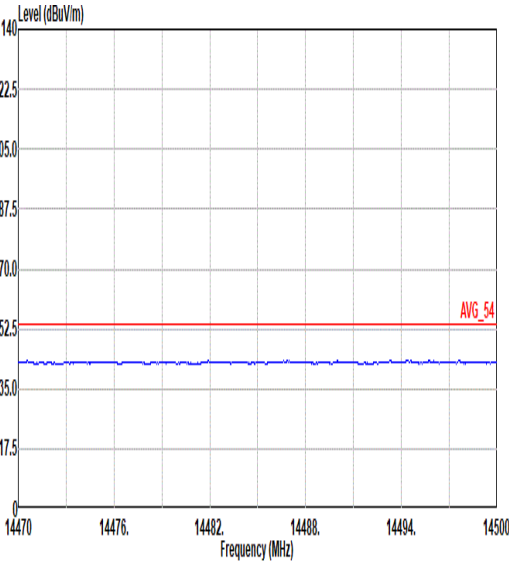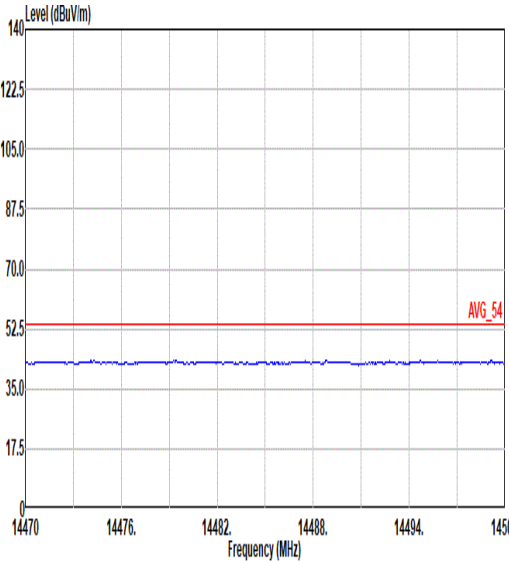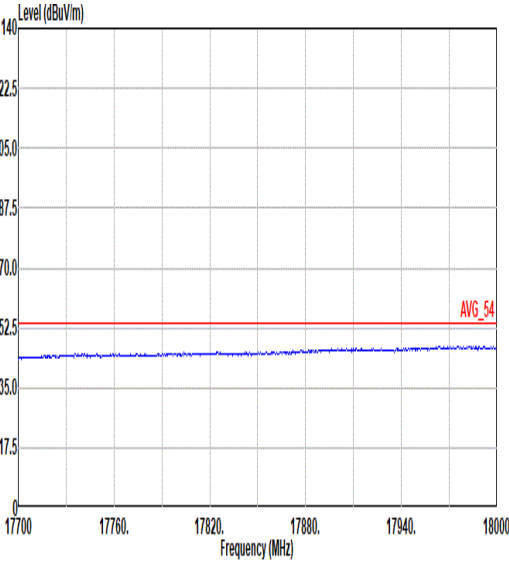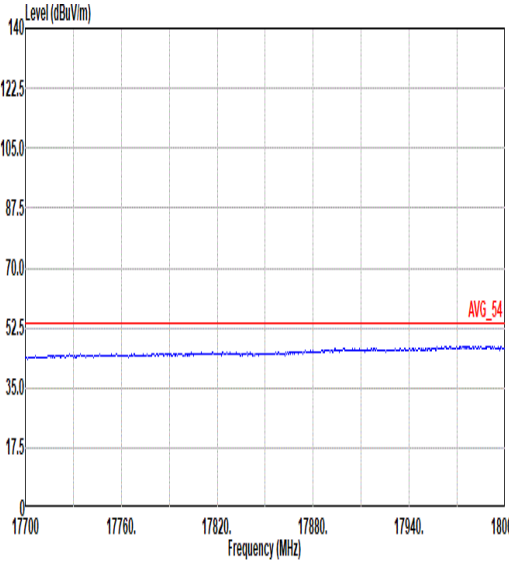

Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>
17.7G ~18G Avg.	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>

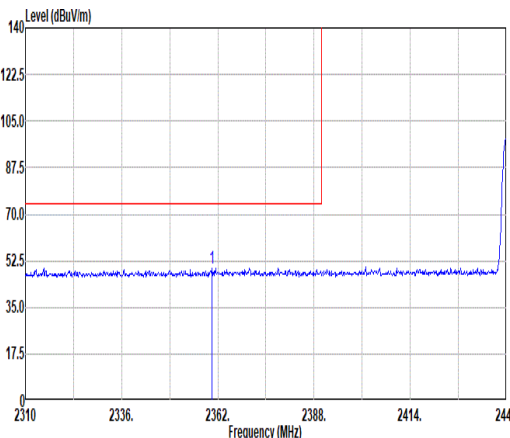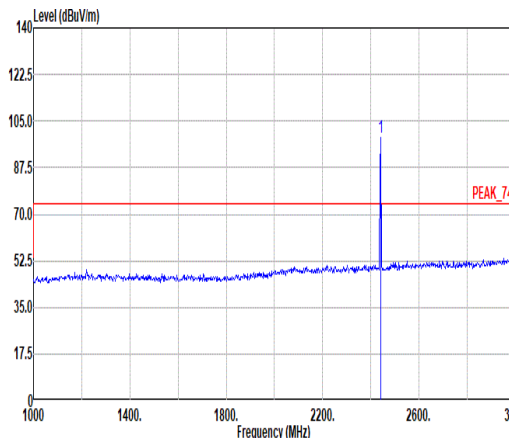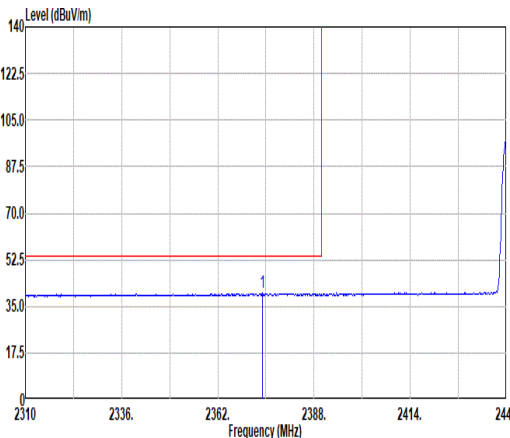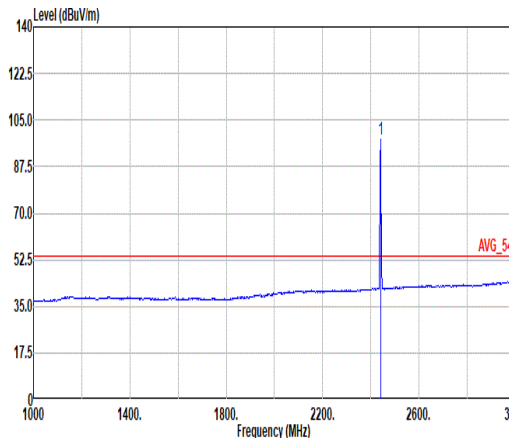





Mode	2																																																																																																								
	Band Edge - L																																																																																																								
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																								
ANT	1																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																		
Peak																																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2360.44</td><td>49.72</td><td>74.00</td><td>-24.28</td><td>40.44</td><td>27.20</td><td>8.63</td><td>36.23</td><td>9.68</td><td>100</td><td>28</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2360.44	49.72	74.00	-24.28	40.44	27.20	8.63	36.23	9.68	100	28	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>98.60</td><td>-----</td><td>-----</td><td>88.90</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>100</td><td>28</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2440.00	98.60	-----	-----	88.90	27.50	8.78	36.26	9.68	100	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	2360.44	49.72	74.00	-24.28	40.44	27.20	8.63	36.23	9.68	100	28	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																													
1	2440.00	98.60	-----	-----	88.90	27.50	8.78	36.26	9.68	100	28	PEAK																																																																																													
Avg.																																																																																																									
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2373.96</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>30.45</td><td>27.34</td><td>8.66</td><td>36.24</td><td>9.68</td><td>100</td><td>28</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2373.96	39.89	54.00	-14.11	30.45	27.34	8.66	36.24	9.68	100	28	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>97.99</td><td>-----</td><td>-----</td><td>88.29</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>100</td><td>28</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2440.00	97.99	-----	-----	88.29	27.50	8.78	36.26	9.68	100	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	2373.96	39.89	54.00	-14.11	30.45	27.34	8.66	36.24	9.68	100	28	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																													
1	2440.00	97.99	-----	-----	88.29	27.50	8.78	36.26	9.68	100	28	AVERAGE																																																																																													







Mode	2																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<div><p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.86</td><td>49.89</td><td>74.00</td><td>-24.11</td><td>39.91</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>100</td><td>28</td><td>PEAK</td></tr></table></div>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.86	49.89	74.00	-24.11	39.91	27.70	8.88	36.28	9.68	100	28	PEAK	Blank					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2489.86	49.89	74.00	-24.11	39.91	27.70	8.88	36.28	9.68	100	28	PEAK																																													
Avg.	<div><p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p><table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2488.48</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>30.40</td><td>27.68</td><td>8.87</td><td>36.28</td><td>9.68</td><td>100</td><td>28</td><td>AVERAGE</td></tr></table></div>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2488.48	40.35	54.00	-13.65	30.40	27.68	8.87	36.28	9.68	100	28	AVERAGE	Blank					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2488.48	40.35	54.00	-13.65	30.40	27.68	8.87	36.28	9.68	100	28	AVERAGE																																													

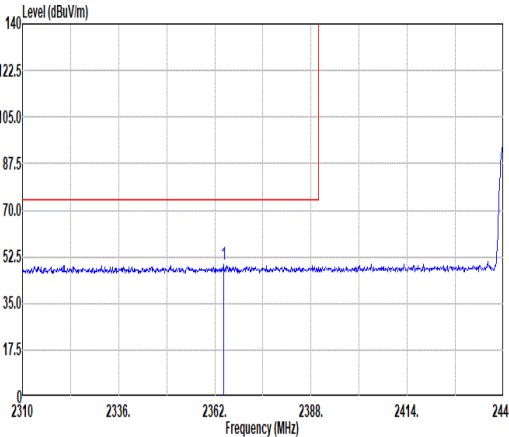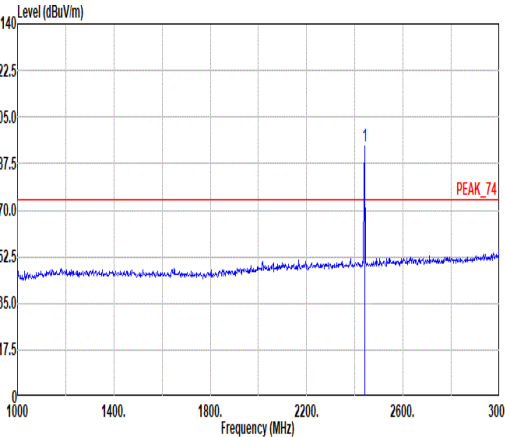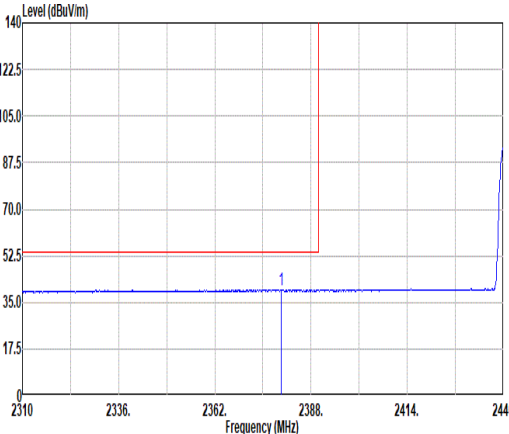
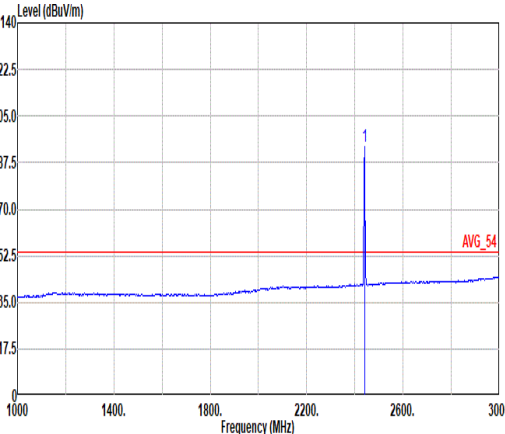


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2364.34</td><td>49.50</td><td>74.00</td><td>-24.50</td><td>40.17</td><td>27.24</td><td>8.64</td><td>36.23</td><td>9.68</td><td>400</td><td>192</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.34	49.50	74.00	-24.50	40.17	27.24	8.64	36.23	9.68	400	192	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>93.94</td><td>-----</td><td>-----</td><td>84.24</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>400</td><td>192</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	93.94	-----	-----	84.24	27.50	8.78	36.26	9.68	400	192
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2364.34	49.50	74.00	-24.50	40.17	27.24	8.64	36.23	9.68	400	192	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	93.94	-----	-----	84.24	27.50	8.78	36.26	9.68	400	192	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.94</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>30.21</td><td>27.40</td><td>8.67</td><td>36.24</td><td>9.68</td><td>400</td><td>192</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.94	39.72	54.00	-14.28	30.21	27.40	8.67	36.24	9.68	400	192	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>93.31</td><td>-----</td><td>-----</td><td>83.61</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>400</td><td>192</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	93.31	-----	-----	83.61	27.50	8.78	36.26	9.68	400	192
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2379.94	39.72	54.00	-14.28	30.21	27.40	8.67	36.24	9.68	400	192	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	93.31	-----	-----	83.61	27.50	8.78	36.26	9.68	400	192	AVERAGE																																																																																							



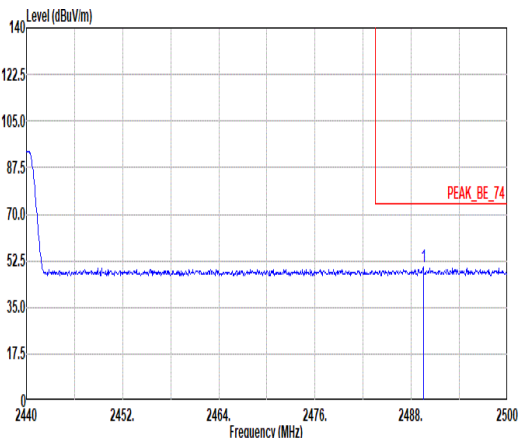
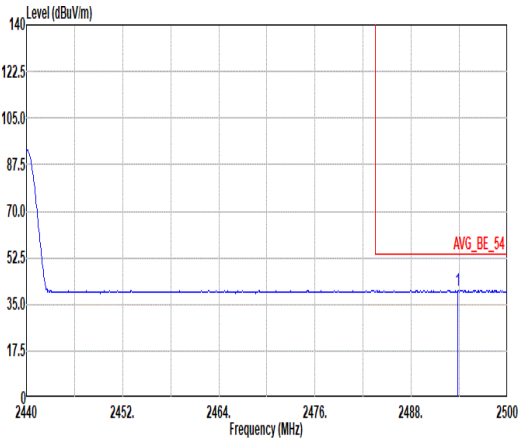


Mode	2																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<div><p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.50</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>40.02</td><td>27.69</td><td>8.88</td><td>36.28</td><td>9.68</td><td>400</td><td>192</td><td>PEAK</td></tr></table></div>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.50	49.99	74.00	-24.01	40.02	27.69	8.88	36.28	9.68	400	192	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2489.50	49.99	74.00	-24.01	40.02	27.69	8.88	36.28	9.68	400	192	PEAK																																													
Avg.	<div><p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.02</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>30.28</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>400</td><td>192</td><td>AVERAGE</td></tr></table></div>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.02	40.26	54.00	-13.74	30.28	27.70	8.88	36.28	9.68	400	192	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2493.02	40.26	54.00	-13.74	30.28	27.70	8.88	36.28	9.68	400	192	AVERAGE																																													



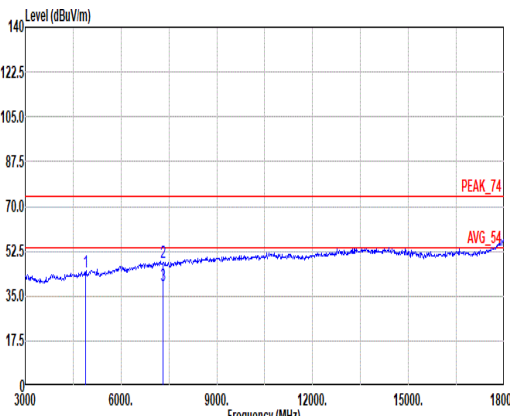
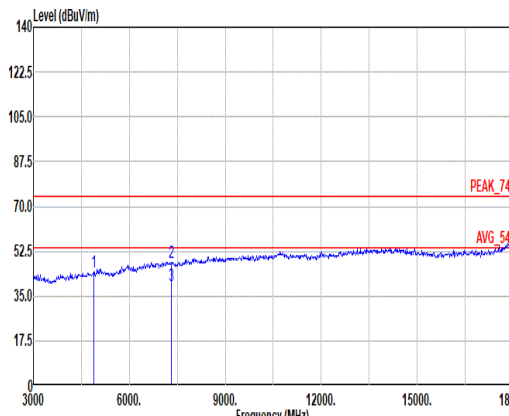


Mode	2																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg.																																																																																																																																																							
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>44.13</td><td>74.00</td><td>-29.87</td><td>35.88</td><td>32.58</td><td>12.56</td><td>37.56</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>34.20</td><td>36.86</td><td>15.45</td><td>38.61</td><td>0.35</td><td>300</td><td>194</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>24.92</td><td>36.86</td><td>15.45</td><td>38.61</td><td>0.35</td><td>300</td><td>194</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	44.13	74.00	-29.87	35.88	32.58	12.56	37.56	0.67	--	--	PEAK	2	7320.00	48.25	74.00	-25.75	34.20	36.86	15.45	38.61	0.35	300	194	PEAK	3	7320.00	38.97	54.00	-15.03	24.92	36.86	15.45	38.61	0.35	300	194	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>44.39</td><td>74.00</td><td>-29.61</td><td>36.14</td><td>32.58</td><td>12.56</td><td>37.56</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>48.28</td><td>74.00</td><td>-25.72</td><td>34.23</td><td>36.86</td><td>15.45</td><td>38.61</td><td>0.35</td><td>400</td><td>301</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>38.98</td><td>54.00</td><td>-15.02</td><td>24.93</td><td>36.86</td><td>15.45</td><td>38.61</td><td>0.35</td><td>400</td><td>301</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	44.39	74.00	-29.61	36.14	32.58	12.56	37.56	0.67	--	--	PEAK	2	7320.00	48.28	74.00	-25.72	34.23	36.86	15.45	38.61	0.35	400	301	PEAK	3	7320.00	38.98	54.00	-15.02	24.93	36.86	15.45	38.61	0.35	400	301
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4800.00	44.13	74.00	-29.87	35.88	32.58	12.56	37.56	0.67	--	--	PEAK																																																																																																																																											
2	7320.00	48.25	74.00	-25.75	34.20	36.86	15.45	38.61	0.35	300	194	PEAK																																																																																																																																											
3	7320.00	38.97	54.00	-15.03	24.92	36.86	15.45	38.61	0.35	300	194	Average																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4800.00	44.39	74.00	-29.61	36.14	32.58	12.56	37.56	0.67	--	--	PEAK																																																																																																																																											
2	7320.00	48.28	74.00	-25.72	34.23	36.86	15.45	38.61	0.35	400	301	PEAK																																																																																																																																											
3	7320.00	38.98	54.00	-15.02	24.93	36.86	15.45	38.61	0.35	400	301	Average																																																																																																																																											

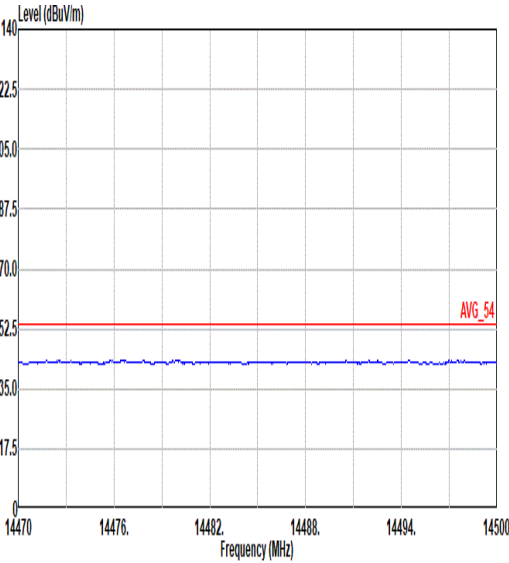
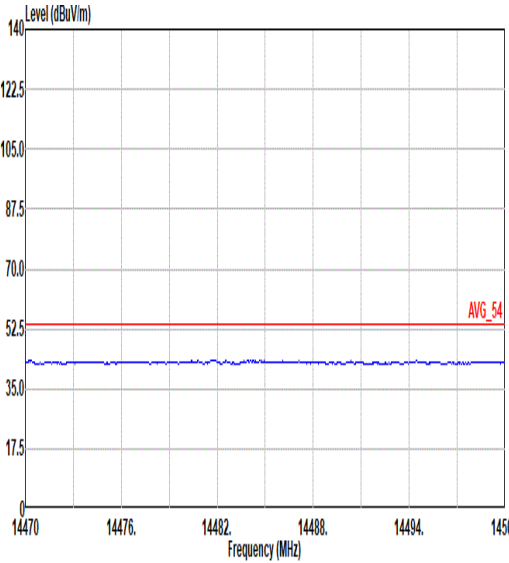
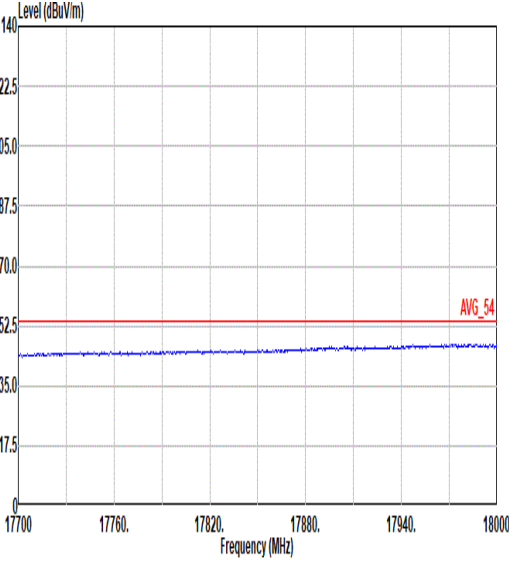
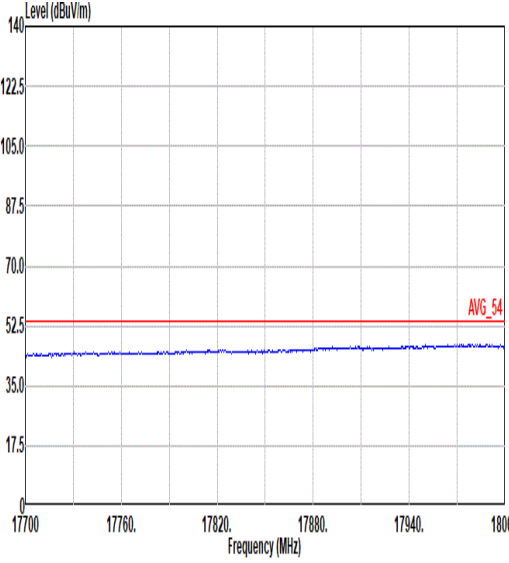


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>
	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>

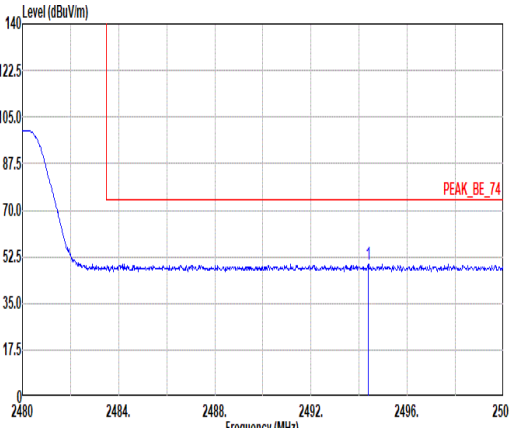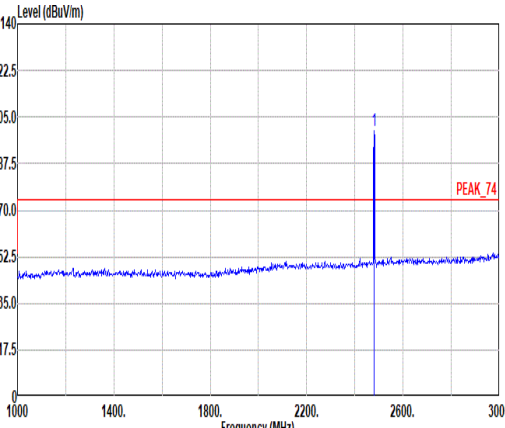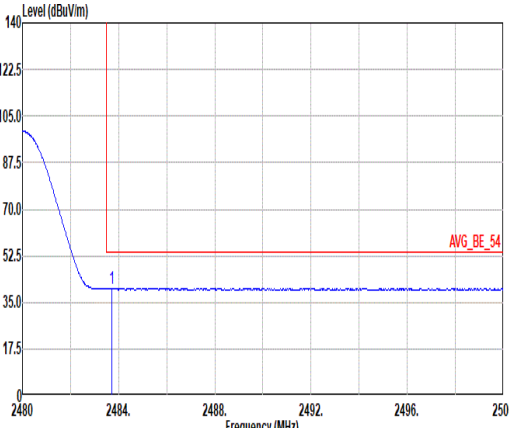
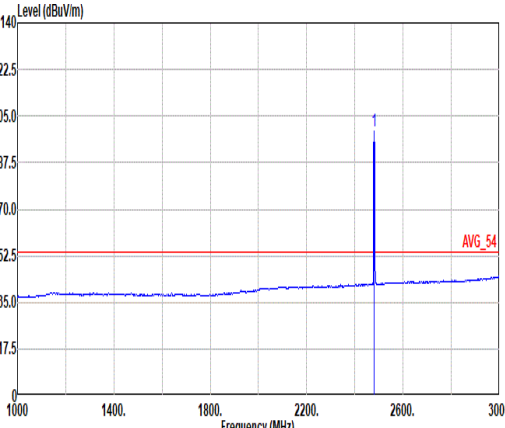


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE GSKF_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.38</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>39.84</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>126</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.38	49.82	74.00	-24.18	39.84	27.70	8.88	36.28	9.68	126	60	PEAK	 <p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.07</td><td>-----</td><td>-----</td><td>90.20</td><td>27.60</td><td>8.86</td><td>36.27</td><td>9.68</td><td>126</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.07	-----	-----	90.20	27.60	8.86	36.27	9.68	126	60	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2494.38	49.82	74.00	-24.18	39.84	27.70	8.88	36.28	9.68	126	60	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	100.07	-----	-----	90.20	27.60	8.86	36.27	9.68	126	60	PEAK																																																																																								
Avg.	 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.72</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>30.50</td><td>27.64</td><td>8.86</td><td>36.27</td><td>9.68</td><td>126</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.72	40.41	54.00	-13.59	30.50	27.64	8.86	36.27	9.68	126	60	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.54</td><td>-----</td><td>-----</td><td>89.67</td><td>27.60</td><td>8.86</td><td>36.27</td><td>9.68</td><td>126</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.54	-----	-----	89.67	27.60	8.86	36.27	9.68	126	60	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.72	40.41	54.00	-13.59	30.50	27.64	8.86	36.27	9.68	126	60	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	99.54	-----	-----	89.67	27.60	8.86	36.27	9.68	126	60	AVERAGE																																																																																								

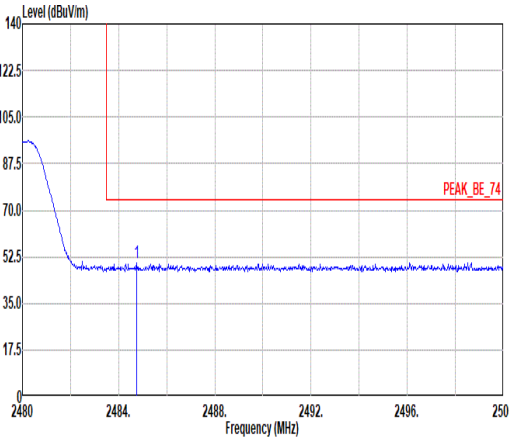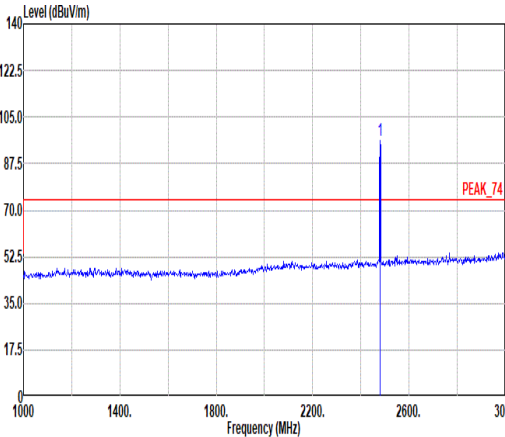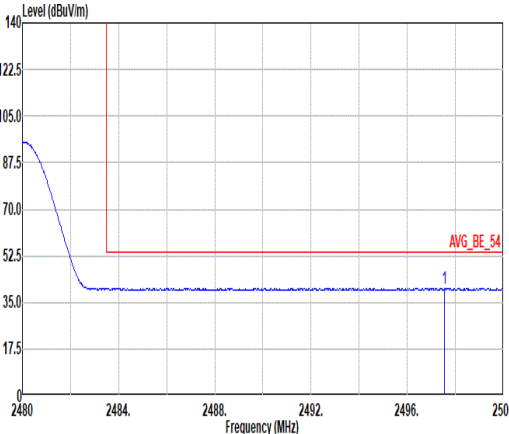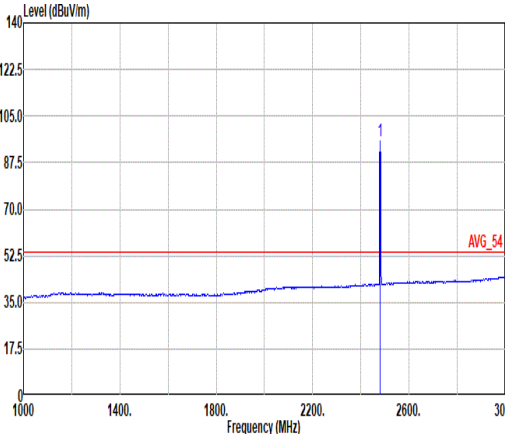





Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.74</td><td>50.40</td><td>74.00</td><td>-23.60</td><td>40.47</td><td>27.65</td><td>8.87</td><td>36.27</td><td>9.68</td><td>100</td><td>177</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.74	50.40	74.00	-23.60	40.47	27.65	8.87	36.27	9.68	100	177	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.21</td><td>-----</td><td>-----</td><td>86.34</td><td>27.60</td><td>8.86</td><td>36.27</td><td>9.68</td><td>100</td><td>177</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.21	-----	-----	86.34	27.60	8.86	36.27	9.68	100	177
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.74	50.40	74.00	-23.60	40.47	27.65	8.87	36.27	9.68	100	177	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	96.21	-----	-----	86.34	27.60	8.86	36.27	9.68	100	177	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.54</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>30.32</td><td>27.70</td><td>8.89</td><td>36.28</td><td>9.68</td><td>100</td><td>177</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.54	40.31	54.00	-13.69	30.32	27.70	8.89	36.28	9.68	100	177	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.63</td><td>-----</td><td>-----</td><td>85.76</td><td>27.60</td><td>8.86</td><td>36.27</td><td>9.68</td><td>100</td><td>177</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.63	-----	-----	85.76	27.60	8.86	36.27	9.68	100	177
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2497.54	40.31	54.00	-13.69	30.32	27.70	8.89	36.28	9.68	100	177	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	95.63	-----	-----	85.76	27.60	8.86	36.27	9.68	100	177	AVERAGE																																																																																							

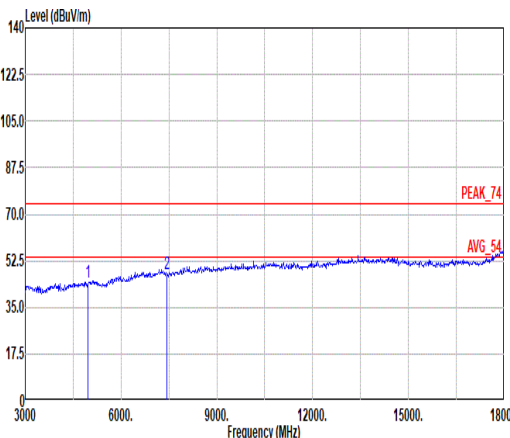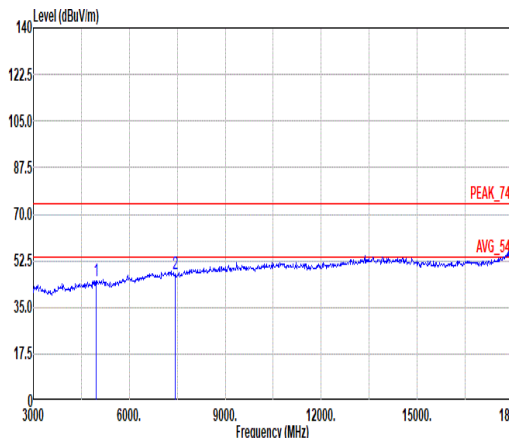

Mode	3																																																																		
	Harmonic																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH39_2480MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal						Vertical																																																												
Peak Avg.																																																																			
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>35.70</td><td>32.94</td><td>12.70</td><td>37.63</td><td>0.50</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>33.80</td><td>36.44</td><td>15.59</td><td>38.71</td><td>0.33</td><td>--</td><td>-- PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	44.21	74.00	-29.79	35.70	32.94	12.70	37.63	0.50	--	-- PEAK	2	7440.00	47.45	74.00	-26.55	33.80	36.44	15.59	38.71	0.33	--	-- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	4960.00	44.21	74.00	-29.79	35.70	32.94	12.70	37.63	0.50	--	-- PEAK																																																								
2	7440.00	47.45	74.00	-26.55	33.80	36.44	15.59	38.71	0.33	--	-- PEAK																																																								



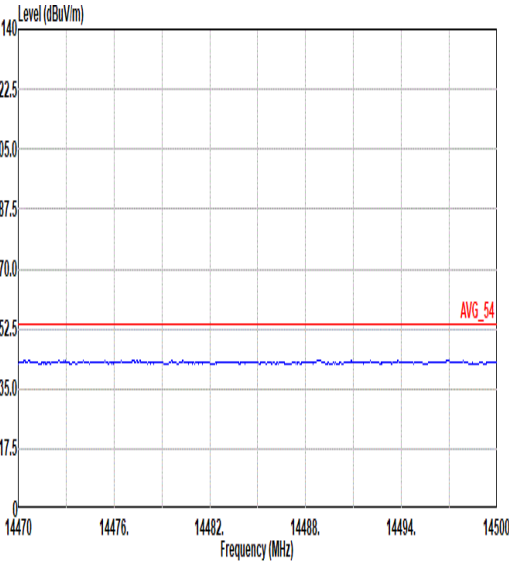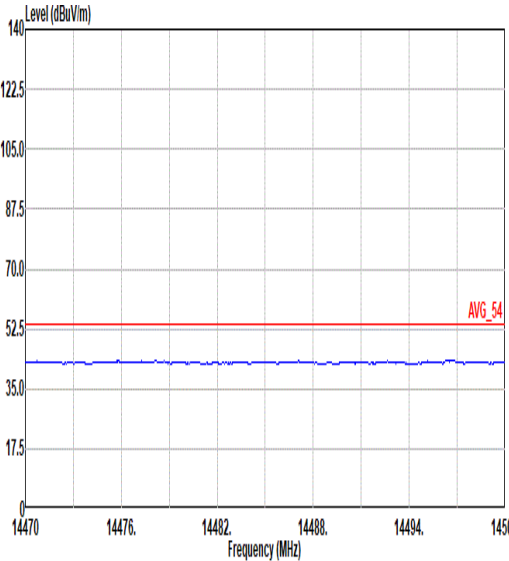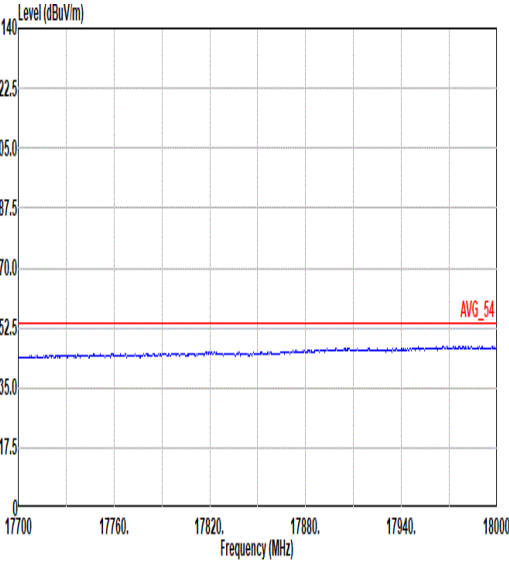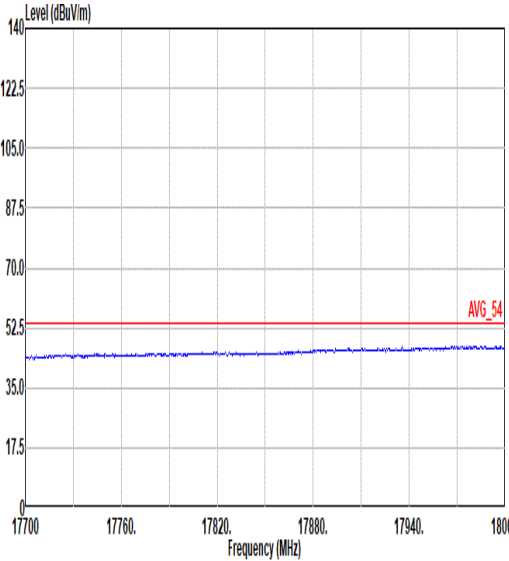

Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>
17.7G ~18G Avg.	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL</p>

<2Mbps>





## C2.1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE GSKF	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE GSKF	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE GSKF	38	2478	2Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth-LE GSKF	38	2478	2Mbps	-	SHF





## C2.2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE GSKF	01	2375.52	40.80	54.00	-13.20	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	01	-	-	-	-	-	-	-	-	Harmonic
5	Bluetooth-LE GSKF	19	2485.00	41.14	54.00	-12.86	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	19	-	-	-	-	-	-	-	-	Harmonic
6	Bluetooth-LE GSKF	38	2492.23	41.15	54.00	-12.85	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSKF	38	-	-	-	-	-	-	-	-	Harmonic
7	LF	38	954.41	36.06	46.00	-9.94	V	Peak	Pass	-	LF
8	SHF	38	24559.00	41.87	74.00	-32.13	H	Peak	Pass	-	SHF

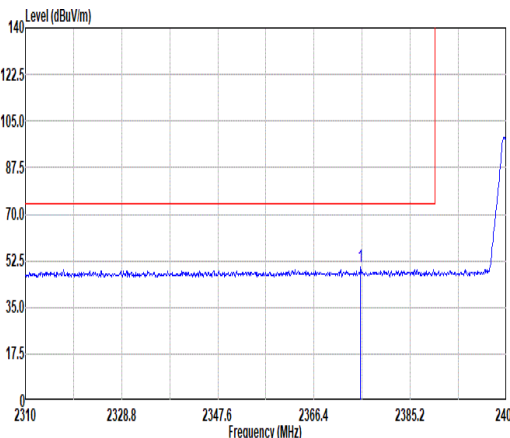
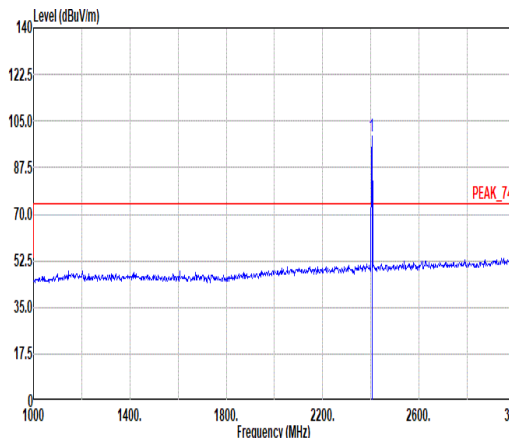
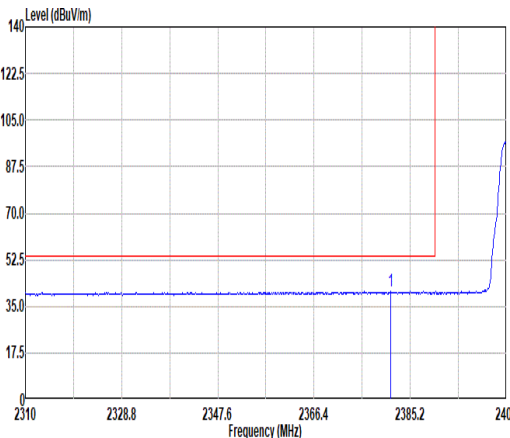
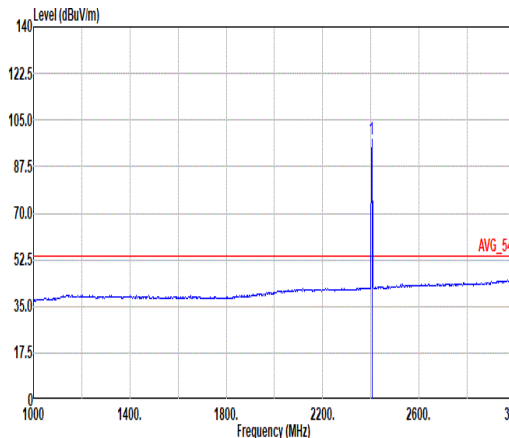


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH01_2404MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.52</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>40.64</td><td>27.36</td><td>8.66</td><td>36.24</td><td>9.68</td><td>113</td><td>28</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.52	50.10	74.00	-23.90	40.64	27.36	8.66	36.24	9.68	113	28	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>99.23</td><td>-----</td><td>-----</td><td>89.64</td><td>27.44</td><td>8.72</td><td>36.25</td><td>9.68</td><td>113</td><td>28</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	99.23	-----	-----	89.64	27.44	8.72	36.25	9.68	113	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2375.52	50.10	74.00	-23.90	40.64	27.36	8.66	36.24	9.68	113	28	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2404.00	99.23	-----	-----	89.64	27.44	8.72	36.25	9.68	113	28	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2381.35</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>31.21</td><td>27.39</td><td>8.67</td><td>36.24</td><td>9.68</td><td>113</td><td>28</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.35	40.71	54.00	-13.29	31.21	27.39	8.67	36.24	9.68	113	28	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>97.78</td><td>-----</td><td>-----</td><td>88.19</td><td>27.44</td><td>8.72</td><td>36.25</td><td>9.68</td><td>113</td><td>28</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	97.78	-----	-----	88.19	27.44	8.72	36.25	9.68	113	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2381.35	40.71	54.00	-13.29	31.21	27.39	8.67	36.24	9.68	113	28	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2404.00	97.78	-----	-----	88.19	27.44	8.72	36.25	9.68	113	28	AVERAGE																																																																																							

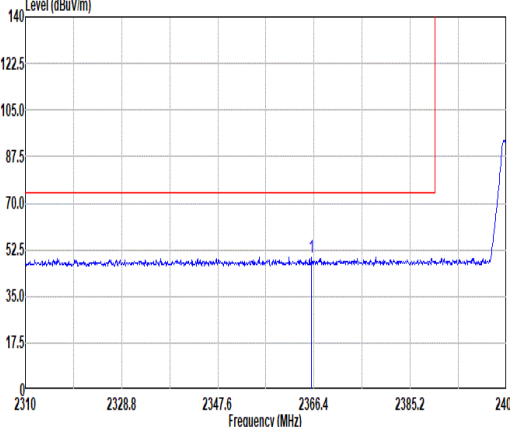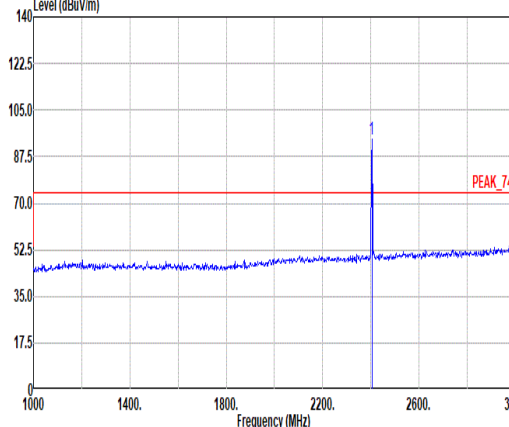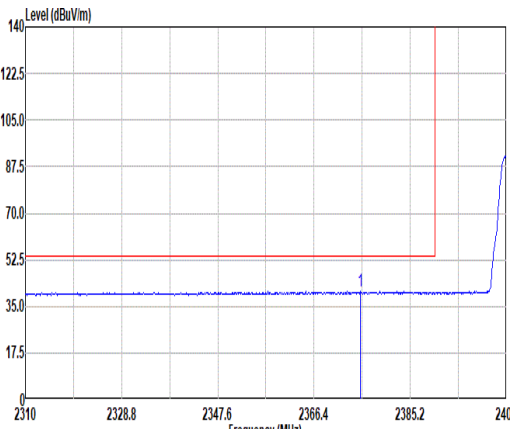
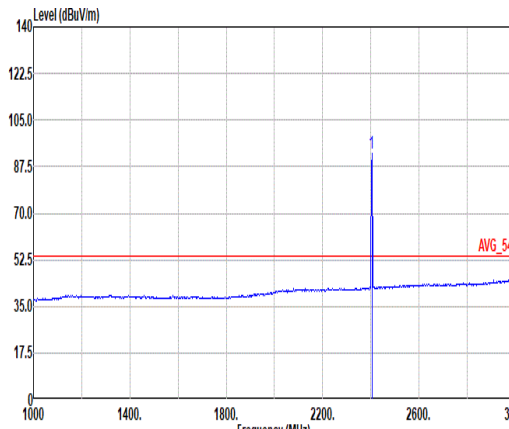


Mode	4																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_Bluetooth-LE GSKF_CH01_2404MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	<div>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2365.93</td><td>49.84</td><td>74.00</td><td>-24.16</td><td>40.48</td><td>27.26</td><td>8.65</td><td>36.23</td><td>9.68</td><td>366</td><td>278 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2365.93	49.84	74.00	-24.16	40.48	27.26	8.65	36.23	9.68	366	278 PEAK	<div>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>93.91</td><td>-----</td><td>-----</td><td>84.32</td><td>27.44</td><td>8.72</td><td>36.25</td><td>9.68</td><td>366</td><td>278 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	93.91	-----	-----	84.32	27.44	8.72	36.25	9.68	366
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2365.93	49.84	74.00	-24.16	40.48	27.26	8.65	36.23	9.68	366	278 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	93.91	-----	-----	84.32	27.44	8.72	36.25	9.68	366	278 PEAK																																																																																																
Avg.																																																																																																											
	<div>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2375.52</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>31.34</td><td>27.36</td><td>8.66</td><td>36.24</td><td>9.68</td><td>366</td><td>278 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2375.52	40.80	54.00	-13.20	31.34	27.36	8.66	36.24	9.68	366	278 AVERAGE	<div>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>92.48</td><td>-----</td><td>-----</td><td>82.89</td><td>27.44</td><td>8.72</td><td>36.25</td><td>9.68</td><td>366</td><td>278 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	92.48	-----	-----	82.89	27.44	8.72	36.25	9.68	366
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2375.52	40.80	54.00	-13.20	31.34	27.36	8.66	36.24	9.68	366	278 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	92.48	-----	-----	82.89	27.44	8.72	36.25	9.68	366	278 AVERAGE																																																																																																

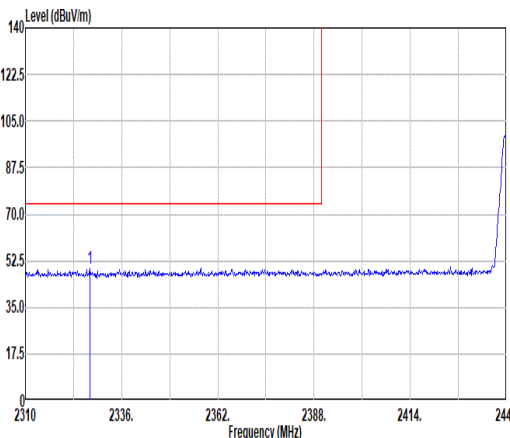
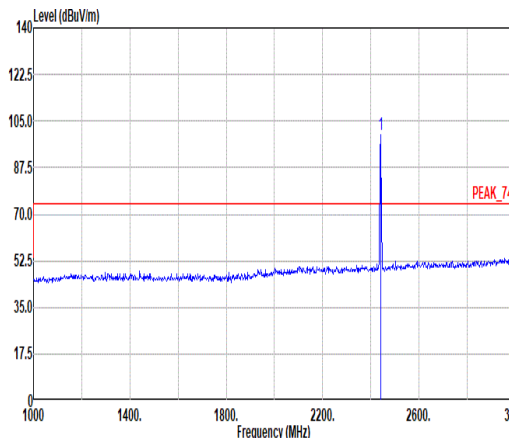
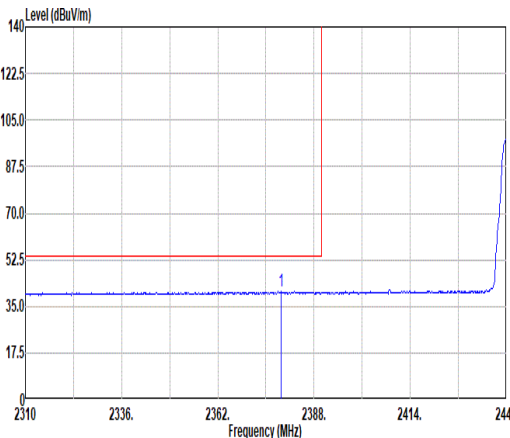
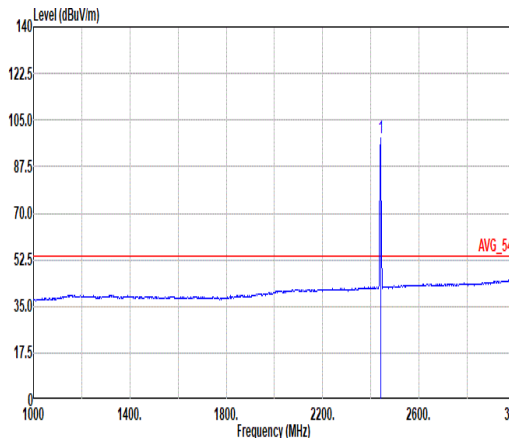


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2327.42</td><td>49.71</td><td>74.00</td><td>-24.29</td><td>40.58</td><td>27.10</td><td>8.57</td><td>36.22</td><td>9.68</td><td>103</td><td>26</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2327.42	49.71	74.00	-24.29	40.58	27.10	8.57	36.22	9.68	103	26	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.87</td><td>-----</td><td>-----</td><td>90.17</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>103</td><td>26</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	99.87	-----	-----	90.17	27.50	8.78	36.26	9.68	103	26
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2327.42	49.71	74.00	-24.29	40.58	27.10	8.57	36.22	9.68	103	26	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	99.87	-----	-----	90.17	27.50	8.78	36.26	9.68	103	26	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.16</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>31.27</td><td>27.39</td><td>8.67</td><td>36.24</td><td>9.68</td><td>103</td><td>26</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.16	40.77	54.00	-13.23	31.27	27.39	8.67	36.24	9.68	103	26	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>98.42</td><td>-----</td><td>-----</td><td>88.72</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>103</td><td>26</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	98.42	-----	-----	88.72	27.50	8.78	36.26	9.68	103	26
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2379.16	40.77	54.00	-13.23	31.27	27.39	8.67	36.24	9.68	103	26	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	98.42	-----	-----	88.72	27.50	8.78	36.26	9.68	103	26	AVERAGE																																																																																							

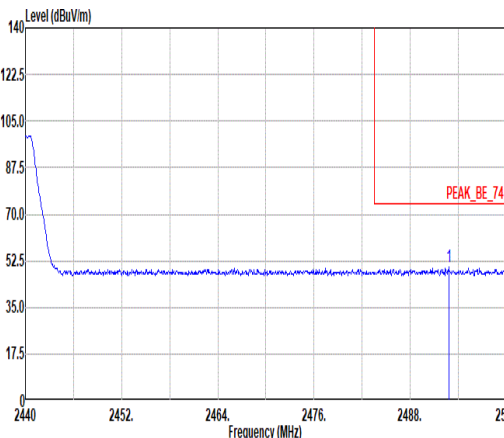
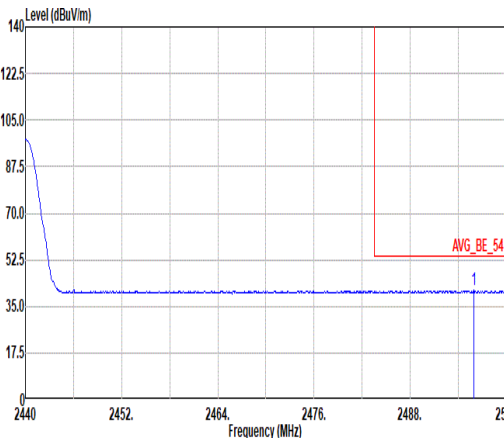


Mode	5																																																																	
	Band Edge - R																																																																	
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	<div><p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2492.80</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>40.12</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>103</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>26 PEAK</td></tr></table></div>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2492.80	50.10	74.00	-23.90	40.12	27.70	8.88	36.28	9.68	103											26 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																								
1	2492.80	50.10	74.00	-23.90	40.12	27.70	8.88	36.28	9.68	103																																																								
										26 PEAK																																																								
Avg.	<div><p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2495.92</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>30.99</td><td>27.70</td><td>8.89</td><td>36.28</td><td>9.68</td><td>103</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>26 AVERAGE</td></tr></table></div>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2495.92	40.98	54.00	-13.02	30.99	27.70	8.89	36.28	9.68	103											26 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																								
1	2495.92	40.98	54.00	-13.02	30.99	27.70	8.89	36.28	9.68	103																																																								
										26 AVERAGE																																																								

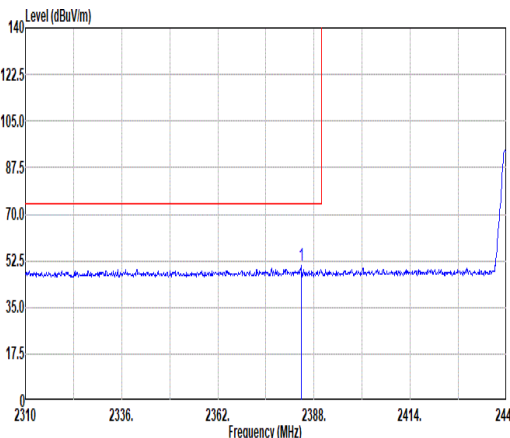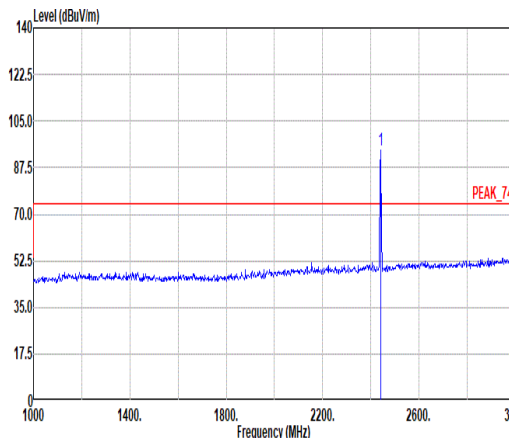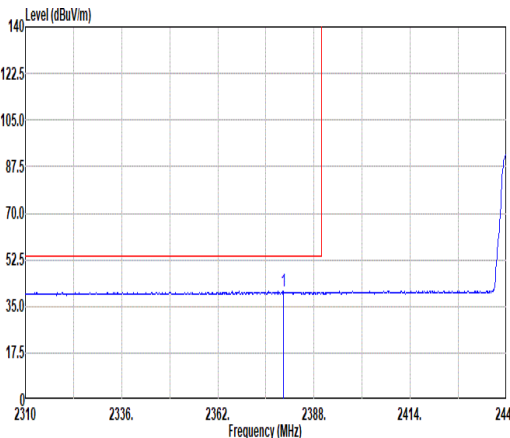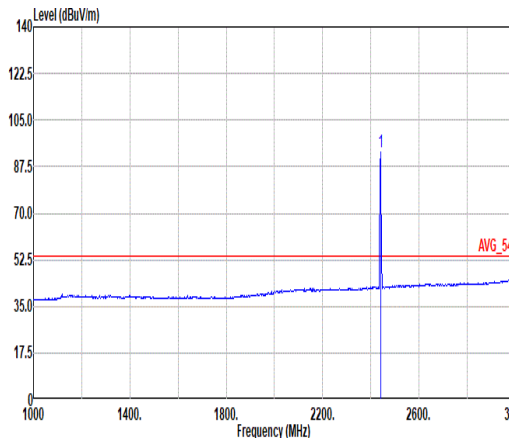





Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.62</td><td>50.49</td><td>74.00</td><td>-23.51</td><td>41.02</td><td>27.35</td><td>8.68</td><td>36.24</td><td>9.68</td><td>396</td><td>142</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.62	50.49	74.00	-23.51	41.02	27.35	8.68	36.24	9.68	396	142	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>94.30</td><td>-----</td><td>-----</td><td>84.60</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>396</td><td>142</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.30	-----	-----	84.60	27.50	8.78	36.26	9.68	396	142
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2384.62	50.49	74.00	-23.51	41.02	27.35	8.68	36.24	9.68	396	142	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	94.30	-----	-----	84.60	27.50	8.78	36.26	9.68	396	142	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.81</td><td>40.56</td><td>54.00</td><td>-13.44</td><td>31.05</td><td>27.40</td><td>8.67</td><td>36.24</td><td>9.68</td><td>396</td><td>142</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.81	40.56	54.00	-13.44	31.05	27.40	8.67	36.24	9.68	396	142	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>92.89</td><td>-----</td><td>-----</td><td>83.19</td><td>27.50</td><td>8.78</td><td>36.26</td><td>9.68</td><td>396</td><td>142</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	92.89	-----	-----	83.19	27.50	8.78	36.26	9.68	396	142
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2379.81	40.56	54.00	-13.44	31.05	27.40	8.67	36.24	9.68	396	142	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	92.89	-----	-----	83.19	27.50	8.78	36.26	9.68	396	142	AVERAGE																																																																																							

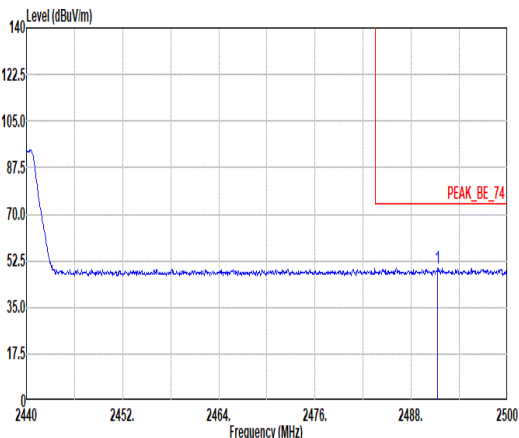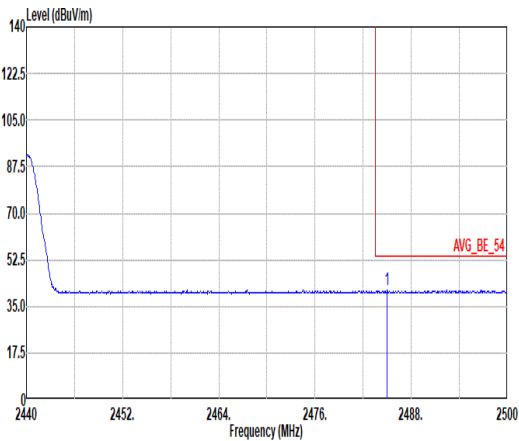





Mode	5																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	<div><p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.30</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>39.57</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>396</td><td>142</td><td>PEAK</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.30	49.55	74.00	-24.45	39.57	27.70	8.88	36.28	9.68	396	142	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2491.30	49.55	74.00	-24.45	39.57	27.70	8.88	36.28	9.68	396	142	PEAK																																		
Avg.	<div><p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</p><table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.00</td><td>41.14</td><td>54.00</td><td>-12.86</td><td>31.21</td><td>27.65</td><td>8.87</td><td>36.27</td><td>9.68</td><td>396</td><td>142</td><td>AVERAGE</td></tr></table></div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.00	41.14	54.00	-12.86	31.21	27.65	8.87	36.27	9.68	396	142	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.00	41.14	54.00	-12.86	31.21	27.65	8.87	36.27	9.68	396	142	AVERAGE																																		



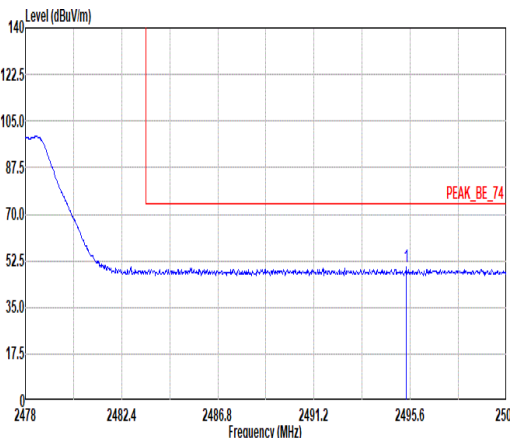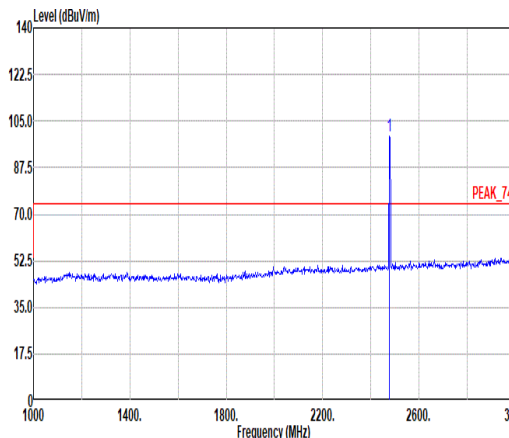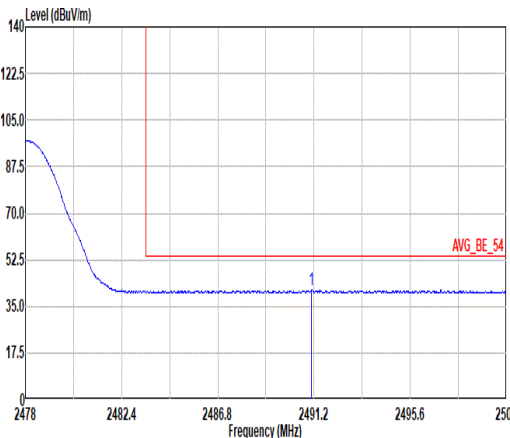
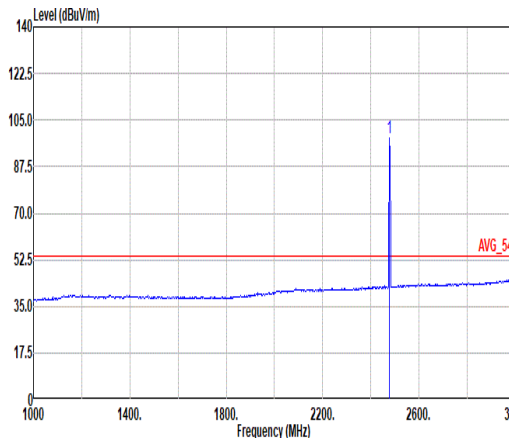


Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH38_2478MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2495.42</td><td>49.97</td><td>74.00</td><td>-24.03</td><td>39.98</td><td>27.70</td><td>8.89</td><td>36.28</td><td>9.68</td><td>100</td><td>296</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.42	49.97	74.00	-24.03	39.98	27.70	8.89	36.28	9.68	100	296	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>99.55</td><td>-----</td><td>-----</td><td>89.71</td><td>27.58</td><td>8.85</td><td>36.27</td><td>9.68</td><td>100</td><td>296</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	99.55	-----	-----	89.71	27.58	8.85	36.27	9.68	100	296
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2495.42	49.97	74.00	-24.03	39.98	27.70	8.89	36.28	9.68	100	296	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	99.55	-----	-----	89.71	27.58	8.85	36.27	9.68	100	296	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2491.09</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>31.10</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>100</td><td>296</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.09	41.08	54.00	-12.92	31.10	27.70	8.88	36.28	9.68	100	296	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>98.15</td><td>-----</td><td>-----</td><td>88.31</td><td>27.58</td><td>8.85</td><td>36.27</td><td>9.68</td><td>100</td><td>296</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	98.15	-----	-----	88.31	27.58	8.85	36.27	9.68	100	296
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2491.09	41.08	54.00	-12.92	31.10	27.70	8.88	36.28	9.68	100	296	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	98.15	-----	-----	88.31	27.58	8.85	36.27	9.68	100	296	AVERAGE																																																																																							

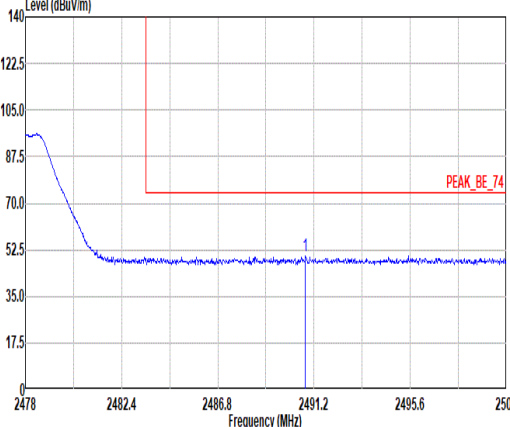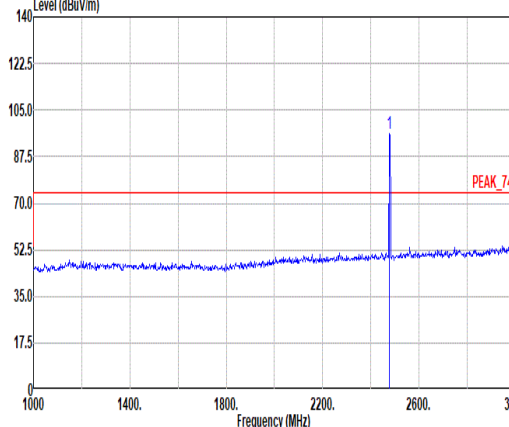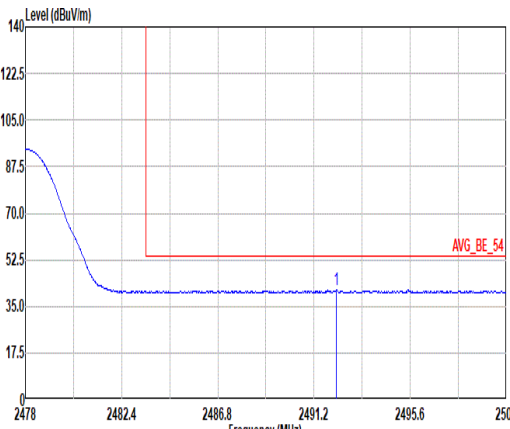
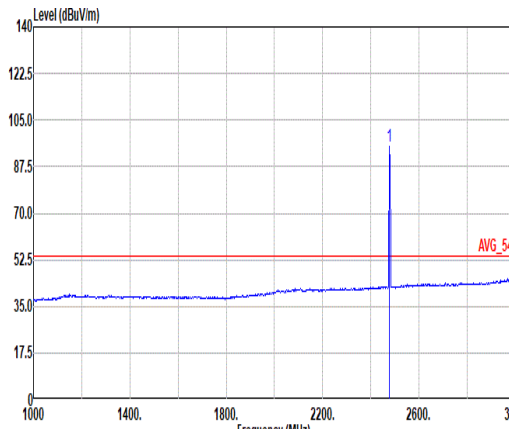


Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GSKF_CH38_2478MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<div>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2490.80</td><td>50.41</td><td>74.00</td><td>-23.59</td><td>40.43</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.80	50.41	74.00	-23.59	40.43	27.70	8.88	36.28	9.68	100	176	PEAK	<div>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>96.34</td><td>-----</td><td>-----</td><td>86.50</td><td>27.58</td><td>8.85</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	96.34	-----	-----	86.50	27.58	8.85	36.27	9.68	100	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2490.80	50.41	74.00	-23.59	40.43	27.70	8.88	36.28	9.68	100	176	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	96.34	-----	-----	86.50	27.58	8.85	36.27	9.68	100	176	PEAK																																																																																							
Avg.																																																																																																			
	<div>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2492.23</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>31.17</td><td>27.70</td><td>8.88</td><td>36.28</td><td>9.68</td><td>100</td><td>176</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.23	41.15	54.00	-12.85	31.17	27.70	8.88	36.28	9.68	100	176	AVERAGE	<div>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_231030 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto</div> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>94.93</td><td>-----</td><td>-----</td><td>85.09</td><td>27.58</td><td>8.85</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	94.93	-----	-----	85.09	27.58	8.85	36.27	9.68	100	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.23	41.15	54.00	-12.85	31.17	27.70	8.88	36.28	9.68	100	176	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	94.93	-----	-----	85.09	27.58	8.85	36.27	9.68	100	176	AVERAGE																																																																																							

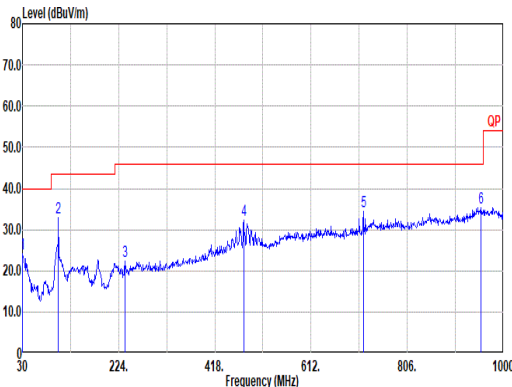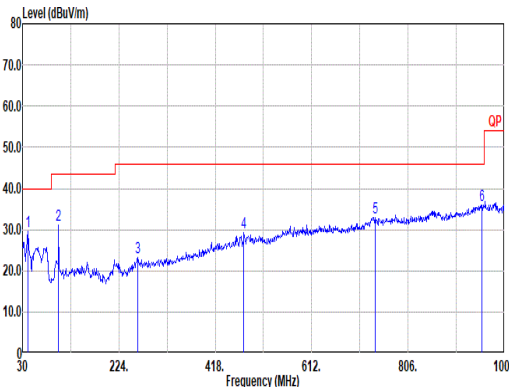

Mode	7																																																																																																																																																																																																																																												
	LF																																																																																																																																																																																																																																												
	2400-2483.5_Bluetooth-LE GSKF_CH38_2478MHz																																																																																																																																																																																																																																												
ANT	1																																																																																																																																																																																																																																												
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																					
QP/ Peak																																																																																																																																																																																																																																													
	Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_231020 HORIZONTAL							Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_231020 VERTICAL																																																																																																																																																																																																																																					
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>24.18</td><td>40.00</td><td>-15.82</td><td>33.50</td><td>25.01</td><td>1.00</td><td>35.59</td><td>0.26</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>102.75</td><td>32.99</td><td>43.50</td><td>-10.51</td><td>49.79</td><td>16.57</td><td>1.91</td><td>35.50</td><td>0.22</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>236.61</td><td>22.31</td><td>46.00</td><td>-23.69</td><td>37.63</td><td>16.92</td><td>2.82</td><td>35.25</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>476.20</td><td>32.43</td><td>46.00</td><td>-13.57</td><td>39.62</td><td>23.39</td><td>3.96</td><td>34.67</td><td>0.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>717.73</td><td>34.42</td><td>46.00</td><td>-11.58</td><td>36.12</td><td>27.17</td><td>4.82</td><td>33.85</td><td>0.16</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>954.41</td><td>35.45</td><td>46.00</td><td>-10.55</td><td>31.89</td><td>30.92</td><td>5.51</td><td>32.96</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	24.18	40.00	-15.82	33.50	25.01	1.00	35.59	0.26	--	--	--	Peak	2	102.75	32.99	43.50	-10.51	49.79	16.57	1.91	35.50	0.22	--	--	--	Peak	3	236.61	22.31	46.00	-23.69	37.63	16.92	2.82	35.25	0.19	--	--	--	Peak	4	476.20	32.43	46.00	-13.57	39.62	23.39	3.96	34.67	0.13	--	--	--	Peak	5	717.73	34.42	46.00	-11.58	36.12	27.17	4.82	33.85	0.16	--	--	--	Peak	6	954.41	35.45	46.00	-10.55	31.89	30.92	5.51	32.96	0.09	--	--	--	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>40.67</td><td>29.69</td><td>40.00</td><td>-10.31</td><td>44.50</td><td>19.33</td><td>1.21</td><td>35.59</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>102.75</td><td>31.13</td><td>43.50</td><td>-12.37</td><td>47.93</td><td>16.57</td><td>1.91</td><td>35.50</td><td>0.22</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>261.83</td><td>23.16</td><td>46.00</td><td>-22.84</td><td>34.99</td><td>20.22</td><td>2.96</td><td>35.20</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>475.23</td><td>29.33</td><td>46.00</td><td>-16.67</td><td>36.53</td><td>23.38</td><td>3.96</td><td>34.67</td><td>0.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>740.04</td><td>33.06</td><td>46.00</td><td>-12.94</td><td>33.55</td><td>28.20</td><td>4.89</td><td>33.73</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>954.41</td><td>36.06</td><td>46.00</td><td>-9.94</td><td>32.50</td><td>30.92</td><td>5.51</td><td>32.96</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	40.67	29.69	40.00	-10.31	44.50	19.33	1.21	35.59	0.24	--	--	--	Peak	2	102.75	31.13	43.50	-12.37	47.93	16.57	1.91	35.50	0.22	--	--	--	Peak	3	261.83	23.16	46.00	-22.84	34.99	20.22	2.96	35.20	0.19	--	--	--	Peak	4	475.23	29.33	46.00	-16.67	36.53	23.38	3.96	34.67	0.13	--	--	--	Peak	5	740.04	33.06	46.00	-12.94	33.55	28.20	4.89	33.73	0.15	--	--	--	Peak	6	954.41	36.06	46.00	-9.94	32.50	30.92	5.51	32.96	0.09	--	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																	
1	30.00	24.18	40.00	-15.82	33.50	25.01	1.00	35.59	0.26	--	--	--	Peak																																																																																																																																																																																																																																
2	102.75	32.99	43.50	-10.51	49.79	16.57	1.91	35.50	0.22	--	--	--	Peak																																																																																																																																																																																																																																
3	236.61	22.31	46.00	-23.69	37.63	16.92	2.82	35.25	0.19	--	--	--	Peak																																																																																																																																																																																																																																
4	476.20	32.43	46.00	-13.57	39.62	23.39	3.96	34.67	0.13	--	--	--	Peak																																																																																																																																																																																																																																
5	717.73	34.42	46.00	-11.58	36.12	27.17	4.82	33.85	0.16	--	--	--	Peak																																																																																																																																																																																																																																
6	954.41	35.45	46.00	-10.55	31.89	30.92	5.51	32.96	0.09	--	--	--	Peak																																																																																																																																																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																	
1	40.67	29.69	40.00	-10.31	44.50	19.33	1.21	35.59	0.24	--	--	--	Peak																																																																																																																																																																																																																																
2	102.75	31.13	43.50	-12.37	47.93	16.57	1.91	35.50	0.22	--	--	--	Peak																																																																																																																																																																																																																																
3	261.83	23.16	46.00	-22.84	34.99	20.22	2.96	35.20	0.19	--	--	--	Peak																																																																																																																																																																																																																																
4	475.23	29.33	46.00	-16.67	36.53	23.38	3.96	34.67	0.13	--	--	--	Peak																																																																																																																																																																																																																																
5	740.04	33.06	46.00	-12.94	33.55	28.20	4.89	33.73	0.15	--	--	--	Peak																																																																																																																																																																																																																																
6	954.41	36.06	46.00	-9.94	32.50	30.92	5.51	32.96	0.09	--	--	--	Peak																																																																																																																																																																																																																																

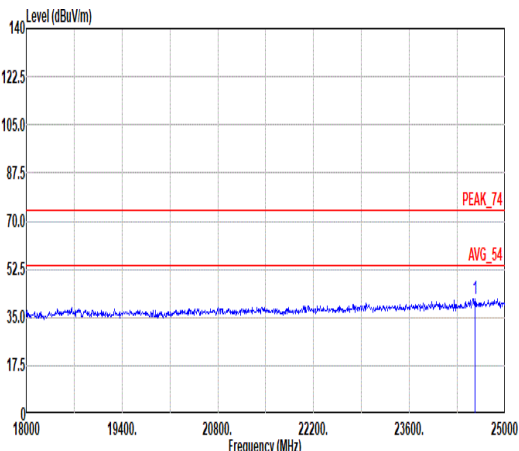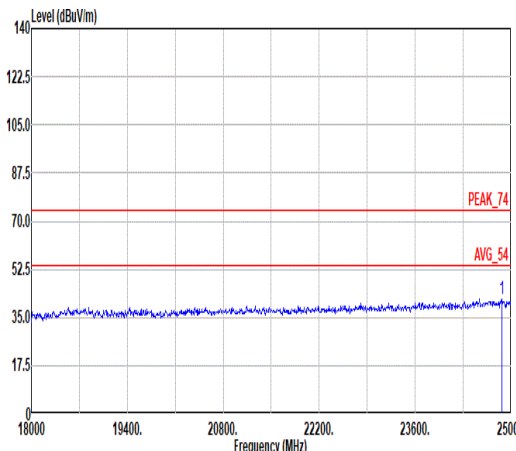

Mode	8																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth-LE GSKF_CH38_2478MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1223_240624 HORIZONTAL</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24559.00</td><td>41.87</td><td>74.00</td><td>-32.13</td><td>36.69</td><td>39.32</td><td>28.86</td><td>53.46</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24559.00	41.87	74.00	-32.13	36.69	39.32	28.86	53.46	-9.54	--	Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1223_240624 VERTICAL</p> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24860.00</td><td>41.58</td><td>74.00</td><td>-32.42</td><td>36.04</td><td>39.34</td><td>29.02</td><td>53.28</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24860.00	41.58	74.00	-32.42	36.04	39.34	29.02	53.28	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24559.00	41.87	74.00	-32.13	36.69	39.32	28.86	53.46	-9.54	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24860.00	41.58	74.00	-32.42	36.04	39.34	29.02	53.28	-9.54	--	Peak																																																																													



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.06	381	2.62	2.7kHz
Bluetooth - LE for 2Mbps	31.73	198	5.05	5.1kHz

