

FCC SAR Compliance Test Report

For

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET

FOTAN NT HONGKONG

Model: KM7

Test Engineer: Jiang Xuling *Jiang Xuling*

Report Number: WSCT-ANAB-R&E250400030A-SAR

Report Date: 26 May 2025

FCC ID: 2ADYY-KM7

Check By: Wei Liangmei *Wei Liangmei*

Approved By: Li Huaibi *Li Huaibi*

Prepared By: World Standardization Certification & Testing Group
(Shenzhen) Co., Ltd.

Building A-B, Baoli'an Industrial Park, No. 58 and
60, Tangtou Avenue, Shiyan Street, Bao'an District,
Shenzhen City, Guangdong Province, China

Tel: +86-755-26996192

Fax: +86-755-86376605



Table of contents

1	General information	5
1.1	Notes	5
1.2	Application details	5
1.3	Statement of Compliance	6
1.4	EUT Information	8
2	Testing laboratory	10
3	ACCREDITATIONS	10
4	Test Environment	10
5	Applicant and Manufacturer	10
6	Test standards:	11
6.1	RF exposure limits	12
6.2	SAR Definition	12
7	SAR Measurement System	13
7.1	The Measurement System	13
7.2	Robot	14
7.3	Probe	15
7.4	DAE	16
7.5	Phantom	17
7.6	Device Holder	18
7.7	SAR Scan General Requirement	19
7.8	Measurement procedure	20
7.9	Tissue simulating liquids: dielectric properties	21
7.10	Tissue simulating liquids: parameters	22
8	System Check	23
8.1	System check procedure	23
8.2	System check results	24
9	Test Position Configurations	25

9.1	Head Exposure Conditions.....	25
9.2	Body Exposure Condition.....	27
10	SAR Test Configuration	28
10.1	GSM Test Configurations.....	28
10.2	UMTS Test Configuration.....	28
10.3	LTE Test Configuration	30
10.4	Wi-Fi Test Configuration.....	32
10.5	Wi-Fi 2.4G SAR Test Procedures.....	32
11	Detailed Test Results.....	34
11.1	Conducted Power measurements.....	34
11.1.1	Conducted Power of GSM.....	34
11.1.2	Conducted Power of WCDMA.....	35
11.1.3	Conducted Power of LTE Band 2	36
11.1.4	Conducted Power of LTE Band 4	38
11.1.5	Conducted Power of LTE Band 5	40
11.1.6	Conducted Power of LTE Band 7	42
11.1.7	Conducted Power of LTE Band 12	44
11.1.8	Conducted Power of LTE Band 17	46
11.1.9	Conducted Power of LTE Band 38	47
11.1.10	Conducted Power of LTE Band 41	49
11.1.12	Conducted Power of LTE Band 66	51
11.1.25	Conducted Power of Wi-Fi 2.4G.....	53
11.1.26	Conducted Power of Wi-Fi 5G.....	54
11.1.27	Conducted Power of BT	55
11.1.28	Tune-up power tolerance	56
11.2	SAR test results	58
11.3	Test Result.....	61

11.3.1	Results overview of GSM	61
11.3.2	Results overview of WCDMA	62
11.3.3	Results overview of LTE	63
11.3.4	Results overview of WIFI&BT	72
12	Multiple Transmitter Information.....	76
12.1	Simultaneous Transmission Possibilities.....	77
12.1.1	SAR Summation Scenario	78
13	Measurement uncertainty evaluation	83
13.1	Measurement uncertainty evaluation for SAR test	83
13.2	Measurement uncertainty evaluation for system check.....	85
14	Test equipment and ancillaries used for tests	86

Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Release	26 May 2025	Li Huaibi

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. Shenzhen Timeway Testing Laboratories does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item: 2025-04-08
Start of test: 2025-04-09
End of test: 2025-05-26

1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for KM7 is as below:

Band	Position Test Points	MAX Reported SAR _{1g} (W/kg)
GSM850	Head	0.163
GSM1900	Head	0.049
UMTS Band 2	Head	0.069
UMTS Band 4	Head	0.027
UMTS Band 5	Head	0.125
LTE Band 2	Head	0.072
LTE Band 4	Head	0.023
LTE Band 5	Head	0.142
LTE Band 7	Head	0.119
LTE Band 12	Head	0.058
LTE Band 17	Head	0.069
LTE Band 38	Head	0.060
LTE Band 41	Head	0.096
LTE Band 66	Head	0.031
BT	Head	0.098
Wi-Fi 2.4G	Head	0.194
WIFI5G Band1	Head	0.166
WIFI5G Band2	Head	0.195
WIFI5G Band3	Head	0.260
WIFI5G Band4	Head	0.243

Band	Position Test Points	MAX Reported SAR _{1g} (W/kg)
GSM850	Body & Hotspot 10mm	0.625
GSM1900	Body & Hotspot 10mm	0.857
UMTS Band 2	Body & Hotspot 10mm	0.505
UMTS Band 4	Body & Hotspot 10mm	0.187
UMTS Band 5	Body & Hotspot 10mm	0.224
LTE Band 2	Body & Hotspot 10mm	0.631
LTE Band 4	Body & Hotspot 10mm	0.283
LTE Band 5	Body & Hotspot 10mm	0.221
LTE Band 7	Body & Hotspot 10mm	0.605
LTE Band 12	Body & Hotspot 10mm	0.129
LTE Band 17	Body & Hotspot 10mm	0.144
LTE Band 38	Body & Hotspot 10mm	0.247
LTE Band 41	Body & Hotspot 10mm	0.311
LTE Band 66	Body & Hotspot 10mm	0.283
BT	Body & Hotspot 10mm	0.064
Wi-Fi 2.4G	Body & Hotspot 10mm	0.047
WIFI5G Band1	Body & Hotspot 10mm	0.078
WIFI5G Band2	Body & Hotspot 10mm	0.121
WIFI5G Band3	Body & Hotspot 10mm	0.145
WIFI5G Band4	Body & Hotspot 10mm	0.129
Maximum Max. SAR Level(s) Measured: (Limit: 1.6W/Kg):	GSM850	0.163 W/kg1gHeadTissue
	WIFI5G Band3	0.260 W/kg1gHeadTissue
	GSM1900	0.857 W/kg1gBodyTissue
	WIFI5G Band3	0.145 W/kg1gBodyTissue
The Head highest simultaneous SAR :		0.423 W/kg1gHeadTissue
The Body highest simultaneous SAR :		1.002 W/kg1gBodyTissue

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1g tissue according to the FCC rule the ANSI/IEEE C95.1:2005, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.4 EUT Information

Device Information:			
Product Type:	Mobile Phone		
Model:	KM7		
Trade Name:	TECNO		
Software number:	KM7-15.1.1		
Hardware number:	V1.2		
Device Type:	Portable device		
Exposure Category:	uncontrolled environment / general population		
Production Unit or Identical Prototype:	Production Unit		
Antenna Type :	Integral Antenna		
Device Operating Configurations:			
Supporting Mode(s) :	GSM850, PCS 1900 WCDMA B2/ WCDMA B4/ WCDMA B5 LTE Band 2/ LTE Band 4/ LTE Band 5 LTE Band 7/LTE Band 12/ LTE Band 17 LTE Band 38/LTE Band 41/ LTE Band 66		
Modulation:	GSM/GPRS: GMSK, /EGPRS: 8PSK, /WCDMA: QPSK HSDPA/HSUPA: QPSK /16QAM, /LTE: QPSK/16QAM		
Device Class :	Class B, No DTM Mode		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	UMTS Band 2	1850~1910	1930~1990
	UMTS Band 4	1710~1755	2110~2155
	UMTS Band 5	824~849	869~894
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 17	704~716	734~746
	LTE Band 38	2570~2620	2570~2620
	LTE Band 41	2496~2690	2496~2690
	LTE Band 42	3450~3550	3450~3550
	LTE Band 66	1710~1780	2110~2200
	Wi-Fi (2.4G)	2412~2462	
	Wi-Fi (5G)	5180~5240	5180~5240
		5260~5320	5260~5320
		5500~5700	5500~5700
5745~5825		5745~5825	
BT	2402~2480		
NFC	13.553~13.567		

Antenna gain:	GSM 850/WCDMA B5/LTE B5: -5.21dbi PCS 1900/WCDMA B2/LTE B2: -1.78dbi WCDMA B4/LTE B4/ LTE B66: -7.93dbi LTE B7/ LTE B38/ LTE B41:-0.44dbi LTE B12/LTE B17: -5.41dbi
Radiated Power (EIRP/ERP) Limit	GSM 850/WCDMA B5/LTE B5: 7.00W(38.45dBm) PCS 1900/WCDMA B2/LTE B2:2.00W(33.01dBm) WCDMA B4/LTE B4/ LTE B66: 1.00W(30.00dBm) LTE B7/LTE B38/LTE B41: 2.00W(33.01dBm) LTE B12/B17: 3.00W(34.77dBm)
Power Source:	Rechargeable Li-ion Polymer Battery Model: BL-50FT Rated Voltage: 3.92V Rated Capacity: 5060mAh Nominal Energy:19.84Wh Typical Capacity: 5160mAh Limited Charge Voltage: 4.53V

Note:1:The test results of this test report relate exclusively to the test item specified in this test report. World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

2: For NFC evaluation, it is not necessary to test NFC because its power is very low

2 Testing laboratory

Test Site	World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Laboratory A:	Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China
Laboratory B:	Building J-7F and Building D, Dongjiang Science & Technology Park, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen City, Guangdong Province, China

3 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

CBTL	IECEE (international Electrotechnical Commiss, The certificate registration number is TL672)	Laboratory A ☐
		Laboratory B ☐
China	CNAS (The certificated registration number: L3732)	Laboratory A ☐
		Laboratory B ☐
USA	A2LA (The certificated registration number: 5768.01)	Laboratory A ☐
		Laboratory B ☐
USA	ANAB (The certificated registration number: AT-3951)	Laboratory A ☒
		Laboratory B ☐

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

4 Test Environment

	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2 °C
Tissue Simulating liquid:	22 ± 2 °C	22 ± 2 °C
Relative humidity content:	30 – 70 %	30 – 70 %

5 Applicant and Manufacturer

Applicant/Client Name:	TECNO MOBILE LIMITED
Applicant Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer Name:	TECNO MOBILE LIMITED
Manufacturer Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG

6 Test standards:

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEC/IEEE 62209-1528	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB447498 D04	Interim General RF Exposure Guidance v01
4	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
5	KDB865664 D02	RF Exposure Reporting v01r02
6	KDB941225 D01	3G SAR Procedures v03r01
7	KDB941225 D05	SAR for LTE Devices v02r05
8	KDB248227 D01	802.11 Wi-Fi SAR v02r02
9	KDB941225 D06	Hotspot Mode v02r01
10	KDB648474 D04	Handset SAR v01r03
11	KDB690783 D01	SAR Listings on Grant v01r03

6.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Heads/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

6.2 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)


ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

7 SAR Measurement System

7.1 The Measurement System

DASY8 is a flexible, high-precision near-field scanner optimized for automated measurements in free-space and tissue simulating liquids (TSL), using the most advanced probes covering the frequency range from 3 kHz to 110 GHz. The software enables point, area, and volume measurements and conformal scanning of complex geometries.

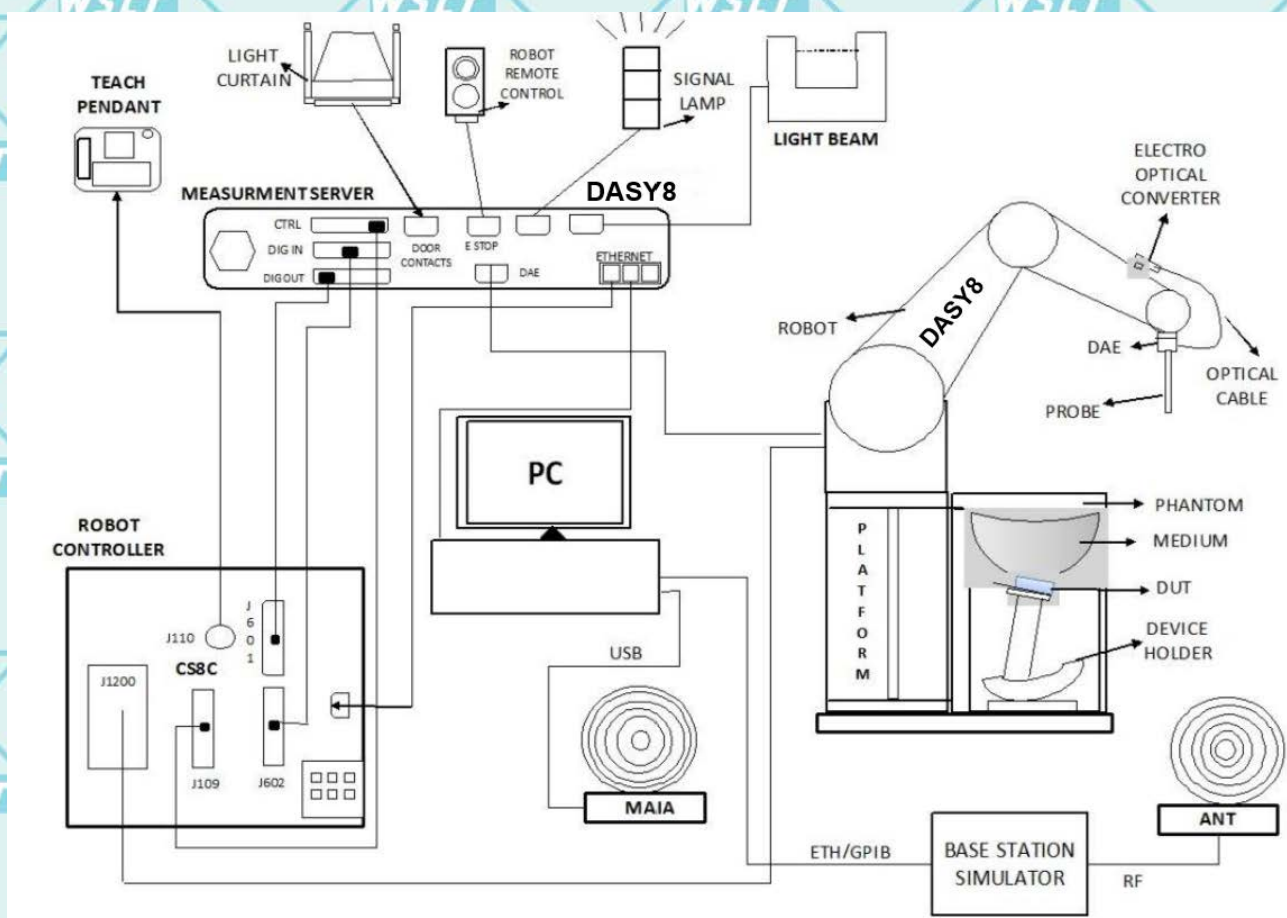

The DASY8 SAR module consists of an isotropic dosimetric probe (SAR) mounted on the TX2 precision robot, which allows field scanning inside anthropomorphic phantoms filled with tissue-simulating liquids. The probes are miniaturized, sensitive, isotropic, linear, stable and calibrated with precise boundary compensation. The spatial accuracy of probe positioning within the phantom is better than 0.2 mm. Scanning is optimized and adaptive to the induced field. The spatial SAR peak is determined without reconstruction.

7.2 Robot

The DASY8 system uses the high-precision industrial robots TX2-60L and TX2-90XL from Stäubli SA (France). The TX2 family of robots provides the ideal combination of speed, rigidity, size, and precision:

- High precision (repeatability 0.03 mm)
- High reliability and low maintenance costs (industrial design)
- ELF interference (motor control fields are shielded by the closed metallic construction)
- Hygienic encapsulated 6-axis arm enabled by a hollow shaft gearbox, no external cables.



7.3 Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

For the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7895&7391 with following specifications is used



Frequency: 4MHz – 10GHz ;

Linearity: $\pm 0.2\text{dB}$ (30MHz – 10GHz)

Dynamic Range: $10\mu\text{W/g}$ – 100 mW/g

Linearity: $\pm 0.2\text{dB}$ (noise: typically $<1\mu\text{W/g}$)

Directivity (typical): $\pm 0.1\text{ dB}$ in TSL (rotation around probe axis)
 $\pm 0.3\text{ dB}$ in TSL (rotation normal to probe axis)

Sensor Arrangement	Triangular
Connector Angle	46.9°
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

7.4 DAE

DAE4ip– Data Acquisition Electronics 4 with Integrated Power

Data Acquisition Electronics 4 with an integrated power supply for time unlimited measurements.

Performance:

- Measurement range: -100—+300 mV (16-bit resolution and two range settings: 4 mV, 400 mV)
- Input offset voltage: <5 μ V (with auto zero)
- Input resistance: 200M Ω
- Input bias current: <50 fA
- Power supply: integrated (from the DASY8 measurement server)
- Dimensions (L $\times$ W $\times$ H): 60 $\times$ 60 $\times$ 68 mm
- Calibration: ISO/IEC 17025 calibration service available.



7.5 Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left—and right-hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents the liquid from evaporating. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.



Material	Vinyl ester, fiberglass reinforced (VE-GF)
Liquid Compatibility	The phantom shell is compatible with SPEAG's tissue-simulating liquids (sugar and oil-based). However, using other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	$2 \pm 0.2\text{mm}$ ($6 \pm 0.2\text{mm}$ at ear point)
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Support	DASY6/8: standard-size platform slot
Accessories	DASY52 stand-alone: SPEAG standard phantom table Mounting Device and Adaptors

7.6 Device Holder

The DASY instrument holder is designed to accommodate the various positions specified in the standard. It has two scales for instrument rotation (with respect to the body axis) and instrument tilt (with respect to the line between the ear reference points). The center of rotation for both scales is the Ear Reference Point (ERP). This eliminates the need to reposition the instrument when changing angles.

The DASY instrument holder is made of low-loss POM material with the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material in the immediate vicinity of the device was reduced because measurements indicated that the influence of the clamp on the test results could be reduced.



Device holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

7.7 SAR Scan General Requirement

According to kdb865664 D01 v01r04:

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports, unless further guidance has been provided by the FCC.

		≤ 3 GHz	>3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm $\pm$ 1 mm	$\frac{1}{2}\delta\ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx Area, Δy Area		≤ 2 GHz: ≤ 15 mm 2-3 GHz: ≤ 12 mm	3- 4 GHz: ≤ 12 mm 4- 6 GHz: ≤ 10 mm
Maximum zoom scan spatial resolution: Δx Zoom, Δy Zoom		≤ 2 GHz: ≤ 8 mm 2-3 GHz: ≤ 5 mm*	3- 4 GHz: ≤ 5 mm* 4- 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)	≤ 5 mm	3- 4 GHz: ≤ 4 mm 4- 5 GHz: ≤ 3 mm 5- 6 GHz: ≤ 2 mm
	graded grid Δz Zoom (1): between 1 st two points closest to phantom surface	≤ 4 mm	3-4 GHz: ≤ 3 mm 4-5 GHz: ≤ 2.5 mm 5-6 GHz: ≤ 2 mm
	Δz Zoom (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z$ Zoom (n-1) mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3- 4 GHz: ≥ 28 mm 4- 5 GHz: ≥ 25 mm 5- 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.8 Measurement procedure

Power Drift :

All SAR tests were performed with a fully charged battery under the DUT and transmitting at maximum output power. The DASY measurement software uses the power reference measurement and power drift measurement procedures to monitor the power drift of the DUT during SAR testing. Both methods measure the field value at a specified reference position before and after the SAR test. The software calculates the field difference in dB. If the power drift exceeds 5%, the SAR is retested.

Area scan:



All antennas and radiating structures that may contribute to the measured SAR or influence the SAR distribution must be included in the area scan. The areas of the transmitter(s), antenna(s) and host device, when projected onto the phantom, must be within the area scan measurement region. The area scan measurement resolution must enable the extrapolation algorithms of the SAR system to correctly identify the peak SAR location(s) for subsequent zoom scan measurements to correctly determine the 1-g SAR. Area scans are performed at a constant distance from the phantom surface, determined by the measurement frequencies.

Zoom Scan:

Except when area scan based 1-g SAR estimation applies, a zoom scan measurement is required at the highest peak SAR location determined in the area scan to determine the 1-g SAR. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR. The zoom scan volume must be larger than the required minimum dimensions described 7.7. There must be at least one measurement point within the first 5 mm from the phantom surface for measurements ≤ 3 GHz, two measurement points for measurements ≤ 5 GHz and three measurement points for measurements above 5 GHz. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols in 7.7. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements.

7.9 Tissue simulating liquids: dielectric properties

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

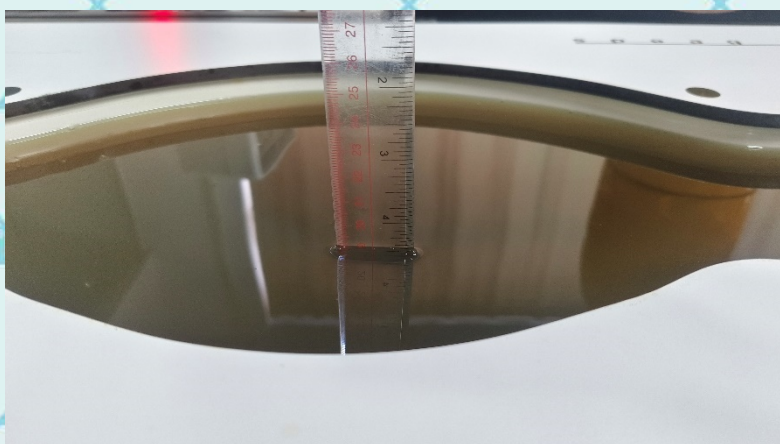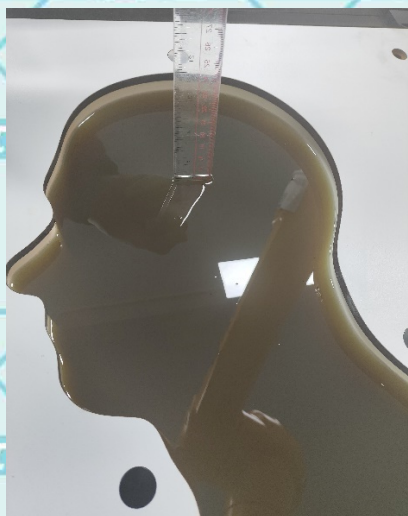

Simulating Head Liquid for 5G(HBBL600-10000MHz V6), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

7.10 Tissue simulating liquids: parameters

Used Target Frequency	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
	ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
750MHz Head	41.90 (39.805~43.995)	0.89 (0.85~0.93)	43.90	0.885	21.6°C	2025-04-23
835MHz Head	41.50 (39.425~43.575)	0.90 (0.86~0.95)	41.60	0.914	21.6°C	2025-04-26
1750MHz Head	40.10 (38.10~42.10)	1.37 (1.31~1.43)	41.90	1.34	21.6°C	2025-04-30
1900MHz Head	40.00 (38.00~42.00)	1.40 (1.33~1.47)	41.70	1.44	21.6°C	2025-05-06
2450MHz Head	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.27	1.82	21.6°C	2025-05-09
2550MHz Head	39.10 (37.15~41.05)	1.91 (1.82~2.01)	40.80	1.90	21.6°C	2025-05-13
2600MHz Head	39.00 (37.05~40.95)	1.96 (1.86~2.05)	39.87	1.94	21.6°C	2025-05-16
5200MHz Head	36.00 (34.20~37.80)	4.66 (4.43~4.89)	36.30	4.54	21.6°C	2025-05-19
5500MHz Head	35.60 (33.82~37.38)	4.96 (4.71~5.20)	35.80	4.88	21.6°C	2025-05-22
5800MHz Head	35.30 (33.54~37.06)	5.27 (5.01~5.53)	35.30	5.23	21.6°C	2025-05-25


ϵ_r = Relative permittivity, σ = Conductivity

8 System Check

8.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

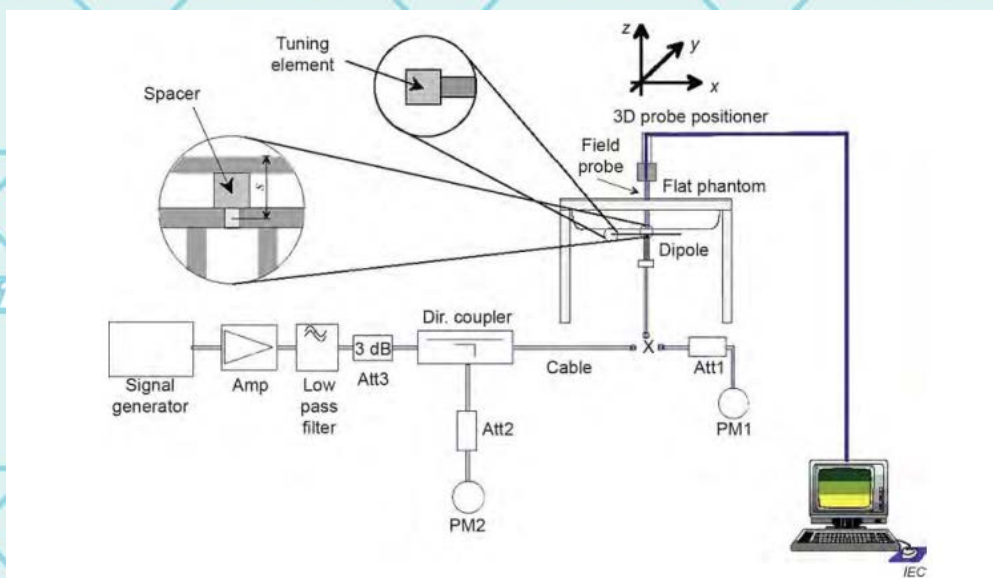

8.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)		
D750V3 Body	8.46 (7.62~9.30)	5.70 (5.13~6.27)	8.58	5.70	21.6°C	2025-04-23
D835V2 Body	9.68 (8.72~10.64)	6.44 (5.80~7.08)	9.94	6.55	21.6°C	2025-04-26
D1750V2 Body	36.40 (32.76~40.04)	19.60 (17.64~21.56)	36.20	19.50	21.6°C	2025-04-30
D1900V2 Body	39.70 (35.73~43.67)	21.00 (18.90~23.10)	40.40	21.10	21.6°C	2025-05-06
D2550V2 Body	54.10 (48.69~59.51)	24.70 (22.23~27.17)	55.80	25.60	21.6°C	2025-05-13
D5200V2 Body	76.00 (68.40~83.60)	22.00 (19.80~24.20)	71.70	20.70	21.6°C	2025-05-19
D5300V2 Body	80.60 (72.54~88.66)	23.30 (20.97~25.63)	80.80	23.10	21.6°C	2025-05-20
D5500V2 Body	85.60 (77.04~94.16)	24.50 (22.05~26.95)	79.00	22.50	21.6°C	2025-05-22
D5600V2 Body	83.30 (74.97~91.63)	24.10 (21.69~26.51)	78.70	22.40	21.6°C	2025-05-24
D5800V2 Body	79.00 (71.10~86.90)	22.70 (20.43~24.97)	77.60	22.00	21.6°C	2025-05-25

Note: 1. All SAR values are normalized to 1W forward power.

2. The actual forward power output to the dipole antenna is 20dbm(100mw), so the measured value differs ten times from the table


9 Test Position Configurations

9.1 Head Exposure Conditions

According to the IEEE-1528, the head phantom needs to test both "Cheek" and "Tilt" positions. Configure the DUT for voice operation, if necessary. For example, for a DUT with a flip, swivel, or slide cover piece, open the cover if this is consistent with voice operation. If the DUT can also be used with the cover closed, both configurations shall be tested.

Define two imaginary lines on the DUT, the vertical centreline and the horizontal line, relative to the DUT in vertical orientation as shown in Figure

The vertical centreline passes through two points on the front side of the DUT: the midpoint of the width w_t of the DUT at the level of the acoustic output (Point A in Figure), and the midpoint of the width w_b at the bottom of the DUT (Point B). The horizontal line is perpendicular to the vertical centerline, and passes through the centre of the acoustic output (Figure). The two lines intersect at Point A. Note that for many DUTs, Point A coincides with the centre of the acoustic output. However, the acoustic output could be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the DUT, especially for clamshell DUTs, DUTs with flip cover pieces, and other irregularly shaped DUTs.

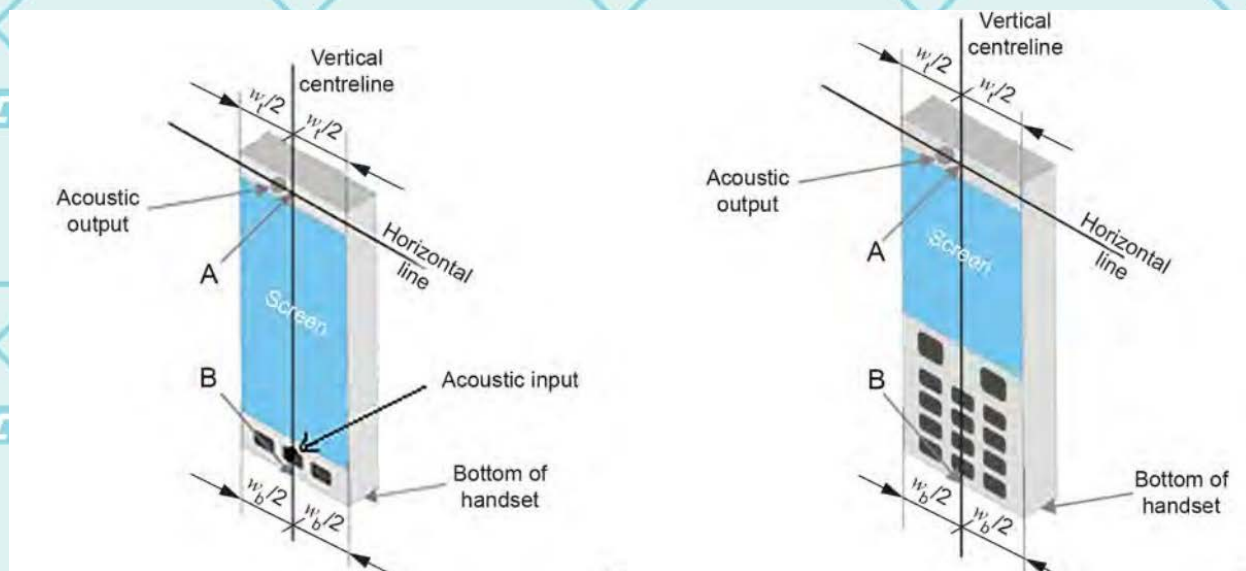

Vertical and horizontal reference lines and reference points A and B on two example device types: a full touch-screen smart phone (left) and a DUT with a keypad (right)

w_t Width of the DUT at the level of the acoustic output

w_b Width of the bottom of the DUT

A Midpoint of the width w_t of the DUT at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the DUT

Cheek position:

Position the DUT close to the surface of the phantom such that Point A is on the (virtual) extension of the line passing through points RE (right-ear ear reference point) and LE (left-ear ear reference point) on the phantom. The plane determined by the vertical centreline and the horizontal line of the DUT shall be parallel to the sagittal plane of the phantom.



Tilt position:

Place the DUT in the cheek position. While maintaining the orientation of the DUT, move the DUT away from the pinna along the line passing through RE and LE far enough to allow a rotation of the DUT away from the cheek by 15° . Rotate the DUT around the horizontal line by 15° .

While maintaining the orientation of the DUT, move the DUT towards the phantom on a line passing through RE and LE until any part of the DUT touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g. an extended antenna in contact with the back of the head phantom, the angle of the DUT shall be reduced. In this case, the tilt position is obtained if any part of the DUT is in contact with the pinna and a second point on the DUT is in contact with the phantom, e.g. the antenna in contact with the back of the head.




9.2 Body Exposure Condition


According to 447498 D04

Devices that support transmission while used with body-worn accessories must be tested for SAR compliance related to each body-worn condition of use. SAR evaluation is required for body-worn accessories supplied with the device they are attached to.

The general informing principle is that the selected test configurations must conservatively capture the various body-worn accessory use conditions expected by users. For instance, devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, must be tested for SAR compliance using a conservative minimum test separation distance not to exceed 5 mm for all use conditions required by the device.

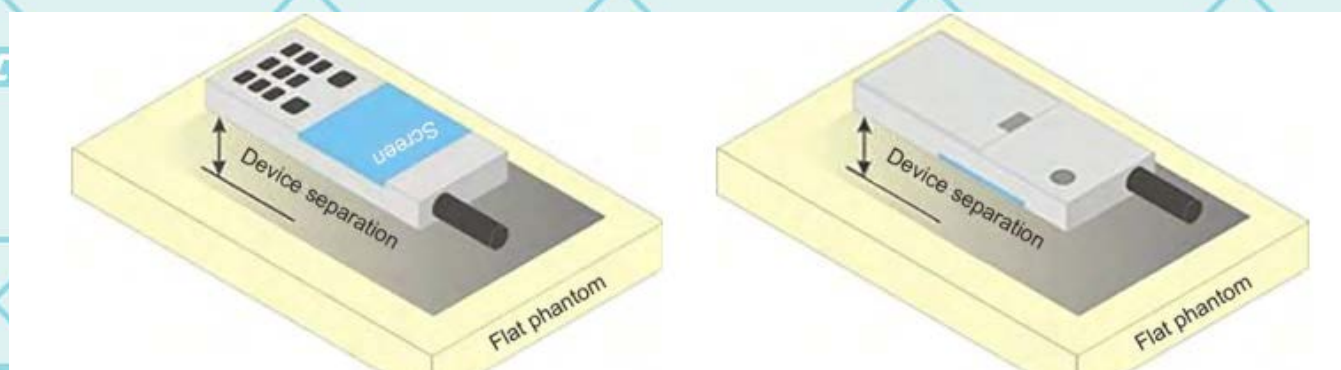

Test positions for body-worn devices

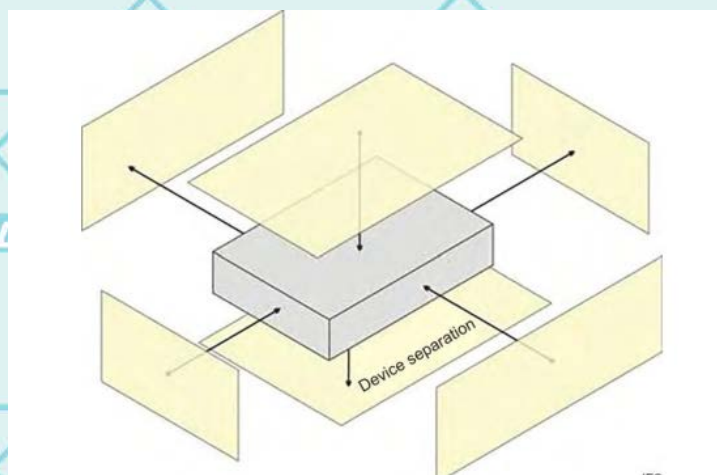

Possible test positions for a generic device

Testing of all six faces of the DUT (see Figure) might not be required; justification shall be provided when omitting testing of some faces.

10 SAR Test Configuration

10.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

10.2 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1”s for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the Headset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1”s. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1”s. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the Headset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in

the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC. HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, Δ hs for HS-DPCCH is set automatically to the correct value when Δ ACK, Δ NACK, Δ CQI = 8. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^c	β_c ^c	β_d ^c	β_d (SF) ^c	β_c / β_d ^c	β_{hs} (1) ^c	CM(dB)(2) ^c	MPR (dB) ^c
1 ^c	2/15 ^c	15/15 ^c	64 ^c	2/15 ^c	4/15 ^c	0.0 ^c	0 ^c
2 ^c	12/15(3) ^c	15/15(3) ^c	64 ^c	12/15(3) ^c	24/15 ^c	1.0 ^c	0 ^c
3 ^c	15/15 ^c	8/15 ^c	64 ^c	15/8 ^c	30/15 ^c	1.5 ^c	0.5 ^c
4 ^c	15/15 ^c	4/15 ^c	64 ^c	15/4 ^c	30/15 ^c	1.5 ^c	0.5 ^c

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^c

Note 2 : CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. ^c

Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^c

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.:

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

4) HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

10.3 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

10.4 Wi-Fi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for Wi-Fi mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. 802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2412	1#	√	△
		2437	6	√	△
		2462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output 1/4 dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

10.5 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

11 Detailed Test Results

11.1 Conducted Power measurements

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

11.1.1 Conducted Power of GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM(CS)		33.50	33.13	33.39	33.21	-9.03	25.77	26.03	25.85
GPRS (GMSK)	1Tx slot	33.50	33.13	33.38	33.19	-9.03	25.77	26.02	25.83
	2Tx slots	33.00	32.39	32.70	32.51	-9.03	25.03	25.34	25.15
	3Tx slots	31.00	30.54	30.94	30.77	-6.02	23.18	23.58	23.41
	4Tx slots	30.00	29.37	29.70	29.42	-4.26	22.01	22.34	22.06
EGPRS (8PSK)	1Tx slot	33.50	33.10	33.36	33.19	-3.01	25.74	26.00	25.83
	2Tx slots	33.00	32.40	32.68	32.48	-9.03	25.04	25.32	25.12
	3Tx slots	31.00	30.53	30.93	30.69	-6.02	23.17	23.57	23.33
	4Tx slots	30.00	29.37	29.66	29.42	-4.26	22.01	22.30	22.06
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM(CS)		29.50	29.01	28.92	28.89	-9.03	27.23	27.14	27.11
GPRS (GMSK)	1Tx slot	29.50	29.06	28.95	28.95	-9.03	27.28	27.17	27.17
	2Tx slots	28.50	28.38	28.23	28.19	-9.03	26.60	26.45	26.41
	3Tx slots	27.00	26.69	26.54	26.47	-6.02	24.91	24.76	24.69
	4Tx slots	25.50	25.49	25.37	25.23	-4.26	23.71	23.59	23.45
EGPRS (8PSK)	1Tx slot	29.50	29.05	28.96	28.94	-3.01	27.27	27.18	27.16
	2Tx slots	28.50	28.41	28.27	28.20	-9.03	26.63	26.49	26.42
	3Tx slots	27.00	26.72	26.54	26.47	-6.02	24.94	24.76	24.69
	4Tx slots	25.50	25.50	25.33	25.24	-4.26	23.72	23.55	23.46

Note:

Division Factors

To average the power, the division factor is as follows:

1Tx-slots = 1 transmit time slots out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

11.1.2 Conducted Power of WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band 2		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880.0	1907.6
RMC 12.2K		23.50	23.19	23.28	23.33
HSDPA	Subtest-1	23.50	23.06	23.08	23.14
	Subtest-2	23.50	23.04	23.10	23.25
	Subtest-3	23.50	23.05	23.08	23.13
	Subtest-4	23.50	23.03	23.12	23.13
HSUPA	Subtest-1	21.50	21.21	21.33	21.41
	Subtest-2	21.50	20.69	21.33	21.36
	Subtest-3	22.50	22.17	22.27	22.33
	Subtest-4	21.00	20.73	20.86	20.94
	Subtest-5	22.50	22.18	22.27	22.34
Mode		Maximum Tune-up(dBm)	WCDMA Band 4		
			Conducted Power (dBm)		
			CH1312	CH1413	CH1513
			1712.4	1732.6	1752.6
RMC 12.2K		23.00	22.99	22.88	22.76
HSDPA	Subtest-1	23.00	23.00	22.91	22.76
	Subtest-2	23.00	23.00	22.88	22.78
	Subtest-3	23.50	23.04	22.83	22.80
	Subtest-4	23.50	23.02	22.88	22.79
HSUPA	Subtest-1	21.50	21.07	20.96	20.84
	Subtest-2	21.50	21.04	20.93	20.82
	Subtest-3	22.00	20.55	21.95	21.81
	Subtest-4	22.50	22.07	20.40	20.30
	Subtest-5	22.50	22.07	21.96	21.82
Mode		Maximum Tune-up(dBm)	WCDMA Band 5		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
			826.4	836.6	846.6
RMC 12.2K		23.00	22.51	22.46	22.55
HSDPA	Subtest-1	22.50	21.85	21.99	22.01
	Subtest-2	22.50	21.86	22.00	22.05
	Subtest-3	22.50	21.97	21.92	22.01
	Subtest-4	22.50	21.88	21.87	22.08
HSUPA	Subtest-1	22.00	21.51	21.57	21.65
	Subtest-2	22.00	21.53	21.55	21.66
	Subtest-3	23.00	22.50	22.53	22.59
	Subtest-4	21.50	21.01	21.08	21.14
	Subtest-5	23.00	22.53	22.51	22.58

Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

11.1.3 Conducted Power of LTE Band 2

LTE-FDD Band 2					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18607	18900	19193
1.4MHz	QPSK	1	0	24.50	24.15	23.68	24.00
			2	24.50	24.29	23.81	24.12
			5	24.50	24.19	23.68	24.00
		3	0	24.50	24.16	23.84	24.03
			2	24.50	24.23	23.84	24.04
			3	24.50	24.19	23.82	24.02
	16QAM	6	0	23.50	23.26	22.87	23.18
			0	24.50	24.15	23.69	24.03
			2	24.50	24.28	23.80	24.11
		3	5	24.50	24.18	23.67	24.00
			0	24.50	24.15	23.85	24.04
			2	24.50	24.19	23.86	24.08
3MHz	QPSK	1	3	24.50	24.18	23.80	24.00
			0	23.50	23.25	22.89	23.18
			0	24.50	24.15	23.69	24.03
		8	2	24.50	24.28	23.80	24.11
			5	24.50	24.18	23.67	24.00
			0	24.50	24.15	23.85	24.04
	16QAM	3	2	24.50	24.19	23.86	24.08
			3	24.50	24.18	23.80	24.00
			0	23.50	23.25	22.89	23.18
		15	0	23.50	23.14	22.80	23.06
			0	24.00	23.91	23.54	23.85
			7	24.00	23.99	23.63	23.95
5MHz	QPSK	1	14	24.00	23.88	23.60	23.91
			0	23.50	23.11	22.77	23.02
			4	23.50	23.19	22.85	23.14
		8	7	23.50	23.20	22.81	23.04
			0	23.50	23.14	22.80	23.06
			0	24.00	23.91	23.54	23.85
	16QAM	1	7	24.00	23.99	23.63	23.95
			14	24.00	23.90	23.55	23.92
			0	23.50	23.13	22.75	23.05
		8	4	23.50	23.19	22.84	23.11
			7	23.50	23.18	22.82	23.02
			0	23.50	23.13	22.82	23.07

LTE-FDD Band 2				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18650 1855.0MHz	18900 1880.0MHz	19150 1905.0MHz
10MHz	QPSK	1	0	24.50	24.29	23.95	24.31
			25	24.50	24.33	23.97	24.32
			49	24.50	24.31	23.96	24.23
		25	0	23.50	23.20	22.87	23.13
			13	23.50	23.30	22.92	23.15
			25	23.50	23.28	22.90	23.06
	16QAM	50	0	23.50	23.25	22.90	23.11
			0	24.50	24.27	23.90	24.26
			25	24.50	24.32	23.93	24.28
		1	49	24.50	24.26	23.92	24.17
			0	23.50	23.22	22.83	23.17
			13	23.50	23.29	22.93	23.17
15MHz	QPSK	25	25	23.50	23.29	22.90	23.03
			0	23.50	23.24	22.92	23.15
			0	23.50	23.24	22.92	23.15
	16QAM	36	0	24.50	24.27	23.95	24.26
			38	24.50	24.33	23.97	24.36
			74	24.50	24.18	23.97	24.24
	16QAM	75	0	23.50	23.30	22.90	23.23
			18	23.50	23.34	22.93	23.26
			39	23.50	23.29	22.94	23.17
20MHz	QPSK	75	0	23.50	23.34	22.93	23.24
			0	24.50	24.19	23.88	24.23
			38	24.50	24.26	23.89	24.29
	16QAM	74	0	24.50	24.09	23.90	24.15
			0	23.50	23.28	22.92	23.20
			18	23.50	23.33	22.96	23.24
20MHz	QPSK	39	23.50	23.29	22.95	23.18	23.18
			0	23.50	23.35	22.93	23.24
			0	23.50	23.35	22.93	23.24
	16QAM	18700 1860.0MHz	0	24.50	24.23	23.98	24.09
			50	24.50	24.43	24.09	24.37
			99	24.50	23.99	24.07	24.12
20MHz	QPSK	50	0	23.50	23.21	22.88	23.12
			25	23.50	23.31	22.94	23.20
			50	23.50	23.21	22.96	23.06
	16QAM	100	0	23.50	23.23	22.88	23.09
			0	24.50	24.17	23.95	23.99
			50	24.50	24.33	24.03	24.28
20MHz	QPSK	99	24.50	23.93	24.02	24.02	24.02
			0	23.50	23.22	22.86	23.12
			25	23.50	23.35	22.96	23.22
	16QAM	50	50	23.50	23.22	22.99	23.09
			0	23.50	23.23	22.89	23.10
			0	23.50	23.23	22.89	23.10

11.1.4 Conducted Power of LTE Band 4

LTE-FDD Band 4				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	24.50	23.37	24.11	23.94
			2	24.50	23.49	24.23	24.01
			5	24.50	23.44	24.13	23.90
		3	0	24.50	23.45	24.20	23.94
			2	24.50	23.48	24.23	23.95
			3	24.50	23.42	24.16	23.96
	16QAM	6	0	23.50	22.50	23.25	23.01
		1	0	24.50	23.41	24.13	23.93
			2	24.50	23.47	24.25	24.03
			3	5	24.50	23.40	24.15
		0		24.50	23.44	24.22	23.92
		2		24.50	23.49	24.22	23.94
6	3	24.50	23.42	24.17	23.94		
	0	23.50	22.49	23.25	23.02		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	19965	20175
1711.5MHz						1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	24.00	23.19	23.96	23.79
			7	24.50	23.29	24.07	23.88
			14	24.00	23.23	23.94	23.80
		8	0	23.50	22.41	23.18	22.93
			4	23.50	22.46	23.23	22.99
			7	23.50	22.50	23.15	22.92
	16QAM	15	0	23.50	22.48	23.18	22.94
		1	0	24.00	23.22	23.96	23.75
			7	24.50	23.29	24.05	23.89
			14	24.00	23.23	23.93	23.79
		8	0	23.50	22.41	23.15	22.92
			4	23.50	22.49	23.26	22.99
15	7		23.50	22.47	23.18	22.92	
	0	23.50	22.45	23.19	22.96		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	19975	20175
1712.5MHz						1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	24.50	23.46	24.19	23.99
			13	24.50	23.60	24.33	24.05
			24	24.50	23.61	24.13	23.90
		12	0	23.50	22.51	23.23	23.02
			6	23.50	22.56	23.33	23.07
			13	23.50	22.61	23.17	23.01
	16QAM	25	0	23.50	22.58	23.26	23.01
		1	0	24.50	23.50	24.20	23.96
			13	24.50	23.59	24.34	24.03
			24	24.50	23.61	24.13	23.88
		12	0	23.50	22.51	23.22	23.01
			6	23.50	22.59	23.34	23.05
13	23.50		22.58	23.23	23.02		
25	0	23.50	22.58	23.25	23.03		

LTE-FDD Band 4				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20000 1715.0MHz	20175 1732.5MHz	20350 1750.0MHz
10MHz	QPSK	1	0	24.50	23.56	24.17	24.18
			25	24.50	23.76	24.33	24.24
			49	24.50	23.88	24.13	24.12
		25	0	23.50	22.58	23.21	23.04
			13	23.50	22.71	23.32	23.05
			25	23.50	22.77	23.17	22.98
	16QAM	50	0	23.50	22.69	23.23	23.01
			0	24.50	23.55	24.21	24.16
			25	24.50	23.71	24.37	24.24
		1	49	24.50	23.84	24.12	24.14
			0	23.50	22.58	23.21	23.05
			13	23.50	22.72	23.32	23.04
15MHz	QPSK	25	25	23.50	22.80	23.18	22.96
			0	23.50	22.70	23.23	22.99
			0	23.50	22.70	23.23	22.99
	16QAM	50	0	23.50	22.70	23.23	22.99
			0	23.50	22.70	23.23	22.99
			0	23.50	22.70	23.23	22.99
20MHz	QPSK	1	0	24.50	23.53	24.09	24.20
			38	24.50	23.89	24.34	24.25
			74	24.50	23.99	23.96	24.14
		36	0	23.50	22.64	23.21	23.13
			18	23.50	22.82	23.32	23.16
			39	23.50	22.90	23.16	23.08
	16QAM	75	0	23.50	22.80	23.23	23.11
			0	24.50	23.47	24.05	24.14
			38	24.50	23.80	24.36	24.21
		36	74	24.50	23.94	23.99	24.04
			0	23.50	22.60	23.23	23.11
			18	23.50	22.86	23.29	23.10
20MHz	QPSK	36	39	23.50	22.91	23.16	23.04
			0	23.50	22.81	23.24	23.13
			0	23.50	22.81	23.24	23.13
	16QAM	75	0	23.50	22.81	23.24	23.13
			0	23.50	22.81	23.24	23.13
			0	23.50	22.81	23.24	23.13
20MHz	QPSK	1	0	24.50	23.52	24.02	24.19
			50	24.50	23.98	24.47	24.30
			99	24.50	24.14	24.05	24.02
		50	0	23.50	22.67	23.20	23.11
			25	23.50	22.95	23.29	23.15
			50	23.50	23.04	23.14	23.00
	16QAM	100	0	23.50	22.86	23.16	23.05
			0	24.50	23.45	24.01	24.12
			50	24.50	23.93	24.48	24.22
		50	99	24.50	24.09	24.03	23.93
			0	23.50	22.68	23.22	23.12
			25	23.50	22.96	23.29	23.15
20MHz	QPSK	50	50	23.50	23.05	23.12	23.00
			0	23.50	22.82	23.15	23.05
			0	23.50	22.82	23.15	23.05
	16QAM	100	0	23.50	22.82	23.15	23.05
			0	23.50	22.82	23.15	23.05
			0	23.50	22.82	23.15	23.05

11.1.5 Conducted Power of LTE Band 5

LTE-FDD Band 5				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643	
					824.7MHz	836.5MHz	848.3MHz	
1.4MHz	QPSK	1	0	25.00	24.59	24.33	24.30	
			2	25.00	24.66	24.43	24.31	
			5	25.00	24.62	24.33	24.20	
		3	0	25.00	24.58	24.52	24.27	
			2	25.00	24.61	24.47	24.29	
			3	25.00	24.57	24.46	24.30	
	16QAM	6	0	24.00	23.64	23.50	23.30	
			1	0	24.00	23.62	23.52	23.08
				2	24.00	23.70	23.58	23.10
		3		5	24.00	23.64	23.53	23.06
			3	0	24.00	23.75	23.67	23.45
				2	24.00	23.78	23.73	23.45
6	3	24.00		23.70	23.64	23.46		
	0	23.00	22.85	22.66	22.51			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	20415	20525	20635
825.5MHz						836.5MHz	847.5MHz	
3MHz	QPSK	1	0	24.50	24.32	24.31	24.15	
			7	24.50	24.41	24.31	24.23	
			14	24.50	24.30	24.26	24.19	
		8	0	23.50	23.50	23.43	23.26	
			4	24.00	23.56	23.52	23.35	
			7	24.00	23.57	23.48	23.28	
		15	0	24.00	23.52	23.47	23.31	
			0	24.00	23.77	23.47	23.07	
			16QAM	1	7	24.00	23.83	23.48
	14	24.00			23.73	23.45	22.98	
	0	23.00			22.61	22.49	22.33	
	8	4		23.00	22.61	22.51	22.32	
		7		23.00	22.59	22.43	22.32	
		15		0	23.00	22.58	22.44	22.39

LTE-FDD Band 5				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625	
					826.5MHz	836.5MHz	846.5MHz	
5MHz	QPSK	1	0	25.00	24.60	24.51	24.37	
			13	25.00	24.64	24.61	24.37	
			24	25.00	24.62	24.56	24.27	
		12	0	24.00	23.54	23.49	23.53	
			6	24.00	23.67	23.58	23.47	
			13	24.00	23.62	23.52	23.37	
	16QAM	25	0	24.00	23.60	23.55	23.44	
			1	0	24.50	24.11	23.82	23.69
				13	24.50	24.21	23.86	23.73
		12		24	24.50	24.14	23.82	23.55
			0	23.00	22.57	22.42	22.48	
			6	23.00	22.67	22.53	22.50	
10MHz	QPSK	1	13	23.00	22.66	22.49	22.38	
			25	23.00	22.58	22.55	22.44	
			0	23.00	22.58	22.55	22.44	
		25	0	23.00	22.58	22.55	22.44	
			0	24.50	24.08	23.78	23.39	
			25	24.50	24.07	23.76	23.41	
	16QAM	1	49	24.50	24.02	23.71	23.28	
			0	23.00	22.61	22.52	22.46	
			13	23.00	22.69	22.59	22.54	
		25	25	23.00	22.65	22.52	22.37	
			0	23.00	22.64	22.54	22.43	
			0	23.00	22.64	22.54	22.43	

11.1.6 Conducted Power of LTE Band 7

LTE-FDD Band 7				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425
					2502.5MHz	2535.0MHz	2567.5MHz
5MHz	QPSK	1	0	23.50	23.08	23.17	23.28
			13	23.50	23.18	23.22	23.39
			24	23.50	23.17	23.14	23.38
		12	0	22.50	22.06	22.23	22.31
			6	22.50	22.14	22.29	22.40
			13	22.50	22.19	22.25	22.38
	16QAM	25	0	22.50	22.14	22.28	22.36
		1	0	23.50	23.09	23.15	23.30
			13	23.50	23.17	23.19	23.39
			24	23.50	23.15	23.15	23.35
		12	0	22.50	22.07	22.24	22.30
			6	22.50	22.13	22.28	22.38
13	22.50		22.17	22.26	22.40		
		25	0	22.50	22.13	22.27	22.39
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	20800	21100	21400
					2505.0MHz	2535.0MHz	2565.0MHz
10MHz	QPSK	1	0	23.50	23.13	23.30	23.37
			25	23.50	23.21	23.31	23.49
			49	23.50	23.20	23.25	23.50
		25	0	22.50	22.17	22.29	22.27
			13	22.50	22.28	22.32	22.36
			25	22.50	22.22	22.32	22.41
	16QAM	50	0	22.50	22.22	22.30	22.37
		1	0	23.50	23.14	23.28	23.39
			25	23.50	23.24	23.31	23.48
			49	24.00	23.25	23.31	23.55
		25	0	22.50	22.13	22.22	22.30
			13	22.50	22.25	22.34	22.36
25	22.50		22.25	22.37	22.35		
		50	0	22.50	22.26	22.33	22.34

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20825	21100	21375
					2057.5MHz	2535.0MHz	2562.5MHz
15MHz	QPSK	1	0	23.50	23.09	23.23	23.28
			38	23.50	23.23	23.31	23.41
			74	23.50	23.15	23.20	23.48
		36	0	22.50	22.20	22.27	22.27
			18	22.50	22.28	22.38	22.36
			39	22.50	22.32	22.33	22.38
	16QAM	75	0	22.50	22.27	22.39	22.39
			0	23.50	23.10	23.24	23.29
			38	23.50	23.22	23.31	23.41
		36	74	23.50	23.16	23.18	23.44
			0	22.50	22.19	22.33	22.29
			18	22.50	22.31	22.37	22.33
20MHz	QPSK	39	22.50	22.34	22.34	22.34	22.37
			22.50	22.32	22.35	22.35	22.40
			75	0	22.50	22.32	22.35
	16QAM	1	0	23.50	23.04	23.24	23.18
			50	23.50	23.33	23.45	23.38
			99	23.50	23.18	23.25	23.32
	16QAM	50	0	22.50	22.20	22.23	22.29
			25	22.50	22.27	22.33	22.35
			50	22.50	22.25	22.27	22.30
	16QAM	100	0	22.50	22.20	22.25	22.29
			0	23.50	23.04	23.25	23.16
			50	23.50	23.33	23.46	23.38
		50	99	23.50	23.17	23.25	23.34
			0	22.50	22.17	22.22	22.27
			25	22.50	22.31	22.34	22.34
	16QAM	50	22.50	22.26	22.26	22.26	22.29
			50	22.50	22.26	22.26	22.29
			100	0	22.50	22.17	22.25

11.1.7 Conducted Power of LTE Band 12

LTE-FDD Band 12				Maximum Tune- up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23017 699.7MHz	23095 707.5MHz	23173 715.5MHz
1.4MHz	QPSK	1	0	25.00	24.59	24.45	24.67
			2	25.00	24.67	24.57	24.74
			5	25.00	24.60	24.48	24.69
		3	0	25.00	24.60	24.59	24.69
			2	25.00	24.58	24.64	24.72
			3	25.00	24.63	24.63	24.69
	16QAM	6	0	24.00	23.64	23.66	23.77
		1	0	24.00	23.64	23.65	23.40
			2	24.00	23.65	23.71	23.46
			5	24.00	23.67	23.65	23.43
		3	0	24.00	23.74	23.78	23.81
			2	24.00	23.77	23.85	23.83
3MHz	QPSK	1	3	24.00	23.71	23.80	23.84
			6	23.00	22.83	22.82	22.95
		8	0	25.00	24.36	24.35	24.57
			7	25.00	24.44	24.43	24.63
			14	25.00	24.38	24.41	24.59
		15	0	24.00	23.57	23.59	23.69
			4	24.00	23.64	23.69	23.74
			7	24.00	23.61	23.66	23.67
	16QAM	1	0	24.00	23.62	23.59	23.69
			0	24.00	23.74	23.55	23.30
			7	24.00	23.83	23.64	23.42
		8	14	24.00	23.77	23.60	23.29
			0	23.00	22.61	22.59	22.63
			4	23.00	22.66	22.68	22.73
		15	7	23.00	22.66	22.63	22.68
			0	23.00	22.62	22.58	22.75

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	25.00	24.65	24.62	24.67
			13	25.00	24.68	24.72	24.76
			24	25.00	24.66	24.77	24.68
		12	0	24.00	23.66	23.66	23.79
			6	24.00	23.65	23.74	23.84
			13	24.00	23.65	23.65	23.74
	16QAM	25	0	24.00	23.63	23.65	23.77
			0	24.50	24.11	23.98	23.98
			13	24.50	24.23	23.99	24.05
		1	24	24.50	24.14	23.98	23.97
			0	23.00	22.63	22.60	22.75
			6	23.00	22.64	22.68	22.87
		12	13	23.00	22.66	22.68	22.80
			0	23.00	22.64	22.72	22.76
			0	23.00	22.50	23095	23130
		25	0	23.00	704.0MHz	707.5MHz	711.0MHz
			25	23.00			
			49	25.00			
10MHz	QPSK	1	0	25.00	24.67	24.72	24.83
			25	25.00	24.69	24.74	24.90
			49	25.00	24.73	24.81	24.89
		25	0	24.00	23.66	23.68	23.73
			13	24.00	23.81	23.80	23.85
			25	24.00	23.76	23.71	23.72
	16QAM	50	0	24.00	23.67	23.70	23.70
			0	24.50	24.06	23.90	23.60
		1	25	24.50	24.12	23.89	23.63
			49	24.50	24.07	23.93	23.66
		25	0	23.00	22.72	22.67	22.71
			13	23.00	22.82	22.82	22.86
			25	23.00	22.78	22.71	22.72
		50	0	23.00	22.70	22.74	22.70

11.1.8 Conducted Power of LTE Band 17

LTE-FDD Band 17				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825	
					706.5MHz	710.0MHz	713.5MHz	
5MHz	QPSK	1	0	25.00	24.55	24.55	24.57	
			13	25.00	24.60	24.68	24.65	
			24	25.00	24.60	24.64	24.55	
		12	0	24.00	23.62	23.59	23.67	
			6	24.00	23.63	23.63	23.72	
			13	24.00	23.57	23.60	23.64	
	16QAM	25	0	24.00	23.57	23.60	23.63	
			1	0	24.50	24.04	23.81	23.85
				13	24.50	24.11	23.93	23.94
		24		24.50	24.03	23.83	23.90	
		12	0	23.00	22.58	22.51	22.67	
			6	23.00	22.65	22.62	22.74	
13	23.00		22.56	22.55	22.63			
25	0	23.00	22.60	22.62	22.59			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	23780	23790	23800	
					709.0MHz	710.0MHz	711.0MHz	
10MHz	QPSK	1	0	25.00	24.56	24.65	24.66	
			25	25.00	24.67	24.72	24.83	
			49	25.00	24.70	24.65	24.80	
		25	0	24.00	23.57	23.56	23.57	
			13	24.00	23.68	23.67	23.70	
			25	24.00	23.64	23.61	23.59	
	16QAM	50	0	24.00	23.63	23.61	23.67	
			0	24.00	23.99	23.85	23.47	
			25	24.50	24.01	23.82	23.54	
		1	49	24.50	24.06	23.78	23.57	
			25	0	23.00	22.56	22.55	22.58
				13	23.00	22.72	22.64	22.69
25	23.00	22.65		22.59	22.63			
50	0	23.00	22.61	22.65	22.61			

11.1.9 Conducted Power of LTE Band 38

LTE-TDD Band 38				Maximum Tune- up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		37775	38000	38225		
					2572.5MHz	2595.0MHz	2617.5MHz		
5MHz	QPSK	1	0	24.00	23.89	23.95	23.84		
			13	24.50	24.04	24.06	23.94		
			24	24.00	23.92	23.96	23.78		
		12	0	23.00	22.93	22.93	22.83		
			6	23.00	22.96	22.97	22.91		
			13	23.00	22.94	22.94	22.87		
	16QAM	25	0	23.00	22.92	22.97	22.87		
			1	0	24.00	23.90	23.97	23.83	
				13	24.50	24.04	24.07	23.92	
		12		24	24.00	23.92	23.96	23.75	
			25	0	23.00	22.89	22.94	22.87	
				6	23.00	22.95	22.97	22.90	
13	23.00	22.93		22.95	22.89				
0	23.00	22.90	22.98	22.87					
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune- up(dBm)	37800	38000	38200		
					2575.0MHz	2595.0MHz	2615.0MHz		
10MHz	QPSK	1	0	24.50	23.95	24.04	24.04		
			25	24.50	24.01	24.04	24.05		
			49	24.50	24.02	24.04	23.94		
		25	0	23.00	22.93	22.96	22.91		
			13	23.00	22.98	23.00	22.94		
			25	23.00	22.96	22.97	22.88		
		50	0	23.00	22.93	23.00	22.96		
			16QAM	1	0	24.50	23.94	24.03	24.02
					25	24.50	23.99	24.06	24.04
	49	24.50			24.01	24.05	23.95		
	16QAM	25	0	23.50	22.93	23.01	22.93		
			13	23.00	22.97	22.99	22.94		
			25	23.00	22.95	22.96	22.89		
		50	0	23.00	22.96	22.97	22.93		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37825	38000	38175
					2577.5MHz	2595.0MHz	2612.5MHz
15MHz	QPSK	1	0	24.50	23.91	24.00	24.03
			38	24.50	24.00	24.06	24.11
			74	24.00	23.91	23.95	23.92
		36	0	23.00	22.93	22.99	22.92
			18	23.50	23.02	23.01	22.96
			39	23.00	22.97	22.96	22.89
	16QAM	75	0	23.00	22.99	22.99	22.94
			0	24.50	23.88	23.98	24.01
			38	24.50	24.03	24.07	24.07
		36	74	24.00	23.90	23.98	23.92
			0	23.00	22.94	22.95	22.92
			18	23.50	22.99	23.01	22.98
20MHz	QPSK	39	23.00	22.97	22.94	22.94	22.90
			0	23.00	22.99	22.99	22.93
		75	0	23.00	22.99	22.99	22.93
			0	24.00	23.83	23.95	23.89
			50	24.50	24.11	24.13	24.09
			99	24.00	23.90	23.95	23.83
	16QAM	50	0	23.00	22.95	22.97	22.90
			25	23.50	23.02	23.00	23.00
			50	23.00	22.92	22.95	22.86
		100	0	23.00	22.91	22.94	22.89
			0	24.00	23.85	23.94	23.91
			50	24.50	24.09	24.12	24.09
25MHz	QPSK	99	24.00	23.90	23.95	23.95	23.84
			0	23.00	22.92	22.94	22.92
			25	23.50	23.00	23.05	22.98
		50	50	23.00	22.94	22.93	22.88
			0	23.00	22.89	22.92	22.88
			0	23.00	22.89	22.92	22.88

11.1.10 Conducted Power of LTE Band 41

LTE-TDD Band 41					Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40065	40265	40640	41015	41215
					2537.5MHz	2557.5MHz	2595.0MHz	2632.5 MHz	2652.5MHz
5MHz	QPSK	1	0	24.00	23.93	23.41	23.88	23.21	23.54
			13	24.50	24.01	23.52	24.02	23.32	23.61
			24	24.00	23.89	23.40	23.91	23.17	23.43
		12	0	23.00	22.87	22.41	22.94	22.22	22.50
			6	23.00	22.94	22.47	22.99	22.26	22.53
			13	23.00	22.91	22.45	22.99	22.23	22.46
	16QAM	25	0	23.00	22.93	22.45	22.97	22.23	22.49
			0	24.00	23.92	23.41	23.90	23.22	23.53
			13	24.50	24.02	23.51	24.00	23.30	23.60
		1	0	24.00	23.88	23.38	23.88	23.17	23.45
			24	24.00	23.88	23.38	23.88	23.17	23.45
			0	23.00	22.87	22.42	22.96	22.23	22.49
		12	6	23.50	22.94	22.48	23.01	22.26	22.50
			13	23.00	22.94	22.46	22.97	22.20	22.43
			0	23.00	22.92	22.45	22.98	22.23	22.48
		25	0	23.00	22.92	22.45	22.98	22.23	22.48
10MHz	QPSK	1	0	24.50	23.93	22.42	22.96	22.35	22.74
			25	24.50	23.97	22.48	23.01	22.36	22.71
			49	24.50	23.92	22.49	23.02	22.30	22.57
		25	0	23.00	22.86	22.46	22.99	22.35	22.71
			13	23.00	22.93	23.42	23.96	23.40	23.84
			25	23.00	22.94	23.51	24.06	23.44	23.82
		50	0	23.00	22.93	23.41	24.04	23.30	23.55
			0	24.50	23.95	22.41	22.97	22.36	22.75
			25	24.50	23.97	22.46	22.99	22.36	22.72
		1	49	24.50	23.91	22.46	23.01	22.31	22.60
			0	23.00	22.86	22.47	23.02	22.36	22.70
			13	23.50	22.93	23.42	23.88	23.37	23.86
	16QAM	25	25	23.00	22.96	23.46	23.84	23.43	24.02
			0	23.50	22.91	23.28	23.53	23.13	23.72
			0	23.50	22.91	23.28	23.53	23.13	23.72
		50	0	23.50	22.91	23.28	23.53	23.13	23.72
			0	23.50	22.91	23.28	23.53	23.13	23.72
			0	23.50	22.91	23.28	23.53	23.13	23.72
		1	0	23.50	22.91	23.28	23.53	23.13	23.72
			0	23.50	22.91	23.28	23.53	23.13	23.72
			0	23.50	22.91	23.28	23.53	23.13	23.72

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40115	40315	40640	40965	41165
					2542.5MHz	2562.5MHz	2595.0MHz	2627.5MHz	2647.5MHz
15MHz	QPSK	1	0	24.00	23.90	23.43	23.95	23.42	23.88
			38	24.50	23.98	23.53	24.08	23.46	23.84
			74	24.50	23.76	23.39	24.02	23.28	23.53
		36	0	23.00	22.87	22.42	22.96	22.35	22.74
			18	23.50	22.95	22.48	23.01	22.36	22.71
			39	23.50	22.95	22.49	23.02	22.30	22.57
		75	0	23.00	22.92	22.46	22.99	22.35	22.71
			38	24.00	23.87	23.42	23.96	23.40	23.84
			74	24.50	23.95	23.51	24.06	23.44	23.82
	16QAM	1	0	23.00	22.84	22.41	22.97	22.36	22.75
			18	23.00	22.93	22.46	22.99	22.36	22.72
			39	23.50	22.91	22.46	23.01	22.31	22.60
		36	0	23.00	22.84	22.41	22.97	22.36	22.75
			18	23.00	22.93	22.46	22.99	22.36	22.72
			39	23.50	22.91	22.46	23.01	22.31	22.60
20MHz	QPSK	1	0	24.00	23.86	23.40	23.93	23.33	23.73
			50	24.50	24.02	23.59	24.16	23.49	23.82
			99	24.50	23.72	23.37	24.02	23.22	23.42
		50	0	23.00	22.79	22.39	22.99	22.34	22.69
			25	23.50	22.91	22.48	23.05	22.40	22.75
			50	23.50	22.91	22.46	23.01	22.28	22.55
		100	0	23.00	22.84	22.41	22.98	22.30	22.61
			0	24.00	23.84	23.39	23.93	23.33	23.72
			50	24.50	24.04	23.60	24.15	23.50	23.84
		16QAM	0	23.00	22.81	22.40	22.99	22.36	22.73
			25	23.50	22.93	22.49	23.05	22.38	22.71
			50	23.50	22.92	22.47	23.01	22.28	22.54
	16QAM	1	0	23.00	22.85	22.41	22.96	22.29	22.62
			0	24.00	23.84	23.39	23.93	23.33	23.72
			50	24.50	24.04	23.60	24.15	23.50	23.84
		50	0	23.00	22.81	22.40	22.99	22.36	22.73
			25	23.50	22.93	22.49	23.05	22.38	22.71
			50	23.50	22.92	22.47	23.01	22.28	22.54
		100	0	23.00	22.85	22.41	22.96	22.29	22.62
			0	24.00	23.84	23.39	23.93	23.33	23.72
			50	24.50	24.04	23.60	24.15	23.50	23.84
		16QAM	0	23.00	22.81	22.40	22.99	22.36	22.73
			25	23.50	22.93	22.49	23.05	22.38	22.71
			50	23.50	22.92	22.47	23.01	22.28	22.54

11.1.12 Conducted Power of LTE Band 66

LTE-FDD Band 66					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131979 1710.7MHz	132322 1755.0MHz	132665 1779.3MHz
1.4MHz	QPSK	1	0	23.50	23.49	23.44	23.02
			2	24.00	23.58	23.51	23.08
			5	24.00	23.51	23.41	22.99
		3	0	24.00	23.53	23.62	23.13
			2	24.00	23.52	23.64	23.14
			3	24.00	23.57	23.57	23.09
	16QAM	6	0	23.00	22.63	22.65	22.23
			0	23.00	22.56	22.66	21.89
			2	23.00	22.62	22.69	21.97
		3	5	23.00	22.58	22.62	21.92
			0	23.00	22.72	22.87	22.28
			2	23.00	22.73	22.88	22.28
3MHz	QPSK	1	3	23.00	22.75	22.84	22.30
			0	22.00	21.84	21.82	21.46
			0	23.50	23.21	23.37	22.86
		8	7	23.50	23.35	23.40	23.03
			14	23.50	23.27	23.28	22.92
			0	23.00	22.50	22.56	22.10
		15	4	23.00	22.57	22.59	22.15
			7	23.00	22.54	22.54	22.12
			0	23.00	22.46	22.53	22.10
	16QAM	1	0	23.00	22.67	22.54	21.81
			7	23.00	22.87	22.60	21.94
			14	23.00	22.75	22.46	21.76
		8	0	22.00	21.52	21.57	21.10
			4	22.00	21.60	21.62	21.13
			7	22.00	21.57	21.55	21.14
		15	0	22.00	21.56	21.48	21.18
			0	24.00	23.52	23.67	23.15
5MHz	QPSK	1	13	24.00	23.73	23.72	23.20
			24	24.00	23.72	23.64	23.10
			0	23.00	22.60	22.64	22.24
		12	6	23.00	22.69	22.66	22.26
			13	23.00	22.78	22.65	22.23
			0	23.00	22.68	22.67	22.23
		25	0	23.50	23.05	22.95	22.58
			13	23.50	23.26	23.02	22.66
			24	23.50	23.34	22.89	22.57
	16QAM	1	0	22.00	21.60	21.59	21.22
			6	22.00	21.72	21.60	21.25
			13	22.00	21.79	21.57	21.24
		12	0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19
		25	0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19
		1	0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19
			0	22.00	21.66	21.65	21.19

LTE-FDD Band 66				Maximum Tune- up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		132022	132322	132622	
					1715.0MHz	1755.0MHz	1775.0MHz	
10MHz	QPSK	1	0	24.00	23.52	23.70	23.28	
			25	24.00	23.81	23.69	23.34	
			49	24.00	23.83	23.53	23.17	
		25	0	23.00	22.62	22.68	22.25	
			13	23.00	22.83	22.75	22.29	
			25	23.00	22.89	22.63	22.17	
	16QAM	50	0	23.00	22.75	22.71	22.26	
			0	23.00	22.96	22.88	22.15	
			25	23.50	23.26	22.84	22.19	
		1	49	23.50	23.25	22.73	22.07	
			25	0	22.00	21.63	21.64	21.21
				13	22.00	21.91	21.71	21.29
15MHz	25	25		22.00	21.91	21.57	21.18	
		0	22.00	21.75	21.68	21.21		
		0	22.00	21.75	21.68	21.21		
	16QAM	50	0	22.00	21.75	21.68	21.21	
			0	22.00	21.75	21.68	21.21	
			0	22.00	21.75	21.68	21.21	
15MHz	QPSK	1	0	24.00	23.49	23.72	23.37	
			38	24.00	23.85	23.67	23.37	
			74	24.00	23.84	23.48	23.19	
		36	0	23.00	22.67	22.69	22.30	
			18	23.00	22.91	22.68	22.28	
			39	23.00	22.91	22.57	22.19	
	16QAM	75	0	23.00	22.82	22.68	22.29	
			0	23.00	22.96	22.91	22.42	
			38	23.50	23.33	22.86	22.45	
		36	74	23.50	23.31	22.66	22.27	
			0	22.00	21.69	21.76	21.29	
			18	22.00	21.94	21.76	21.28	
20MHz	QPSK	1	39	22.00	21.96	21.64	21.24	
			0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
		50	0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
	16QAM	100	0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
		50	0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
			0	22.00	21.80	21.66	21.31	
20MHz	QPSK	1	0	24.00	23.51	23.76	23.32	
			50	24.00	23.97	23.83	23.30	
			99	24.00	23.89	23.52	23.09	
		50	0	23.00	22.75	22.77	22.38	
			25	23.00	22.99	22.77	22.33	
			50	23.00	22.95	22.59	22.24	
	16QAM	100	0	23.00	22.87	22.65	22.33	
			0	23.00	22.88	22.95	22.63	
			50	23.50	23.31	22.93	22.66	
		50	99	23.50	23.21	22.72	22.43	
			0	22.00	21.79	21.75	21.42	
			25	22.50	22.07	21.76	21.42	
35MHz	QPSK	50	50	22.00	21.99	21.55	21.27	
			0	22.00	21.87	21.64	21.38	
			0	22.00	21.87	21.64	21.38	
	16QAM	100	0	22.00	21.87	21.64	21.38	
			0	22.00	21.87	21.64	21.38	
			0	22.00	21.87	21.64	21.38	

11.1.25 Conducted Power of Wi-Fi 2.4G

ANT1

Mode	802.11b		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	13.28	13.19	13.64
Mode	802.11g		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	15.85	16.85	16.58
Mode	802.11n(HT20)		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	17.02	17.32	17.20
Mode	802.11n(HT40)		
Channel/Frequency(MHz)	1(2422)	6(2437)	11(2452)
Average Power(dBm)	17.28	16.90	17.16

ANT2

Mode	802.11b		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	9.18	10.79	11.09
Mode	802.11g		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	12.35	13.51	13.53
Mode	802.11n(HT20)		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	13.22	14.42	14.17
Mode	802.11n(HT40)		
Channel/Frequency(MHz)	1(2422)	6(2437)	11(2452)
Average Power(dBm)	14.47	14.52	14.68

MIMO

Mode	802.11n(HT20)		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	18.53	19.12	18.95
Mode	802.11n(HT40)		
Channel/Frequency(MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	19.11	20.66	19.10

11.1.26 Conducted Power of Wi-Fi 5G

Band	Mode	Channel	Frequency (MHz)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
U-NII-1 (5150-5250)	802.11a	36	5180	9.00±1.0	8.93	No
		48	5240	10.00±1.0	9.59	No
	802.11n-HT20	36	5180	10.50±1.0	10.08	No
		48	5240	10.00±1.0	9.90	No
	802.11n-HT40	38	5190	10.00±1.0	9.93	No
		46	5230	10.50±1.0	10.29	Yes
	802.11ac-VHT20	36	5180	10.50±1.0	10.22	No
		48	5240	9.50 ±1.0	9.42	No
	802.11ac-VHT40	38	5190	10.50±1.0	10.26	No
		46	5230	9.50±1.0	9.26	No
	802.11ac-VHT80	42	5210	9.00±1.0	8.97	No
Band	Mode	Channel	Frequency (MHz)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
U-NII-2a (5250-5350)	802.11a	52	5260	9.50 ±1.0	9.04	No
		64	5320	9.50 ±1.0	9.45	No
	802.11n-HT20	52	5260	9.50 ±1.0	9.04	No
		64	5320	10.00 ±1.0	9.73	Yes
	802.11n-HT40	54	5270	8.50 ±1.0	8.40	No
		62	5310	8.50 ±1.0	8.28	No
	802.11ac-VHT20	52	5260	9.50 ±1.0	9.27	No
		64	5320	9.50 ±1.0	9.44	No
	802.11ac-VHT40	54	5270	8.50 ±1.0	8.43	No
		62	5310	8.50 ±1.0	8.29	No
	802.11ac-VHT80	58	5290	8.00 ±1.0	7.80	No
Band	Mode	Channel	Frequency (MHz)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
U-NII-2c (5470-5725)	802.11a	100	5500	8.50 ±1.0	8.21	Yes
		140	5700	7.50 ±1.0	7.39	No
	802.11n-HT20	100	5500	8.50 ±1.0	8.09	No
		140	5700	7.50 ±1.0	7.40	No
	802.11n-HT40	102	5510	6.00 ±1.0	5.61	No
		134	5670	5.50 ±1.0	5.09	No
	802.11ac-VHT20	100	5500	7.50 ±1.0	7.30	No
		140	5700	7.00 ±1.0	6.63	No
	802.11ac-VHT40	102	5510	6.00 ±1.0	5.58	No
		134	5670	5.50 ±1.0	5.01	No
	802.11ac-VHT80	106	5530	6.00 ±1.0	5.58	No
		122	5610	5.50 ±1.0	5.34	No
Band	Mode	Channel	Frequency (MHz)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
U-NII-3 (5725-5825)	802.11a	149	5745	8.00 ±1.0	7.78	No
		165	5825	7.50 ±1.0	7.49	No
	802.11n-HT20	149	5745	8.00 ±1.0	7.81	Yes
		165	5825	8.00 ±1.0	7.62	No
	802.11n-HT40	151	5755	5.50 ±1.0	5.41	No
		159	5795	4.50 ±1.0	4.25	No
	802.11ac-VHT20	149	5745	7.50 ±1.0	7.19	No
		165	5825	7.50 ±1.0	7.09	No
	802.11ac-VHT40	151	5755	5.50 ±1.0	5.38	No
		159	5795	4.50 ±1.0	4.23	No
	802.11ac-VHT80	155	5775	5.50 ±1.0	5.25	No

11.1.27 Conducted Power of BT

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	8.00	6.59	6.51	7.88
	π/4QPSK	7.00	5.86	5.46	6.84
	8DPSK	7.00	5.86	5.48	6.85
BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	19	39
			2402MHz	2440MHz	2480MHz
	1Mbps	9.50	5.78	6.10	9.20
	2Mbps	9.50	5.26	6.08	8.24
Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (dBm)	Exclusion thresholds for 1-g SAR(dBm)	SAR evaluation required
39	2.441	8.00	7.88	4.77	Yes
19	2.402	9.50	9.20	4.77	Yes

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances ≤ 40 cm are determined by:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

*When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

11.1.28 Tune-up power tolerance

Band	Tune-up power tolerance(dBm)		
GSM850	GSM/GPRS (GMSK)	GSM	Max output power =33.50 ±1.0dBm
		1TXslots	Max output power =33.50 ±1.0dBm
		2TXslots	Max output power =33.00±1.0dBm
		3TXslots	Max output power =31.00 ±1.0dBm
	EGPRS (8-PSK)	4TXslots	Max output power =30.00 ±1.0dBm
		1TXslots	Max output power =33.50 ±1.0dBm
		2TXslots	Max output power =33.00 ±1.0dBm
		3TXslots	Max output power =31.00 ±1.0dBm
GSM1900	GSM/GPRS (GMSK)	4TXslots	Max output power =30.00 ±1.0dBm
		GSM	Max output power =29.50 ±1.0dBm
		1TXslots	Max output power =29.50 ±1.0dBm
		2TXslots	Max output power =28.50 ±1.0dBm
	EGPRS (8-PSK)	3TXslots	Max output power =27.00 ±1.0dBm
		4TXslots	Max output power =25.50 ±1.0dBm
		1TXslots	Max output power =29.50 ±1.0dBm
		2TXslots	Max output power =28.50 ±1.0dBm
WCDMA 2		3TXslots	Max output power =27.00 ±1.0dBm
WCDMA 4		4TXslots	Max output power =25.50 ±1.0dBm
WCDMA 5		1TXslots	Max output power =29.50 ±1.0dBm
LTE B2		2TXslots	Max output power =28.50 ±1.0dBm
LTE B4		3TXslots	Max output power =27.00 ±1.0dBm
LTE B5		4TXslots	Max output power =25.50 ±1.0dBm
LTE B7		1TXslots	Max output power =29.50 ±1.0dBm
LTE B12		2TXslots	Max output power =28.50 ±1.0dBm
LTE B17		3TXslots	Max output power =27.00 ±1.0dBm
LTE B38		4TXslots	Max output power =25.50 ±1.0dBm
LTE B41		1TXslots	Max output power =29.50 ±1.0dBm
LTE B66		2TXslots	Max output power =28.50 ±1.0dBm

Band	Tune-up power tolerance(dBm)		
WIFI	2.4G (MAIN ANT1)	802.11b	Max output power =14.00±1.0dBm
		802.11g	Max output power =17.00±1.0dBm
		802.11n (HT20)	Max output power =17.50±1.0dBm
		802.11n (HT40)	Max output power =17.50±1.0dBm
	2.4G (MAIN ANT2)	802.11b	Max output power =11.50±1.0dBm
		802.11g	Max output power =14.00±1.0dBm
		802.11n (HT20)	Max output power =14.50±1.0dBm
		802.11n (HT40)	Max output power =15.00±1.0dBm
	2.4G (MAIN MIMO)	802.11n (HT20)	Max output power =19.50±1.0dBm
		802.11n (HT40)	Max output power =21.00±1.0dBm
	U-NII-1(5150-5250)	802.11n-HT40	Max output power =10.5±1.0dBm
	U-NII-2a(5250-5350)	802.11n-HT20	Max output power =10.00±1.0dBm
BT	U-NII-2c(5470-5725)	802.11a	Max output power =8.50±1.0dBm
	U-NII-3(5725-5825)	802.11n-HT20	Max output power =8.00±1.0dBm
	GFSK mode		Max output power =8.00±1.0dBm
BLE	π/4DQPSK mode		Max output power =7.00±1.0dBm
	8DPSK mode		Max output power =7.00±1.0dBm
	1Mbps Power		Max output power =9.50±1.0dBm
	2Mbps Power		Max output power =9.50±1.0dBm

11.2 SAR test results

Notes:

- 1) Per KDB447498 ,the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the scaled SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8 \text{ W/kg}$), testing at the high and low channels is optional.
- 2) Per KDB447498 , testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB447498 , All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.
- 4) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn with headset SAR.
- 5) Per KDB248227 D01v01r02, the procedures required to establish specific device operating configurations for testing the SAR of 802.11 a/b/g transmitters.
 - (1) For Headsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is $\leq 0.4 \text{ W/kg}$, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.
 - (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is $\leq 1.2 \text{ W/kg}$.

(3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

6) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

7) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

8) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

9) Per KDB 941225 D01, 3G SAR Measurement Procedures, The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

10) Per KDB 941225 D05, SAR Evaluation Considerations for LTE Devices

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be

tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

11.3 Test Result

11.3.1 Results overview of GSM

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GSM 850 (voice)	Left Cheek	190	836.6	0.010	0.158	100	1.00	33.39	33.50	1.026	0.162
	Left Tilt	190	836.6	-0.050	0.079	100	1.00	33.39	33.50	1.026	0.081
	Right Cheek	190	836.6	0.000	0.159	100	1.00	33.39	33.50	1.026	0.163
	Right Tilt	190	836.6	0.050	0.076	100	1.00	33.39	33.50	1.026	0.078
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GPRS 850+4slots	Front	190	836.6	0.020	0.369	100	1.00	33.39	33.50	1.026	0.378
	Back	190	836.6	-0.020	0.609	100	1.00	33.39	33.50	1.026	0.625
	Left	190	836.6	0.030	0.194	100	1.00	33.39	33.50	1.026	0.199
	right	190	836.6	-0.130	0.281	100	1.00	33.39	33.50	1.026	0.288
	Top	190	836.6	0.150	0.015	100	1.00	33.39	33.50	1.026	0.015
	Bottom	190	836.6	0.110	0.247	100	1.00	33.39	33.50	1.026	0.253

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GSM 1900 (voice)	Left Cheek	512	1850.2	0.15	0.039	100	1.00	29.06	29.50	1.107	0.043
	Left Tilt	512	1850.2	0.07	0.019	100	1.00	29.06	29.50	1.107	0.021
	Right Cheek	512	1850.2	0.05	0.044	100	1.00	29.06	29.50	1.107	0.049
	Right Tilt	512	1850.2	-0.17	0.032	100	1.00	29.06	29.50	1.107	0.035
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
GPRS 1900+4slots	Front	512	1850.2	0.03	0.596	100	1.00	29.06	29.50	1.107	0.660
	Back	512	1850.2	-0.01	0.774	100	1.00	29.06	29.50	1.107	0.857
	Left	512	1850.2	-0.05	0.137	100	1.00	29.06	29.50	1.107	0.152
	right	512	1850.2	0.02	0.281	100	1.00	29.06	29.50	1.107	0.311
	Top	512	1850.2	-0.09	0.026	100	1.00	29.06	29.50	1.107	0.029
	Bottom	512	1850.2	0.03	0.645	100	1.00	29.06	29.50	1.107	0.714

11.3.2 Results overview of WCDMA

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Left Cheek	9538	1907.6	-0.02	0.066	100	1.00	23.33	23.50	1.040	0.069
	Left Tilt	9538	1907.6	0.07	0.061	100	1.00	23.33	23.50	1.040	0.063
	Right Cheek	9538	1907.6	0.00	0.062	100	1.00	23.33	23.50	1.040	0.064
	Right Tilt	9538	1907.6	-0.03	0.050	100	1.00	23.33	23.50	1.040	0.052
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Front	9538	1907.6	-0.01	0.451	100	1.00	23.33	23.50	1.040	0.469
	Back	9538	1907.6	-0.01	0.486	100	1.00	23.33	23.50	1.040	0.505
	Left	9538	1907.6	-0.05	0.337	100	1.00	23.33	23.50	1.040	0.350
	right	9538	1907.6	0.03	0.184	100	1.00	23.33	23.50	1.040	0.191
	Top	9538	1907.6	-0.16	0.016	100	1.00	23.33	23.50	1.040	0.017
	Bottom	9538	1907.6	0.07	0.356	100	1.00	23.33	23.50	1.040	0.370

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Left Cheek	1312	1712.4	0.10	0.021	100	1.00	23.04	23.50	1.112	0.023
	Left Tilt	1312	1712.4	0.11	0.019	100	1.00	23.04	23.50	1.112	0.021
	Right Cheek	1312	1712.4	0.00	0.023	100	1.00	23.04	23.50	1.112	0.026
	Right Tilt	1312	1712.4	0.18	0.024	100	1.00	23.04	23.50	1.112	0.027
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Front	1312	1712.4	-0.07	0.156	100	1.00	23.04	23.50	1.112	0.173
	Back	1312	1712.4	-0.04	0.168	100	1.00	23.04	23.50	1.112	0.187
	Left	1312	1712.4	0.04	0.098	100	1.00	23.04	23.50	1.112	0.109
	right	1312	1712.4	0.03	0.026	100	1.00	23.04	23.50	1.112	0.029
	Top	1312	1712.4	-0.09	0.003	100	1.00	23.04	23.50	1.112	0.003
	Bottom	1312	1712.4	-0.02	0.133	100	1.00	23.04	23.50	1.112	0.148

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Left Cheek	4233	846.6	-0.050	0.104	100	1.00	22.59	23.00	1.099	0.114
	Left Tilt	4233	846.6	-0.140	0.051	100	1.00	22.59	23.00	1.099	0.056
	Right Cheek	4233	846.6	0.040	0.114	100	1.00	22.59	23.00	1.099	0.125
	Right Tilt	4233	846.6	0.190	0.061	100	1.00	22.59	23.00	1.099	0.067
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Front	4233	846.6	0.020	0.178	100	1.00	22.59	23.00	1.099	0.196
	Back	4233	846.6	-0.030	0.204	100	1.00	22.59	23.00	1.099	0.224
	Left	4233	846.6	0.020	0.112	100	1.00	22.59	23.00	1.099	0.123
	right	4233	846.6	-0.160	0.042	100	1.00	22.59	23.00	1.099	0.046
	Top	4233	846.6	-0.030	0.006	100	1.00	22.59	23.00	1.099	0.007
	Bottom	4233	846.6	0.050	0.035	100	1.00	22.59	23.00	1.099	0.038

11.3.3 Results overview of LTE

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Left Cheek	18700	1860.0	0.020	0.058	100	1.00	24.43	24.50	1.016	0.059
		Left Tilt	18700	1860.0	-0.090	0.022	100	1.00	24.43	24.50	1.016	0.022
		Right Cheek	18700	1860.0	0.010	0.071	100	1.00	24.43	24.50	1.016	0.072
		Right Tilt	18700	1860.0	0.020	0.023	100	1.00	24.43	24.50	1.016	0.023
	50%RB	Left Cheek	18700	1860.0	0.010	0.056	100	1.00	24.43	24.50	1.016	0.057
		Left Tilt	18700	1860.0	-0.050	0.020	100	1.00	24.43	24.50	1.016	0.020
		Right Cheek	18700	1860.0	0.030	0.068	100	1.00	24.43	24.50	1.016	0.069
		Right Tilt	18700	1860.0	-0.160	0.022	100	1.00	24.43	24.50	1.016	0.022
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Front	18700	1860.0	0.030	0.518	100	1.00	24.43	24.50	1.016	0.526
		Back	18700	1860.0	0.000	0.621	100	1.00	24.43	24.50	1.016	0.631
		Left	18700	1860.0	0.150	0.434	100	1.00	24.43	24.50	1.016	0.441
		right	18700	1860.0	0.030	0.305	100	1.00	24.43	24.50	1.016	0.310
		Top	18700	1860.0	-0.050	0.006	100	1.00	24.43	24.50	1.016	0.006
		Bottom	18700	1860.0	0.010	0.241	100	1.00	24.43	24.50	1.016	0.245
	50%RB	Front	18700	1860.0	0.020	0.504	100	1.00	24.43	24.50	1.016	0.512
		Back	18700	1860.0	-0.070	0.611	100	1.00	24.43	24.50	1.016	0.621
		Left	18700	1860.0	0.040	0.425	100	1.00	24.43	24.50	1.016	0.432
		right	18700	1860.0	0.060	0.297	100	1.00	24.43	24.50	1.016	0.302
		Top	18700	1860.0	-0.030	0.008	100	1.00	24.43	24.50	1.016	0.008
		Bottom	18700	1860.0	0.080	0.233	100	1.00	24.43	24.50	1.016	0.237

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Left Cheek	20175	1732.5	0.012	0.023	100	1.00	24.48	24.50	1.005	0.023
		Left Tilt	20175	1732.5	-0.080	0.016	100	1.00	24.48	24.50	1.005	0.016
		Right Cheek	20175	1732.5	-0.160	0.020	100	1.00	24.48	24.50	1.005	0.020
		Right Tilt	20175	1732.5	-0.040	0.016	100	1.00	24.48	24.50	1.005	0.016
	50%RB	Left Cheek	20175	1732.5	0.020	0.023	100	1.00	24.48	24.50	1.005	0.023
		Left Tilt	20175	1732.5	-0.050	0.014	100	1.00	24.48	24.50	1.005	0.014
		Right Cheek	20175	1732.5	0.030	0.018	100	1.00	24.48	24.50	1.005	0.018
		Right Tilt	20175	1732.5	-0.150	0.009	100	1.00	24.48	24.50	1.005	0.009
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Front	20175	1732.5	0.140	0.199	100	1.00	24.48	24.50	1.005	0.200
		Back	20175	1732.5	0.020	0.282	100	1.00	24.48	24.50	1.005	0.283
		Left	20175	1732.5	0.060	0.153	100	1.00	24.48	24.50	1.005	0.154
		right	20175	1732.5	-0.180	0.092	100	1.00	24.48	24.50	1.005	0.092
		Top	20175	1732.5	-0.050	0.004	100	1.00	24.48	24.50	1.005	0.004
		Bottom	20175	1732.5	-0.030	0.118	100	1.00	24.48	24.50	1.005	0.119
	50%RB	Front	20175	1732.5	0.070	0.195	100	1.00	24.48	24.50	1.005	0.196
		Back	20175	1732.5	-0.010	0.273	100	1.00	24.48	24.50	1.005	0.274
		Left	20175	1732.5	-0.130	0.149	100	1.00	24.48	24.50	1.005	0.150
		right	20175	1732.5	0.050	0.091	100	1.00	24.48	24.50	1.005	0.091
		Top	20175	1732.5	-0.110	0.003	100	1.00	24.48	24.50	1.005	0.003
		Bottom	20175	1732.5	0.080	0.115	100	1.00	24.48	24.50	1.005	0.116

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Left Cheek	20450	829.0	-0.16	0.105	100	1.00	24.67	25.00	1.079	0.113
		Left Tilt	20450	829.0	-0.05	0.026	100	1.00	24.67	25.00	1.079	0.028
		Right Cheek	20450	829.0	0.030	0.132	100	1.00	24.67	25.00	1.079	0.142
		Right Tilt	20450	829.0	0.030	0.048	100	1.00	24.67	25.00	1.079	0.052
	50%RB	Left Cheek	20450	829.0	0.05	0.088	100	1.00	24.67	25.00	1.079	0.095
		Left Tilt	20450	829.0	0.01	0.015	100	1.00	24.67	25.00	1.079	0.016
		Right Cheek	20450	829.0	-0.030	0.112	100	1.00	24.67	25.00	1.079	0.121
		Right Tilt	20450	829.0	0.090	0.040	100	1.00	24.67	25.00	1.079	0.043
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Front	20450	829.0	0.040	0.176	100	1.00	24.67	25.00	1.079	0.190
		Back	20450	829.0	0.100	0.205	100	1.00	24.67	25.00	1.079	0.221
		Left	20450	829.0	-0.190	0.142	100	1.00	24.67	25.00	1.079	0.153
		Right	20450	829.0	-0.060	0.091	100	1.00	24.67	25.00	1.079	0.098
		Top	20450	829.0	-0.040	0.006	100	1.00	24.67	25.00	1.079	0.006
		Bottom	20450	829.0	0.010	0.130	100	1.00	24.67	25.00	1.079	0.140
	50%RB	Front	20450	829.0	0.050	0.173	100	1.00	24.67	25.00	1.079	0.187
		Back	20450	829.0	-0.180	0.201	100	1.00	24.67	25.00	1.079	0.217
		Left	20450	829.0	-0.070	0.136	100	1.00	24.67	25.00	1.079	0.147
		Right	20450	829.0	-0.030	0.088	100	1.00	24.67	25.00	1.079	0.095
		Top	20450	829.0	-0.110	0.003	100	1.00	24.67	25.00	1.079	0.003
		Bottom	20450	829.0	0.040	0.124	100	1.00	24.67	25.00	1.079	0.134

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Left Cheek	21400	2565.0	-0.040	0.107	100	1.00	23.55	24.00	1.109	0.119
		Left Tilt	21400	2565.0	0.140	0.069	100	1.00	23.55	24.00	1.109	0.077
		Right Cheek	21400	2565.0	-0.150	0.086	100	1.00	23.55	24.00	1.109	0.095
		Right Tilt	21400	2565.0	-0.090	0.066	100	1.00	23.55	24.00	1.109	0.073
	50%RB	Left Cheek	21400	2565.0	0.010	0.101	100	1.00	23.55	24.00	1.109	0.112
		Left Tilt	21400	2565.0	0.000	0.061	100	1.00	23.55	24.00	1.109	0.068
		Right Cheek	21400	2565.0	-0.020	0.085	100	1.00	23.55	24.00	1.109	0.094
		Right Tilt	21400	2565.0	-0.080	0.052	100	1.00	23.55	24.00	1.109	0.058
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Front	21400	2565.0	0.130	0.429	100	1.00	23.55	24.00	1.109	0.476
		Back	21400	2565.0	-0.010	0.545	100	1.00	23.55	24.00	1.109	0.605
		Left	21400	2565.0	-0.050	0.369	100	1.00	23.55	24.00	1.109	0.409
		Right	21400	2565.0	0.020	0.252	100	1.00	23.55	24.00	1.109	0.280
		Top	21400	2565.0	0.180	0.009	100	1.00	23.55	24.00	1.109	0.010
		Bottom	21400	2565.0	0.110	0.219	100	1.00	23.55	24.00	1.109	0.243
	50%RB	Front	21400	2565.0	0.180	0.421	100	1.00	23.55	24.00	1.109	0.467
		Back	21400	2565.0	-0.050	0.539	100	1.00	23.55	24.00	1.109	0.598
		Left	21400	2565.0	0.030	0.358	100	1.00	23.55	24.00	1.109	0.397
		Right	21400	2565.0	-0.160	0.244	100	1.00	23.55	24.00	1.109	0.271
		Top	21400	2565.0	0.050	0.008	100	1.00	23.55	24.00	1.109	0.009
		Bottom	21400	2565.0	0.120	0.207	100	1.00	23.55	24.00	1.109	0.230

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Left Cheek	23130	711.0	0.13	0.057	100	1.00	24.90	25.00	1.023	0.058
		Left Tilt	23130	711.0	0.03	0.027	100	1.00	24.90	25.00	1.023	0.028
		Right Cheek	23130	711.0	0.00	0.056	100	1.00	24.90	25.00	1.023	0.057
		Right Tilt	23130	711.0	-0.02	0.030	100	1.00	24.90	25.00	1.023	0.031
	50%RB	Left Cheek	23130	711.0	0.06	0.044	100	1.00	24.90	25.00	1.023	0.045
		Left Tilt	23130	711.0	-0.02	0.021	100	1.00	24.90	25.00	1.023	0.021
		Right Cheek	23130	711.0	-0.03	0.041	100	1.00	24.90	25.00	1.023	0.042
		Right Tilt	23130	711.0	0.04	0.019	100	1.00	24.90	25.00	1.023	0.019
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Front	23130	711.0	-0.03	0.097	100	1.00	24.90	25.00	1.023	0.099
		Back	23130	711.0	-0.05	0.126	100	1.00	24.90	25.00	1.023	0.129
		Left	23130	711.0	0.02	0.036	100	1.00	24.90	25.00	1.023	0.037
		Right	23130	711.0	-0.01	0.090	100	1.00	24.90	25.00	1.023	0.092
		Top	23130	711.0	-0.10	0.003	100	1.00	24.90	25.00	1.023	0.003
		Bottom	23130	711.0	0.03	0.084	100	1.00	24.90	25.00	1.023	0.086
	50%RB	Front	23130	711.0	-0.01	0.088	100	1.00	24.90	25.00	1.023	0.090
		Back	23130	711.0	0.05	0.114	100	1.00	24.90	25.00	1.023	0.117
		Left	23130	711.0	0.03	0.026	100	1.00	24.90	25.00	1.023	0.027
		Right	23130	711.0	-0.04	0.081	100	1.00	24.90	25.00	1.023	0.083
		Top	23130	711.0	-0.09	0.002	100	1.00	24.90	25.00	1.023	0.002
		Bottom	23130	711.0	-0.05	0.075	100	1.00	24.90	25.00	1.023	0.077

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Left Cheek	23800	711.0	-0.10	0.063	100	1.00	24.83	25.00	1.040	0.066
		Left Tilt	23800	711.0	0.01	0.035	100	1.00	24.83	25.00	1.040	0.036
		Right Cheek	23800	711.0	0.03	0.066	100	1.00	24.83	25.00	1.040	0.069
		Right Tilt	23800	711.0	0.04	0.037	100	1.00	24.83	25.00	1.040	0.038
	50%RB	Left Cheek	23800	711.0	-0.02	0.050	100	1.00	24.83	25.00	1.040	0.052
		Left Tilt	23800	711.0	0.05	0.023	100	1.00	24.83	25.00	1.040	0.024
		Right Cheek	23800	711.0	0.03	0.059	100	1.00	24.83	25.00	1.040	0.061
		Right Tilt	23800	711.0	0.01	0.027	100	1.00	24.83	25.00	1.040	0.028
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Front	23800	711.0	-0.02	0.112	100	1.00	24.83	25.00	1.040	0.116
		Back	23800	711.0	-0.06	0.138	100	1.00	24.83	25.00	1.040	0.144
		Left	23800	711.0	0.03	0.036	100	1.00	24.83	25.00	1.040	0.037
		Right	23800	711.0	-0.03	0.105	100	1.00	24.83	25.00	1.040	0.109
		Top	23800	711.0	-0.09	0.004	100	1.00	24.83	25.00	1.040	0.004
		Bottom	23800	711.0	0.01	0.098	100	1.00	24.83	25.00	1.040	0.102
	50%RB	Front	23800	711.0	0.03	0.097	100	1.00	24.83	25.00	1.040	0.101
		Back	23800	711.0	-0.02	0.116	100	1.00	24.83	25.00	1.040	0.121
		Left	23800	711.0	-0.07	0.025	100	1.00	24.83	25.00	1.040	0.026
		Right	23800	711.0	0.05	0.084	100	1.00	24.83	25.00	1.040	0.087
		Top	23800	711.0	-0.12	0.002	100	1.00	24.83	25.00	1.040	0.002
		Bottom	23800	711.0	-0.04	0.077	100	1.00	24.83	25.00	1.040	0.080

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Left Cheek	38000	2595.0	-0.12	0.055	100	1.00	24.13	24.50	1.089	0.060
		Left Tilt	38000	2595.0	0.15	0.014	100	1.00	24.13	24.50	1.089	0.015
		Right Cheek	38000	2595.0	0.17	0.038	100	1.00	24.13	24.50	1.089	0.041
		Right Tilt	38000	2595.0	-0.03	0.005	100	1.00	24.13	24.50	1.089	0.005
	50%RB	Left Cheek	38000	2595.0	-0.07	0.038	100	1.00	24.13	24.50	1.089	0.041
		Left Tilt	38000	2595.0	0.05	0.006	100	1.00	24.13	24.50	1.089	0.007
		Right Cheek	38000	2595.0	-0.01	0.028	100	1.00	24.13	24.50	1.089	0.030
		Right Tilt	38000	2595.0	0.03	0.002	100	1.00	24.13	24.50	1.089	0.002
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Front	38000	2595.0	-0.06	0.161	100	1.00	24.13	24.50	1.089	0.175
		Back	38000	2595.0	-0.04	0.227	100	1.00	24.13	24.50	1.089	0.247
		Left	38000	2595.0	0.02	0.153	100	1.00	24.13	24.50	1.089	0.167
		Right	38000	2595.0	0.05	0.036	100	1.00	24.13	24.50	1.089	0.039
		Top	38000	2595.0	-0.11	0.008	100	1.00	24.13	24.50	1.089	0.009
		Bottom	38000	2595.0	-0.03	0.188	100	1.00	24.13	24.50	1.089	0.205
	50%RB	Front	38000	2595.0	-0.09	0.140	100	1.00	24.13	24.50	1.089	0.152
		Back	38000	2595.0	0.05	0.197	100	1.00	24.13	24.50	1.089	0.215
		Left	38000	2595.0	-0.03	0.124	100	1.00	24.13	24.50	1.089	0.135
		Right	38000	2595.0	-0.03	0.021	100	1.00	24.13	24.50	1.089	0.023
		Top	38000	2595.0	-0.08	0.002	100	1.00	24.13	24.50	1.089	0.002
		Bottom	38000	2595.0	0.04	0.159	100	1.00	24.13	24.50	1.089	0.173

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Left Cheek	40620	2593.0	0.050	0.062	100	1.00	24.16	24.50	1.081	0.067
		Left Tilt	40620	2593.0	-0.140	0.026	100	1.00	24.16	24.50	1.081	0.028
		Right Cheek	40620	2593.0	0.010	0.038	100	1.00	24.16	24.50	1.081	0.041
		Right Tilt	40620	2593.0	0.080	0.023	100	1.00	24.16	24.50	1.081	0.025
		Left Cheek	39750	2506.0	-0.110	0.043	100	1.00	24.16	24.50	1.081	0.047
		Left Cheek	40185	2549.5	0.050	0.044	100	1.00	24.16	24.50	1.081	0.048
		Left Cheek	41055	2636.5	-0.110	0.084	100	1.00	24.16	24.50	1.081	0.091
20MHz		Left Cheek	41490	2680.0	-0.100	0.089	100	1.00	24.16	24.50	1.081	0.096
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Front	40620	2593.0	0.030	0.201	100	1.00	24.16	24.50	1.081	0.217
		Back	40620	2593.0	-0.020	0.288	100	1.00	24.16	24.50	1.081	0.311
		Left	40620	2593.0	0.120	0.120	100	1.00	24.16	24.50	1.081	0.130
		Right	40620	2593.0	-0.130	0.057	100	1.00	24.16	24.50	1.081	0.062
		Top	40620	2593.0	0.050	0.003	100	1.00	24.16	24.50	1.081	0.003
		Bottom	40620	2593.0	0.080	0.095	100	1.00	24.16	24.50	1.081	0.103
		Back	39750	2506.0	-0.090	0.208	100	1.00	24.16	24.50	1.081	0.225
5MHz		Back	40185	2549.5	-0.120	0.209	100	1.00	24.16	24.50	1.081	0.226
10MHz		Back	41055	2636.5	-0.040	0.385	100	1.00	24.16	24.50	1.081	0.416
15MHz		Back	41490	2680.0	-0.040	0.393	100	1.00	24.16	24.50	1.081	0.425
20MHz		Back	41490	2680.0	-0.040	0.393	100	1.00	24.16	24.50	1.081	0.425

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	50%RB	Left Cheek	40620	2593.0	0.050	0.059	100	1.00	24.16	24.50	1.081	0.064
		Left Tilt	40620	2593.0	0.110	0.024	100	1.00	24.16	24.50	1.081	0.026
		Right Cheek	40620	2593.0	-0.040	0.036	100	1.00	24.16	24.50	1.081	0.039
		Right Tilt	40620	2593.0	-0.130	0.021	100	1.00	24.16	24.50	1.081	0.023
		Left Cheek	39750	2506.0	-0.020	0.041	100	1.00	24.16	24.50	1.081	0.044
		Left Cheek	40185	2549.5	0.080	0.041	100	1.00	24.16	24.50	1.081	0.044
		Left Cheek	41055	2636.5	-0.170	0.082	100	1.00	24.16	24.50	1.081	0.089
20MHz		Left Cheek	41490	2680.0	0.130	0.087	100	1.00	24.16	24.50	1.081	0.094
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	50%RB	Front	40620	2593.0	-0.010	0.197	100	1.00	24.16	24.50	1.081	0.213
		Back	40620	2593.0	0.040	0.282	100	1.00	24.16	24.50	1.081	0.305
		Left	40620	2593.0	0.060	0.112	100	1.00	24.16	24.50	1.081	0.121
		Right	40620	2593.0	-0.020	0.053	100	1.00	24.16	24.50	1.081	0.057
		Top	40620	2593.0	-0.110	0.002	100	1.00	24.16	24.50	1.081	0.002
		Bottom	40620	2593.0	-0.060	0.091	100	1.00	24.16	24.50	1.081	0.098
		Back	39750	2506.0	-0.050	0.203	100	1.00	24.16	24.50	1.081	0.220
5MHz		Back	40185	2549.5	-0.160	0.207	100	1.00	24.16	24.50	1.081	0.224
10MHz		Back	41055	2636.5	0.020	0.376	100	1.00	24.16	24.50	1.081	0.407
15MHz		Back	41490	2680.0	0.170	0.389	100	1.00	24.16	24.50	1.081	0.421
20MHz		Back	41490	2680.0	0.170	0.389	100	1.00	24.16	24.50	1.081	0.421

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Left Cheek	132072	1720.0	0.100	0.031	100	1.00	23.97	24.00	1.007	0.031
		Left Tilt	132072	1720.0	-0.190	0.008	100	1.00	23.97	24.00	1.007	0.008
		Right Cheek	132072	1720.0	0.070	0.022	100	1.00	23.97	24.00	1.007	0.022
		Right Tilt	132072	1720.0	0.120	0.007	100	1.00	23.97	24.00	1.007	0.007
	50%RB	Left Cheek	132072	1720.0	0.140	0.030	100	1.00	23.97	24.00	1.007	0.030
		Left Tilt	132072	1720.0	0.020	0.008	100	1.00	23.97	24.00	1.007	0.008
		Right Cheek	132072	1720.0	0.060	0.021	100	1.00	23.97	24.00	1.007	0.021
		Right Tilt	132072	1720.0	-0.180	0.006	100	1.00	23.97	24.00	1.007	0.006
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Front	132072	1720.0	0.160	0.216	100	1.00	23.97	24.00	1.007	0.217
		Back	132072	1720.0	-0.020	0.281	100	1.00	23.97	24.00	1.007	0.283
		Left	132072	1720.0	-0.150	0.104	100	1.00	23.97	24.00	1.007	0.105
		Right	132072	1720.0	0.110	0.043	100	1.00	23.97	24.00	1.007	0.043
		Top	132072	1720.0	0.100	0.008	100	1.00	23.97	24.00	1.007	0.008
		Bottom	132072	1720.0	-0.150	0.126	100	1.00	23.97	24.00	1.007	0.127
	50%RB	Front	132072	1720.0	0.060	0.210	100	1.00	23.97	24.00	1.007	0.211
		Back	132072	1720.0	-0.150	0.276	100	1.00	23.97	24.00	1.007	0.278
		Left	132072	1720.0	-0.020	0.099	100	1.00	23.97	24.00	1.007	0.100
		Right	132072	1720.0	0.170	0.041	100	1.00	23.97	24.00	1.007	0.041
		Top	132072	1720.0	0.130	0.005	100	1.00	23.97	24.00	1.007	0.005
		Bottom	132072	1720.0	0.020	0.121	100	1.00	23.97	24.00	1.007	0.122

11.3.4 Results overview of WIFI&BT

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11ax20	Left Cheek	6	2437	0.04	0.118	100	1.00	20.66	21.00	1.081	0.128
	Left Tilt	6	2437	-0.05	0.179	100	1.00	20.66	21.00	1.081	0.194
	Right Cheek	6	2437	0.03	0.049	100	1.00	20.66	21.00	1.081	0.053
	Right Tilt	6	2437	0.01	0.080	100	1.00	20.66	21.00	1.081	0.087
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11ax20	Front	6	2437	0.02	0.028	100	1.00	20.66	21.00	1.081	0.030
	Back	6	2437	0.00	0.043	100	1.00	20.66	21.00	1.081	0.047
	Left	6	2437	-0.01	0.002	100	1.00	20.66	21.00	1.081	0.002
	Right	6	2437	-0.03	0.031	100	1.00	20.66	21.00	1.081	0.034
	Top	6	2437	5.00	0.035	100	1.00	20.66	21.00	1.081	0.038
	Bottom	6	2437	-0.02	0.002	100	1.00	20.66	21.00	1.081	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240	Left Cheek	46	5230	0.05	0.059	100	1.00	10.29	10.50	1.050	0.062
	Left Tilt	46	5230	-0.13	0.158	100	1.00	10.29	10.50	1.050	0.166
	Right Cheek	46	5230	-0.04	0.040	100	1.00	10.29	10.50	1.050	0.042
	Right Tilt	46	5230	0.06	0.105	100	1.00	10.29	10.50	1.050	0.110
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240	Front	46	5230	-0.05	0.027	100	1.00	10.29	10.50	1.050	0.028
	Back	46	5230	0.10	0.074	100	1.00	10.29	10.50	1.050	0.078
	Left	46	5230	-0.01	0.003	100	1.00	10.29	10.50	1.050	0.003
	Right	46	5230	0.02	0.025	100	1.00	10.29	10.50	1.050	0.026
	Top	46	5230	-0.06	0.046	100	1.00	10.29	10.50	1.050	0.048
	Bottom	46	5230	-0.02	0.002	100	1.00	10.29	10.50	1.050	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320	Left Cheek	64	5320	0.03	0.095	100	1.00	9.73	10.00	1.064	0.101
	Left Tilt	64	5320	0.00	0.183	100	1.00	9.73	10.00	1.064	0.195
	Right Cheek	64	5320	-0.04	0.044	100	1.00	9.73	10.00	1.064	0.047
	Right Tilt	64	5320	-0.02	0.131	100	1.00	9.73	10.00	1.064	0.139
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320	Front	64	5320	0.03	0.069	100	1.00	9.73	10.00	1.064	0.073
	Back	64	5320	-0.17	0.114	100	1.00	9.73	10.00	1.064	0.121
	Left	64	5320	0.05	0.007	100	1.00	9.73	10.00	1.064	0.007
	Right	64	5320	-0.06	0.053	100	1.00	9.73	10.00	1.064	0.056
	Top	64	5320	0.02	0.081	100	1.00	9.73	10.00	1.064	0.086
	Bottom	64	5320	-0.09	0.002	100	1.00	9.73	10.00	1.064	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700	Left Cheek	100	5500	-0.03	0.146	100	1.00	8.21	8.50	1.069	0.156
	Left Tilt	100	5500	-0.11	0.243	100	1.00	8.21	8.50	1.069	0.260
	Right Cheek	100	5500	0.02	0.070	100	1.00	8.21	8.50	1.069	0.075
	Right Tilt	100	5500	-0.05	0.179	100	1.00	8.21	8.50	1.069	0.191
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700	Front	100	5500	0.02	0.092	100	1.00	8.21	8.50	1.069	0.098
	Back	100	5500	-0.03	0.136	100	1.00	8.21	8.50	1.069	0.145
	Left	100	5500	0.04	0.009	100	1.00	8.21	8.50	1.069	0.010
	Right	100	5500	-0.06	0.076	100	1.00	8.21	8.50	1.069	0.081
	Top	100	5500	-0.05	0.118	100	1.00	8.21	8.50	1.069	0.126
	Bottom	100	5500	-0.02	0.003	100	1.00	8.21	8.50	1.069	0.003

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825	Left Cheek	149	5745	0.01	0.125	100	1.00	7.81	8.00	1.045	0.131
	Left Tilt	149	5745	-0.13	0.233	100	1.00	7.81	8.00	1.045	0.243
	Right Cheek	149	5745	0.03	0.061	100	1.00	7.81	8.00	1.045	0.064
	Right Tilt	149	5745	-0.04	0.146	100	1.00	7.81	8.00	1.045	0.153
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825	Front	149	5745	-0.02	0.078	100	1.00	7.81	8.00	1.045	0.081
	Back	149	5745	-0.06	0.123	100	1.00	7.81	8.00	1.045	0.129
	Left	149	5745	-0.06	0.007	100	1.00	7.81	8.00	1.045	0.007
	Right	149	5745	0.03	0.062	100	1.00	7.81	8.00	1.045	0.065
	Top	149	5745	0.04	0.103	100	1.00	7.81	8.00	1.045	0.108
	Bottom	149	5745	-0.02	0.002	100	1.00	7.81	8.00	1.045	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Left Cheek	39	2480	0.050	0.087	100	1.00	9.20	9.50	1.072	0.093
	Left Tilt	39	2480	0.500	0.091	100	1.00	9.20	9.50	1.072	0.098
	Right Cheek	39	2480	-1.000	0.072	100	1.00	9.20	9.50	1.072	0.077
	Right Tilt	39	2480	1.500	0.078	100	1.00	9.20	9.50	1.072	0.084
Mode	Position	Ch.	Freq. (MHz)	Power Drift (db)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Front	39	2480	0.350	0.038	100	1.00	9.20	9.50	1.072	0.041
	Back	39	2480	0.500	0.060	100	1.00	9.20	9.50	1.072	0.064
	Left	39	2480	2.000	0.025	100	1.00	9.20	9.50	1.072	0.027
	Right	39	2480	-0.500	0.034	100	1.00	9.20	9.50	1.072	0.036
	Top	39	2480	1.500	0.022	100	1.00	9.20	9.50	1.072	0.024
	Bottom	39	2480	-2.000	0.015	100	1.00	9.20	9.50	1.072	0.016

Note:

- 1.The maximum SAR Value of each test band is marked bold.
- 2.SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- 3.Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- 4.Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- 5.Per KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- 6.Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
- 7.Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

12 Multiple Transmitter Information

The SAR measurement positions of each side are as below:



< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Top side	Bottom side
2G/3G/4G /5G Antenna	Yes	Yes	Yes	Yes	Yes	Yes
Wi-Fi/BT Antenna	Yes	Yes	Yes	Yes	Yes	Yes

- 1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

12.1 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS/LTE/NR +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS/LTE/NR +BT	YES	YES	YES

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.

12.1.1 SAR Summation Scenario

Head

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3 SAR 1g(W/kg)			
GSM850 (voice)	Left Cheek	0.162	0.128	0.156	0.093	0.290	1.6
	Left Tilt	0.081	0.194	0.260	0.098	0.275	
	Right Cheek	0.163	0.053	0.075	0.077	0.216	
	Right Tilt	0.078	0.087	0.191	0.084	0.165	
GSM1900 (voice)	Left Cheek	0.043	0.128	0.156	0.093	0.171	
	Left Tilt	0.021	0.194	0.260	0.098	0.215	
	Right Cheek	0.049	0.053	0.075	0.077	0.102	
	Right Tilt	0.035	0.087	0.191	0.084	0.122	
WCDMA Band 2	Left Cheek	0.069	0.128	0.156	0.093	0.197	
	Left Tilt	0.063	0.194	0.260	0.098	0.257	
	Right Cheek	0.064	0.053	0.075	0.077	0.117	
	Right Tilt	0.052	0.087	0.191	0.084	0.139	
WCDMA Band 4	Left Cheek	0.023	0.128	0.156	0.093	0.151	
	Left Tilt	0.021	0.194	0.260	0.098	0.215	
	Right Cheek	0.026	0.053	0.075	0.077	0.079	
	Right Tilt	0.027	0.087	0.191	0.084	0.114	
WCDMA Band 5	Left Cheek	0.114	0.128	0.156	0.093	0.242	
	Left Tilt	0.056	0.194	0.260	0.098	0.250	
	Right Cheek	0.125	0.053	0.075	0.077	0.178	
	Right Tilt	0.067	0.087	0.191	0.084	0.154	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WiFi2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.059	0.128	0.156	0.093	0.187	1.6
	Left Tilt		0.022	0.194	0.260	0.098	0.216	
	Right Cheek		0.072	0.053	0.075	0.077	0.125	
	Right Tilt		0.023	0.087	0.191	0.084	0.110	
	Left Cheek	50%RB	0.057	0.128	0.156	0.093	0.185	
	Left Tilt		0.020	0.194	0.260	0.098	0.214	
	Right Cheek		0.069	0.053	0.075	0.077	0.122	
	Right Tilt		0.022	0.087	0.191	0.084	0.109	
LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.023	0.128	0.156	0.093	0.151	
	Left Tilt		0.016	0.194	0.260	0.098	0.210	
	Right Cheek		0.020	0.053	0.075	0.077	0.073	
	Right Tilt		0.016	0.087	0.191	0.084	0.103	
	Left Cheek	50%RB	0.023	0.128	0.156	0.093	0.151	
	Left Tilt		0.014	0.194	0.260	0.098	0.208	
	Right Cheek		0.018	0.053	0.075	0.077	0.071	
	Right Tilt		0.009	0.087	0.191	0.084	0.096	
LTE Band 5 QPSK (10MHz)	Left Cheek	1RB	0.113	0.128	0.156	0.093	0.241	
	Left Tilt		0.028	0.194	0.260	0.098	0.222	
	Right Cheek		0.142	0.053	0.075	0.077	0.195	
	Right Tilt		0.052	0.087	0.191	0.084	0.139	
	Left Cheek	50%RB	0.095	0.128	0.156	0.093	0.223	
	Left Tilt		0.016	0.194	0.260	0.098	0.210	
	Right Cheek		0.121	0.053	0.075	0.077	0.174	
	Right Tilt		0.043	0.087	0.191	0.084	0.130	
LTE Band 7 QPSK (10MHz)	Left Cheek	1RB	0.119	0.128	0.156	0.093	0.247	
	Left Tilt		0.077	0.194	0.260	0.098	0.271	
	Right Cheek		0.095	0.053	0.075	0.077	0.148	
	Right Tilt		0.073	0.087	0.191	0.084	0.160	
	Left Cheek	50%RB	0.112	0.128	0.156	0.093	0.240	
	Left Tilt		0.068	0.194	0.260	0.098	0.262	
	Right Cheek		0.094	0.053	0.075	0.077	0.147	
	Right Tilt		0.058	0.087	0.191	0.084	0.145	
LTE Band 12 QPSK (10MHz)	Left Cheek	1RB	0.058	0.128	0.156	0.093	0.186	
	Left Tilt		0.028	0.194	0.260	0.098	0.222	
	Right Cheek		0.057	0.053	0.075	0.077	0.110	
	Right Tilt		0.031	0.087	0.191	0.084	0.118	
	Left Cheek	50%RB	0.045	0.128	0.156	0.093	0.173	
	Left Tilt		0.021	0.194	0.260	0.098	0.215	
	Right Cheek		0.042	0.053	0.075	0.077	0.095	
	Right Tilt		0.019	0.087	0.191	0.084	0.106	
LTE Band 17 QPSK (10MHz)	Left Cheek	1RB	0.066	0.128	0.156	0.093	0.194	
	Left Tilt		0.036	0.194	0.260	0.098	0.230	
	Right Cheek		0.069	0.053	0.075	0.077	0.122	
	Right Tilt		0.038	0.087	0.191	0.084	0.125	
	Left Cheek	50%RB	0.052	0.128	0.156	0.093	0.180	
	Left Tilt		0.024	0.194	0.260	0.098	0.218	
	Right Cheek		0.061	0.053	0.075	0.077	0.114	
	Right Tilt		0.028	0.087	0.191	0.084	0.115	
LTE Band 38 QPSK (20MHz)	Left Cheek	1RB	0.060	0.128	0.156	0.093	0.188	
	Left Tilt		0.015	0.194	0.260	0.098	0.209	
	Right Cheek		0.041	0.053	0.075	0.077	0.094	
	Right Tilt		0.005	0.087	0.191	0.084	0.092	
	Left Cheek	50%RB	0.041	0.128	0.156	0.093	0.169	
	Left Tilt		0.007	0.194	0.260	0.098	0.201	
	Right Cheek		0.030	0.053	0.075	0.077	0.083	
	Right Tilt		0.002	0.087	0.191	0.084	0.089	

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3 1g(W/kg)		
LTE Band 41 QPSK (20MHz)	Left Cheek	1RB	0.067	0.128	0.156	0.093	1.6
	Left Tilt		0.028	0.194	0.260	0.098	
	Right Cheek		0.041	0.053	0.075	0.077	
	Right Tilt		0.025	0.087	0.191	0.084	
	Left Cheek	50%RB	0.064	0.128	0.156	0.093	
	Left Tilt		0.026	0.194	0.260	0.098	
	Right Cheek		0.039	0.053	0.075	0.077	
	Right Tilt		0.023	0.087	0.191	0.084	
LTE Band 66 QPSK (20MHz)	Left Cheek	1RB	0.031	0.128	0.156	0.093	
	Left Tilt		0.008	0.194	0.260	0.098	
	Right Cheek		0.022	0.053	0.075	0.077	
	Right Tilt		0.007	0.087	0.191	0.084	
	Left Cheek	50%RB	0.030	0.128	0.156	0.093	
	Left Tilt		0.008	0.194	0.260	0.098	
	Right Cheek		0.021	0.053	0.075	0.077	
	Right Tilt		0.006	0.087	0.191	0.084	

Hotspot(body-worn10mm)

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3 1g(W/kg)			
GSM850 (GPRS 4slots)	Front	0.378	0.030	0.098	0.041	0.408	1.6
	Back	0.625	0.047	0.145	0.064	0.672	
	Left	0.199	0.002	0.010	0.027	0.201	
	right	0.288	0.034	0.081	0.036	0.322	
	Top	0.015	0.038	0.126	0.024	0.053	
	Bottom	0.253	0.002	0.003	0.016	0.255	
GSM1900 (GPRS 4slots)	Front	0.660	0.030	0.098	0.041	0.690	
	Back	0.857	0.047	0.145	0.064	0.904	
	Left	0.152	0.002	0.010	0.027	0.154	
	right	0.311	0.034	0.081	0.036	0.345	
	Top	0.029	0.038	0.126	0.024	0.067	
	Bottom	0.714	0.002	0.003	0.016	0.716	
WCDMA Band 2	Front	0.469	0.030	0.098	0.041	0.499	
	Back	0.505	0.047	0.145	0.064	0.552	
	Left	0.350	0.002	0.010	0.027	0.352	
	right	0.191	0.034	0.081	0.036	0.225	
	Top	0.017	0.038	0.126	0.024	0.055	
	Bottom	0.370	0.002	0.003	0.016	0.372	
WCDMA Band 4	Front	0.173	0.030	0.098	0.041	0.203	
	Back	0.187	0.047	0.145	0.064	0.234	
	Left	0.109	0.002	0.010	0.027	0.111	
	right	0.029	0.034	0.081	0.036	0.063	
	Top	0.003	0.038	0.126	0.024	0.041	
	Bottom	0.148	0.002	0.003	0.016	0.150	
WCDMA Band 5	Front	0.196	0.030	0.098	0.041	0.226	
	Back	0.224	0.047	0.145	0.064	0.271	
	Left	0.123	0.002	0.010	0.027	0.125	
	right	0.046	0.034	0.081	0.036	0.080	
	Top	0.007	0.038	0.126	0.024	0.045	
	Bottom	0.038	0.002	0.003	0.016	0.040	

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3) 1g(W/kg)			
LTE Band 2	Front	1RB	0.526	0.030	0.098	0.041	0.556	1.6
	Back		0.631	0.047	0.145	0.064	0.678	
	Left		0.441	0.002	0.010	0.027	0.443	
	right		0.310	0.034	0.081	0.036	0.344	
	Top		0.006	0.038	0.126	0.024	0.044	
	Bottom		0.245	0.002	0.003	0.016	0.247	
	Front	50%RB	0.512	0.030	0.098	0.041	0.542	
	Back		0.621	0.047	0.145	0.064	0.668	
	Left		0.432	0.002	0.010	0.027	0.434	
	right		0.302	0.034	0.081	0.036	0.336	
	Top		0.008	0.038	0.126	0.024	0.046	
	Bottom		0.237	0.002	0.003	0.016	0.239	
LTE Band 4	Front	1RB	0.200	0.030	0.098	0.041	0.230	
	Back		0.283	0.047	0.145	0.064	0.330	
	Left		0.154	0.002	0.010	0.027	0.156	
	right		0.092	0.034	0.081	0.036	0.126	
	Top		0.004	0.038	0.126	0.024	0.042	
	Bottom		0.119	0.002	0.003	0.016	0.121	
	Front	50%RB	0.196	0.030	0.098	0.041	0.226	
	Back		0.274	0.047	0.145	0.064	0.321	
	Left		0.150	0.002	0.010	0.027	0.152	
	right		0.091	0.034	0.081	0.036	0.125	
	Top		0.003	0.038	0.126	0.024	0.041	
	Bottom		0.116	0.002	0.003	0.016	0.118	
LTE Band 5	Front	1RB	0.190	0.030	0.098	0.041	0.220	
	Back		0.221	0.047	0.145	0.064	0.268	
	Left		0.153	0.002	0.010	0.027	0.155	
	right		0.098	0.034	0.081	0.036	0.132	
	Top		0.006	0.038	0.126	0.024	0.044	
	Bottom		0.140	0.002	0.003	0.016	0.142	
	Front	50%RB	0.187	0.030	0.098	0.041	0.217	
	Back		0.217	0.047	0.145	0.064	0.264	
	Left		0.147	0.002	0.010	0.027	0.149	
	right		0.095	0.034	0.081	0.036	0.129	
	Top		0.003	0.038	0.126	0.024	0.041	
	Bottom		0.134	0.002	0.003	0.016	0.136	
LTE Band 7	Front	1RB	0.476	0.030	0.098	0.041	0.506	
	Back		0.605	0.047	0.145	0.064	0.652	
	Left		0.409	0.002	0.010	0.027	0.411	
	right		0.280	0.034	0.081	0.036	0.314	
	Top		0.010	0.038	0.126	0.024	0.048	
	Bottom		0.243	0.002	0.003	0.016	0.245	
	Front	50%RB	0.467	0.030	0.098	0.041	0.497	
	Back		0.598	0.047	0.145	0.064	0.645	
	Left		0.397	0.002	0.010	0.027	0.399	
	right		0.271	0.034	0.081	0.036	0.305	
	Top		0.009	0.038	0.126	0.024	0.047	
	Bottom		0.230	0.002	0.003	0.016	0.232	

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 3 1g(W/kg))			
LTE Band 12	Front	1RB	0.099	0.030	0.098	0.041	0.129	1.6
	Back		0.129	0.047	0.145	0.064	0.176	
	Left		0.037	0.002	0.010	0.027	0.039	
	right		0.092	0.034	0.081	0.036	0.126	
	Top		0.003	0.038	0.126	0.024	0.041	
	Bottom		0.086	0.002	0.003	0.016	0.088	
	Front	50%RB	0.090	0.030	0.098	0.041	0.120	
	Back		0.117	0.047	0.145	0.064	0.164	
	Left		0.027	0.002	0.010	0.027	0.029	
	right		0.083	0.034	0.081	0.036	0.117	
	Top		0.002	0.038	0.126	0.024	0.040	
	Bottom		0.077	0.002	0.003	0.016	0.079	
LTE Band 17	Front	1RB	0.116	0.030	0.098	0.041	0.146	
	Back		0.144	0.047	0.145	0.064	0.191	
	Left		0.037	0.002	0.010	0.027	0.039	
	right		0.109	0.034	0.081	0.036	0.143	
	Top		0.004	0.038	0.126	0.024	0.042	
	Bottom		0.102	0.002	0.003	0.016	0.104	
	Front	50%RB	0.101	0.030	0.098	0.041	0.131	
	Back		0.121	0.047	0.145	0.064	0.168	
	Left		0.026	0.002	0.010	0.027	0.028	
	right		0.087	0.034	0.081	0.036	0.121	
	Top		0.002	0.038	0.126	0.024	0.040	
	Bottom		0.080	0.002	0.003	0.016	0.082	
LTE Band 38	Front	1RB	0.175	0.030	0.098	0.041	0.205	
	Back		0.247	0.047	0.145	0.064	0.294	
	Left		0.167	0.002	0.010	0.027	0.169	
	right		0.039	0.034	0.081	0.036	0.073	
	Top		0.009	0.038	0.126	0.024	0.047	
	Bottom		0.205	0.002	0.003	0.016	0.207	
	Front	50%RB	0.152	0.030	0.098	0.041	0.182	
	Back		0.215	0.047	0.145	0.064	0.262	
	Left		0.135	0.002	0.010	0.027	0.137	
	right		0.023	0.034	0.081	0.036	0.057	
	Top		0.002	0.038	0.126	0.024	0.040	
	Bottom		0.173	0.002	0.003	0.016	0.175	
LTE Band 41	Front	1RB	0.217	0.030	0.098	0.041	0.247	
	Back		0.311	0.047	0.145	0.064	0.358	
	Left		0.130	0.002	0.010	0.027	0.132	
	right		0.062	0.034	0.081	0.036	0.096	
	Top		0.003	0.038	0.126	0.024	0.041	
	Bottom		0.103	0.002	0.003	0.016	0.105	
	Front	50%RB	0.213	0.030	0.098	0.041	0.243	
	Back		0.305	0.047	0.145	0.064	0.352	
	Left		0.121	0.002	0.010	0.027	0.123	
	right		0.057	0.034	0.081	0.036	0.091	
	Top		0.002	0.038	0.126	0.024	0.040	
	Bottom		0.098	0.002	0.003	0.016	0.100	
LTE Band 66	Front	1RB	0.217	0.030	0.098	0.041	0.247	
	Back		0.283	0.047	0.145	0.064	0.330	
	Left		0.105	0.002	0.010	0.027	0.107	
	right		0.043	0.034	0.081	0.036	0.077	
	Top		0.008	0.038	0.126	0.024	0.046	
	Bottom		0.127	0.002	0.003	0.016	0.129	
	Front	50%RB	0.211	0.030	0.098	0.041	0.241	
	Back		0.278	0.047	0.145	0.064	0.325	
	Left		0.100	0.002	0.010	0.027	0.102	
	right		0.041	0.034	0.081	0.036	0.075	
	Top		0.005	0.038	0.126	0.024	0.043	
	Bottom		0.122	0.002	0.003	0.016	0.124	

13 Measurement uncertainty evaluation

13.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by SPEAG. The breakdown of the individual uncertainties is as follows:

DASY8 Uncertainty Budget								
According to IEC/IEEE 62209-1528 (Frequency band: 300MHz-3GHz range)								
Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(ci) (1g)	(ci) (10g)	Std. Unc (1g)	Std. Unc (10g)
Measurement System Errors								
CF	Probe Calibration	±13.3%	N	2	1	1	±6.7%	±6.7%
CF _{drift}	Probe Calibration Drift	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±2.8%	R	$\sqrt{3}$	1	1	±1.6%	±1.6%
ISO	Probe Isotropy	±7.6%	R	$\sqrt{3}$	1	1	±4.4%	±4.4%
DAE	Other Probe+Electronic	±0.8%	N	1	1	1	±0.8%	±0.8%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±0.006 mm	N	1	0.14	0.14	±0.10%	±0.10%
DAT	Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.)DAK	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
LIQ(T _σ)	Conductivity (temp.)BB	±3.3%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%
EPS	Phantom Permittivity	±14.0%	R	$\sqrt{3}$	0	0	±0%	±0%
DIS	Distance DUT – TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D _{xyz}	Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
MOD	DUT Modulation ^m	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. ^{val}	±0.0%	N	1	1	1	±0.0%	±0.0%
RF _{in}	Unc.Input Power ^{val}	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling ^p	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%
u(ΔSAR)	Combined Uncertainty						±11.3%	±11.2%
U	Expanded Uncertainty						±22.6%	±22.5%

DASY8 Uncertainty Budget

According to IEC/IEEE 62209-1528
(Frequency band: 3GHz–6GHz range)

Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(ci) (1g)	(ci) (10g)	Std.Unc (1g)	Std.Unc (10g)
Measurement System Errors								
CF	Probe Calibration	±13.1%	N	2	1	1	±6.55%	±6.55%
CF _{drift}	Probe Calibration Drift	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
ISO	Probe Isotropy	±7.6%	R	$\sqrt{3}$	1	1	±4.4%	±4.4%
DAE	Other Probe+Electronic	±1.2%	N	1	1	1	±1.2%	±1.2%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±0.005 mm	N	1	0.29	0.29	±0.2%	±0.20%
DAT	Data Processing	±2.3%	N	1	1	1	±2.3%	±2.3%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.)DAK	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
LIQ(T _σ)	Conductivity (temp.)BB	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%
EPS	Phantom Permittivity	±14.0%	R	$\sqrt{3}$	0.25	0.25	±2.0%	±2.0%
DIS	Distance DUT – TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D _{xyz}	Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
MOD	DUT Modulation ^m	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±1.7%	R	$\sqrt{3}$	1	1	±1.0%	±1.0%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. ^{val}	±0.0%	N	1	1	1	±0.0%	±0.0%
RF _{in}	Unc.Input Power ^{val}	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling ^p	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%
u(ΔSAR)	Combined Uncertainty						±11.6%	±11.6%
U	Expanded Uncertainty						±23.3%	±23.1%

13.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by SPEAG. The breakdown of the individual uncertainties is as follows:

Uncertainty For System Performance Check								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i 1g	C _i 10g	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	6.7	N	1	1	1	6.70	6.70	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.88	3.88	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
RF ambient Conditions - Noise	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
RF ambient Conditions – Reflections	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Probe positioned Mechanical Tolerance	0.8	R	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe positioning with respect to Phantom Shell	6.7	R	$\sqrt{3}$	1	1	3.87	3.87	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Dipole								
Deviation of experimental source from numerical source	5.5	N	1	1	1	3.18	3.18	∞
Input power and SAR drift measurement	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Dipole axis to liquid Distance	3.4	R	$\sqrt{3}$	1	1	1.96	1.96	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.0	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.78	0.71	1.13	1.03	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.78	0.71	3.90	3.55	5
Liquid Permittivity (meas.)	2.5	N	1	0.23	0.26	0.33	0.38	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.23	0.26	1.15	1.30	∞
Combined Standard Uncertainty		Rss				11.29	11.18	
Expanded Uncertainty (95% Confidence interval)		k				20.57	19.95	

14 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	calibration	
					Last Cal.	Due Date
☒	SPEAG	E-Field PROBE	EX3DV4	7895	2024-11-28	2025-11-27
☒	SPEAG	E-Field PROBE	EX3DV4	7391	2024-11-16	2025-11-15
☒	SPEAG	Validation Kits	D750V3	1151	2024-08-19	2027-08-18
☒	SPEAG	Validation Kits	D835V2	4d203	2024-08-20	2027-08-19
☒	SPEAG	Validation Kits	D1750V2	1143	2024-08-20	2027-08-19
☒	SPEAG	Validation Kits	D1900V2	5d211	2024-08-19	2027-08-18
☒	SPEAG	Validation Sources	D2550V2	1015	2024-08-16	2027-08-15
☒	SPEAG	Validation Sources	D3500V2	1164	2024-10-17	2027-10-16
☒	SPEAG	Validation Sources	D3700V2	1139	2024-10-17	2027-10-16
☒	SPEAG	Validation Sources	D3900V2	1106	2024-10-17	2027-10-16
☒	SPEAG	Validation Sources	D4600V2	1097	2024-10-17	2027-10-16
☒	SPEAG	Validation Sources	D4900V2	1093	2024-10-08	2027-10-07
☒	SPEAG	Validation Sources	D5GHzV2	1412	2024-10-17	2027-10-16
☒	SPEAG	Validation Sources	D6.5GHzV2	1116	2024-10-14	2027-10-13
☒	SPEAG	DAE	DAE4	1495	2024-07-24	2025-07-23
☒	SPEAG	DAE	DAE4ip	1872	2024-10-18	2025-10-17
☒	SPEAG	Dielectric parameter probes	DAK-3.5	1363	2024-11-05	2025-11-04
☒	R & S	Universal Radio Communication Tester	CMU 200	119733	2024-10-21	2025-10-20
☒	R & S	Universal Radio Communication Tester	CMW500	144459	2024-10-21	2025-10-20
☒	R & S	UXM5G Wireless Test Platform	E7515B	MY60192341	2024-10-21	2025-10-20
☒	HP	Network Analyser	8753D	3410A08889	2024-10-21	2025-10-20
☒	HP	Signal Generator	E4421B	GB39340770	2024-10-28	2025-10-27
☒	Keithley	Multimeter	Keithley 2000	4014539	2024-10-28	2025-10-27
☒	SATIMO	Amplifier	Power Amplifier	MODU-023-A-0004	2024-10-21	2025-10-20
☒	Agilent	Power Meter	E4418B	GB43312909	2024-10-21	2025-10-20
☒	Agilent	Power Meter Sensor	E4412A	MY41500046	2024-10-21	2025-10-20