

WIFI Module

WIFI-V897 Series

IEEE 802.11 2X2 MIMO ac/a/b/g/n WiFi

Features:

➤ **Reserving System**

IEEE Std. 802.11a
IEEE Std. 802.11b
IEEE Std. 802.11g
IEEE Std. 802.11n
IEEE Std. 802.11ac

➤ **Chip Solution**

Marvell 88W8897



Model	Standard	Rate	Channel	POWER	HW Version	SW Version
WIFI-2-V897EA1	IEEE 802.11a/b/g/n/ac	866.7Mbps	2.4G/5G	5V	V1.0	E3X15110

iRay Technology Co. Ltd.

RM 202, Building 7, No. 590, Ruiqing RD., Zhangjiang East, Pudong, Shanghai, China

<http://www.iRaygroup.com>

Feedback of customer's Confirmation

We accept the specification after Confirmed

Customer name	Customer signature	Confirmation Date

Approved	Checked	Designed	Product	WiFi Module
Bai lang	Qian zijin	Fan xijun	Model	WIFI-2-V897EA1
			Date	2018-05-18

Record of Modification

No	Date of	Main content of	Reason of	Serial number of	Confirm
----	---------	-----------------	-----------	------------------	---------

	modification	modification	modification	modification	
1	20180518	Confirmed for the first time			Fan xijun

1. Introduction

WIFI-2-V897EA1 is based on Marvell 88W8897, complied with IEEE 802.11a/b/g/n/ac. The Module is a highly integrated MAC/BBP and 2.4/5GHz RF/PA/LNA single chip which supports a 866.7Mbps PHY rate. The Module is designed to support standard-based features in the areas of security, quality of service, and international regulations, giving end users the greatest performance anytime and in any circumstance. This documentation describes the engineering requirements specification.

- IEEE802.11ac (draft)compliant,2x2 MIMO spatial stream multiplexing with data rates up to MCS9(866.7Mbps)

1.1 RF module Overview

The general HW architecture for the module is shown in Figure 1. This WLAN Module design is based on Marvell 88W8897. It is a highly integrated single-chip MIMO(Multiple In Multiple Out) Wireless LAN (WLAN) network interface controller complying with the 802.11ac specification over SDIO,PCIE,USB and UART interface.. It combines a MAC, a 2T2R capable baseband, and RF in a single chip. The 88w8897 provides a complete solution for a high throughput performance wireless client .

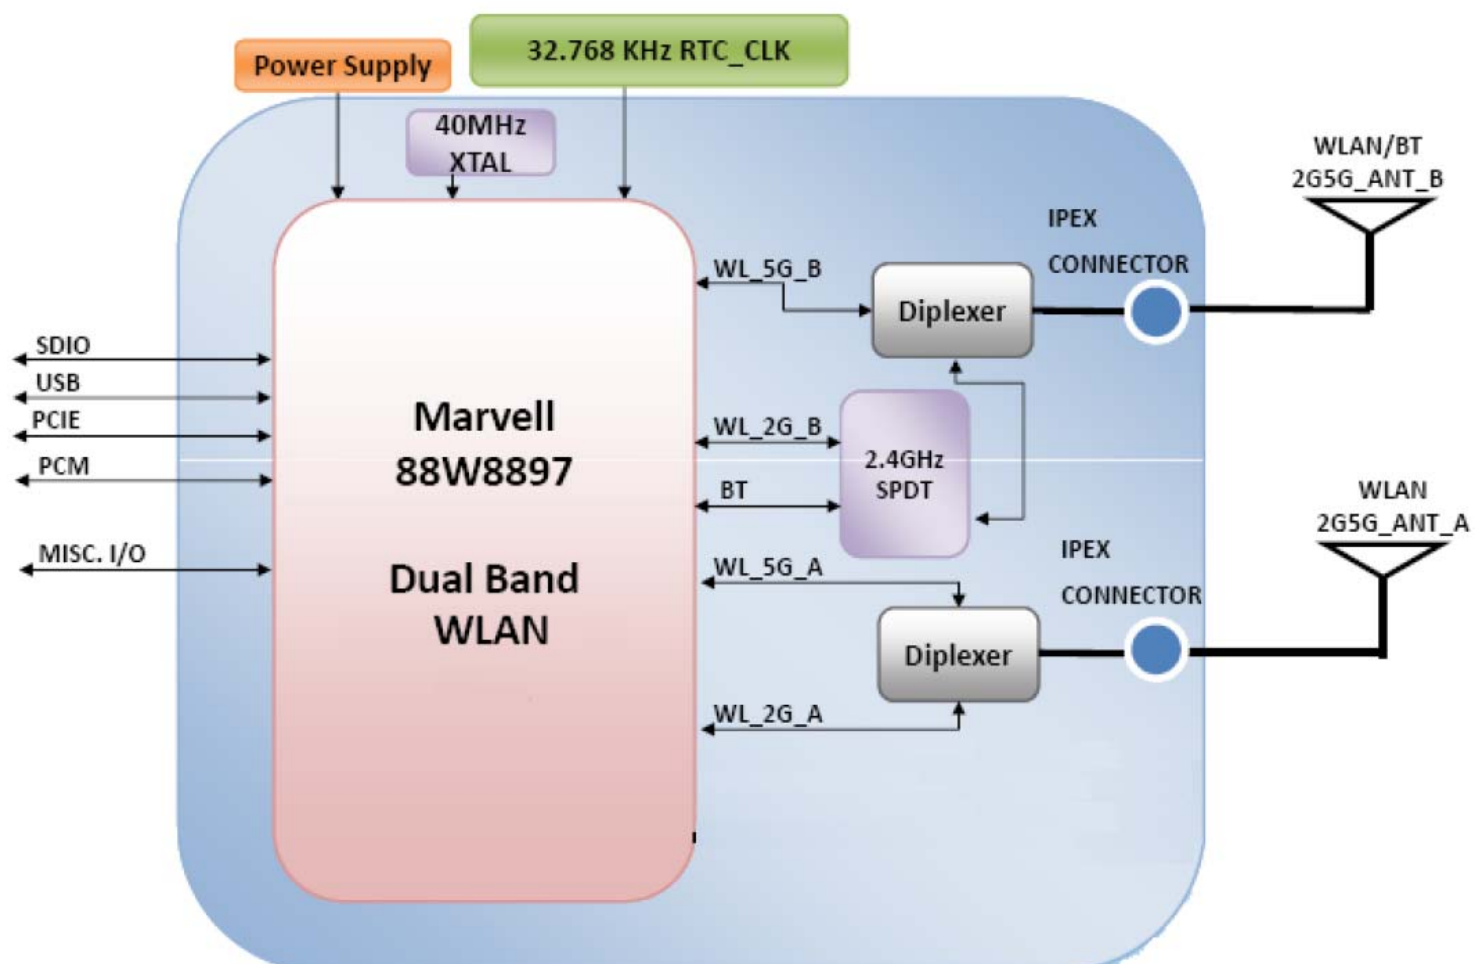


Figure 1 WIFI-2-V897EA1 Block Diagram

Note: **Interface supports and combinations as shown below:**

Scenario	WLAN	Firmware Download I/F	Firmware Download Mode	Configuration *
1	PCIe	PCIe	Serial	CON[3:0]=b'1 110

NOTE:

PCIe v3.0(2.5Gbps) interface

USB 2.0 interface with LPM support

1.2 Specification reference

This specification is based on additional references listed below.

- _ IEEE Std. 802.11a
- _ IEEE Std. 802.11b
- _ IEEE Std. 802.11g
- _ IEEE Std. 802.11n
- _ IEEE Std. 802.11ac

1.3 System Functions

Table1: General Specification as below:


Main Chipset	Marvell 88W8897
Operating Frequency	2.4G/5G
WiFi Standard	802.11a/b/g/n/ac(2x2)
Modulation	11b: DBPSK, DQPSK and CCK and DSSS 11a/g: BPSK, QPSK, 16QAM, 64QAM and OFDM 11n: BPSK, QPSK, 16QAM, 64QAM and OFDM 11ac: BPSK, QPSK, 16QAM, 64QAM,256QAM and OFDM
Data rates	11b:1, 2, 5.5 and 11Mbps 11a/g:6, 9, 12, 18, 24, 36, 48 and 54 Mbps 11n: MCS0~15, up to 300Mbps 11ac: MCS0~9, Nss=2, up to 866.7Mbps
Form factor	LGA
Host Interface	PCIE,USB
PCB Stack	6-layers design
Dimension	Typical, 30.0mmx 26.8mm
Antenna	External antenna
Operation Temperature	-20℃ to +50℃
Storage Temperature	-45℃ to +85℃
Operation Voltage	3.3V +/-10% , 1.8V +/-10%
Interfaces	PCIe interfaces support for WLAN
Systems	1、 Drip-in WLAN Linux drivers are Android ready and validated on Android based systems. 2、 Support for Linux kernel versions up to 2.6.32.

1.4 gain

		Antenna 1	Antenna 2	Antenna 3	Antenna 4
GAIN	2400~2483.5 MHz	1.8	1.8	2.4	2.4
	5150~5250 MHz	6	6	3.6	3.6
	5725~5850 MHz	6	6	3.6	3.6

2. Mechanical Specification

Typical Dimension (L x W): 30.0mmx 26.8mm

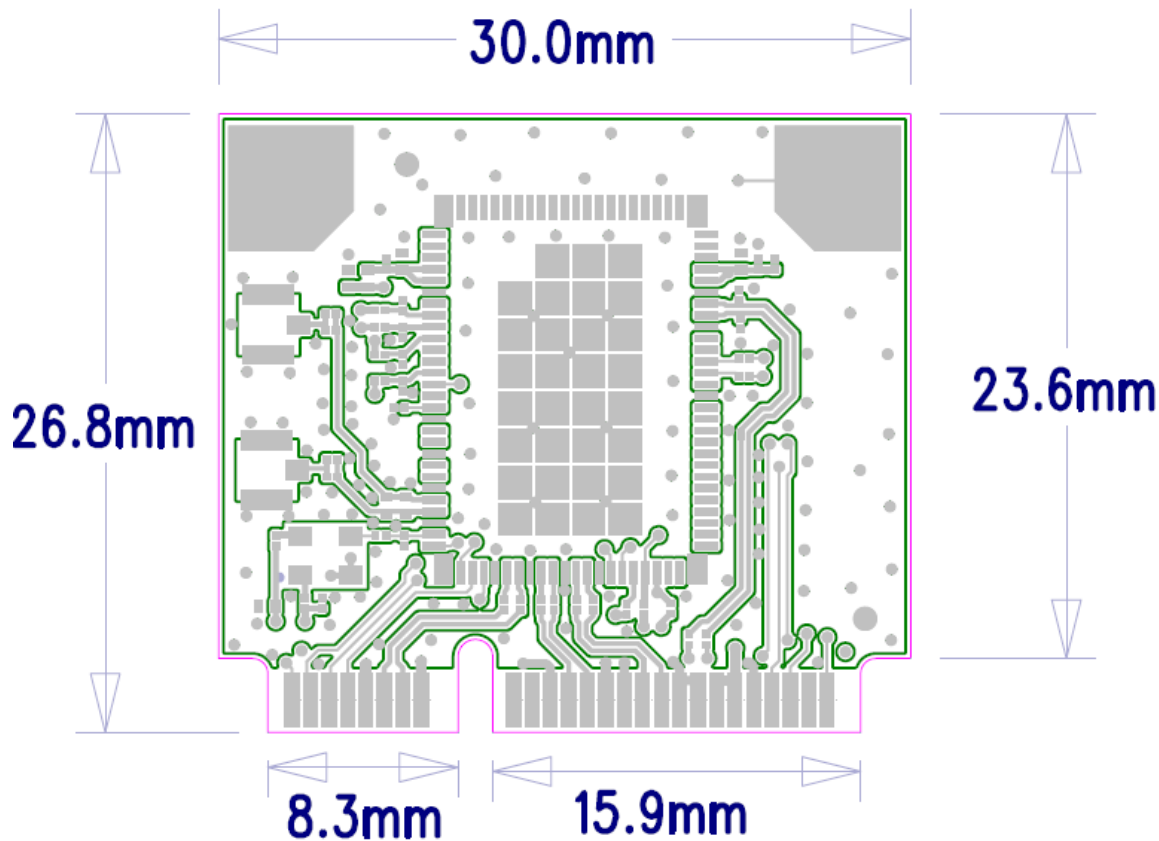

Pin feet from left to right

PIN	Description	PIN	Description	PIN	Description
1	WAKEn	19	N.C	37	GND
2	VDD33	20	PCIE_DISABLE	38	USB_DP
3	GPIO0/CLK_REQ	21	GND	39	VDD3.3V
4	GND	22	PCIE_PERST	40	GND
5	WLAN_IRQ(O)/WAKE_UP	23	PCIE_TX_N	41	VDD3.3V
6	N.C	24	VDD3.3V	42	N.C
7	PCIE_CLKREQ_N	25	PCIE_TX_P	43	GND
8	N.C	26	GND	44	LED_WLAN
9	GND	27	GND	45	GPIO[10]/NFC_NOT_ALLOWED
10	N.C	28	N.C	46	LED_WPAN
11	PCIE_CLE_N	29	GND	47	GPIO[11]/NFC_ACTIVE
12	N.C	30	N.C	48	N.C
13	PCIE_CLK_P	31	PCIE_RX_N	49	N.C
14	N.C	32	N.C	50	GND
15	GND	33	PCIE_RX_P	51	PDN
16	N.C	34	GND	52	+3.3Vaux
17	N.C	35	GND		
18	GND	36	USB_DM		

Notes:

1. PCIE Impedance targets: Single-ended Z of 60 ohms +- 15% . Differential Impedance of ~100 ohm +- 20%.

2. USB Impedance targets: D+/D- are differential and should have 90ohms impedance.


3. Product Picture



TOP VIEW



BOTTOM VIEW

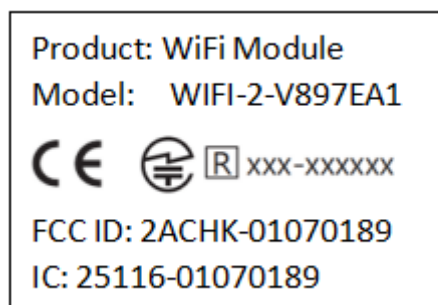

4. Electrical Specification

This Specification is based-on conductive DVT testing result. The extreme condition include overall temperature (-20°C,+25°C,+50°C) and overall voltage (3.3V +/-10% , 1.8V +/-10%).

4. 1 Absolute Maximum Ratings:

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remarks
Pin73/ VIO	Host I/O power supply	- - -	1.8 2.5 3.3	2.2 3.0 4.0	V	
Pin44/ VIO_SD	SDIO power supply	- -	1.8 3.3	2.2 4.0	V	
Pin5/ 3V3_VBAT	LDO VBAT input	-	3.3	4.0	V	
Pin72/ 3V3_USB	LDO USB VBAT input	-	3.3	4.0	V	
Pin4/ 3V3_RF	LDO RF VBAT input	-	3.3	4.0	V	

4. 2 Recommended Operating Conditions:

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remarks
Pin73/ VIO	1.8V/2.5V/3.3V digital I/O power supply	1.62 2.25 2.97	1.8 2.5 3.3	1.98 2.75 3.63	V	
Pin44/ VIO_SD	1.8V/3.3V digital I/O SDIO power supply	1.62 2.97	1.8 3.3	1.98 3.63	V	
Pin5/ 3V3_VBAT	LDO VBAT input	2.7	3.3	5.0	V	
Pin72/ 3V3_USB	LDO USB VBAT input	2.97	3.3	3.63	V	
Pin4/ 3V3_RF	LDO RF VBAT input	2.97	3.3	3.63	V	

4. 3 IEEE 802.11a Section:

Items	Contents					
Specification	IEEE802.11a					
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM					
Channel	CH36 to CH165					
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps					
TX Characteristics	Min.	Typ.	Max.	Unit	Remark	
1. Power Levels						
1) 13dBm Target (For Each antenna port)	11	13	15	dBm		
2. Spectrum Mask @ Target Power						
1) at fc +/-11MHz	-	-	-20	dBr		
2) at fc +/-20MHz	-	-	-28	dBr		
3) at fc > +/-30MHz	-	-	-40	dBr		
3. Constellation Error(EVM) @ Target Power						
1) 6Mbps	-	-	-5	dB		
2) 9Mbps	-	-	-8	dB		
3) 12Mbps	-	-	-10	dB		
4) 18Mbps	-	-	-13	dB		
5) 24Mbps	-	-	-16	dB		
6) 36Mbps	-	-	-19	dB		
7) 48Mbps	-	-	-22	dB		
8) 54Mbps	-	-	-25	dB		

4. Frequency Error	-20		20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) 6Mbps (PER $\leq$ 10%)	-	-	-84	dBm	
2) 9Mbps (PER $\leq$ 10%)	-	-	-83	dBm	
3) 12Mbps (PER $\leq$ 10%)	-	-	-81	dBm	
4) 18Mbps (PER $\leq$ 10%)	-	-	-79	dBm	
5) 24Mbps (PER $\leq$ 10%)	-	-	-76	dBm	
6) 36Mbps (PER $\leq$ 10%)	-	-	-72	dBm	
7) 48Mbps (PER $\leq$ 10%)	-	-	-68	dBm	
8) 54Mbps (PER $\leq$ 10%)	-	-	-67	dBm	
6. Maximum Input Level (PER $\leq$ 10%)	-30			dBm	

4.4 IEEE 802.11b Section:

Items	Contents				
Specification	IEEE802.11b				
Mode	DBPSK, DQPSK and CCK and DSSS				
Channel	CH1 to CH13				
Data rate	1, 2, 5.5, 11Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels(Calibrated)					
1) 16dBm Target (For Each antenna port)	14	16	18	dBm	
2. Spectrum Mask @ Target Power					
1) fc +/-11MHz to +/-22MHz	-	-	-30	dBr	
2) fc > +/-22MHz	-	-	-50	dBr	
3. Constellation Error(EVM) @ Target Power					
1) 1Mbps	-	-	-10	dB	
2) 2Mbps	-	-	-10	dB	
3) 5.5Mbps	-	-	-10	dB	
4) 11Mbps	-	-20	-10	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) 1Mbps (FER $\leq$ 8%)	-	-	-83	dBm	
2) 2Mbps (FER $\leq$ 8%)	-	-	-83	dBm	
3) 5.5Mbps (FER $\leq$ 8%)	-	-	-83	dBm	
4) 11Mbps (FER $\leq$ 8%)	-	-	-83	dBm	
6. Maximum Input Level (FER $\leq$ 8%)	-10	-	-	dBm	

4. 5 IEEE 802.11g Section:

Items	Contents				
Specification	IEEE802.11g				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH1 to CH13				
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels					
1) 14dBm Target (For Each antenna port)	12	14	16	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-11MHz	-	-	-20	dBr	
2) at fc +/-20MHz	-	-	-28	dBr	
3) at fc > +/-30MHz	-	-	-40	dBr	
3. Constellation Error(EVM) @ Target Power					
1) 6Mbps	-	-	-5	dB	
2) 9Mbps	-	-	-8	dB	
3) 12Mbps	-	-	-10	dB	
4) 18Mbps	-	-	-13	dB	
5) 24Mbps	-	-	-16	dB	
6) 36Mbps	-	-	-19	dB	
7) 48Mbps	-	-	-22	dB	
8) 54Mbps	-	-	-25	dB	
4. Frequency Error	-10	-	10	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) 6Mbps (PER $\leq$ 10%)	-	-	-89	dBm	
2) 9Mbps (PER $\leq$ 10%)	-	-	-87	dBm	
3) 12Mbps (PER $\leq$ 10%)	-	-	-86	dBm	
4) 18Mbps (PER $\leq$ 10%)	-	-	-84	dBm	
5) 24Mbps (PER $\leq$ 10%)	-	-	-81	dBm	
6) 36Mbps (PER $\leq$ 10%)	-	-	-77	dBm	
7) 48Mbps (PER $\leq$ 10%)	-	-	-73	dBm	
8) 54Mbps (PER $\leq$ 10%)	-	-	-72	dBm	
6. Maximum Input Level (PER $\leq$ 10%)	-30			dBm	

4.6 IEEE 802.11n HT20 Section:

Items	Contents				
Specification	IEEE802.11n HT20 @ 2.4G IEEE802.11n HT20 @ 5G				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH1 to CH13 @ 2.4G CH36 to CH165 @ 5G				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels					
1) 13dBm Target (For Each antenna port) @ 2.4G	11	13	15	dBm	
2) 12dBm Target (For Each antenna port) @ 5G	10	12	14	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-11MHz	-	-	-20	dBr	
2) at fc +/-20MHz	-	-	-28	dBr	
3) at fc > +/-30MHz	-	-	-45	dBr	
3. Constellation Error(EVM) @ Target Power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error					
1) IEEE802.11n HT20 @ 2.4G	-10	-	10	ppm	
2) IEEE802.11n HT20 @ 5G	-10	-	10	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) MCS0 (PER $\leq$ 10%)	-	-	-85	dBm	
2) MCS1 (PER $\leq$ 10%)	-	-	-82	dBm	
3) MCS2 (PER $\leq$ 10%)	-	-	-80	dBm	
4) MCS3 (PER $\leq$ 10%)	-	-	-77	dBm	
5) MCS4 (PER $\leq$ 10%)	-	-	-73	dBm	
6) MCS5 (PER $\leq$ 10%)	-	-	-69	dBm	
7) MCS6 (PER $\leq$ 10%)	-	-	-68	dBm	
8) MCS7 (PER $\leq$ 10%)	-	-	-67	dBm	

6. Maximum Input Level (PER $\leq 10\%$)					
1) IEEE802.11n HT20 @ 2.4G	-20	-	-	dBm	
2) IEEE802.11n HT20 @ 5G	-30	-	-	dBm	

4.7 IEEE 802.11n HT40 Section:

Items	Contents				
Specification	IEEE802.11n HT20 @ 2.4G IEEE802.11n HT20 @ 5G				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH3 to CH11 @ 2.4G CH38 to CH163 @ 5G				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
1) 11dBm Target (For Each antenna port) @ 2.4G	9	11	13	dBm	
2) 10dBm Target (For Each antenna port) @ 5G	8	10	12	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-21MHz	-	-	-20	dBr	
2) at fc +/-40MHz	-	-	-28	dBr	
3) at fc > +/-60MHz	-	-	-45	dBr	
3. Constellation Error(EVM) @ Target Power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error					
1) IEEE802.11n HT20 @ 2.4G	-10	-	10	ppm	
2) IEEE802.11n HT20 @ 5G	-12	-	12	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) MCS0 (PER $\leq 10\%$)	-	-	-82	dBm	
2) MCS1 (PER $\leq 10\%$)	-	-	-79	dBm	
3) MCS2 (PER $\leq 10\%$)	-	-	-77	dBm	
4) MCS3 (PER $\leq 10\%$)	-	-	-74	dBm	
5) MCS4 (PER $\leq 10\%$)	-	-	-70	dBm	
6) MCS5 (PER $\leq 10\%$)	-	-	-66	dBm	
7) MCS6 (PER $\leq 10\%$)	-	-	-65	dBm	
8) MCS7 (PER $\leq 10\%$)	-	-	-64	dBm	

6. Maximum Input Level(PER $\leq$ 10%)					
1) IEEE802.11n HT20 @ 2.4G	-20	-	-	dBm	
2) IEEE802.11n HT20 @ 5G	-30	-	-	dBm	

4.8 IEEE 802.11ac Section:

Items	Contents				
Specification	IEEE802.11ac				
Mode	BPSK, QPSK, 16QAM, 64QAM ,256QAM and OFDM				
Channel	CH42 to CH157 VHT80				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
1) 8dBm Target (For Each antenna port)	6	8	10	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-11MHz /20MHz/30MHz	-	-	-20	dBr	
2) at fc +/-21MHz /40MHz/60MHz	-	-	-28	dBr	
3) at fc +/-41MHz /80MHz/120MHz	-	-	-40	dBr	
3. Constellation Error(EVM) @ Target Power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-27	dB	
9) MCS8			-30	dB	
10) MCS9			-32	dB	
4. Frequency Error	-10	-	10	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)			VHT80		
1) MCS0 (PER $\leq$ 10%)			-76	dBm	
2) MCS1 (PER $\leq$ 10%)			-73	dBm	
3) MCS2 (PER $\leq$ 10%)			-71	dBm	
4) MCS3 (PER $\leq$ 10%)			-68	dBm	
5) MCS4 (PER $\leq$ 10%)			-65	dBm	
6) MCS5 (PER $\leq$ 10%)			-63	dBm	
7) MCS6 (PER $\leq$ 10%)			-61	dBm	
8) MCS7 (PER $\leq$ 10%)			-59	dBm	
9) MCS8 (PER $\leq$ 10%)			-56	dBm	
10) MCS9 (PER $\leq$ 10%)			-54	dBm	

6. Maximum Input Level(PER $\leq$ 10%)	-30	-	-	dBm	
--	-----	---	---	-----	--

4.9 Clock Specifications


Symbol	Parameter	Min.	Typ.	Max.	Unit
CLK	Clock Frequency Range	32 or 32.768 -50ppm	32 or 32.768	32 or 32.768 +50ppm	KHz
T _{HIGH}	Clock high time	40	-	-	ns
T _{LOW}	Clock low time	40	-	-	ns
T _{RISE}	Clock rise time	-	-	5	ns
T _{FALL}	Clock fall time	-	-	5	ns

4.10 Reset Configuration

WIFI-2-V897EA1 is reset to its default operating state under the following conditions:

- Power-on reset (POR)
- Software/Firmware reset
- External pin reset (RESETn)

4.11 Power up Timing Sequence

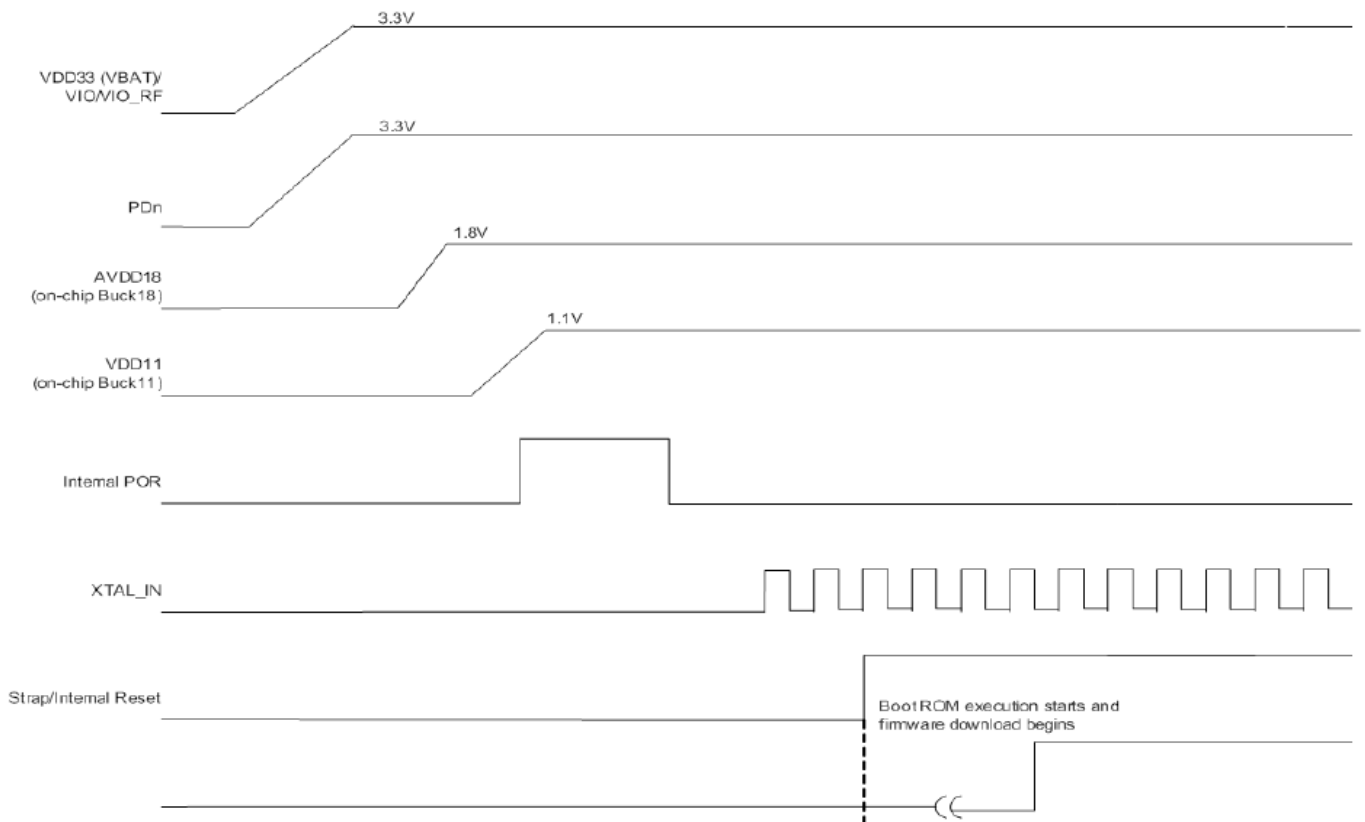

5. Interfaces

5.1.1 Host Interface

Pin Name	Supply	No Pad Power State	Reset State	HW State ¹	PD ² State	PD Prog ³	Internal PU/PD	PU ⁴	PD ³
PCIE_RCLK_P	AVDD18	--	--	--	--	--	--	--	--
PCI Express Differential Clock Input—Positive									
PCIE_RCLK_N	AVDD18	--	--	--	--	--	--	--	--
PCI Express Differential Clock Input—Negative									
PCIE_TX_P	AVDD18	--	--	--	--	--	--	--	--
PCI Express Transmit Data—Positive									
PCIE_TX_N	AVDD18	--	--	--	--	--	--	--	--
PCI Express Transmit Data—Negative									
PCIE_RX_P	AVDD18	--	--	--	--	--	--	--	--
PCI Express Receive Data—Positive									
PCIE_RX_N	AVDD18	--	--	--	--	--	--	--	--
PCI Express Receive Data—Negative									
PCIE_WAKEn	VIO	tristate	input	output	n/a	n/a	n/a	no	no
PCIe wake signal (output) (active low)									
PCIE_CLKREQn	VIO	tristate	input	output	n/a	n/a	n/a	no	no
PCIe clock request (input/output) (active low)									
PCIE_W_DISABLE/ GPIO[13]	VIO	tristate	input	input	tristate	yes	nominal PU	yes	yes
PCIe Mode: PCIe host indication to disable the WLAN function of the device (input) (active low) GPIO Mode: GPIO[13]									
PCIE_PERSTn/ GPIO[12]	VIO	tristate	input	input	tristate	yes	nominal PD	yes	yes
PCIe Mode: PCIe host indication to reset the device (input) (active low) GPIO Mode: GPIO[12]									

5.1.2 PCI Express Interface

Pin Name	PCI Express Specification Pin Name	I/O	Description
PCIE_RCLK_N	REFCLK_N	I	PCI Express Platform Reference Clock Negative signal of differential pair 100 MHz low-voltage interface
PCIE_RCLK_P	REFCLK_P	I	PCI Express Platform Reference Clock Positive signal of differential pair 100 MHz low-voltage interface
PCIE_TX_N	TXN	O	PCI Express Lane 0, Transmit Pair, Negative Signal 2.5 GHz serial low-voltage interface
PCIE_TX_P	TXP	O	PCI Express Lane 0, Transmit Pair, Positive Signal 2.5 GHz serial low-voltage interface
PCIE_RX_N	RXN	I	PCI Express Lane 0, Receive Pair, Negative Signal 2.5 GHz serial low-voltage interface
PCIE_RX_P	RXP	I	PCI Express Lane 0, Receive Pair, Positive Signal 2.5 GHz serial low-voltage interface
PCIE_WAKEn	WAKE#	O	PCI Express Wake Signal Driven low to re-activate the PCI Express link hierarchy's main power rails and reference clocks (open drain, active low)
PCIE_CLKREQn	CLKREQ#	I/O	PCI Express Clock Request Driven low to request the availability of the PCI Express reference clock in order to allow the PCI Express interface to send/receive data (open drain, active low). If L1 Substate is enabled, it is also used as input to replace analog squelch detection and indicate request from link partner to recover the link.
PCIE_PRESTn	PERSTn#	I	PCI Express Reset Used for setting or returning all port states to the initial conditions specified in the PCIe base specification. Asserted 100 ms after power rails are within specifications. (active low)
PCIE_W_DISABLEn	W_DISABLE#	I	PCI Express Wireless Disable Allows users to disable, thru a system-provided switch, the add-in card's radio operation in order to meet public safety regulations or when otherwise desired (active low)

5.2 PCI Express Interface

5.2.1 Interface Signal Description

Symbol	Parameter	Min.	Typ.	Max.	Unit
UI	Unit interval Each UI 400 ps $\pm$ 300 PPM UI does not account for SSC dictated variations	399.98	400-	400.12	ps
V _{TX-DIFFpp}	Differential peak-to-peak output voltage $V_{TX_DIFFpp}=2* V_{TX_D+} - V_{TX_D-} $	0.8	-	1.2	V
V _{TX-DE-RATIO}	De-emphasized differential output voltage(ratio)	-3.0	-3.5	-4.0	dB
T _{RX-EYE}	Minimum Tx eye width	0.75	-	-	UI
T _{RX-EYE-MEDIAN- MAX-JIT}	Maximum time between jitter median and maximum deviation from median	-	-	0.125	UI
T _{TX-RISE} T _{TX-FALL}	D+/D- Tx output rise/fall time	0.125	-	-	UI
T _{TX-CM-DC-ACTIVE-I DLE-DELTA}	Absolute delta of DC common mode voltage during L0 and electrical idle	0	-	100	mV
T _{TX-CM-DC-LINE-DE LTA}	Absolute delta of DC common mode voltage between D+ and D-	0	-	25	mV
T _{TX-IDLE-DIFFp}	Electrical idle differential peak output voltage	0	-	20	mV
T _{TX-RCV-DETECT}	Voltage change allowed during receiver detection	-	-	600	mV
T _{TX-DC-CM}	Tx DC common mode voltage	-	-	3.6	V
T _{TX-SHORT}	Tx short circuit current limit	-	-	90	mA
T _{TX-IDLE-MIN}	Minimum time spent in electrical idle	50	-	-	UI
T _{TX-IDLE-SET-TO-ID LE}	Maximum time to transition to a valid electrical idle after sending an electrical idle ordered set	-	-	20	UI
T _{TX-IDLE-TO-DIFF-D TA}	Maximum time to transition to valid Tx specifications after leaving an electrical condition	-	-	20	UI
RL _{TX-DIFF}	Differential return loss	10	-	-	dB
RL _{TX-CM}	Common mode return loss	6	-	-	dB
C _{TX}	AC coupling capacitor	7.5	-	200	nF
T _{Crosstalk}	Crosstalk random timeout	0	-	1	ms

5.2.2 Differential Rx Output Electricals

Symbol	Parameter	Min.	Typ.	Max.	Unit
UI	Unit interval Each UI 400 ps $\pm$ 300 PPM UI does not account for SSC dictated variations	399.98	400-	400.12	ps
V _{RX-DIFFpp}	Differential peak-to-peak output voltage $V_{RX_DIFFpp} = 2 * V_{TX_D+} - V_{TX_D-} $	0.175	-	1.2	V
T _{RX-EYE}	Minimum Tx eye width	0.4	-	-	UI
T _{RX-EYE-MEDIAN-MAX-JIT}	Maximum time between jitter median and maximum deviation from median	-	-	0.3	UI
V _{RX-CM-ACp}	AC peak common mode input voltage	-	-	150	mV
RL _{RX-DIFF}	Differential return loss	10	-	-	dB
RL _{RX-CM}	Common mode return loss	6	-	-	dB
Z _{RX-DIFF-DC}	DC differential input impedance	80	100	120	Ω
Z _{RX-DC}	DC input impedance	40	50	60	Ω
Z _{RX-HIGH-IMP-DC-POS}	Powered down DC input impedance positive	50	-	-	k
Z _{RX-HIGH-IMP-DC-NEG}	Powered down DC input impedance negative	1	-	-	k Ω
V _{RX-IDLE-DET-DIFFp}	Electrical idle detect threshold	65	-	175	UI
T _{RX-IDLE-DET-DIFF-ENTERTIME}	Unexpected electrical idle enter detect threshold integration time	-	-	10	UI
L _{RX-SKEW}	Total skew	-	-2	0	dB

5.3 USB Interface

5.3.1 USB 2.0 Device Interface Description

Pin Name	USB 2.0 Specification Pin Name	Description
Pin72/3V3_USB	VBUS	USB Bus Power Supply On-board regulator regulates voltage from VBUS level to voltage levels used by USB PHY
	GND	USB Bus Ground Common ground on SoC device
Pin70/USB_DP	D+	USB Data Plus One of the differential data pair
Pin69/USB_DM	D-	USB Data Minus One of the differential data pair

ftware Requirements

The driver supports the following operating systems: Linux, Microsoft Windows XP, Vista and Win7.

Mfg. software tool version is :

MFG-W8897-MF-WIFI-BT-NFC-NO-CAL-BRG-FC-WIN-X86-2.1.0.76-15.2.7.p22

7. Statement:

FCC Radiation Exposure Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The modular can be installed or integrated in mobile or fix devices only. This modular be installed in any portable device, for example, USB dongle like transmitters is forbidden. This modular complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be collocated or operating in conjunction with antenna or transmitter. If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display label referring to the enclosed module. This exterior label can use wording such as the following:” Contains Transmitter Module FCC ID: 2ACHK- 01070189 Or Contains FCC ID: 2ACHK- 01070189 when the module is installed inside another device, the user manual of this device must contain below warning statements;1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions :(1) This device may not cause harmful interference.(2) This device must accept any interference received, including interference that may undesired operation.2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product. This device is intended only for OEM integrators under the following conditions:1) The antenna must be installed such that 20 cm is maintained between the antenna and user.2) The transmitter module may not be co-located with any other transmitter or antenna. Module Antenna Type 1: 2.4G ANT,

1.8dBi gain; 5G ANT, 6dBi gain; Antenna Type 2: 2.4G ANT, 2.4dBi gain; 5G ANT, 3.6dBi gain;

The antenna installation and operating configurations of this transmitter, including any applicable source-based time- averaging duty factor, antenna gain and cable loss must satisfy MPE categorical Exclusion Requirements of 2.1091.

The host end product must include a user manual that clearly defines operating requirements and conditions that must be observed to ensure compliance with current FCC RF exposure guidelines.

For portable devices, in addition to the conditions 3 through 6 described above, a separate approval is required to satisfy the SAR requirements of FCC Part 2.1093

If the device is used for other equipment that separate approval is required for all other operating configurations, including portable configurations with respect to 2.1093 and different antenna configurations.

The final host / module combination may also need to be evaluated against the FCC Part 15B criteria for unintentional radiators in order to be properly authorized for operation as a Part 15 digital device.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. In cases where the manual is provided only in a form other than paper, such as on a computer disk or over the Internet, the information required by this section may be included in the manual in that alternative form, provided the user can reasonably be expected to have the capability to access information in that form.

Any modifications made to the module will void the Grant of Certification, this module is limited to OEM installation only and must not be sold to end-users, end-user has no manual instructions to remove or install the device, only software or operating procedure shall be placed in the end-user operating manual of final products.

IC Radiation Exposure Statement

RSS-Gen standard.

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

According to the definition of mobile and fixed device is described in RSS-102, this device is a mobile device; maintain at least a 20 cm separation between the EUT and the user's body and must not transmit simultaneously with any other antenna or transmitter.

Déclaration sur l'exposition aux rayonnements RF

L'autre utilisé pour l'émetteur doit être installé pour fournir une distance de séparation d'au moins 20 cm de toutes les personnes et ne doit pas être colocalisé ou fonctionner conjointement avec une autre antenne ou un autre émetteur.

The host product shall be properly labelled to identify the modules within the host product.

The Innovation, Science and Economic Development Canada certification label of a module shall be clearly visible at all times when installed in the host product; otherwise, the host product must be labelled to display the Innovation, Science and Economic Development Canada certification number for the module, preceded by the word "Contains" or similar wording expressing the same meaning, as follows:

"Contains IC: 25116-01070189" or "where: 25116-01070189 is the module's certification number".

Le produit hôte doit être correctement étiqueté pour identifier les modules dans le produit hôte.

L'étiquette de certification d'Innovation, Sciences et Développement économique Canada d'un module doit être clairement visible en tout temps lorsqu'il est installé dans le produit hôte; sinon, le produit hôte doit porter une étiquette indiquant le numéro de certification d'Innovation, Sciences et Développement économique Canada pour le module, précédé du mot «Contient» ou d'un libellé semblable exprimant la même signification, comme suit:


"Contient IC:25116-01070189" ou "où: 25116-01070189 est le numéro de certification du module".

W52 is in door use only

AP mode

WIFI module works in AP mode, it connects to workstation by the wireless network card of the workstation. Data and command flows in workstation directly.

In normal case, workstation sends command to wifi module through wireless network card.

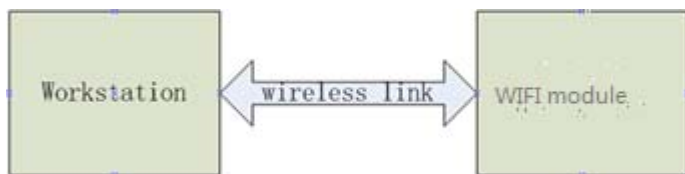

Principle

Input voltage is 3.3V. Voltage Classified Start-up after Power Supply. The PHY layer and the physical layer of the main IC work together to emit the modulation waveform and bandwidth required by the target.