
# 3216 Chip antenna

### For Bluetooth / WLAN Applicationsd

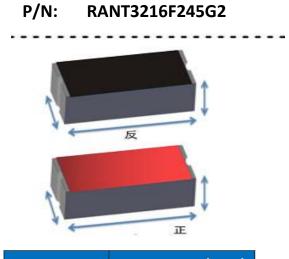

	Dimension (mm)		
L	3.23 ± 0.20		
W	1.66 ± 0.20		
Т	1.23 ± 0.20		

Company: Shenzhen Xinghaisheng Technology Co., Ltd Address:Building 3, 2nd Floor, Zhifeng Industrial Park, No. 68 Shahe Road, Longgang District, Shenzhen

### **Part Number Information**


A	Product Series	Antenna		
В	Dimension L x W	3.2X1.6mm (+-0.2mm)		
C	Material	High K material		
D	Working Frequency	2.4 ~ 2.5GHz		
E	Feeding mode	Monopole & Single Feeding		
F	Antenna type	Type=02		

### 1. Electrical Specification

Specification				
Part Number	RANT3216F245M02			
Central Frequency	2450	MHz		
Bandwidth	idth 100 (Min.)			
Return Loss	-6.5 (Max) d			
Peak Gain	Peak Gain 2.71			
Impedance	50	Ohm		
Operating Temperature	-40 ~ +85	°C		
Maximum Power	4 W			
Resistance to Soldering Heats	10 ( @ 260°C) sec			
Polarization	Linear			
Azimuth Beamwidth	Omni-directional			
Termination	Cu / Sn (Leadless)			

#### 2. Recommended PCB Pattern


#### **Evaluation Board Dimension**

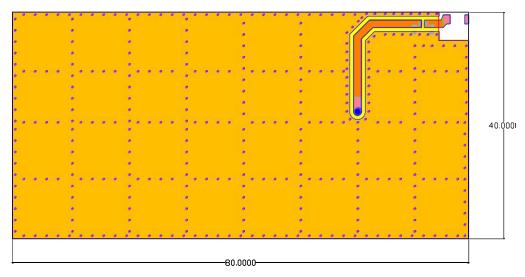


Unit: mm




### **Suggested Matching Circuit**

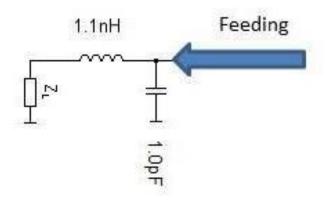

Layout Dimensions in Clearance area(Size=5.2\*5.0mm)

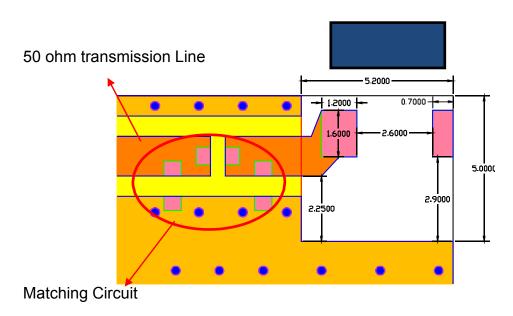


FootPrint (Unit:mm)

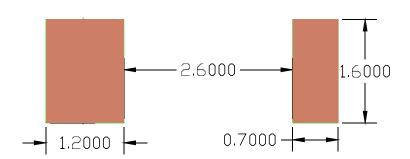


#### 3. Measurement Results

#### **Return Loss**

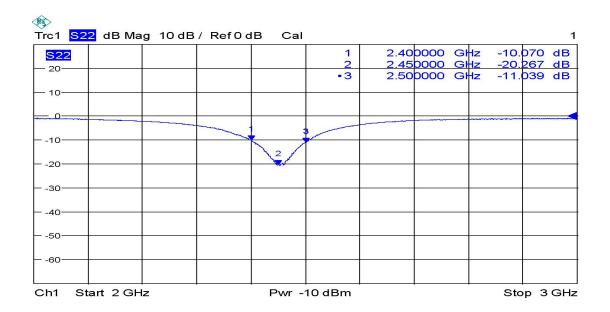


#### **Radiation Pattern**

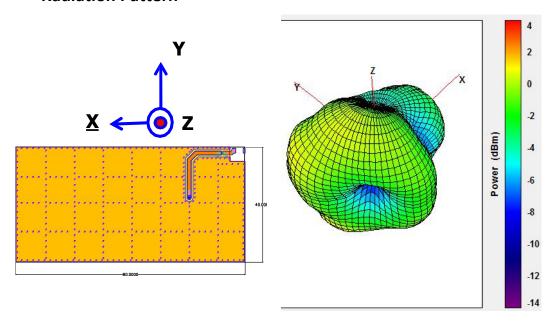

	Efficiency	Peak Gain	Directivity
2400MHz	55.21 %	1.45 dBi	5.32 dBi
2450MHz	66.45 %	2.71 dBi	5.21 dBi
2500MHz	57.53 %	1.98 dBi	5.29 dBi

Chamber Coordinate System

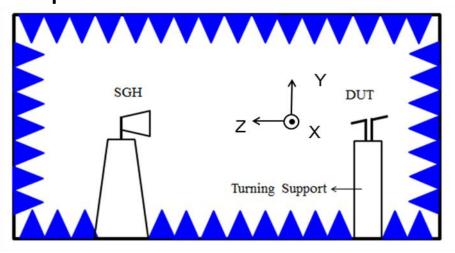



ITEM	REQUIREMENTS	TEST CONDITION
Solderability	1. Wetting shall exceed 90% coverage 2. No visible mechanical damage  TEMP (°C)  230°C  4±1 sec.  150°C	Pre-heating temperature:150°C/60sec. Solder temperature:230±5°C Duration:4±1sec. Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin
Solder heat Resistance	1. No visible mechanical damage 2. Central Freq. change :within ± 6%  TEMP (°C)  260°C  150°C  60sec	Pre-heating temperature:150°C/60sec. Solder temperature:260±5°C Duration:10±0.5sec. Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin
Component Adhesion (Push test)	No visible mechanical damage	The device should be reflow soldered(230±5°C for 10sec.) to a tinned copper substrate A dynometer force gauge should be applied the side of the component. The device must with-ST-F 0.5 Kg without failure of the termination attached to component.
Component Adhesion (Pull test)	No visible mechanical damage	Insert 10cm wire into the remaining oper eye bend ,the ends of even wire lengths upward and wind together.  Terminal shall not be remarkably damaged.

Thermal shock	1. No visible mechanical damage  2. Central Freq. change: within +6%  Phase Temperature(°C) Time(min)  1. +85±5°C 30±3  2. Room Within Temperature 3sec	+85°C=>30±3min -40°C=>30±3min Test cycle:10 cycles The chip shall be stabilized at normal condition for 2~3 hours before measuring.	
	3 -40±2°C 30±3 4 Room Within Temperature 3sec		
Resistance to High Temperature	No visible mechanical damage     Central Freq. change :within ±6%     No disconnection or short circuit.	Temperature: 85±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.	
Resistance to Low Temperature	No visible mechanical damage     Central Freq. change :within ±6%     No disconnection or short circuit.	Temperature:-40±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.	
Humidity	No visible mechanical damage     Central Freq. change :within ±6%     No disconnection or short circuit.	Temperature: 40±2°C Humidity: 90% to 95% RH Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.	

#### 5. Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.



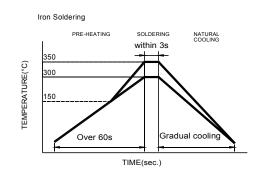


Recommended temperature profiles for re-flow soldering in Figure 1.

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be


- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3 sec.

### **6.Packaging Information**

#### **♦** Tape Specification:

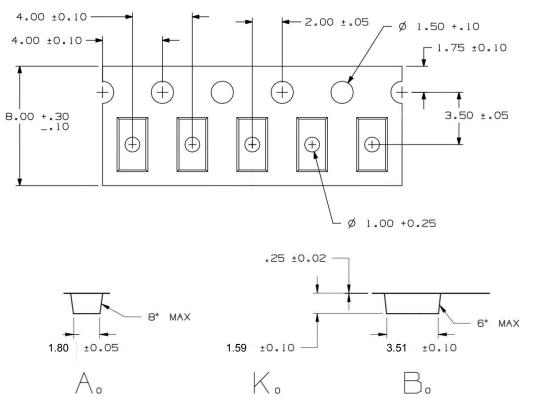

♦ Reel Specification: (7", Φ180 mm)

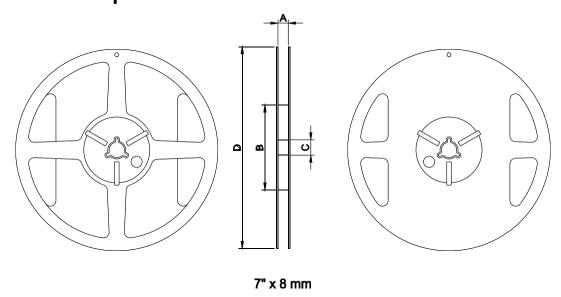

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)
8	9.0±0.5	60±2	13.5±0.5	178±2	5000

#### 7. Storage and Transportation Information

#### **Storage Conditions**

To maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: -10~ 40°C and 30~70% RH.
- 2. Recommended products should be used within 6 months from the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air.

#### **Transportation Conditions**

- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.