



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Car Diagnostics Tablet

Test Model: P804

Environmental Conditions

Temperature:	24.0° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Bill Zhu
Supervised by:	Li huan





A.1 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit (MHz)
NVNT	1-DH5	2402	Ant1	1.033	/
NVNT	1-DH5	2441	Ant1	1.027	/
NVNT	1-DH5	2480	Ant1	1.011	/
NVNT	2-DH5	2402	Ant1	1.308	/
NVNT	2-DH5	2441	Ant1	1.307	/
NVNT	2-DH5	2480	Ant1	1.323	/
NVNT	3-DH5	2402	Ant1	1.308	/
NVNT	3-DH5	2441	Ant1	1.288	/
NVNT	3-DH5	2480	Ant1	1.287	/






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

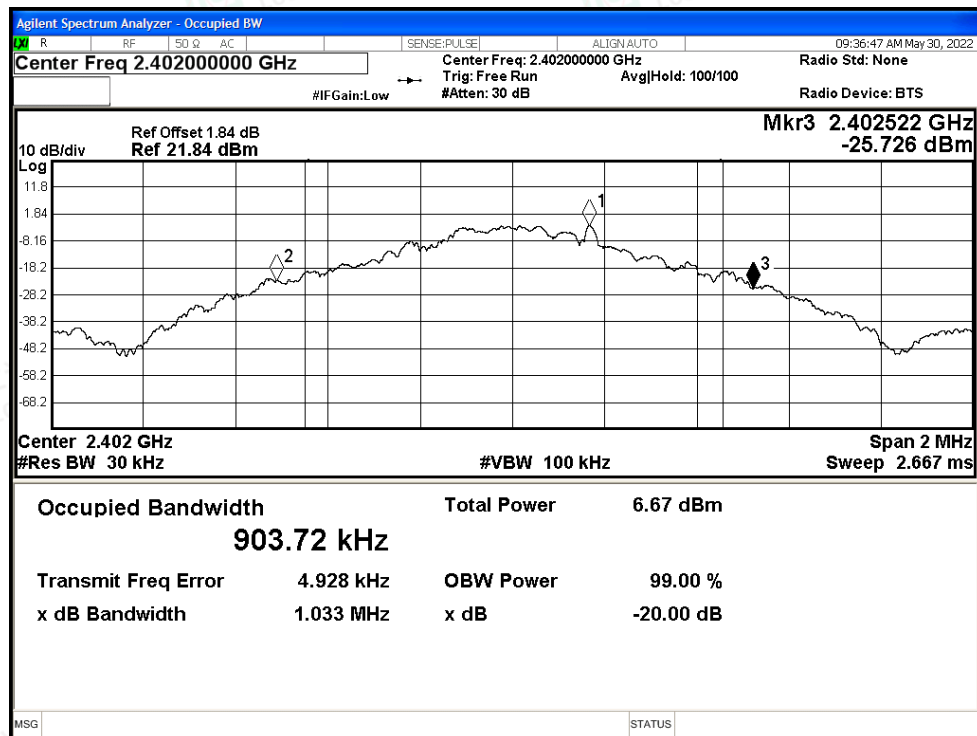


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

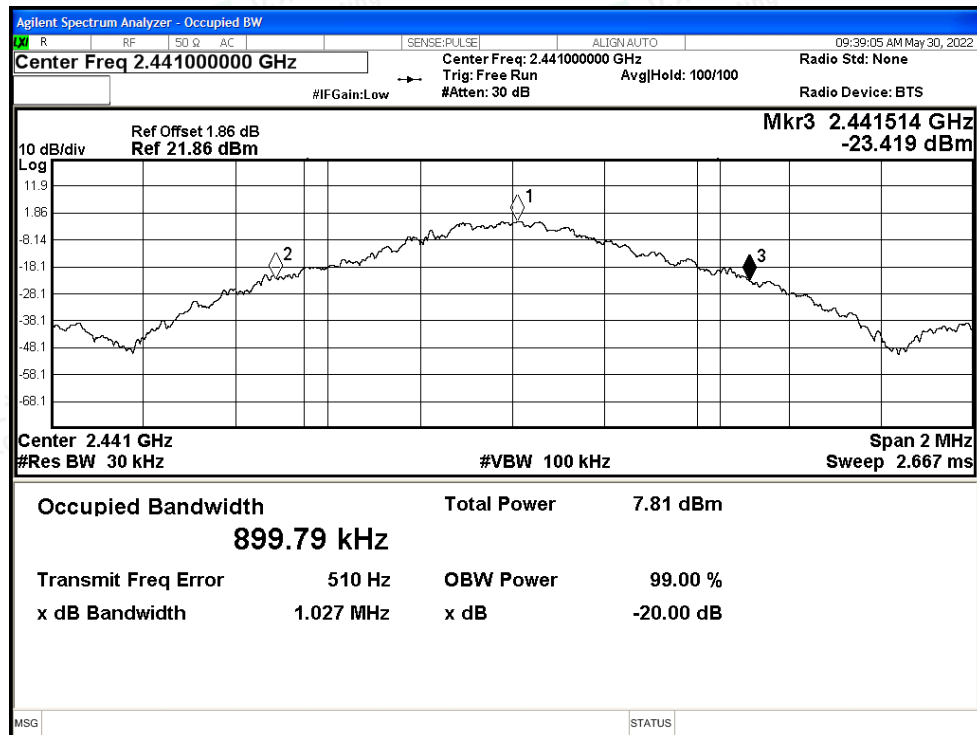




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

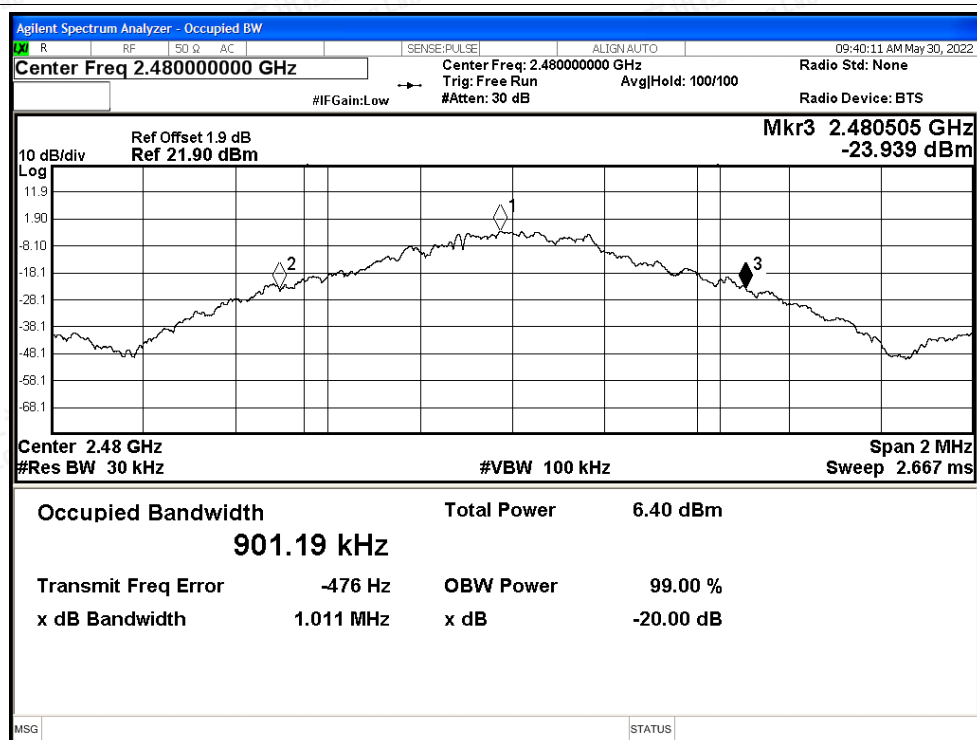


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

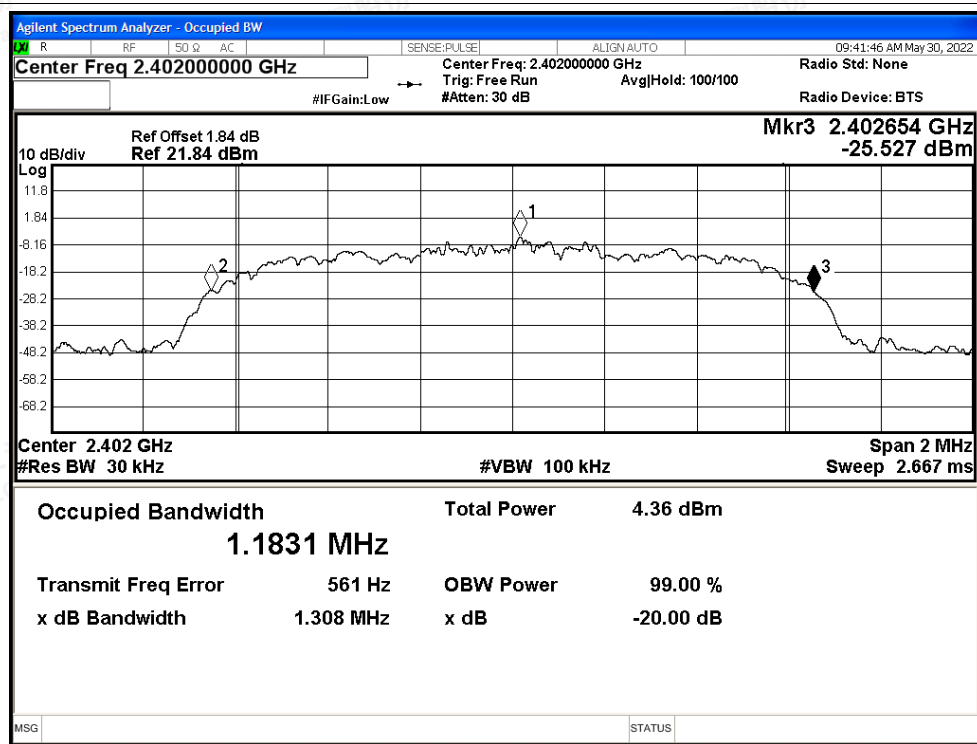




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

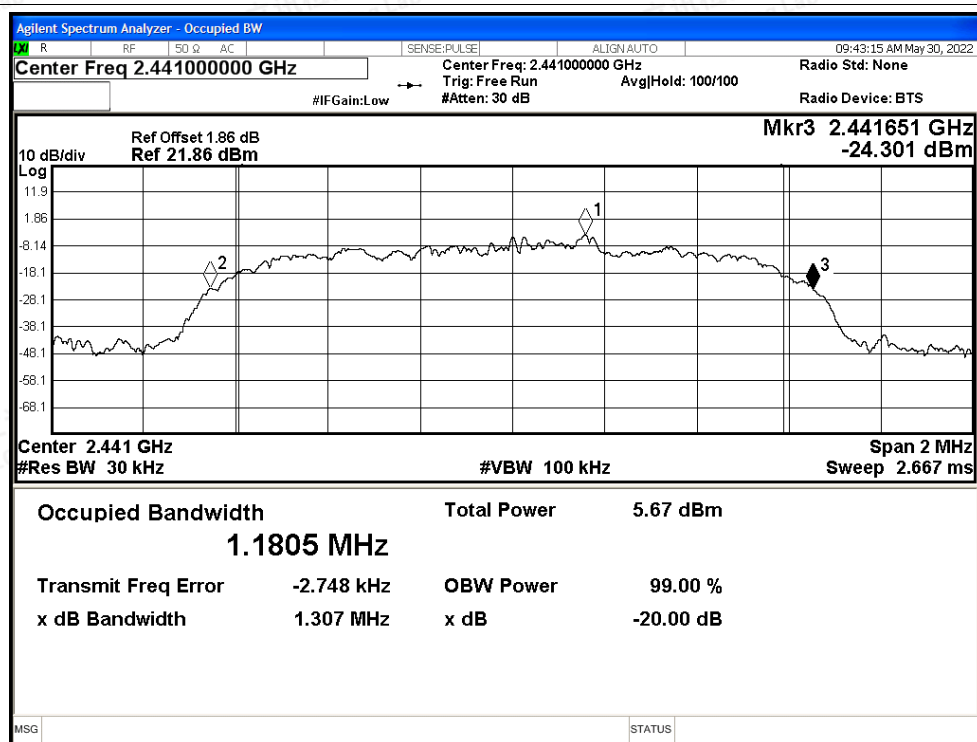


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

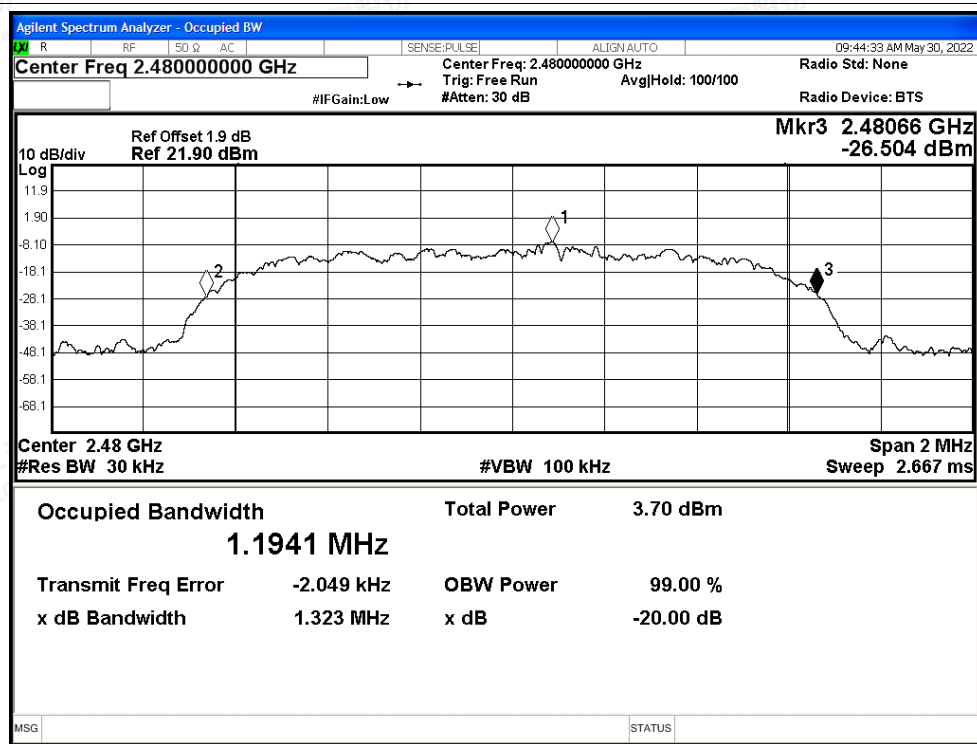




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

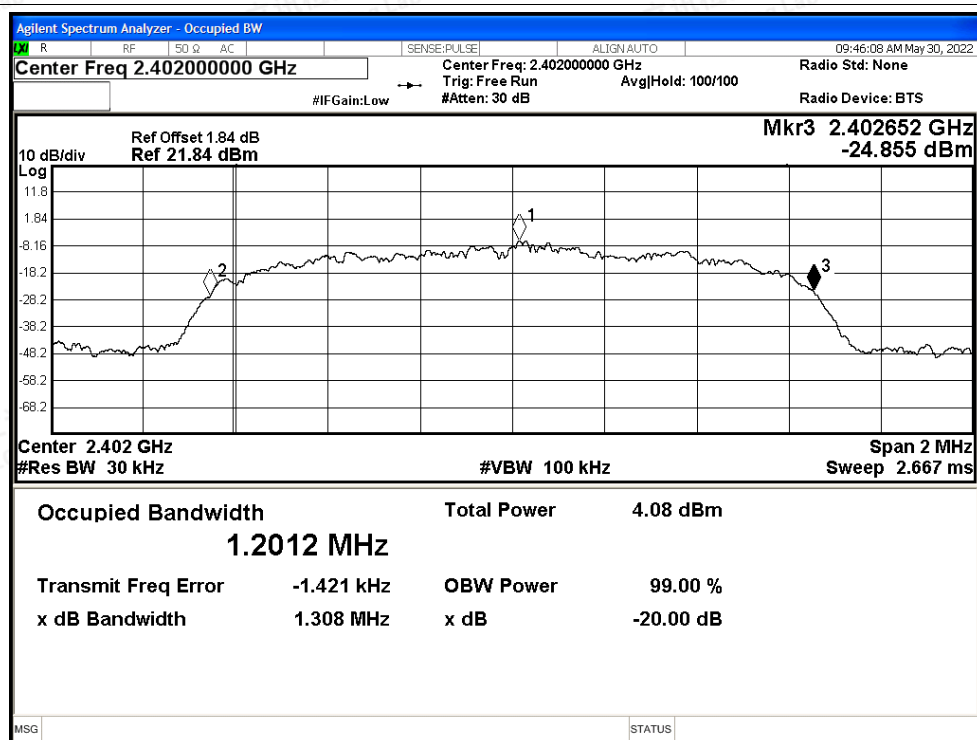

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

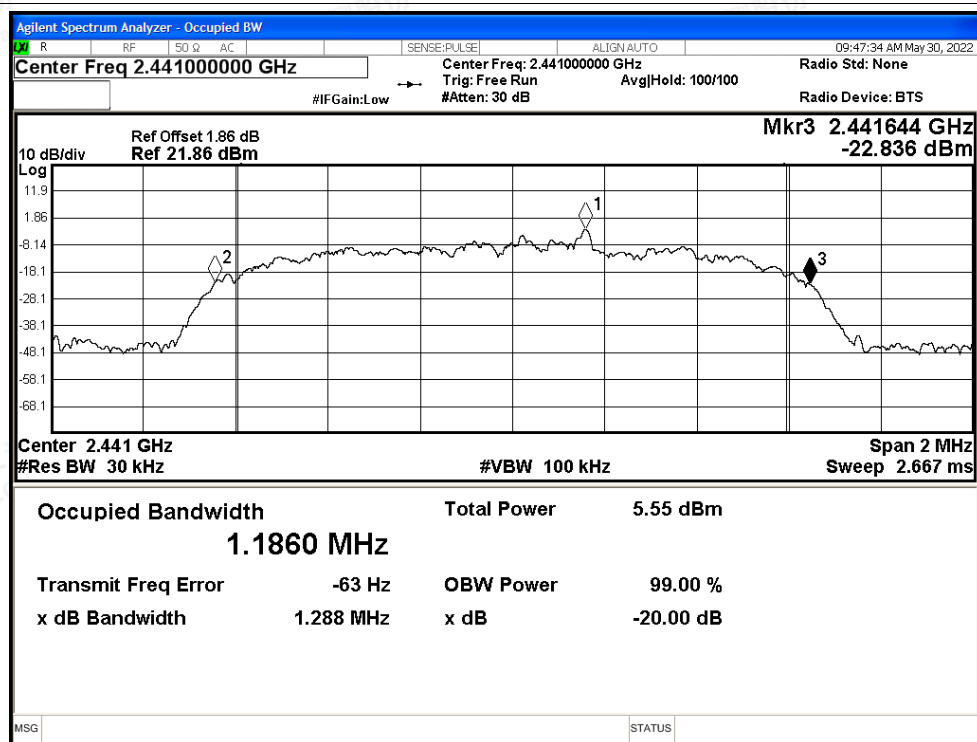

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

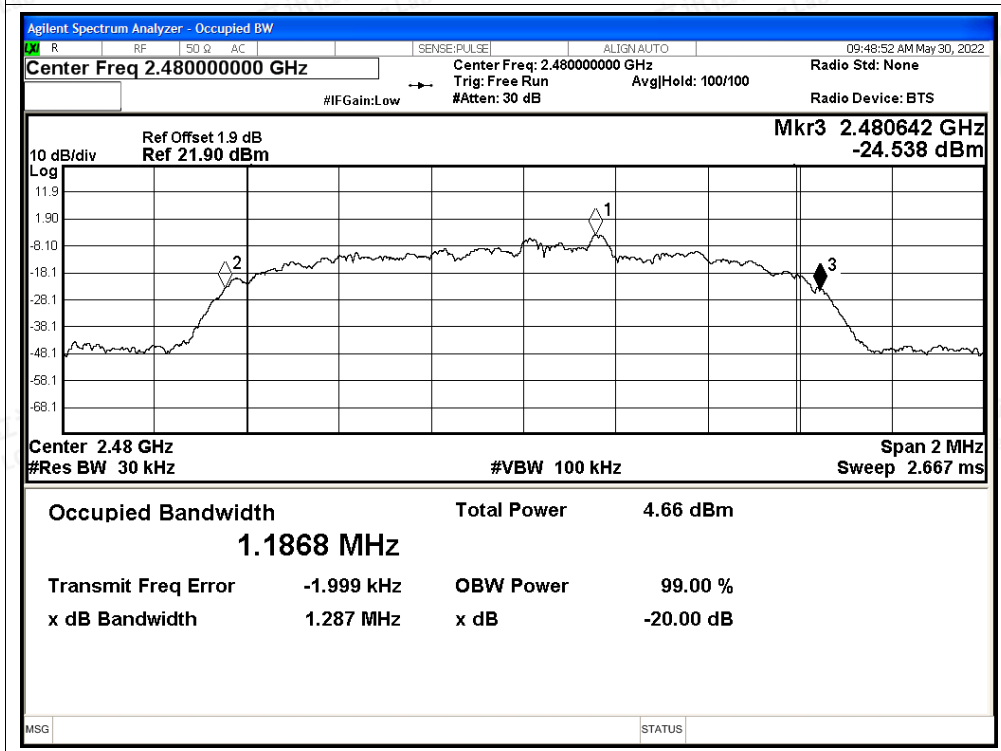



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.37	21	Pass
NVNT	1-DH5	2441	Ant1	1.68	21	Pass
NVNT	1-DH5	2480	Ant1	0.23	21	Pass
NVNT	2-DH5	2402	Ant1	-0.53	21	Pass
NVNT	2-DH5	2441	Ant1	0.78	21	Pass
NVNT	2-DH5	2480	Ant1	-0.62	21	Pass
NVNT	3-DH5	2402	Ant1	-0.4	21	Pass
NVNT	3-DH5	2441	Ant1	0.92	21	Pass
NVNT	3-DH5	2480	Ant1	-0.47	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

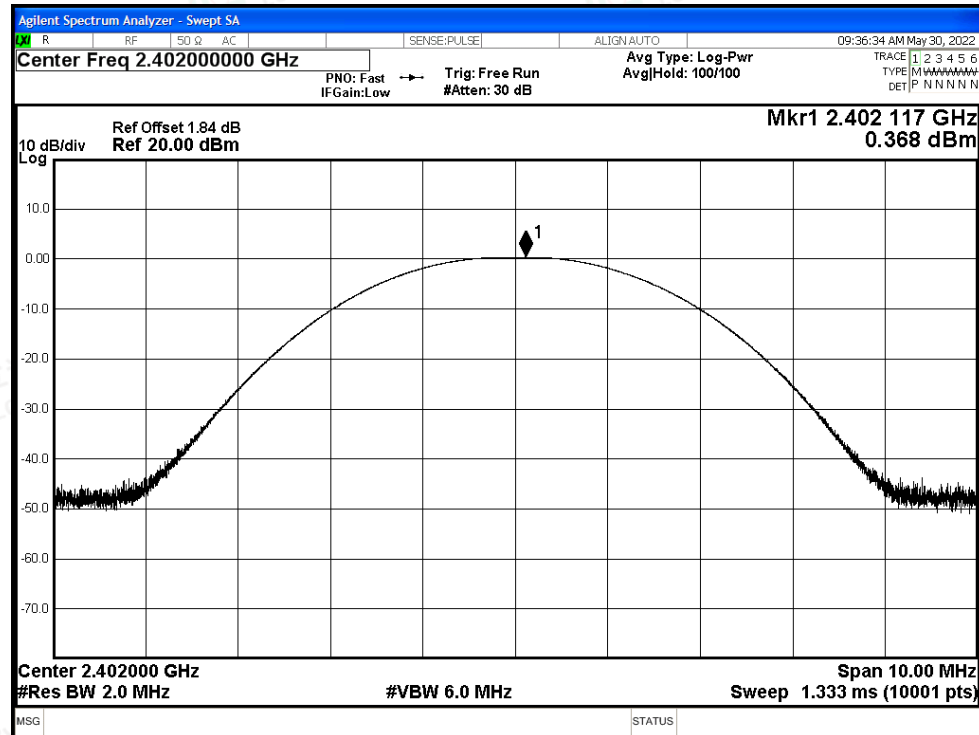


Power NVNT 1-DH5 2441MHz Ant1

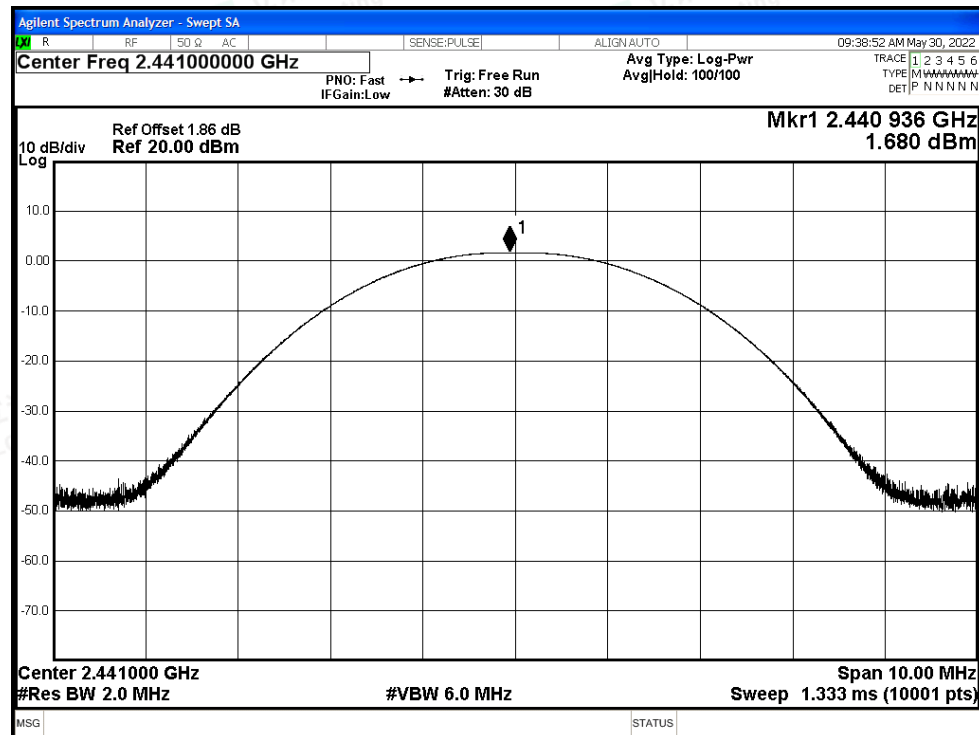




Power NVNT 1-DH5 2480MHz Ant1

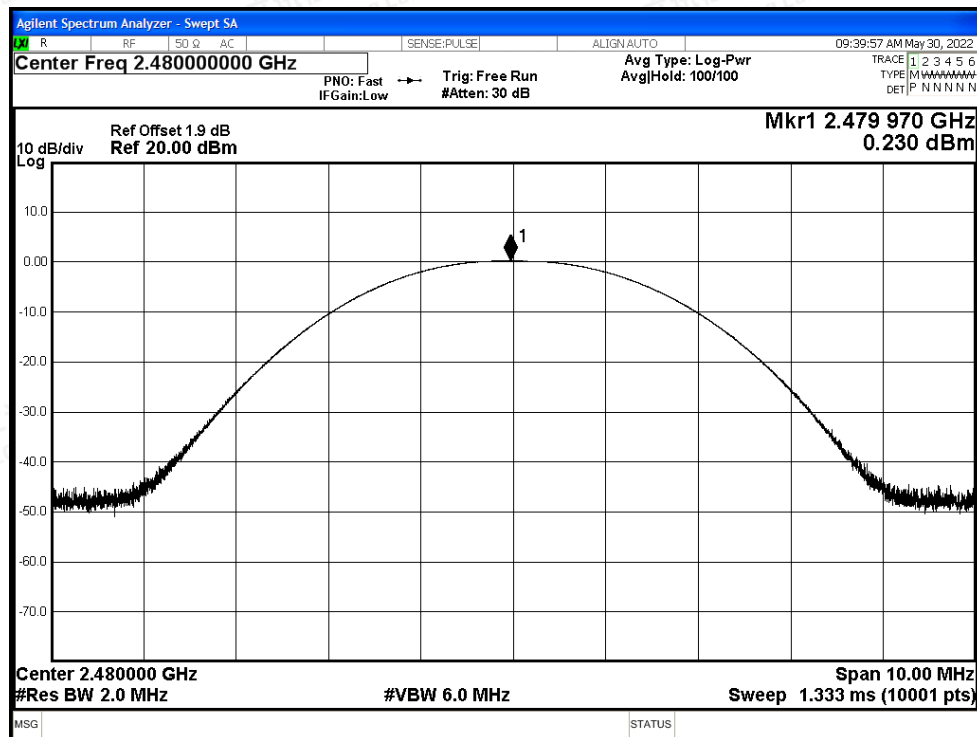


Power NVNT 2-DH5 2402MHz Ant1

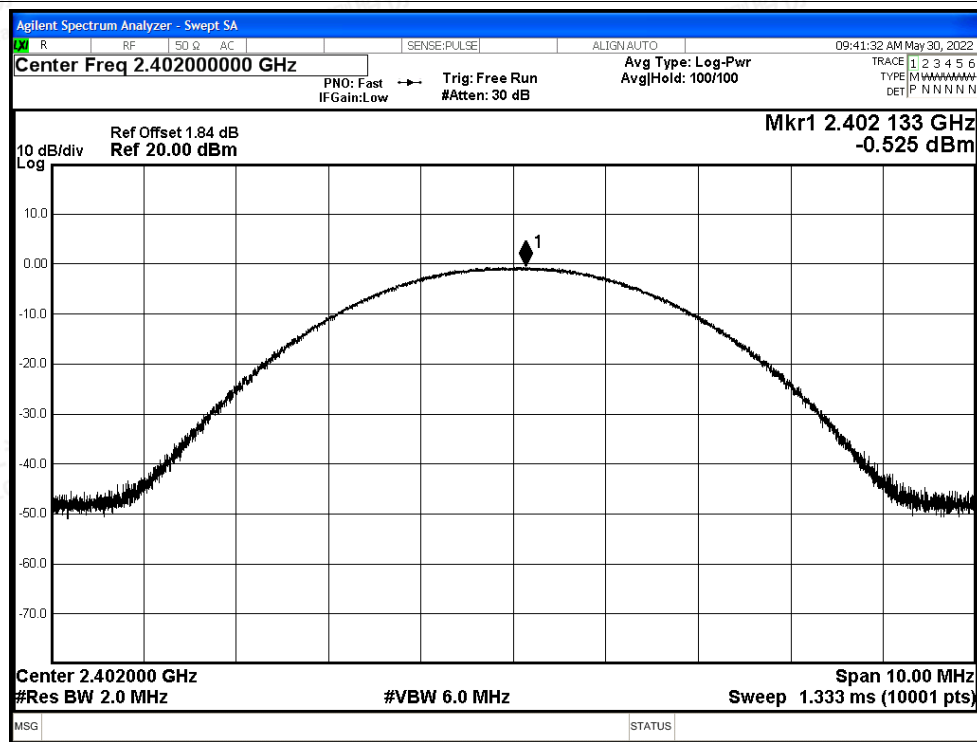




Power NVNT 2-DH5 2441MHz Ant1

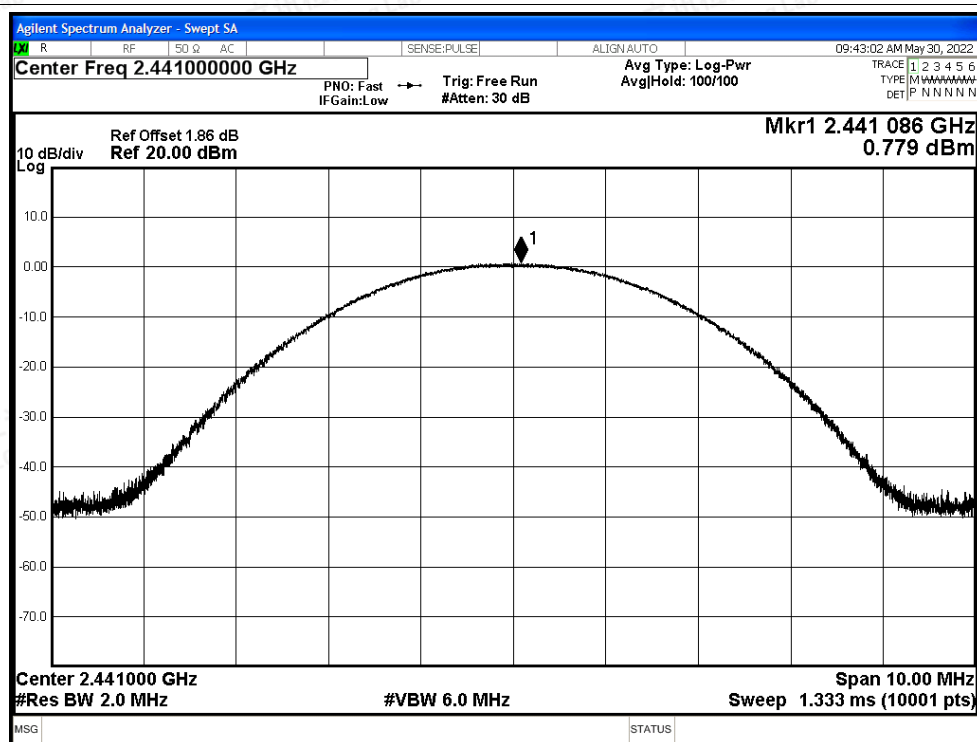

Power NVNT 2-DH5 2480MHz Ant1

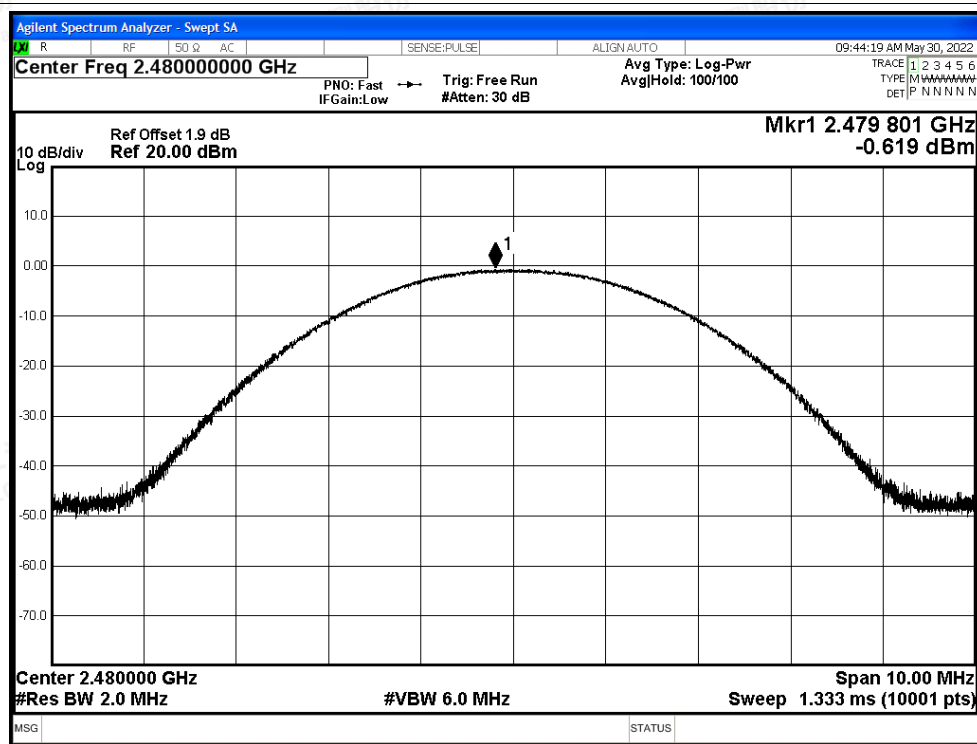

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




Power NVNT 3-DH5 2402MHz Ant1

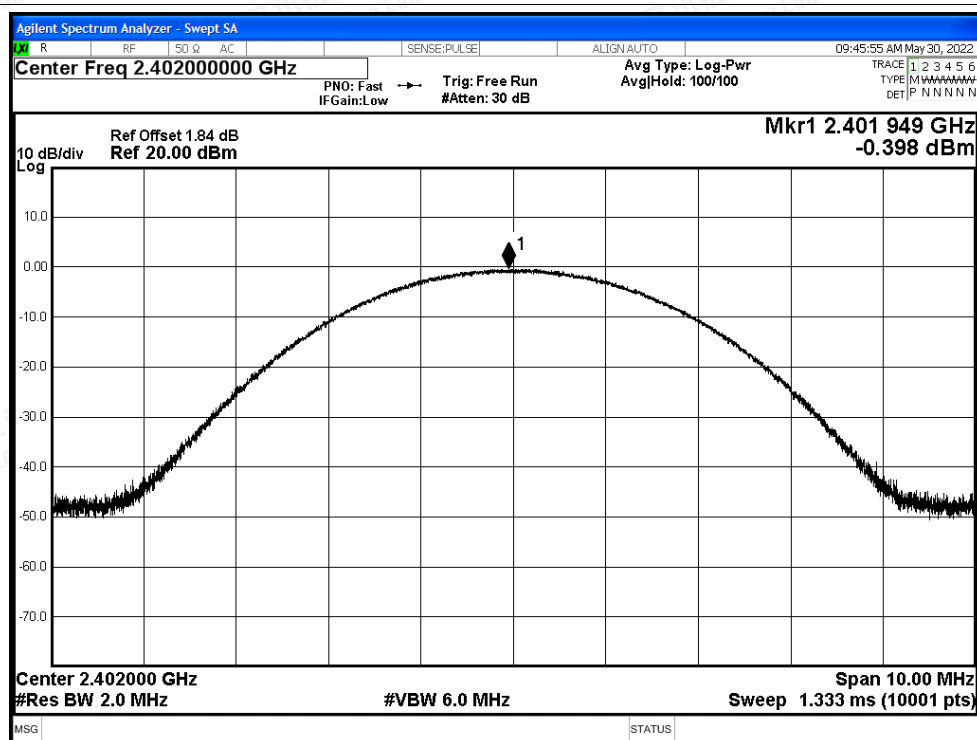

Power NVNT 3-DH5 2441MHz Ant1

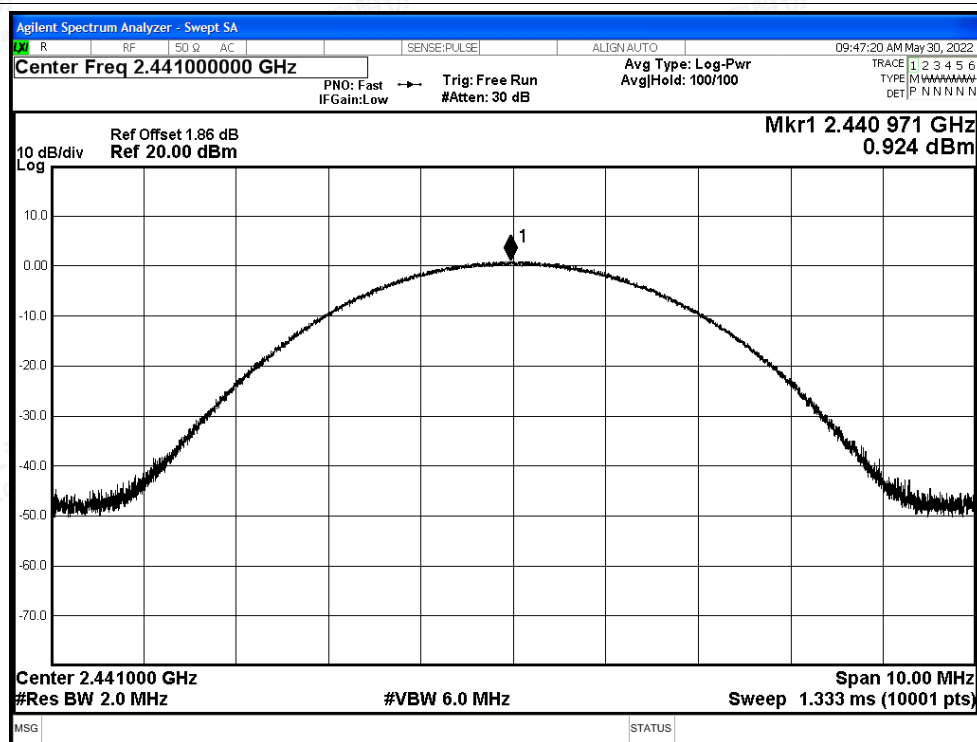

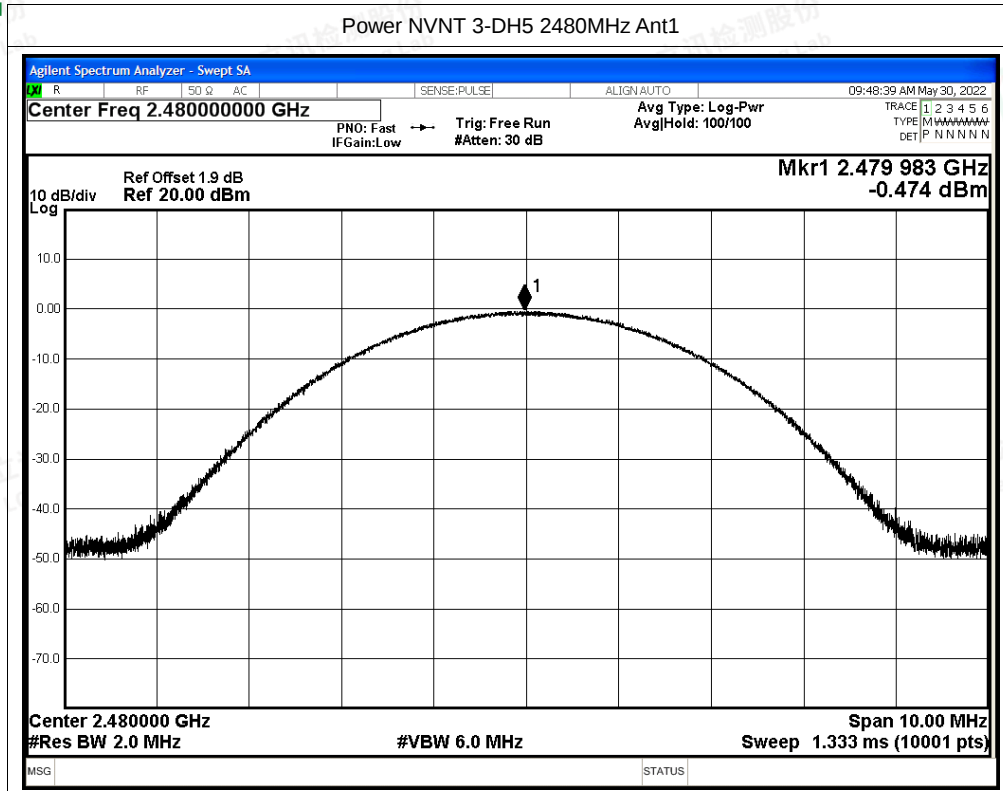



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.974	2403.156	1.182	0.689	Pass
NVNT	2-DH5	Ant1	2402.012	2403.01	0.998	0.872	Pass
NVNT	3-DH5	Ant1	2402.012	2403.128	1.116	0.872	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

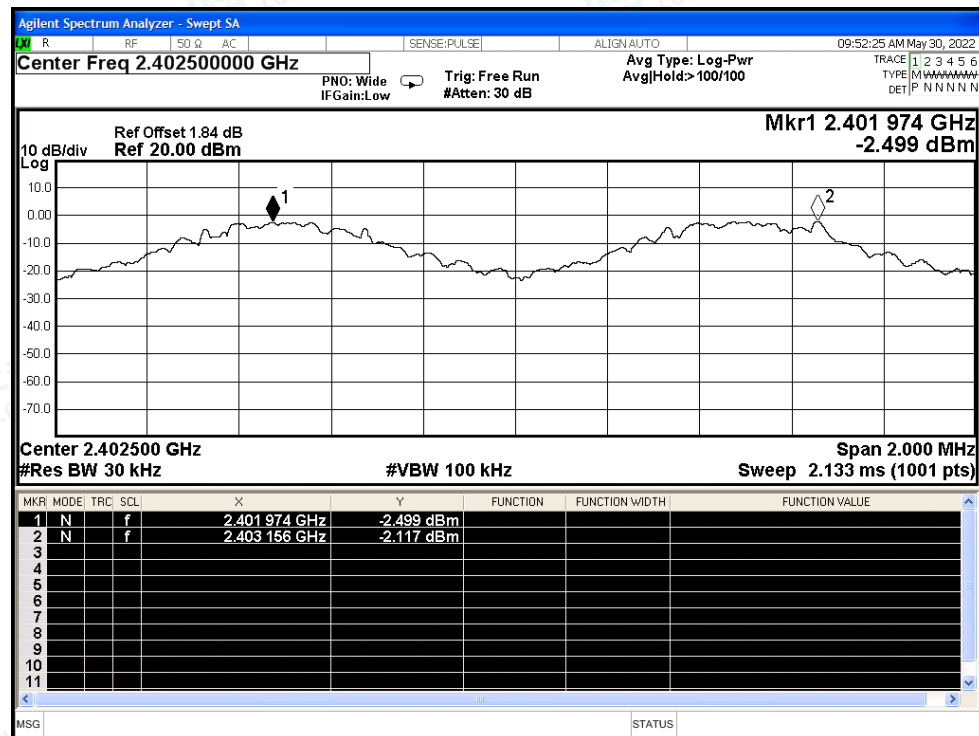


CFS NVNT 2-DH5 2402MHz Ant1

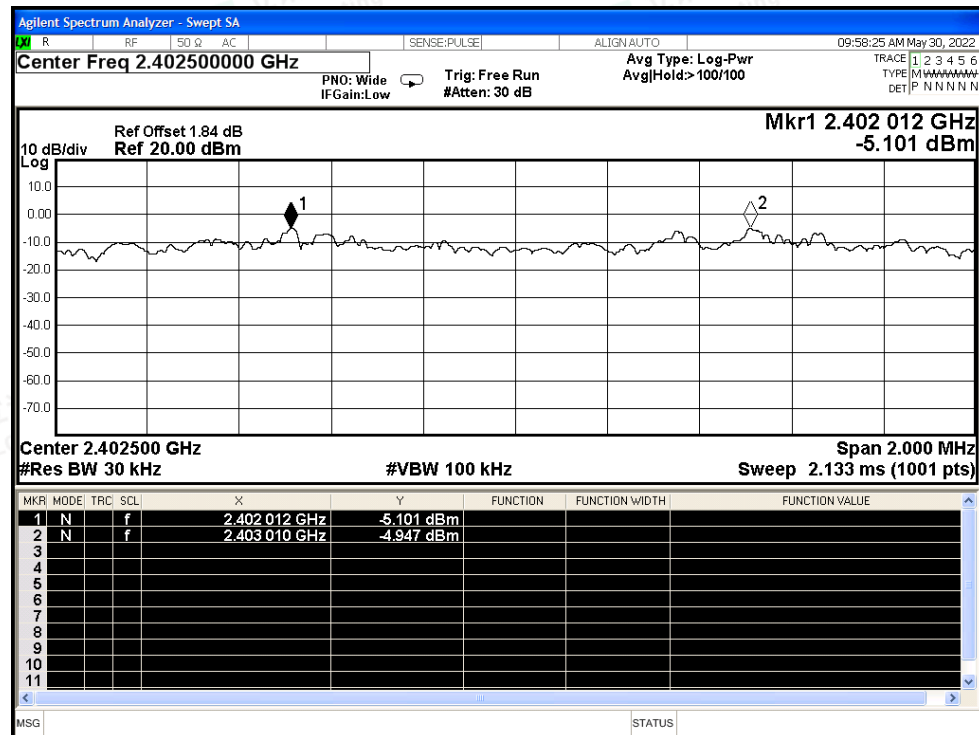



CFS NVNT 3-DH5 2402MHz Ant1

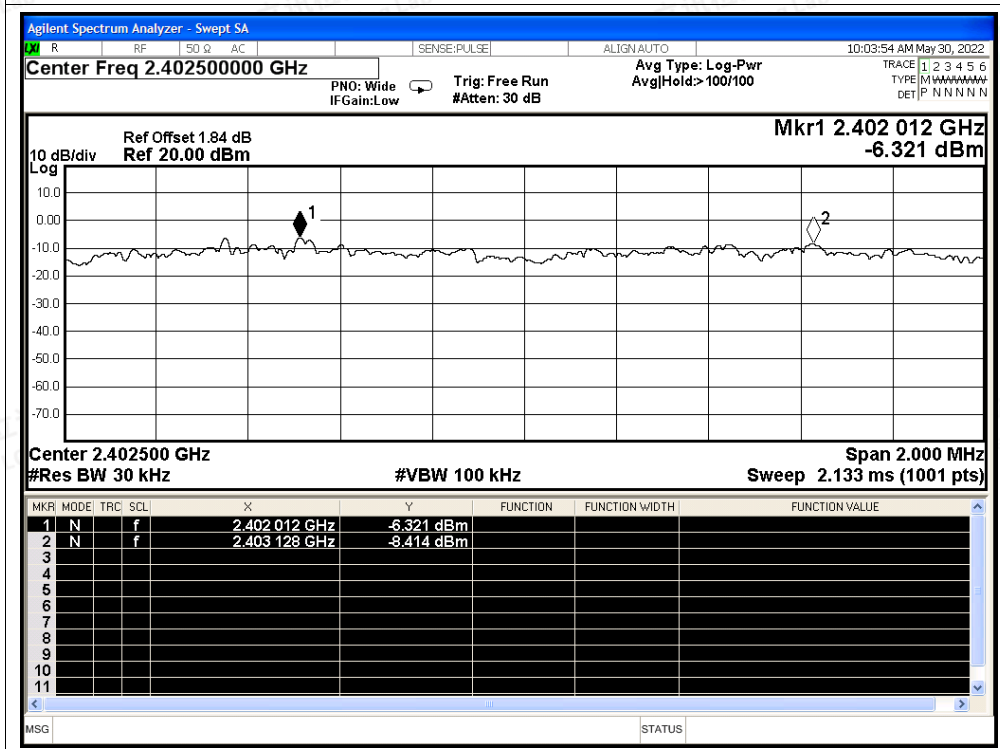



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.882	308.374	107	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	299.728	104	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.881	276.576	96	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.881	299.624	104	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.88	319.68	111	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.885	326.005	113	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	294.474	102	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.886	314.574	109	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.885	343.315	119	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

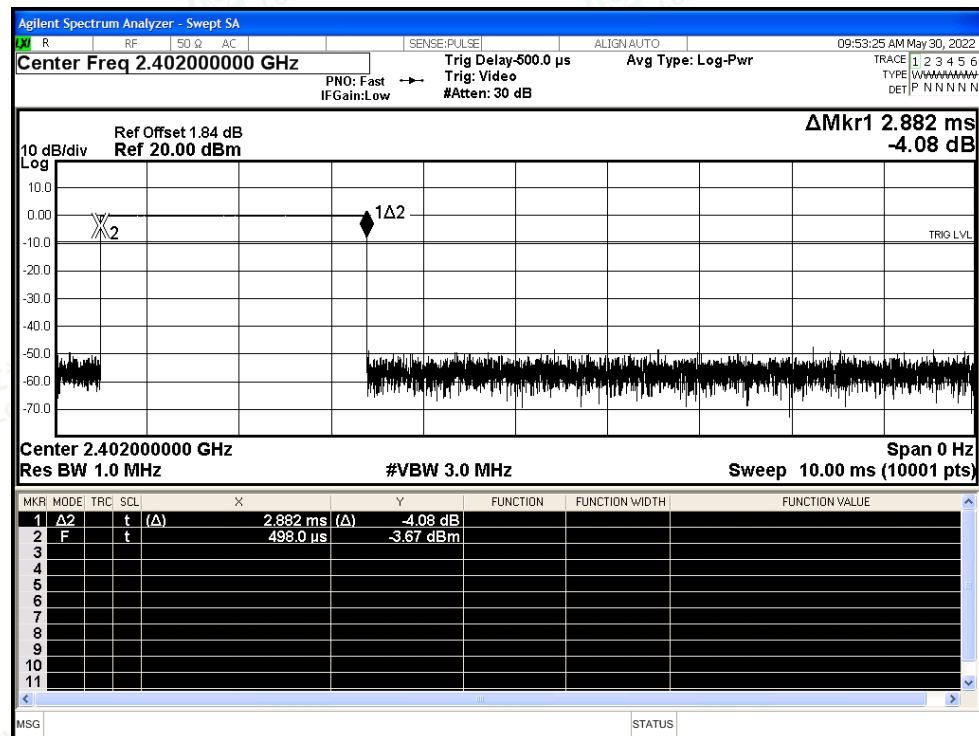

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

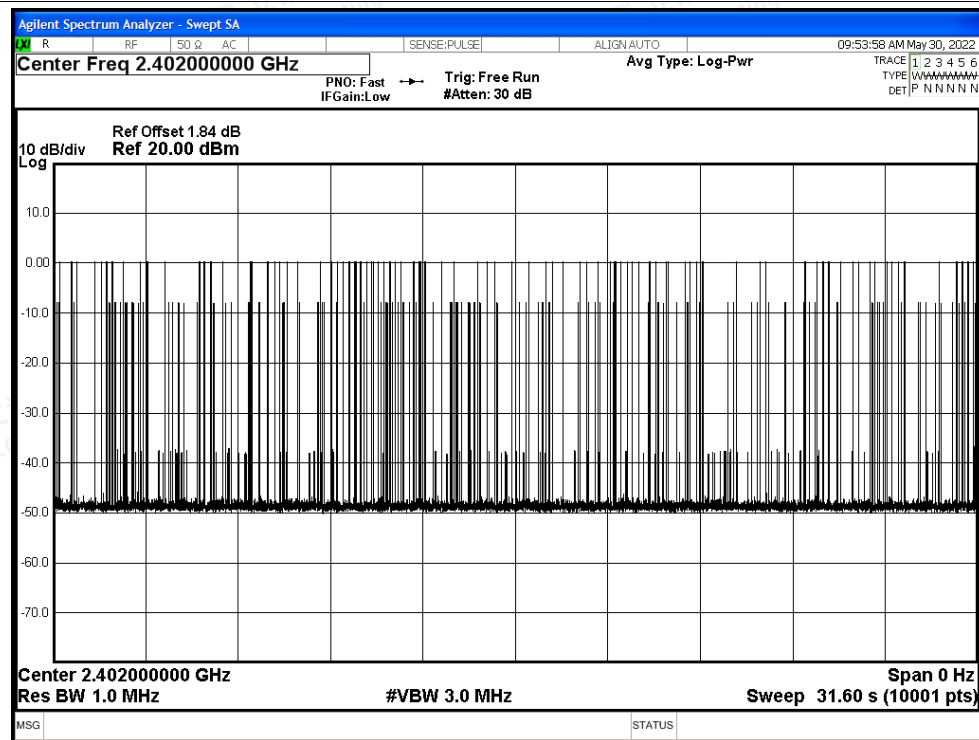

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

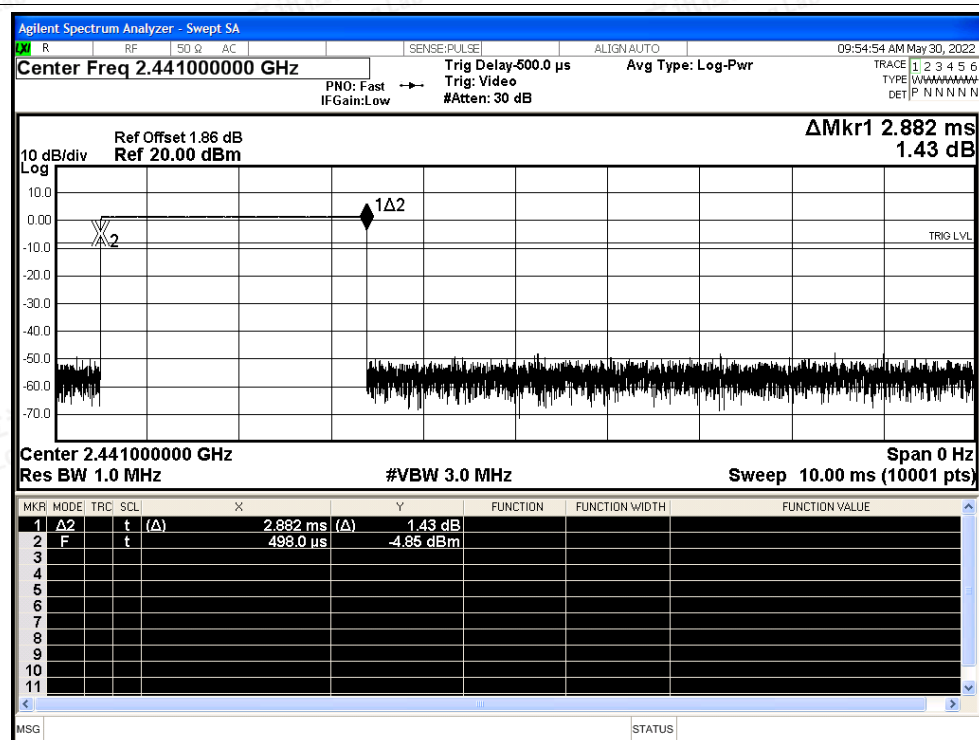

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

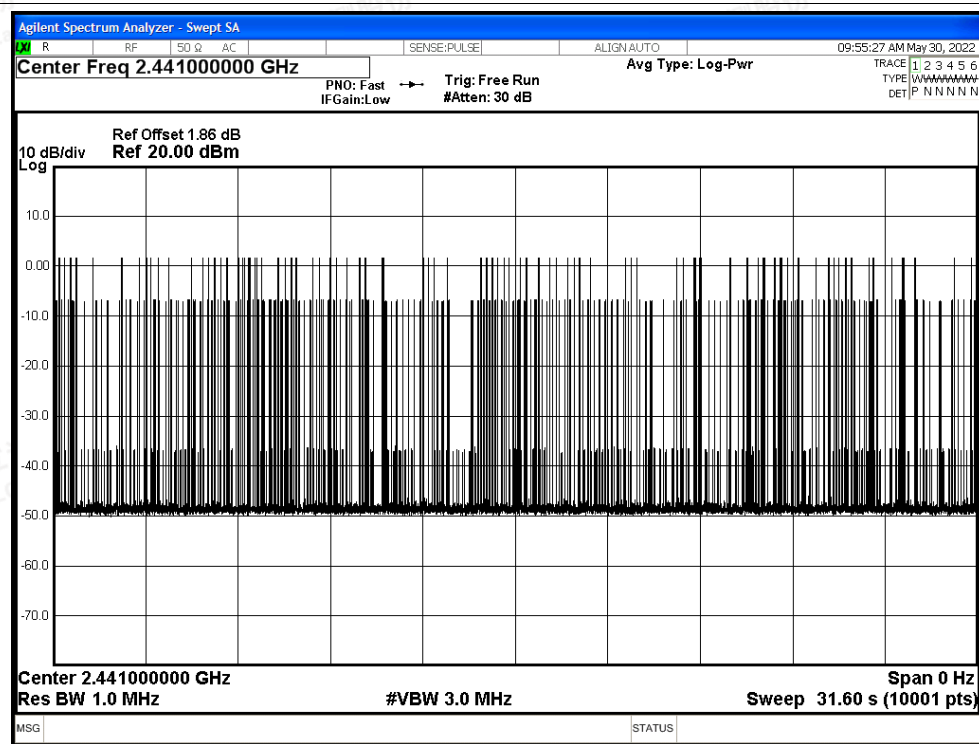

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

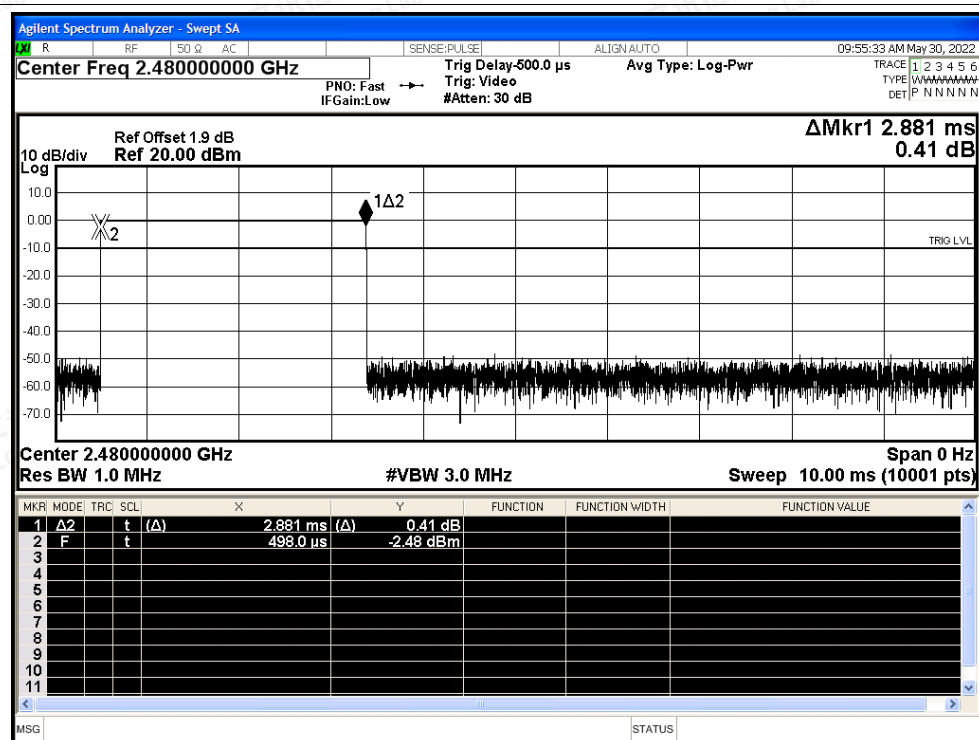


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

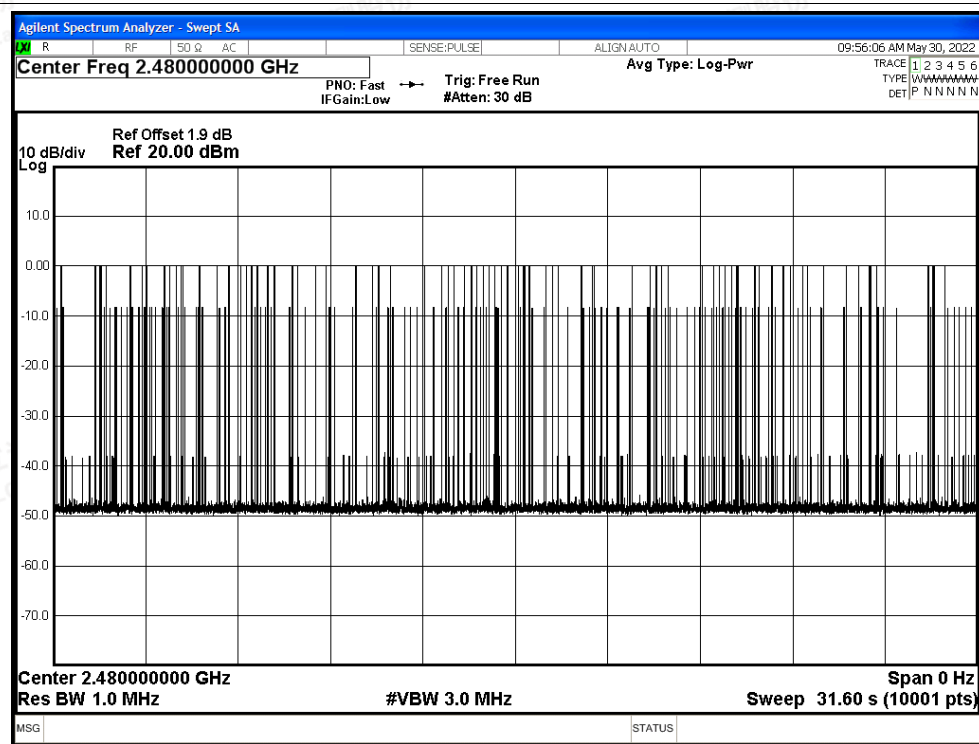




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

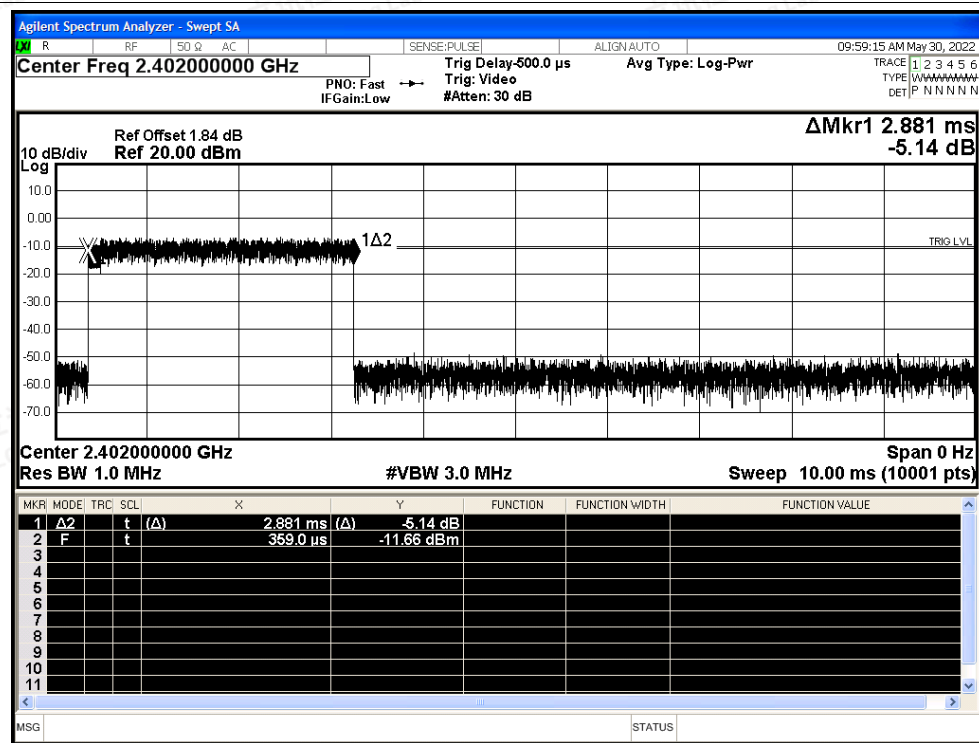


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

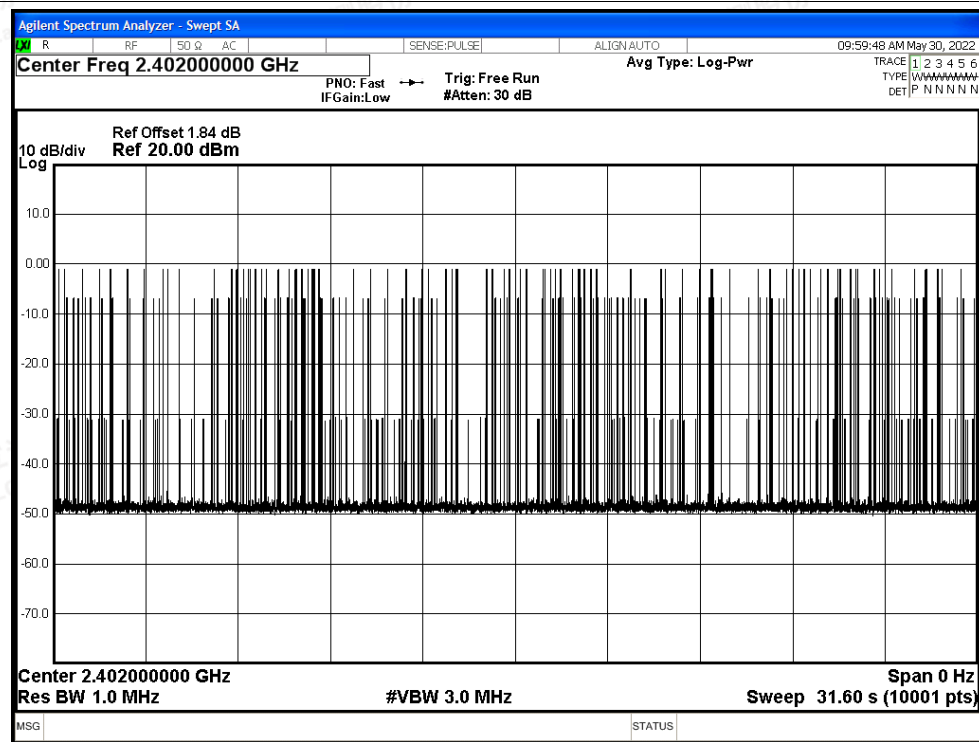




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

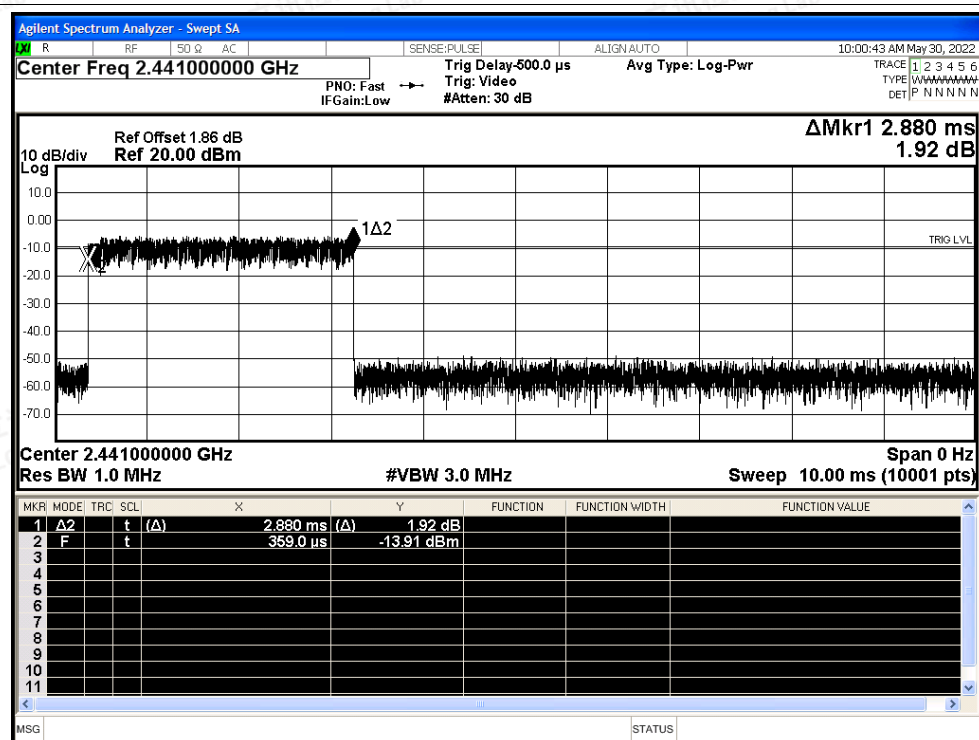


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

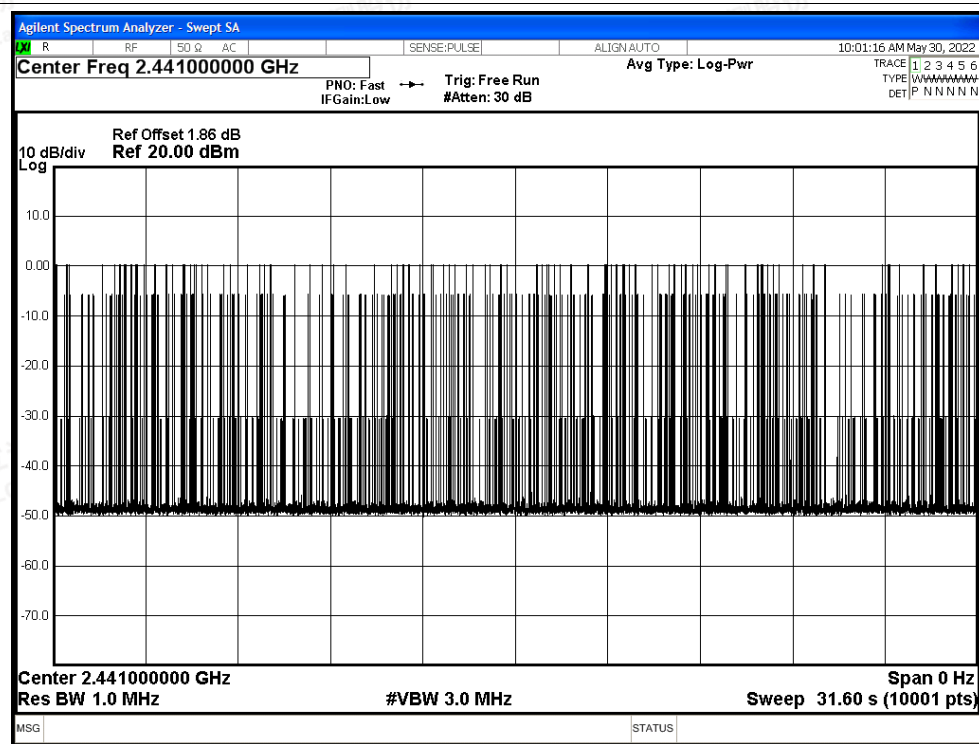




Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

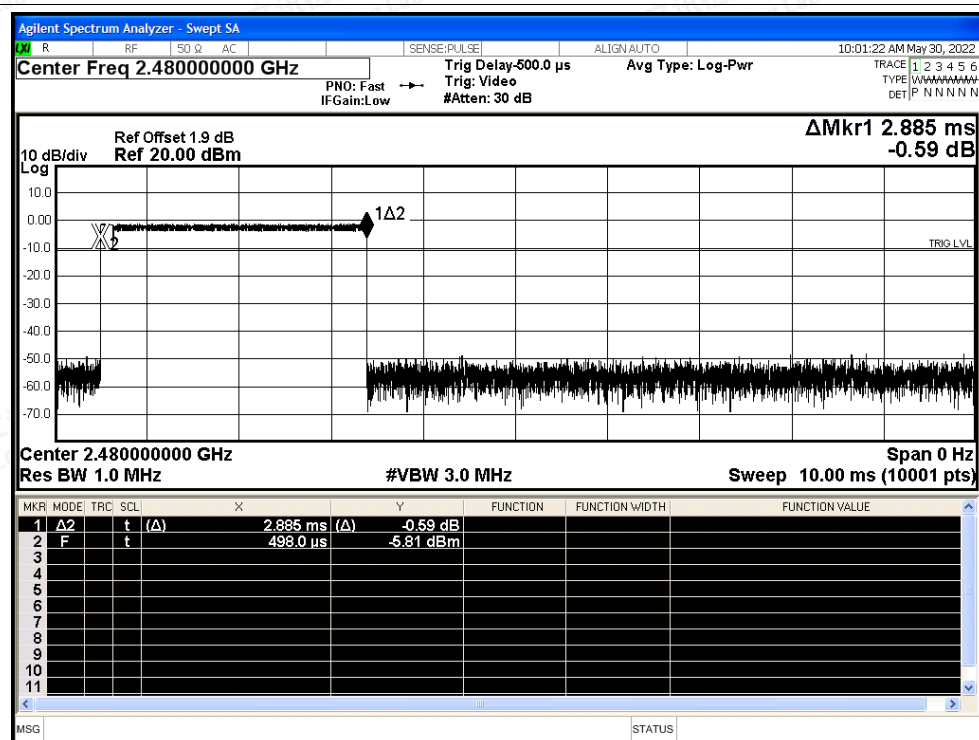


Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

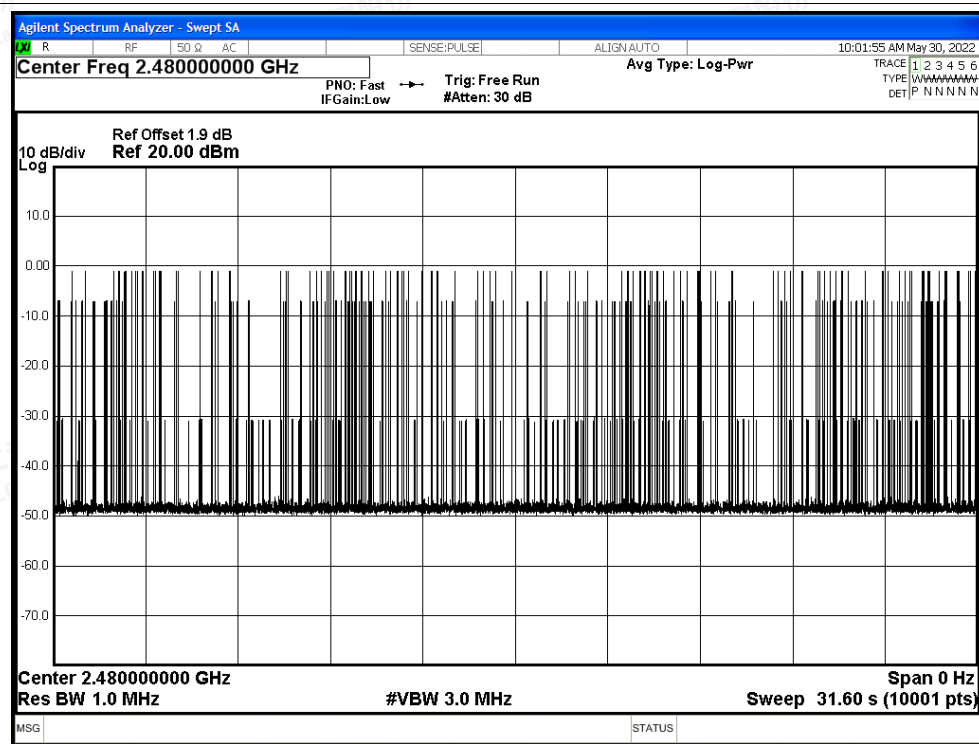




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

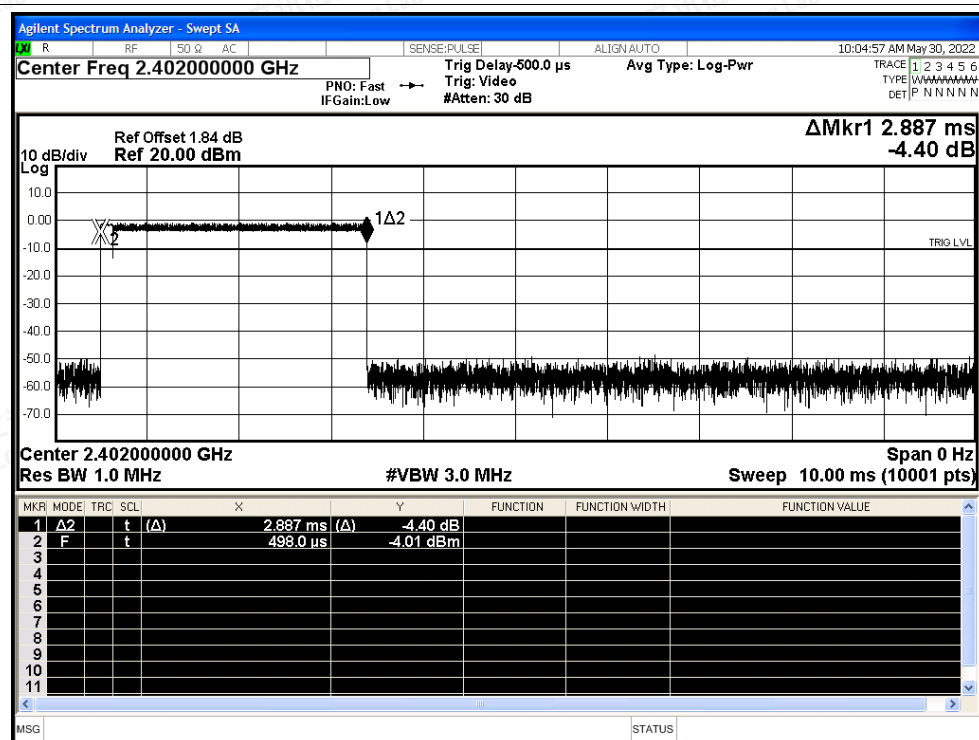


Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

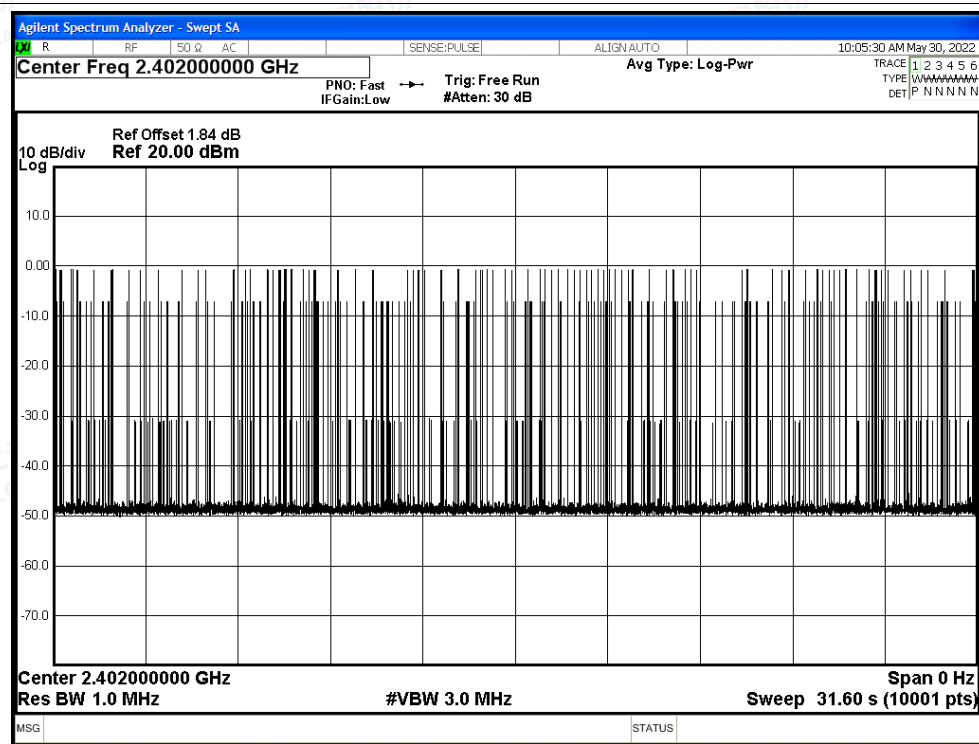




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

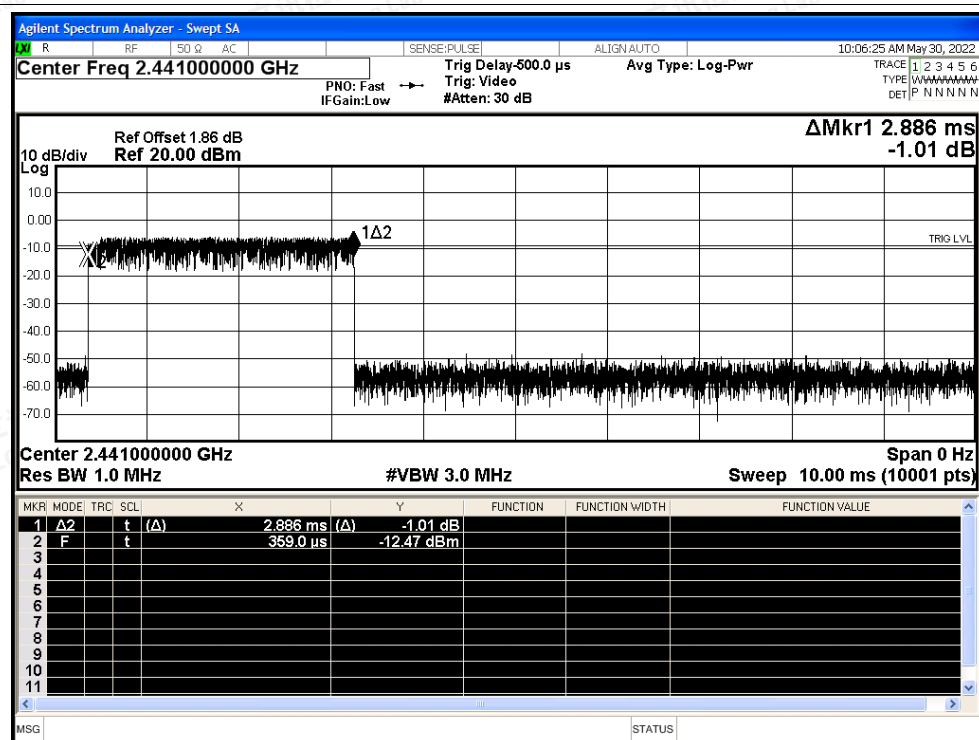


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

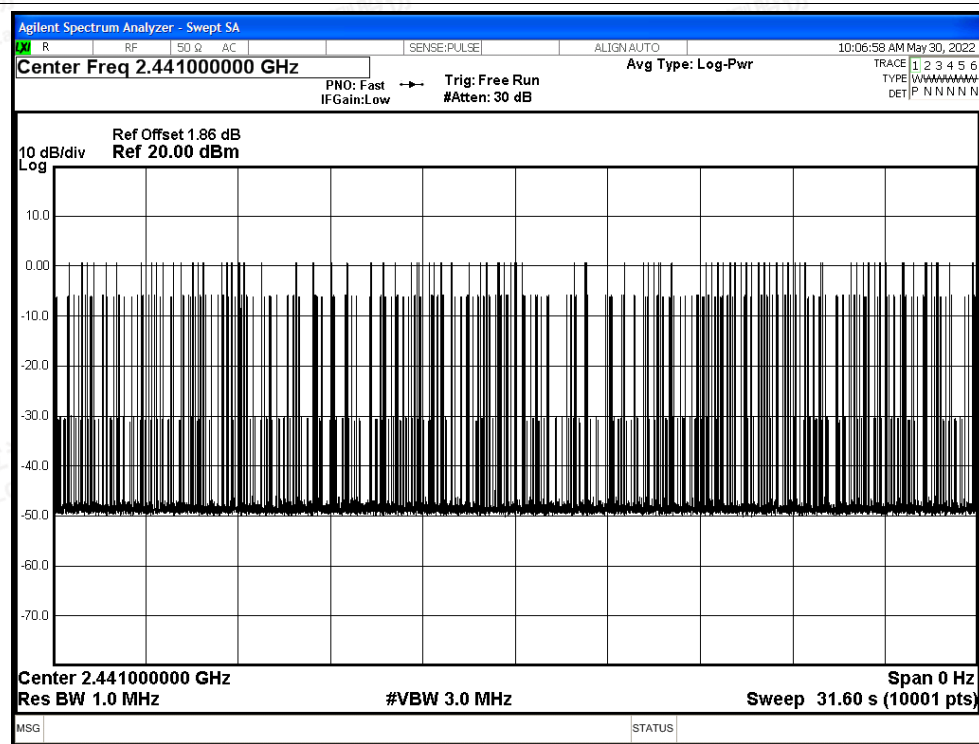




Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

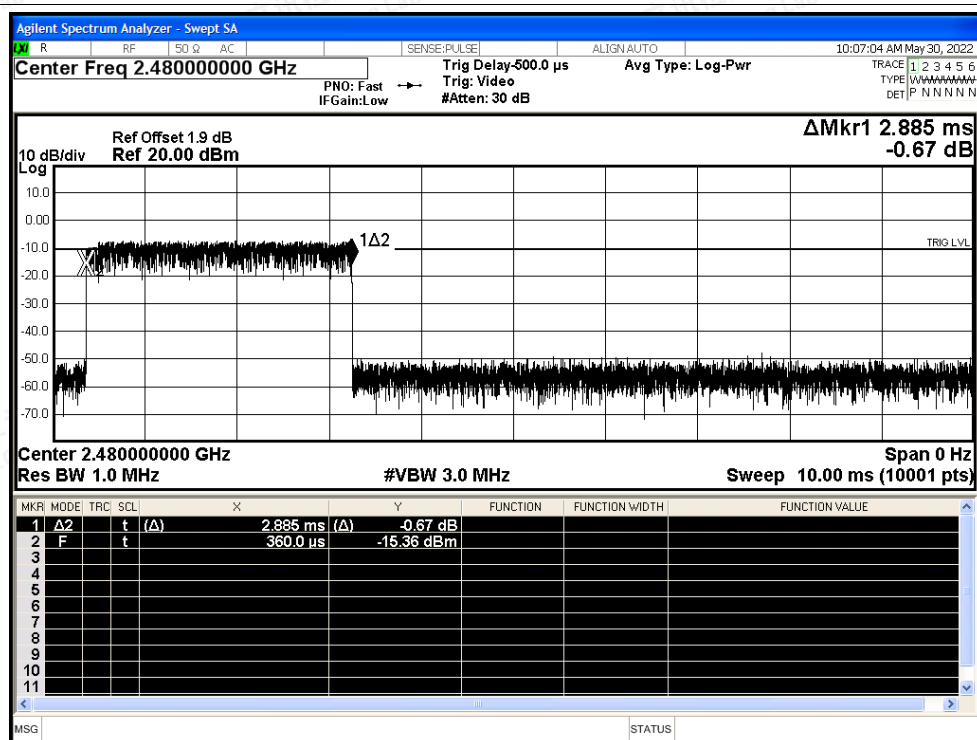

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

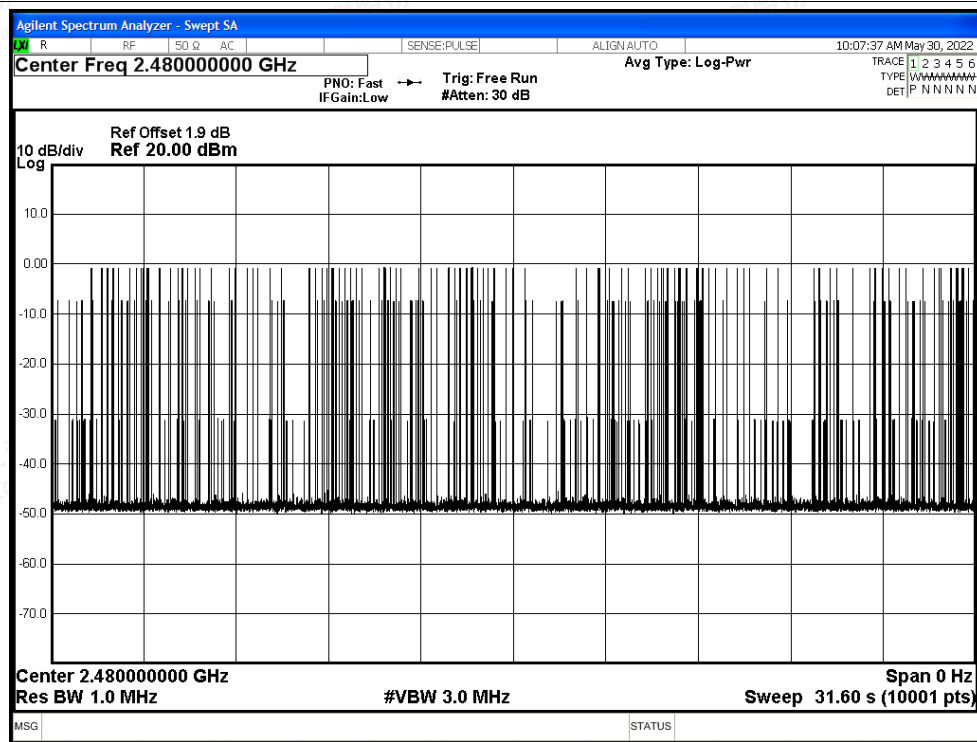



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

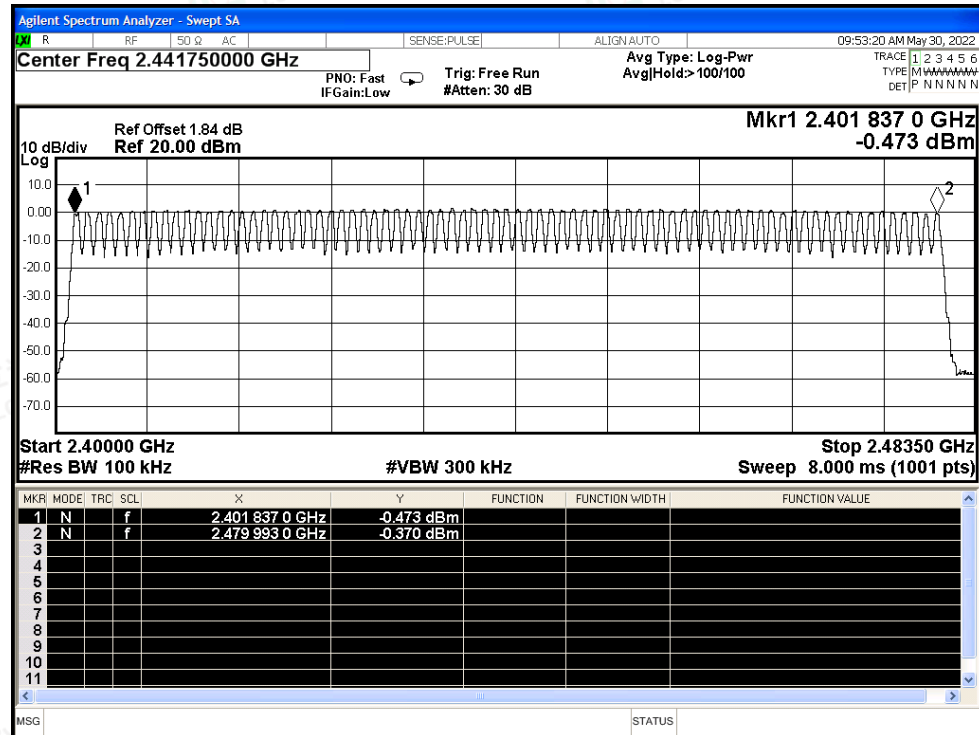


Hopping No. NVNT 2-DH5 2402MHz Ant1

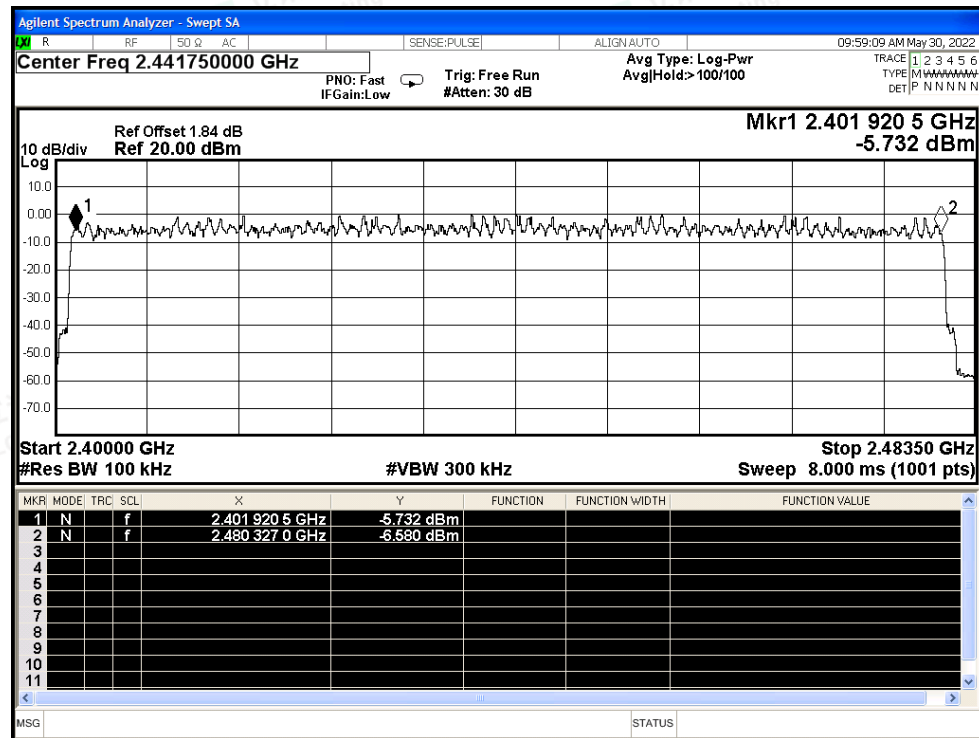



Hopping No. NVNT 3-DH5 2402MHz Ant1

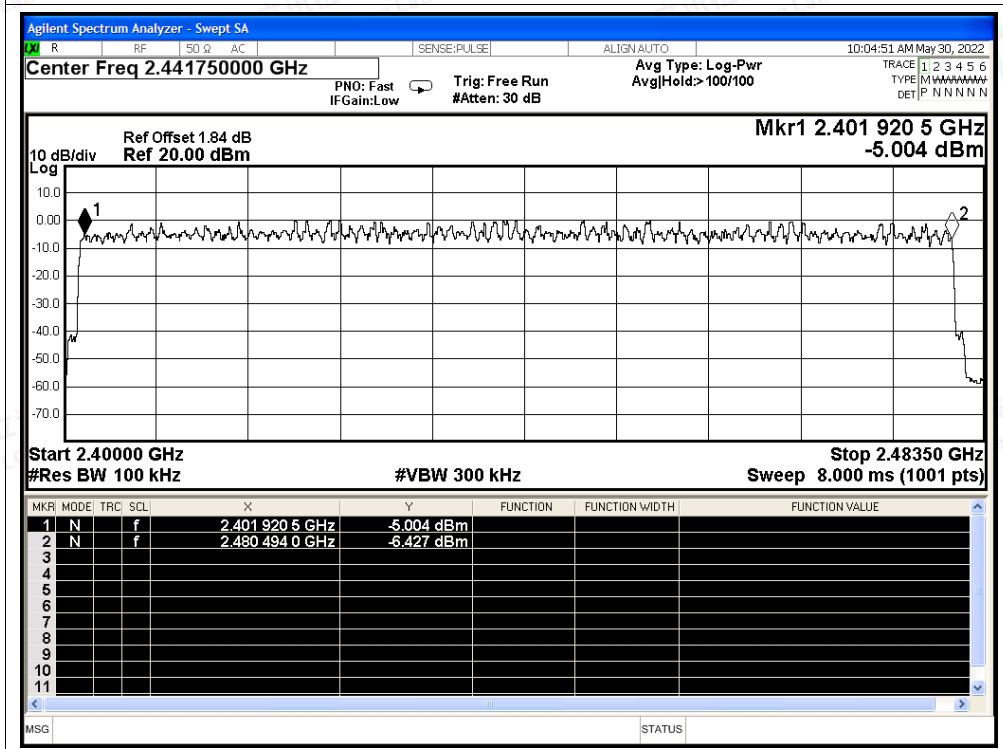



A.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-56.18	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-56.68	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-55.56	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-53.37	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-55.02	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.83	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

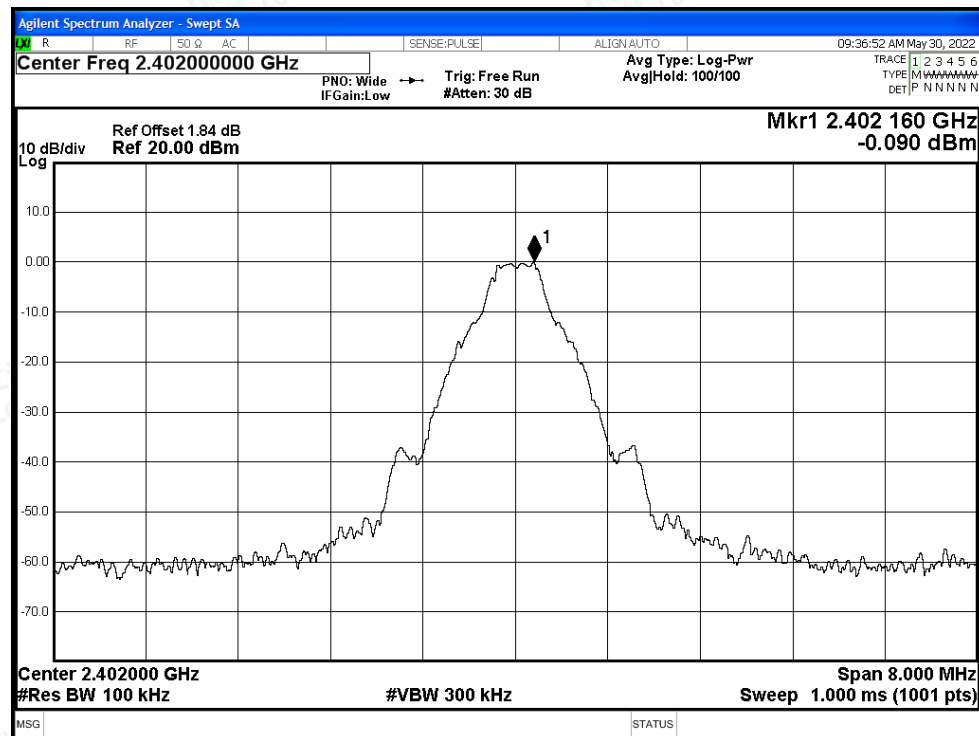


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

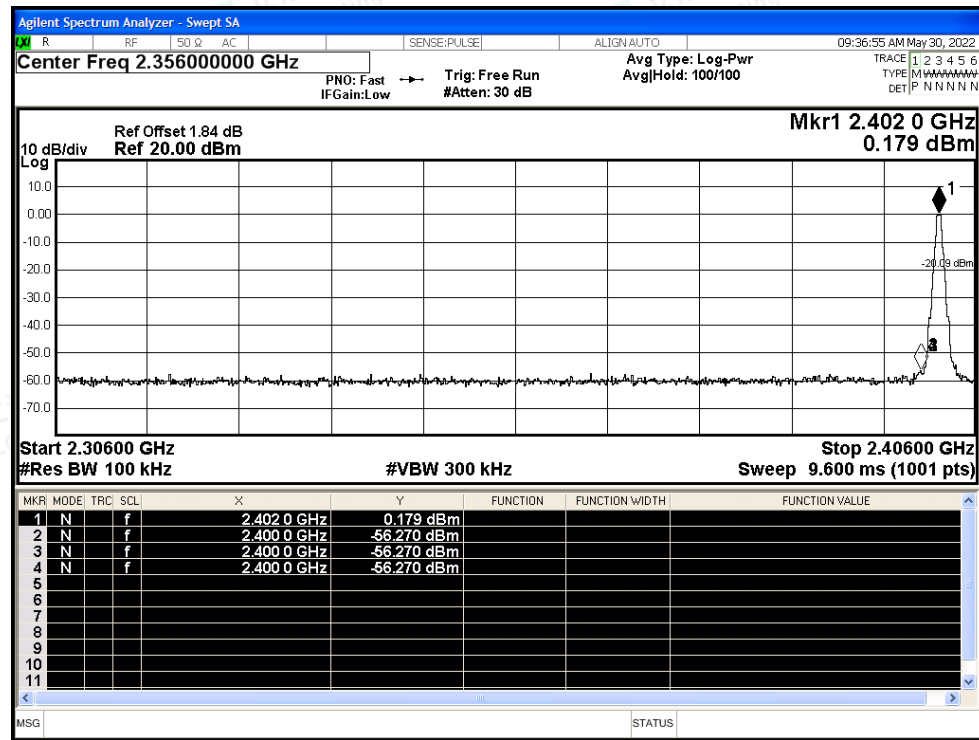




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

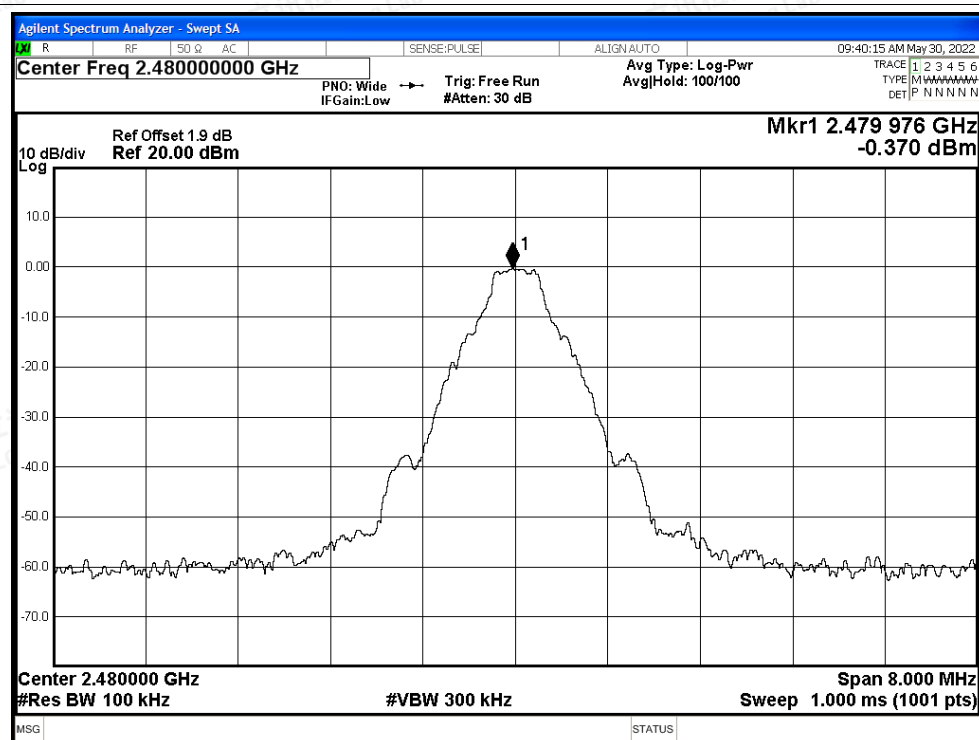

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

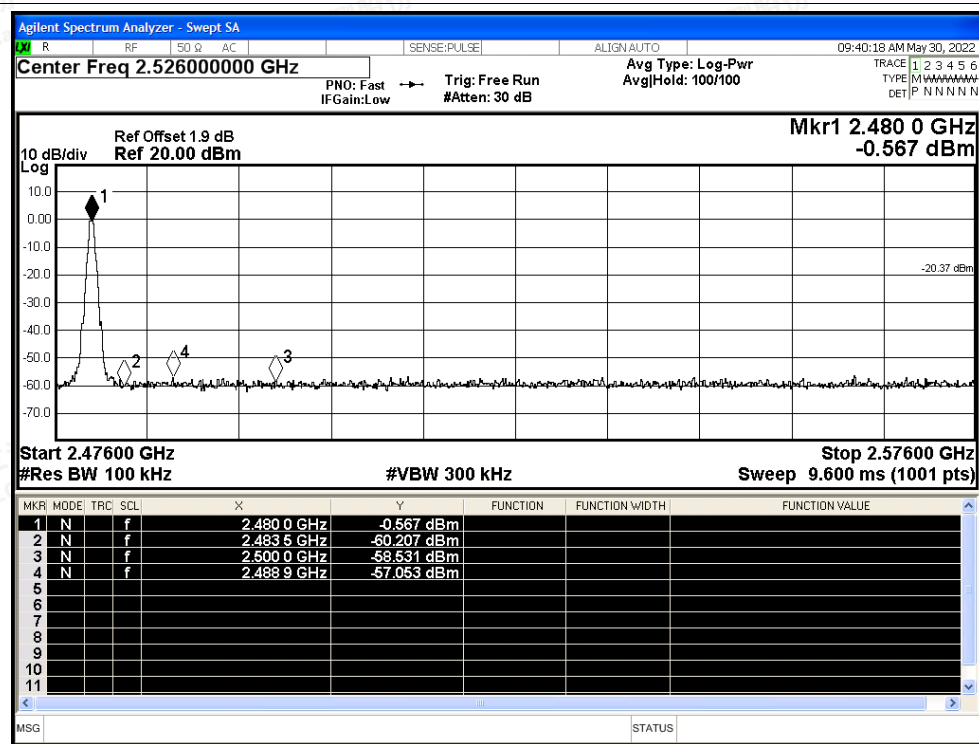

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

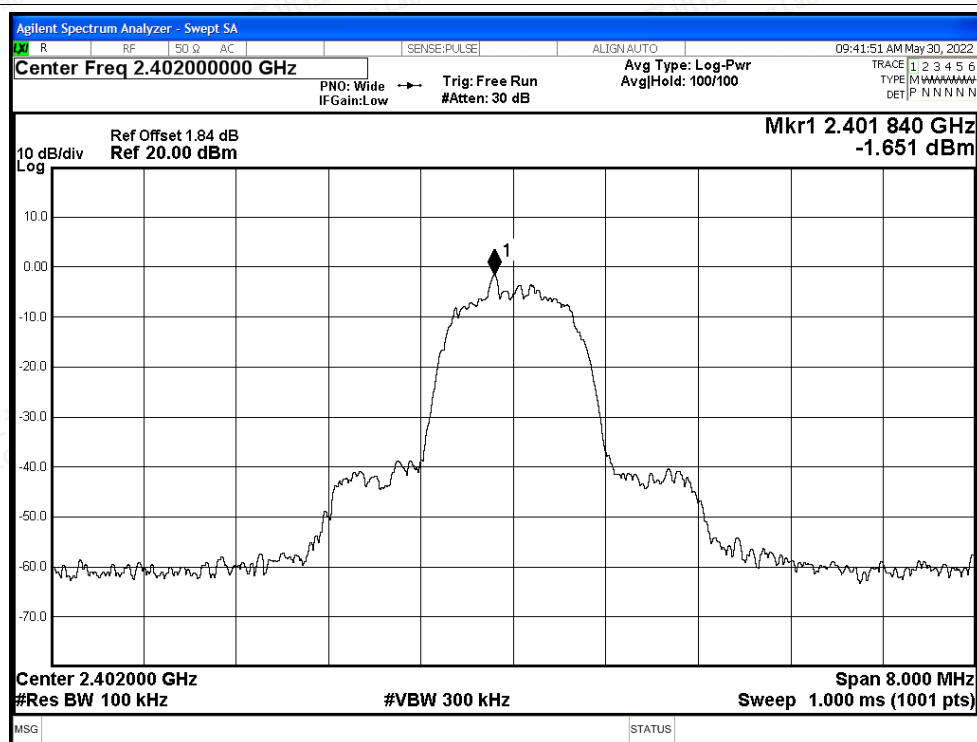


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

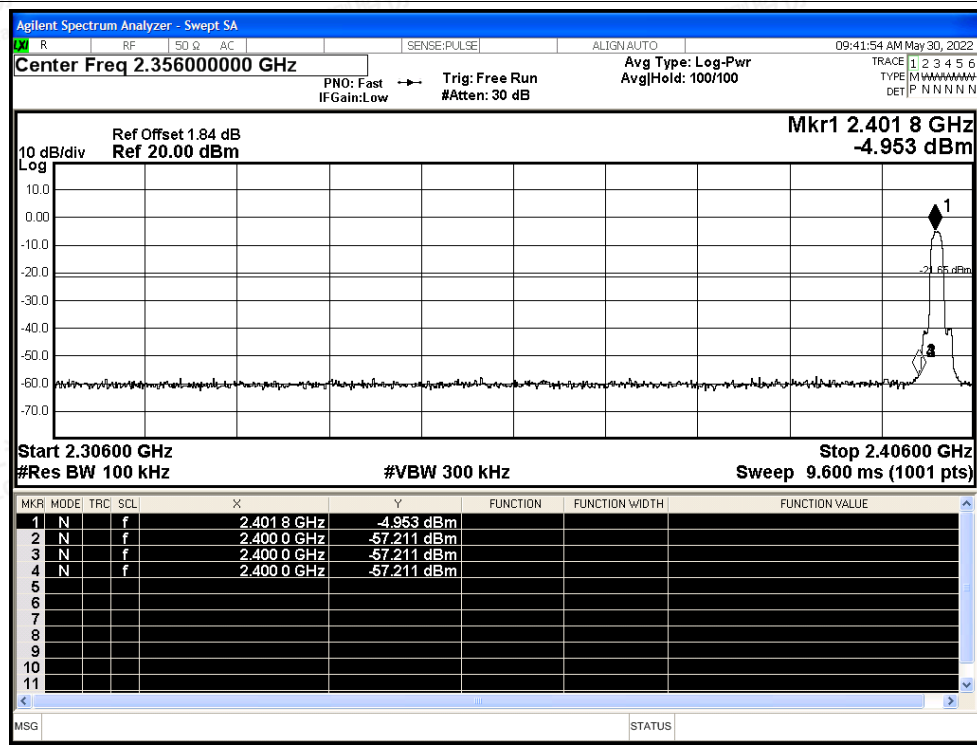




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

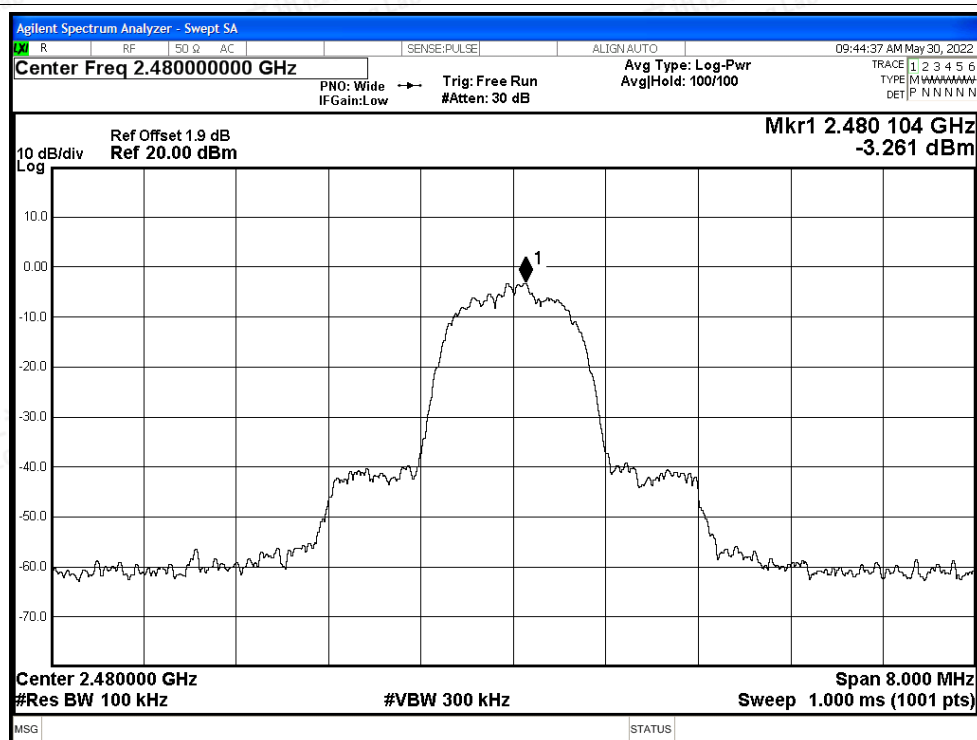


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

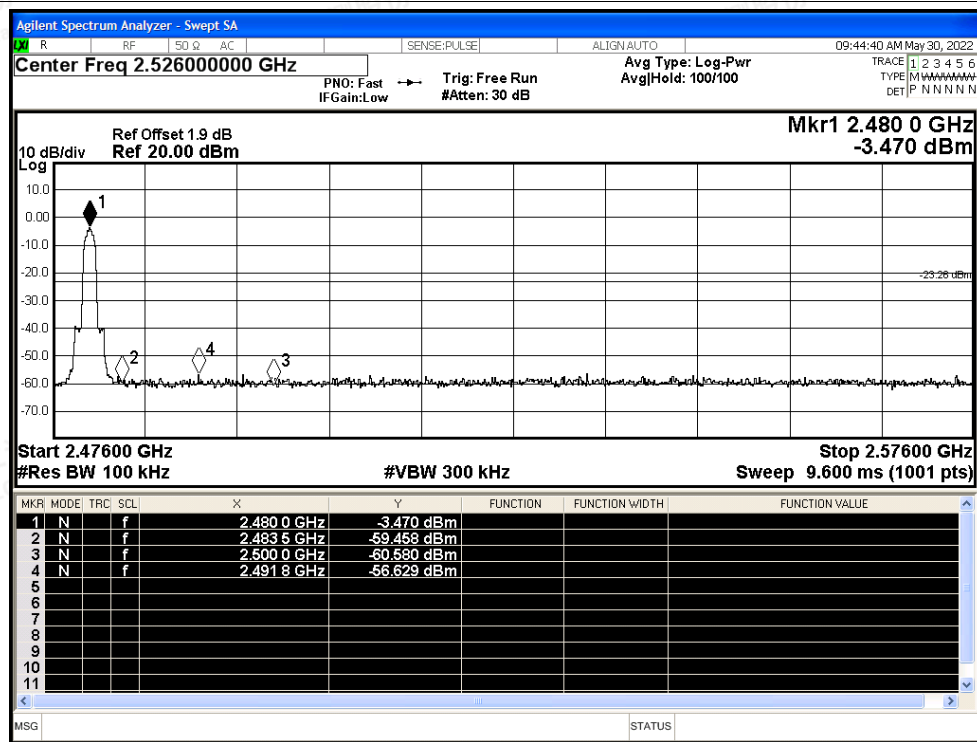




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

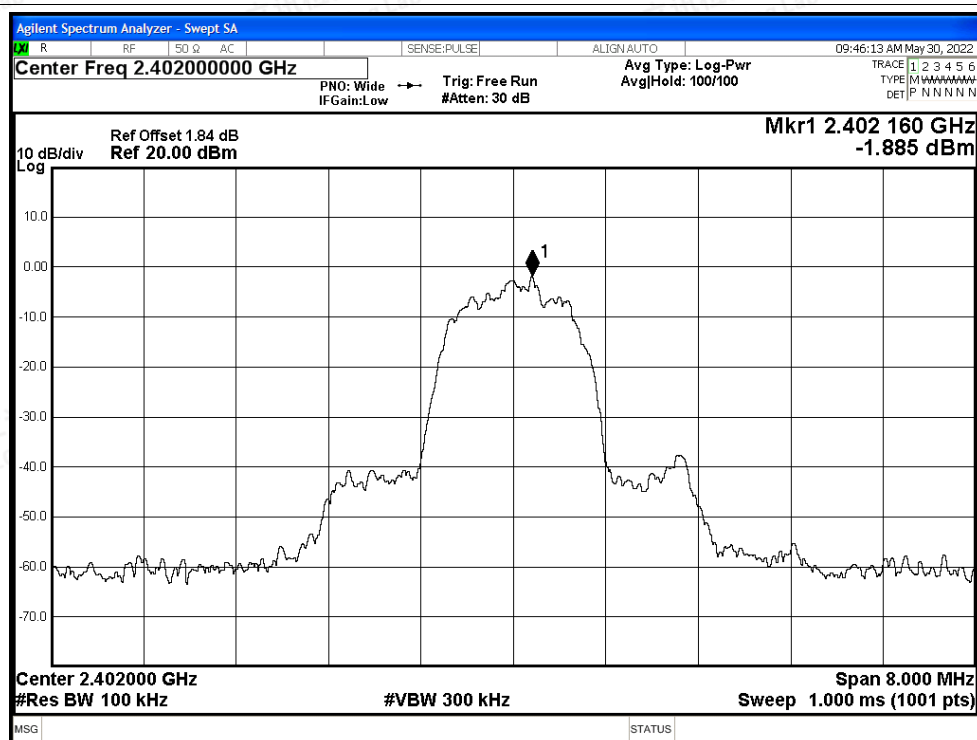


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

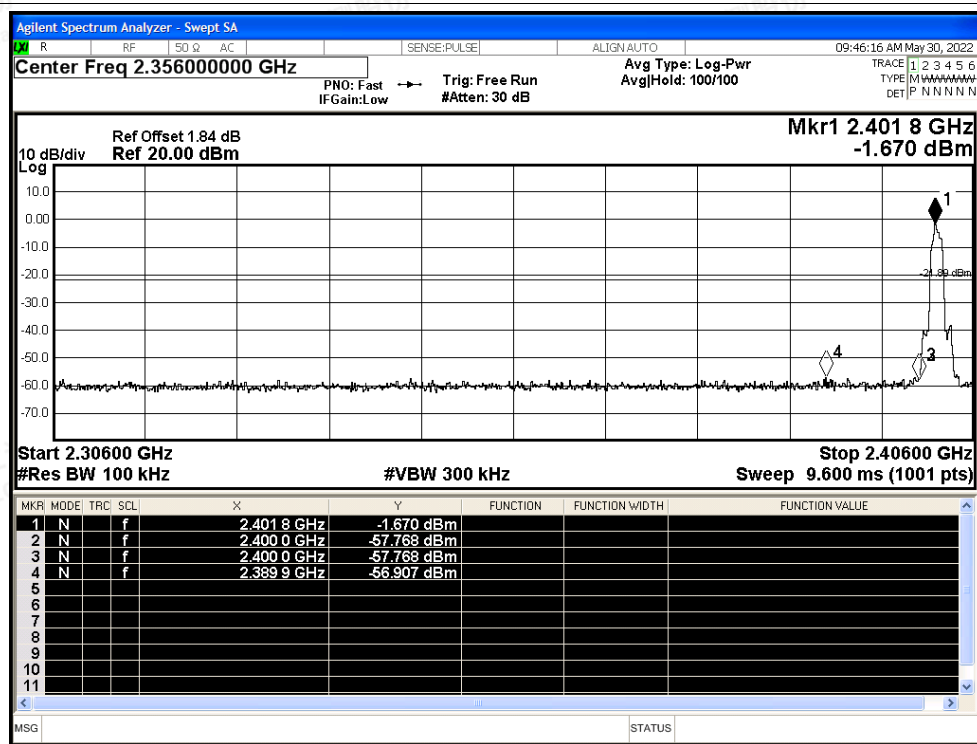




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

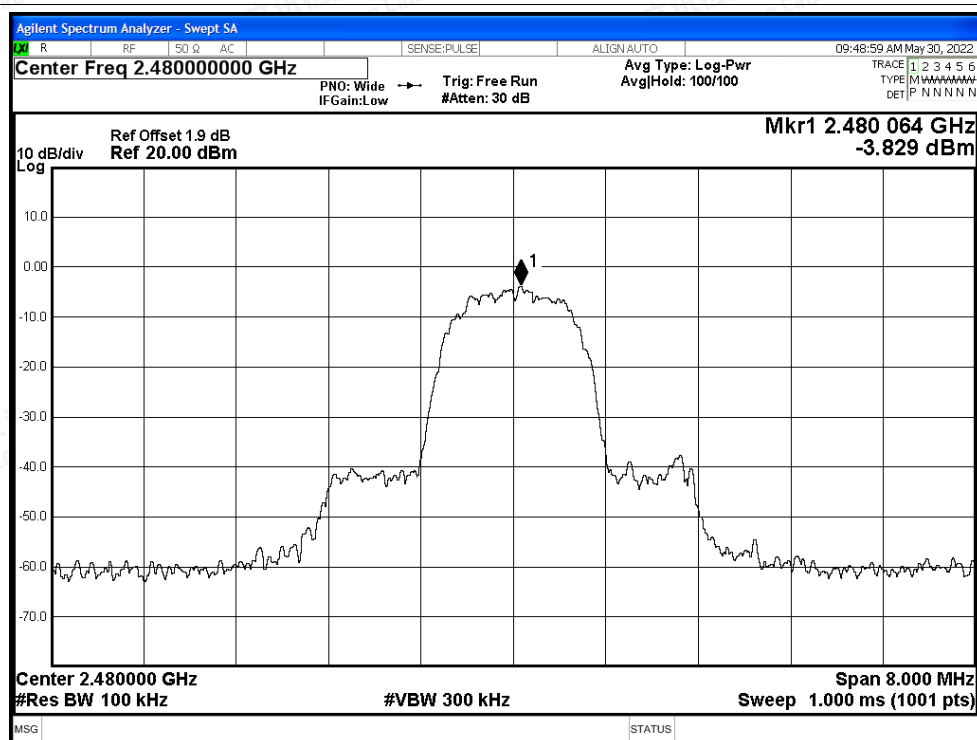

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

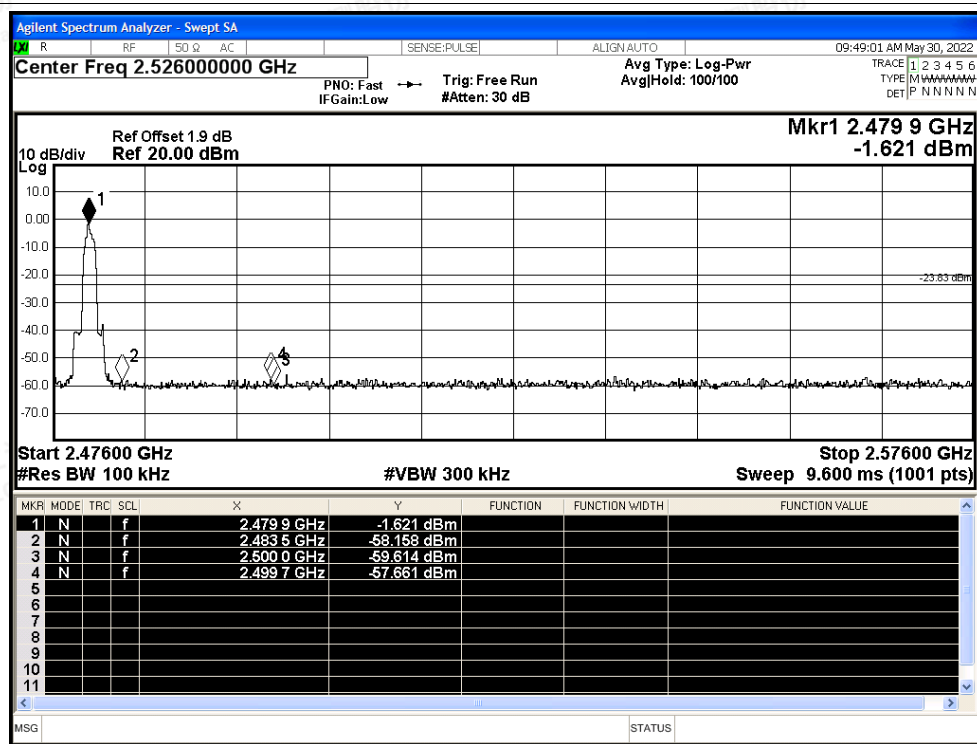

**(Hopping)**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-56.19	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.86	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-55.01	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-52.04	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-54.49	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.26	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

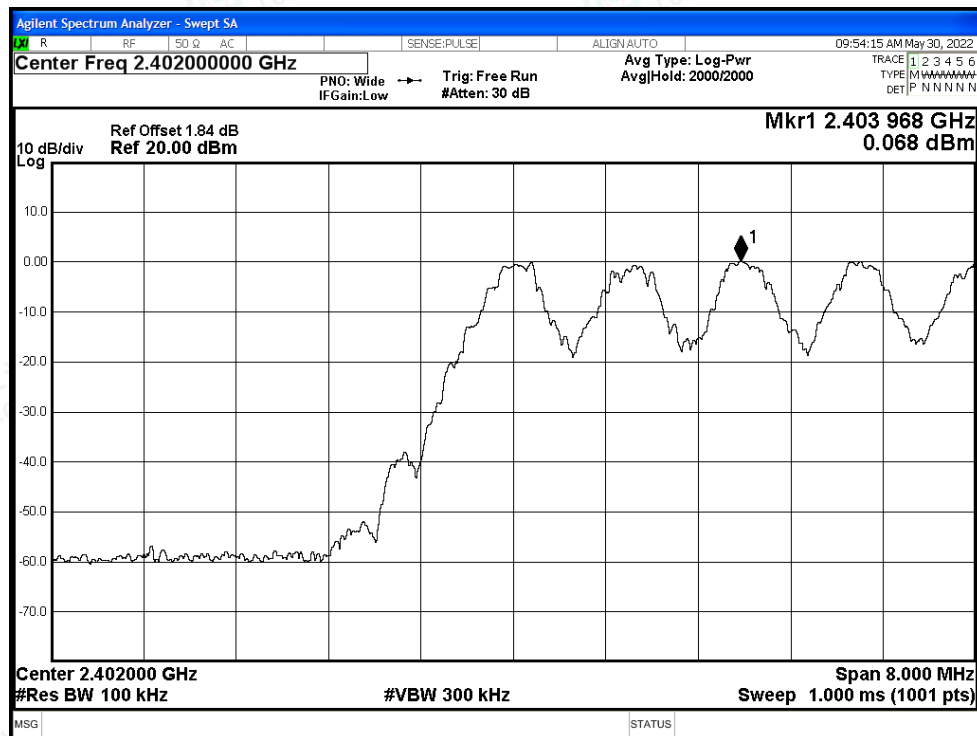


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

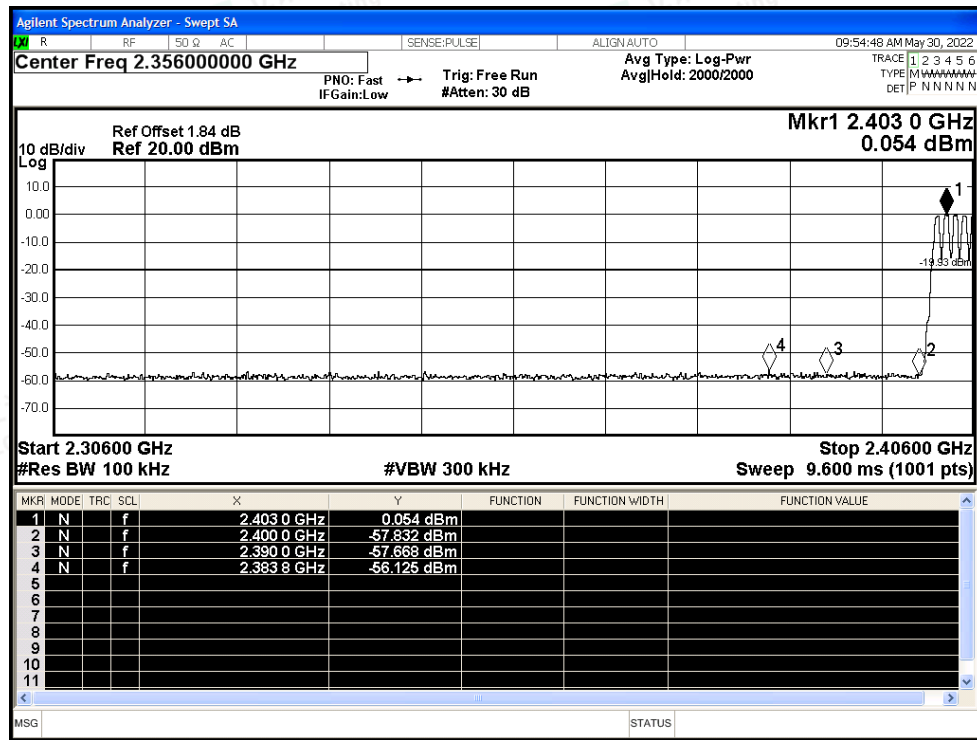




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

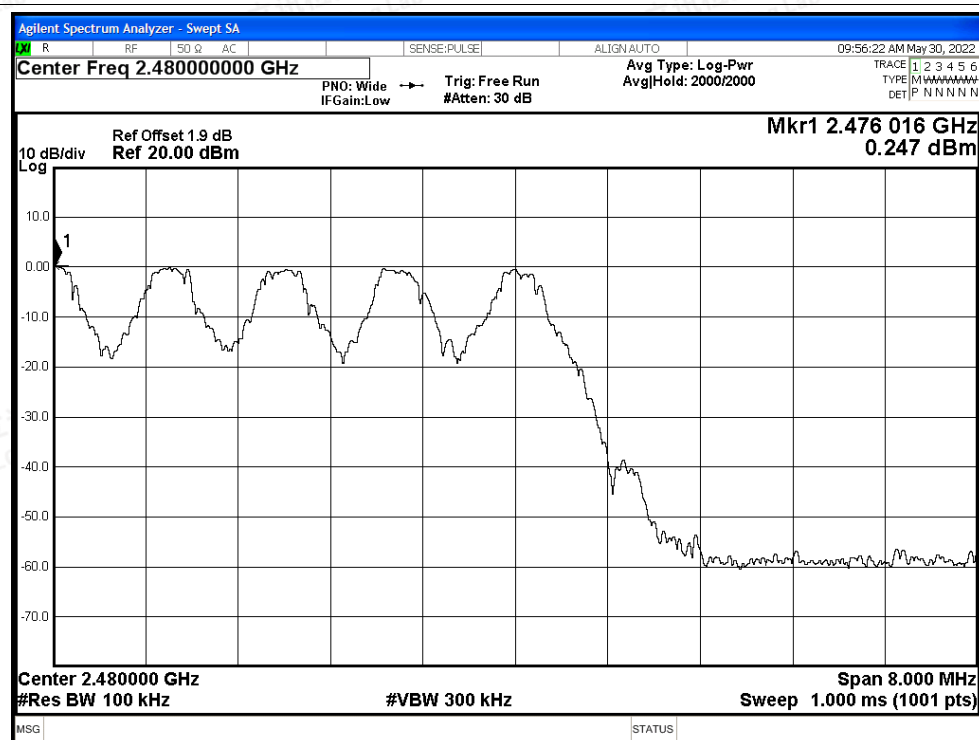

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

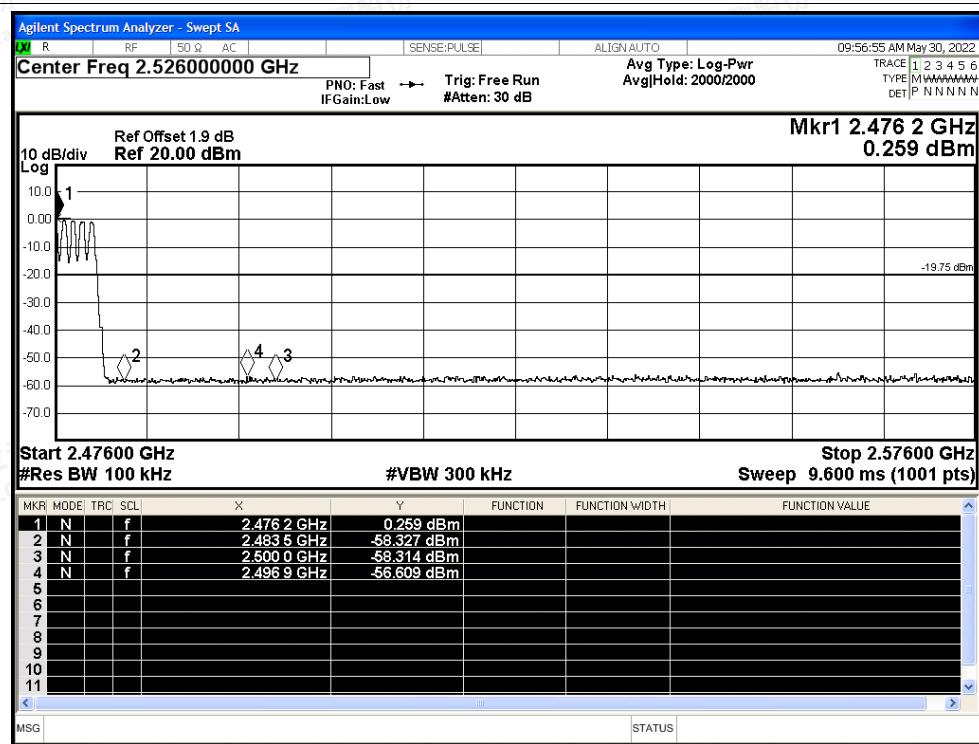

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

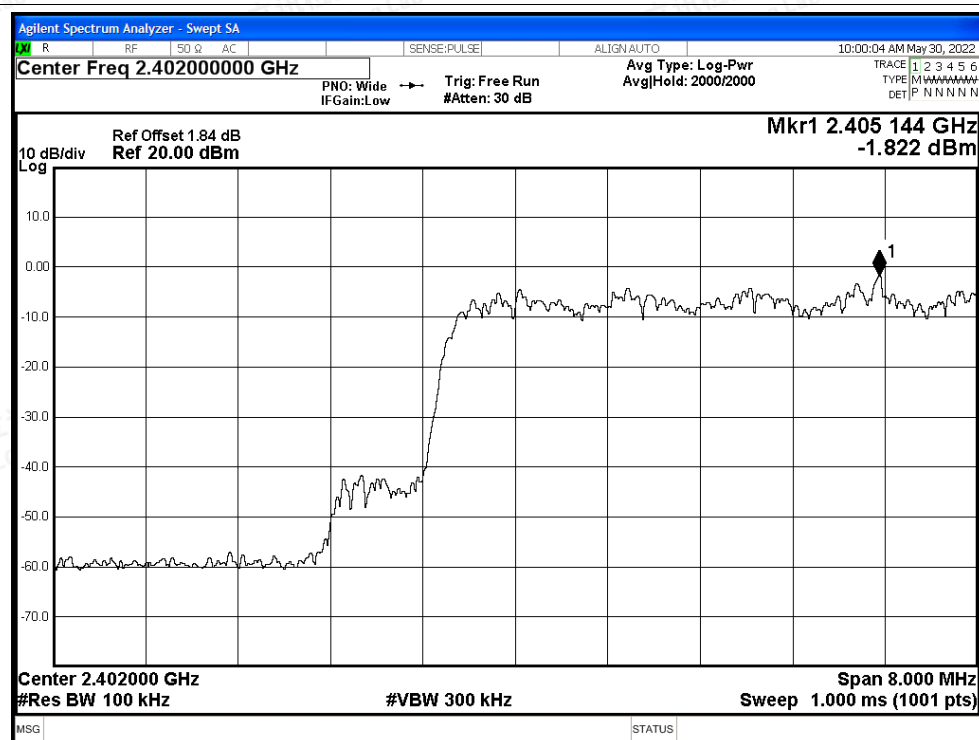

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

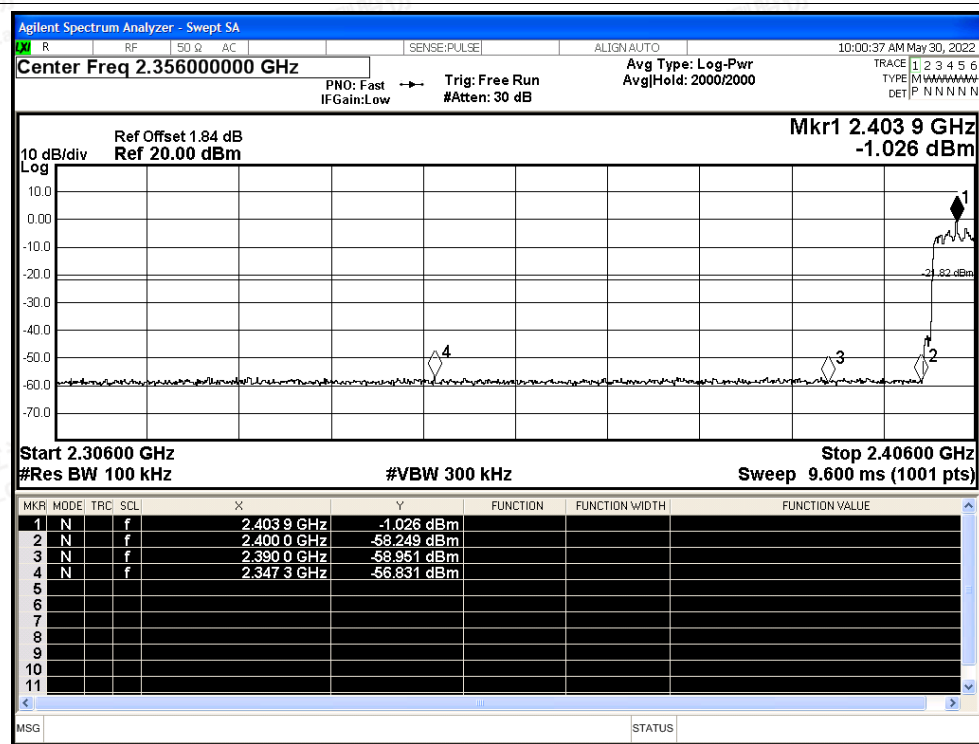

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

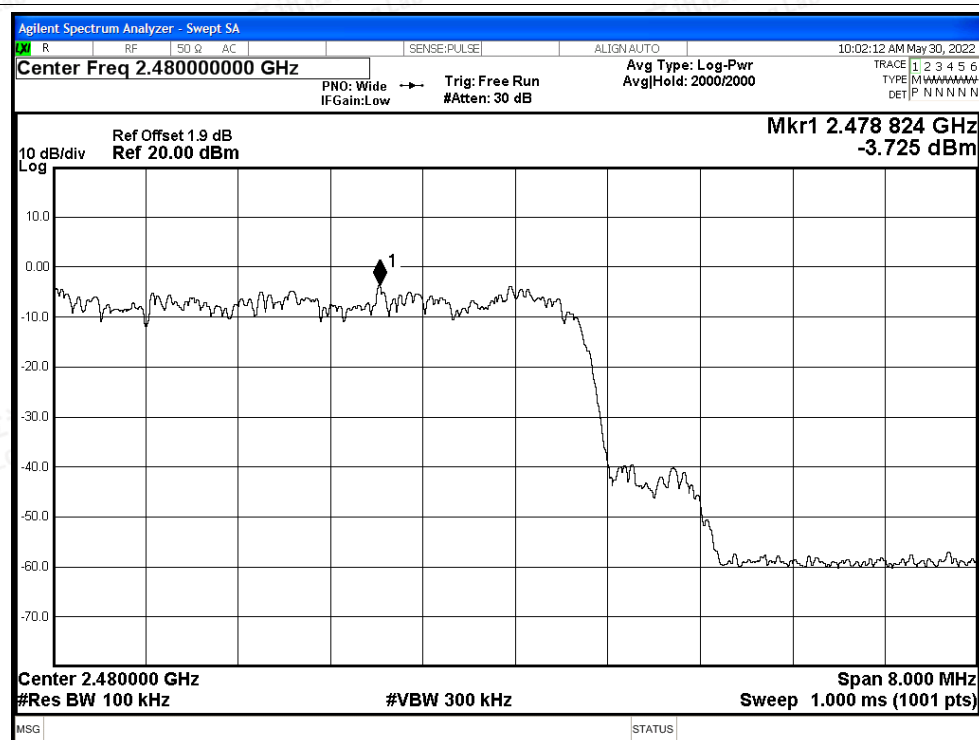


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

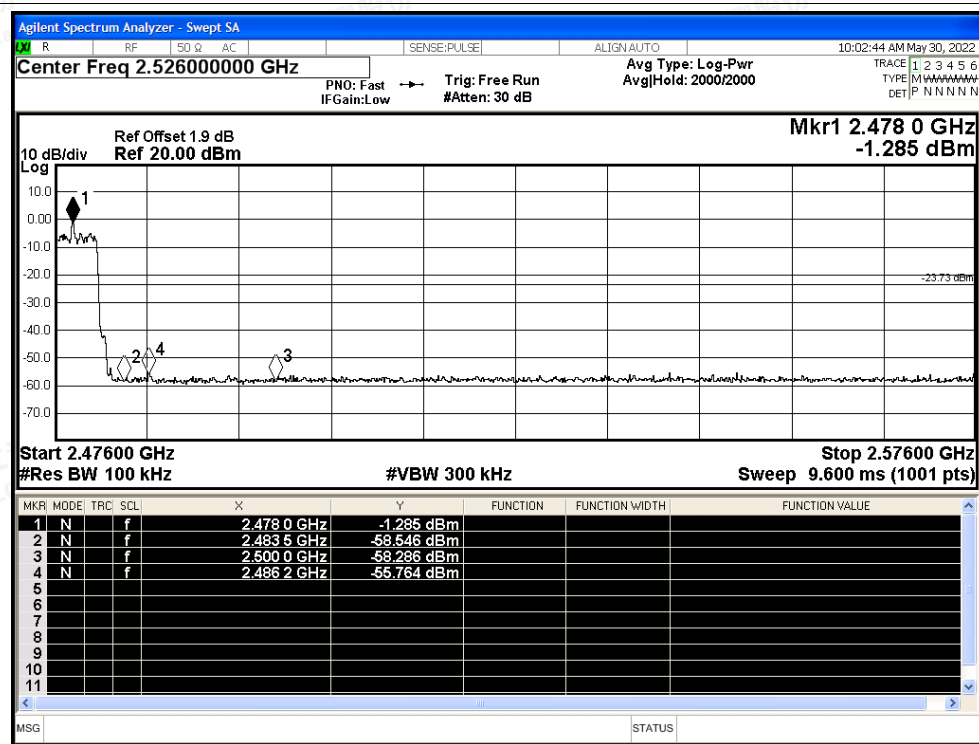




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

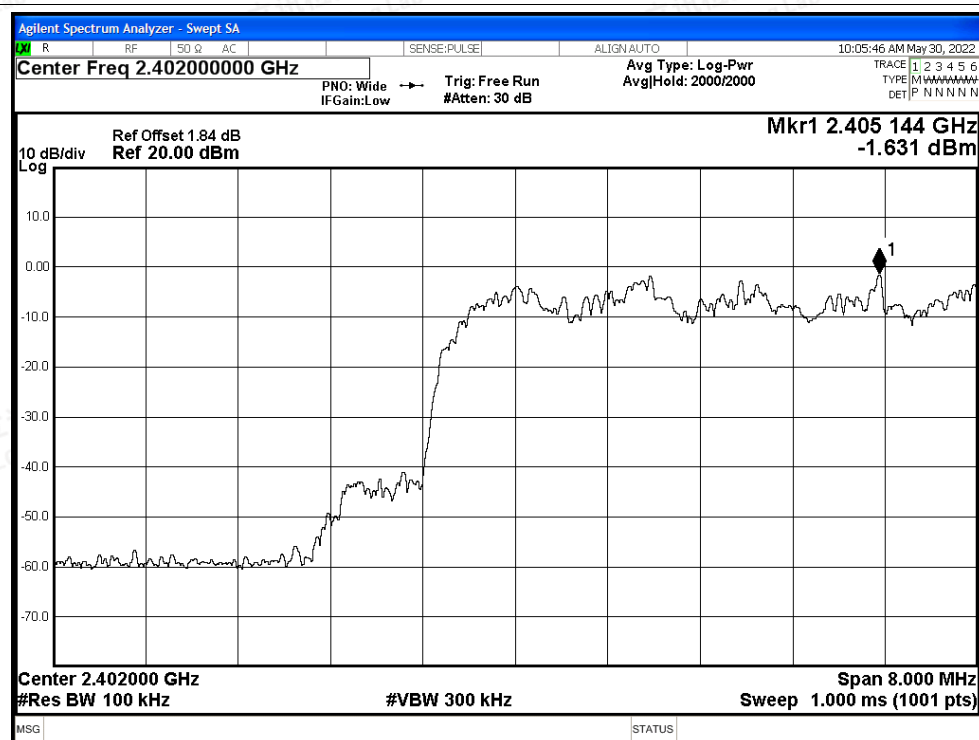

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

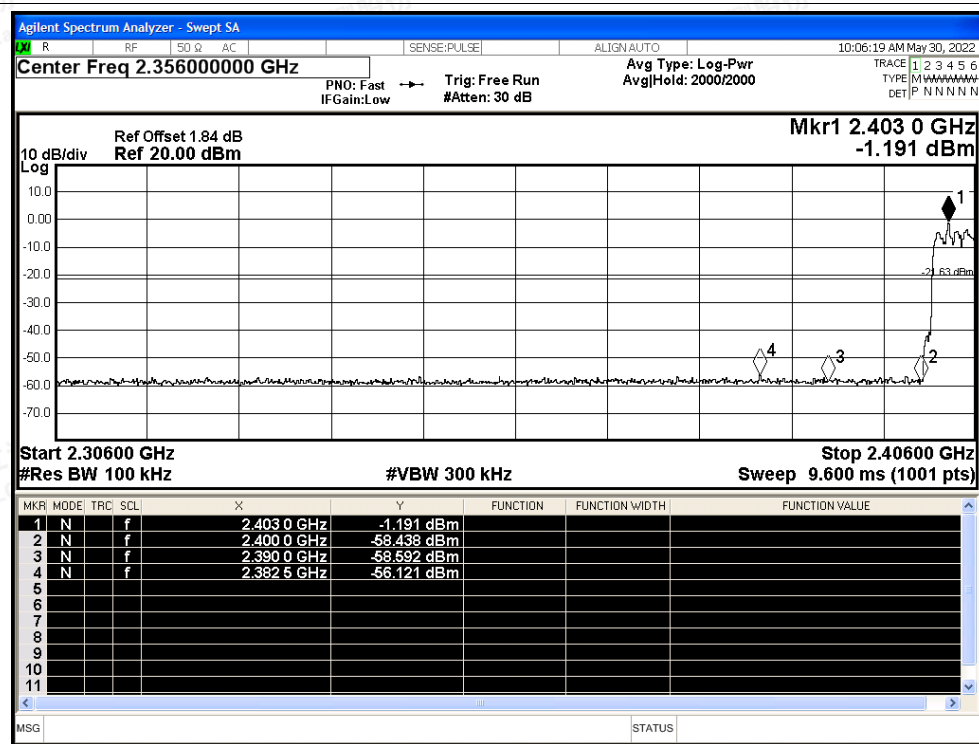

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

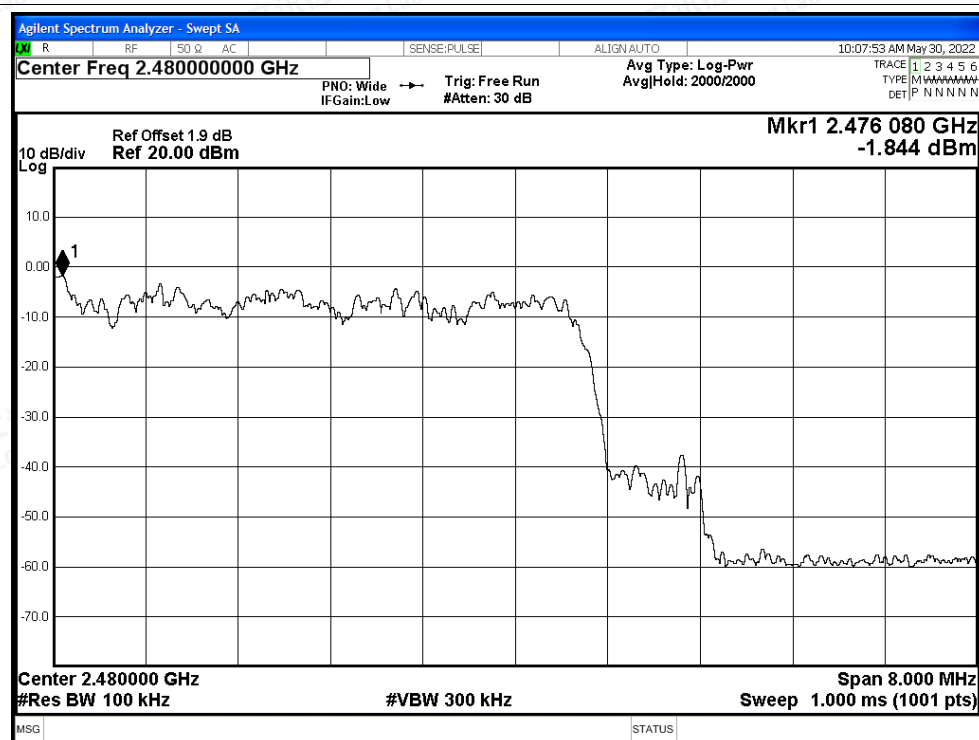

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

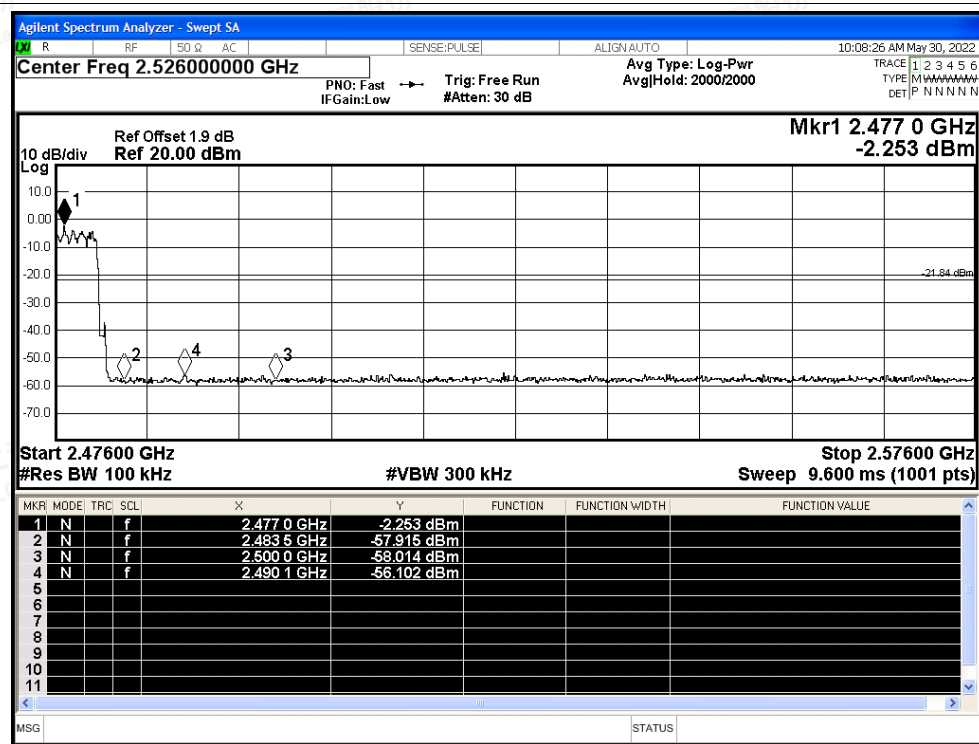



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-55.84	-20	Pass
NVNT	1-DH5	2441	Ant1	-55.58	-20	Pass
NVNT	1-DH5	2480	Ant1	-55.51	-20	Pass
NVNT	2-DH5	2402	Ant1	-53.85	-20	Pass
NVNT	2-DH5	2441	Ant1	-54.79	-20	Pass
NVNT	2-DH5	2480	Ant1	-53.47	-20	Pass
NVNT	3-DH5	2402	Ant1	-53.11	-20	Pass
NVNT	3-DH5	2441	Ant1	-54.93	-20	Pass
NVNT	3-DH5	2480	Ant1	-53.89	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

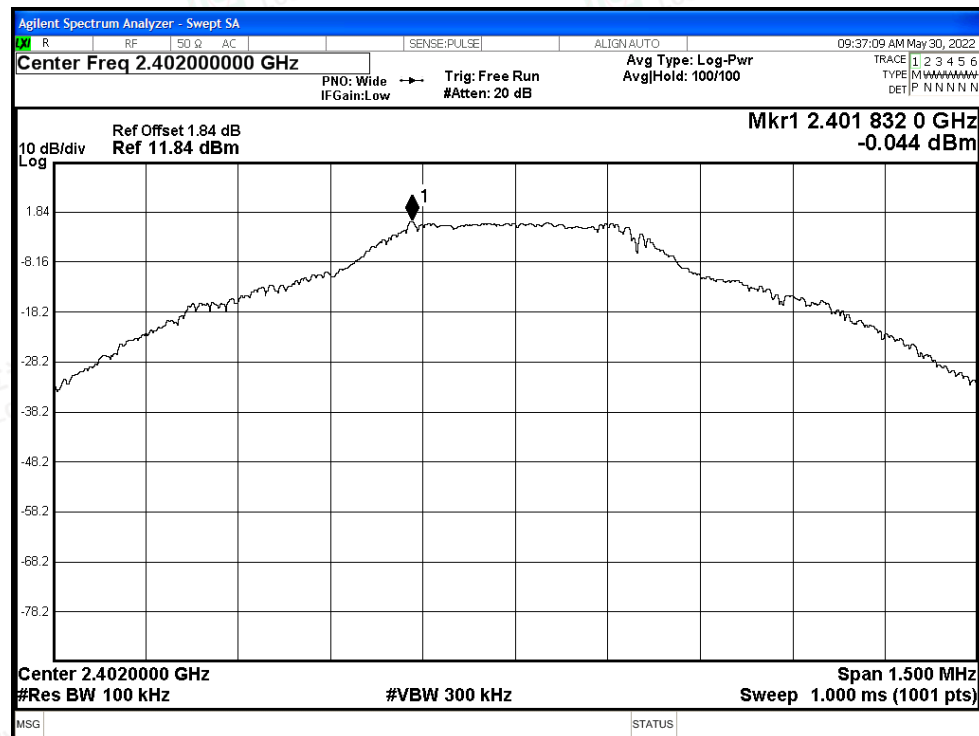

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

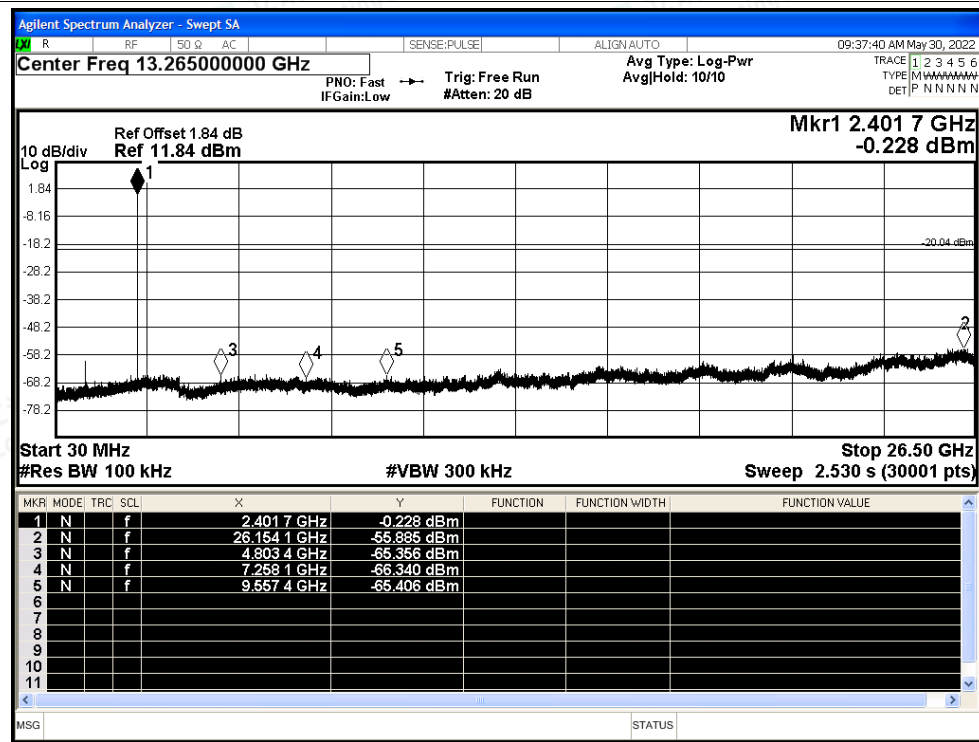

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

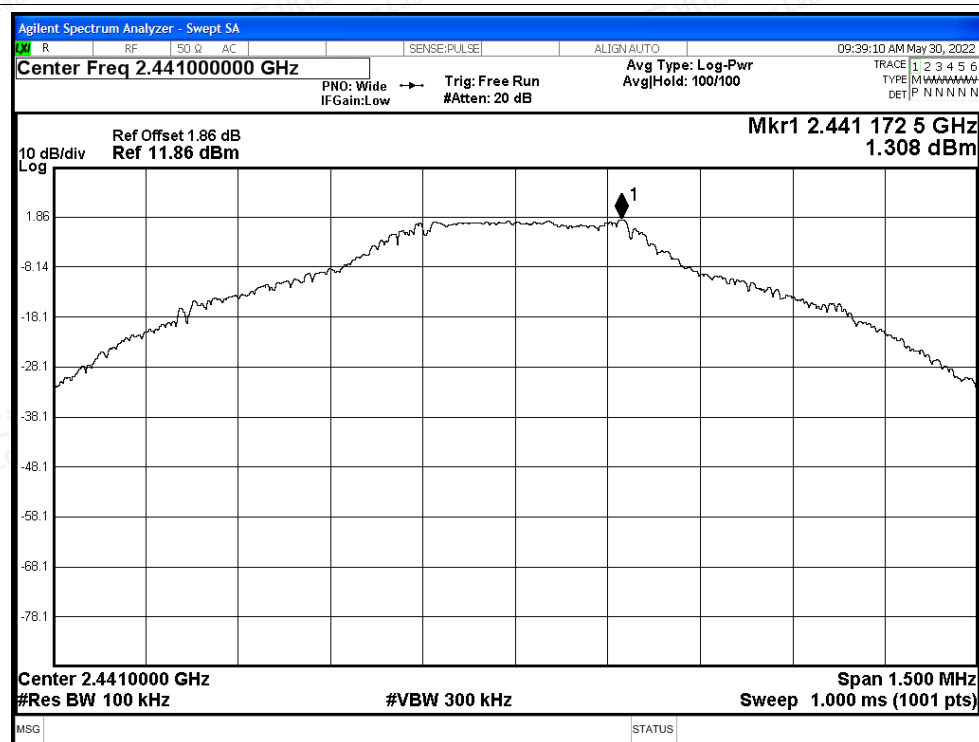


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

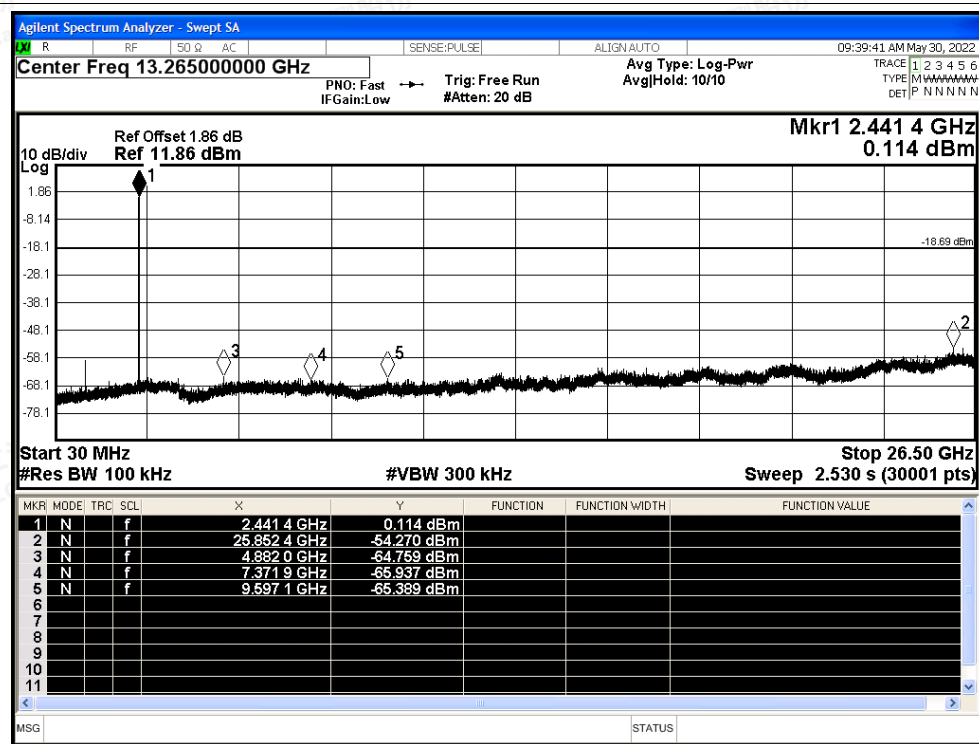




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

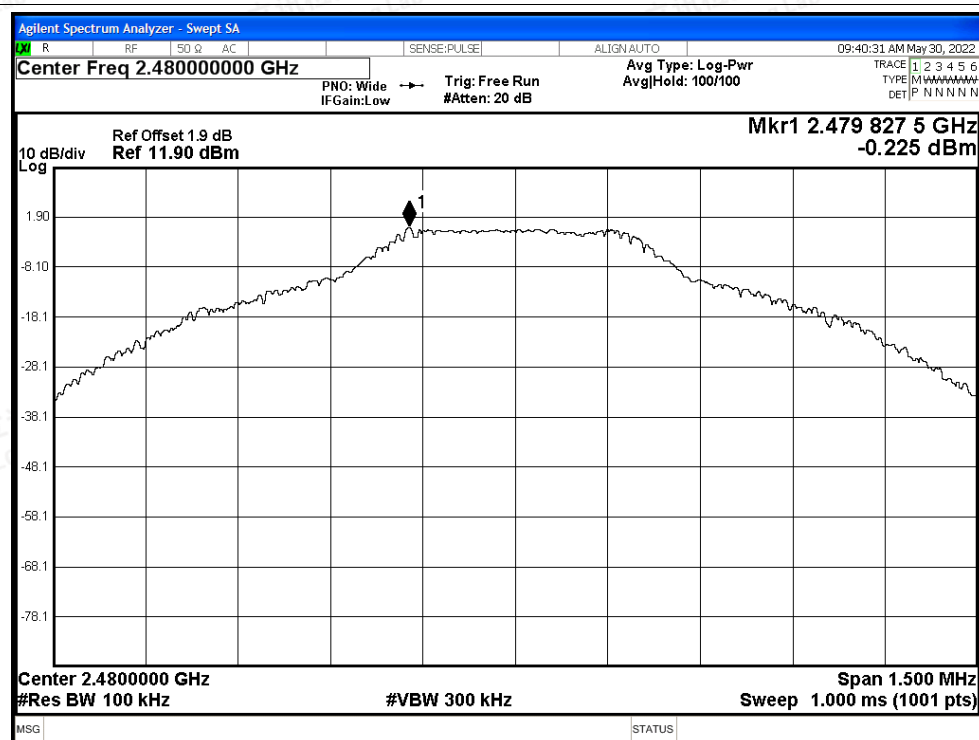


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

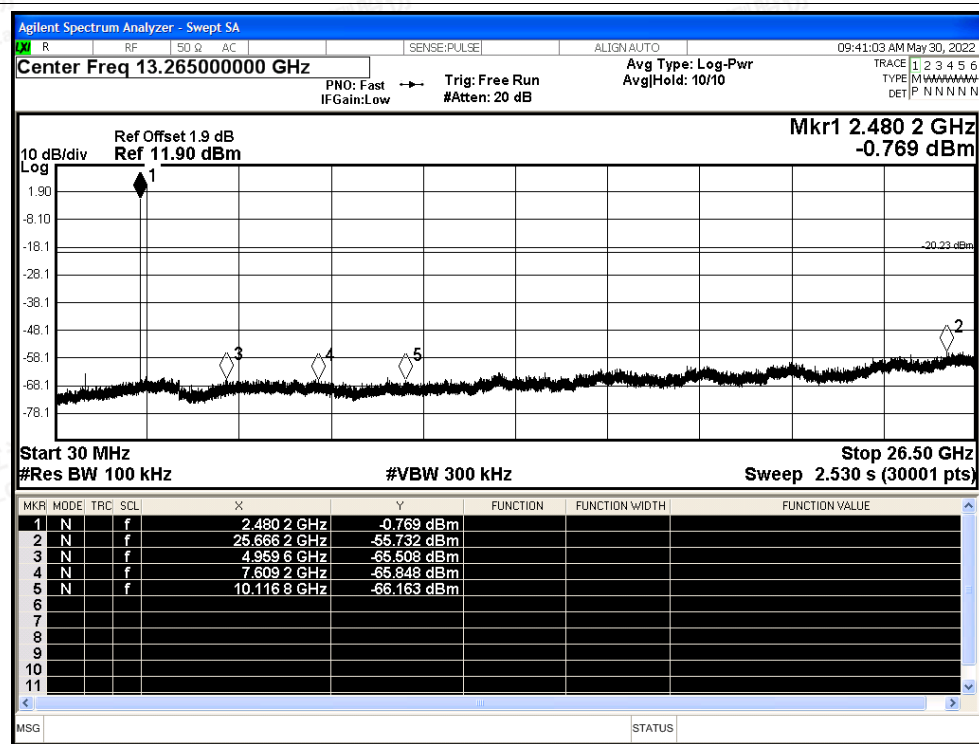




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

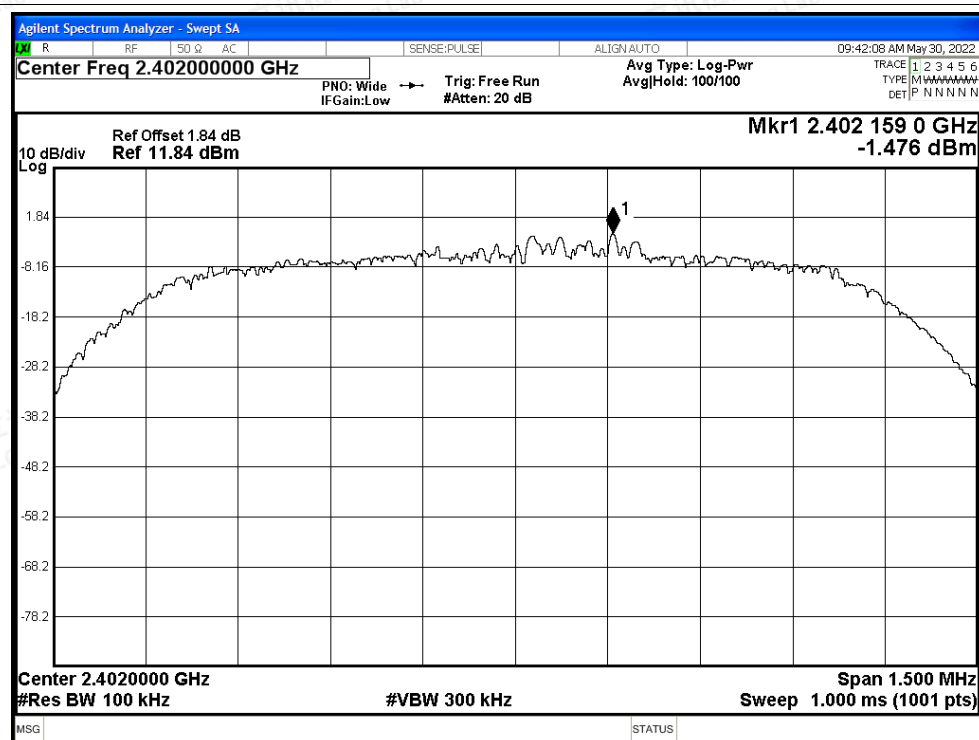


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

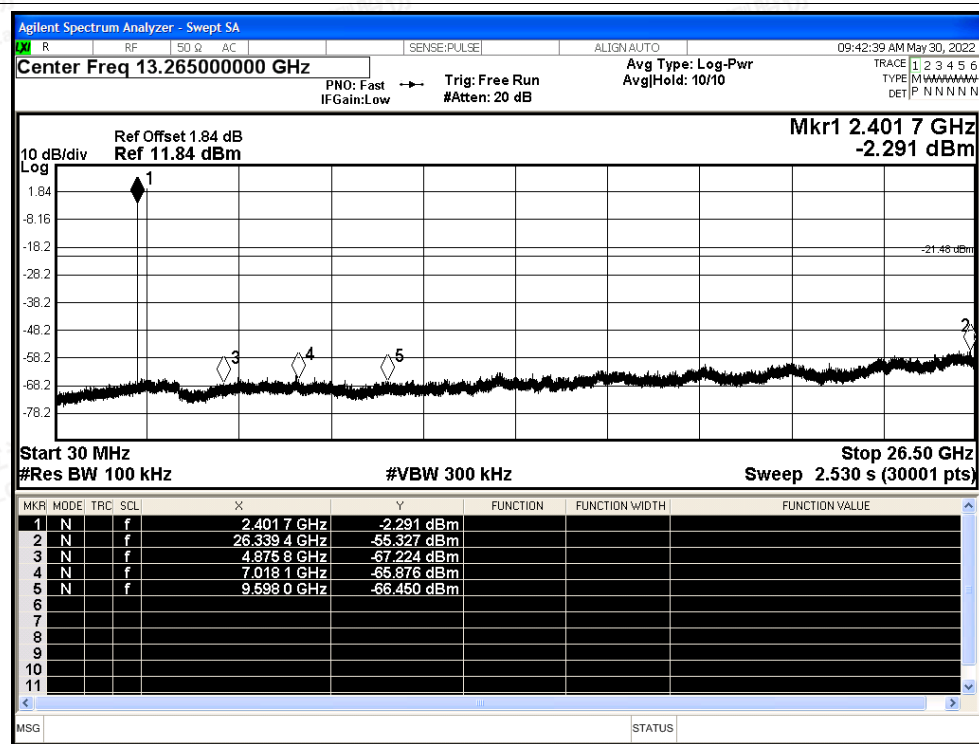




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

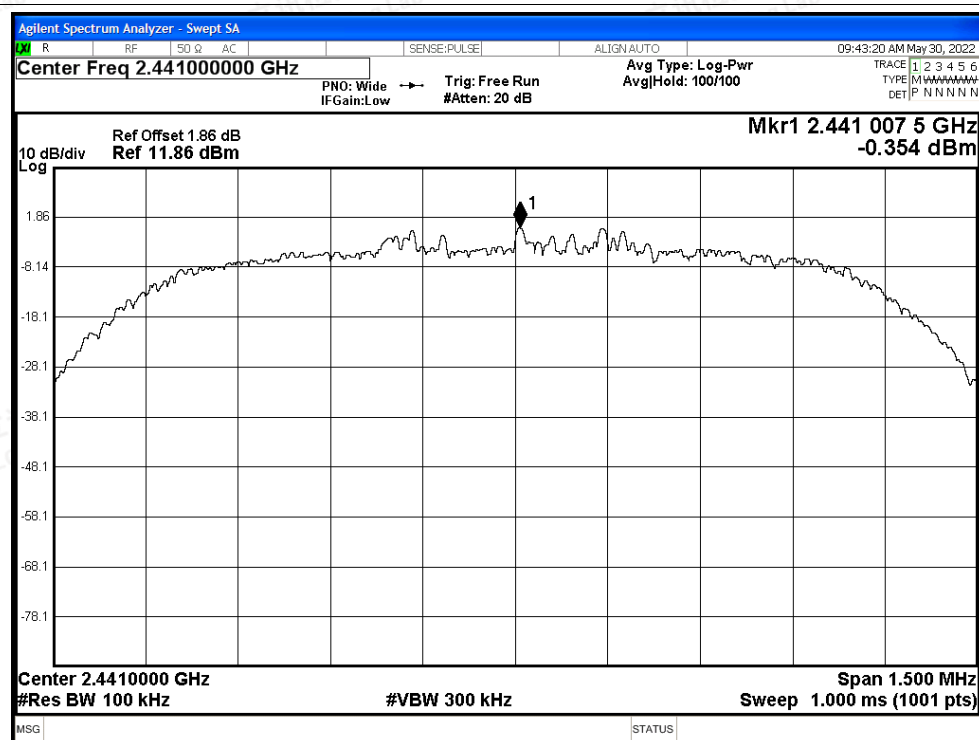


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

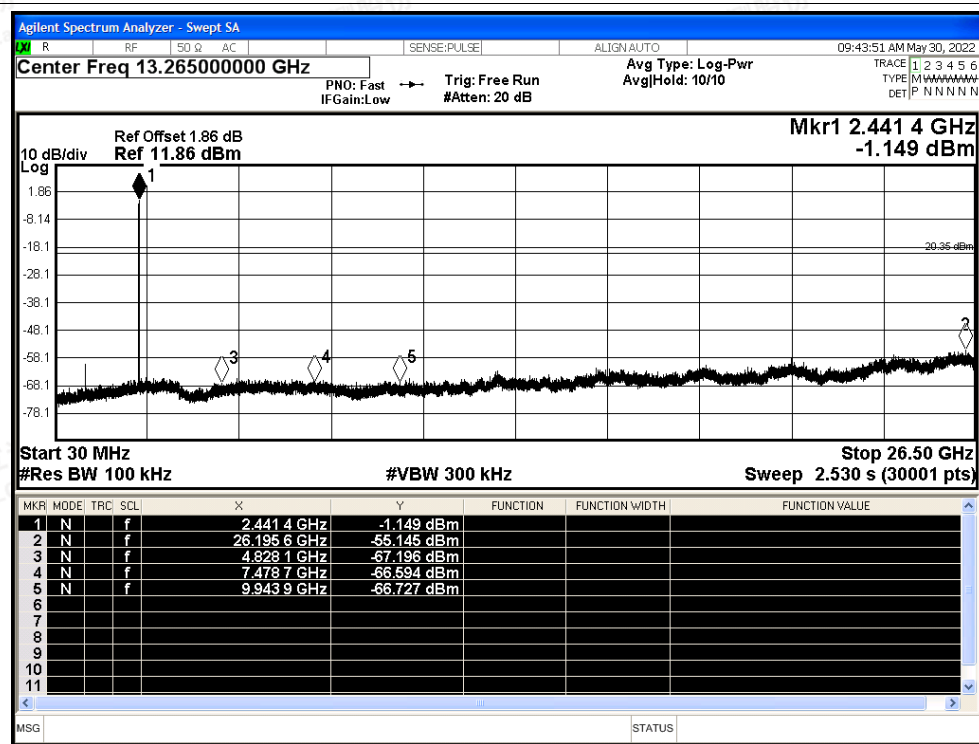




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

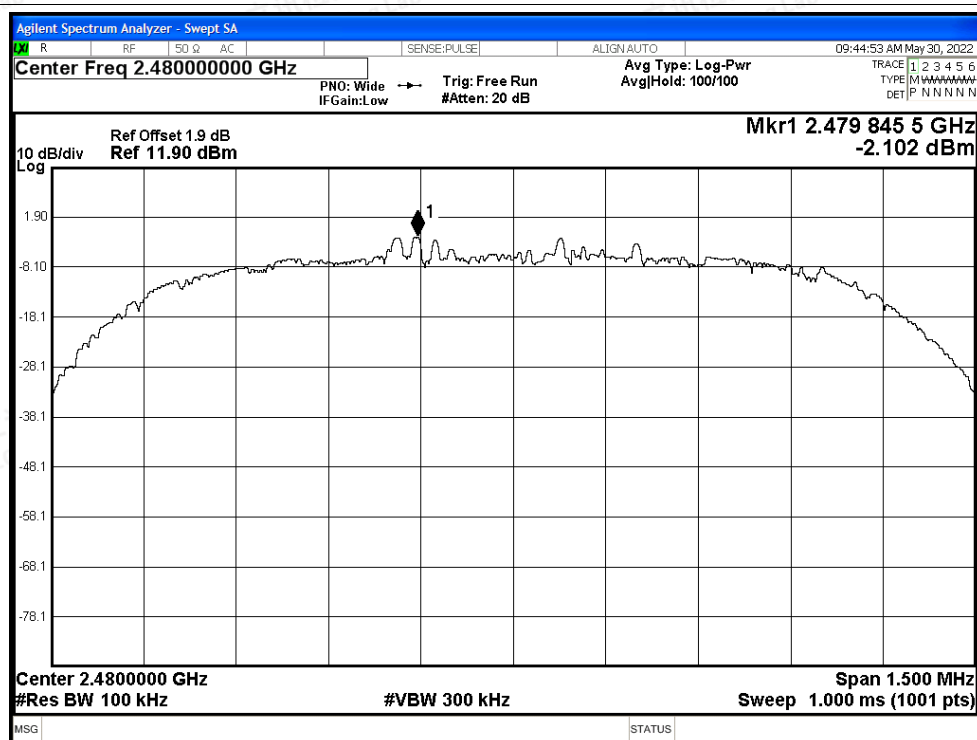


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

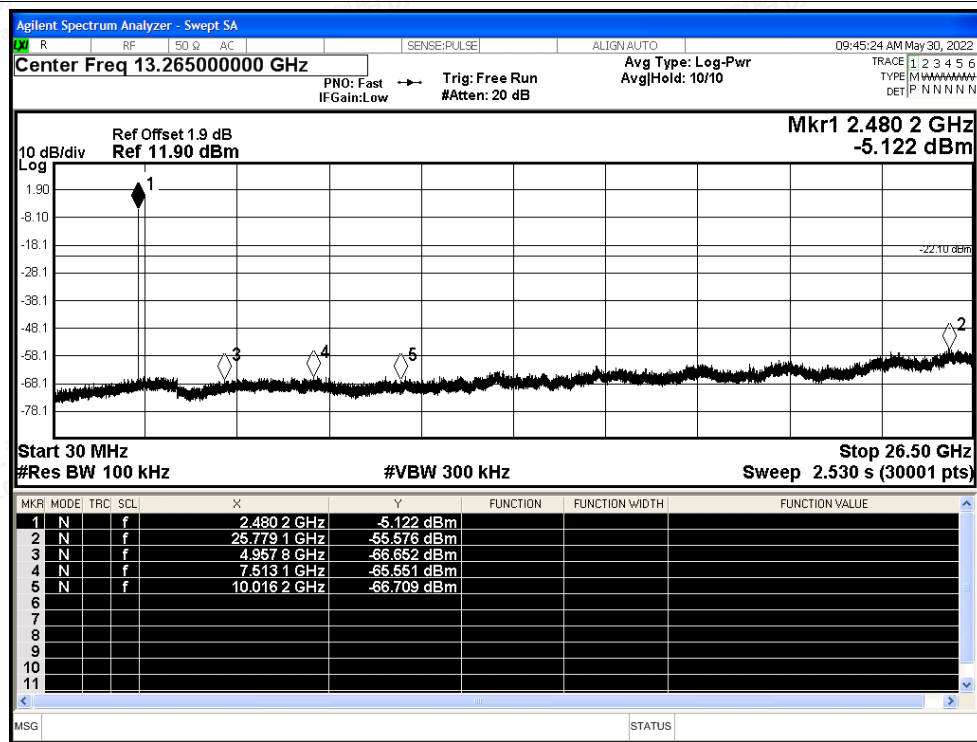




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

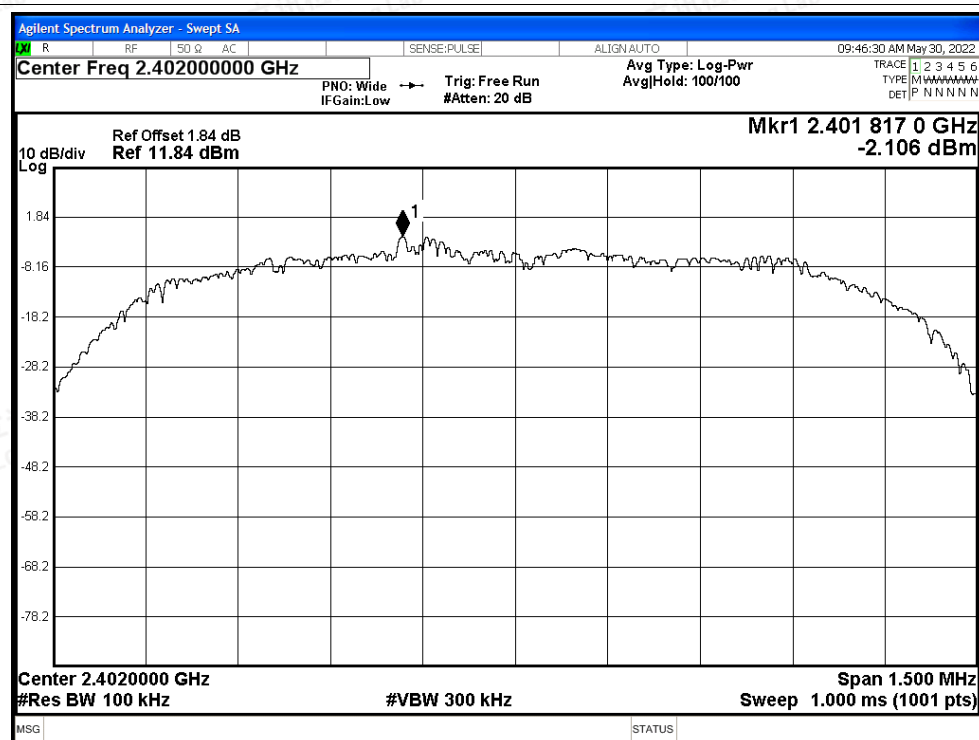


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

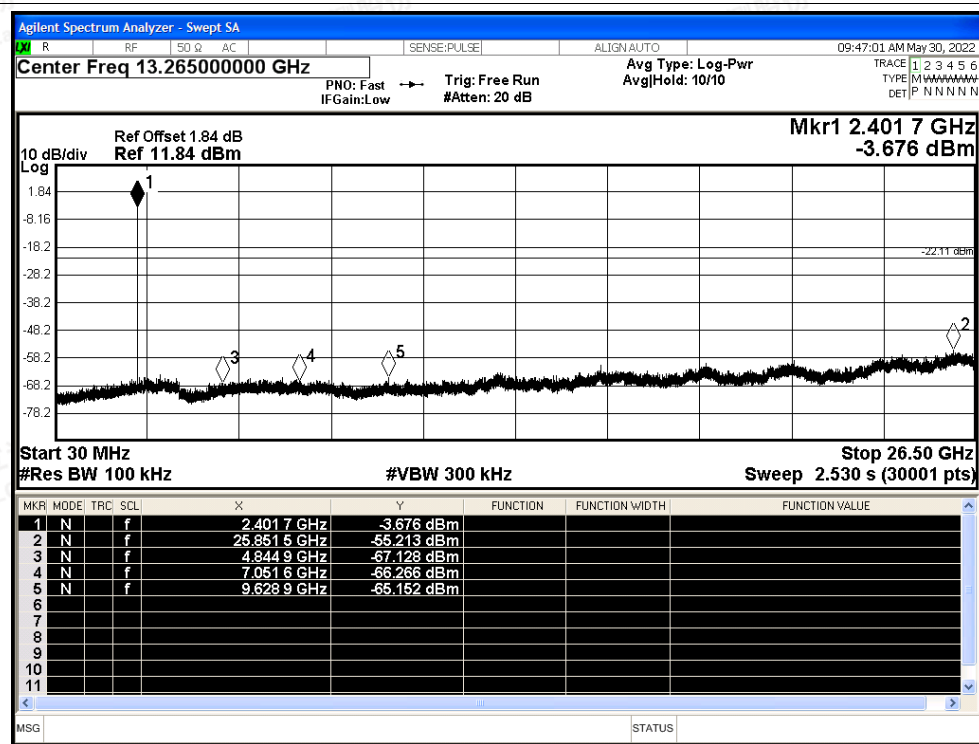




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

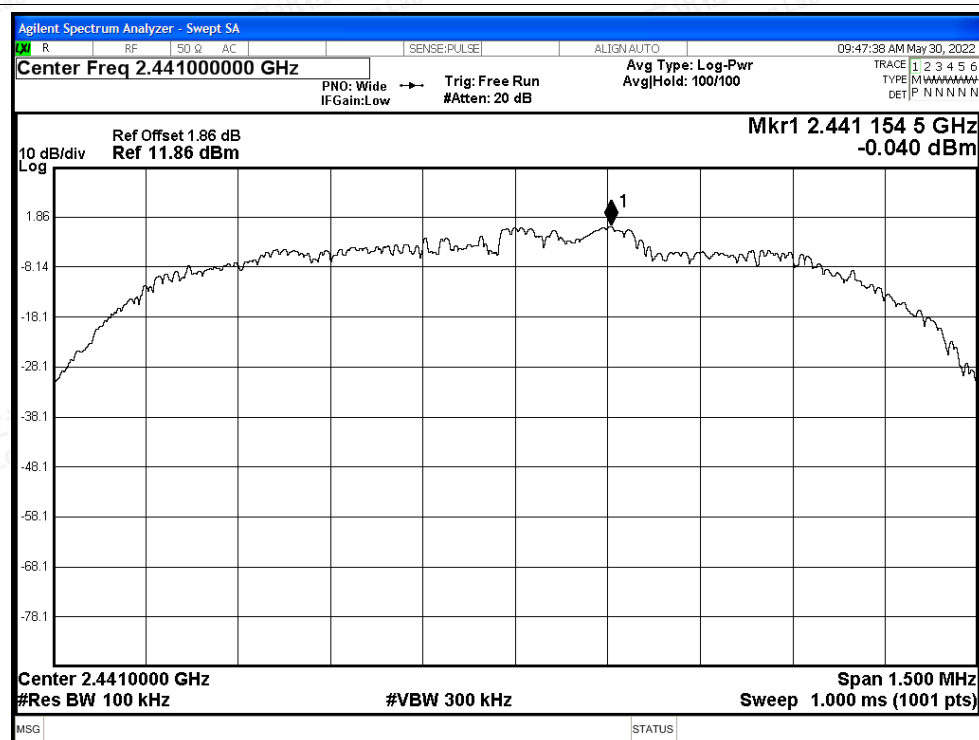

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

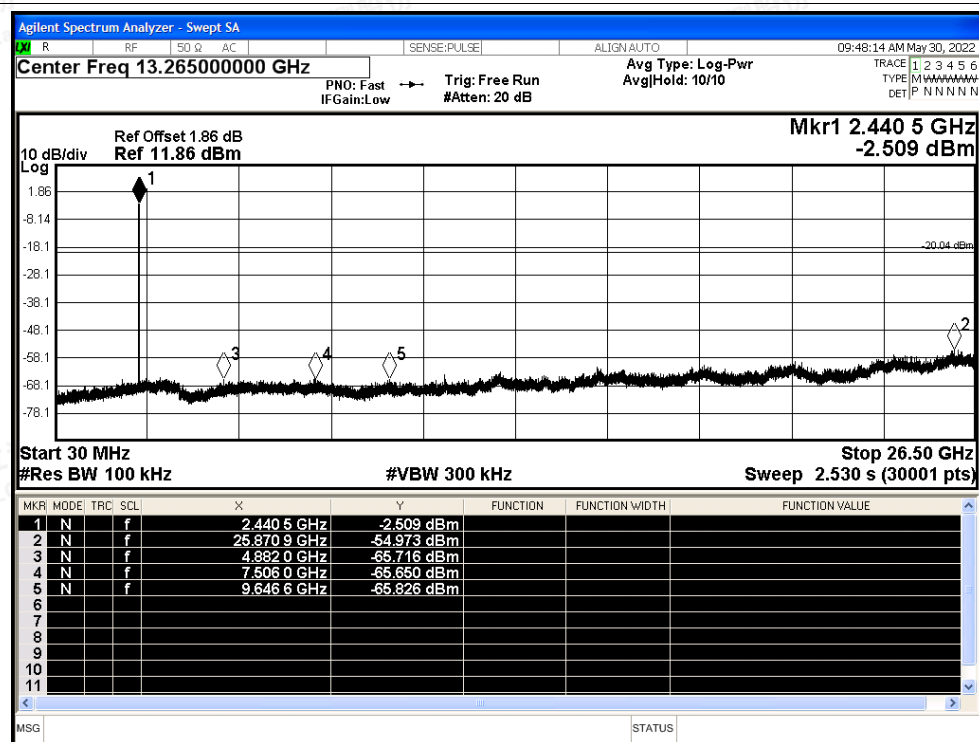

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

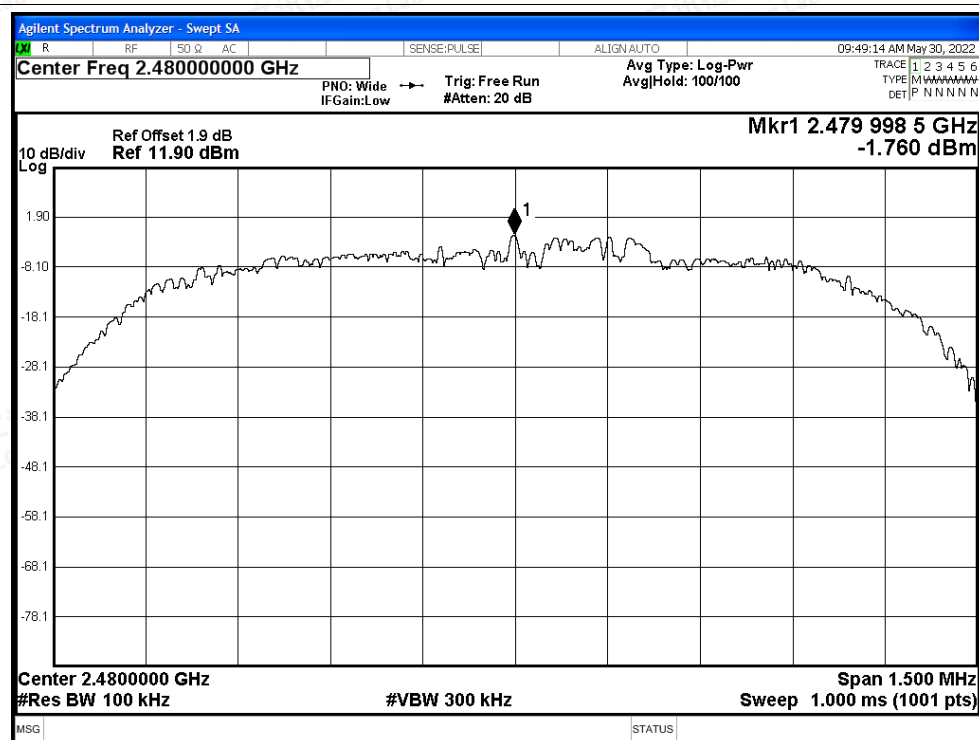

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

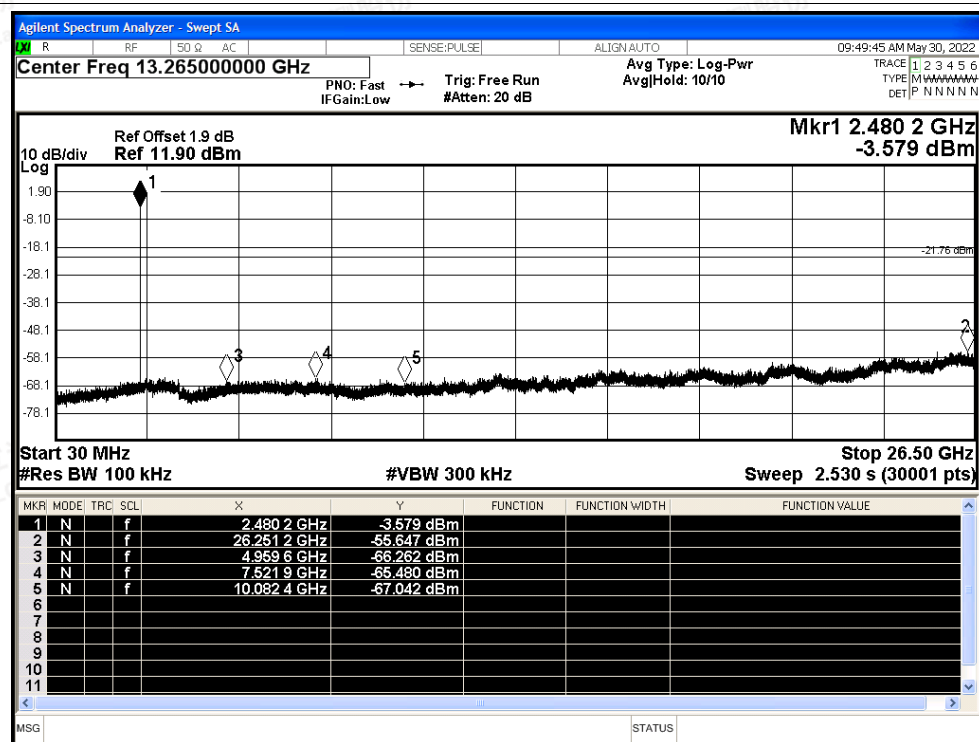



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-51.33	2	45.93	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-60.77	2	36.49	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2337.264	-47.09	2	50.17	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2382.864	-60.22	2	37.04	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-50.84	2	46.42	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-60.32	2	36.94	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-49.53	2	47.73	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-59.75	2	37.51	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2497.12	-47.46	2	49.8	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2484.064	-59.65	2	37.61	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-50.81	2	46.45	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-59.94	2	37.32	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-51.43	2	45.83	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-60.83	2	36.43	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2374.32	-47.44	2	49.82	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2384.88	-60.27	2	36.99	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-50.26	2	47	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-60.54	2	36.72	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-49.6	2	47.66	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-59.69	2	37.57	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2497.768	-47.55	2	49.71	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.656	-59.62	2	37.64	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-49.97	2	47.29	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-59.96	2	37.3	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-51.61	2	45.65	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-60.82	2	36.44	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2377.488	-47.67	2	49.59	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2387.856	-60.22	2	37.04	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-50.65	2	46.61	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-60.5	2	36.76	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-49.81	2	47.45	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-59.72	2	37.54	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2498.584	-47.33	2	49.93	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.848	-59.64	2	37.62	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-51.79	2	45.47	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-60.09	2	37.17	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

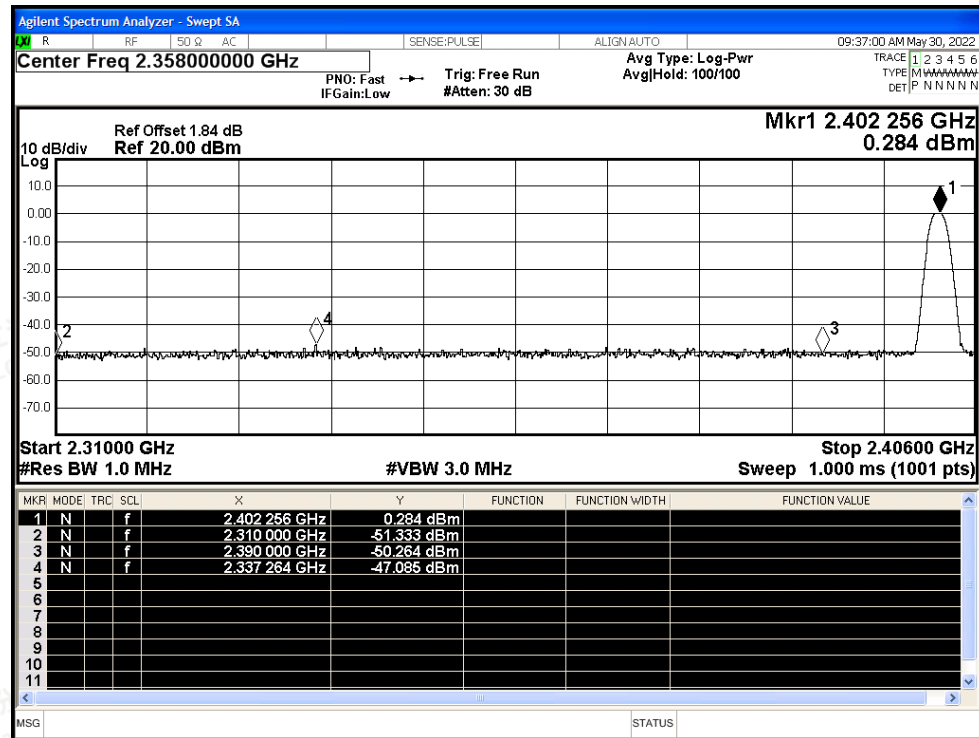


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

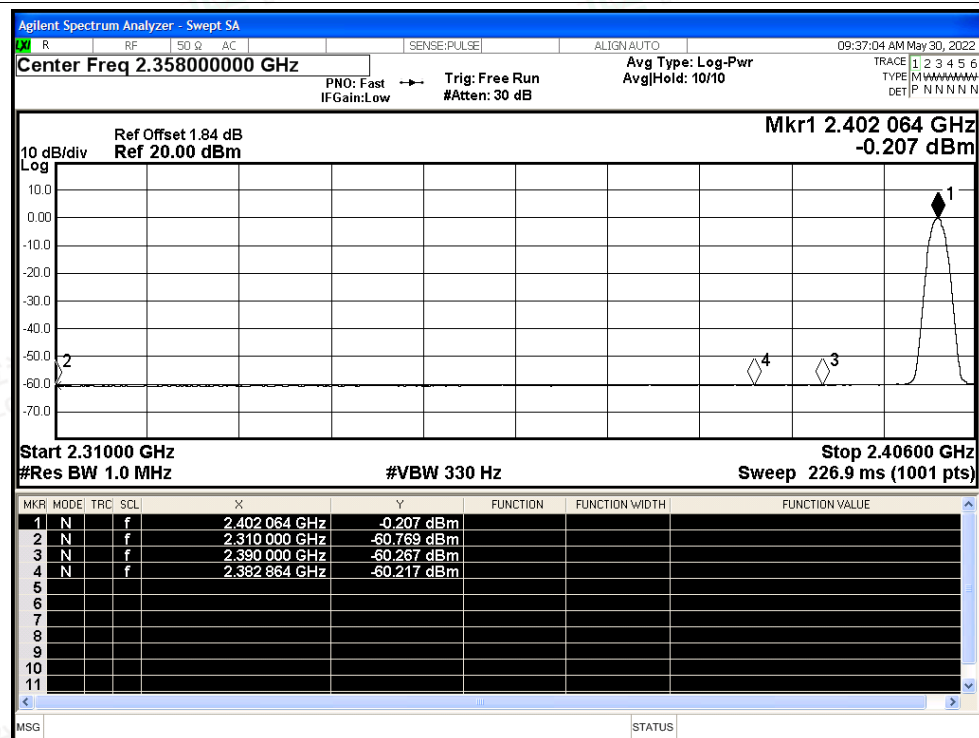




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

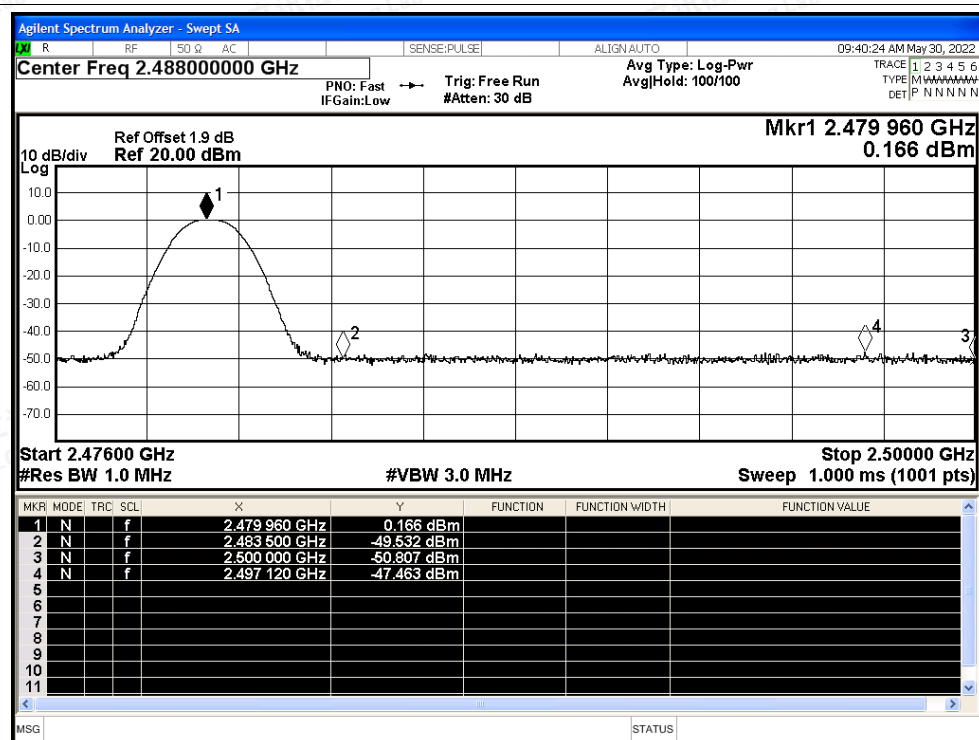


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

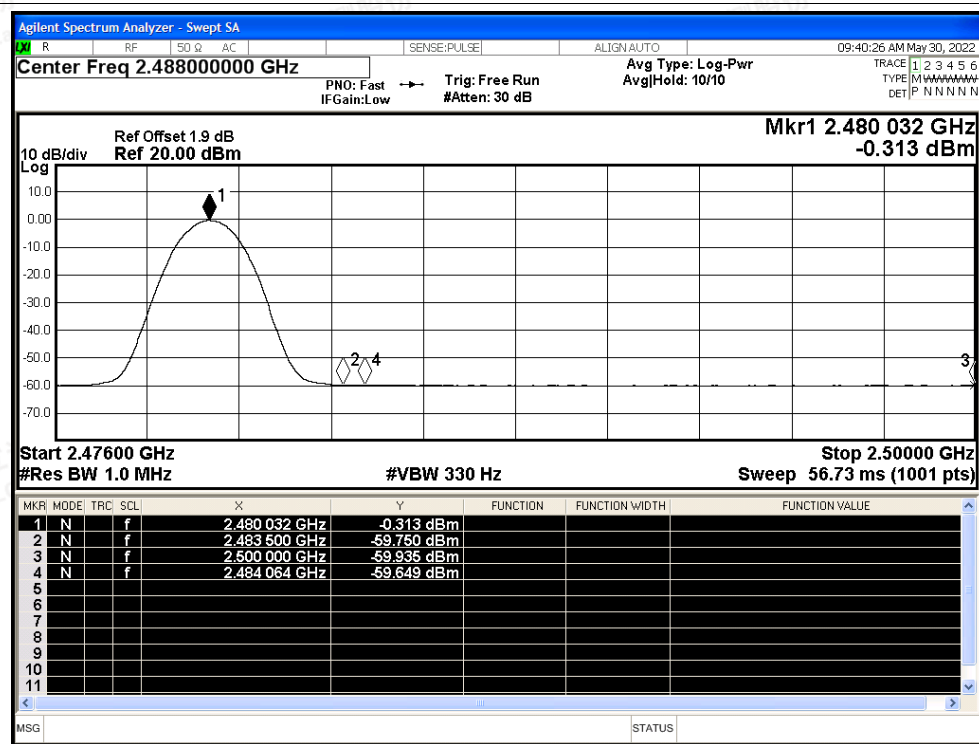




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

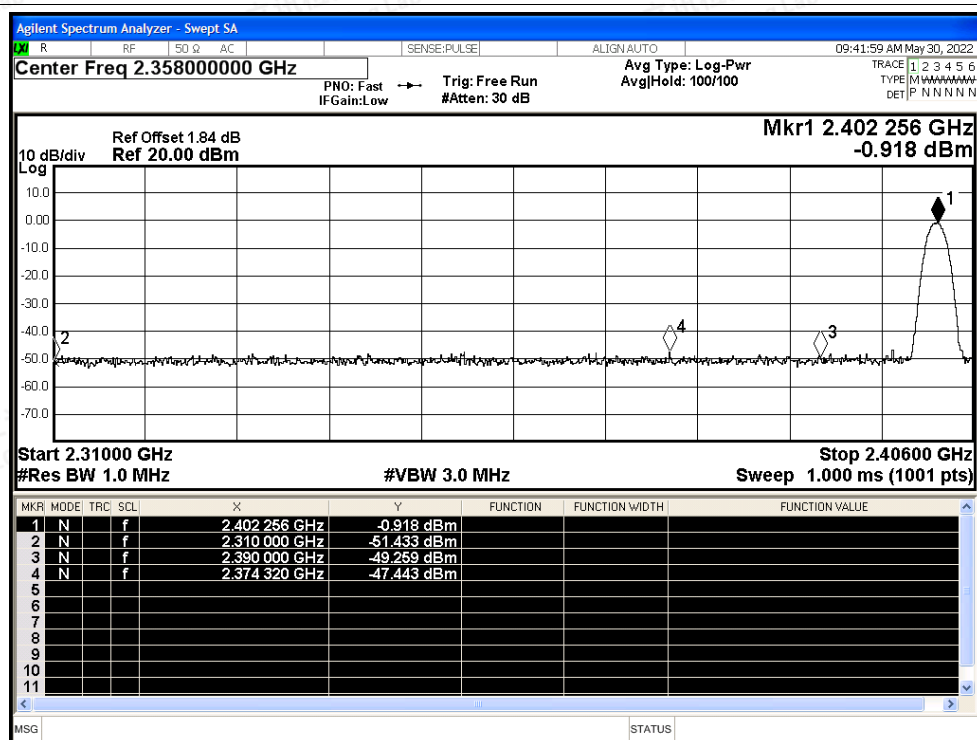


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

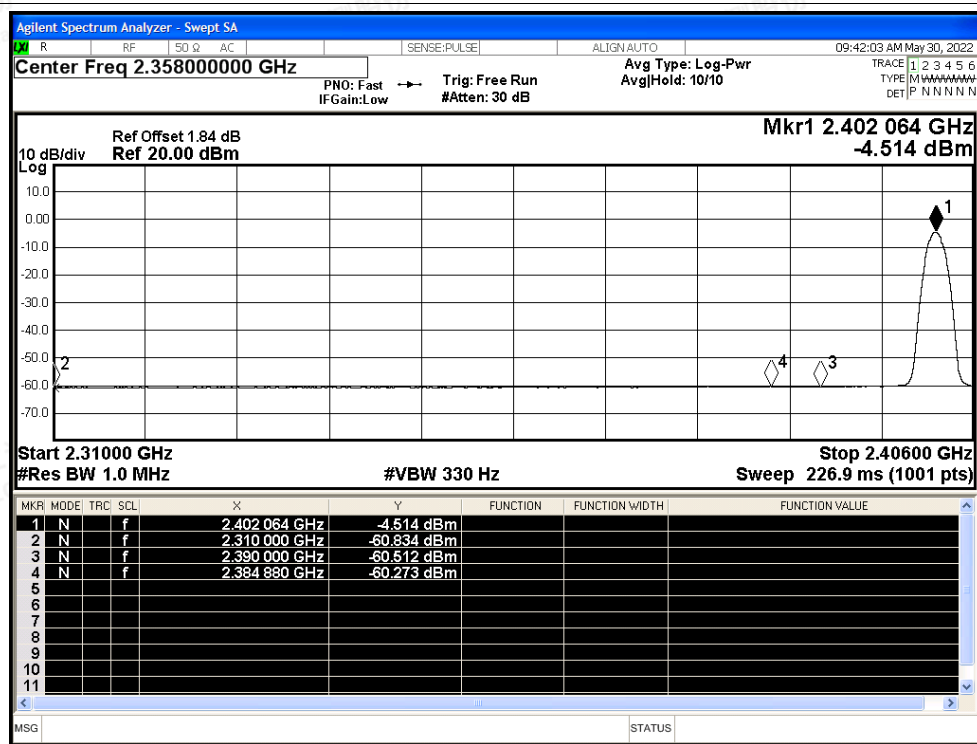




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

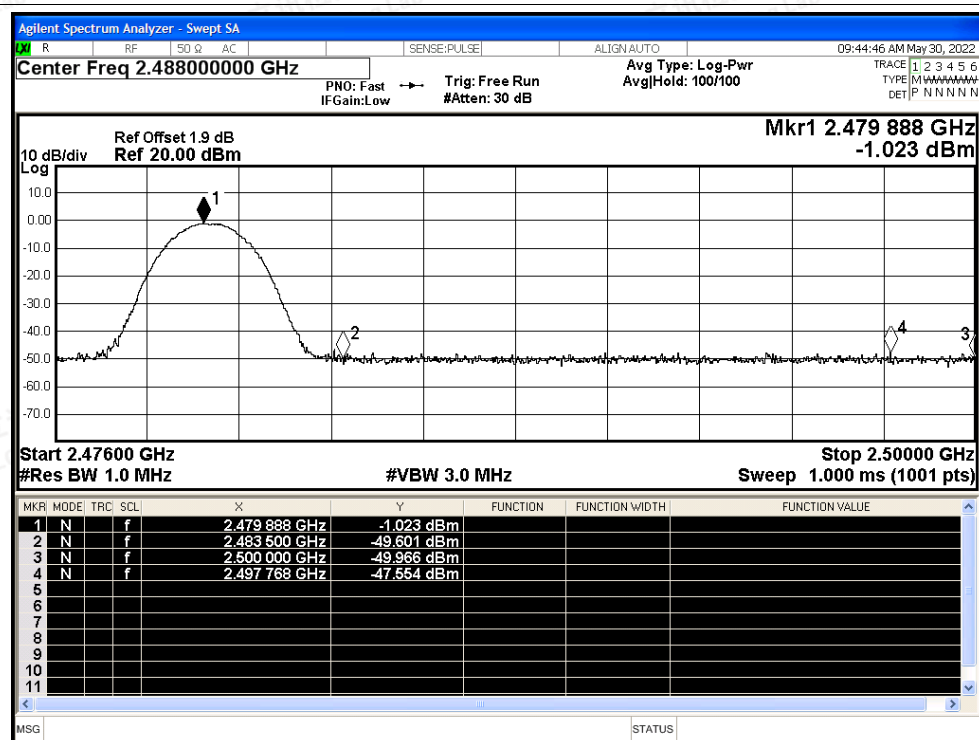

Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

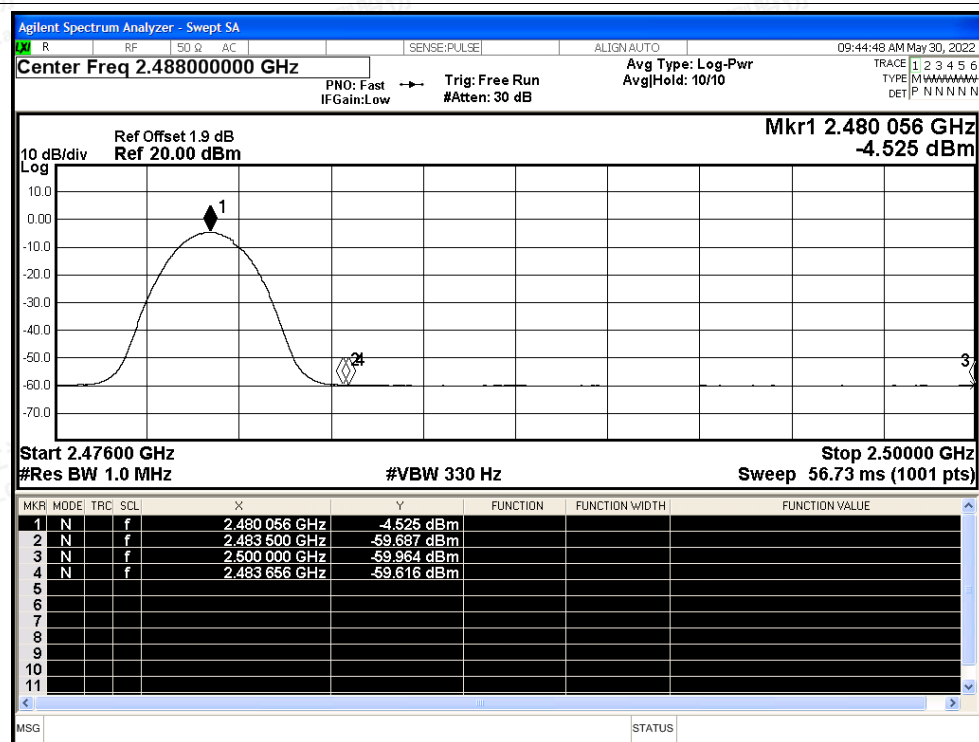

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

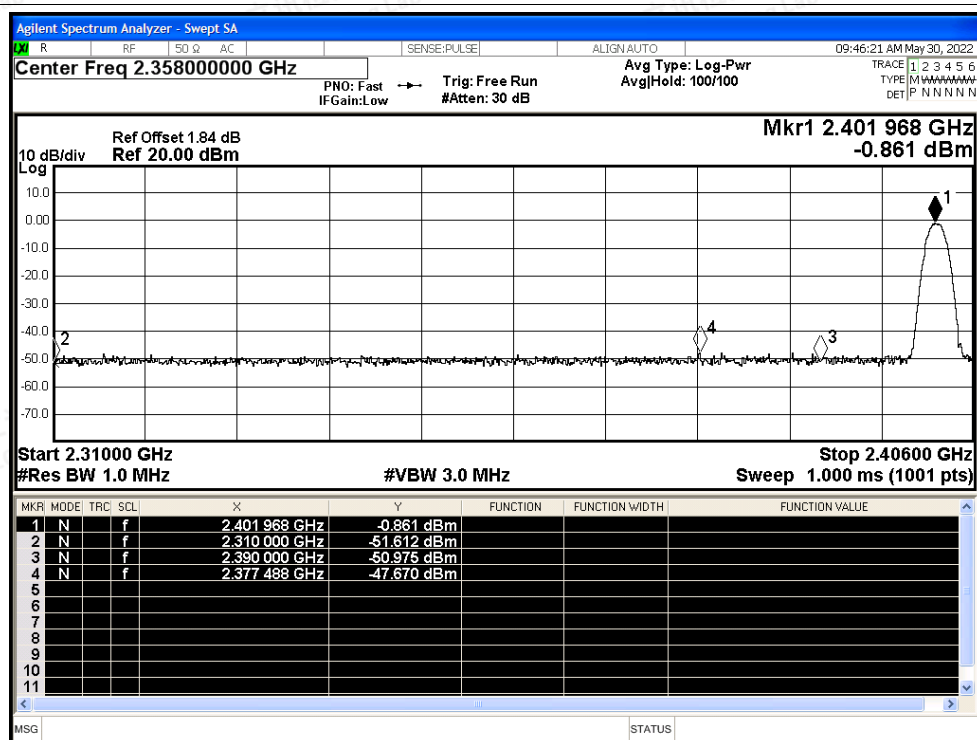

Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

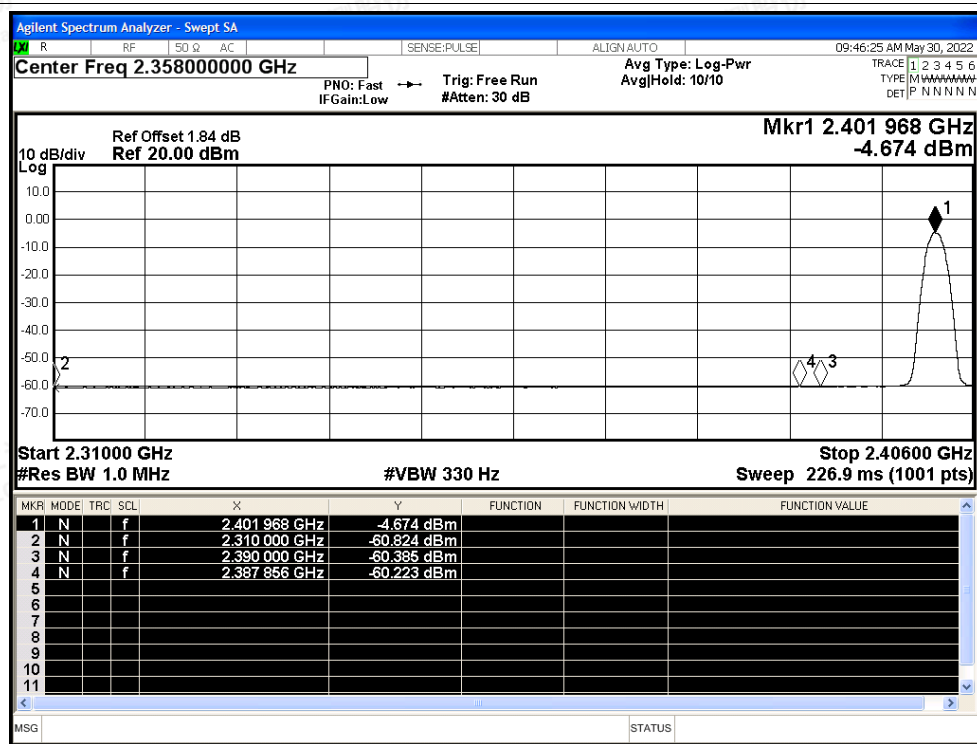

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

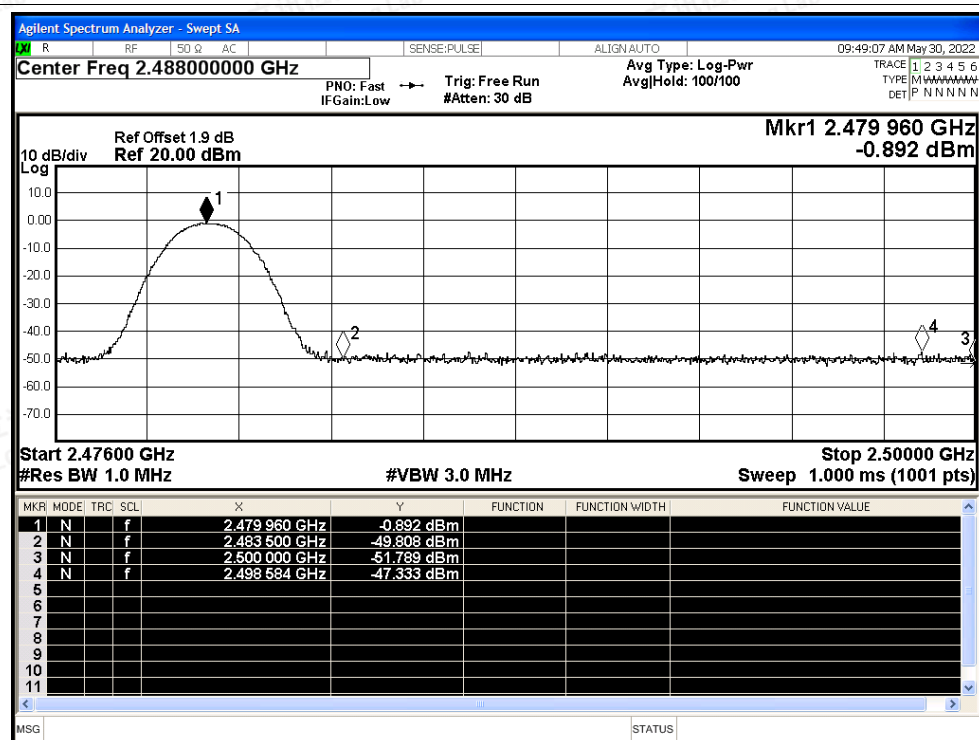

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

