

Appendix A

RF Test Data for 2.4G WIFI (Conducted Measurement)

Product Name: IOT Gateway

Trade Mark: N/A

Test Model: IOT-1110


Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Ken He
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
11B	2437	Ant1	98.82	PASS
11G	2437	Ant1	100	PASS
11N20SISO	2437	Ant1	100	PASS
11N40SISO	2437	Ant1	100	PASS


Duty Cycle_11B_2437_Ant1

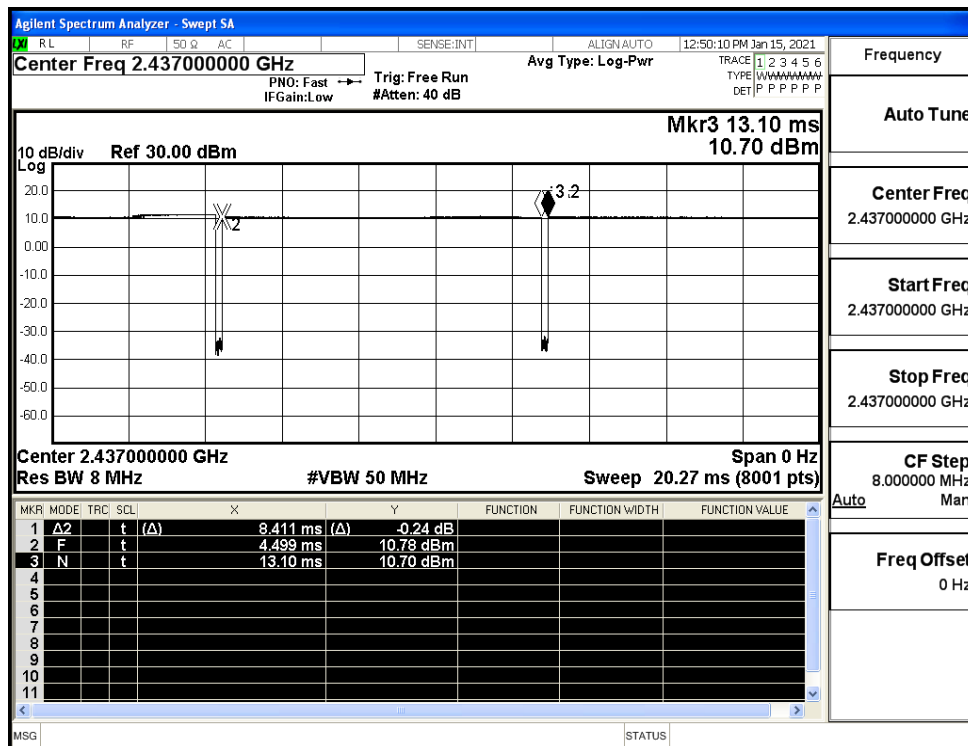


Duty Cycle_11G_2437_Ant1

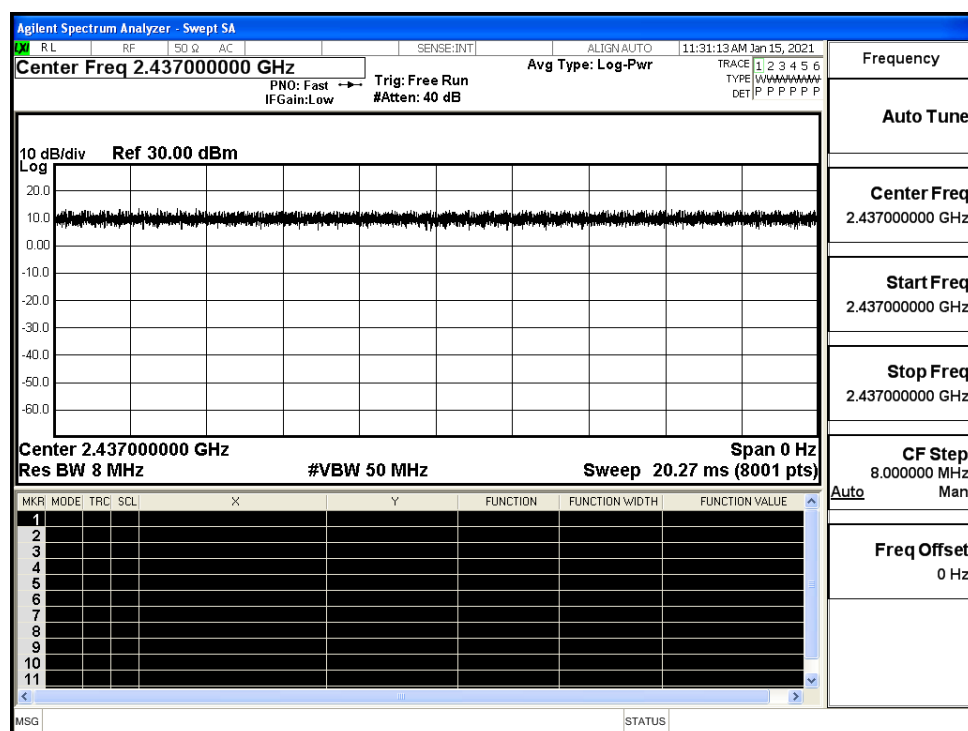

Duty Cycle_11N20SISO_2437_Ant1

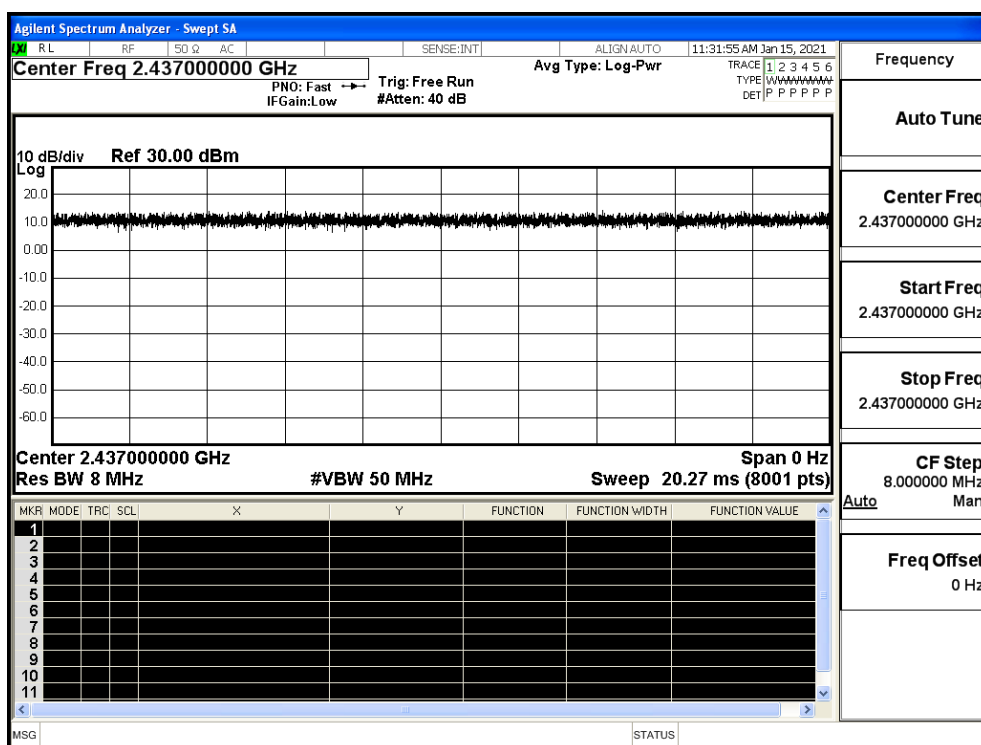

Duty Cycle_11N40SISO_2437_Ant1

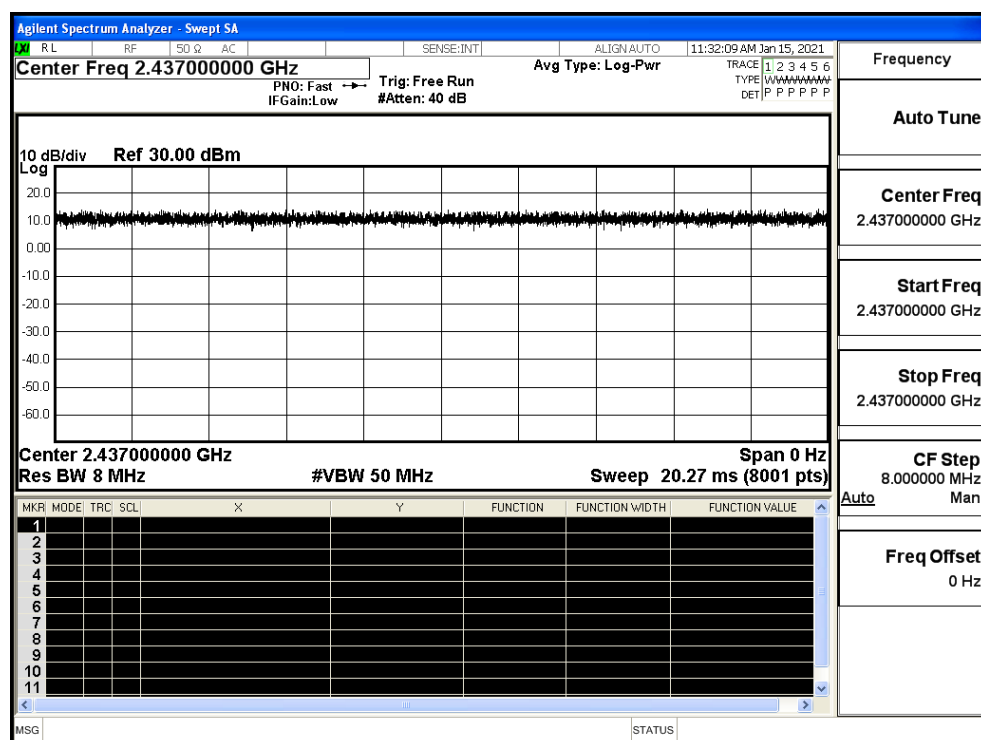


A.2 Maximum Conducted Output Power


Mode	Channel	Meas.Level [dBm]	Limit [dBm]	Verdict
11B	LCH	15.91	30	PASS
	MCH	15.69	30	PASS
	HCH	15.48	30	PASS
11G	LCH	14.27	30	PASS
	MCH	14.19	30	PASS
	HCH	14.22	30	PASS
11N20SISO	LCH	13.04	30	PASS
	MCH	13.02	30	PASS
	HCH	12.96	30	PASS
11N40SISO	LCH	13.04	30	PASS
	MCH	12.28	30	PASS
	HCH	12.22	30	PASS

Test Graphs


11B/LCH

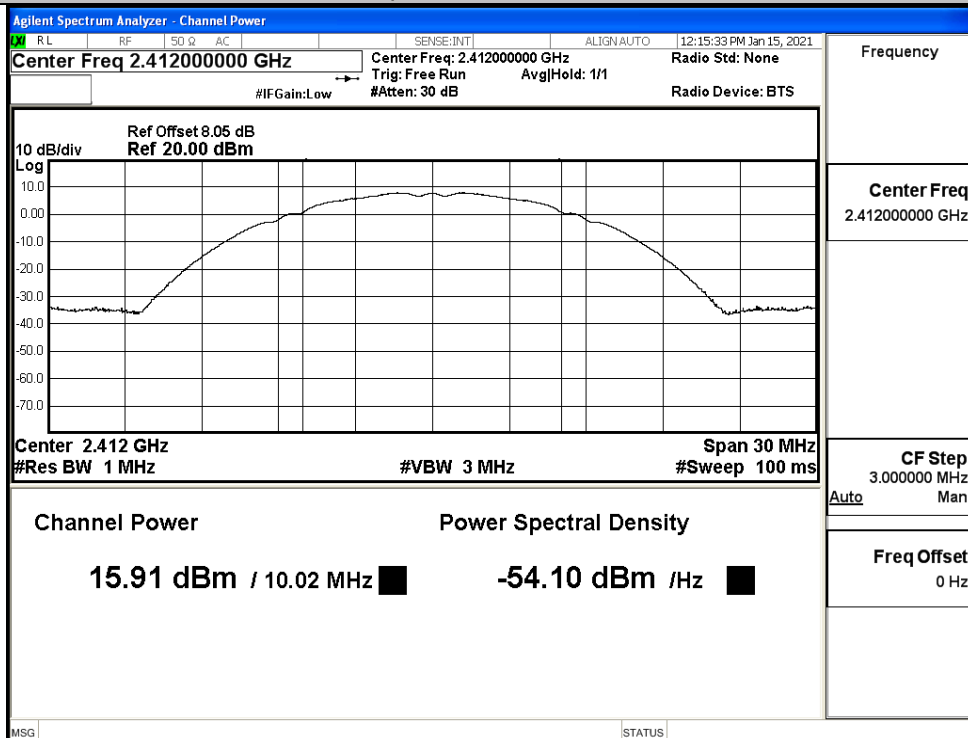


11B/MCH

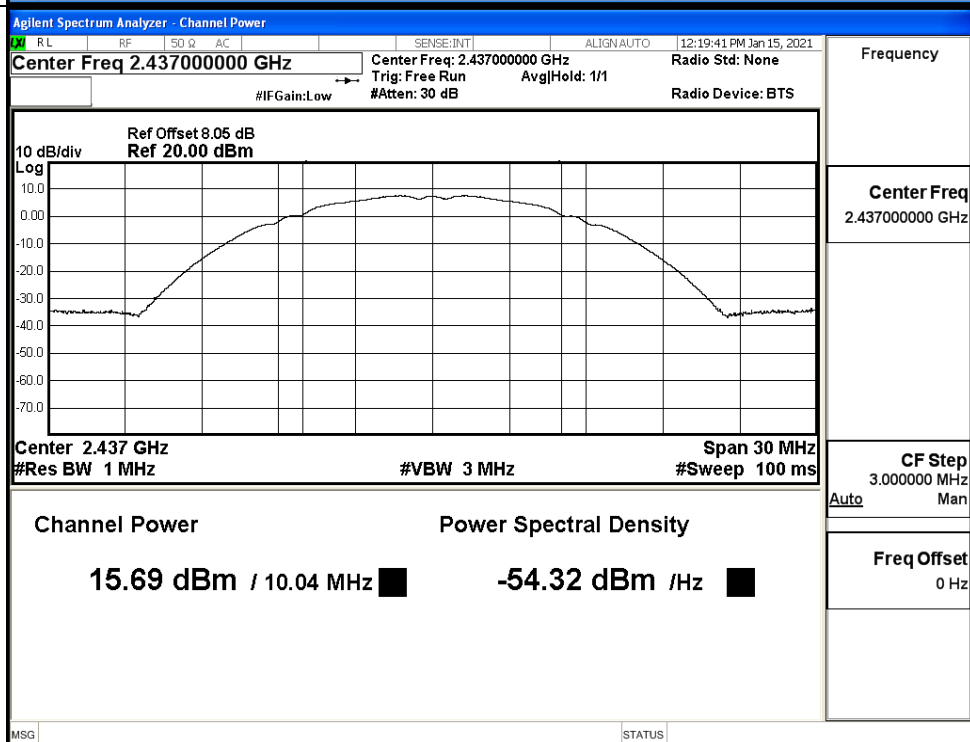


11B/HCH

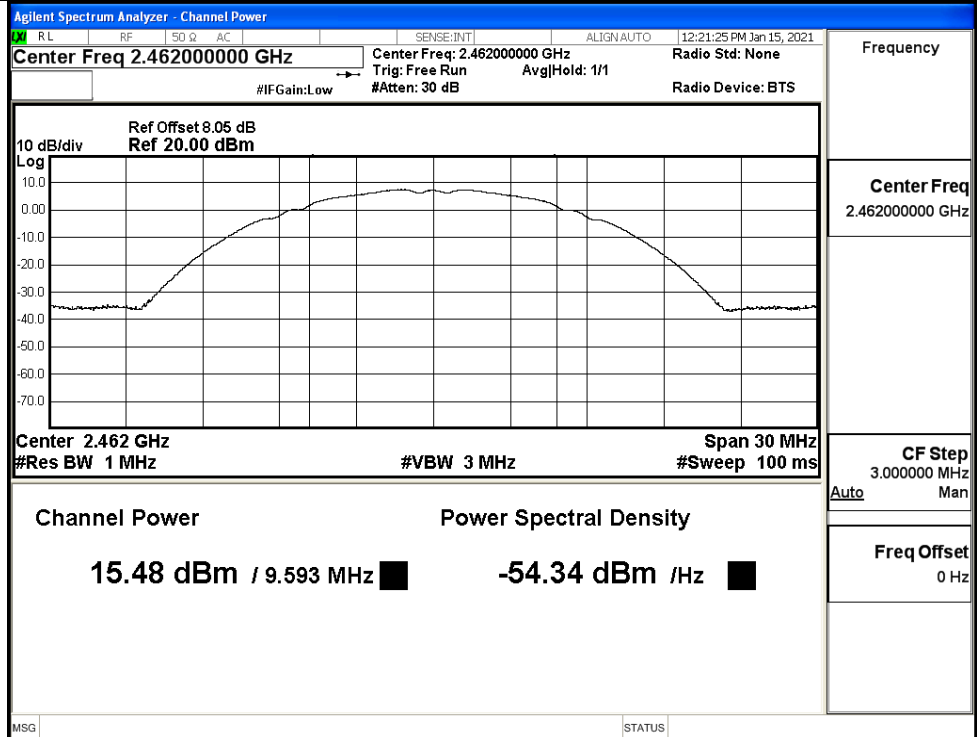


11G/LCH

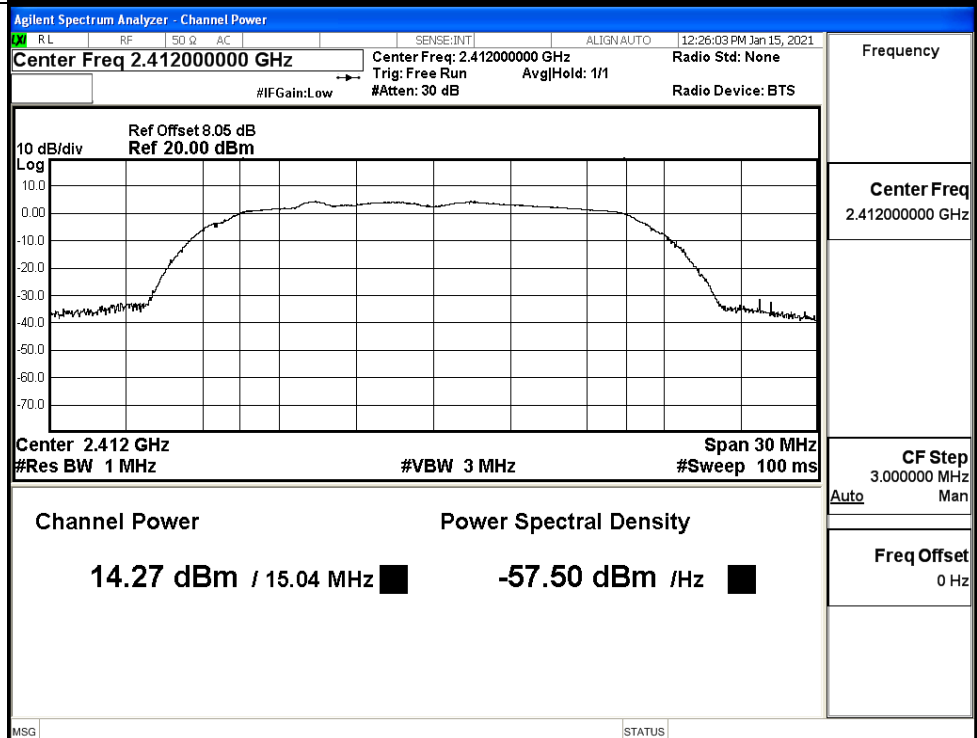


11G/MCH

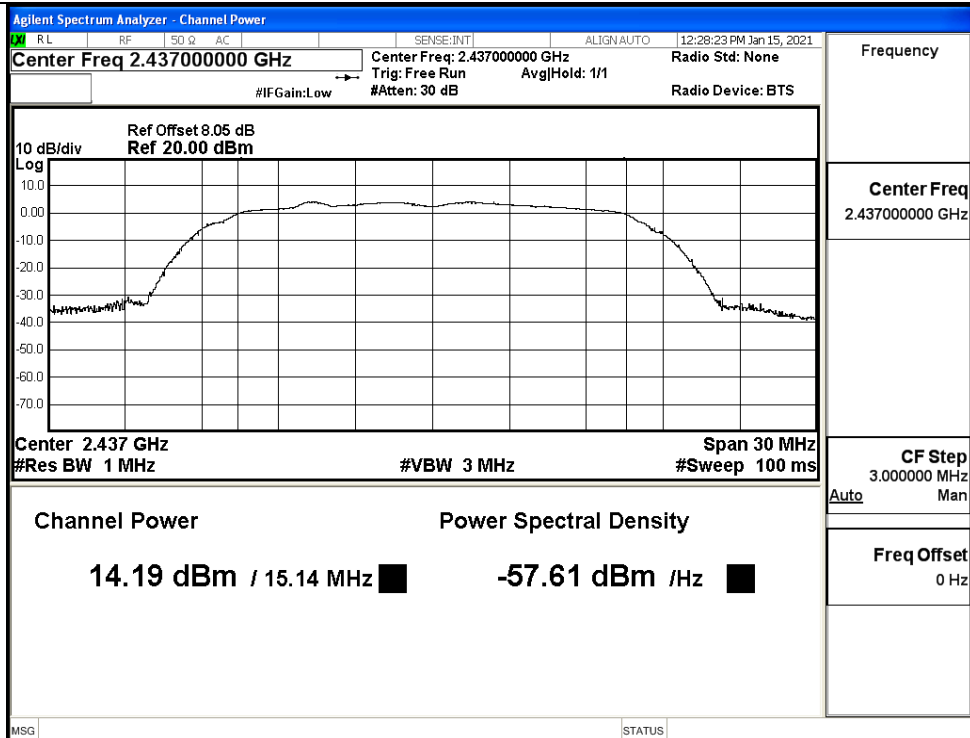


11G/HCH

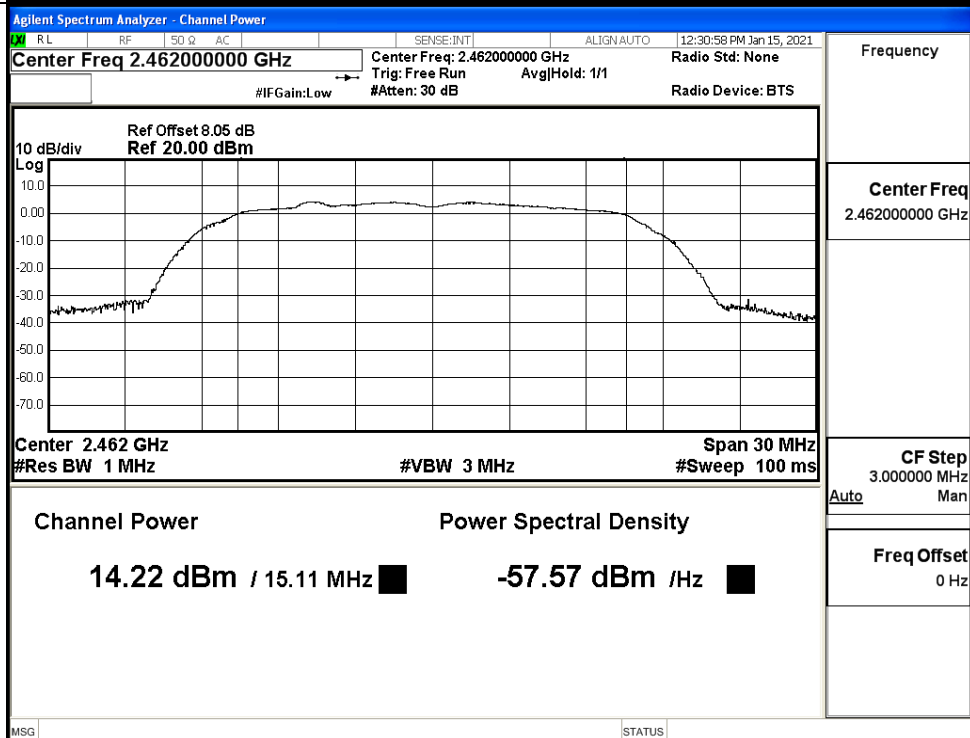


11N20SISO/LCH

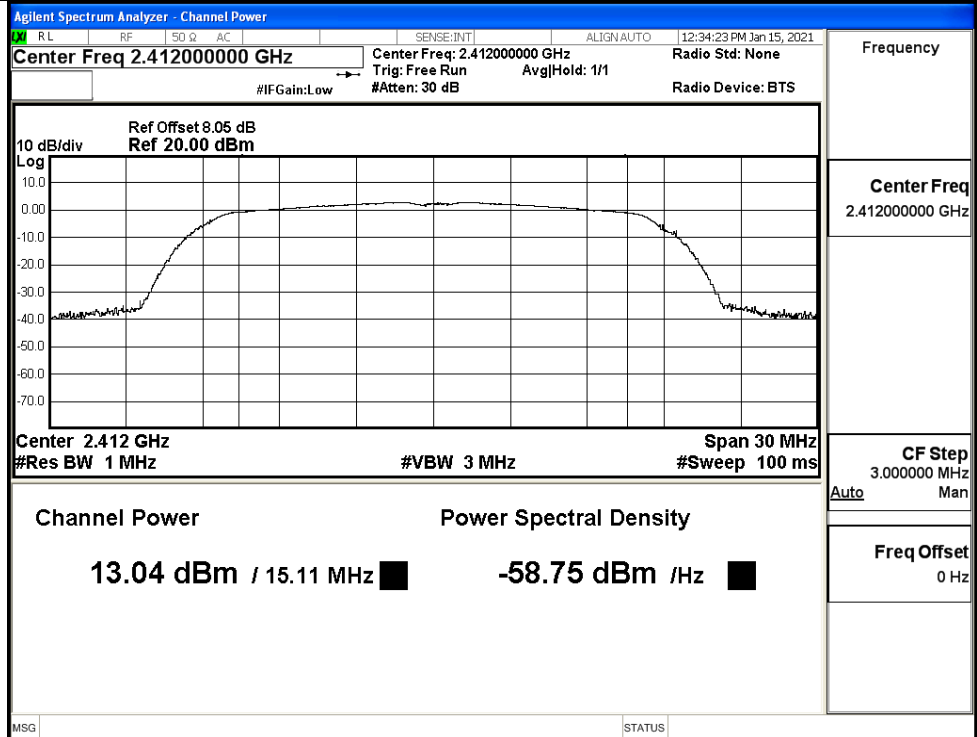


11N20SISO/MCH

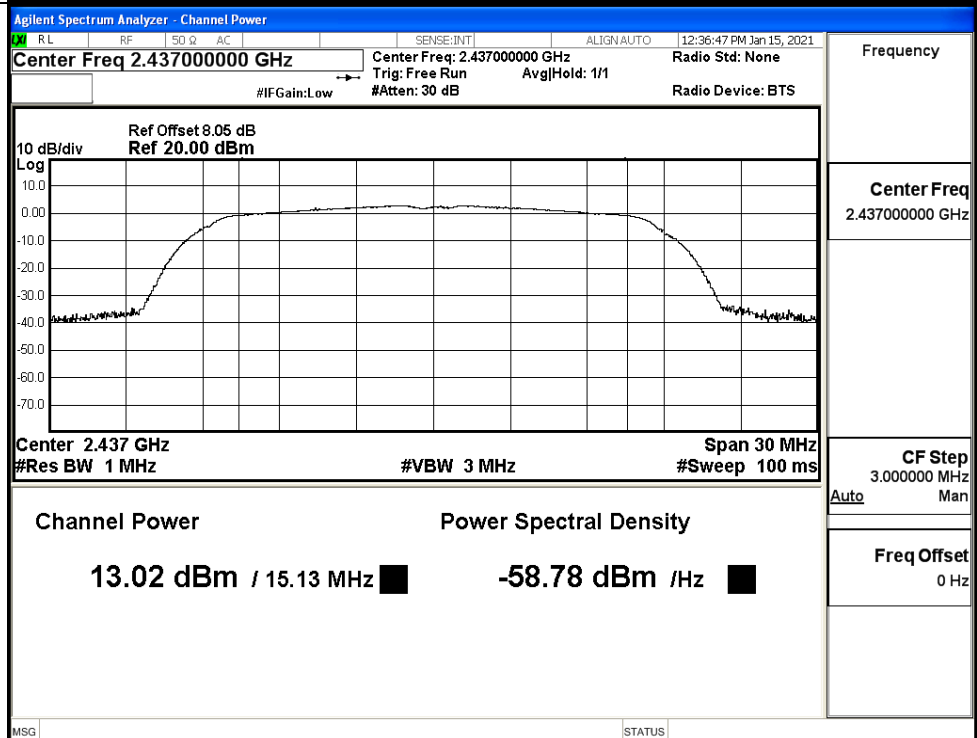


11N20SISO/HCH

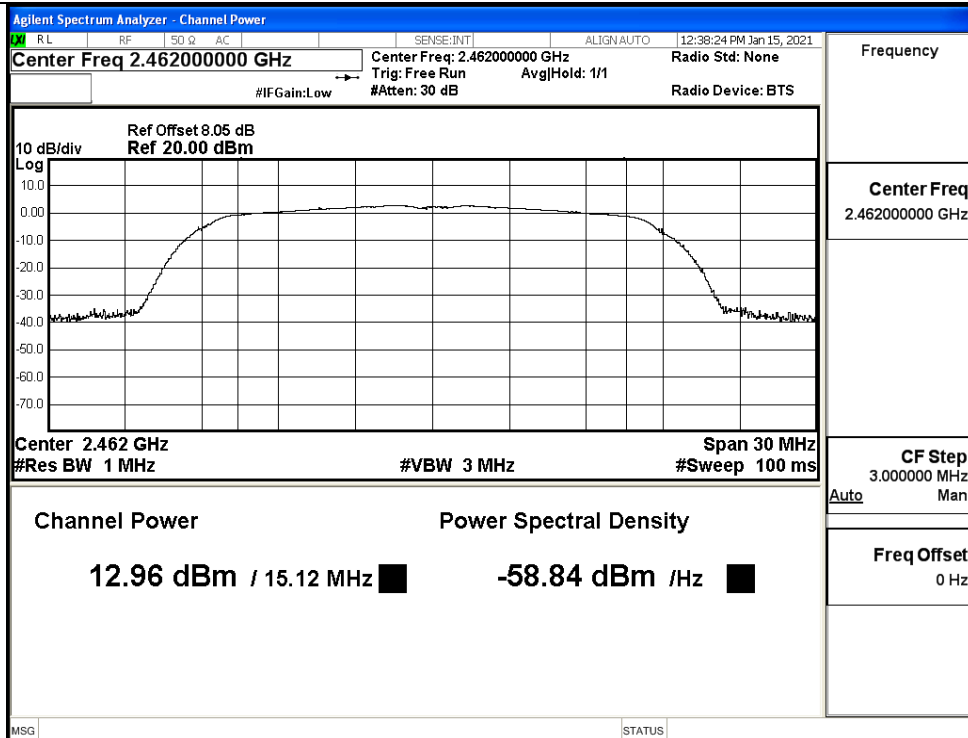


11N40SISO/LCH

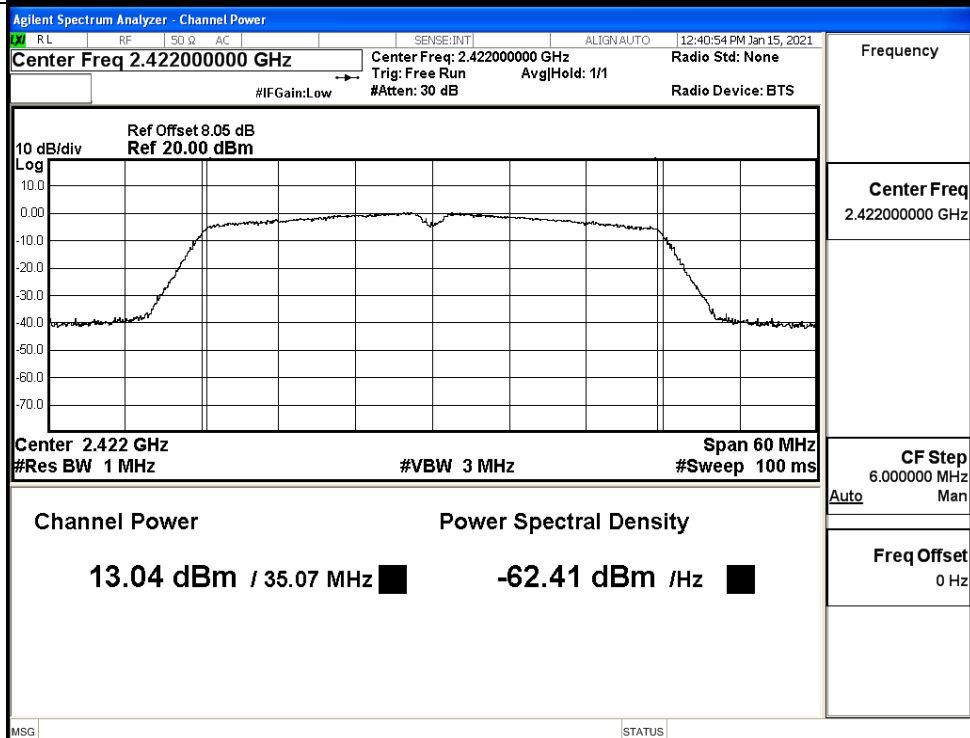


11N40SISO/MCH

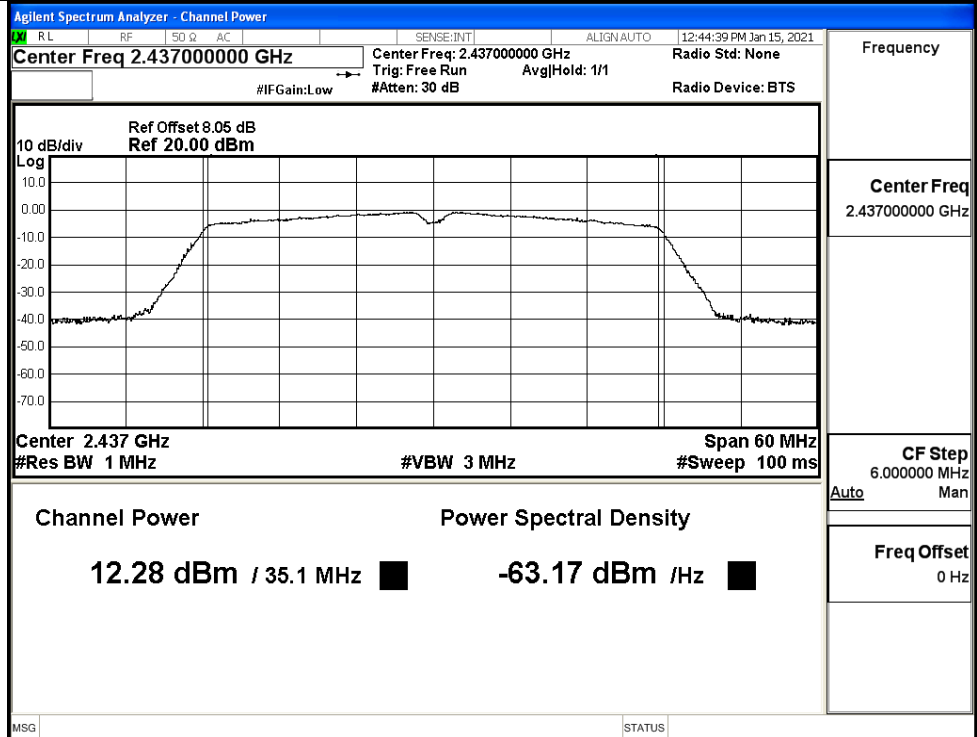


11N40SISO/HCH

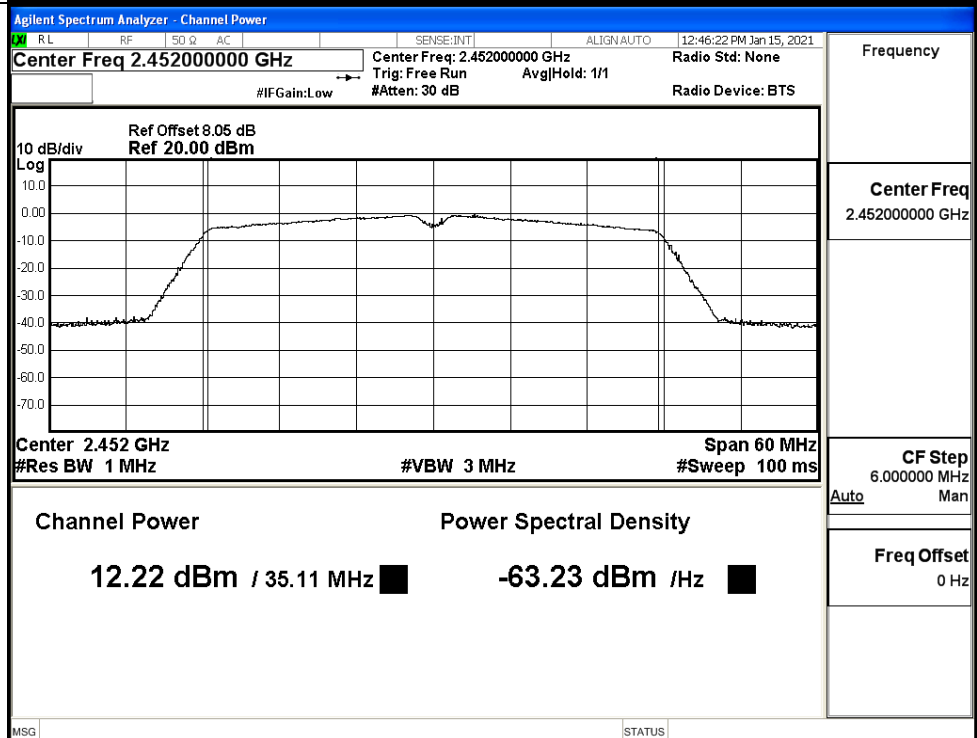


Mode	Channel	Meas.Level [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
11B	LCH	-13.803	8	PASS
	MCH	-12.057	8	PASS
	HCH	-7.789	8	PASS
11G	LCH	-19.933	8	PASS
	MCH	-20.453	8	PASS
	HCH	-21.389	8	PASS
11N20SISO	LCH	-20.866	8	PASS
	MCH	-22.149	8	PASS
	HCH	-21.800	8	PASS
11N40SISO	LCH	-24.658	8	PASS
	MCH	-24.094	8	PASS
	HCH	-24.513	8	PASS

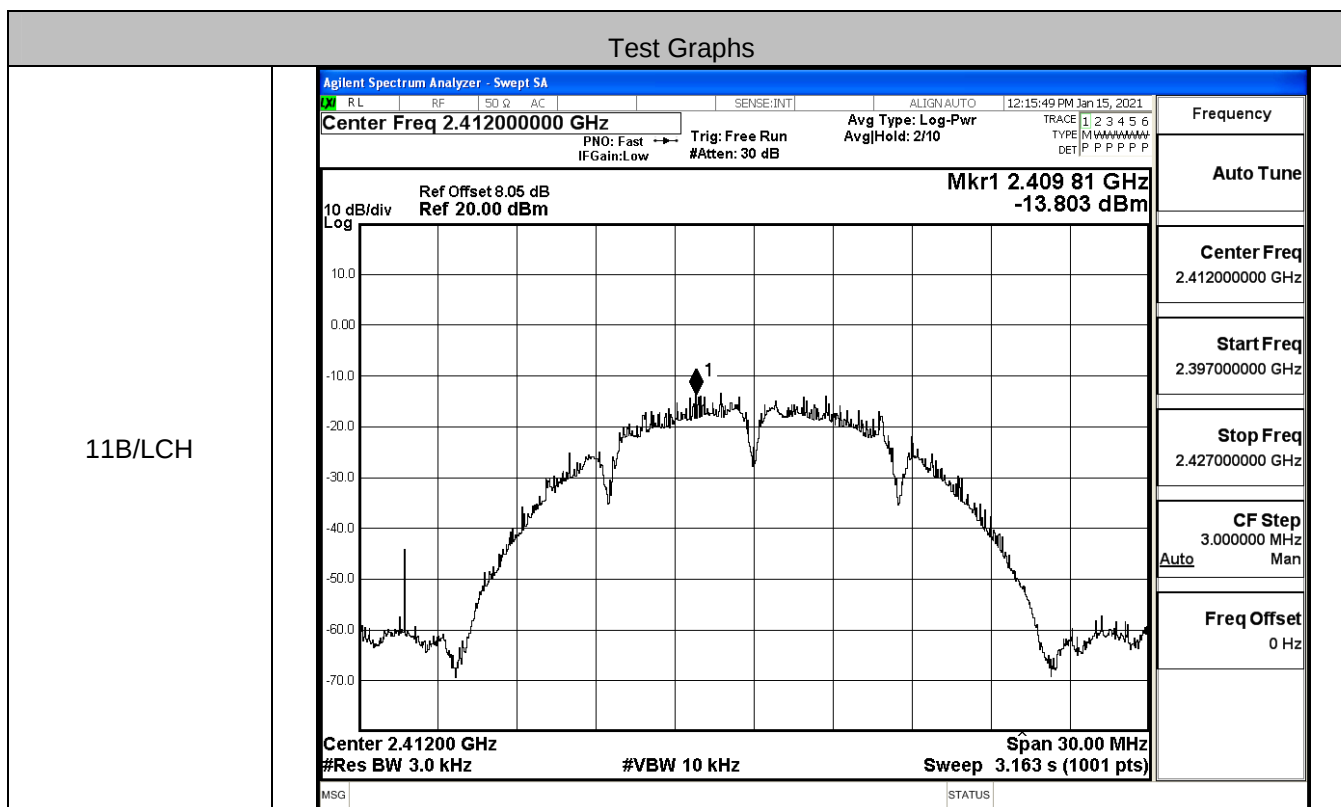


11B/MCH

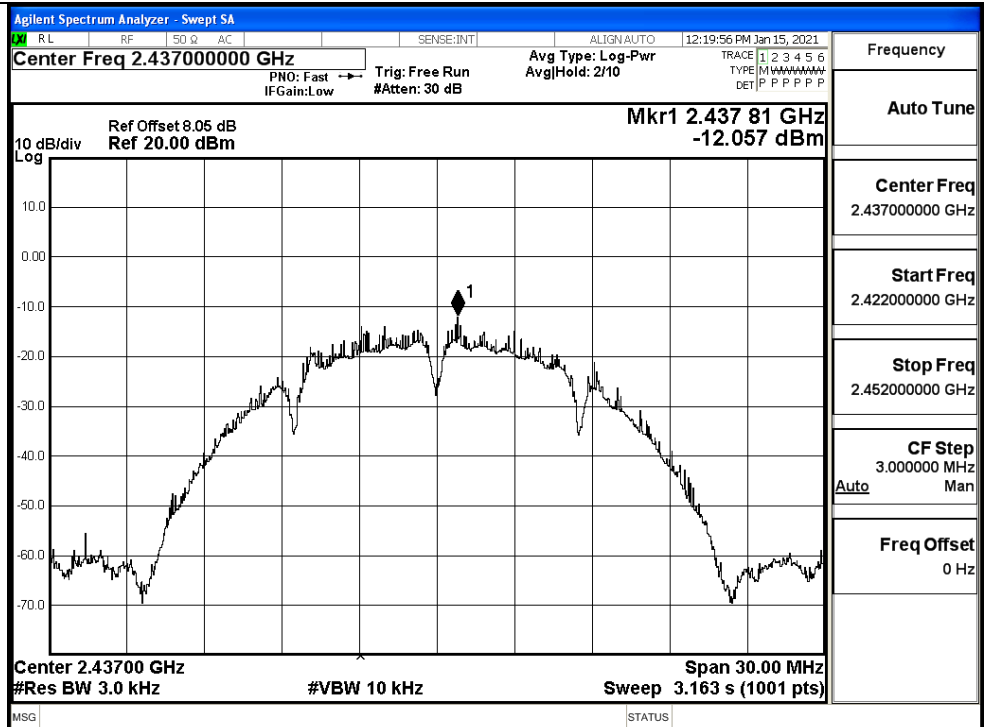


11B/HCH

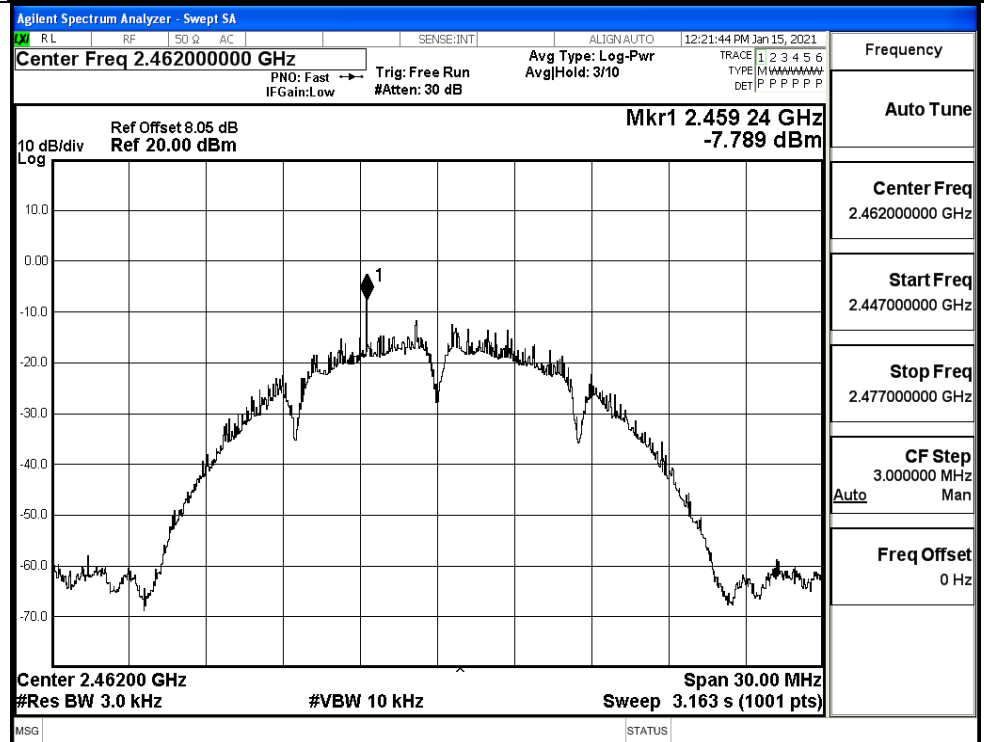


11G/LCH

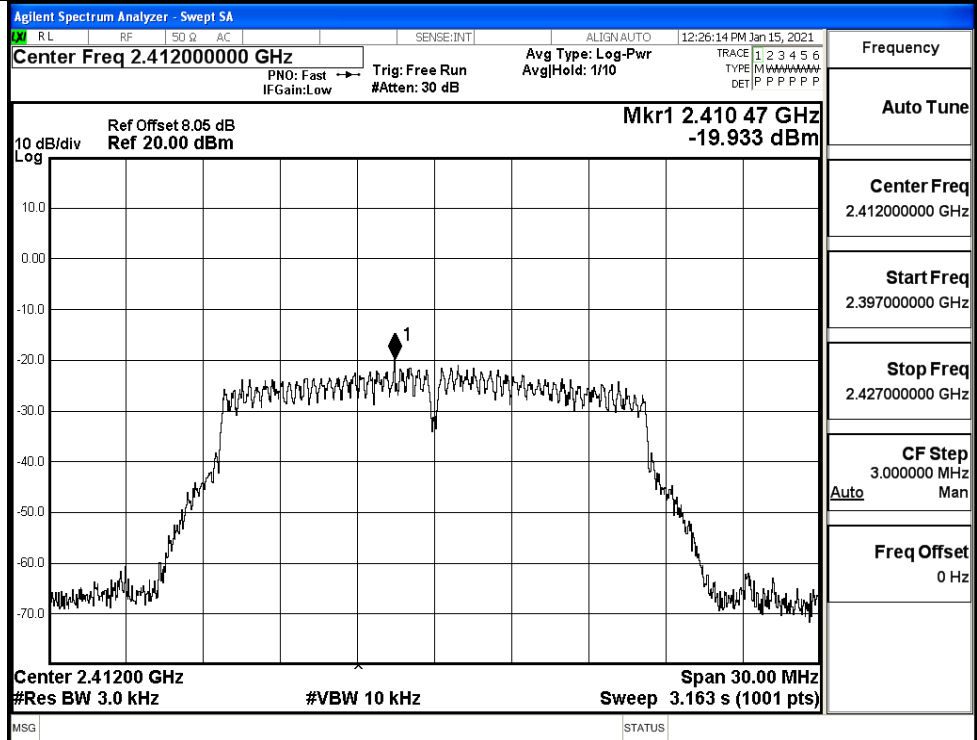


11G/MCH

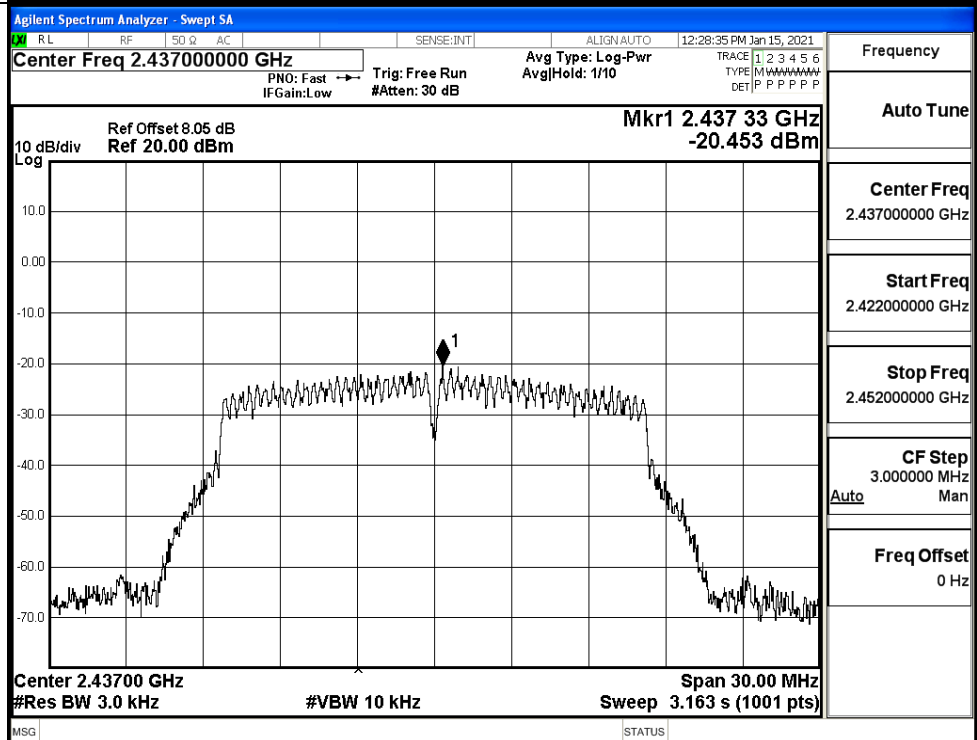


11G/HCH

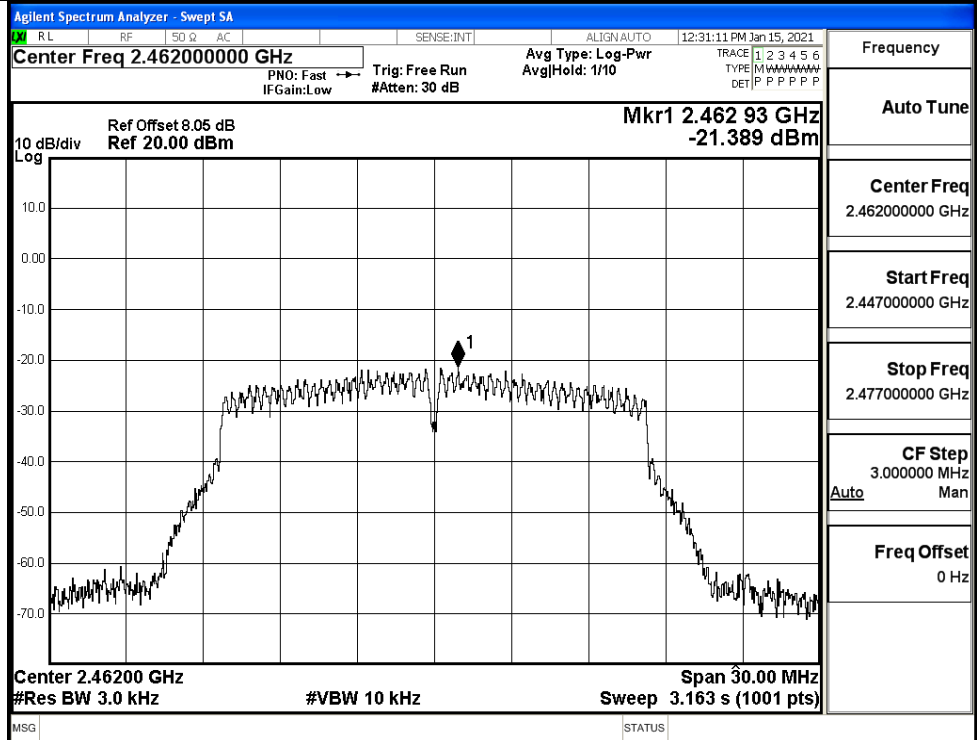


11N20SISO/LCH

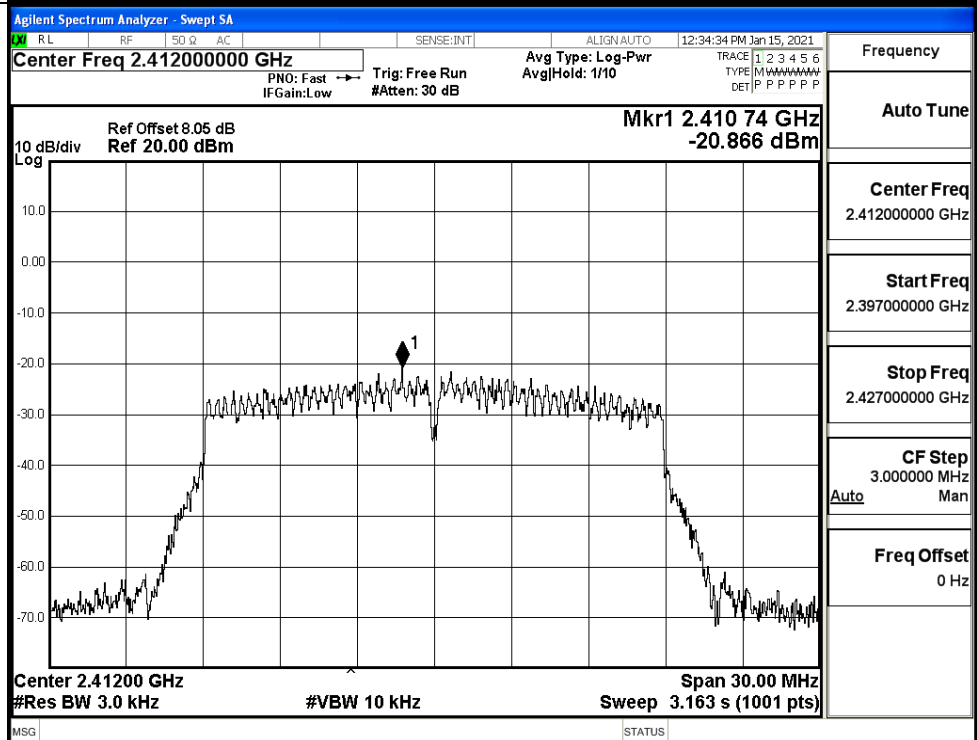


11N20SISO/MCH

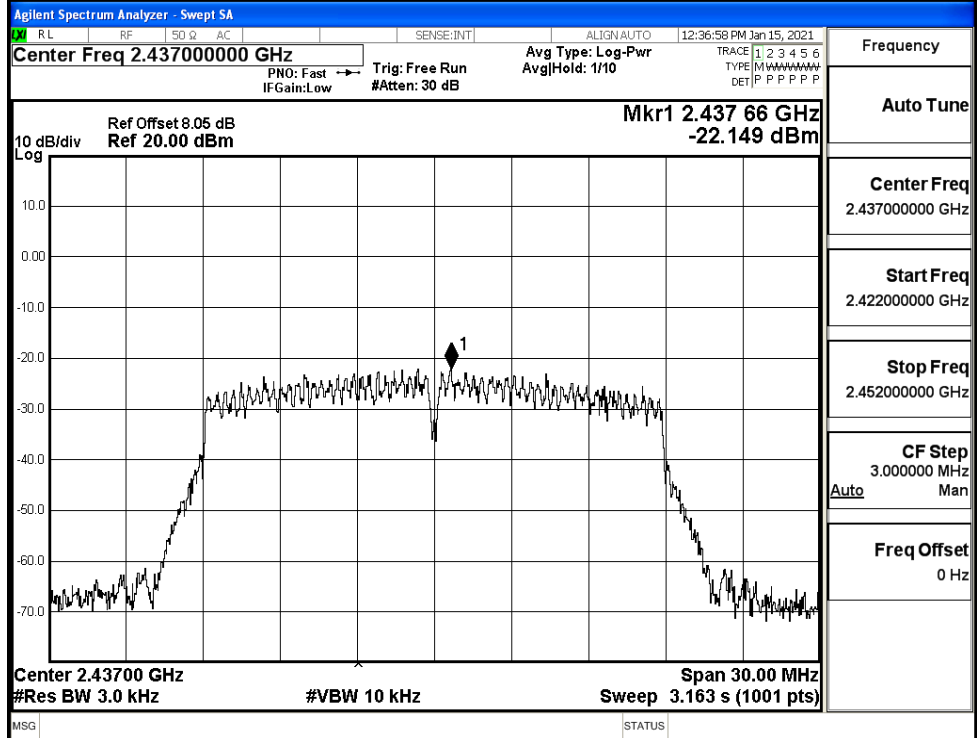


11N20SISO/HCH

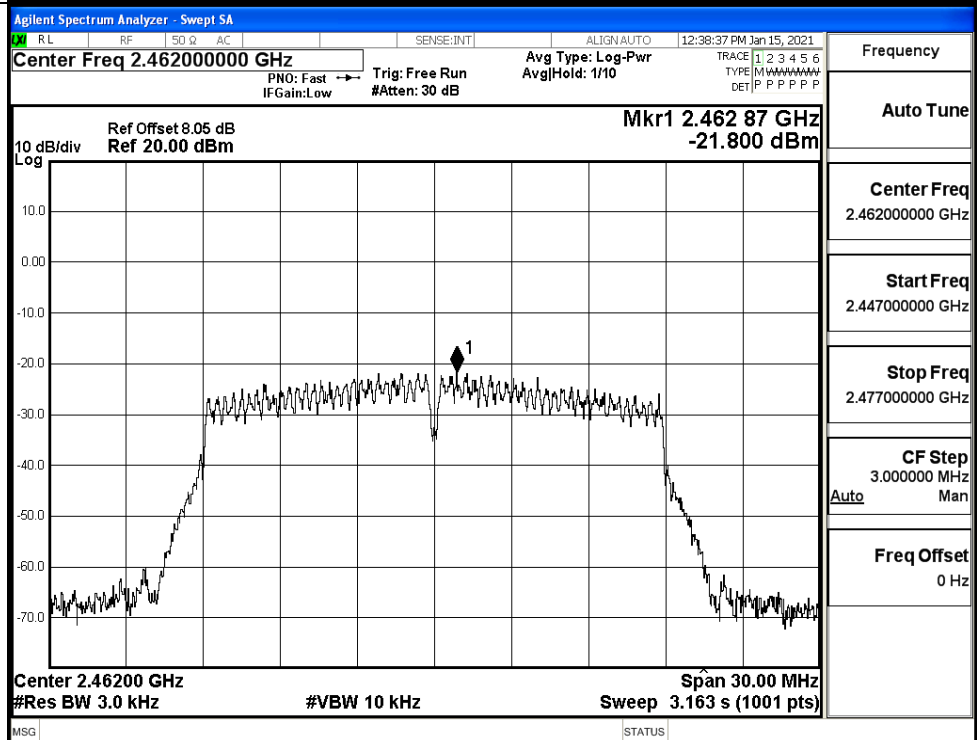

11N40SISO/LCH

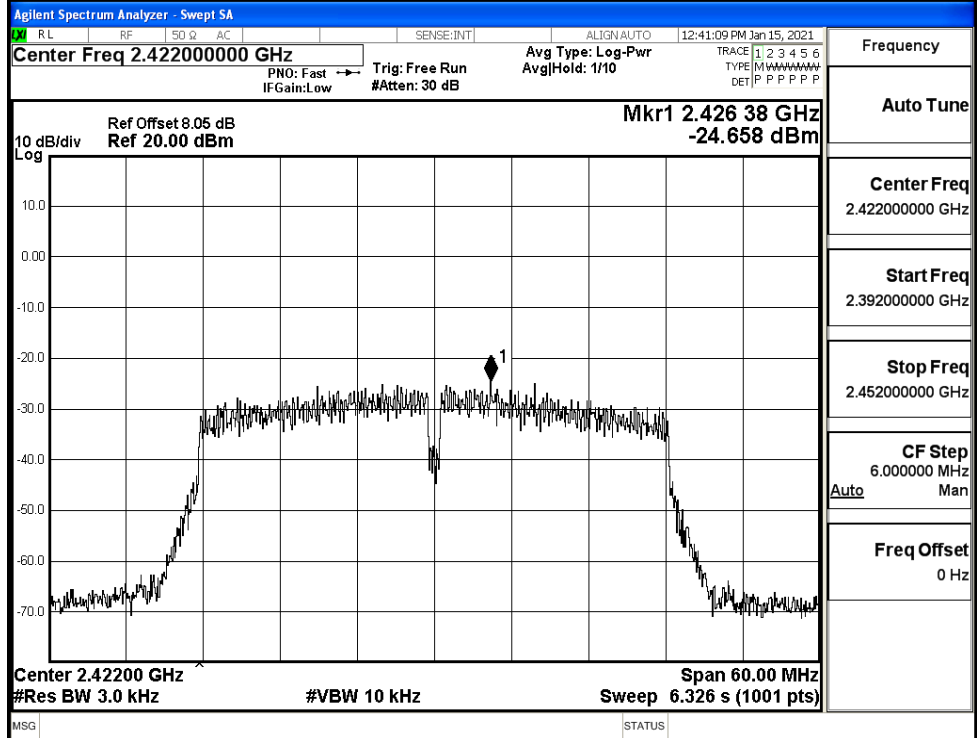

11N40SISO/MCH

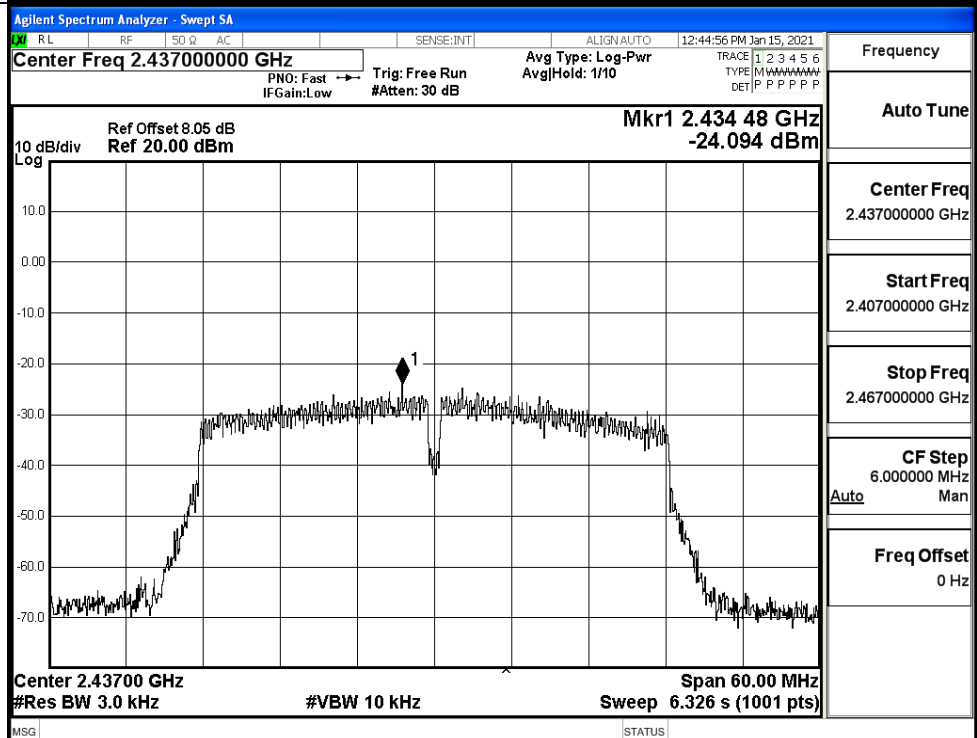

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 12:46:39 PM Jan 15, 2021

Center Freq 2.452000000 GHz PNO: Fast Trg: Free Run Avg Type: Log-Pwr TRACE 1 2 3 4 5 6
IF Gain: Low #Atten: 30 dB Avg/Hold: 1/10 TYPE M W W W W W W W W W
DET P P P P P P P

Ref Offset 8.05 dB Mkr1 2.448 52 GHz
Ref 20.00 dBm -24.513 dBm

10 dB/div
Log

Center 2.45200 GHz Span 60.00 MHz
#Res BW 3.0 kHz Sweep 6.326 s (1001 pts)
#VBW 10 kHz


Frequency
Auto Tune
Center Freq
2.452000000 GHz
Start Freq
2.422000000 GHz
Stop Freq
2.482000000 GHz
CF Step
6.000000 MHz
Auto Man
Freq Offset
0 Hz

A.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	10.02	≥ 0.5	PASS
	MCH	10.04	≥ 0.5	PASS
	HCH	9.593	≥ 0.5	PASS
11G	LCH	15.04	≥ 0.5	PASS
	MCH	15.14	≥ 0.5	PASS
	HCH	15.11	≥ 0.5	PASS
11N20SISO	LCH	15.11	≥ 0.5	PASS
	MCH	15.13	≥ 0.5	PASS
	HCH	15.12	≥ 0.5	PASS
11N40SISO	LCH	35.07	≥ 0.5	PASS
	MCH	35.10	≥ 0.5	PASS
	HCH	35.11	≥ 0.5	PASS

Test Graphs


11B/LCH

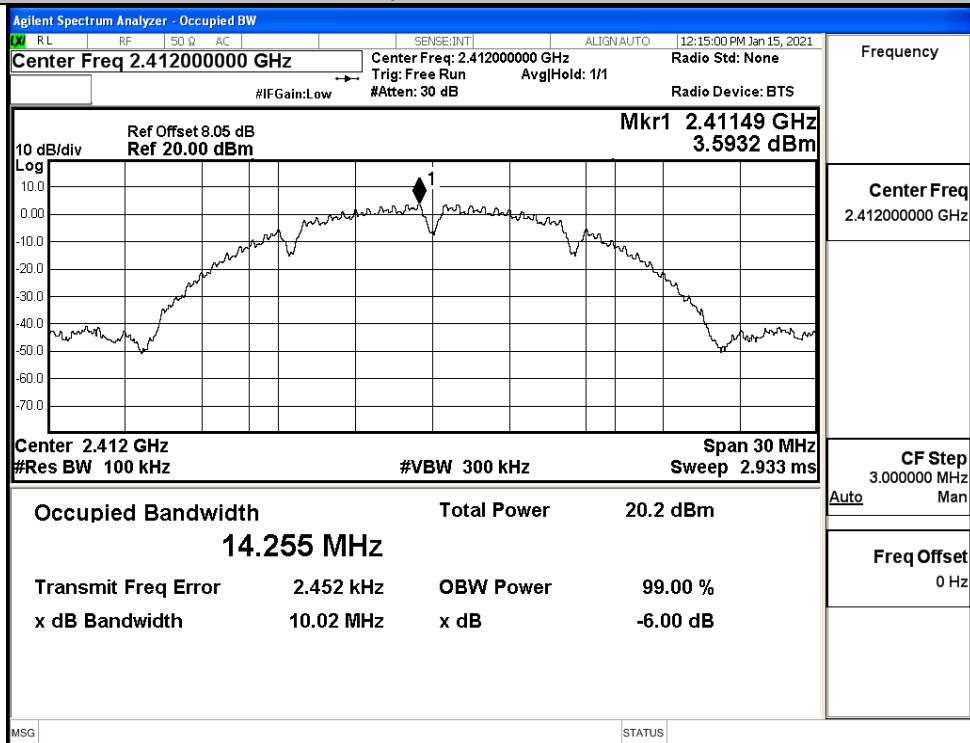


11B/MCH

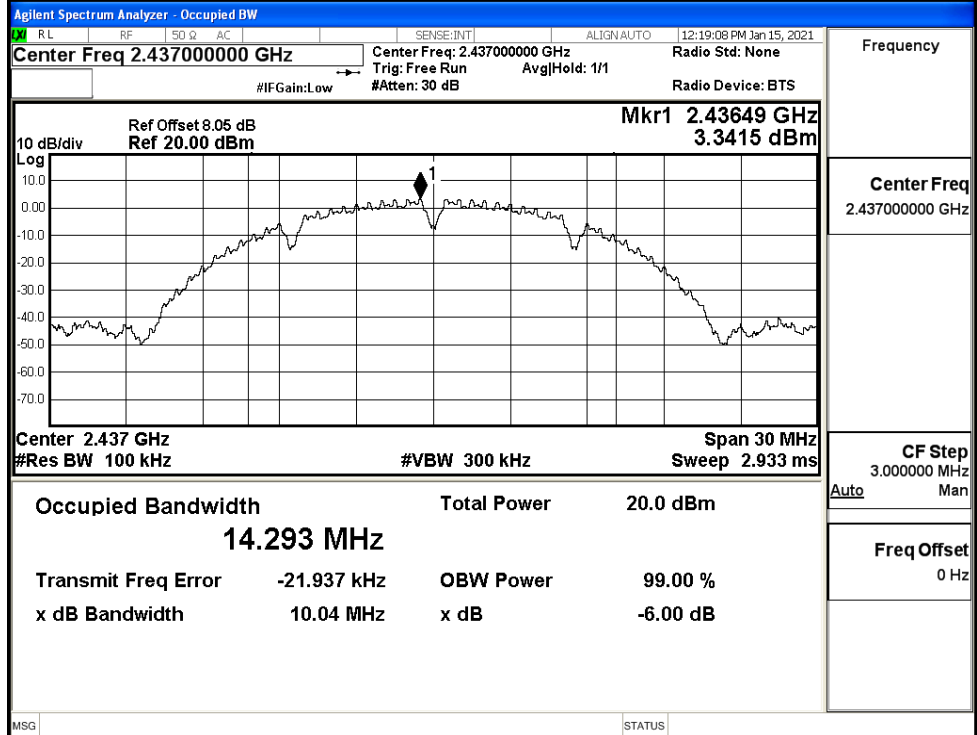


11B/HCH

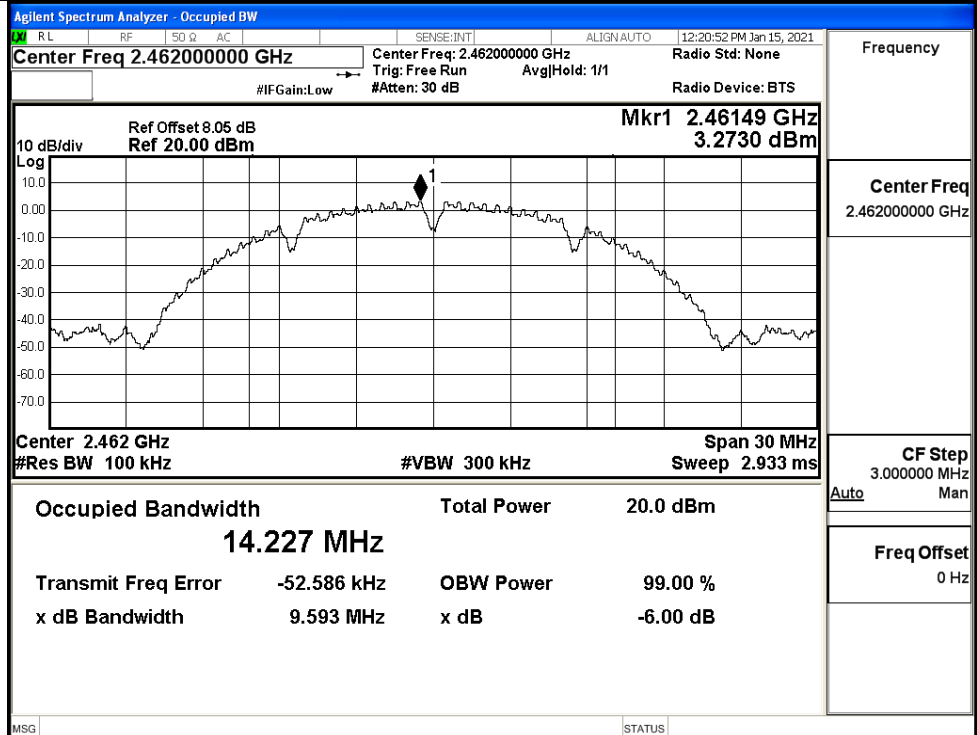


11G/LCH

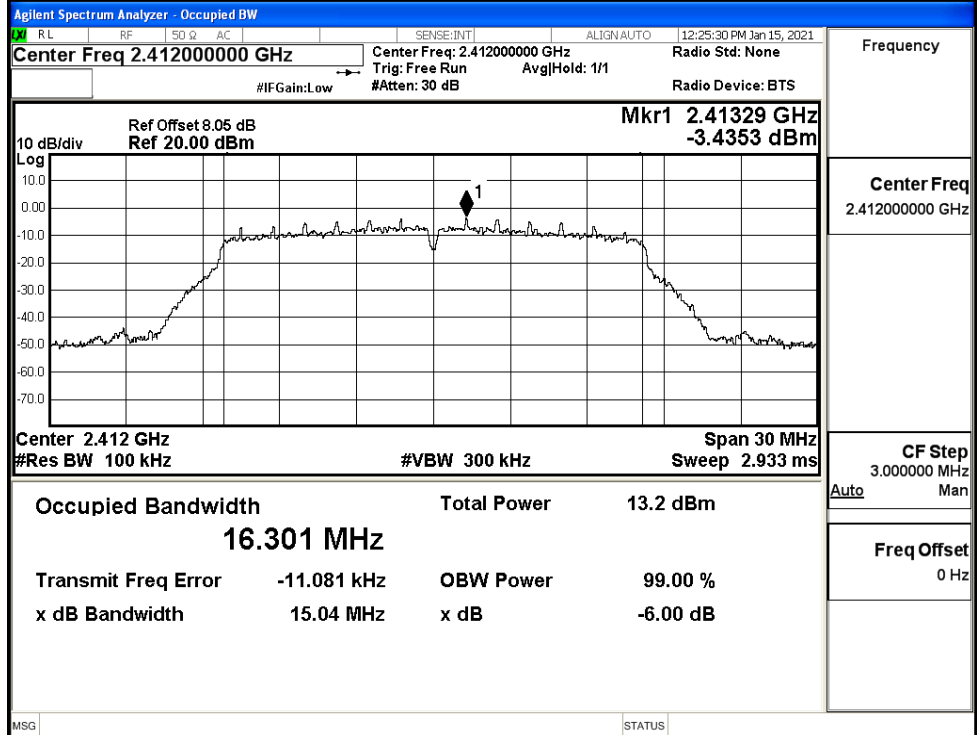

11G/MCH

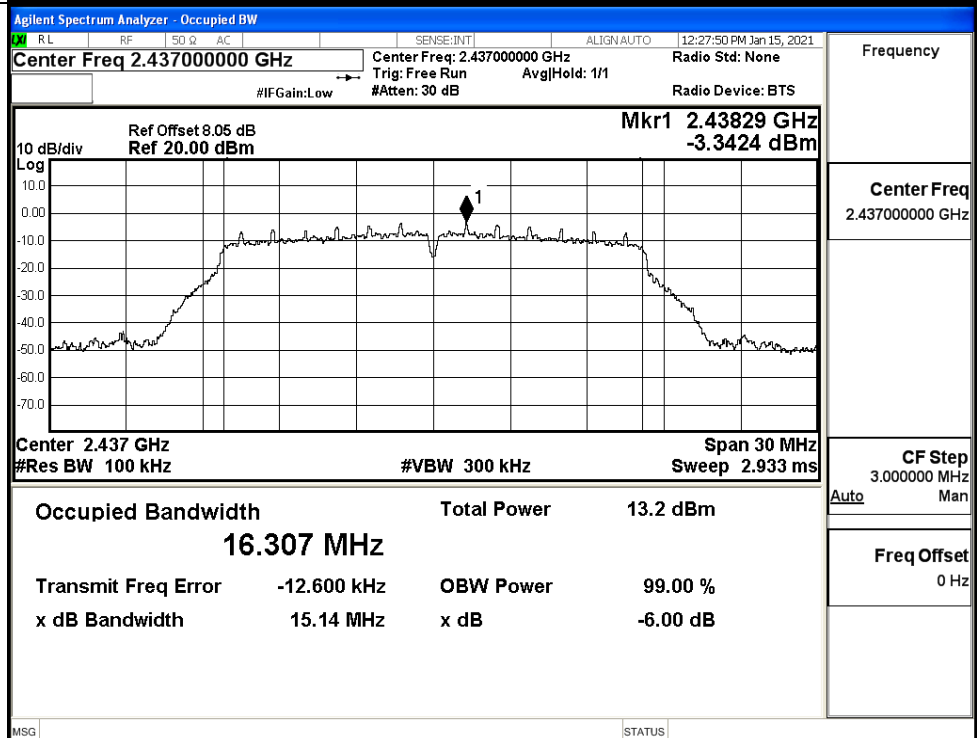


11G/HCH

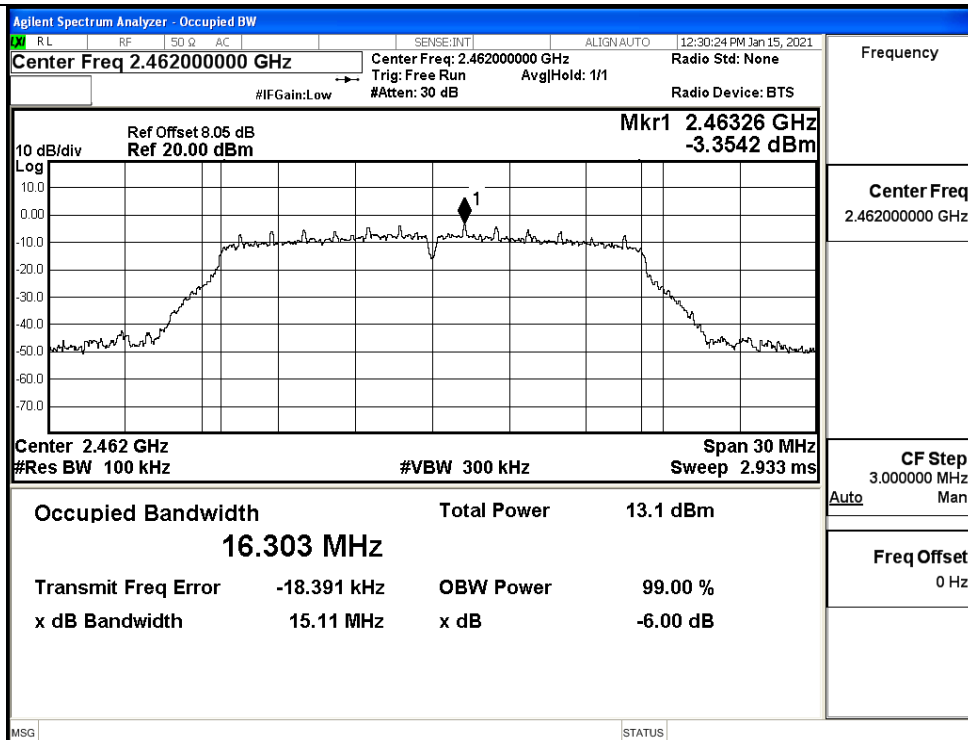

Frequency

Center Freq
2.462000000 GHzCF Step
3.000000 MHz
Auto ManFreq Offset
0 Hz


11N20SISO/LCH

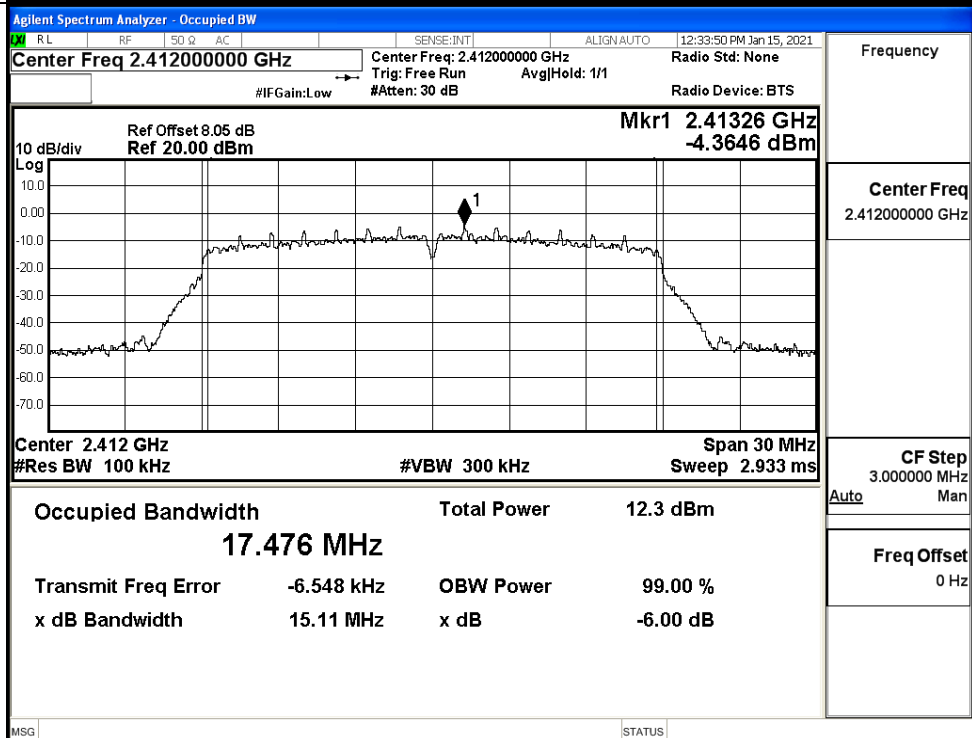


Frequency

Center Freq
2.412000000 GHzCF Step
3.000000 MHz
Auto ManFreq Offset
0 Hz


11N20SISO/MCH

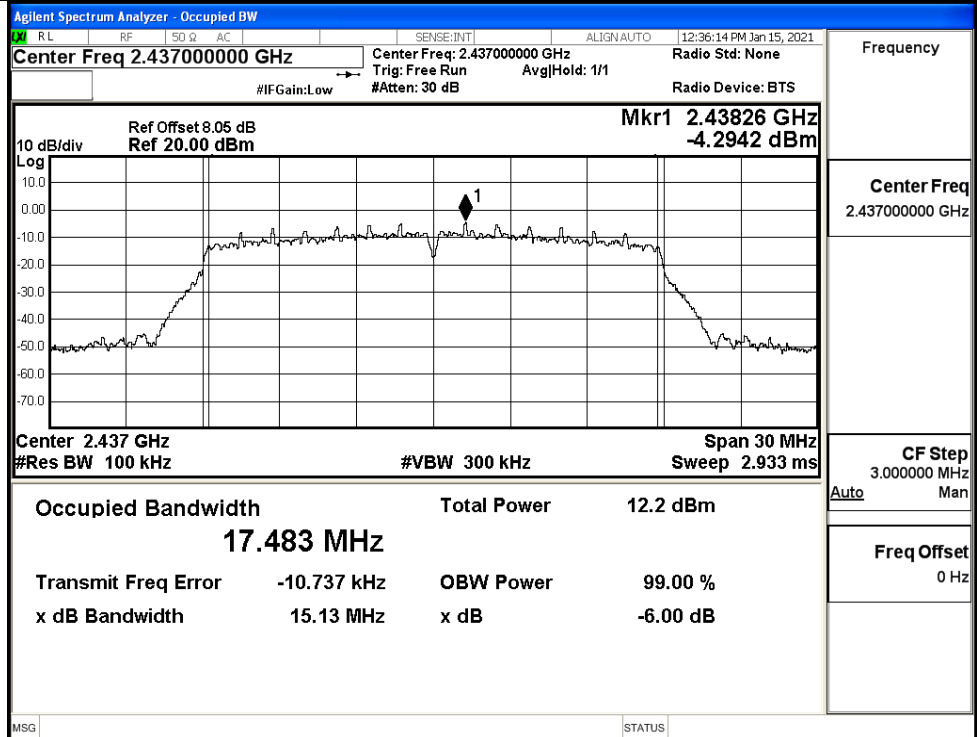


11N20SISO/HCH

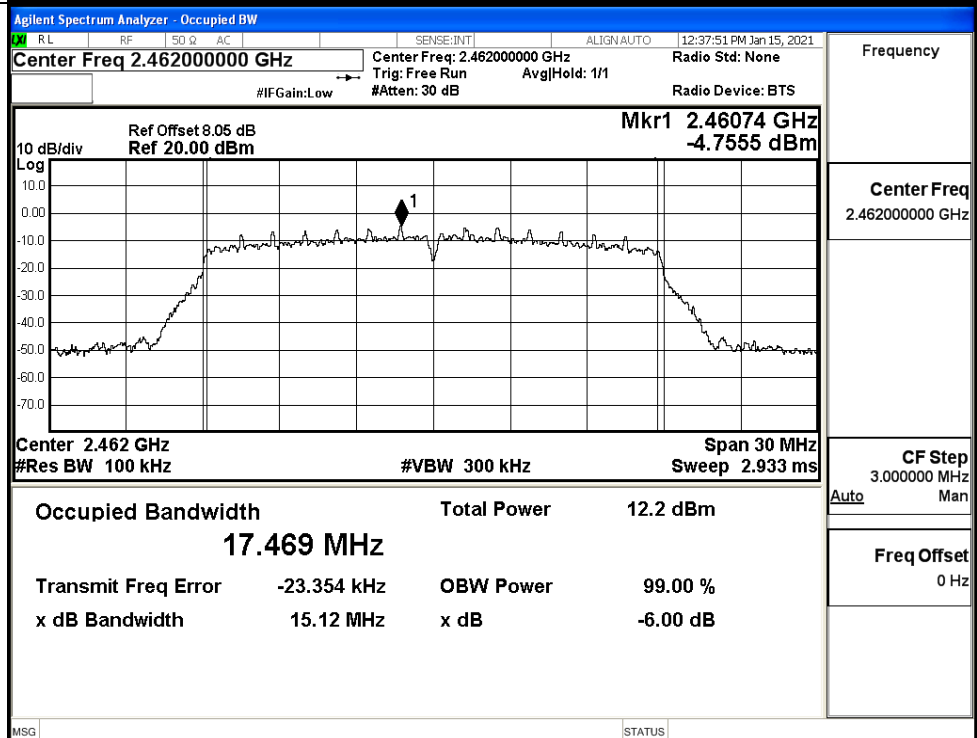


11N40SISO/LCH

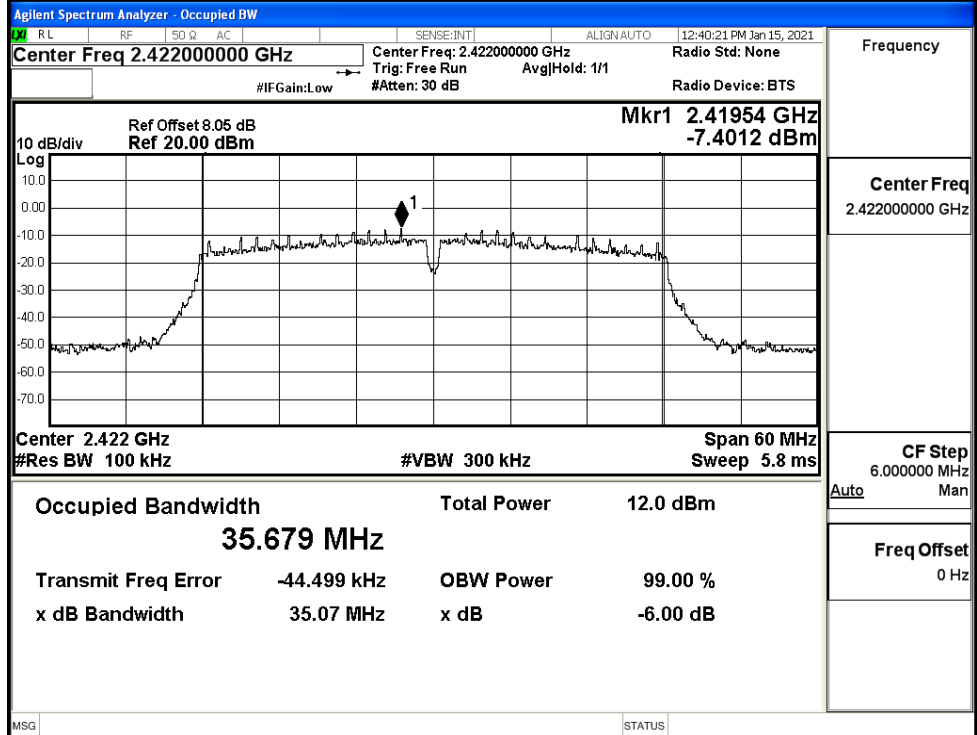

11N40SISO/MCH

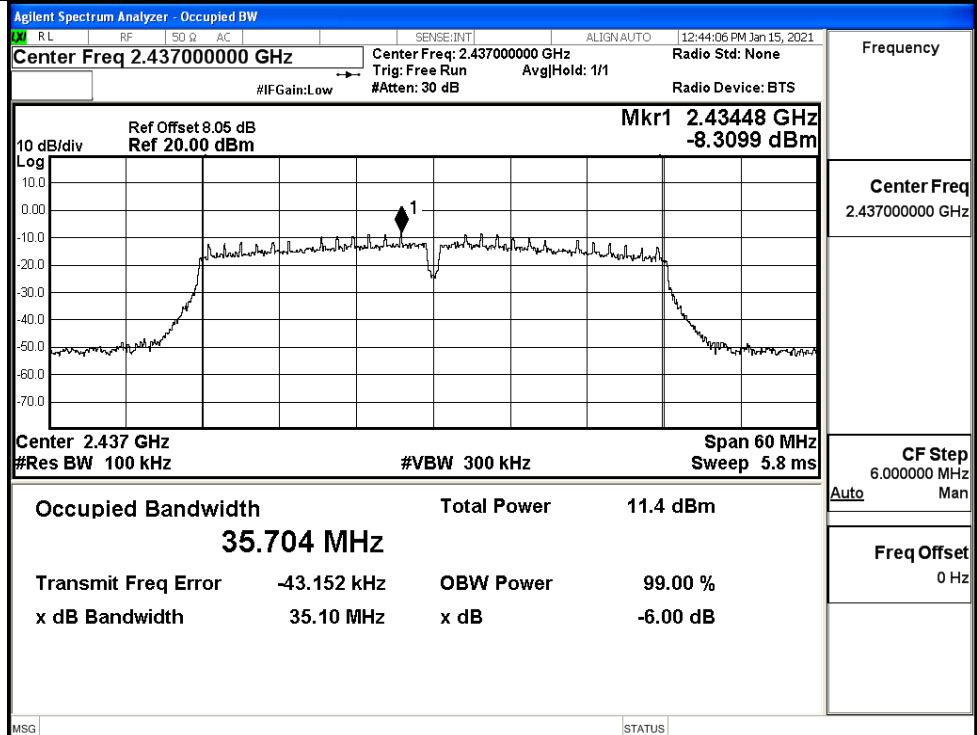

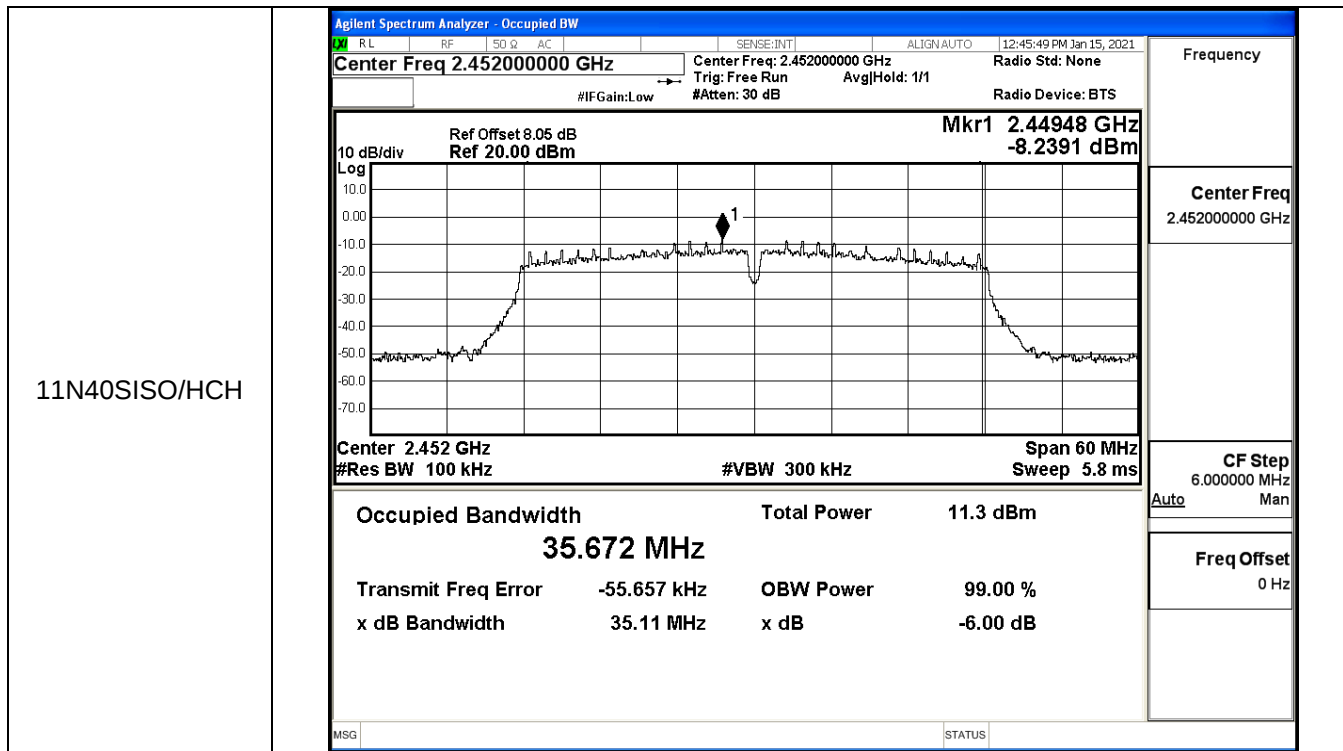


A.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdic
------	---------	------------	------------------	-------------	--------


					t
11B	LCH	3.559	-38.761	-16.441	PASS
	MCH	3.179	-37.608	-16.821	PASS
	HCH	3.317	-37.756	-16.683	PASS
11G	LCH	-4.678	-37.905	-24.678	PASS
	MCH	-4.123	-38.358	-24.123	PASS
	HCH	-4.511	-37.796	-24.511	PASS
11N20 SISO	LCH	-4.629	-38.419	-24.629	PASS
	MCH	-5.659	-37.332	-25.659	PASS
	HCH	-5.064	-38.150	-25.064	PASS
11N40 SISO	LCH	-7.895	-38.233	-27.895	PASS
	MCH	-8.355	-38.671	-28.355	PASS
	HCH	-8.311	-36.875	-28.311	PASS

11B LCH Graphs

Pref/11B/LCH

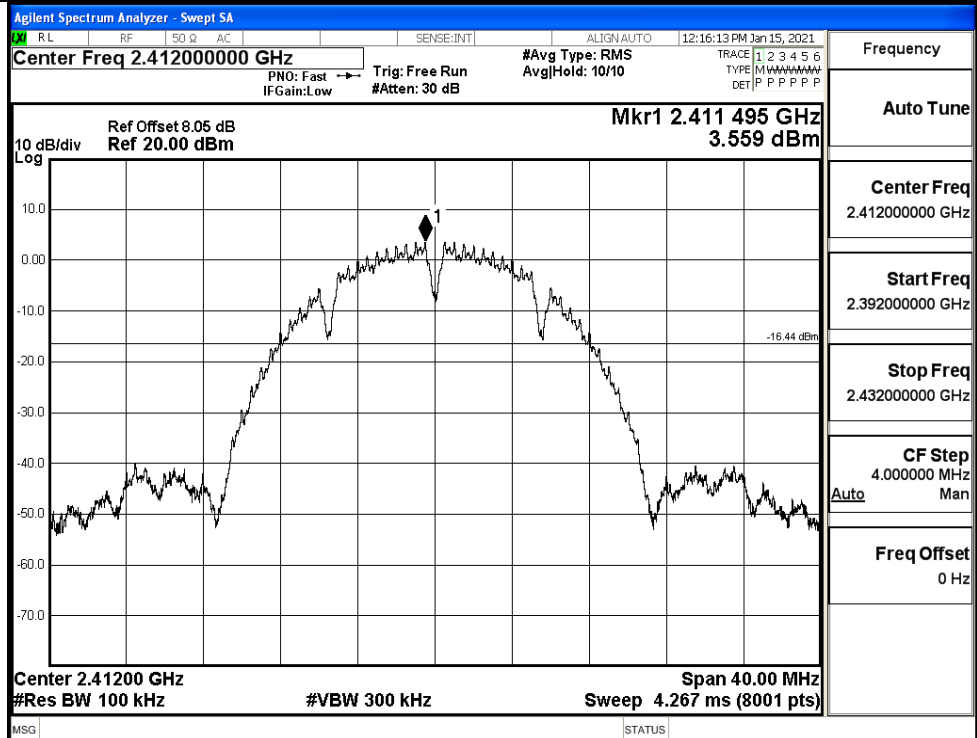


Puw/11B/LCH

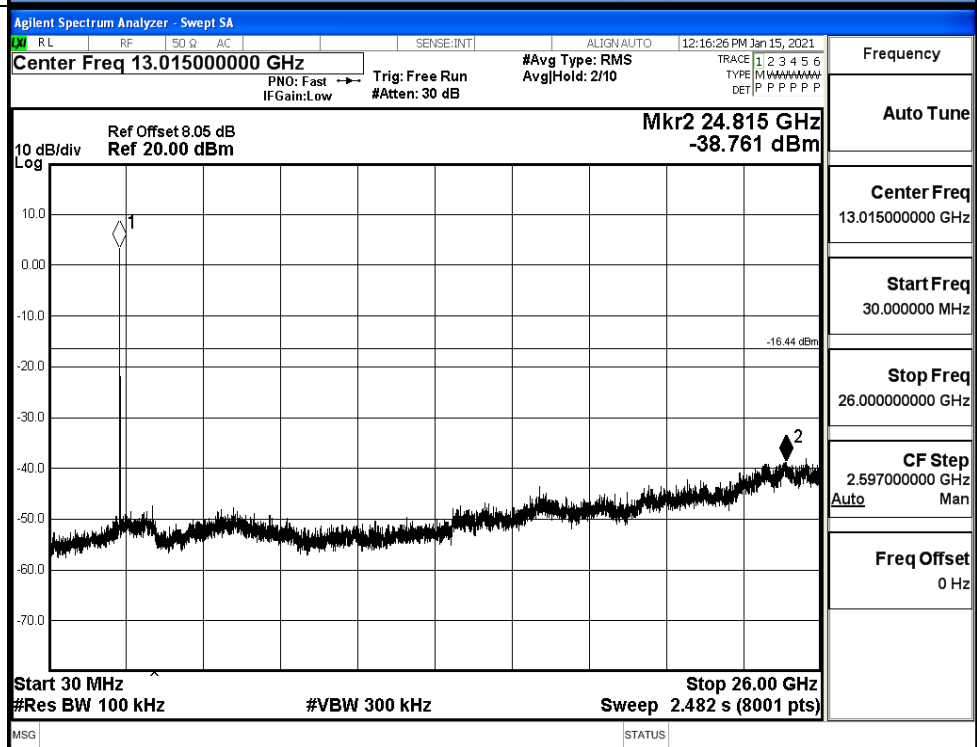


11B MCH Graphs

Pref/11B/MCH

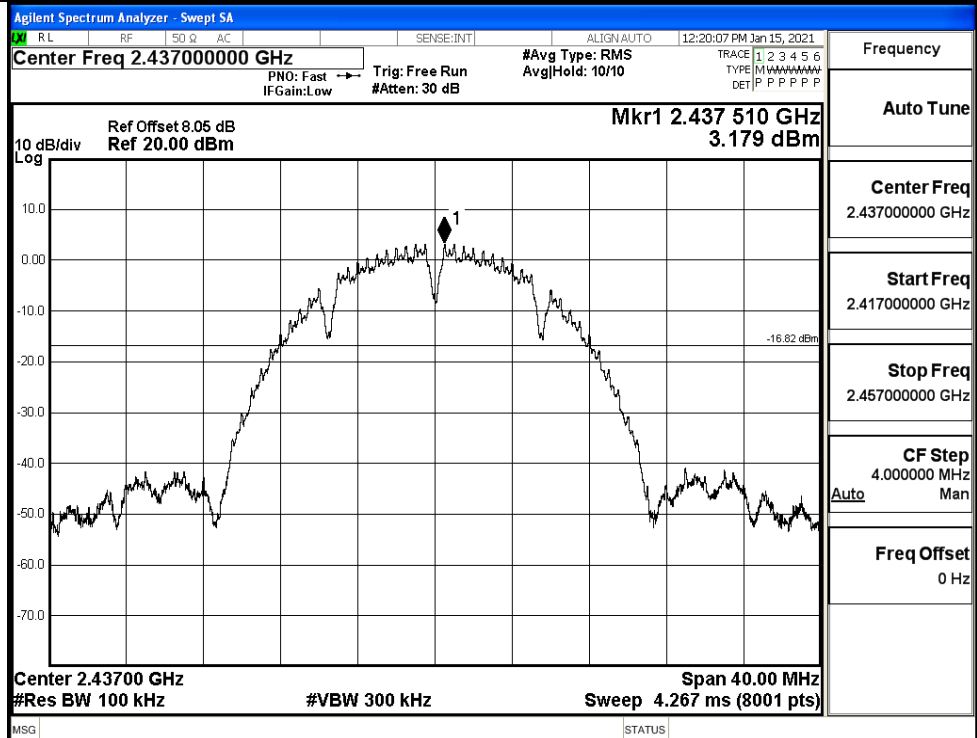


Puw/11B/MCH

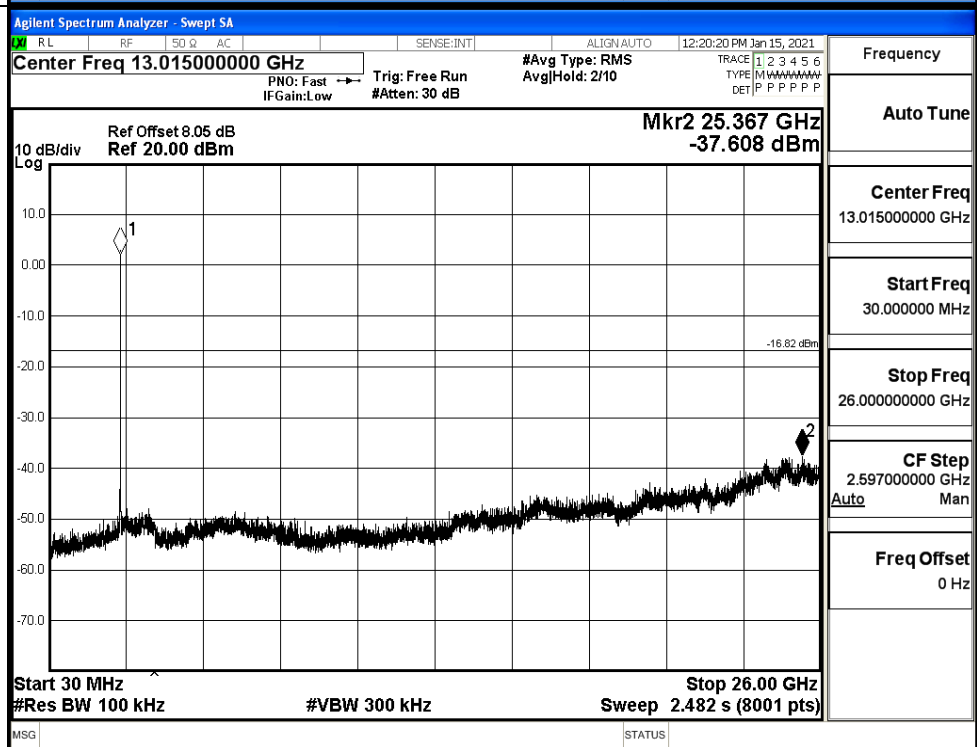


11B HCH Graphs

Pref/11B/HCH

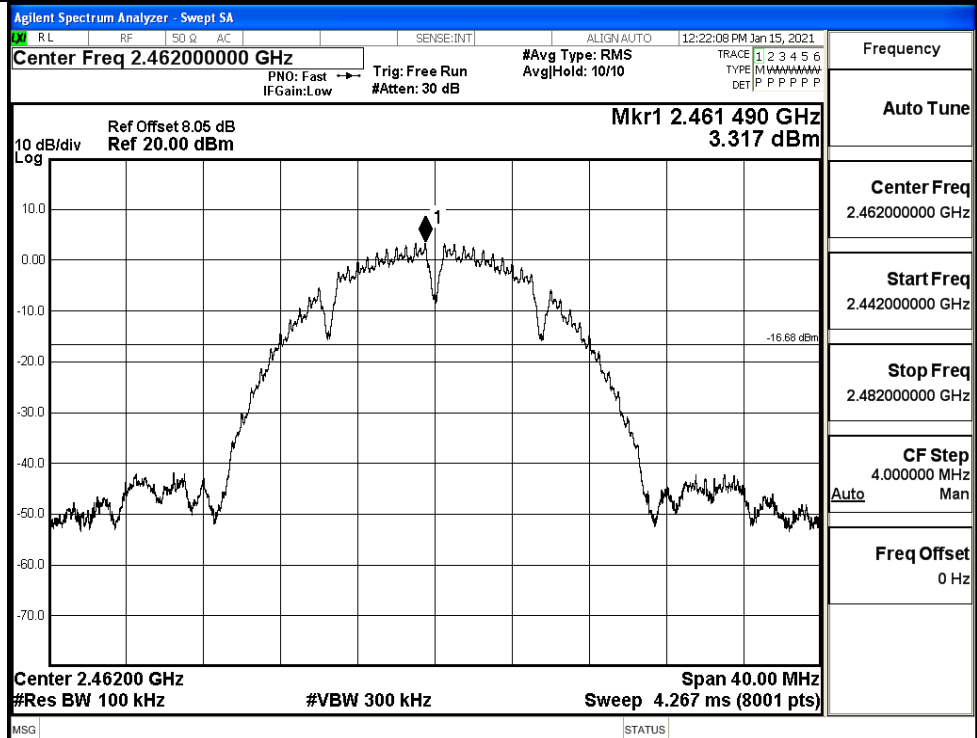


Puw/11B/HCH

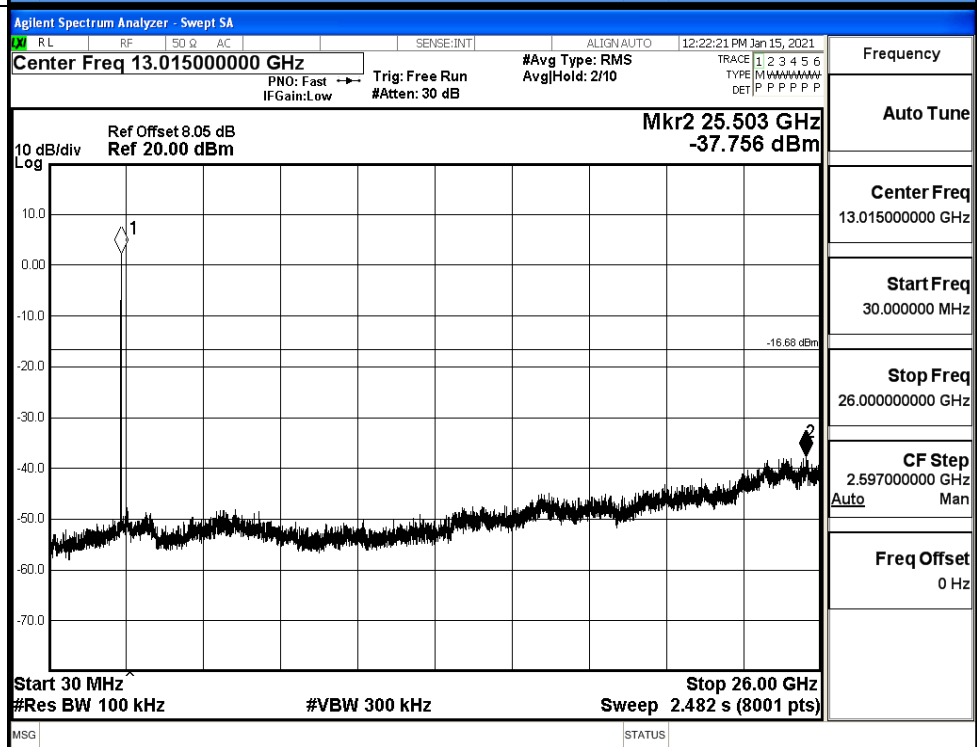


11G LCH Graphs

Pref/11G/LCH

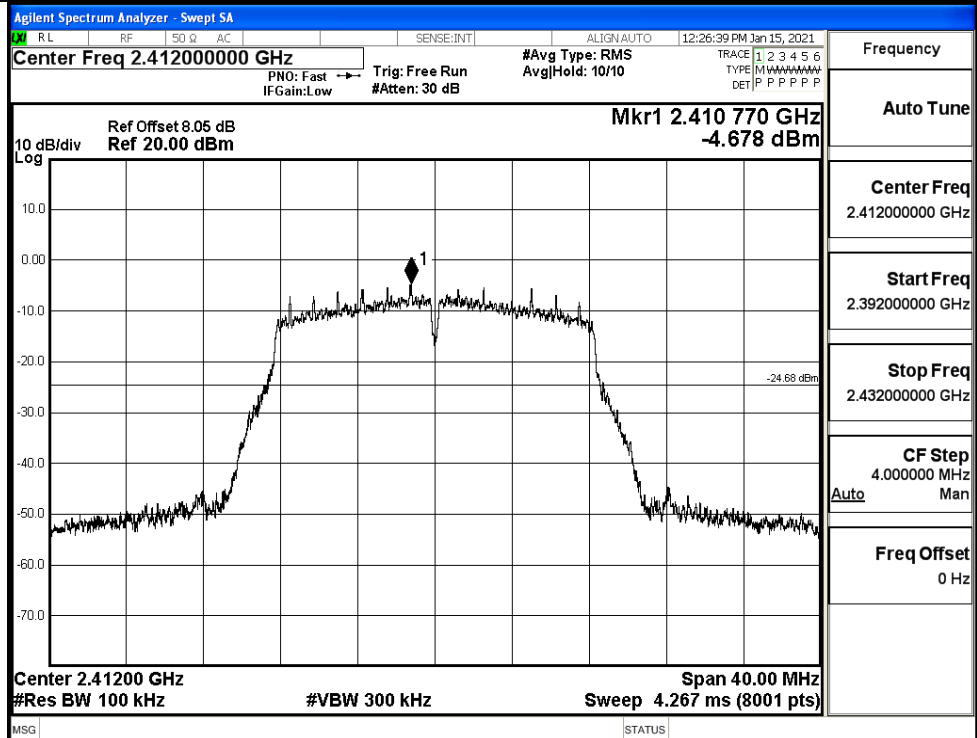


Puw/11G/LCH

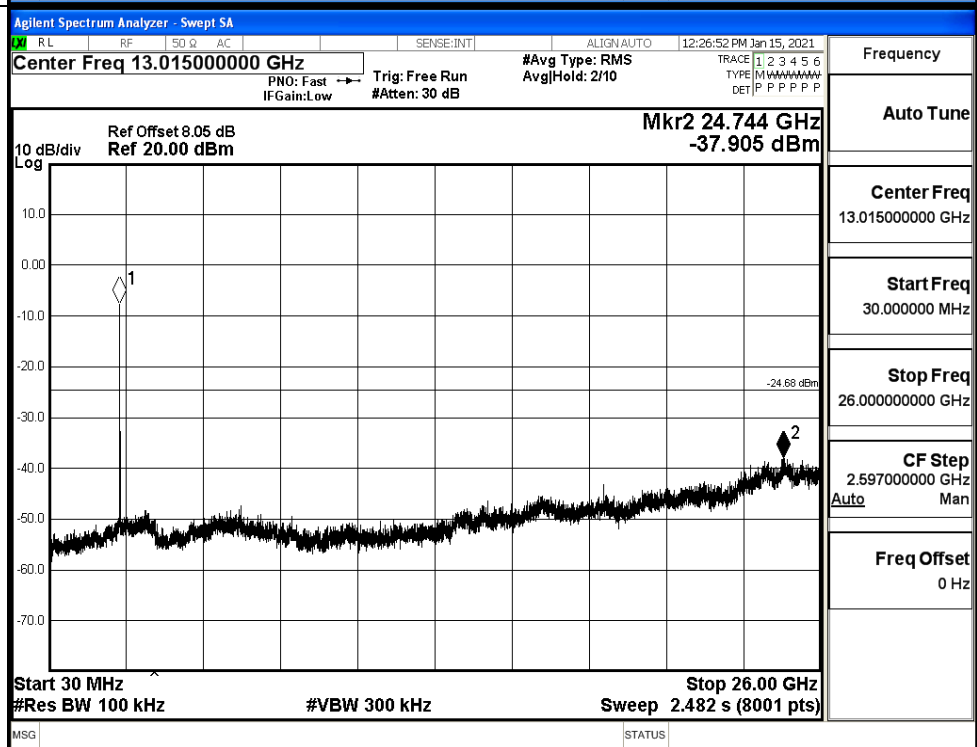


11G MCH Graphs

Pref/11G/MCH

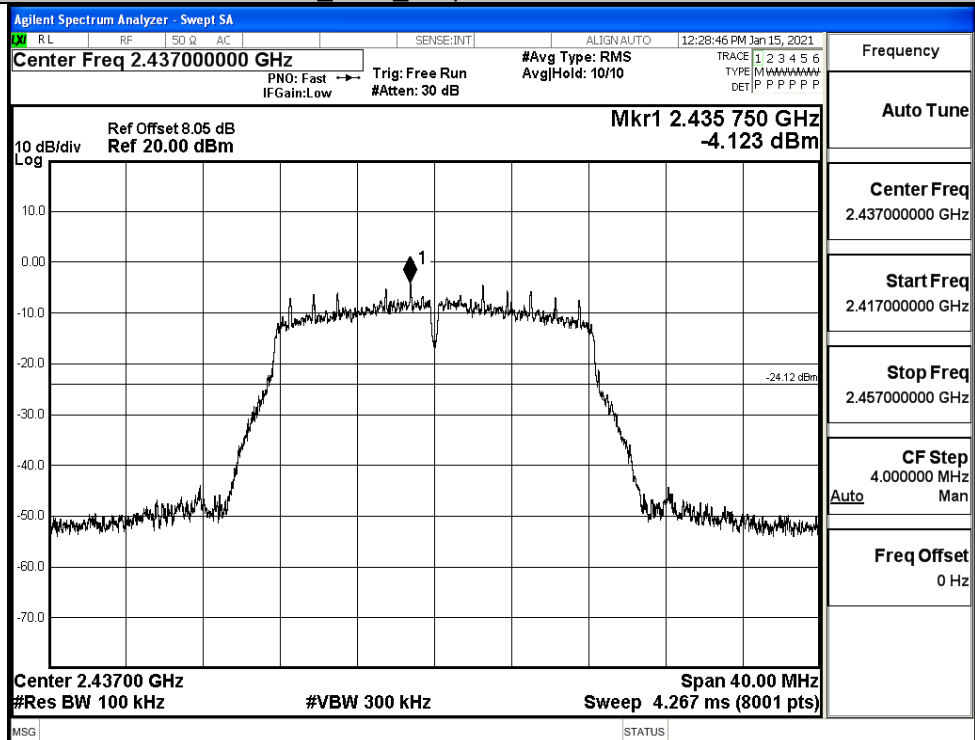


Puw/11G/MCH

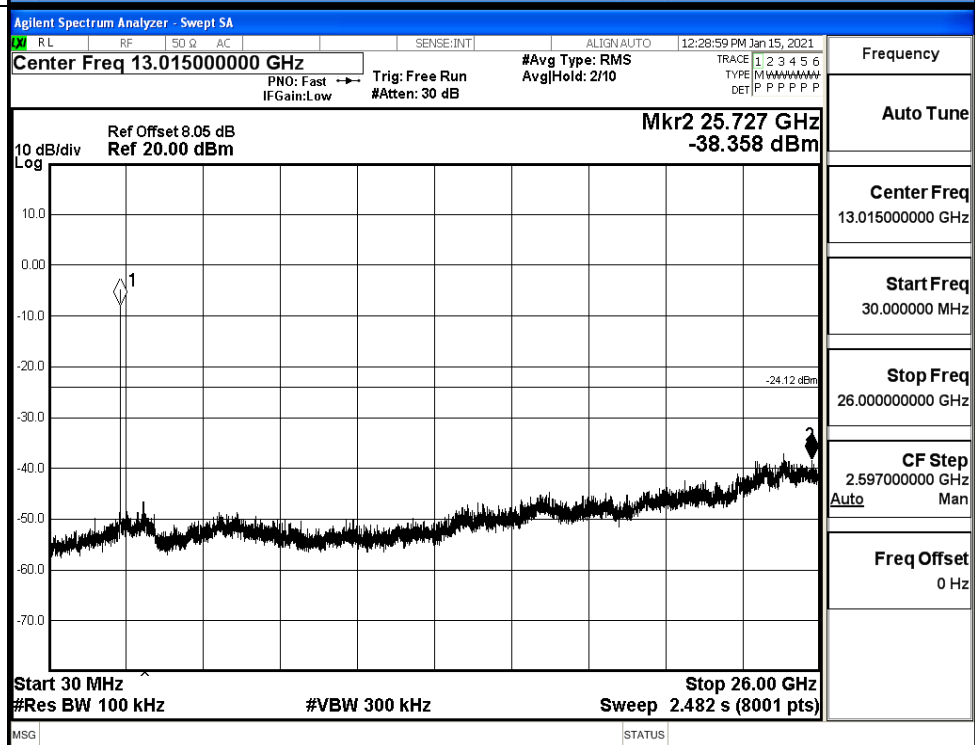


11G HCH Graphs



Pref/11G/HCH

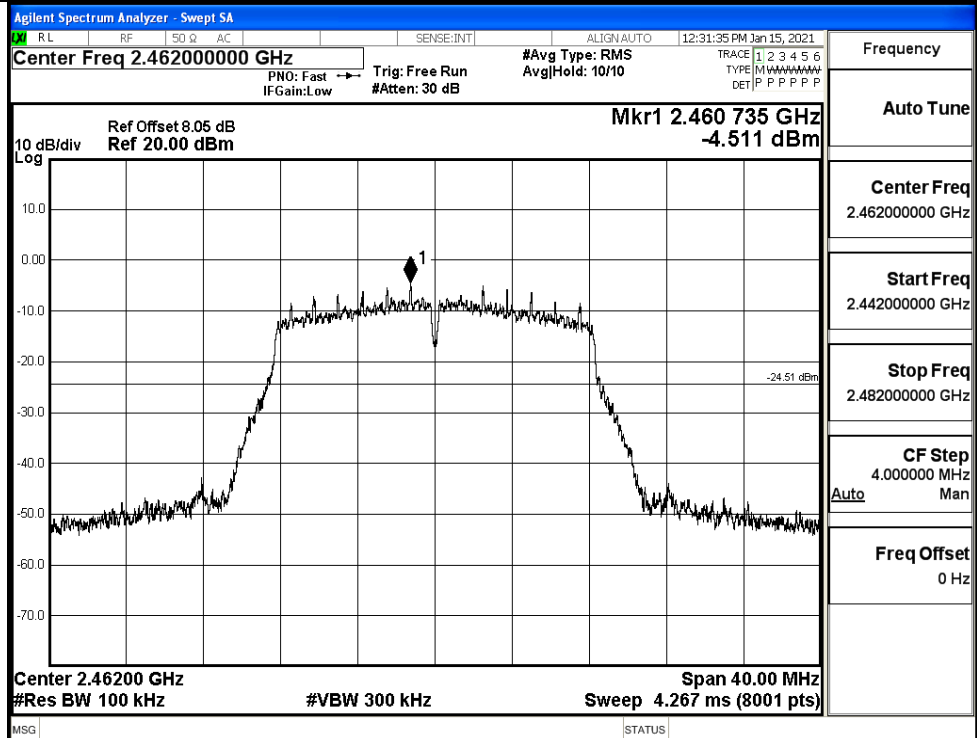



Puw/11G/HCH

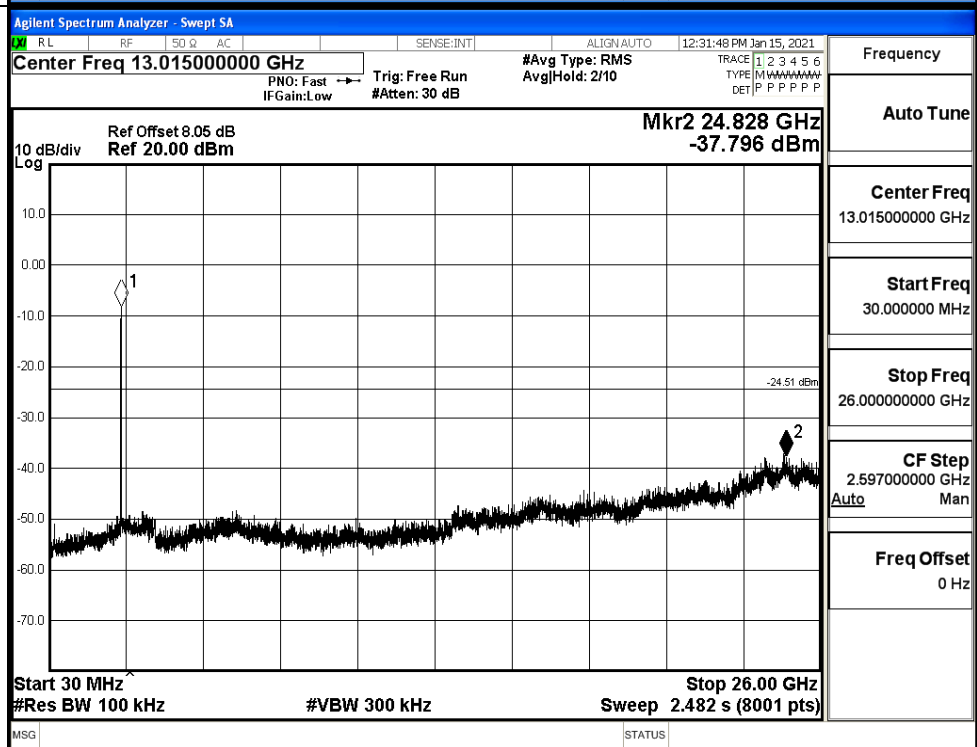



11N20SISO LCH Graphs

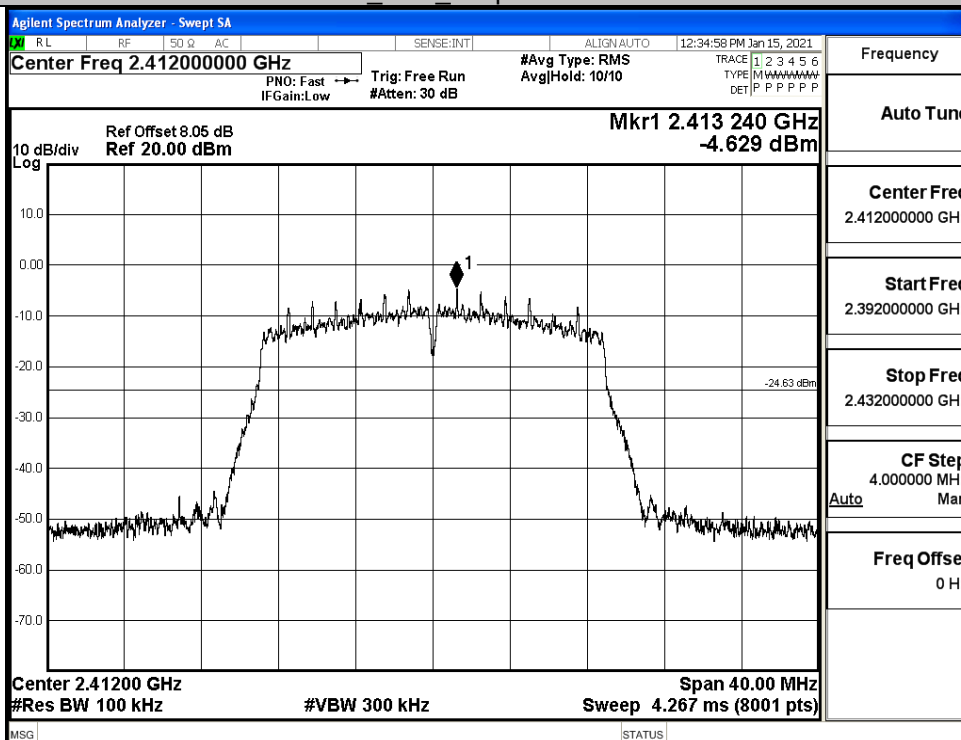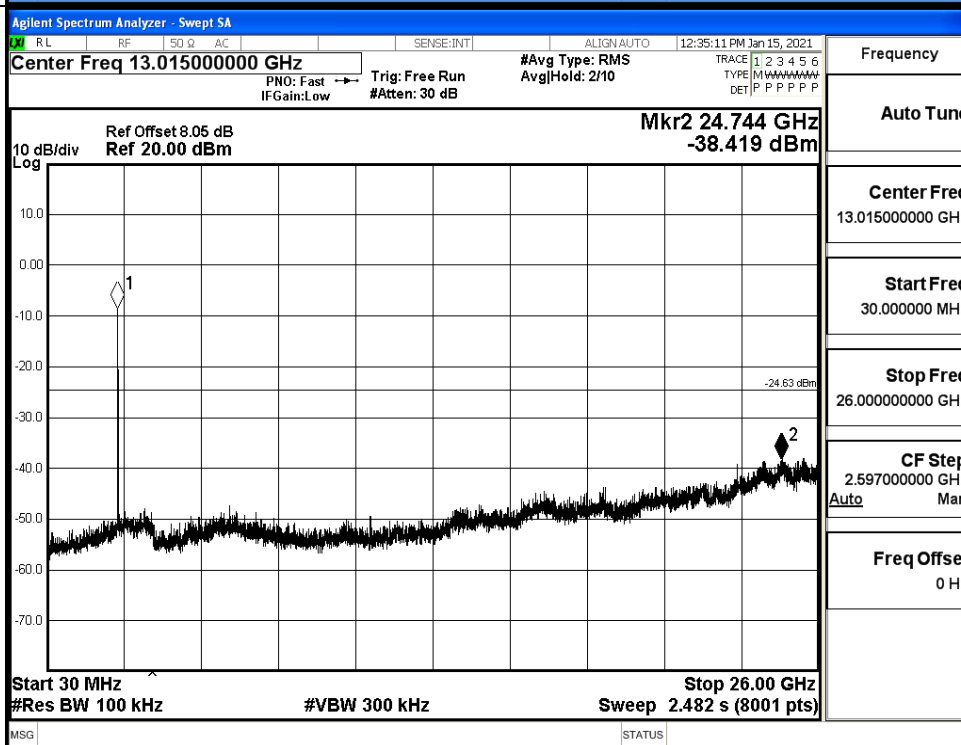Pref/11N20SIS
O/LCHPuw/11N20
SISO/LCH



11N20SISO MCH Graphs

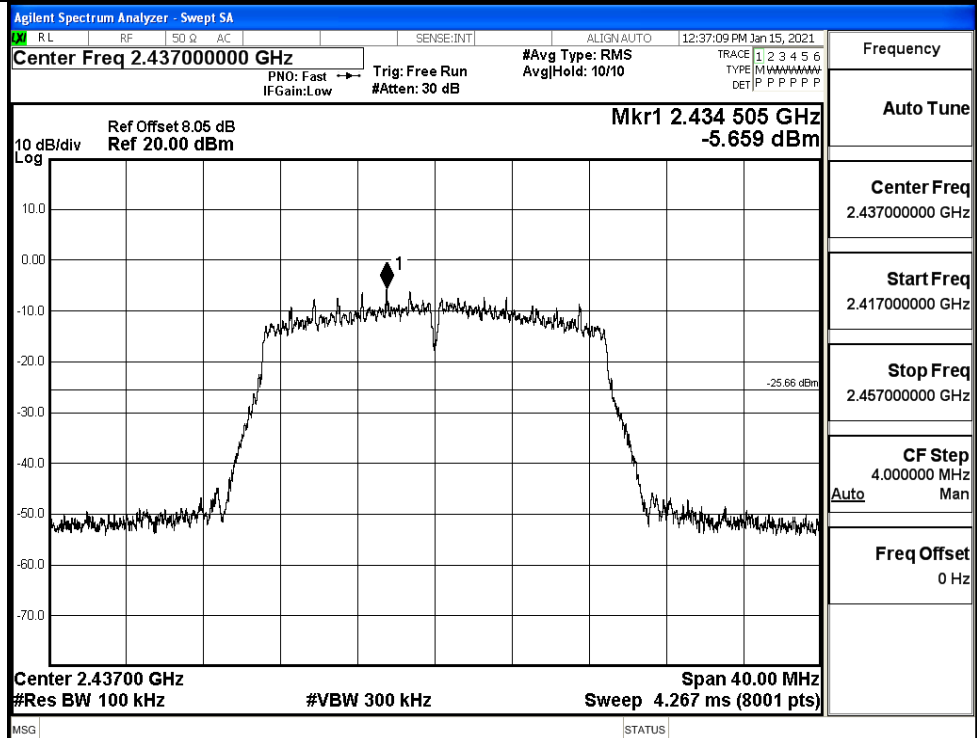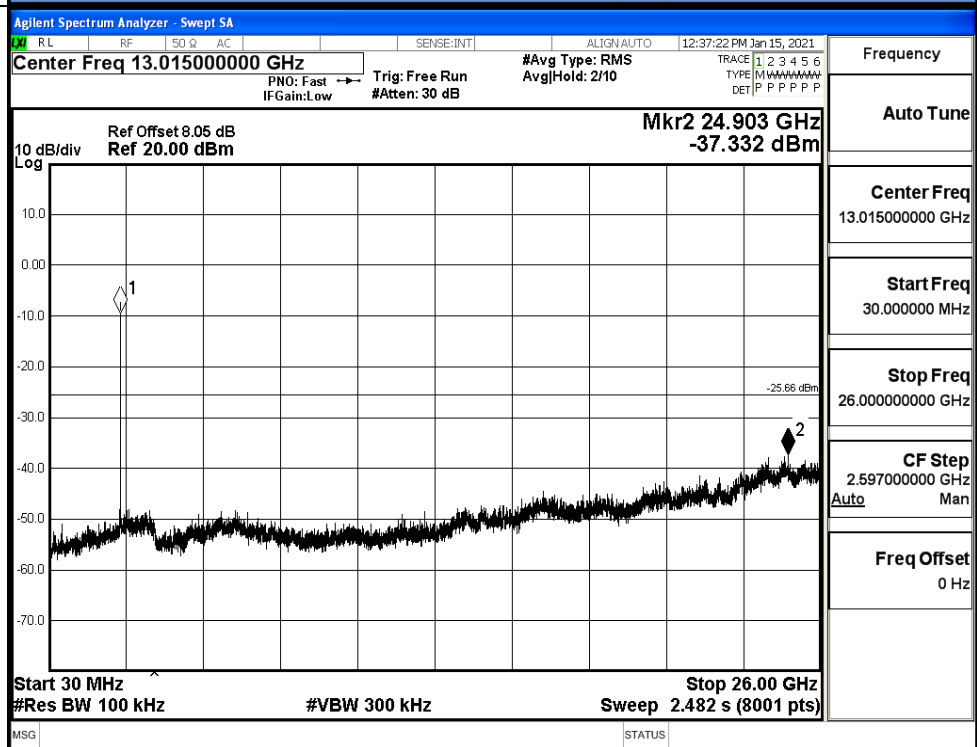Pref/11N20
SISO/MCHPuw/11N20
SISO/MCH



11N20SISO HCH Graphs

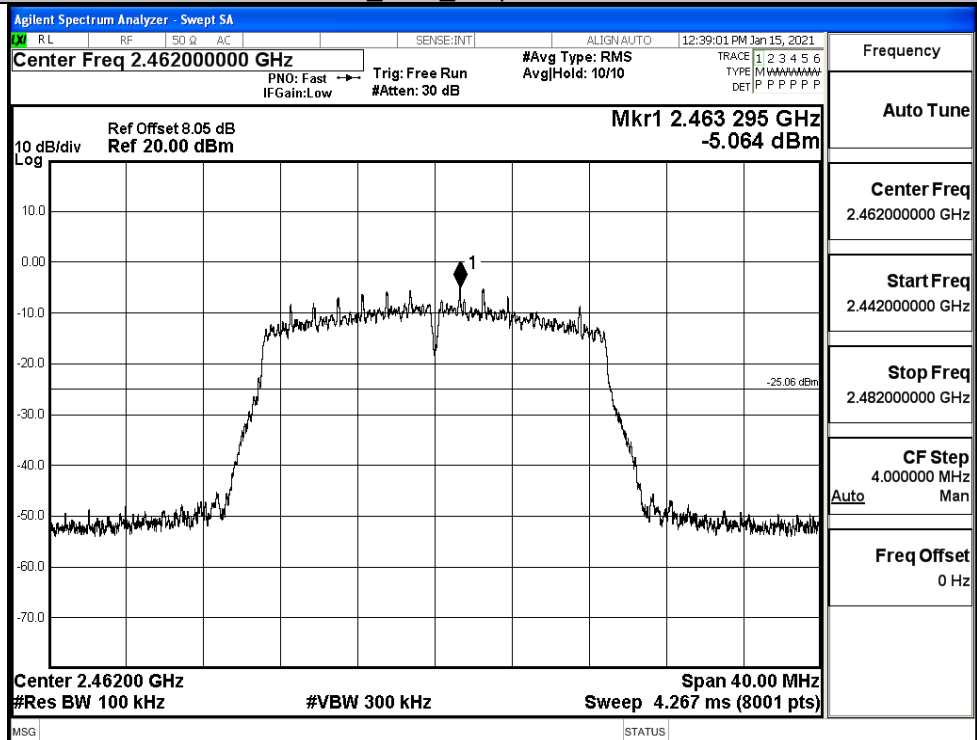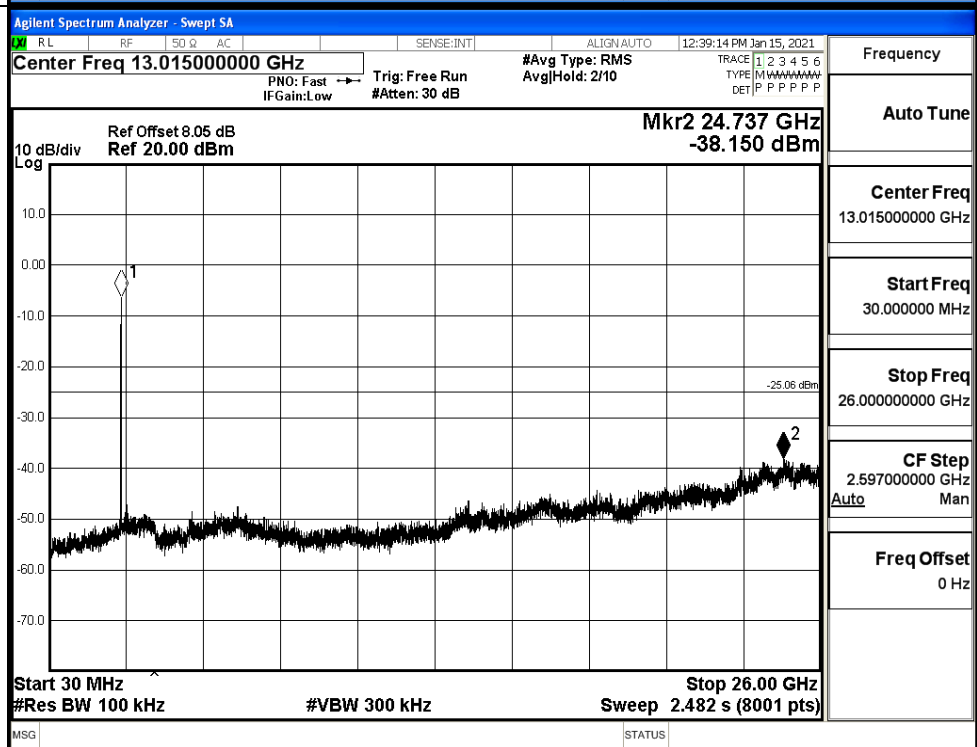Pref/11N20
SISO/HCHPuw/11N20
SISO/HCH



11N40SISO LCH Graphs

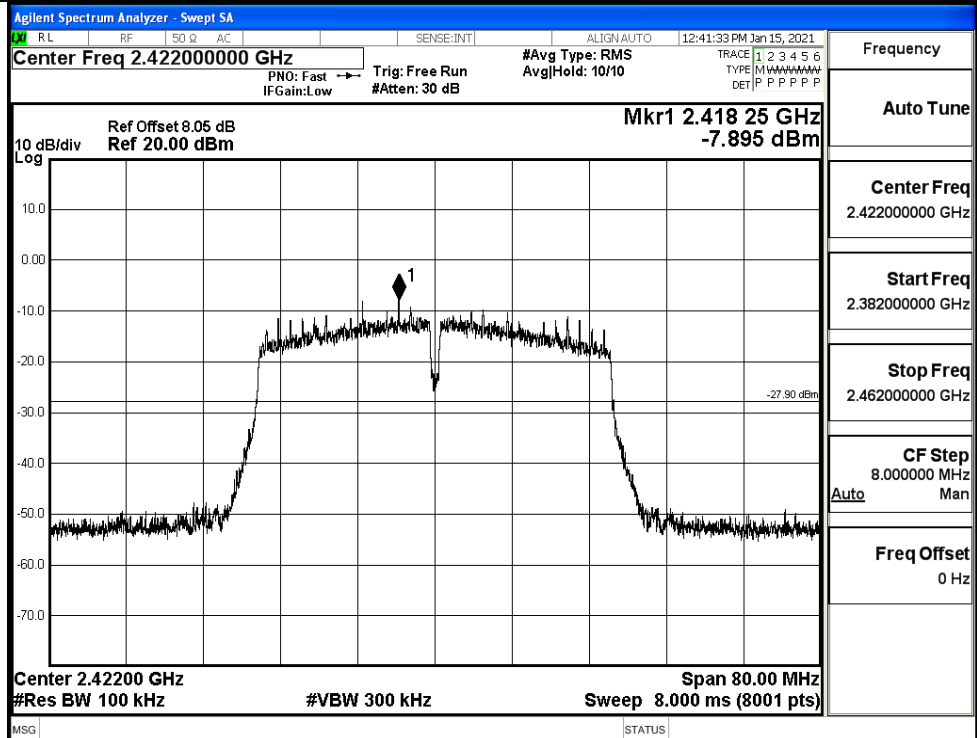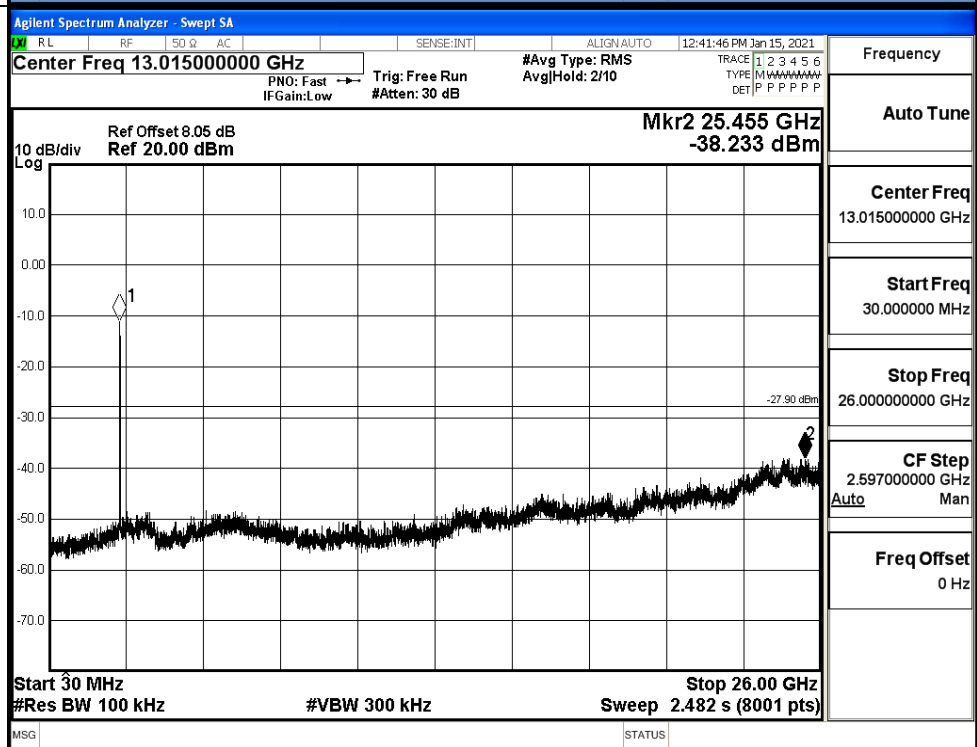Pref/11N40
SISO/LCHPuw/11N40
SISO/LCH

11N40SISO MCH Graphs

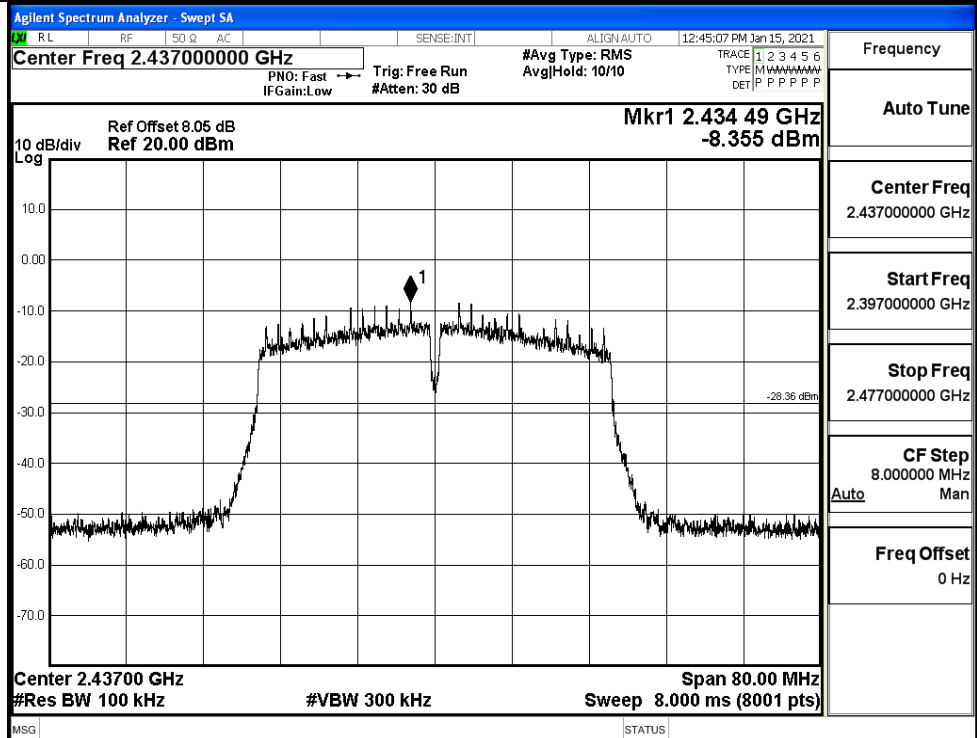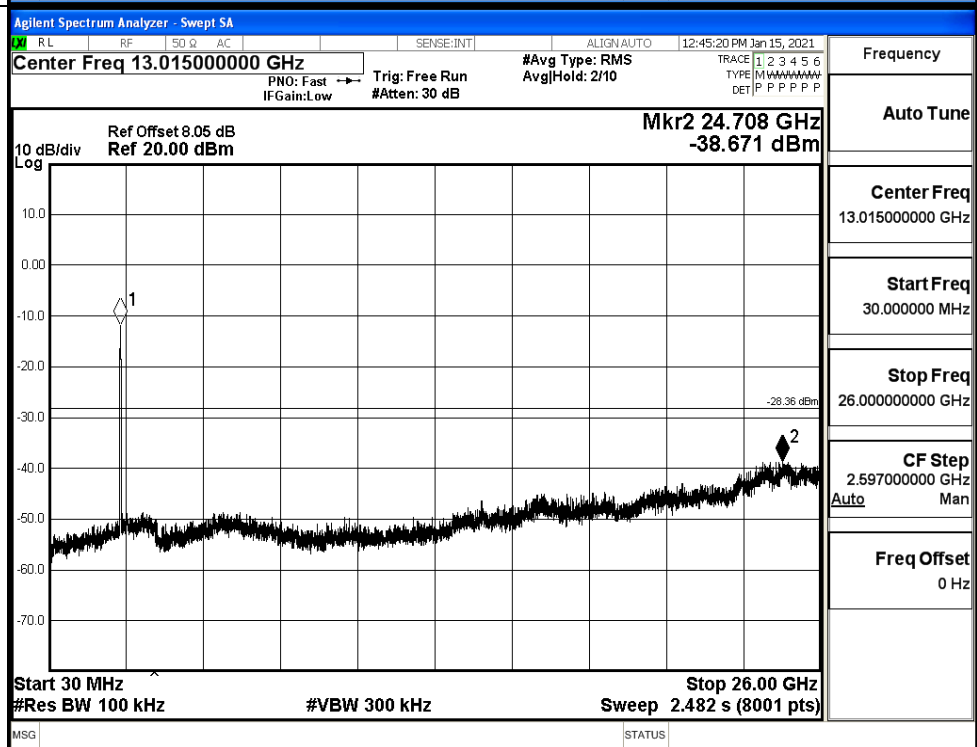Pref/11N40
SISO/MCHPuw/11N40
SISO/MCH

11N40SISO HCH Graphs

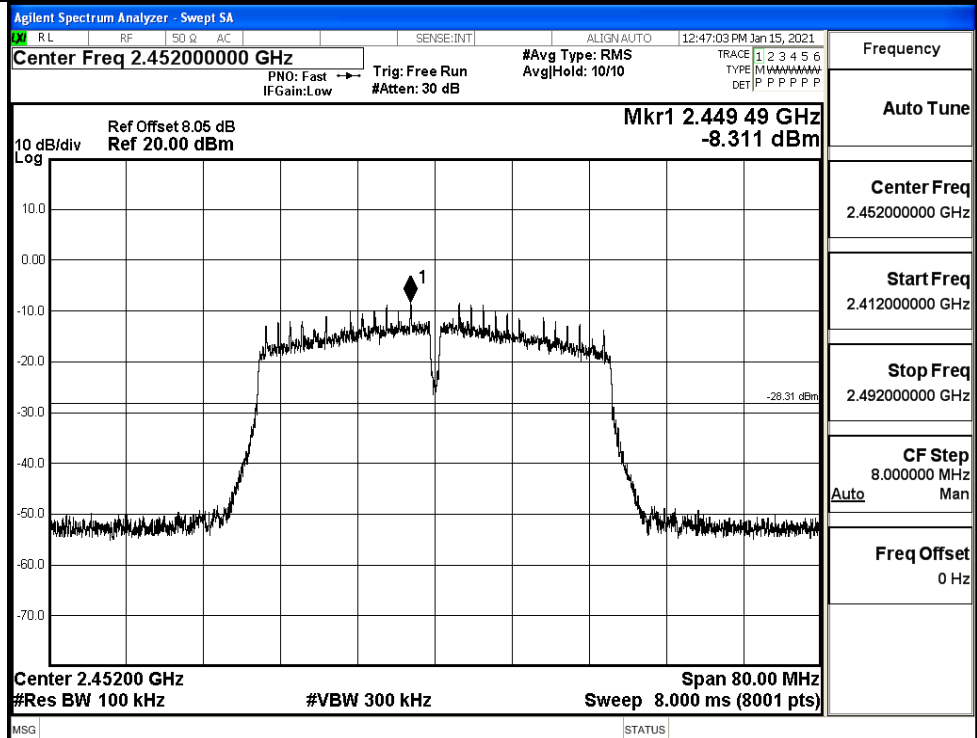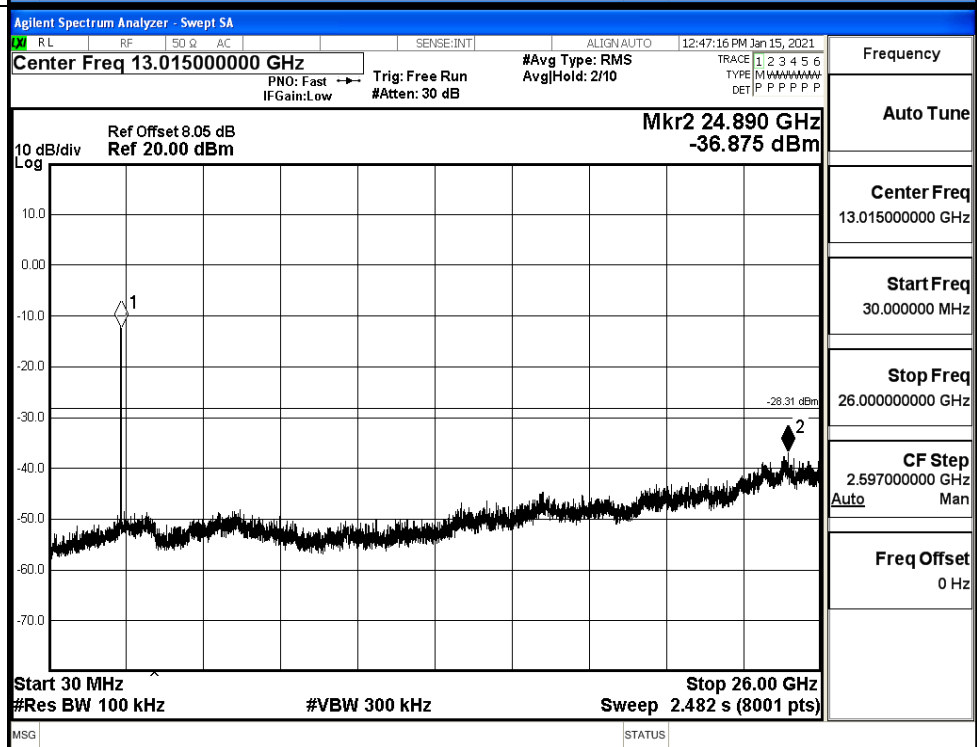
Pref/11N40
SISO/HCHPuw/11N40
SISO/HCH

A.6 Band-edge for RF Conducted Emissions


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	3.603	-49.164	-16.4	PASS
	HCH	3.285	-49.551	-16.72	PASS
11G	LCH	-3.346	-49.177	-23.35	PASS
	HCH	-4.145	-49.832	-24.15	PASS
11N20SISO	LCH	-4.273	-49.469	-24.27	PASS
	HCH	-4.467	-49.690	-24.47	PASS
11N40SISO	LCH	-7.467	-49.777	-27.47	PASS
	HCH	-8.680	-49.466	-28.68	PASS

Test Graphs


11B/LCH

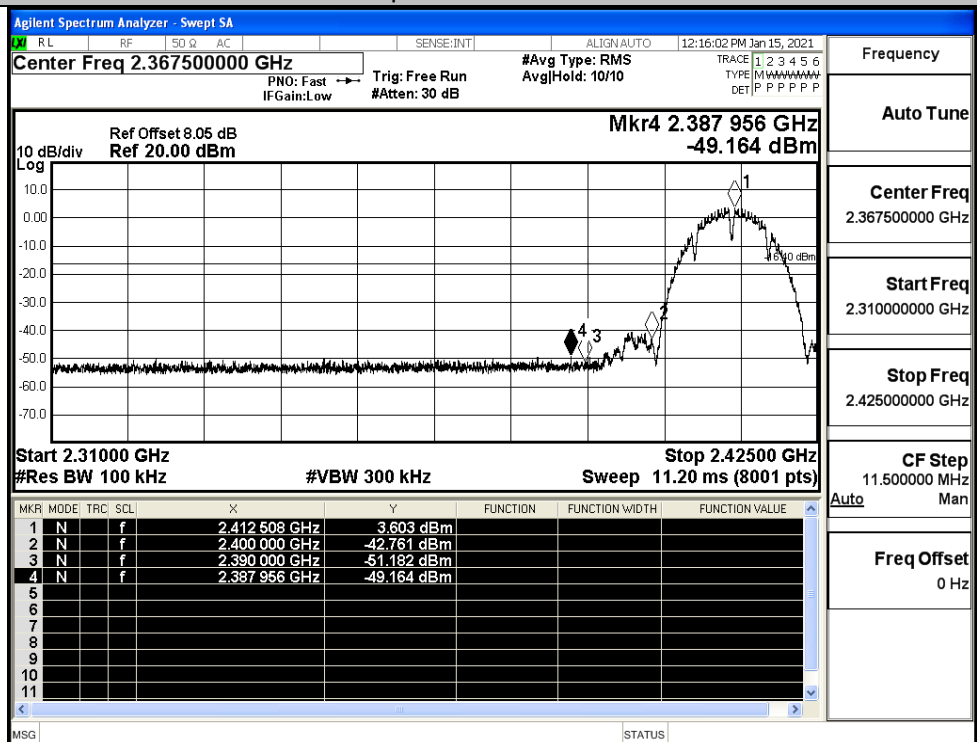


11B/HCH

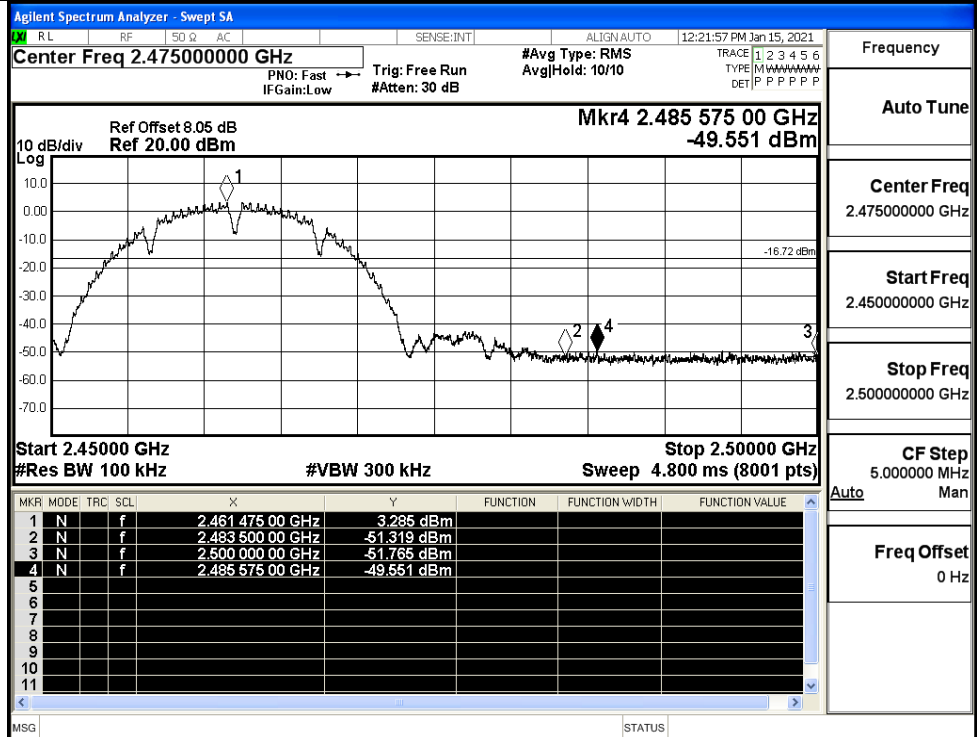


11G/LCH

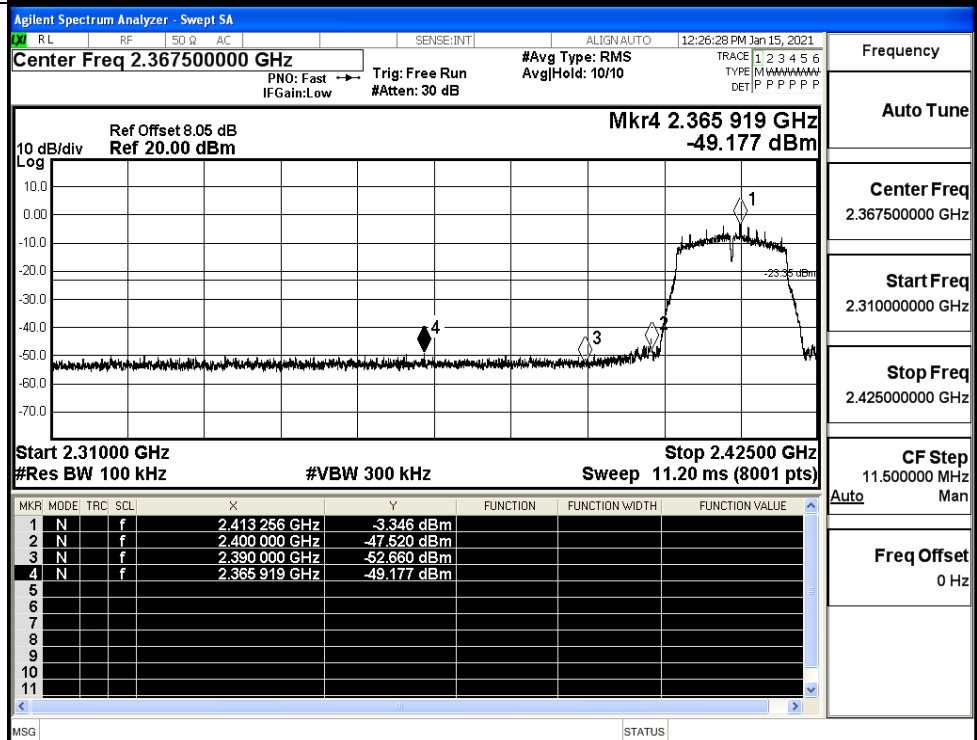


11G/HCH

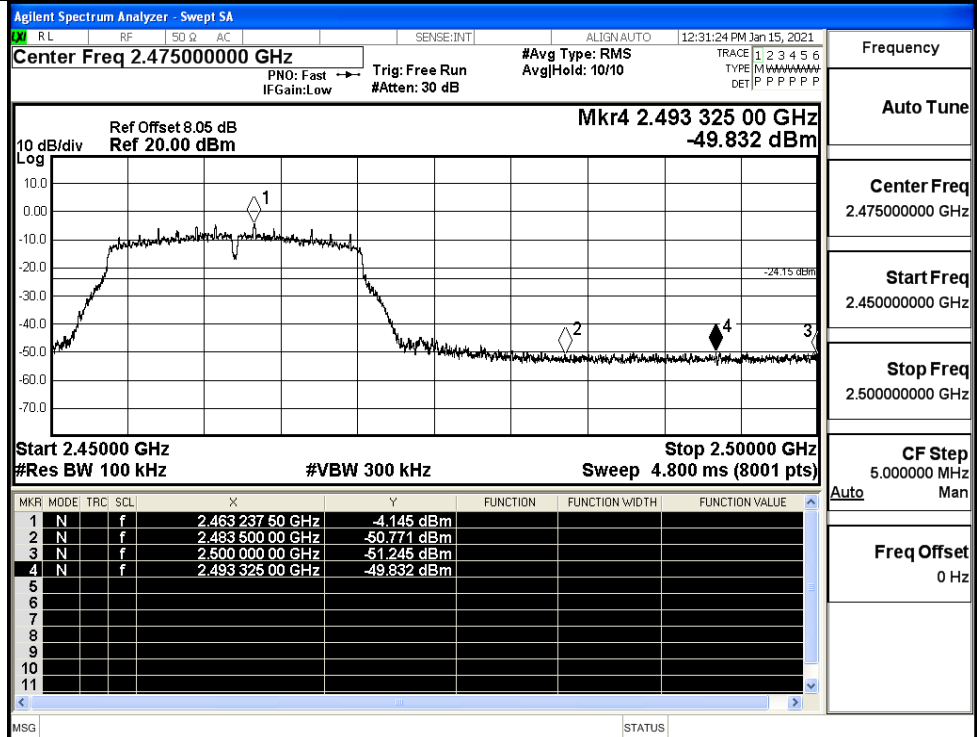

11N20SISO/LCH

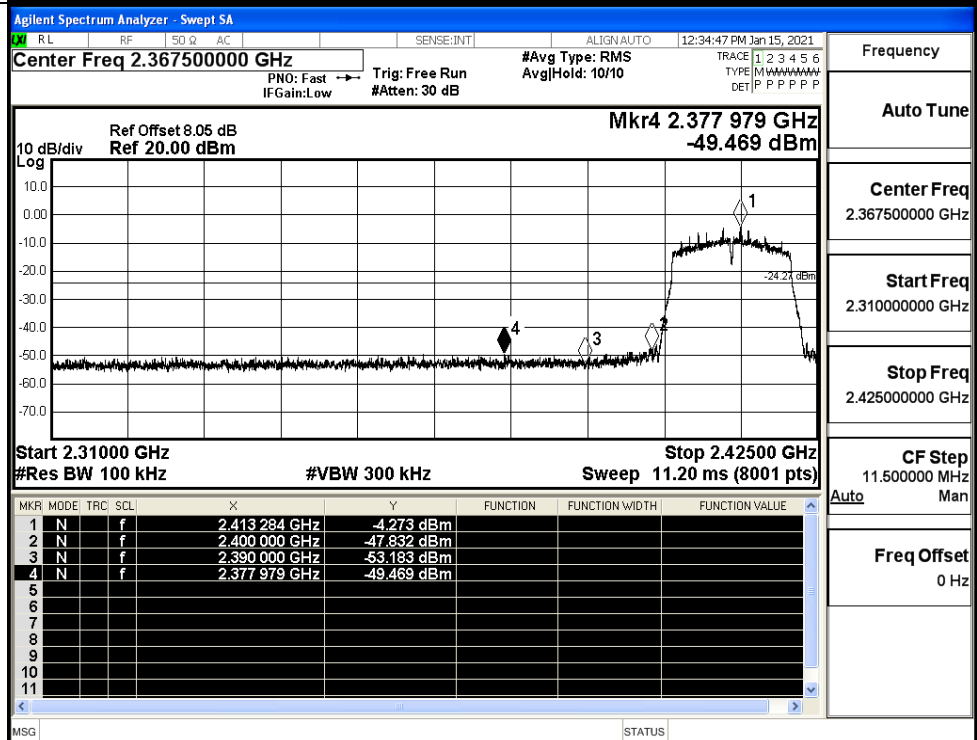

11N20SISO/HCH

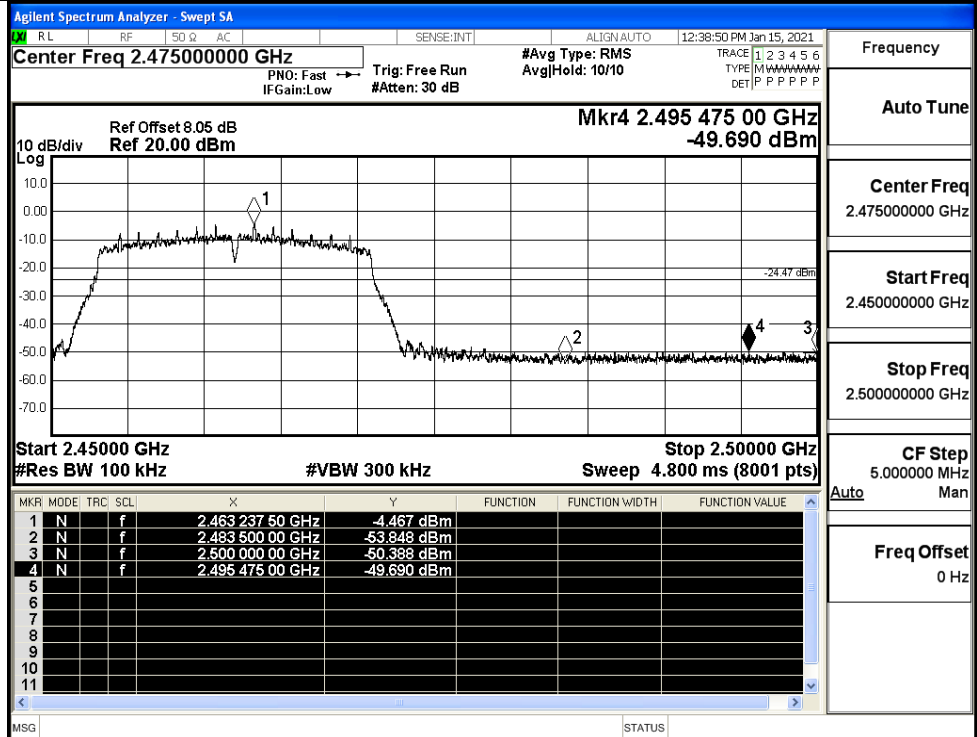

Frequency

Auto Tune

Center Freq

2.475000000 GHz

Start Freq

2.450000000 GHz

Stop Freq

2.500000000 GHz

CF Step


5.000000 MHz

Auto

Freq Offset

0 Hz

11N40SISO/LCH

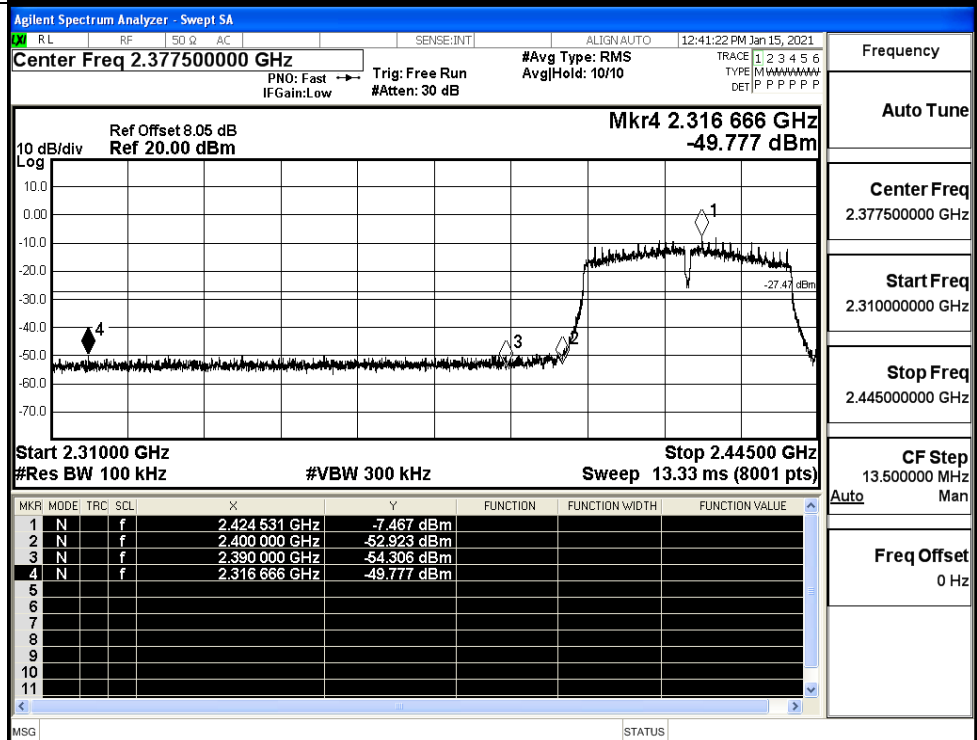

Frequency

Auto Tune

Center Freq

2.377500000 GHz

Start Freq

2.310000000 GHz

Stop Freq

2.445000000 GHz

CF Step


13.500000 MHz

Auto

Freq Offset

0 Hz

11N40SISO/HCH

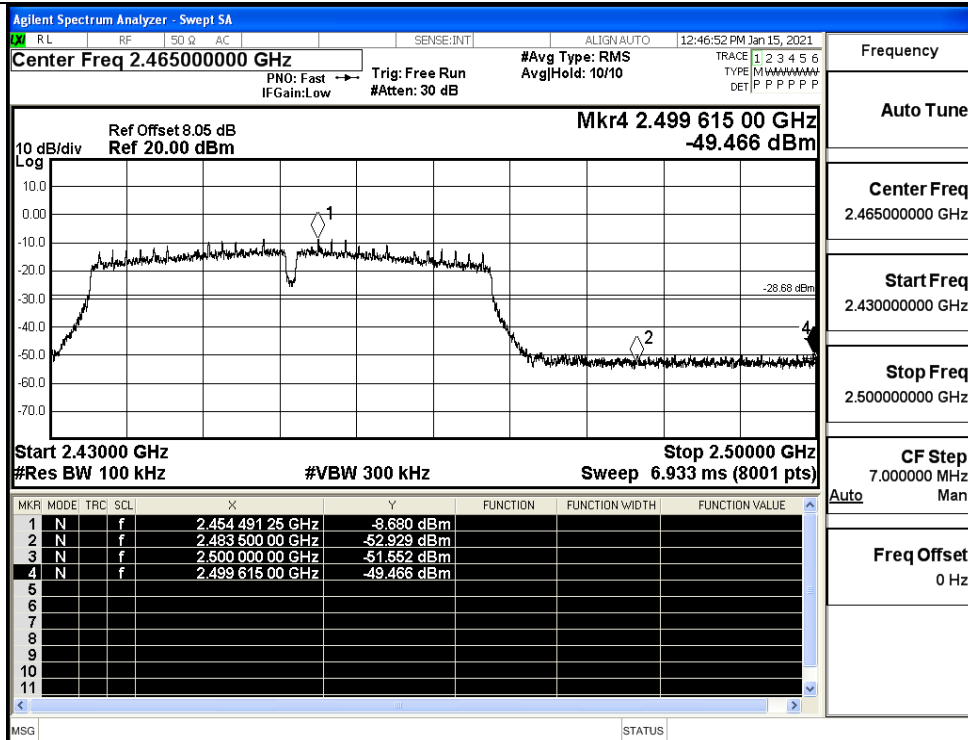

Frequency

Auto Tune

Center Freq
2.465000000 GHz

Start Freq
2.430000000 GHz

Stop Freq
2.500000000 GHz

CF Step
7.000000 MHz
Auto Man


Freq Offset
0 Hz

A.7 Restrict-band band-edge measurements


Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
11B	2412	Ant1	2310.0	-44.82	2.0	0	50.44	PEAK	74	PASS
	2412	Ant1	2310.0	-53.76	2.0	0	41.50	AV	54	PASS
	2412	Ant1	2390.0	-42.47	2.0	0	52.78	PEAK	74	PASS
	2412	Ant1	2390.0	-52.91	2.0	0	42.35	AV	54	PASS
	2462	Ant1	2483.5	-41.24	2.0	0	54.02	PEAK	74	PASS
	2462	Ant1	2483.5	-52.47	2.0	0	42.79	AV	54	PASS
	2462	Ant1	2500.0	-42.94	2.0	0	52.32	PEAK	74	PASS
	2462	Ant1	2500.0	-52.44	2.0	0	42.82	AV	54	PASS
11G	2412	Ant1	2310.0	-43.97	2.0	0	51.29	PEAK	74	PASS
	2412	Ant1	2310.0	-53.59	2.0	0	41.67	AV	54	PASS
	2412	Ant1	2390.0	-42.19	2.0	0	53.07	PEAK	74	PASS
	2412	Ant1	2390.0	-52.82	2.0	0	42.43	AV	54	PASS
	2462	Ant1	2483.5	-41.94	2.0	0	53.32	PEAK	74	PASS
	2462	Ant1	2483.5	-52.65	2.0	0	42.60	AV	54	PASS
	2462	Ant1	2500.0	-40.48	2.0	0	54.78	PEAK	74	PASS
	2462	Ant1	2500.0	-52.53	2.0	0	42.73	AV	54	PASS
11N20 SISO	2412	Ant1	2310.0	-42.93	2.0	0	52.33	PEAK	74	PASS
	2412	Ant1	2310.0	-53.63	2.0	0	41.62	AV	54	PASS
	2412	Ant1	2390.0	-42.65	2.0	0	52.61	PEAK	74	PASS
	2412	Ant1	2390.0	-52.82	2.0	0	42.44	AV	54	PASS
	2462	Ant1	2483.5	-42.08	2.0	0	53.18	PEAK	74	PASS
	2462	Ant1	2483.5	-52.73	2.0	0	42.53	AV	54	PASS
	2462	Ant1	2500.0	-41.74	2.0	0	53.52	PEAK	74	PASS
	2462	Ant1	2500.0	-52.55	2.0	0	42.71	AV	54	PASS
11N40 SISO	2422	Ant1	2310.0	-42.66	2.0	0	52.59	PEAK	74	PASS
	2422	Ant1	2310.0	-53.69	2.0	0	41.57	AV	54	PASS

	2422	Ant1	2390.0	-42.60	2.0	0	52.65	PEAK	74	PASS
	2422	Ant1	2390.0	-52.79	2.0	0	42.47	AV	54	PASS
	2452	Ant1	2483.5	-43.68	2.0	0	51.58	PEAK	74	PASS
	2452	Ant1	2483.5	-52.75	2.0	0	42.50	AV	54	PASS
	2452	Ant1	2500.0	-42.51	2.0	0	52.75	PEAK	74	PASS
	2452	Ant1	2500.0	-52.67	2.0	0	42.59	AV	54	PASS


Restrict-band band-edge measurements_11B_2412_Ant1_PEAK

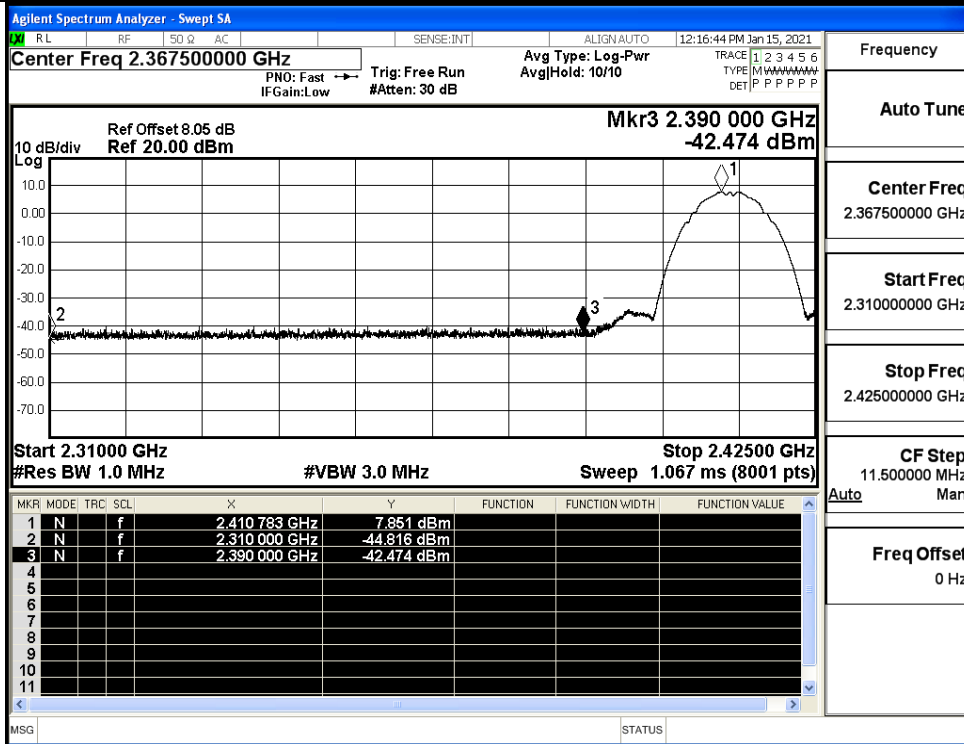


Restrict-band band-edge measurements_11B_2412_Ant1_AV

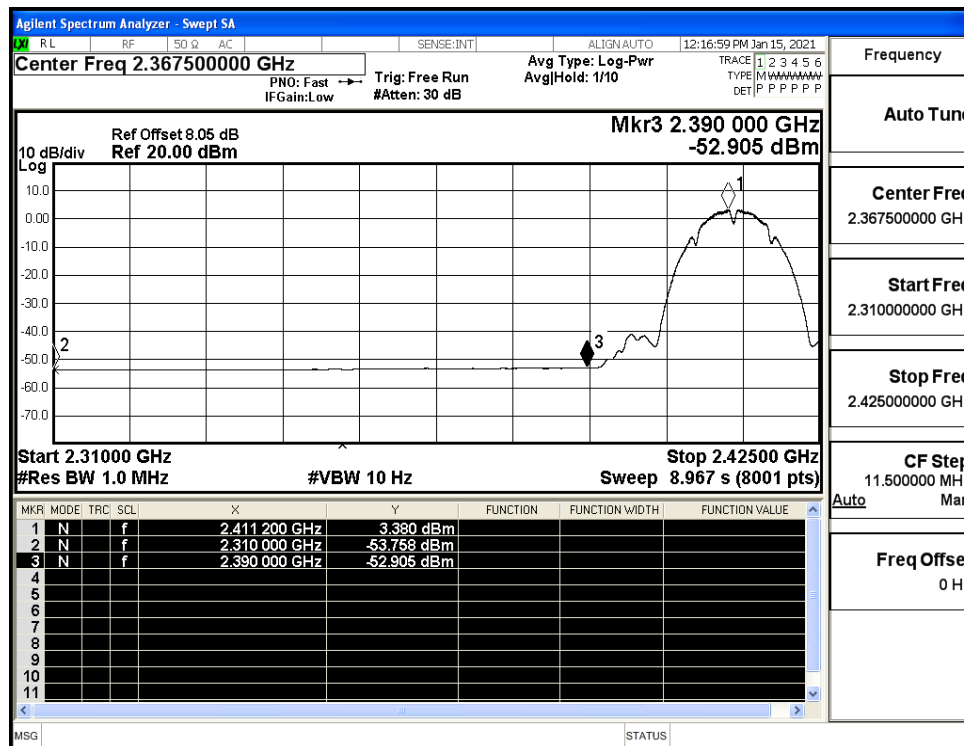


Restrict-band band-edge measurements_11B_2462_Ant1_PEAK

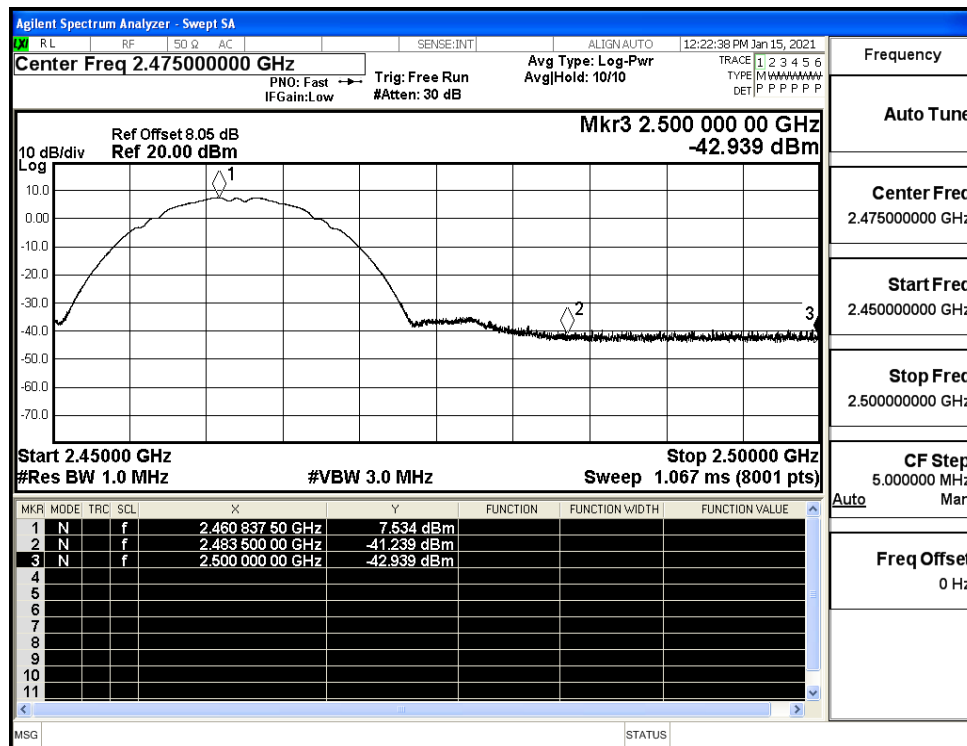


Restrict-band band-edge measurements_11B_2462_Ant1_AV

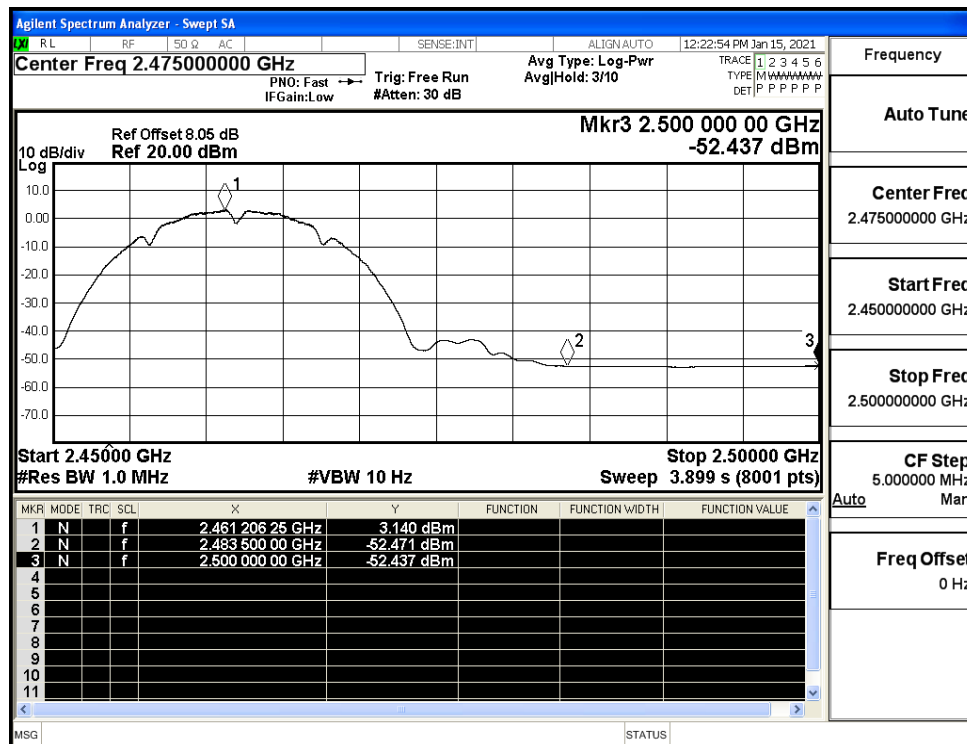


Restrict-band band-edge measurements_11G_2412_Ant1_PEAK

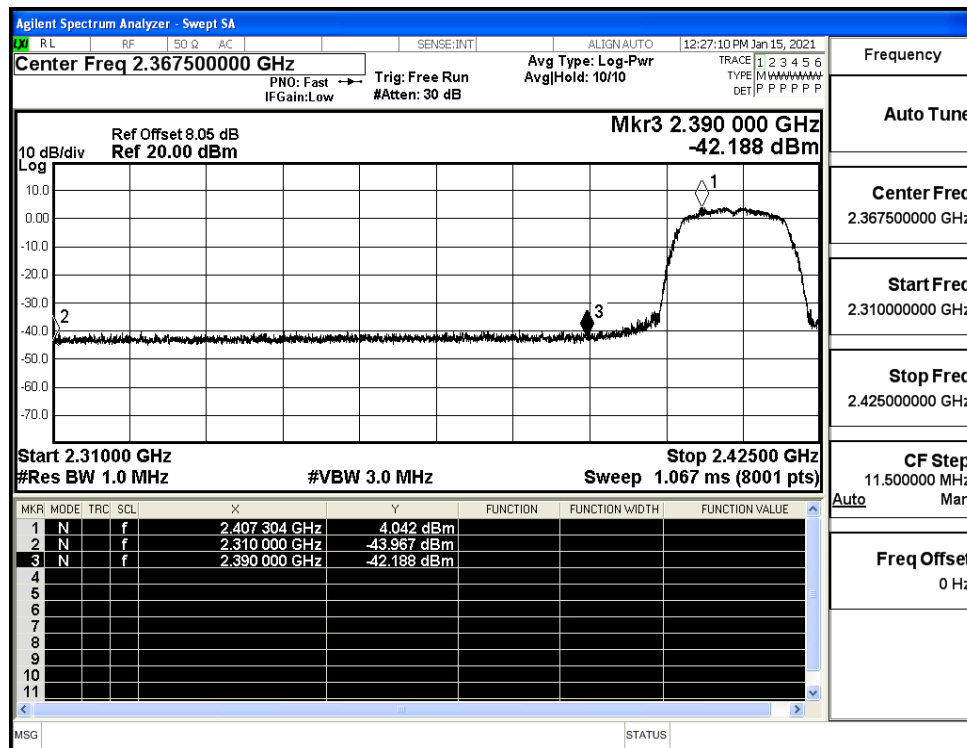


Restrict-band band-edge measurements_11G_2412_Ant1_AV

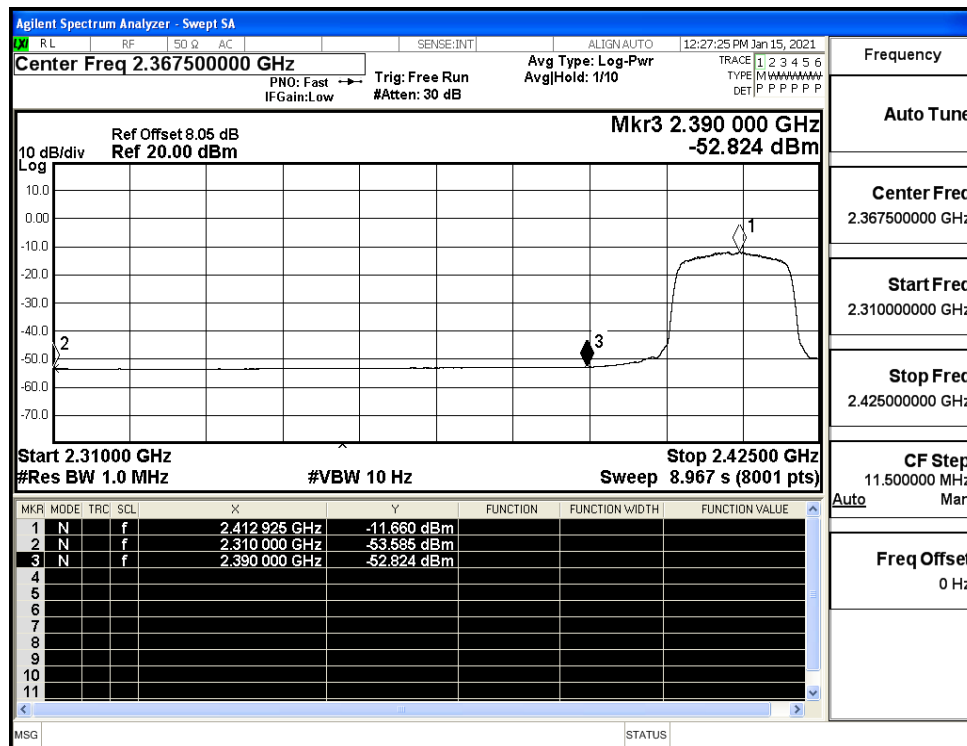


Restrict-band band-edge measurements_11G_2462_Ant1_PEAK

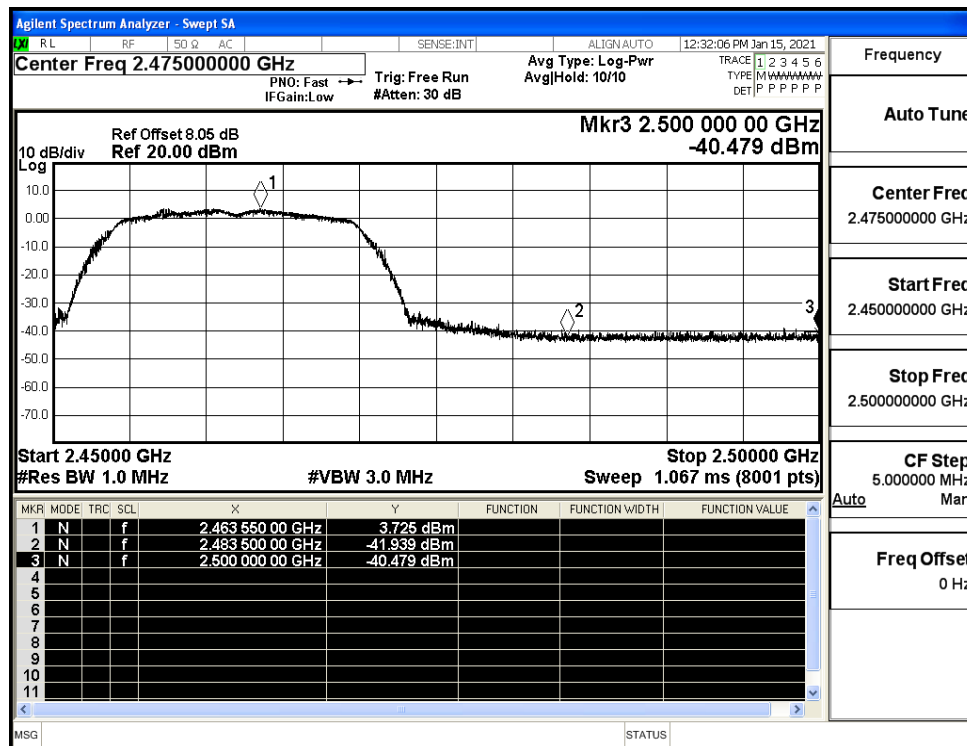


Restrict-band band-edge measurements_11G_2462_Ant1_AV

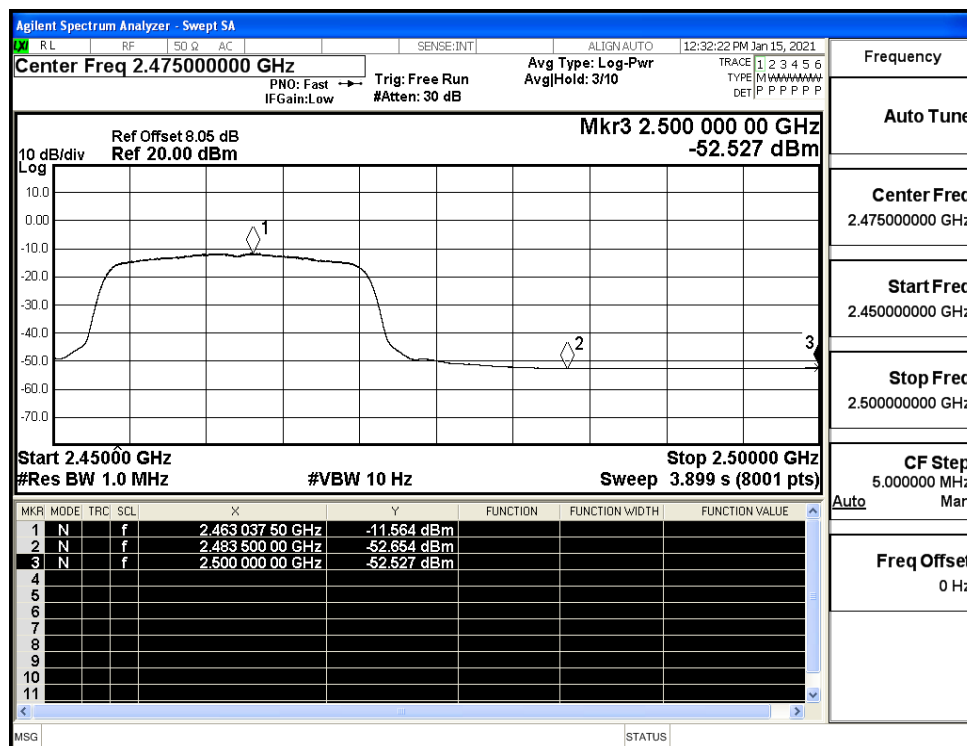


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_PEAK

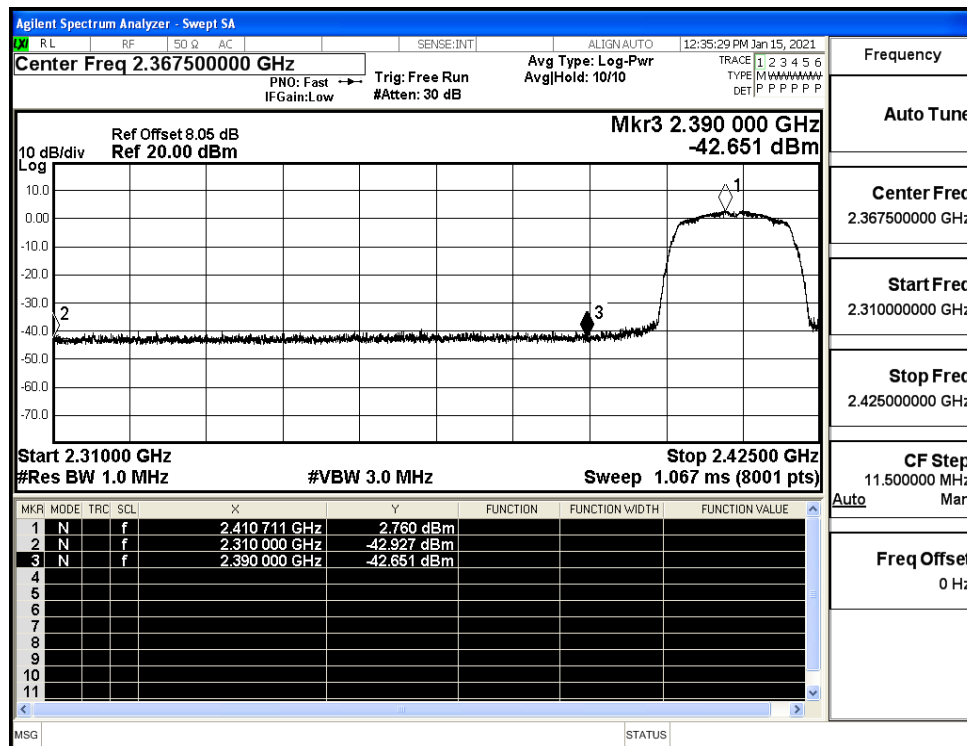


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_AV

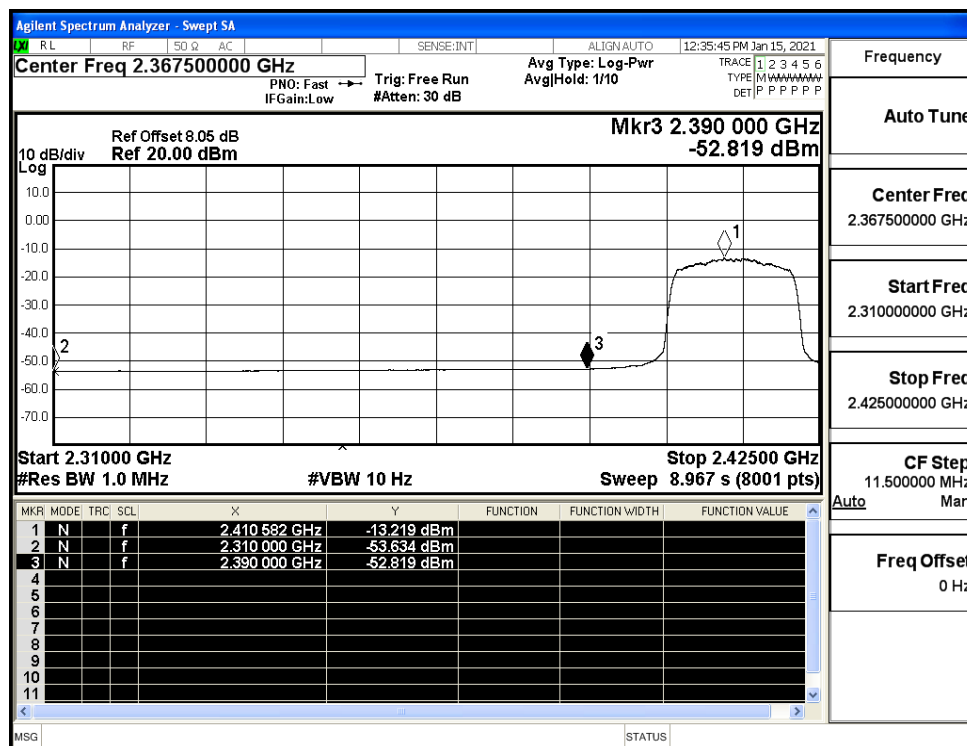


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_PEAK

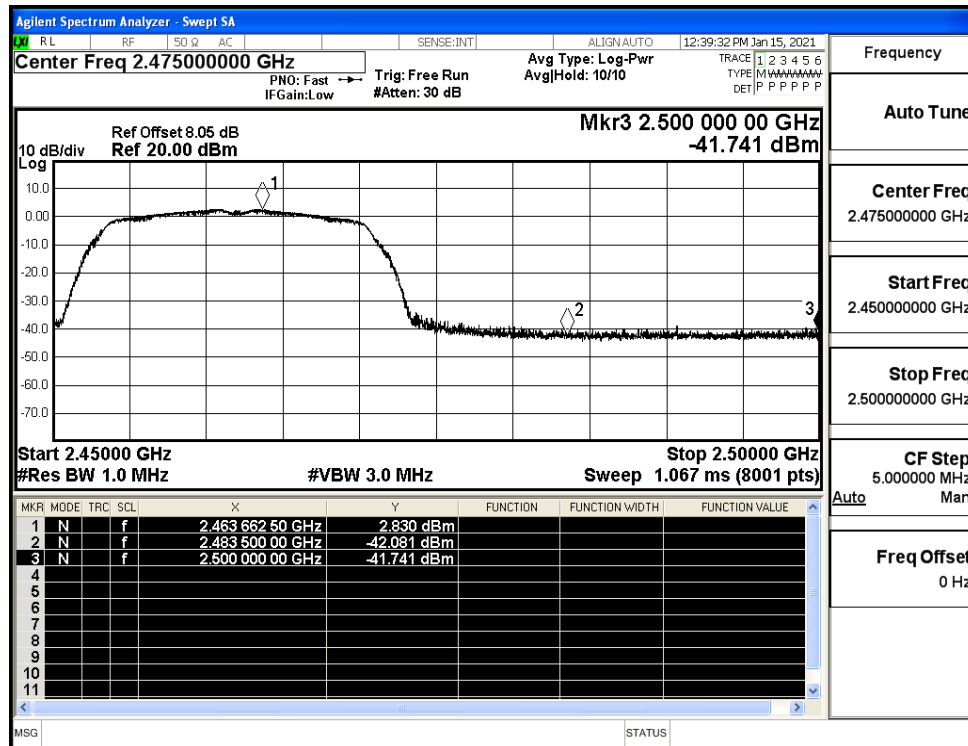


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_AV

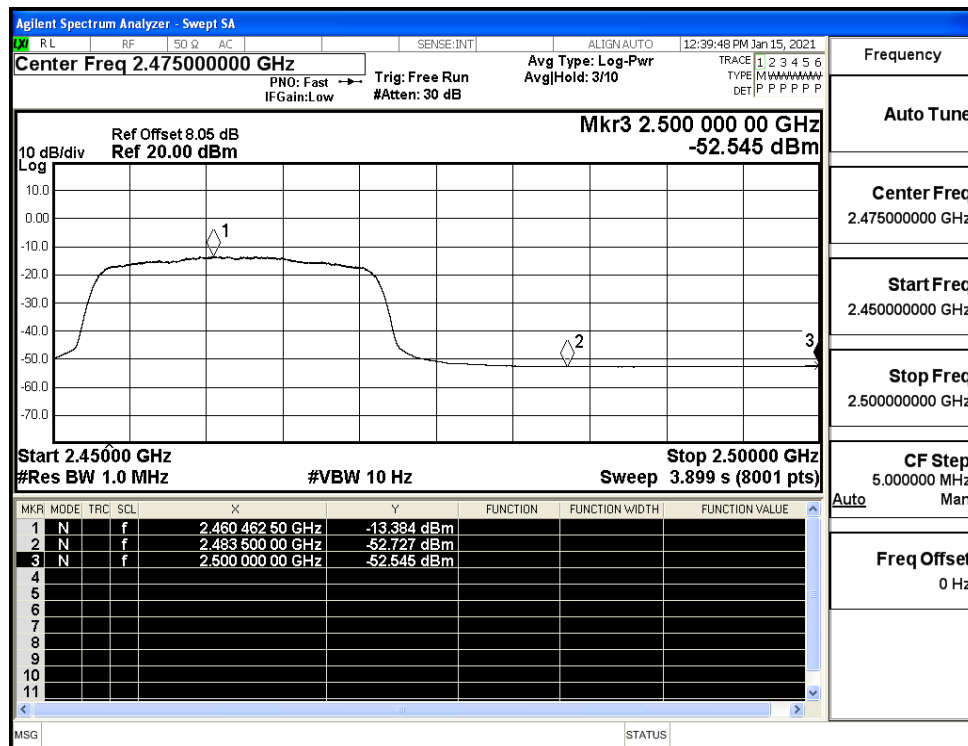


Restrict-band band-edge measurements_11N40SISO_2422_Ant1_PEAK

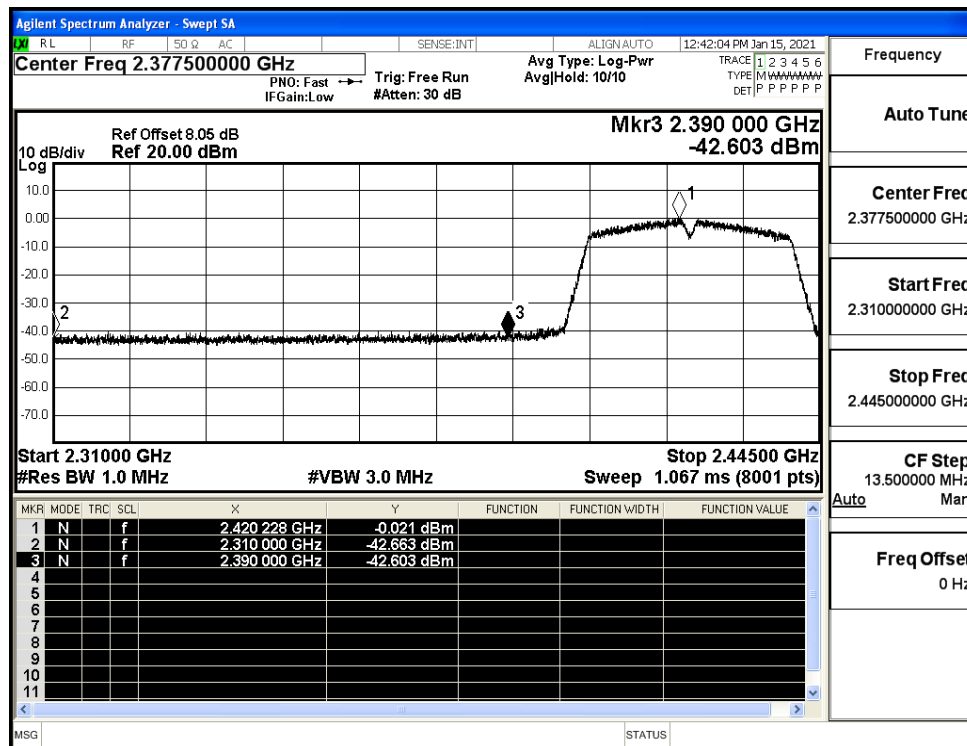

Restrict-band band-edge measurements_11N40SISO_2422_Ant1_AV

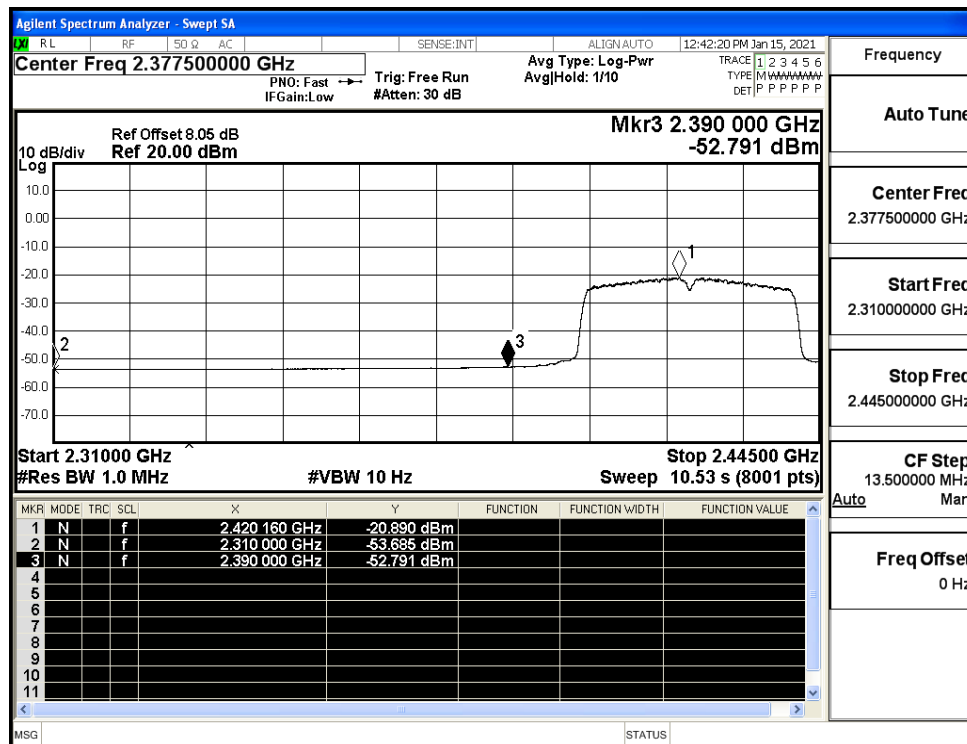

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_PEAK

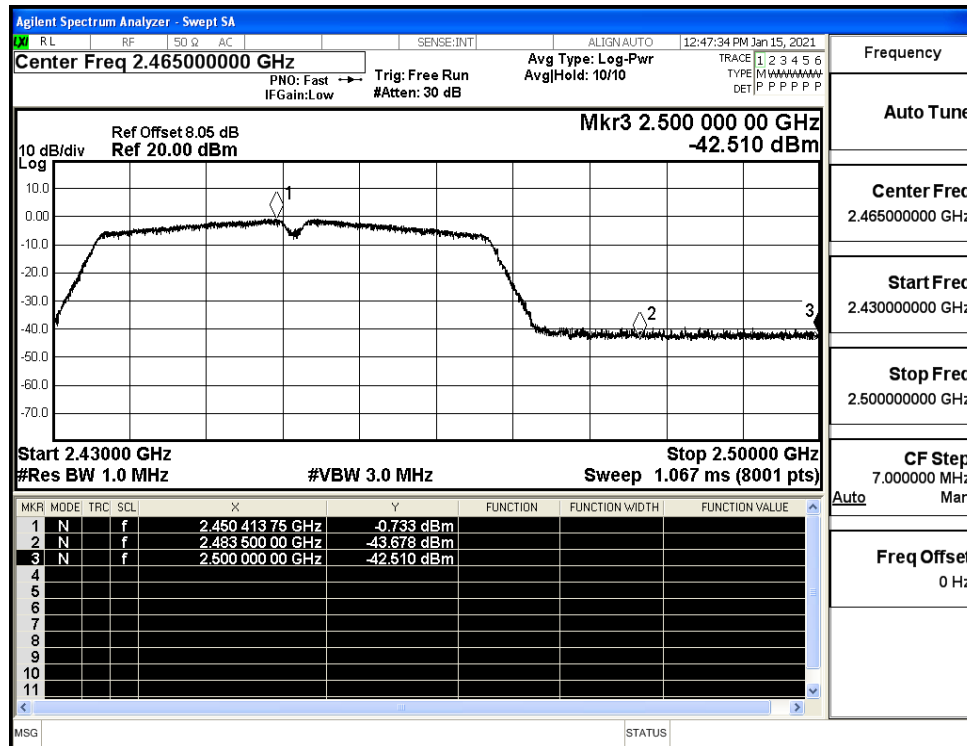

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_AV

