


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

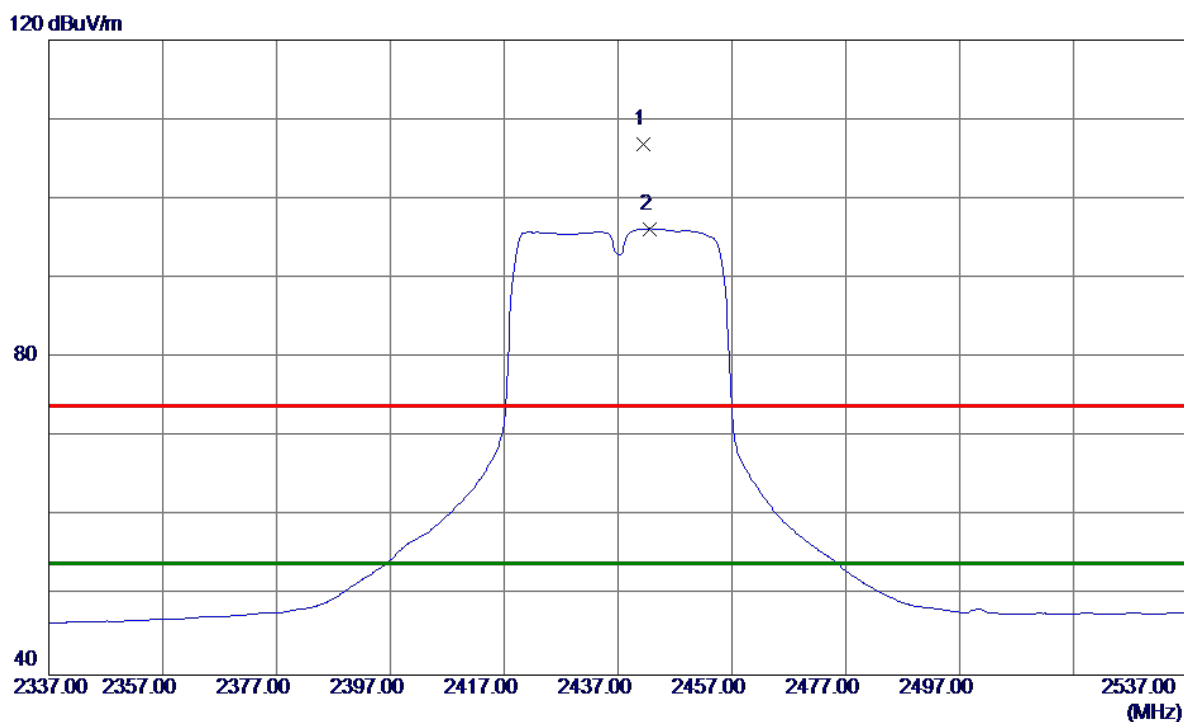


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2441.4000	73.58	33.25	106.83	74.00	32.83	Peak	No Limit
2 *	2442.6000	62.99	33.25	96.24	54.00	42.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


80 dBuV/m

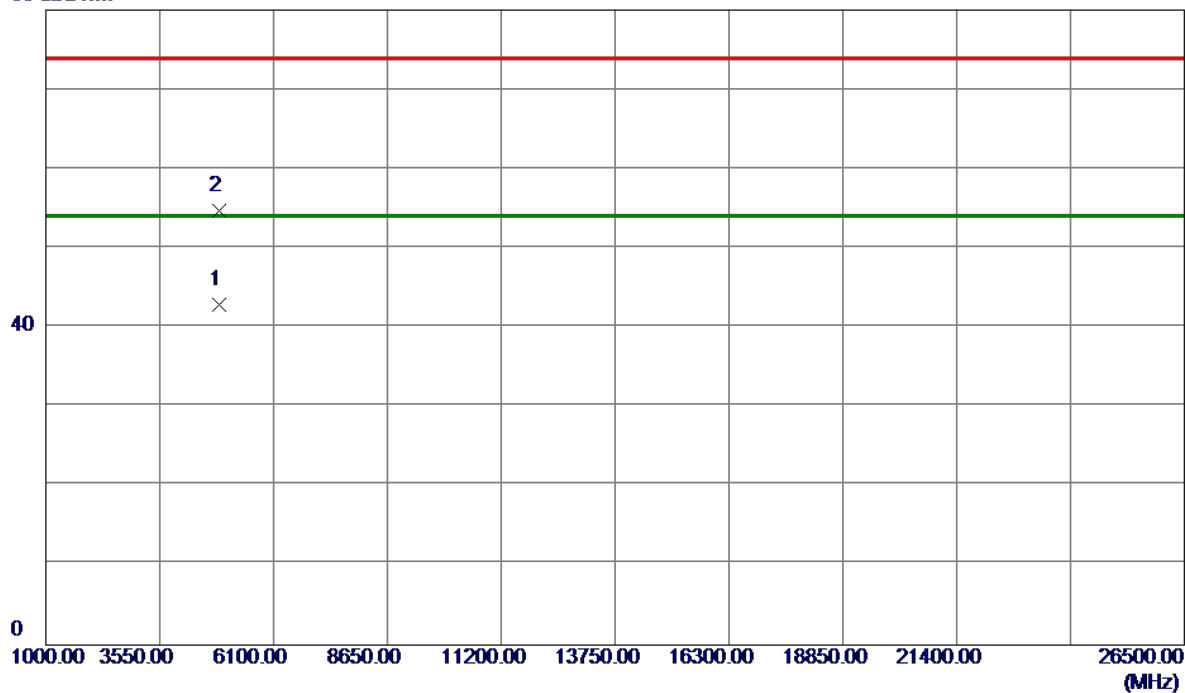

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.9000	36.04	6.83	42.87	54.00	-11.13	AVG	
2	4874.0500	47.90	6.84	54.74	74.00	-19.26	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

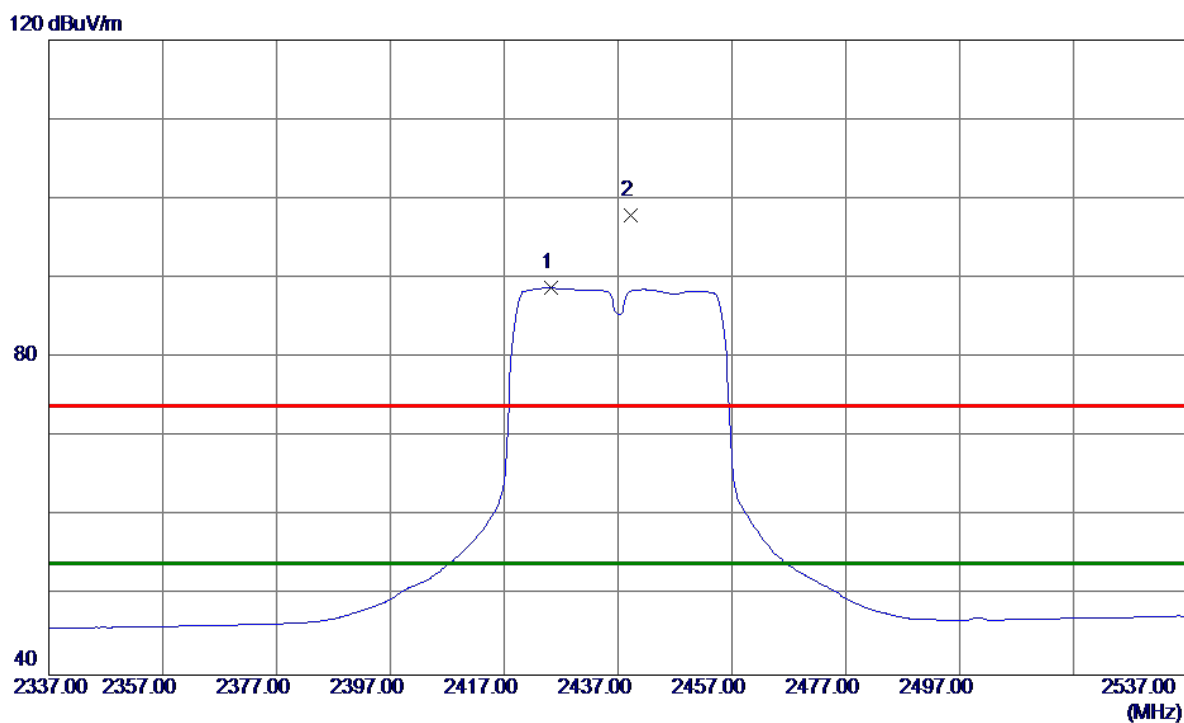


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2425.2000	55.62	33.19	88.81	54.00	34.81	AVG	No Limit
2	2439.2000	64.68	33.24	97.92	74.00	23.92	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

80 dBuV/m

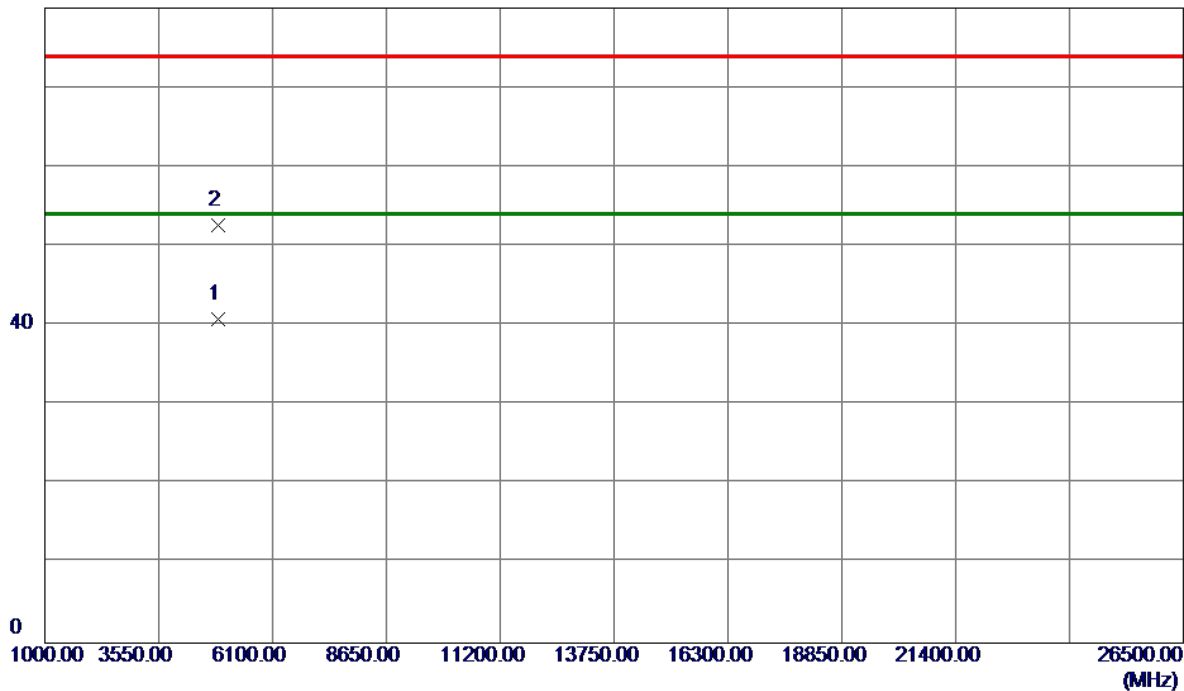


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9000	34.01	6.84	40.85	54.00	-13.15	AVG	
2	4874.2000	45.73	6.84	52.57	74.00	-21.43	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

120 dBuV/m

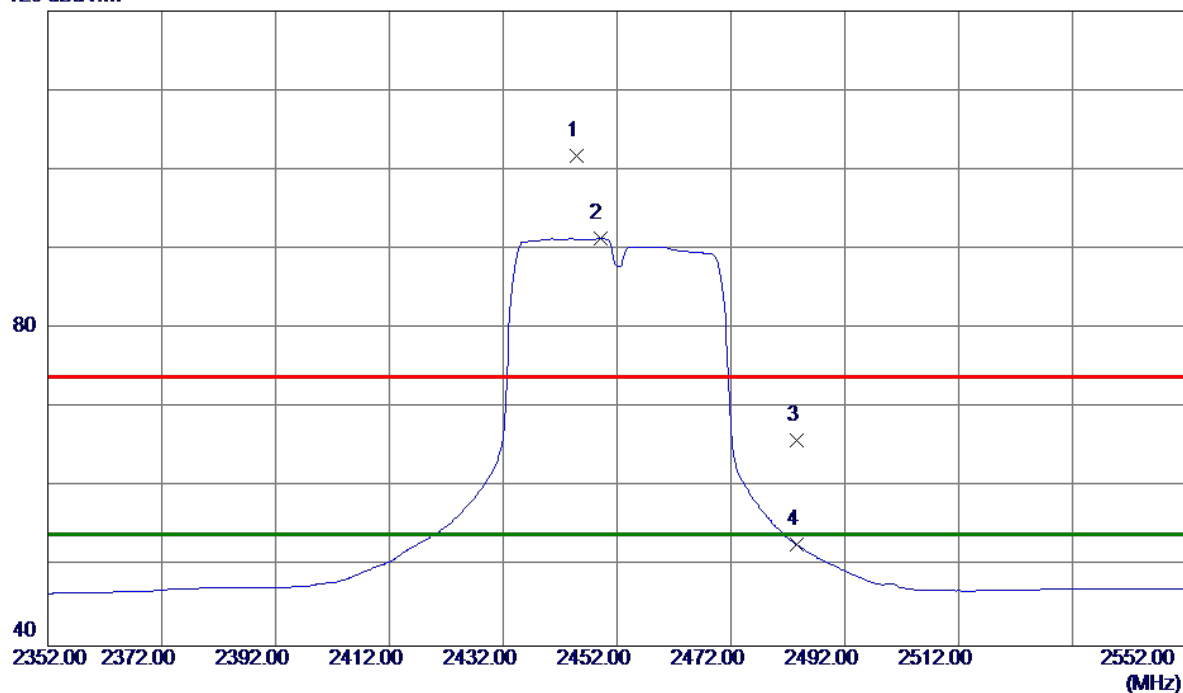


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2444.8000	68.43	33.26	101.69	74.00	27.69	Peak	No Limit
2 *	2449.0000	58.05	33.28	91.33	54.00	37.33	AVG	No Limit
3	2483.5000	32.52	33.41	65.93	74.00	-8.07	Peak	
4	2483.5000	19.33	33.41	52.74	54.00	-1.26	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical


80 dBuV/m

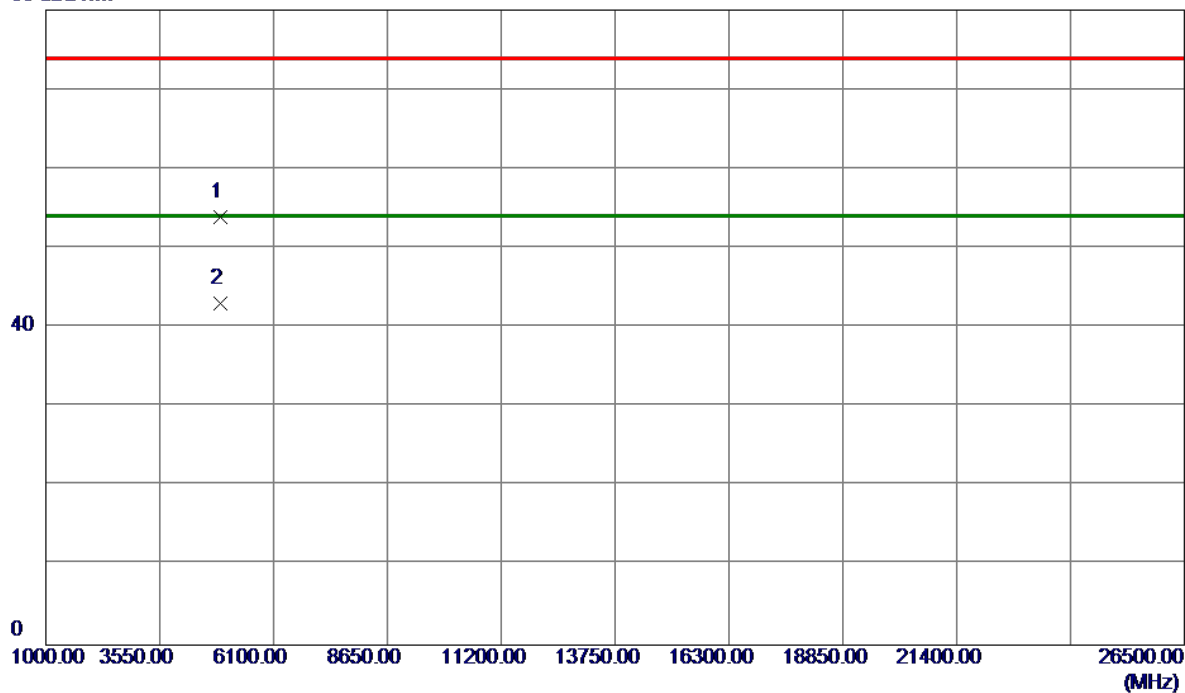

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4900.4200	47.03	6.93	53.96	74.00	-20.04	Peak	
2 *	4904.1400	36.15	6.95	43.10	54.00	-10.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

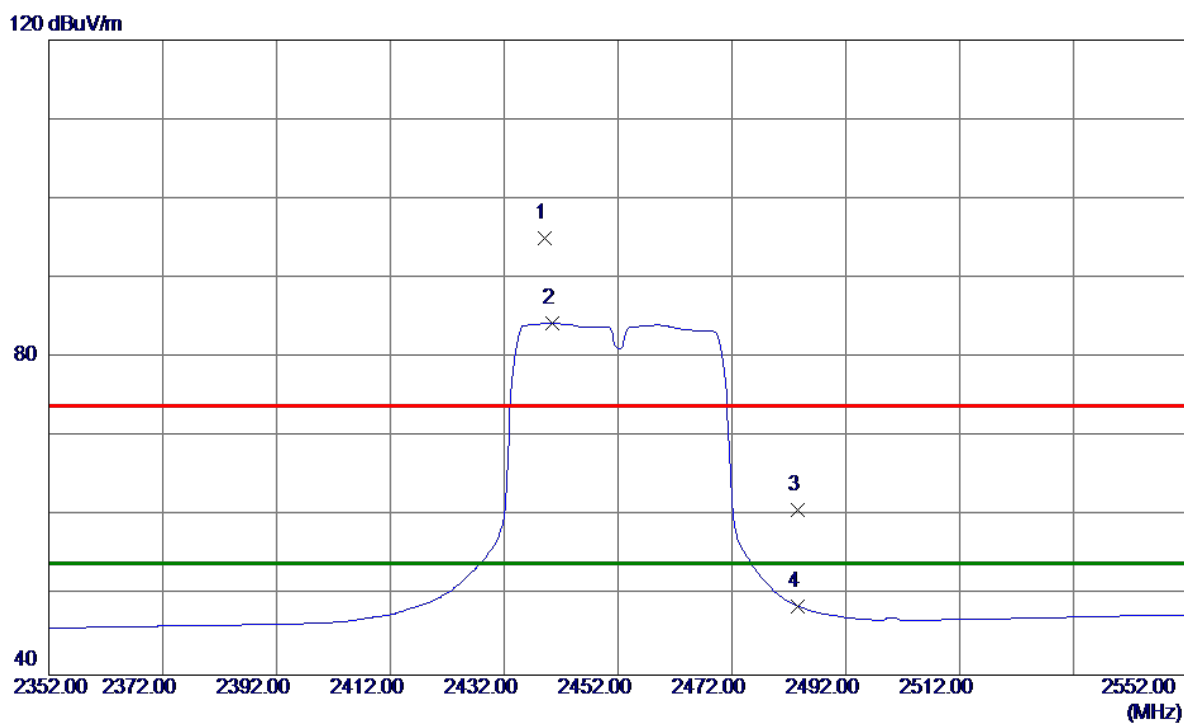


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2439.2000	61.82	33.24	95.06	74.00	21.06	Peak	No Limit
2 *	2440.4000	51.09	33.25	84.34	54.00	30.34	AVG	No Limit
3	2483.5000	27.41	33.41	60.82	74.00	-13.18	Peak	
4	2483.5000	15.26	33.41	48.67	54.00	-5.33	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

80 dBuV/m

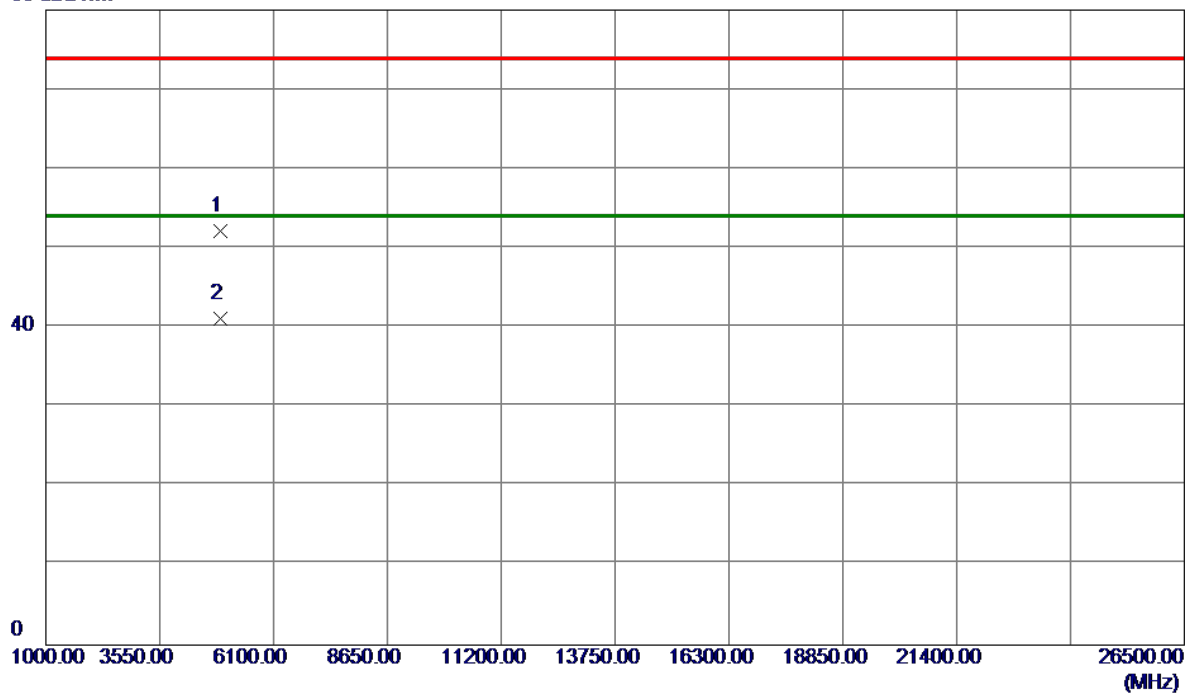


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4903.4200	45.28	6.94	52.22	74.00	-21.78	Peak	
2 *	4904.0500	34.11	6.95	41.06	54.00	-12.94	AVG	

Internal Antenna

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical

120 dBuV/m

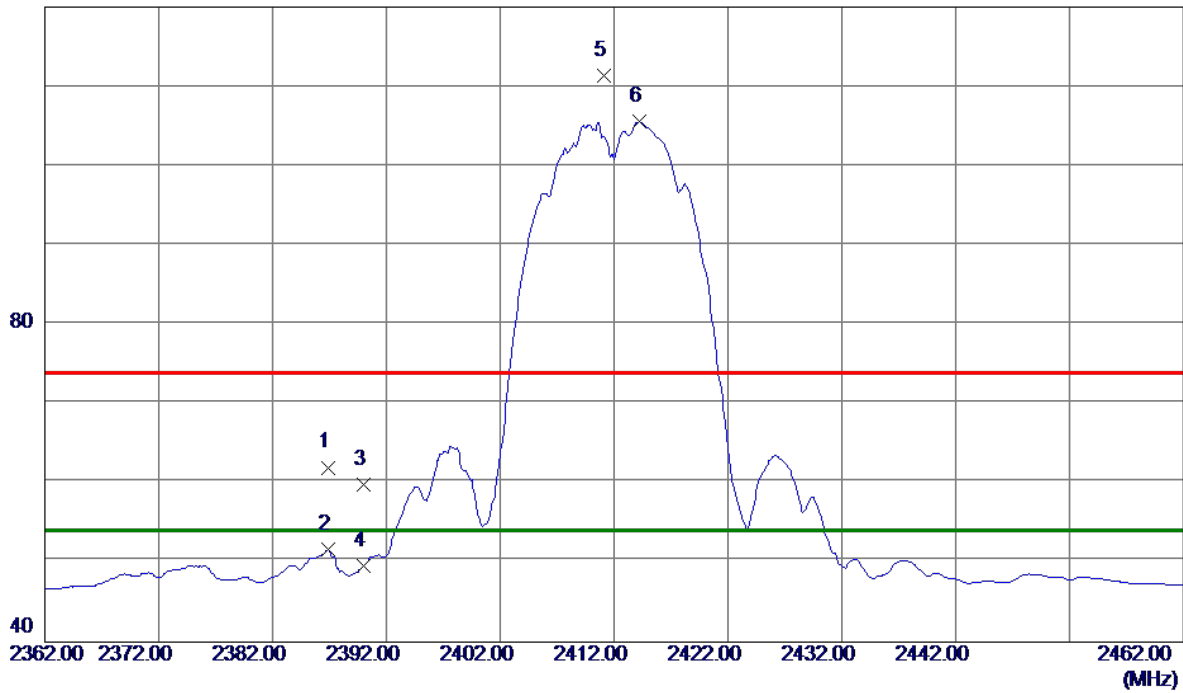


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.9000	28.96	33.04	62.00	74.00	-12.00	Peak	
2	2386.9000	18.57	33.04	51.61	54.00	-2.39	AVG	
3	2390.0000	26.83	33.06	59.89	74.00	-14.11	Peak	
4	2390.0000	16.58	33.06	49.64	54.00	-4.36	AVG	
5	2411.1000	78.21	33.14	111.35	74.00	37.35	Peak	No Limit
6 *	2414.2000	72.38	33.15	105.53	54.00	51.53	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical


80 dBuV/m

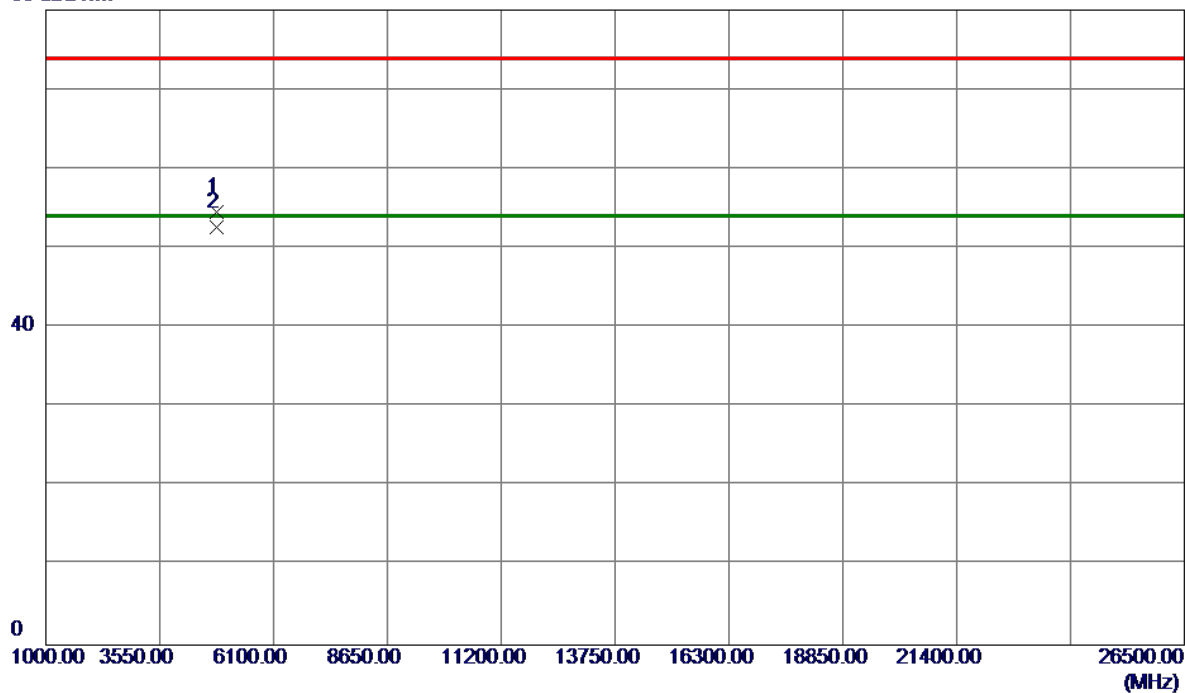

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9780	47.87	6.66	54.53	74.00	-19.47	Peak	
2 *	4824.0240	45.92	6.66	52.58	54.00	-1.42	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

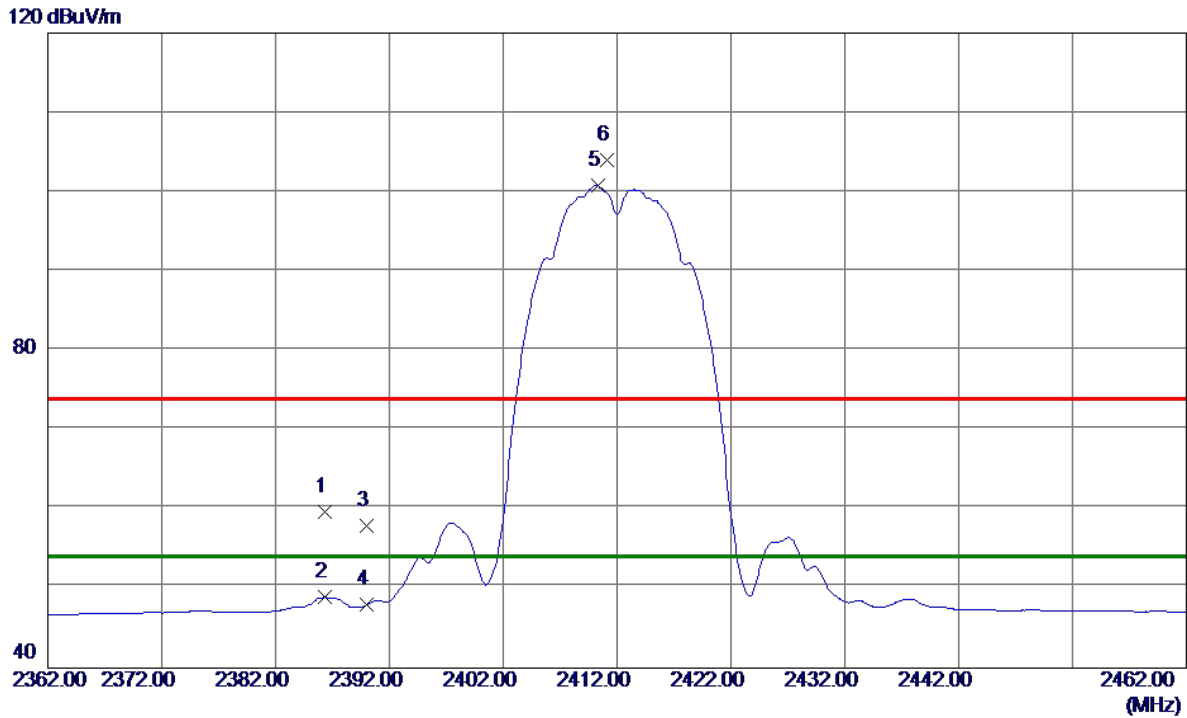


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.3000	26.69	33.04	59.73	74.00	-14.27	Peak	
2	2386.3000	15.90	33.04	48.94	54.00	-5.06	AVG	
3	2390.0000	24.89	33.06	57.95	74.00	-16.05	Peak	
4	2390.0000	14.87	33.06	47.93	54.00	-6.07	AVG	
5 *	2410.3000	67.62	33.13	100.75	54.00	46.75	AVG	No Limit
6	2411.1000	70.92	33.14	104.06	74.00	30.06	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

80 dBuV/m

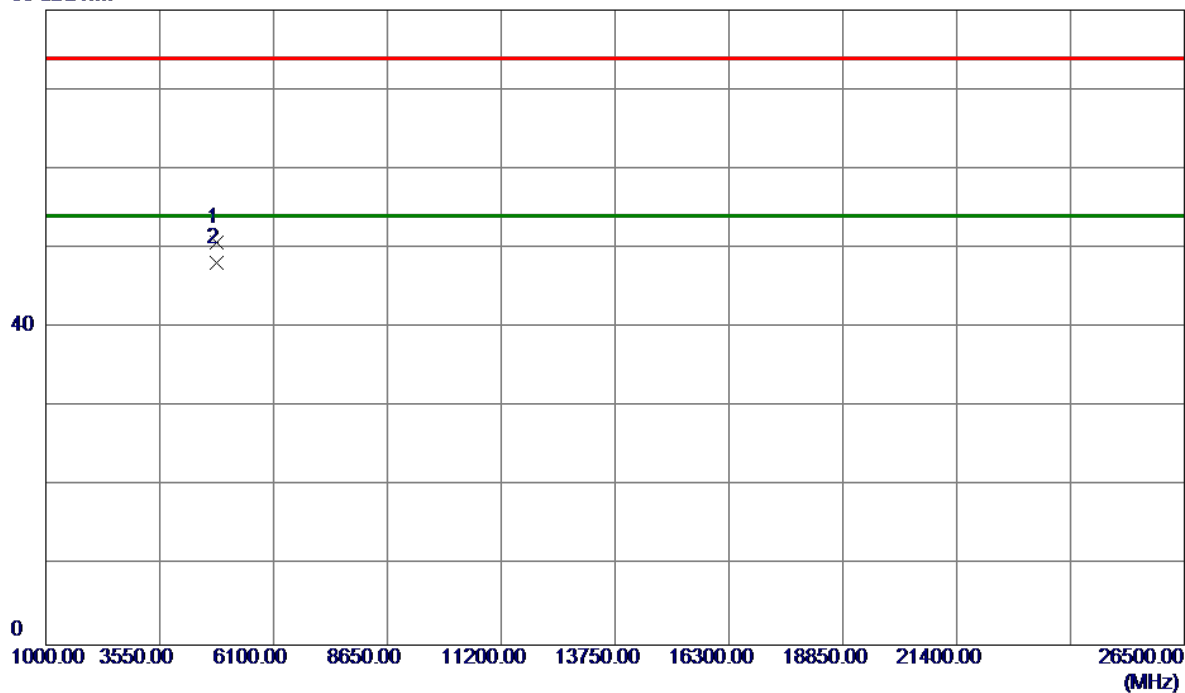


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4823.9340	44.02	6.66	50.68	74.00	-23.32	Peak	
2 *	4823.9420	41.46	6.66	48.12	54.00	-5.88	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical

120 dBuV/m

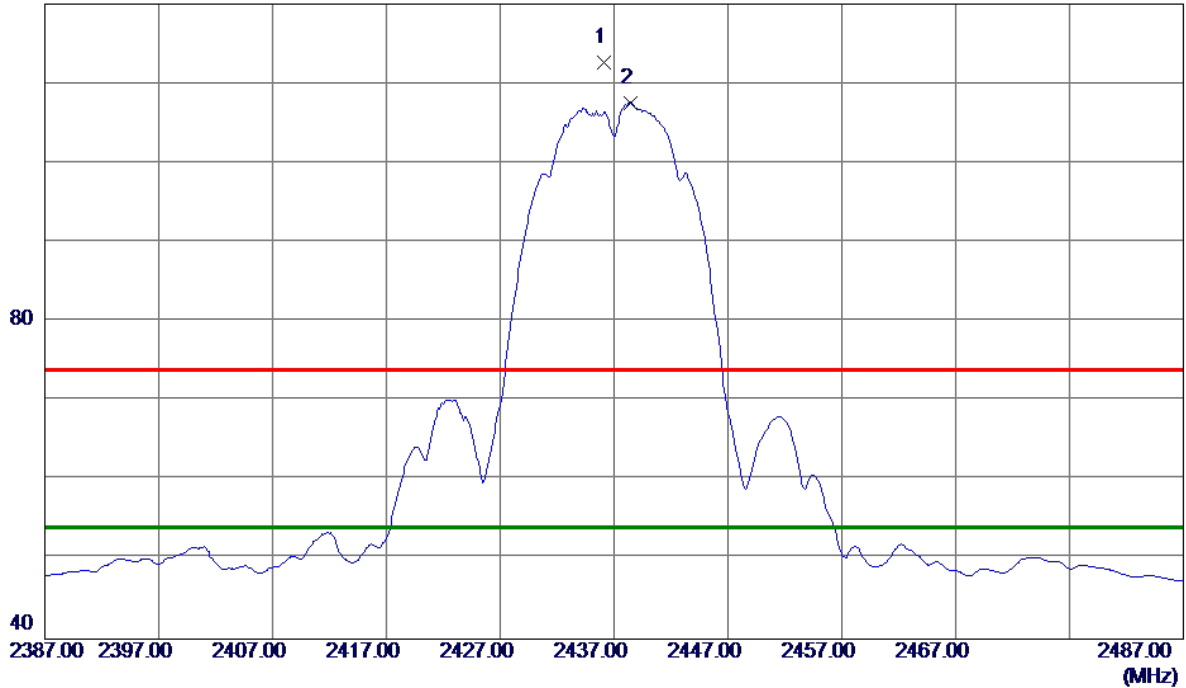


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.1000	79.43	33.23	112.66	74.00	38.66	Peak	No Limit
2 *	2438.4000	74.36	33.24	107.60	54.00	53.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical


80 dBuV/m

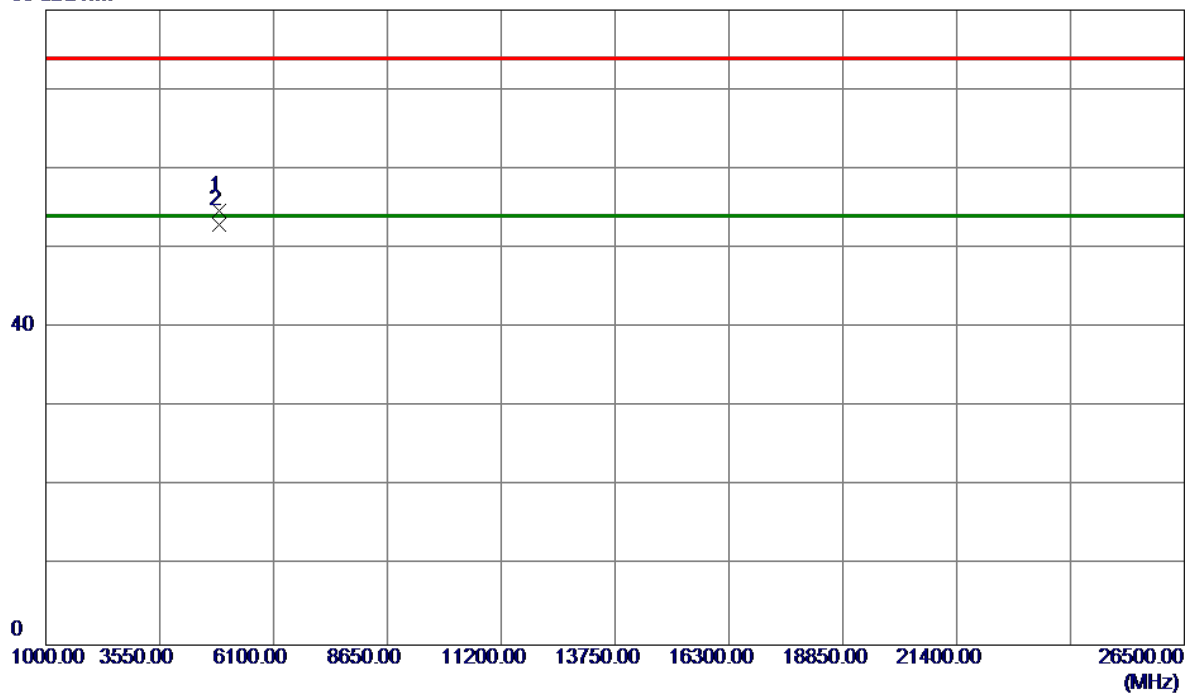

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9420	47.85	6.84	54.69	74.00	-19.31	Peak	
2 *	4873.9920	46.05	6.84	52.89	54.00	-1.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

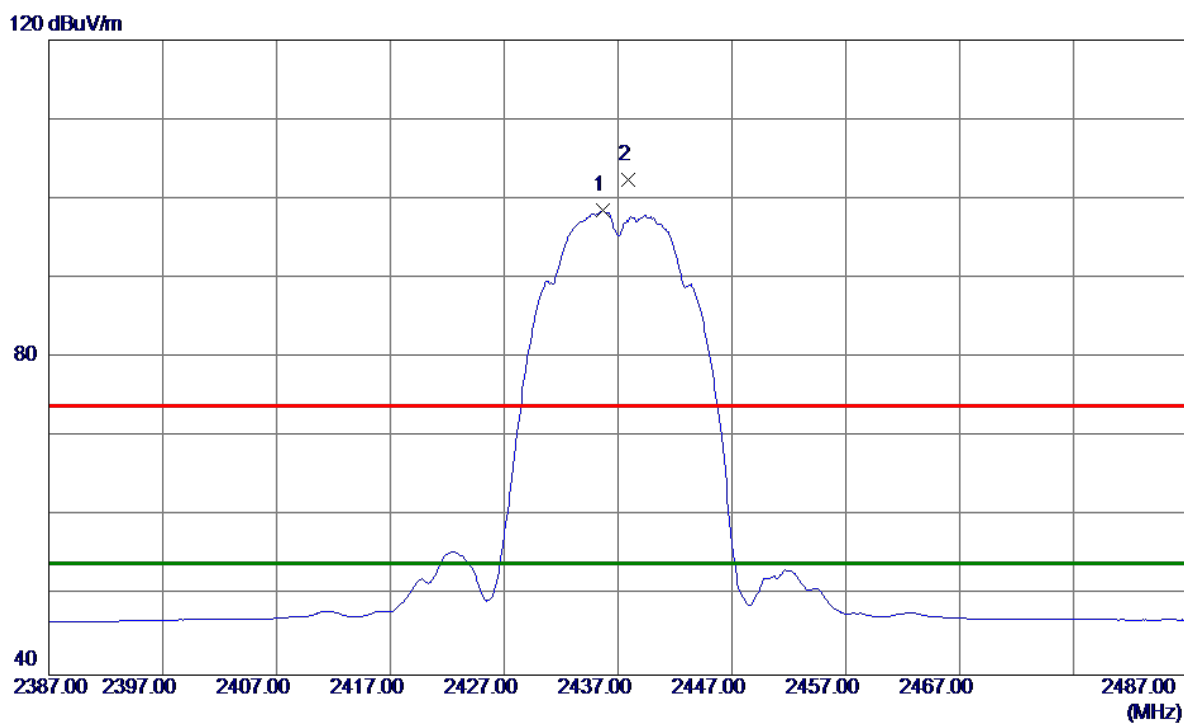


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.7000	65.26	33.23	98.49	54.00	44.49	AVG	No Limit
2	2437.9000	69.21	33.24	102.45	74.00	28.45	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal


80 dBuV/m

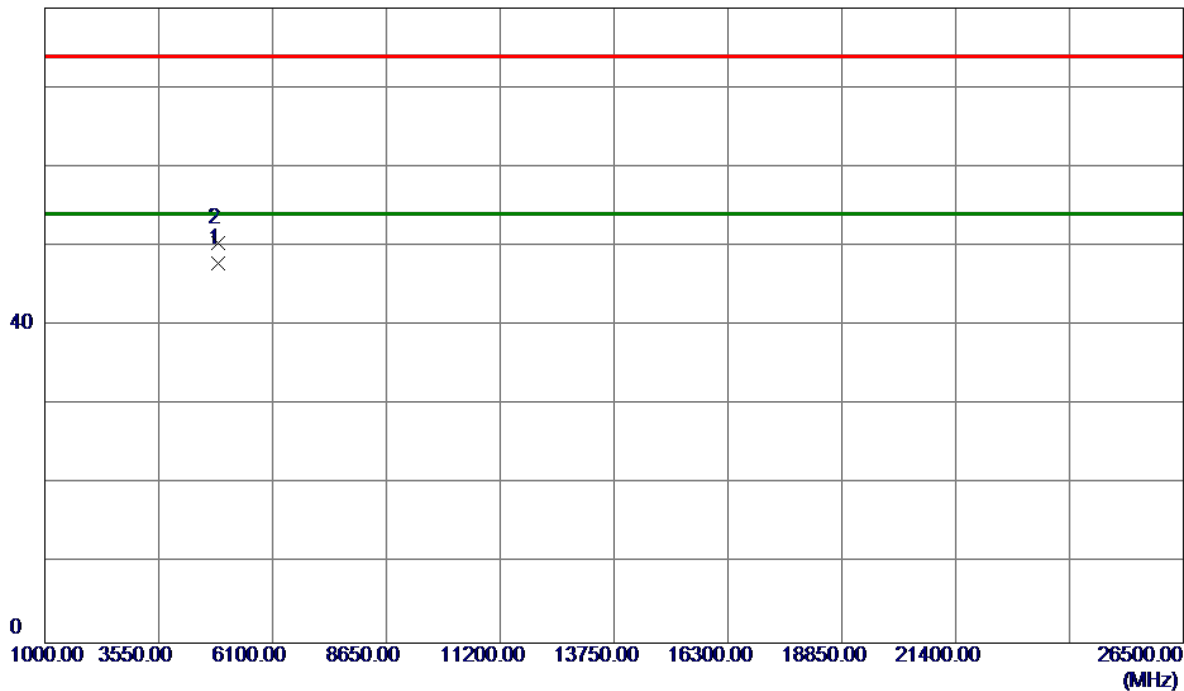

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9260	41.07	6.84	47.91	54.00	-6.09	AVG	
2	4873.9270	43.62	6.84	50.46	74.00	-23.54	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical

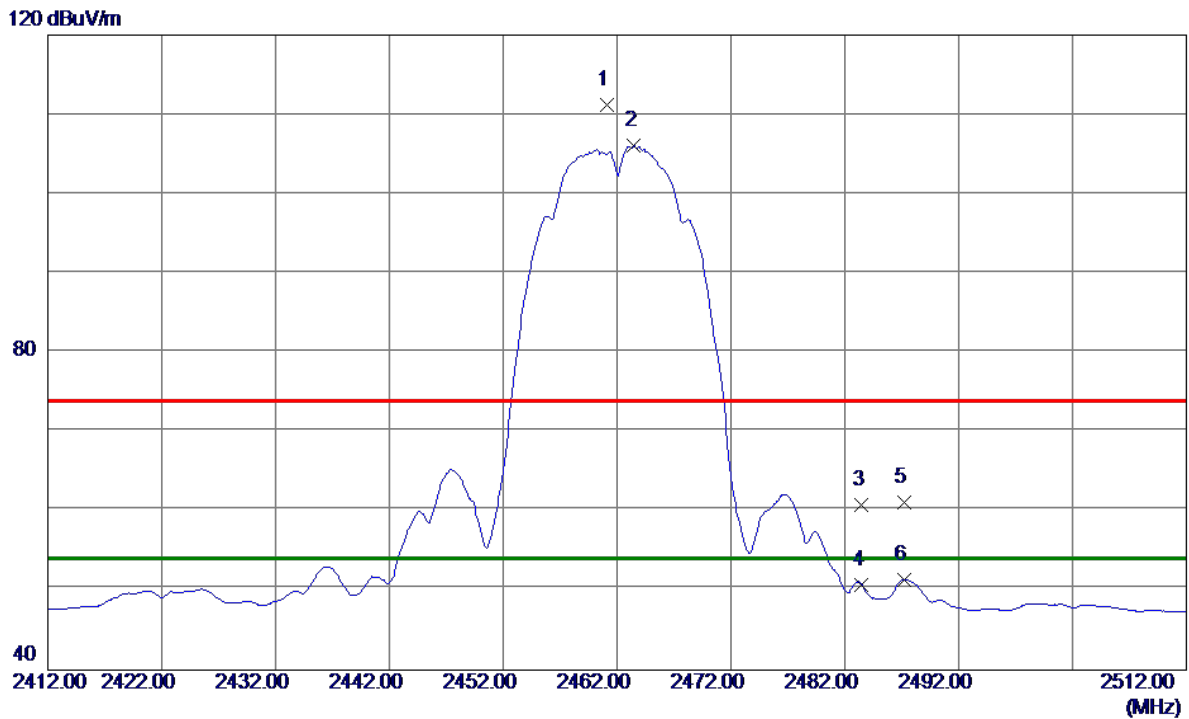


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.1000	77.85	33.32	111.17	74.00	37.17	Peak	No Limit
2 *	2463.5000	72.70	33.33	106.03	54.00	52.03	AVG	No Limit
3	2483.5000	27.40	33.41	60.81	74.00	-13.19	Peak	
4	2483.5000	17.37	33.41	50.78	54.00	-3.22	AVG	
5	2487.2000	27.72	33.42	61.14	74.00	-12.86	Peak	
6	2487.2000	17.98	33.42	51.40	54.00	-2.60	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical


80 dBuV/m

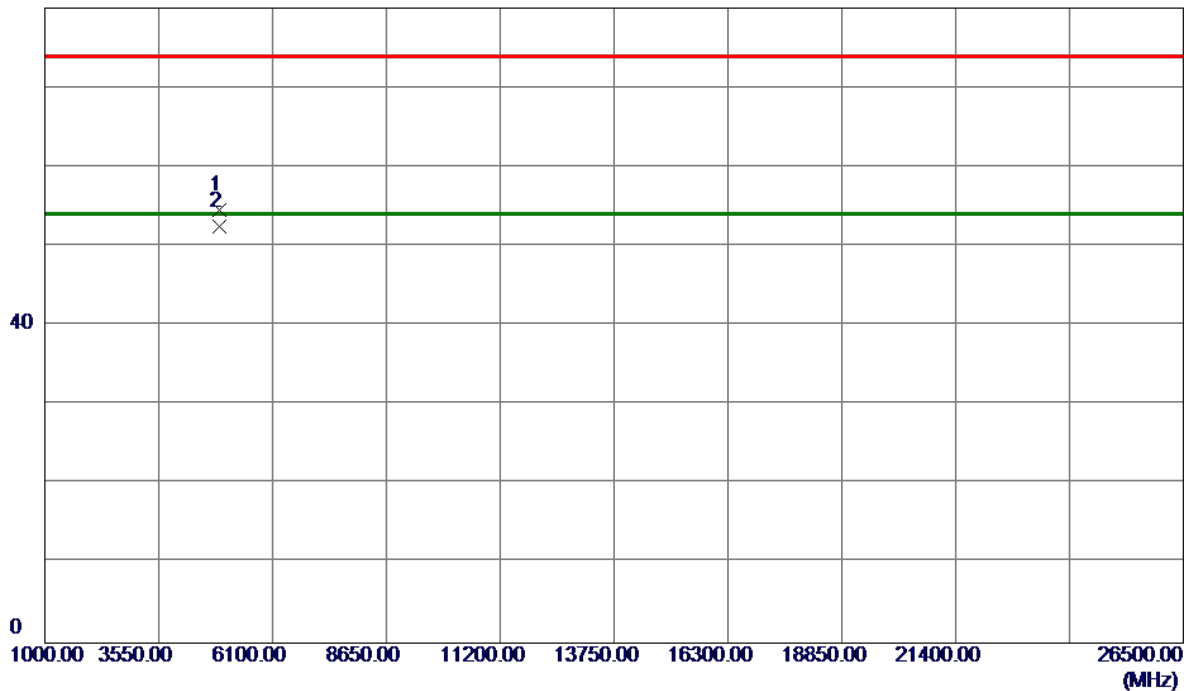

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8950	47.47	7.02	54.49	74.00	-19.51	Peak	
2 *	4923.9880	45.42	7.02	52.44	54.00	-1.56	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

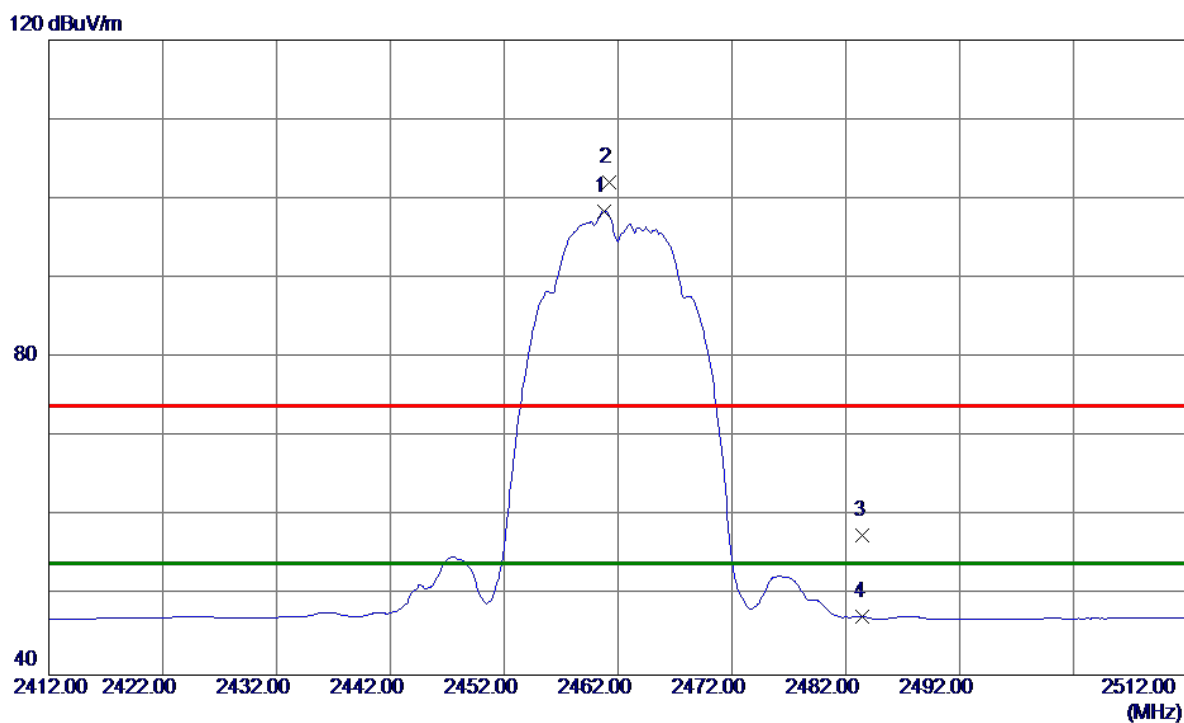


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.8000	65.12	33.32	98.44	54.00	44.44	AVG	No Limit
2	2461.2000	68.83	33.32	102.15	74.00	28.15	Peak	No Limit
3	2483.5000	24.26	33.41	57.67	74.00	-16.33	Peak	
4	2483.5000	13.97	33.41	47.38	54.00	-6.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

80 dBuV/m

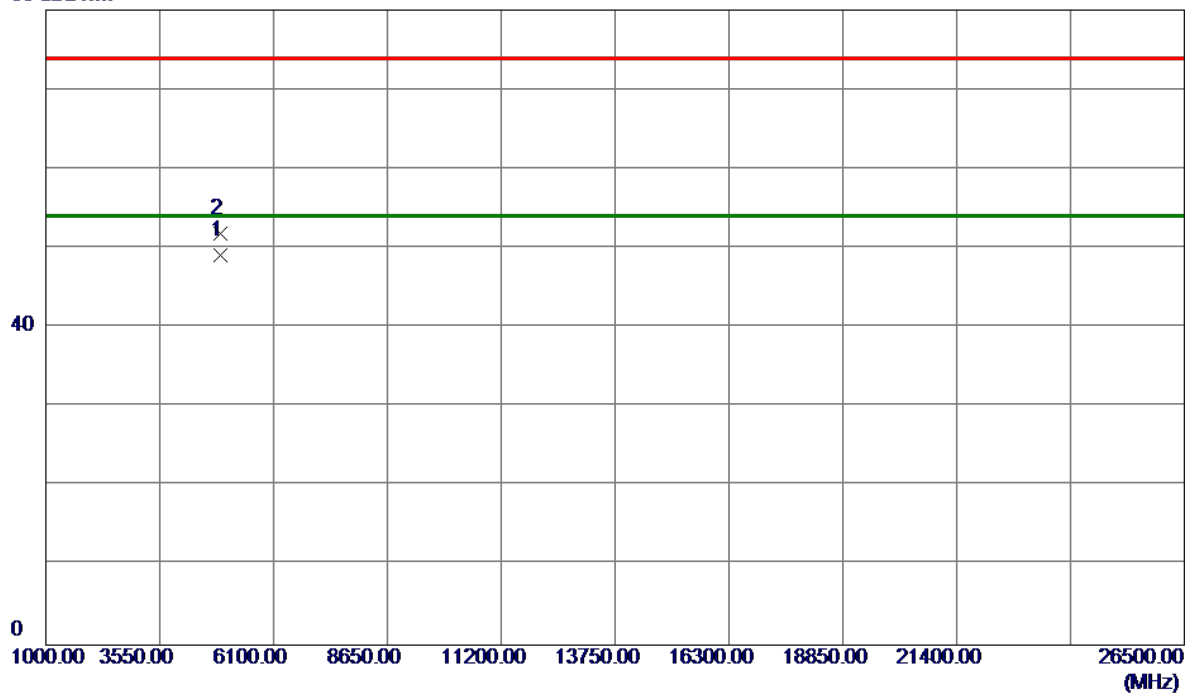


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9540	42.15	7.02	49.17	54.00	-4.83	AVG	
2	4924.0190	44.84	7.02	51.86	74.00	-22.14	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

120 dBuV/m

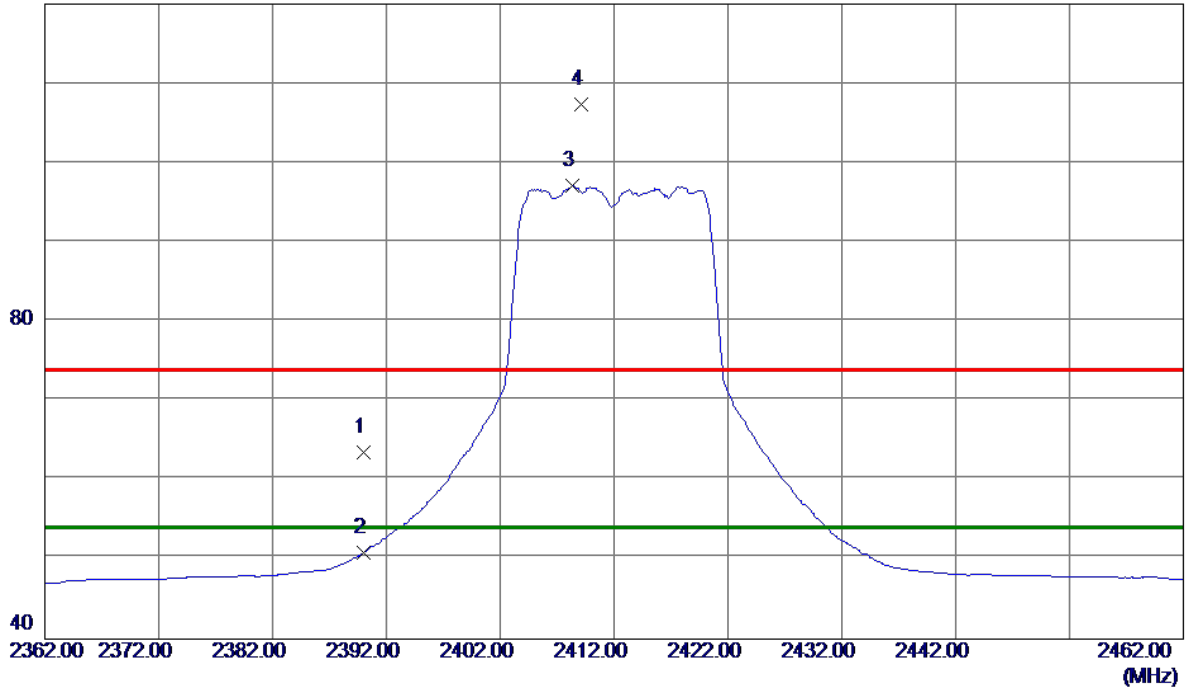


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	30.53	33.06	63.59	74.00	-10.41	Peak	
2	2390.0000	17.77	33.06	50.83	54.00	-3.17	AVG	
3 *	2408.3000	63.93	33.13	97.06	54.00	43.06	AVG	No Limit
4	2409.1000	74.16	33.13	107.29	74.00	33.29	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical


80 dBuV/m

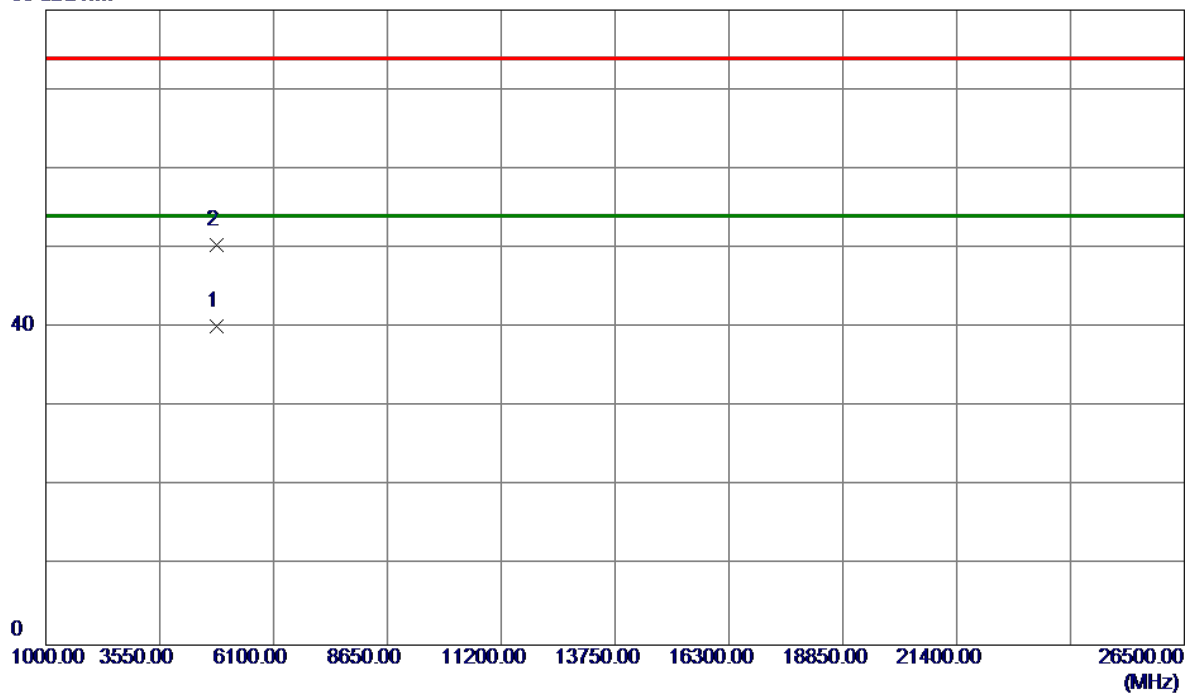

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4825.5000	33.46	6.66	40.12	54.00	-13.88	AVG	
2	4821.1800	43.82	6.65	50.47	74.00	-23.53	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

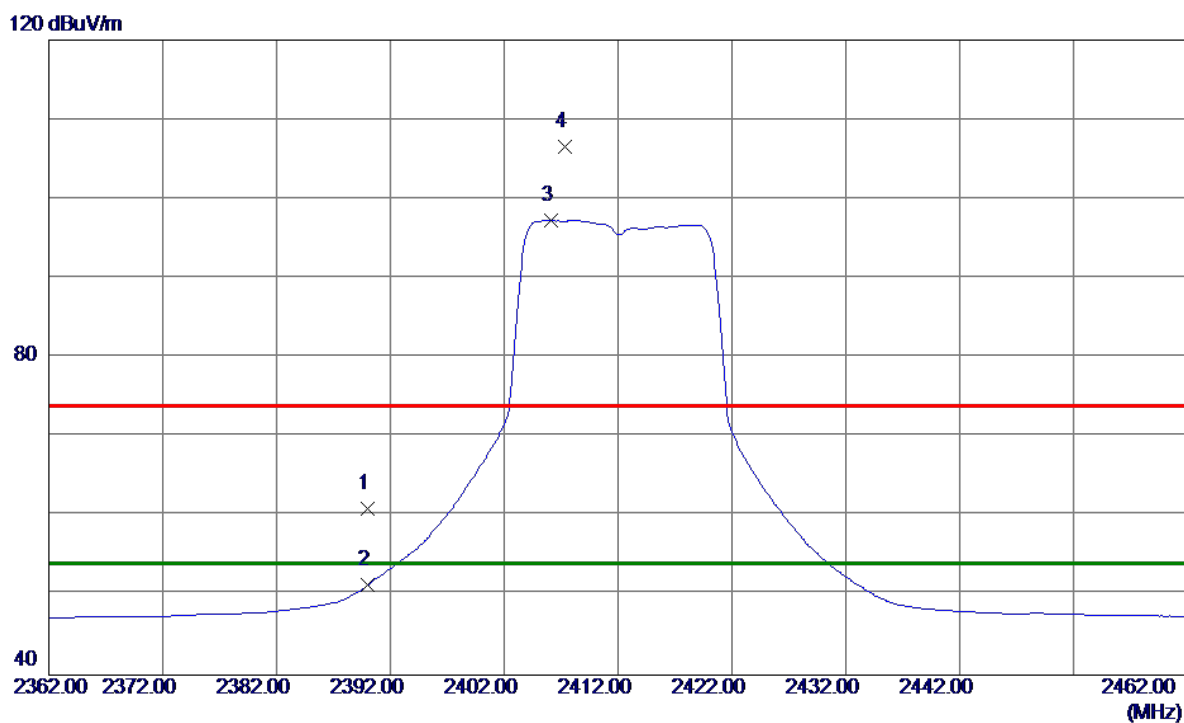


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	27.88	33.06	60.94	74.00	-13.06	Peak	
2	2390.0000	18.28	33.06	51.34	54.00	-2.66	AVG	
3 *	2406.1000	64.23	33.12	97.35	54.00	43.35	AVG	No Limit
4	2407.3000	73.48	33.12	106.60	74.00	32.60	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

80 dBuV/m

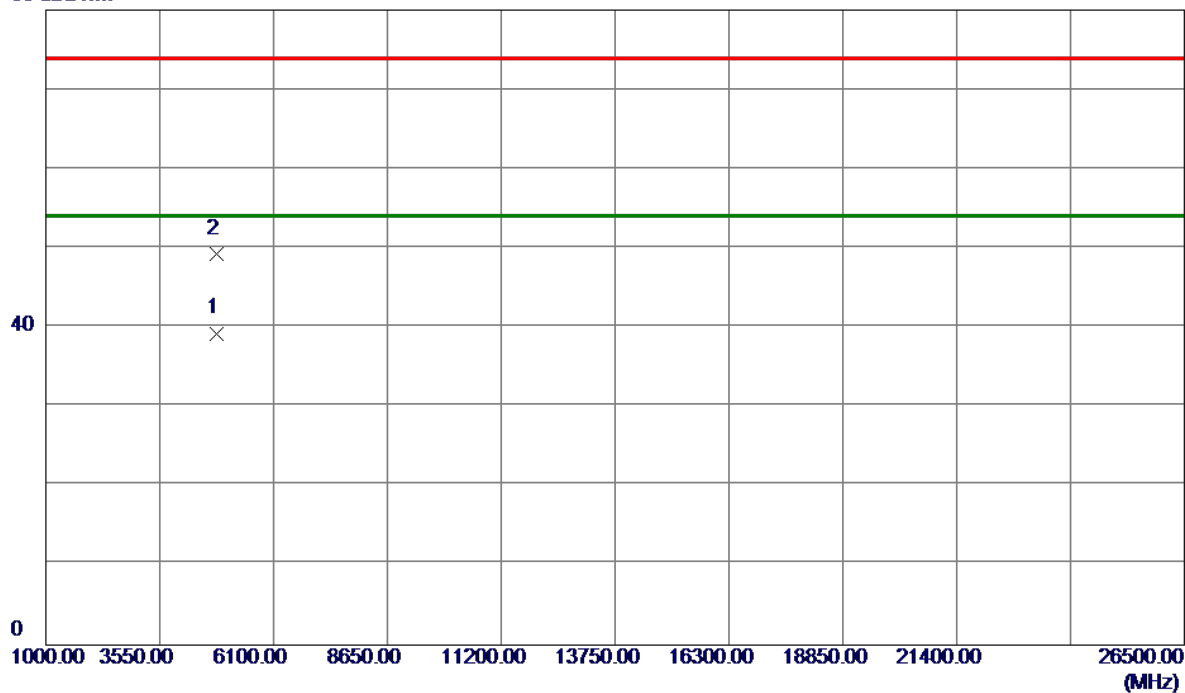


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4825.2000	32.62	6.66	39.28	54.00	-14.72	AVG	
2	4825.7400	42.67	6.66	49.33	74.00	-24.67	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical

120 dBuV/m

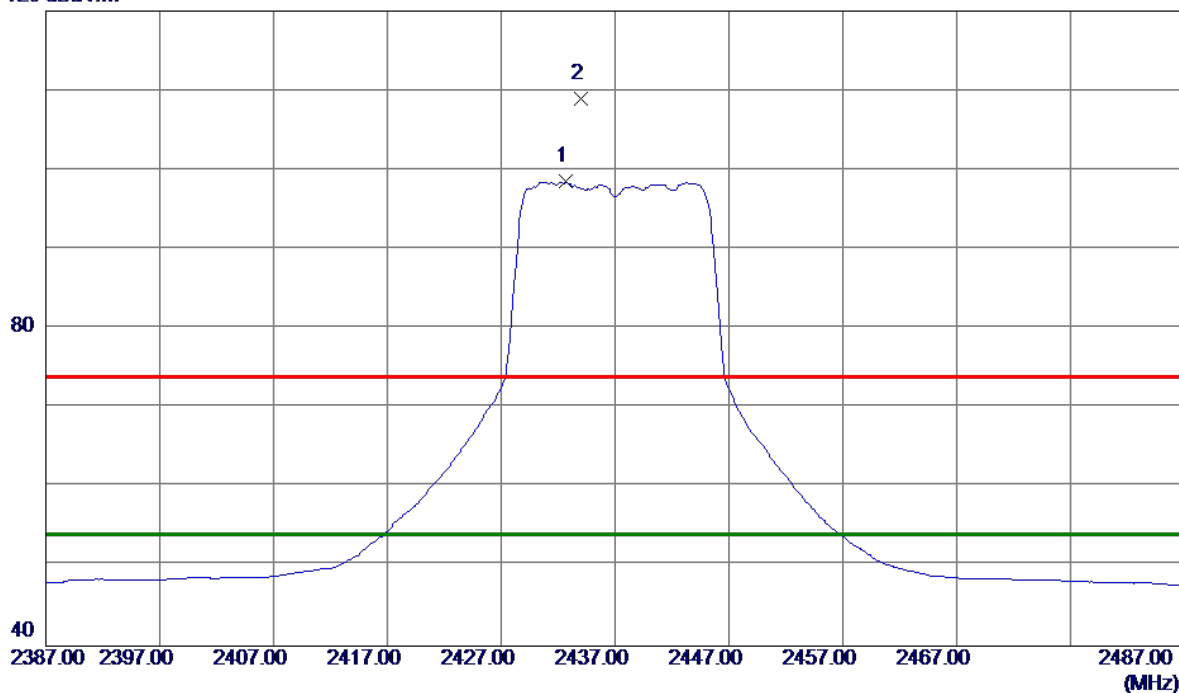


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2432.7000	65.29	33.22	98.51	54.00	44.51	AVG	No Limit
2	2434.0000	75.77	33.22	108.99	74.00	34.99	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical


80 dBuV/m

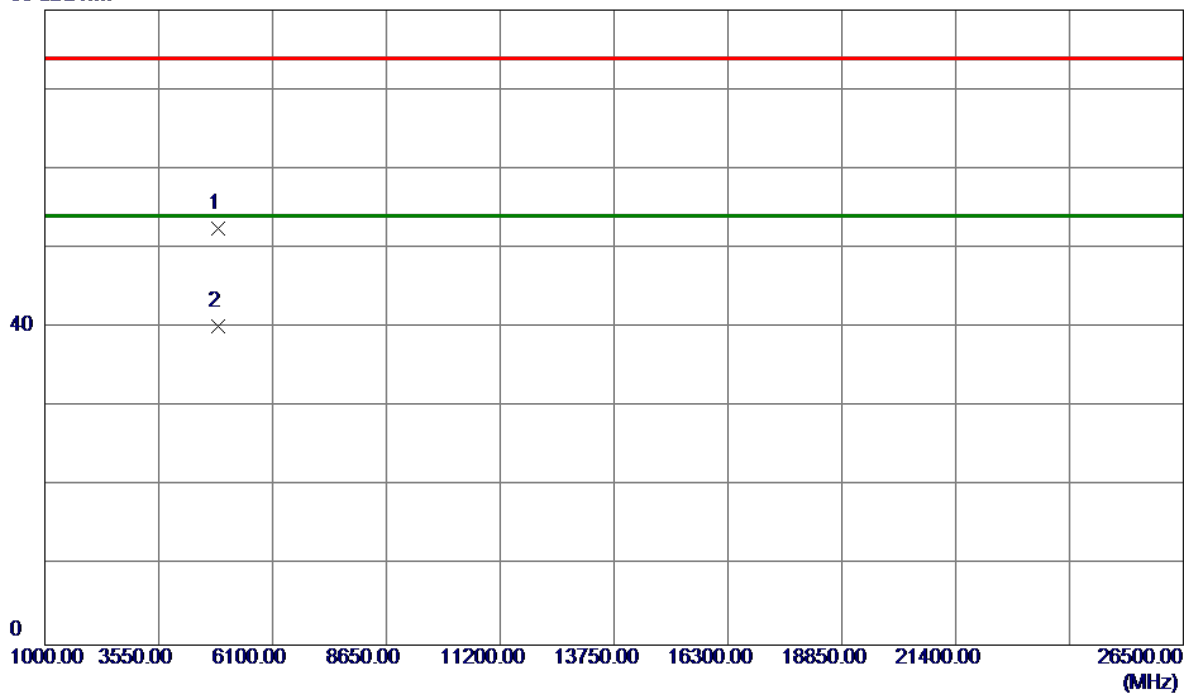

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0600	45.71	6.84	52.55	74.00	-21.45	Peak	
2 *	4874.3300	33.27	6.84	40.11	54.00	-13.89	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

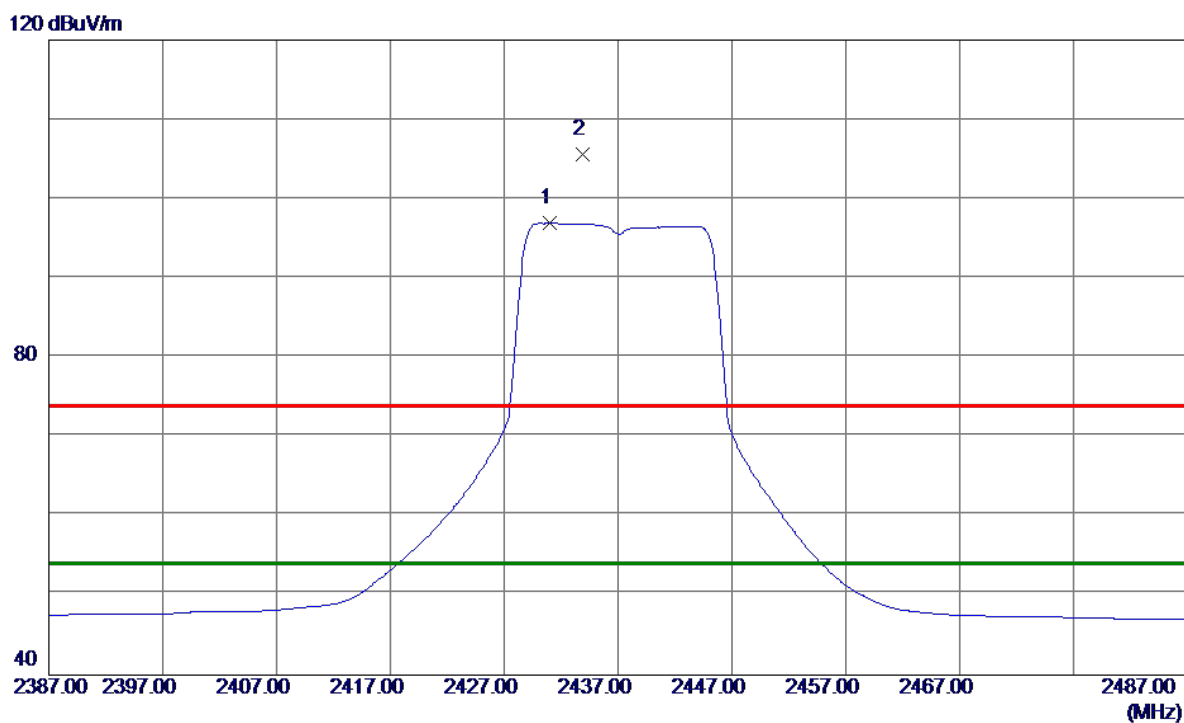


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2431.0000	63.76	33.21	96.97	54.00	42.97	AVG	No Limit
2	2433.9000	72.39	33.22	105.61	74.00	31.61	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

80 dBuV/m

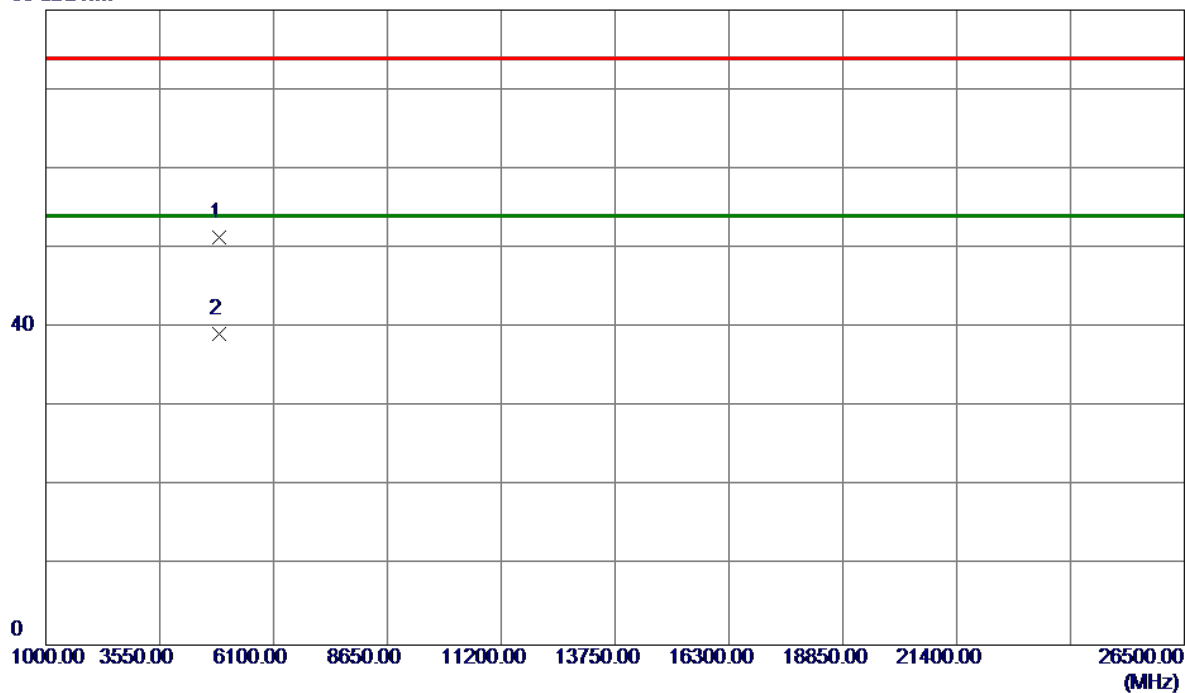


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.3600	44.51	6.84	51.35	74.00	-22.65	Peak	
2 *	4875.6500	32.36	6.84	39.20	54.00	-14.80	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical

120 dBuV/m

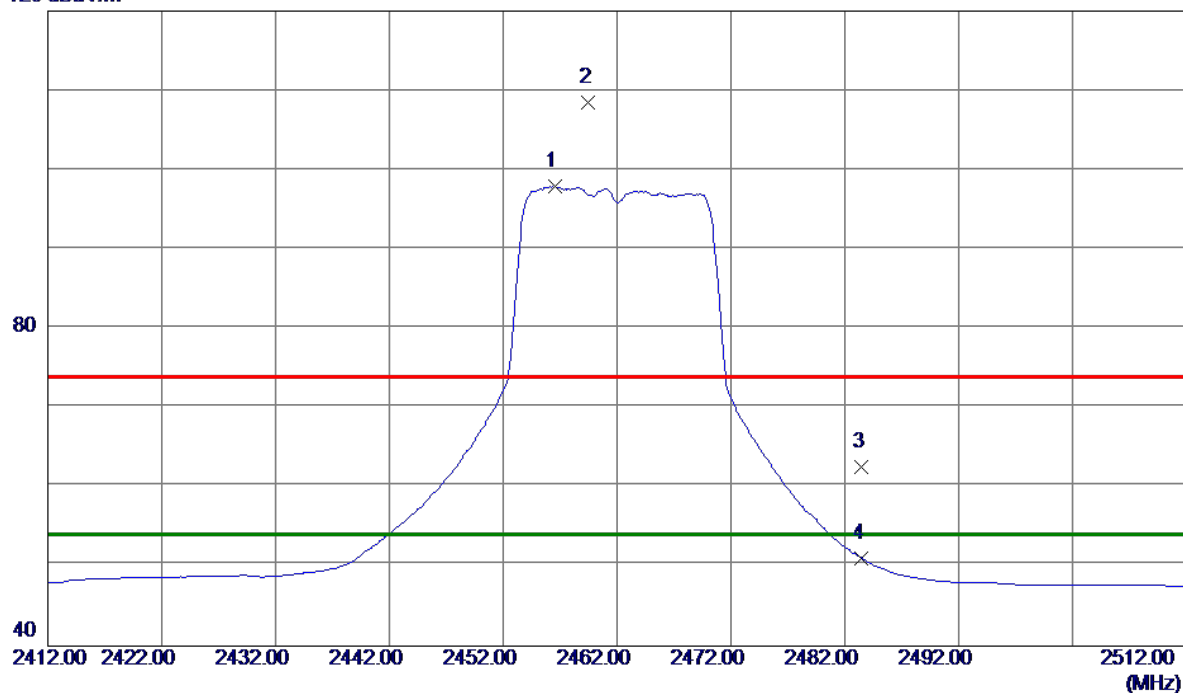


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2456.6000	64.56	33.31	97.87	54.00	43.87	AVG	No Limit
2	2459.5000	75.12	33.32	108.44	74.00	34.44	Peak	No Limit
3	2483.5000	29.14	33.41	62.55	74.00	-11.45	Peak	
4	2483.5000	17.68	33.41	51.09	54.00	-2.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical


80 dBuV/m

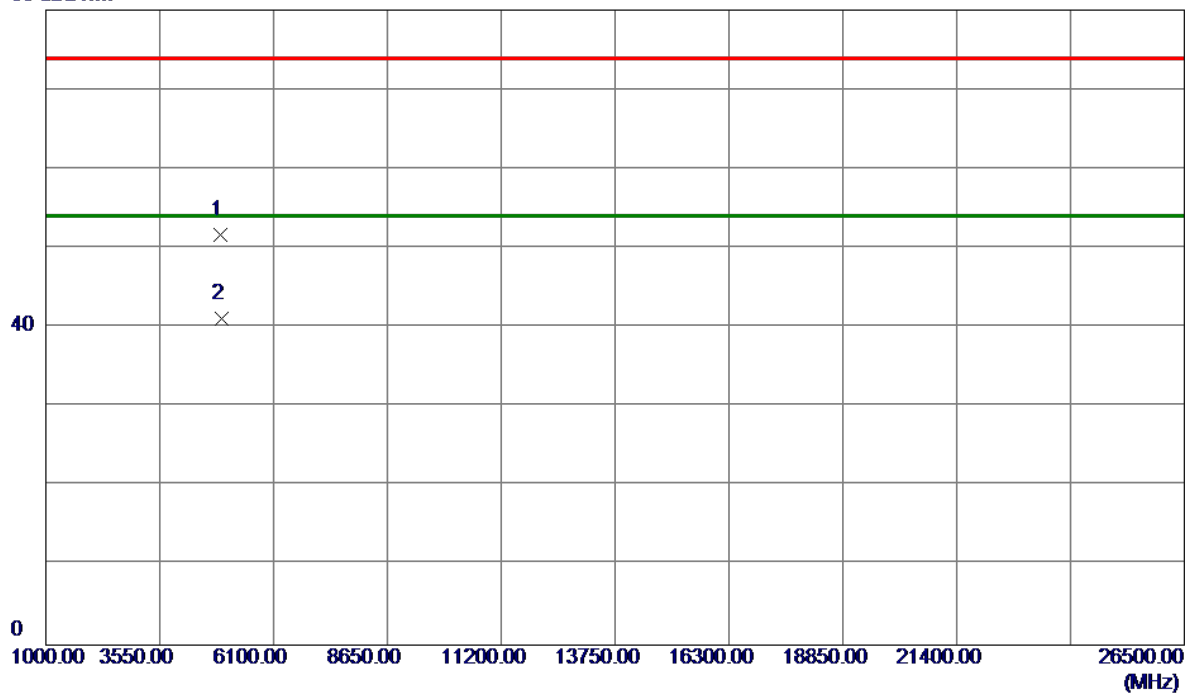

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4921.2000	44.67	7.01	51.68	74.00	-22.32	Peak	
2 *	4925.5000	34.08	7.02	41.10	54.00	-12.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal

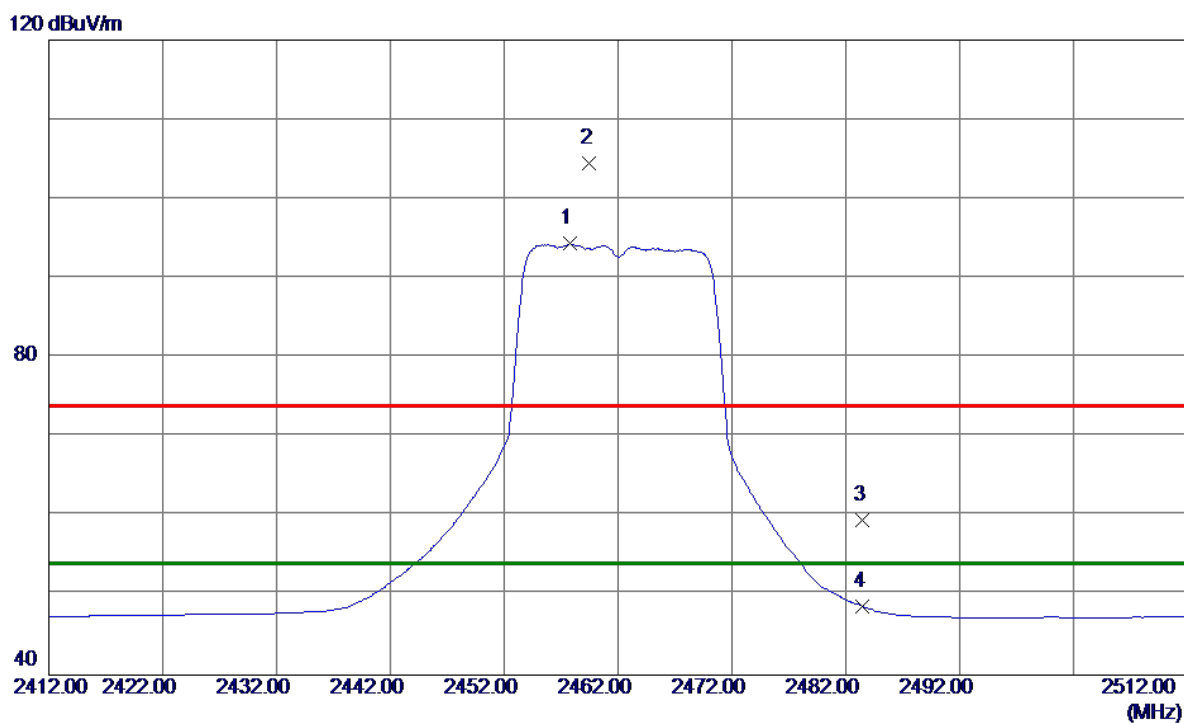


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2457.8000	61.03	33.31	94.34	54.00	40.34	AVG	No Limit
2	2459.5000	71.18	33.32	104.50	74.00	30.50	Peak	No Limit
3	2483.5000	26.13	33.41	59.54	74.00	-14.46	Peak	
4	2483.5000	15.24	33.41	48.65	54.00	-5.35	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal


80 dBuV/m

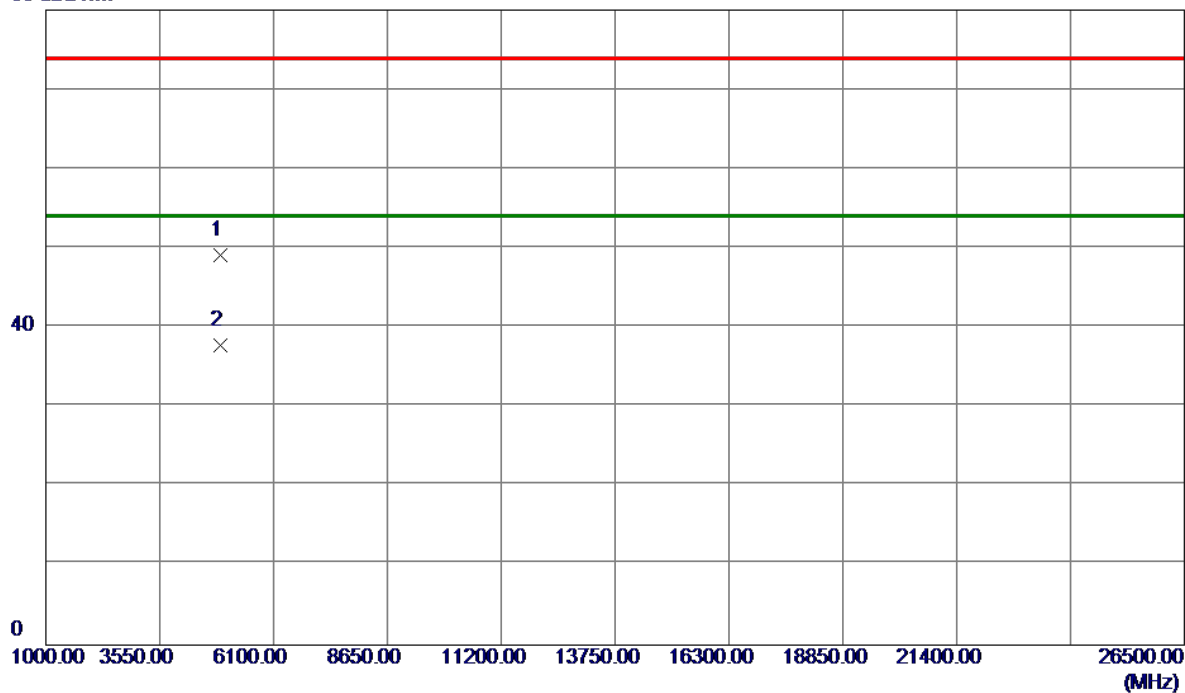

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4921.2500	42.10	7.01	49.11	74.00	-24.89	Peak	
2 *	4921.7500	30.78	7.01	37.79	54.00	-16.21	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

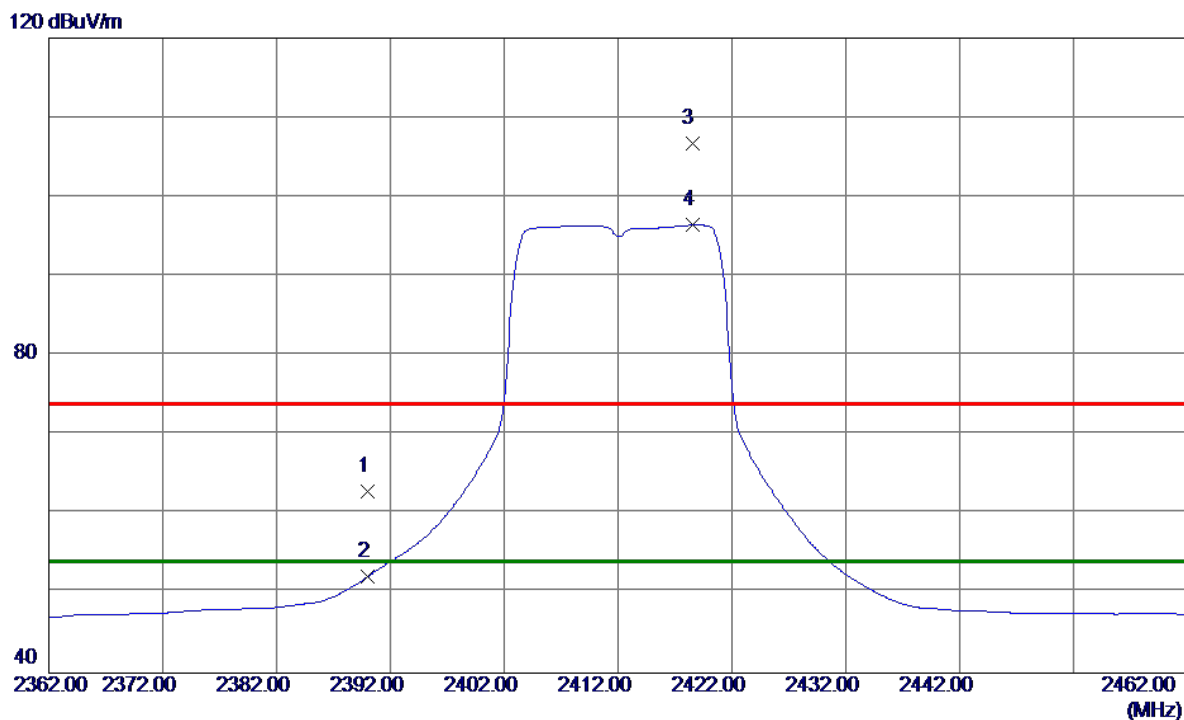


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	29.82	33.06	62.88	74.00	-11.12	Peak	
2	2390.0000	19.08	33.06	52.14	54.00	-1.86	AVG	
3	2418.5000	73.61	33.16	106.77	74.00	32.77	Peak	No Limit
4 *	2418.6000	63.26	33.16	96.42	54.00	42.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical


80 dBuV/m

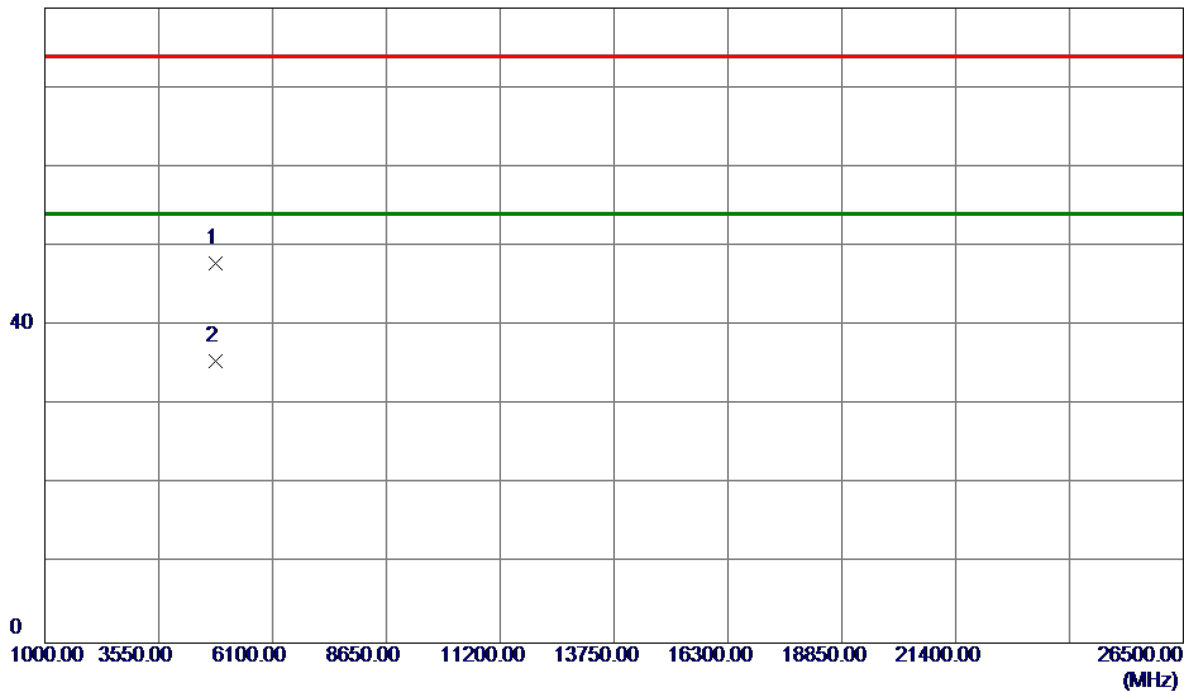

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.8400	41.26	6.66	47.92	74.00	-26.08	Peak	
2 *	4825.2200	28.80	6.66	35.46	54.00	-18.54	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal

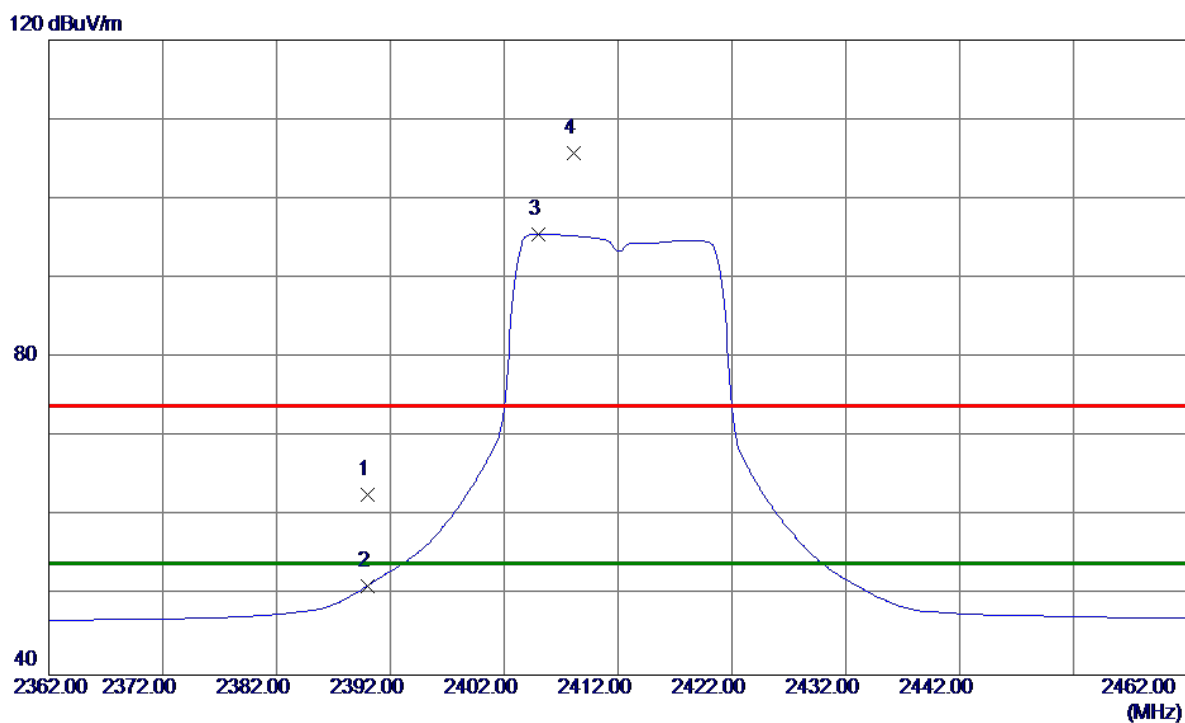


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	29.68	33.06	62.74	74.00	-11.26	Peak	
2	2390.0000	18.21	33.06	51.27	54.00	-2.73	AVG	
3 *	2405.0000	62.40	33.11	95.51	54.00	41.51	AVG	No Limit
4	2408.1000	72.56	33.12	105.68	74.00	31.68	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal


80 dBuV/m

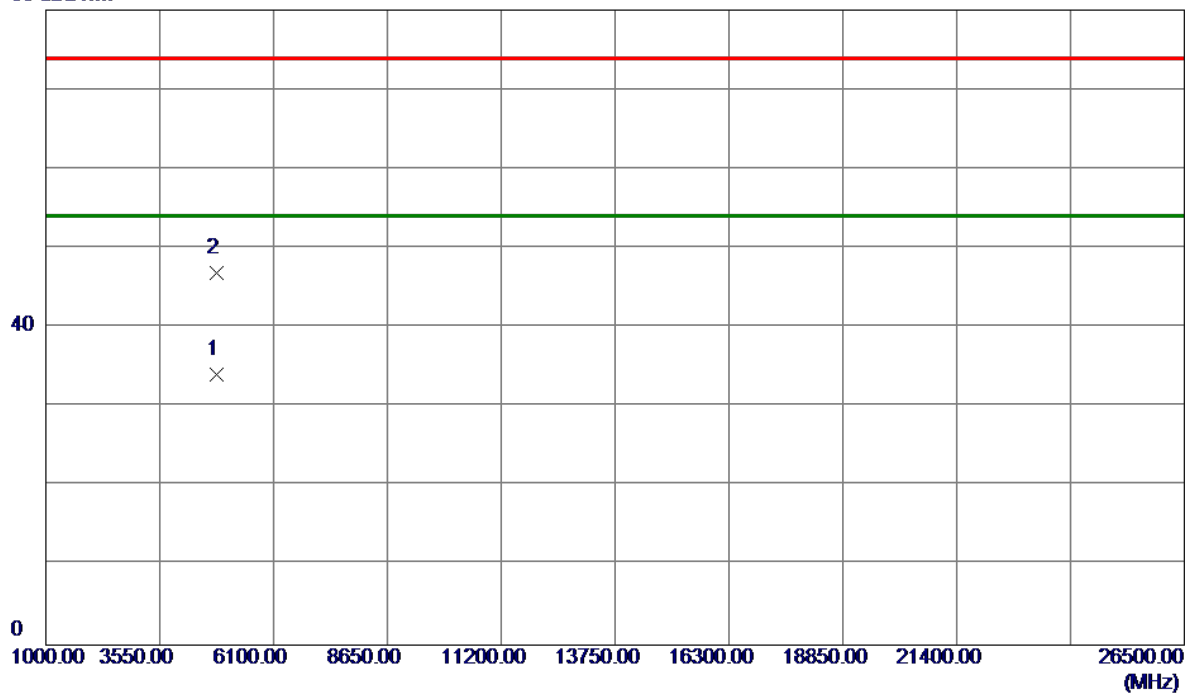

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4822.5800	27.45	6.65	34.10	54.00	-19.90	AVG	
2	4824.0200	40.15	6.66	46.81	74.00	-27.19	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical

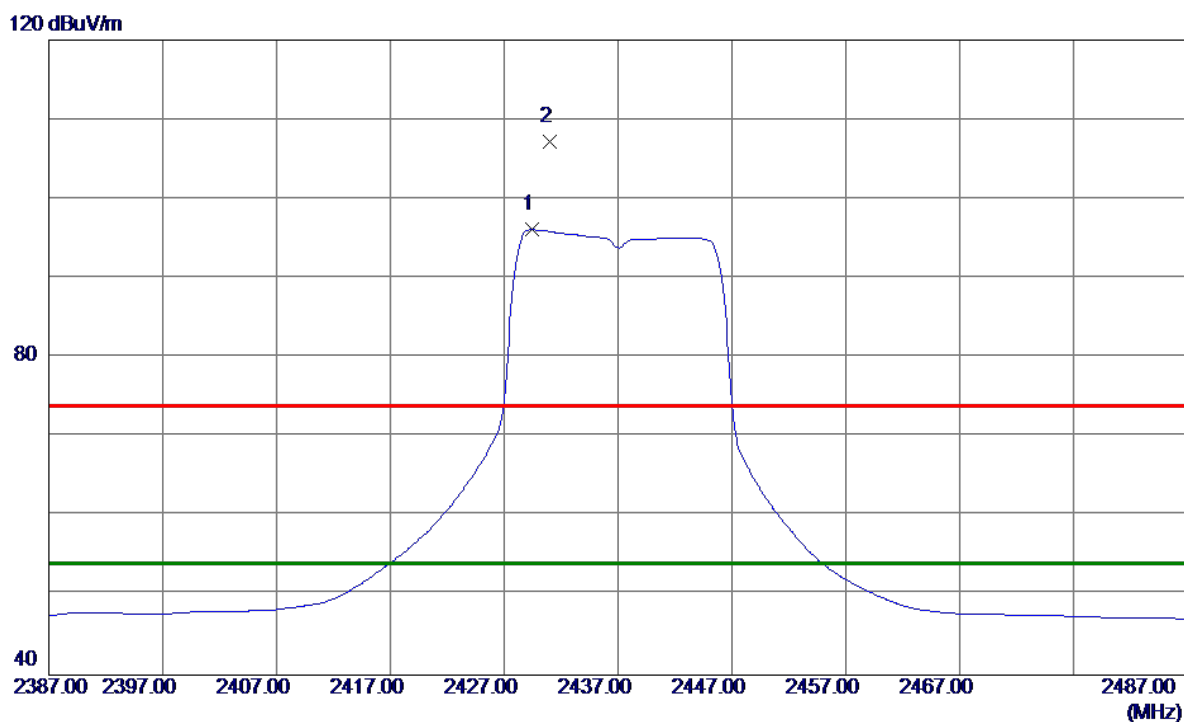


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2429.4000	62.89	33.20	96.09	54.00	42.09	AVG	No Limit
2	2431.0000	74.01	33.21	107.22	74.00	33.22	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical


80 dBuV/m

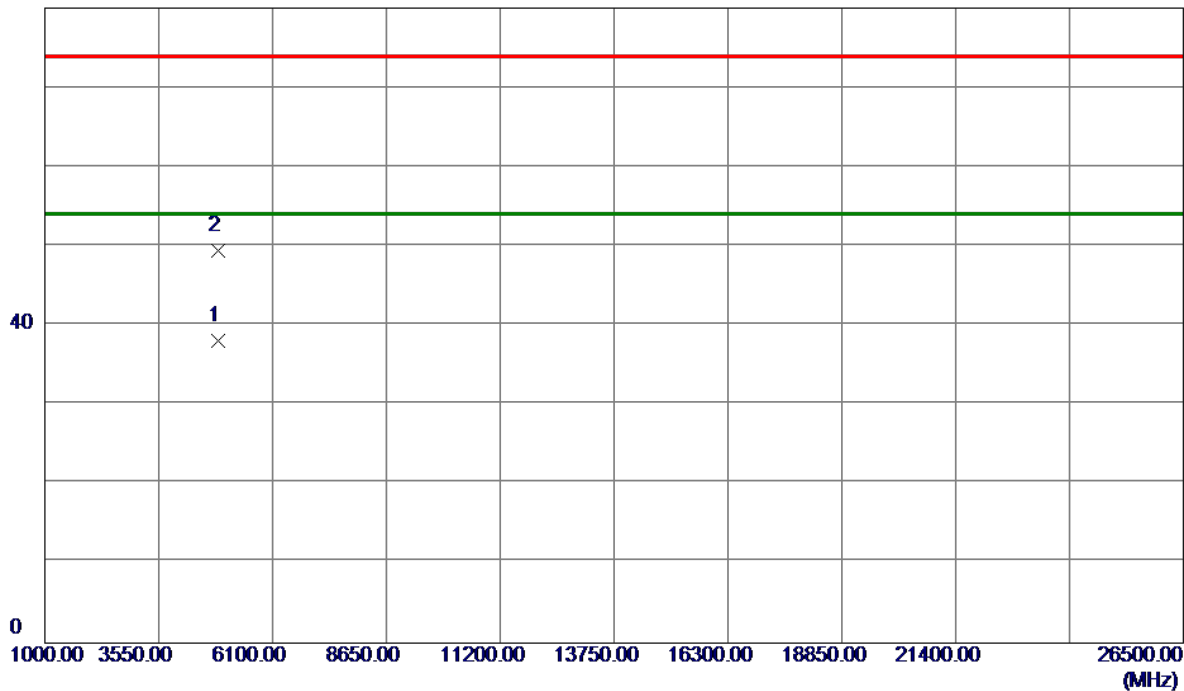

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.8500	31.19	6.83	38.02	54.00	-15.98	AVG	
2	4878.6500	42.61	6.85	49.46	74.00	-24.54	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

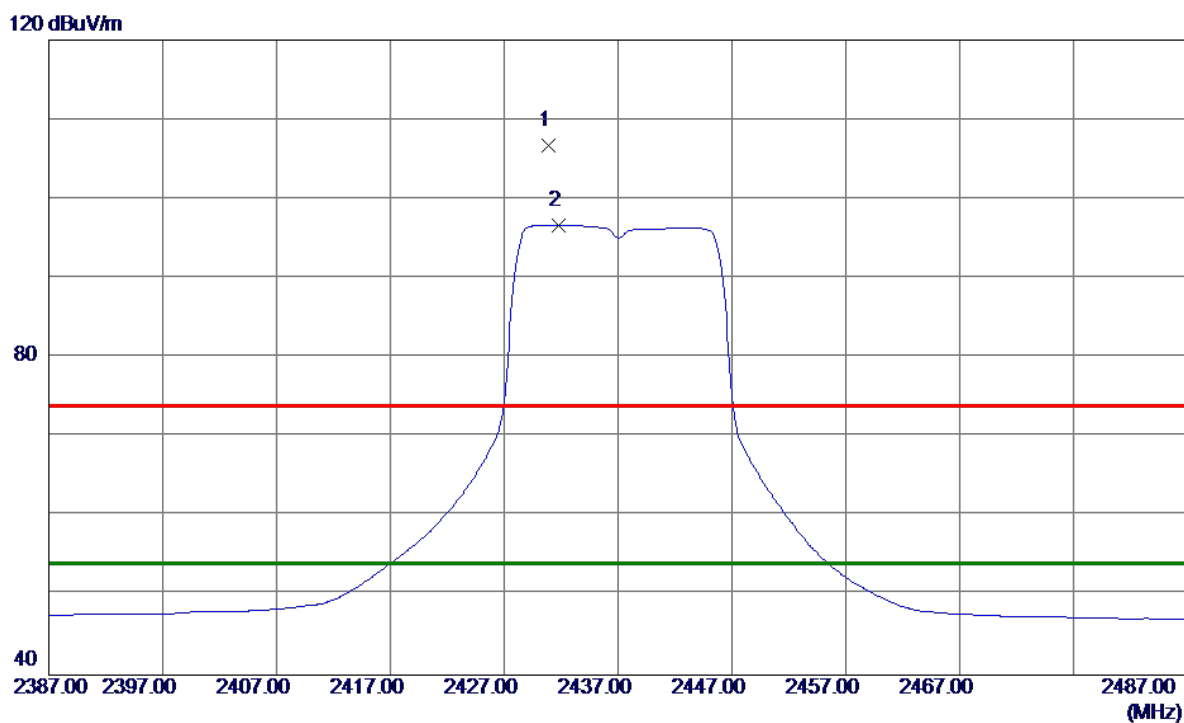


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2430.9000	73.59	33.21	106.80	74.00	32.80	Peak	No Limit
2 *	2431.8000	63.44	33.21	96.65	54.00	42.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

80 dBuV/m

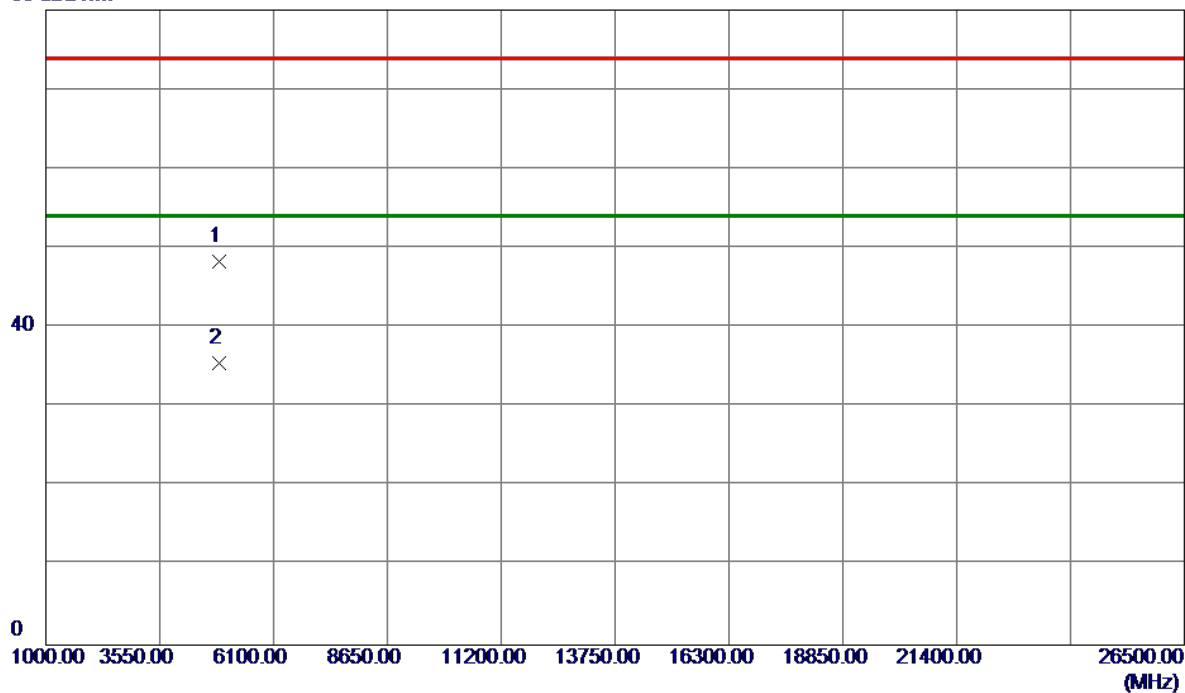


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.1000	41.47	6.84	48.31	74.00	-25.69	Peak	
2 *	4875.1500	28.67	6.84	35.51	54.00	-18.49	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

120 dBuV/m

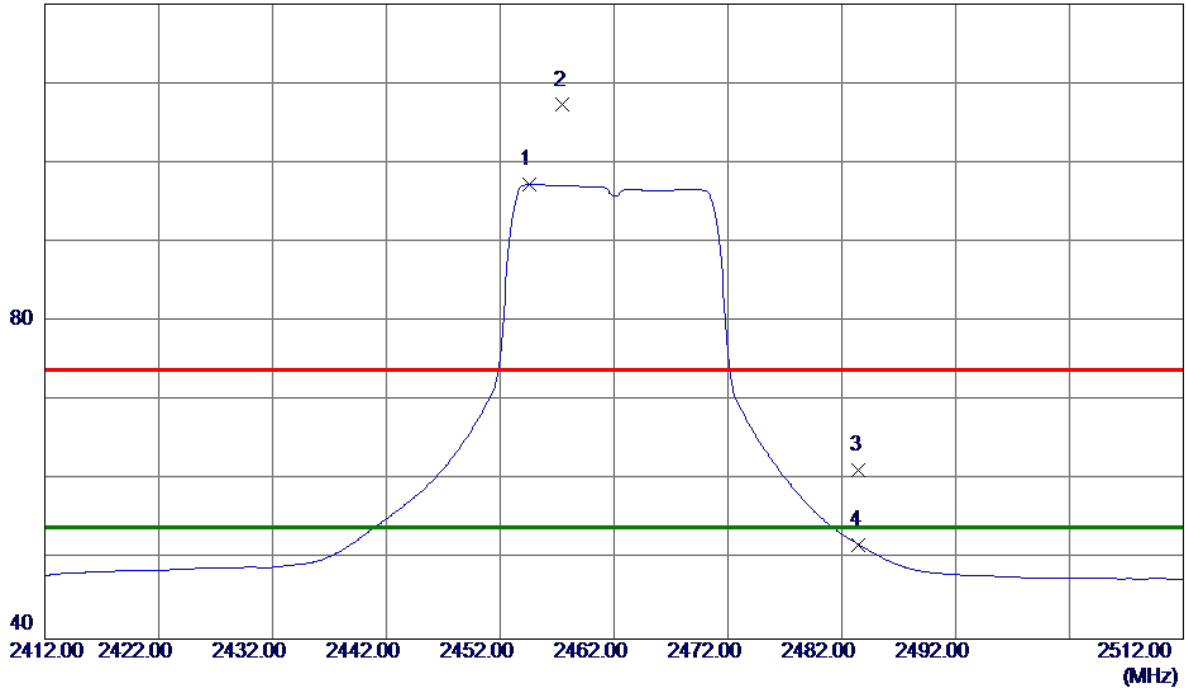


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.6000	63.97	33.30	97.27	54.00	43.27	AVG	No Limit
2	2457.5000	73.97	33.31	107.28	74.00	33.28	Peak	No Limit
3	2483.5000	27.90	33.41	61.31	74.00	-12.69	Peak	
4	2483.5000	18.48	33.41	51.89	54.00	-2.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical


80 dBuV/m

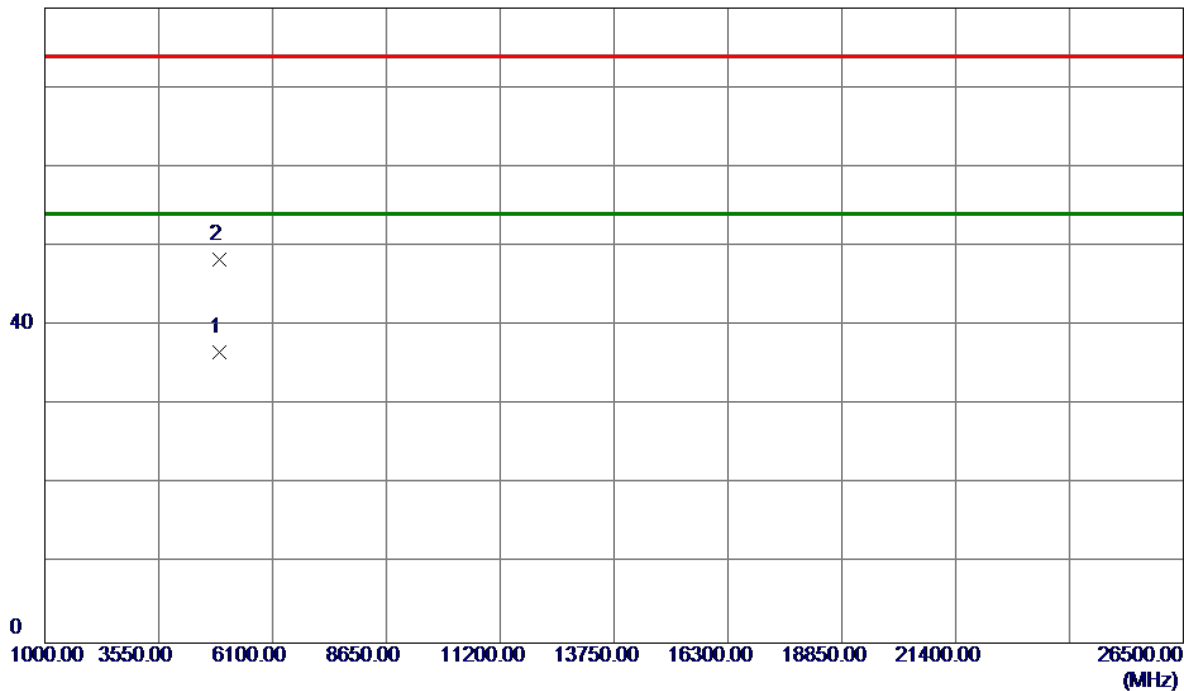

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4922.9500	29.70	7.01	36.71	54.00	-17.29	AVG	
2	4923.7500	41.24	7.02	48.26	74.00	-25.74	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

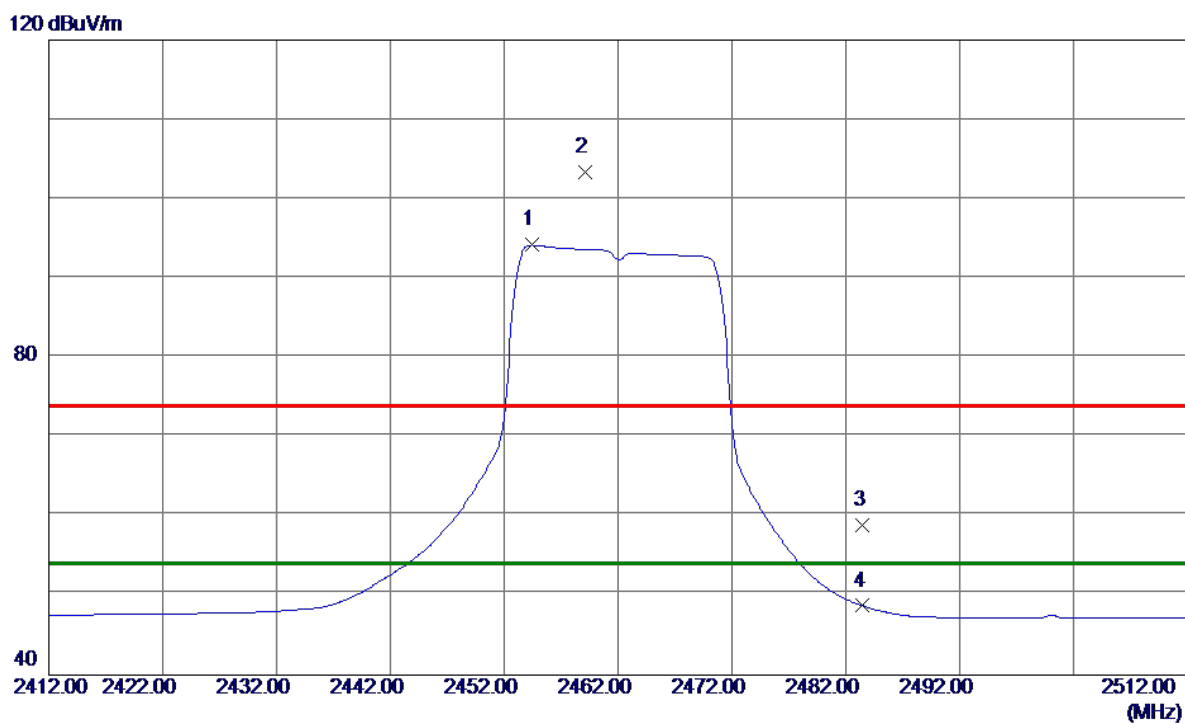


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.4000	60.87	33.30	94.17	54.00	40.17	AVG	No Limit
2	2459.1000	70.04	33.32	103.36	74.00	29.36	Peak	No Limit
3	2483.5000	25.52	33.41	58.93	74.00	-15.07	Peak	
4	2483.5000	15.31	33.41	48.72	54.00	-5.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal


80 dBuV/m

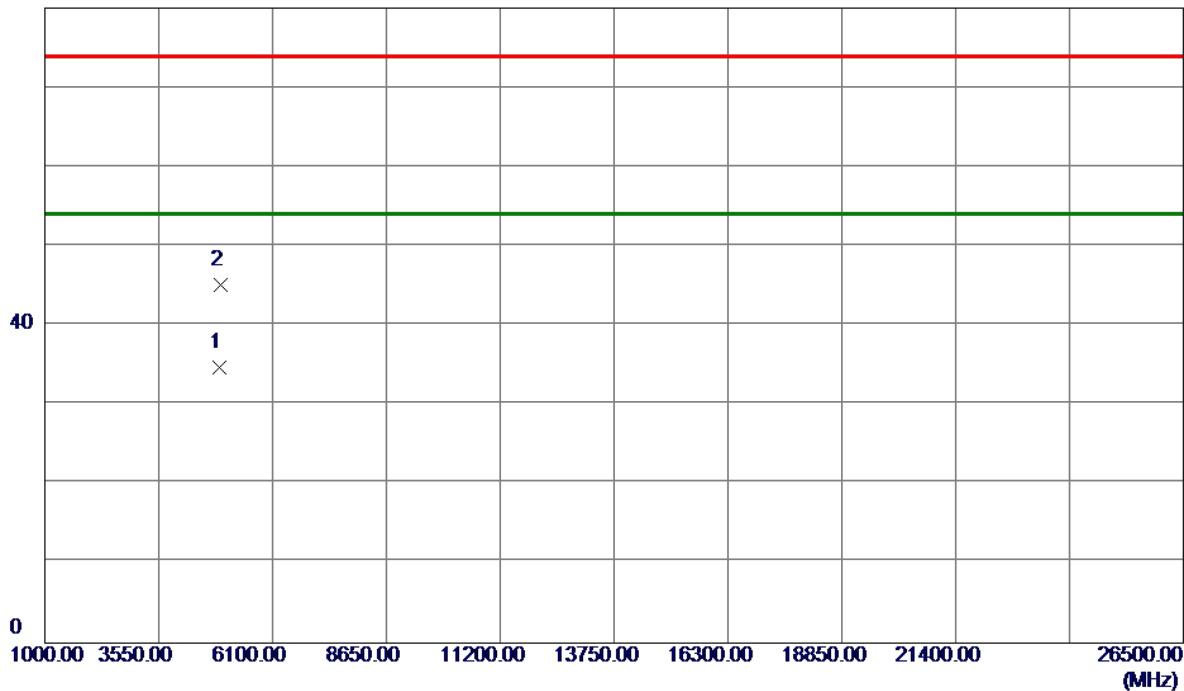

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.6500	27.66	7.02	34.68	54.00	-19.32	AVG	
2	4924.3500	38.09	7.02	45.11	74.00	-28.89	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical

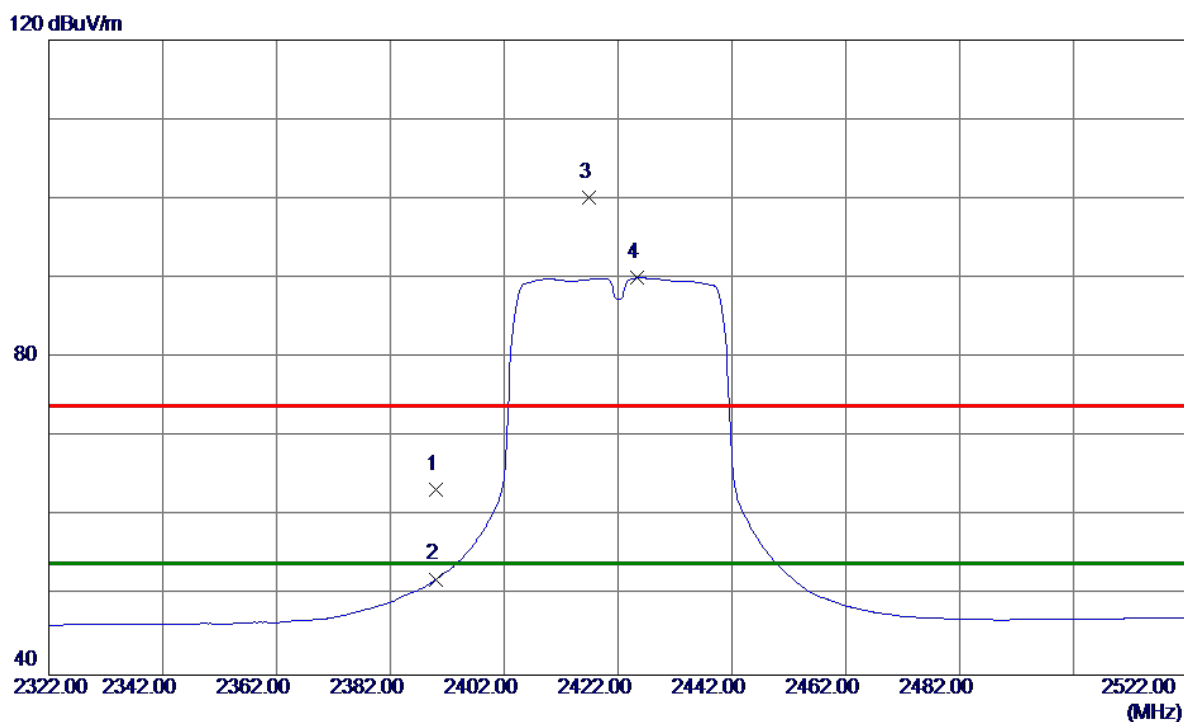


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	30.36	33.06	63.42	74.00	-10.58	Peak	
2	2390.0000	19.02	33.06	52.08	54.00	-1.92	AVG	
3	2416.8000	66.99	33.16	100.15	74.00	26.15	Peak	No Limit
4 *	2425.4000	56.83	33.19	90.02	54.00	36.02	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical


80 dBuV/m

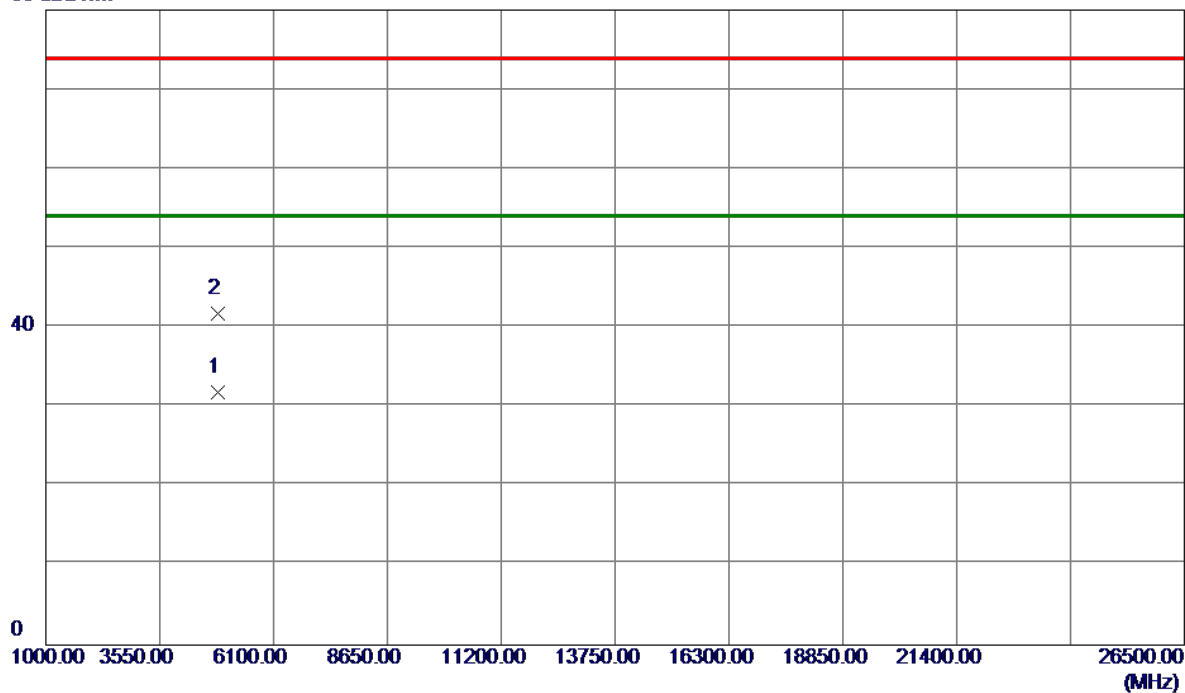

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4843.0500	25.08	6.73	31.81	54.00	-22.19	AVG	
2	4846.7000	34.98	6.74	41.72	74.00	-32.28	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

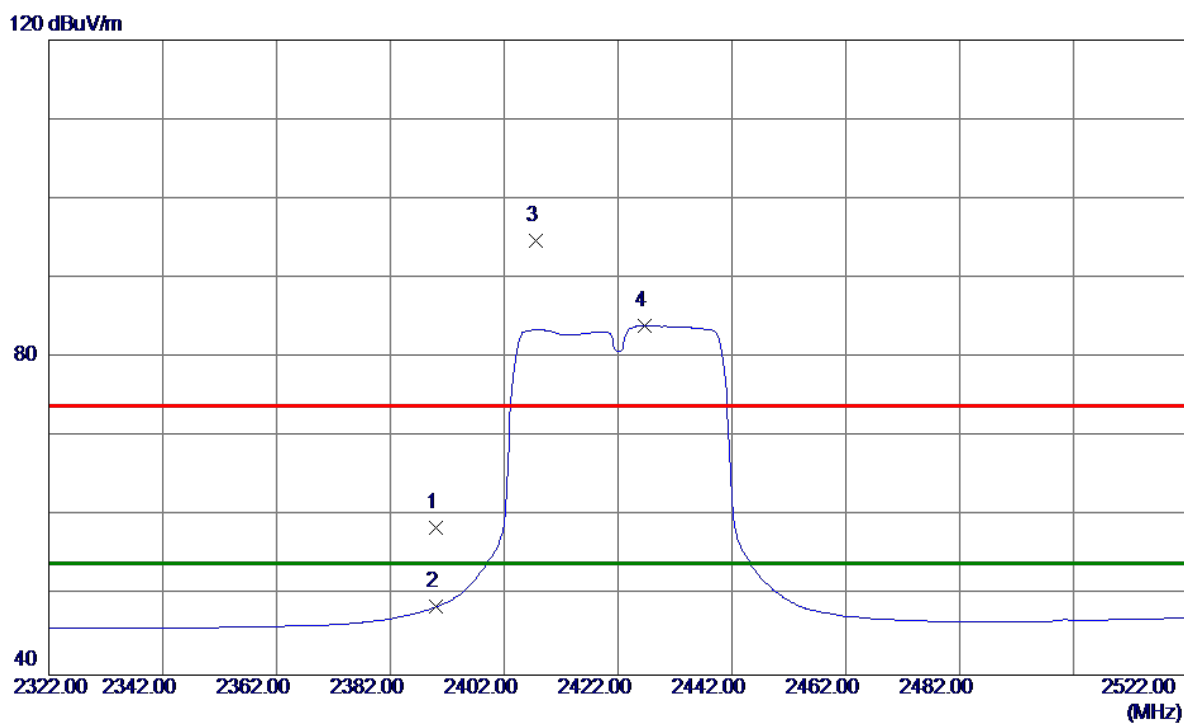


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.45	33.06	58.51	74.00	-15.49	Peak	
2	2390.0000	15.53	33.06	48.59	54.00	-5.41	AVG	
3	2407.6000	61.53	33.12	94.65	74.00	20.65	Peak	No Limit
4 *	2426.6000	50.79	33.19	83.98	54.00	29.98	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

80 dBuV/m

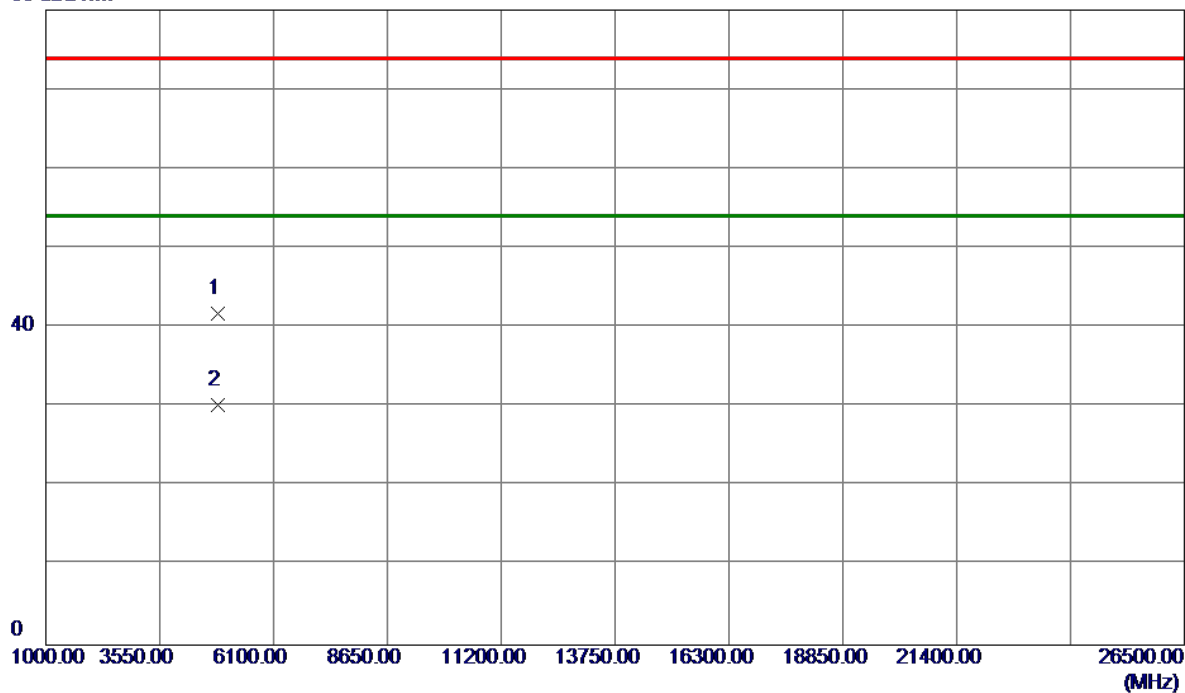


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4840.7000	35.04	6.72	41.76	74.00	-32.24	Peak	
2 *	4846.0000	23.53	6.74	30.27	54.00	-23.73	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

120 dBuV/m

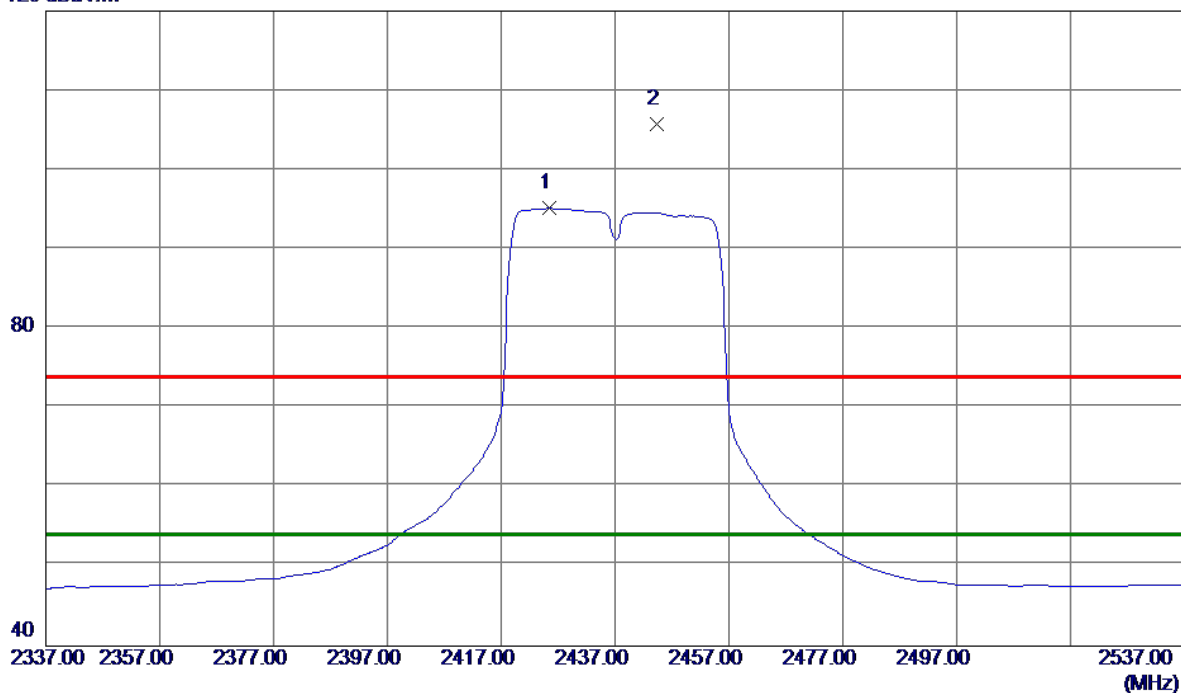


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2425.4000	61.97	33.19	95.16	54.00	41.16	AVG	No Limit
2	2444.4000	72.51	33.26	105.77	74.00	31.77	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


80 dBuV/m

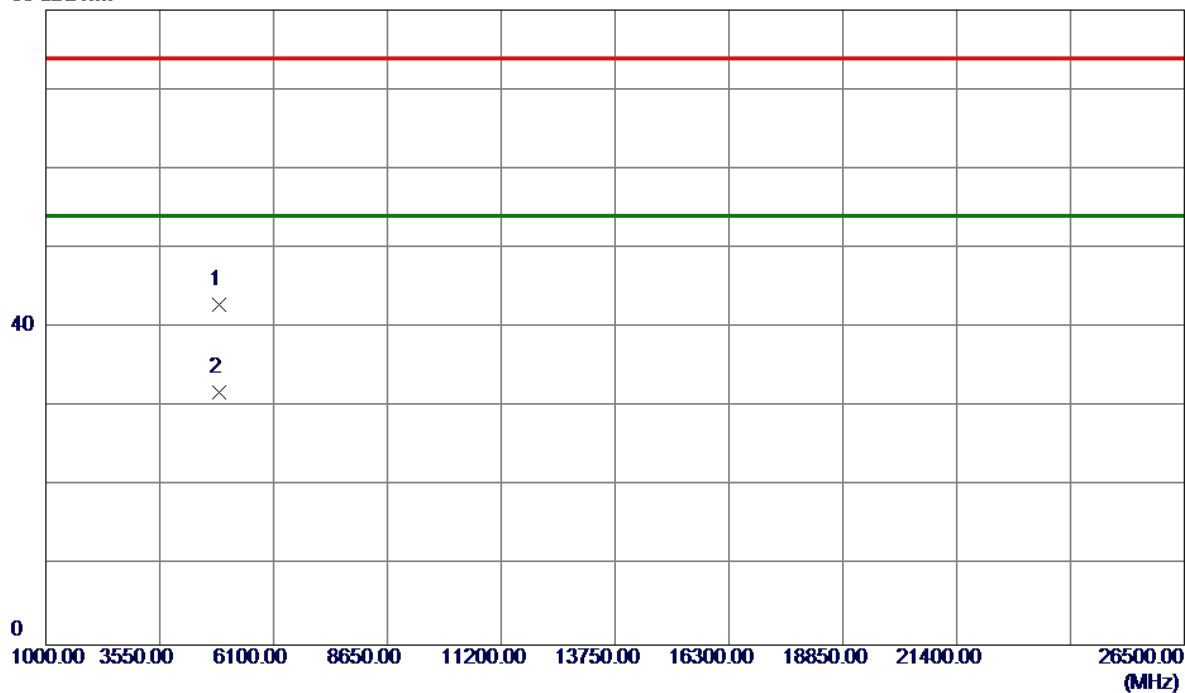

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.8500	36.09	6.84	42.93	74.00	-31.07	Peak	
2 *	4875.9000	25.02	6.84	31.86	54.00	-22.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

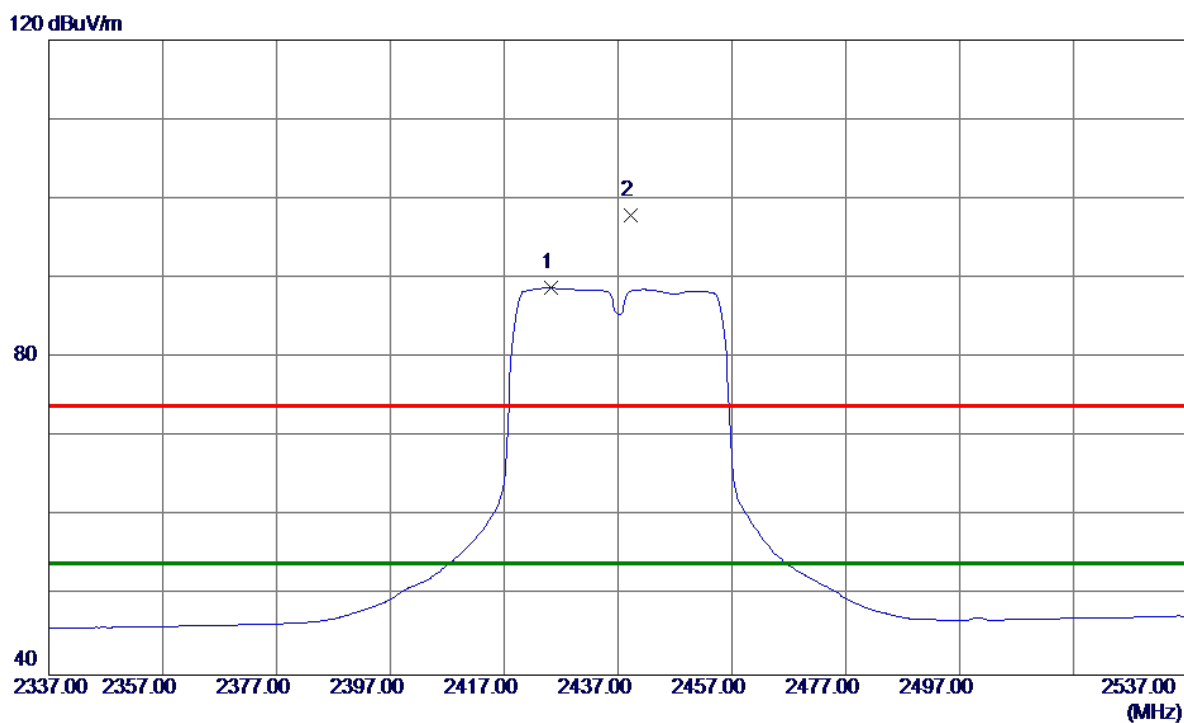


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2425.2000	55.62	33.19	88.81	54.00	34.81	AVG	No Limit
2	2439.2000	64.68	33.24	97.92	74.00	23.92	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal


80 dBuV/m

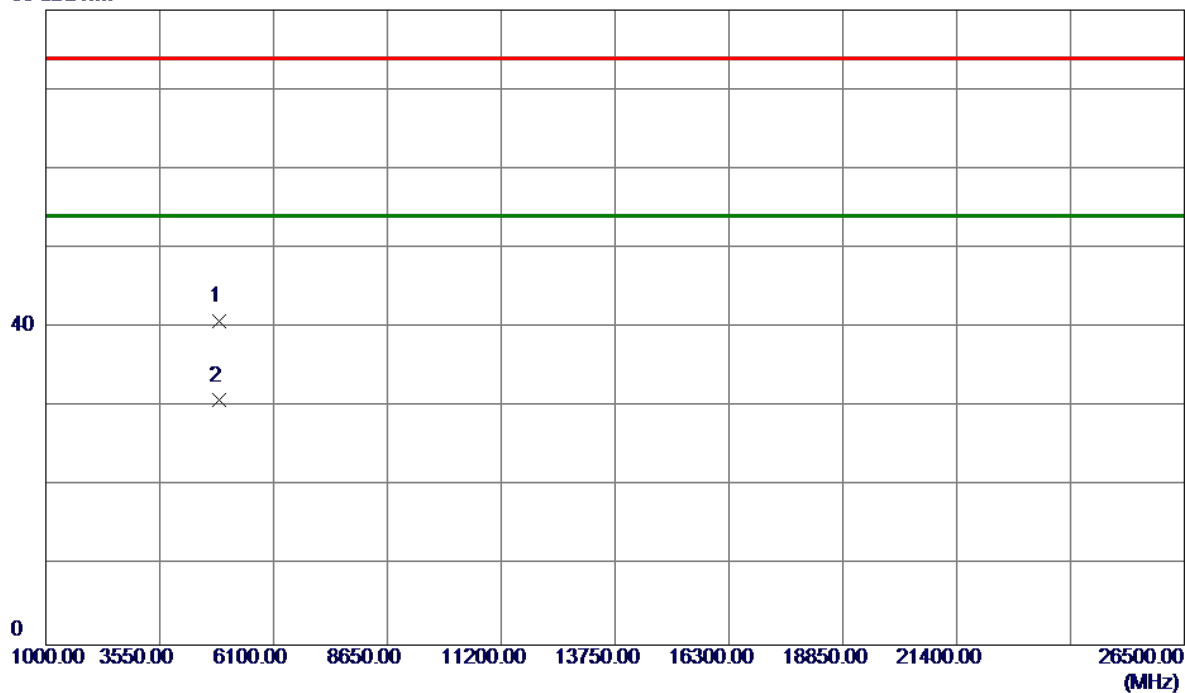

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4871.9500	34.04	6.83	40.87	74.00	-33.13	Peak	
2 *	4876.7000	23.95	6.85	30.80	54.00	-23.20	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

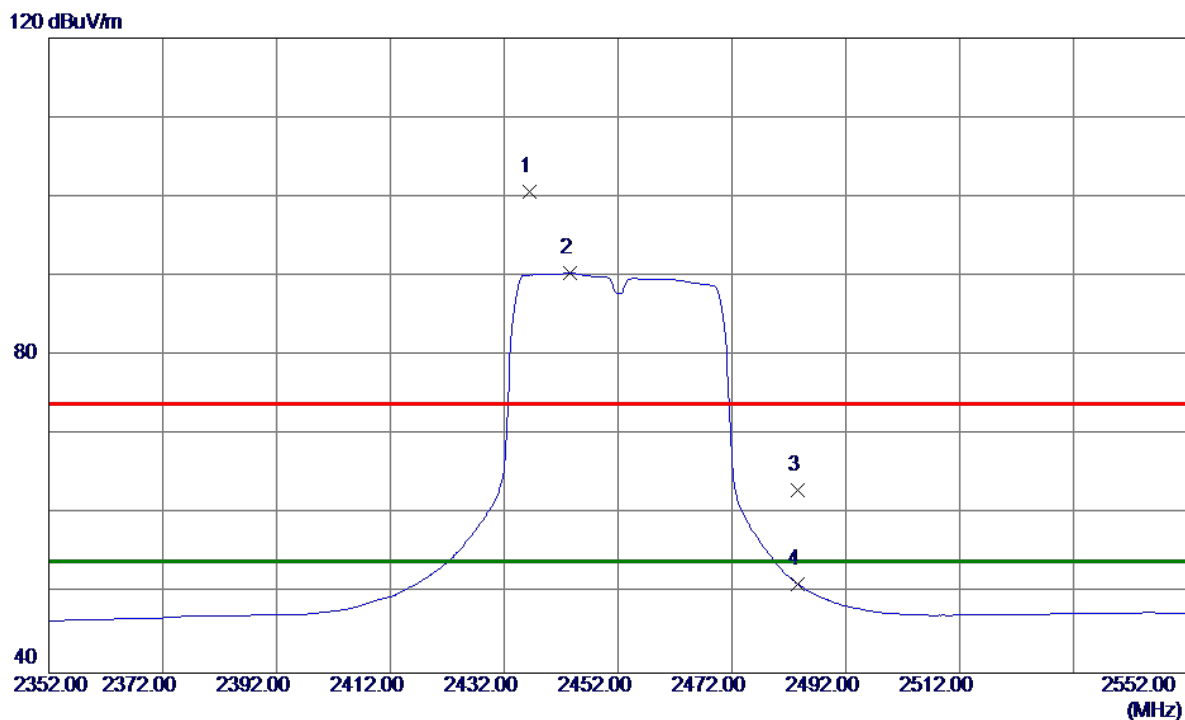


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.4000	67.37	33.23	100.60	74.00	26.60	Peak	No Limit
2 *	2443.6000	57.10	33.26	90.36	54.00	36.36	AVG	No Limit
3	2483.5000	29.70	33.41	63.11	74.00	-10.89	Peak	
4	2483.5000	17.80	33.41	51.21	54.00	-2.79	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical


80 dBuV/m

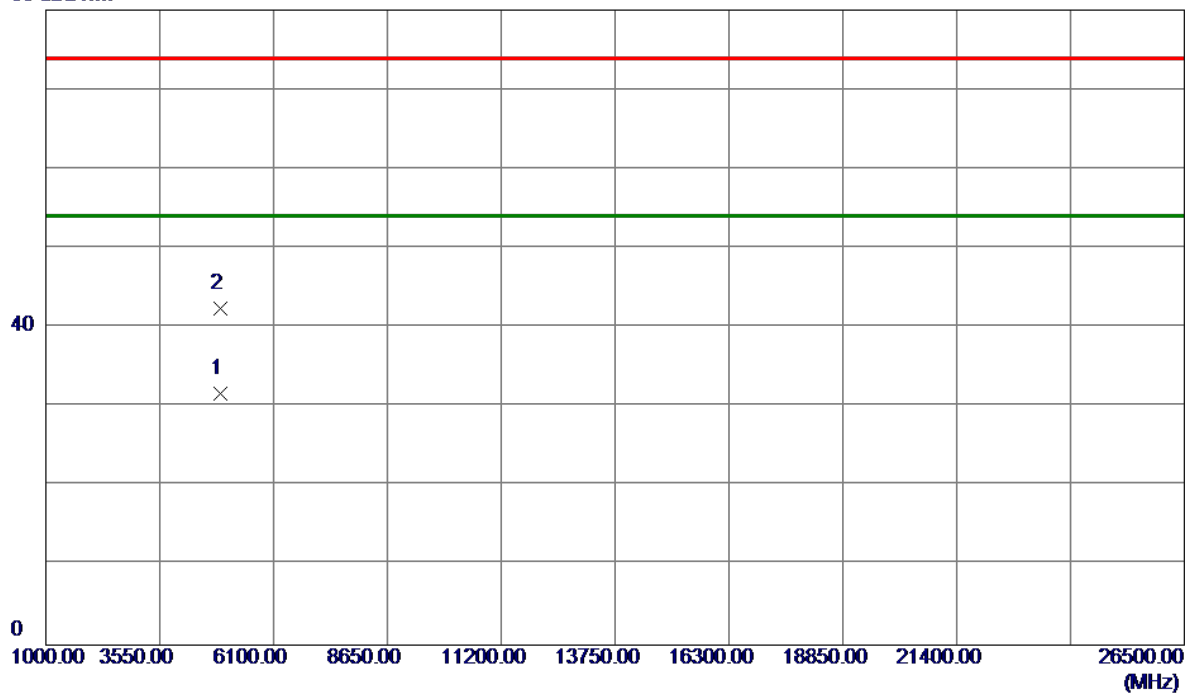

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4902.5500	24.68	6.94	31.62	54.00	-22.38	AVG	
2	4904.6000	35.42	6.95	42.37	74.00	-31.63	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

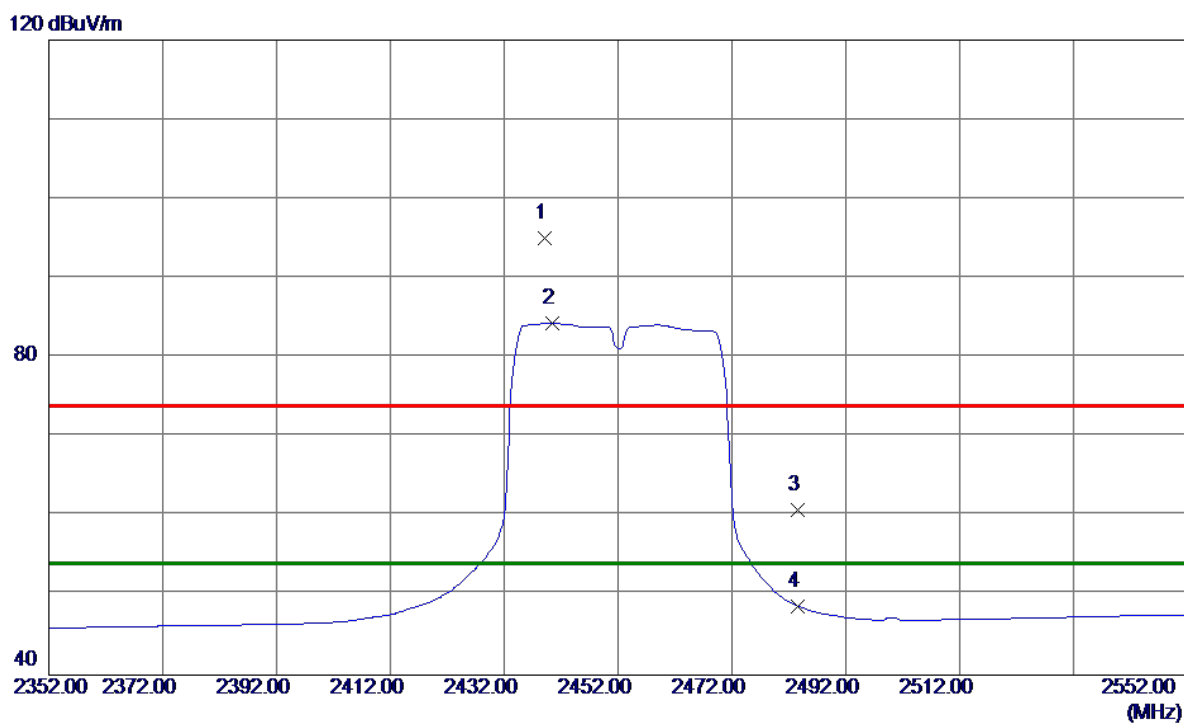


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2439.2000	61.82	33.24	95.06	74.00	21.06	Peak	No Limit
2 *	2440.4000	51.09	33.25	84.34	54.00	30.34	AVG	No Limit
3	2483.5000	27.41	33.41	60.82	74.00	-13.18	Peak	
4	2483.5000	15.26	33.41	48.67	54.00	-5.33	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

80 dBuV/m

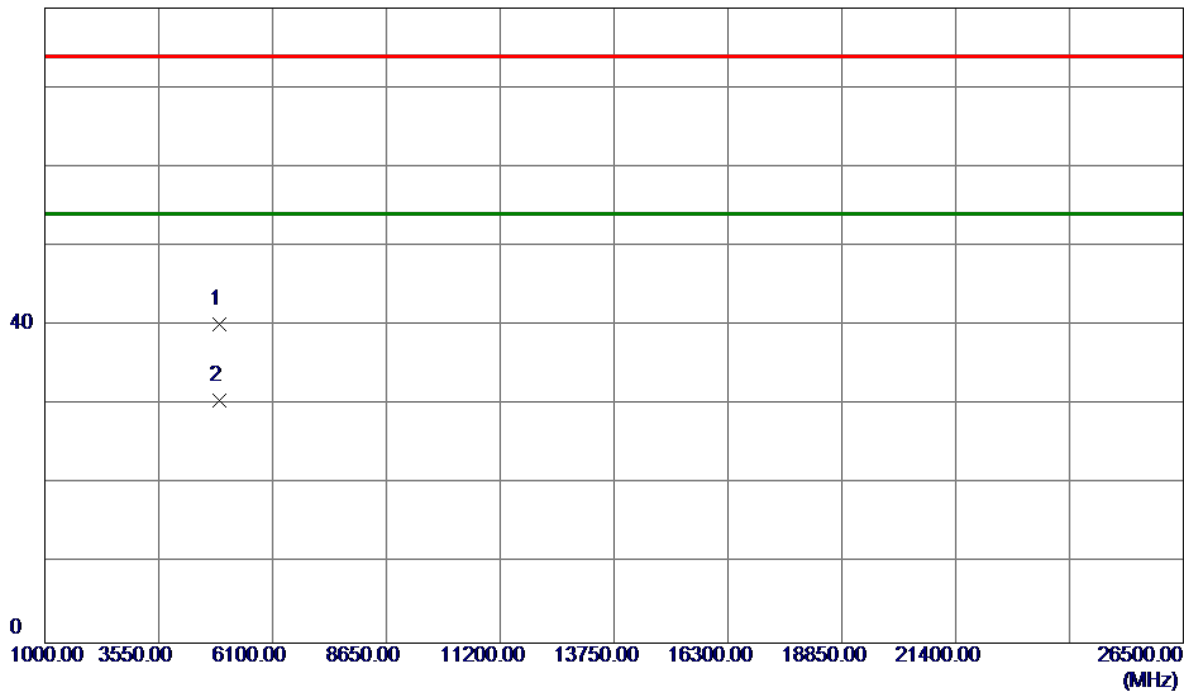


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4902.9600	33.26	6.94	40.20	74.00	-33.80	Peak	
2 *	4903.7799	23.56	6.94	30.50	54.00	-23.50	AVG	

APPENDIX E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.11	14	500	Complies
2437	10.08	14.04	500	Complies
2462	10.1	14	500	Complies

TX CH01

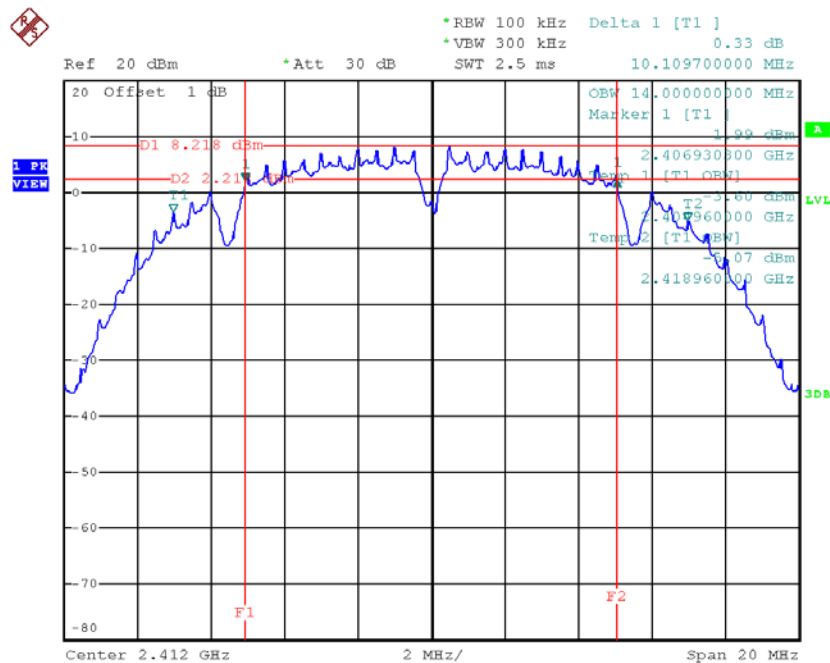


Date: 23.NOV.2017 16:41:33

TX CH06

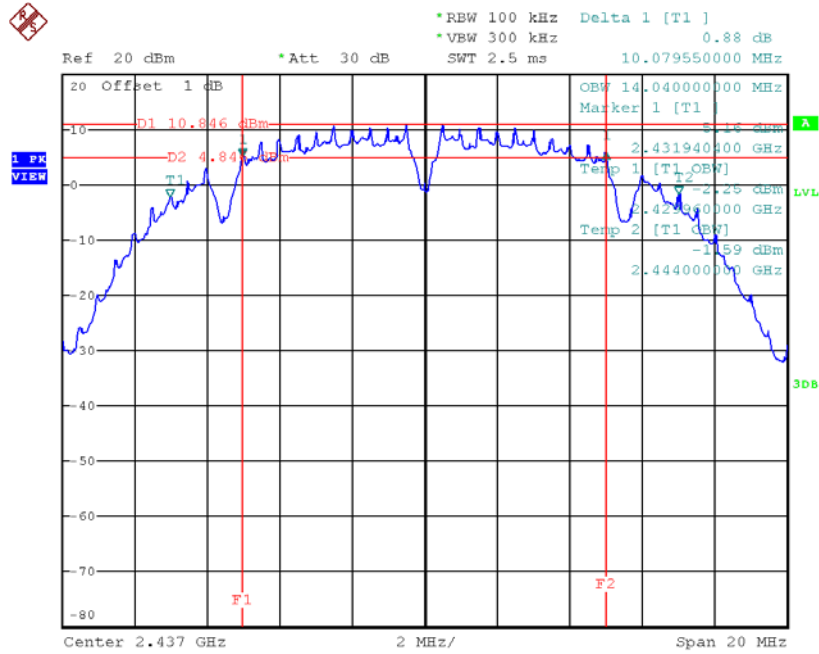

Date: 23.NOV.2017 16:43:17

TX CH11

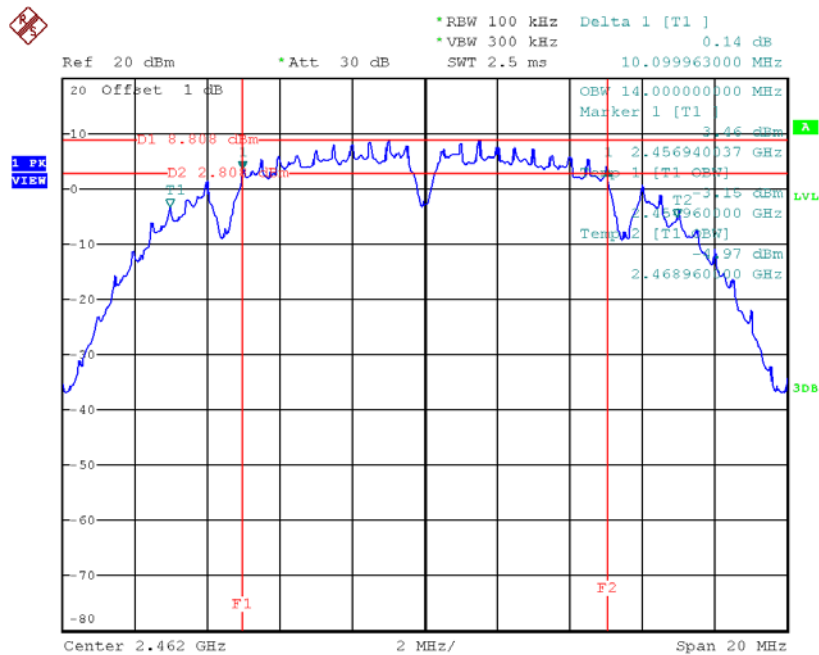


Date: 23.NOV.2017 16:44:59

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.47	16.56	500	Complies
2437	16.43	16.56	500	Complies
2462	16.47	16.52	500	Complies

TX CH01

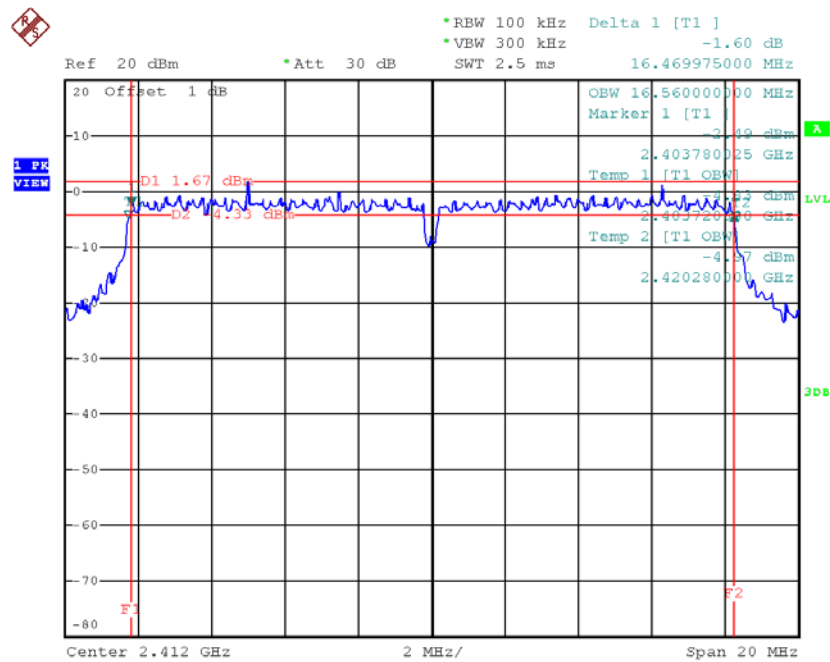


Date: 23.NOV.2017 14:10:21

TX CH06

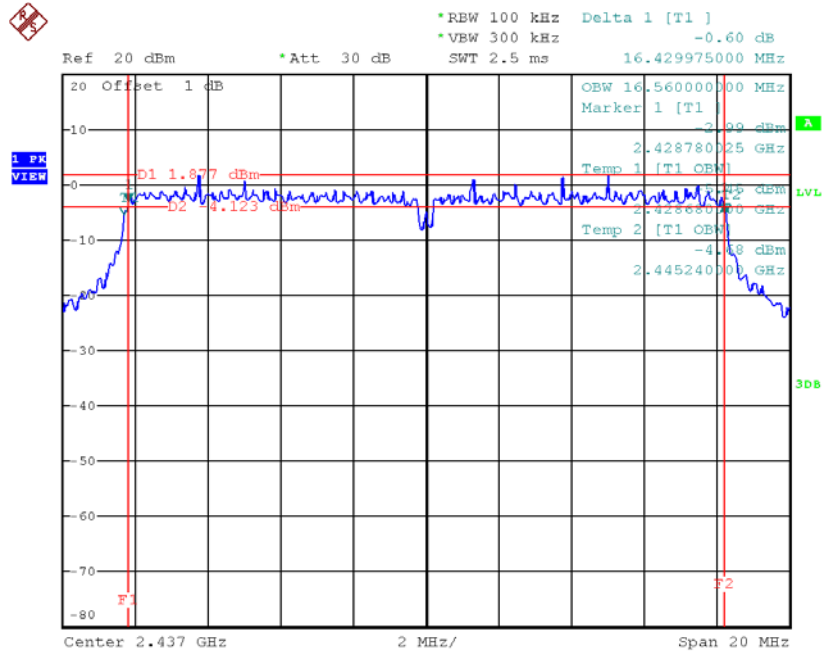

Date: 23.NOV.2017 14:11:47

TX CH11

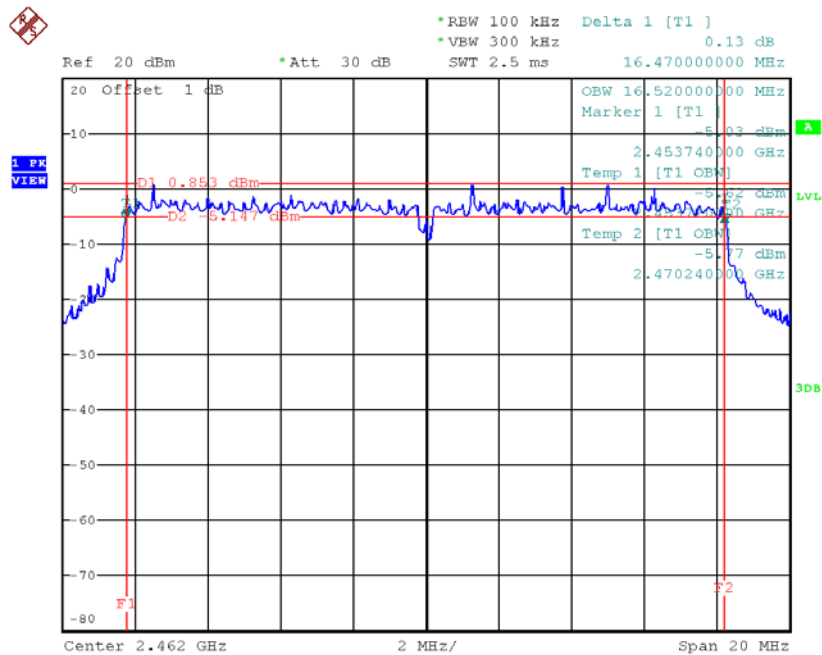


Date: 23.NOV.2017 14:14:27

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.68	17.76	500	Complies
2437	17.68	17.76	500	Complies
2462	17.74	17.72	500	Complies

TX CH01

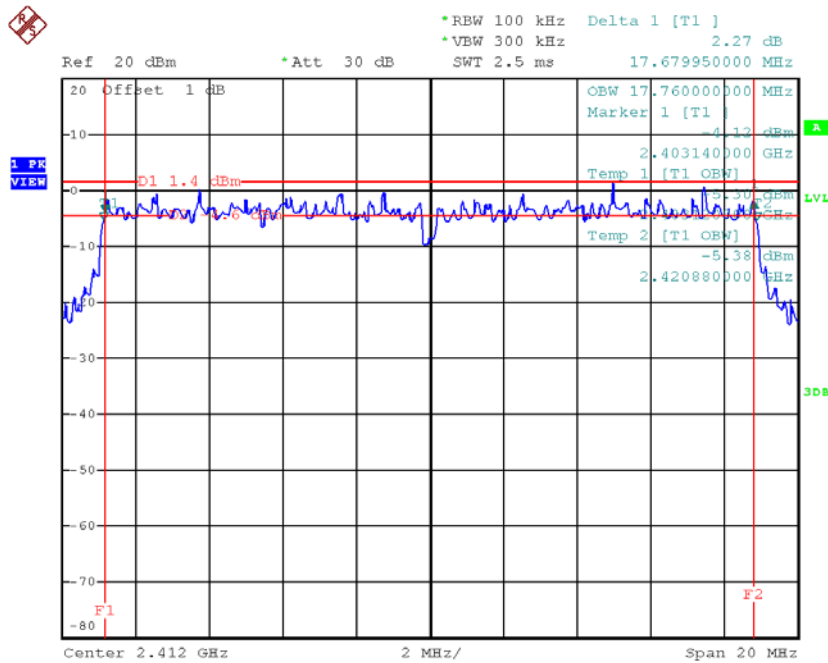


Date: 23.NOV.2017 14:17:50

TX CH06

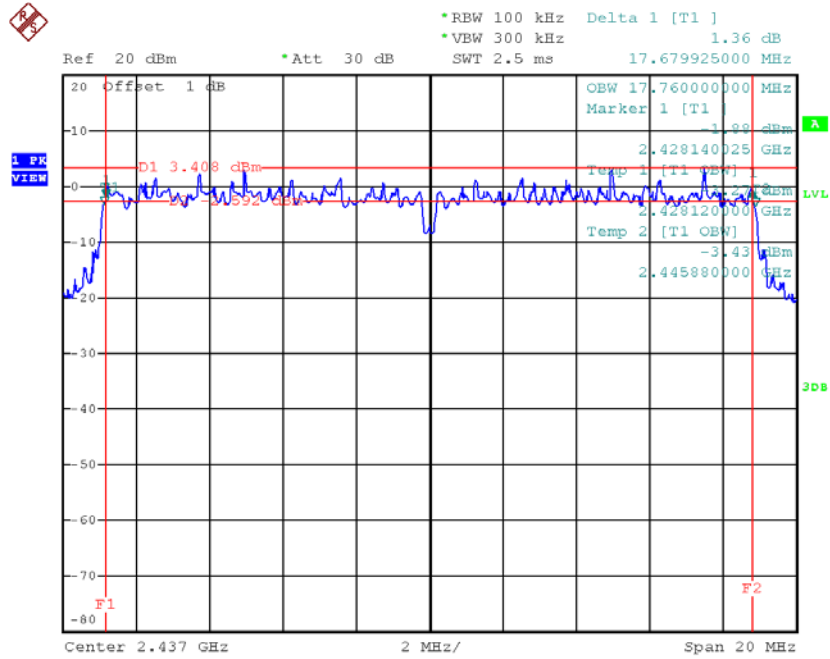

Date: 23.NOV.2017 14:19:22

TX CH11

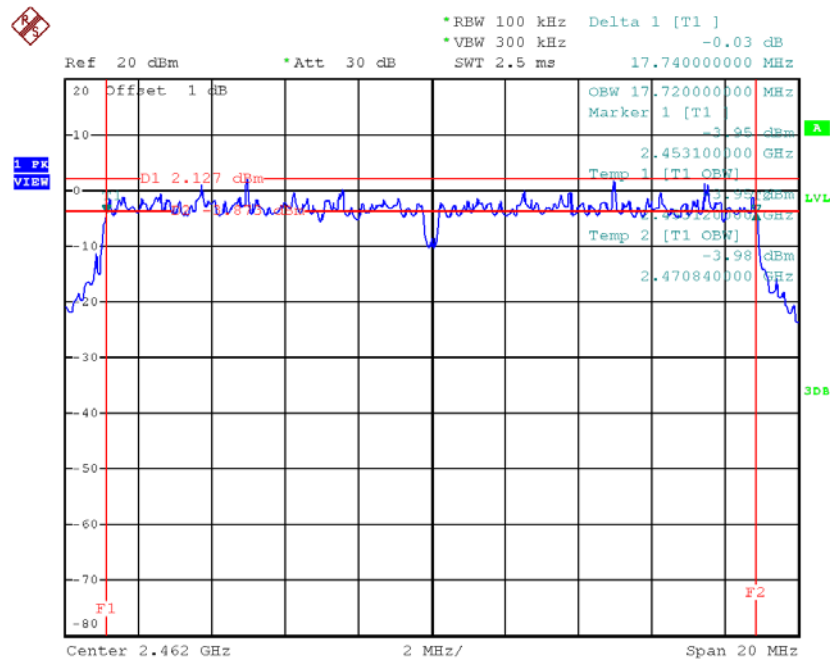


Date: 23.NOV.2017 14:20:45

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	35.88	36.08	500	Complies
2437	36.24	36.16	500	Complies
2452	35.99	36.16	500	Complies

TX CH03

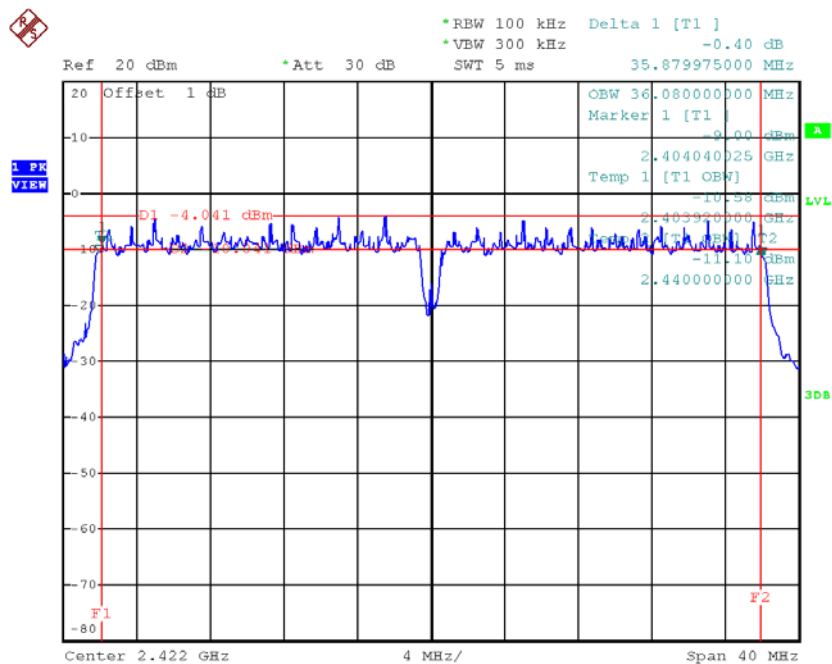


Date: 23.NOV.2017 14:24:05

TX CH06

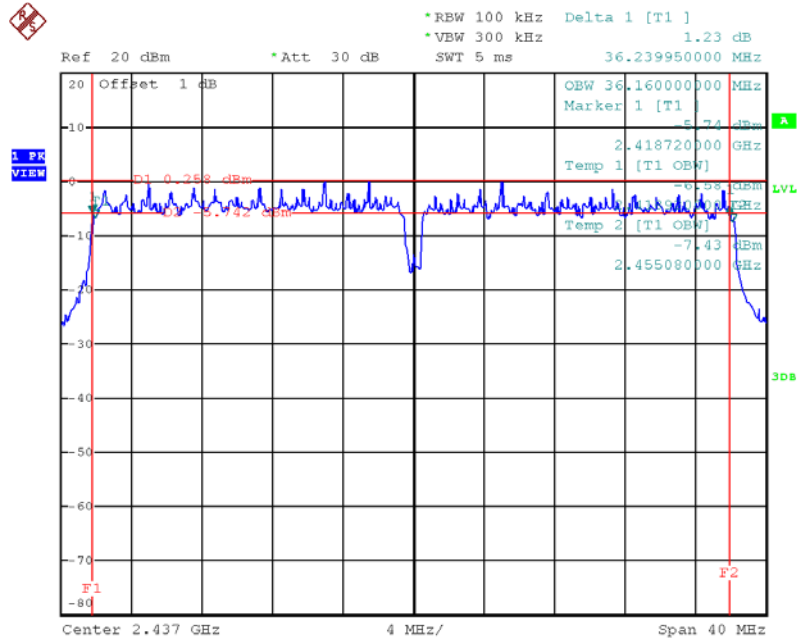

Date: 23.NOV.2017 14:25:56

TX CH09

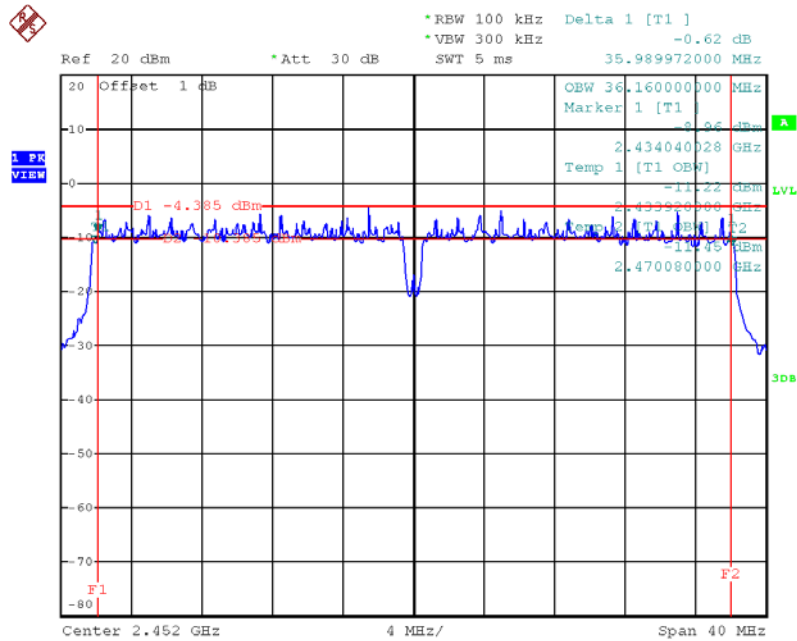

Date: 23.NOV.2017 14:27:20

APPENDIX F - MAXIMUM PEAK CONDUCTED & AVG OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.04	0.04	30.00	1.00	Complies
2437	15.39	0.03	30.00	1.00	Complies
2462	15.51	0.04	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	15.58	0.04	30.00	1.00	Complies
2437	14.85	0.03	30.00	1.00	Complies
2462	14.89	0.03	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.83	0.08	30.00	1.00	Complies
2437	18.14	0.07	30.00	1.00	Complies
2462	18.22	0.07	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	26.91	0.49	30.00	1.00	Complies
2437	26.64	0.46	30.00	1.00	Complies
2462	23.56	0.23	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	26.81	0.48	30.00	1.00	Complies
2437	26.52	0.45	30.00	1.00	Complies
2462	23.80	0.24	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	29.87	0.97	30.00	1.00	Complies
2437	29.59	0.91	30.00	1.00	Complies
2462	26.69	0.47	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.54	0.18	30.00	1.00	Complies
2437	26.53	0.45	30.00	1.00	Complies
2462	23.08	0.20	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.29	0.21	30.00	1.00	Complies
2437	26.58	0.45	30.00	1.00	Complies
2462	24.10	0.26	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.94	0.39	30.00	1.00	Complies
2437	29.57	0.90	30.00	1.00	Complies
2462	26.63	0.46	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	19.61	0.09	30.00	1.00	Complies
2437	26.48	0.44	30.00	1.00	Complies
2452	19.90	0.10	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	20.08	0.10	30.00	1.00	Complies
2437	26.30	0.43	30.00	1.00	Complies
2452	19.75	0.09	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	22.86	0.19	30.00	1.00	Complies
2437	29.40	0.87	30.00	1.00	Complies
2452	22.84	0.19	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	13.32	0.02	30.00	1.00	Complies
2437	12.85	0.02	30.00	1.00	Complies
2462	12.82	0.02	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 2					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	13.05	0.02	30.00	1.00	Complies
2437	12.31	0.02	30.00	1.00	Complies
2462	12.22	0.02	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_Total					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.20	0.04	30.00	1.00	Complies
2437	15.60	0.04	30.00	1.00	Complies
2462	15.54	0.04	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.19	0.04	30.00	1.00	Complies
2437	16.37	0.04	30.00	1.00	Complies
2462	13.28	0.02	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 2					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	15.01	0.03	30.00	1.00	Complies
2437	15.13	0.03	30.00	1.00	Complies
2462	12.35	0.02	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_Total					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.65	0.07	30.00	1.00	Complies
2437	18.80	0.08	30.00	1.00	Complies
2462	15.85	0.04	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	11.81	0.02	30.00	1.00	Complies
2437	16.07	0.04	30.00	1.00	Complies
2462	12.04	0.02	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	11.87	0.02	30.00	1.00	Complies
2437	15.17	0.03	30.00	1.00	Complies
2462	12.32	0.02	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	14.85	0.03	30.00	1.00	Complies
2437	18.65	0.07	30.00	1.00	Complies
2462	15.19	0.03	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	8.48	0.01	30.00	1.00	Complies
2437	15.89	0.04	30.00	1.00	Complies
2452	8.61	0.01	30.00	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	8.36	0.01	30.00	1.00	Complies
2437	14.58	0.03	30.00	1.00	Complies
2452	8.33	0.01	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	AVG Power (dBm)	AVG Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	11.43	0.01	30.00	1.00	Complies
2437	18.29	0.07	30.00	1.00	Complies
2452	11.48	0.01	30.00	1.00	Complies

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : TX B Mode_ANT 1

TX B mode CH01

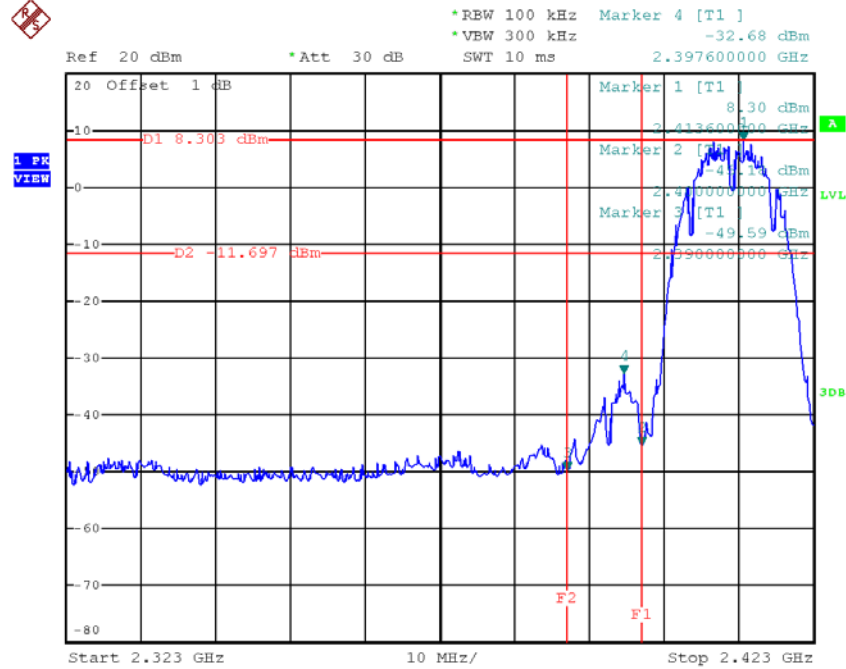


Date: 23.NOV.2017 16:41:40

TX B mode CH11

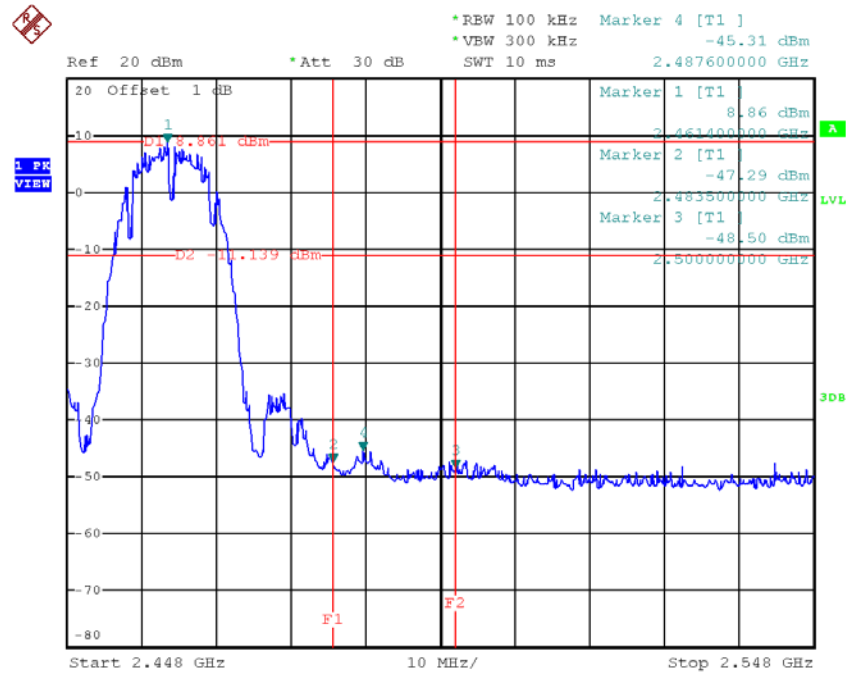


Date: 23.NOV.2017 16:45:06


TX B mode CH01 (10 Harmonic of the frequency)

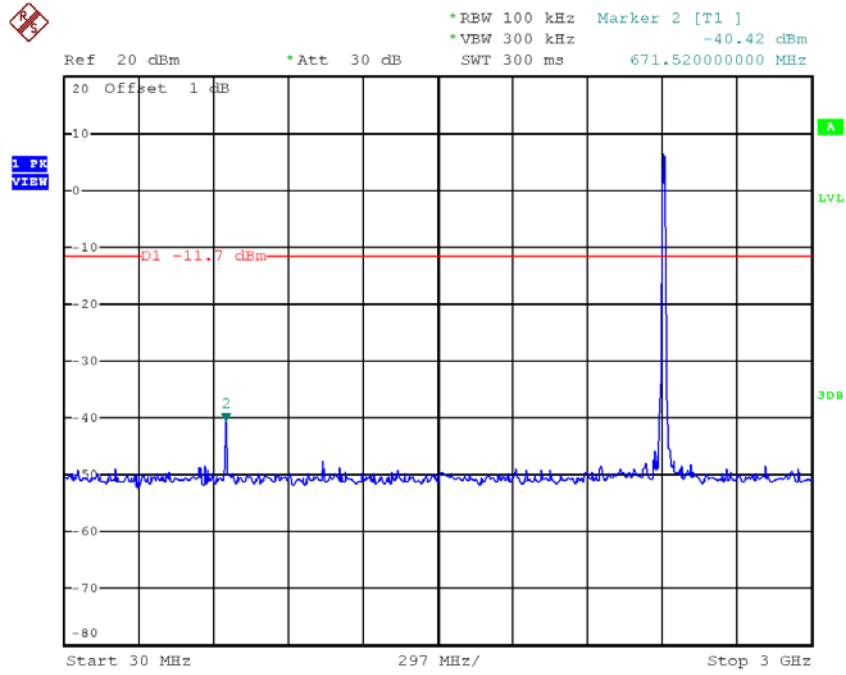

Date: 23.NOV.2017 16:41:53

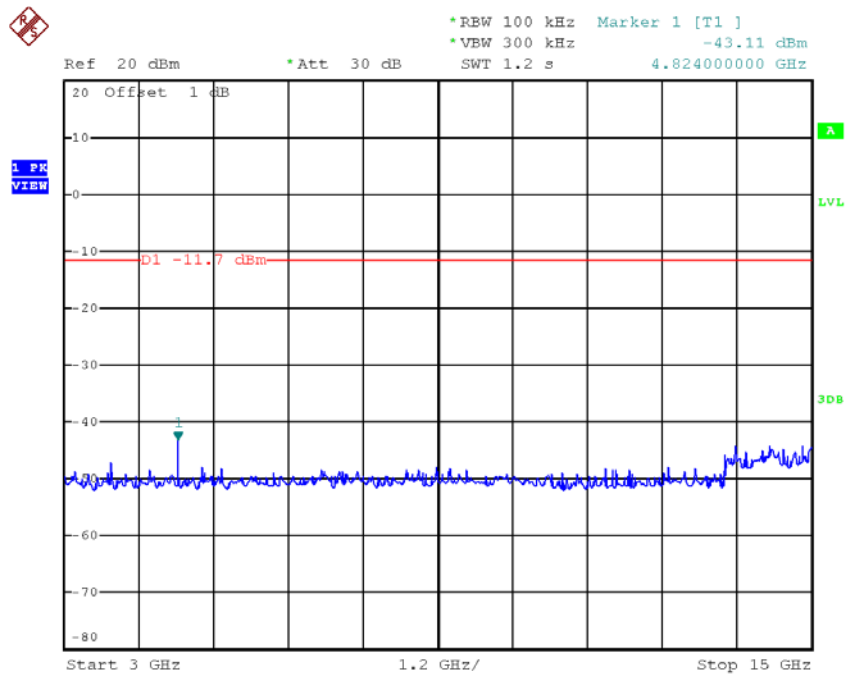


Date: 23.NOV.2017 16:42:00

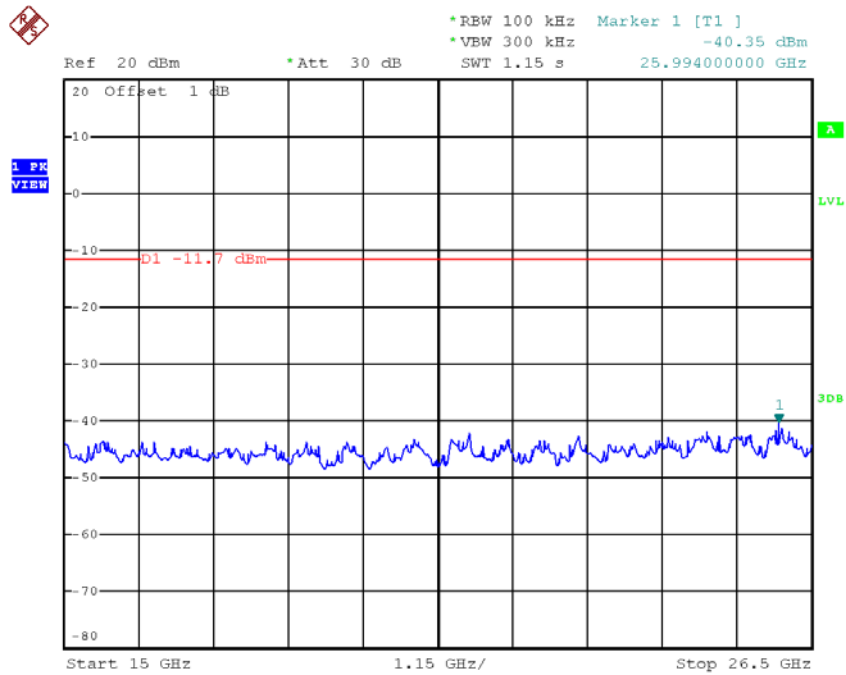


Date: 23.NOV.2017 16:42:07


TX B mode CH06 (10 Harmonic of the frequency)

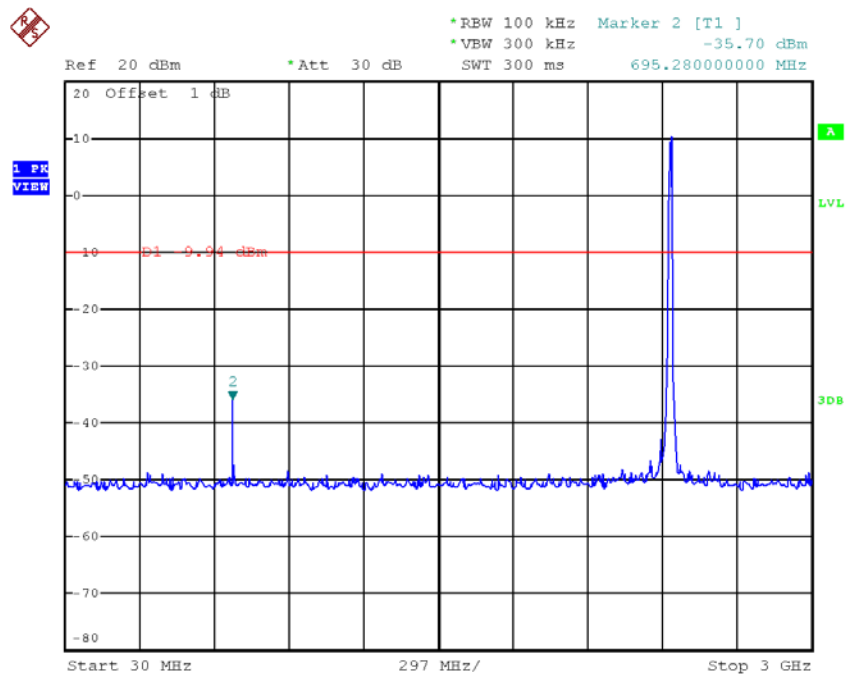

Date: 23.NOV.2017 16:43:38

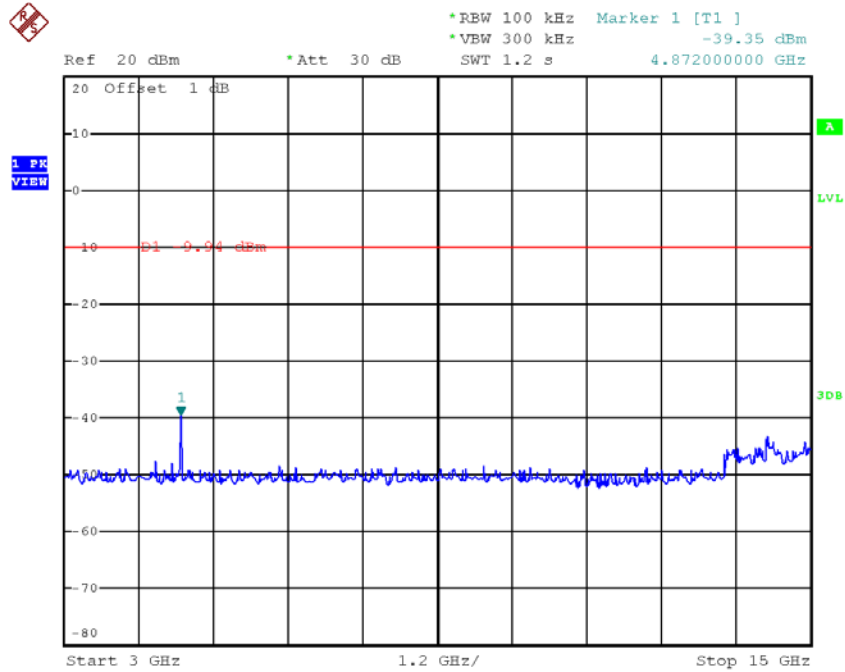


Date: 23.NOV.2017 16:43:45

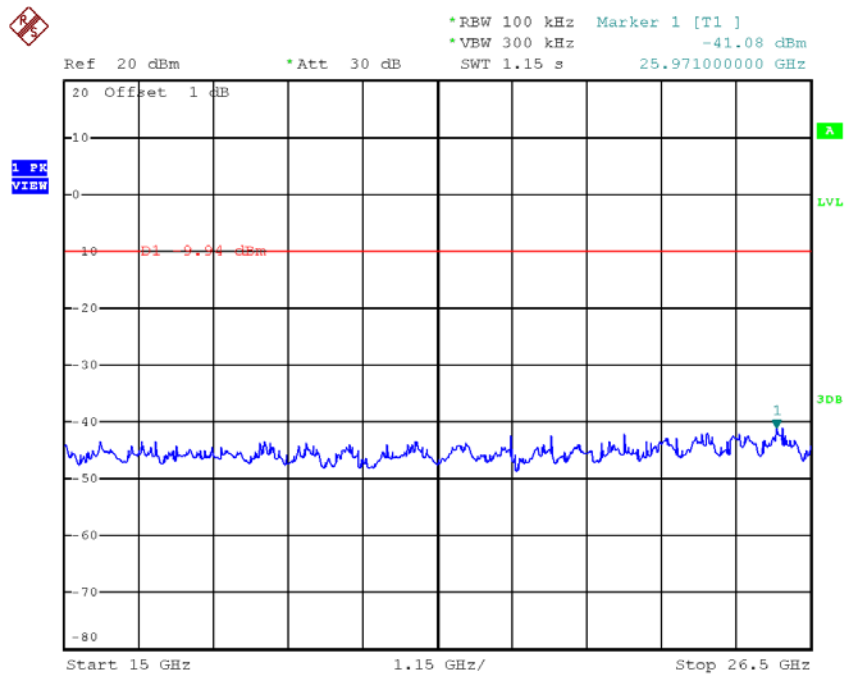


Date: 23.NOV.2017 16:43:51


TX B mode CH11 (10 Harmonic of the frequency)

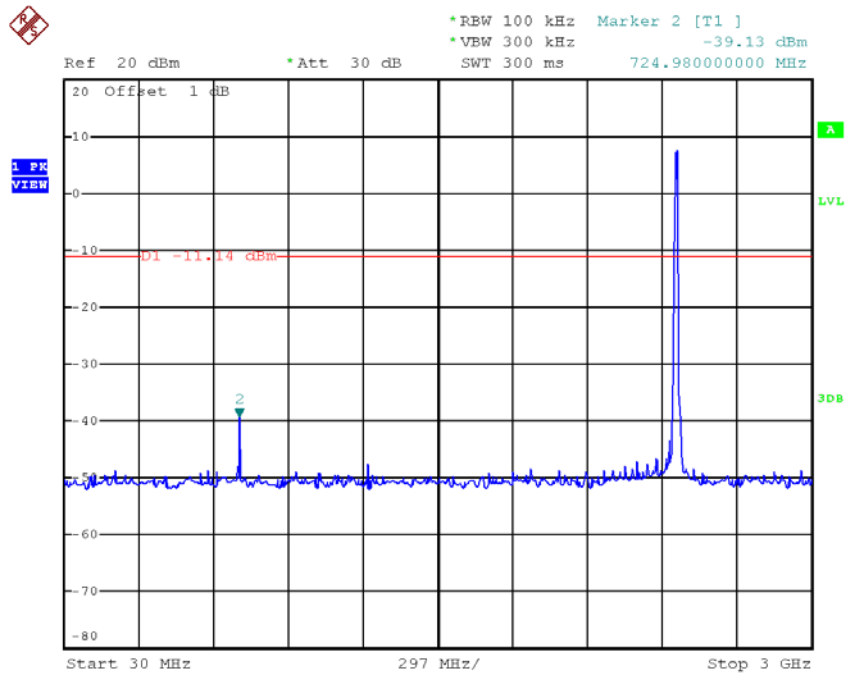

Date: 23.NOV.2017 16:45:19

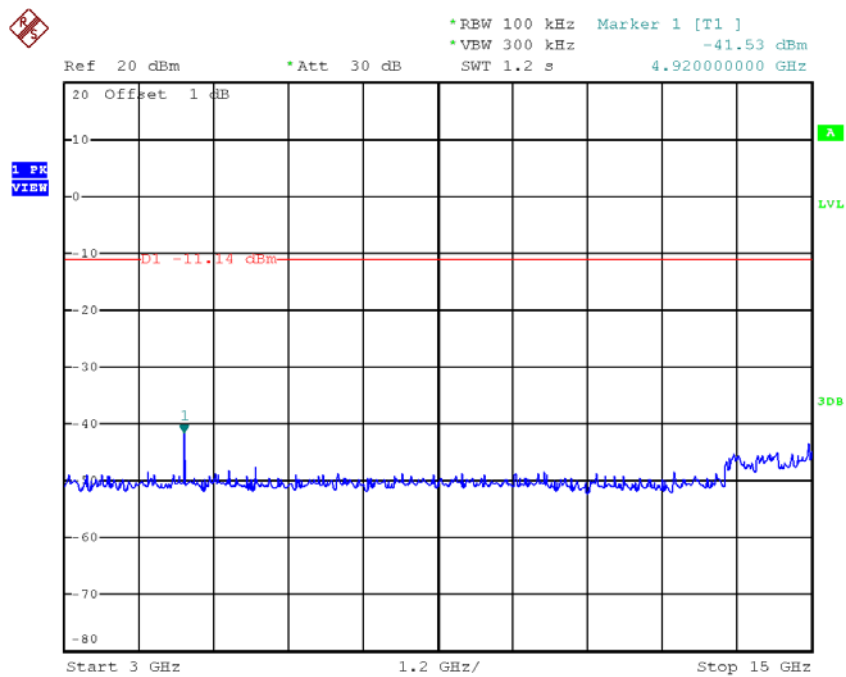


Date: 23.NOV.2017 16:45:26

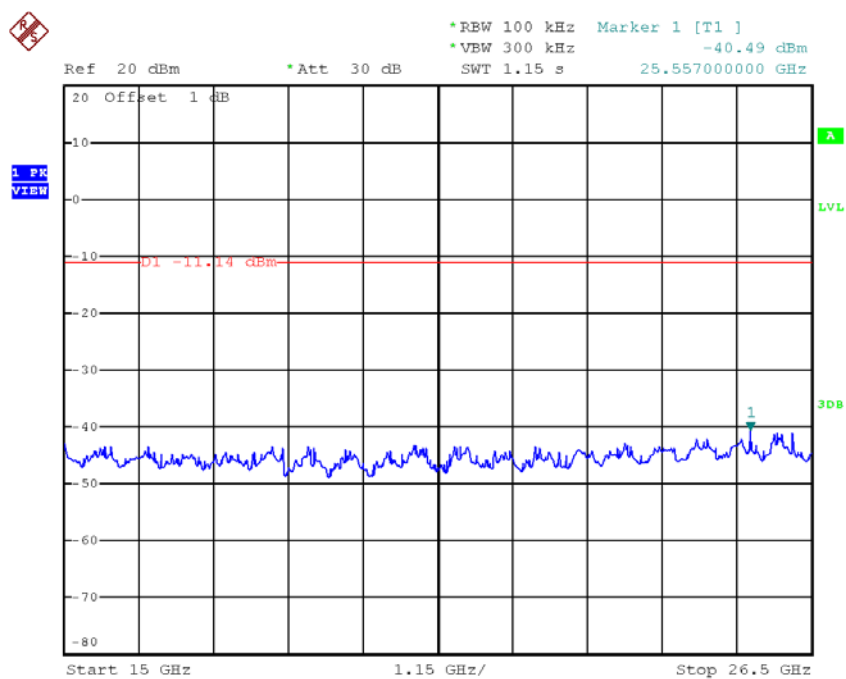

Date: 23.NOV.2017 16:45:33


Test Mode : TX B Mode_ANT 2

TX B mode CH01

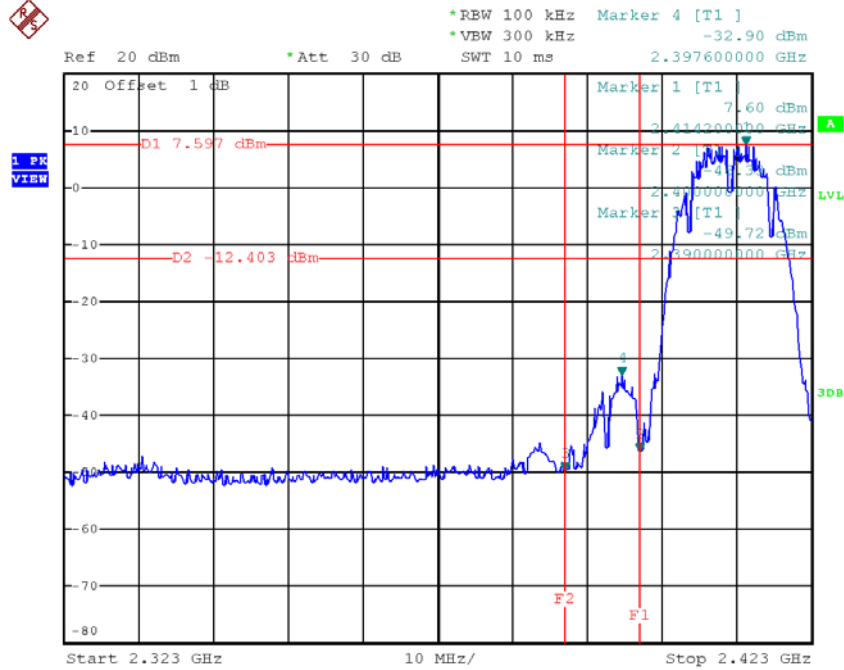


Date: 23.NOV.2017 16:47:09

TX B mode CH11

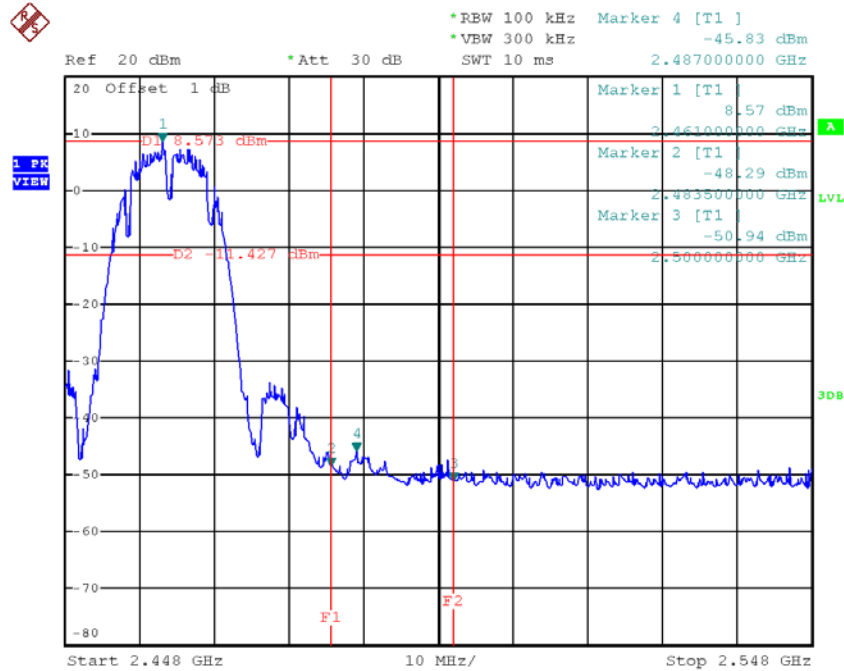


Date: 23.NOV.2017 16:50:37


TX B mode CH01 (10 Harmonic of the frequency)

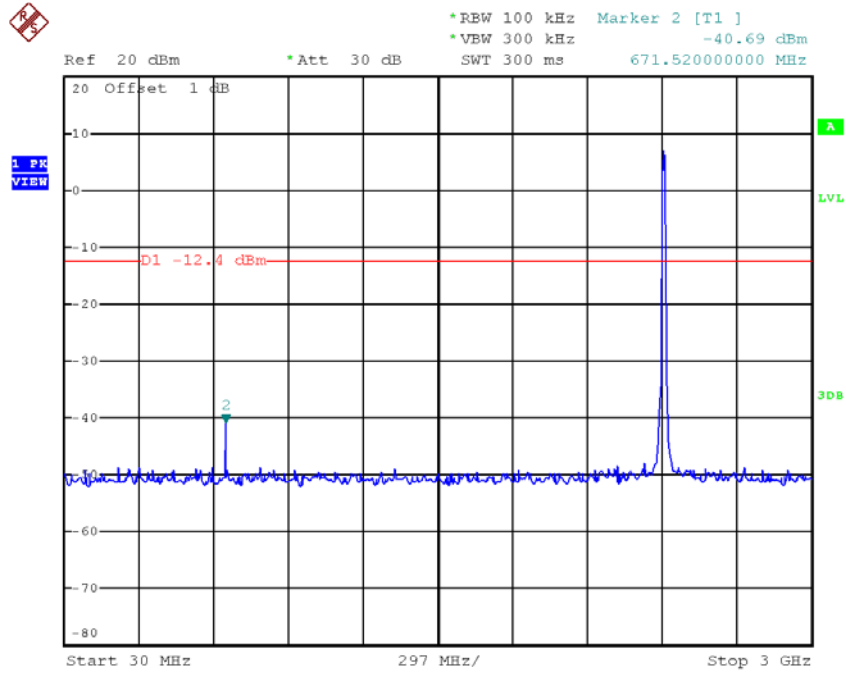

Date: 23.NOV.2017 16:47:22

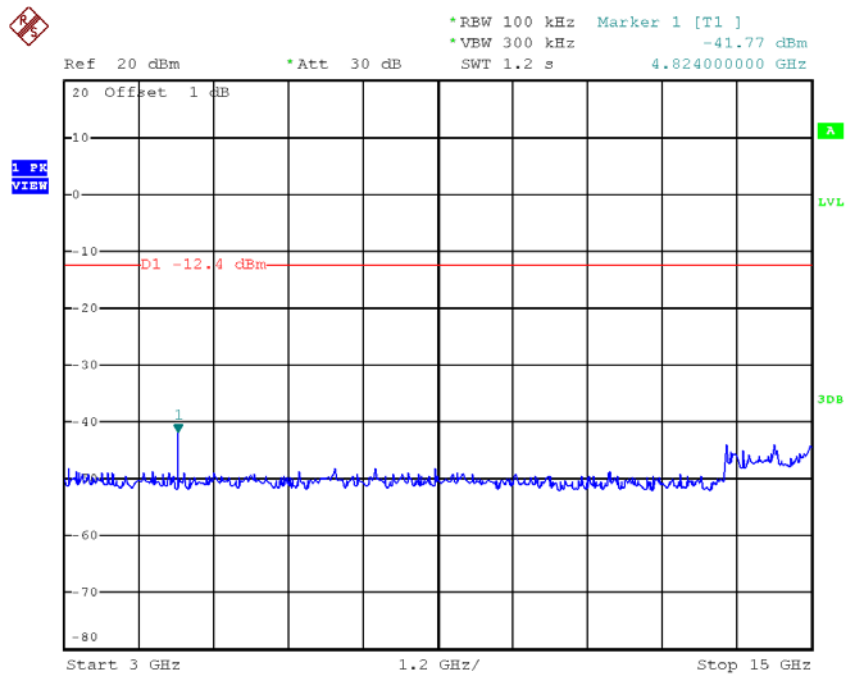


Date: 23.NOV.2017 16:47:28

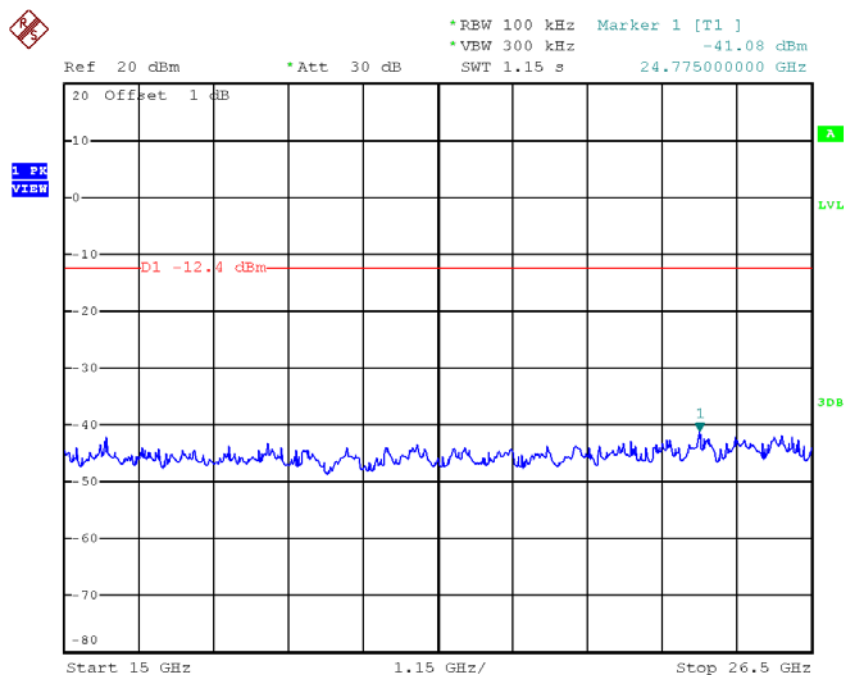


Date: 23.NOV.2017 16:47:35


TX B mode CH06 (10 Harmonic of the frequency)

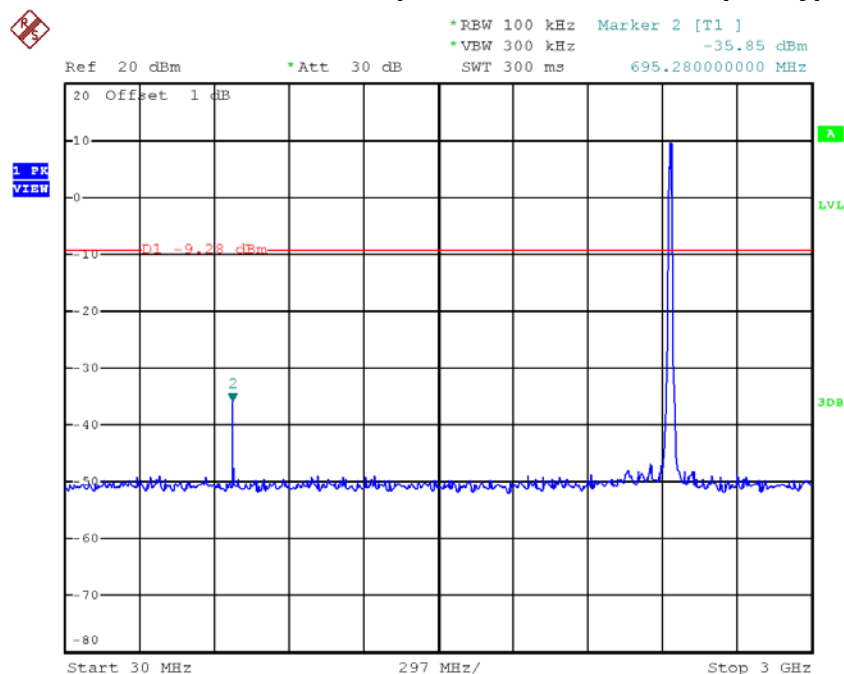

Date: 23.NOV.2017 16:49:04

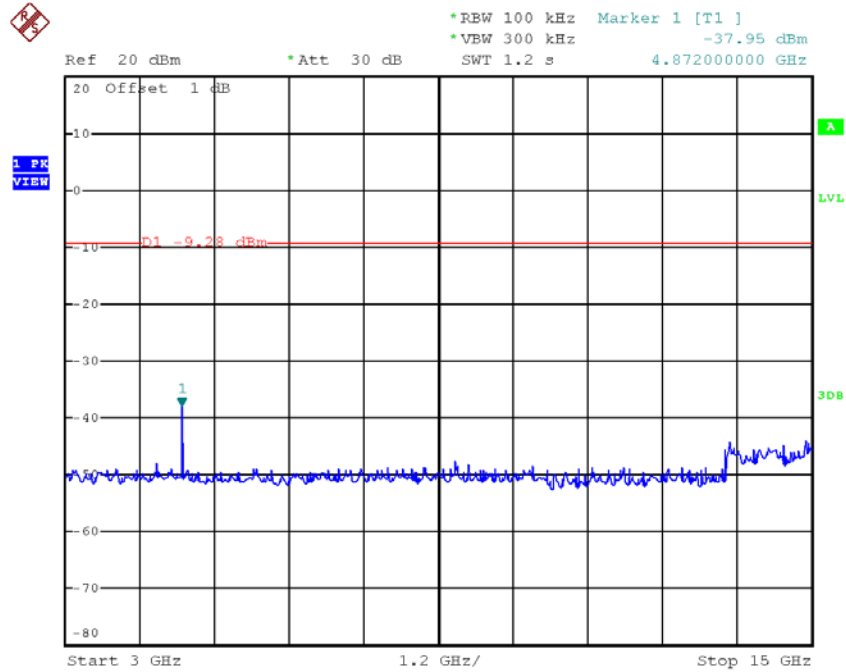


Date: 23.NOV.2017 16:49:11

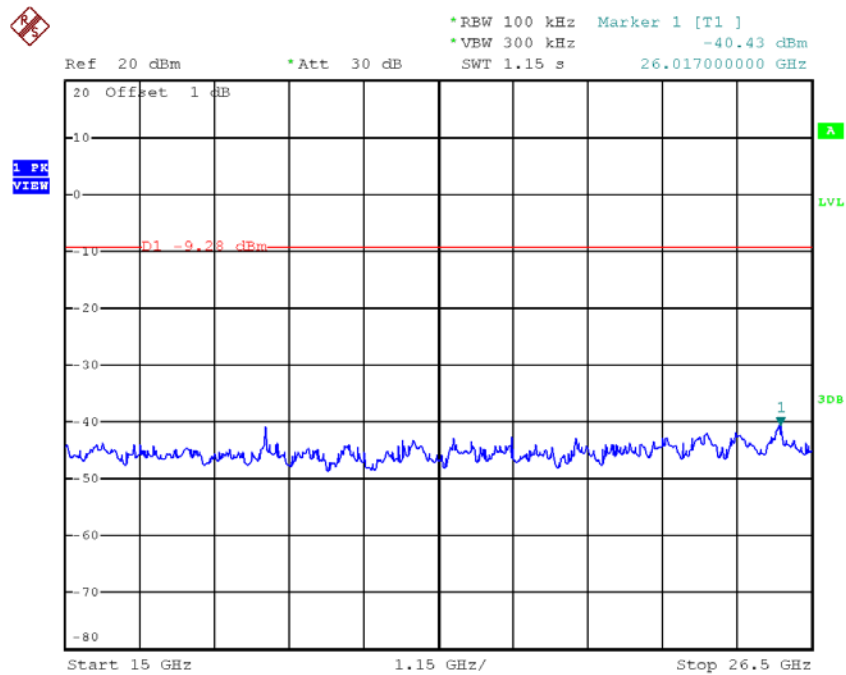


Date: 23.NOV.2017 16:49:18


TX B mode CH11 (10 Harmonic of the frequency)

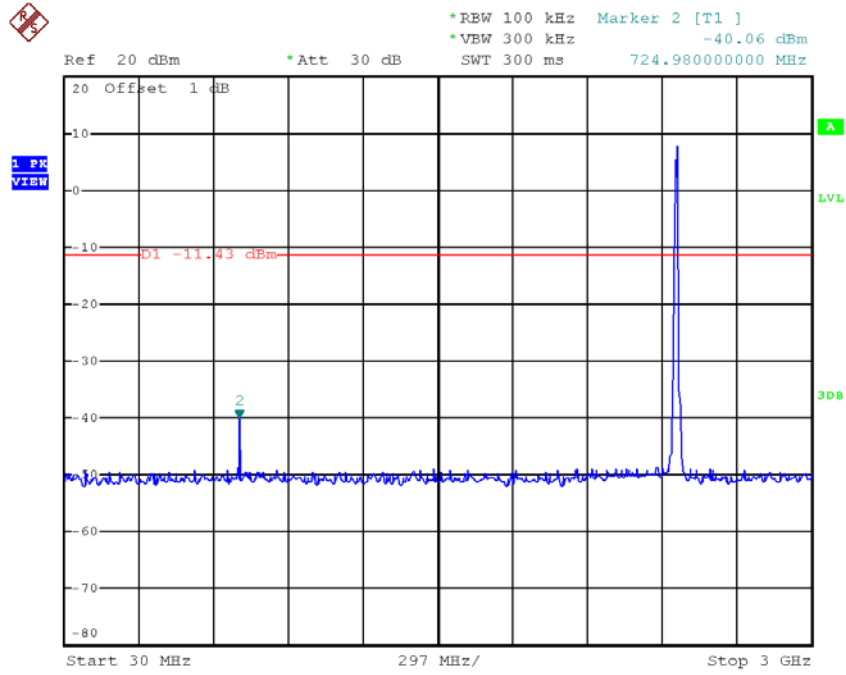

Date: 23.NOV.2017 16:50:49

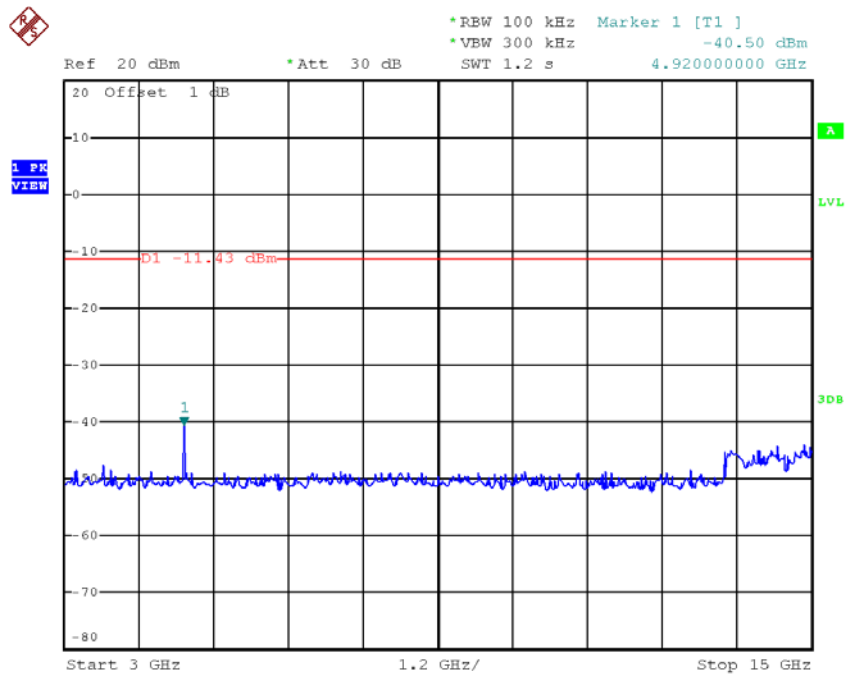


Date: 23.NOV.2017 16:50:56

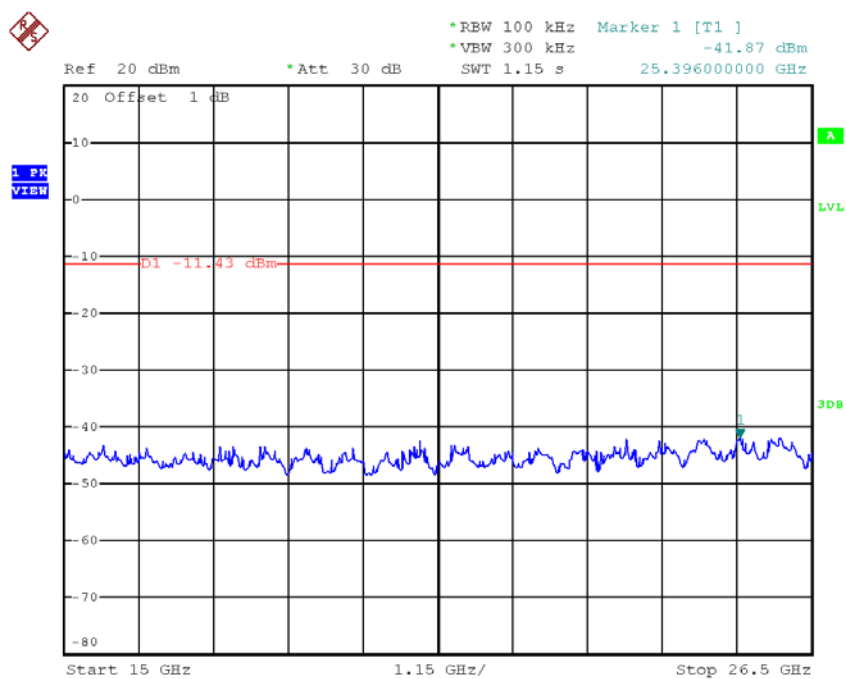

Date: 23.NOV.2017 16:51:03


Test Mode : TX G Mode_ANT 1

TX G mode CH01

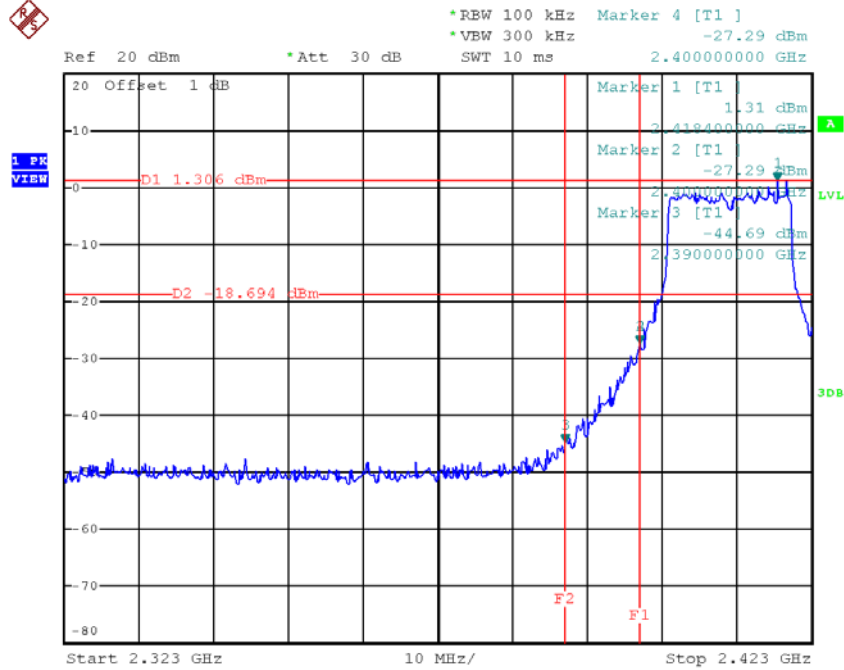


Date: 23.NOV.2017 14:10:28

TX G mode CH11

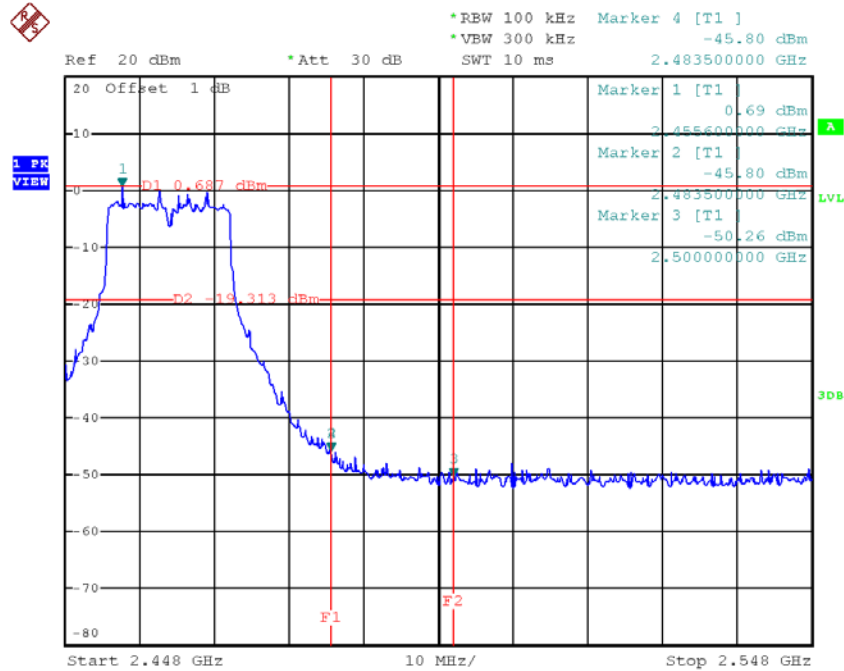


Date: 23.NOV.2017 14:14:34


TX G mode CH01 (10 Harmonic of the frequency)

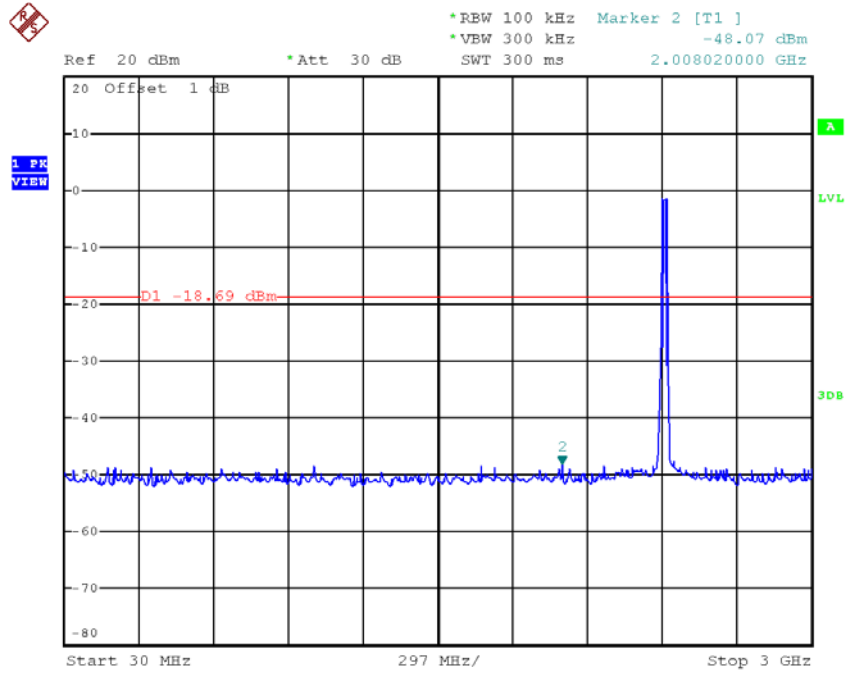

Date: 23.NOV.2017 14:10:41

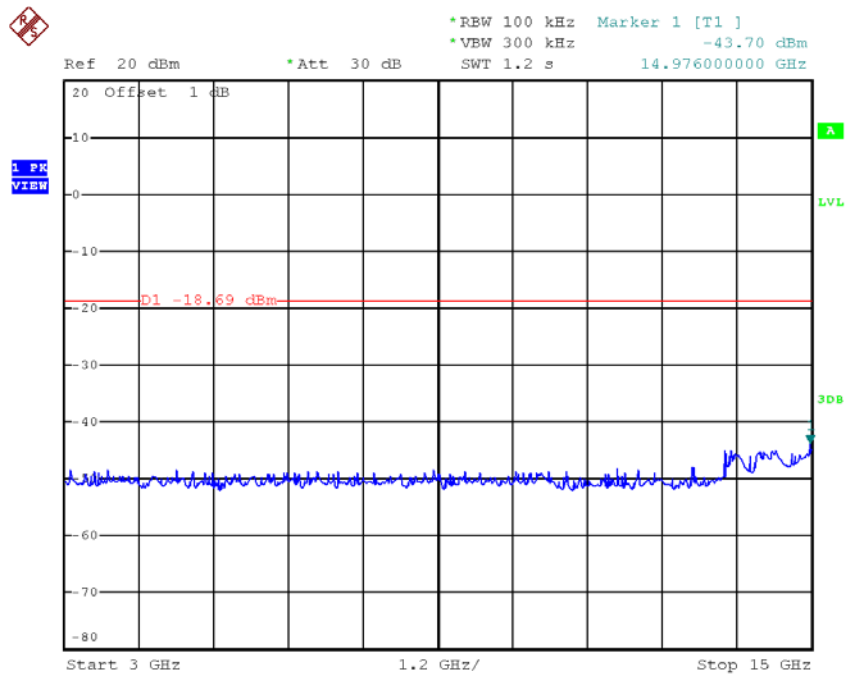


Date: 23.NOV.2017 14:10:48

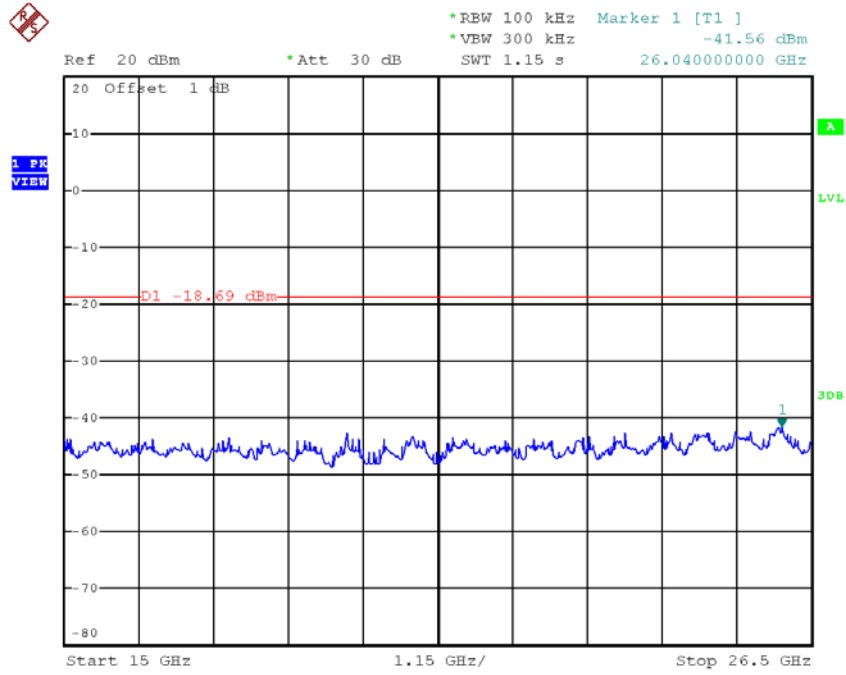


Date: 23.NOV.2017 14:10:55


TX G mode CH06 (10 Harmonic of the frequency)

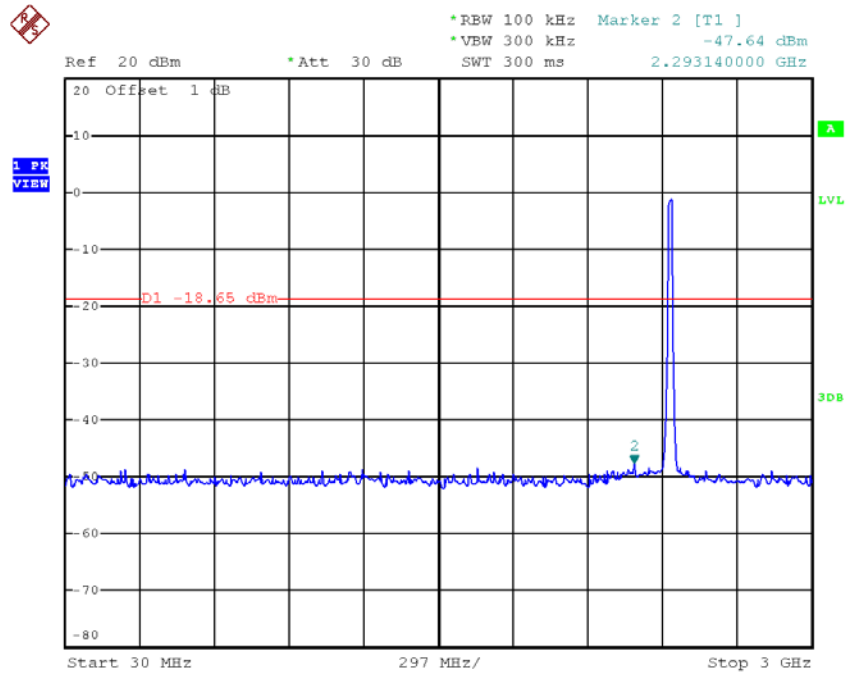

Date: 23.NOV.2017 14:12:07

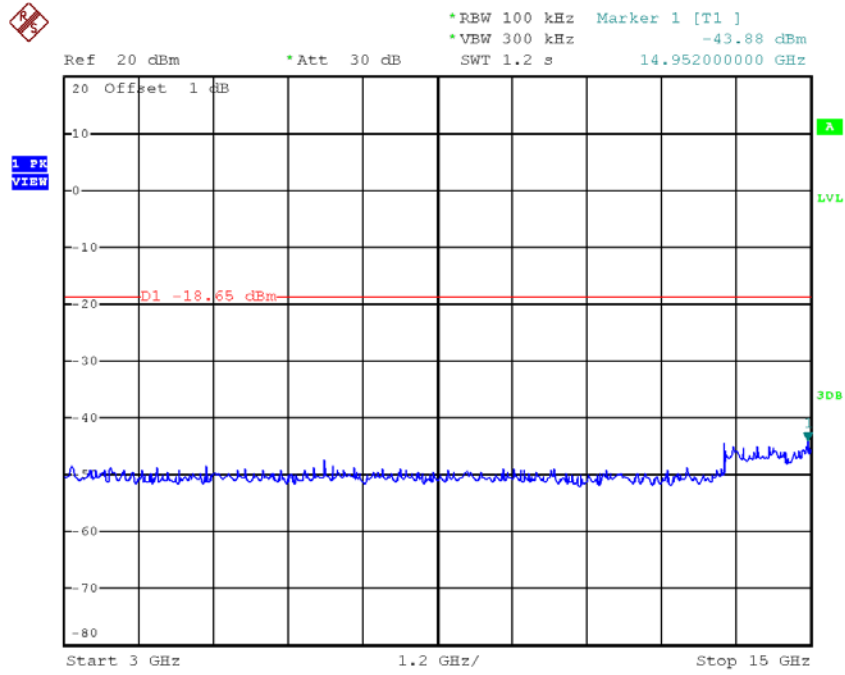


Date: 23.NOV.2017 14:12:14

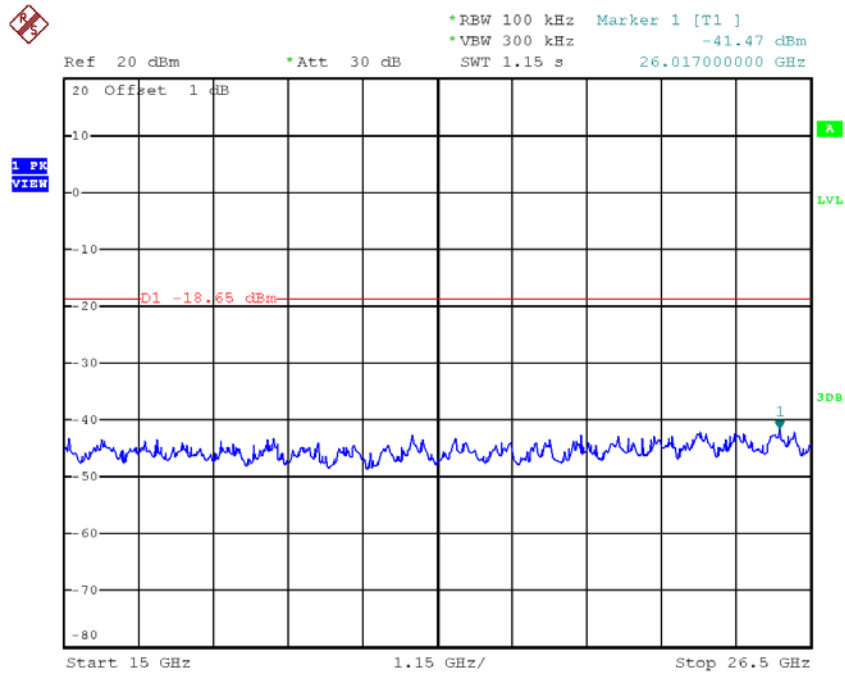


Date: 23.NOV.2017 14:12:21


TX G mode CH11 (10 Harmonic of the frequency)

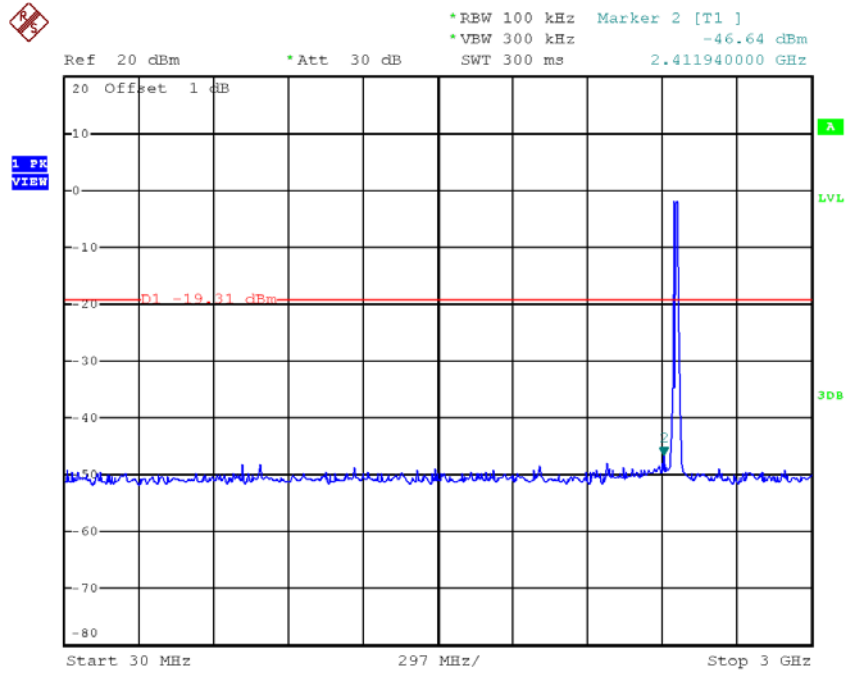

Date: 23.NOV.2017 14:14:47

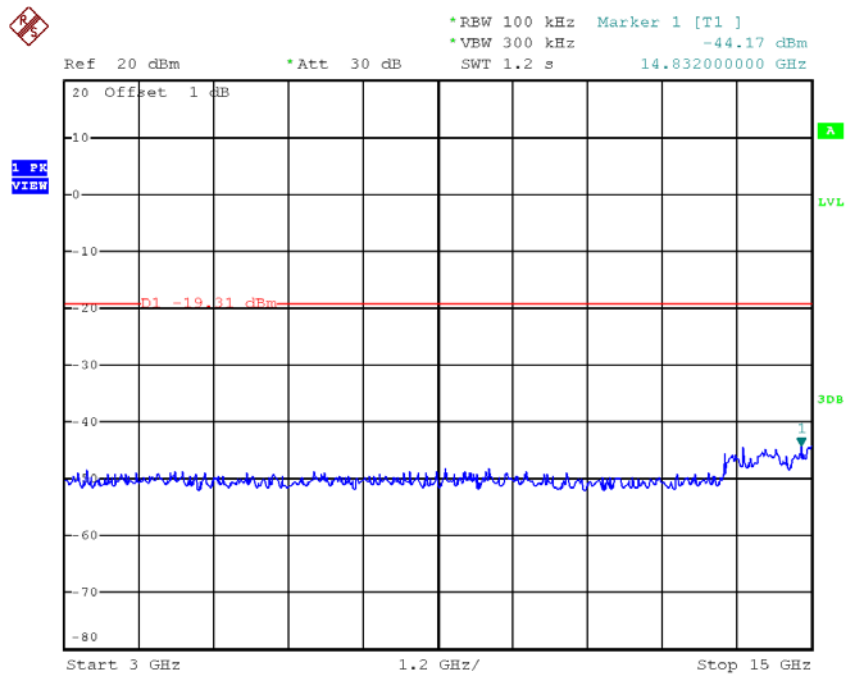


Date: 23.NOV.2017 14:14:54

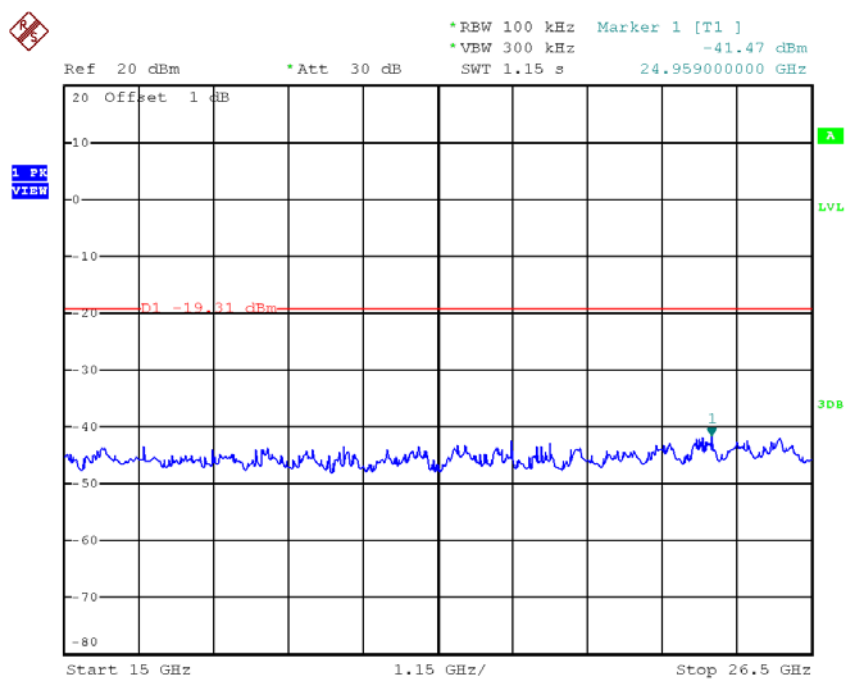

Date: 23.NOV.2017 14:15:00


Test Mode : TX G Mode_ANT 2

TX G mode CH01

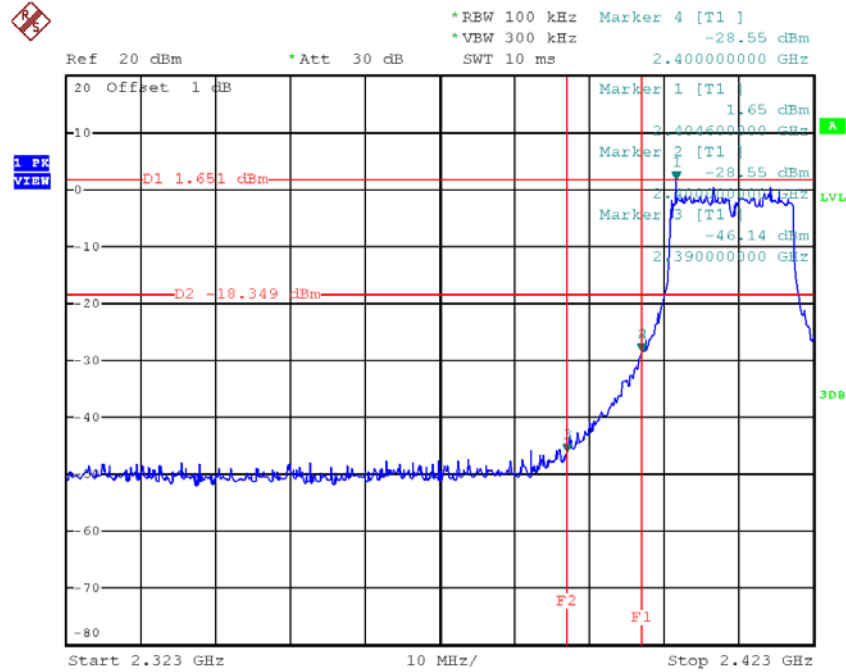


Date: 23.NOV.2017 14:37:40

TX G mode CH11

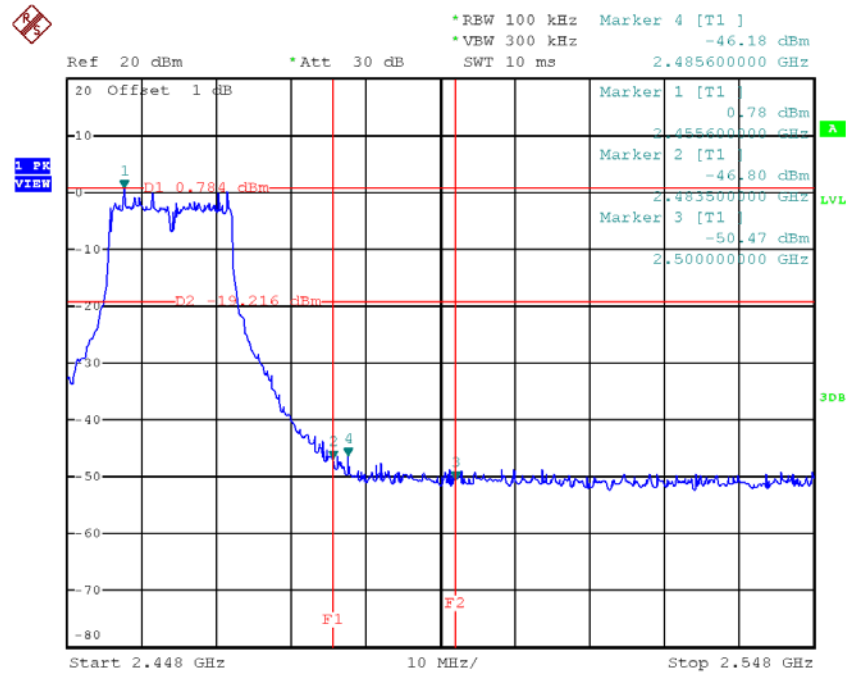


Date: 23.NOV.2017 14:40:47


TX G mode CH01 (10 Harmonic of the frequency)

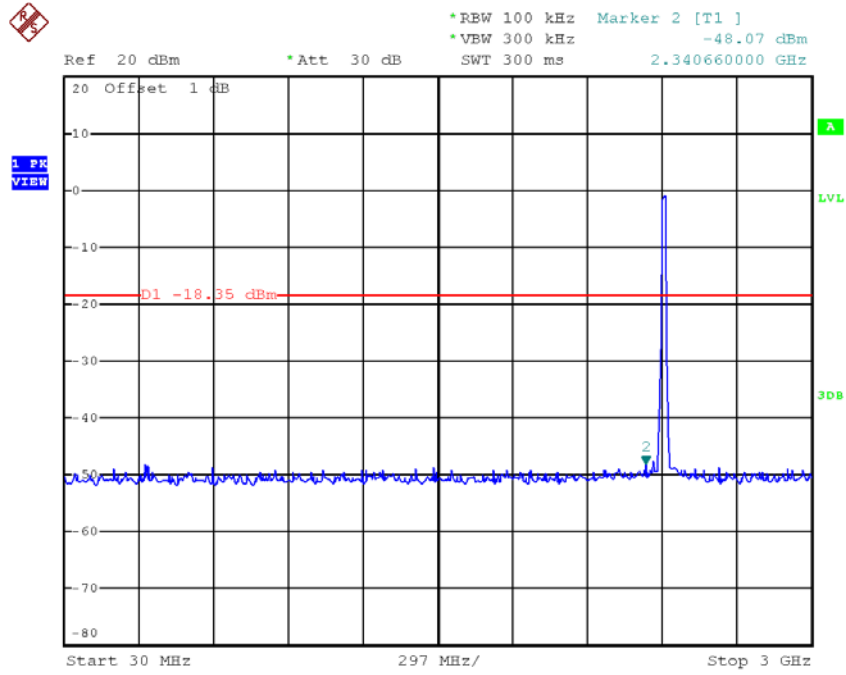

Date: 23.NOV.2017 14:37:52

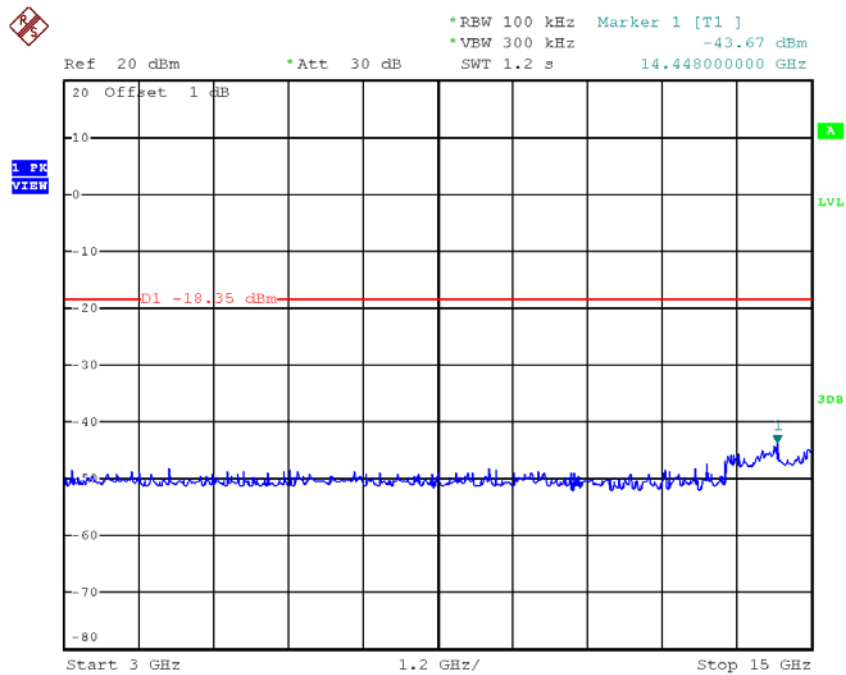


Date: 23.NOV.2017 14:37:59

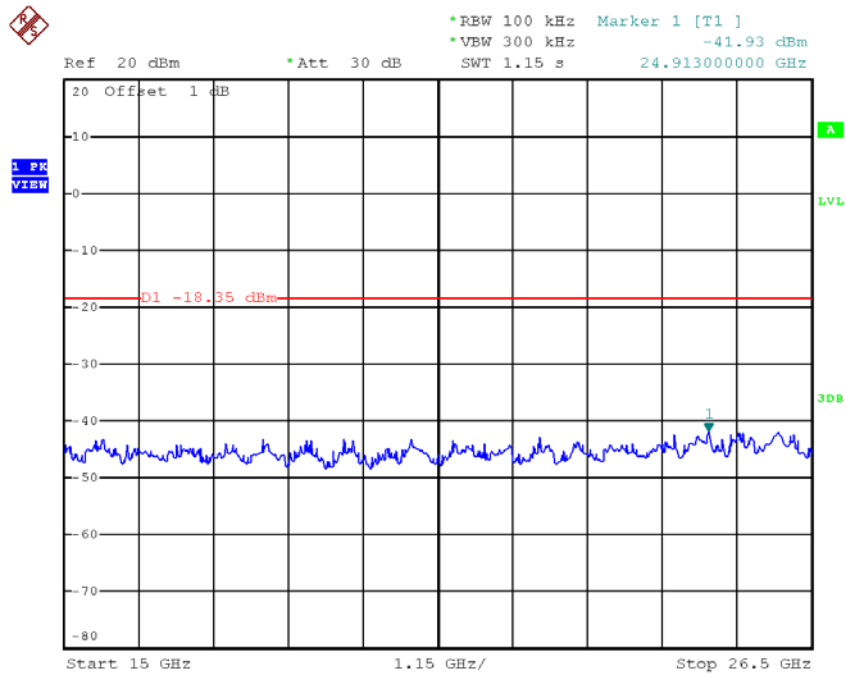


Date: 23.NOV.2017 14:38:06


TX G mode CH06 (10 Harmonic of the frequency)

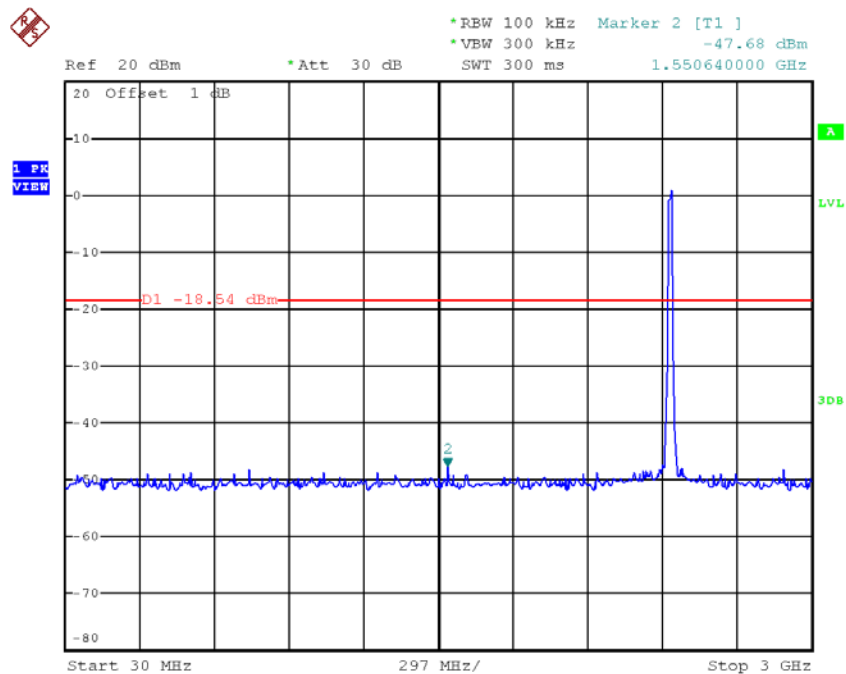

Date: 23.NOV.2017 14:39:31

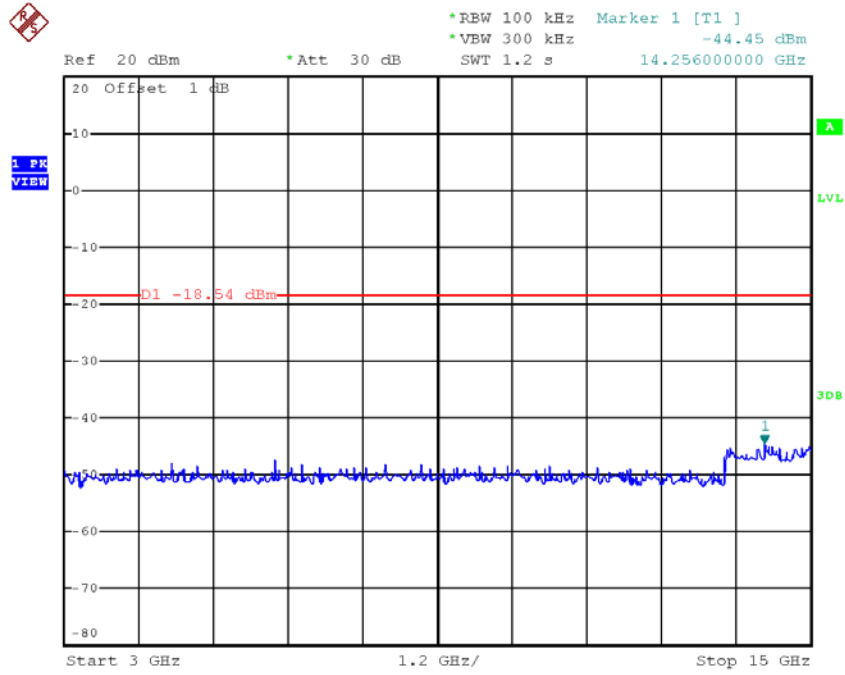


Date: 23.NOV.2017 14:39:38

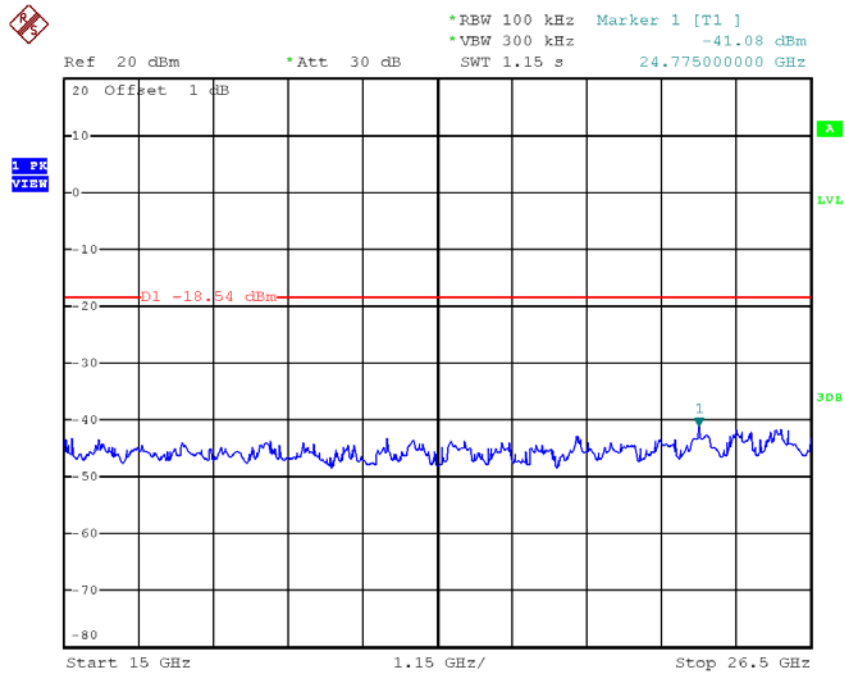


Date: 23.NOV.2017 14:39:45


TX G mode CH11 (10 Harmonic of the frequency)

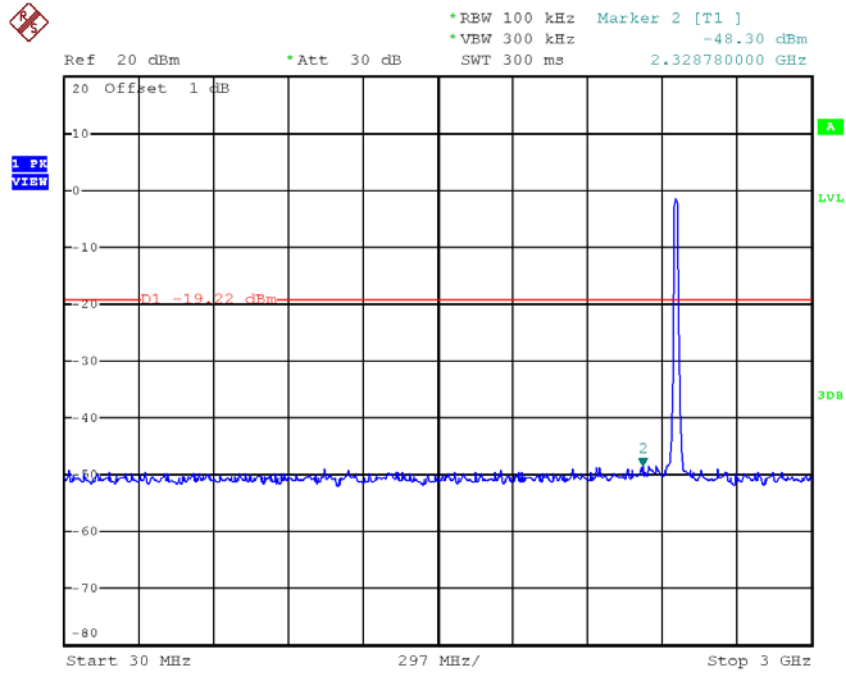

Date: 23.NOV.2017 14:41:00

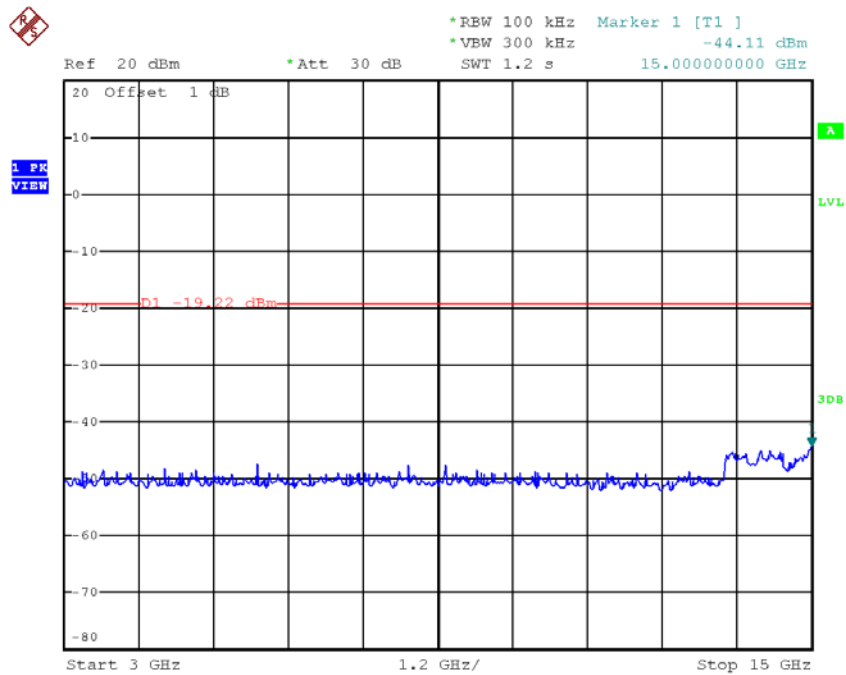


Date: 23.NOV.2017 14:41:07

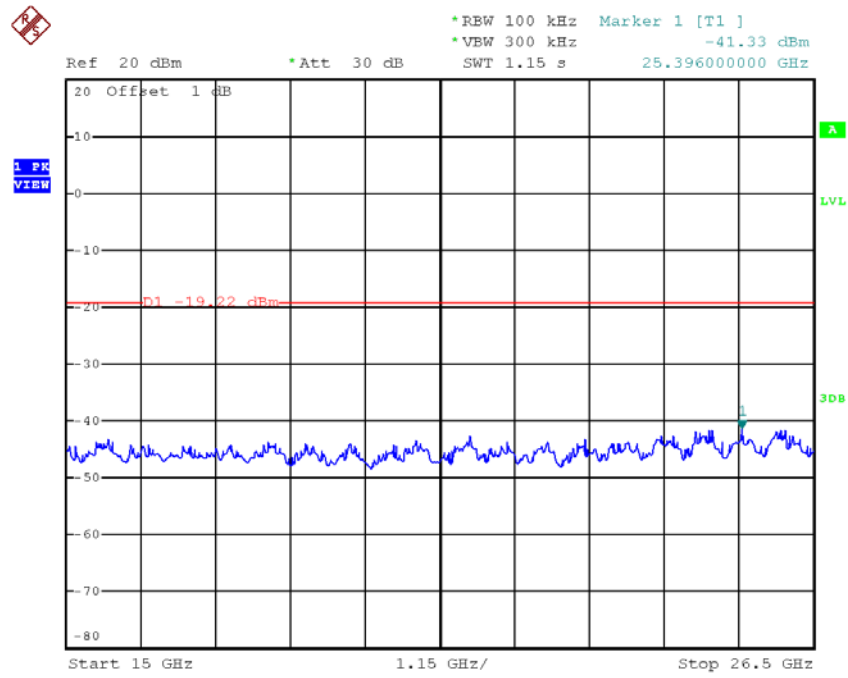

Date: 23.NOV.2017 14:41:15


Test Mode : TX N-20M Mode_ANT 1

TX HT20 mode CH01

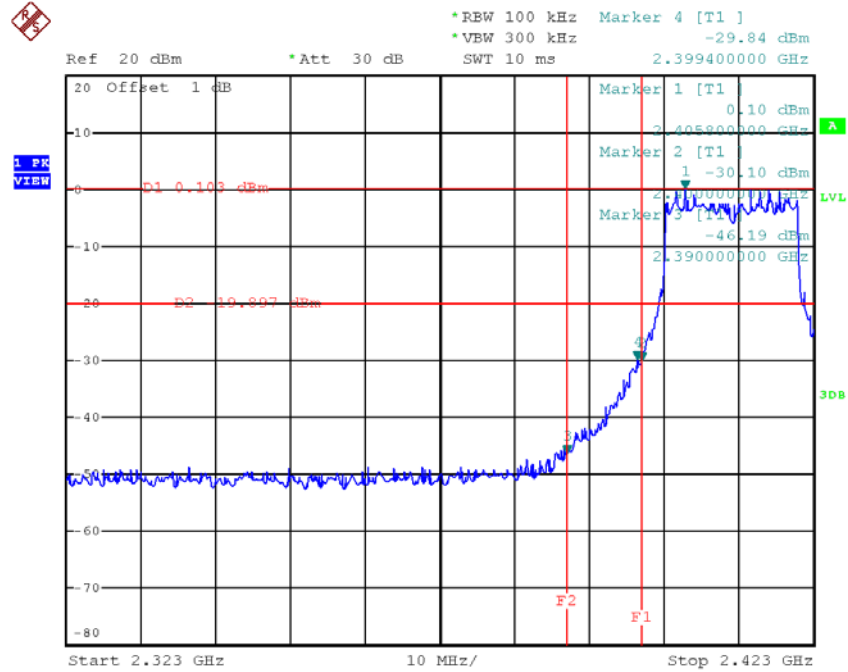

Date: 23.NOV.2017 14:17:57

TX HT20 mode CH11

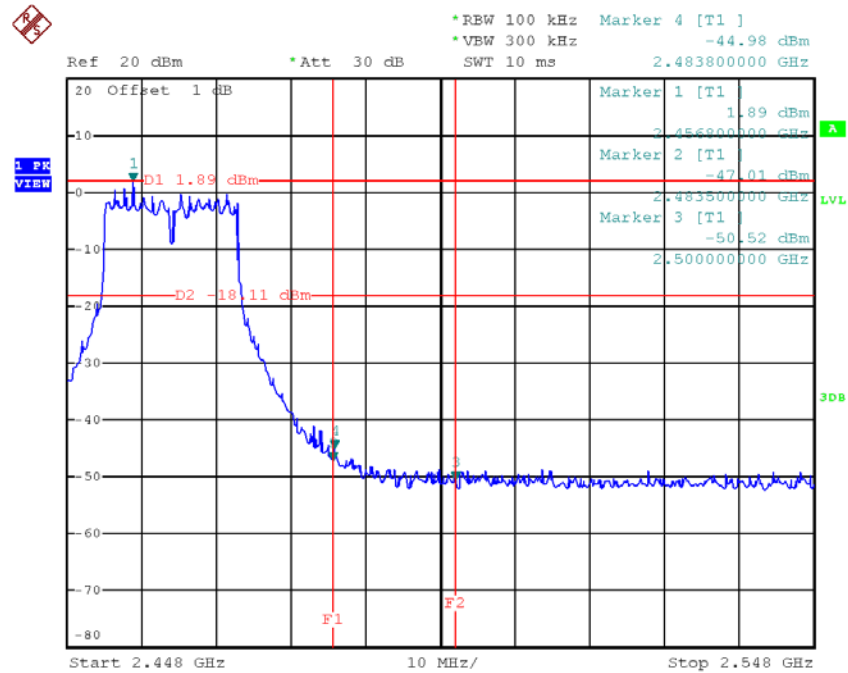

Date: 23.NOV.2017 14:20:52