

TEST REPORT

Applicant Name: Dragino Technology Co., Limited.
Address: Room 202, BaoChengTai industrial park, No.8 CaiYun
LongCheng Street, LongGang District, Shenzhen China
Report Number: 2401U46223E-RF-00
FCC ID: ZHZPSNS

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: NB-IoT Sensor Node
Model No.: SDI-12-NS
Multiple Model(s) No.: SDI-12-NB, PS-NS-NA, PS-NB-NA, PS-NB-I5, PS-NB-T20,
PS-NB-D04, PS-NS-I5, PS-NS-T20, PS-NS-D04, PS-NB-Tx,
PS-NB-Ix, PS-NB-Dx, PS-NS-Tx, PS-NS-Ix, PS-NS-Dx
Trade Mark: DRAGINO
Date Received: 2024/06/24
Issue Date: 2024/10/21

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jojo. Guo

Jojo Guo
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
APPLICABLE STANDARD	13
RESULT	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.209, §15.205 & §15.247(D) – UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS16	
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	18
FACTOR & OVER LIMIT/MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH	37
STANDARD APPLICABLE	37
TEST PROCEDURE	37
TEST DATA	38
FCC §15.247(B) (3) - PEAK OUTPUT POWER MEASUREMENT	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40

FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	42
EUT PHOTOGRAPHS	43
TEST SETUP PHOTOGRAPHS	44
APPENDIX	45
APPENDIX A: DTS BANDWIDTH	45
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	48
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	51
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	52
APPENDIX E: BAND EDGE MEASUREMENTS	55
APPENDIX F: DUTY CYCLE	56

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401U46223E-RF-00	Original Report	2024/10/21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	NB-IoT Sensor Node
Tested Model	SDI-12-NS
Multiple Model(s)	SDI-12-NB, PS-NS-NA, PS-NB-NA, PS-NB-I5, PS-NB-T20, PS-NB-D04, PS-NS-I5, PS-NS-T20, PS-NS-D04, PS-NB-Tx, PS-NB-Ix, PS-NB-Dx, PS-NS-Tx, PS-NS-Ix, PS-NS-Dx
Frequency Range	BLE: 2402-2480MHz
Maximum Conducted Peak Output Power	BLE: 0.14dBm
Modulation Technique	BLE: GFSK
Antenna Specification [#]	0.37dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery
Sample serial number	SDI-12-NS: 2ND9-1 for Conducted and Radiated Emissions Test SDI-12-NB: 2ND9-8 for Conducted and Radiated Emissions Test PS-NB-D04: 2ND9-7 for Conducted and Radiated Emissions Test PS-NS-D04: 2ND9-2 for Conducted and Radiated Emissions Test 2ND9-3 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The Multiple models are electrically identical with the test model except for probe, enclosure, battery and charging module. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.247 rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

The multiple EUT model can generally divide to two groups:

The NS version, include model PS-NS-NA, SDI-12-NS, PS-NS-I5, PS-NS-T20, PS-NS-D04, PS-NS-Tx, PS-NS-Ix, PS-NS-Dx, within this EUT group, all models is electrical identical, SDI-12-NS is basic model, PS-NS-NA is identical to SDI-12-NS, other models with one more probe(I5 probe or T20 probe or D04 probe), detail refer the DOS provided by applicant.

The NB version, include model PS-NB-NA, SDI-12-NB, PS-NB-I5, PS-NB-T20, PS-NB-D04, PS-NB-Tx, PS-NB-Ix, PS-NB-Dx, within this EUT group, all models is electrical identical, SDI-12-NB is basic model, PS-NB-NA is identical to SDI-12-NB, other models with one more probe(I5 probe or T20 probe or D04 probe), detail refer the DOS provided by applicant.

The NS version and NB version with same radio board, the difference between them is battery and shell, and the NS version with one more charging board which can use for solar charging than NB version.

Model SDI-12-NS was select to full test, model SDI-12-NB was select to check for without charging board, for the difference probe, the worst case PS-NS-D04and PS-NB-D04 was select to verify compliance.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“Smart Snippets tool box v5.0.1.2”[#] exercise software was used and the power level is Default[#]. The software and power level was provided by the applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions below 1GHz:

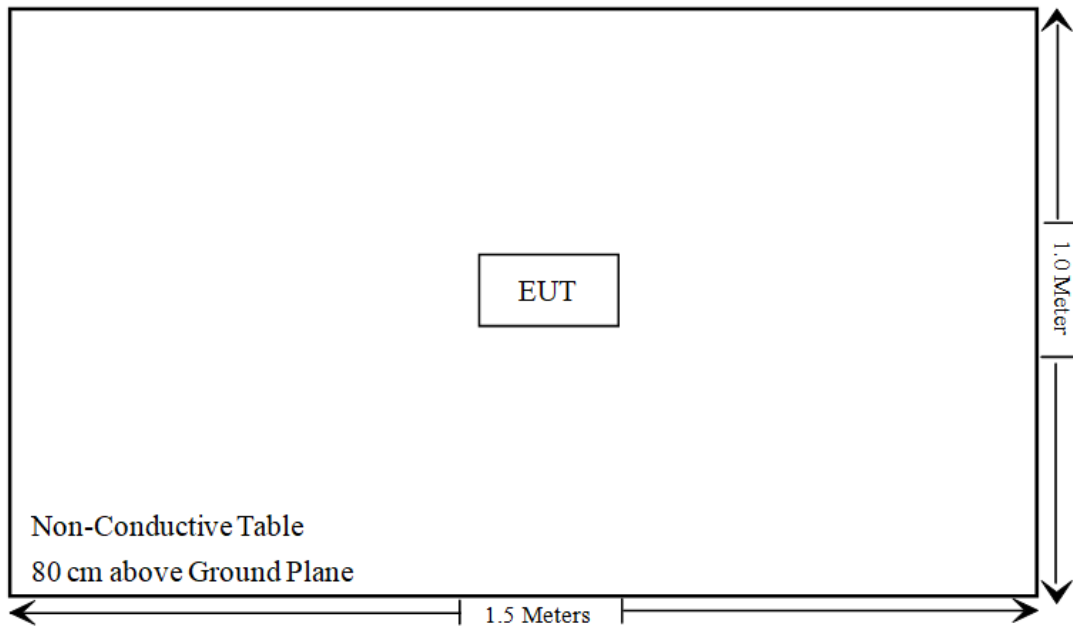

For Radiated Emissions above 1GHz:

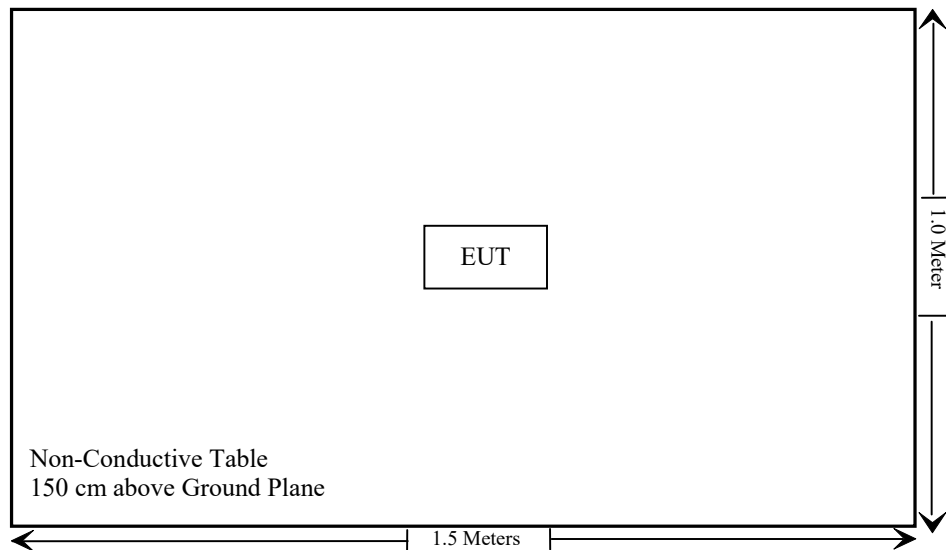

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant

Not Applicable: The device is battery powered.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2024/06/27	2025/06/26
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Agilent	Signal Generator	N5183A	MY50140588	2023/12/18	2024/12/17

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
BLE	2402-2480	0.5	0.37	-1.78	-1.28	0.0007	0.2	0.768
LTE B2	1850-1910	25.0	0.45	-1.70	23.30	0.214	0.2	0.768
LTE B4	1710-1755	25.0	0.45	-1.70	23.30	0.214	0.2	0.768
LTE B5	824-849	25.0	0.18	-1.97	23.03	0.201	0.2	0.422
LTE B12	699-716	25.0	0.23	-1.92	23.08	0.203	0.2	0.358
LTE B13	777-787	25.0	0.18	-1.97	23.03	0.201	0.2	0.398
LTE B17	704-716	25.0	0.23	-1.92	23.08	0.203	0.2	0.360
LTE B25	1850-1915	25.0	0.45	-1.70	23.30	0.214	0.2	0.768
LTE B66	1710-1780	25.0	0.45	-1.70	23.30	0.214	0.2	0.768
LTE B85	698-716	25.0	0.23	-1.92	23.08	0.203	0.2	0.357

Note:

The tune up conducted power and antenna gain was declared by the applicant.

The device contains a certified WWAN model (model: BC660K-GL, FCC ID: XMR2021BC660KGL)

Simultaneously transmitting condition:

The worst case ratio=0.0007/0.768+0.203/0.357=0.57<1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain[#] is 0.37dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant


FCC §15.209, §15.205 & §15.247(D) – UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

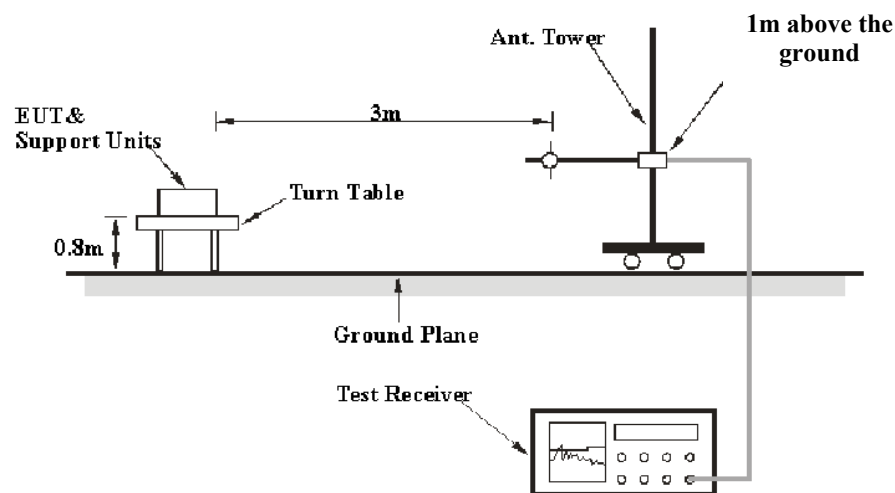

30MHz-1GHz:

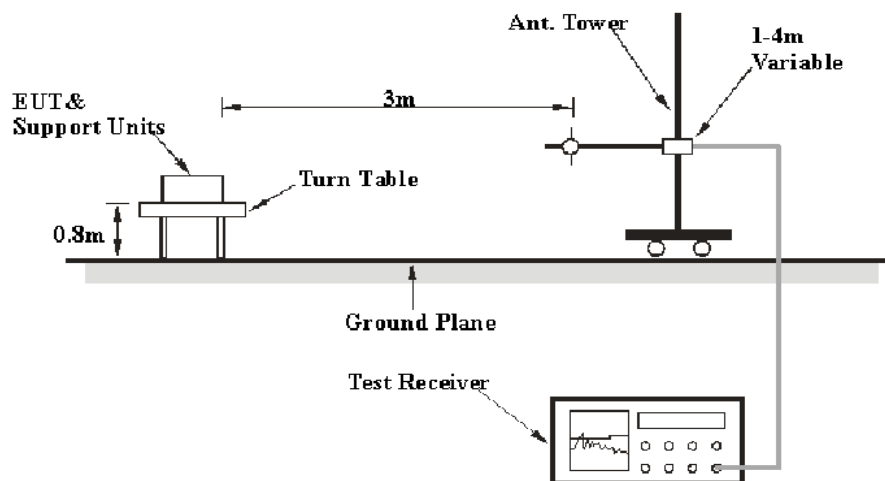

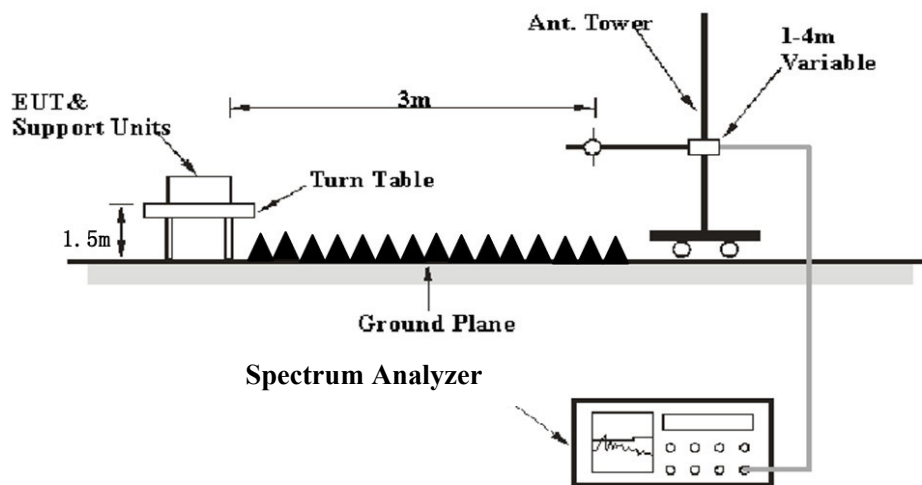Above 1GHz:

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25 GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC 15.205, FCC 15.209, FCC 15.247.

Test Data

Environmental Conditions

Temperature:	22~25.6 °C
Relative Humidity:	50~54 %
ATM Pressure:	101.0 kPa

The testing was performed by Anson Su on 2024-07-18 and 2024-07-19 for below 1GHz and Sadow Tan on 2024-08-26 for above 1GHz.

EUT operation mode: Transmitting

Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.


9 kHz-30MHz:

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)

For Model: SDI-12-NS


Horizontal

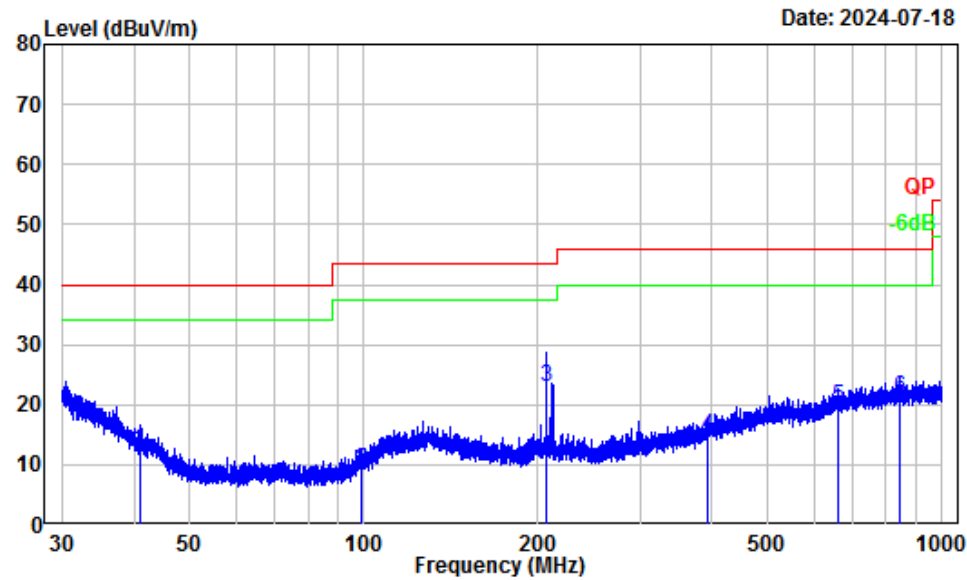

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB	
1	40.86	-12.07	24.55	12.48	40.00	-27.52	QP
2	99.31	-15.62	24.71	9.09	43.50	-34.41	QP
3	206.85	-13.64	36.51	22.87	43.50	-20.63	QP
4	391.92	-10.82	25.56	14.74	46.00	-31.26	QP
5	662.31	-6.59	26.26	19.67	46.00	-26.33	QP
6	842.50	-4.89	26.14	21.25	46.00	-24.75	QP

Vertical

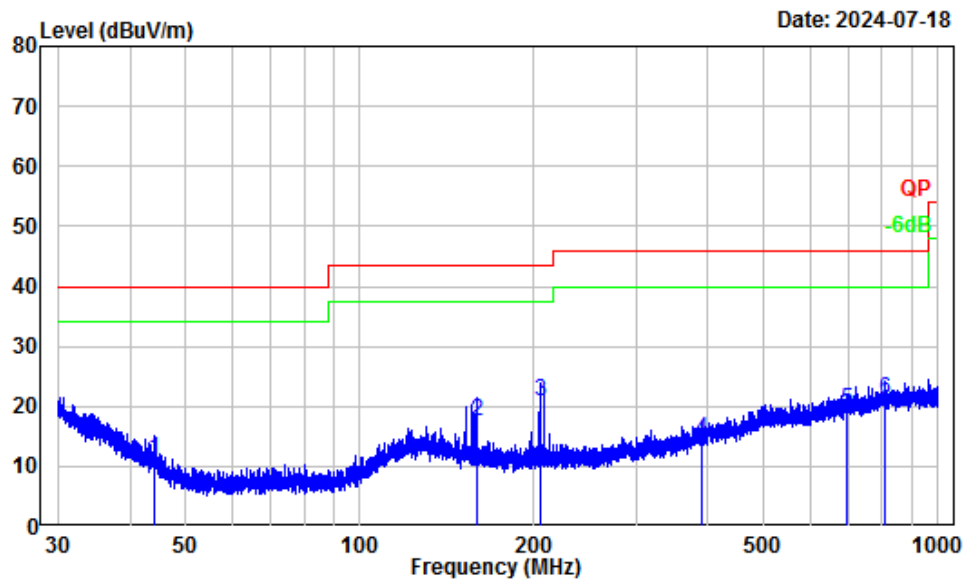


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	44.00 -15.28	26.47	11.19	40.00	-28.81	QP
2	159.29 -14.15	31.60	17.45	43.50	-26.05	QP
3	205.77 -14.71	35.45	20.74	43.50	-22.76	QP
4	390.04 -11.09	25.55	14.46	46.00	-31.54	QP
5	695.03 -6.62	25.91	19.29	46.00	-26.71	QP
6	809.56 -5.35	26.37	21.02	46.00	-24.98	QP

For Model: PS-NS-D04


Horizontal

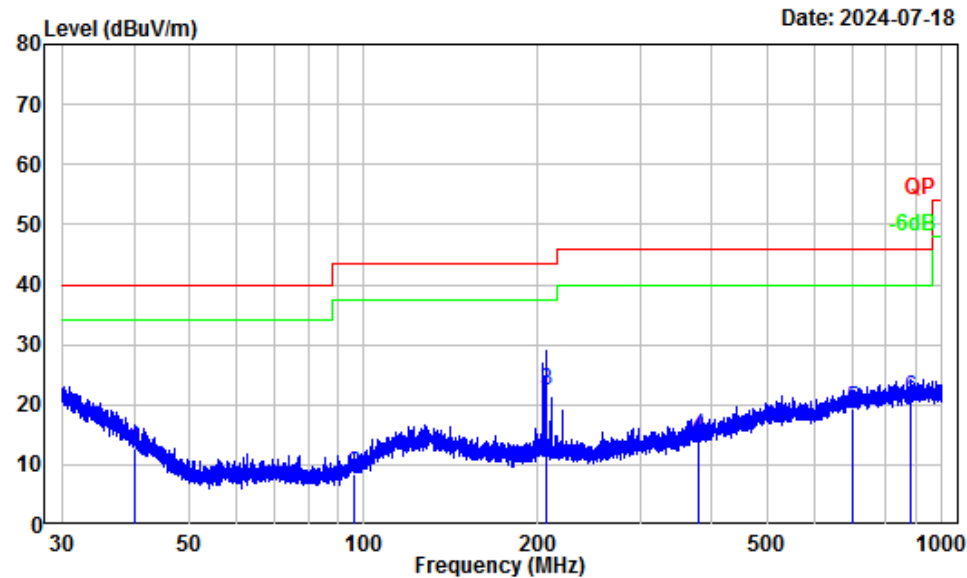

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.10	-11.58	24.14	12.56	40.00	-27.44 QP
2	96.35	-16.41	24.90	8.49	43.50	-35.01 QP
3	206.22	-13.61	35.99	22.38	43.50	-21.12 QP
4	380.41	-11.14	25.84	14.70	46.00	-31.30 QP
5	698.39	-6.18	25.62	19.44	46.00	-26.56 QP
6	881.79	-4.57	25.58	21.01	46.00	-24.99 QP

Vertical

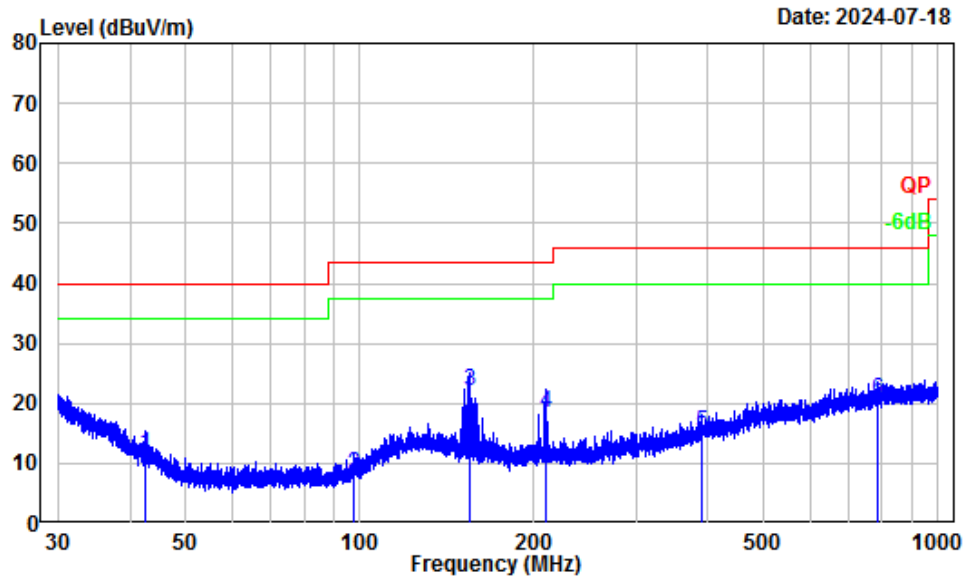


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.40	-14.37	25.72	11.35	40.00	-28.65	QP
2	97.67	-17.39	25.41	8.02	43.50	-35.48	QP
3	154.89	-14.02	35.92	21.90	43.50	-21.60	QP
4	209.59	-14.74	33.30	18.56	43.50	-24.94	QP
5	389.35	-11.11	26.19	15.08	46.00	-30.92	QP
6	786.13	-5.58	26.09	20.51	46.00	-25.49	QP

For Model: SDI-12-NB


Horizontal

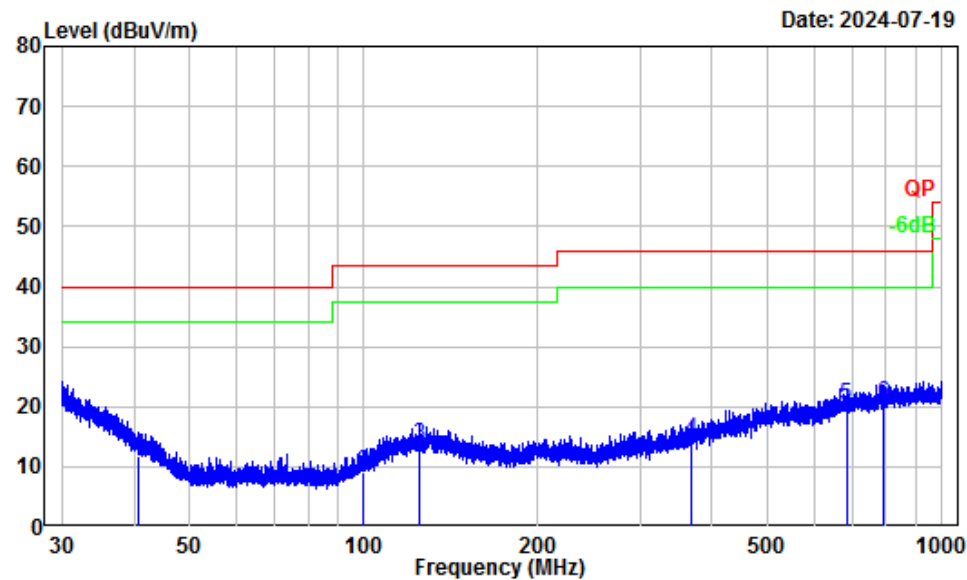

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	40.76 -12.00	23.78	11.78	40.00	-28.22 QP
2	99.62 -15.53	24.59	9.06	43.50	-34.44 QP
3	124.84 -12.22	25.91	13.69	43.50	-29.81 QP
4	368.43 -11.47	25.95	14.48	46.00	-31.52 QP
5	683.25 -6.35	26.48	20.13	46.00	-25.87 QP
6	792.70 -5.34	25.86	20.52	46.00	-25.48 QP

Vertical

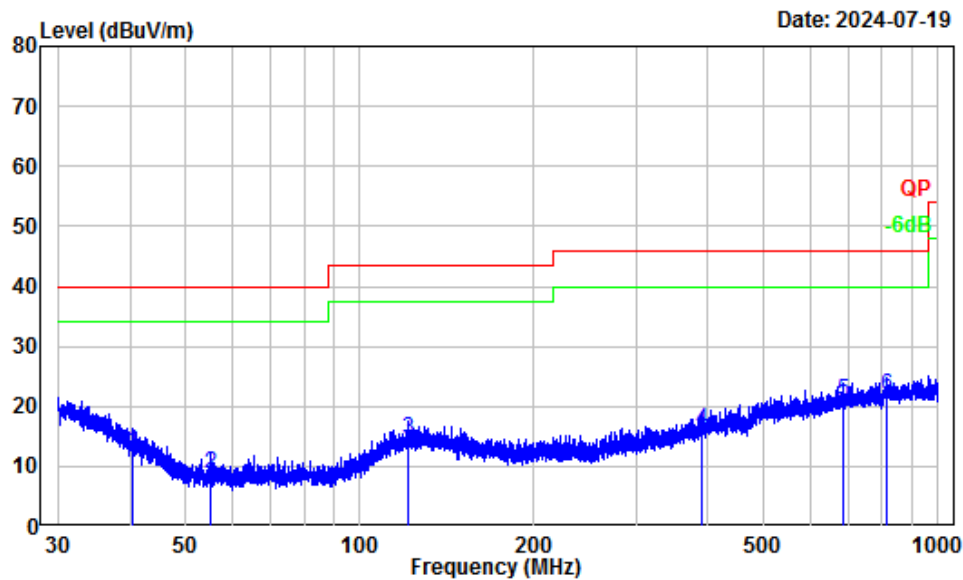


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.29	-13.18	25.54	12.36	40.00	-27.64 QP
2	55.17	-18.74	27.35	8.61	40.00	-31.39 QP
3	121.44	-12.74	27.16	14.42	43.50	-29.08 QP
4	391.41	-11.05	27.09	16.04	46.00	-29.96 QP
5	685.35	-6.73	27.68	20.95	46.00	-25.05 QP
6	813.82	-5.33	27.03	21.70	46.00	-24.30 QP

For Model: PS-NB-D04


Horizontal

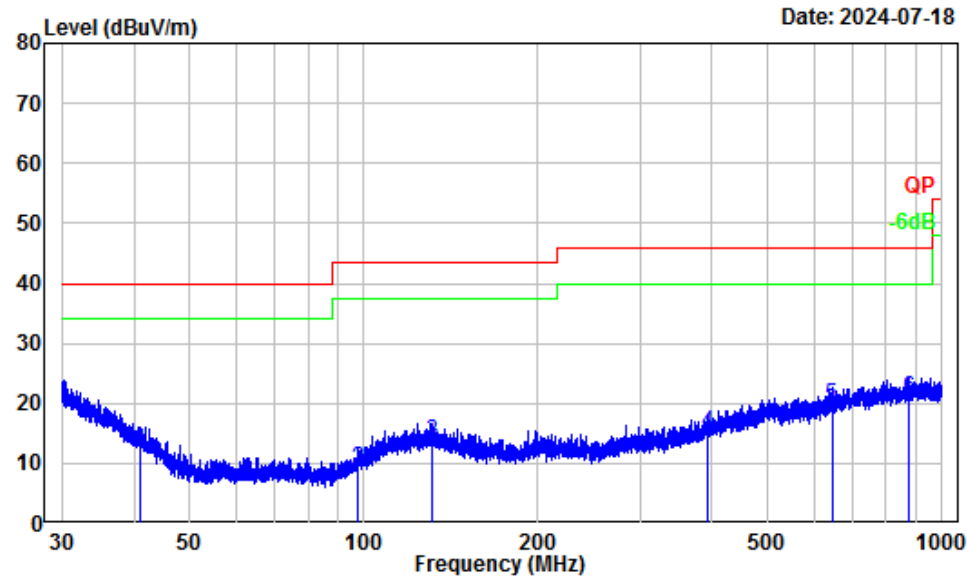

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.95	-12.13	24.26	12.13	40.00	-27.87 QP
2	97.54	-16.08	25.02	8.94	43.50	-34.56 QP
3	131.47	-12.15	25.71	13.56	43.50	-29.94 QP
4	394.34	-10.75	25.75	15.00	46.00	-31.00 QP
5	644.84	-6.88	26.63	19.75	46.00	-26.25 QP
6	877.94	-4.60	25.57	20.97	46.00	-25.03 QP

Vertical

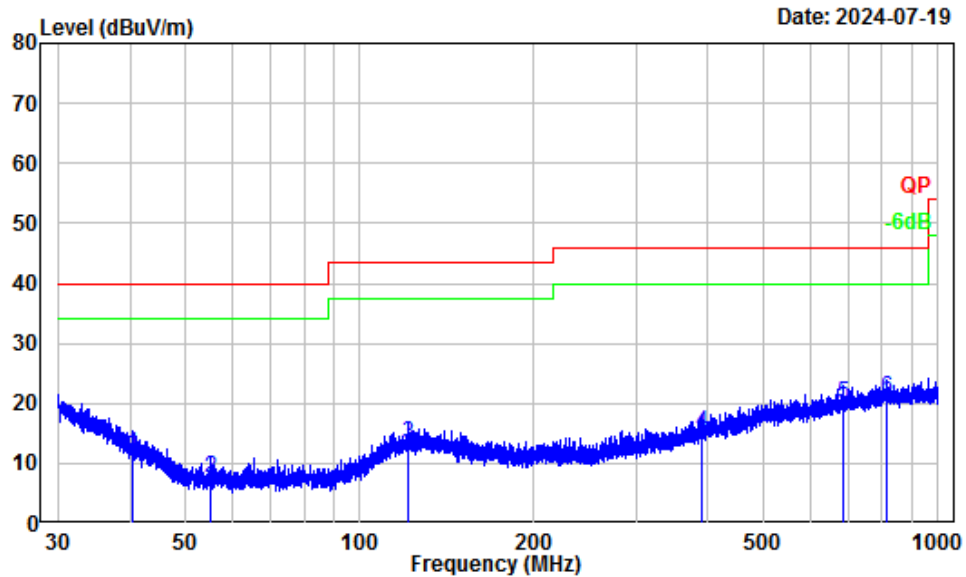

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U46223E-RF
Test Mode : BLE
Tester : Anson Su

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	40.29 -13.18	24.54	11.36	40.00	-28.64 QP
2	55.17 -18.74	26.35	7.61	40.00	-32.39 QP
3	121.44 -12.74	26.16	13.42	43.50	-30.08 QP
4	391.41 -11.05	26.09	15.04	46.00	-30.96 QP
5	685.35 -6.73	26.68	19.95	46.00	-26.05 QP
6	813.82 -5.33	26.03	20.70	46.00	-25.30 QP

1-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
BLE 1M							
Low Channel 2402MHz							
2361.11	53.99	PK	H	-2.93	51.06	74	-22.94
2361.11	40.35	AV	H	-2.93	37.42	54	-16.58
2356.25	54.05	PK	V	-2.93	51.12	74	-22.88
2356.25	41.14	AV	V	-2.93	38.21	54	-15.79
4804.00	53.85	PK	H	1.69	55.54	74	-18.46
4804.00	43.73	AV	H	1.69	45.42	54	-8.58
4804.00	49.58	PK	V	1.69	51.27	74	-22.73
4804.00	38.27	AV	V	1.69	39.96	54	-14.04
Middle Channel 2440MHz							
4880.00	53.98	PK	H	1.69	55.67	74	-18.33
4880.00	48.82	AV	H	1.69	50.51	54	-3.49
4880.00	49.96	PK	V	1.69	51.65	74	-22.35
4880.00	42.62	AV	V	1.69	44.31	54	-9.69
High Channel 2480MHz							
2483.93	57.56	PK	H	-3.17	54.39	74	-19.61
2483.93	41.71	AV	H	-3.17	38.54	54	-15.46
2483.74	55.94	PK	V	-3.17	52.77	74	-21.23
2483.74	41.17	AV	V	-3.17	38.00	54	-16.00
4960.00	54.86	PK	H	2.77	57.63	74	-16.37
4960.00	50.81	AV	H	2.77	53.58	54	-0.42
4960.00	51.33	PK	V	2.77	54.10	74	-19.90
4960.00	44.38	AV	V	2.77	47.15	54	-6.85

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


Test plots for Band Edge Measurements (Radiated):

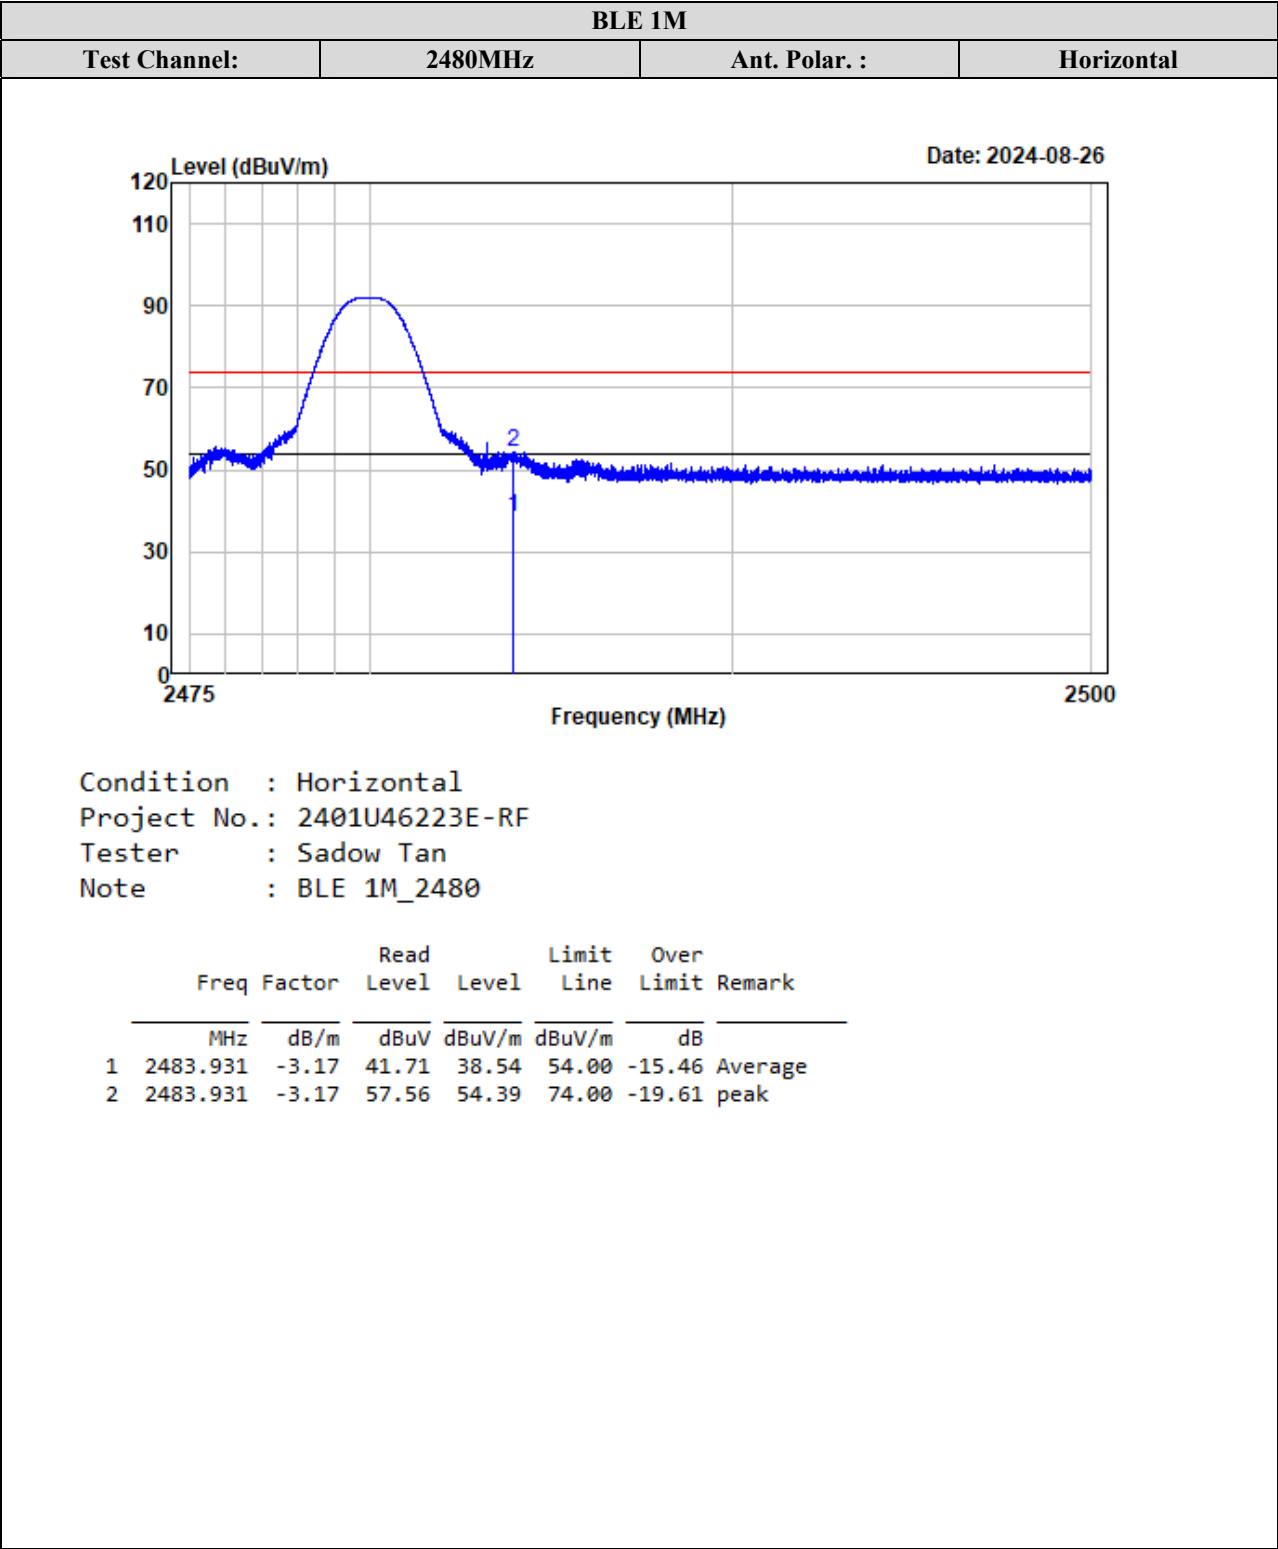


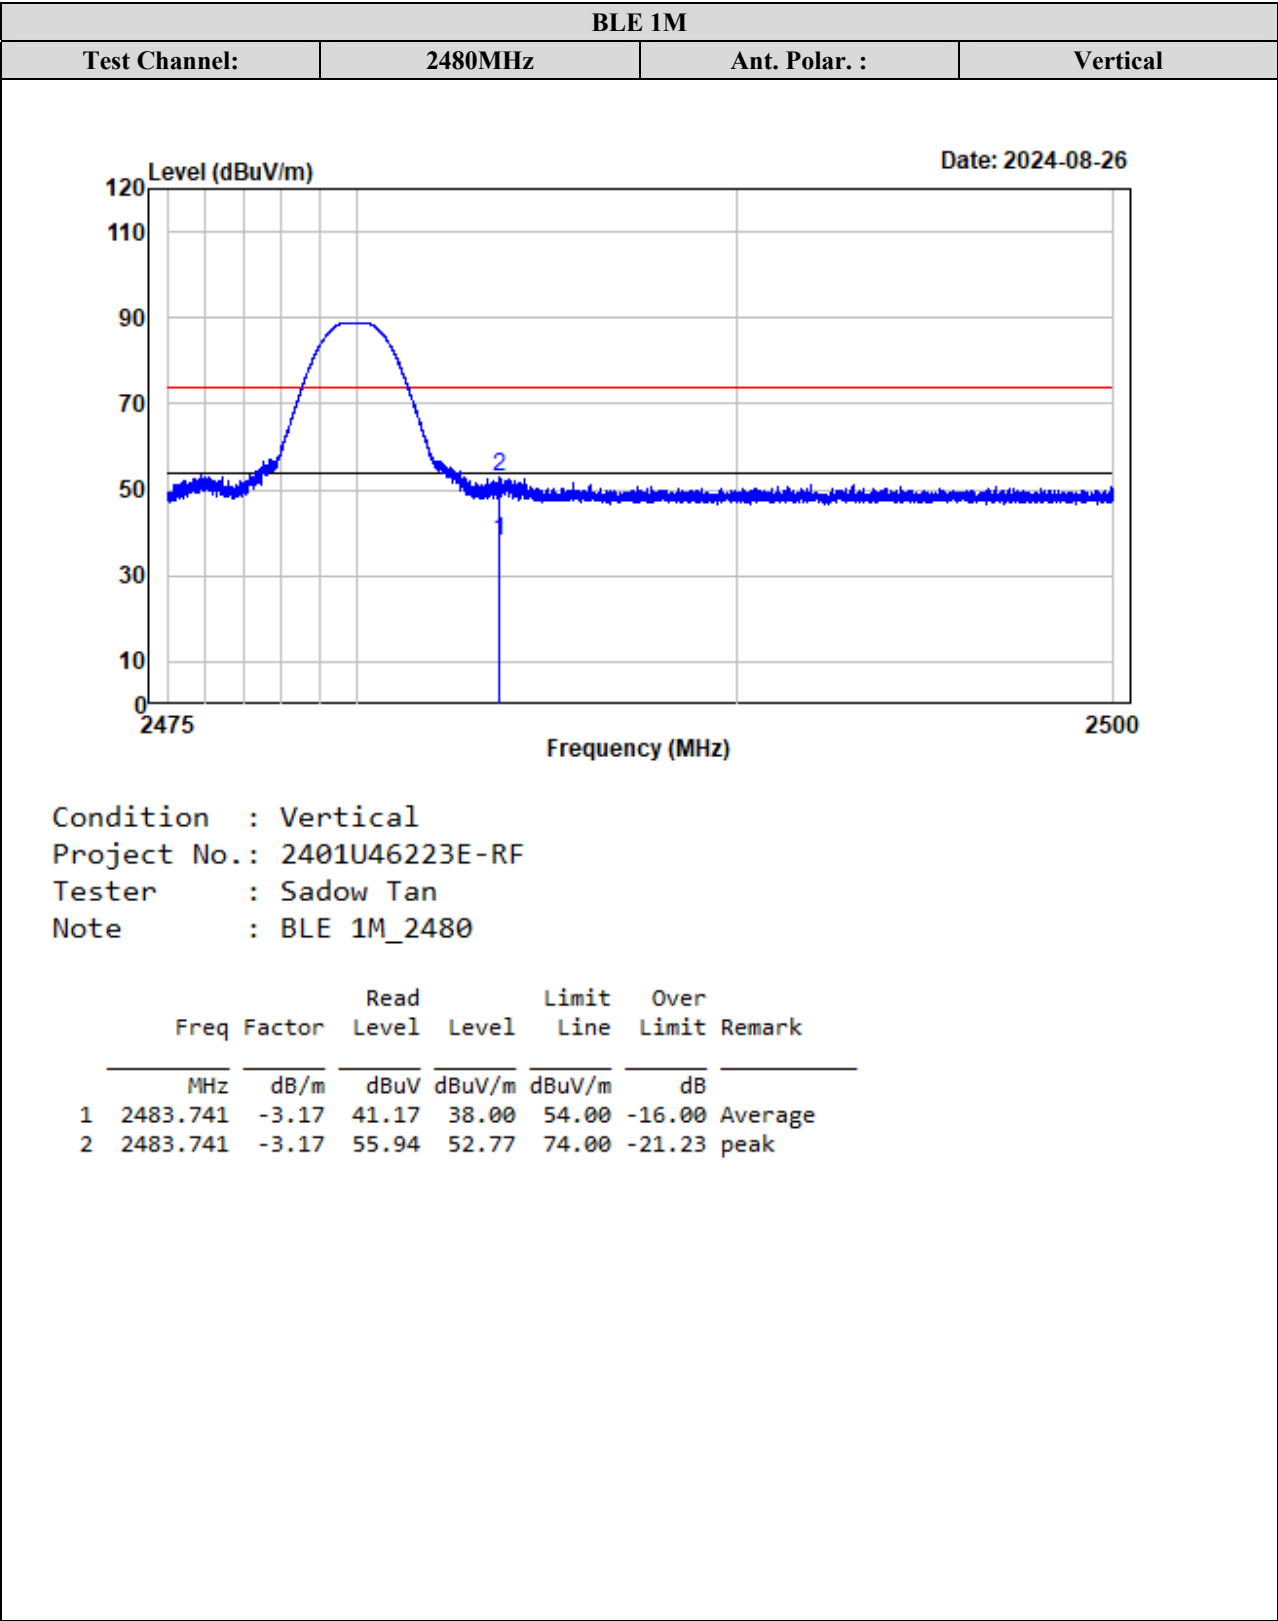



Test plots for Harmonic Measurements:

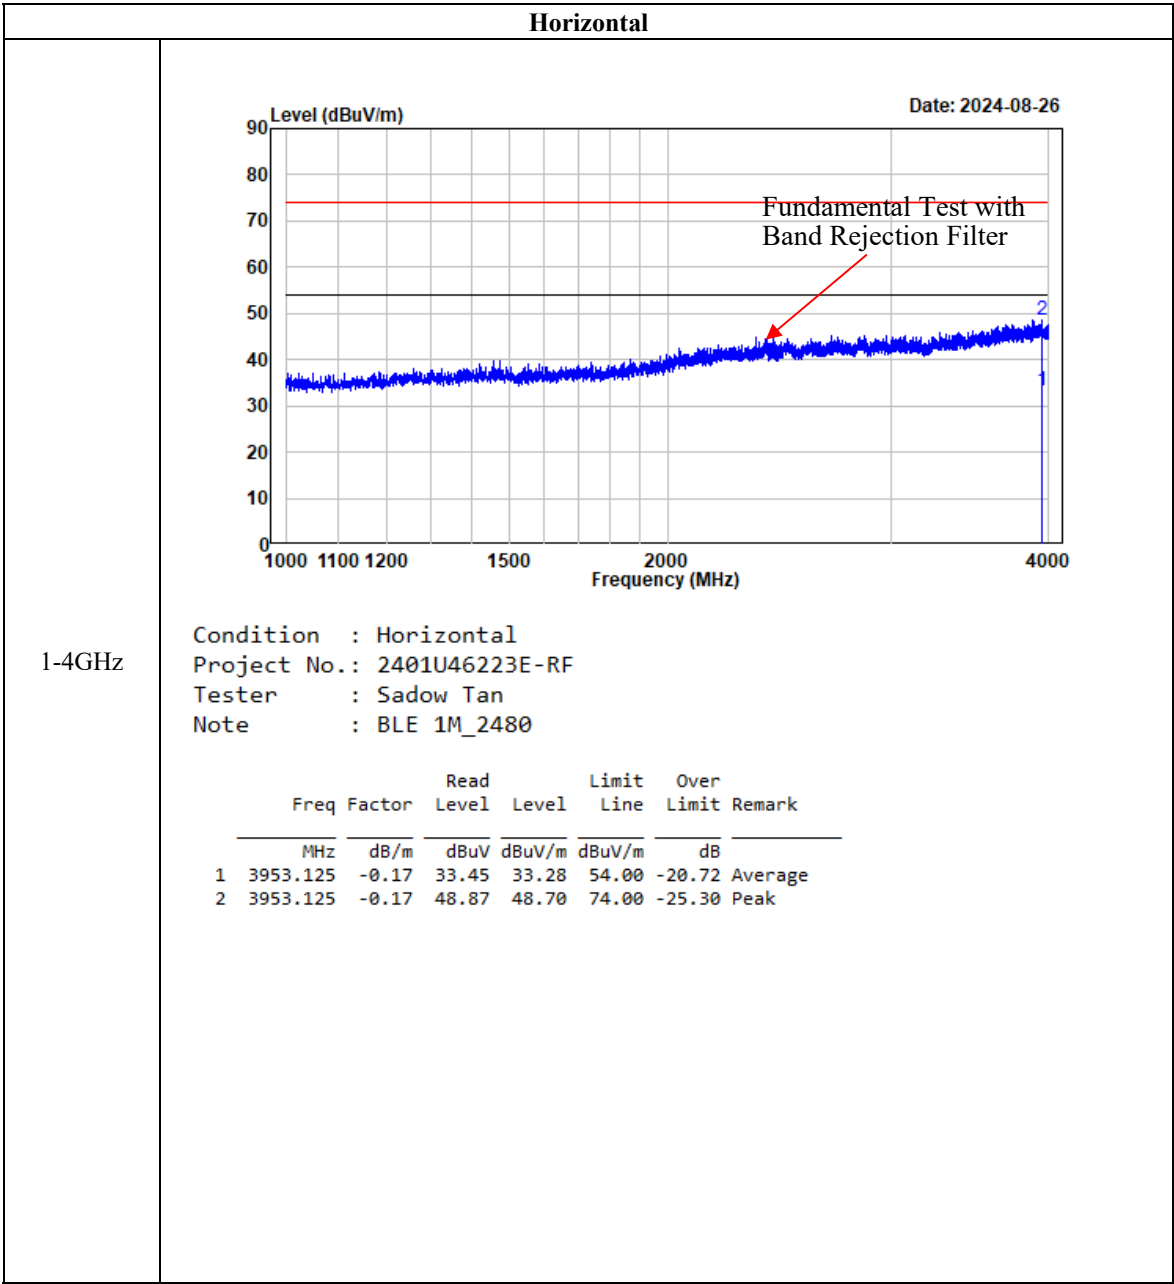


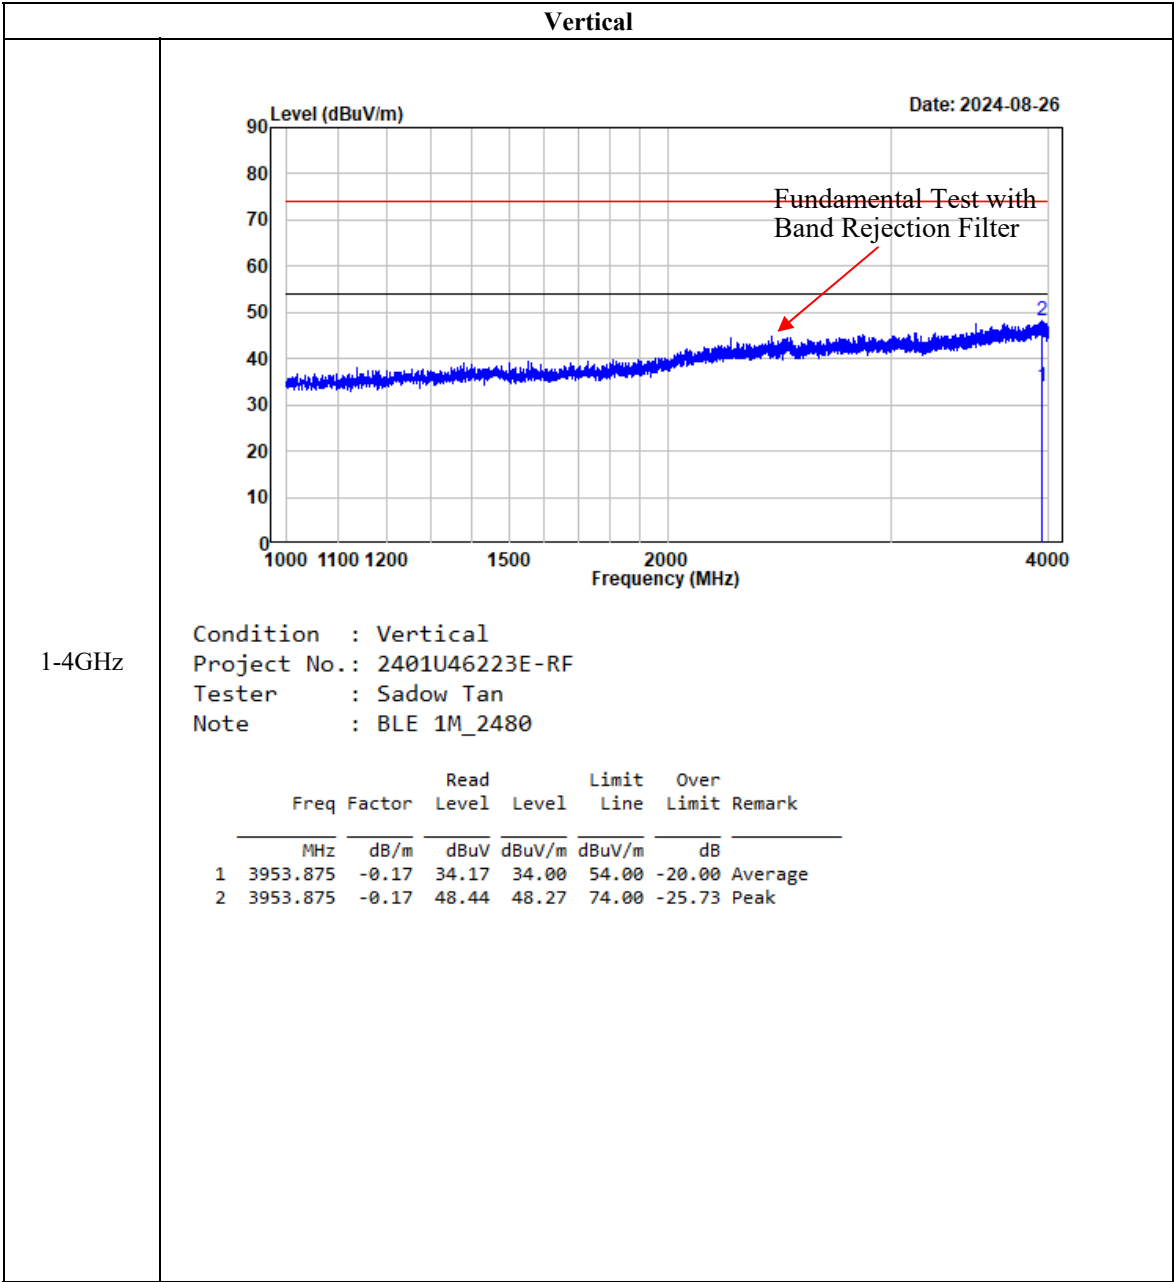

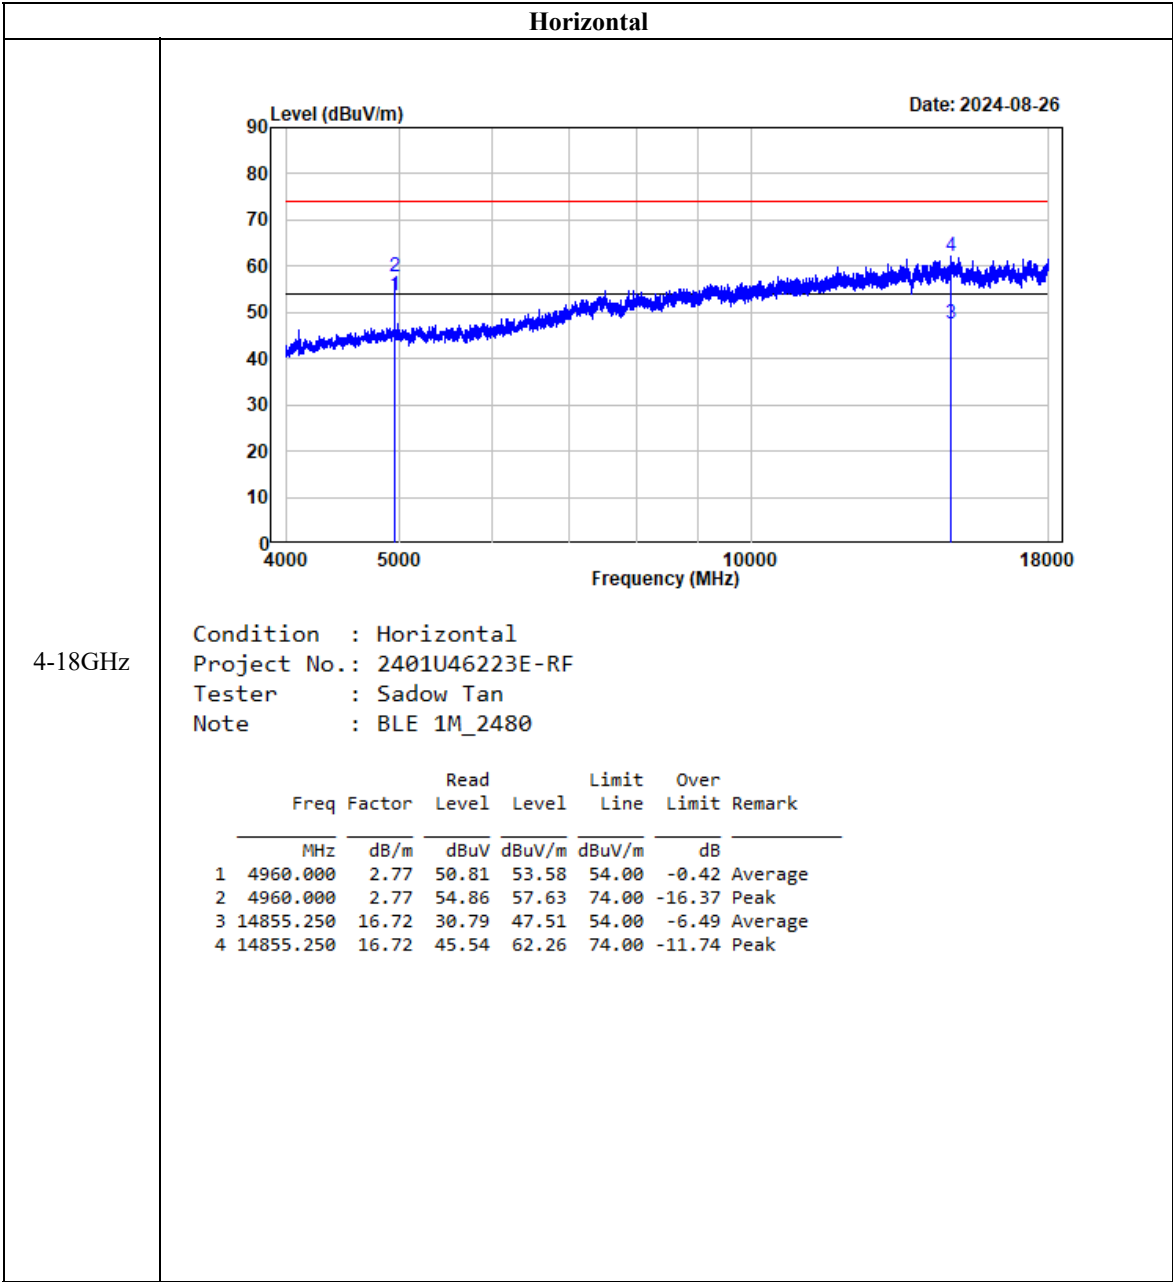

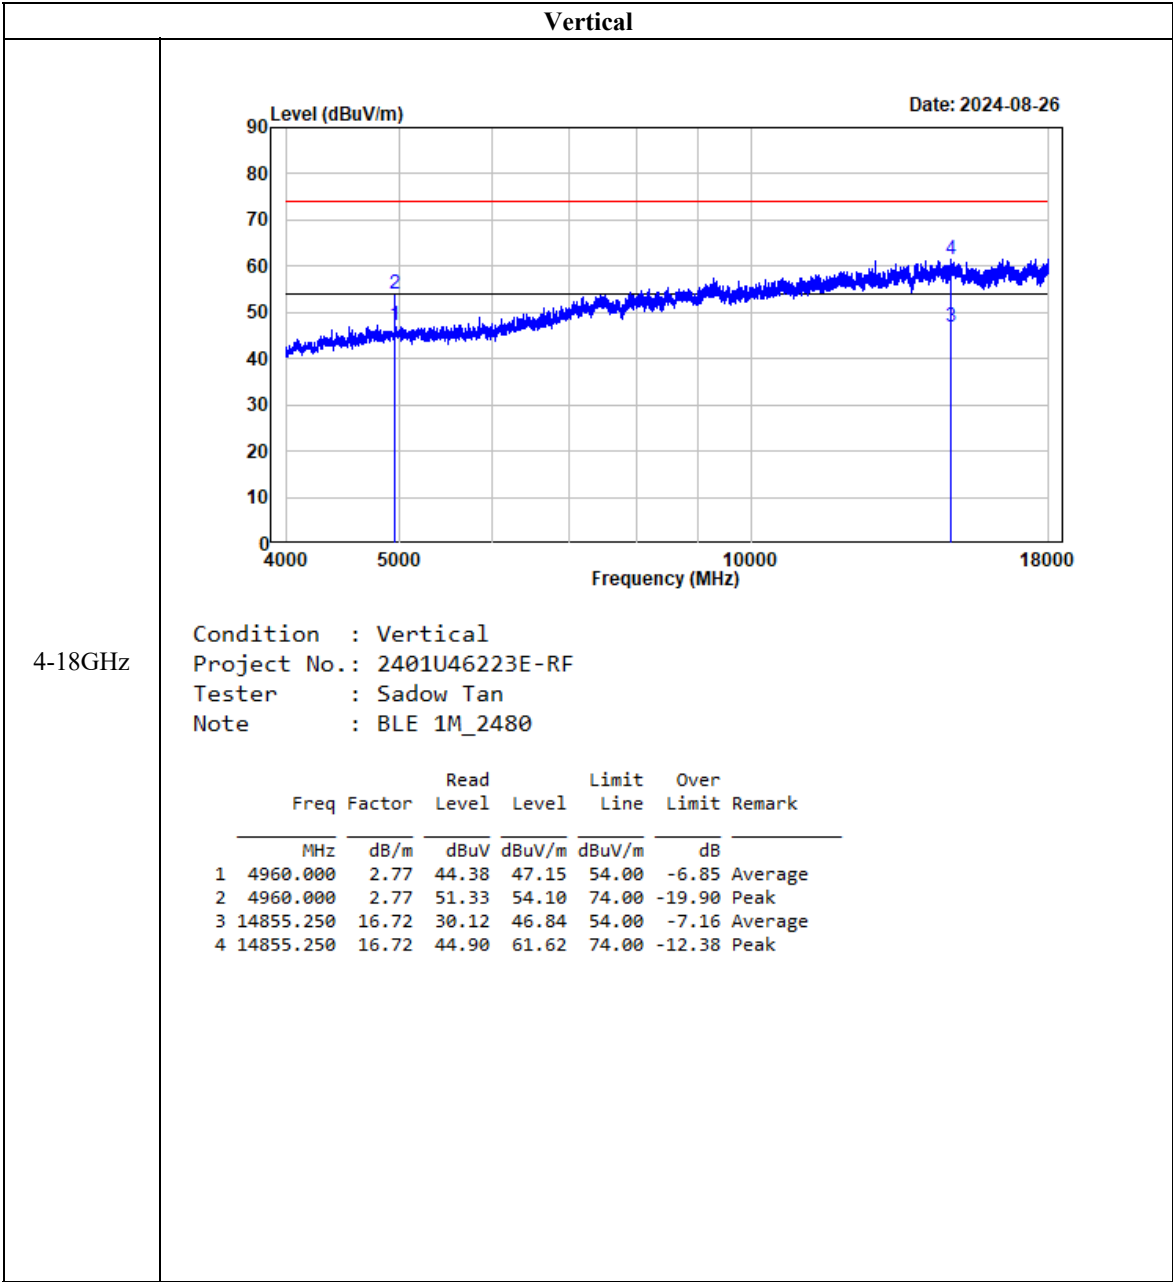

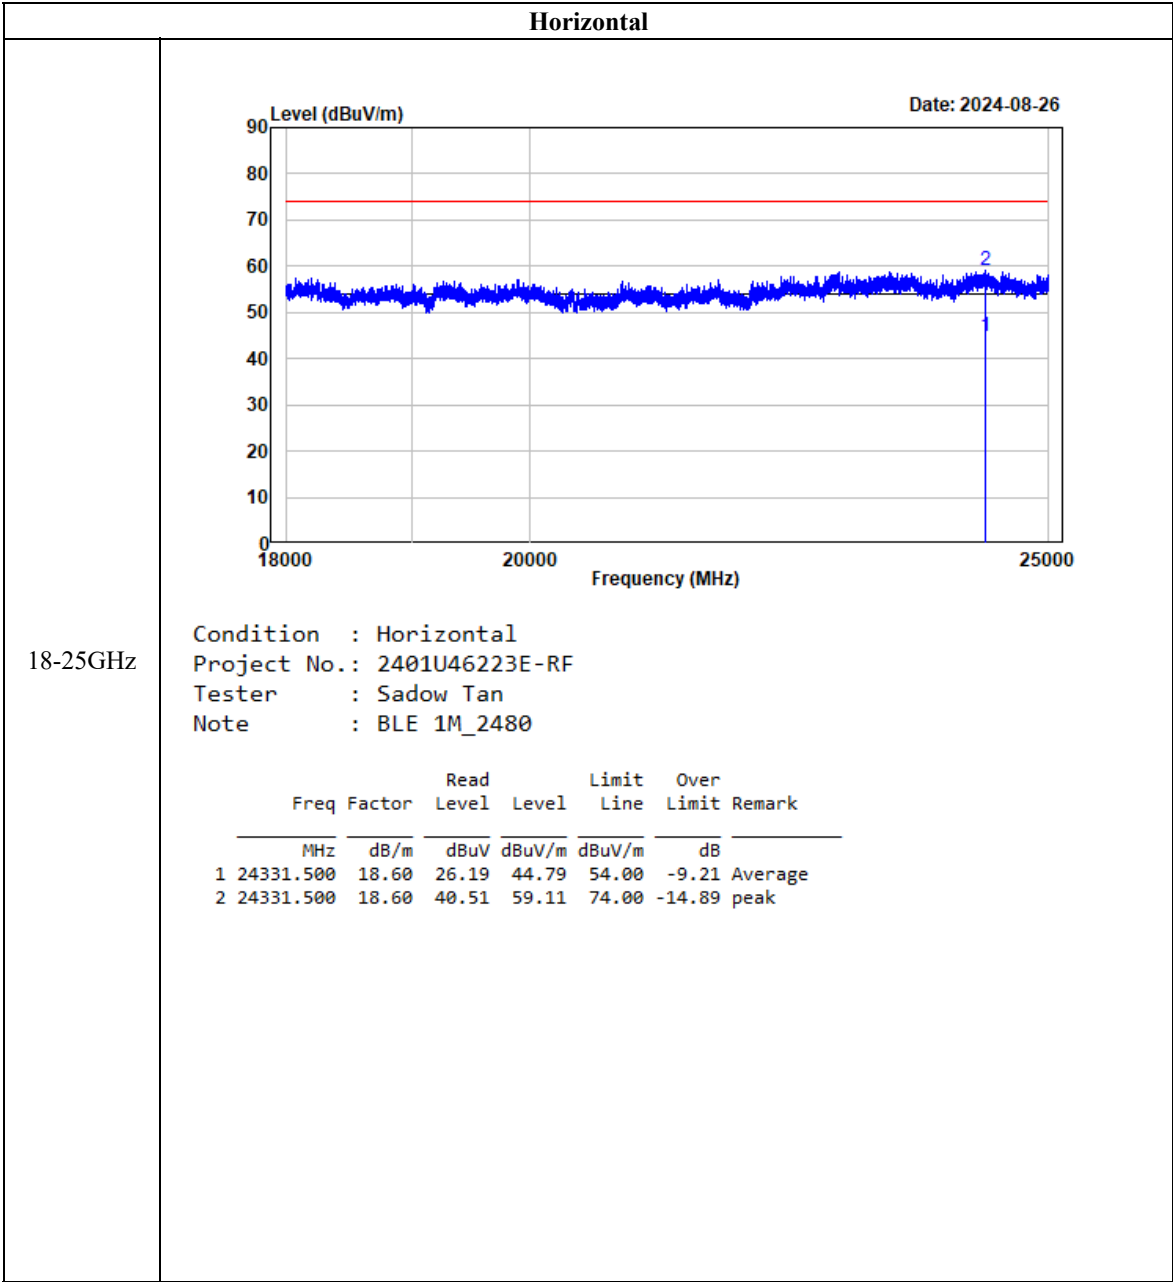

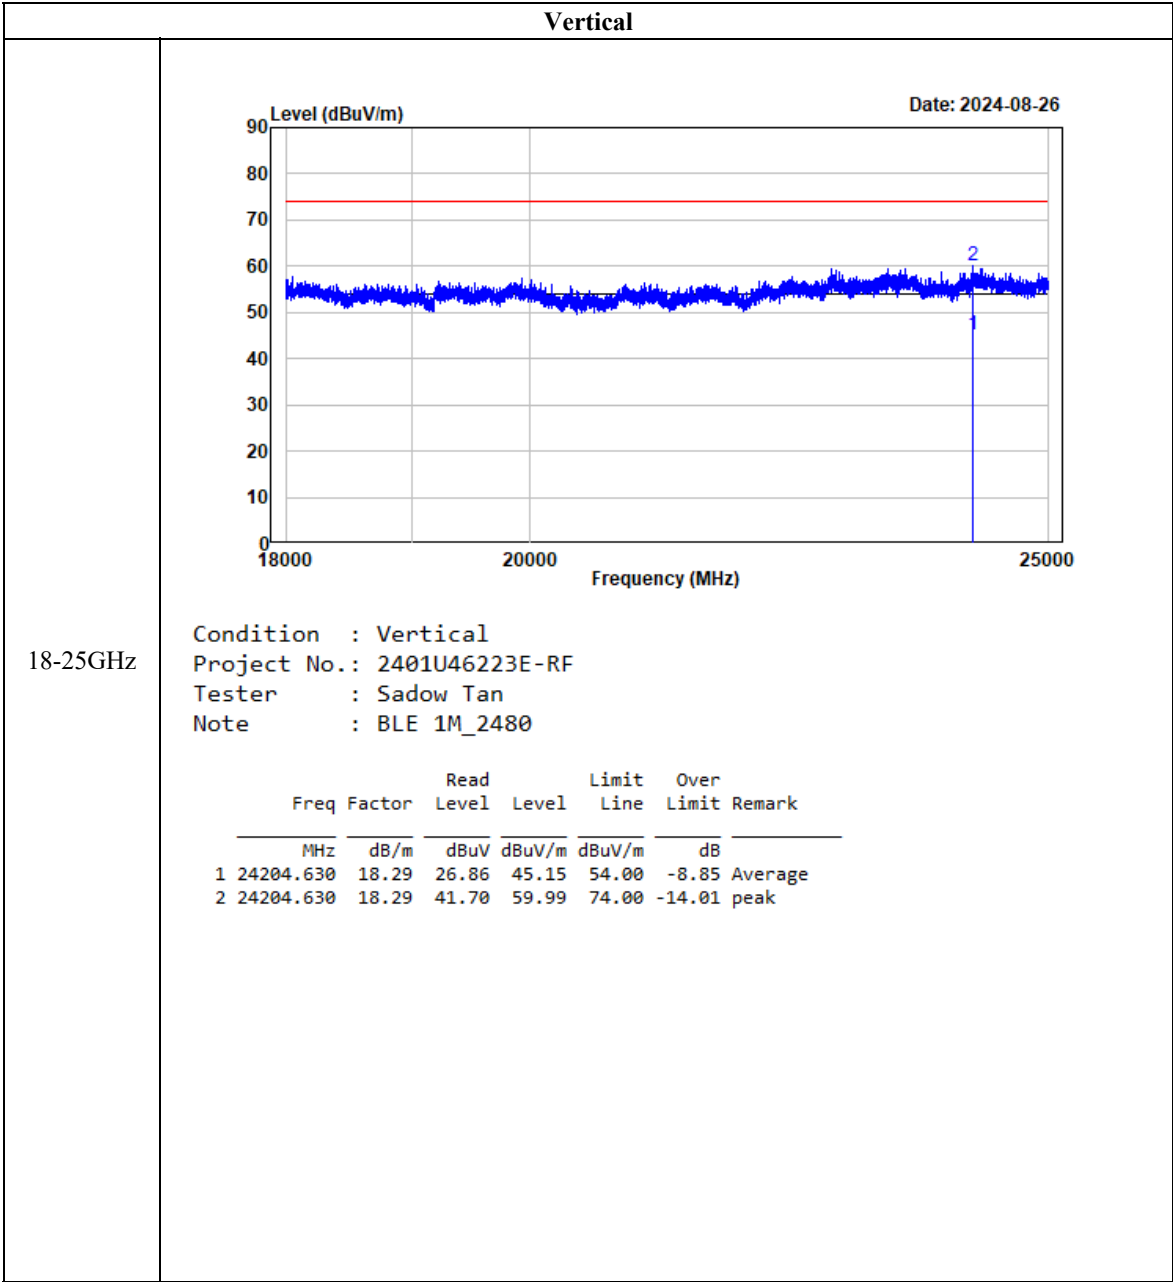

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

- a. Set RBW = 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

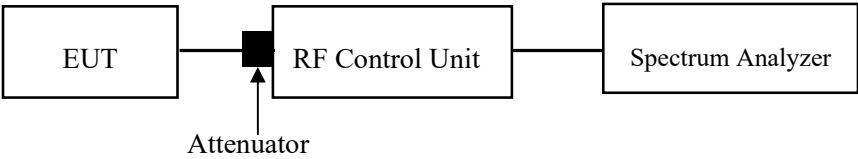

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Navilite Cai on 2024-07-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.3.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Navilite Cai on 2024-07-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set analyzer center frequency to DTS channel center frequency
3. Set the span to 1.5 times the DTS bandwidth.
4. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

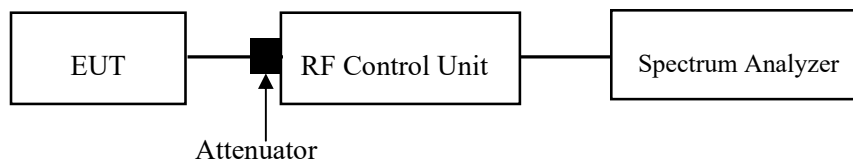

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Navilite Cai on 2024-07-13.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.
Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.
Report the three highest emissions relative to the limit.

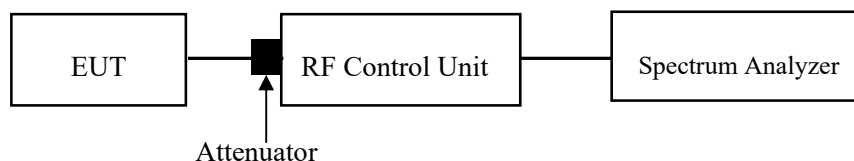

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Navilite Cai on 2024-07-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401U46223E-RF External photo and 2401U46223E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401U46223E-RF Test Setup photo.


Appendix


Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.70	2401.65	2402.34	0.5	PASS
		2440	0.67	2439.66	2440.33	0.5	PASS
		2480	0.68	2479.66	2480.34	0.5	PASS

Test Graphs

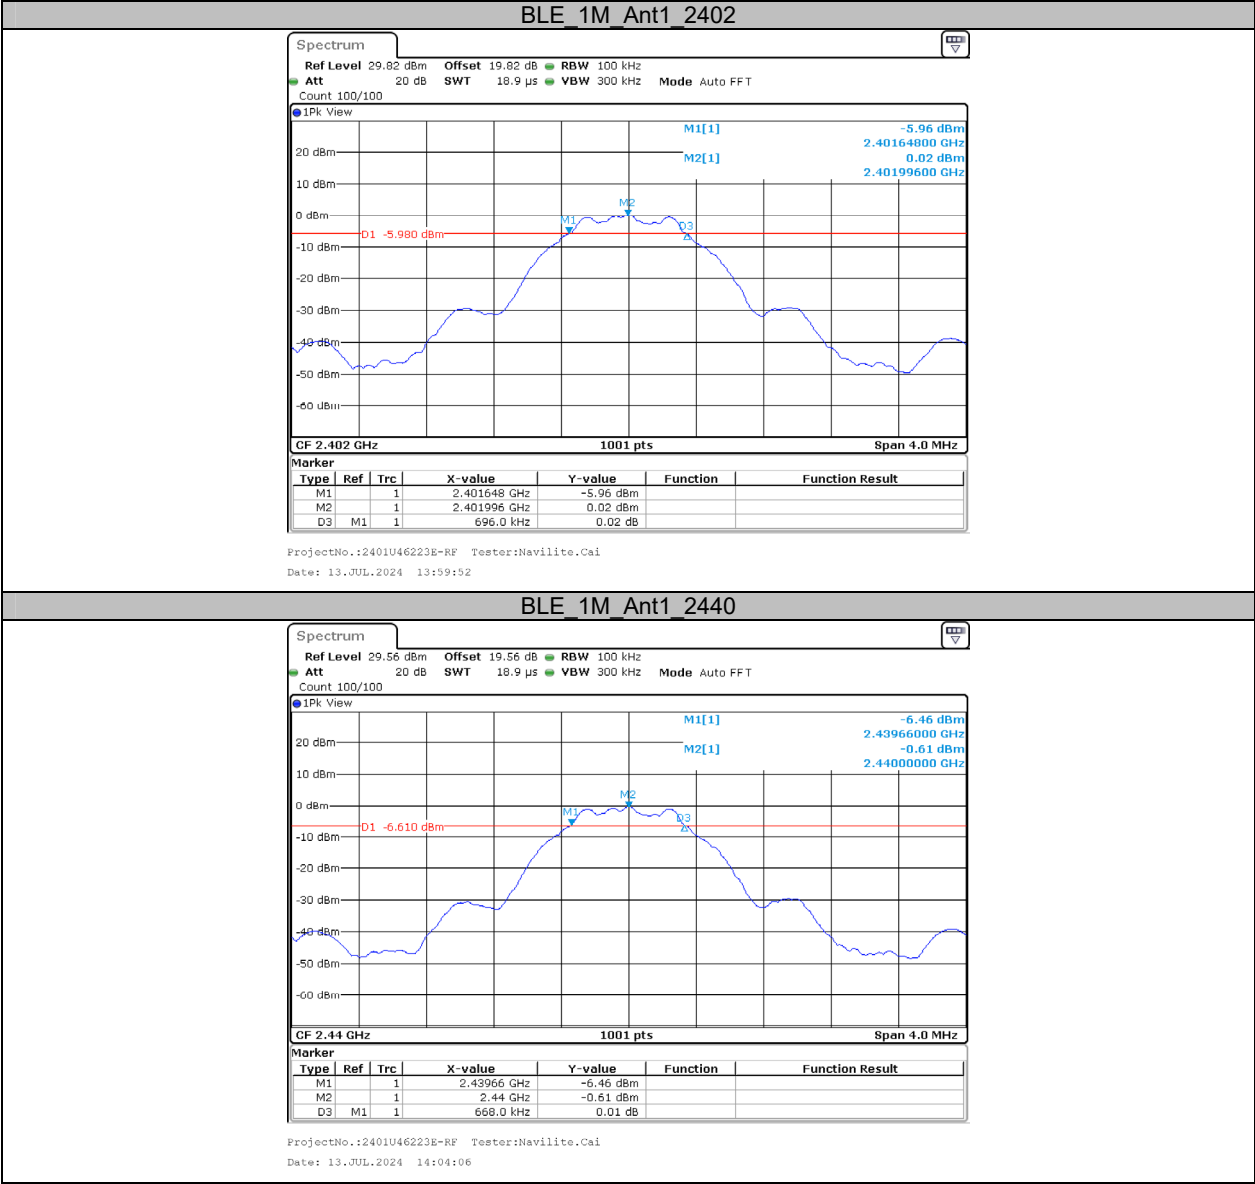


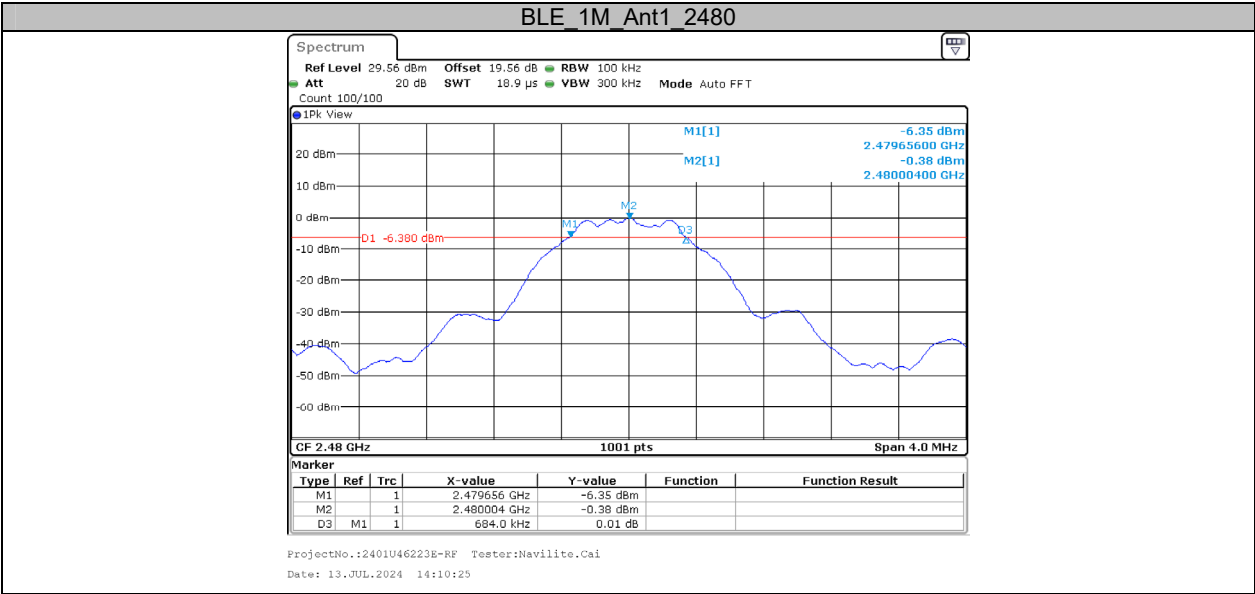


Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.047	2401.4805	2402.5275	---	---
		2440	1.047	2439.4805	2440.5275	---	---
		2480	1.047	2479.4805	2480.5275	---	---

Test Graphs

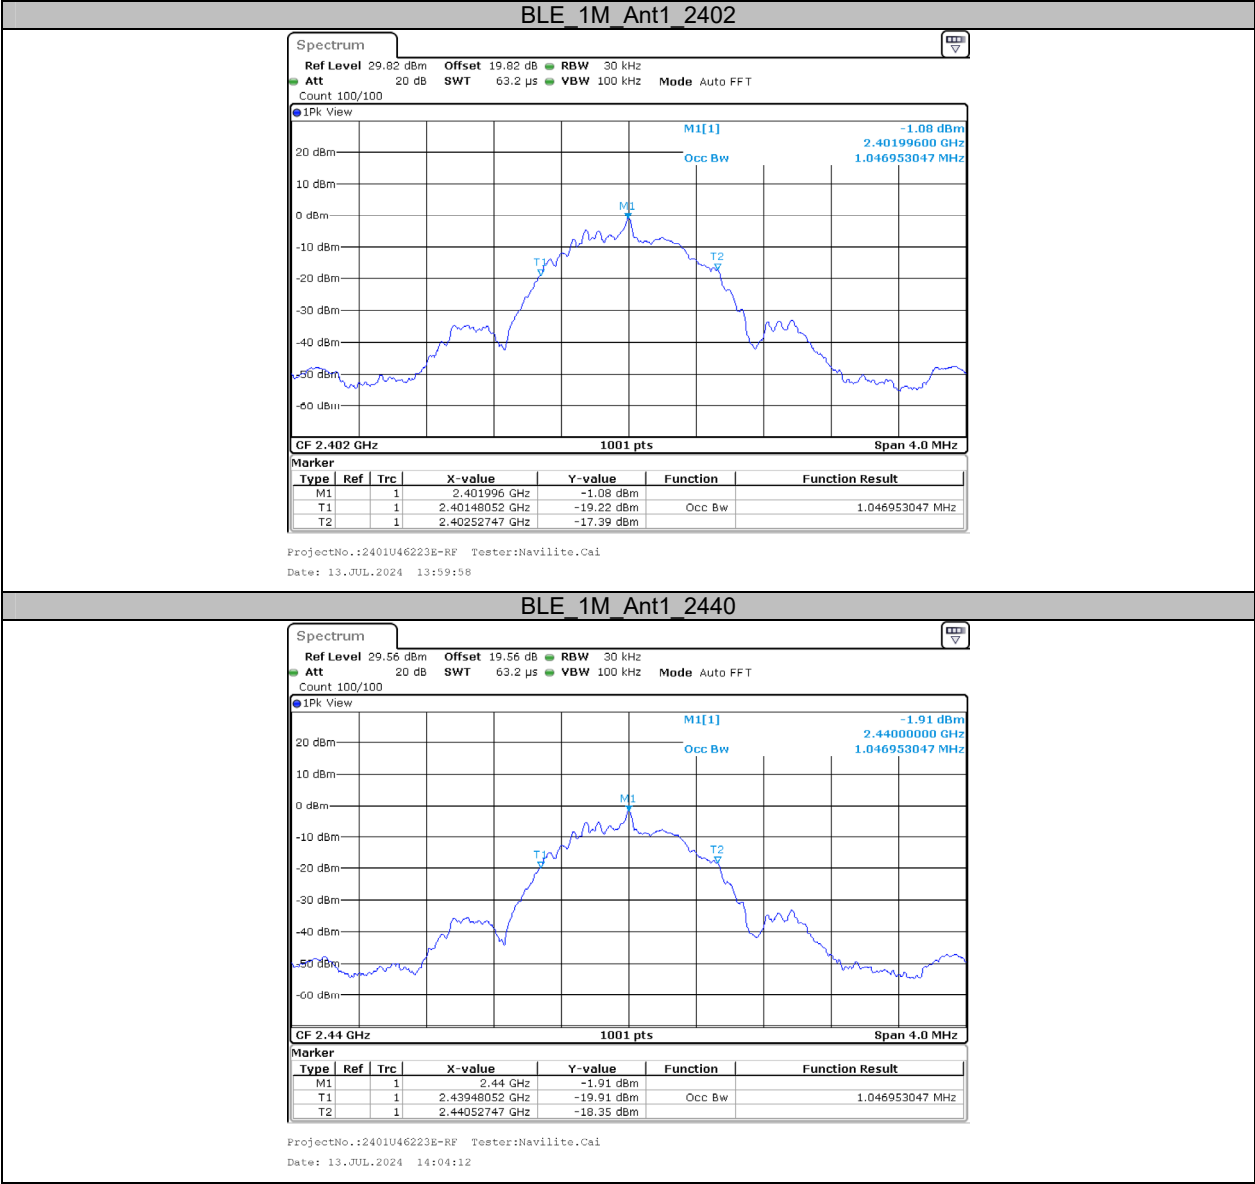

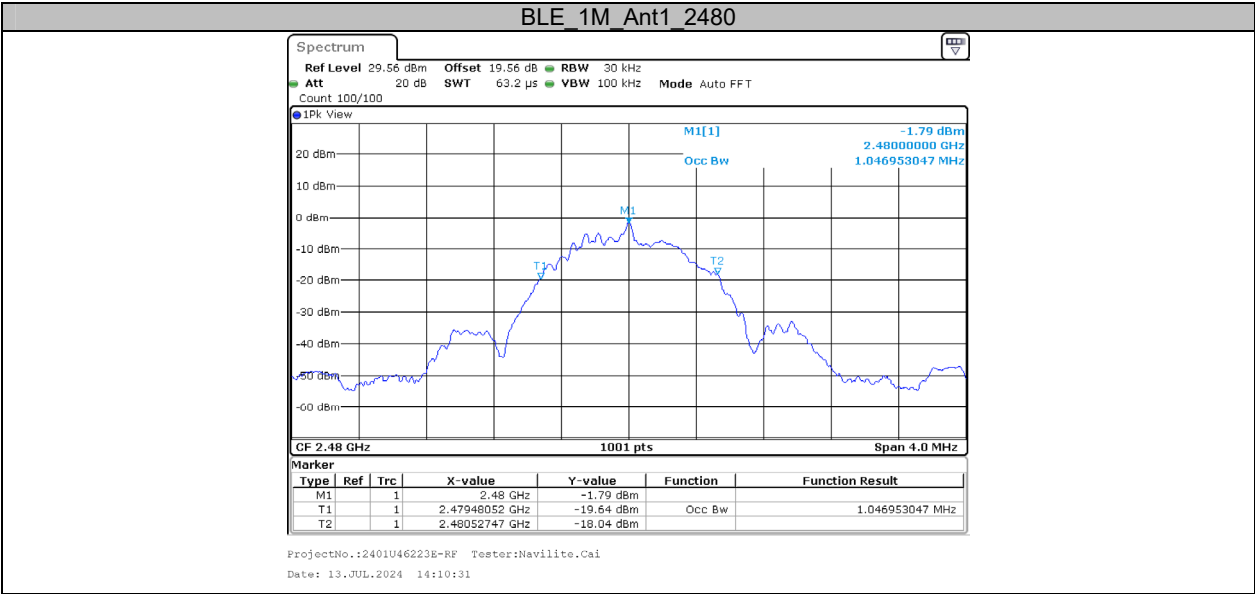

Appendix C: Maximum conducted output power**Test Result**

Model: SDI-12-NS

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.14	≤30	PASS
		2440	-0.41	≤30	PASS
		2480	-0.22	≤30	PASS

Model: SDI-12-NB

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.11	≤30	PASS
		2440	-0.56	≤30	PASS
		2480	-0.31	≤30	PASS

Model: PS-NS-D04

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.09	≤30	PASS
		2440	-0.71	≤30	PASS
		2480	-0.34	≤30	PASS


Model: PS-NB-D04


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.12	≤30	PASS
		2440	-0.48	≤30	PASS
		2480	-0.39	≤30	PASS

Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.67	≤8.00	PASS
		2440	-15.41	≤8.00	PASS
		2480	-15.22	≤8.00	PASS


Test Graphs

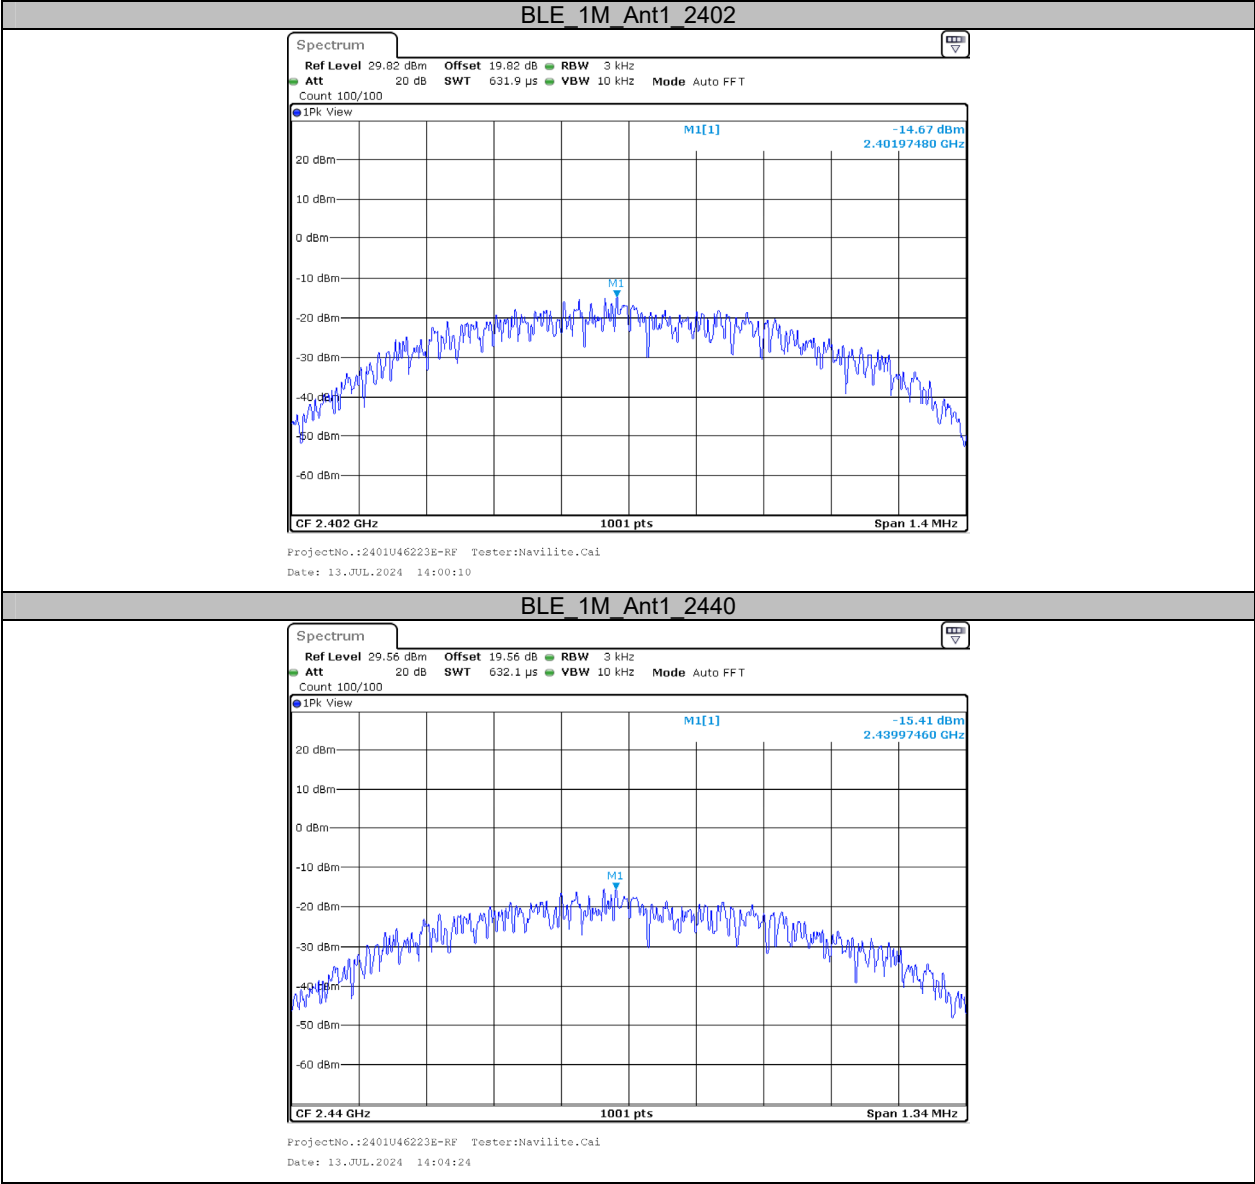

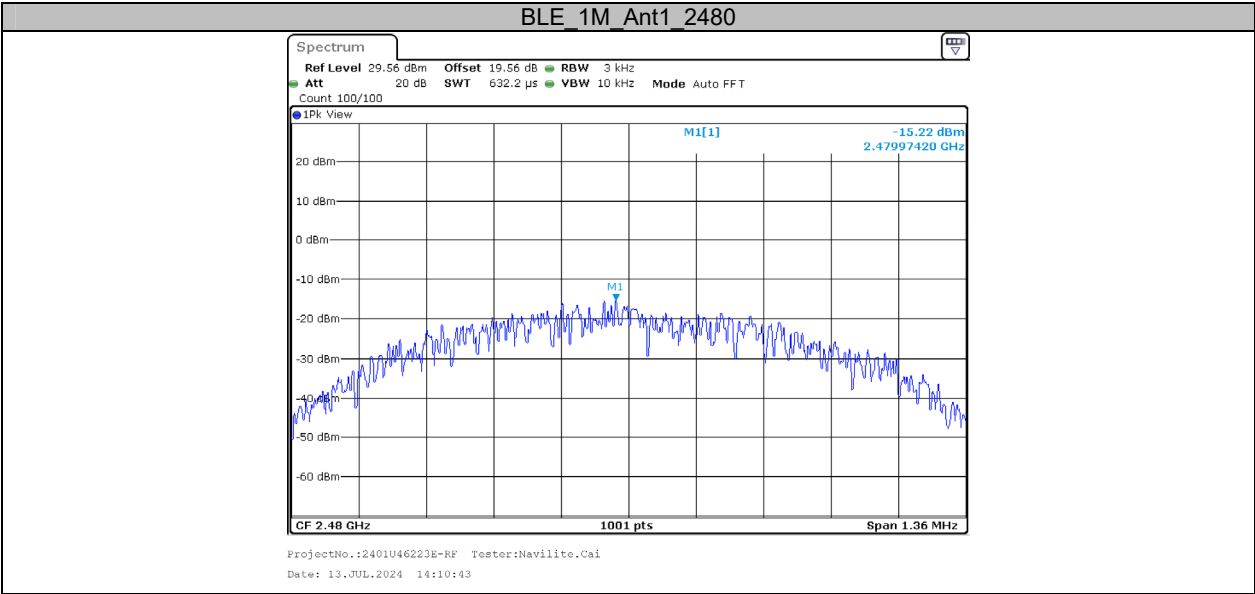

Appendix E: Band edge measurements

Test Graphs

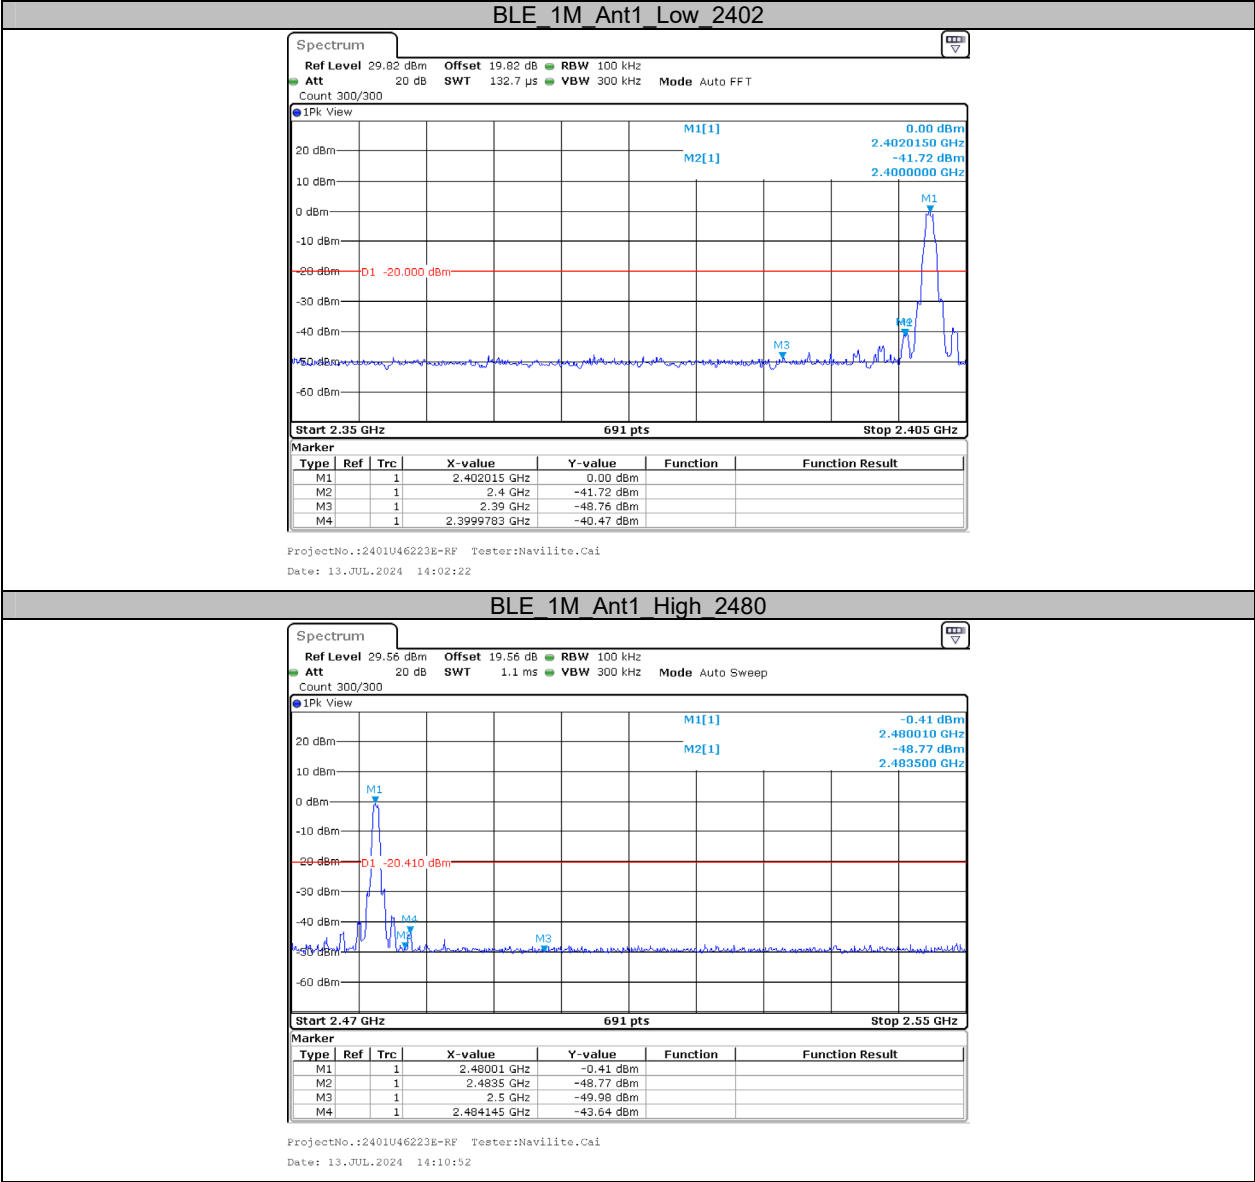


Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2440	0.42	0.63	66.67	1.76

Test Graphs

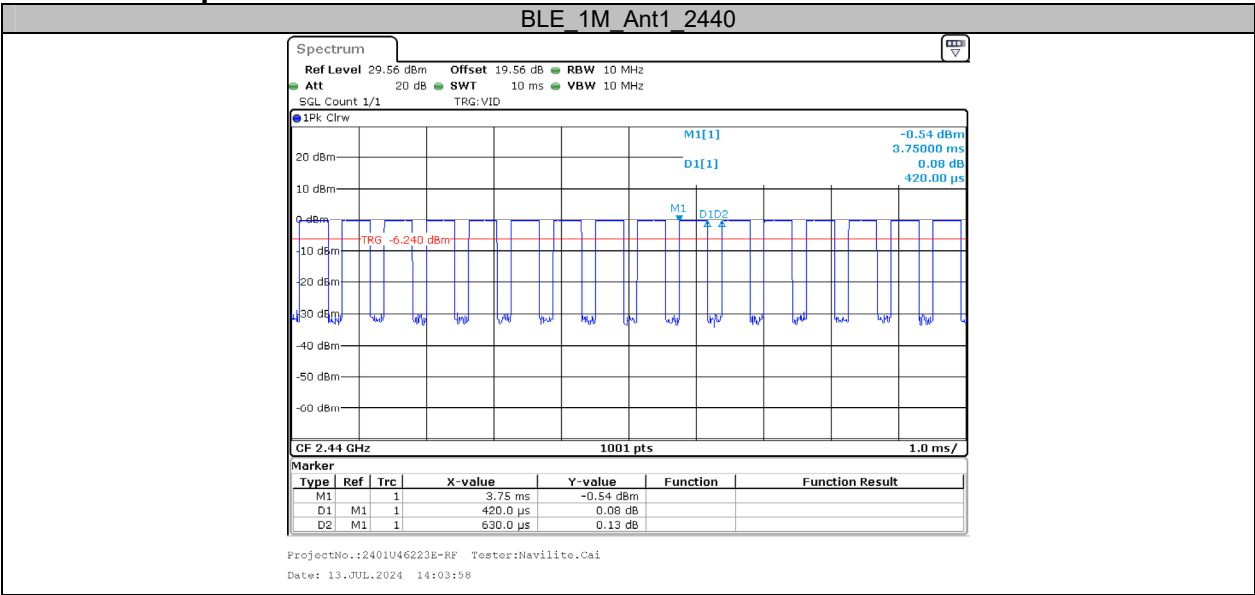

***** END OF REPORT *****