



FCC RADIO TEST REPORT

FCC ID : J9C-M2X75
Equipment : Module
Brand Name : Qualcomm
Model Name : M2X75
Applicant : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego, California 92121, United States
Manufacturer : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego, California 92121, United States
Standard : FCC 47 CFR Part 2, 96

The product was received on Apr. 11, 2024 and testing was performed from May 20, 2024 to Jul. 27, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Site	6
1.4 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Items	12
3.1 Measuring Instruments	12
3.2 Conducted Output Power Measurement	13
3.3 Peak-to-Average Ratio	14
3.4 EIRP	15
3.5 Occupied Bandwidth	16
3.6 Conducted Band Edge	17
3.7 Conducted Spurious Emission	18
3.8 Frequency Stability	19
4 Radiated Test Items	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission	22
5 List of Measuring Equipment.....	23
6 Measurement Uncertainty	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG3D2703-02E	01	Initial issue of report	Aug. 07, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
3.3	§96.41	Peak-to-Average Ratio	Pass	-
3.4	§96.41	Effective Isotropic Radiated Power	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Pass	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1053 §96.41	Radiated Spurious Emission	Pass	1.95 dB under the limit at 14429.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Rebecca Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature						
General Specs						
WCDMA/LTE/5G NR and GNSS.						
Support band and evaluated information						
Supported band			n48			
Evaluated and Tested band			n48			
TDD band Power Class						
	SISO PC3			MIMO PC3		
n48	V			V		
RF Exposure						
Max Antenna Gain information(dBi)						
Band	Ant 0	Ant 1	Ant 2	Ant 3	Main Ant. #	MIMO Main Ant. #
n48	0.2	0.2	0.2	0.2	2	2&0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY
Test Engineer	Sherry Wu and Kelvin Lu
Temperature (°C)	20~24
Relative Humidity (%)	51~56

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jesse Fan, Tim Lee, and Wilson Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.4 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Modulation Type	Modulation	Modulation Type	Modulation
A	DFT-s-OFDM PI/2 BPSK	N/A	N/A
B	DFT-s-OFDM QPSK	F	CP-OFDM QPSK
C	DFT-s-OFDM 16QAM	G	CP-OFDM 16QAM
D	DFT-s-OFDM 64QAM	H	CP-OFDM 64QAM
E	DFT-s-OFDM 256QAM	I	CP-OFDM 256QAM

<SISO Mode>

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D, E	All	1, Half, Full	L, M, H
EIRP	A, B, C, D, E	All	1, Half, Full	L, M, H
PAR	A, B, C, D, E	20 MHz	Full	M
Bandwidth	A, F, G, H, I	All	Full	M
ACLR, Mask	A, B, C, D, E, F	All	1RB Full	L, M, H
CSE	B	All	1RB	L, M, H
Frequency Stability	A	20 MHz	Full	M
RSE	A	40 MHz	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR and frequency stability.
4. For 5G NR n48 support SISO Mode Antenna 2 (Main Ant.) and Antenna 0& 1& 3, Radiated Spurious Emission is full test. Conducted test items are verified and the worst case is Antenna 2. Therefore, the report only performed Antenna 2 test results.
5. For 5G NR n48 SISO Mode Modulation support CP-OFDM & DFT-s-OFDM. Therefore, the report only performed Higher Conducted power (DFT-s-OFDM) test results.
6. For 5G NR n48 the test country code is set to MCC 310.


<MIMO Mode>

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	F, G, H, I	All	1, Half, Full	L, M, H
EIRP	F, G, H, I	All	1, Half, Full	L, M, H
PAR	F, G, H, I	20 MHz	Full	M
Bandwidth	F, G, H, I	All	Full	M
ACLR, Mask	F, G, H, I	All	1RB Full	L, M, H
CSE	F	All	1RB	L, M, H
Frequency Stability	F	20 MHz	Full	M
RSE	F	40 MHz	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/ offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR and frequency stability.
4. For 5G NR n48 support MIMO Mode Antenna 2+0 (Main Ant.) and Antenna 0+1& 0+3& 1+2& 1+0& 1+3& 0+2& 2+1& 2+3& 3+2& 3+0& 3+1; Radiated Spurious Emission is full test. Conducted test items are verified and the worst case is Antenna 2+0. Therefore, the report only performed Antenna 2+0 test results.
5. For 5G NR n48 MIMO Mode Modulation support CP-OFDM only.

2.2 Connection Diagram of Test System

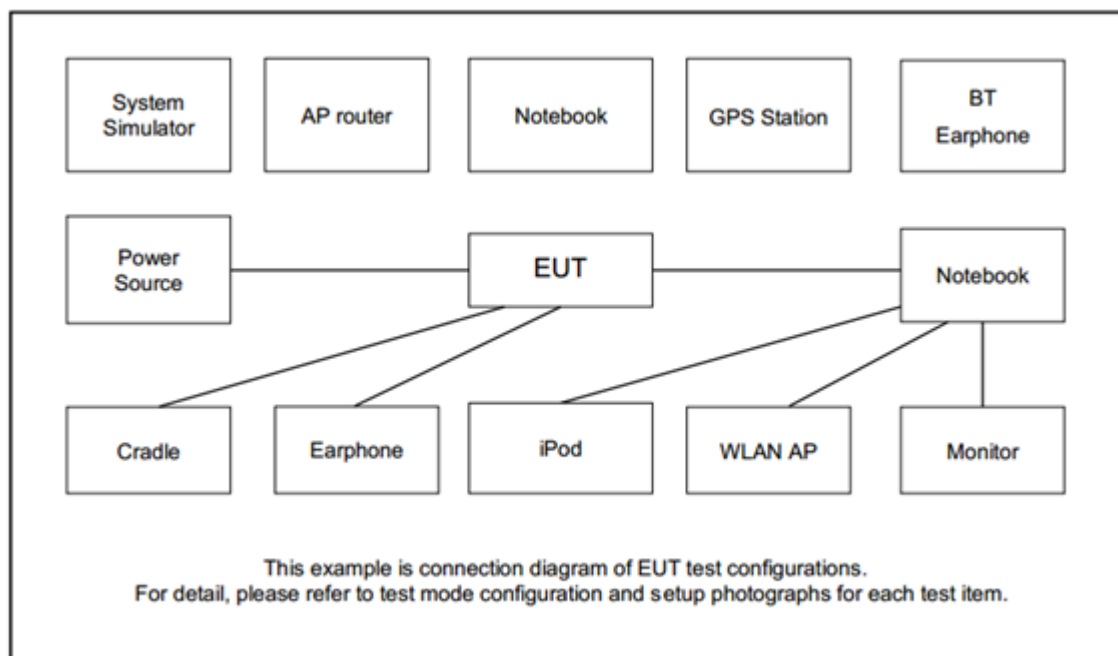



2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Carrier board	Qualcomm	30-35174-500	N/A	N/A	N/A
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.5 + 10 = 14.5 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 EIRP, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, and Conducted Spurious Emission

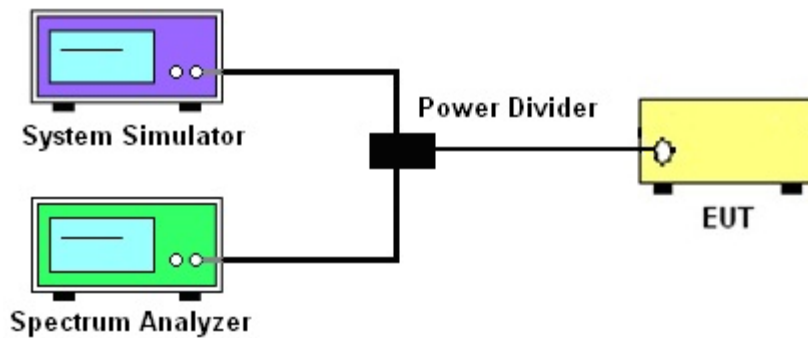

3.1.4 Frequency Stability

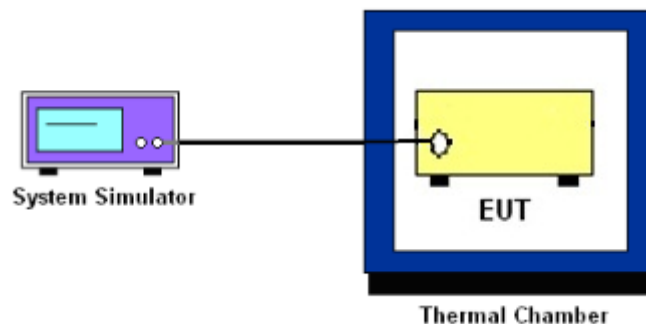

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 EIRP

3.4.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for 5G NR n48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5.

According to KDB 412172 D01 Power Approach,

$EIRP = PT + GT - LC$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

Remark:

1. Total channel power is complied with EIRP limit 23dBm/10MHz.
2. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
3. The measured ACLR ratio shall be at least 30 dB.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.
10. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

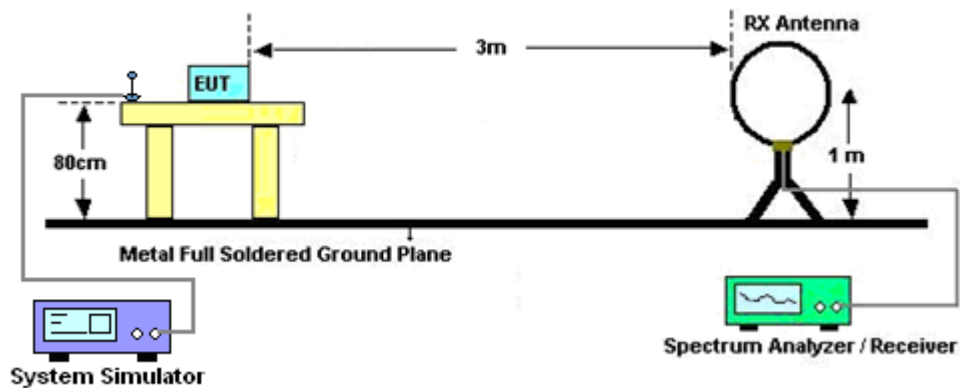


For radiated test from 30MHz to 1GHz

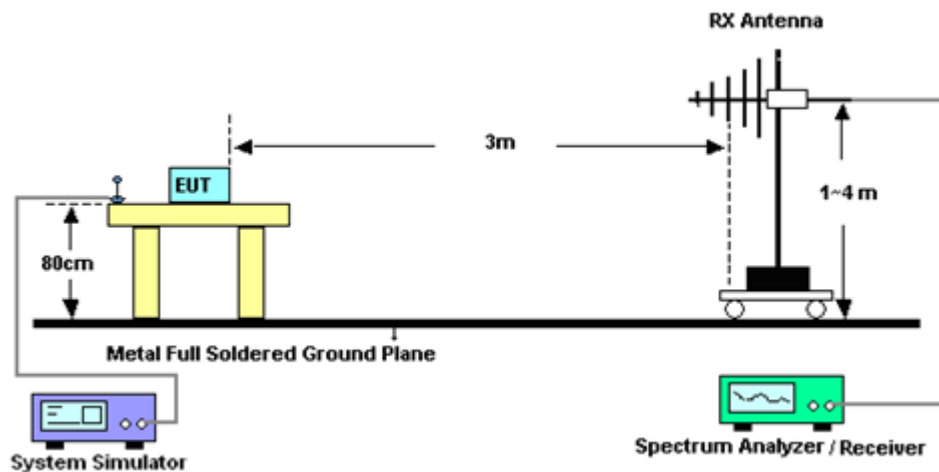

For radiated test from 1GHz to 18GHz

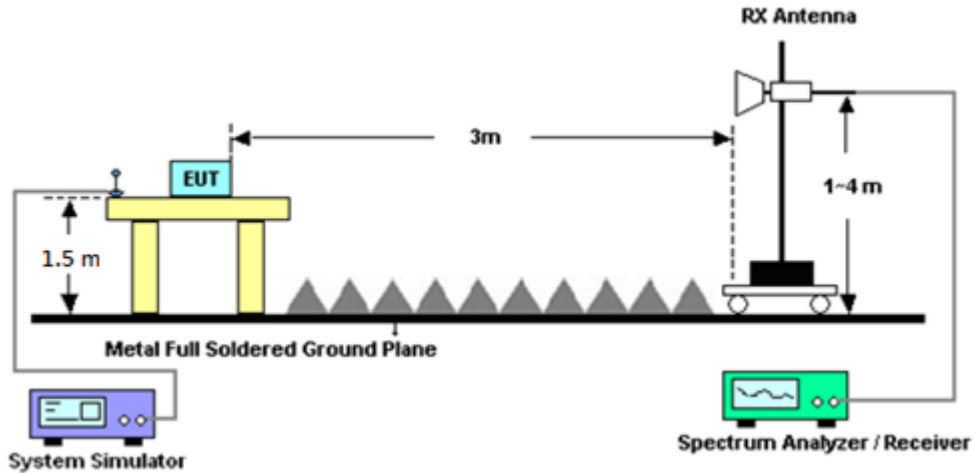

For radiated test above 18GHz

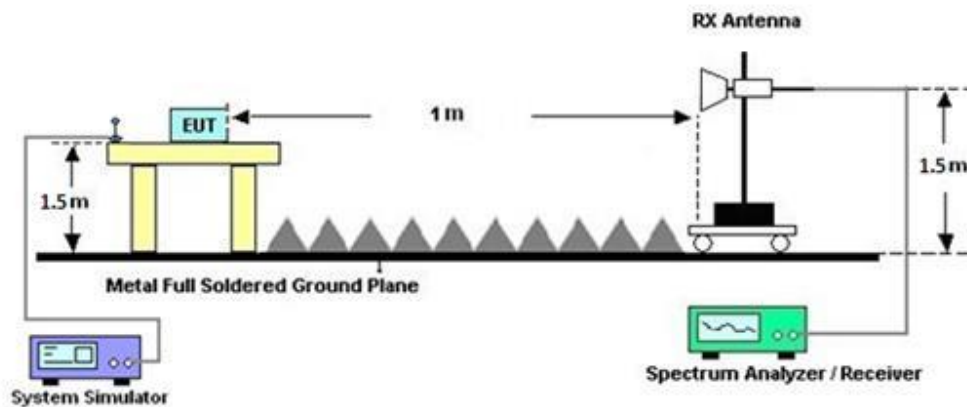

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
8. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
9. ERP (dBm) = EIRP (dBm) - 2.15
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 23, 2024	May 20, 2024~ Jul. 27, 2024	Feb. 22, 2025	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 03, 2023	May 20, 2024~ Jul. 27, 2024	Nov. 02, 2024	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 31, 2023	May 20, 2024~ Jul. 27, 2024	Jul. 30, 2024	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	May 20, 2024~ Jul. 27, 2024	Nov. 23, 2024	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 20, 2024	May 20, 2024~ Jul. 27, 2024	Mar. 19, 2025	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 23, 2023	May 20, 2024~ May 21, 2024	May 22, 2024	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 22, 2024	May 22, 2024~ Jul. 27, 2024	May 21, 2025	Radiation (03CH12-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18G-5 6-01-A70	EC1900249	1GHz~18GHz	Dec. 20, 2023	May 20, 2024~ Jul. 27, 2024	Dec. 19, 2024	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2023	May 20, 2024~ Jul. 27, 2024	Dec. 06, 2024	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	May 13, 2024	May 20, 2024~ Jul. 27, 2024	May 12, 2025	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Aug. 29, 2023	May 20, 2024~ Jul. 27, 2024	Aug. 28, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-900-100 0-15000-60SS	SN11	1GHz High Pass Filter	Mar. 13, 2024	May 20, 2024~ Jul. 27, 2024	Mar. 12, 2025	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-30 00-18000-60SS	SN2	3GHz High Pass Filter	Mar. 13, 2024	May 20, 2024~ Jul. 27, 2024	Mar. 12, 2025	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872.5-6 750-18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 13, 2024	May 20, 2024~ Jul. 27, 2024	Mar. 12, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 20, 2024~ Jul. 27, 2024	Mar. 05, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 18, 2023	May 20, 2024~ Jul. 27, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 18, 2023	May 20, 2024~ Jul. 27, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 18, 2023	May 20, 2024~ Jul. 27, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210117	N/A	Oct. 19, 2023	May 20, 2024~ Jul. 27, 2024	Oct. 18, 2024	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 20, 2024~ Jul. 27, 2024	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 20, 2024~ Jul. 27, 2024	N/A	Radiation (03CH12-HY)
DC Power Supply	GW Instek	SPS-606	GEO835522	0~60V : 0~6A	N/A	May 20, 2024~ Jul. 27, 2024	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 20, 2024~ Jul. 01, 2024	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 20, 2024~ Jul. 01, 2024	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
DC Power Supply	GW Instek	GPE2323	GET910884	0V~64V ;0A~6A	Nov. 16, 2023	May 22, 2024~ Jul. 24, 2024	Nov. 15, 2024	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101049	10Hz~44GHz	Sep. 26, 2023	May 22, 2024~ Jul. 24, 2024	Sep. 25, 2024	Conducted (TH03-HY)
Temperature Chamber	ESPEC	LHU-113	1012005860	-20℃ ~85℃	Dec. 13, 2023	May 22, 2024~ Jul. 24, 2024	Dec. 12, 2024	Conducted (TH03-HY)
Hygrometer	TECEPIL	DTM-303B	TP200886	NA	Mar. 14, 2024	May 22, 2024~ Jul. 24, 2024	Mar. 13, 2025	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6262116725	LTE	Oct. 25, 2023	May 22, 2024~ Jul. 24, 2024	Oct. 24, 2024	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262148275	FR1	Oct. 24, 2023	May 22, 2024~ Jul. 24, 2024	Oct. 23, 2024	Conducted (TH03-HY)
Coupler	MVE	MVE4816-10	A800024	N/A	Mar. 12, 2024	May 22, 2024~ Jul. 24, 2024	Mar. 11, 2025	Conducted (TH03-HY)
Power divider	Anritsu	K241C	2143398	9KHz~40GHz	Jun. 13, 2023	May 22, 2024~ Jun. 11, 2024	Jun. 12, 2024	Conducted (TH03-HY)
Power divider	Anritsu	K241C	2143398	9KHz~40GHz	Jun. 13, 2024	Jun. 13, 2024~ Jul. 24, 2024	Jun. 12, 2025	Conducted (TH03-HY)
Software 1	Sporton	FCC 5GNR_FSV3044_ 20231106	N/A	Conducted Test Item	N/A	May 22, 2024~ Jul. 24, 2024	N/A	Conducted (TH03-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.291 dB
---	----------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.630 dB
---	----------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.140 dB
---	----------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

<SISO Mode>

NR n48 Maximum Average Power [dBm] (GT - LC = 0.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	22.60	22.78	22.64	22.98	0.1986		
10	1	22		22.64	22.73	22.58				
10	12	6		22.66	22.71	22.62				
10	1	0		22.00	22.16	22.00				
10	1	23		21.96	22.12	21.92				
10	24	0		22.15	22.31	22.14				
10	1	1	QPSK	22.56	22.78	22.56				
10	1	22		22.63	22.64	22.51				
10	12	6		22.68	22.77	22.53				
10	1	0		21.47	21.62	21.49				
10	1	23		21.48	21.64	21.41				
10	24	0		21.61	21.82	21.62				
10	1	1	16-QAM	21.41	21.64	21.45	21.84	0.1528		
10	1	1	64-QAM	20.08	20.39	20.29				
10	1	1	256-QAM	18.10	18.29	18.18				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n48 Maximum Average Power [dBm] (GT - LC = 0.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	18.69	22.76	22.64	22.98	0.1986		
15	1	36		22.66	22.77	18.62				
15	18	9		22.78	22.75	22.64				
15	1	0		18.60	22.15	22.05				
15	1	37		22.07	22.13	18.53				
15	36	0		18.75	22.36	18.71				
15	1	1	QPSK	18.62	22.75	22.57				
15	1	36		22.58	22.61	18.56				
15	18	9		22.61	22.64	22.59				
15	1	0		18.58	21.67	21.56				
15	1	37		21.55	21.68	18.56				
15	36	0		18.77	21.72	18.67				
15	1	1	16-QAM	17.53	21.41	21.40	21.61	0.1449		
15	1	1	64-QAM	17.69	20.32	20.15				
15	1	1	256-QAM	18.25	18.22	18.13				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



NR n48 Maximum Average Power [dBm] (GT - LC = 0.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	18.71	22.76	22.56	22.99	0.1991		
20	1	49		22.68	22.69	18.49				
20	25	12		22.79	22.79	22.69				
20	1	0		18.64	22.07	21.93				
20	1	50		22.04	22.05	18.42				
20	50	0		18.87	22.33	18.70				
20	1	1	QPSK	18.65	22.56	22.51			21.67	0.1469
20	1	49		22.66	22.52	18.48				
20	25	12		22.75	22.72	22.54				
20	1	0		18.61	21.50	21.39				
20	1	50		21.50	21.45	18.38				
20	50	0		18.83	21.70	18.68				
20	1	1	16-QAM	17.44	21.47	21.34	21.67	0.1469		
20	1	1	64-QAM	17.72	20.20	20.08				
20	1	1	256-QAM	18.20	18.20	18.07				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n48 Maximum Average Power [dBm] (GT - LC = 0.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	12.22	18.89	12.18	22.99	0.1991		
30	1	76		12.14	18.81	12.25				
30	36	18		12.31	22.78	22.77				
30	1	0		12.17	18.91	12.18				
30	1	77		12.15	18.71	12.14				
30	75	0		12.25	18.93	12.28				
30	1	1	QPSK	12.20	18.81	12.11				
30	1	76		12.14	18.82	12.09				
30	36	18		12.29	22.79	22.70				
30	1	0		12.22	18.79	12.17				
30	1	77		12.10	18.71	12.10				
30	75	0		12.17	18.86	12.18				
30	1	1	16-QAM	11.73	18.74	11.65	19.01	0.0796		
30	1	1	64-QAM	11.65	18.81	11.69				
30	1	1	256-QAM	11.72	18.20	11.71				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



NR n48 Maximum Average Power [dBm] (GT - LC = 0.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	12.25	18.87	12.15	22.98	0.1986		
40	1	104		12.23	18.75	12.00				
40	50	25		12.37	22.78	12.26				
40	1	0		12.25	18.70	12.16				
40	1	105		12.20	18.66	11.98				
40	100	0		12.27	18.37	12.13				
40	1	1	QPSK	12.18	18.72	12.08				
40	1	104		12.16	18.72	11.92				
40	50	25		12.26	22.78	12.17				
40	1	0		12.18	18.68	12.12				
40	1	105		12.16	18.62	11.94				
40	100	0		12.23	18.35	12.13				
40	1	1	16-QAM	11.60	18.74	11.57	18.94	0.0783		
40	1	1	64-QAM	11.66	18.72	11.66				
40	1	1	256-QAM	11.72	18.36	11.67				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



<MIMO Mode>

Part96 NR n48 Maximum Average Power [dBm], DG = 0.2 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	QPSK	18.48	18.61	18.45	17.86	17.86	17.59	21.19	21.26	21.05	21.46	0.1400
10	1	22		18.53	18.63	18.39	17.73	17.76	17.68	21.16	21.23	21.06		
10	12	6		18.34	18.50	18.36	17.66	17.64	17.59	21.02	21.10	21.00		
10	1	0		16.94	17.11	16.89	16.19	16.29	16.06	19.59	19.73	19.51		
10	1	23		17.00	17.09	16.84	16.14	16.21	16.05	19.60	19.68	19.47		
10	24	0		16.90	16.97	16.87	16.17	16.15	16.17	19.56	19.59	19.54		
10	1	1	16-QAM	18.04	18.12	17.95	17.48	17.41	17.28	20.78	20.79	20.64	20.99	0.1256
10	1	1	64-QAM	16.52	16.62	16.49	15.56	15.62	15.56	19.08	19.16	19.06		
10	1	1	256-QAM	13.42	13.59	13.39	12.61	12.73	12.57	16.04	16.19	16.01		
Limit	EIRP < 23dBm/10MHz			Result									Pass	

Part96 NR n48 Maximum Average Power [dBm], DG = 0.2 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	QPSK	13.96	18.47	18.34	13.29	17.75	17.54	16.65	21.14	20.97	21.34	0.1361
15	1	36		18.51	18.42	13.76	17.68	17.80	13.10	21.13	21.13	16.45		
15	19	9		18.26	18.30	18.13	17.54	17.60	17.35	20.93	20.97	20.77		
15	1	0		13.99	17.05	16.93	13.17	16.27	16.05	16.61	19.69	19.52		
15	1	37		17.02	17.03	13.82	16.23	16.45	13.15	19.65	19.76	16.51		
15	38	0		13.82	16.82	13.63	13.15	16.15	13.07	16.51	19.51	16.37		
15	1	1	16-QAM	13.79	17.99	17.87	13.29	17.41	17.20	16.56	20.72	20.56	20.92	0.1236
15	1	1	64-QAM	13.93	16.46	16.36	12.98	15.61	15.35	16.49	19.07	18.89		
15	1	1	256-QAM	13.40	13.60	13.35	12.51	12.65	12.50	15.99	16.16	15.96		
Limit	EIRP < 23dBm/10MHz			Result									Pass	



Part96 NR n48 Maximum Average Power [dBm], DG = 0.2 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	QPSK	13.84	18.54	18.27	13.25	17.71	17.44	16.57	21.16	20.89	21.36	0.1368
20	1	49		18.48	18.49	13.65	17.66	17.61	12.95	21.10	21.08	16.32		
20	25	12		18.37	18.43	18.20	17.64	17.57	17.34	21.03	21.03	20.80		
20	1	0		13.85	16.95	16.76	13.25	16.21	15.85	16.57	19.61	19.34		
20	1	50		16.88	16.92	13.63	16.11	16.05	12.91	19.52	19.52	16.30		
20	51	0		13.93	17.01	13.80	13.28	16.30	13.02	16.63	19.68	16.44		
20	1	1	16-QAM	13.78	17.95	17.68	13.45	17.26	17.09	16.63	20.63	20.41	20.83	0.1211
20	1	1	64-QAM	13.92	16.39	16.18	12.98	15.38	15.21	16.49	18.92	18.73		
20	1	1	256-QAM	13.41	13.48	13.20	12.62	12.47	12.39	16.04	16.01	15.82		
Limit	EIRP < 23dBm/10MHz			Result									Pass	



Part96 NR n48 Maximum Average Power [dBm], DG = 0.2 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	8.40	16.04	8.38	7.61	15.27	7.54	11.03	18.68	10.99	21.25	0.1334
30	1	76		8.41	16.04	8.24	7.57	15.21	7.61	11.02	18.66	10.95		
30	39	19		8.18	18.41	8.29	7.54	17.64	7.56	10.88	21.05	10.95		
30	1	0		8.36	16.05	8.35	7.53	15.30	7.61	10.98	18.70	11.01		
30	1	77		8.27	15.99	8.22	7.49	15.22	7.54	10.91	18.63	10.90		
30	78	0		8.35	15.93	8.31	7.53	15.16	7.51	10.97	18.57	10.94		
30	1	1	16-QAM	8.33	16.07	8.30	7.70	15.37	7.73	11.04	18.74	11.03	18.94	0.0783
30	1	1	64-QAM	8.41	16.01	8.29	7.43	15.14	7.43	10.96	18.61	10.89		
30	1	1	256-QAM	8.45	13.59	8.47	7.56	12.69	7.52	11.04	16.17	11.03		
Limit	EIRP < 23dBm/10MHz			Result									Pass	

Part96 NR n48 Maximum Average Power [dBm], DG = 0.2 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	8.40	16.05	8.29	7.63	15.25	7.44	11.04	18.68	10.90	21.19	0.1315
40	1	104		8.41	16.03	8.14	7.58	15.15	7.45	11.03	18.62	10.82		
40	53	26		8.25	18.33	8.18	7.67	17.59	7.47	10.98	20.99	10.85		
40	1	0		8.33	15.94	8.28	7.80	15.22	7.45	11.08	18.61	10.90		
40	1	105		8.31	15.90	8.09	7.51	15.22	7.46	10.94	18.58	10.80		
40	106	0		8.31	15.41	8.16	7.74	14.75	7.60	11.04	18.10	10.90		
40	1	1	16-QAM	8.25	15.86	8.08	7.80	15.24	7.33	11.04	18.57	10.73	18.77	0.0753
40	1	1	64-QAM	8.34	15.89	8.35	7.46	15.08	7.43	10.93	18.51	10.92		
40	1	1	256-QAM	8.53	13.47	8.32	7.59	12.58	7.41	11.10	16.06	10.90		
Limit	EIRP < 23dBm/10MHz			Result									Pass	

**FR1 n48**

<SISO Mode>


Peak-to-Average Ratio

Mode	FR1 n48 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	3.84	4.42	5.40	5.80	PASS
Mode	FR1 n48 / 20MHz / DFT-S OFDM				
Mod.	256QAM	-	-	-	Limit: 13dB
RB Size	Full RB	-	-	-	Result
Middle CH	6.58	-	-	-	PASS




FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

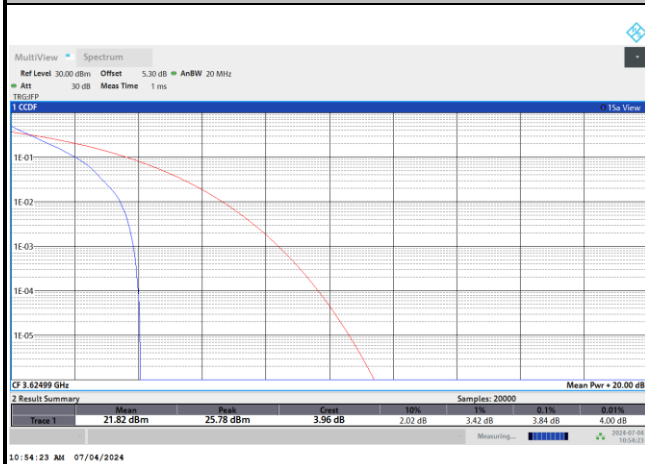


QPSK

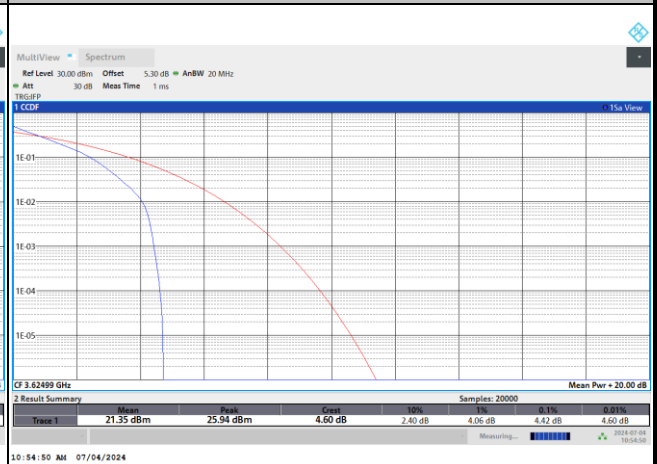


16QAM

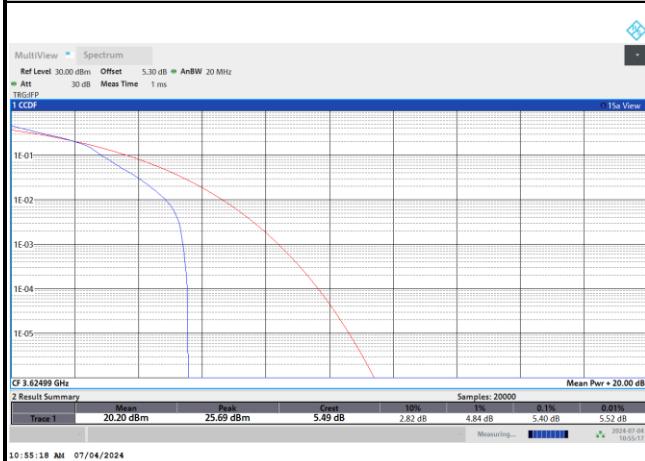

64QAM

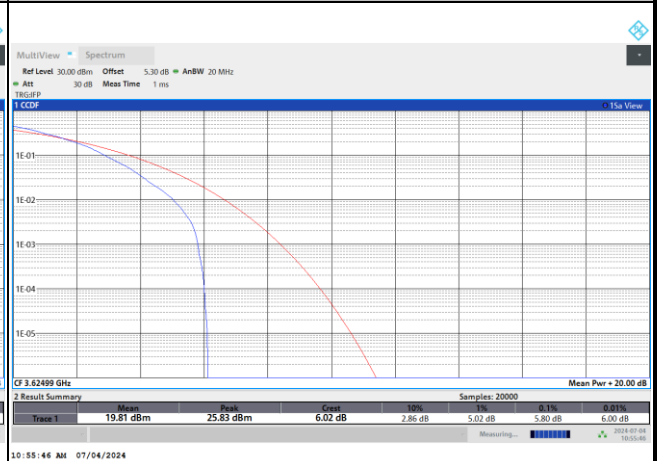

256QAM

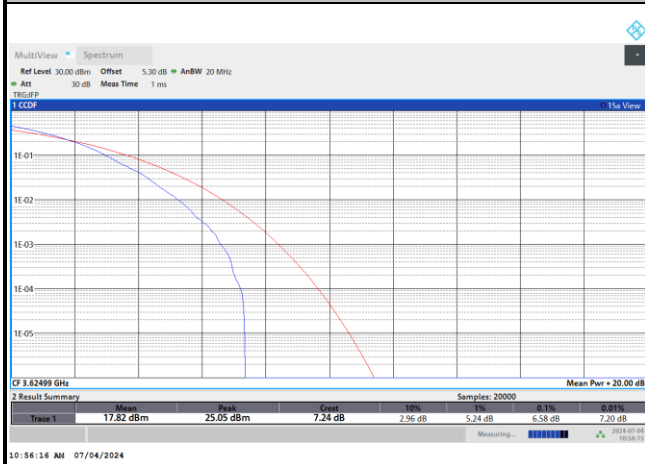

**26dB Bandwidth**


Mode	FR1 n48 : 26dB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	-	-	-
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	-	-	-
Middle CH	10.11	14.59	19.81	29.74	38.68	-	-	-

Mode	FR1 n48 : 26dB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	10.22	10.25	15.41	15.40	20.46	20.44	30.79	30.95
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	10.21	10.13	15.32	15.31	20.41	20.32	30.88	30.83
BW	40MHz		-		-		-	
Mod.	QPSK	16QAM	-	-	-	-	-	-
Middle CH	40.94	41.10	-	-	-	-	-	-
Mod.	64QAM	256QAM	-	-	-	-	-	-
Middle CH	41.03	40.93	-	-	-	-	-	-




FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

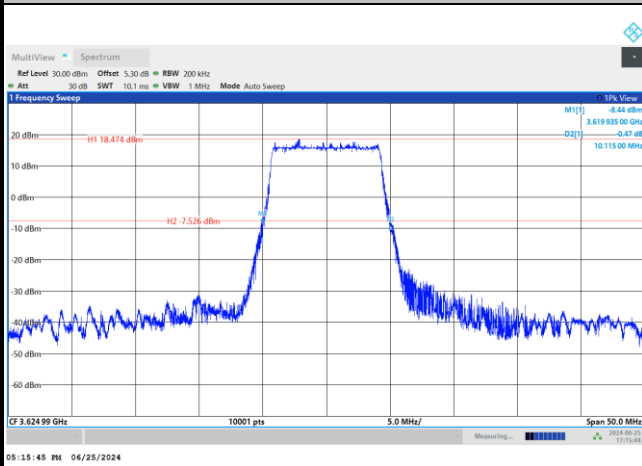


FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

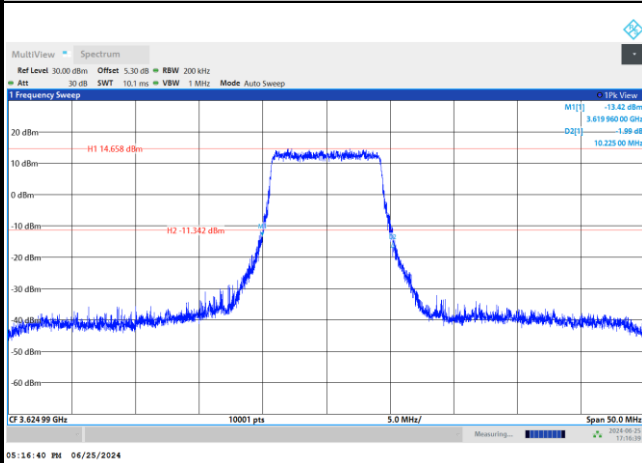


16QAM

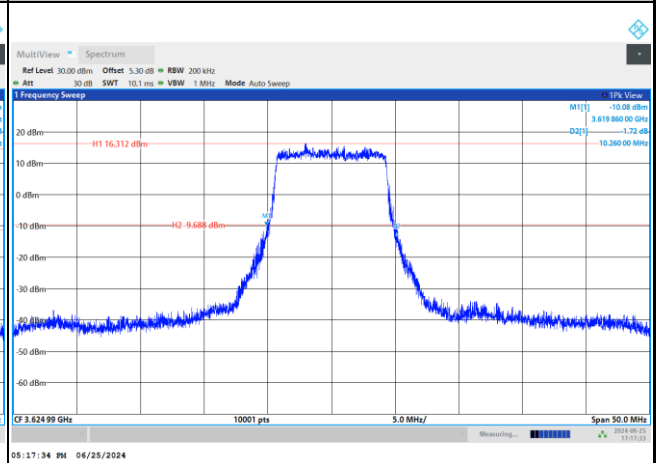

64QAM

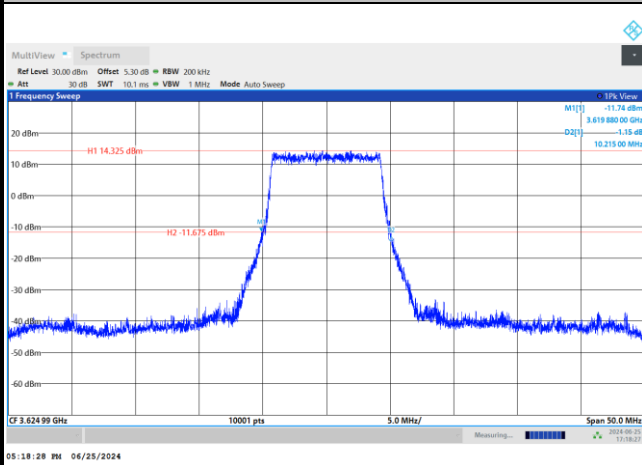


256QAM

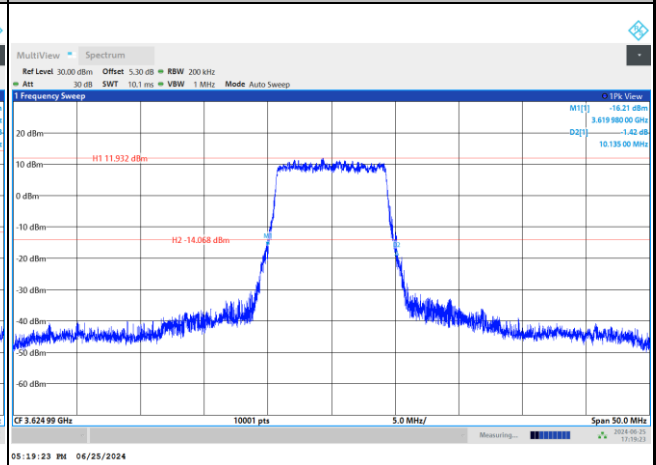




FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

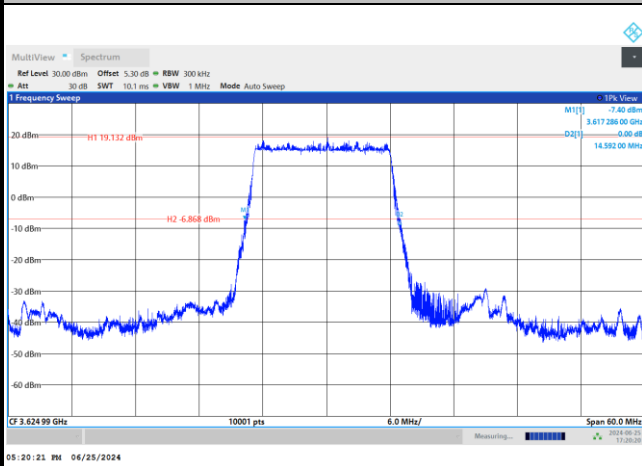


FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

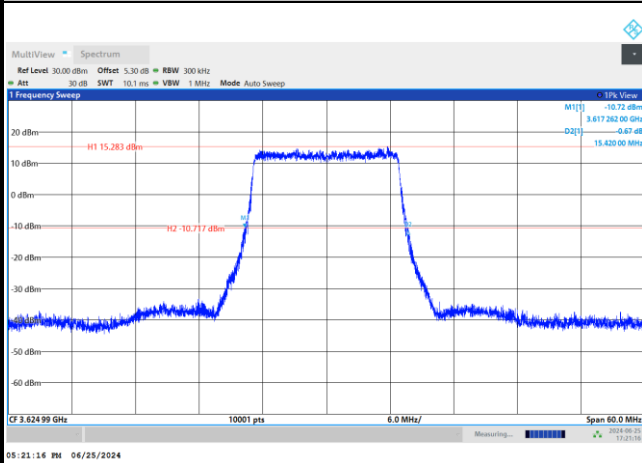


16QAM

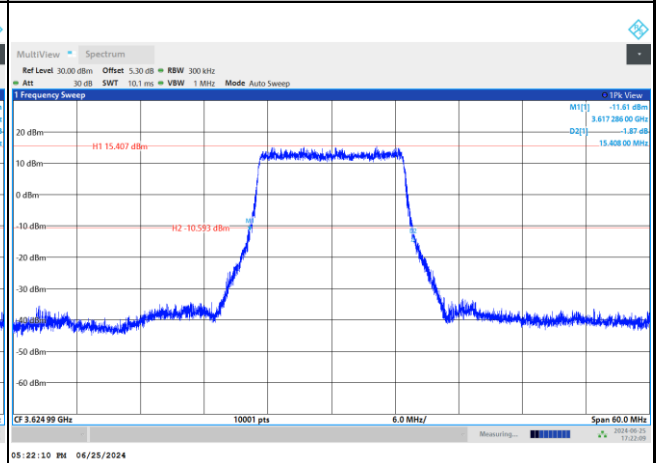

64QAM

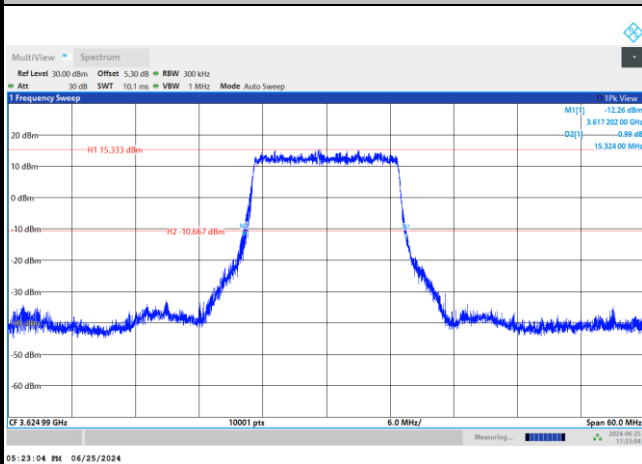


256QAM

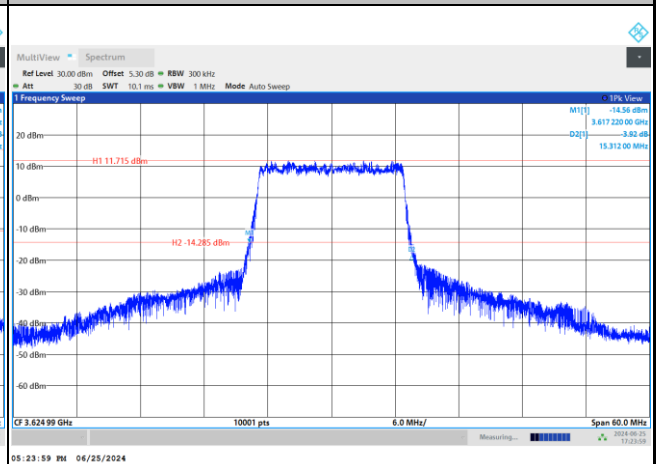

[illegible]

QPSK

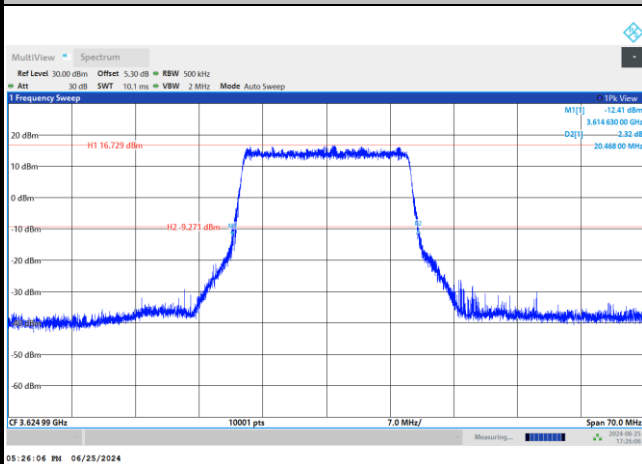

MultiView Spectrum

Ref Level 30.00 dBm Offset 5.30 dB BW 500 kHz

Att 30 dB SWT 10.1 ms VBW 2 MHz Mode Auto Sweep

Frequency Sweep

10% View

M1() -13.45 dBm

3.614 600 00 GHz

D2() -0.25 dB

-20.447 00 MHz

20 dBm

H1 16.415 dBm

10 dBm

0 dBm

-10 dBm

H2 -9.585 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

CF 3.62499 GHz 10001 pts 7.0 MHz/ Span 70.0 MHz

05:27:39 PM 04/25/2024

Measuring...

2024-04-25 17:27:39

MultiView Spectrum

Ref Level 30.00 dBm Offset 5.30 dB RBW 500 kHz

Att 30 dB SWT 10.1 ms VBW 2 MHz Mode Auto Sweep

1 Frequency Sweep

10% View

M1[1] -15.12 dBm

3.614 721 00 GHz -3.28 dBm

D2[1] -20.419 00 MHz

H1 16.247 dBm

H2 -9.753 dBm

CF 3.624 99 GHz 10001 pts 7.0 MHz/ Span 70.0 MHz

Measuring...

05:33:50 PM 06/25/2024

MultiView Spectrum

Ref Level 30.00 dBm Offset 5.30 dB RBW 500 kHz

Att 30 dB SWT 10.1 ms VBW 2 MHz Mode Auto Sweep

1 Frequency Sweep

20 dBm

10 dBm

0 dBm

-10 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

CF 3.62499 GHz

10001 pts

7.0 MHz/

Span 70.0 MHz

M1 13.162 dBm

M2 -12.838 dBm

13.162 dBm

-12.838 dBm

3.614819 00 MHz

3.614819 00 MHz

20.321 00 MHz


Measuring...

2024/04/25 17:05:18




FR1 n48 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

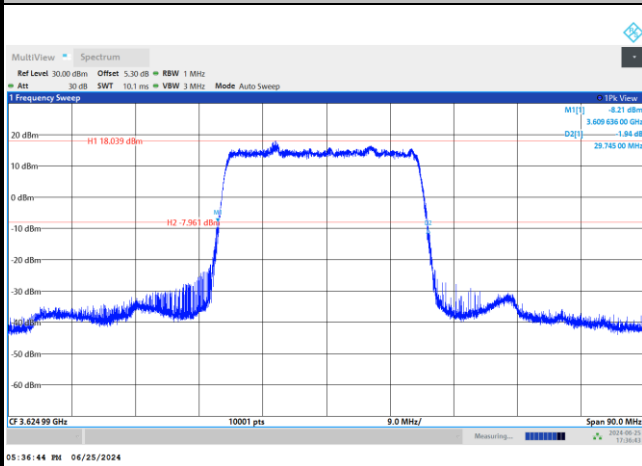


FR1 n48 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

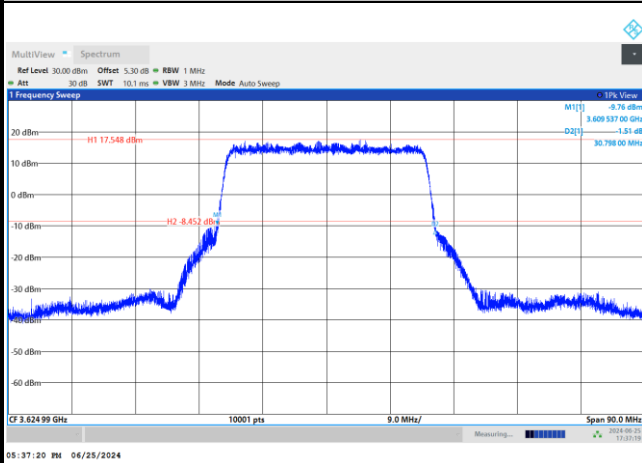


16QAM

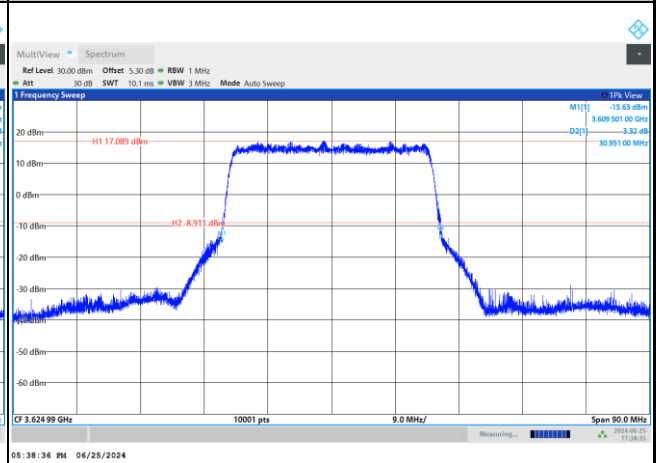

64QAM

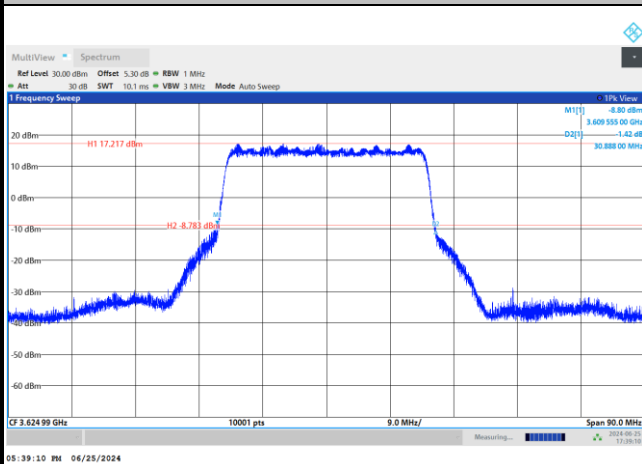


256QAM

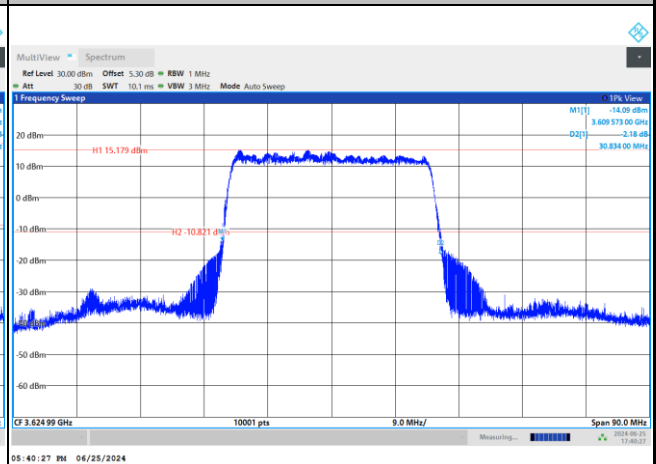




FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

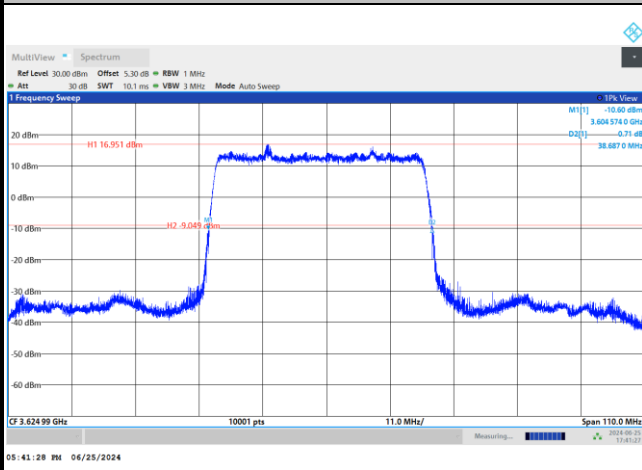


FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

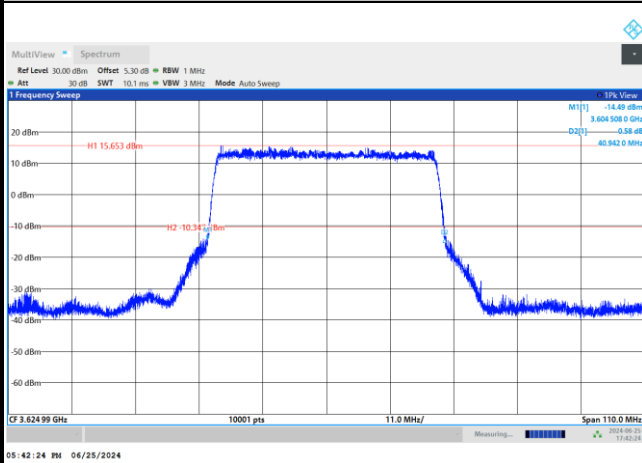


16QAM

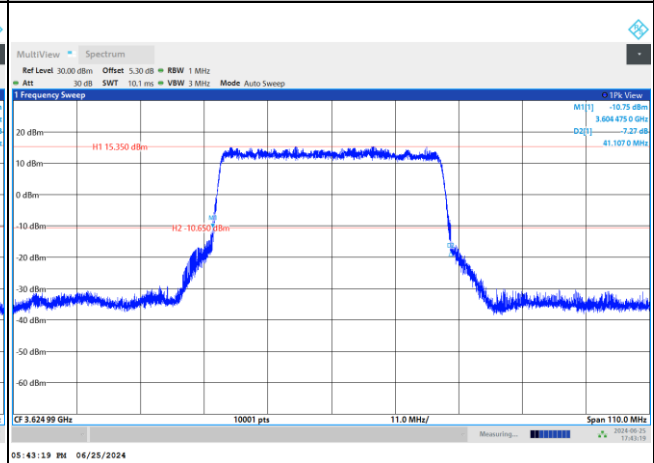

64QAM

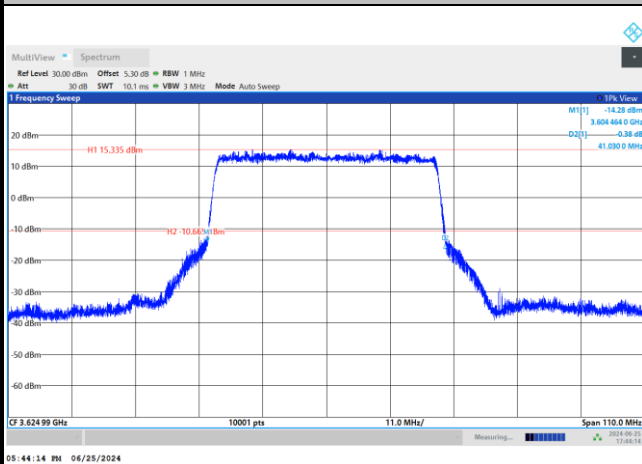

256QAM

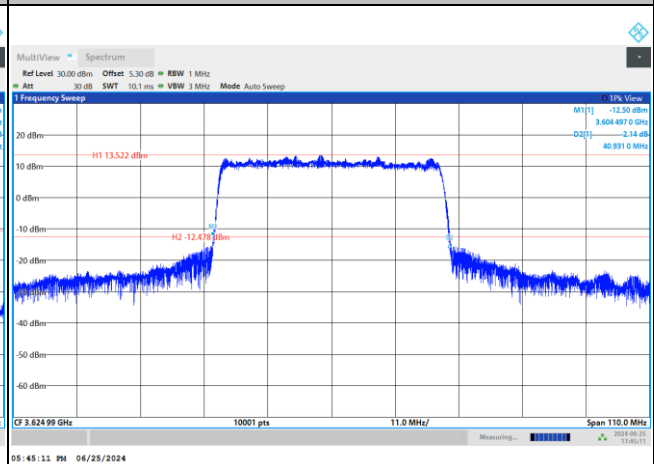

**Occupied Bandwidth**


Mode	FR1 n48 : OB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	-	-	-
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	-	-	-
Middle CH	8.66	12.96	18.02	27.15	35.96	-	-	-

Mode	FR1 n48 : OB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	8.65	8.73	13.69	13.71	18.32	18.34	28.17	28.15
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	8.70	8.64	13.68	13.66	18.32	18.33	28.10	28.19
BW	40MHz		-		-		-	
Mod.	QPSK	16QAM	-	-	-	-	-	-
Middle CH	38.09	38.05	-	-	-	-	-	-
Mod.	64QAM	256QAM	-	-	-	-	-	-
Middle CH	38.08	38.23	-	-	-	-	-	-




FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

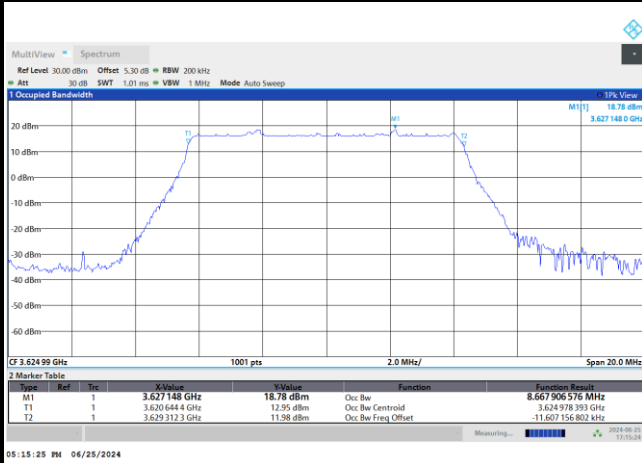


FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

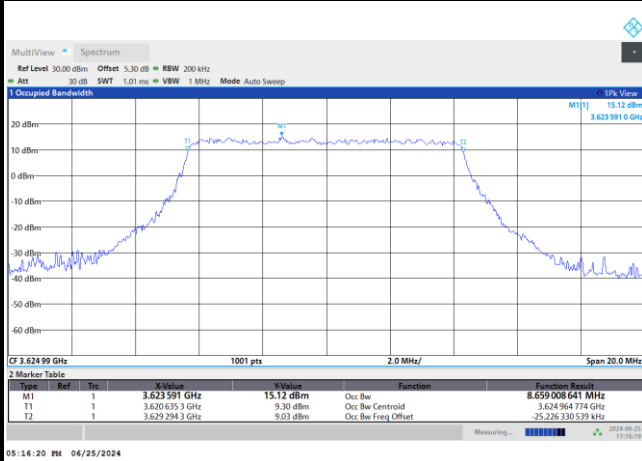


16QAM

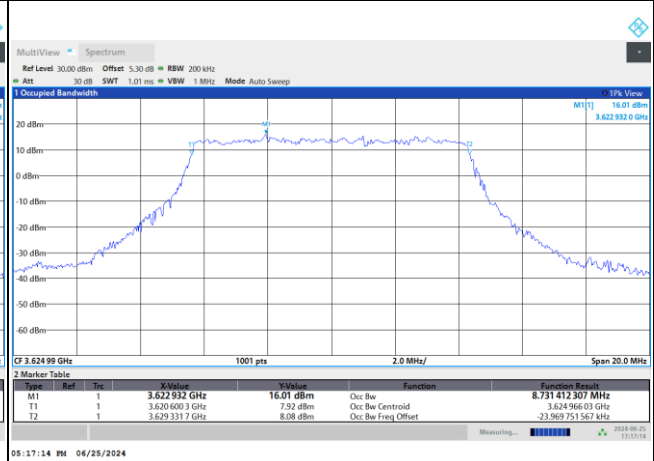

64QAM

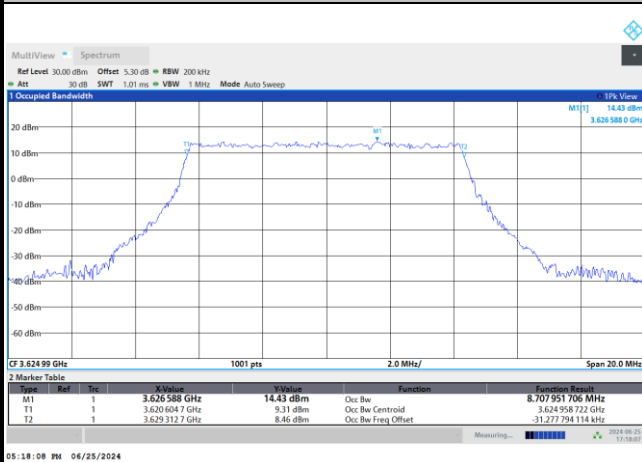


256QAM

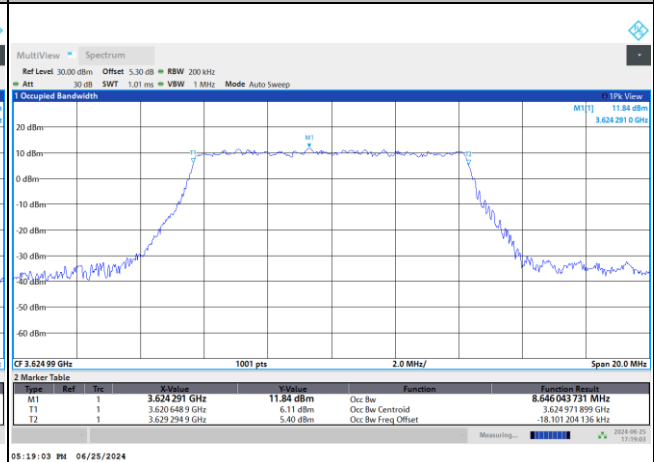




FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

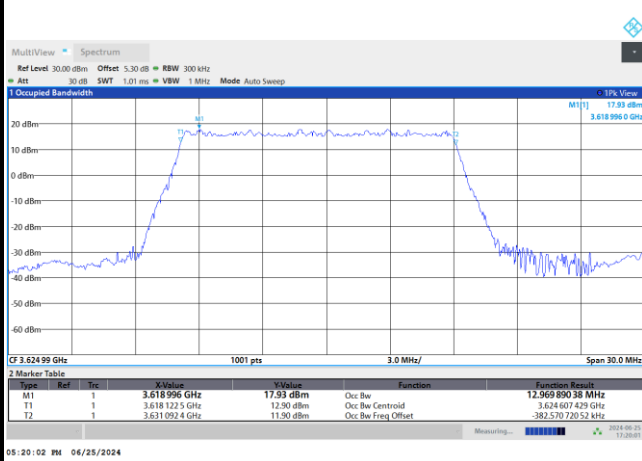


FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

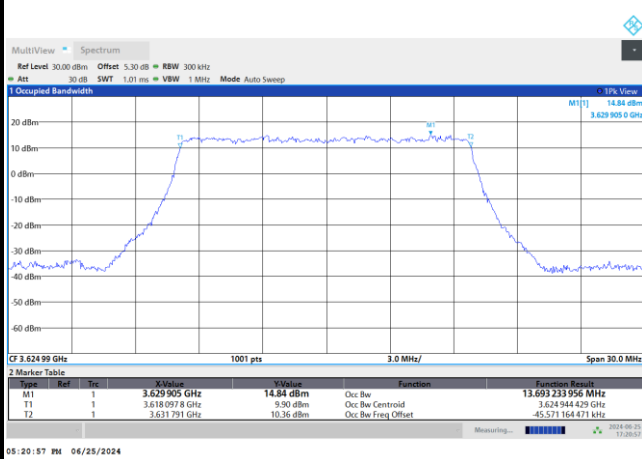


16QAM

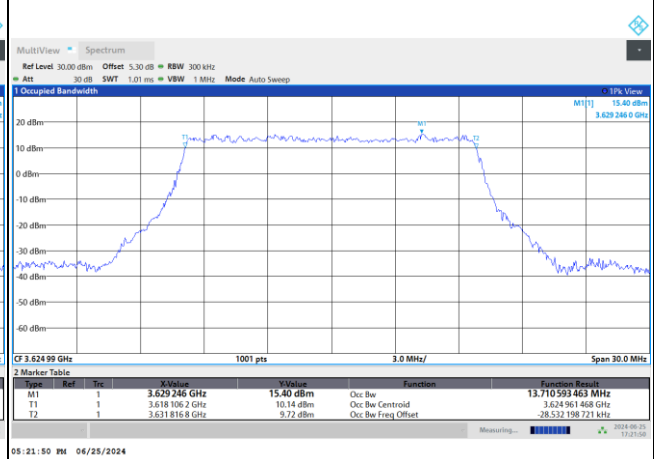

64QAM

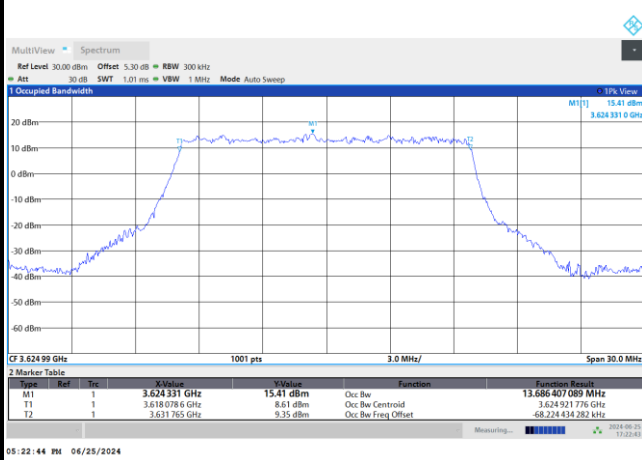


256QAM

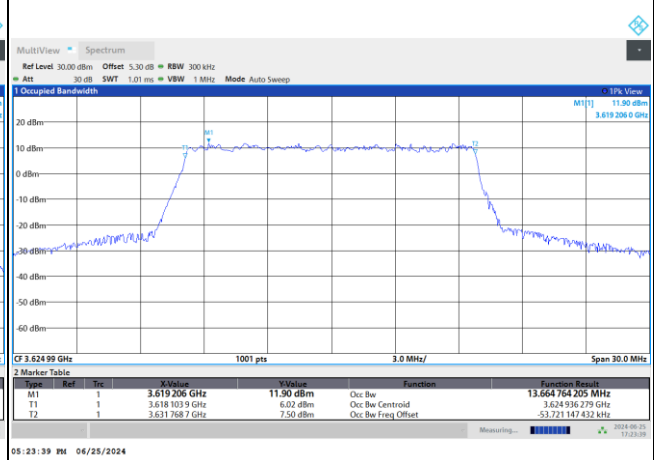




FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

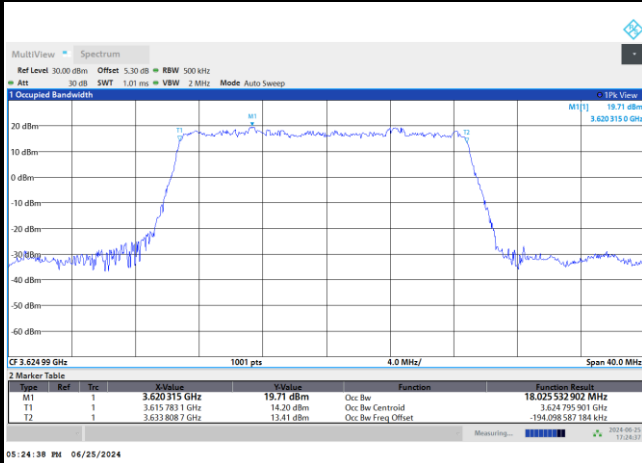


FR1 n48 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

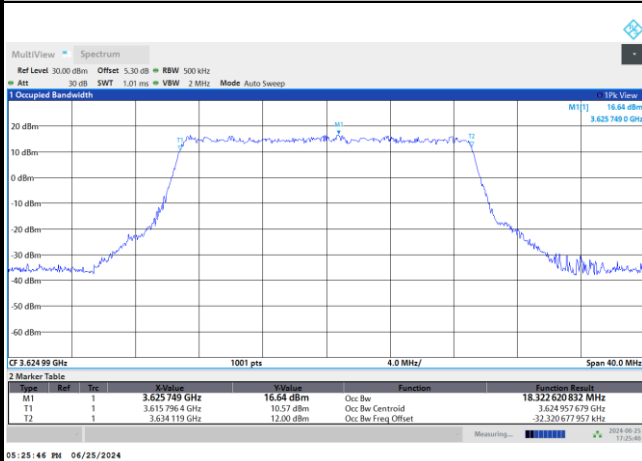


16QAM

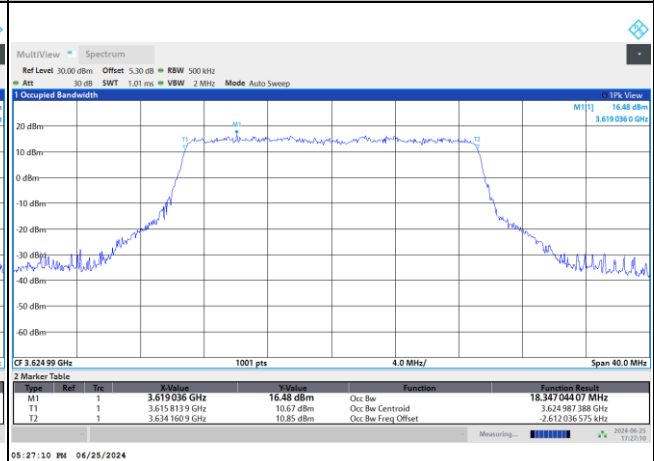

64QAM

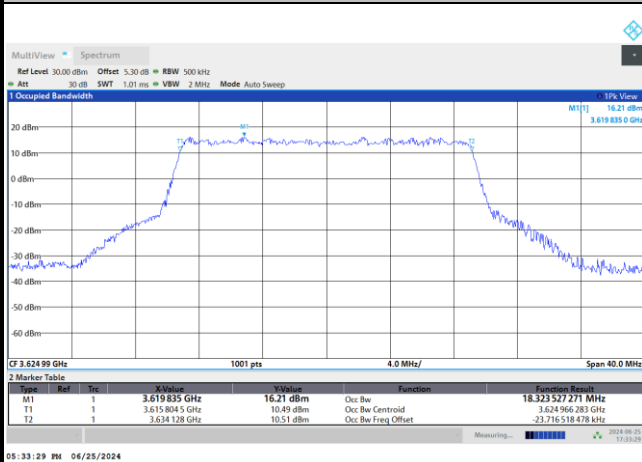


256QAM

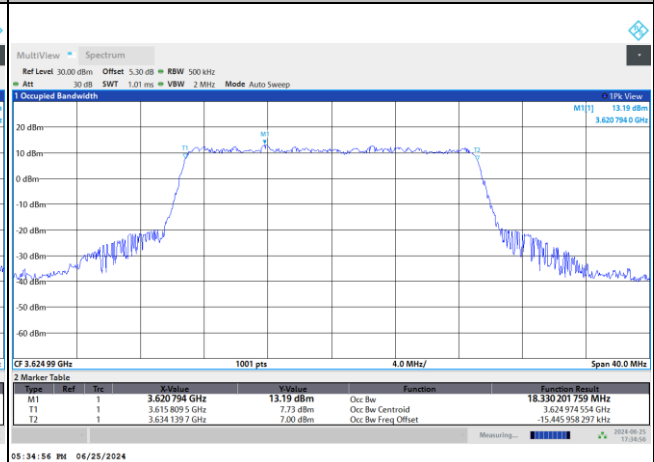




FR1 n48 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

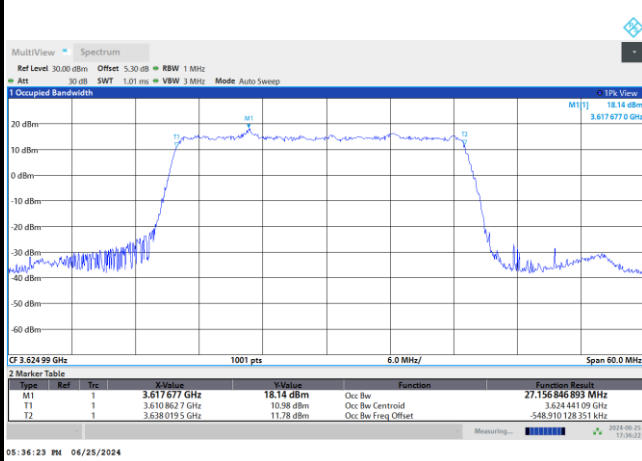


FR1 n48 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

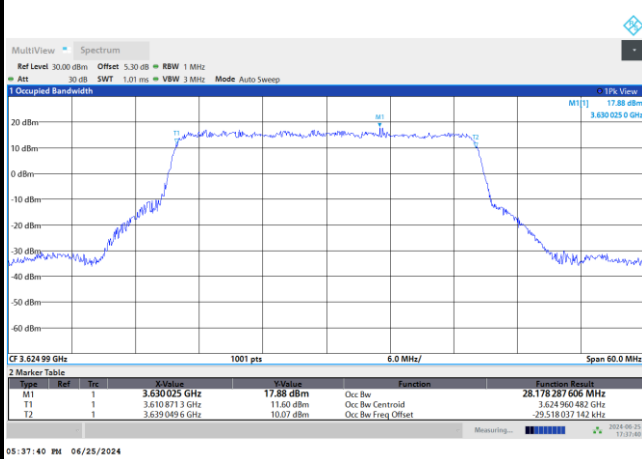


16QAM

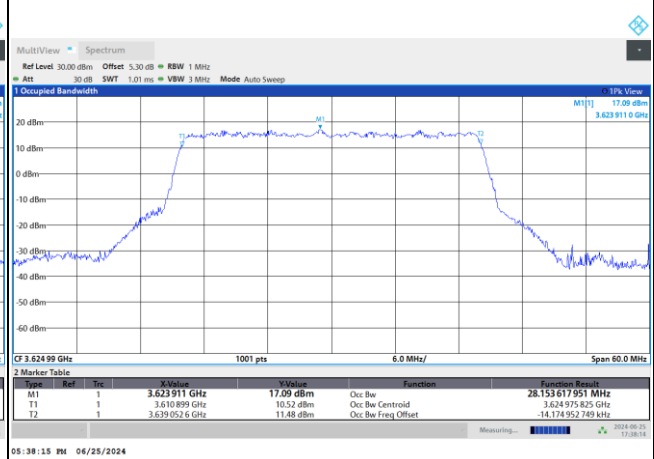

64QAM

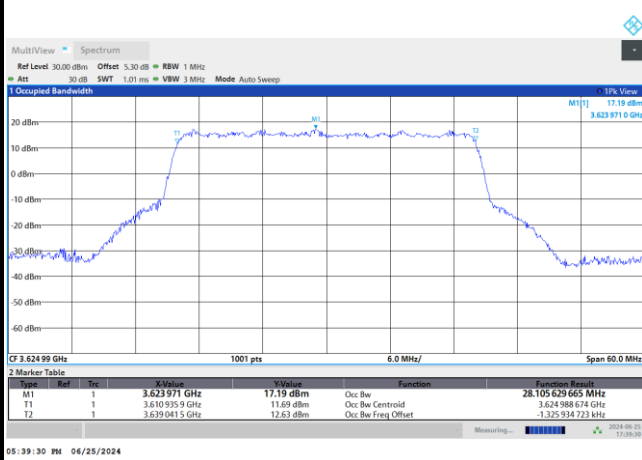


256QAM

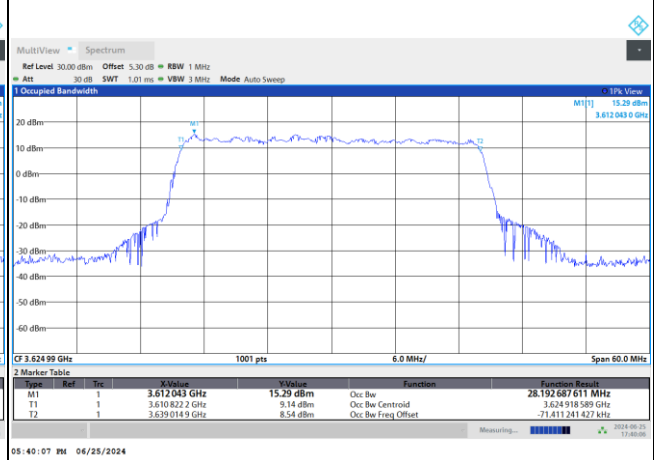




FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

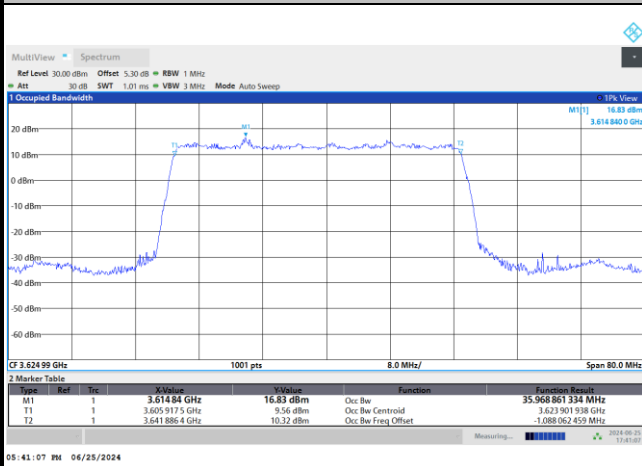


FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

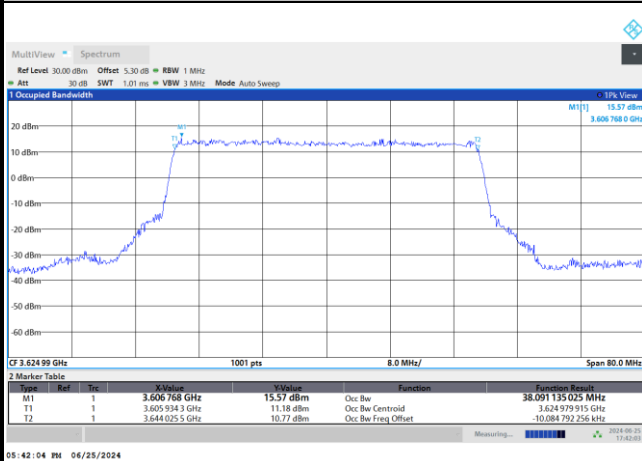


16QAM

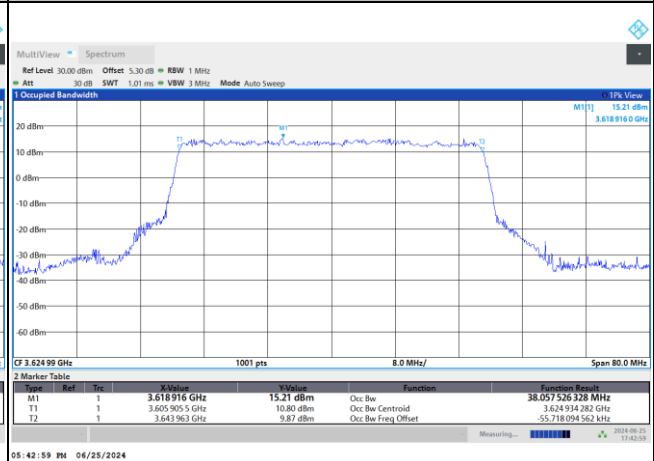

64QAM

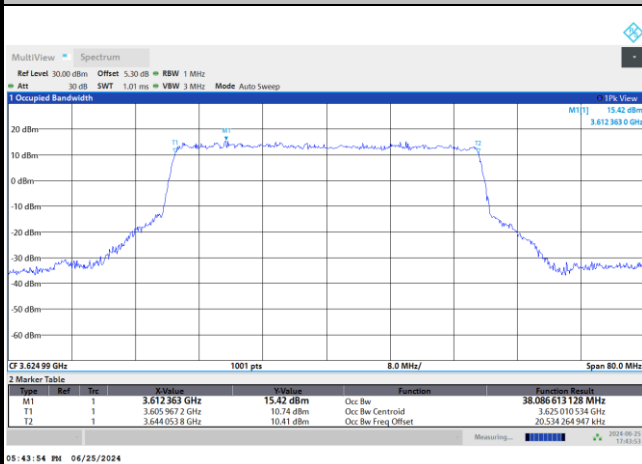


256QAM

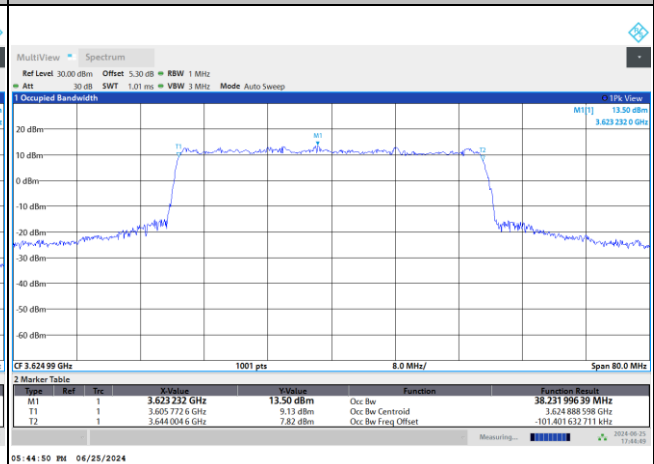


**Unwanted Emission (MASK)**


FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

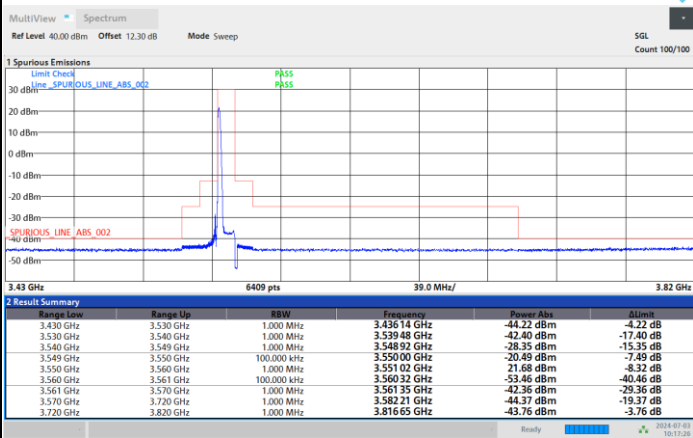Lowest Channel**1RB0****1RBmax**

10:17:26 AM 07/03/2024

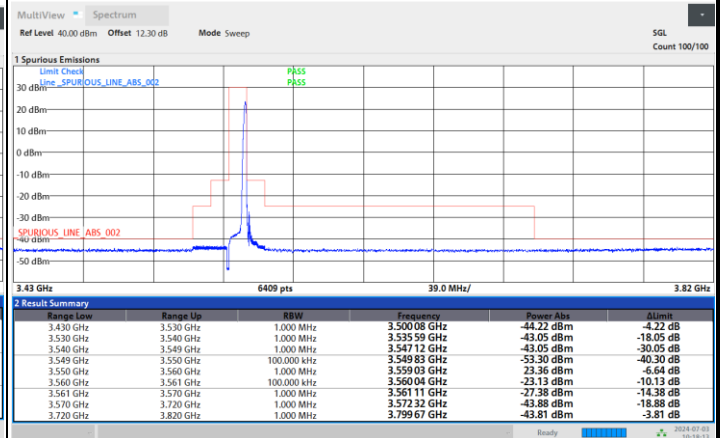

10:18:14 AM 07/03/2024

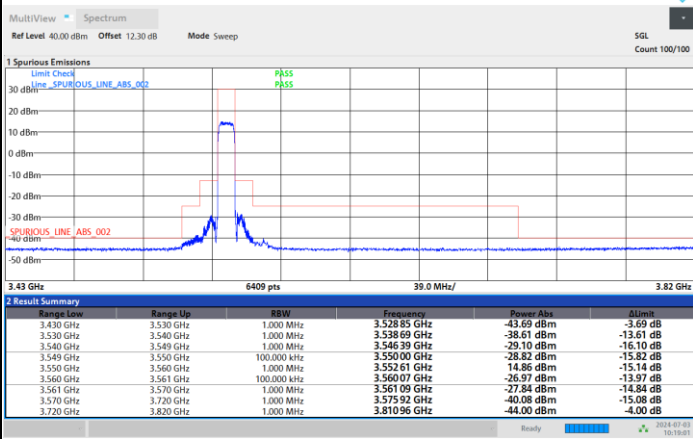Full RB

10:19:01 AM 07/03/2024





FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Middle Channel

1RB0

1RBmax

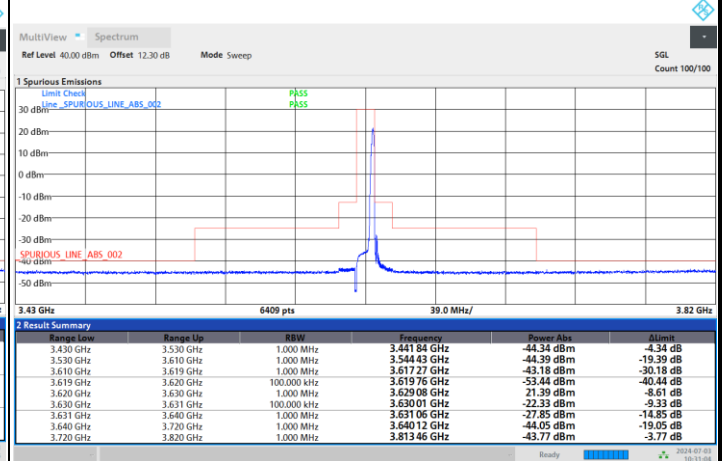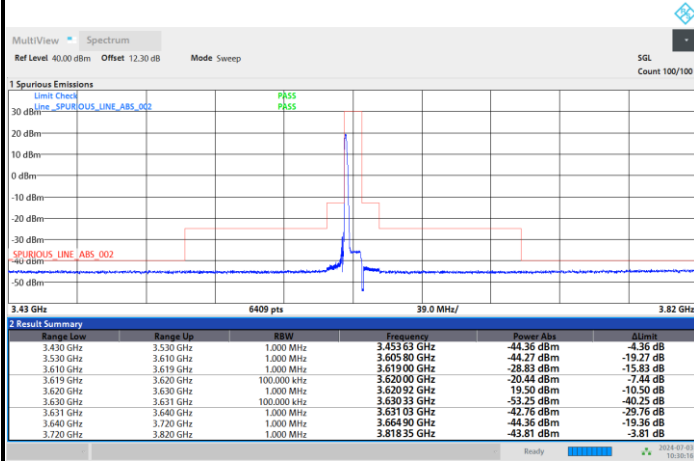

Full RB

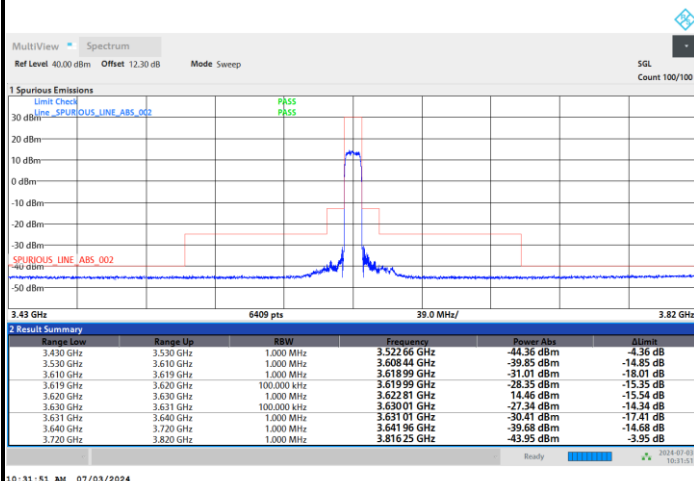





FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel


1RB0

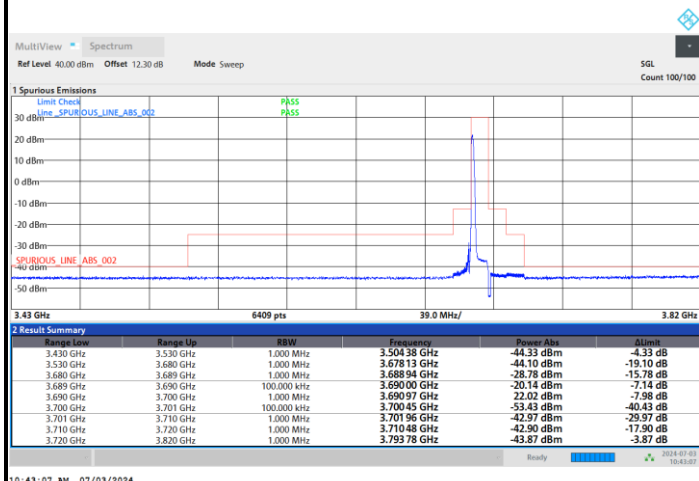

1RBmax

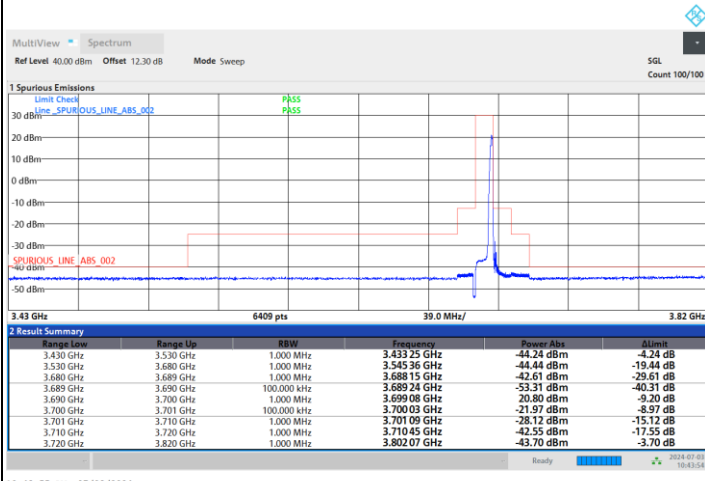

Full RB

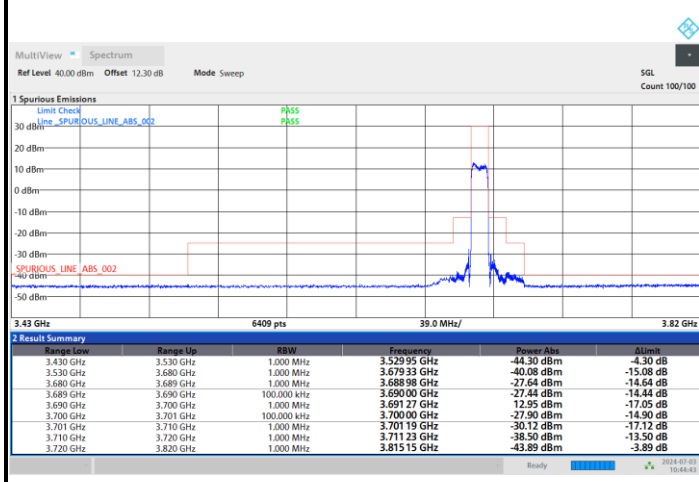





FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Lowest Channel


1RB0

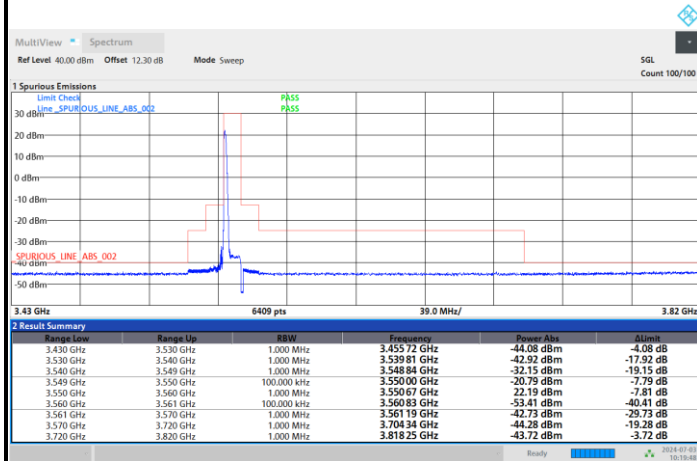

1RBmax

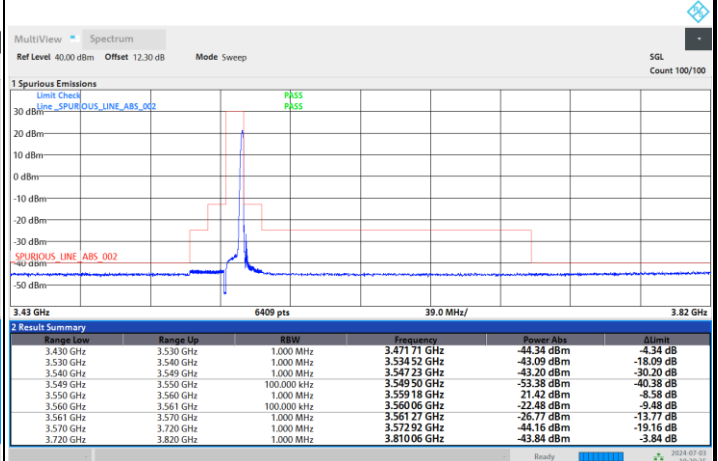

Full RB

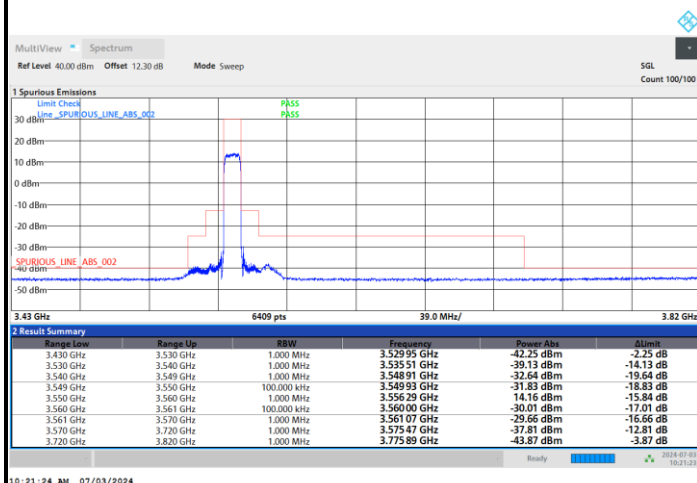





FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Middle Channel


1RB0

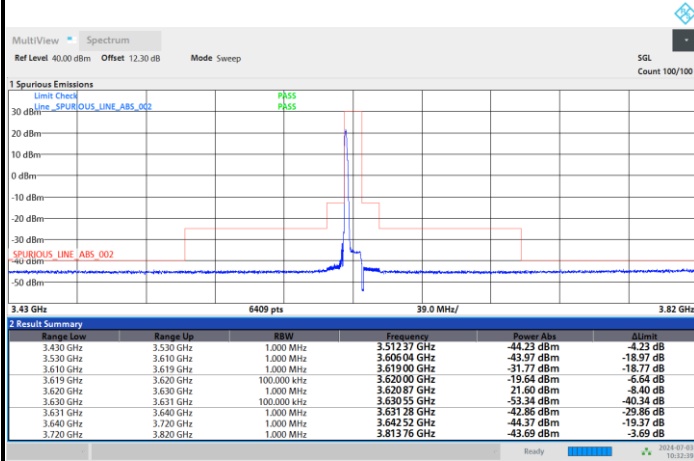

1RBmax

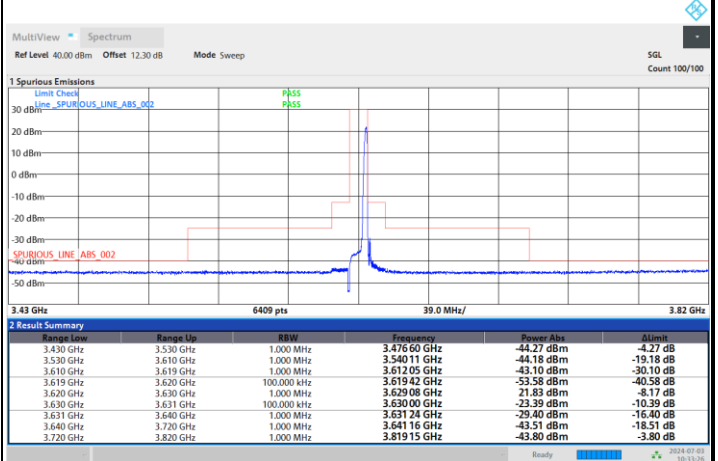

Full RB

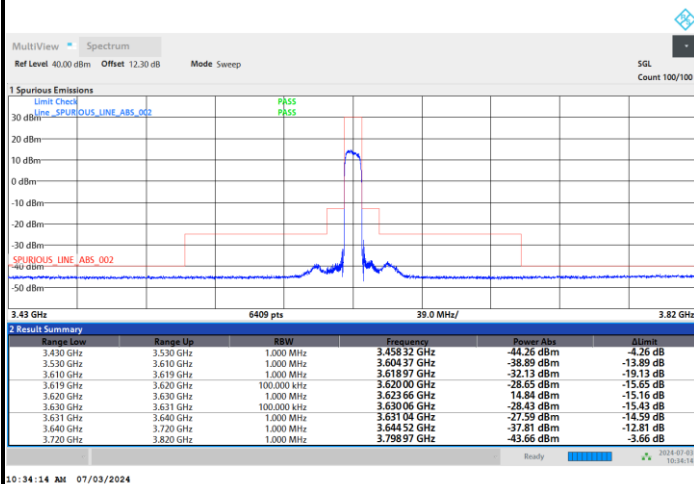




FR1 n48 / 10MHz / DFT-S OFDM / QPSK


Highest Channel

1RB0

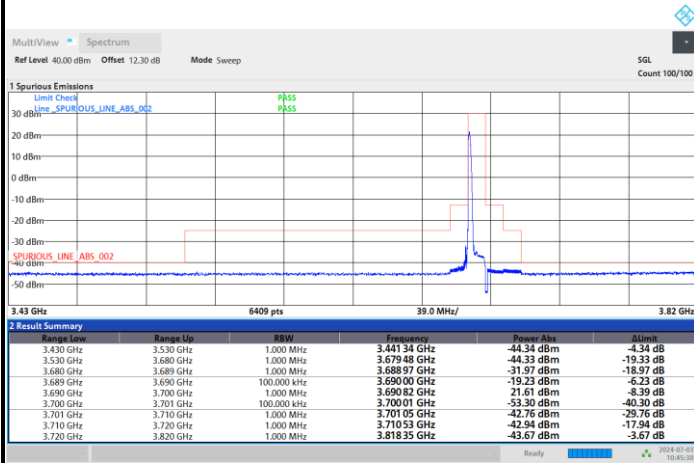


10:45:31 AM 07/03/2024

1RBmax

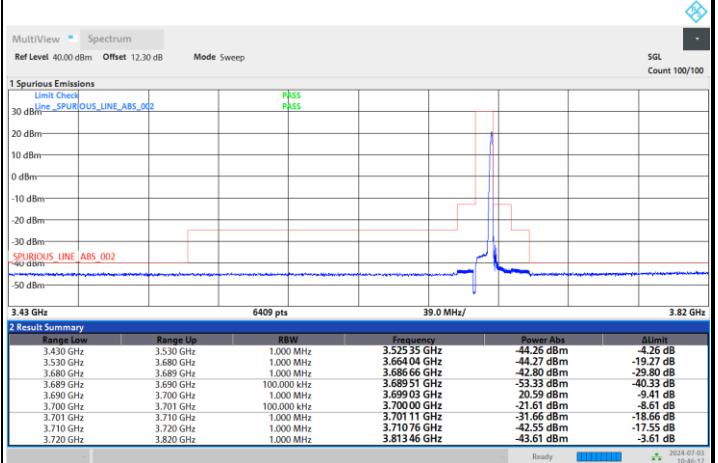

10:46:18 AM 07/03/2024

Full RB

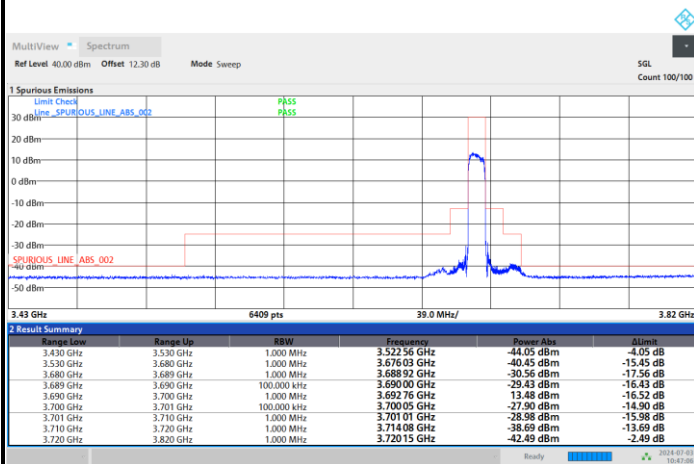


10:47:06 AM 07/03/2024




FR1 n48 / 10MHz / DFT-S OFDM / 16QAM

Lowest Channel

1RB0

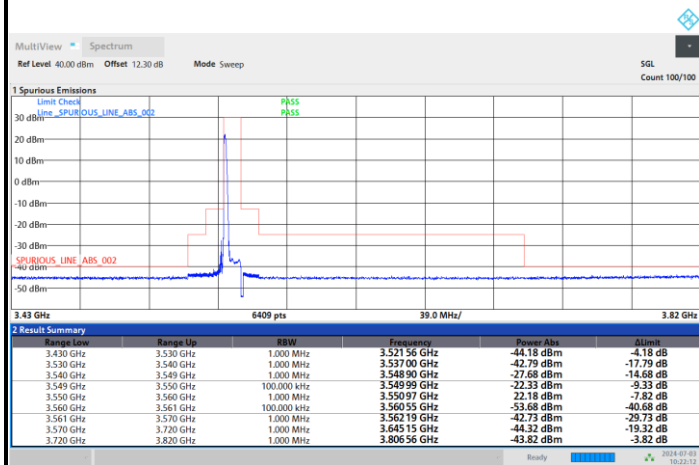

1RBmax

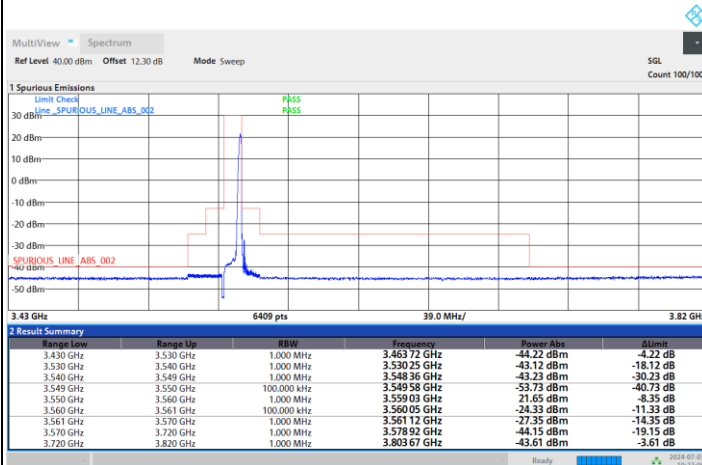

Full RB

