



No. DAT-P-114/01-01



No. L0442

TEST REPORT

No. 2006E01036-1

FCCID	R38YL728G2
Test name	Electromagnetic Field (Specific Absorption Rate)
Product	DUAL-GSM, DUAL-WORKING SMART PHONE
Model	CoolPAD™ 728G2
Client	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Type of test	Non Type Approval

Telecommunication Metrology Center
of Ministry of Information Industry



Notes

1. . The test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
2. Copies of the test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
3. The test report shall be invalid if there are no signatures of the testing person, reviewing person and approving person on it.
4. The test report shall be invalid if it is altered.
5. Any demurrals about the test shall be put forward to the testing organization within 15 days after the receiving of the test report.
6. This test report standalone does not constitute or imply by its own an approval of the product by any Certification Authorities or Competent Bodies.
7. This report is only valid if complete, and test report shall not be reproduced except in full, without written approval of the laboratory.
8. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of MII and the Accreditation Bodies, if it applies.

Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
(Telecommunication Metrology Center of MII)

Post code: 100083

Telephone: +86 10 62302041

Fax: +86 10 62304793

Web site: <http://www.emcite.com>

E-mail: welcome@emcite.com

TABLE OF CONTENT

1 COMPETENCE AND WARRANTIES	5
2 GENERAL CONDITIONS	5
3 DESCRIPTION OF EUT	5
3.1 ADDRESSING INFORMATION RELATED TO EUT	5
3.2 CONSTITUENTS OF EUT	6
3.3 GENERAL DESCRIPTION	6
4 OPERATIONAL CONDITIONS DURING TEST	7
4.1 SCHEMATIC TEST CONFIGURATION	7
4.2 SAR MEASUREMENT SET-UP	7
4.3 DASY4 E-FIELD PROBE SYSTEM	8
4.4 E-FIELD PROBE CALIBRATION	9
4.5 OTHER TEST EQUIPMENT	9
4.6 EQUIVALENT TISSUES	10
4.7 SYSTEM SPECIFICATIONS	11
5 CHARACTERISTICS OF THE TEST	11
5.1 APPLICABLE LIMIT REGULATIONS	11
5.2 APPLICABLE MEASUREMENT STANDARDS	11
6 LABORATORY ENVIRONMENT	12
7 CONDUCTED OUTPUT POWER MEASUREMENT	12
7.1 SUMMARY	12
7.2 CONDUCTED POWER	12
8 TEST RESULTS	13
8.1 DIELECTRIC PERFORMANCE	13
8.2 SYSTEM VALIDATION	13
8.3 SUMMARY OF MEASUREMENT RESULTS	13
8.4 CONCLUSION	16
9 MEASUREMENT UNCERTAINTY	16
10 MAIN TEST INSTRUMENTS	17
11 TEST PERIOD	17
12 TEST LOCATION	17
ANNEX A MEASUREMENT PROCESS	18
ANNEX B TEST LAYOUT	19
ANNEX C GRAPH RESULTS	24
ANNEX D SYSTEM VALIDATION RESULTS	76
ANNEX E PROBE CALIBRATION CERTIFICATE	77


**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 4 of 85


Product Name	DUAL-GSM, DUAL-WORKING SMART PHONE	Sample Model	CoolPAD™ 728G2
Client	Yulong Computer Telecommunication Scientific (Shenzhen) Co.	Type of test	Non Type Approval
Factory	Yulong Computer Telecommunication Scientific (Shenzhen) Co.	Sampling arrival date	June 28 th , 2006
Manufacturer	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd		
Sampling/ Sending sample	Sending sample	Sample sent by	Wang Dexin
Sampling location	/	Sampling person	/
Sample quantity	1	Sample matrix	/
Series number of the Sample	352021005599576		
Test basis	EN 50360-2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. EN 50361-2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. IEC 62209-1-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz) ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.		
Test conclusion	Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report. General Judgment: Pass (Stamp)		
Note	The test results relate only to the items tested of the sample(s).		

Approved by



(Lu Bingsong)

Deputy Director of the laboratory

Reviewed by


(Wang Hongbo)

Tested by


(Qi Dianyuan)



1 COMPETENCE AND WARRANTIES

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory accredited by DAR (DATEch) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik) for the tests indicated in the Certificate No. **DAT-P-114/01-01**.

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory competent to carry out the tests described in this test report.

Telecommunication Metrology Center of Ministry of Information Industry guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at **Telecommunication Metrology Center of Ministry of Information Industry** at the time of execution of the test.

Telecommunication Metrology Center of Ministry of Information Industry is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2 GENERAL CONDITIONS

- 2.1 This report only refers to the item that has undergone the test.
- 2.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.
- 2.3 This document is only valid if complete; no partial reproduction can be made without written approval of Telecommunication Metrology Center of Ministry of Information Industry.
- 2.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of Ministry of Information Industry and the Accreditation Bodies, if it applies.

3 DESCRIPTION OF EUT

3.1 Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address/Post	8/F B. High Tech Plaza, TianAn Cyberpark, Chegongmiao, Shenzhen, P.R.China
City	Shenzhen
Postal Code	518040
Country	China
Telephone	86-755-83301199
Fax	86-755-83439004

**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 6 of 85

Table 2: Manufacturer

Name or Company	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address/Post	8/F B. High Tech Plaza, TianAn Cyberpark, Chegongmiao, Shenzhen, P.R.China
City	Shenzhen
Postal Code	518040
Country	China
Telephone	86-755-83301199
Fax	86-755-83439004

3.2 Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
Handset	CoolPAD™ 728G2	352021005599576	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Lithium Battery	CPLD-10	728G2T062100188	TCL Hyper-power Batteries INC.
AC/DC Adapter	XKD-C2000NHS5.0-12	\	XIXING - Switching Power Supply, Transformer and Electromagnetic Counter



Picture 1: Constituents of the sample (Lithium Battery is in the Handset)

3.3 General Description

Equipment Under Test (EUT) is a model of DUAL-GSM, DUAL-WORKING SMART PHONE with integrated antenna. It consists of Handset and normal options: Lithium Battery and AC/DC Adapter as Table 3

and Picture 1. With the request of the client, SAR is tested for the band of PCS 1900MHz. Its GPRS class is 10.

Since the EUT has two transmitters (GSM1 and GSM2), firstly perform a SAR test for the following two statuses both at 1900MHz Channel 810 with the "Left Cheek" position, Status 1: "GSM1 is transmitting, GSM2 is standing by" and Status 2: "GSM2 is transmitting, GSM2 is standing by". Establish which one gives the highest SAR (see Table 11 to check the results). Then perform the full set of SAR tests showing the worst case SAR results (see Table 12 to Table 14 to check the results). Find out the worst case in the body test, and then do one more test under the same setup with an earphone (see Table 15 to check the results).

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration


A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

4.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

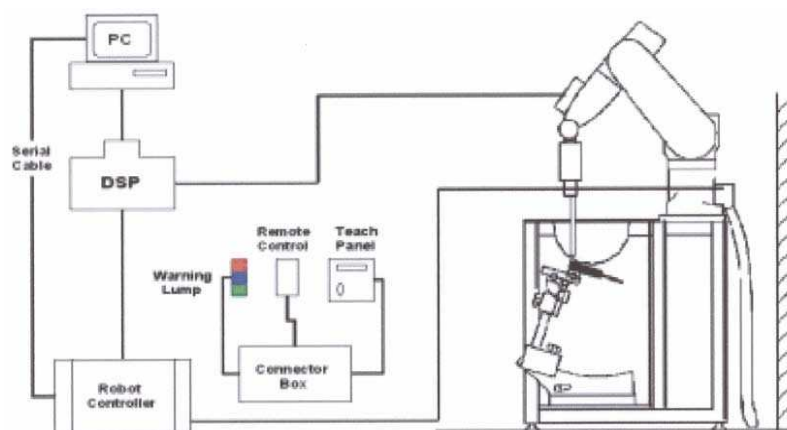

Picture 2: SAR Lab Test Measurement Set-up


The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

4.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System(ET3DV6 only) Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: $\pm 0.2\text{ dB}$ (30 MHz to 3 GHz)
Directivity	$\pm 0.2\text{ dB}$ in brain tissue (rotation around probe axis) $\pm 0.4\text{ dB}$ in brain tissue (rotation normal probe axis)

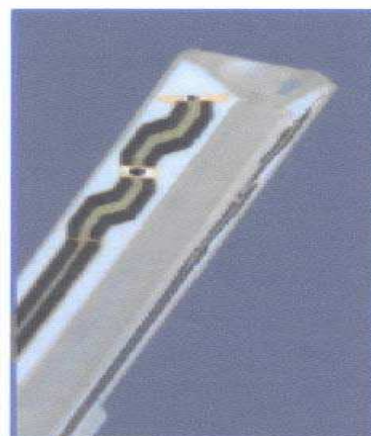

Picture 3: ET3DV6 E-field Probe

Dynamic Range	5u W/g to > 100mW/g; Linearity: ±0.2dB
Surface Detection	±0.2 mm repeatability in air and clear liquids over diffuse reflecting surface(ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



Picture4:ET3DV6 E-field probe

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy was evaluated and found to be better than ± 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

Note: Please see Annex E to check the probe calibration certificate.



Picture 5:Device Holder

4.5 Other Test Equipment

4.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the

rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

4.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow all predefined phantom positions and measurement grids by the complete setup of manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Picture6:Generic Twin Phantom

4.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 4 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01).

Table 4. Composition of the Head Tissue Equivalent Matter

MIXTURE %	FREQUENCY 1900MHz		
Water	55.242		
Glycol monobutyl	44.452		
Salt	0.306		
Dielectric Parameters Target Value	f=1900MHz	$\epsilon=40.0$	$\sigma=1.40$

Table 5. Composition of the Body Tissue Equivalent Matter

MIXTURE %	FREQUENCY 1900MHz		
Water	69.91		
Glycol monobutyl	29.96		
Salt	0.13		
Dielectric Parameters Target Value	f=1900MHz	$\epsilon=53.3$	$\sigma=1.52$

4.7 System Specifications

4.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

5 CHARACTERISTICS OF THE TEST

5.1 Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

EN 50361–2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

IEC 62209-1-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices:

Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

6 LABORATORY ENVIRONMENT

Table 6: The Ambient Conditions during EMF Test

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7 CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

7.2 Conducted Power

7.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at 3 channels, 512, 661 and 810 for both GSM transmitters before SAR test and after SAR test.

7.2.2 Measurement result

Table 7: Conducted Power Measurement Results

	Conducted Power		
	Channel 512 (1850.2MHz)	Channel 661 (1880MHz)	Channel 810 (1909.8MHz)
GSM1 Before Test (dBm)	29.4	29.4	29.4
GSM1 After Test (dBm)	29.5	29.6	29.3
GSM2 Before Test (dBm)	29.7	29.6	29.4
GSM2 After Test (dBm)	29.6	29.5	29.4

7.2.3 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 11 to Table 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

8 TEST RESULTS

8.1 Dielectric Performance

Table 8: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	1900MHz	40.0	1.40
Measurement value (Average of 10 tests)	1900MHz	40.0	1.46

Table 9: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	1900MHz	53.3	1.52
Measurement value (Average of 10 tests)	1900MHz	55.85	1.55

8.2 System Validation

Table 10: System Validation

Measurement is made at temperature 23.3 °C, relative humidity 47%, input power 250 mW. Liquid temperature during the test: 22.5°C					
Liquid parameters		Frequency	Permittivity ϵ	Conductivity σ (S/m)	
		1900 MHz	40.27	1.45	
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)	
		10 g Average	1 g Average	10 g Average	1 g Average
	1900 MHz	5.125	9.925	5.27	9.91

Note: Target Values used are one fourth of those in IEEE Std 1528-2003 (feeding power is normalized to 1 Watt), i.e. 250 mW is used as feeding power to the validation dipole (SPEAG using).

8.3 Summary of Measurement Results

Table 11: SAR Values of both Statuses (Head, 1900 MHz Band)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency of Status1(See Fig.1)	0.070	0.116	-0.200
Left hand, Touch cheek, Top frequency of Status2 (See Fig.49)	0.058	0.102	-0.186

**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 14 of 85

Table 12: SAR Values of Status 1 (Head, 1900 MHz Band)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency(See Fig.1)	0.070	0.116	-0.200
Left hand, Touch cheek, Mid frequency(See Fig.3)	0.102	0.167	-0.200
Left hand, Touch cheek, Bottom frequency(See Fig.5)	0.159	0.259	0.001
Left hand, Tilt 15 Degree, Top frequency(See Fig.7)	0.041	0.072	-0.200
Left hand, Tilt 15 Degree, Mid frequency(See Fig.9)	0.052	0.093	-0.056
Left hand, Tilt 15 Degree, Bottom frequency(See Fig.11)	0.066	0.120	0.014
Right hand, Touch cheek, Top frequency(See Fig.13)	0.083	0.158	0.010
Right hand, Touch cheek, Mid frequency(See Fig.15)	0.118	0.220	-0.200
Right hand, Touch cheek, Bottom frequency(See Fig.17)	0.182	0.338	-0.200
Right hand, Tilt 15 Degree, Top frequency(See Fig.19)	0.026	0.045	0.200
Right hand, Tilt 15 Degree, Mid frequency(See Fig.21)	0.047	0.089	0.048
Right hand, Tilt 15 Degree, Bottom frequency(See Fig.23)	0.076	0.152	0.047

**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 15 of 85

Table 13: SAR Values of Status 1 (Body, 1900 MHz Band)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency(See Fig.25)	0.064	0.101	0.119
Body, Towards Ground, Mid frequency(See Fig.27)	0.088	0.141	-0.059
Body, Towards Ground, Bottom frequency(See Fig.29)	0.121	0.193	0.039
Body, Towards Phantom, Top frequency(See Fig.31)	0.040	0.063	0.200
Body, Towards Phantom, Mid frequency(See Fig.33)	0.059	0.096	0.071
Body, Towards Phantom, Bottom frequency(See Fig.35)	0.098	0.159	0.200

Table 14: SAR Values of Status 1 (Body, 1900 MHz Band with GPRS)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency(See Fig.37)	0.120	0.196	-0.194
Body, Towards Ground, Mid frequency(See Fig.39)	0.166	0.270	0.128
Body, Towards Ground, Bottom frequency(See Fig.41)	0.207	0.342	0.025
Body, Towards Phantom, Top frequency(See Fig.43)	0.049	0.075	-0.133
Body, Towards Phantom, Mid frequency(See Fig.45)	0.067	0.104	-0.185
Body, Towards Phantom, Bottom frequency(See Fig.47)	0.120	0.194	-0.200

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)	
	2.0	1.6		
Test Case	Measurement Result (W/kg)			
	10 g Average	1 g Average		
Body, Towards Ground, Bottom frequency (See Fig.51)	0.106	0.174	0.200	

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

[illegible]

**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 17 of 85

16	Phantom Uncertainty (shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity - measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity - measurement uncertainty	B	5.0	N	1	0.6	1.7	M
	Combined Standard Uncertainty			RSS			11.25	
	Expanded Uncertainty (95% CONFIDENCE INTERVAL)			K=2			22.5	

10 MAIN TEST INSTRUMENTS

Table16: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 29,2005	One year
02	Power meter	NRVD	101253	June 20, 2006	One year
03	Power sensor	NRV-Z5	100333		
04	Power sensor	NRV-Z6	100011	September 3, 2005	One year
05	Signal Generator	E4433B	US37230472	September 5, 2005	One Year
06	Amplifier	VTL5400	0505	No Calibration Requested	
07	BTS	CMU 200	105948	August 15, 2005	One year
08	E-field Probe	SPEAG ET3DV6	1736	November 25, 2005	One year
09	DAE	SPEAG DAE3	536	July 11, 2005	One year

11 TEST PERIOD

The test is performed from July 5th, 2006 to July 8th, 2006.

12 TEST LOCATION

The test is performed at Radio Communication & Electromagnetic Compatibility Laboratory of Telecommunication Metrology Center.

END OF REPORT BODY

ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

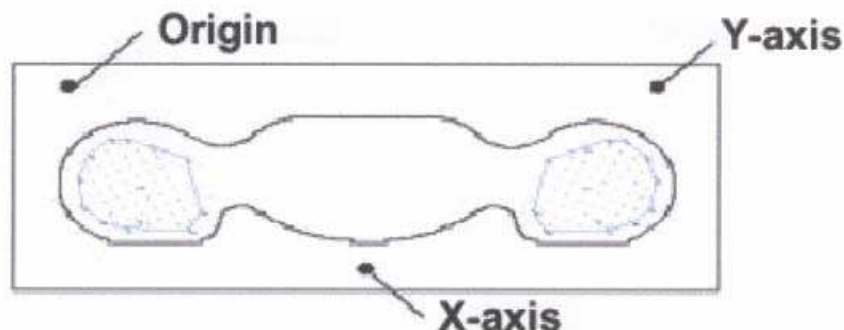

Picture A: SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT



Picture B1: Specific Absorption Rate Test Layout



Picture B2: Liquid depth in the Flat Phantom (PCS 1900MHz)



Picture B4: Left Hand Touch Cheek Position




Picture B5: Left Hand Tilt 15° Position




Picture B6: Right Hand Touch Cheek Position




Picture B7: Right Hand Tilt 15° Position

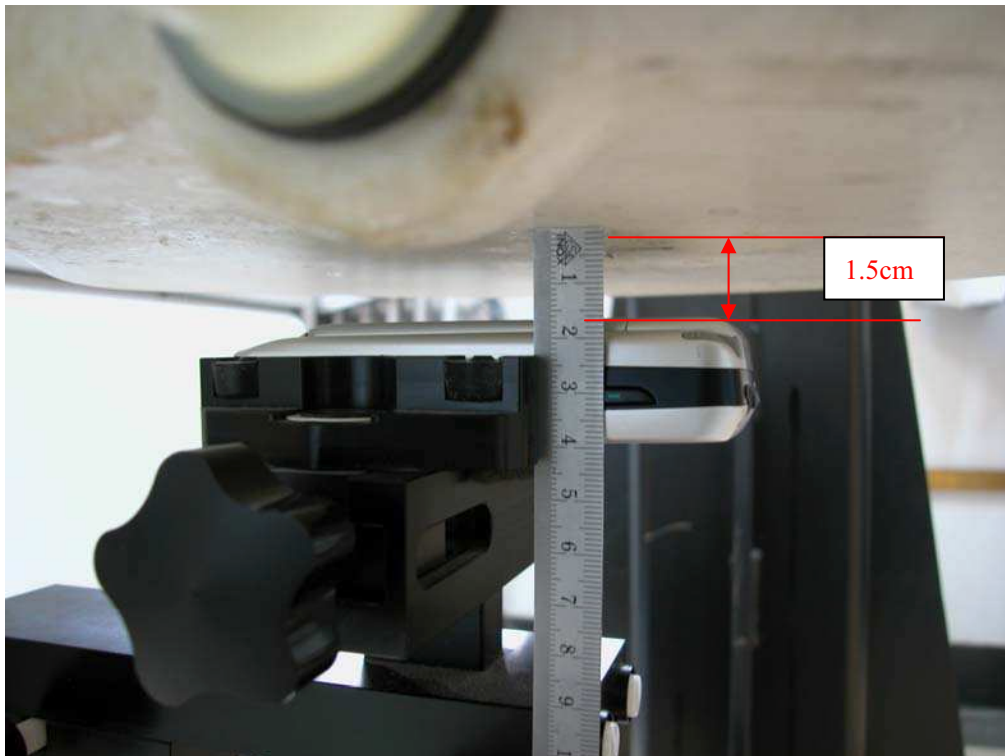

Picture B8: Body-worn Position (toward ground, the distance from handset to the bottom of the Phantom is 1.5cm)

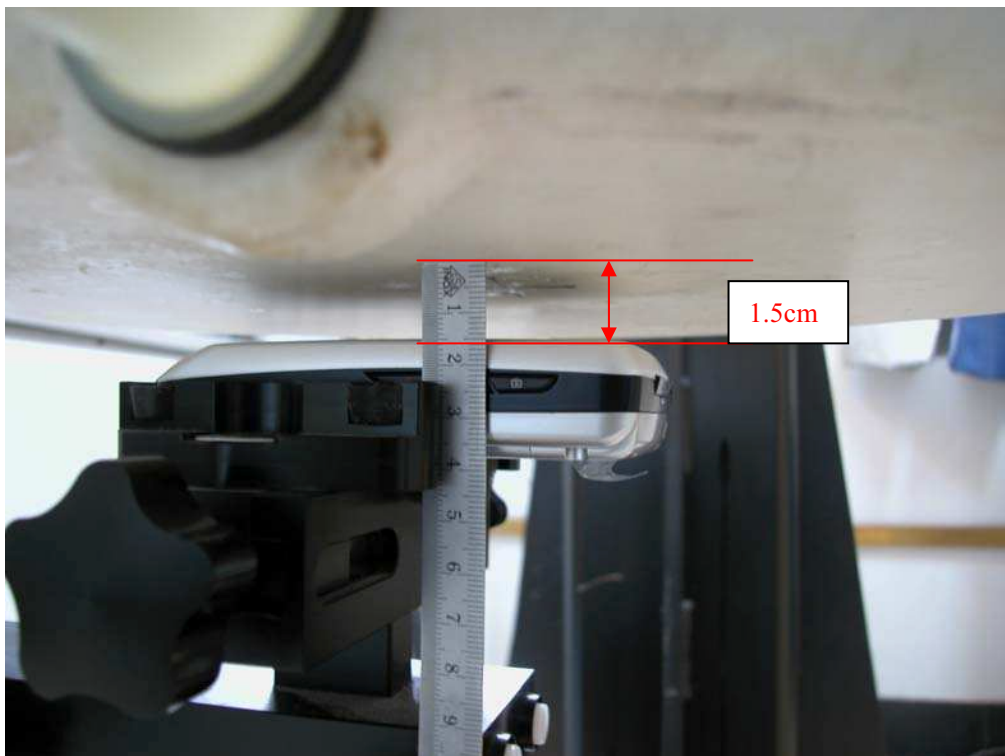

Picture B9: Body-worn Position (toward phantom, the distance from handset to the bottom of the Phantom is 1.5cm)

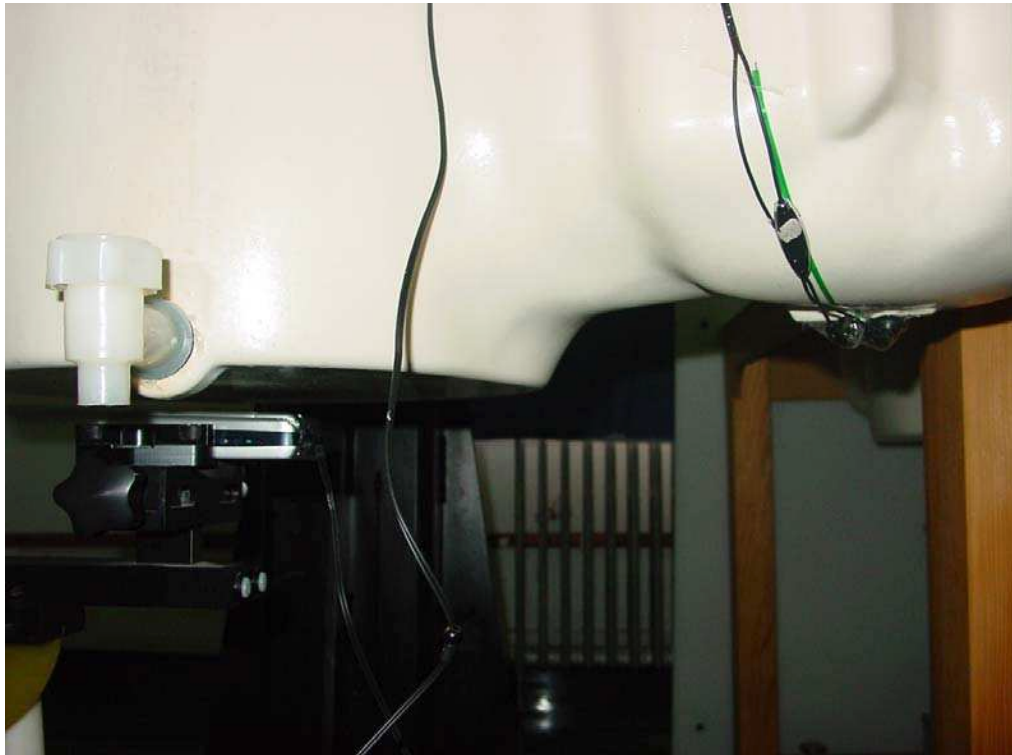

Picture B10: Body-worn Position with An Earphone (toward ground, the distance from handset to the bottom of the Phantom is 1.5cm)

ANNEX C GRAPH RESULTS

1900 Left Cheek High

Date/Time: 2006-7-5 12:27:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.120 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.75 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.126 mW/g

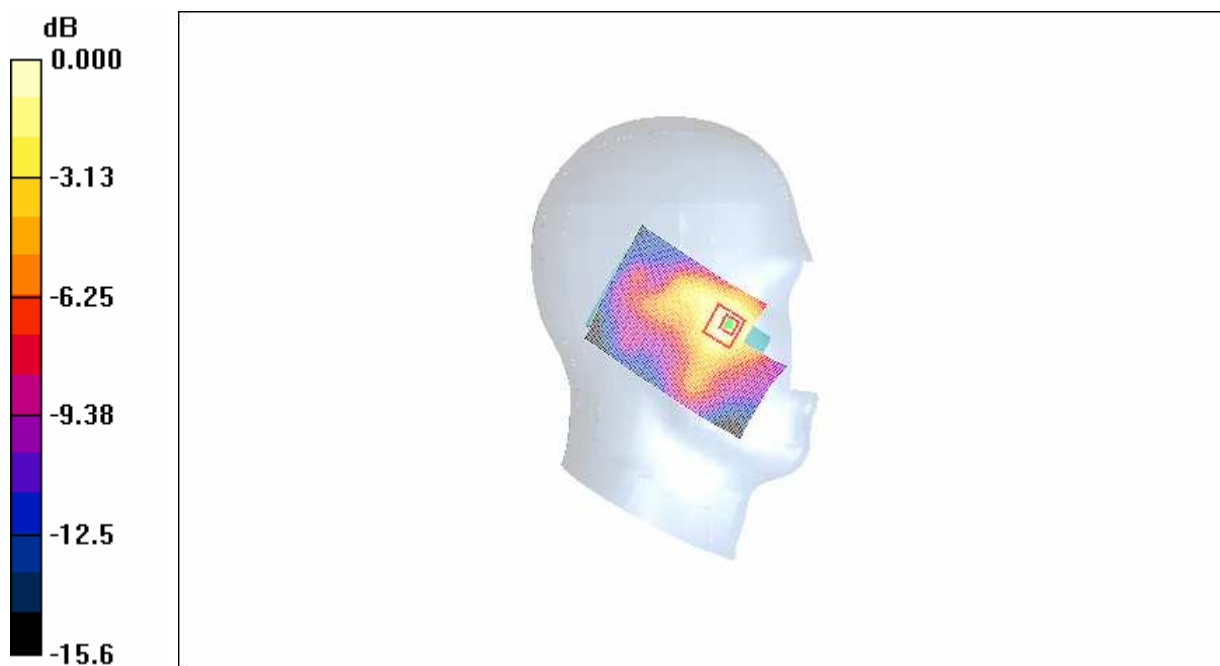

0 dB = 0.126mW/g

Fig. 1 Left Hand Touch Cheek PCS 1900MHz CH810

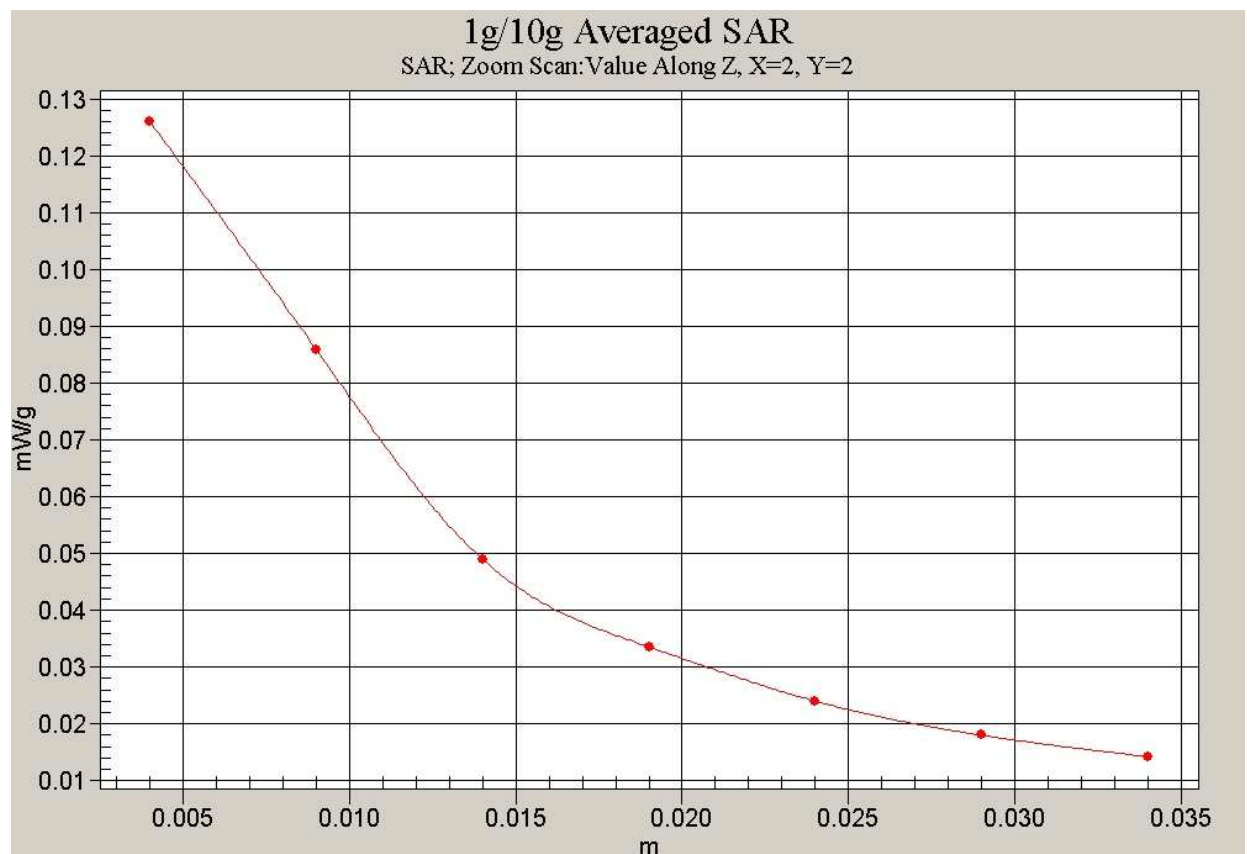


Fig. 2 Z-Scan at power reference point (PCS 1900MHz CH810)

1900 Left Cheek Middle

Date/Time: 2006-7-5 12:42:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.176 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.43 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

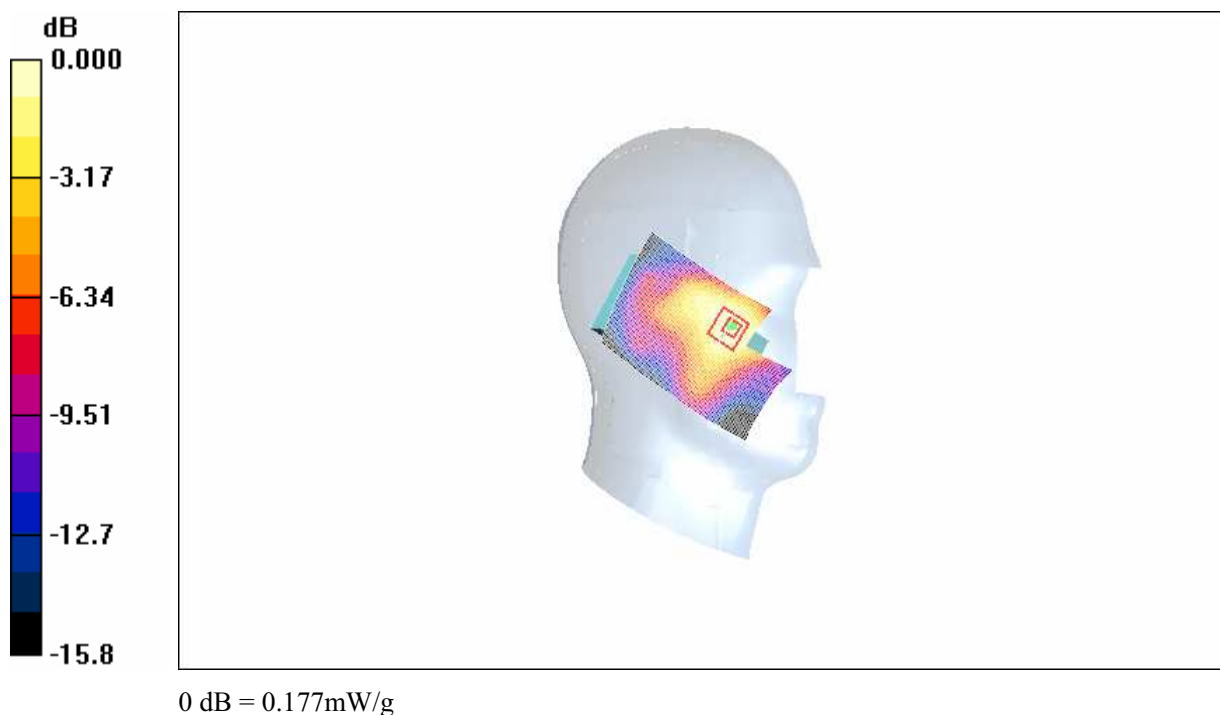


Fig. 3 Left Hand Touch Cheek PCS 1900MHz CH661

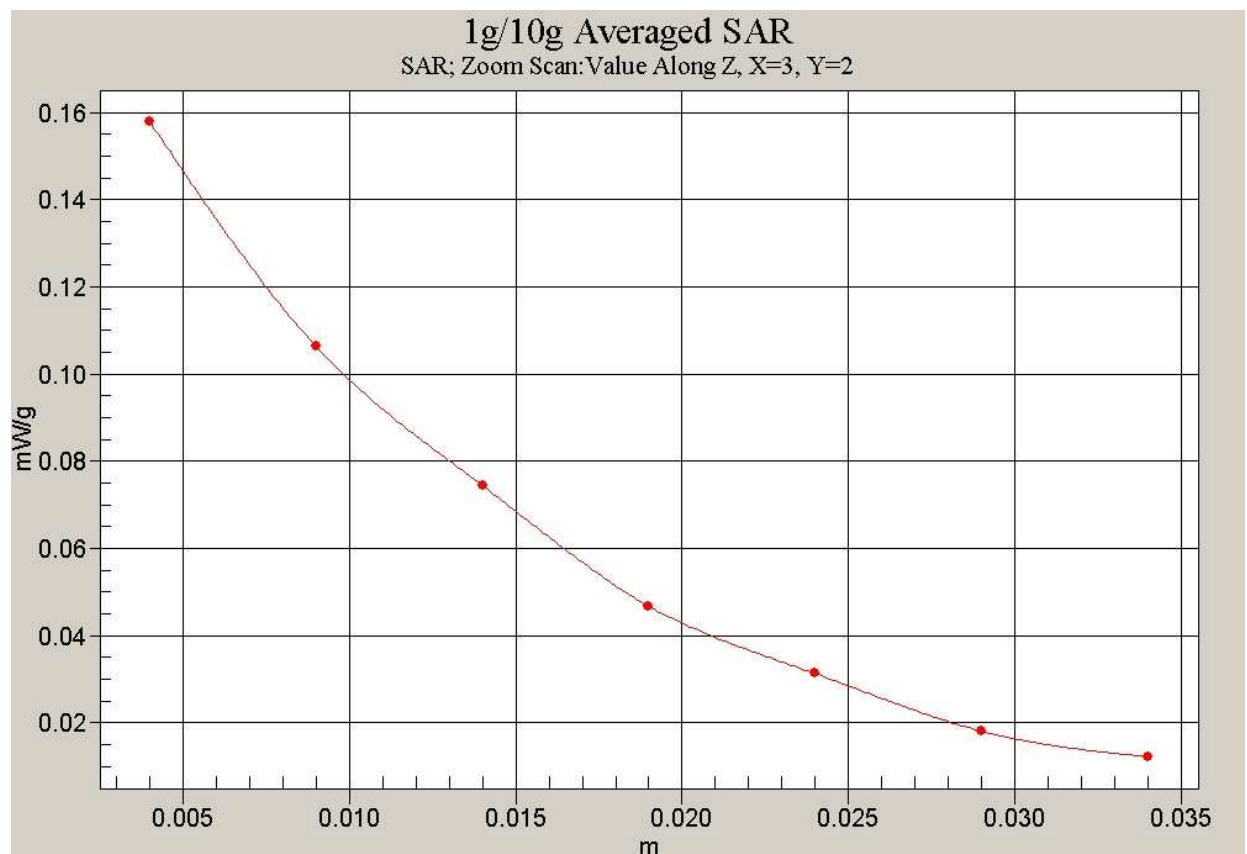


Fig. 4 Z-Scan at power reference point (PCS 1900MHz CH661)

1900 Left Cheek Low

Date/Time: 2006-7-5 12:57:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.281 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.91 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

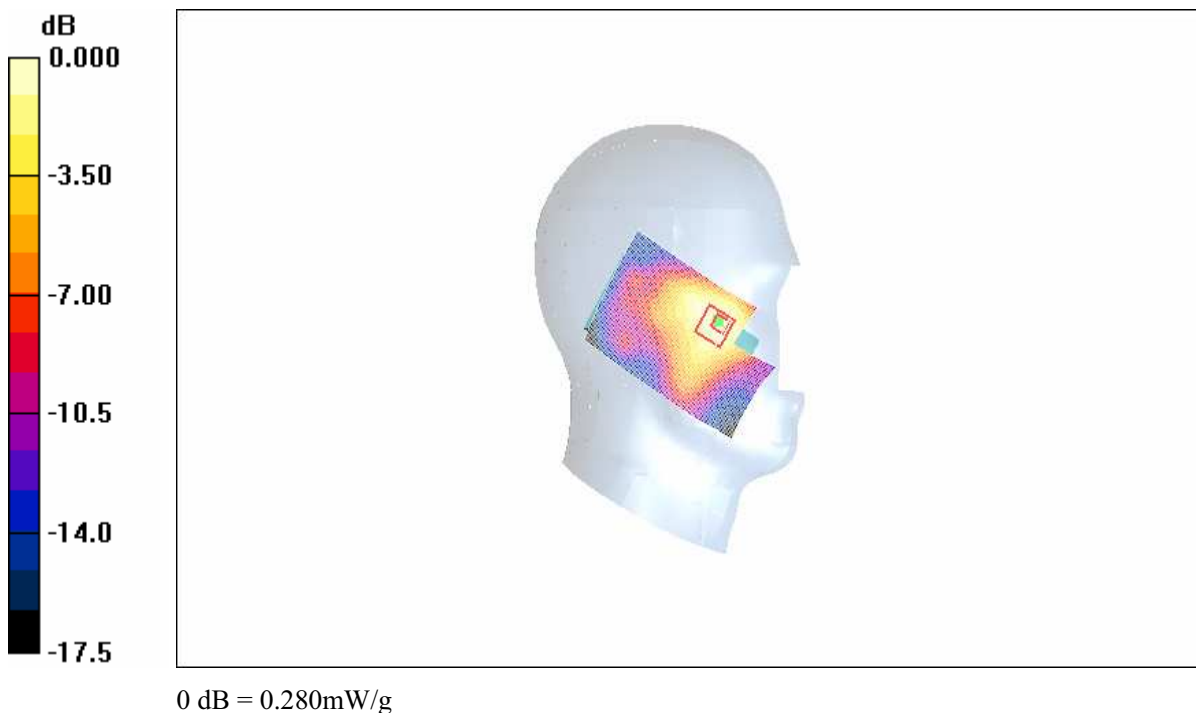


Fig. 5 Left Hand Touch Cheek PCS 1900MHz CH512

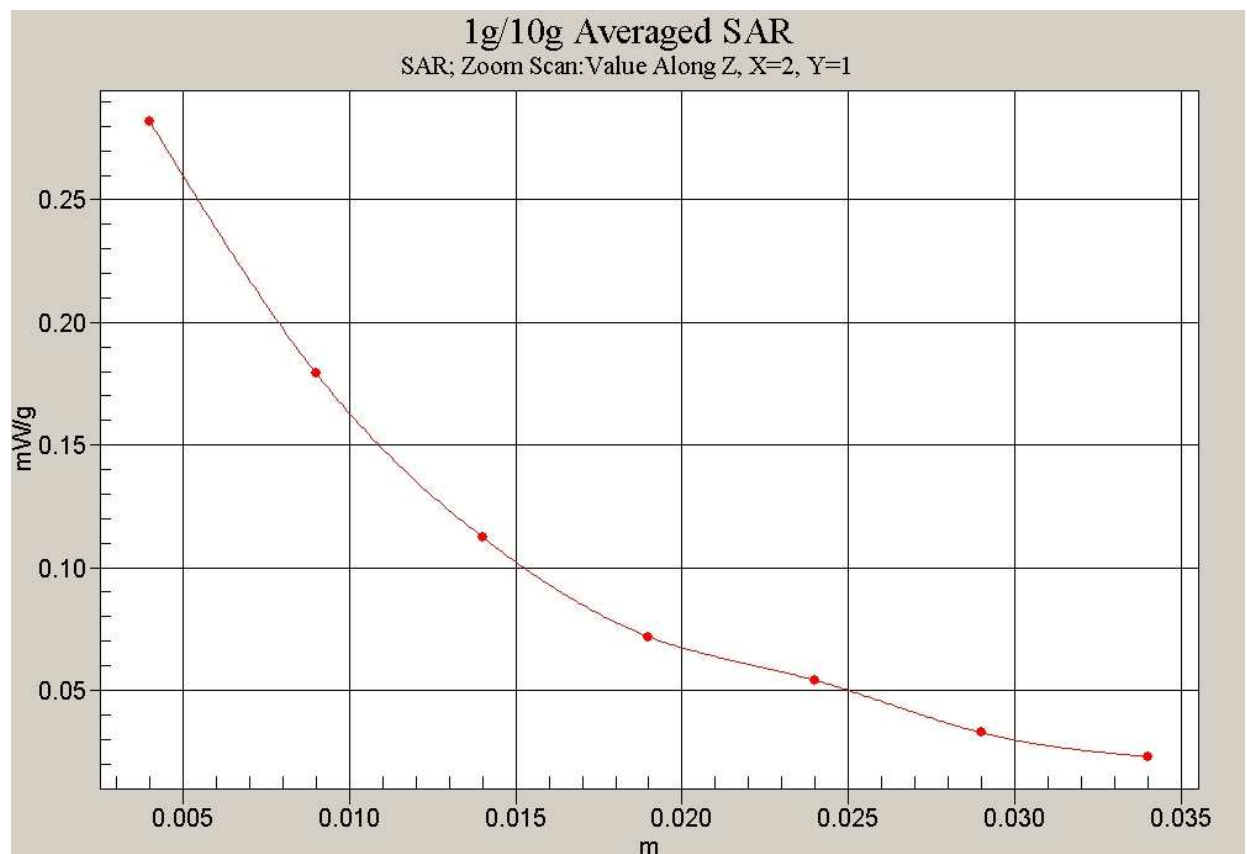


Fig. 6 Z-Scan at power reference point (PCS 1900MHz CH512)

1900 Left Tilt High

Date/Time: 2006-7-5 13:12:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.075 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.55 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

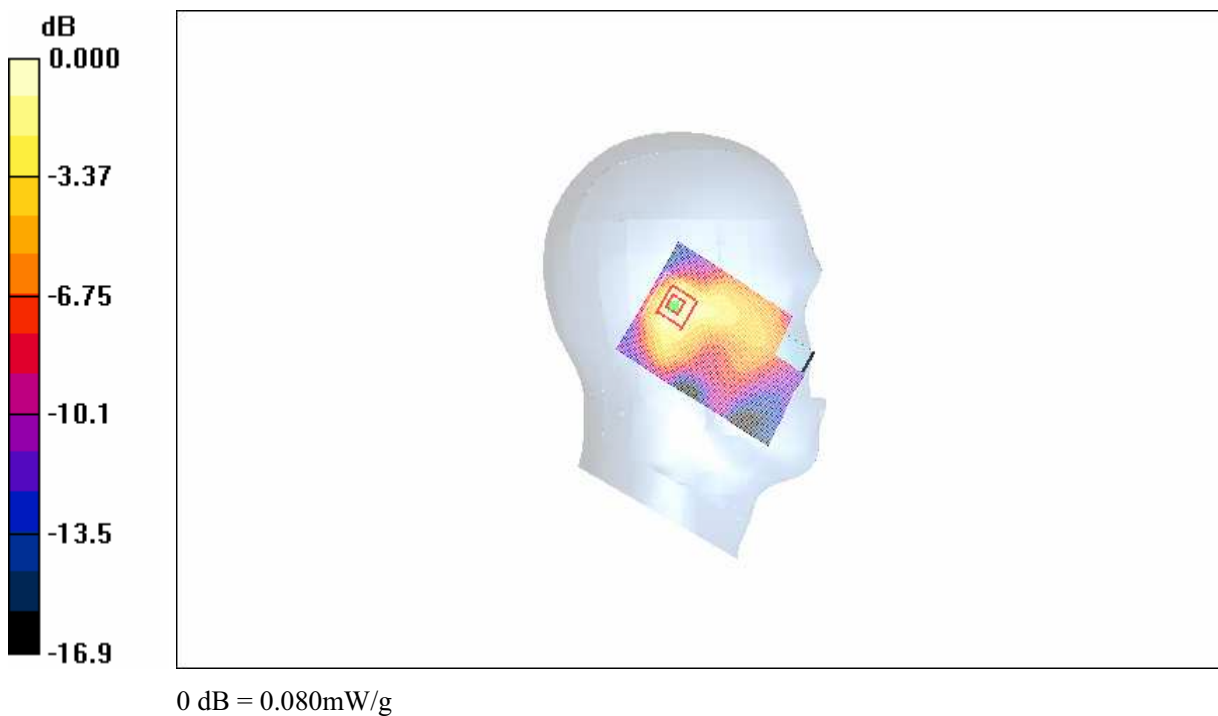


Fig. 7 Left Hand Tilt 15° PCS 1900MHz CH810

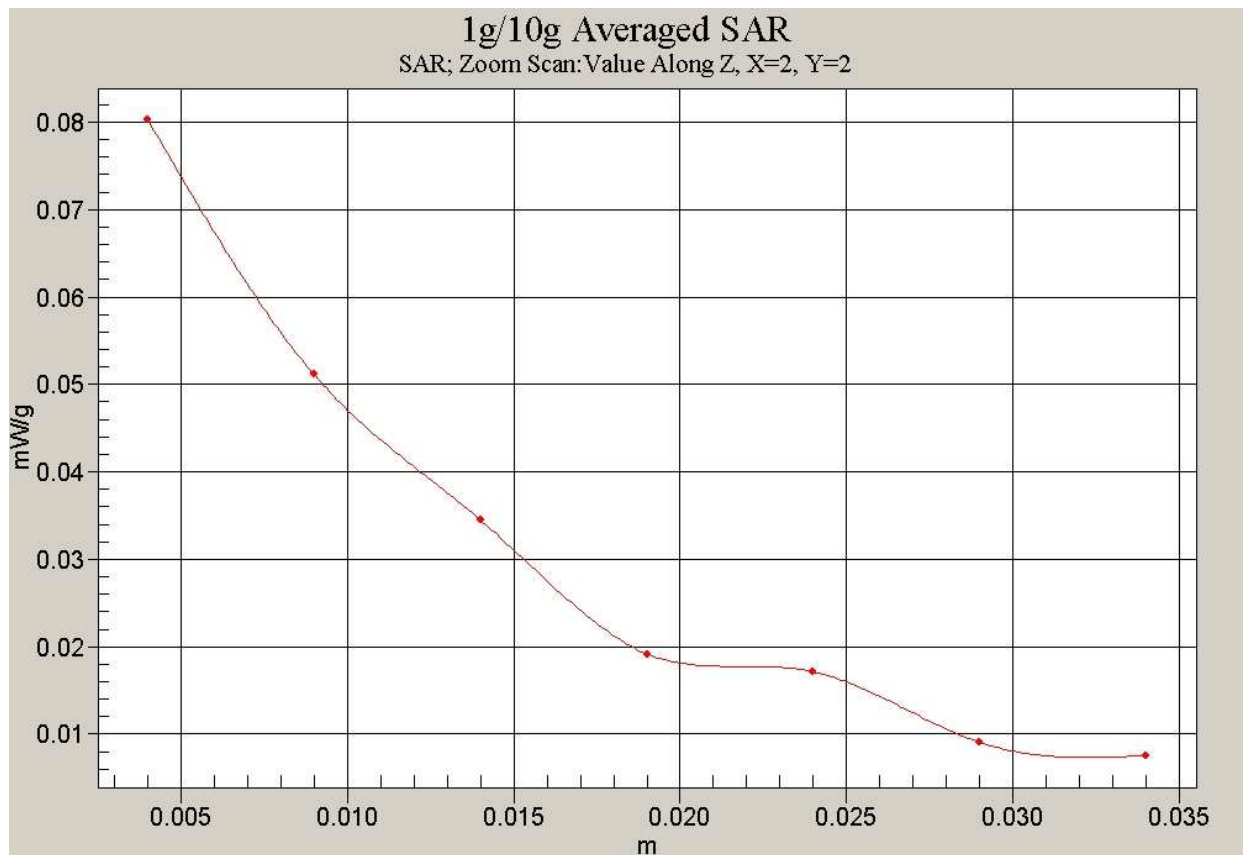


Fig. 8 Z-Scan at power reference point (PCS 1900MHz CH810)

1900 Left Tilt Middle

Date/Time: 2006-7-5 13:27:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.098 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.55 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

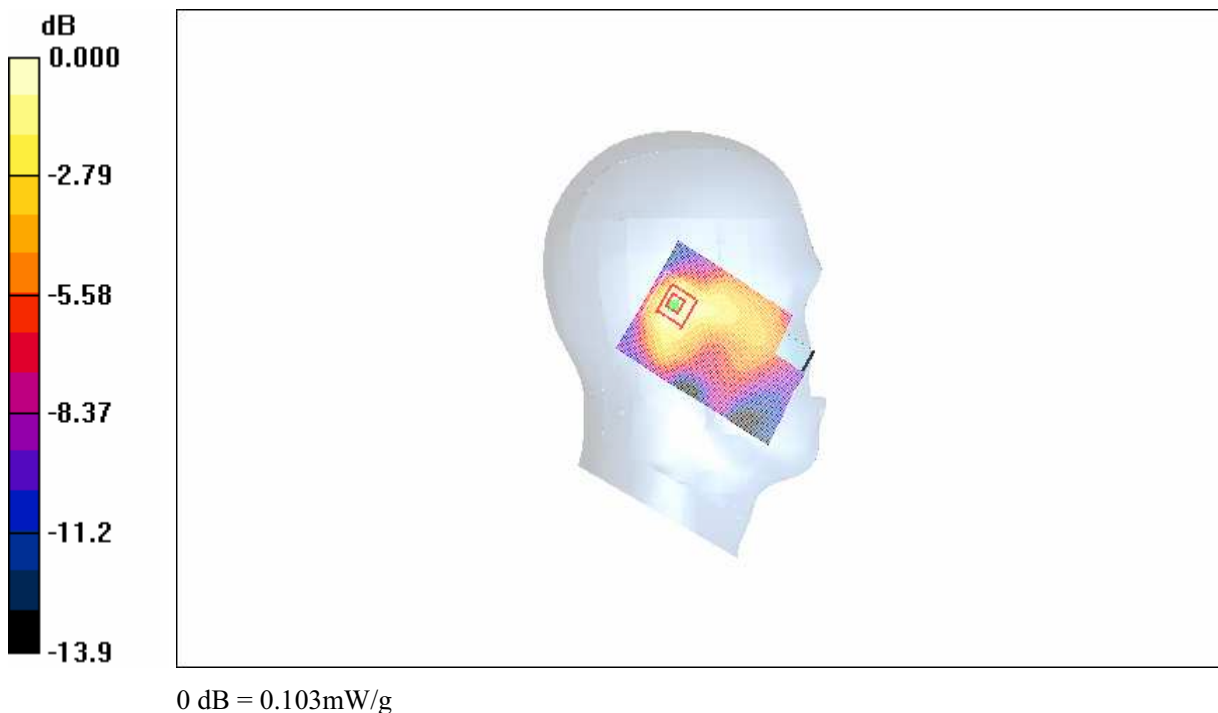


Fig. 9 Left Hand Tilt 15°PCS 1900MHz CH661

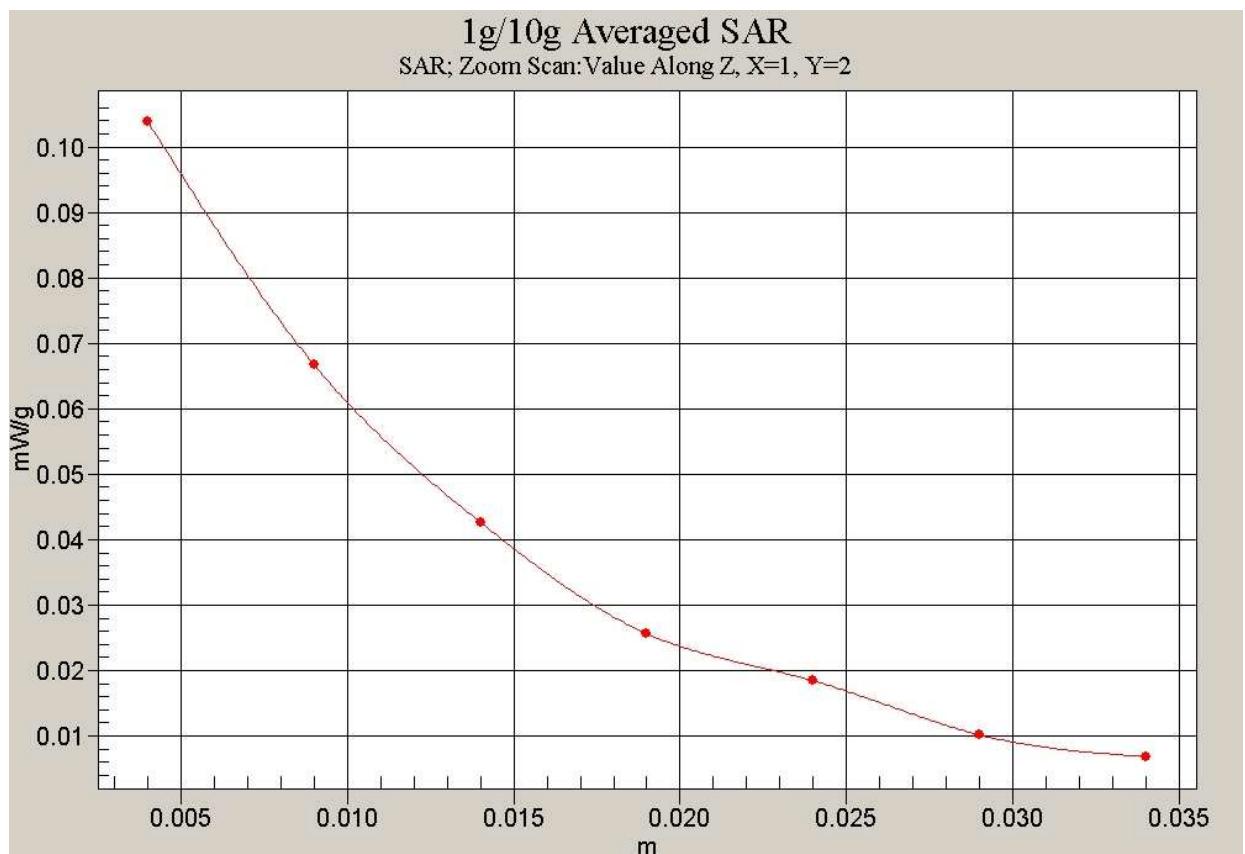


Fig. 10 Z-Scan at power reference point (PCS 1900MHz CH661)

1900 Left Tilt Low

Date/Time: 2006-7-5 13:44:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.110 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.40 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

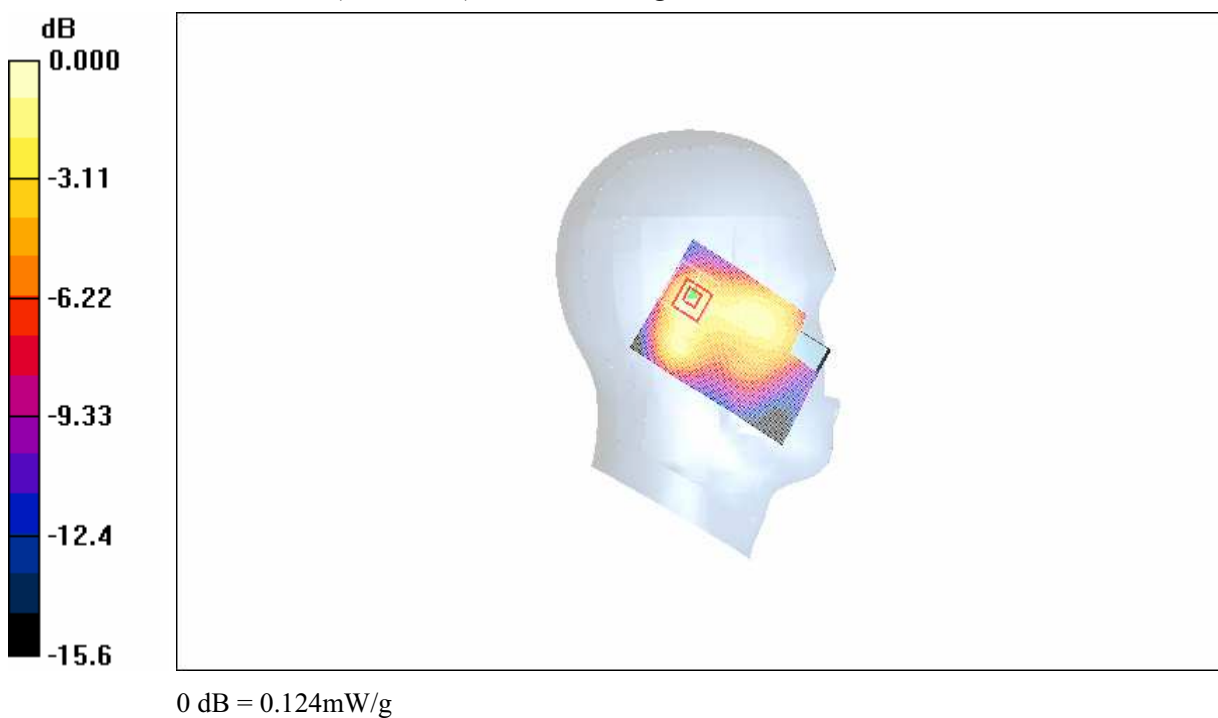


Fig. 11 Left Hand Tilt 15°PCS 1900MHz CH512

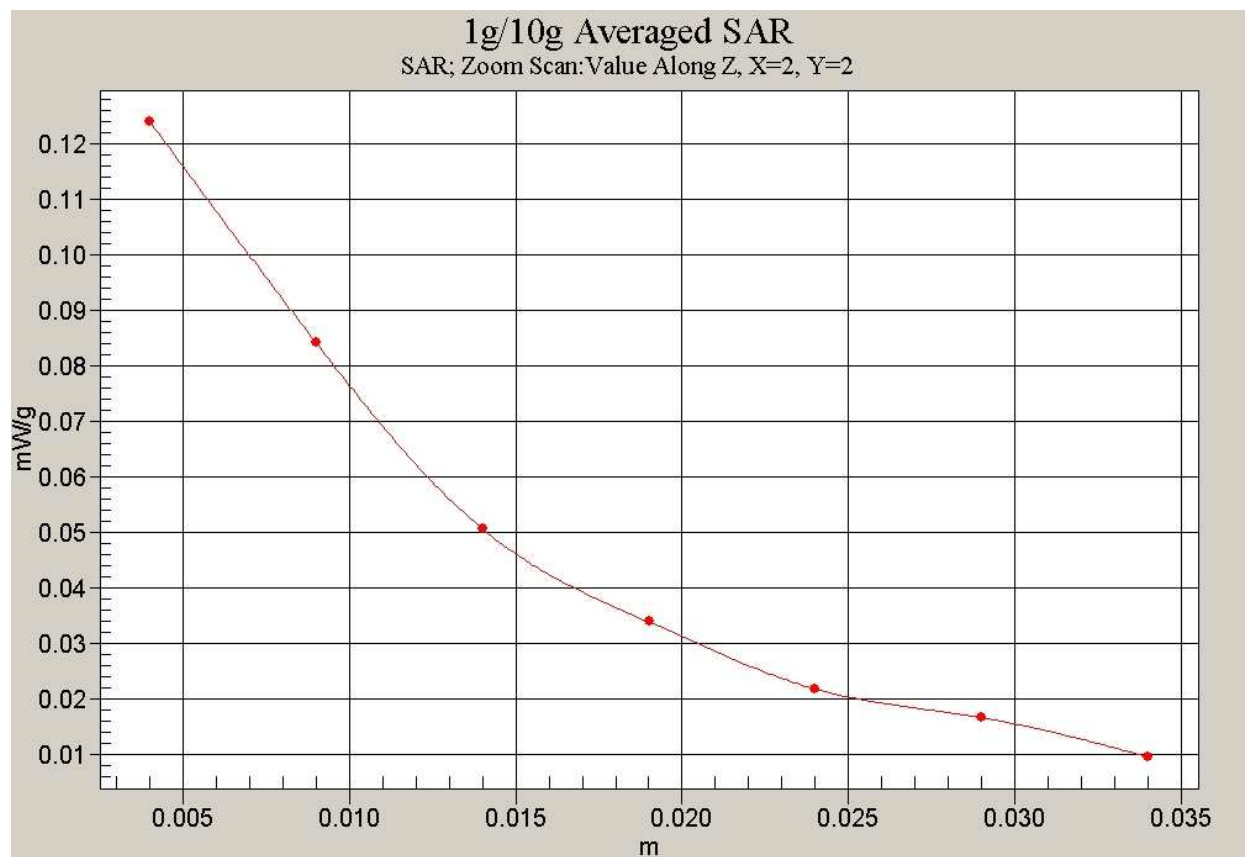


Fig. 12 Z-Scan at power reference point (PCS 1900MHz CH512)

1900 Right Cheek High

Date/Time: 2006-7-5 14:03:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.164 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.37 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

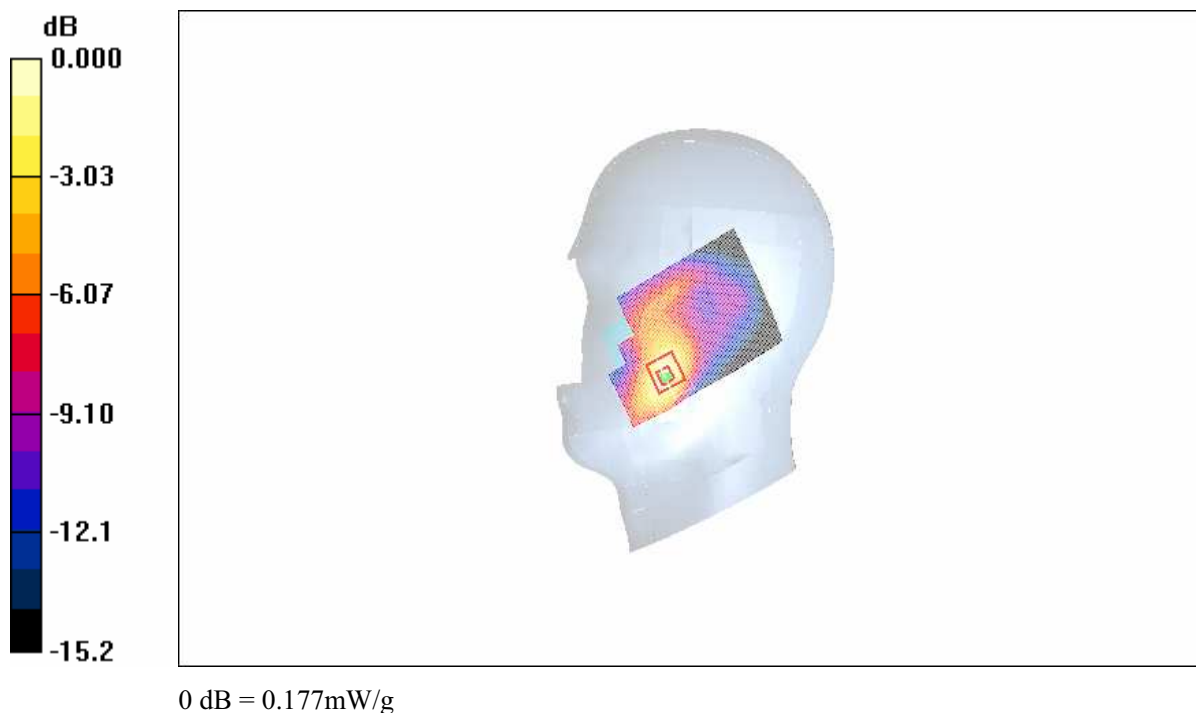


Fig. 13 Right Hand Touch Cheek PCS 1900MHz CH810

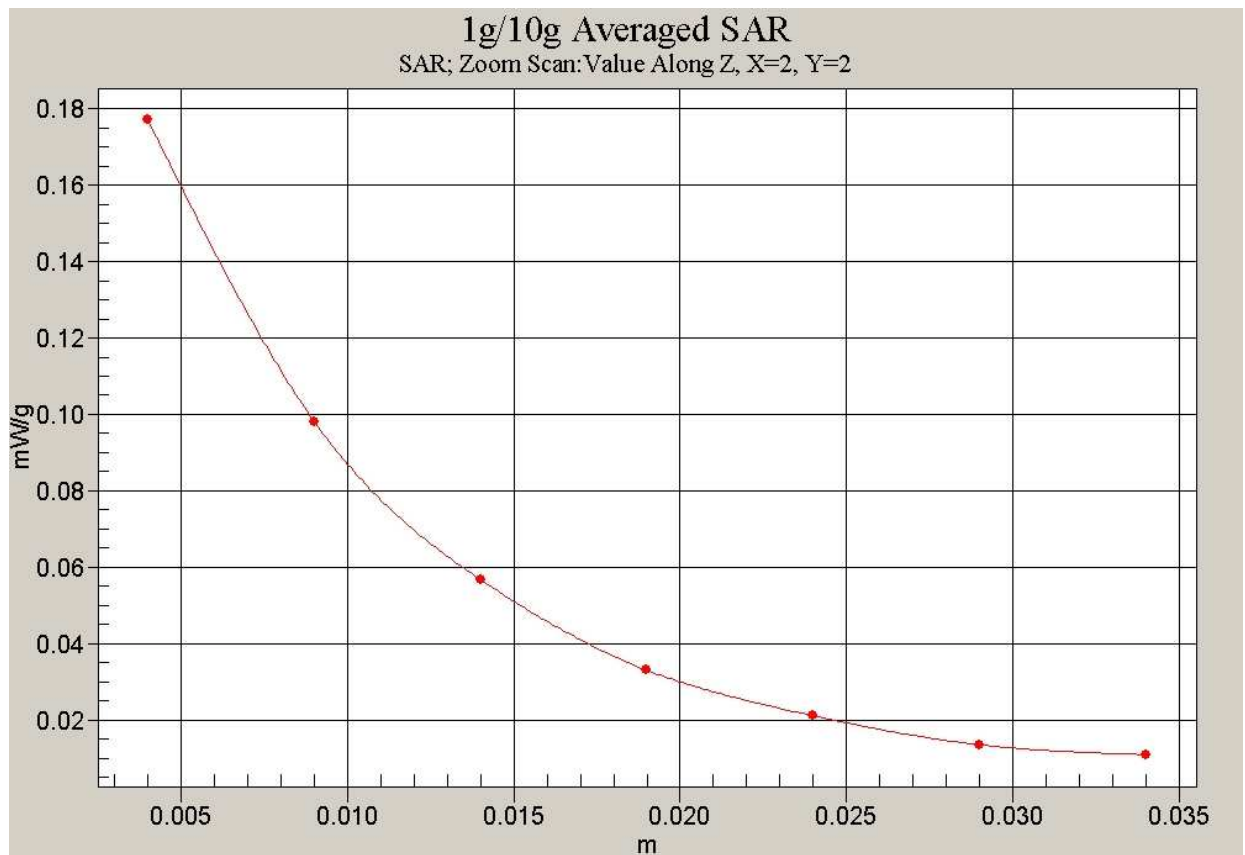


Fig. 14 Z-Scan at power reference point (PCS 1900MHz CH810)

1900 Right Cheek Middle

Date/Time: 2006-7-5 14:18:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.236 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.37 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

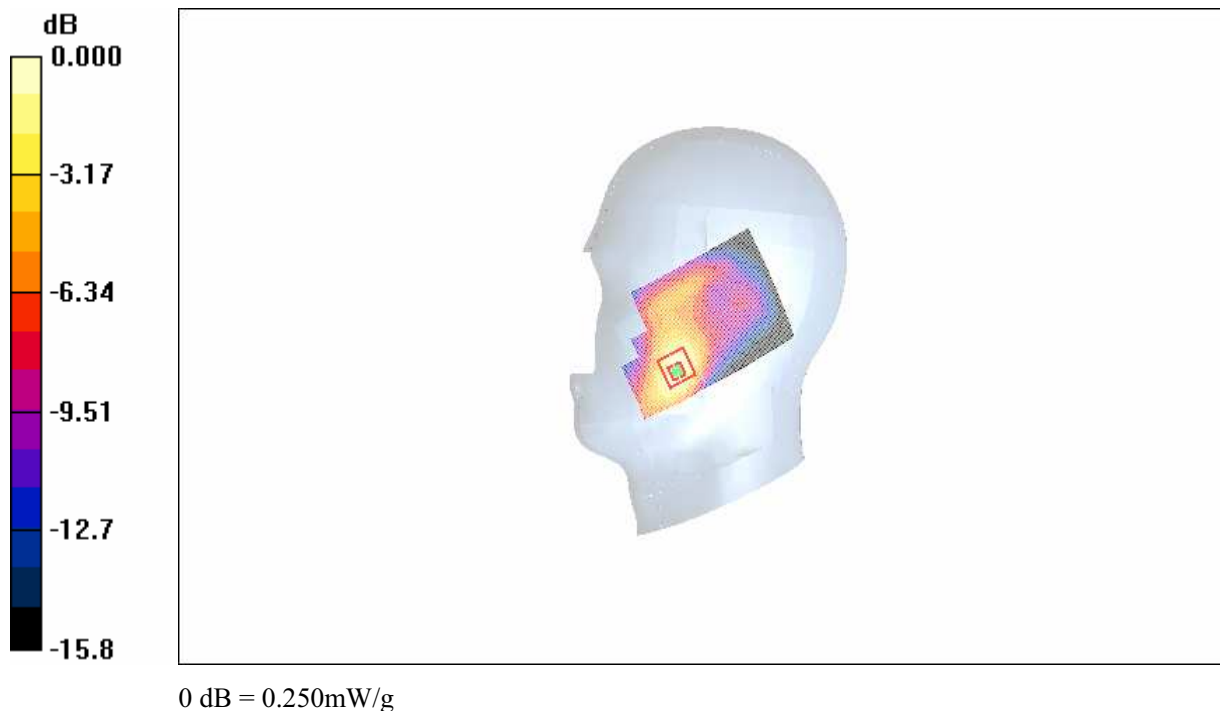


Fig.15 Right Hand Touch Cheek PCS 1900MHz CH661

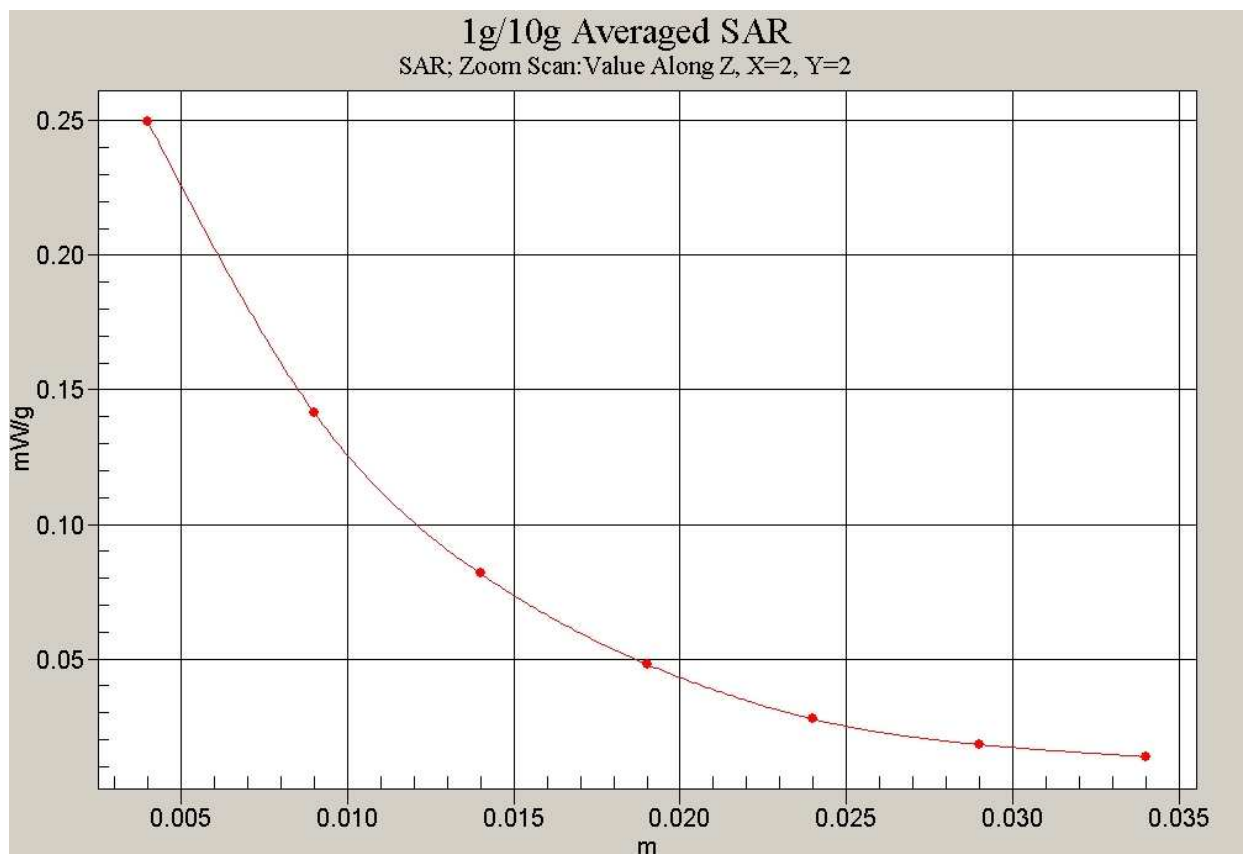


Fig. 16 Z-Scan at power reference point (PCS 1900MHz CH661)

1900 Right Cheek Low

Date/Time: 2006-7-5 14:33:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.90 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

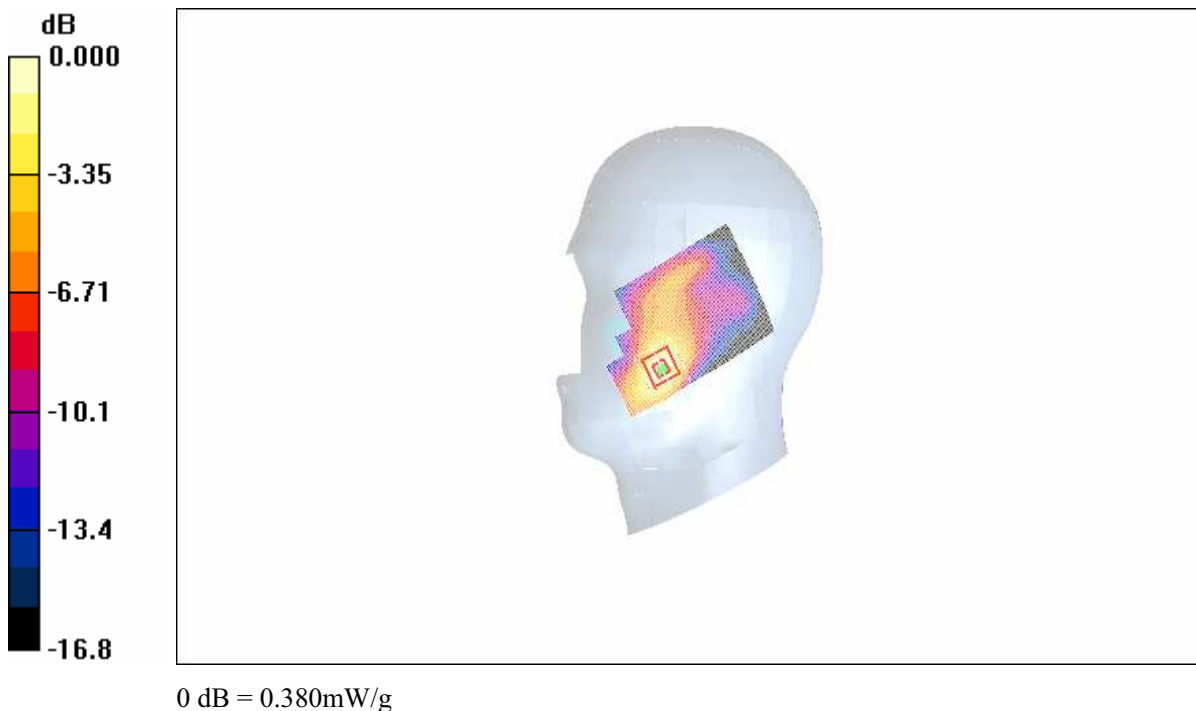


Fig. 17 Right Hand Touch Cheek PCS 1900MHz CH512

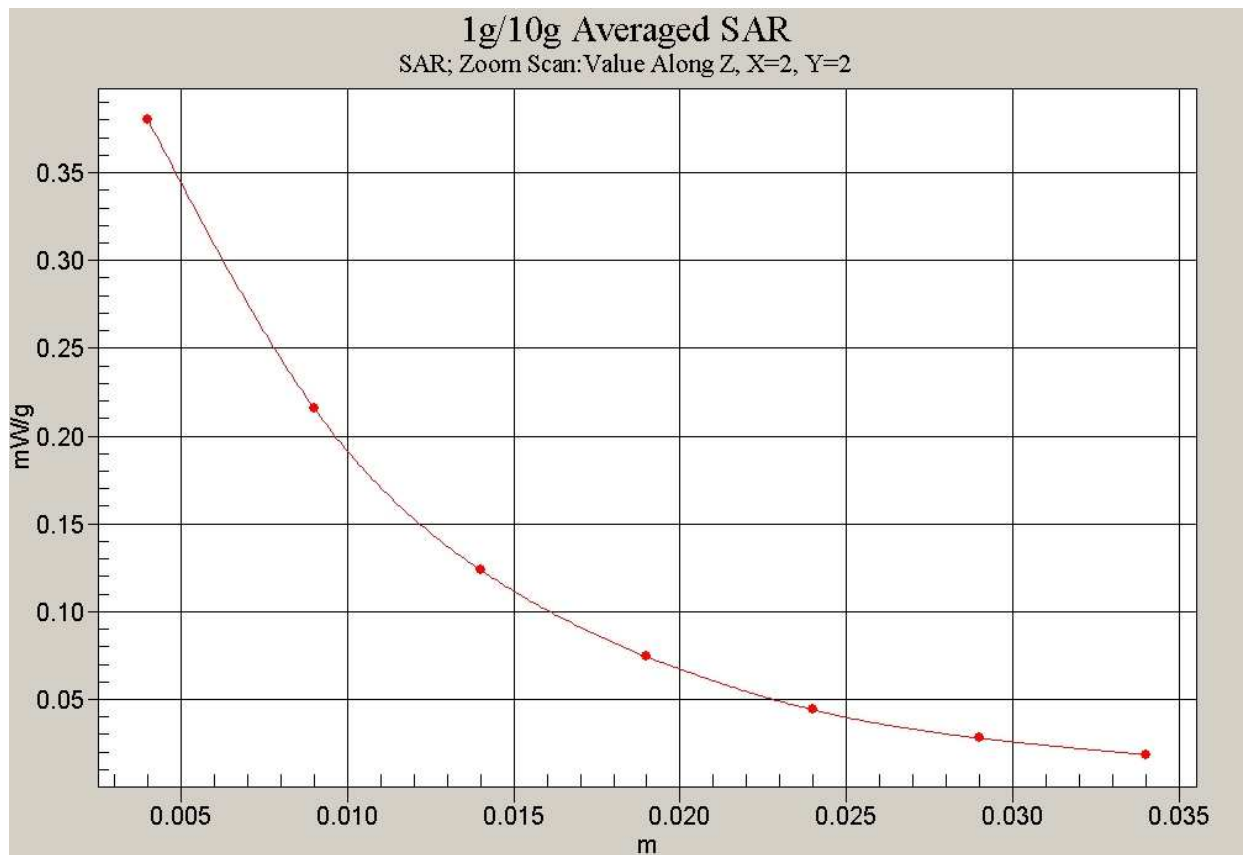


Fig. 18 Z-Scan at power reference point (PCS 1900MHz CH512)

1900 Right Tilt High

Date/Time: 2006-7-5 14:48:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.060 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.46 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

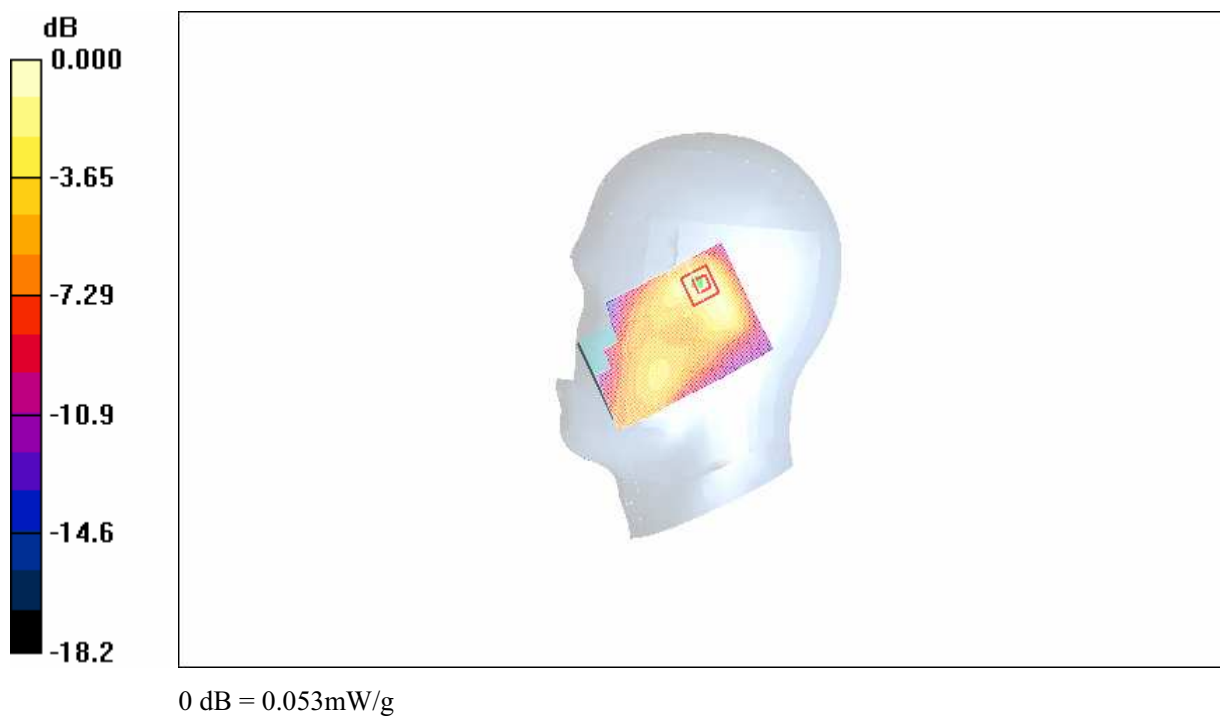


Fig. 19 Right Hand Tilt 15°PCS 1900MHz CH810

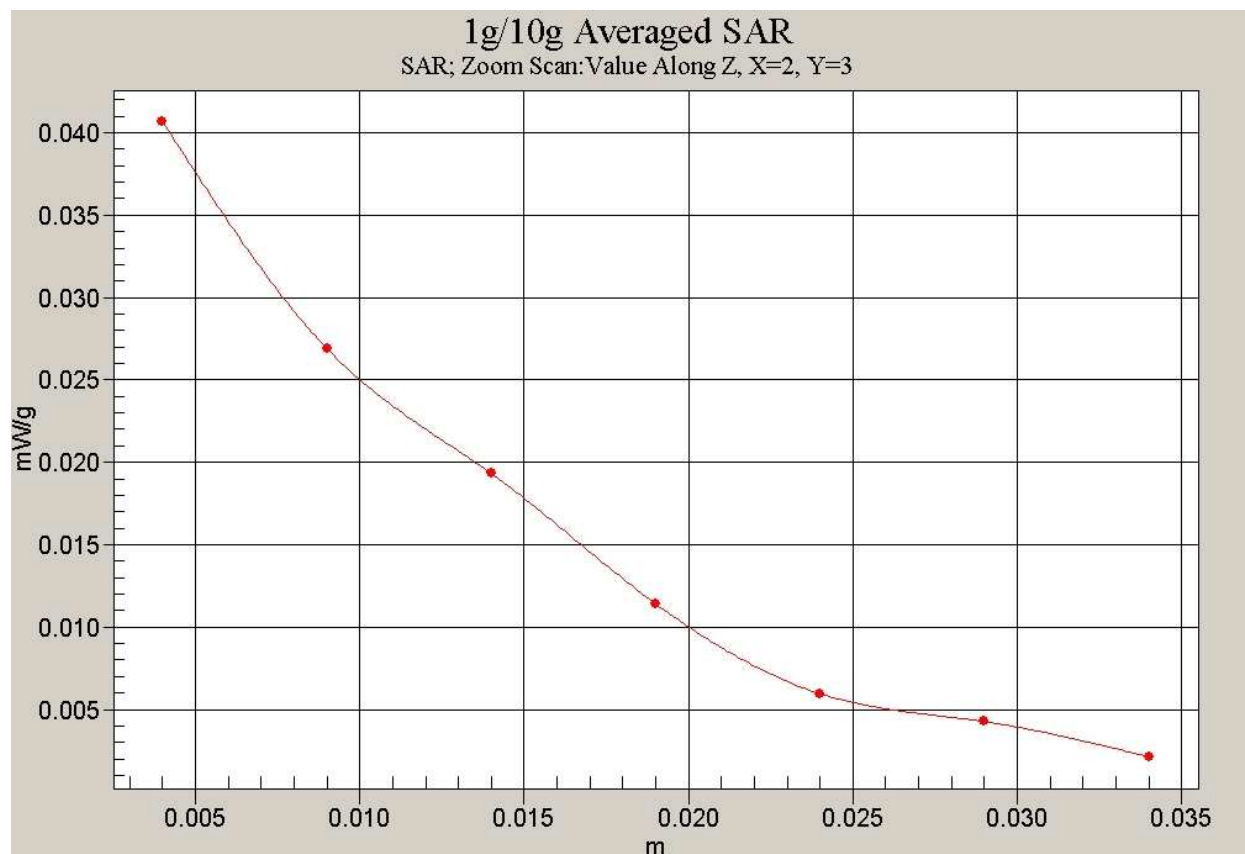


Fig. 20 Z-Scan at power reference point (PCS 1900MHz CH810)

1900 Right Tilt Middle

Date/Time: 2006-7-5 15:03:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.108 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

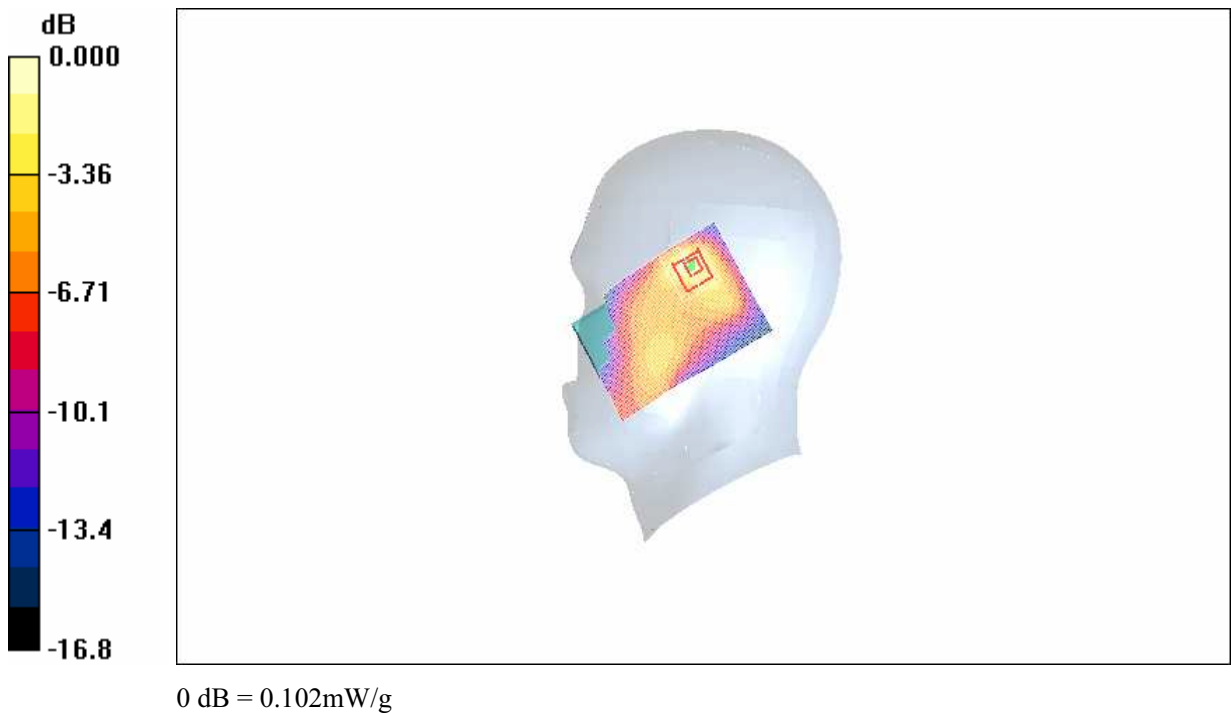


Fig. 21 Right Hand Tilt 15°PCS 1900MHz CH661

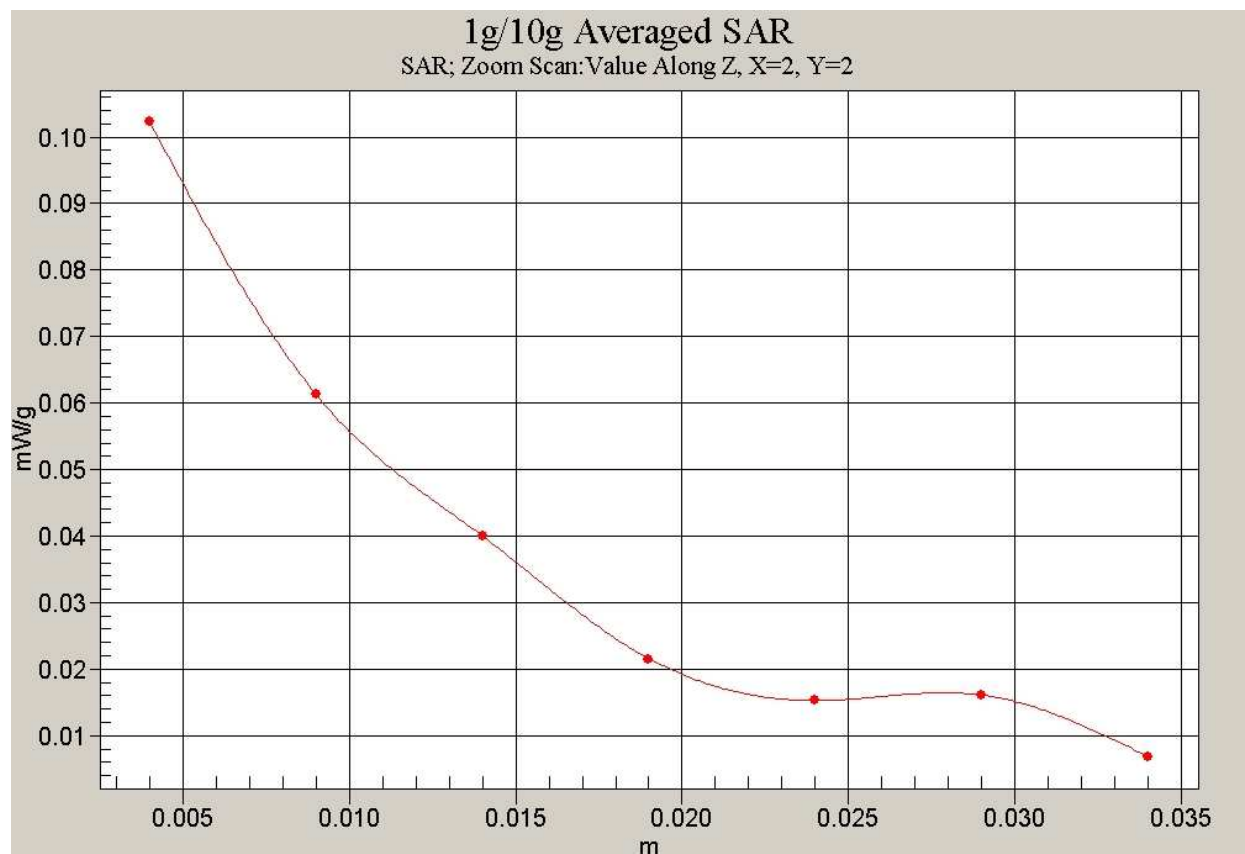


Fig. 22 Z-Scan at power reference point (PCS 1900MHz CH661)

1900 Right Tilt Low

Date/Time: 2006-7-5 15:18:19

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.181 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.72 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

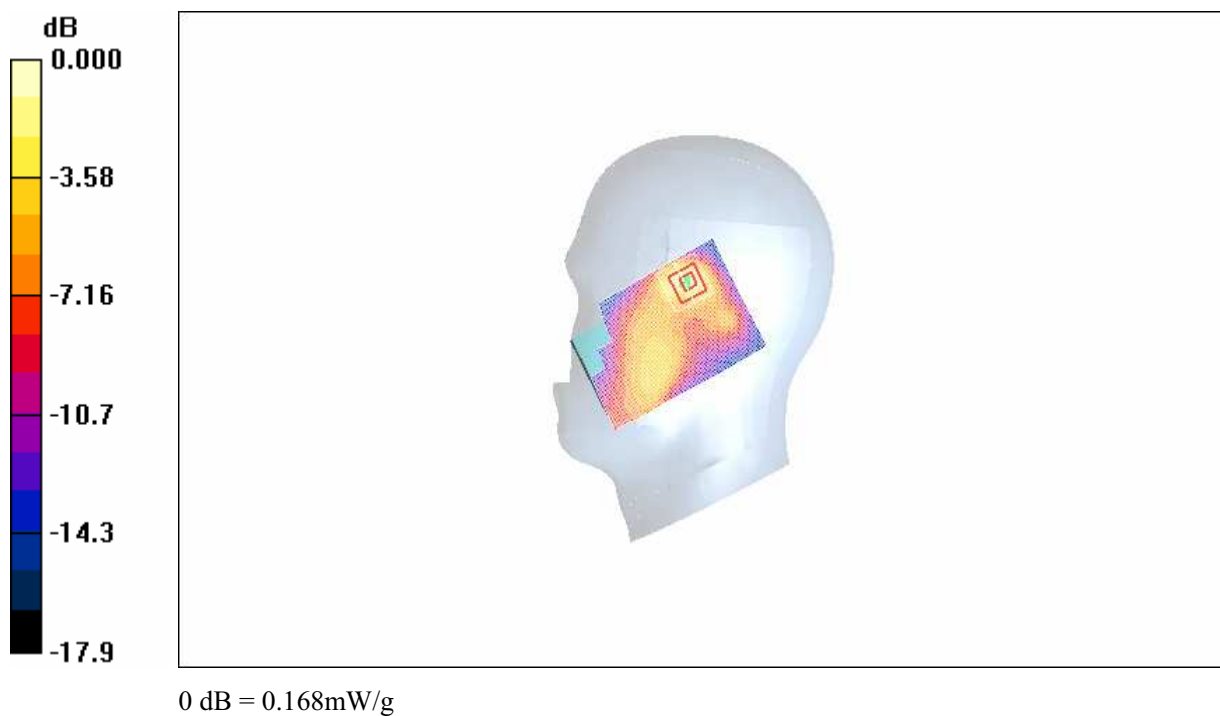


Fig. 23 Right Hand Tilt 15°PCS 1900MHz CH512

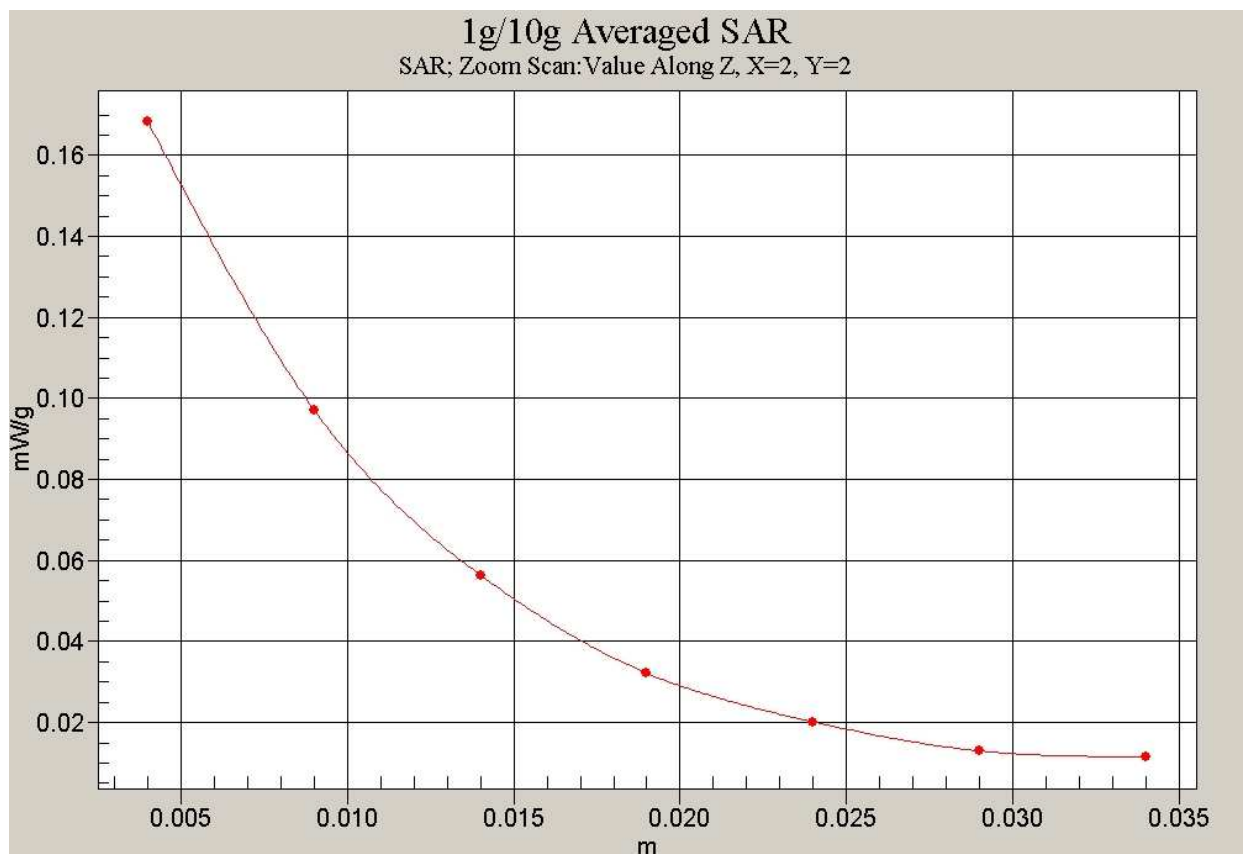


Fig. 24 Z-Scan at power reference point (PCS 1900MHz CH512)

1900 Body Toward Ground High

Date/Time: 2006-7-6 10:33:15

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.114 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.74 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.108 mW/g

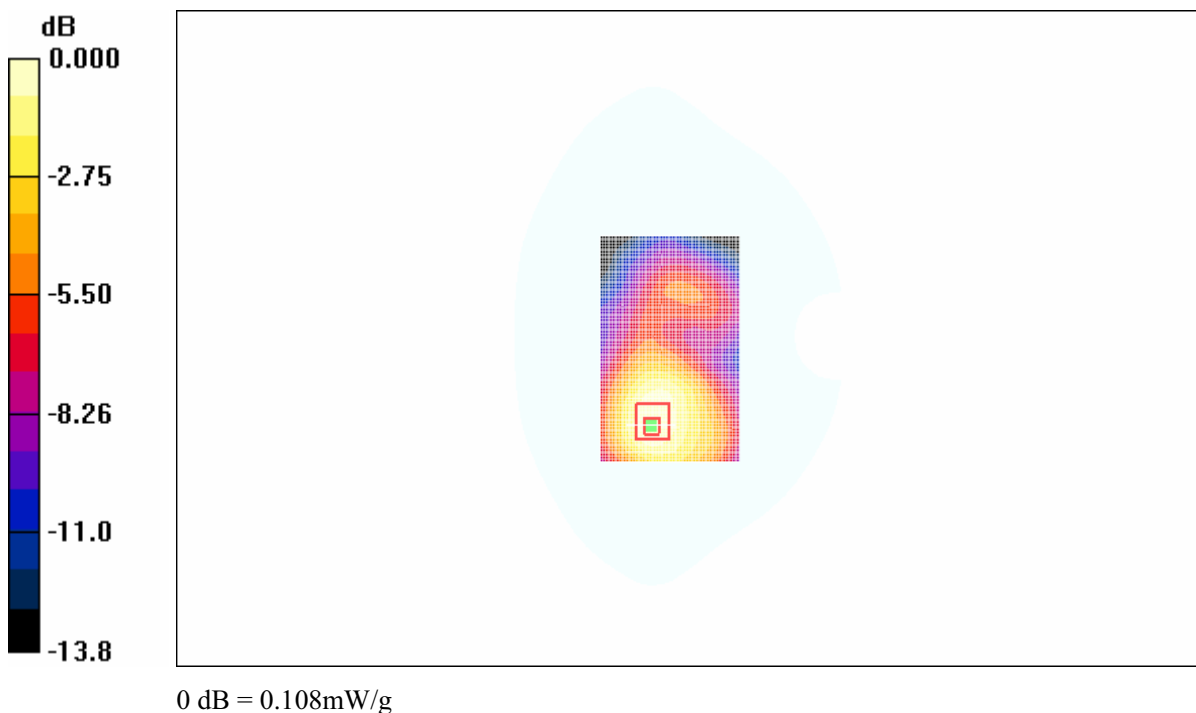


Fig. 25 PCS 1900MHz, Body, Towards Ground, CH810

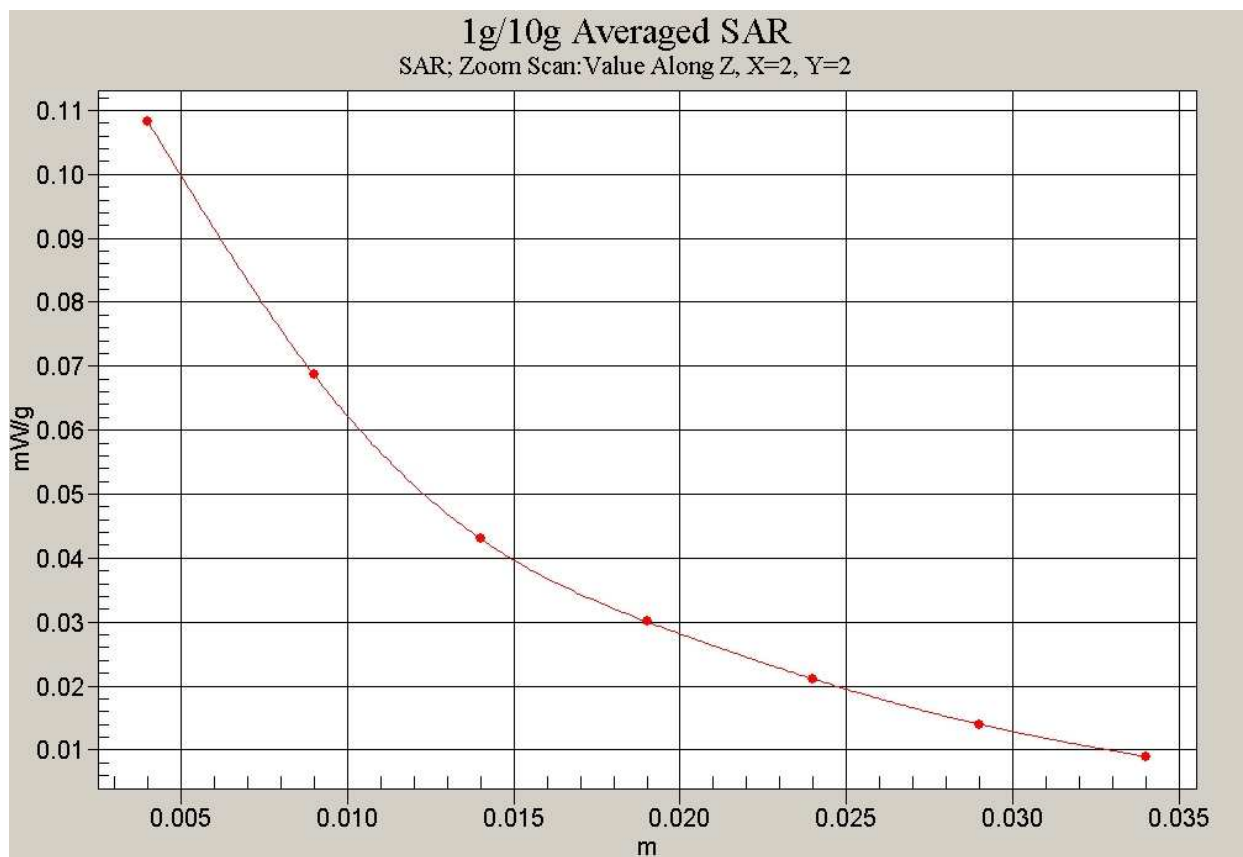


Fig. 26 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH810)

1900 Body Toward Ground Middle

Date/Time: 2006-7-6 10:48:08

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.161 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.94 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.088 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

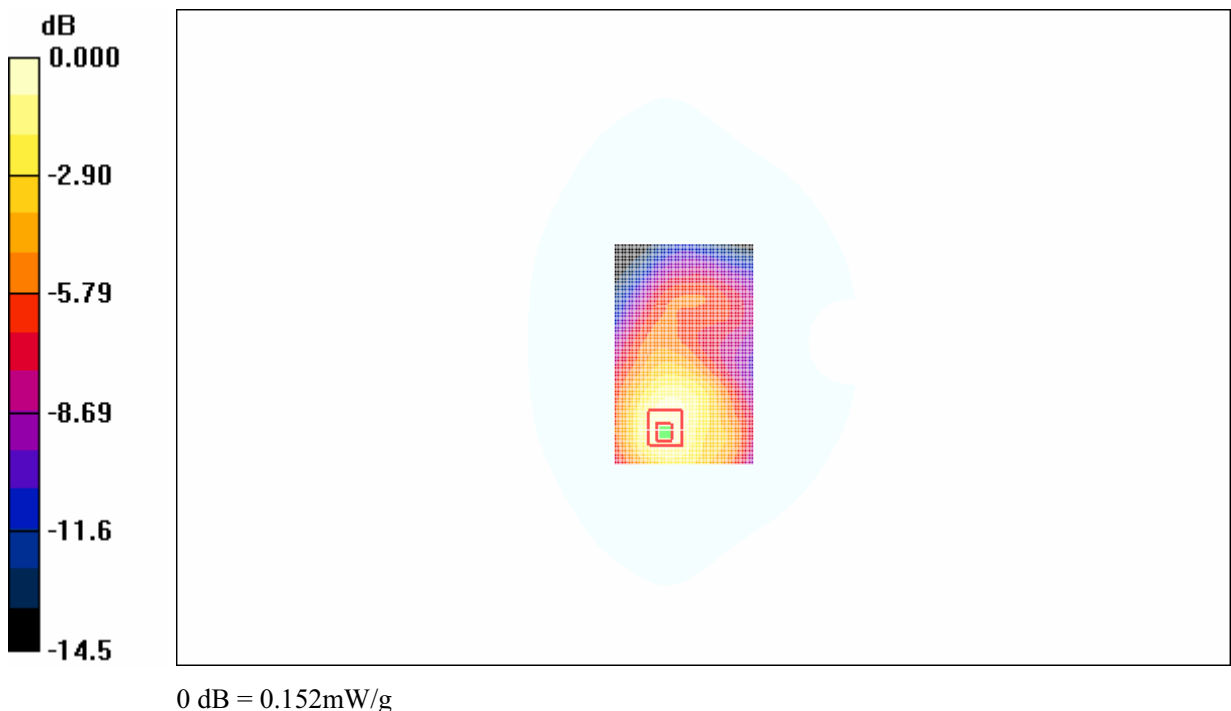


Fig. 27 PCS 1900MHz, Body, Towards Ground, CH661

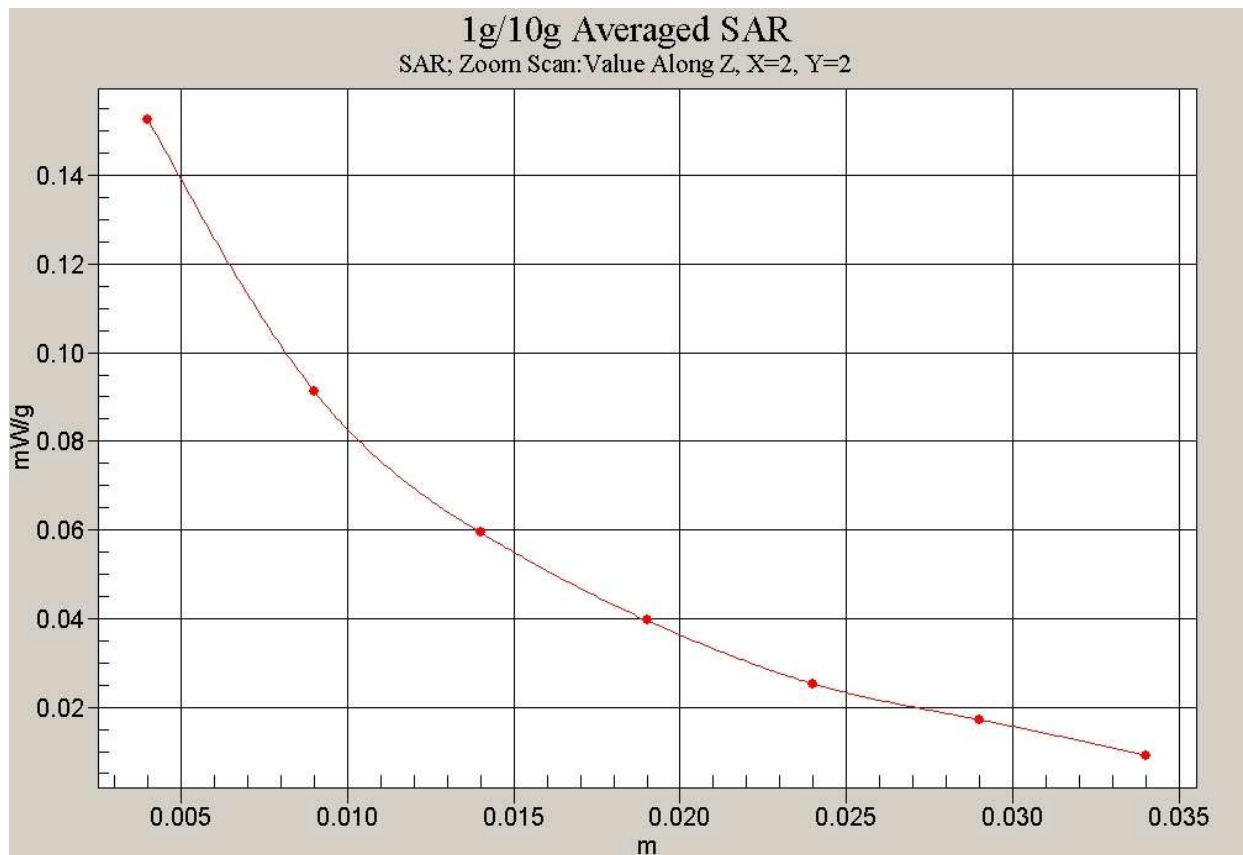


Fig. 28 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH661)

1900 Body Toward Ground Low

Date/Time: 2006-7-6 11:05:14

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.214 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.85 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

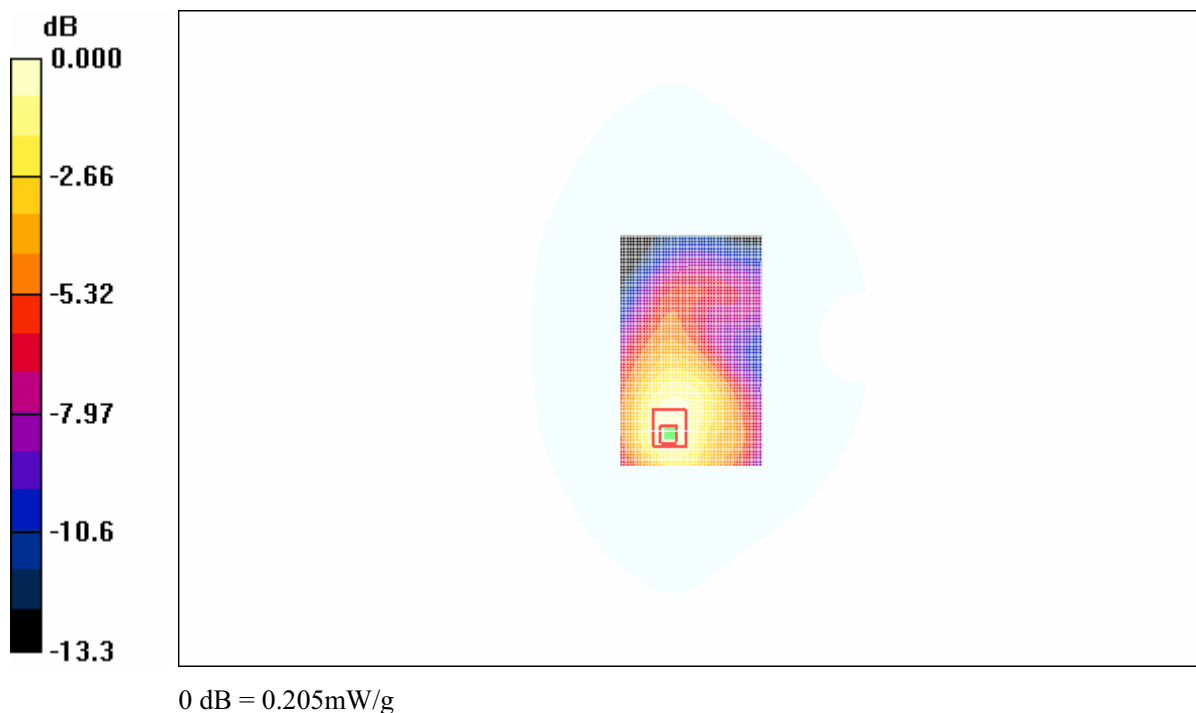


Fig. 29 PCS 1900MHz, Body, Towards Ground, CH512

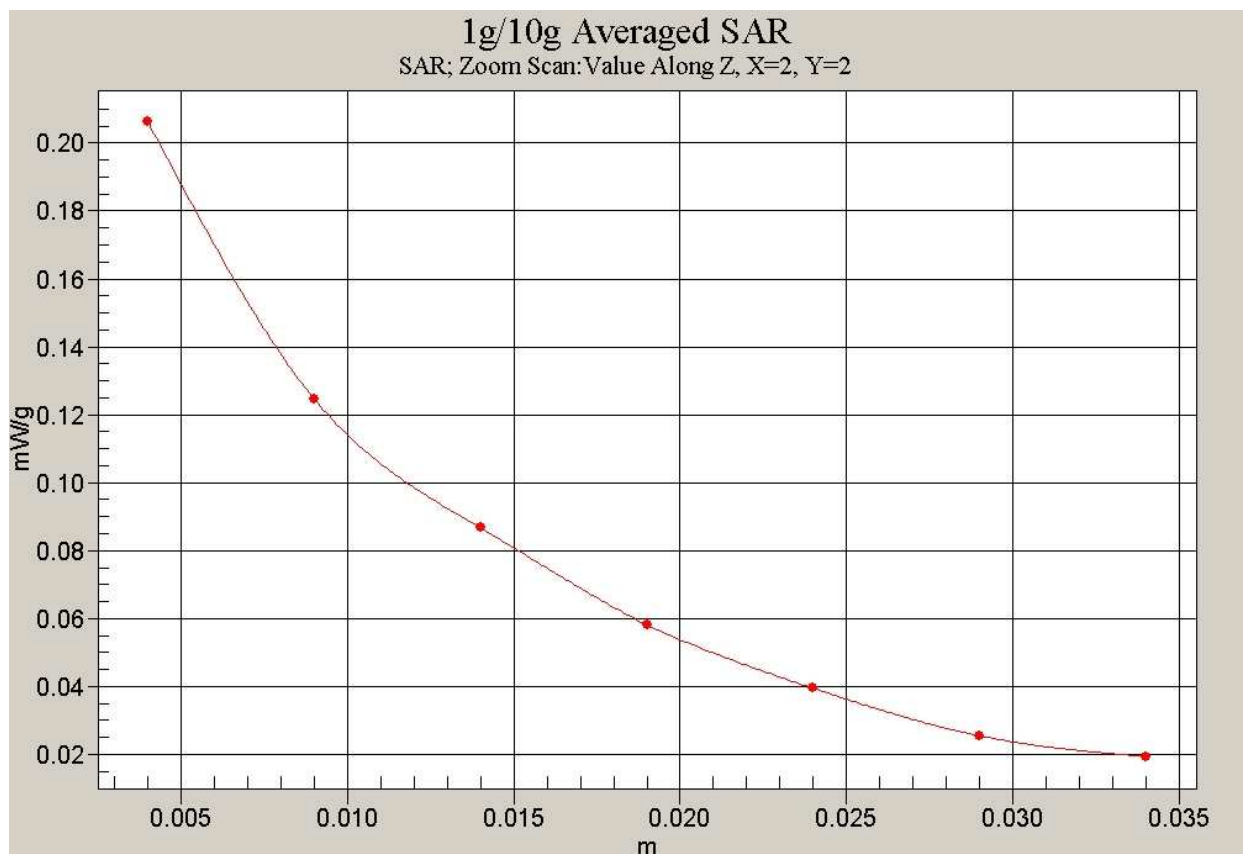


Fig. 30 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH512)

1900 Body Toward Phantom High

Date/Time: 2006-7-6 11:17:22

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.070 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.64 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

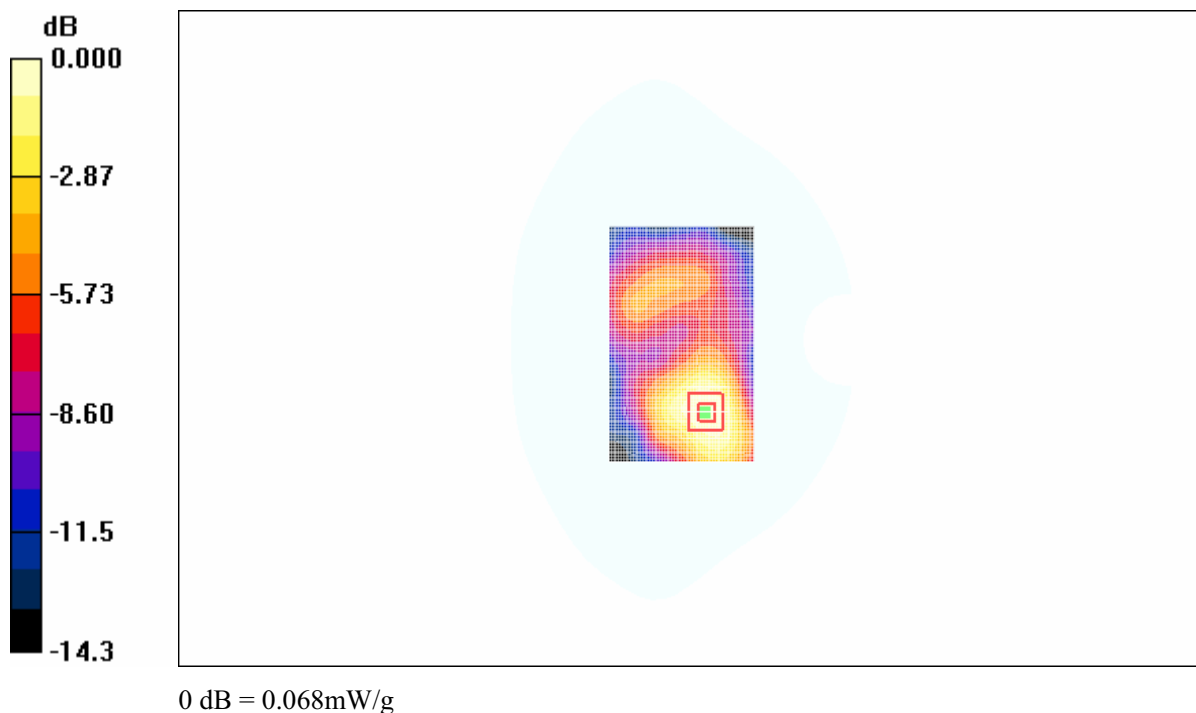


Fig. 31 PCS 1900MHz, Body, Towards Ground, CH810

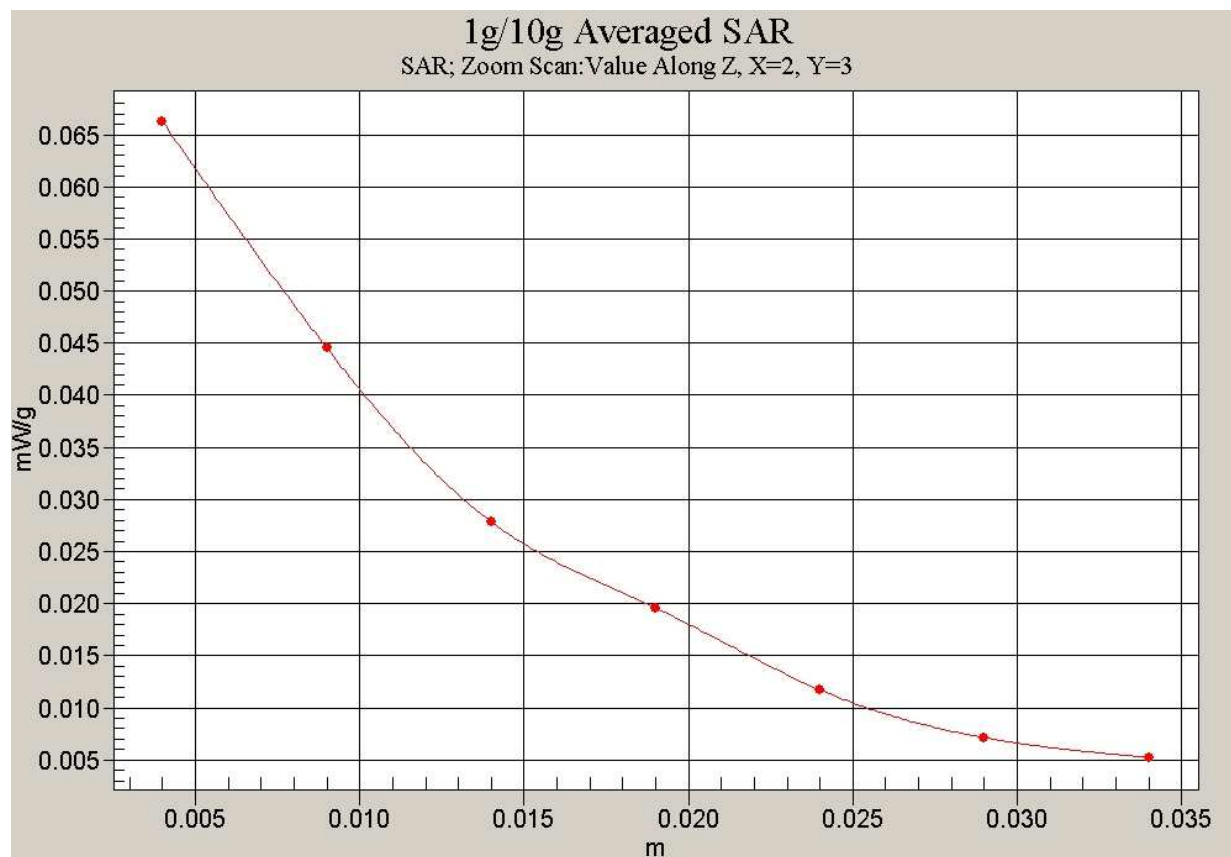


Fig. 32 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH810)

1900 Body Toward Phantom Middle

Date/Time: 2006-7-6 11:33:14

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.101 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.30 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

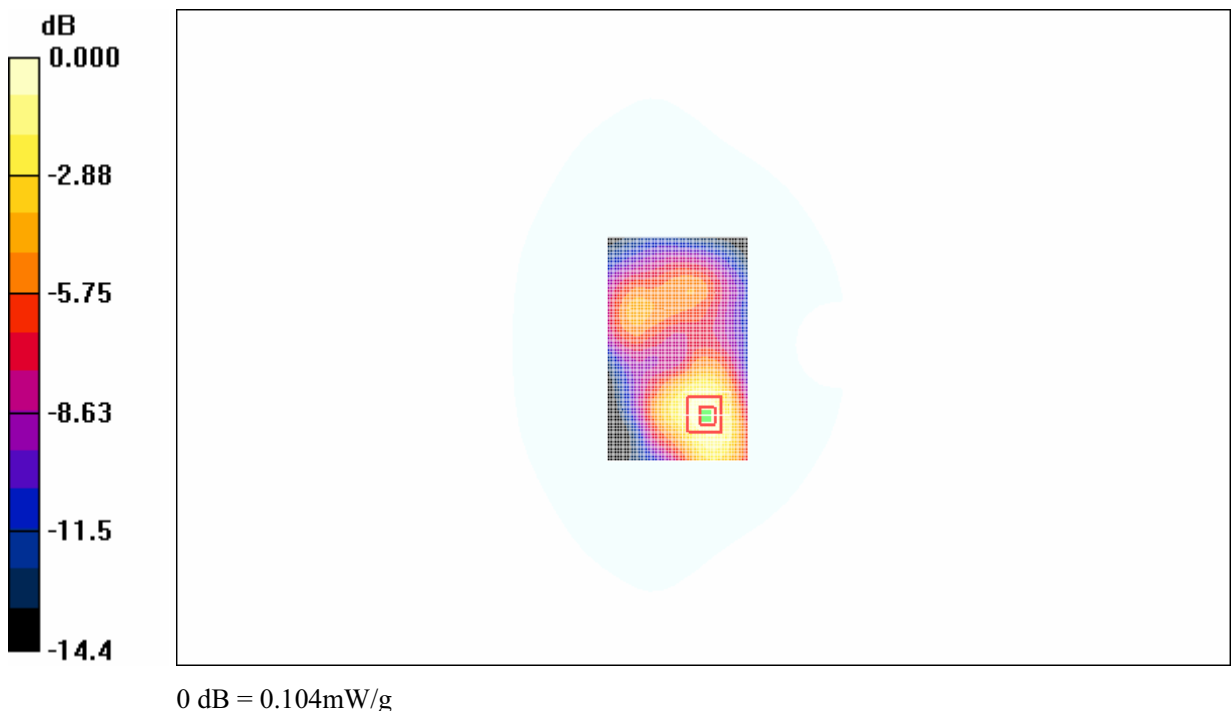


Fig. 33 PCS 1900MHz, Body, Towards Ground, CH661

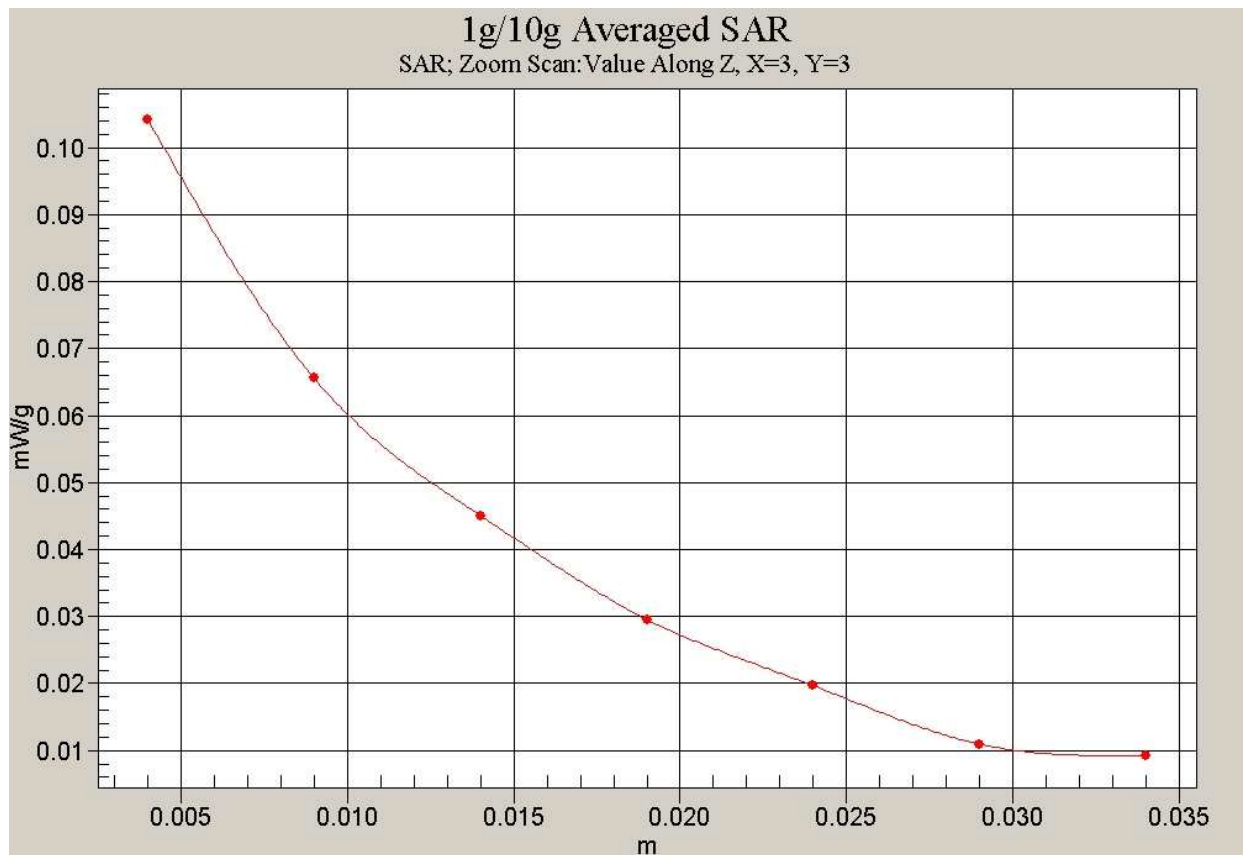


Fig. 34 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH661)

1900 Body Toward Ground Low

Date/Time: 2006-7-6 12:21:05

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.175 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

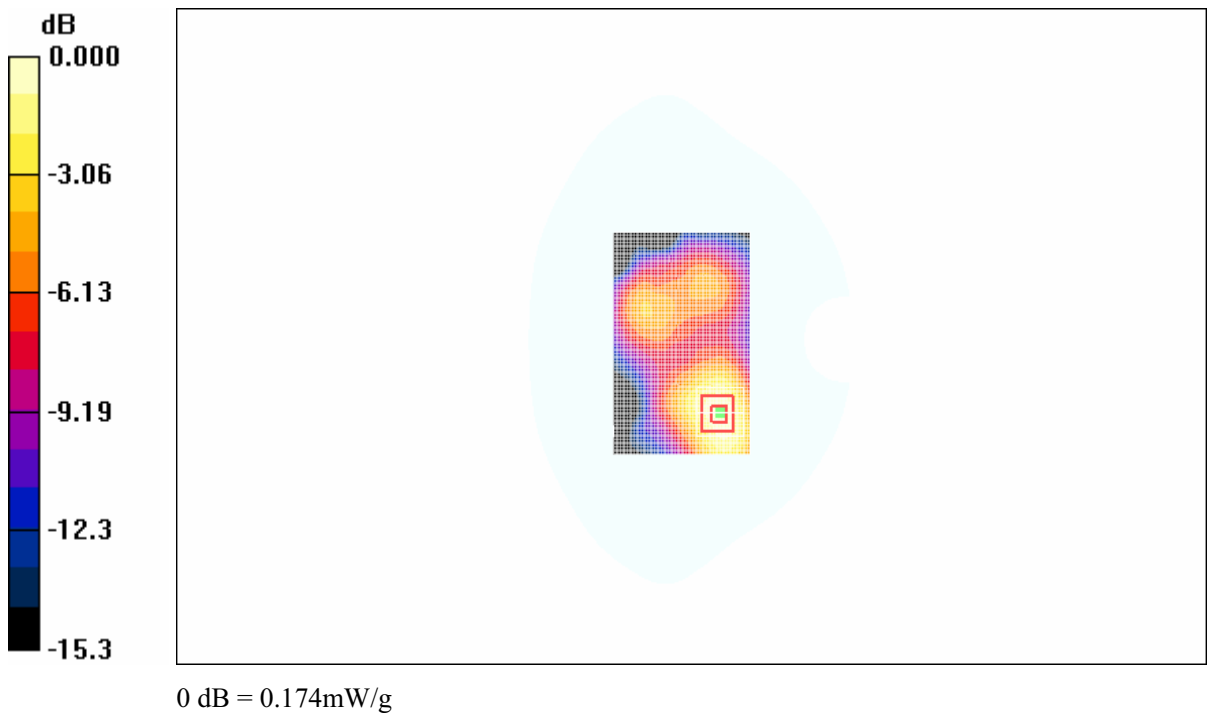


Fig. 35 PCS 1900MHz, Body, Towards Ground, CH512

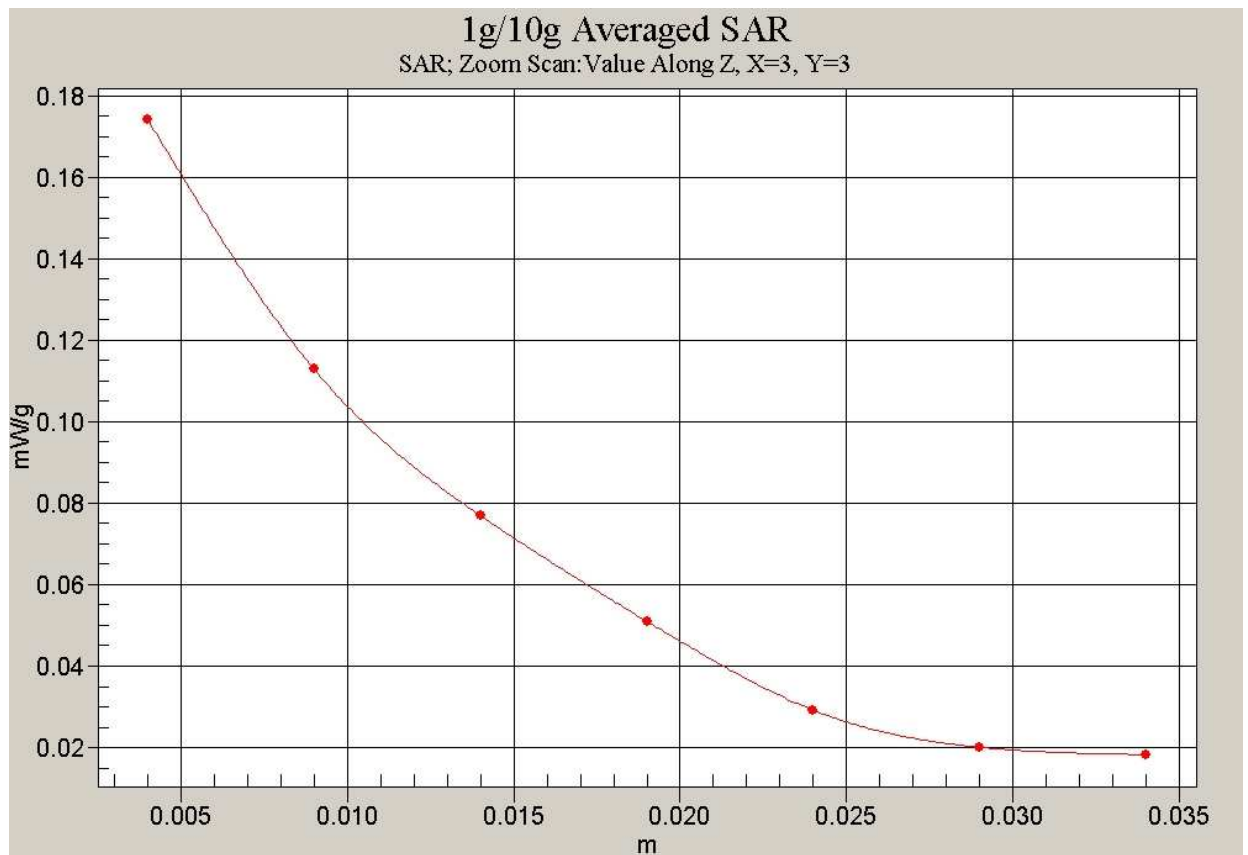


Fig. 36 Z-Scan at power reference point (PCS 1900MHz, Body Towards Ground, CH512)

1900 Body Toward Ground High with GPRS

Date/Time: 2006-7-6 12:38:22

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.214 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.80 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

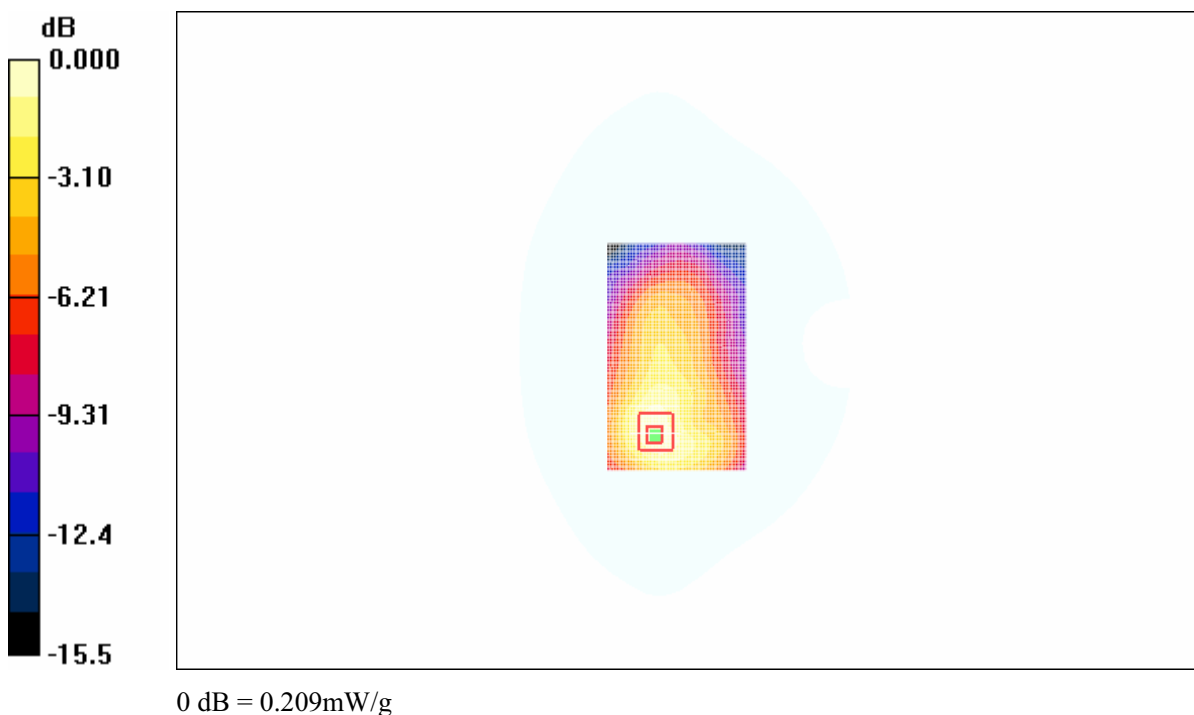


Fig. 37 PCS 1900MHz, Body, Towards Ground with GPRS, CH810

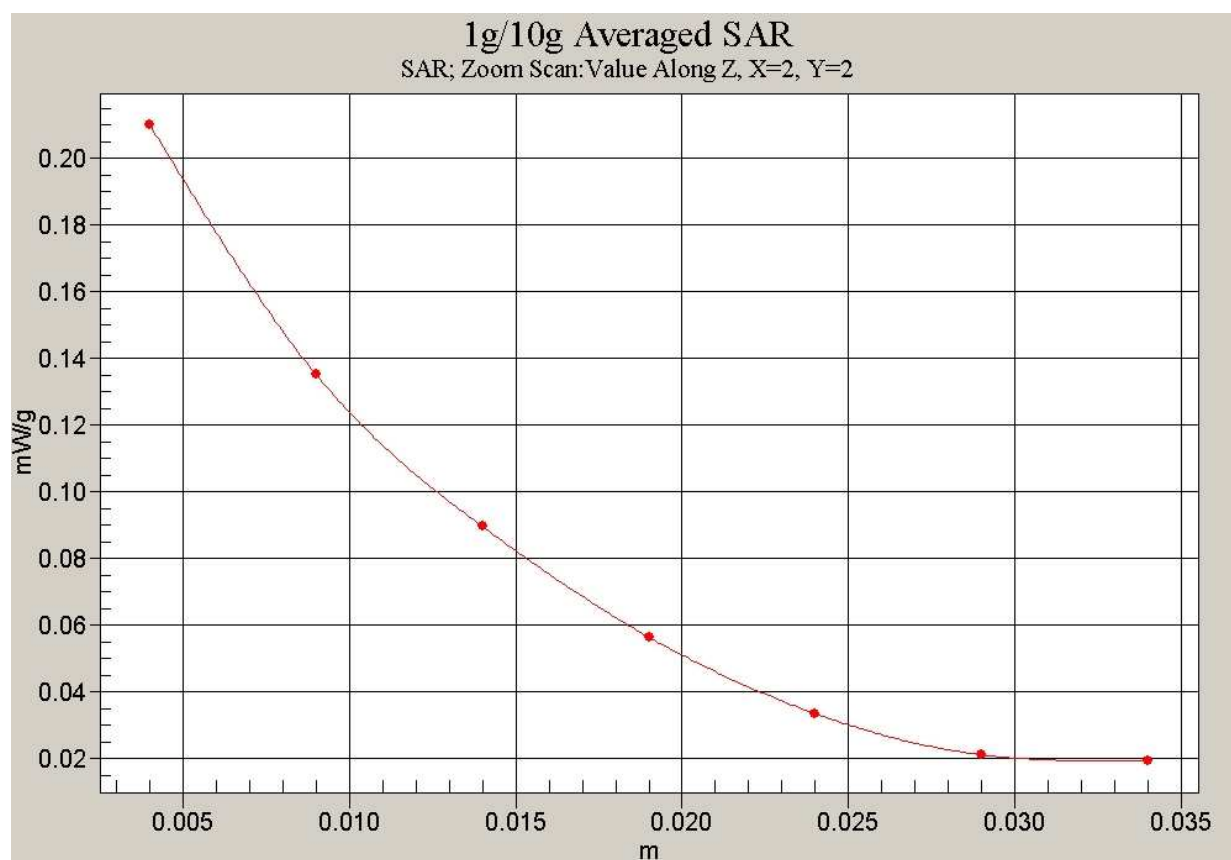


Fig. 38 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH810)

1900 Body Toward Ground Middle with GPRS

Date/Time: 2006-7-6 12:55:47

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.300 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.28 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

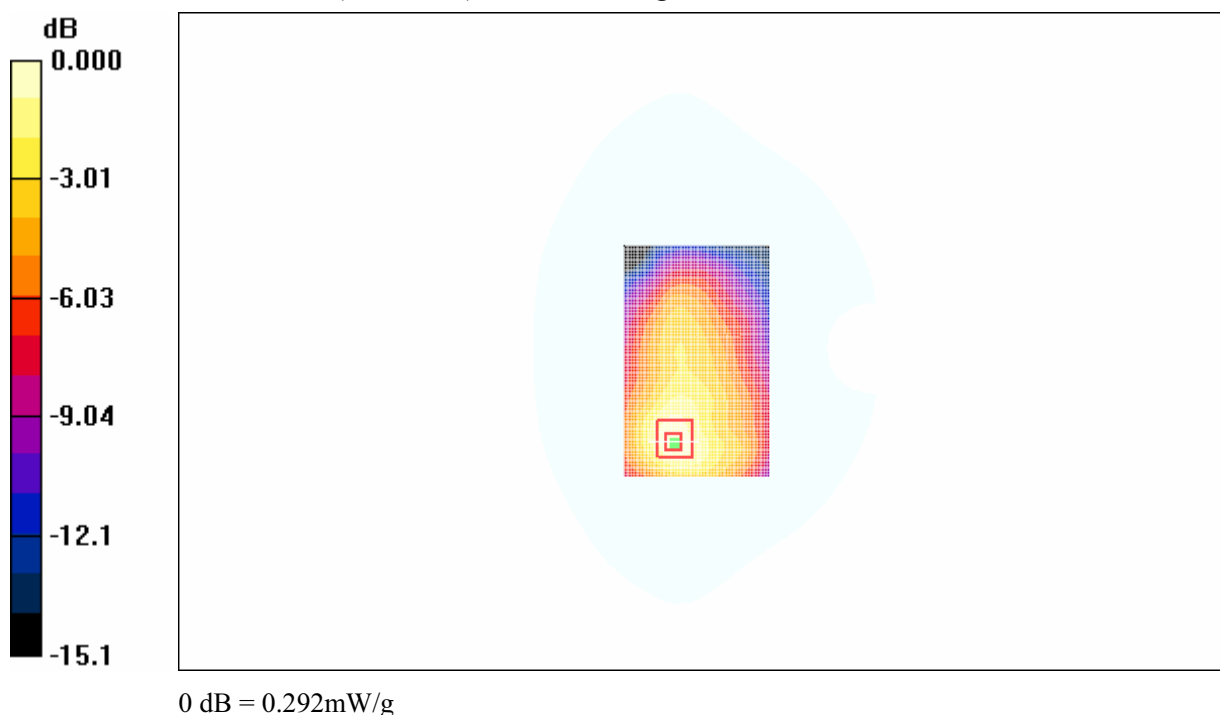


Fig. 39 PCS 1900MHz, Body, Towards Ground with GPRS, CH661

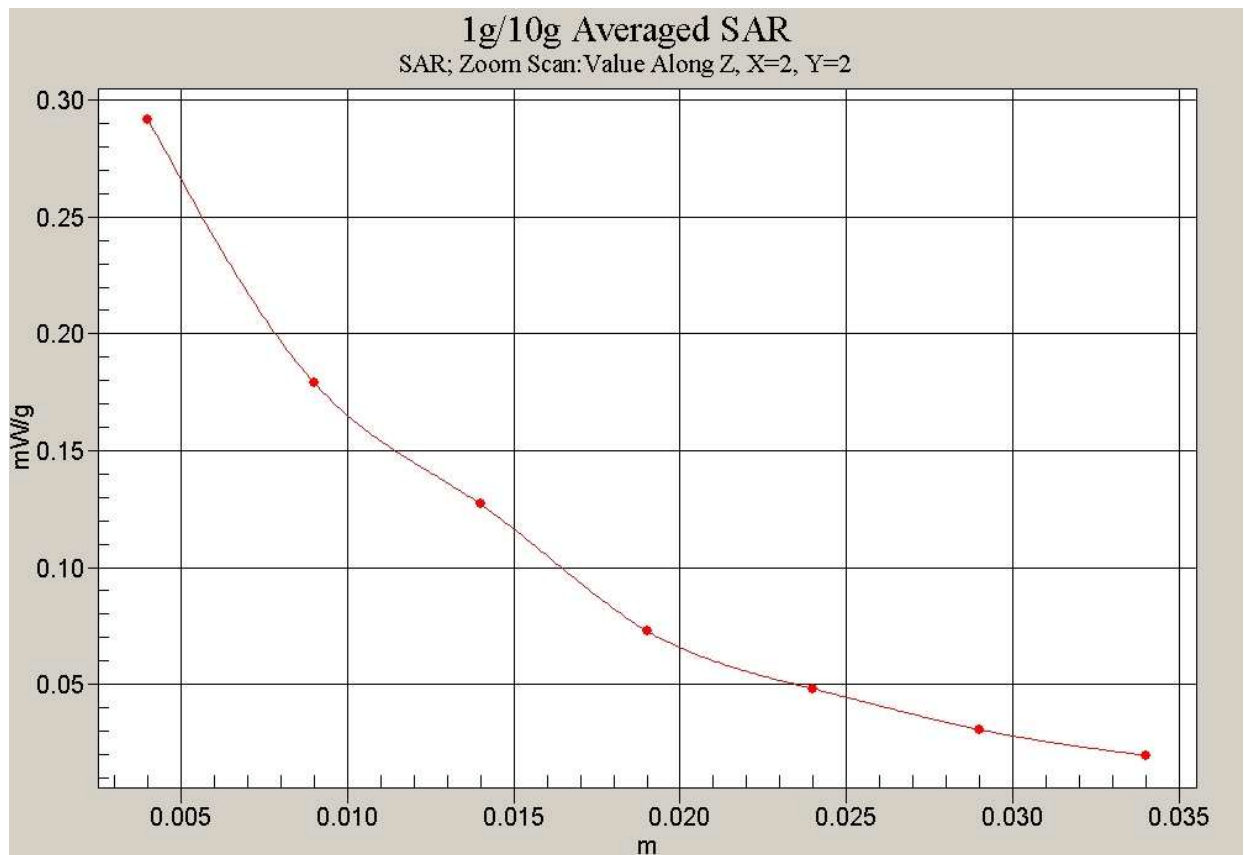


Fig. 40 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH661)

1900 Body Toward Ground Low with GPRS

Date/Time: 2006-7-6 13:17:11

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.372 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

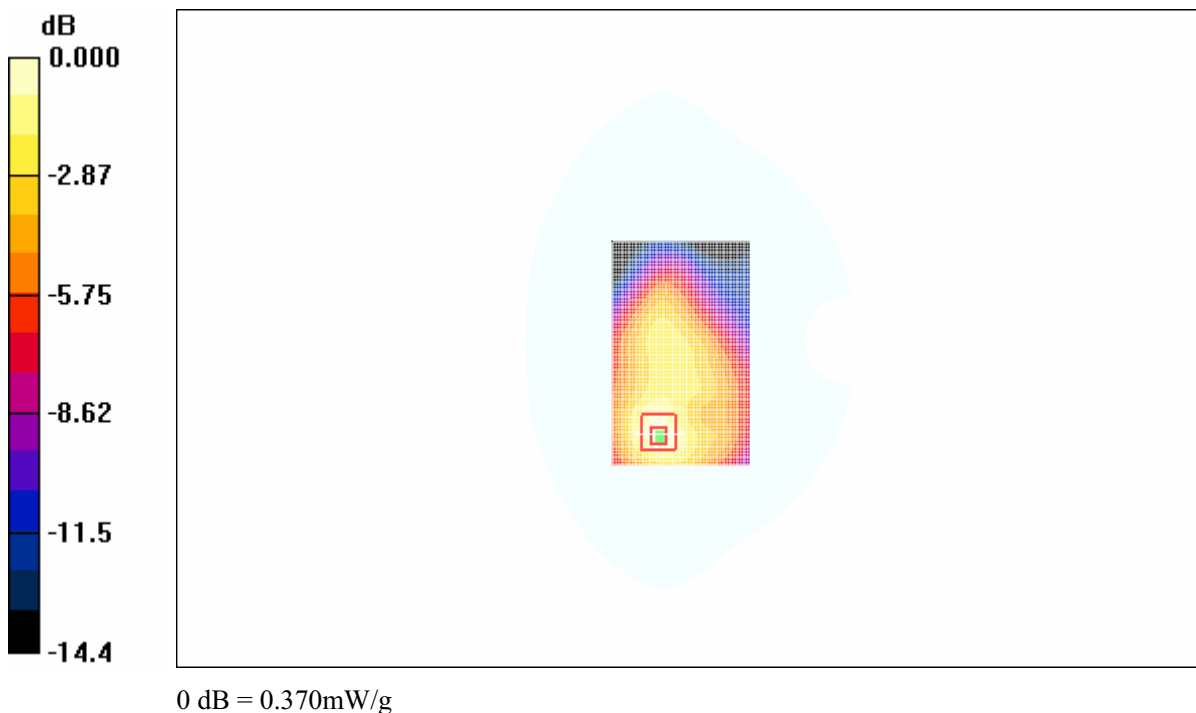


Fig. 41 PCS 1900MHz, Body, Towards Ground with GPRS, CH512

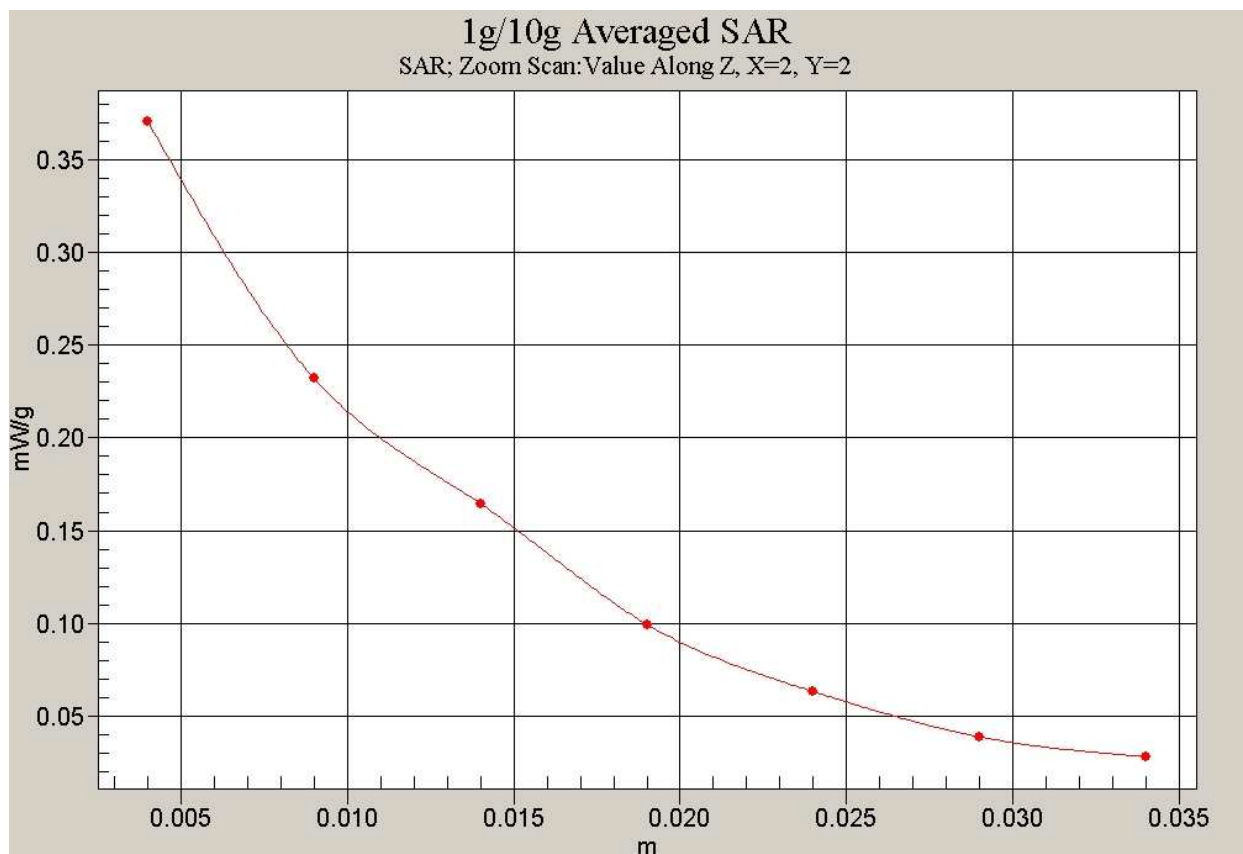


Fig. 42 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH512)

1900 Body Toward Phantom High with GPRS

Date/Time: 2006-7-6 13:32:17

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.082 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.78 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

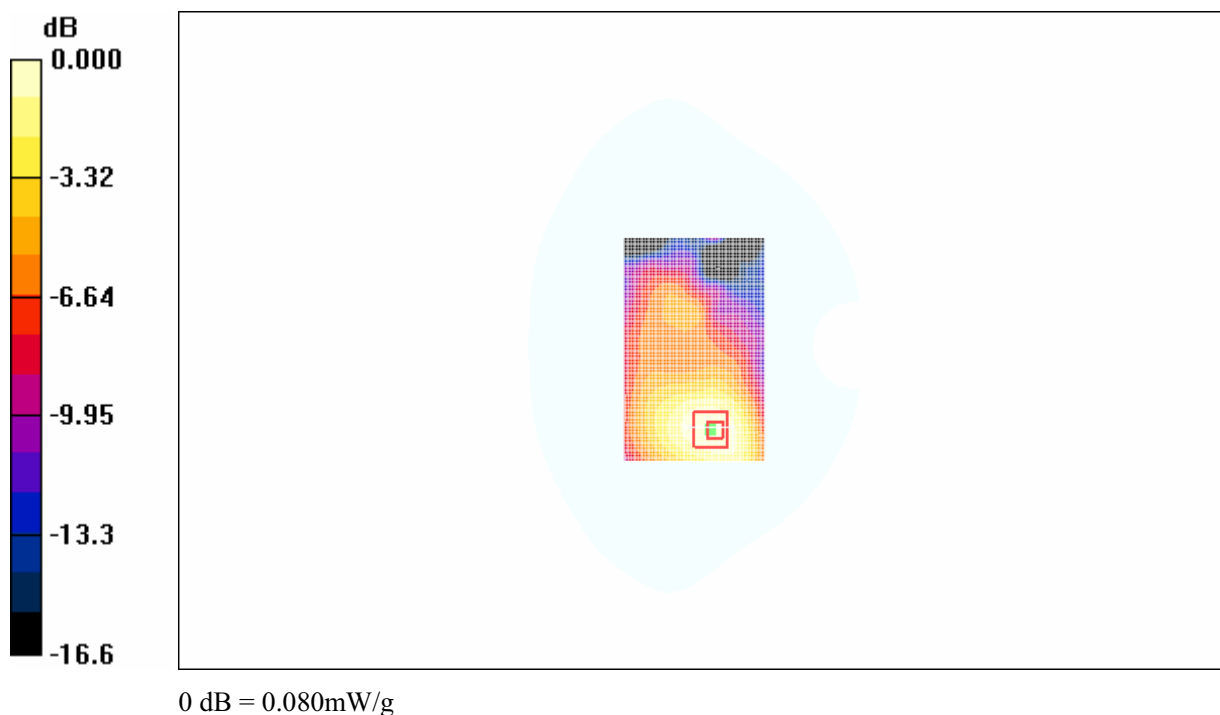


Fig. 43 PCS 1900MHz, Body, Towards Ground with GPRS, CH810

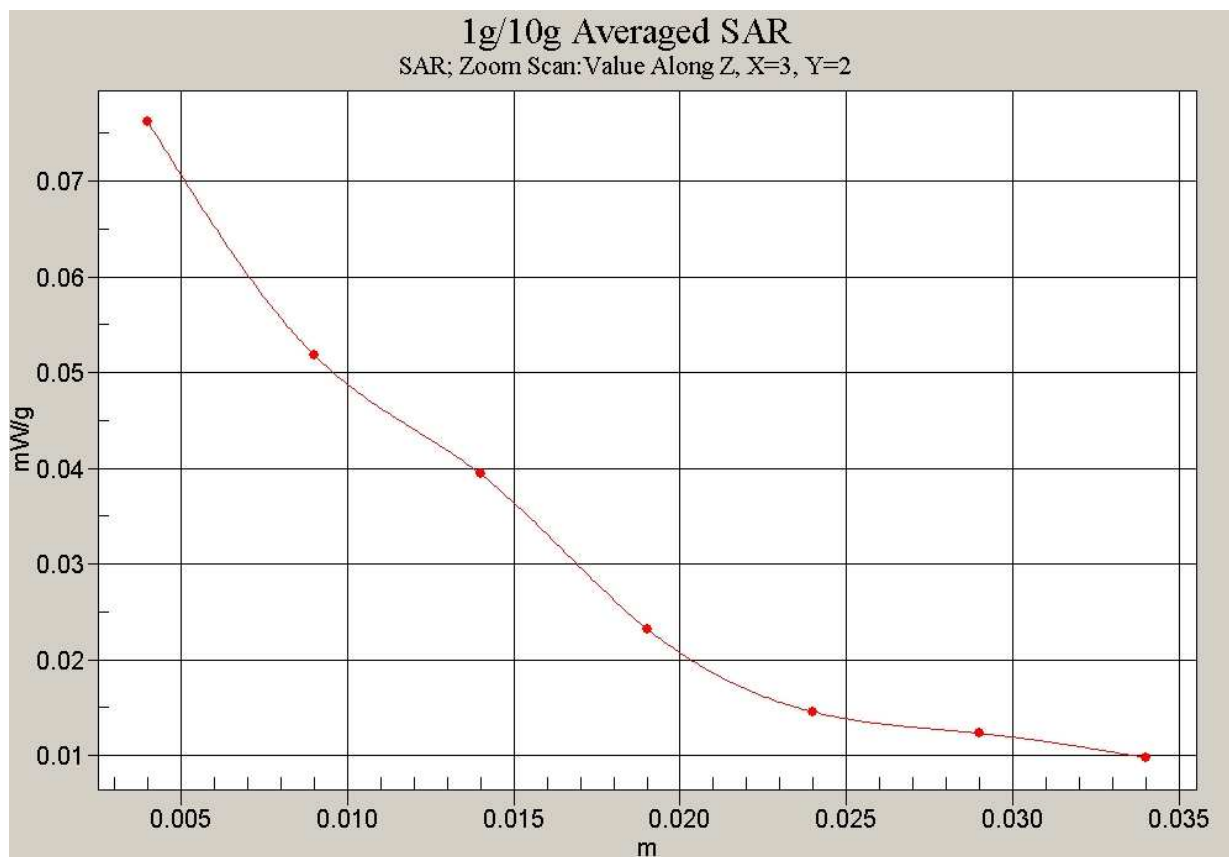


Fig. 44 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH810)

1900 Body Toward Phantom Middle with GPRS

Date/Time: 2006-7-6 13:49:16

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.112 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

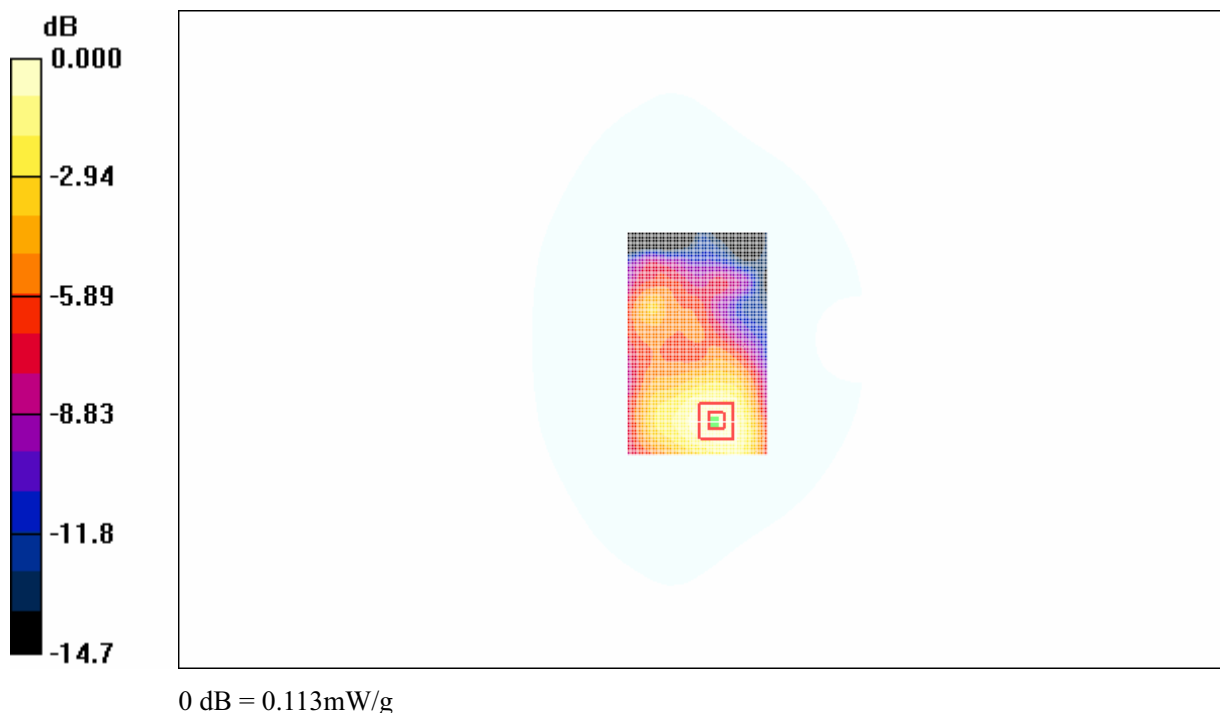


Fig. 45 PCS 1900MHz, Body, Towards Ground with GPRS, CH661

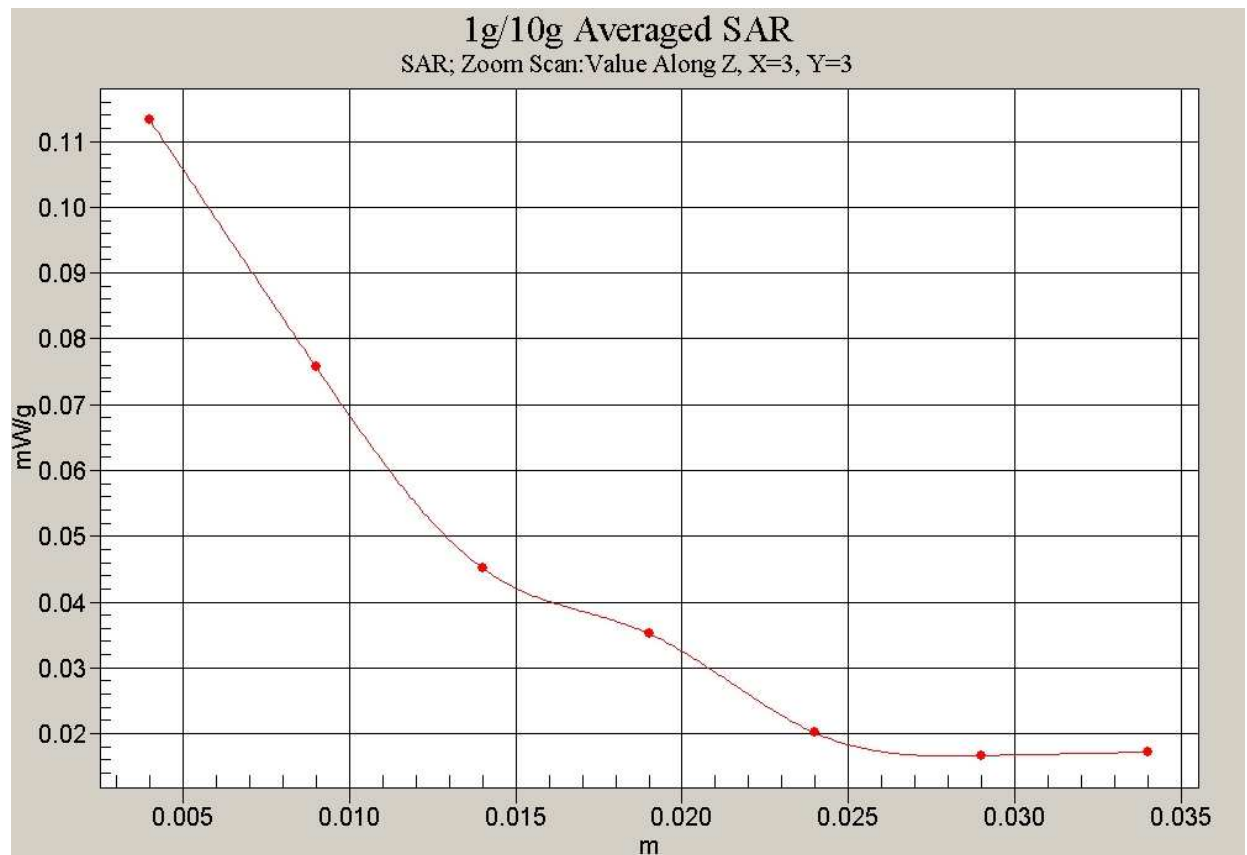


Fig. 46 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH661)

1900 Body Toward Ground Low with GPRS

Date/Time: 2006-7-6 14:07:13

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 55.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.213 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.58 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.208 mW/g

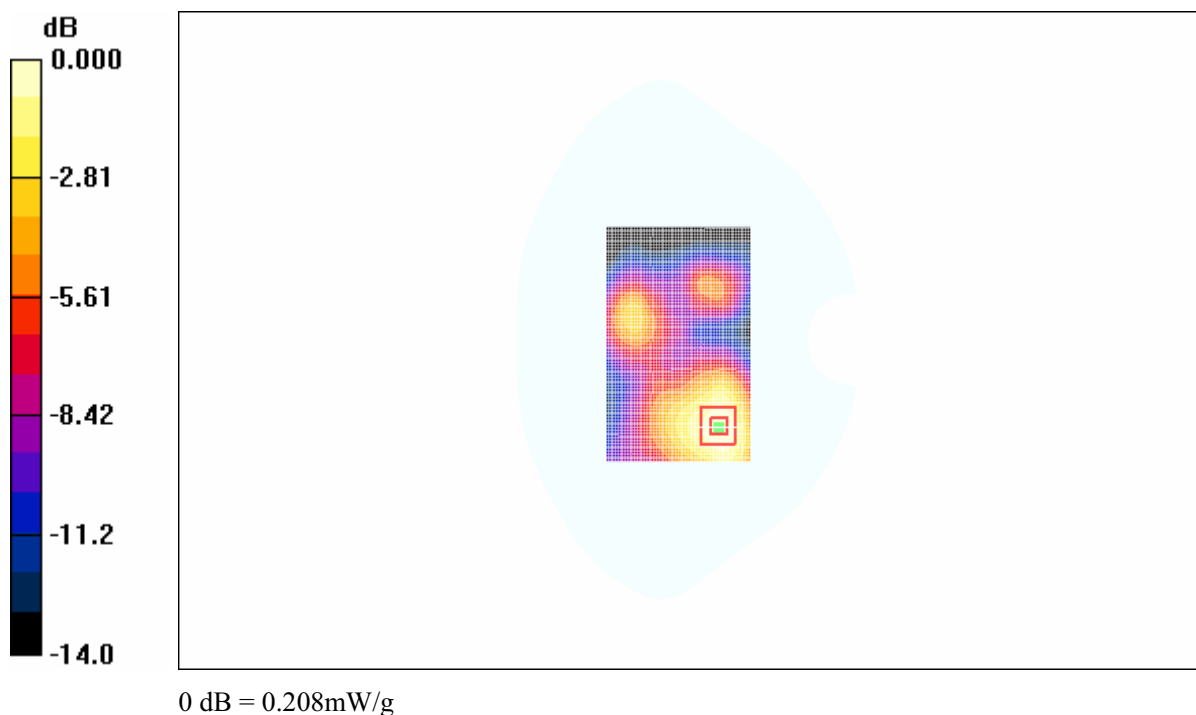


Fig. 47 PCS 1900MHz, Body, Towards Ground with GPRS, CH512

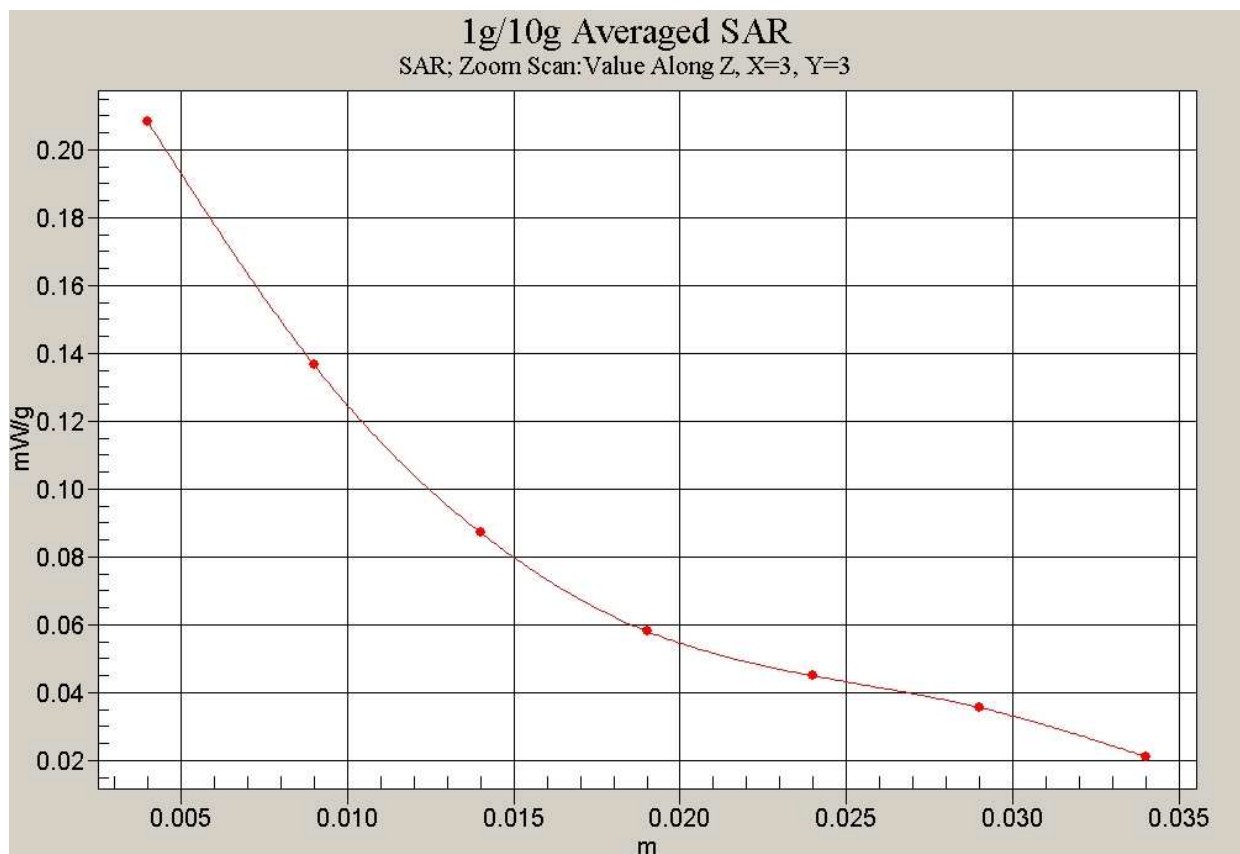


Fig. 48 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with GPRS, CH512)

1900 Left Cheek High of GSM2

Date/Time: 2006-7-5 11:55:04

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.114 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.59 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

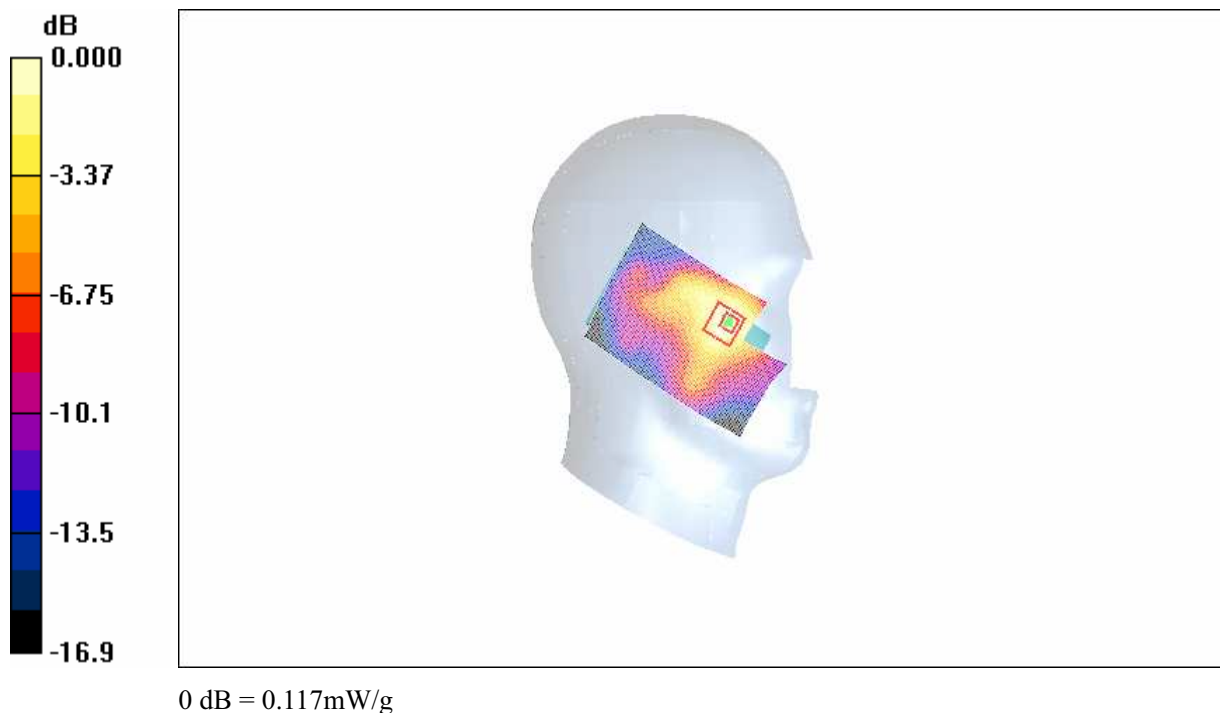


Fig. 49 Left Hand Touch Cheek PCS 1900MHz CH810

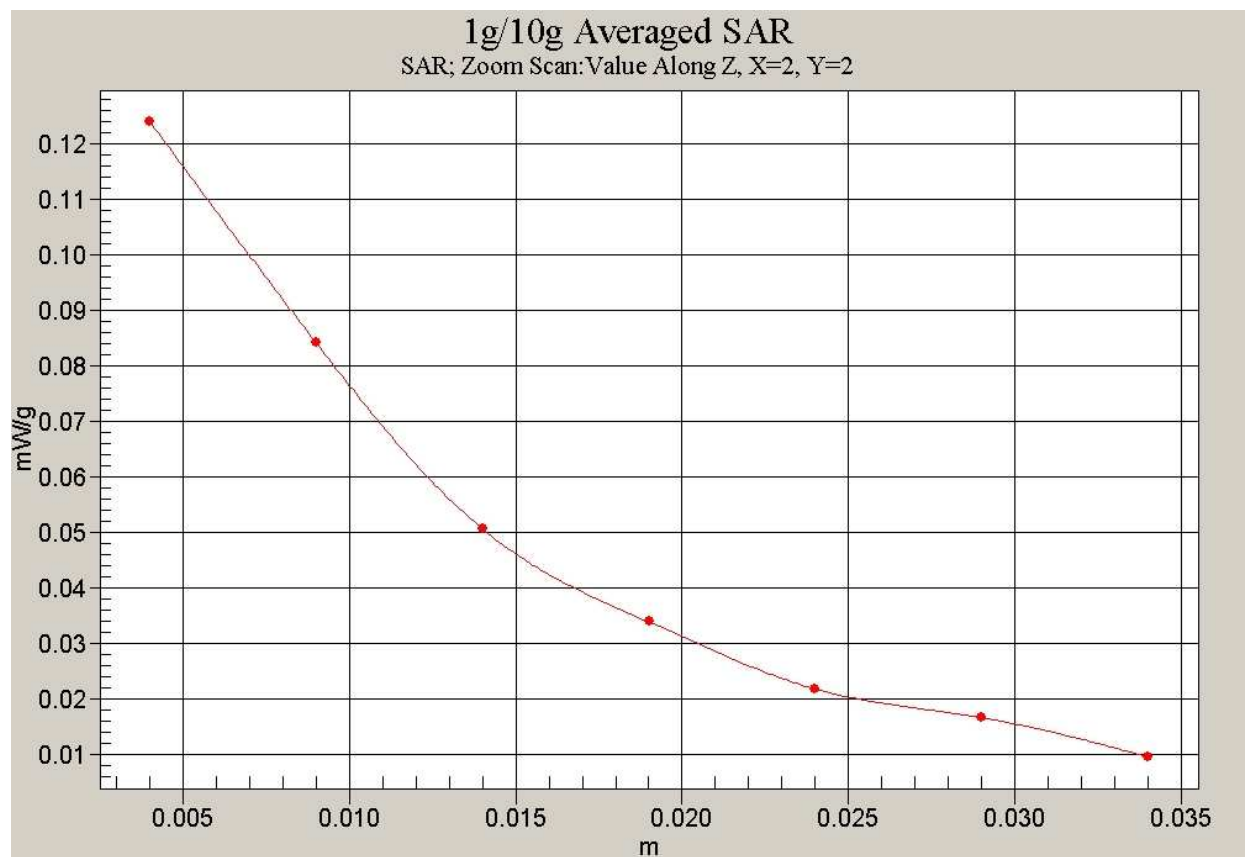


Fig. 50 Z-Scan at power reference point (PCS 1900MHz CH810)

1900 Body Toward Ground Low with An Earphone

Date/Time: 2006-7-8 15:38:51

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C

Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Low /Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.177 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

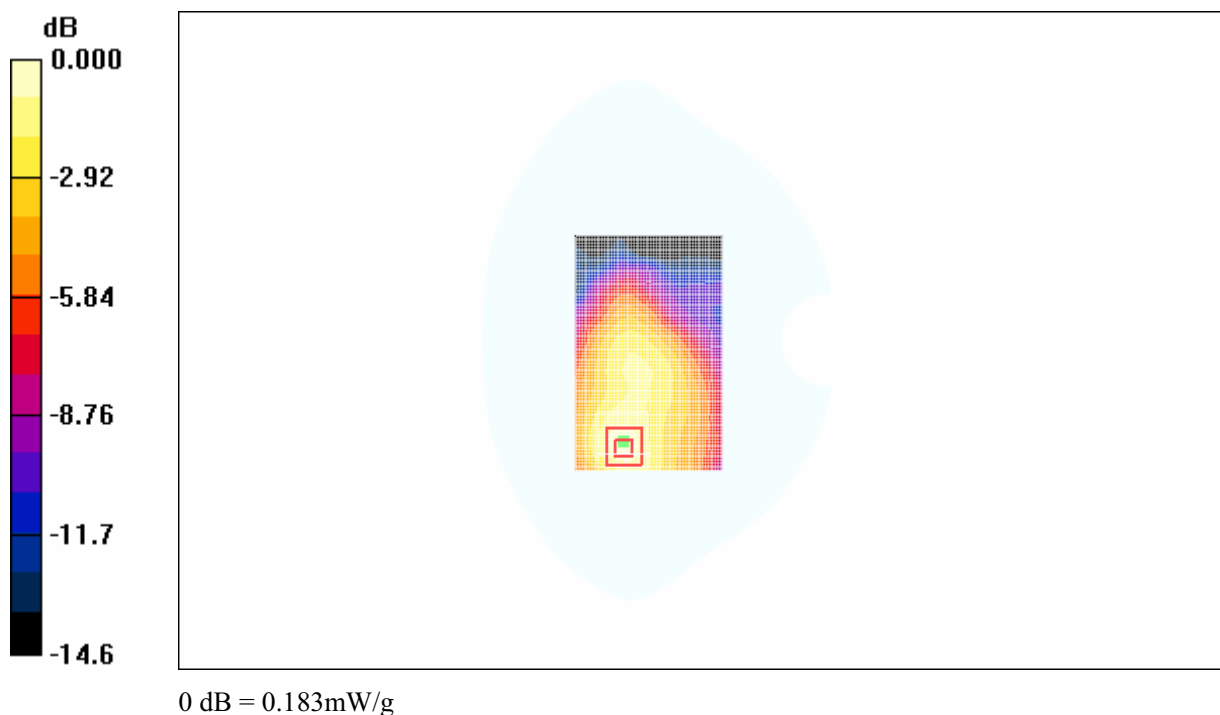


Fig. 51 PCS 1900MHz, Body, Towards Ground Low with An Earphone, CH512

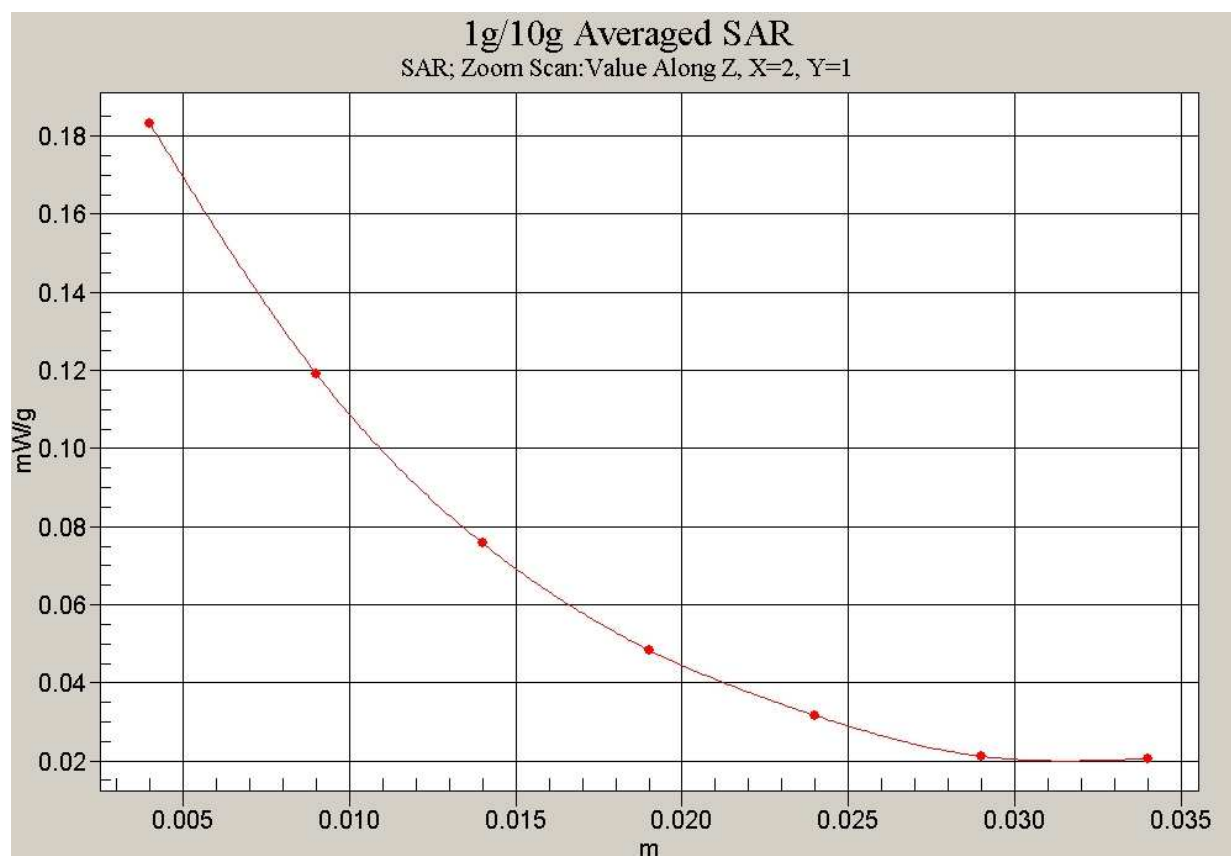


Fig. 52 Z-Scan at power reference point
(PCS 1900MHz, Body Towards Ground with An Earphone, CH512)

ANNEX D SYSTEM VALIDATION RESULTS

1900MHzDAE536Probe1736

Electronics: DAE3 Sn536

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

System Validation/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 92.1 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 11.2 mW/g

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.1 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 11.3 mW/g

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.27 mW/g

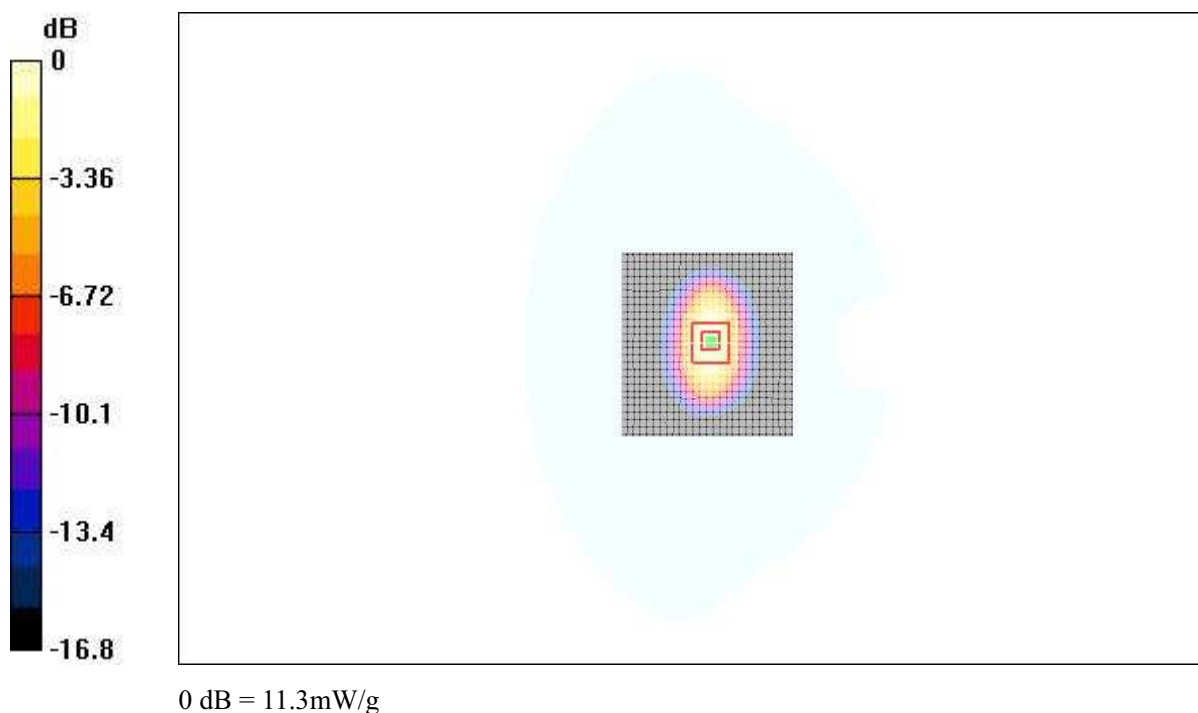


Fig.53 validation 1900MHz 250mW

**Telecommunication Metrology Center
of Ministry of Information Industry**

No.2006E01036-1

Page 77 of 85

ANNEX E PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC-Auden**

Certificate No: **ET3-1736_Nov05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1736**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 25, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference Probe ES3DV2	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
DAE4	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
Reference Probe ES3DV2	SN: 907	21-Jun-05 (SPEAG, No. DAE4-907_Jun05)	Jun-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by:	Name Nico Vetterli	Function Laboratory Technician	Signature 
----------------	------------------------------	--	--

Approved by:	Katja Pokovic	Technical Manager 
--------------	----------------------	--

Issued: November 25, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConF whereby the uncertainty corresponds to that given for ConF. A frequency dependent ConF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1736

November 25, 2005

Probe ET3DV6

SN:1736

Manufactured:	September 27, 2002
Last calibrated:	July 14, 2005
Recalibrated:	November 25, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1736

November 25, 2005

DASY - Parameters of Probe: ET3DV6 SN:1736

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.97 ± 10.1%	$\mu V/(V/m)^2$	DCP X	93 mV
NormY	1.75 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	93 mV
NormZ	1.97 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	9.6	5.0
SAR _{be} [%]	With Correction Algorithm	0.1	0.3

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	13.2	8.8
SAR _{be} [%]	With Correction Algorithm	0.6	0.1

Sensor Offset

Probe Tip to Sensor Center 2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ET3DV6 SN:1736

November 25, 2005

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

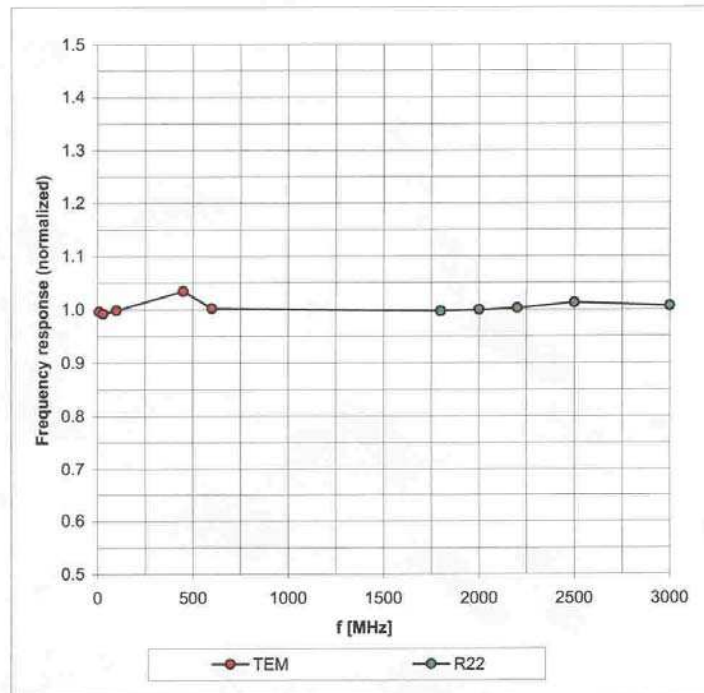


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1736

November 25, 2005

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

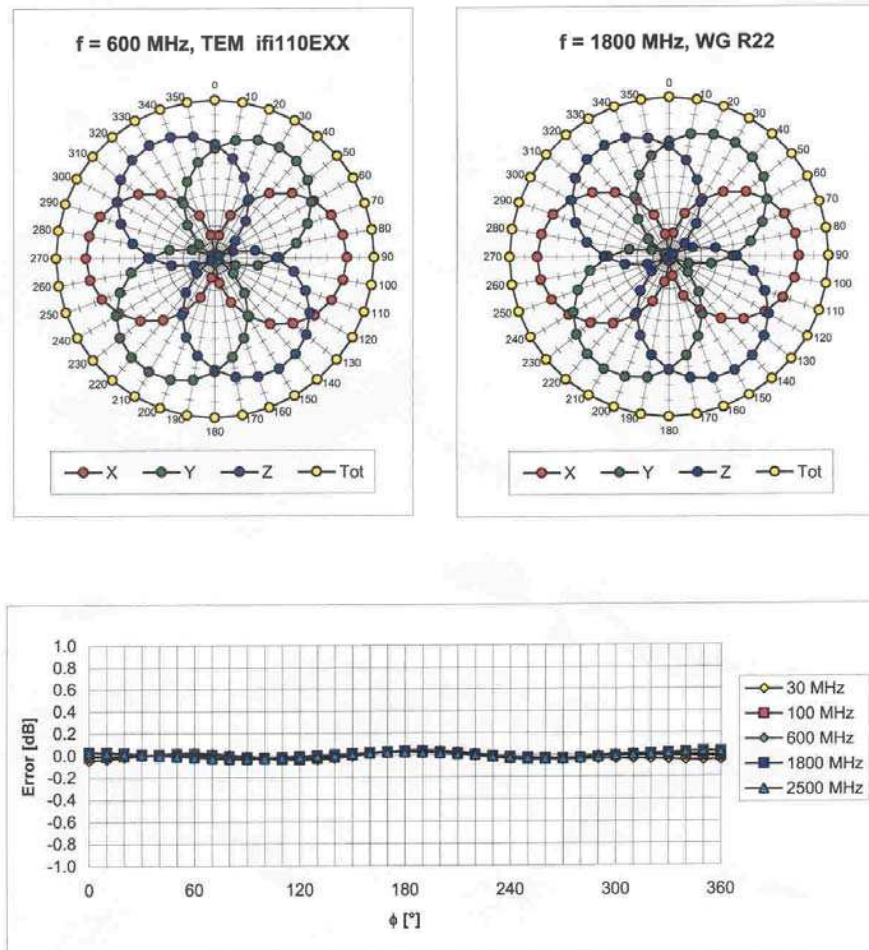


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1736

November 25, 2005

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

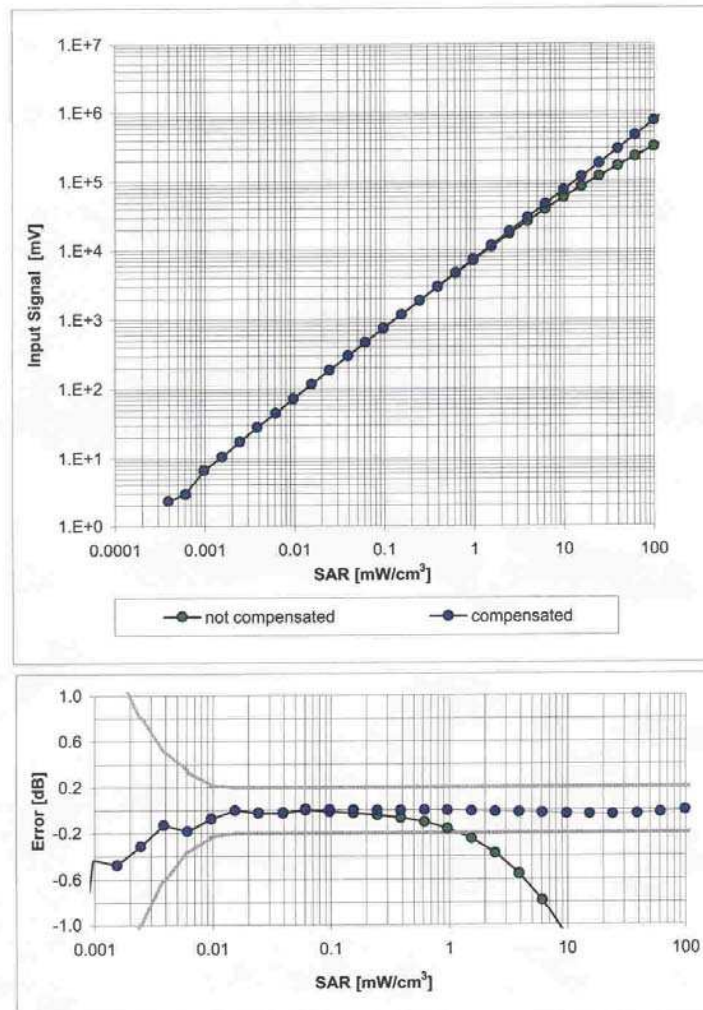


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1736

November 25, 2005

Conversion Factor Assessment

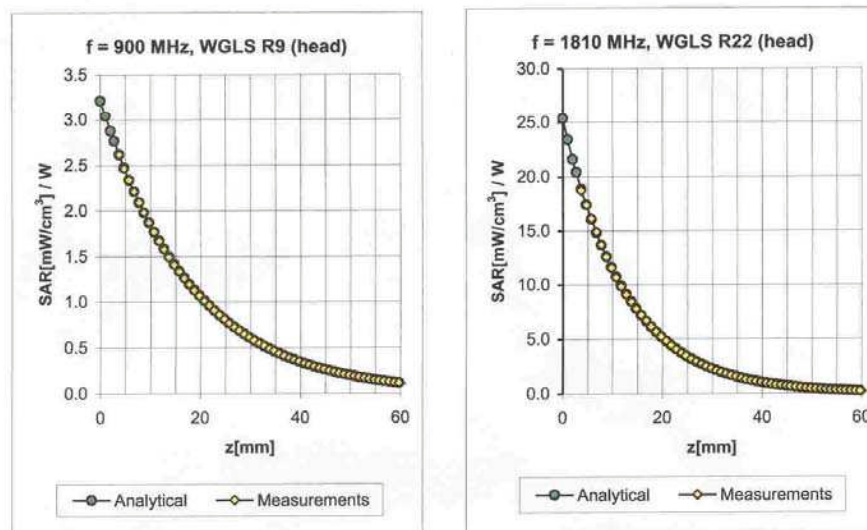

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.56	1.85	6.51 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.47	5.40 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.62	2.29	4.67 ± 11.8% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.12	1.61	7.74 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.47	2.15	6.45 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.78	4.88 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.65	2.11	4.35 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1736

November 25, 2005

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

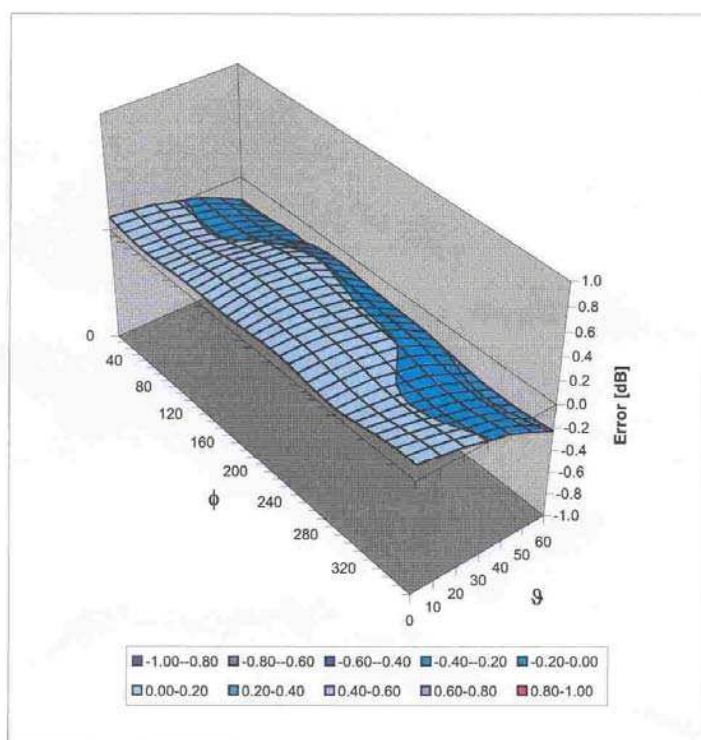

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)