


<b>RADIO DFS REPORT</b> <b>FCC 47 CFR Part 15E, ISED Canada RSS-247</b> <b>Unlicensed National Information Infrastructure Devices in the 5 GHz Bands</b>	
<b>Report Reference No</b>	G0M-2302-1881-TFC407DF-W276-V03
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 <p>DAkkS - Registration number : D-PL-12092-01-03 (ISED)                      ISED Testing Laboratory site: 3470A                      DAkkS - Registration number : D-PL-12092-01-04 (FCC)                      FCC Filed Test Laboratory, Reg.-No.: 96970</p>
<b>Applicant</b>	u-blox AG
<b>Address</b>	Zürcherstrasse 68 8800 Thalwil Switzerland
<b>Test Specification</b>	47 CFR Part 15E RSS-247, Issue 2, 2017-02
<b>Non-Standard Test Method</b>	None
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	MAYA-W2 host-based multiradio modules
<b>Model(s)</b>	MAYA-W276-00B
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	u-blox
<b>Hardware Version(s)</b>	02
<b>Software Version(s)</b>	1.0.0.39.1-18.80.1.p154.38
<b>FCC ID</b>	XPYMAYAW2B
<b>IC</b>	8595A-MAYAW2B
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2023-02-21	
<b>Report:</b>		
Compiled by	Radwan Jaafar	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	
Approved by (+ signature) (Senior Expert Engineer)	Radwan Jaafar	
Date of Issue	2023-12-06	
Total number of pages	35	
<b>General Remarks:</b>		
<p><b>The test results presented in this report relate only to the object tested.</b></p> <p><b>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</b></p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**ADDITIONAL VARIANTS**

Additional Variants (not tested and not evaluated variants)		
Not-tested Variant	Description	
1	Product Type Description	Host-based multiradio module
	Model name	MAYA-W266-00B
	Brand name	u-blox
	Hardware Version	02
	Software Version	1.0.0.39.1-18.80.1.p154.38
	FCC ID	XPYMAYAW2B
	IC	8595A-MAYAW2B
	PMN	MAYA-W266-00B
	HVIN	MAYA-W266-00B
	FVIN	N/A
	HMN	N/A
Comment: Those named additional variants above have not been tested. Those additional variants of the series have been declared by the manufacturer. The test report explicitly states that those variants were neither tested nor assessed nor evaluated.		

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2023-11-02	Initial Release	--
02	2023-11-30	Replaced document: G0M-2302-1881-TFC407DF-W276-V01 Replaced by: G0M-2302-1881-TFC407DF-W276-V02  Reason: Correction of the model name and FVIN of the EUT.	R. Jaafar
03	2023-12-06	Replaced document: G0M-2302-1881-TFC407DF-W276-V02 Replaced by: G0M-2302-1881-TFC407DF-W276-V03  Reason: - Correction of the module name in the plots. - Add test setup photo at section 1.3.	R. Jaafar

**ABBREVIATIONS AND ACRONYMS**

Acronyms	
Acronym	Description
BPSK	Binary Phase Shift Keying
DFS	Dynamic Frequency Selection
EIRP	Equivalent Isotropic Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
HT	High Throughput
IEEE 802.11	MAC and PHY Layer for WiFi
ISED	Innovation, Science and Economic Development Canada
OFDM	Orthogonal Frequency Division Multiplexing
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RBW	Resolution bandwidth
RMS	Root mean square
TPC	Transmit Power Control
VBW	Video bandwidth
VHT	Very High Throughput

**REPORT INDEX**

**1 Equipment (Test Item) Under Test..... 7**

1.1 Photos – Equipment External .....9

1.2 Photos – Equipment Internal ..... 16

1.3 Photos – Test Setup..... 18

1.4 Support Equipment..... 19

1.5 Test Modes .....20

1.6 Test Frequencies.....21

1.7 Normative References..... 22

**2 DFS Specifications ..... 23**

2.1 DFS Detection Thresholds .....23

2.2 DFS Requirements prior to use of channel .....23

2.3 DFS Requirements during normal operation .....23

2.4 DFS Requirements for EUTs with multiple bandwidth modes .....24

2.5 DFS Response Requirements.....24

2.6 DFS Short Radar Waveforms.....25

2.7 DFS Long Radar Waveform .....26

2.8 DFS Hopping Radar Waveform.....26

**3 Result Summary..... 27**

**4 Test Conditions and Results..... 28**

4.1 Test Conditions and Results - Channel Closing Transmission and Channel Move Time .....28

4.2 Test Conditions and Results - Non-Occupancy Time.....32



## 1 Equipment (Test Item) Under Test

Description	MAYA-W2 host-based multiradio modules	
Model	MAYA-W276-00B	
Additional Model(s)	None	
Brand Name(s)	u-blox	
Serial Number(s)	AW86C1DEB9615C00400	
Test Sample Id(s)	44052 (Conducted)	
Hardware Version(s)	02	
Software Version(s)	1.0.0.39.1-18.80.1.p154.38	
PMN	MAYA-W276-00B	
HVIN	MAYA-W276-00B	
FVIN	N/A	
HMN	N/A	
FCC ID	XPYMAYAW2B	
IC	8595A-MAYAW2B	
Equipment type	Radio Module	
DFS Roles	Client without radar detection	
Max. conducted power [dBm]	19.5	
Max. Antenna Gain [dBi]	5.1	
Max. power spectral density [dBm/MHz]	7.675	
Power Class	EIRP < 200 mW and PSD ≥ 10 dBm/MHz	
Detection Threshold [dBm]	-61.5	
Radio type	Transceiver	
Assigned frequency bands	5150 - 5250 MHz 5250 - 5350 MHz 5470 - 5725 MHz 5725 - 5850 MHz	
Radio technology	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11n (HT40) IEEE 802.11ac (VHT20) IEEE 802.11ac (VHT40) IEEE 802.11ac (VHT80)	
Modulation	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	
Number of antenna ports	1	
Antenna-1	Type	External
	Model	ANT-DB1-RAF-SMA
	Manufacturer	Linx Technologies
	Gain	5.1 dBi (U-NII-1) (customer declaration) 5.1 dBi (U-NII-2A) 5.1 dBi (U-NII-2C) 5.1 dBi (U-NII-3)
Antenna-2	Type	Integrated
	Model	custom
	Manufacturer	ProAnt AB
	Gain	-2.7 dBi (U-NII-1) (customer declaration) -2.0 dBi (U-NII-2A) -1.2 dBi (U-NII-2C) -3.8 dBi (U-NII-3)

Supply Voltage (1st port)	V <sub>NOM</sub>	3.3 VDC
Supply Voltage (2nd port)	V <sub>NOM</sub>	1.8 VDC
Operating Temperature	T <sub>NOM</sub>	20 °C
Battery supply	Yes	
AC/DC-Adaptor	Model	None
Manufacturer	u-blox AG Zürcherstrasse 68 8800 Thalwil Switzerland	



## 1.1 Photos – Equipment External

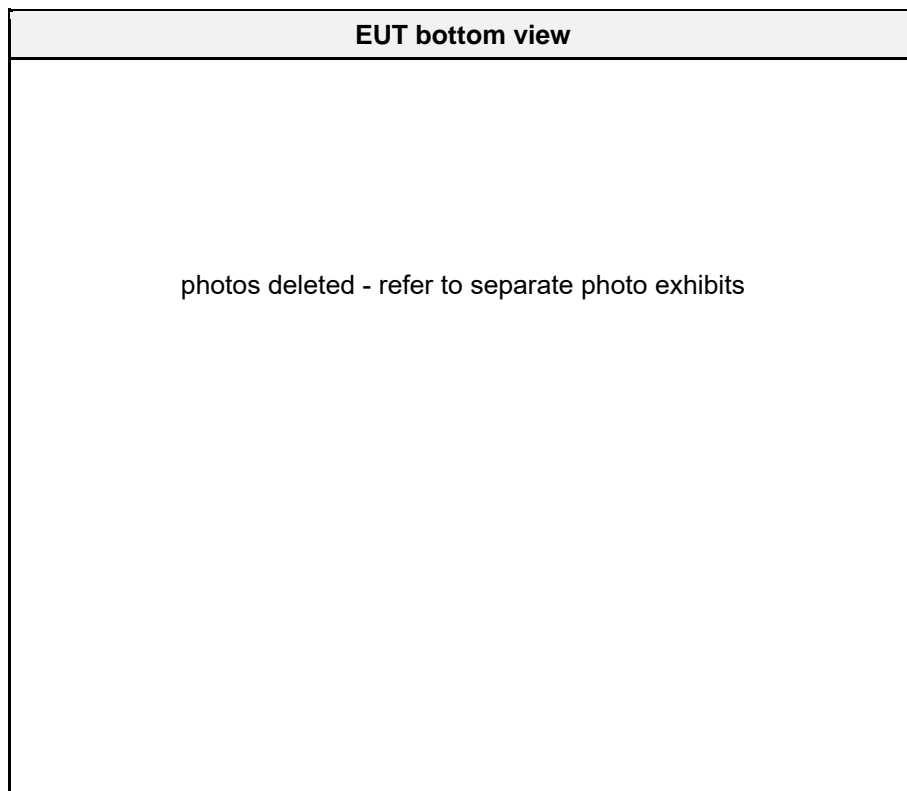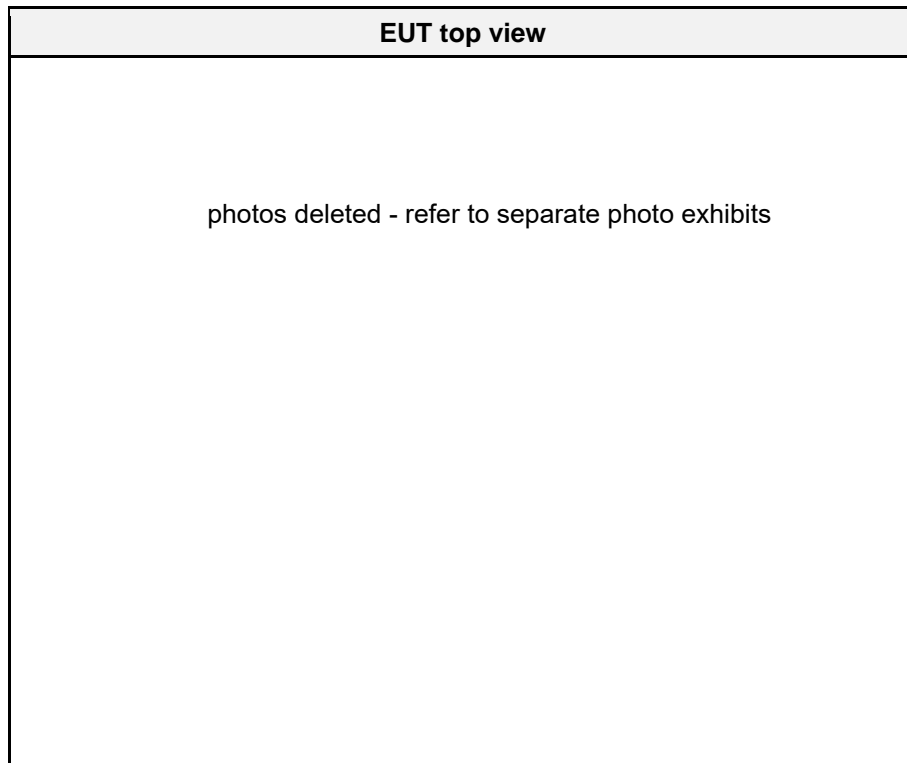

**EUT overview - with embedded antenna**

photos deleted - refer to separate photo exhibits

**RF module with Embedded antenna**

photos deleted - refer to separate photo exhibits

**EUT overview - with external antenna**

photos deleted - refer to separate photo exhibits

**External antenna**

photos deleted - refer to separate photo exhibits

**Evaluation board top view**

photos deleted - refer to separate photo exhibits

**Evaluation board bottom view**



photos deleted - refer to separate photo exhibits

**Data cable**

photos deleted - refer to separate photo exhibits

**USB C cable**

photos deleted - refer to separate photo exhibits

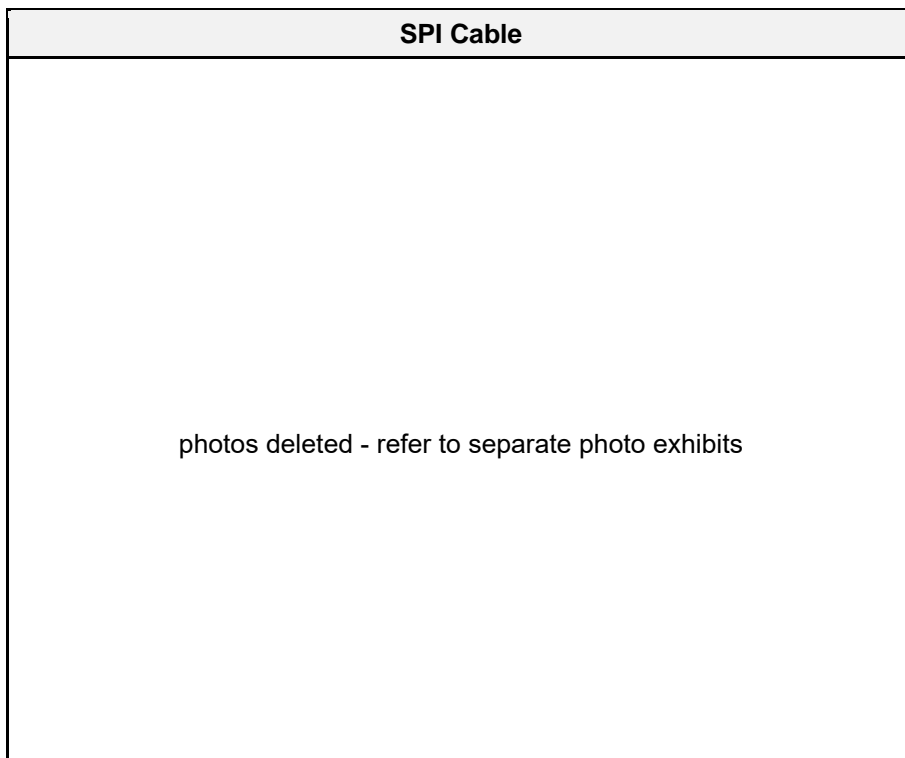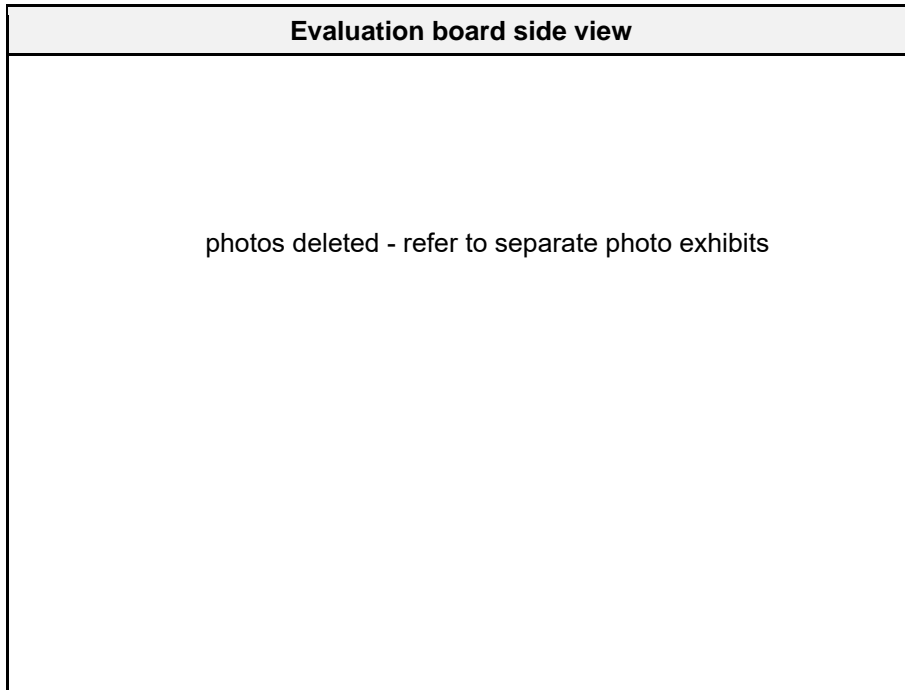



**Power adapter**

photos deleted - refer to separate photo exhibits

**Cable to connect EUT to external power supply**

photos deleted - refer to separate photo exhibits

**1.2 Photos – Equipment Internal**

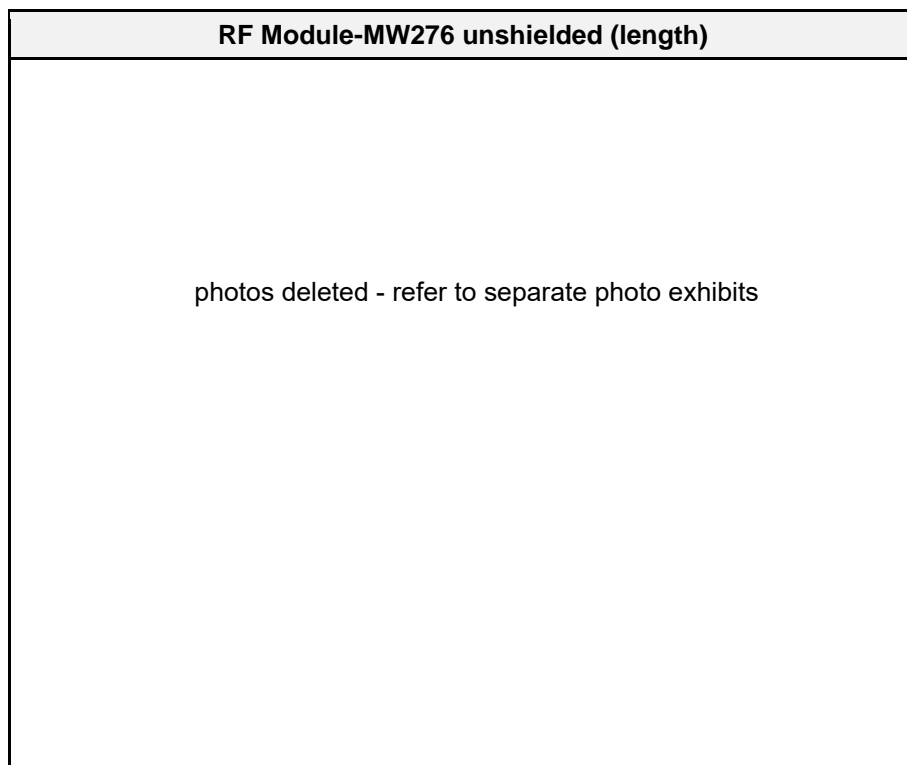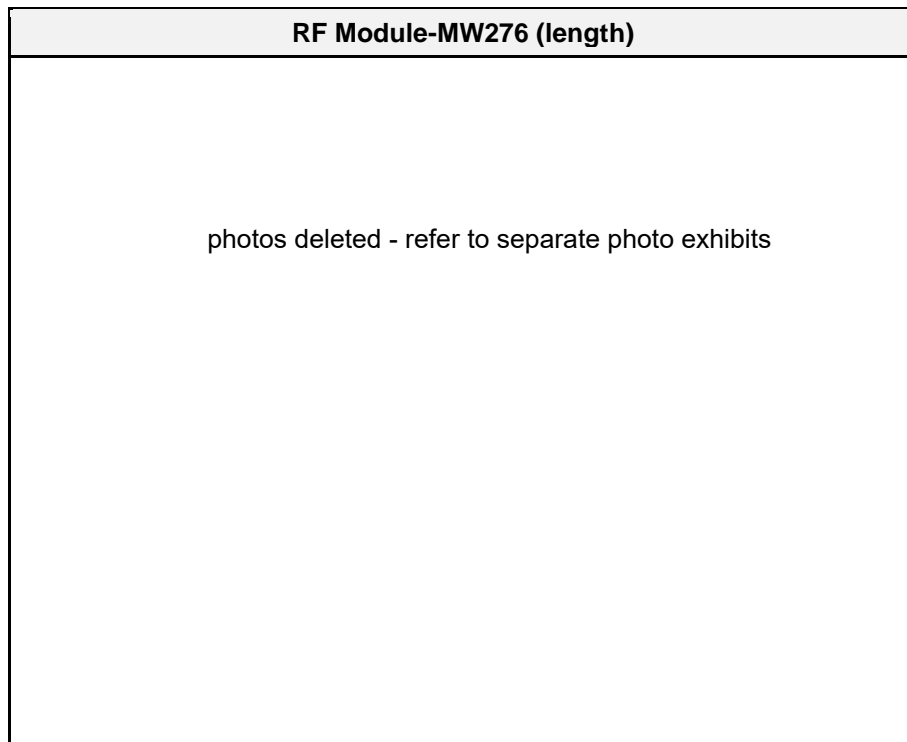




**RF Module-MW276 (width)**

photos deleted - refer to separate photo exhibits

**RF Module-MW276 unshielded (width)**

photos deleted - refer to separate photo exhibits

### 1.3 Photos – Test Setup

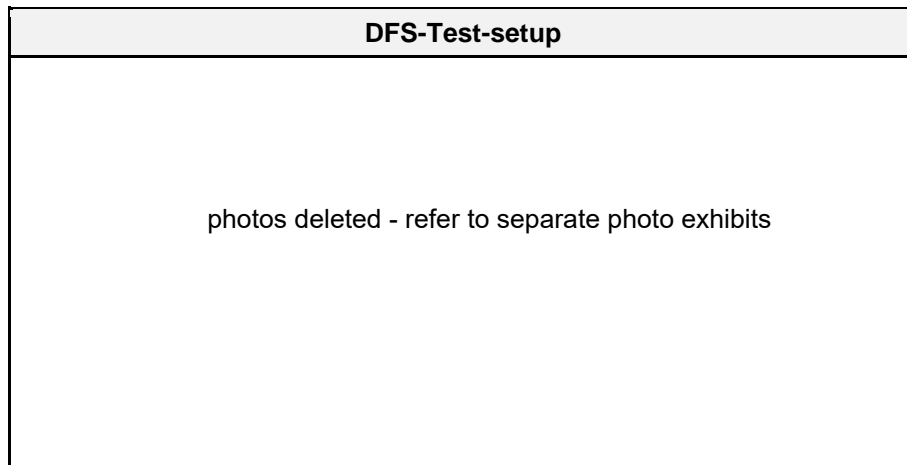

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	WiFi Access Point	ZyXel	NBG6503	FCC-ID: 2468C-NBG6503, for client testing
AE	Notebook	Dell	Latitude E7250	For configuring the test item
AE	Evaluation Board	u-blox		
CBL	USB-C	---	---	Connection between evaluation board and EUT
CBL	Data cable	---	---	
CBL	SBI cable			
CBL	Ethernet	---	---	Connection between evaluation board and notebook
AE	AC/DC Adapter	EDACPOWER ELECT.	EA1045CR	To power the evaluation board
SFT	Terminal	Debian / Linux	---	For configuring the test item
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

## 1.5 Test Modes

Mode	Description
VHT80 (IEEE 802.11ac)	Mode = Transmit Bandwidth = 80 MHz Duty cycle = 99.0% Power setting = 14 (5290 MHz) Power setting = 12 (5530 MHz)

## 1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	52+56+60+64	5290
F2	Tx / Rx	100+104+108+112	5530

## 1.7 Normative References

References	
Designator	Reference
KDB 905462	KDB 905462 D02 v02
KDB 905462	KDB 905462 D03 v01r02
KDB 905462	KDB 905462 D04 v01
RSS-247	RSS-247 Issue 2

## 2 DFS Specifications

The following sections summarize the DFS requirements given in KDB 905462 D02

### 2.1 DFS Detection Thresholds

The DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.  <b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  <b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

### 2.2 DFS Requirements prior to use of channel

The following table summaries the requirements for Master Devices and Client Devices prior to use of channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

### 2.3 DFS Requirements during normal operation

The following table summaries the requirements for Master Devices and Client Devices during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

## 2.4 DFS Requirements for EUTs with multiple bandwidth modes

The following table shows the tests and operational bandwidth for EUTs that support multiple bandwidth operational modes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
<b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

## 2.5 DFS Response Requirements

For Master and Client Devices with radar detection the required response times are shown below

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
<b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. <b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. <b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	



## 2.6 DFS Short Radar Waveforms

The following table shows the waveform parameters, minimum percentage of successful detection and the number of trials for the short radar waveforms Type 0 to 4

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \begin{matrix} \left( \frac{1}{360} \right) \cdot \\ \left( \frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \end{matrix} \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

## 2.7 DFS Long Radar Waveform

The following table shows the waveform parameters, minimum percentage of successful detection and the number of trials for the long radar waveform Type 5

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length  $(12,000,000 / \text{Burst Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

## 2.8 DFS Hopping Radar Waveform

The following table shows the waveform parameters, minimum percentage of successful detection and the number of trials for the long radar waveform Type 6

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:<sup>4</sup>

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

### 3 Result Summary

FCC 47 CFR Part 15E, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
FCC 15E.407 (h)(2) RSS-247 6.3	Waveform verification	KDB 905462 D02 v02 Section 7.5	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	Channel load verification	KDB 905462 D02 v02 Section 7.7	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	U-NII detection bandwidth	KDB 905462 D02 v02 Section 7.8.1	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	Initial Channel Availability Check Time	KDB 905462 D02 v02 Section 7.8.2.1	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	Radar Burst at the beginning of the Channel Availability Check Time	KDB 905462 D02 v02 Section 7.8.2.2	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	Radar Burst at the end of the Channel Availability Check Time	KDB 905462 D02 v02 Section 7.8.2.3	N/R	
FCC 15E.407 (h)(2) RSS-247 6.3	In-Service Monitoring for Channel Closing Transmission and Channel Move Time	KDB 905462 D02 v02 Section 7.8.3	PASS	
FCC 15E.407 (h)(2) RSS-247 6.3	In-Service Monitoring for Non-Occupancy Time	KDB 905462 D02 v02 Section 7.8.3	PASS	
FCC 15E.407 (h)(2) RSS-247 6.3	Statistical performance check	KDB 905462 D02 v02 Section 7.8.4	N/R	
<p>Comment: The Decision Rule is applied on the basis of ETSI TR 102 273 and ETSI TR 100 028. These standards provide guidance on how to calculate and apply measurement uncertainty whilst providing maximum uncertainties allowance. In all cases due consideration will be given to ILAC-G8:09/2019. Where a result is considered conditional in respect of its proximity to the limit line, the customer would be made aware of situation so that they can make an informed decision on how to proceed.</p>				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

## 4 Test Conditions and Results

### 4.1 Test Conditions and Results - Channel Closing Transmission and Channel Move Time



#### 4.1.1 Information

Test Information	
Reference	FCC 15E.407 (h)(2), RSS-247 6.3
Measurement Method	KDB 905462 D02 v02 Section 7.8.3
Operator	Wilfried Treffke
Date	2023-06-21

#### 4.1.2 Limits

Limits	
Maximum channel move time	10 s
Maximum channel closing transmission time	200 ms + aggregate of 60 ms

#### 4.1.3 Setup

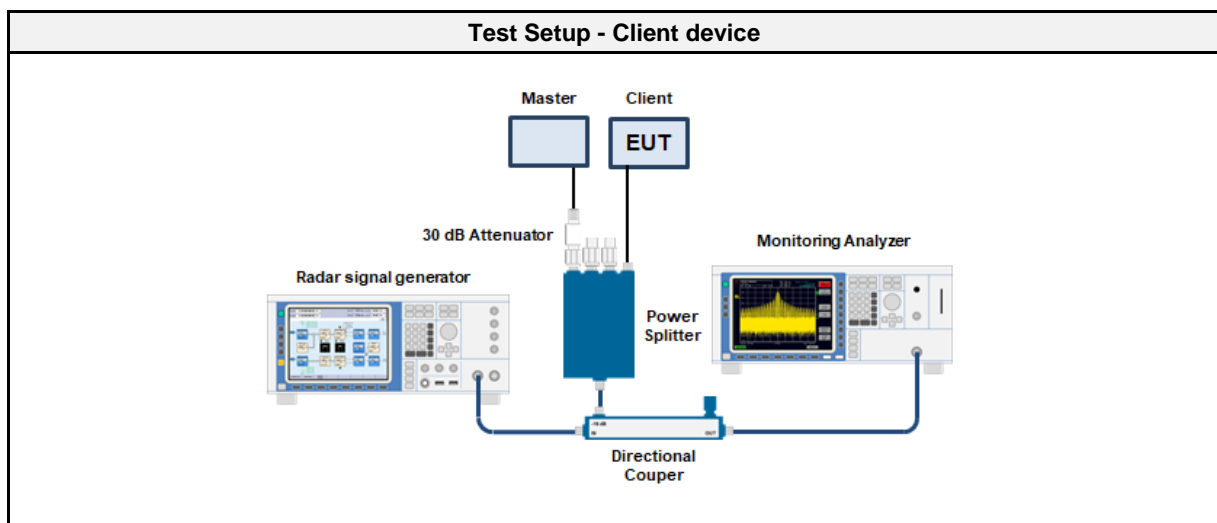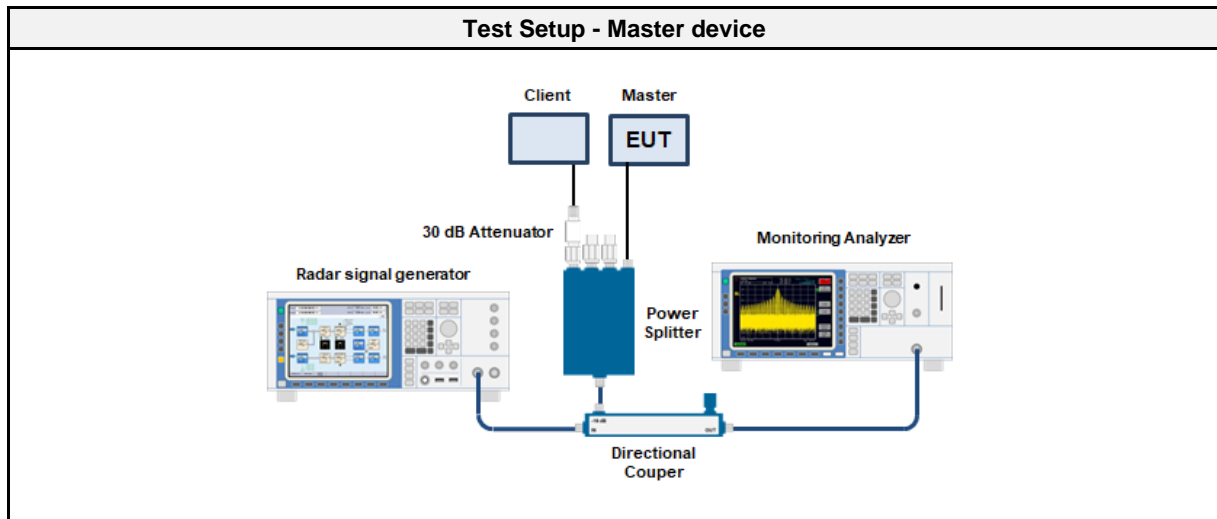

4.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF01631	2023-08	2024-08
Signal Generator	R&S	SMU 200A	EF00004	2022-09	2023-09

4.1.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>The waveform signal generator and the spectrum analyzer are set to the test frequency</li> <li>The spectrum analyzer is set to zero span with RBW = VBW = 3 MHz</li> <li>The sweep time is set to 16 s</li> <li>A channel loading stream is established between master and client</li> <li>At time <math>T_0</math> a single radar burst of type 0 is send to the master with power level 1 dB above the DFS threshold level</li> <li>With the end of the burst the analyzer sweep is triggered and all emissions are recorded</li> <li>The analyzer trace is analyzed in order to determine the instance in time when all transmissions on the channel are stopped</li> <li>The result is recorded as channel move time</li> <li>The analyzer trace is analyzed in order to determine the accumulated transmission time between the end of the burst and the channel move time</li> <li>The result is recorded as channel closing transmission time</li> </ol>

4.1.6 Results

Test Results - Client without radar detection				
Channel	Frequency [MHz]	Channel move time [s]	Channel closing transmission time [ms]	Verdict
52+56+60+64	5290	0.216	≤0.058	PASS
100+104+108+112	5530	0.828	≤0.056	PASS

## DFS Channel moving and closing time

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	44052
Reference Standards:	FCC 15.407
Reference Method:	KDB 905462 D02 v02
Operational Mode:	IEEE 802.11ac (VHT80), Channel: 58, 5290 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-06-21
EUT DFS Role:	Client without radar detection
Closing transmission time $\leq 200$ ms [s]:	0.058 s
Closing transmission time $> 200$ ms [s]:	0.004 s
Channel move time [s]:	0.216 s
Closing time verdict:	PASS
Move time verdict:	PASS
Overall Verdict:	PASS

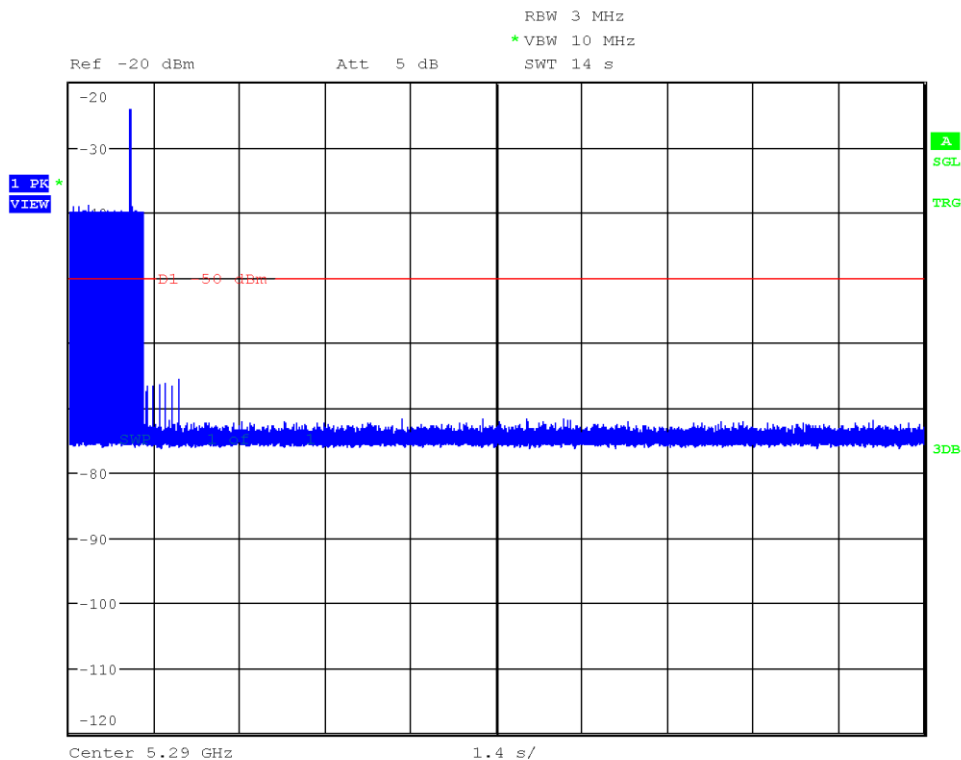


Date: 21.JUN.2023 16:16:48

Test Report No.: G0M-2302-1881-TFC407DF-W276-V03

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

### DFS Channel moving and closing time

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	44052
Reference Standards:	FCC 15.407
Reference Method:	KDB 905462 D02 v02
Operational Mode:	IEEE 802.11ac (VHT80), Channel: 106, 5530 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-06-21
EUT DFS Role:	Client without radar detection
Closing transmission time $\leq$ 200 ms [s]:	0.056 s
Closing transmission time $>$ 200 ms [s]:	0.012 s
Channel move time [s]:	0.828 s
Closing time verdict:	PASS
Move time verdict:	PASS
Overall Verdict:	PASS

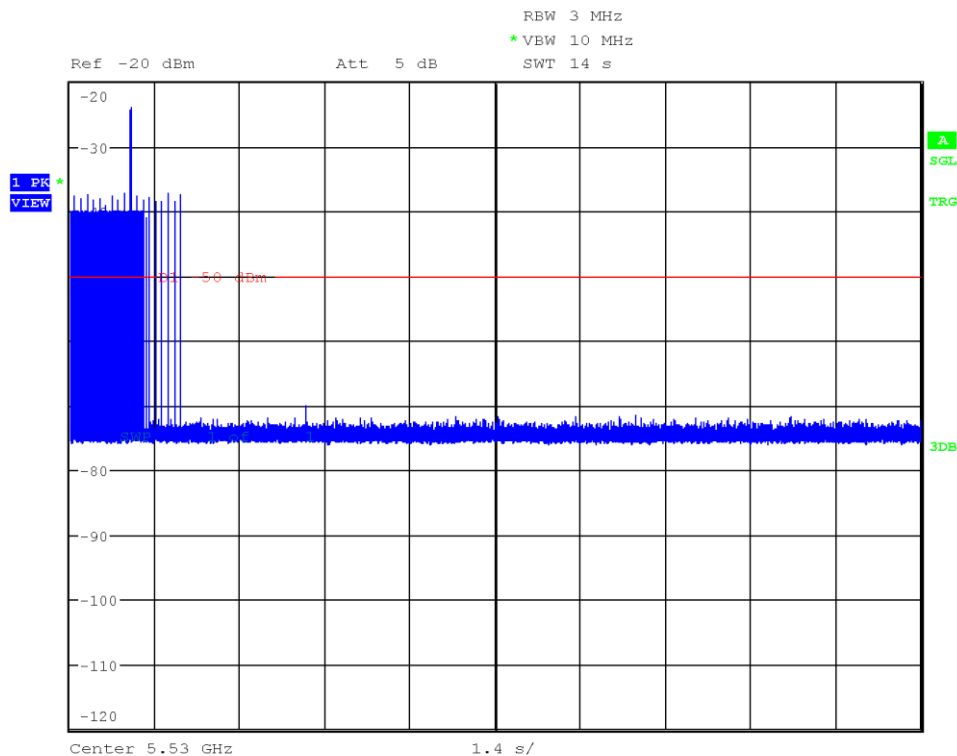

Date: 21.JUN.2023 13:16:11

## 4.2 Test Conditions and Results - Non-Occupancy Time



### 4.2.1 Information

Test Information	
Reference	FCC 15E.407 (h)(2), RSS-247 6.3
Measurement Method	KDB 905462 D02 v02 Section 7.8.3
Operator	Wilfried Treffke
Date	2023-06-21

### 4.2.2 Limits

Limits
30 min

### 4.2.3 Setup

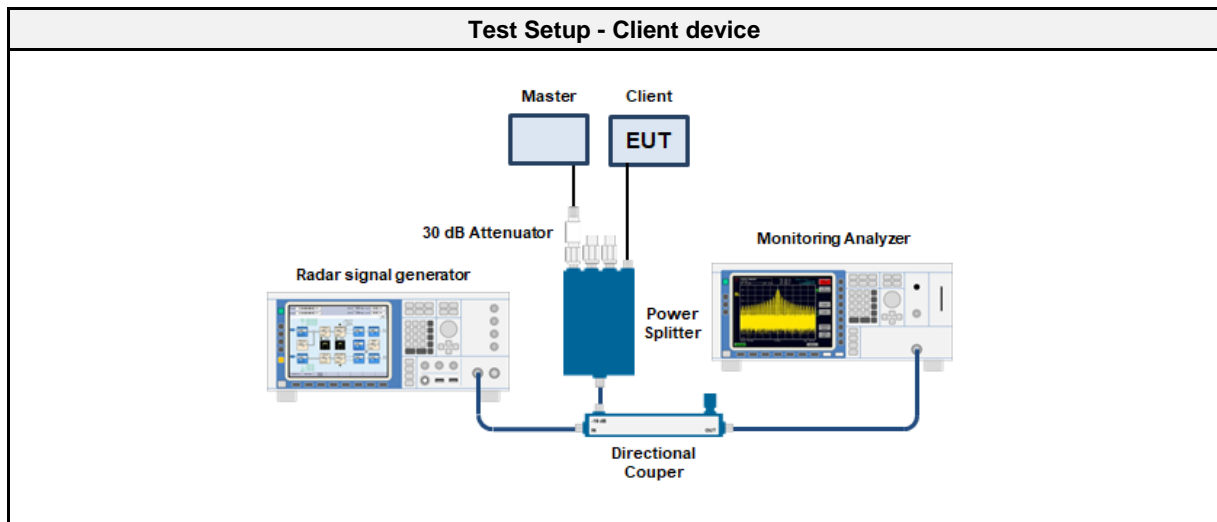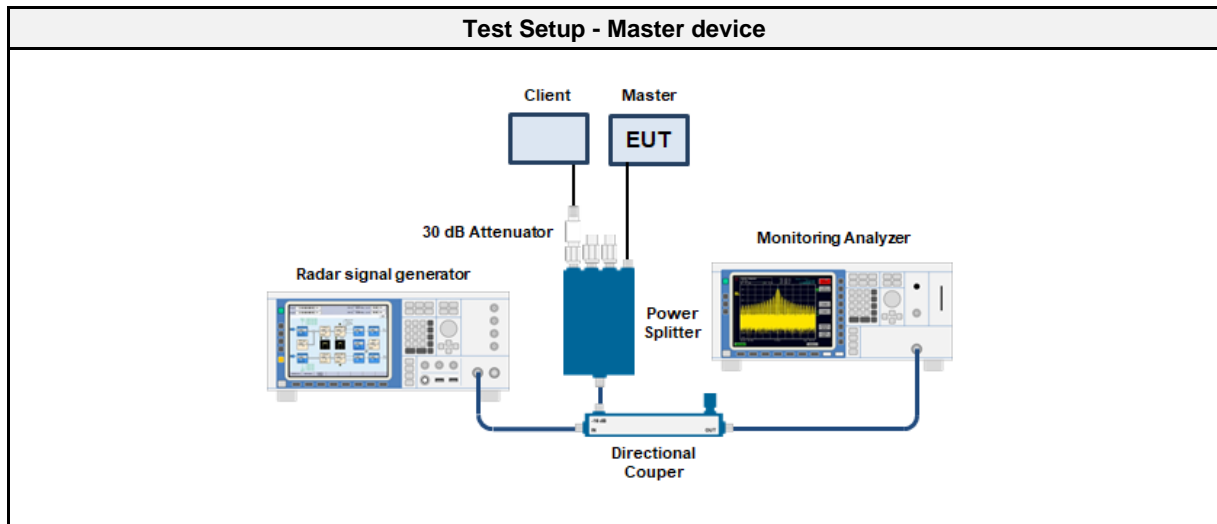



#### 4.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF01631	2023-08	2024-08
Signal Generator	R&S	SMU 200A	EF00004	2022-09	2023-09

#### 4.2.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>1. The waveform signal generator and the spectrum analyzer are set to the test frequency</li> <li>2. The spectrum analyzer is set to zero span with RBW = VBW = 3 MHz</li> <li>3. The sweep time is set to 2000 s</li> <li>4. A channel loading stream is established between master and client</li> <li>5. At time <math>T_0</math> a single radar burst of type 0 is send to the master with a power level 1 dB above the DFS threshold level</li> <li>6. With the end of the burst the analyzer sweep is triggered and all emissions are recorded</li> <li>7. The analyzer trace is analyzed in order to determine the end of the channel move time <math>T_2</math></li> <li>8. The time after between the end of the channel move time is analyzed in order to determine whether the non-occupancy period is preserved</li> <li>9. The duration of the silent period after the end of the end of the channel move time is recorded and compared to the limit</li> </ol>

#### 4.2.6 Results

Test Results - Client without radar detection			
Channel	Frequency [MHz]	Non-occupancy period [s]	Verdict
52+56+60+64	5290	>1800	PASS
100+104+108+112	5530	>1800	PASS

### DFS Non-occupancy period


Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	44052
Reference Standards:	FCC 15.407
Reference Method:	KDB 905462 D02 v02
Operational Mode:	IEEE 802.11ac (VHT80), Channel: 58, 5290 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-06-21
EUT DFS Role:	Client without radar detection
Verdict:	PASS

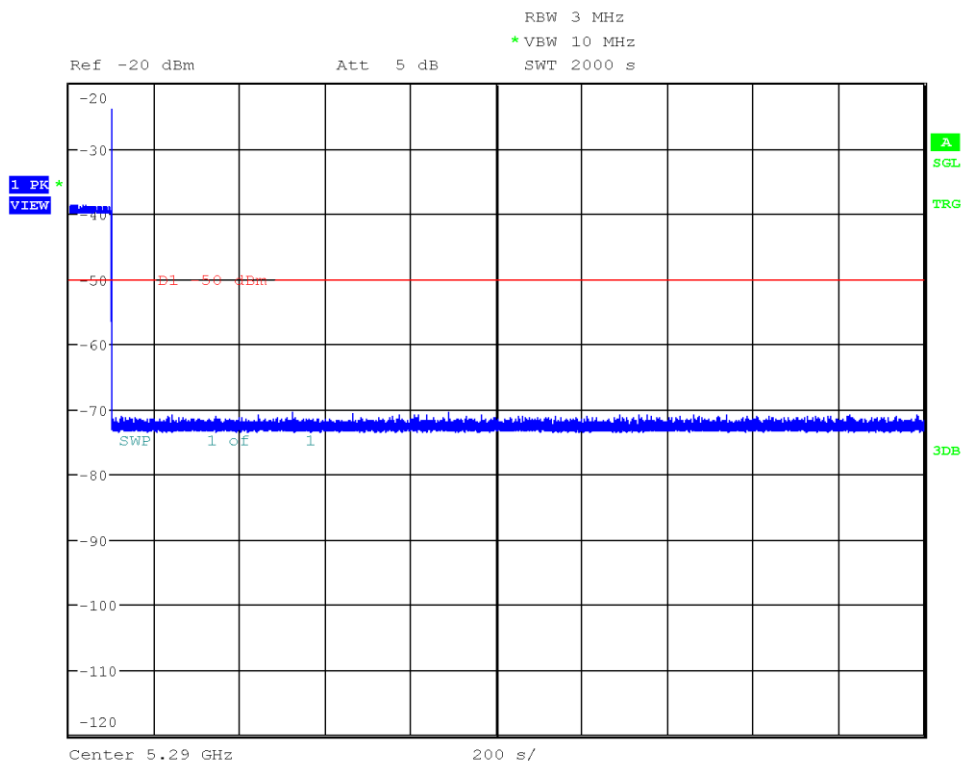

Date: 21.JUN.2023 16:02:42

### DFS Non-occupancy period

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	44052
Reference Standards:	FCC 15.407
Reference Method:	KDB 905462 D02 v02
Operational Mode:	IEEE 802.11ac (VHT80), Channel: 106, 5530 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-06-21
EUT DFS Role:	Client without radar detection
Verdict:	PASS

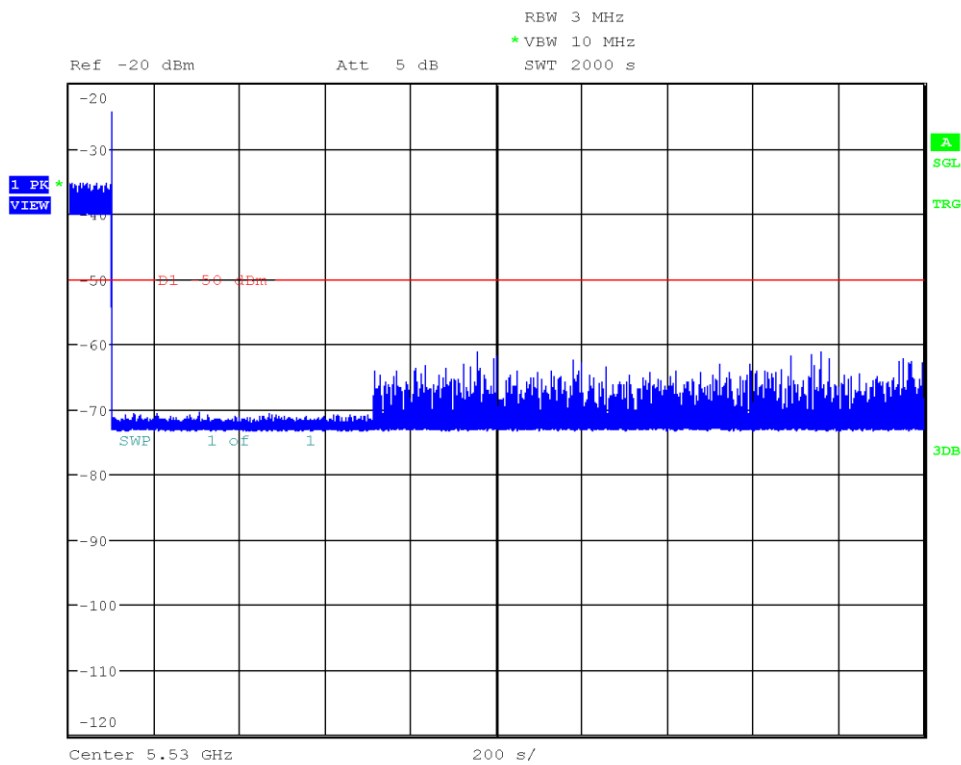

Date: 21.JUN.2023 12:50:35

=== END OF TEST REPORT ===