


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2402.6	0.350	2402.419	2402.769	---	---
TX	Ant1	2438.6	0.358	2438.410	2438.768	---	---
TX	Ant1	2479.4	0.348	2479.218	2479.566	---	---

Test Graphs

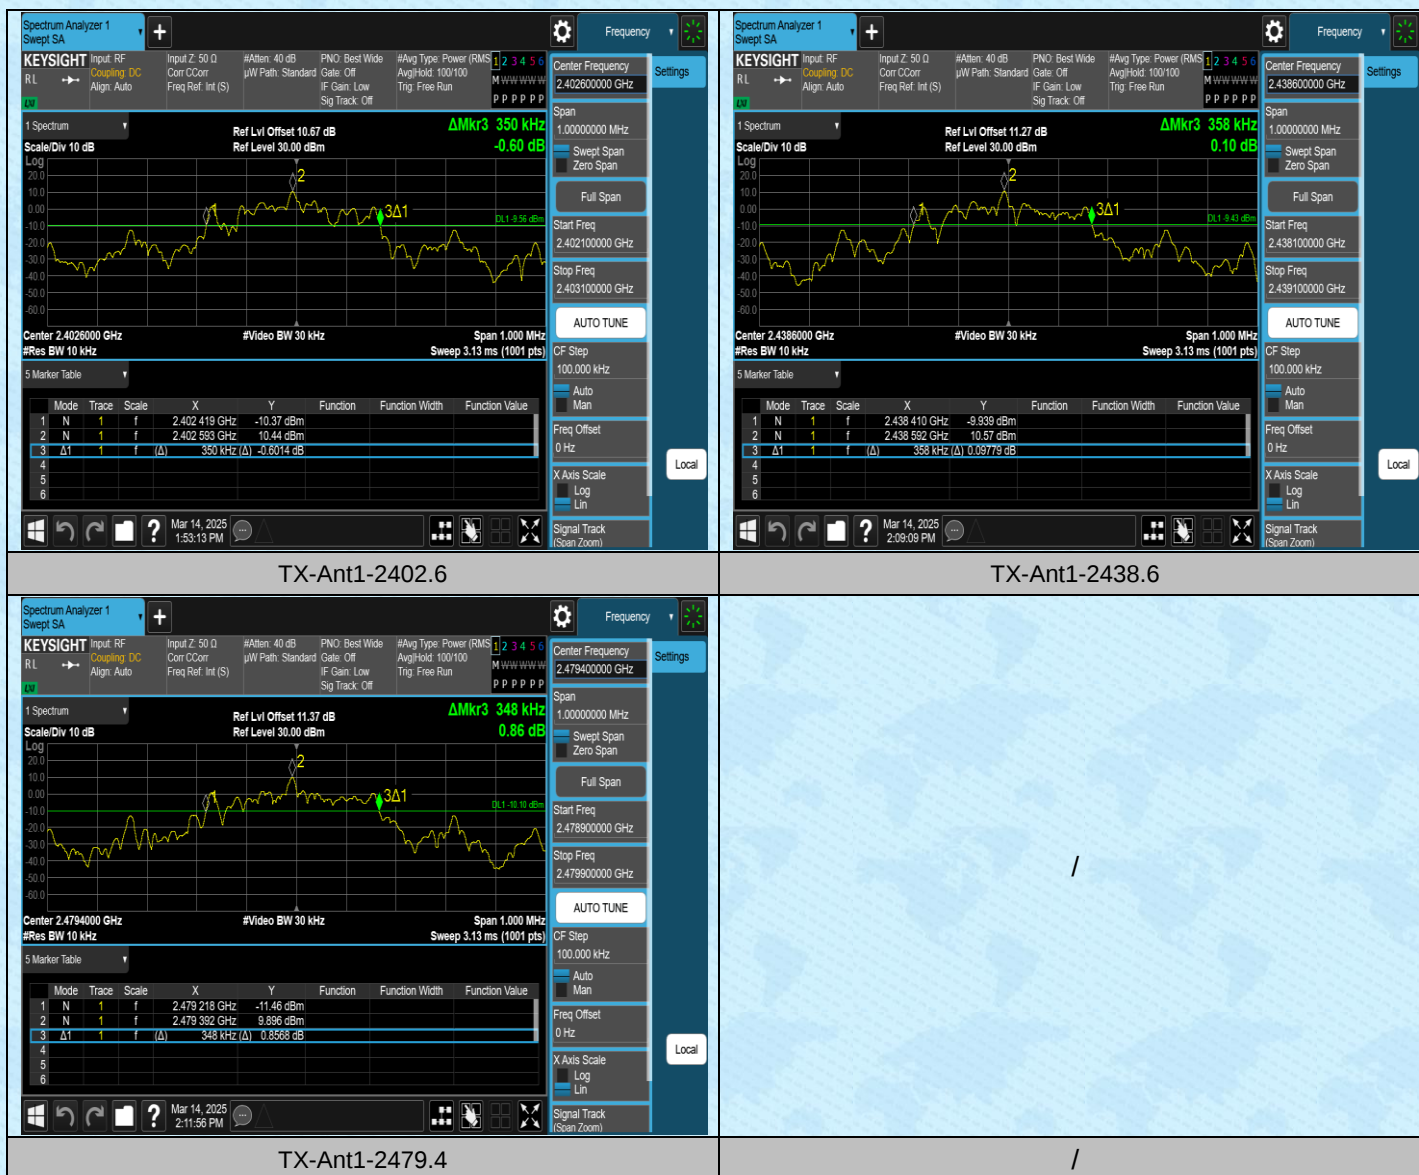

AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2402.6	0.36797	2402.4078	2402.7757	---	---
TX	Ant1	2438.6	0.38347	2438.3979	2438.7814	---	---
TX	Ant1	2479.4	0.37840	2479.2025	2479.5809	---	---

Test Graphs




AppendixC: Maximum conducted output power

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2402.6	11.82	≤20.97	PASS
TX	Ant1	2438.6	11.52	≤20.97	PASS
TX	Ant1	2479.4	10.87	≤20.97	PASS

Test Graphs

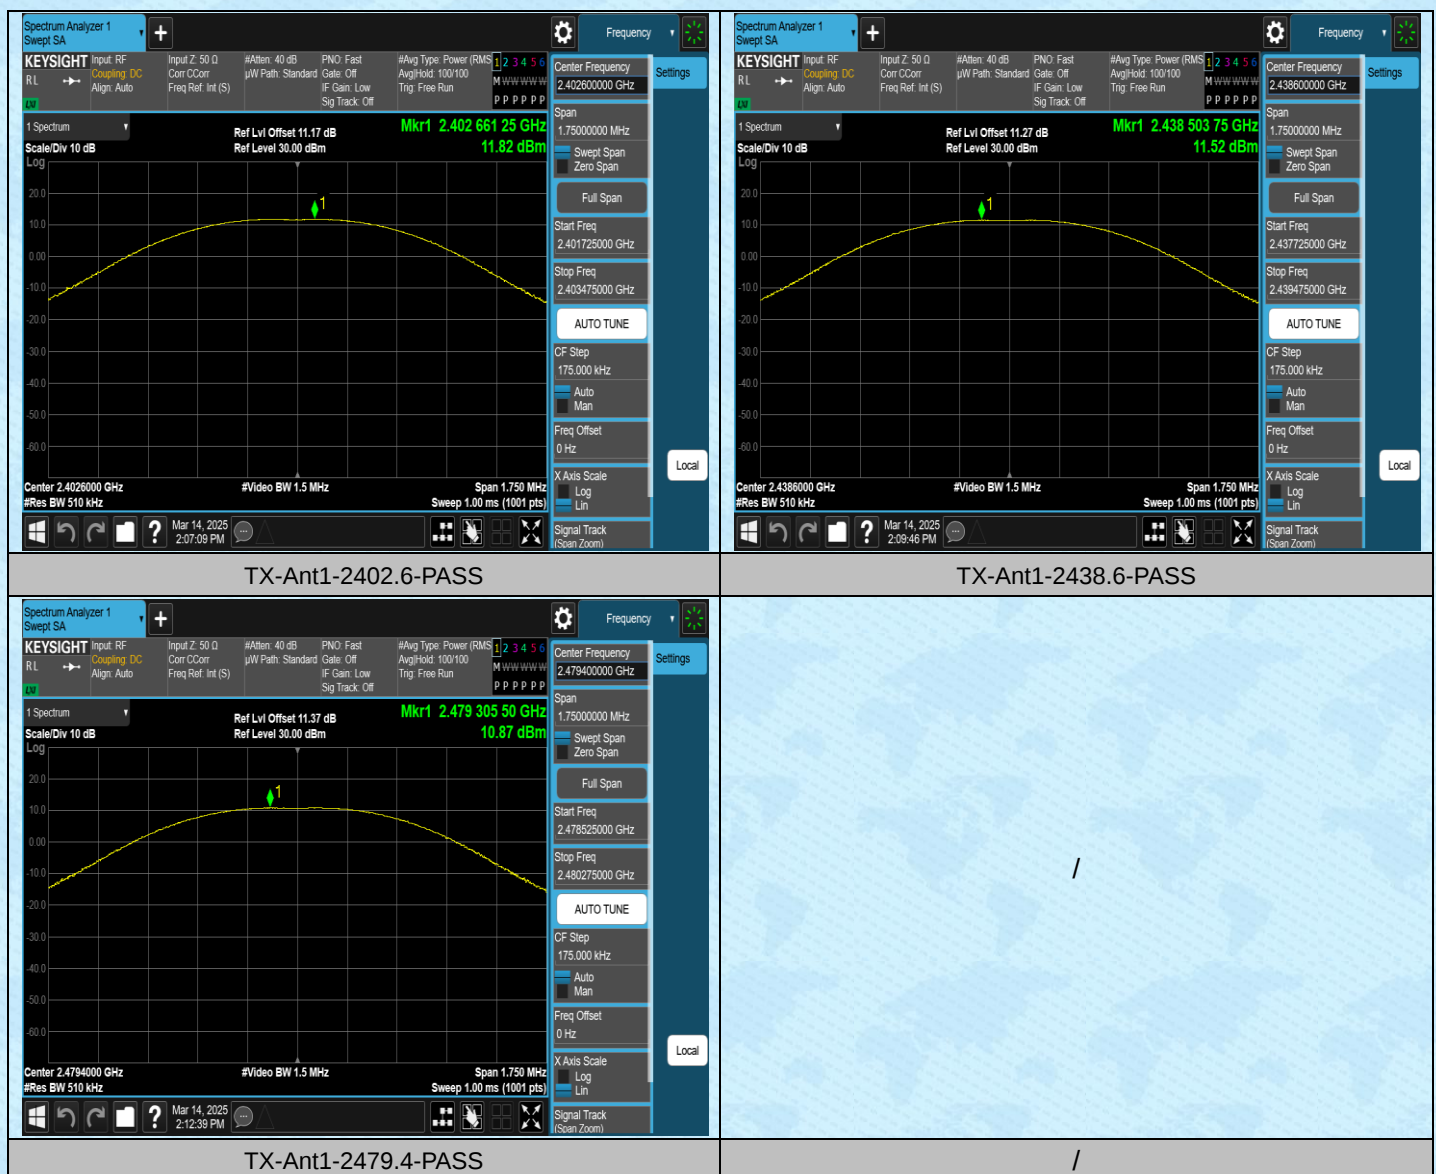

AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2402.6	1.200	0.350	PASS
TX	Ant1	Hop_2438.6	1.200	0.358	PASS
TX	Ant2	Hop_2479.4	1.200	0.348	PASS

Test Graphs




AppendixE: Time of occupancy

Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[ms]	Limit[ms]	Verdict
TX	Ant1	Hop_2402.6	0.604	70	42.28	≤400	PASS
TX	Ant1	Hop_2438.6	0.605	70	42.35	≤400	PASS
TX	Ant1	Hop_2479.4	0.611	70	42.77	≤400	PASS


Test Graphs

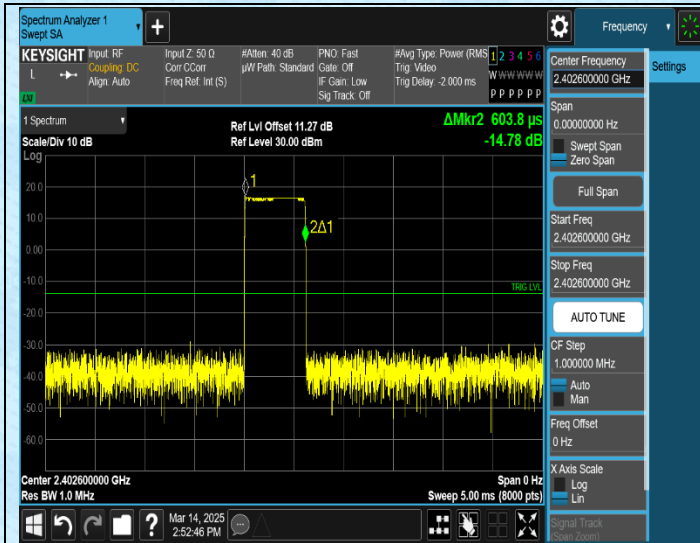


TX-Ant1-Hop_2402.6



TX-Ant1-Hop_2402.6

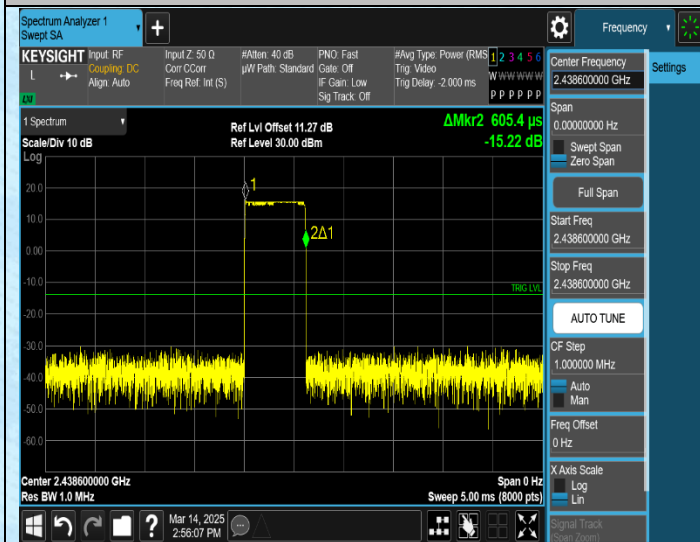


TX-Ant1-Hop_2438.6

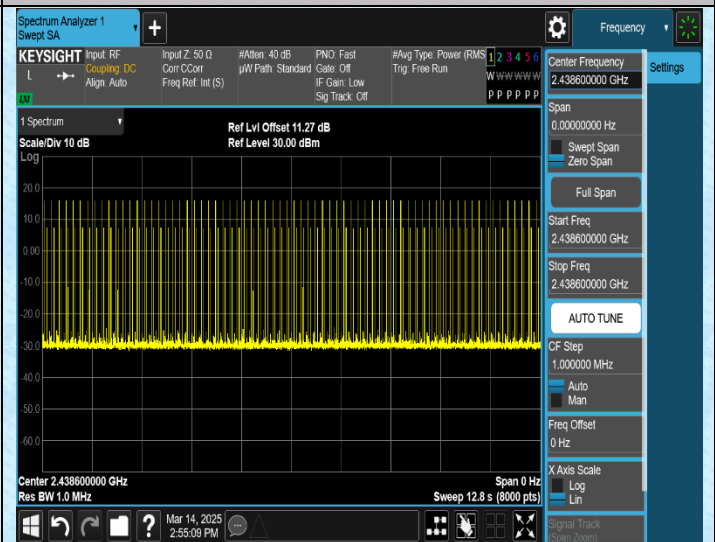

TX-Ant1-Hop_2438.6



TX-Ant1-Hop_2479.4

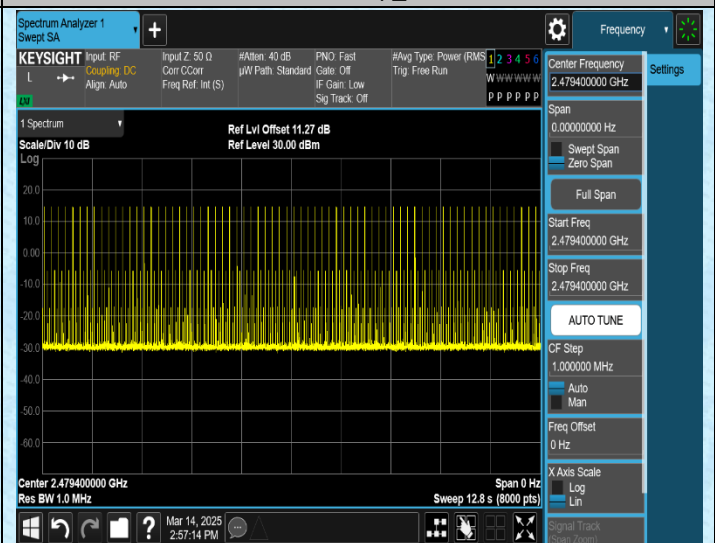

TX-Ant1-Hop_2479.4

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	32	≥15	PASS

Test Graphs


	/
TX-Ant1-Hop-PASS	/

AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2402.6	10.91	-36.71	≤-9.13	PASS
TX	Ant1	High	2479.4	10.56	-22.84	≤-9.69	PASS



Test Graphs


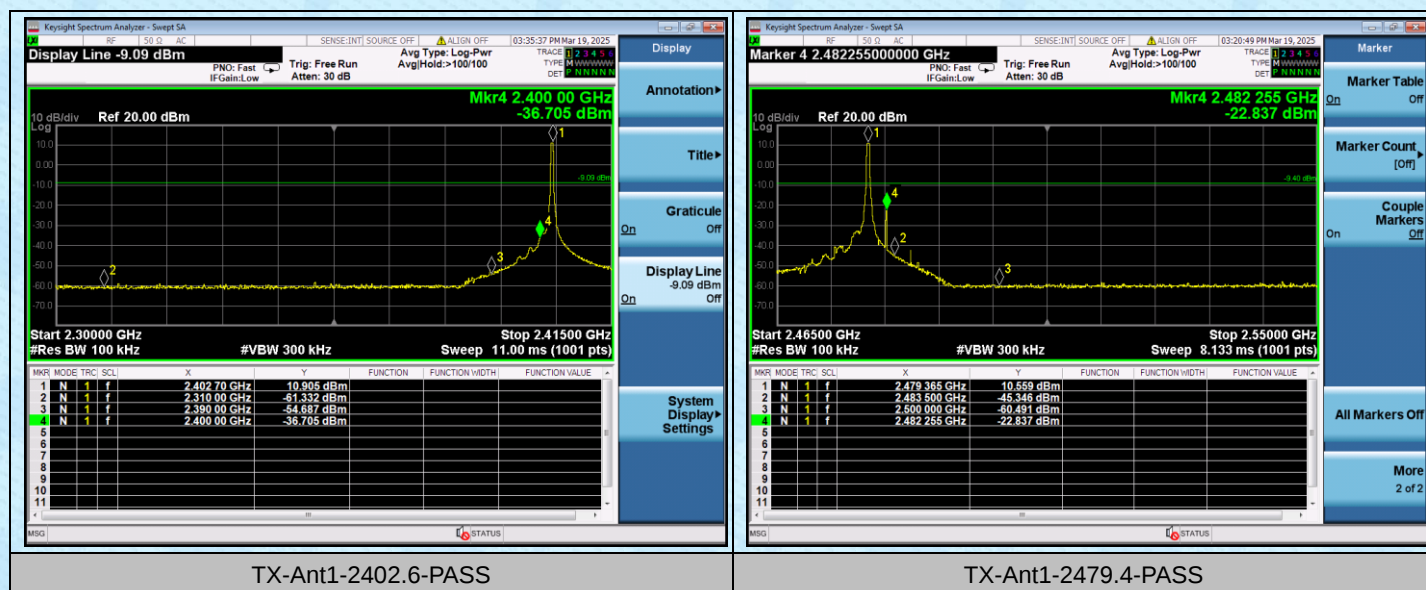


AppendixH:Conducted Spurious Emission**Test Result**

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2402.6	0~Reference	11.17	11.17	---	PASS
TX	Ant1	2402.6	30~1000	11.17	-61.2	≤ -8.83	PASS
TX	Ant1	2402.6	1000~26500	11.17	-47.14	≤ -8.83	PASS
TX	Ant1	2438.6	0~Reference	10.72	10.72	---	PASS
TX	Ant1	2438.6	30~1000	10.72	-61.77	≤ -9.28	PASS
TX	Ant1	2438.6	1000~26500	10.72	-48.53	≤ -9.28	PASS
TX	Ant1	2479.4	0~Reference	10.22	10.22	---	PASS
TX	Ant1	2479.4	30~1000	10.22	-61.82	≤ -9.78	PASS
TX	Ant1	2479.4	1000~26500	10.22	-49.27	≤ -9.78	PASS

Test Graphs

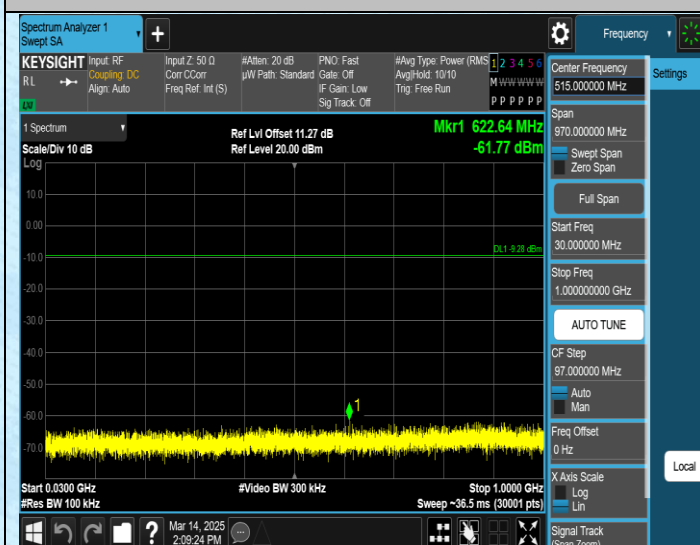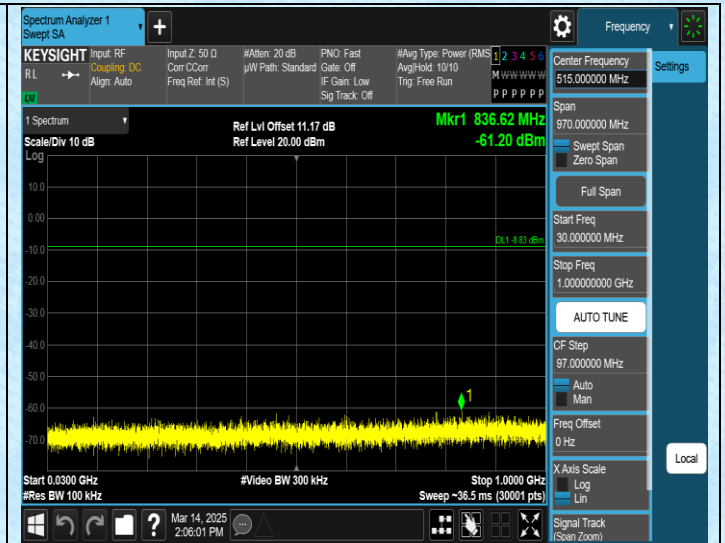

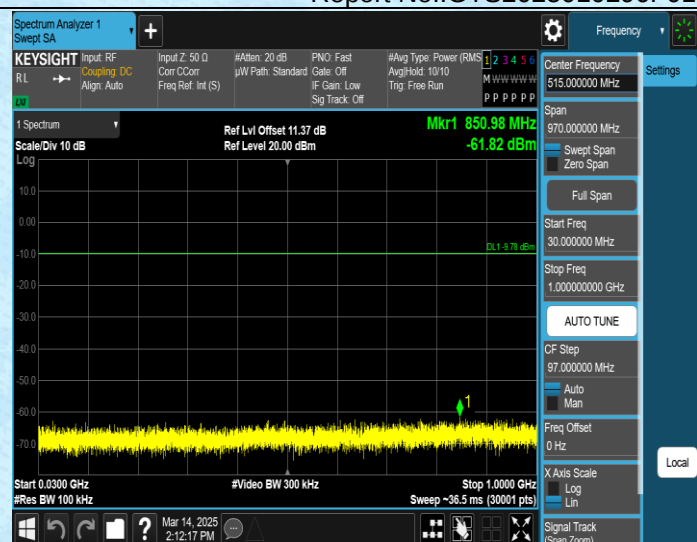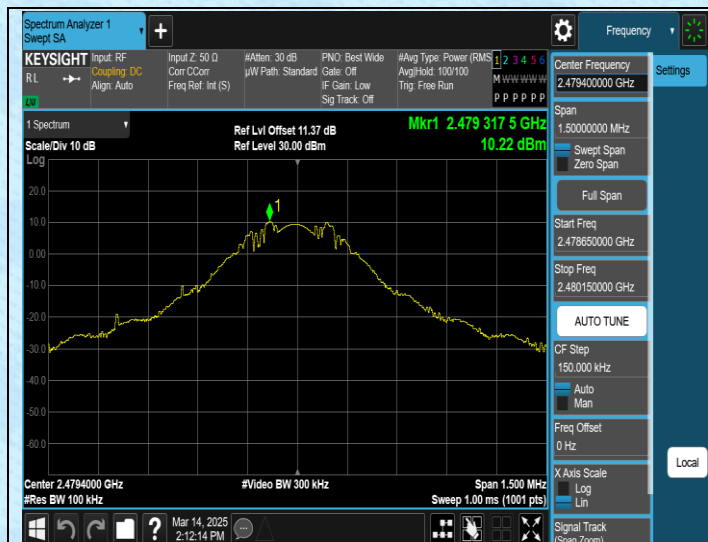

TX-Ant1-2479.4-0-Reference-PASS



TX-Ant1-2479.4-1000-26500-PASS

TX-Ant1-2479.4-30-1000-PASS




AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2402.6	2.45	13.80	17.75	---	---
TX	Ant1	2438.6	2.45	13.80	17.75	---	---
TX	Ant1	2479.4	2.45	13.80	17.75	---	---

Test Graphs

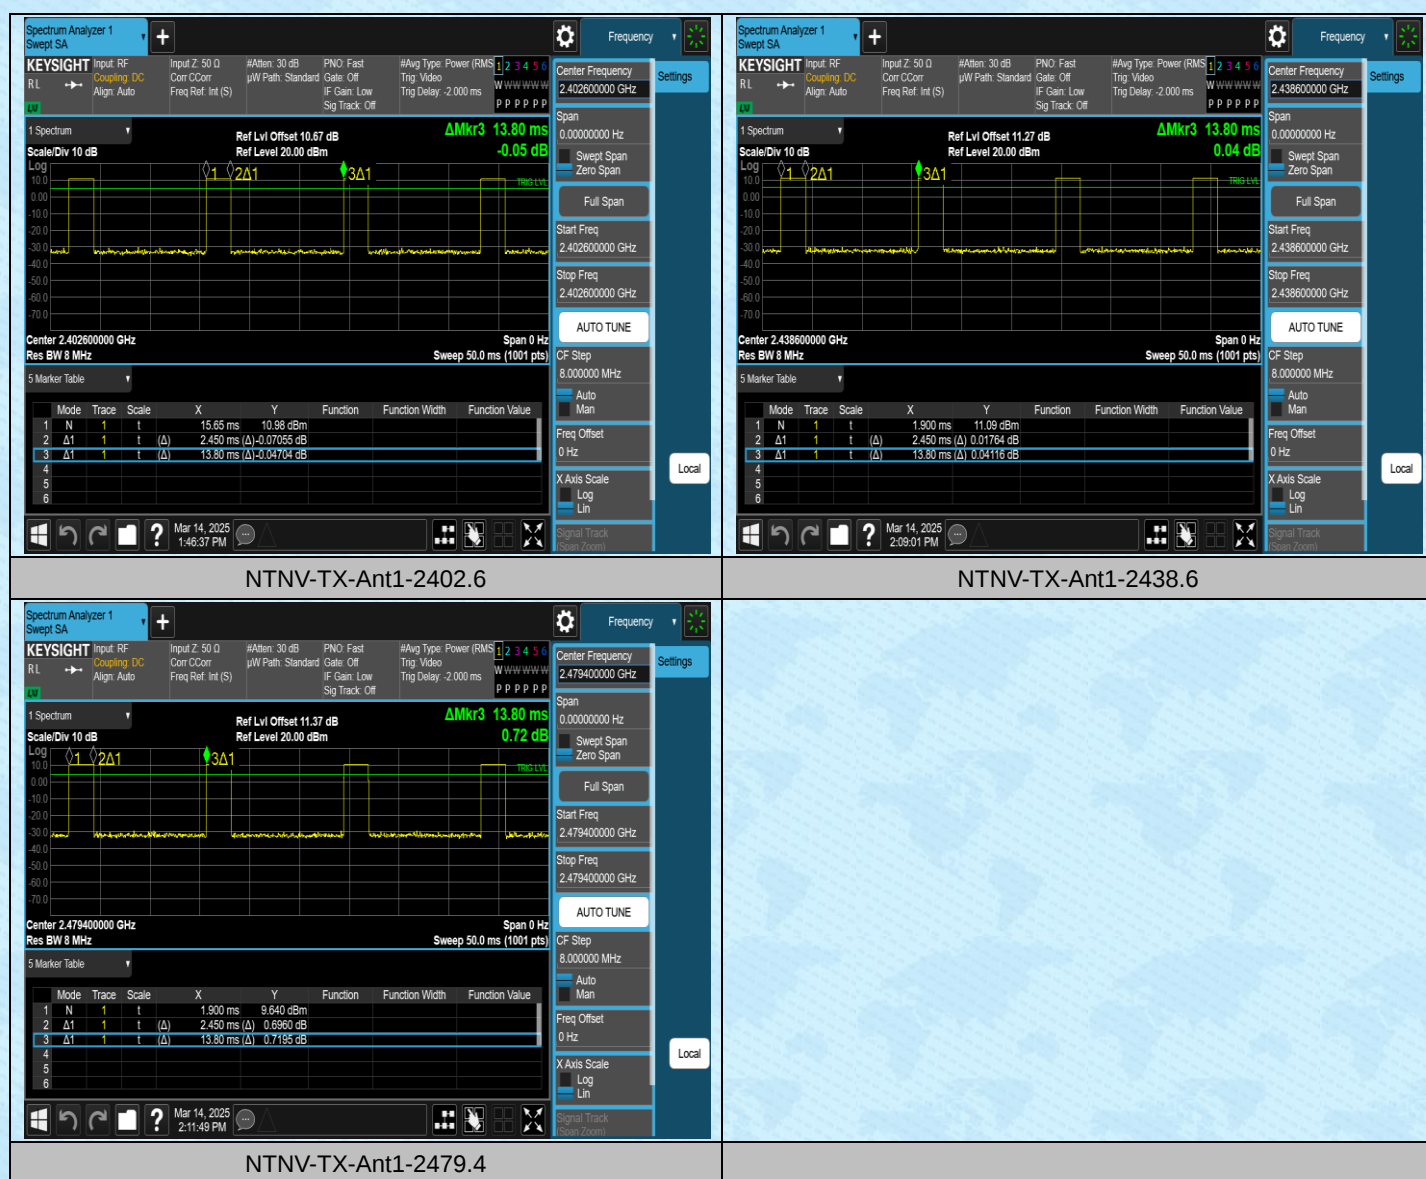

---End---