



RF TEST REPORT

Report No.: SET2019-03473

Product: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

FCC ID: SRQ-ZTEA3LITE01

Model No.: ZTE Blade A3 Lite

Marketing name : ZTE Blade A3 Lite, A3 Lite, ZTE A3 Lite, ZTE Blade A3 2019, A3 2019, ZTE Blade A3 SE

Applicant: ZTE Corporation.

Address: ZTE Plaza, Keji Road South, Shenzhen, China.

Dates of Testing: 03/10/2019 — 04/03/2019

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District Shenzhen, Guangdong 518055, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 139 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

Brand Name.....: ZTE

Trade Name: ZTE

Applicant: ZTE Corporation

Applicant Address: ZTE Plaza, Keji Road South, Shenzhen, China.

Manufacturer: ZTE Corporation

Manufacturer Address.....: ZTE Plaza, Keji Road South, Shenzhen, China.

Test Standards: 47 CFR Part 2: Frequency Allocations and Radio Treaty
Matters; General Rules and Regulations
47 CFR Part 22(H): Cellular Radiotelephone Service
47 CFR Part 24(E): Personal Communications Services
47CFR Part 27: Miscellaneous wireless communications
services

Test Result.....: PASS

Tested by: Robin Luo 2019.04.03
Robin Luo, Test Engineer

Reviewed by.....: Chris You 2019.04.03
Chris You, Senior Engineer

Approved by.....: Shuangwen Zhang 2019.04.03
Shuangwen Zhang, Manager



Table of Contents

1.	GENERAL INFORMATION	5
1.1	EUT Description.....	5
1.2	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator.....	6
1.3	Test Standards and Results.....	8
1.4	Test Configuration of Equipment Under Test	10
1.5	Measurement Results Explanation Example.....	11
1.6	Facilities and Accreditations	12
2.	47 CFR PART 2 REQUIREMENTS.....	13
2.1	Conducted RF Output Power.....	13
2.2	Peak to Average Ratio	15
2.3	99% Occupied Bandwidth and 26dB Bandwidth	17
2.4	Frequency Stability	19
2.5	Conducted Out of Band Emissions.....	22
2.6	Conducted Band Edge	25
2.7	Transmitter Radiated Power (EIRP/ERP).....	27
2.8	Radiated Out of Band Emissions	34
3.	LIST OF MEASURING EQUIPMENT	42
	APPENDIX A	43
	Conducted RF (Average) Output Power	43
	Peak To Average Ratio	55
	99% Occupied Bandwidth.....	79
	26dB Bandwidth	90
	Frequency Stability	100
	Conducted Out of Band Emissions.....	103
	Conducted Band Edge	106



Change History		
Issue	Date	Reason for change
1.0	2019.04.03	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
EUT supports Radios application	LTE Band 2/4/5/12/13/17
Frequency Range	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 5: 824.7MHz~848.3MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 13: 779.5MHz~784.5MHz LTE Band 17: 706.5MHz~713.5MHz
Maximum Output Power to Antenna	LTE Band 2: 22.92dBm LTE Band 4: 23.08dBm LTE Band 5: 24.07dBm LTE Band 12: 22.46dBm LTE Band 13: 22.87dBm LTE Band 17: 23.25 dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 4: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 5: 1.4MHz/3MHz/5MHz/10MHz LTE Band 12: 1.4MHz/3MHz/5MHz/10MHz LTE Band 13: 5MHz/10MH LTE Band 17: 5MHz/10MHz
Modulation Type	QPSK/16QAM/64QAM(downlink only)
Antenna Type	Internal Antenna
Power supply	DC 3.87V from battery DC 5V from adapter

1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Band	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
LTE Band 2	QPSK	1.4	1M09G7D	—	0.141
LTE Band 2	16QAM	1.4	1M08W7D	—	0.100
LTE Band 2	QPSK	3	2M68G7D	—	0.140
LTE Band 2	16QAM	3	2M68W7D	—	0.103
LTE Band 2	QPSK	5	4M49G7D	—	0.140
LTE Band 2	16QAM	5	4M48W7D	—	0.101
LTE Band 2	QPSK	10	8M93G7D	0.021	0.125
LTE Band 2	16QAM	10	8M92W7D	—	0.111
LTE Band 2	QPSK	15	13M4G7D	—	0.156
LTE Band 2	16QAM	15	13M4W7D	—	0.096
LTE Band 2	QPSK	20	17M9G7D	—	0.145
LTE Band 2	16QAM	20	17M9W7D	—	0.121
LTE Band 4	QPSK	1.4	1M09G7D	—	0.133
LTE Band 4	16QAM	1.4	1M09W7D	—	0.087
LTE Band 4	QPSK	3	2M68G7D	—	0.131
LTE Band 4	16QAM	3	2M68W7D	—	0.087
LTE Band 4	QPSK	5	4M49G7D	—	0.132
LTE Band 4	16QAM	5	4M48W7D	—	0.104
LTE Band 4	QPSK	10	8M93G7D	0.024	0.139
LTE Band 4	16QAM	10	8M92W7D	—	0.081
LTE Band 4	QPSK	15	13M4G7D	—	0.127
LTE Band 4	16QAM	15	13M4W7D	—	0.083
LTE Band 4	QPSK	20	17M9G7D	—	0.141
LTE Band 4	16QAM	20	17M9W7D	—	0.081

LTE Band 5	QPSK	1.4	1M09G7D	—	0.151
LTE Band 5	16QAM	1.4	1M09W7D	—	0.102
LTE Band 5	QPSK	3	2M68G7D	—	0.146
LTE Band 5	16QAM	3	2M68W7D	—	0.100
LTE Band 5	QPSK	5	4M49G7D	—	0.151
LTE Band 5	16QAM	5	4M48W7D	—	0.098
LTE Band 5	QPSK	10	8M93G7D	0.009	0.109
LTE Band 5	16QAM	10	8M92W7D	—	0.073
LTE Band 12	QPSK	1.4	1M09G7D	—	0.133
LTE Band 12	16QAM	1.4	1M09W7D	—	0.103
LTE Band 12	QPSK	3	2M68G7D	—	0.130
LTE Band 12	16QAM	3	2M68W7D	—	0.116
LTE Band 12	QPSK	5	4M49G7D	—	0.131
LTE Band 12	16QAM	5	4M48W7D	—	0.104
LTE Band 12	QPSK	10	8M92G7D	0.016	0.153
LTE Band 12	16QAM	10	8M92W7D	—	0.118
LTE Band 13	QPSK	5	4M48G7D	—	0.110
LTE Band 13	16QAM	5	4M48W7D	—	0.091
LTE Band 13	QPSK	10	8M92G7D	0.019	0.112
LTE Band 13	16QAM	10	8M91W7D	—	0.093
LTE Band 17	QPSK	5	4M49G7D	—	0.129
LTE Band 17	16QAM	5	4M49W7D	—	0.083
LTE Band 17	QPSK	10	8M92G7D	0.018	0.128
LTE Band 17	16QAM	10	8M92W7D	—	0.087

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part24, Part27 , Part90, for the EUT FCC ID Certification:

1.47 CFR Part 2, 24(E), 27(F), 27(L), 27(H),

2. ANSI/TIA/EIA-603-D-2010

3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
1	2.1046	Conducted RF Output Power	Reporting Only	PASS
2	24.232(d)	Peak to Average Ratio	< 13dB	PASS
3	27.50(b)(10) 27.50(c)(10)	Effective Radiated Power(Band 12/17/13)	EIRP<3Watt	PASS
	27.50(h)(2) 24.232(c)	Effective Radiated Power(Band 2)	EIRP<2Watt	PASS
	27.50(d)(4)	Effective Radiated Power(Band 4)	EIRP<1Watt	PASS
	22.913(a)(2)	Effective Radiated Power(Band 5)	ERP<7Watt	PASS
4	2.1049	Occupied Bandwidth	Reporting Only	PASS
5	2.1051 22.917(a) 24.238(b) 24.53(c) (2)(4) 27.53(g) 27.53(h)	Conducted Band Edge (Band 2/4/5/12/17/13)	<43+10log10(P[watt])	PASS
6	2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Conducted Spurious Emission (Band 2/4/5/12/13/17)	<43+10log10(P[watt])	PASS
7	2.1053 22.917(a) 24.238(a)	Radiated Spurious Emission (Band 2/4/5/12/13/17)	<43+10log10(P[watt])	PASS
				PASS



	27.53(g) 27.53(h)			
8	2.1055, 22.355 24.235 27.54	Frequency Stability	<2.5ppm	PASS

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	13			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	17			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2				✓				✓	✓		✓	✓	✓	✓
	4				✓				✓	✓		✓	✓	✓	✓
	5				✓				✓	✓		✓	✓	✓	✓
	12				✓				✓	✓		✓	✓	✓	✓
	13				✓				✓	✓		✓	✓	✓	✓
	17				✓				✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	5	✓	✓	✓	✓			✓	✓			✓		✓	
	12	✓	✓	✓	✓			✓	✓			✓		✓	
	13			✓	✓			✓	✓			✓		✓	
	17			✓	✓			✓	✓			✓		✓	
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	12	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	13			✓	✓			✓	✓	✓		✓	✓		✓
	17			✓	✓			✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓						✓		✓			✓	✓	✓
	4	✓						✓		✓			✓	✓	✓
	5	✓						✓		✓			✓	✓	✓
	12	✓						✓		✓			✓	✓	✓
	13			✓				✓		✓			✓	✓	✓
	17			✓				✓		✓			✓	✓	✓



Frequency Stability	2				✓			✓				✓		✓	
	4				✓			✓				✓		✓	
	5				✓			✓				✓		✓	
	12				✓			✓				✓		✓	
	13				✓			✓				✓		✓	
	17				✓			✓				✓		✓	
ERP/EIRP	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	13			✓	✓			✓	✓	✓			✓	✓	✓
	17			✓	✓			✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓
	5	✓	✓	✓	✓			✓		✓			✓	✓	✓
	12	✓	✓	✓	✓			✓		✓			✓	✓	✓
	13			✓	✓			✓		✓			✓	✓	✓
	17			✓	✓			✓		✓			✓	✓	✓
Note	1. The mark “✓” means that this configuration is chosen for testing. 2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 3. For E.R.P/E.I.R.P. measurement, the widest bandwidth and the bandwidth with the highest conducted power of each band is chosen for testing. Besides, the lowest bandwidth of each band is also measured for reporting only.														

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7 + 10 = 17 \text{ (dB)}\end{aligned}$$



1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: CN5031

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2019.

ISED Registration: 11185A-1

CAB identifier: CN0064

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Dec. 31, 2019.

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2 REQUIREMENTS

2.1 Conducted RF Output Power


2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Setup

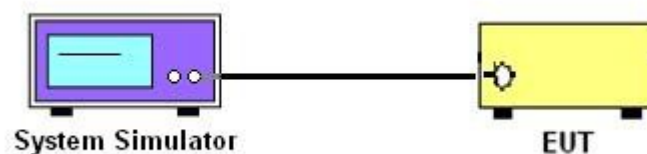

2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



2.1.5 Test Results

Please refer to Appendix A for detail

2.2 Peak to Average Ratio


2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.2.3 Test Description

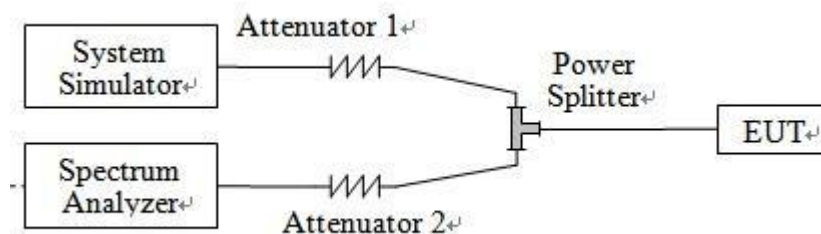

2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



2.2.5 Test Results of Peak-to-Average Ratio

Please refer to Appendix A for detail

2.3 99% Occupied Bandwidth and 26dB Bandwidth

2.3.1 Definition


According to FCC section 2.1049, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.3.3 Test Setup

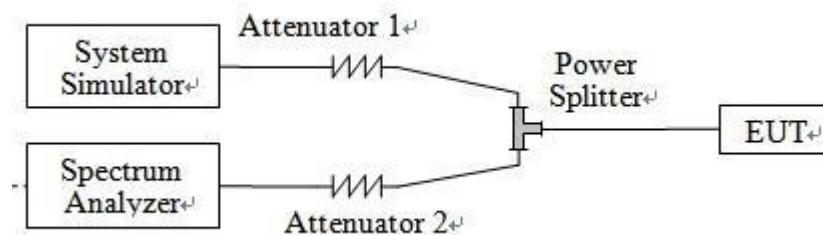

2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A for detail

2.4 Frequency Stability

2.4.1 Requirement


According to FCC requirement, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3 Test Setup

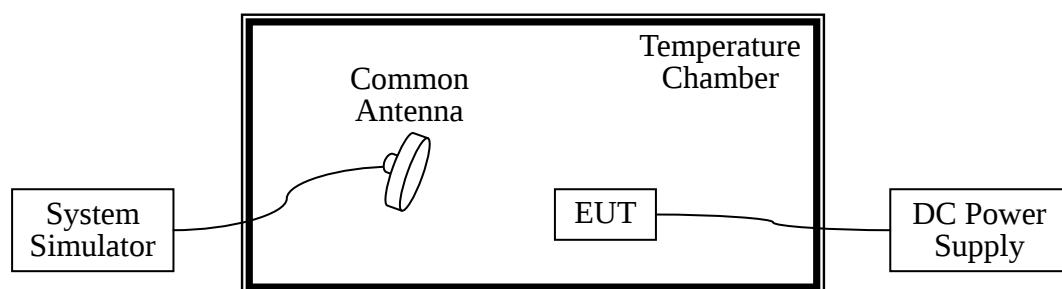

2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized



before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.



2.4.5 Test Result of Frequency Stability

Please refer to Appendix A for detail

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.5.3 Test Setup

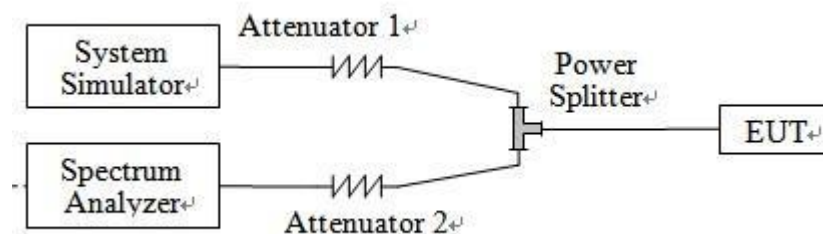

2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.

5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$
8. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



2.5.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A for detail

2.6 Conducted Band Edge

2.6.1 Description of Conducted Band Edge Measurement

22.917(a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238(a)

For operations in the 1850 -1910 MHz band, the FCC limit is $43 + 10 \log_{10}(P [\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


27.53(h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10 \log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3 Test Setup

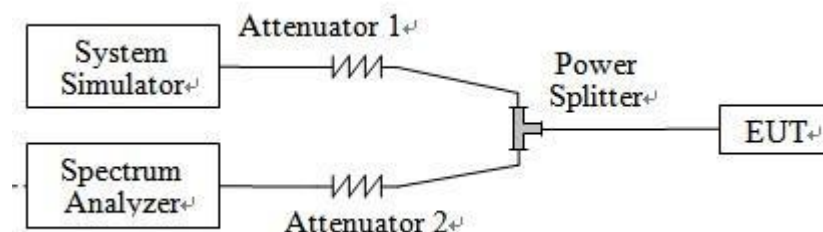

2.6.4 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

2.6.5 Test Result of Conducted Band Edge

Please refer to Appendix A for detail

2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement


Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 and 1 watt with LTE band 4

2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3 Test Setup

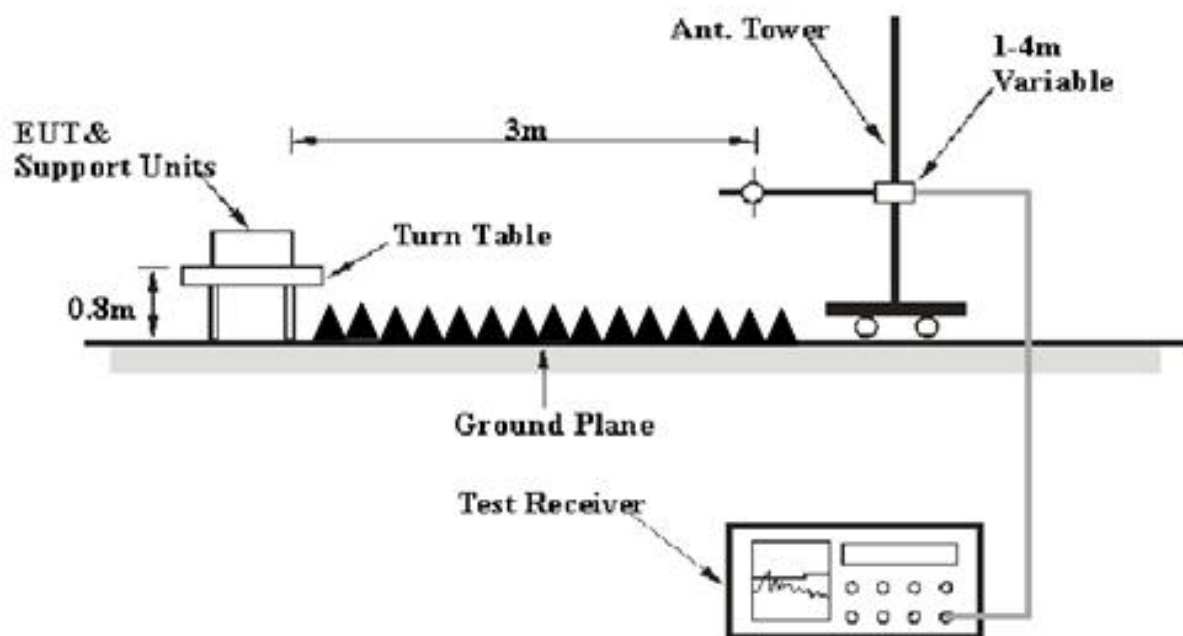

2.7.4 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

AF (dB/m): Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

2.7.5 Test Result of ERP/EIRP

1. LTE Band 2 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
2	1.4	QPSK	1	2	1850.7	21.49	PASS
2	1.4	QPSK	1	5	1880	21.47	PASS
2	1.4	QPSK	3	2	1909.3	21.50	PASS
2	1.4	16QAM	1	0	1850.7	19.90	PASS
2	1.4	16QAM	1	2	1880	19.91	PASS
2	1.4	16QAM	3	2	1909.3	19.99	PASS
2	3	QPSK	1	7	1851.5	21.45	PASS
2	3	QPSK	1	14	1880	21.43	PASS
2	3	QPSK	1	0	1908.5	21.46	PASS
2	3	16QAM	1	14	1851.5	20.05	PASS
2	3	16QAM	1	0	1880	20.09	PASS
2	3	16QAM	1	0	1908.5	20.12	PASS
2	5	QPSK	1	0	1852.5	21.44	PASS
2	5	QPSK	1	0	1880	21.38	PASS
2	5	QPSK	1	24	1907.5	21.45	PASS
2	5	16QAM	1	12	1852.5	20.03	PASS
2	5	16QAM	1	0	1880	19.96	PASS
2	5	16QAM	1	12	1907.5	20.04	PASS
2	10	QPSK	1	0	1855	20.97	PASS
2	10	QPSK	1	0	1880	20.86	PASS
2	10	QPSK	1	49	1905	20.95	PASS
2	10	16QAM	1	0	1855	20.46	PASS
2	10	16QAM	1	0	1880	20.44	PASS
2	10	16QAM	1	24	1905	20.47	PASS
2	15	QPSK	1	0	1857.5	21.83	PASS
2	15	QPSK	1	0	1880	21.93	PASS
2	15	QPSK	1	74	1902.5	21.87	PASS
2	15	16QAM	1	0	1857.5	19.71	PASS
2	15	16QAM	1	0	1880	19.74	PASS
2	15	16QAM	1	74	1902.5	19.82	PASS
2	20	QPSK	1	0	1860	21.62	PASS
2	20	QPSK	1	0	1880	21.56	PASS
2	20	QPSK	1	0	1900	21.55	PASS
2	20	16QAM	1	0	1860	20.80	PASS
2	20	16QAM	1	0	1880	20.75	PASS
2	20	16QAM	1	49	1900	20.82	PASS

2. LTE Band 4 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
4	1.4	QPSK	1	0	1710.7	21.16	PASS
4	1.4	QPSK	1	0	1732.5	21.24	PASS
4	1.4	QPSK	1	0	1754.3	21.17	PASS
4	1.4	16QAM	1	0	1710.7	19.37	PASS
4	1.4	16QAM	1	0	1732.5	19.28	PASS
4	1.4	16QAM	1	0	1754.3	19.42	PASS
4	3	QPSK	1	0	1711.5	21.15	PASS
4	3	QPSK	1	0	1732.5	21.04	PASS
4	3	QPSK	1	0	1753.5	21.16	PASS
4	3	16QAM	1	14	1711.5	19.37	PASS
4	3	16QAM	1	14	1732.5	19.42	PASS
4	3	16QAM	1	14	1753.5	19.35	PASS
4	5	QPSK	1	24	1712.5	21.21	PASS
4	5	QPSK	1	24	1732.5	21.10	PASS
4	5	QPSK	1	24	1752.5	21.16	PASS
4	5	16QAM	1	24	1712.5	20.15	PASS
4	5	16QAM	1	0	1732.5	20.08	PASS
4	5	16QAM	1	0	1752.5	20.16	PASS
4	10	QPSK	1	0	1715	21.41	PASS
4	10	QPSK	1	0	1732.5	21.39	PASS
4	10	QPSK	1	0	1750	21.44	PASS
4	10	16QAM	1	24	1715	19.08	PASS
4	10	16QAM	1	0	1732.5	19.01	PASS
4	10	16QAM	1	24	1750	19.09	PASS
4	15	QPSK	1	74	1717.5	20.99	PASS
4	15	QPSK	1	74	1732.5	20.91	PASS
4	15	QPSK	1	0	1747.5	21.05	PASS
4	15	16QAM	1	74	1717.5	19.12	PASS
4	15	16QAM	1	0	1732.5	19.17	PASS
4	15	16QAM	1	0	1747.5	19.05	PASS
4	20	QPSK	1	0	1720	21.39	PASS
4	20	QPSK	1	0	1732.5	21.46	PASS
4	20	QPSK	1	0	1745	21.48	PASS
4	20	16QAM	1	0	1720	19.09	PASS
4	20	16QAM	1	0	1732.5	19.02	PASS
4	20	16QAM	1	0	1745	19.10	PASS

3. LTE Band 5 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
5	1.4	QPSK	1	5	824.7	21.74	PASS
5	1.4	QPSK	1	2	836.5	21.78	PASS
5	1.4	QPSK	1	5	848.3	21.77	PASS
5	1.4	16QAM	1	5	824.7	20.00	PASS
5	1.4	16QAM	1	2	836.5	19.93	PASS
5	1.4	16QAM	1	0	848.3	20.07	PASS
5	3	QPSK	1	5	825.5	21.65	PASS
5	3	QPSK	1	5	836.5	21.56	PASS
5	3	QPSK	1	5	848.3	21.61	PASS
5	3	16QAM	1	5	825.5	20.00	PASS
5	3	16QAM	1	14	836.5	19.93	PASS
5	3	16QAM	1	5	848.3	20.01	PASS
5	5	QPSK	1	14	826.5	21.74	PASS
5	5	QPSK	1	14	836.5	21.78	PASS
5	5	QPSK	1	14	846.5	21.73	PASS
5	5	16QAM	1	12	826.5	19.80	PASS
5	5	16QAM	1	24	836.5	19.93	PASS
5	5	16QAM	1	0	846.5	19.87	PASS
5	10	QPSK	1	24	829	20.37	PASS
5	10	QPSK	1	24	836.5	20.32	PASS
5	10	QPSK	1	24	844	20.23	PASS
5	10	16QAM	1	24	829	18.52	PASS
5	10	16QAM	1	49	836.5	18.65	PASS
5	10	16QAM	1	24	844	18.63	PASS

4. LTE Band 12 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
12	1.4	QPSK	3	0	699.7	21.16	PASS
12	1.4	QPSK	3	2	707.5	21.24	PASS
12	1.4	QPSK	1	2	715.3	21.17	PASS
12	1.4	16QAM	3	2	699.7	20.07	PASS
12	1.4	16QAM	3	2	707.5	20.11	PASS
12	1.4	16QAM	3	2	715.3	20.12	PASS
12	3	QPSK	1	0	700.5	21.10	PASS
12	3	QPSK	1	0	707.5	21.14	PASS
12	3	QPSK	1	7	714.5	21.11	PASS
12	3	16QAM	1	14	700.5	20.62	PASS
12	3	16QAM	1	14	707.5	20.54	PASS
12	3	16QAM	1	14	714.5	20.65	PASS
12	5	QPSK	1	12	701.5	21.16	PASS
12	5	QPSK	1	24	707.5	21.10	PASS
12	5	QPSK	1	24	713.5	21.18	PASS
12	5	16QAM	1	24	701.5	20.02	PASS
12	5	16QAM	1	0	707.5	20.15	PASS
12	5	16QAM	1	0	713.5	20.08	PASS
12	10	QPSK	1	24	704	21.77	PASS
12	10	QPSK	1	0	707.5	21.85	PASS
12	10	QPSK	1	24	711	21.74	PASS
12	10	16QAM	1	24	704	20.68	PASS
12	10	16QAM	1	0	707.5	20.71	PASS
12	10	16QAM	1	24	711	20.67	PASS

5. LTE Band 13 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
13	5	QPSK	1	0	779.5	20.40	PASS
13	5	QPSK	1	0	782	20.43	PASS
13	5	QPSK	1	0	784.5	20.42	PASS
13	5	16QAM	1	24	779.5	19.60	PASS
13	5	16QAM	1	24	782	19.56	PASS
13	5	16QAM	1	24	784.5	19.58	PASS
13	10	QPSK	1	49	782	20.51	PASS
13	10	QPSK	1	49	782	20.46	PASS
13	10	QPSK	1	49	782	20.49	PASS
13	10	16QAM	1	0	782	19.67	PASS
13	10	16QAM	1	0	782	19.64	PASS
13	10	16QAM	1	0	782	19.66	PASS

6. LTE Band 17 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
17	5	QPSK	1	24	706.5	21.01	PASS
17	5	QPSK	1	24	710	21.05	PASS
17	5	QPSK	1	12	713.5	21.11	PASS
17	5	16QAM	1	24	706.5	19.17	PASS
17	5	16QAM	1	24	710	19.10	PASS
17	5	16QAM	1	12	713.5	19.15	PASS
17	10	QPSK	1	49	709	21.08	PASS
17	10	QPSK	1	49	710	21.03	PASS
17	10	QPSK	1	49	711	20.98	PASS
17	10	16QAM	1	24	709	19.39	PASS
17	10	16QAM	1	49	710	19.32	PASS
17	10	16QAM	1	24	711	19.30	PASS

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

The radiated spurious emission was measured by substitution method according to ANSI / TIA /EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

2.8.2 Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.8.3 Test Setup


For radiated emissions from 9kHz to 30MHz

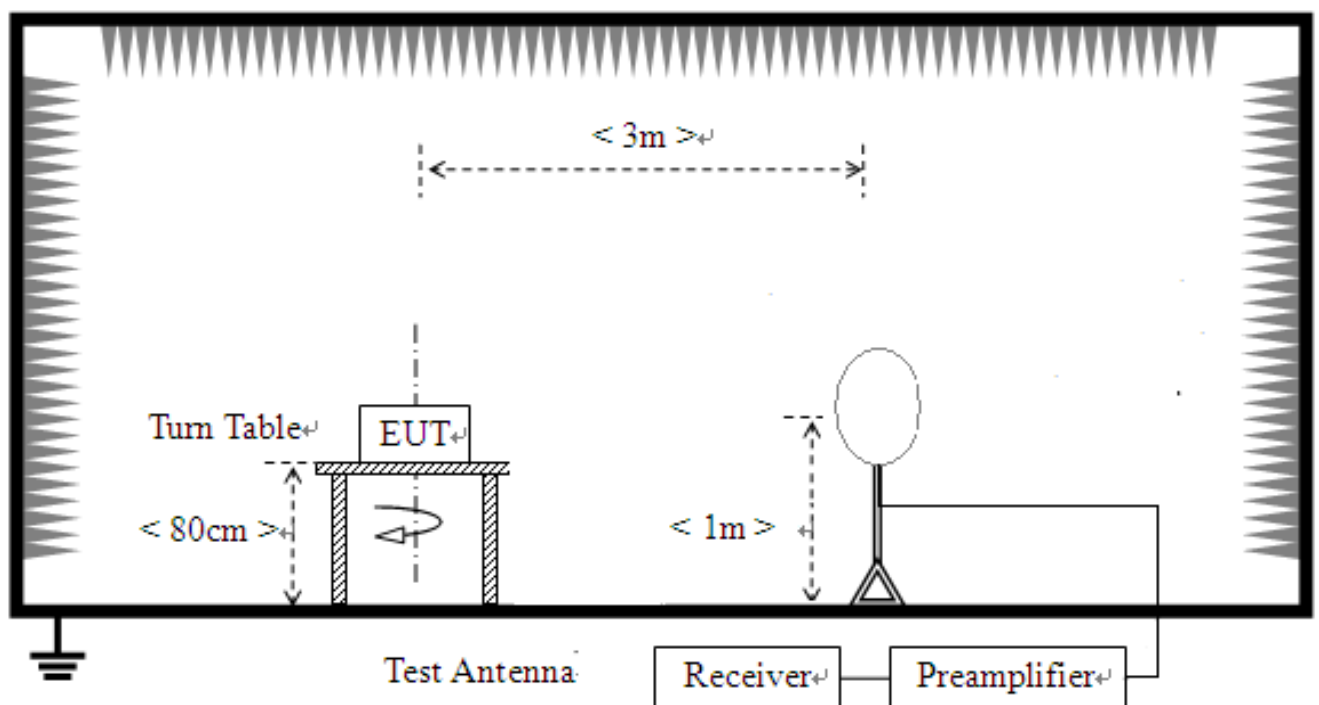

For radiated emissions from 30MHz to 1GHz

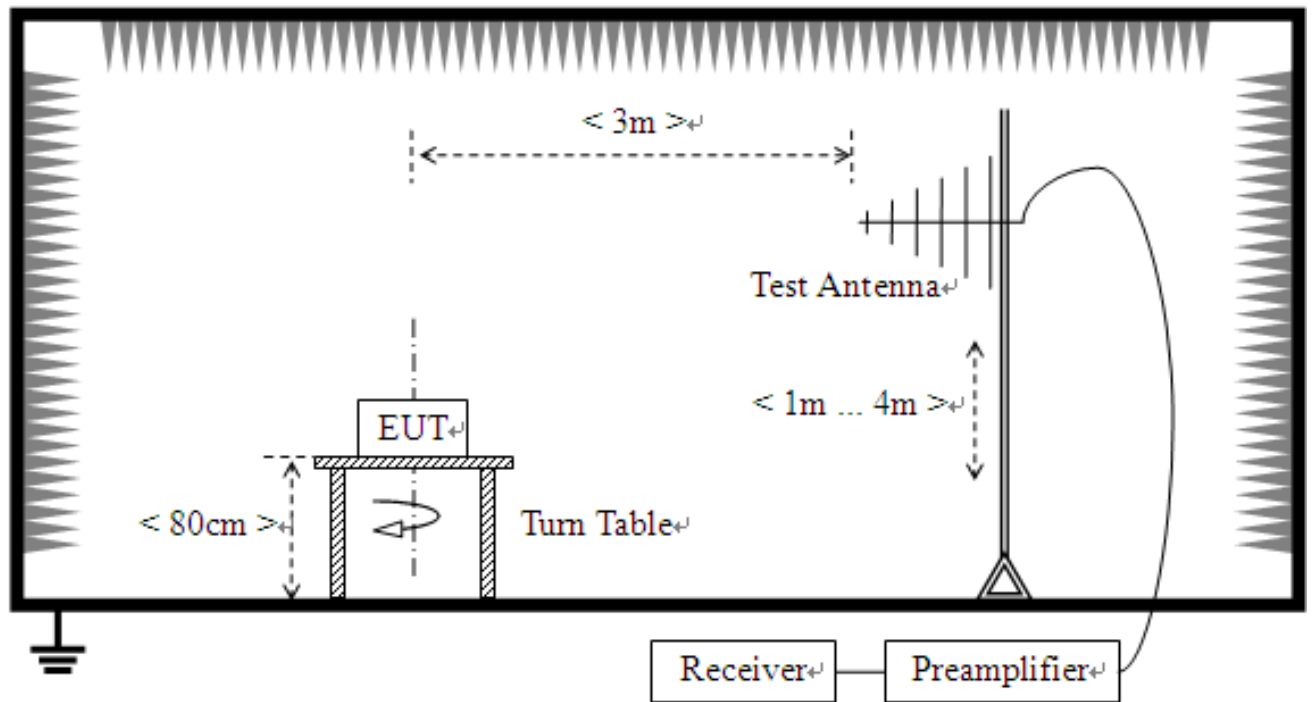

For radiated emissions above 1GHz

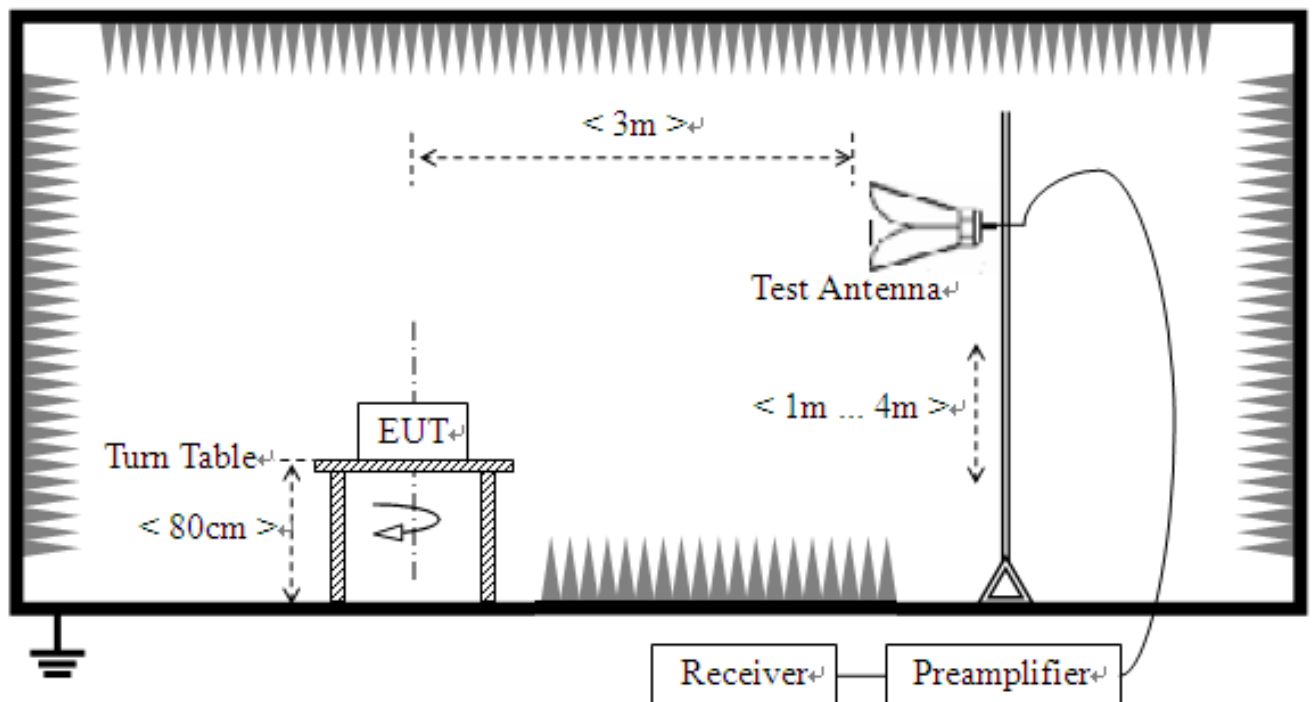

2.8.4 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P (Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

<For Band 7>

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P (Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

11. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.
12. The spectrum is measured from 9 KHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.



13. The maximum RB configurations of the Radiated Spurious Emissions as RB Size 1,
RB Offset 0

2.8.5 Test Result (Plots) of Radiated Spurious Emission

Note: 1. within 30MHz-1GHz were found more than 20dB below limit line

Note: 2. Absolute Level=Reading Level + Factor

LTE Band 2 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	66.8969	-94.35	-75.76	-13.00	62.76	18.59	Horizontal
2	190.210	-98.66	-76.72	-13.00	63.72	21.94	Horizontal
3	3210.10	-53.54	-44.69	-13.00	31.69	8.85	Horizontal
4	4002.50	-54.51	-45.61	-13.00	32.61	8.90	Horizontal
5	6552.27	-54.84	-40.03	-13.00	27.03	14.81	Horizontal
6	13995.9	-58.19	-34.36	-13.00	21.36	23.83	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	63.9840	-94.07	-74.29	-13.00	61.29	19.78	Vertical
2	93.1131	-98.08	-75.08	-13.00	62.08	23.00	Vertical
3	1312.15	-52.71	-55.82	-13.00	42.82	-3.11	Vertical
4	3204.10	-55.48	-46.40	-13.00	33.40	9.08	Vertical
5	5791.39	-55.19	-43.87	-13.00	30.87	11.32	Vertical
6	12837.4	-56.04	-36.25	-13.00	23.25	19.79	Vertical

LTE Band 4 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	65.9259	-93.53	-74.94	-13.00	61.94	18.59	Horizontal
2	191.181	-97.41	-75.43	-13.00	62.43	21.98	Horizontal
3	3214.60	-54.90	-46.14	-13.00	33.14	8.76	Horizontal
4	4037.01	-54.65	-45.90	-13.00	32.90	8.75	Horizontal
5	6120.06	-55.27	-41.17	-13.00	28.17	14.10	Horizontal
6	14626.3	-59.04	-35.56	-13.00	22.56	23.48	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	65.9259	-92.66	-72.67	-13.00	59.67	19.99	Vertical
2	103.793	-99.51	-76.26	-13.00	63.26	23.25	Vertical
3	190.210	-98.67	-79.71	-13.00	66.71	18.96	Vertical
4	3223.61	-54.99	-46.39	-13.00	33.39	8.60	Vertical
5	3787.89	-53.99	-45.38	-13.00	32.38	8.61	Vertical
6	6576.28	-55.63	-41.59	-13.00	28.59	14.04	Vertical

LTE Band 5 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	191.181	-99.47	-77.49	-13.00	64.49	21.98	Horizontal
2	1906.45	-52.77	-53.33	-13.00	40.33	-0.56	Horizontal
3	3244.62	-52.87	-44.71	-13.00	31.71	8.16	Horizontal
4	4040.02	-55.04	-46.31	-13.00	33.31	8.73	Horizontal
5	6498.24	-55.27	-40.30	-13.00	27.30	14.97	Horizontal
6	14074.0	-57.39	-35.10	-13.00	22.10	22.29	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	64.9550	-92.58	-72.70	-13.00	59.70	19.88	Vertical
2	93.1131	-99.15	-76.15	-13.00	63.15	23.00	Vertical
3	188.268	-98.56	-79.61	-13.00	66.61	18.95	Vertical
4	3198.09	-55.03	-45.90	-13.00	32.90	9.13	Vertical
5	6456.22	-54.84	-40.71	-13.00	27.71	14.13	Vertical
6	12585.2	-57.22	-37.18	-13.00	24.18	20.04	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 12 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	66.8969	-94.30	-75.71	-13.00	62.71	18.59	Horizontal
2	190.210	-98.41	-76.47	-13.00	63.47	21.94	Horizontal
3	494.124	-103.95	-73.66	-13.00	60.66	30.29	Horizontal
4	3181.59	-54.56	-45.93	-13.00	32.93	8.63	Horizontal
5	3807.40	-54.38	-45.59	-13.00	32.59	8.79	Horizontal
6	6318.15	-55.47	-40.91	-13.00	27.91	14.56	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	66.8969	-93.41	-73.32	-13.00	60.32	20.09	Vertical
2	189.239	-99.10	-80.14	-13.00	67.14	18.96	Vertical
3	1276.13	-51.82	-55.23	-13.00	42.23	-3.41	Vertical
4	2463.73	-53.65	-50.02	-13.00	37.02	3.63	Vertical
5	3187.59	-55.21	-46.34	-13.00	33.34	8.87	Vertical
6	6498.24	-56.09	-42.09	-13.00	29.09	14.00	Vertical

LTE Band 13 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	61.0711	-96.51	-77.89	-13.00	64.89	18.62	Horizontal
2	76.6066	-93.88	-75.34	-13.00	62.34	18.54	Horizontal
3	189.239	-99.98	-78.09	-13.00	65.09	21.89	Horizontal
4	3211.60	-55.35	-46.53	-13.00	33.53	8.82	Horizontal
5	3888.44	-54.14	-45.78	-13.00	32.78	8.36	Horizontal
6	6132.06	-55.59	-41.48	-13.00	28.48	14.11	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	69.8098	-95.13	-74.73	-13.00	61.73	20.40	Vertical
2	85.3453	-98.44	-76.28	-13.00	63.28	22.16	Vertical
3	189.239	-98.15	-79.19	-13.00	66.19	18.96	Vertical
4	1807.40	-51.95	-53.27	-13.00	40.27	-1.32	Vertical
5	3240.12	-54.48	-46.29	-13.00	33.29	8.19	Vertical
6	6732.36	-54.18	-40.38	-13.00	27.38	13.80	Vertical

LTE Band 17 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	62.0420	-97.84	-79.22	-13.00	66.22	18.62	Horizontal
2	90.2002	-99.50	-80.89	-13.00	67.89	18.61	Horizontal
3	191.181	-98.76	-76.78	-13.00	63.78	21.98	Horizontal
4	2181.59	-54.68	-52.41	-13.00	39.41	2.27	Horizontal
5	3198.09	-55.10	-46.09	-13.00	33.09	9.01	Horizontal
6	6504.25	-55.52	-40.55	-13.00	27.55	14.97	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	66.8969	-93.60	-73.51	-13.00	60.51	20.09	Vertical
2	88.2583	-99.08	-76.57	-13.00	63.57	22.51	Vertical
3	1289.14	-53.54	-56.67	-13.00	43.67	-3.13	Vertical
4	3184.59	-55.22	-46.42	-13.00	33.42	8.80	Vertical
5	3843.42	-54.33	-45.87	-13.00	32.87	8.46	Vertical
6	6300.15	-54.98	-40.98	-13.00	27.98	14.00	Vertical



3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB26	A0304218	2018.05.25	2019.05.24	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2018.05.25	2019.05.24	Radiation
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2018.05.25	2019.05.24	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101341	2018.05.25	2019.05.24	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101339	2018.05.25	2019.05.24	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2018.05.25	2019.05.24	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100148	2018.05.25	2019.05.24	Radiation
Horn antenna (18GHz~26.5GHz)	R&S	HM118	101286	2018.05.25	2019.05.24	Radiation
Horn antenna (18GHz~26.5GHz)	R&S	HM118	101284	2018.05.25	2019.05.24	Radiation
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2018.05.25	2019.05.24	Radiation
Ampilier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2018.05.25	2019.05.24	Radiation
Ampilier 18G~40GHz	R&S	JS42-18002600-2 8-5A	12111.0980.00	2018.05.25	2019.05.24	Radiation
Spectrum Analyzer	Keysight	N9030A	A160702554	2018.10.15	2019.10.14	Conducted
LISN	ROHDE&SCH WARZ	ESH2-Z5	A0304221	2018.05.25	2019.05.24	Conducted
Test Receiver	R&S	ESCS30	A0304260	2018.05.25	2019.05.24	Conducted
Cable	SUNHNER	SUCOFLEX 100	/	2018.05.25	2019.05.24	Radiation
Cable	SUNHNER	SUCOFLEX 104	/	2018.05.25	2019.05.24	Radiation
Temperature chamber	espec	SU-642	93008519	2017.08.25	2018.08.24	Conducted
Wideband Radio Communication tester	R&S	CMW500	149332	2018.05.04	2019.05.03	Conducted
Power Supply	R&S	NGMO1	101037	2018.05.04	2019.05.03	Conducted

The calibration interval was one year.

APPENDIX A

Conducted RF Output Power

Test Result and Data

1. LTE Band 2 Conducted Power Test Verdict:

LTE FDD Band 2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	21.51	21.74	21.36
		1	3	21.38	21.64	21.24
		1	5	21.4	21.63	21.23
		3	0	20.68	20.92	20.51
		3	2	20.69	20.91	20.48
		3	3	20.7	20.93	20.49
		6	0	20.56	20.8	20.38
	16QAM	1	0	20.38	20.59	20.25
		1	3	20.23	20.48	20.12
		1	5	20.36	20.56	20.24
		3	0	19.45	19.67	19.43
		3	2	19.53	19.77	19.46
		3	3	19.55	19.78	19.4
		6	0	19.43	19.68	19.25
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
3MHz	QPSK	1	0	21.66	21.85	21.47
		1	7	21.53	21.75	21.35
		1	14	21.55	21.74	21.34
		8	0	20.83	21.03	20.62
		8	4	20.84	21.02	20.59
		8	7	20.85	21.04	20.6
		15	0	20.71	20.91	20.49
	16QAM	1	0	20.53	20.7	20.36
		1	7	20.38	20.59	20.23
		1	14	20.51	20.67	20.35
		8	0	19.6	19.78	19.54
		8	4	19.68	19.88	19.57

		8	7	19.7	19.89	19.51
		15	0	19.58	19.79	19.36
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	21.76	21.94	21.58
		1	13	21.63	21.84	21.46
		1	24	21.65	21.83	21.45
		12	0	20.93	21.12	20.73
		12	6	20.94	21.11	20.7
		12	13	20.95	21.13	20.71
		25	0	20.81	21	20.6
	16QAM	1	0	20.63	20.79	20.47
		1	13	20.48	20.68	20.34
		1	24	20.61	20.76	20.46
		12	0	19.7	19.87	19.65
		12	6	19.78	19.97	19.68
		12	13	19.8	19.98	19.62
		25	0	19.68	19.88	19.47
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	22.01	22.15	21.96
		1	25	21.88	22.05	21.84
		1	49	21.9	22.04	21.83
		25	0	21.18	21.33	21.11
		25	13	21.19	21.32	21.08
		25	25	21.2	21.34	21.09
		50	0	21.06	21.21	20.98
	16QAM	1	0	20.88	21	20.85
		1	25	20.73	20.89	20.72
		1	49	20.86	20.97	20.84
		25	0	19.95	20.08	20.03
		25	13	20.03	20.18	20.06
		25	25	20.05	20.19	20
		50	0	19.93	20.09	19.85

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	22.33	22.51	22.18
		1	38	22.2	22.41	22.06
		1	74	22.22	22.4	22.05
		36	0	21.5	21.69	21.33
		36	18	21.51	21.68	21.3
		36	39	21.52	21.7	21.31
		75	0	21.38	21.57	21.2
	16QAM	1	0	21.2	21.36	21.07
		1	38	21.05	21.25	20.94
		1	74	21.18	21.33	21.06
		36	0	20.27	20.44	20.25
		36	18	20.35	20.54	20.28
		36	39	20.37	20.55	20.22
		75	0	20.25	20.45	20.07
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	22.78	22.92	22.65
		1	50	22.65	22.82	22.53
		1	99	22.67	22.81	22.52
		50	0	21.95	22.1	21.8
		50	25	21.96	22.09	21.77
		50	50	21.97	22.11	21.78
		100	0	21.83	21.98	21.67
	16QAM	1	0	21.65	21.77	21.54
		1	50	21.5	21.66	21.41
		1	99	21.63	21.74	21.53
		50	0	20.72	20.85	20.72
		50	25	20.8	20.95	20.75
		50	50	20.82	20.96	20.69
		100	0	20.7	20.86	20.54

2. LTE Band 4 Conducted Power Test Verdict:

LTE FDD Band 4				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	22.1	22.35	22.03
		1	3	21.97	22.25	21.91
		1	5	21.99	22.24	21.9
		3	0	21.27	21.53	21.18
		3	2	21.28	21.52	21.15
		3	3	21.29	21.54	21.16
		6	0	21.15	21.41	21.05
	16QAM	1	0	20.97	21.2	20.92
		1	3	20.82	21.09	20.79
		1	5	20.95	21.17	20.91
		3	0	20.04	20.28	20.1
		3	2	20.12	20.38	20.13
		3	3	20.14	20.39	20.07
		6	0	20.02	20.29	19.92
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0	22.23	22.42	22.14
		1	7	22.1	22.32	22.02
		1	14	22.12	22.31	22.01
		8	0	21.4	21.6	21.29
		8	4	21.41	21.59	21.26
		8	7	21.42	21.61	21.27
		15	0	21.28	21.48	21.16
	16QAM	1	0	21.1	21.27	21.03
		1	7	20.95	21.16	20.9
		1	14	21.08	21.24	21.02
		8	0	20.17	20.35	20.21
		8	4	20.25	20.45	20.24
		8	7	20.27	20.46	20.18
		15	0	20.15	20.36	20.03

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	22.39	22.58	22.18
		1	13	22.26	22.48	22.06
		1	24	22.28	22.47	22.05
		12	0	21.56	21.76	21.33
		12	6	21.57	21.75	21.3
		12	13	21.58	21.77	21.31
		25	0	21.44	21.64	21.2
	16QAM	1	0	21.26	21.43	21.07
		1	13	21.11	21.32	20.94
		1	24	21.24	21.4	21.06
		12	0	20.33	20.51	20.25
		12	6	20.41	20.61	20.28
		12	13	20.43	20.62	20.22
		25	0	20.31	20.52	20.07
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	22.71	22.78	22.63
		1	25	22.58	22.68	22.51
		1	49	22.6	22.67	22.5
		25	0	21.88	21.96	21.78
		25	13	21.89	21.95	21.75
		25	25	21.9	21.97	21.76
		50	0	21.76	21.84	21.65
	16QAM	1	0	21.58	21.63	21.52
		1	25	21.43	21.52	21.39
		1	49	21.56	21.6	21.51
		25	0	20.65	20.71	20.7
		25	13	20.73	20.81	20.73
		25	25	20.75	20.82	20.67
		50	0	20.63	20.72	20.52

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	22.96	23.02	22.87
		1	38	22.83	22.92	22.75
		1	74	22.85	22.91	22.74
		36	0	22.13	22.2	22.02
		36	18	22.14	22.19	21.99
		36	39	22.15	22.21	22
		75	0	22.01	22.08	21.89
	16QAM	1	0	21.83	21.87	21.76
		1	38	21.68	21.76	21.63
		1	74	21.81	21.84	21.75
		36	0	20.9	20.95	20.94
		36	18	20.98	21.05	20.97
		36	39	21	21.06	20.91
		75	0	20.88	20.96	20.76
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0	23.05	23.2	23.08
		1	50	22.92	23.1	22.96
		1	99	22.94	23.09	22.95
		50	0	21.33	21.28	21.34
		50	25	21.25	21.18	21.11
		50	50	21.21	21.03	21.08
		100	0	21.21	21.16	21.21
	16QAM	1	0	21.92	22.05	21.97
		1	50	21.77	21.94	21.84
		1	99	21.9	22.02	21.96
		50	0	20.99	21.13	21.15
		50	25	21.07	21.23	21.18
		50	50	21.09	21.24	21.12
		100	0	20.97	21.14	20.97

3. LTE Band 5 Conducted Power Test Verdict:

LTE FDD Band 5				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	23.18	23.31	23.06
		1	3	23.05	23.2	22.95
		1	5	23.03	23.16	22.92
		3	0	22.37	22.45	22.2
		3	2	22.33	22.48	22.24
		3	3	22.34	22.47	22.19
		6	0	22.19	22.28	22.09
	16QAM	1	0	22.05	22.19	21.91
		1	3	21.94	22.04	21.8
		1	5	22.03	22.15	21.89
		3	0	21.14	21.27	21.08
		3	2	21.17	21.36	21.14
		3	3	21.23	21.38	21.05
		6	0	21.09	21.2	20.84
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	23.43	23.61	23.28
		1	7	23.28	23.47	23.14
		1	14	23.32	23.48	23.13
		8	0	22.61	22.76	22.45
		8	4	22.62	22.79	22.47
		8	7	22.63	22.77	22.4
		15	0	22.45	22.64	22.29
	16QAM	1	0	22.31	22.48	22.11
		1	7	22.16	22.33	21.96
		1	14	22.28	22.42	22.08
		8	0	21.39	21.54	21.3
		8	4	21.45	21.66	21.39
		8	7	21.5	21.64	21.28
		15	0	21.35	21.48	21.04

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	23.61	23.84	23.58
		1	13	23.46	23.69	23.47
		1	24	23.48	23.72	23.43
		12	0	22.79	23.01	22.77
		12	6	22.8	23	22.74
		12	13	22.78	22.97	22.73
		25	0	22.64	22.85	22.583
	16QAM	1	0	22.47	22.72	22.42
		1	13	22.34	22.58	22.28
		1	24	22.42	22.7	22.35
		12	0	21.53	21.8	21.57
		12	6	21.66	21.86	21.7
		12	13	21.65	21.89	21.56
		25	0	21.5	21.78	21.32
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	23.85	24.07	23.77
		1	25	23.67	23.95	23.62
		1	49	23.69	23.95	23.66
		25	0	21.46	21.53	21.55
		25	13	21.08	21.33	21.43
		25	25	21.25	21.14	21.15
		50	0	21.33	21.4	21.37
	16QAM	1	0	22.72	22.92	22.62
		1	25	22.61	22.81	22.51
		1	49	22.67	22.84	22.59
		25	0	21.81	21.98	21.78
		25	13	21.86	22.03	21.86
		25	25	21.87	22.06	21.74
		50	0	21.74	21.89	21.52

4. LTE Band 12 Conducted Power Test Verdict:

LTE FDD Band 12				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0	21.69	21.78	21.58
		1	3	21.57	21.66	21.46
		1	5	21.58	21.67	21.45
		3	0	20.84	20.96	20.76
		3	2	20.87	20.93	20.74
		3	3	20.81	20.97	20.75
		6	0	20.71	20.83	20.61
	16QAM	1	0	20.56	20.63	20.46
		1	3	20.45	20.52	20.33
		1	5	20.54	20.6	20.41
		3	0	19.61	19.68	19.62
		3	2	19.73	19.81	19.73
		3	3	19.72	19.78	19.65
		6	0	19.54	19.65	19.43
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23025	23095	23165
3MHz	QPSK	1	0	22.01	22.08	21.96
		1	7	21.89	21.96	21.84
		1	14	21.9	21.97	21.83
		8	0	21.16	21.26	21.14
		8	4	21.19	21.23	21.12
		8	7	21.13	21.27	21.13
		15	0	21.03	21.13	20.99
	16QAM	1	0	20.88	20.93	20.84
		1	7	20.77	20.82	20.71
		1	14	20.86	20.9	20.79
		8	0	19.93	19.98	20
		8	4	20.05	20.11	20.11
		8	7	20.04	20.08	20.03
		15	0	19.86	19.95	19.81

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	22.21	22.25	22.13
		1	13	22.09	22.13	22.01
		1	24	22.1	22.14	22
		12	0	21.36	21.43	21.31
		12	6	21.39	21.4	21.29
		12	13	21.33	21.44	21.3
		25	0	21.23	21.3	21.16
	16QAM	1	0	21.08	21.1	21.01
		1	13	20.97	20.99	20.88
		1	24	21.06	21.07	20.96
		12	0	20.13	20.15	20.17
		12	6	20.25	20.28	20.28
		12	13	20.24	20.25	20.2
		25	0	20.06	20.12	19.98
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	22.38	22.46	22.31
		1	25	22.26	22.34	22.19
		1	49	22.27	22.35	22.18
		25	0	21.16	21.27	21.24
		25	13	21.05	21.08	21.12
		25	25	21.01	21	21.09
		50	0	21.03	21.14	21.09
	16QAM	1	0	21.25	21.31	21.19
		1	25	21.14	21.2	21.06
		1	49	21.23	21.28	21.14
		25	0	20.3	20.36	20.35
		25	13	20.42	20.49	20.46
		25	25	20.41	20.46	20.38
		50	0	20.23	20.33	20.16

5. LTE Band 13 Conducted Power Test Verdict:

LTE FDD Band 13				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	22.31	22.54	22.28
		1	13	22.19	22.42	22.16
		1	24	22.2	22.43	22.15
		12	0	21.46	21.72	21.46
		12	6	21.49	21.69	21.44
		12	13	21.43	21.73	21.45
		25	0	21.33	21.59	21.31
	16QAM	1	0	21.18	21.39	21.16
		1	13	21.07	21.28	21.03
		1	24	21.16	21.36	21.11
		12	0	20.23	20.44	20.32
		12	6	20.35	20.57	20.43
		12	13	20.34	20.54	20.35
		25	0	20.16	20.41	20.13
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	22.69	22.87	22.55
		1	25	22.57	22.75	22.43
		1	49	22.58	22.76	22.42
		25	0	21.16	21.27	21.24
		25	13	21.05	21.08	21.12
		25	25	21.01	21	21.09
		50	0	21.03	21.14	21.09
	16QAM	1	0	21.56	21.72	21.43
		1	25	21.45	21.61	21.3
		1	49	21.54	21.69	21.38
		25	0	20.61	20.77	20.59
		25	13	20.73	20.9	20.7
		25	25	20.72	20.87	20.62
		50	0	20.54	20.74	20.4

6. LTE Band 17 Conducted Power Test Verdict:

LTE FDD Band 17				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	22.84	22.56	22.45
		1	13	22.69	22.43	22.3
		1	24	22.66	22.41	22.26
		12	0	22.01	21.72	21.6
		12	6	21.96	21.73	21.56
		12	13	21.95	21.74	21.57
		25	0	21.9	21.57	21.46
	16QAM	1	0	21.72	21.39	21.32
		1	13	21.57	21.26	21.19
		1	24	21.67	21.34	21.24
		12	0	20.76	20.46	20.51
		12	6	20.87	20.35	20.56
		12	13	20.85	20.41	20.47
		25	0	20.72	19.54	20.23
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0	22.96	23.15	23.05
		1	25	22.84	23	22.92
		1	49	22.82	23.02	22.9
		25	0	21.24	21.32	21.27
		25	13	21.15	21.25	21.18
		25	25	21.05	21.11	21.02
		50	0	21.12	21.2	21.15
	16QAM	1	0	21.83	22	21.94
		1	25	21.69	21.89	21.78
		1	49	21.81	21.98	21.89
		25	0	20.89	21.05	21.09
		25	13	21.00	20.97	21.20
		25	25	21.01	21.07	21.12
		50	0	20.90	20.17	20.89

**Peak To Average Ratio****Test Result and Data**

PeakToAveragePowerRatio NormalTC_NormalVol							
Band	Range	BandWidth	RbMode	Modulation	PAPR (dBm)	Limit (dBm)	Result
FDD02	LowRange	1.4	OneRB_high	Q16	5.99	13.00	Pass
FDD02	LowRange	1.4	fullRB	Q16	6.60	13.00	Pass
FDD02	LowRange	3	OneRB_high	Q16	5.89	13.00	Pass
FDD02	LowRange	3	fullRB	Q16	6.46	13.00	Pass
FDD02	LowRange	5	OneRB_high	Q16	5.93	13.00	Pass
FDD02	LowRange	5	fullRB	Q16	6.44	13.00	Pass
FDD02	LowRange	10	OneRB_high	Q16	5.78	13.00	Pass
FDD02	LowRange	10	fullRB	Q16	6.45	13.00	Pass
FDD02	LowRange	15	OneRB_high	Q16	6.05	13.00	Pass
FDD02	LowRange	15	fullRB	Q16	6.46	13.00	Pass
FDD02	LowRange	20	OneRB_high	Q16	6.35	13.00	Pass
FDD02	LowRange	20	fullRB	Q16	6.42	13.00	Pass
FDD02	MidRange	1.4	OneRB_high	Q16	6.21	13.00	Pass
FDD02	MidRange	1.4	fullRB	Q16	6.34	13.00	Pass
FDD02	MidRange	3	OneRB_high	Q16	6.48	13.00	Pass
FDD02	MidRange	3	fullRB	Q16	6.59	13.00	Pass
FDD02	MidRange	5	OneRB_high	Q16	6.23	13.00	Pass
FDD02	MidRange	5	fullRB	Q16	6.45	13.00	Pass
FDD02	MidRange	10	OneRB_high	Q16	6.51	13.00	Pass
FDD02	MidRange	10	fullRB	Q16	6.51	13.00	Pass
FDD02	MidRange	15	OneRB_high	Q16	6.49	13.00	Pass
FDD02	MidRange	15	fullRB	Q16	6.58	13.00	Pass
FDD02	MidRange	20	OneRB_high	Q16	5.90	13.00	Pass
FDD02	MidRange	20	fullRB	Q16	6.59	13.00	Pass
FDD02	HighRange	1.4	OneRB_high	Q16	5.70	13.00	Pass
FDD02	HighRange	1.4	fullRB	Q16	5.26	13.00	Pass
FDD02	HighRange	3	OneRB_high	Q16	5.69	13.00	Pass



FDD02	HighRange	3	fullRB	Q16	6.42	13.00	Pass
FDD02	HighRange	5	OneRB_high	Q16	5.87	13.00	Pass
FDD02	HighRange	5	fullRB	Q16	6.43	13.00	Pass
FDD02	HighRange	10	OneRB_high	Q16	5.76	13.00	Pass
FDD02	HighRange	10	fullRB	Q16	6.46	13.00	Pass
FDD02	HighRange	15	OneRB_high	Q16	5.84	13.00	Pass
FDD02	HighRange	15	fullRB	Q16	6.44	13.00	Pass
FDD02	HighRange	20	OneRB_high	Q16	6.13	13.00	Pass
FDD02	HighRange	20	fullRB	Q16	6.42	13.00	Pass
FDD04	LowRange	1.4	OneRB_high	Q16	5.17	13.00	Pass
FDD04	LowRange	1.4	fullRB	Q16	5.21	13.00	Pass
FDD04	LowRange	3	OneRB_high	Q16	5.34	13.00	Pass
FDD04	LowRange	3	fullRB	Q16	6.22	13.00	Pass
FDD04	LowRange	5	OneRB_high	Q16	5.63	13.00	Pass
FDD04	LowRange	5	fullRB	Q16	6.24	13.00	Pass
FDD04	LowRange	10	OneRB_high	Q16	5.75	13.00	Pass
FDD04	LowRange	10	fullRB	Q16	6.31	13.00	Pass
FDD04	LowRange	15	OneRB_high	Q16	5.91	13.00	Pass
FDD04	LowRange	15	fullRB	Q16	6.38	13.00	Pass
FDD04	LowRange	20	OneRB_high	Q16	6.13	13.00	Pass
FDD04	LowRange	20	fullRB	Q16	6.35	13.00	Pass
FDD04	MidRange	1.4	OneRB_high	Q16	6.29	13.00	Pass
FDD05	LowRange	3	OneRB_high	Q16	5.71	13.00	Pass
FDD05	LowRange	3	fullRB	Q16	6.32	13.00	Pass
FDD05	LowRange	5	OneRB_high	Q16	5.99	13.00	Pass
FDD05	LowRange	5	fullRB	Q16	6.35	13.00	Pass
FDD05	LowRange	10	OneRB_high	Q16	5.89	13.00	Pass
FDD05	LowRange	10	fullRB	Q16	6.43	13.00	Pass
FDD05	MidRange	1.4	OneRB_high	Q16	5.90	13.00	Pass
FDD05	MidRange	1.4	fullRB	Q16	5.49	13.00	Pass
FDD05	MidRange	3	OneRB_high	Q16	6.18	13.00	Pass
FDD05	MidRange	3	fullRB	Q16	6.45	13.00	Pass



FDD05	MidRange	5	OneRB_high	Q16	6.13	13.00	Pass
FDD05	MidRange	5	fullRB	Q16	6.35	13.00	Pass
FDD05	MidRange	10	OneRB_high	Q16	6.12	13.00	Pass
FDD05	MidRange	10	fullRB	Q16	6.36	13.00	Pass
FDD05	HighRange	1.4	OneRB_high	Q16	5.88	13.00	Pass
FDD05	HighRange	1.4	fullRB	Q16	5.26	13.00	Pass
FDD05	HighRange	3	OneRB_high	Q16	5.78	13.00	Pass
FDD05	HighRange	3	fullRB	Q16	6.42	13.00	Pass
FDD05	HighRange	5	OneRB_high	Q16	5.96	13.00	Pass
FDD05	HighRange	5	fullRB	Q16	6.41	13.00	Pass
FDD05	HighRange	10	OneRB_high	Q16	5.76	13.00	Pass
FDD05	HighRange	10	fullRB	Q16	6.39	13.00	Pass
FDD12	LowRange	1.4	OneRB_high	Q16	5.66	13.00	Pass
FDD12	LowRange	1.4	fullRB	Q16	5.49	13.00	Pass
FDD12	LowRange	3	OneRB_high	Q16	5.72	13.00	Pass
FDD12	LowRange	3	fullRB	Q16	6.49	13.00	Pass
FDD12	LowRange	5	OneRB_high	Q16	5.86	13.00	Pass
FDD12	LowRange	5	fullRB	Q16	6.46	13.00	Pass
FDD12	LowRange	10	OneRB_high	Q16	5.89	13.00	Pass
FDD12	LowRange	10	fullRB	Q16	6.53	13.00	Pass
FDD12	MidRange	1.4	OneRB_high	Q16	5.70	13.00	Pass
FDD12	MidRange	1.4	fullRB	Q16	6.28	13.00	Pass
FDD12	MidRange	3	OneRB_high	Q16	6.13	13.00	Pass
FDD12	MidRange	3	fullRB	Q16	6.58	13.00	Pass
FDD12	MidRange	5	OneRB_high	Q16	6.19	13.00	Pass
FDD12	MidRange	5	fullRB	Q16	6.45	13.00	Pass
FDD12	MidRange	10	OneRB_high	Q16	6.33	13.00	Pass
FDD12	MidRange	10	fullRB	Q16	6.45	13.00	Pass
FDD12	HighRange	1.4	OneRB_high	Q16	4.98	13.00	Pass
FDD12	HighRange	1.4	fullRB	Q16	6.13	13.00	Pass
FDD12	HighRange	3	OneRB_high	Q16	5.43	13.00	Pass
FDD12	HighRange	3	fullRB	Q16	6.45	13.00	Pass




FDD12	HighRange	5	OneRB_high	Q16	5.41	13.00	Pass
FDD12	HighRange	5	fullRB	Q16	6.46	13.00	Pass
FDD12	HighRange	10	OneRB_high	Q16	5.45	13.00	Pass
FDD12	HighRange	10	fullRB	Q16	6.47	13.00	Pass
FDD13	LowRange	5	OneRB_high	Q16	5.77	13.00	Pass
FDD13	LowRange	5	fullRB	Q16	6.30	13.00	Pass
FDD13	LowRange	10	OneRB_high	Q16	5.73	13.00	Pass
FDD13	LowRange	10	fullRB	Q16	6.38	13.00	Pass
FDD13	MidRange	5	OneRB_high	Q16	5.98	13.00	Pass
FDD13	MidRange	5	fullRB	Q16	6.34	13.00	Pass
FDD13	MidRange	10	OneRB_high	Q16	5.98	13.00	Pass
FDD13	MidRange	10	fullRB	Q16	6.33	13.00	Pass
FDD13	HighRange	5	OneRB_high	Q16	5.35	13.00	Pass
FDD13	HighRange	5	fullRB	Q16	6.27	13.00	Pass
FDD13	HighRange	10	OneRB_high	Q16	5.71	13.00	Pass
FDD13	HighRange	10	fullRB	Q16	6.37	13.00	Pass
FDD17	LowRange	5	OneRB_high	Q16	6.00	13.00	Pass
FDD17	LowRange	5	fullRB	Q16	6.54	13.00	Pass
FDD17	LowRange	10	OneRB_high	Q16	5.73	13.00	Pass
FDD17	LowRange	10	fullRB	Q16	6.48	13.00	Pass
FDD17	MidRange	5	OneRB_high	Q16	5.69	13.00	Pass
FDD17	MidRange	5	fullRB	Q16	6.42	13.00	Pass
FDD17	MidRange	10	OneRB_high	Q16	5.90	13.00	Pass
FDD17	MidRange	10	fullRB	Q16	6.40	13.00	Pass
FDD17	HighRange	5	OneRB_high	Q16	5.12	13.00	Pass
FDD17	HighRange	5	fullRB	Q16	6.39	13.00	Pass
FDD17	HighRange	10	OneRB_high	Q16	5.38	13.00	Pass
FDD17	HighRange	10	fullRB	Q16	6.43	13.00	Pass




FDD02_1.4MHz_1850.7_OneRB_high_Q16




FDD02_1.4MHz_1850.7_fullRB_Q16

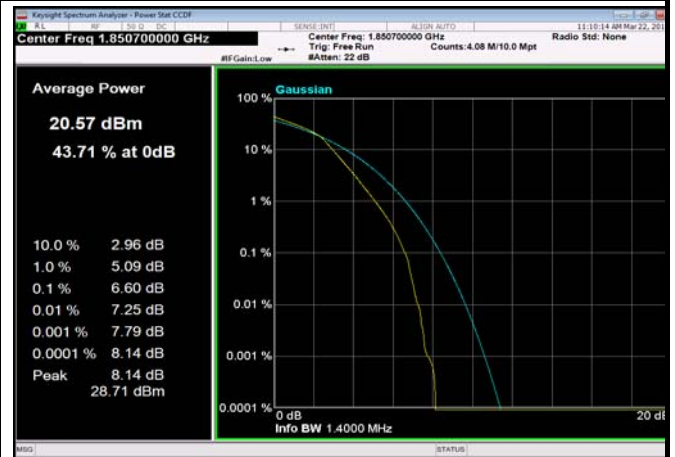


FDD02_3MHz_1851.5_OneRB_high_Q16

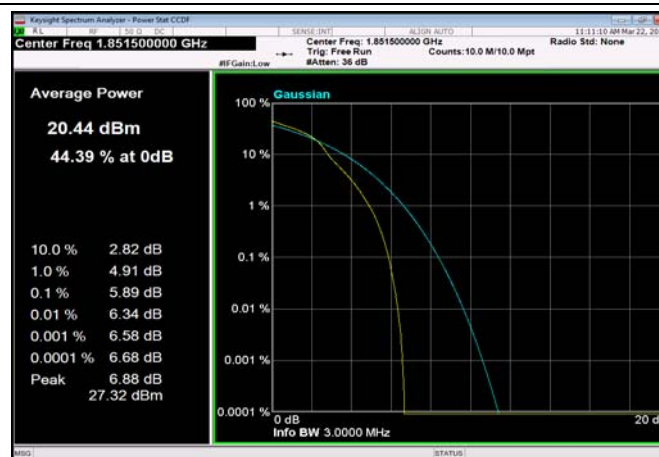


FDD02_3MHz_1851.5_fullRB_Q16

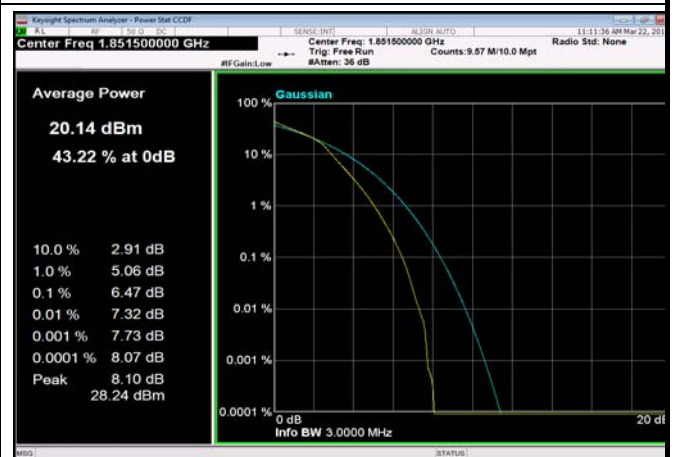

FDD02_5MHz_1852.5_OneRB_high_Q16

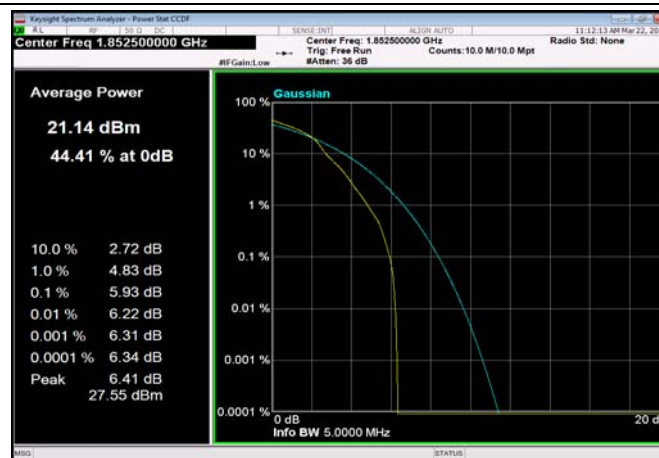


FDD02_5MHz_1852.5_fullRB_Q16

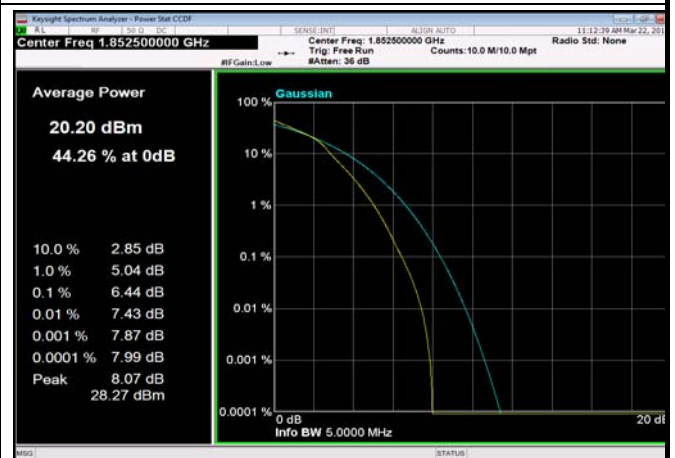





FDD02_10MHz_1855_OneRB_high_Q16

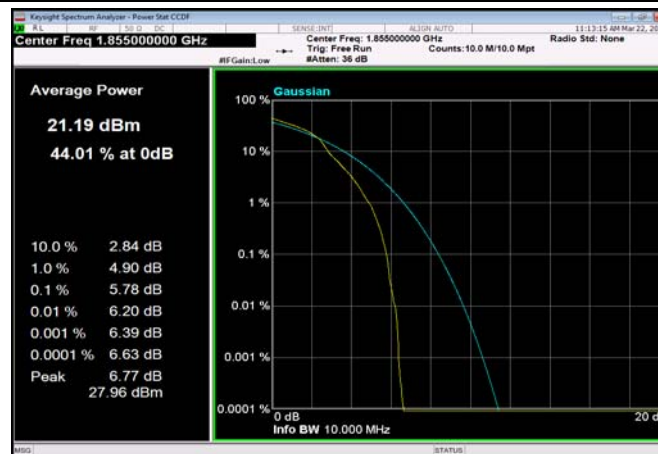


FDD02_10MHz_1855_fullRB_Q16

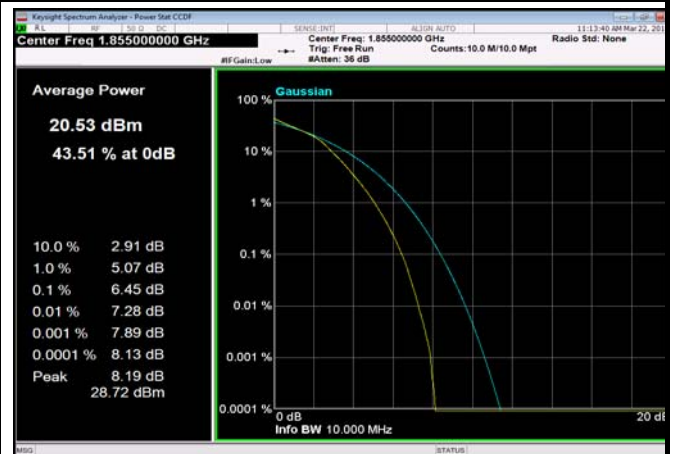


FDD02_15MHz_1857.5_OneRB_high_Q16

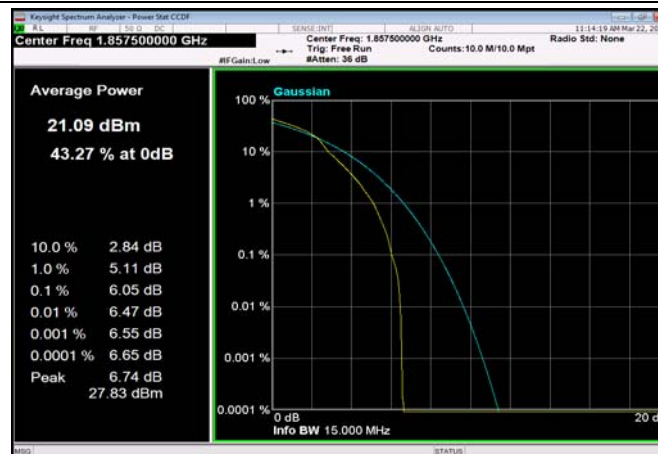


FDD02_15MHz_1857.5_fullRB_Q16

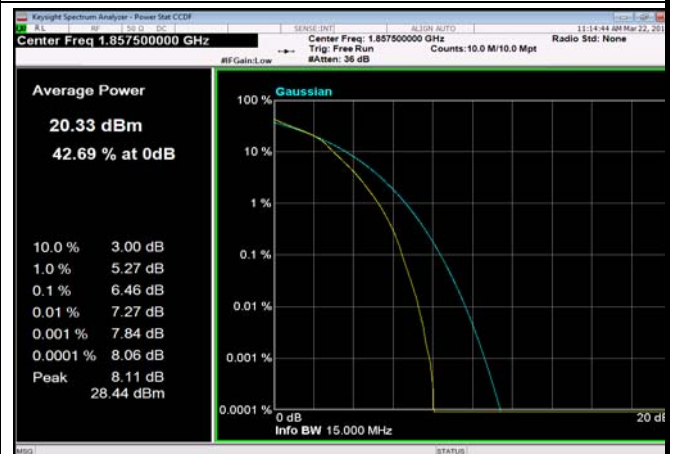

FDD02_20MHz_1860_OneRB_high_Q16

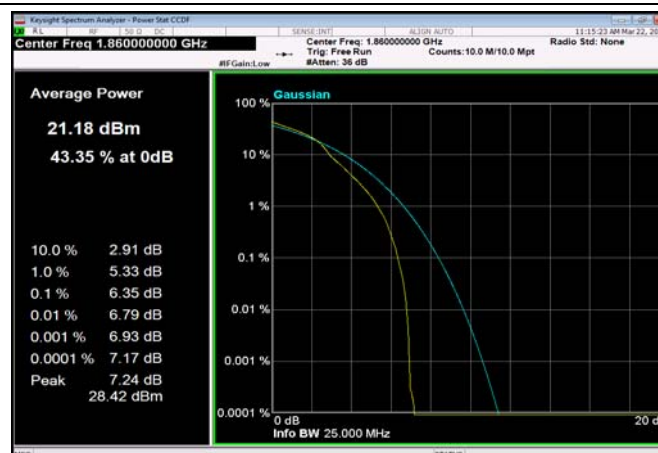


FDD02_20MHz_1860_fullRB_Q16

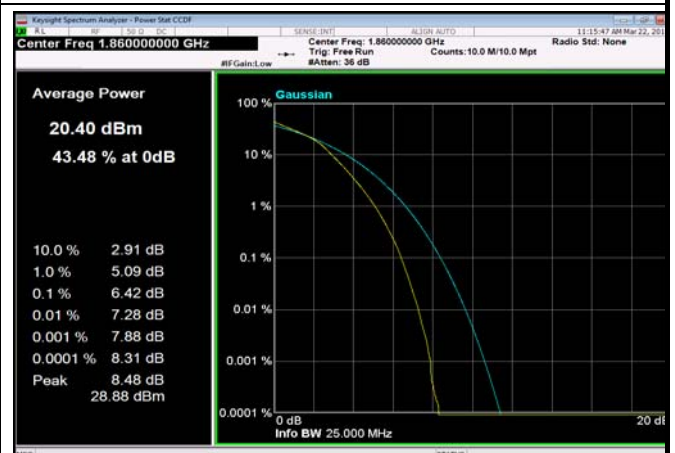





FDD02_1.4MHz_1880_OneRB_high_Q16

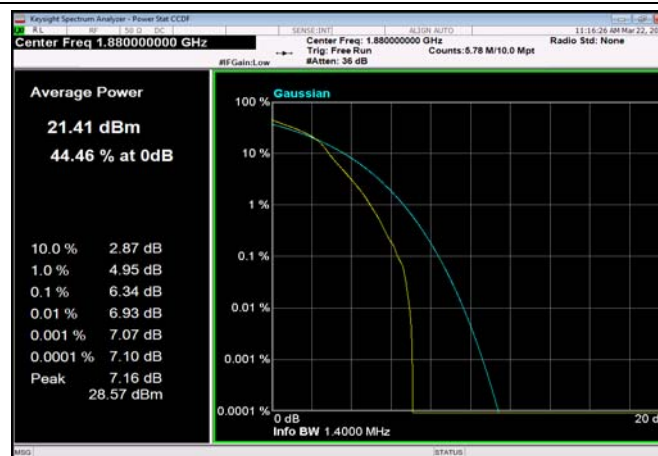


FDD02_1.4MHz_1880_fullRB_Q16

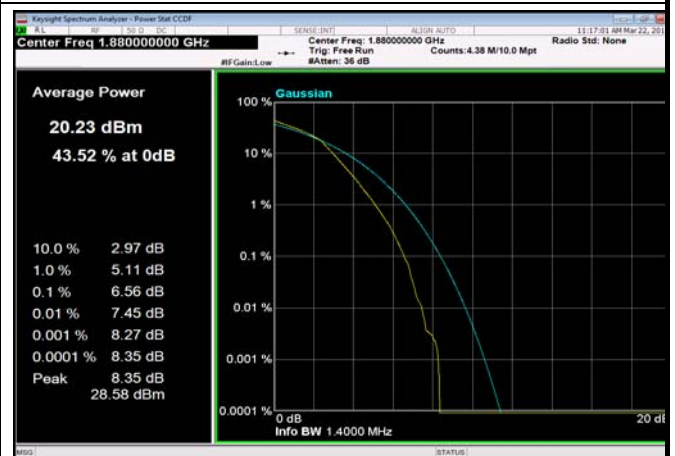


FDD02_3MHz_1880_OneRB_high_Q16

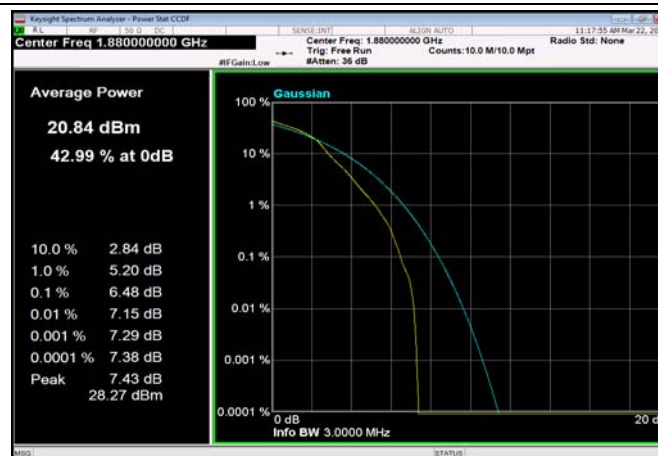


FDD02_3MHz_1880_fullRB_Q16

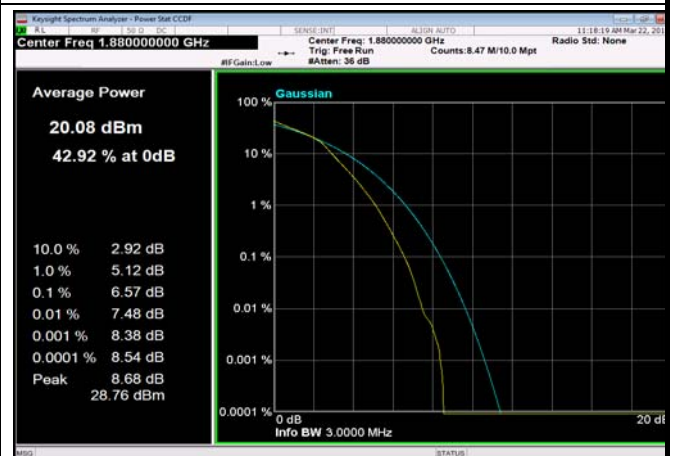

FDD02_5MHz_1880_OneRB_high_Q16

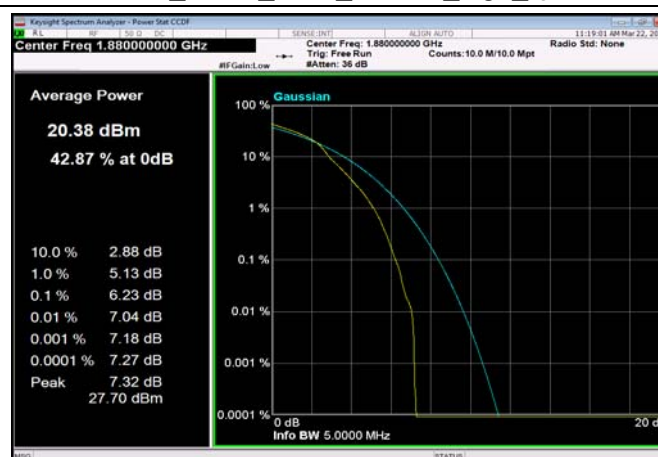


FDD02_5MHz_1880_fullRB_Q16

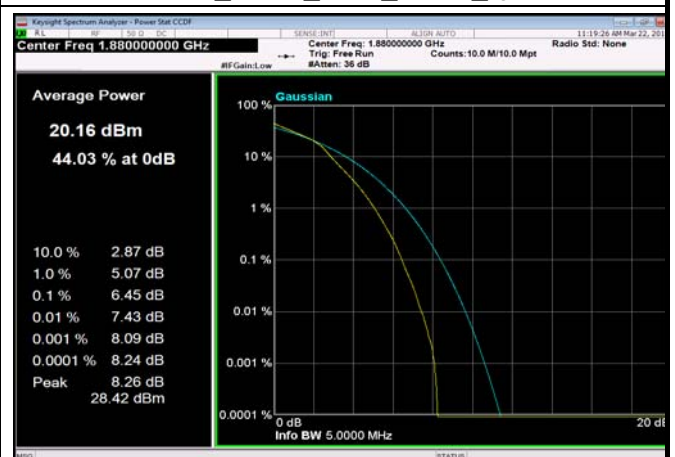





FDD02_10MHz_1880_OneRB_high_Q16

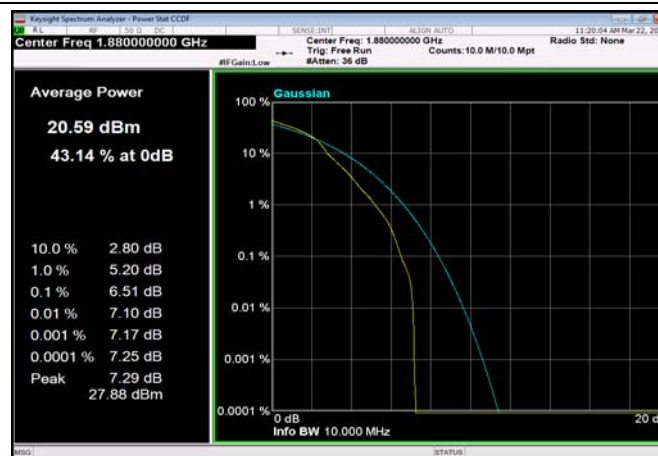


FDD02_10MHz_1880_fullRB_Q16

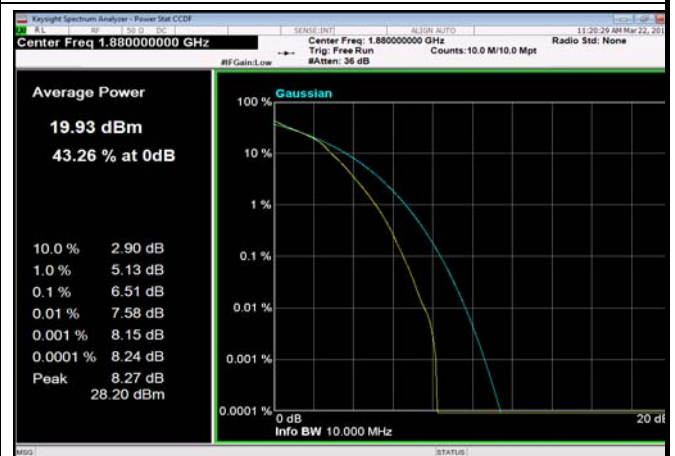


FDD02_15MHz_1880_OneRB_high_Q16

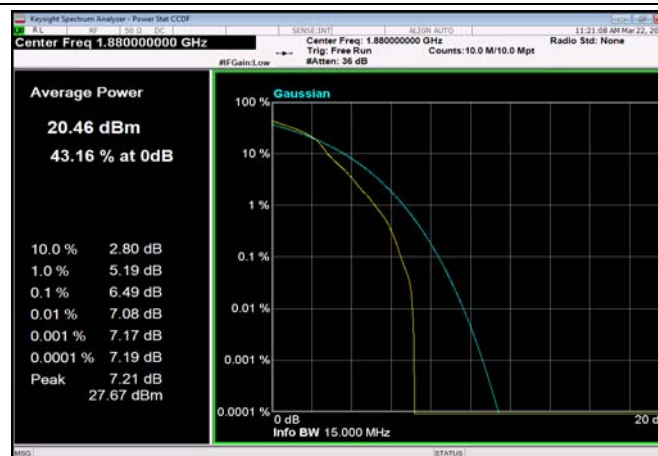


FDD02_15MHz_1880_fullRB_Q16

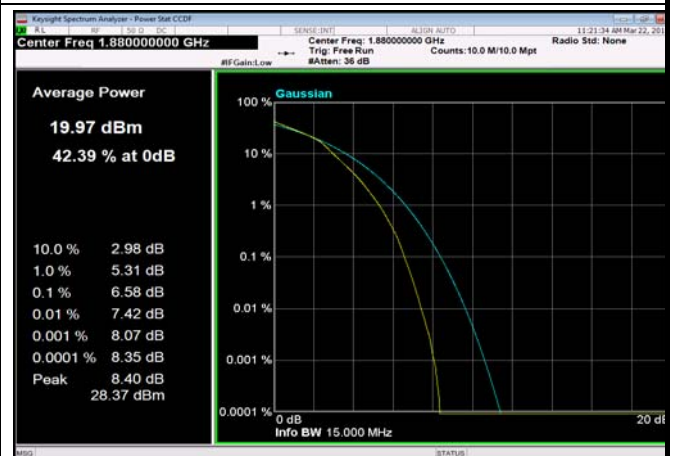


FDD02_20MHz_1880_OneRB_high_Q16

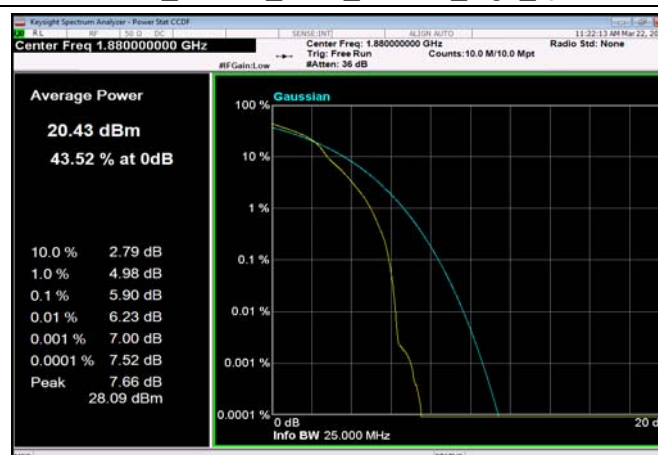


FDD02_20MHz_1880_fullRB_Q16

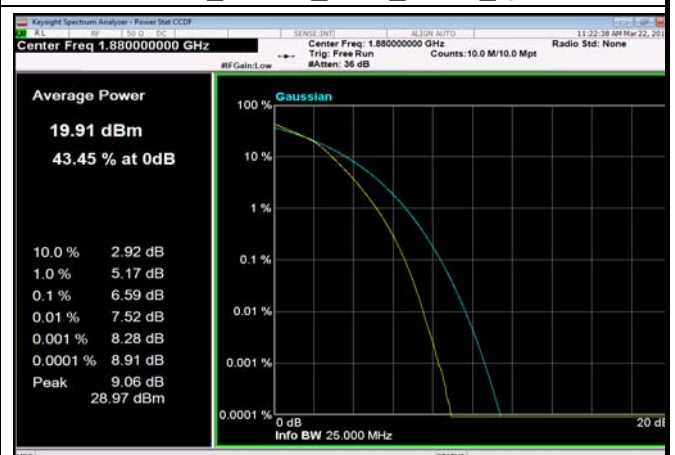


FDD02_1.4MHz_1909.3_OneRB_high_Q16

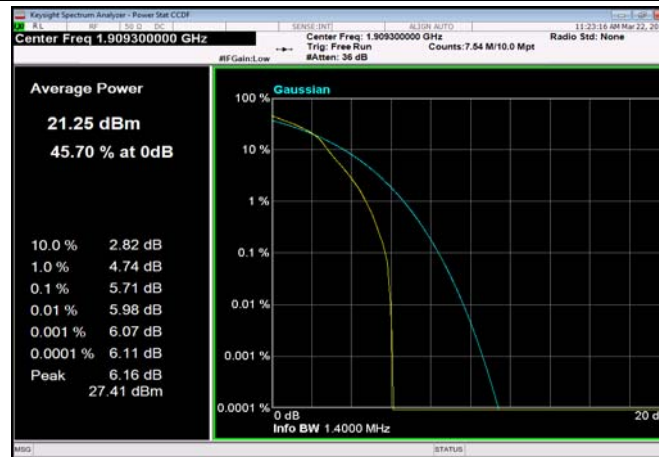


FDD02_1.4MHz_1909.3_fullRB_Q16

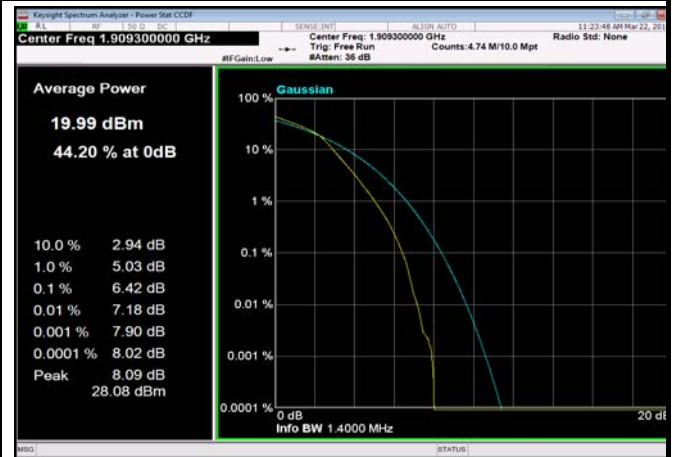


FDD02_3MHz_1908.5_OneRB_high_Q16

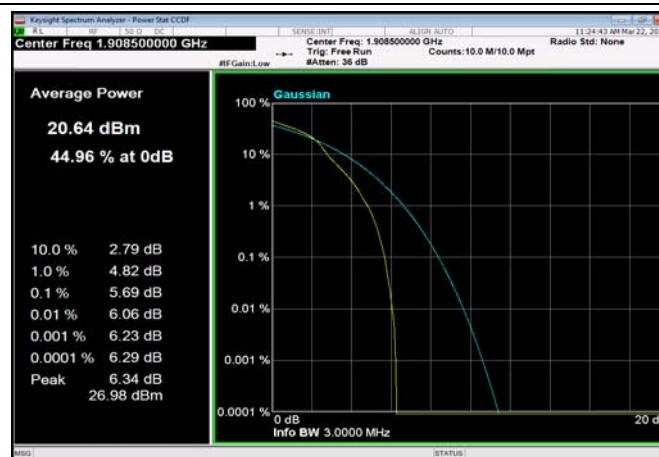


FDD02_3MHz_1908.5_fullRB_Q16

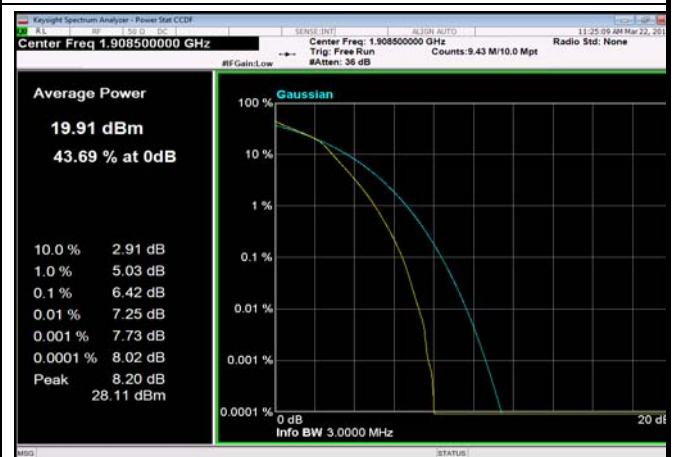

FDD02_5MHz_1907.5_OneRB_high_Q16

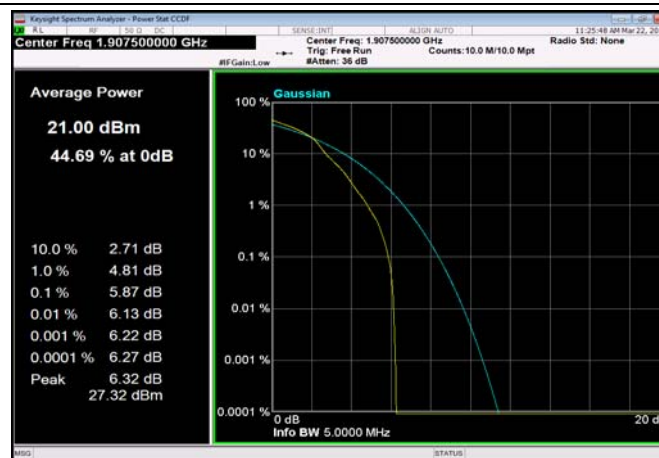


FDD02_5MHz_1907.5_fullRB_Q16

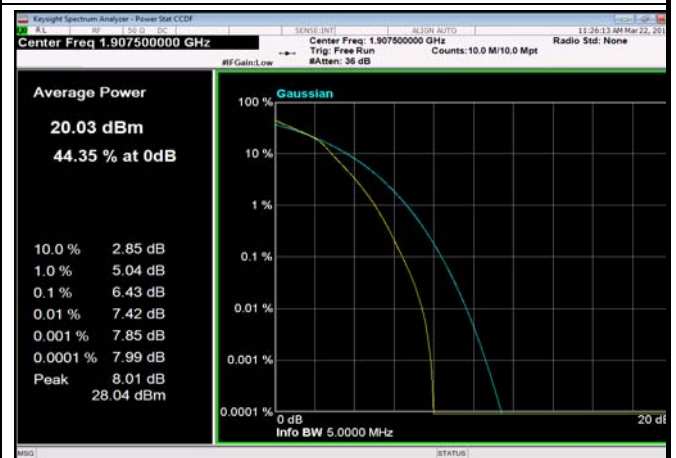





FDD02_10MHz_1905_OneRB_high_Q16

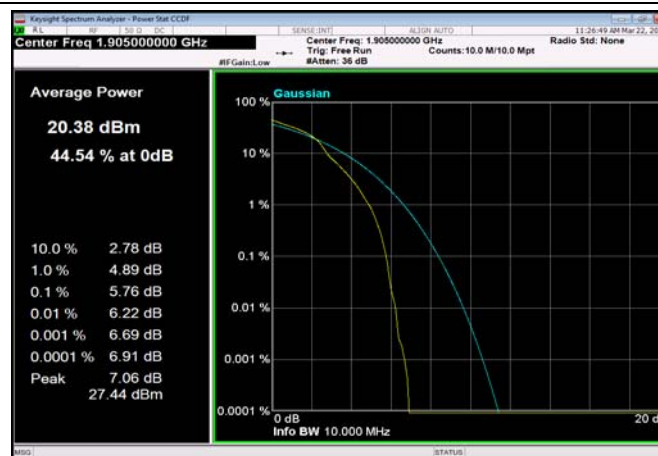


FDD02_10MHz_1905_fullRB_Q16

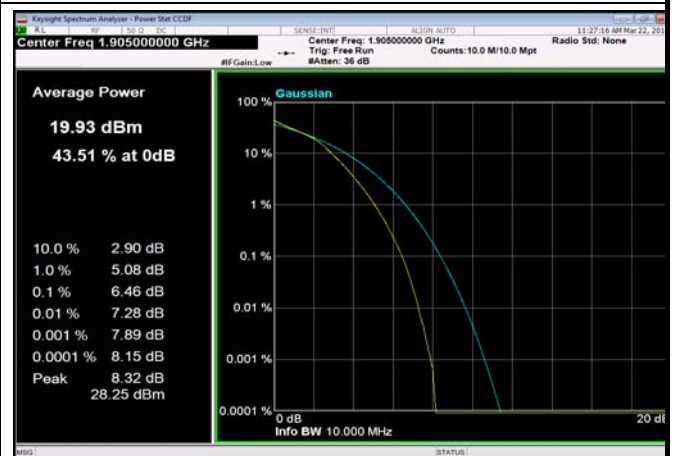


FDD02_15MHz_1902.5_OneRB_high_Q16

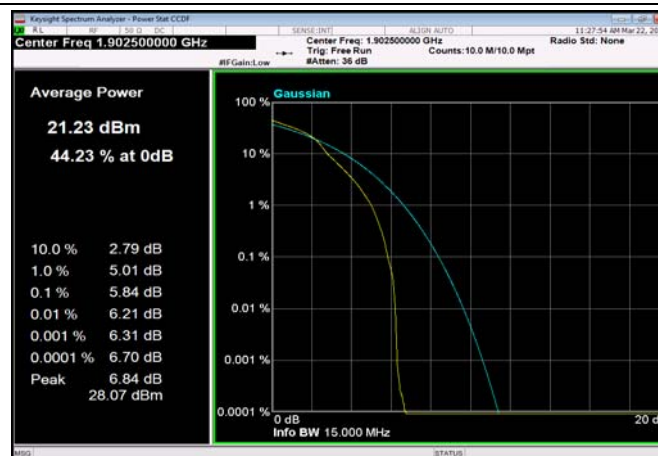


FDD02_15MHz_1902.5_fullRB_Q16

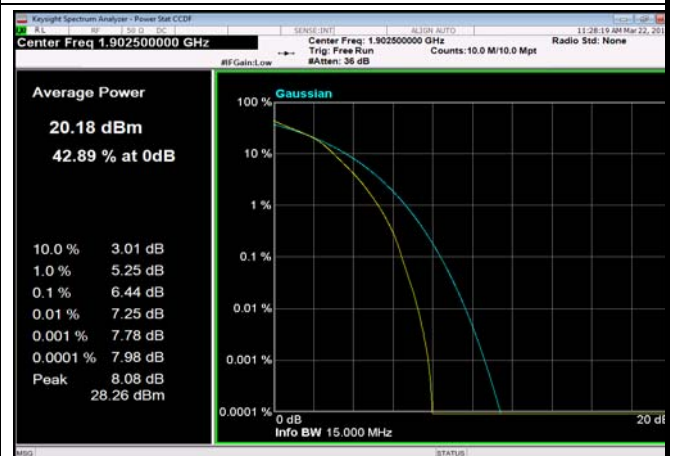

FDD02_20MHz_1900_OneRB_high_Q16

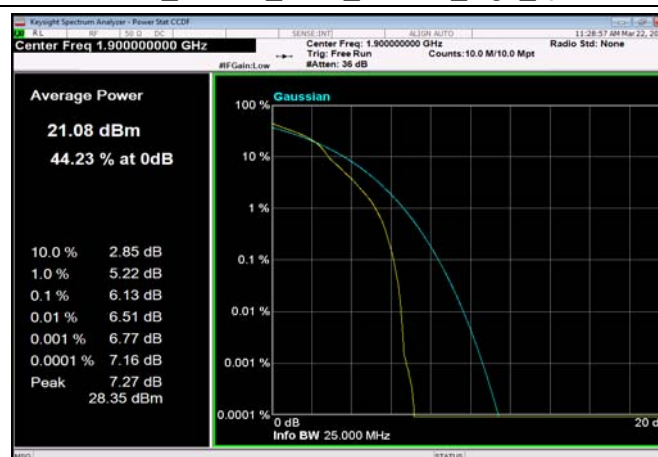


FDD02_20MHz_1900_fullRB_Q16

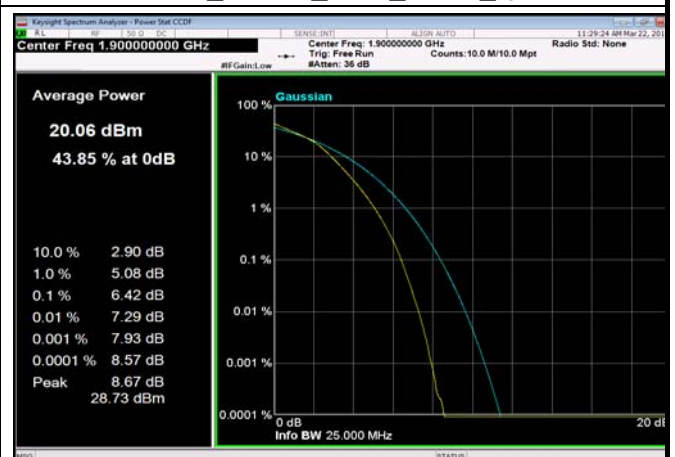





FDD04_1.4MHz_1710.7_OneRB_high_Q16

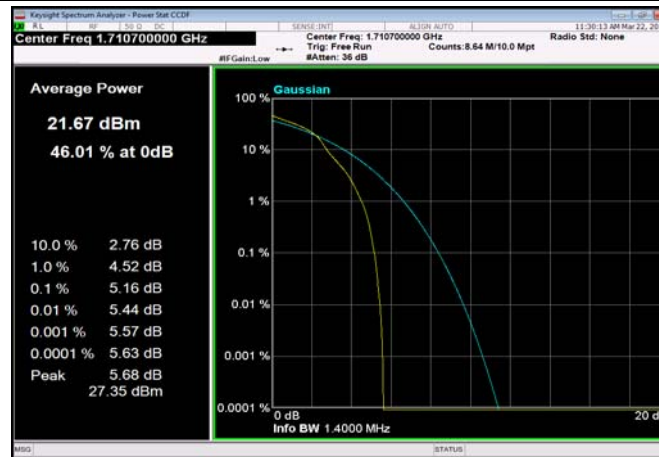


FDD04_1.4MHz_1710.7_fullRB_Q16

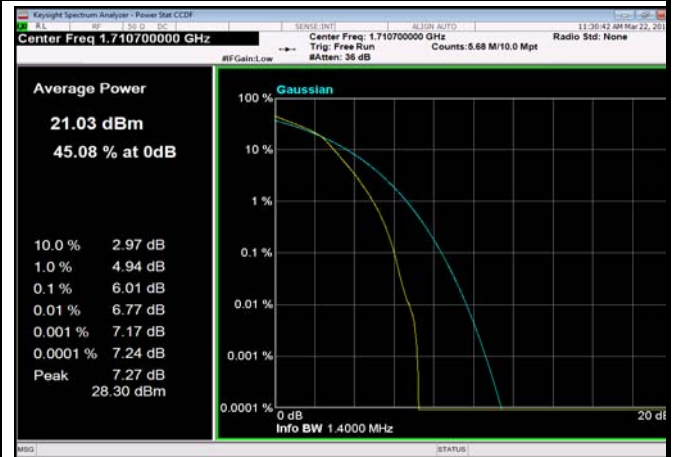


FDD04_3MHz_1711.5_OneRB_high_Q16

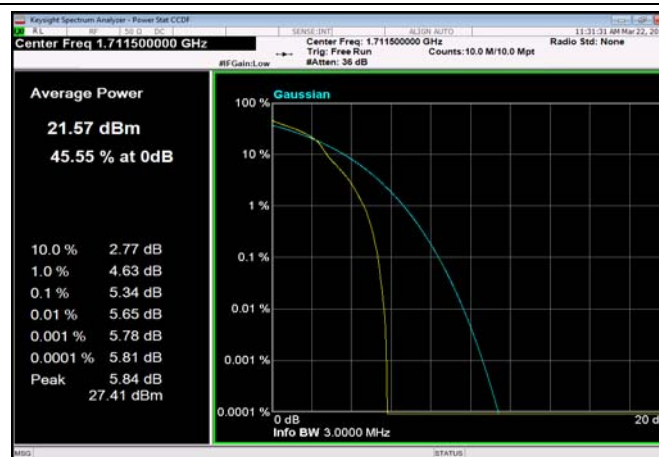


FDD04_3MHz_1711.5_fullRB_Q16

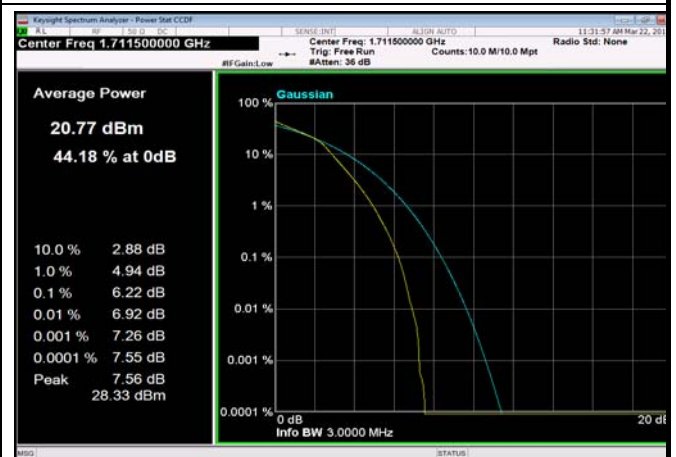

FDD04_5MHz_1712.5_OneRB_high_Q16

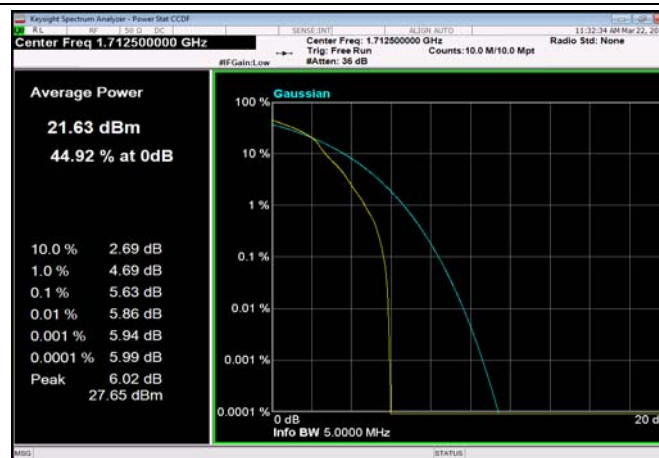


FDD04_5MHz_1712.5_fullRB_Q16

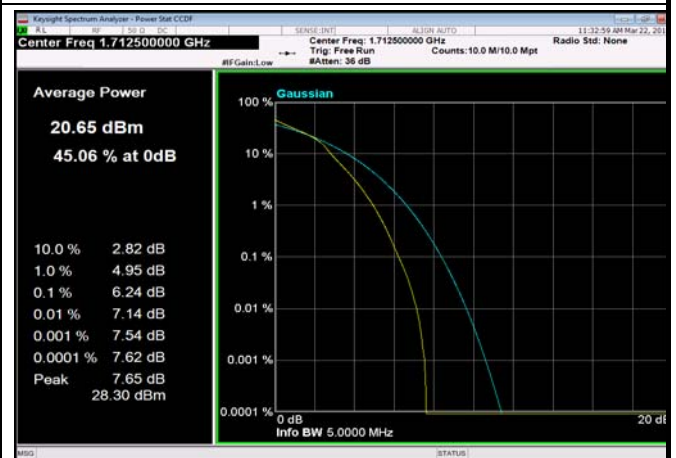





FDD04_10MHz_1715_OneRB_high_Q16

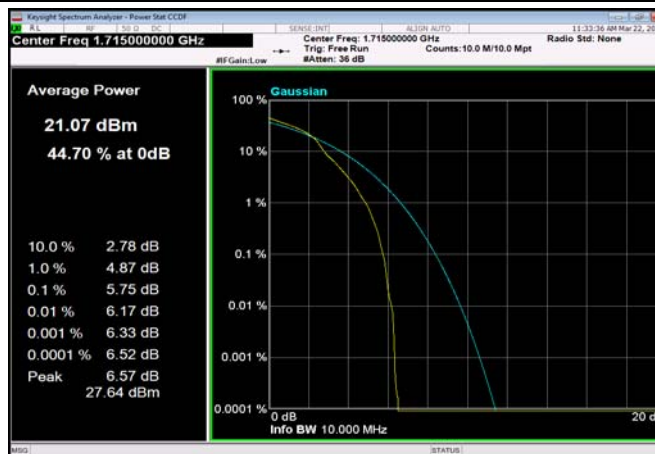


FDD04_10MHz_1715_fullRB_Q16

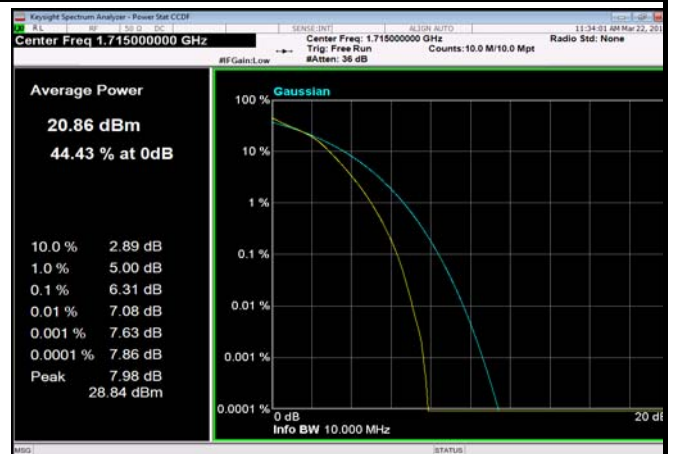


FDD04_15MHz_1717.5_OneRB_high_Q16

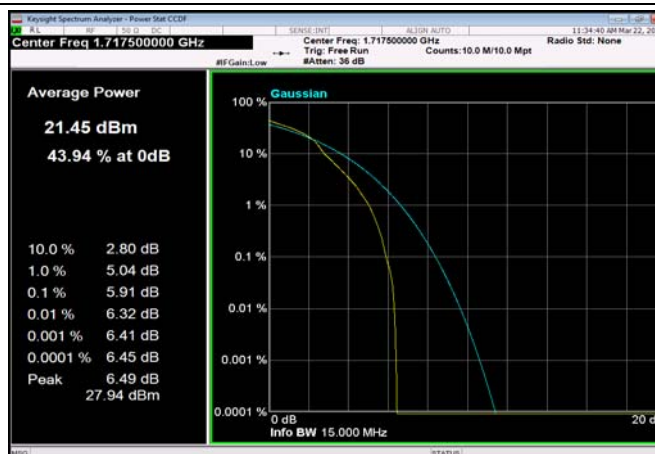


FDD04_15MHz_1717.5_fullRB_Q16

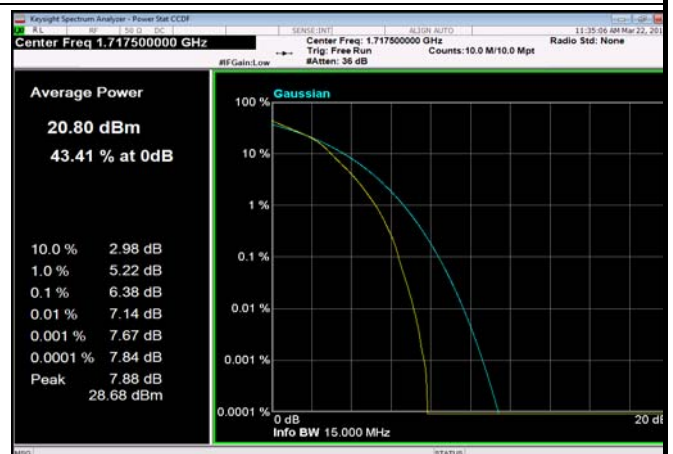


FDD04_20MHz_1720_OneRB_high_Q16

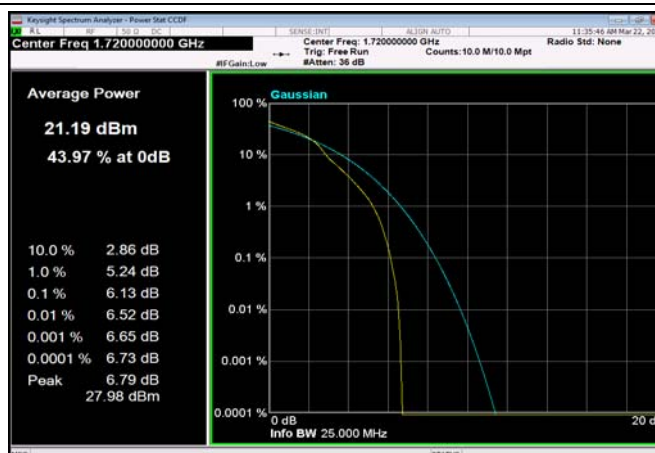


FDD04_20MHz_1720_fullRB_Q16

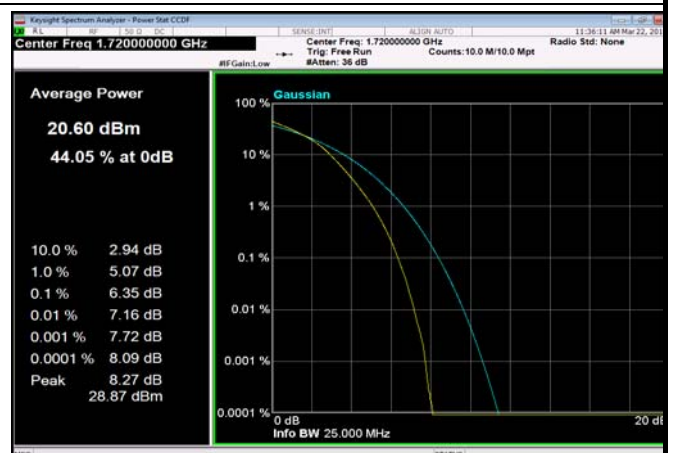


FDD04_1.4MHz_1732.5_OneRB_high_Q16

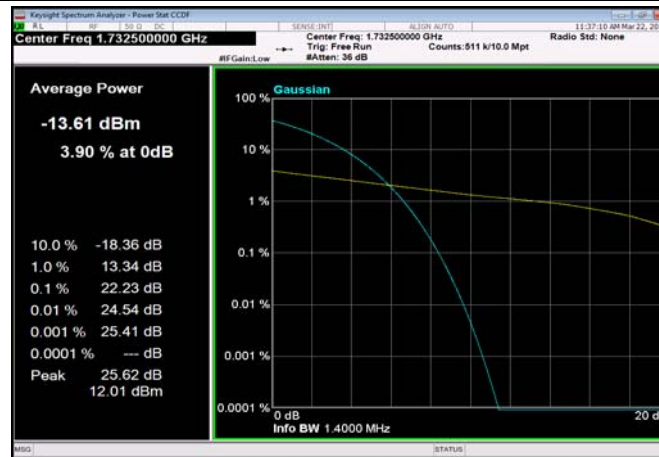


FDD05_3MHz_825.5_OneRB_high_Q16

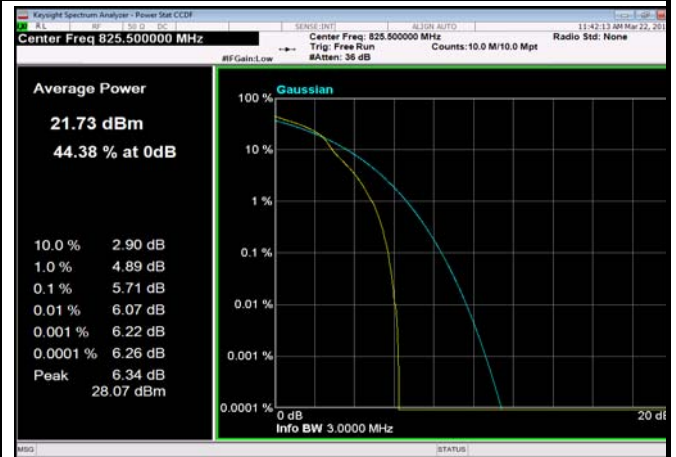


FDD05_3MHz_825.5_fullRB_Q16

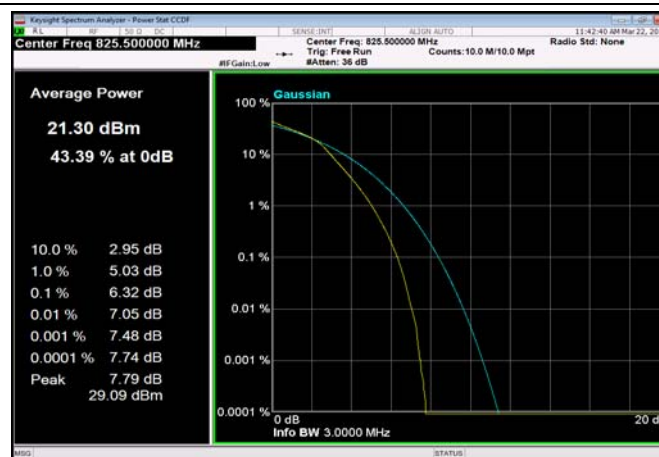


FDD05_5MHz_826.5_OneRB_high_Q16

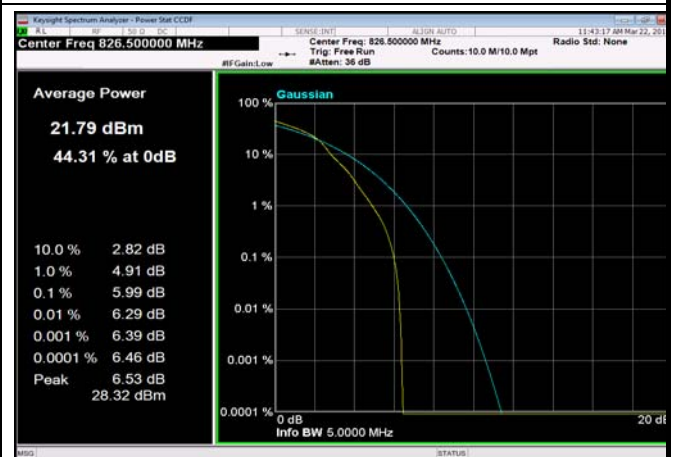

FDD05_5MHz_826.5_fullRB_Q16

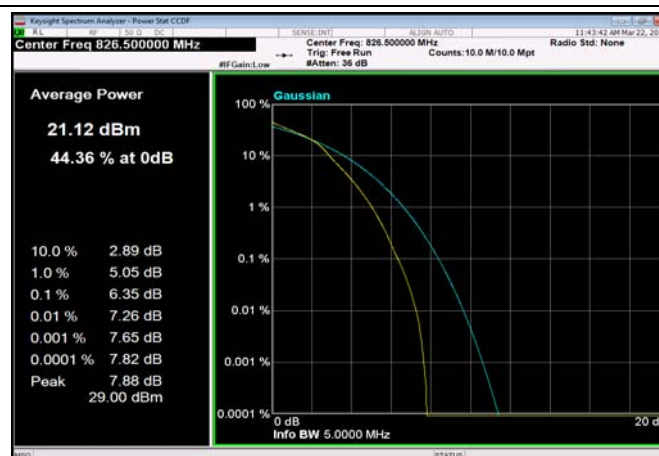


FDD05_10MHz_829_OneRB_high_Q16

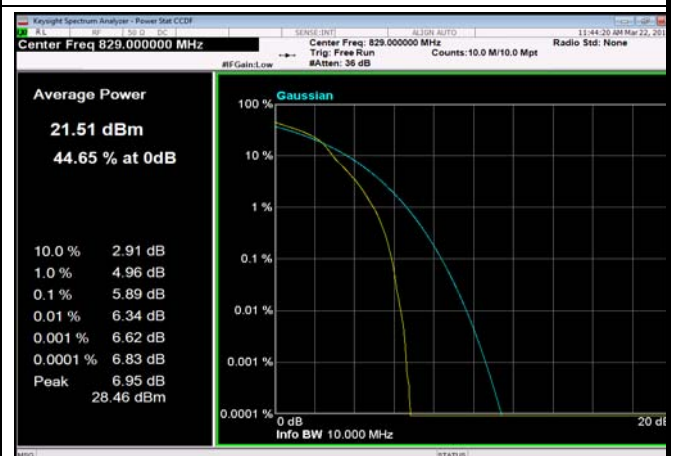





FDD05_10MHz_829_fullRB_Q16

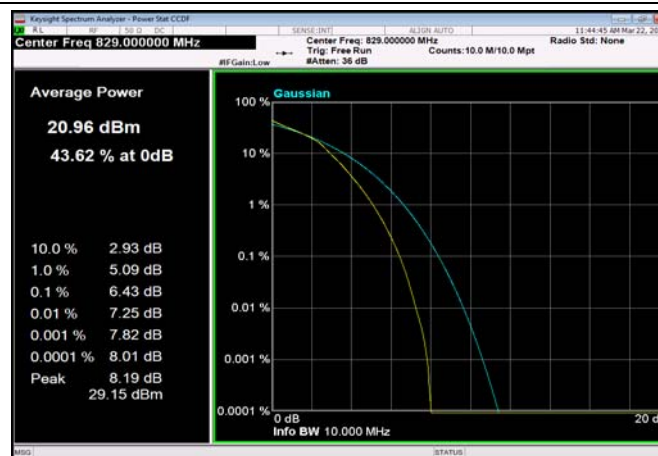


FDD05_1.4MHz_836.5_OneRB_high_Q16

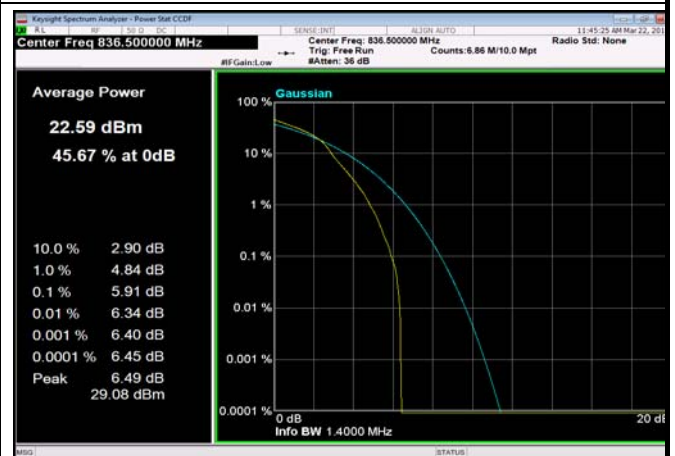


FDD05_1.4MHz_836.5_fullRB_Q16

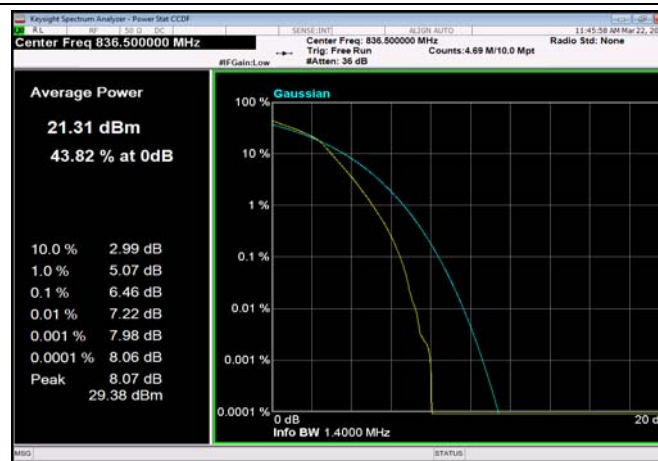


FDD05_3MHz_836.5_OneRB_high_Q16

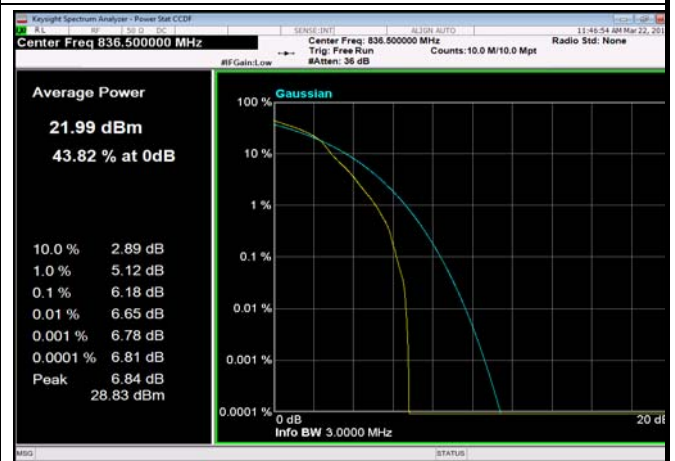

FDD05_3MHz_836.5_fullRB_Q16

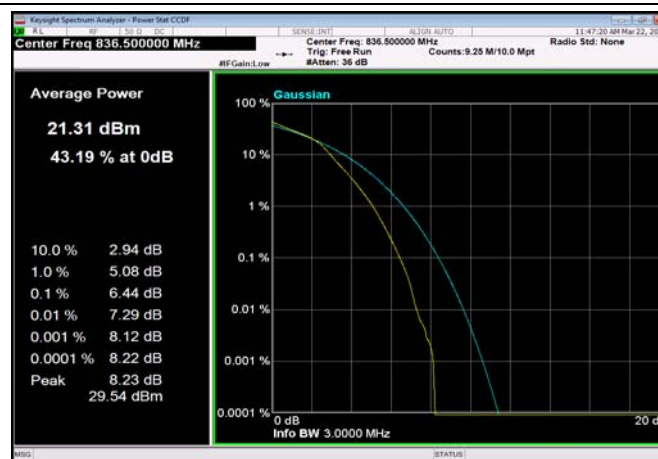


FDD05_5MHz_836.5_OneRB_high_Q16

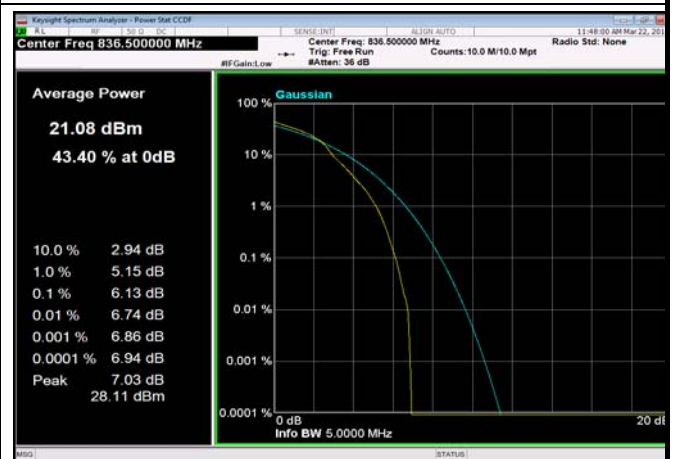





FDD05_5MHz_836.5_fullRB_Q16

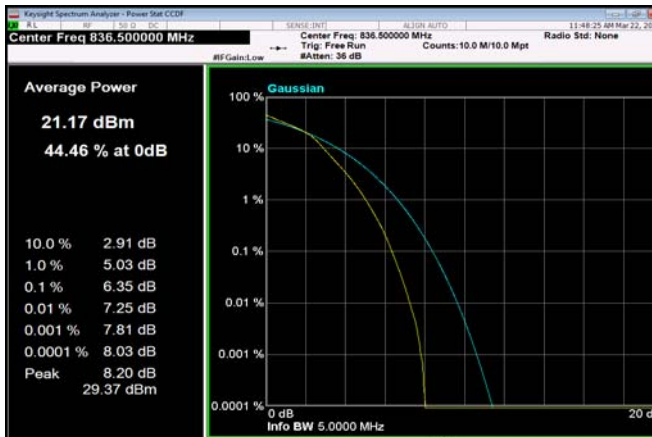


FDD05_10MHz_836.5_OneRB_high_Q16

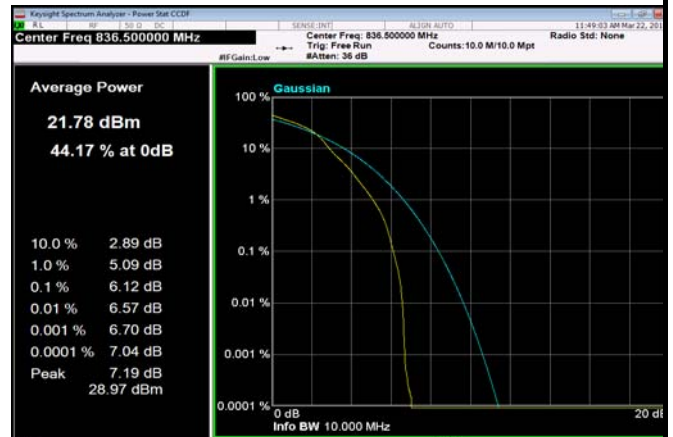


FDD05_10MHz_836.5_fullRB_Q16

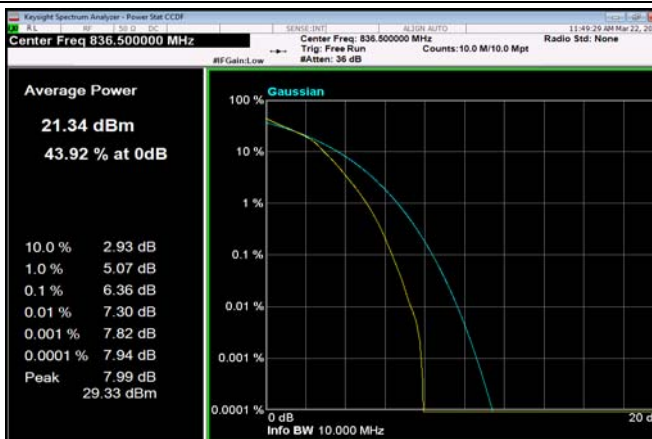


FDD05_1.4MHz_848.3_OneRB_high_Q16

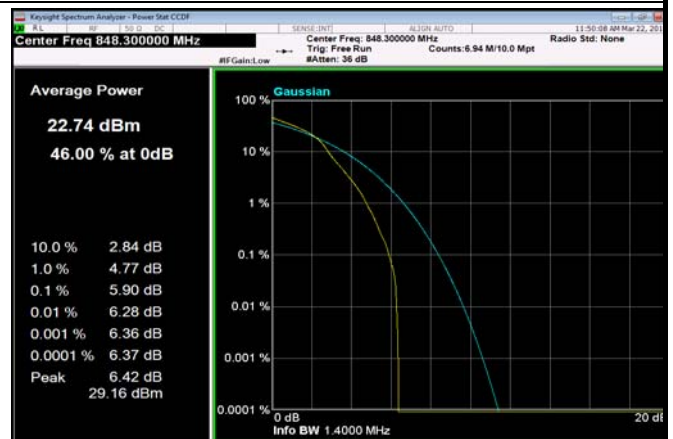

FDD05_1.4MHz_848.3_fullRB_Q16

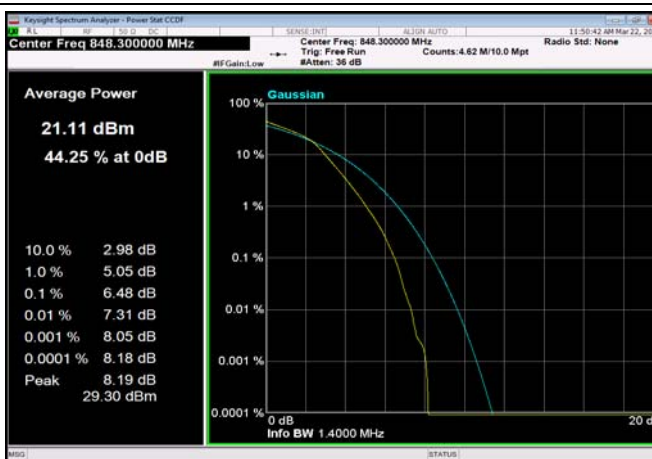


FDD05_3MHz_847.5_OneRB_high_Q16

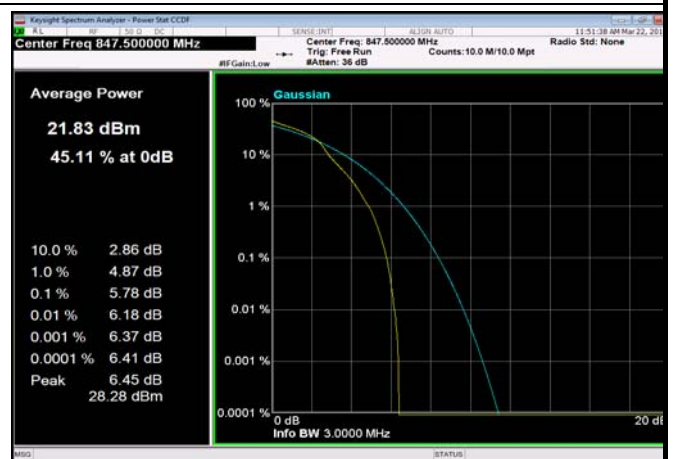





FDD05_3MHz_847.5_fullRB_Q16

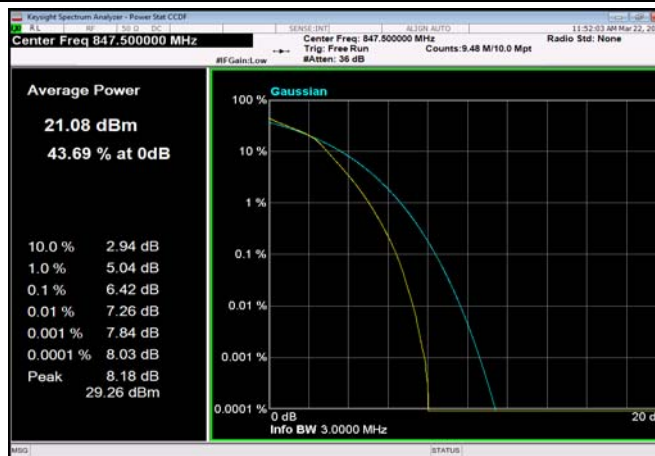


FDD05_5MHz_846.5_OneRB_high_Q16

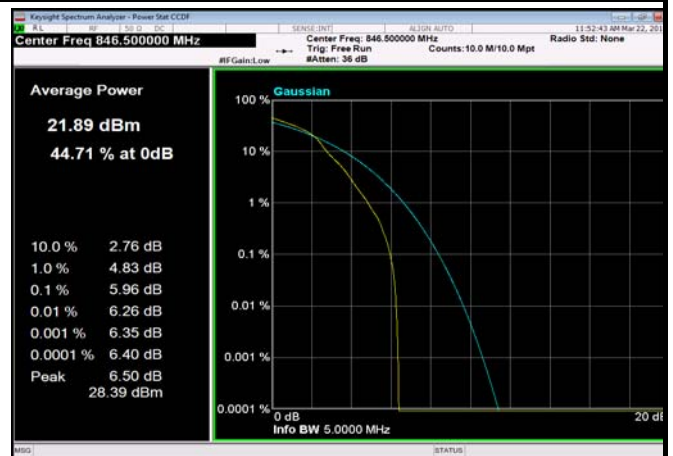


FDD05_5MHz_846.5_fullRB_Q16

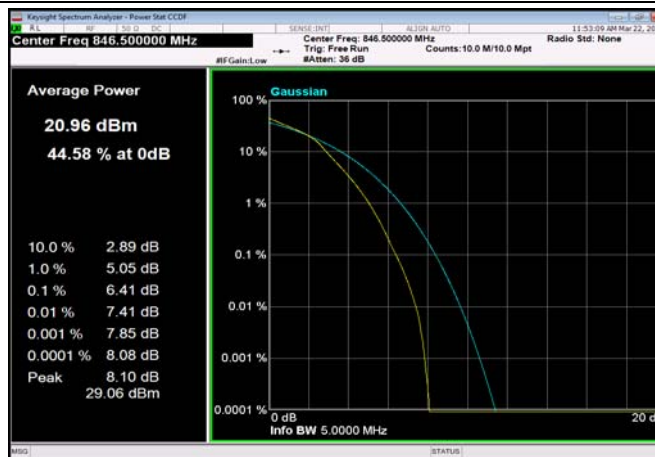


FDD05_10MHz_844_OneRB_high_Q16

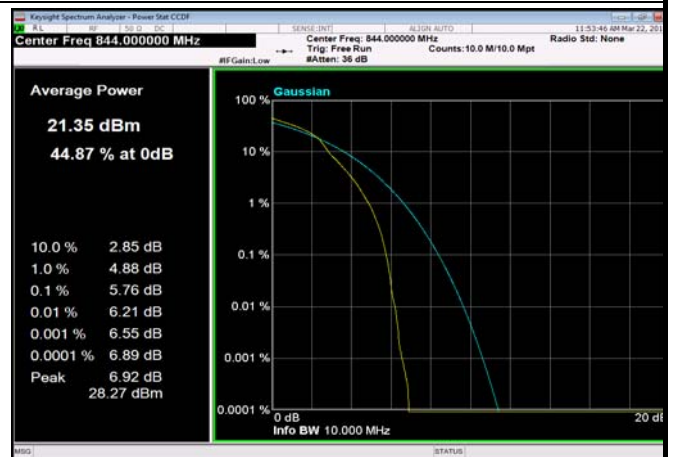

FDD05_10MHz_844_fullRB_Q16

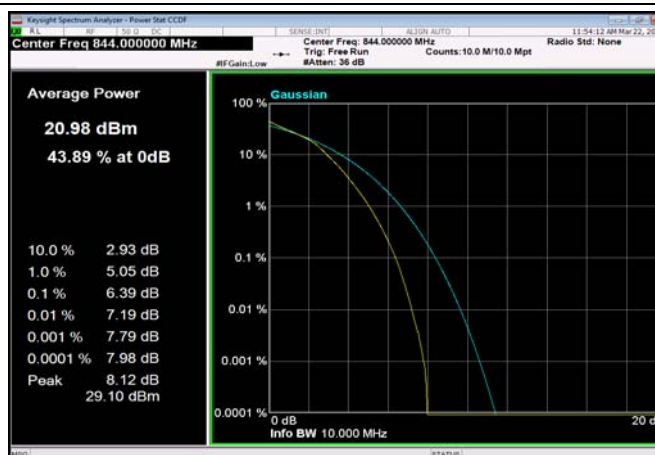


FDD12_1.4MHz_699.7_OneRB_high_Q16

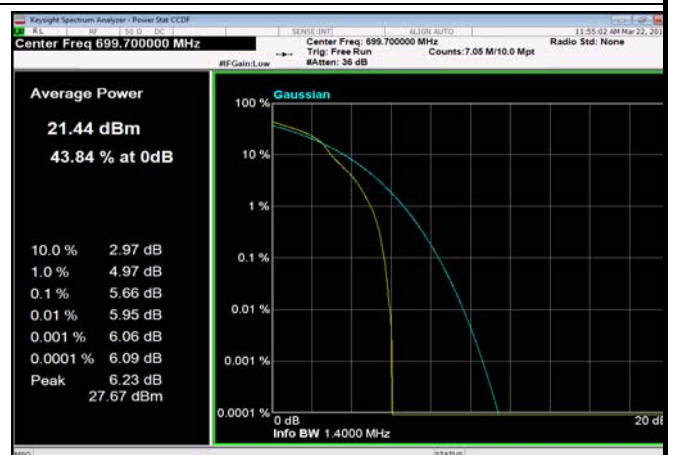





FDD12_1.4MHz_699.7_fullRB_Q16

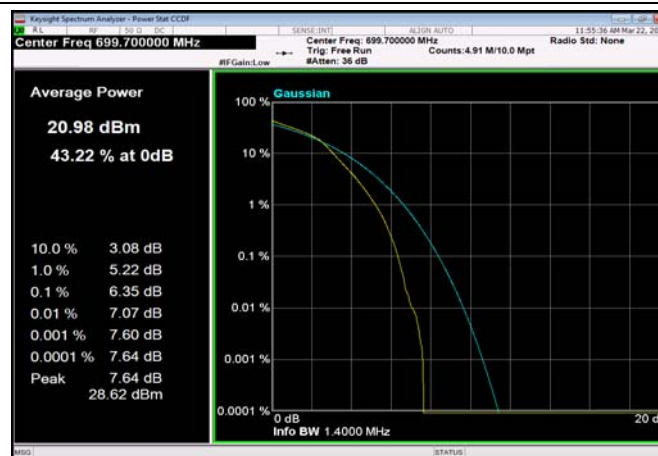


FDD12_3MHz_700.5_OneRB_high_Q16

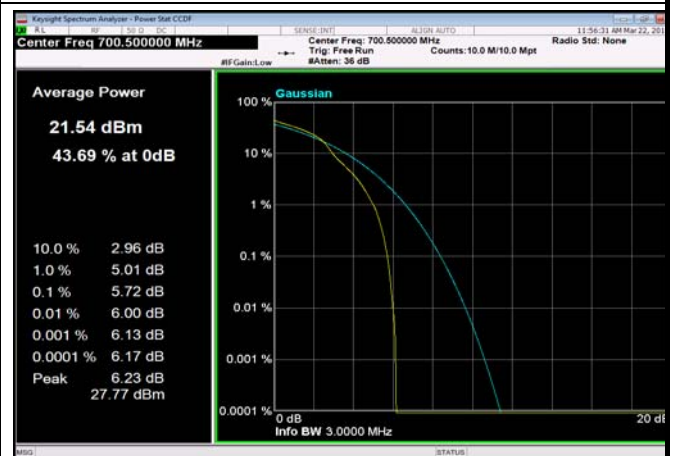


FDD12_3MHz_700.5_fullRB_Q16

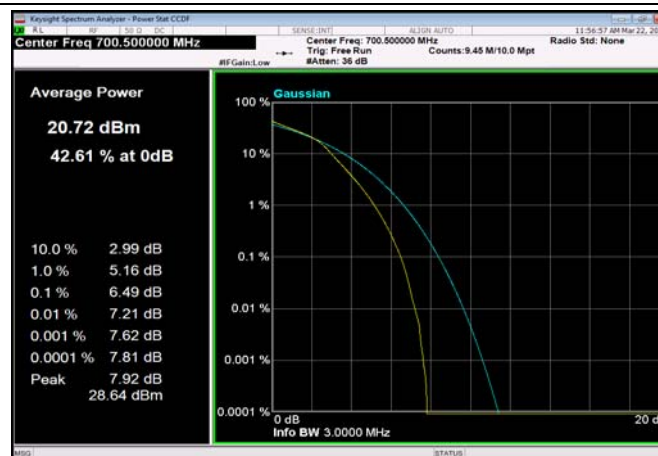


FDD12_5MHz_701.5_OneRB_high_Q16

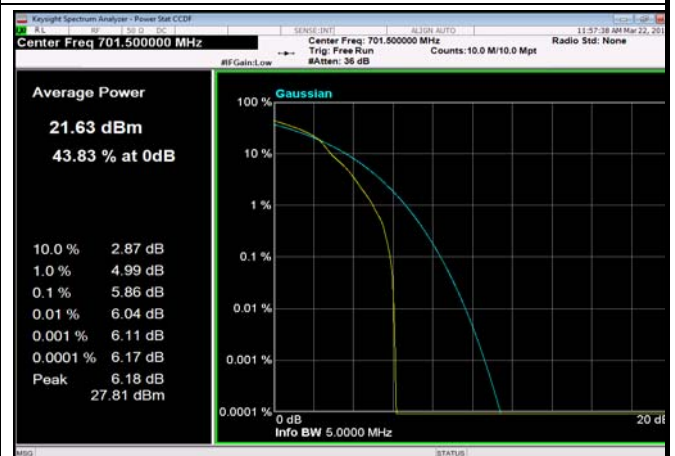

FDD12_5MHz_701.5_fullRB_Q16

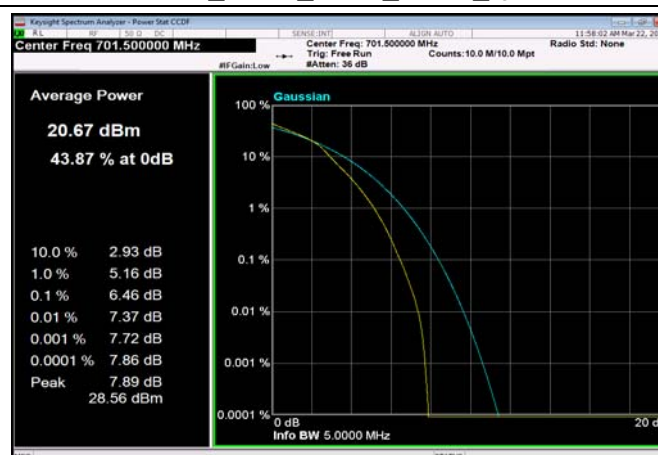


FDD12_10MHz_704_OneRB_high_Q16

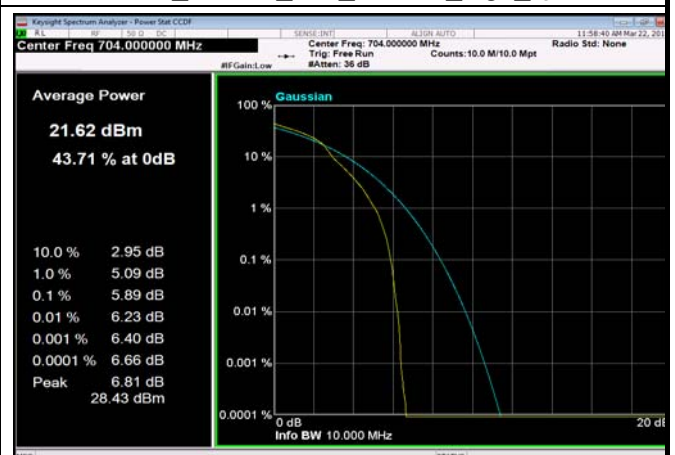





FDD12_10MHz_704_fullRB_Q16

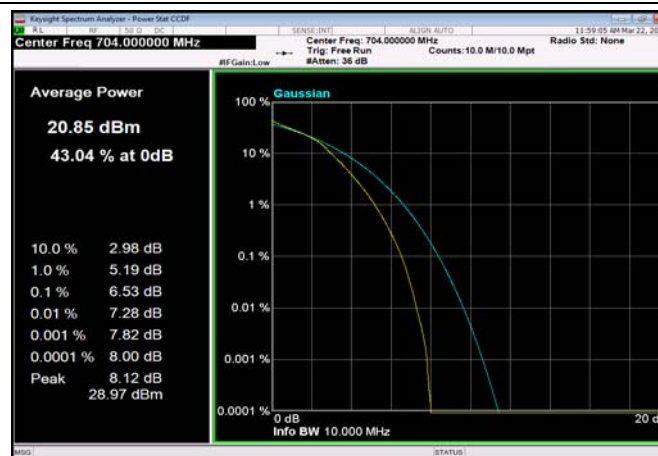


FDD12_1.4MHz_707.5_OneRB_high_Q16

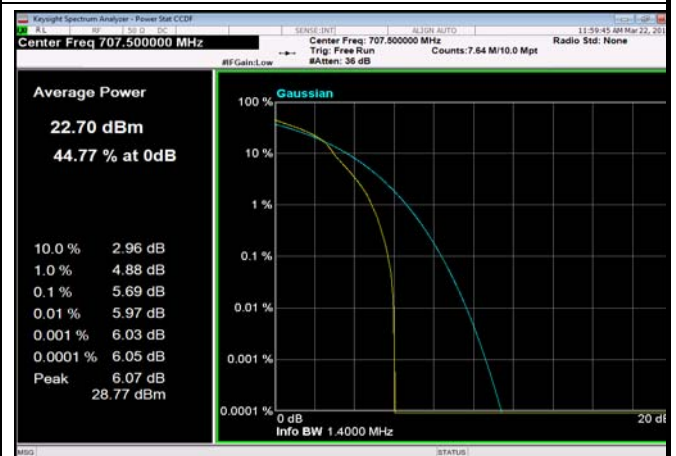


FDD12_1.4MHz_707.5_fullRB_Q16

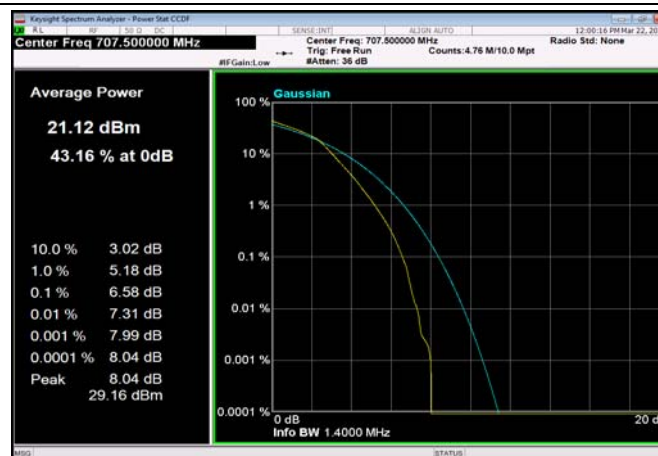


FDD12_3MHz_707.5_OneRB_high_Q16

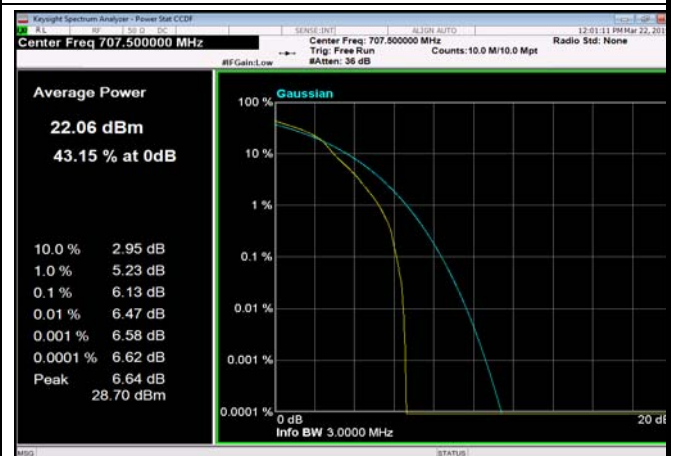

FDD12_3MHz_707.5_fullRB_Q16

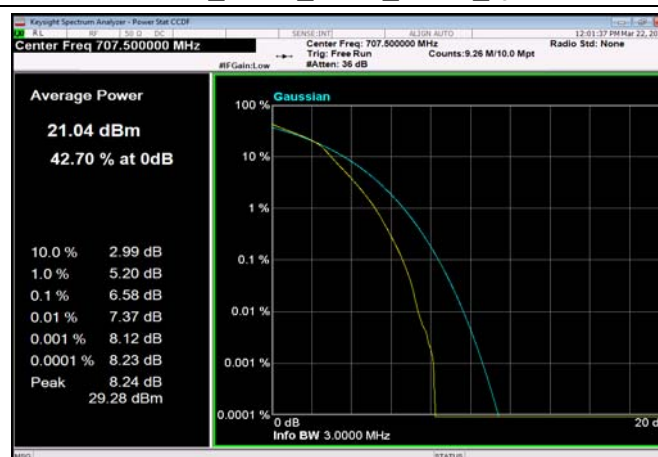


FDD12_5MHz_707.5_OneRB_high_Q16

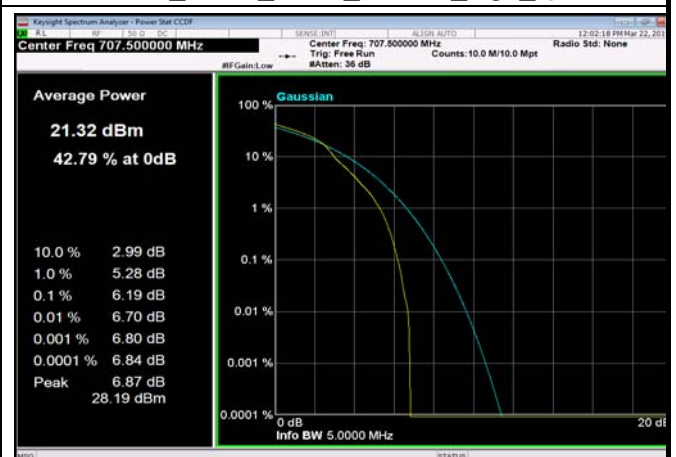





FDD12_5MHz_707.5_fullRB_Q16

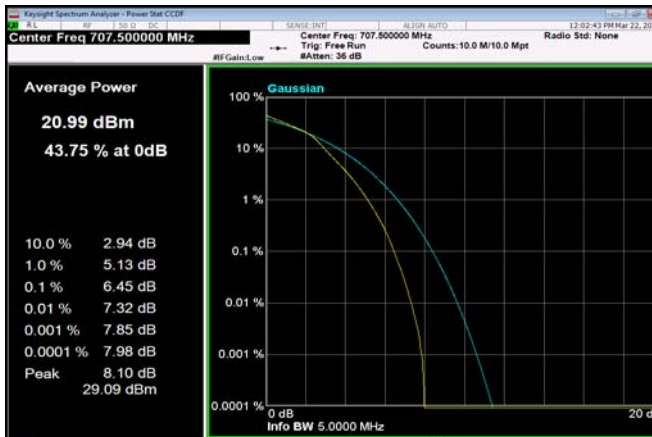


FDD12_10MHz_707.5_OneRB_high_Q16

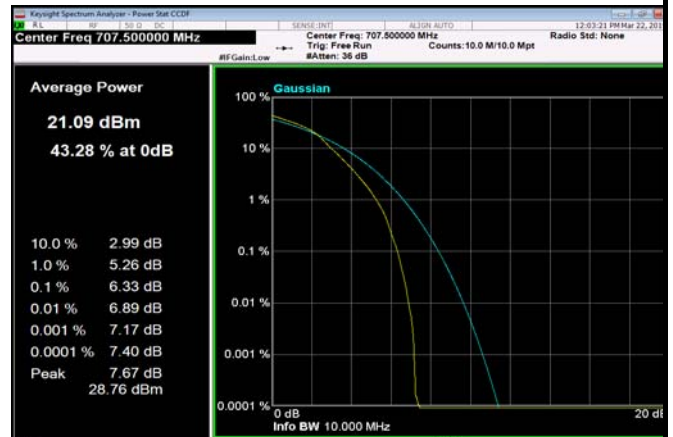


FDD12_10MHz_707.5_fullRB_Q16

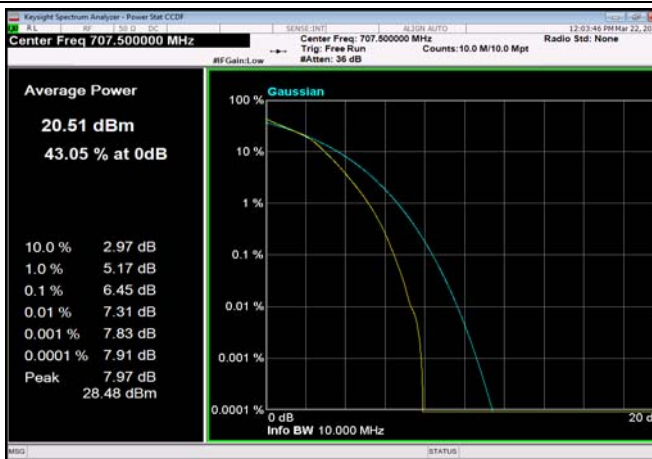


FDD12_1.4MHz_715.3_OneRB_high_Q16

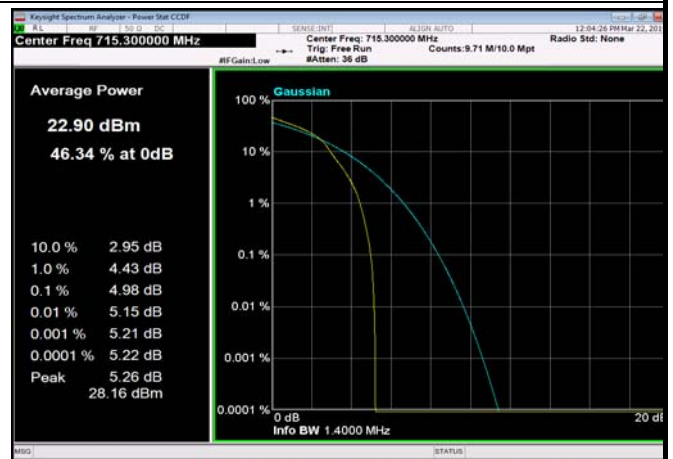

FDD12_1.4MHz_715.3_fullRB_Q16

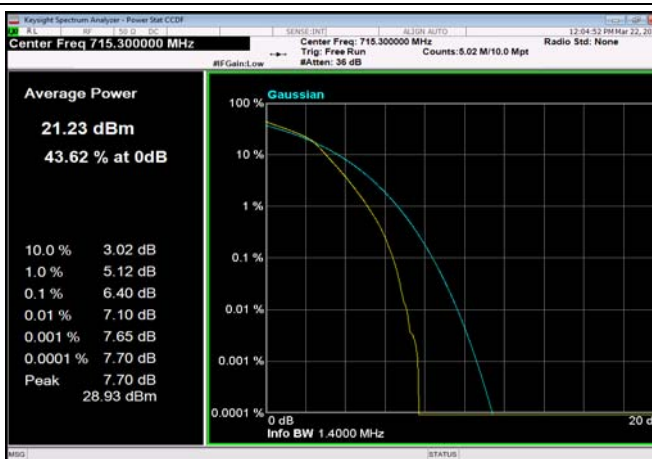


FDD12_3MHz_714.5_OneRB_high_Q16

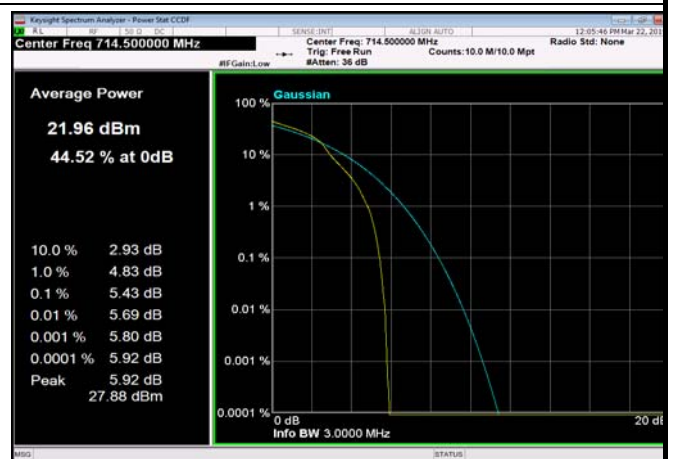





FDD12_3MHz_714.5_fullRB_Q16

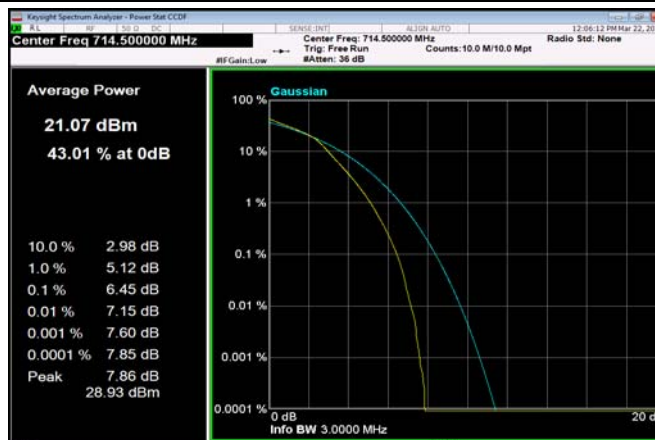


FDD12_5MHz_713.5_OneRB_high_Q16

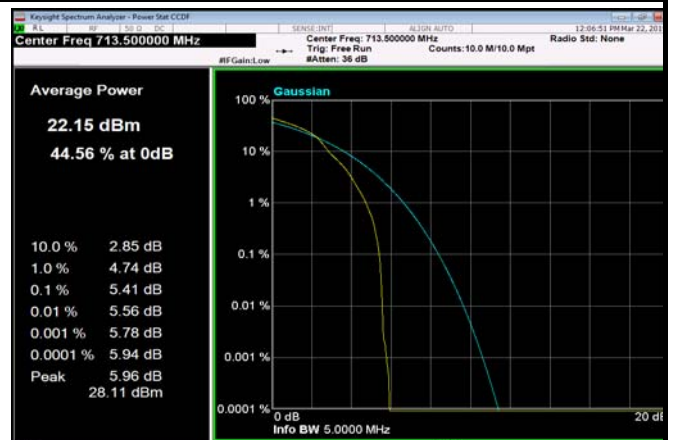


FDD12_5MHz_713.5_fullRB_Q16

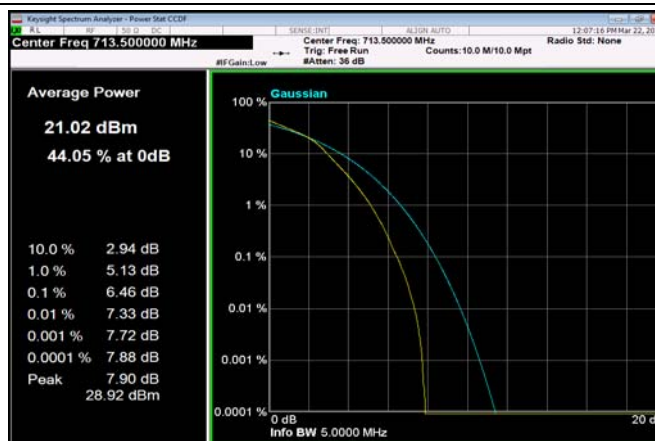


FDD12_10MHz_711_OneRB_high_Q16

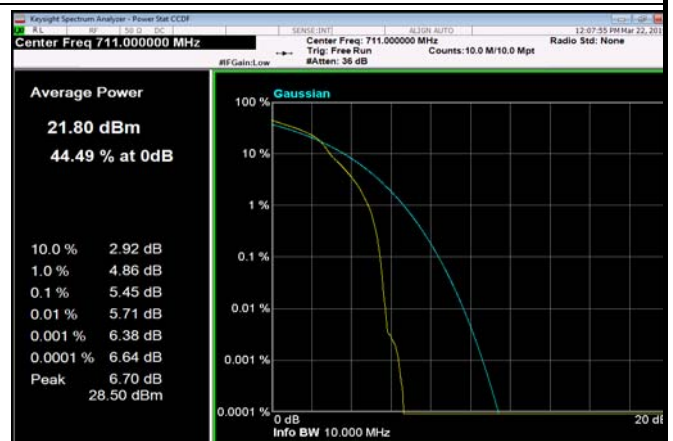

FDD12_10MHz_711_fullRB_Q16

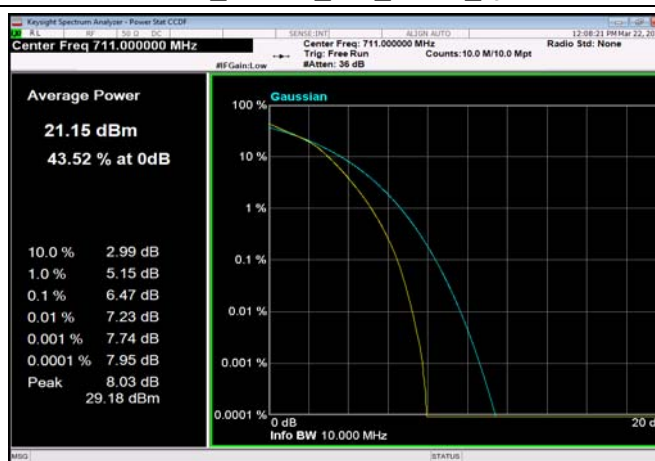


FDD13_5MHz_779.5_OneRB_high_Q16

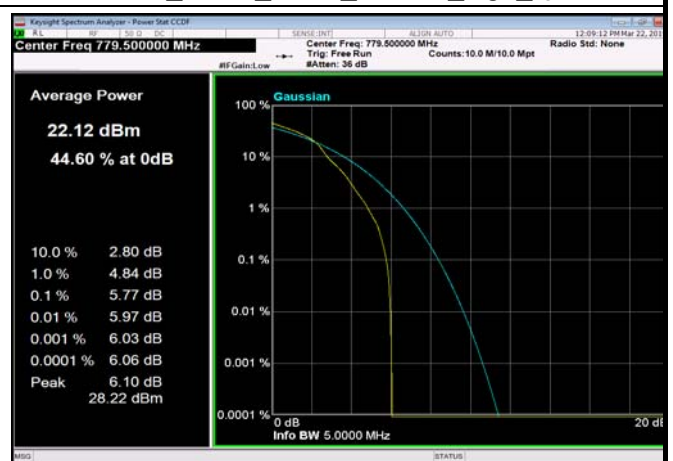





FDD13_5MHz_779.5_fullRB_Q16

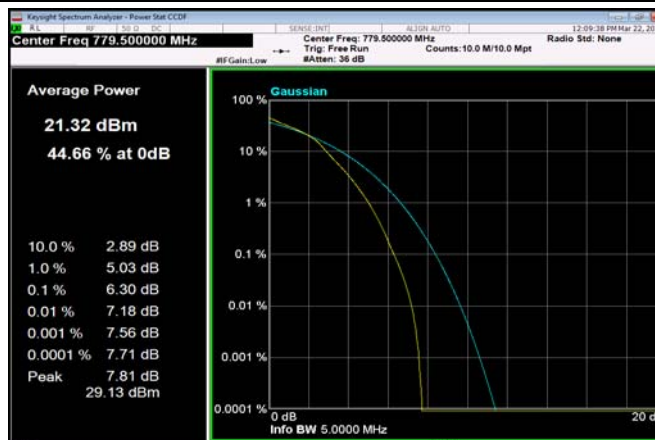


FDD13_10MHz_782_OneRB_high_Q16

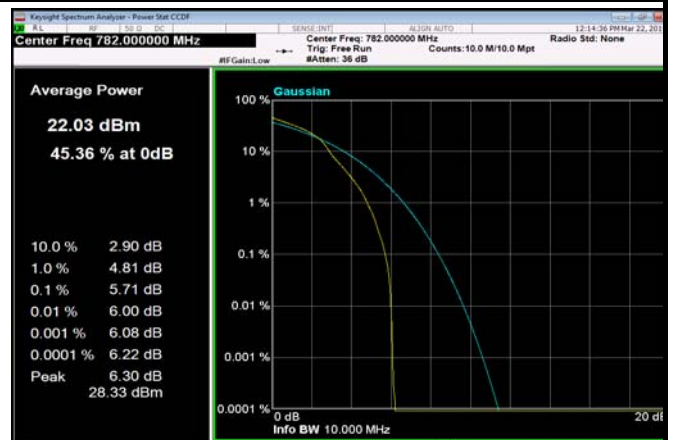


FDD13_10MHz_782_fullRB_Q16

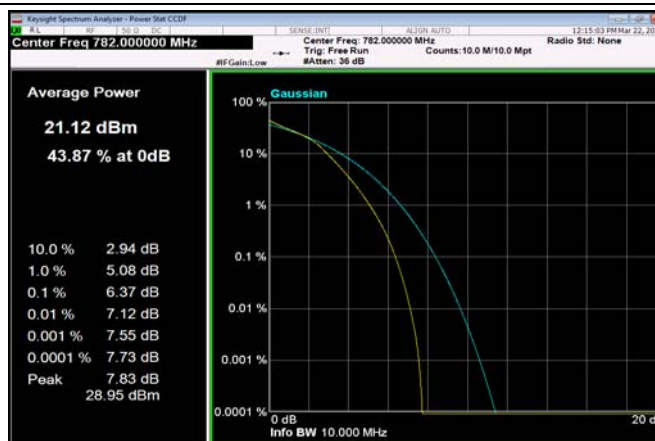


FDD13_5MHz_782_OneRB_high_Q16

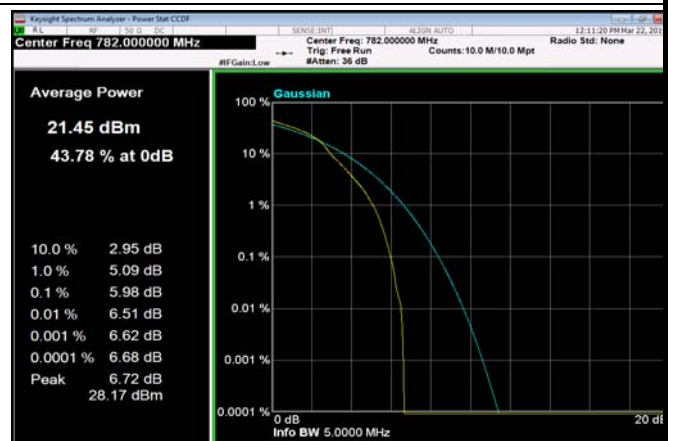

FDD13_5MHz_782_fullRB_Q16

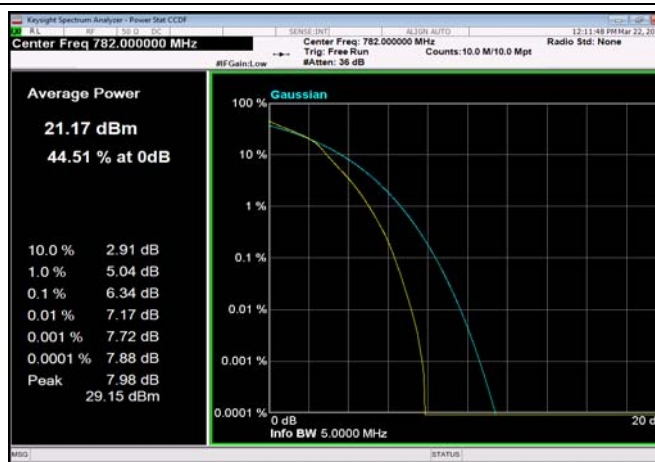


FDD13_10MHz_782_OneRB_high_Q16

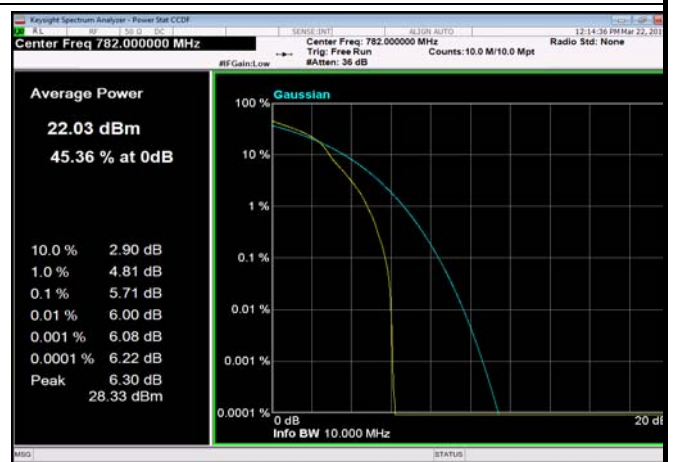





FDD13_10MHz_782_fullRB_Q16

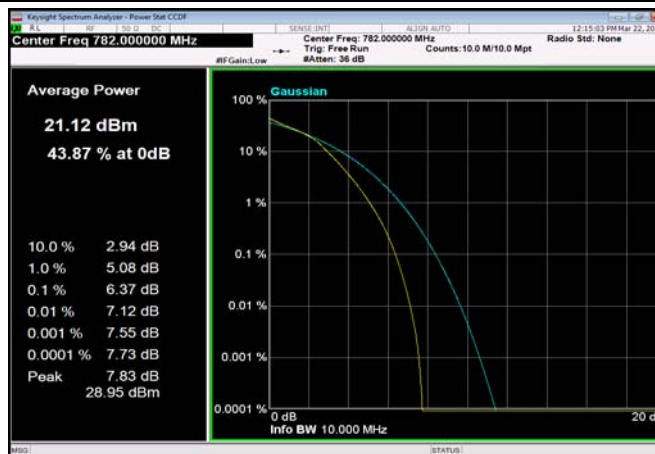


FDD13_5MHz_784.5_OneRB_high_Q16

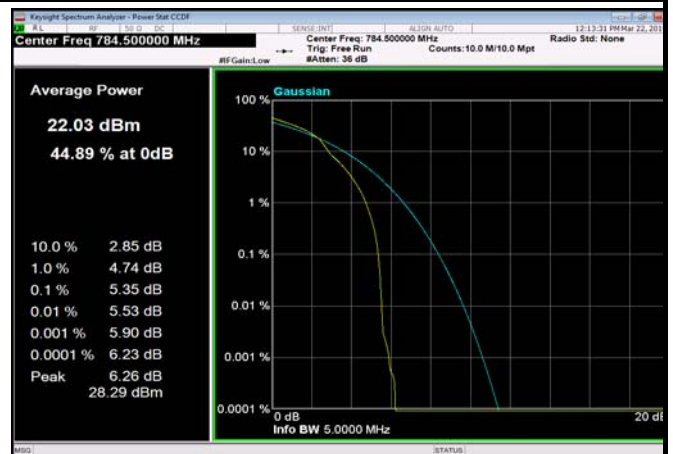


FDD13_5MHz_784.5_fullRB_Q16

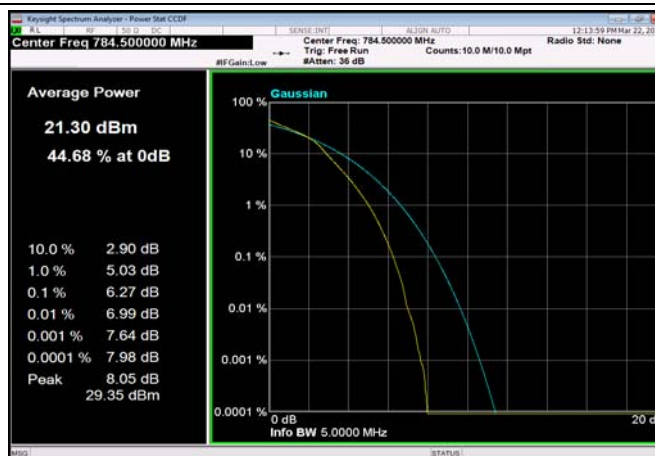


FDD13_10MHz_782_OneRB_high_Q16

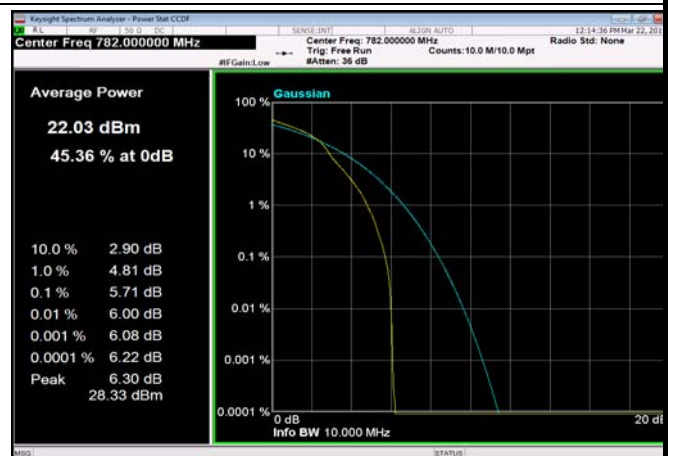

FDD13_10MHz_782_fullRB_Q16

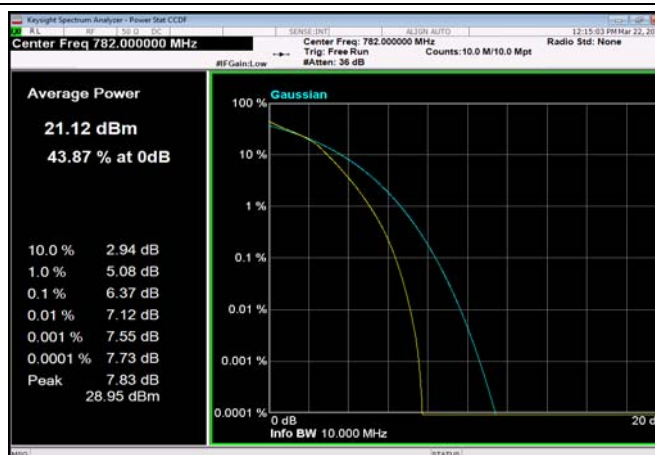


FDD17_5MHz_706.5_OneRB_high_Q16

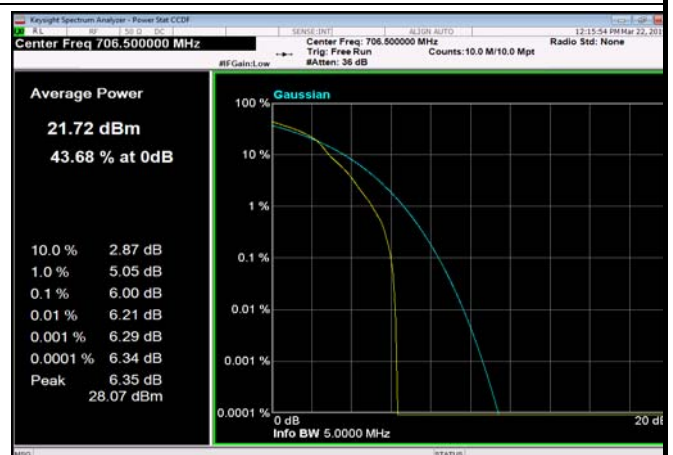





FDD17_5MHz_706.5_fullRB_Q16

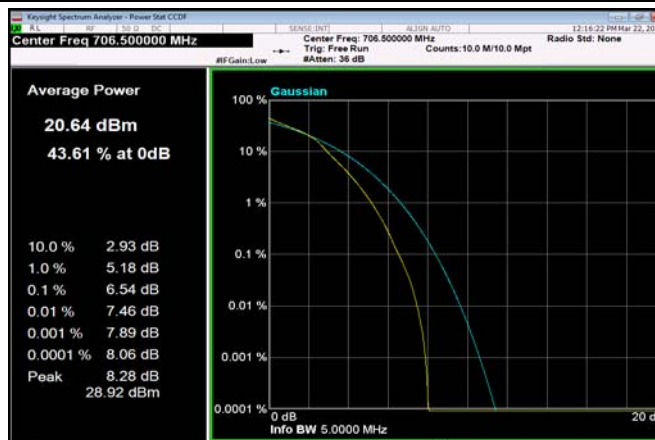


FDD17_10MHz_709_OneRB_high_Q16

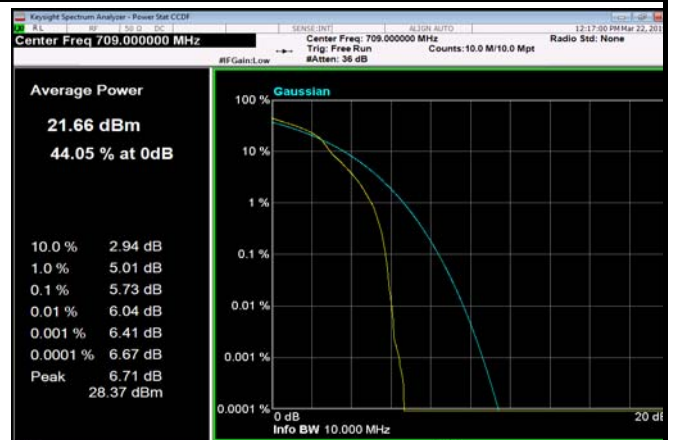


FDD17_10MHz_709_fullRB_Q16

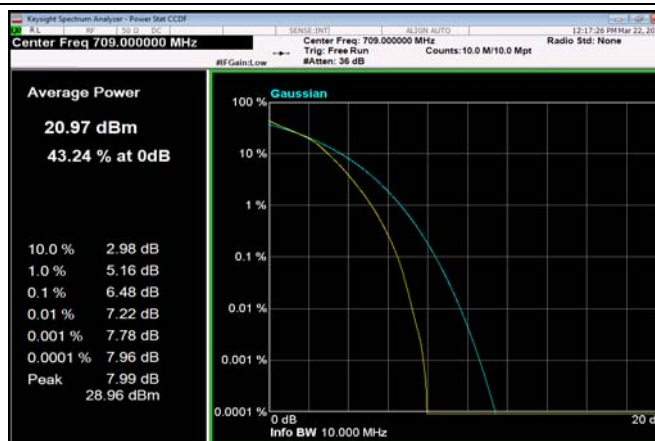


FDD17_5MHz_710_OneRB_high_Q16

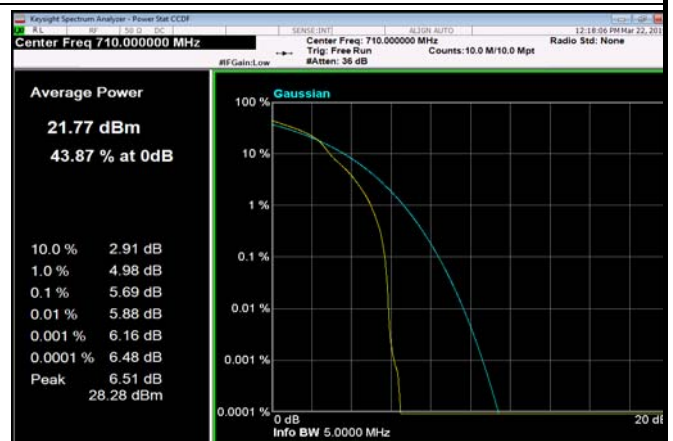

FDD17_5MHz_710_fullRB_Q16

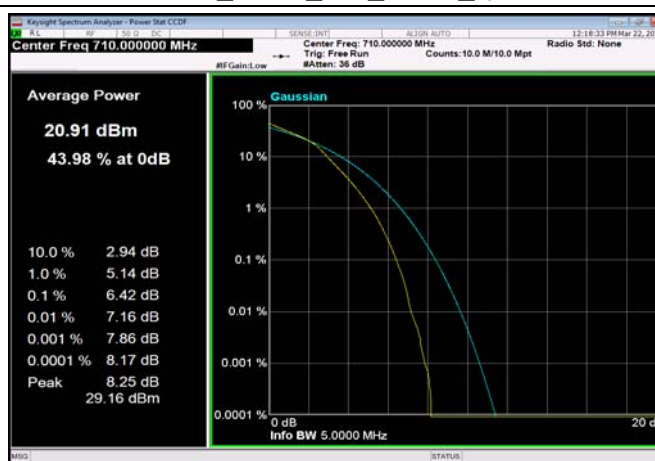


FDD17_10MHz_710_OneRB_high_Q16

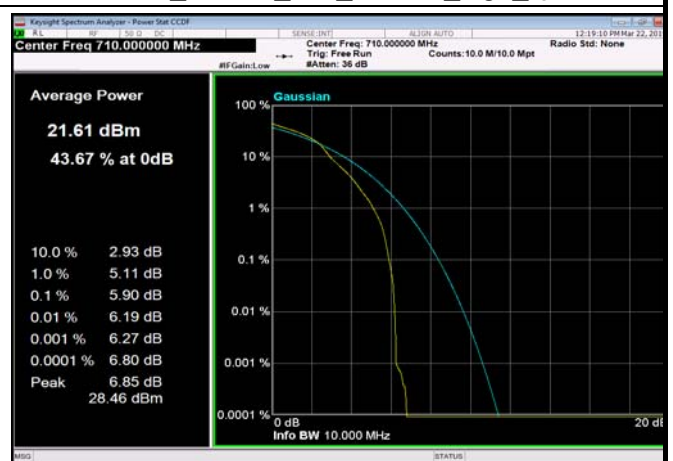





FDD17_10MHz_710_fullRB_Q16

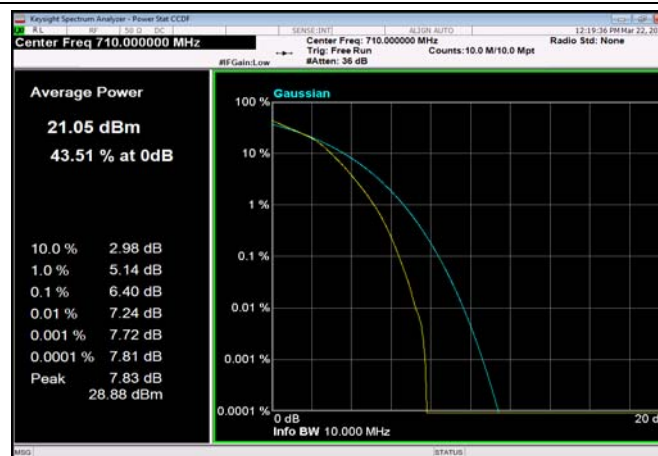


FDD17_5MHz_713.5_OneRB_high_Q16

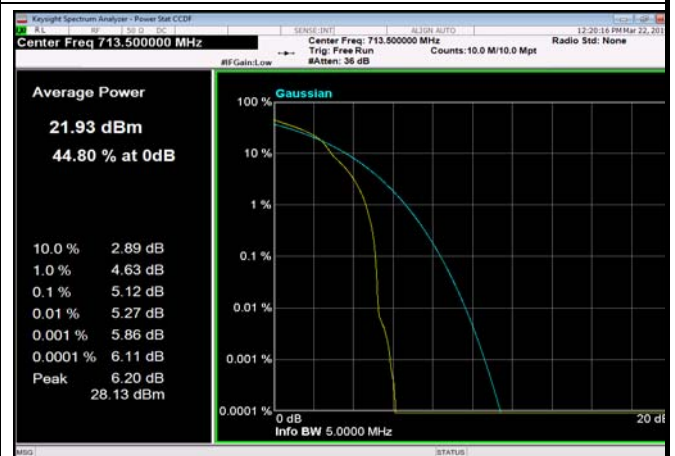


FDD17_5MHz_713.5_fullRB_Q16

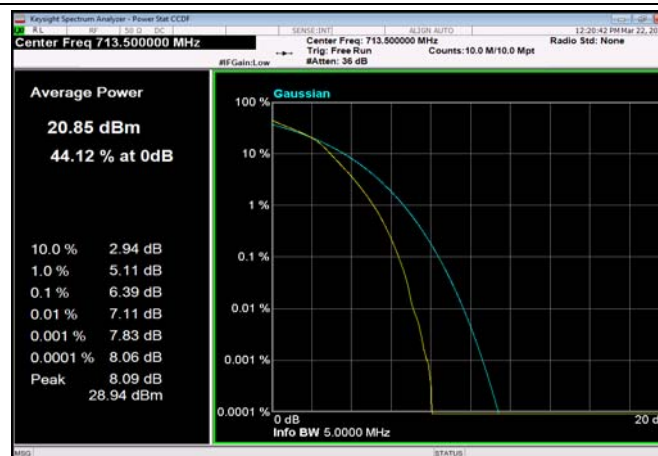

FDD17_10MHz_711_OneRB_high_Q16

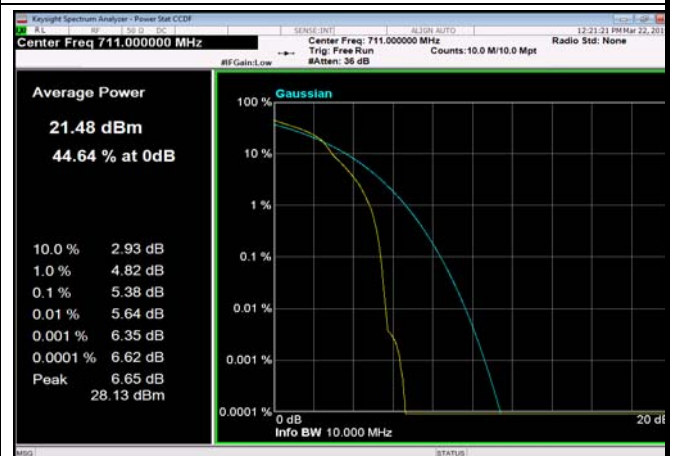

FDD17_10MHz_711_fullRB_Q16

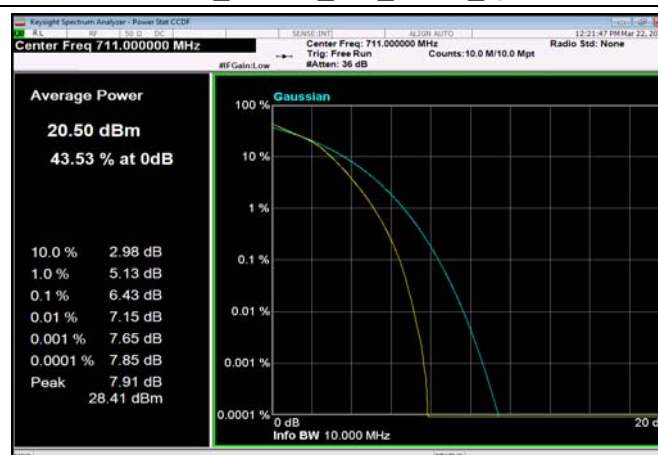

**99% Occupied Bandwidth****Test Result and Data**


Occupied Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	Occupied Bandwidth(99%) (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.085
FDD02	MidRange	1.4	1880	Q16	1.084
FDD02	MidRange	3	1880	QPSK	2.679
FDD02	MidRange	3	1880	Q16	2.678
FDD02	MidRange	5	1880	QPSK	4.485
FDD02	MidRange	5	1880	Q16	4.483
FDD02	MidRange	10	1880	QPSK	8.925
FDD02	MidRange	10	1880	Q16	8.918
FDD02	MidRange	15	1880	QPSK	13.435
FDD02	MidRange	15	1880	Q16	13.435
FDD02	MidRange	20	1880	QPSK	17.893
FDD02	MidRange	20	1880	Q16	17.889
FDD04	MidRange	1.4	1732.5	QPSK	1.086
FDD04	MidRange	1.4	1732.5	Q16	1.087
FDD04	MidRange	3	1732.5	QPSK	2.679
FDD04	MidRange	3	1732.5	Q16	2.678
FDD04	MidRange	5	1732.5	QPSK	4.485
FDD04	MidRange	5	1732.5	Q16	4.483
FDD04	MidRange	10	1732.5	QPSK	8.929
FDD04	MidRange	10	1732.5	Q16	8.921
FDD04	MidRange	15	1732.5	QPSK	13.438
FDD04	MidRange	15	1732.5	Q16	13.439
FDD04	MidRange	20	1732.5	QPSK	17.895
FDD04	MidRange	20	1732.5	Q16	17.896
FDD05	MidRange	1.4	836.5	QPSK	1.086
FDD05	MidRange	1.4	836.5	Q16	1.088




FDD05	MidRange	3	836.5	QPSK	2.68
FDD05	MidRange	3	836.5	Q16	2.678
FDD05	MidRange	5	836.5	QPSK	4.485
FDD05	MidRange	5	836.5	Q16	4.482
FDD05	MidRange	10	836.5	QPSK	8.926
FDD05	MidRange	10	836.5	Q16	8.917
FDD13	MidRange	5	782	QPSK	4.484
FDD13	MidRange	5	782	Q16	4.482
FDD13	MidRange	10	782	QPSK	8.92
FDD13	MidRange	10	782	Q16	8.914
FDD17	MidRange	5	710	QPSK	4.485
FDD17	MidRange	5	710	Q16	4.485
FDD17	MidRange	10	710	QPSK	8.921
FDD17	MidRange	10	710	Q16	8.916
FDD12	MidRange	1.4	707.5	QPSK	1.09
FDD12	MidRange	1.4	707.5	Q16	1.087
FDD12	MidRange	3	707.5	QPSK	2.68
FDD12	MidRange	3	707.5	Q16	2.679
FDD12	MidRange	5	707.5	QPSK	4.486
FDD12	MidRange	5	707.5	Q16	4.485
FDD12	MidRange	10	707.5	QPSK	8.927
FDD12	MidRange	10	707.5	Q16	8.923




FDD02_MidRange_1.4_1880_QPSK

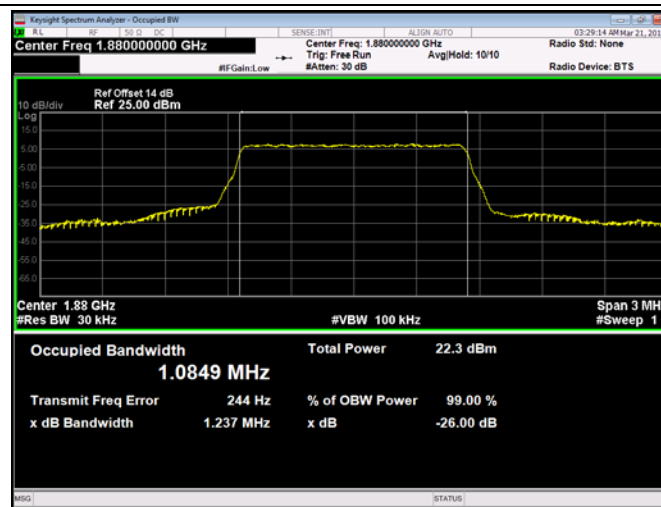


FDD02_MidRange_1.4_1880_Q16

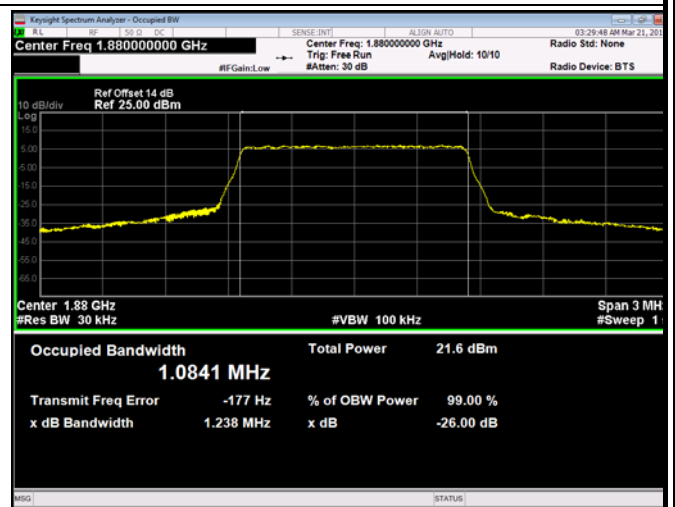


FDD02_MidRange_3_1880_QPSK

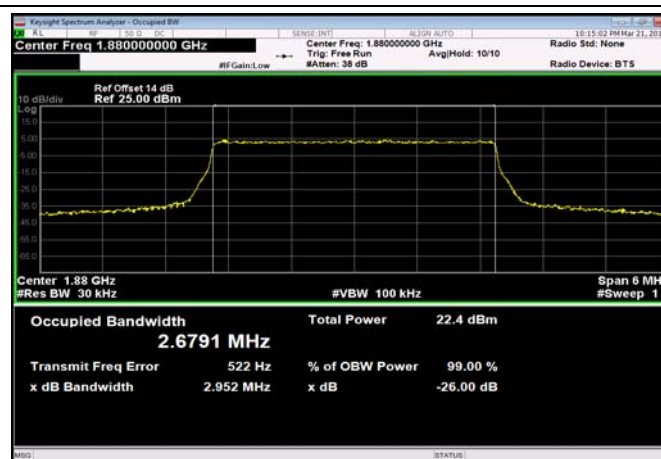


FDD02_MidRange_3_1880_Q16

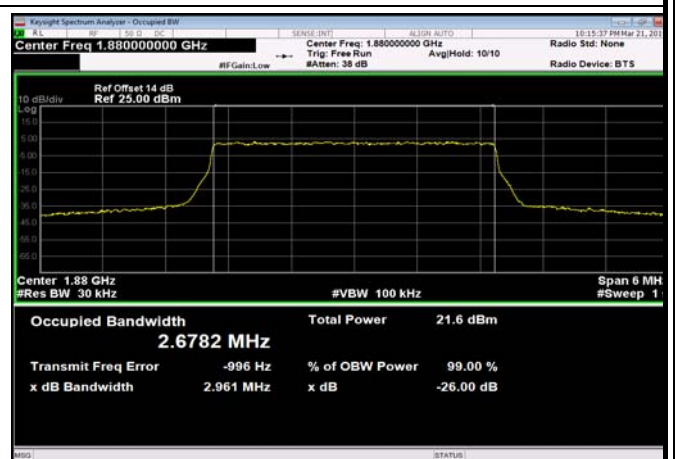

FDD02_MidRange_5_1880_QPSK

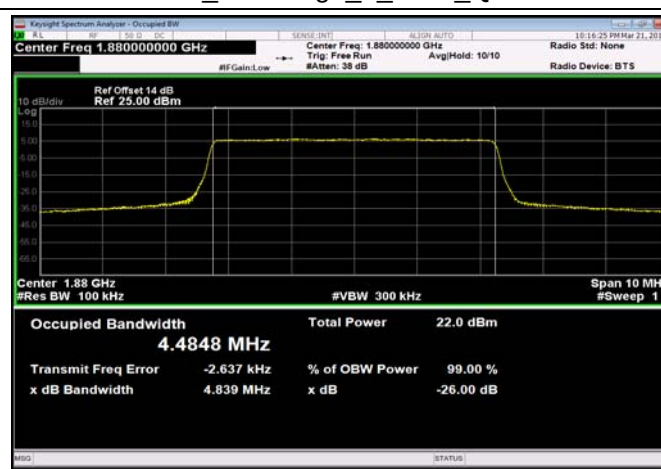


FDD02_MidRange_5_1880_Q16

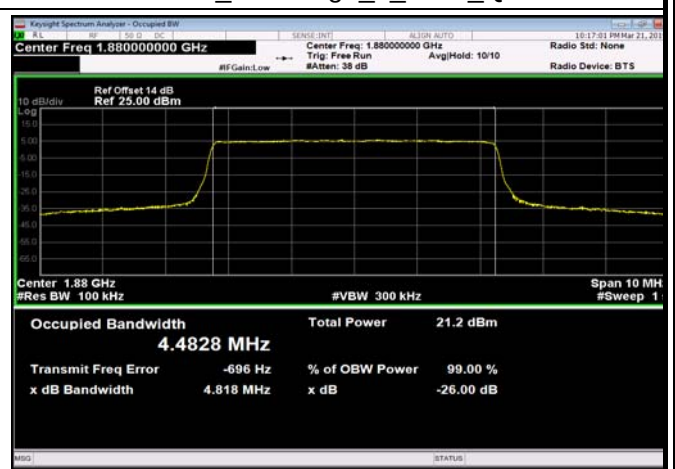





FDD02_MidRange_10_1880_QPSK

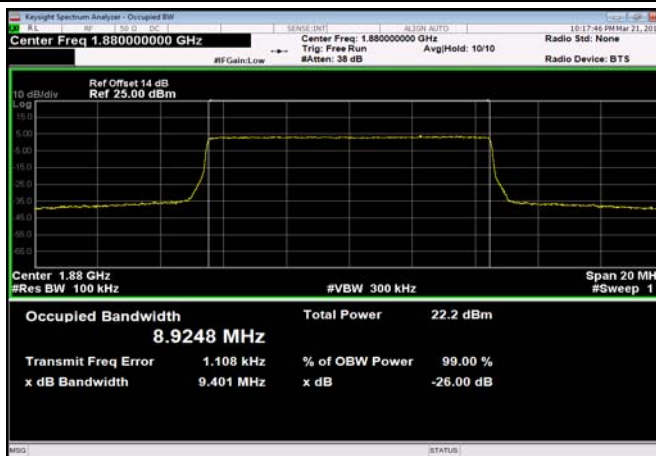


FDD02_MidRange_10_1880_Q16

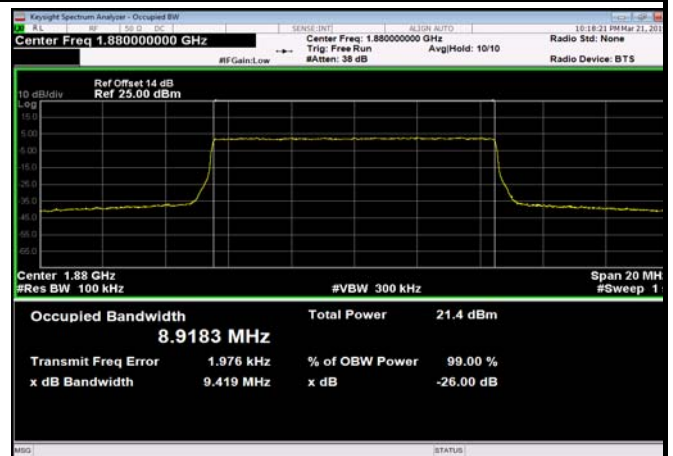


FDD02_MidRange_15_1880_QPSK

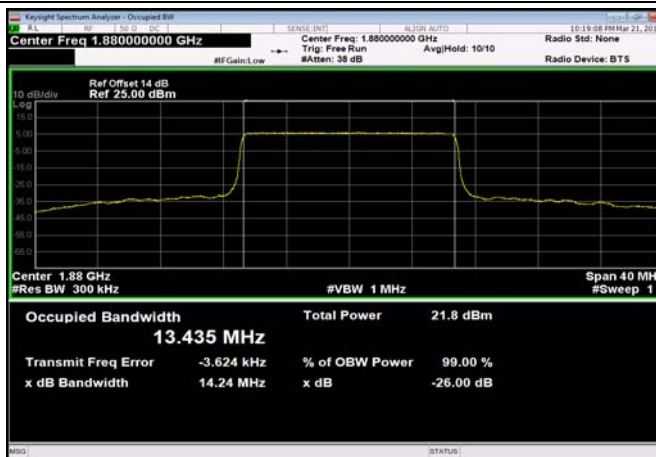


FDD02_MidRange_15_1880_Q16

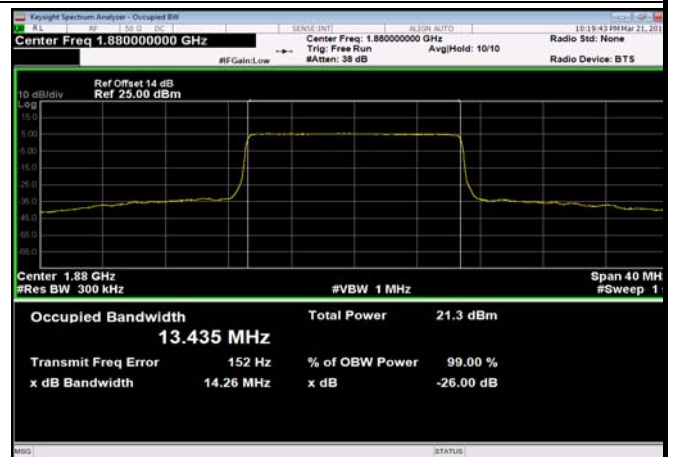

FDD02_MidRange_20_1880_QPSK

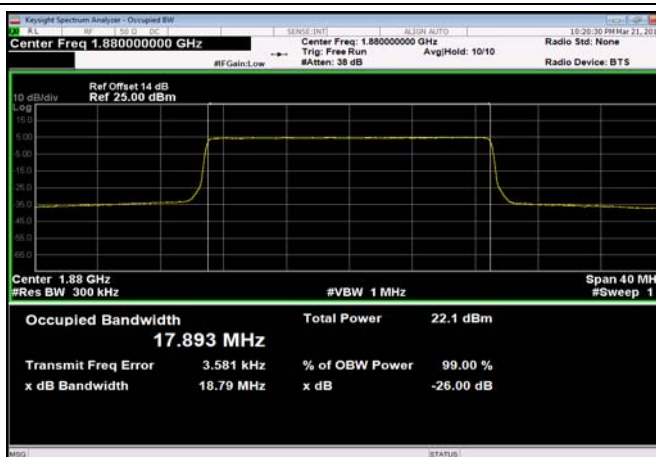


FDD02_MidRange_20_1880_Q16

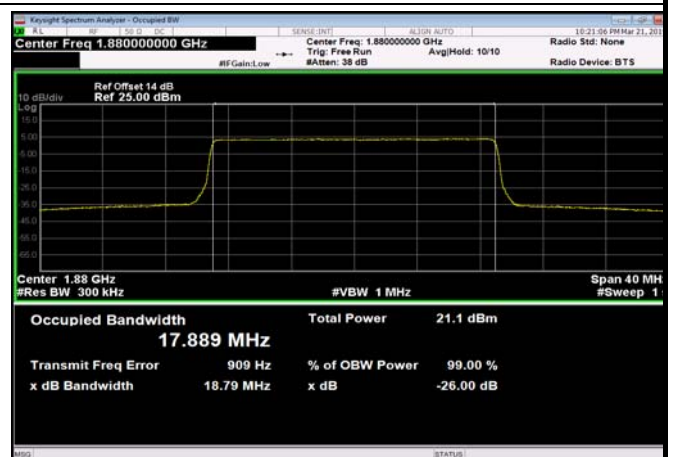





FDD04_MidRange_1.4_1732.5_QPSK

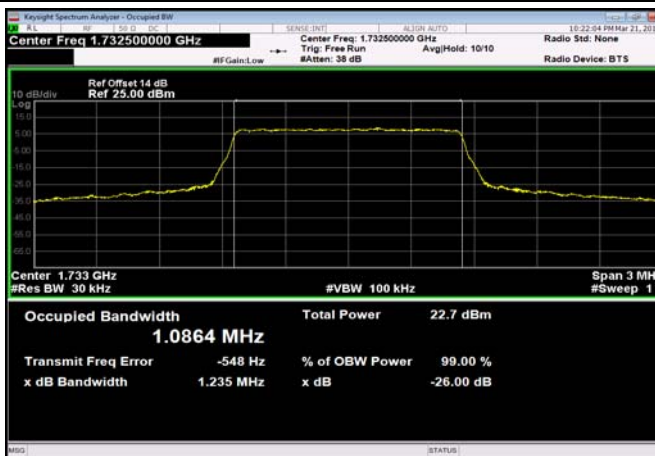


FDD04_MidRange_1.4_1732.5_Q16

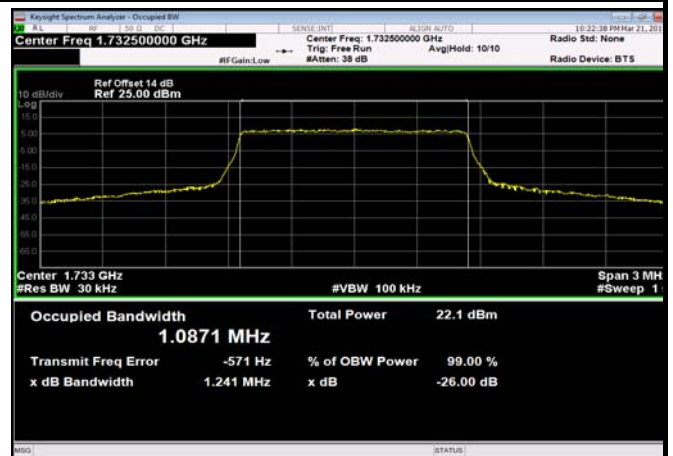


FDD04_MidRange_3_1732.5_QPSK

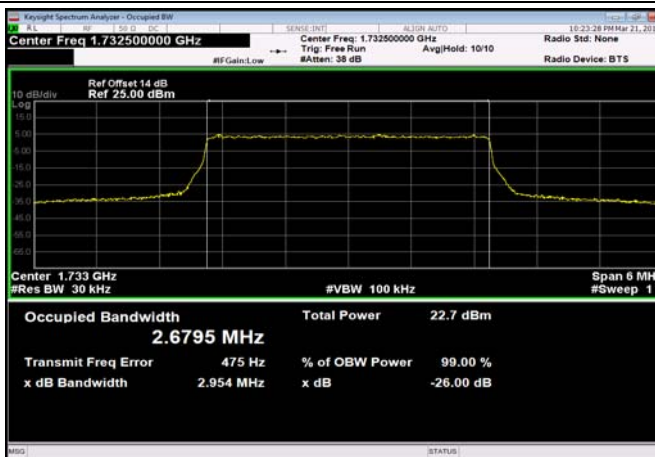


FDD04_MidRange_3_1732.5_Q16

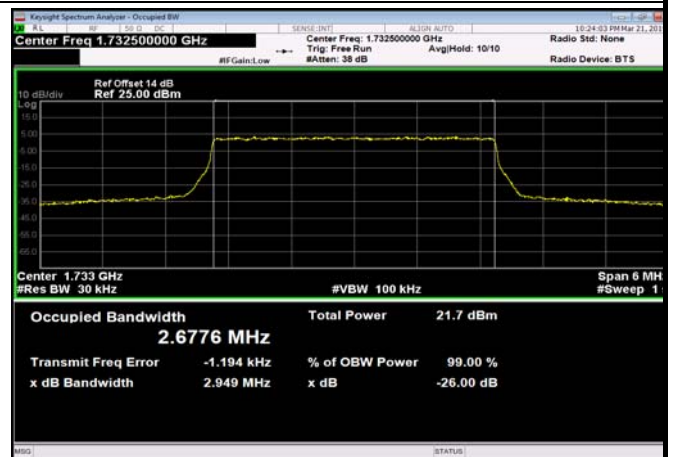

FDD04_MidRange_5_1732.5_QPSK

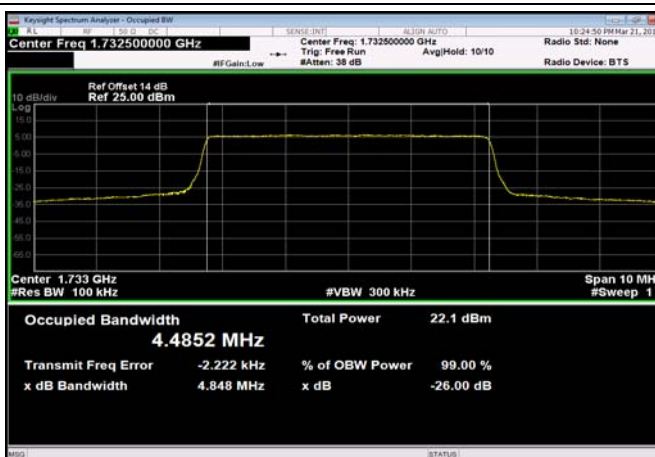


FDD04_MidRange_5_1732.5_Q16

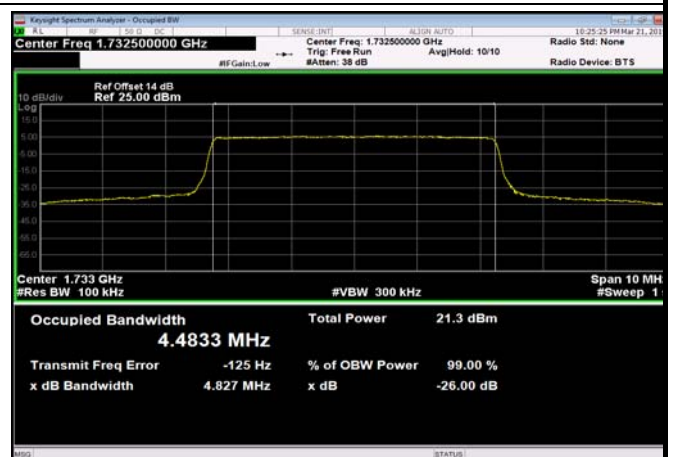





FDD04	MidRange	10	1732.5	QPSK
-------	----------	----	--------	------

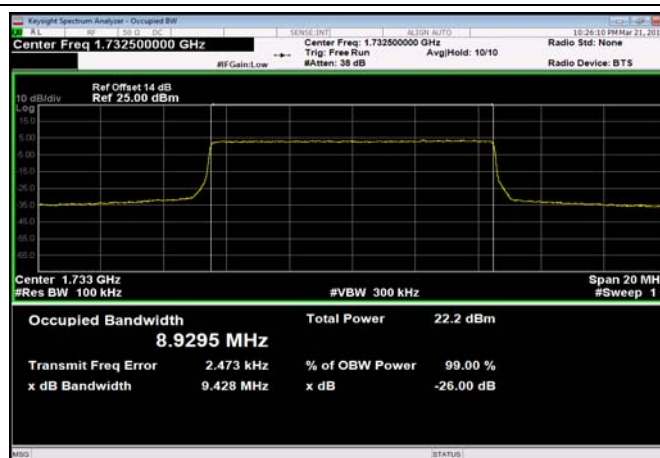


FDD04	MidRange	10	1732.5	Q16
-------	----------	----	--------	-----

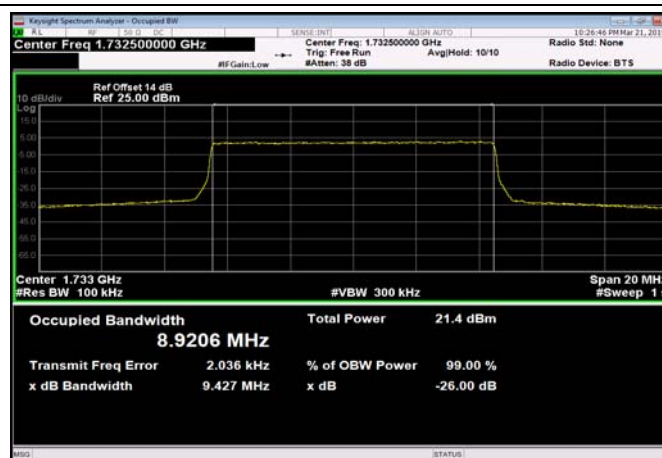


FDD04	MidRange	15	1732.5	QPSK
-------	----------	----	--------	------

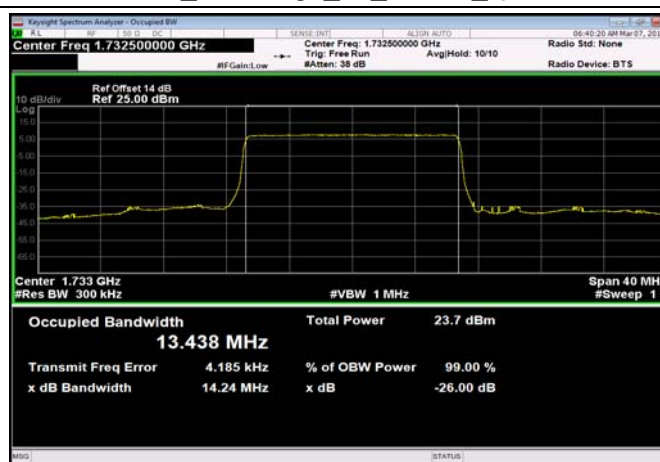


FDD04	MidRange	15	1732.5	Q16
-------	----------	----	--------	-----

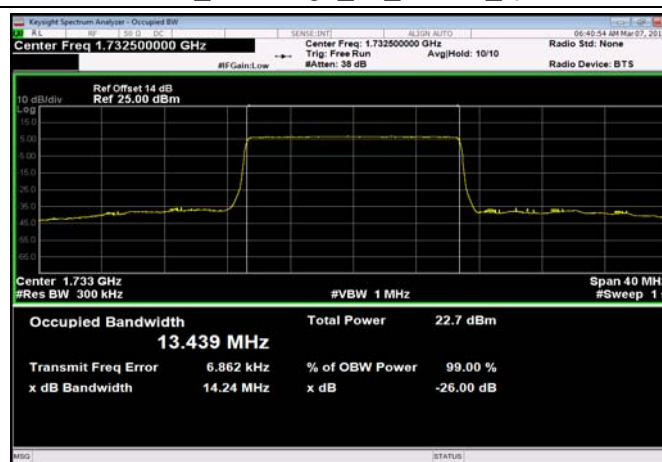

FDD04	MidRange	20	1732.5	QPSK
-------	----------	----	--------	------

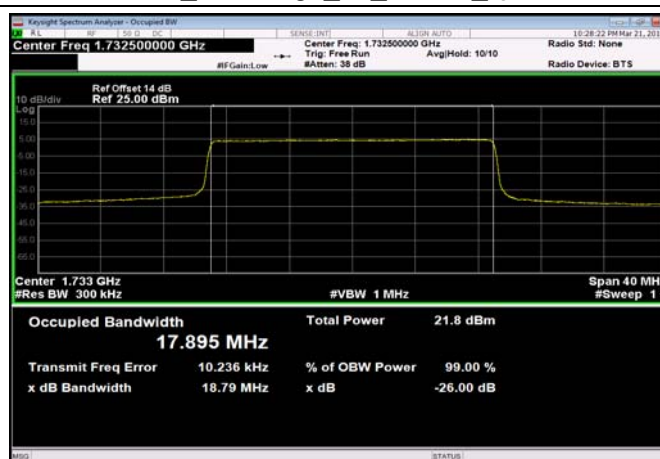


FDD04	MidRange	20	1732.5	Q16
-------	----------	----	--------	-----

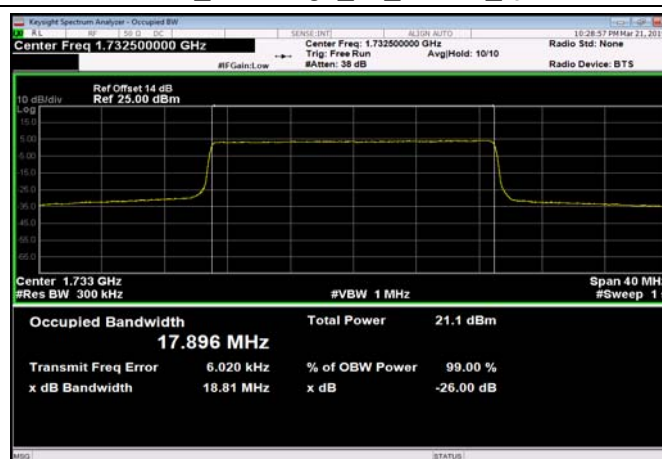


FDD05_MidRange_1.4_836.5_QPSK

FDD05_MidRange_1.4_836.5_Q16

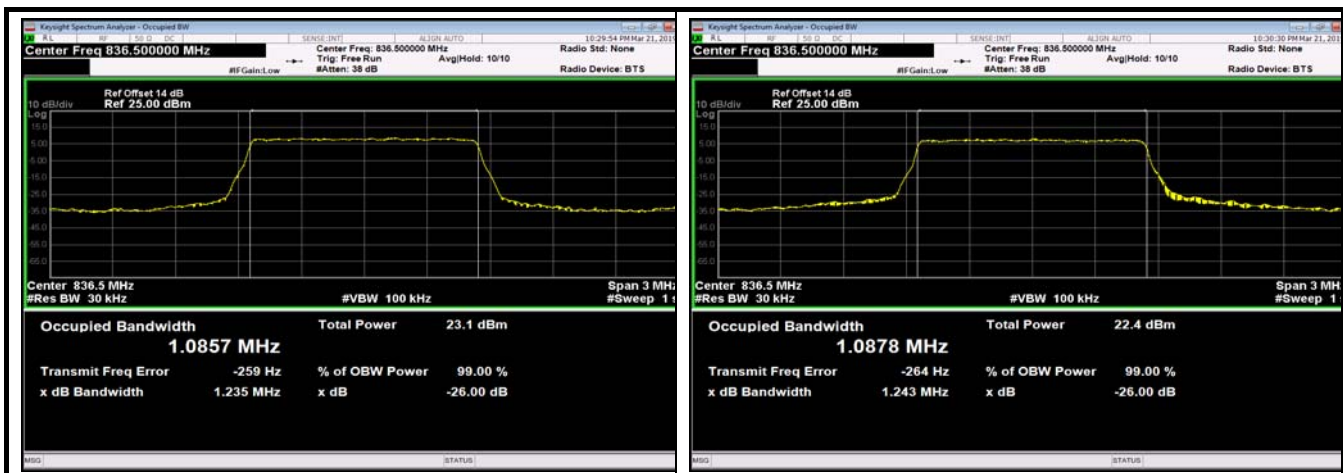





FDD05_MidRange_3_836.5_QPSK

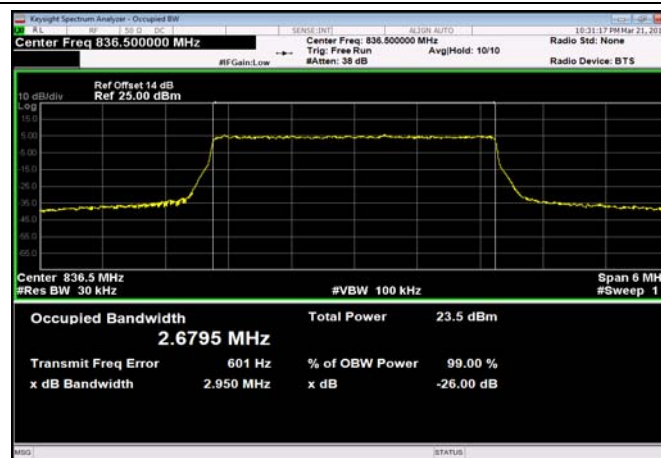


FDD05_MidRange_3_836.5_Q16

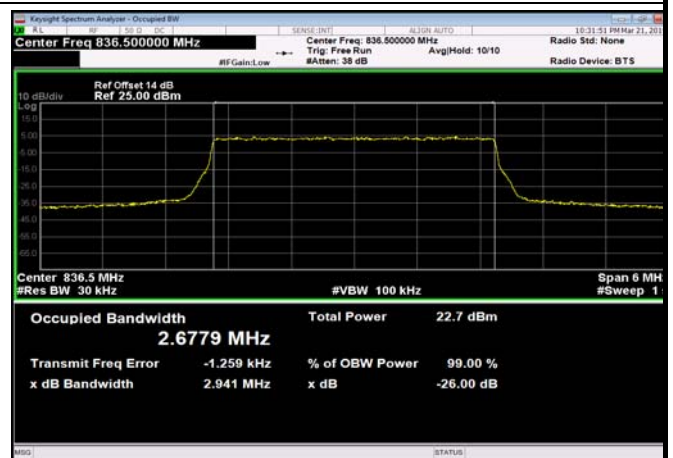


FDD05_MidRange_5_836.5_QPSK

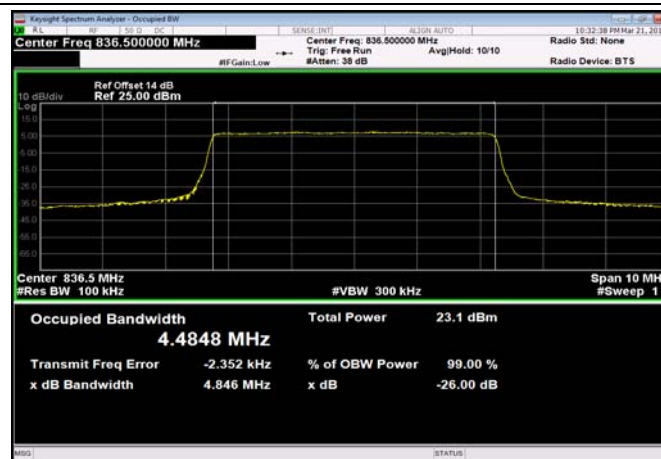


FDD05_MidRange_5_836.5_Q16

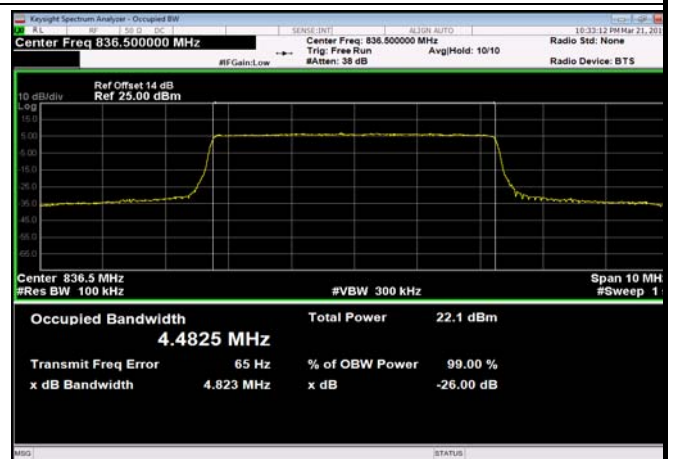

FDD05_MidRange_10_836.5_QPSK

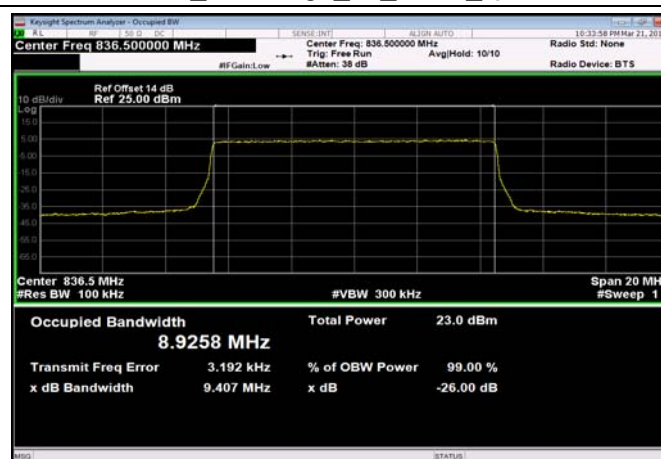


FDD05_MidRange_10_836.5_Q16

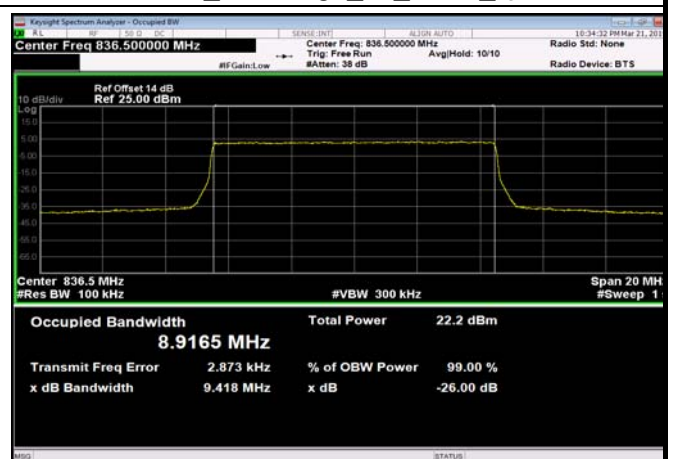





FDD13_MidRange_5_782_QPSK

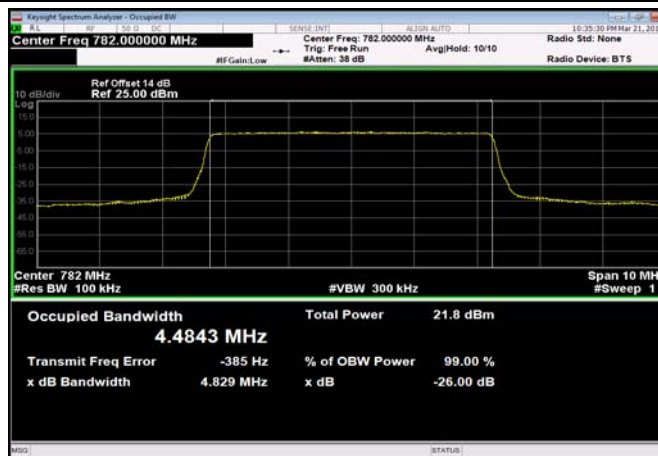


FDD13_MidRange_5_782_Q16

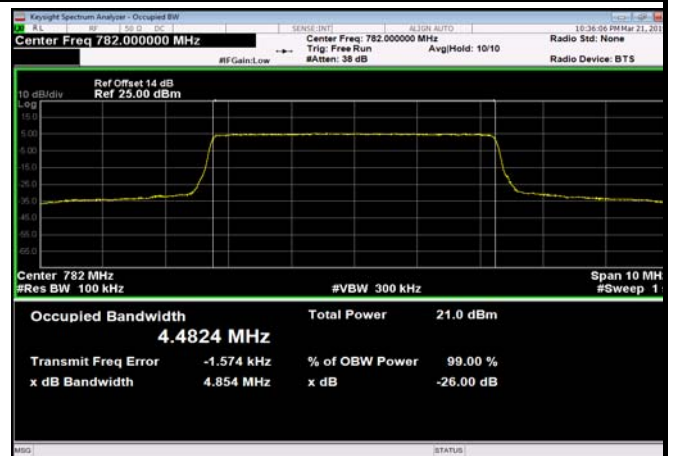


FDD13_MidRange_10_782_QPSK

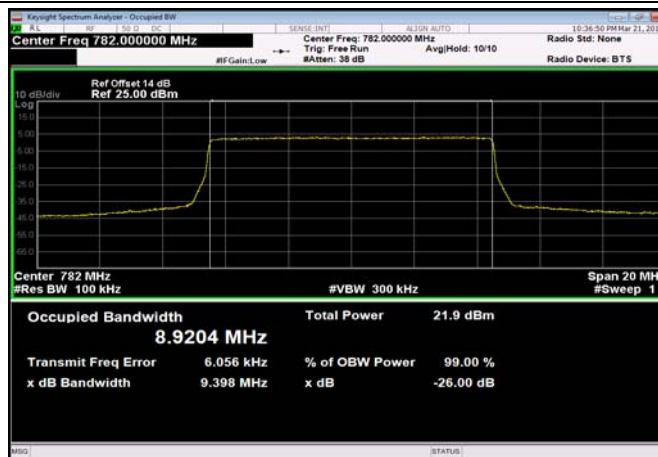

FDD13_MidRange_10_782_Q16

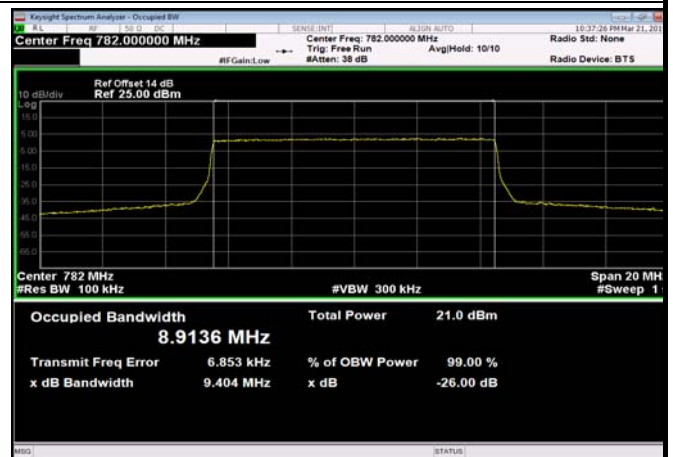

FDD17_MidRange_5_710_QPSK

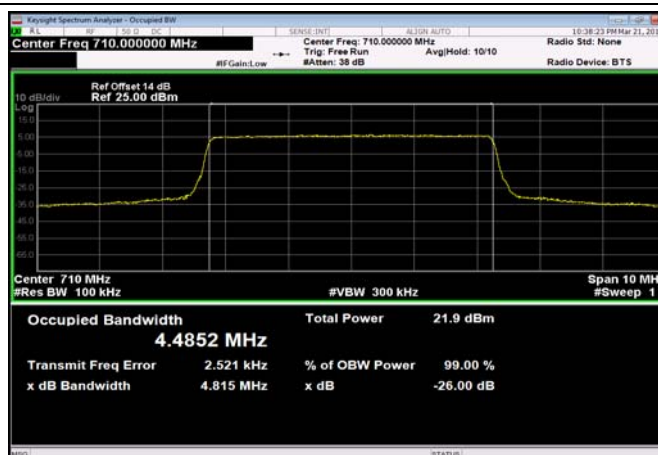

FDD17_MidRange_5_710_Q16

