



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

WiFi Module

MODEL NUMBER: SI07

FCC ID: 2AFG6-SI07

IC: 22166- SI07

REPORT NUMBER: 4789708215-6

ISSUE DATE: November 30, 2020

Prepared for

**Guangzhou Shirui Electronics Co Ltd
192 Kezhu Road, Sciencetech Park, guangzhou Economic Technology Development
District Guangzhou China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	11/30/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
Note: 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.			

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM OUTPUT POWER.....	9
5.4. TEST CHANNEL CONFIGURATION.....	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. THE WORSE CASE CONFIGURATIONS	10
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.8. DESCRIPTION OF TEST SETUP.....	12
6. MEASURING INSTRUMENT AND SOFTWARE USED	13
7. ANTENNA PORT TEST RESULTS	14
7.1. ON TIME AND DUTY CYCLE	14
7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH	15
7.3. CONDUCTED OUTPUT POWER	17
7.4. POWER SPECTRAL DENSITY	18
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	20
8. RADIATED TEST RESULTS.....	22
8.1. RESTRICTED BANDEDGE	28
8.1.1. 802.11b SISO MODE.....	28
8.1.2. 802.11g SISO MODE.....	32
8.1.3. 802.11n HT20 MIMO MODE.....	36
8.1.4. 802.11n HT40 MIMO MODE.....	40
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)	44
8.2.1. 802.11n HT20 MIMO MODE.....	44
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)	50
8.3.1. 802.11b SISO MODE.....	50
8.3.2. 802.11g SISO MODE.....	56
8.3.3. 802.11n HT20 MIMO MODE.....	62
8.3.4. 802.11n HT40 MIMO MODE.....	68



8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	74
8.5.1.	802.11n HT20 MIMO MODE	74
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	76
8.6.1.	802.11n HT20 MIMO MODE	76
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz	78
8.7.1.	802.11n HT20 MIMO MODE	78
9.	AC POWER LINE CONDUCTED EMISSIONS	81
9.1.1.	802.11n HT20 MIMO MODE	82
10.	ANTENNA REQUIREMENTS	84
Appendix		85
Appendix A:	DTS Bandwidth	85
Test Result		85
Test Graphs		86
Appendix B:	Occupied Channel Bandwidth	94
Test Result		94
Test Graphs		95
Appendix C:	Maximum conducted AVG output power	103
Test Result		103
Appendix D:	Maximum power spectral density	104
Test Result		104
Test Graphs		105
Appendix E:	Band edge measurements	111
Test Result		111
Test Graphs		112
Appendix F:	Conducted Spurious Emission	116
Test Result		116
Test Graphs		117
Appendix G:	Duty Cycle	135
Test Result		135
Test Graphs		136



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Guangzhou Shirui Electronics Co Ltd
Address: 192 Kezhu Road, Sciencetech Park, Guangzhou Economic
Technology Development District Guangzhou China

Manufacturer Information

Company Name: Guangzhou Shirui Electronics Co Ltd
Address: 192 Kezhu Road, Sciencetech Park, Guangzhou Economic
Technology Development District Guangzhou China

EUT Information

EUT Name: WiFi Module
Model: SI07
Sample Received Date: October 29, 2020
Sample Status: Normal
Sample ID: 3437335
Date of Tested: October 29, 2020~ November 28, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Mick Zhang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WiFi Module		
Model	SI07		
Radio Technology	WLAN (IEEE 802.11b/g/n HT20/n HT40)		
Operation frequency	IEEE 802.11b: 2412MHz ~ 2462MHz IEEE 802.11g: 2412MHz ~ 2462MHz IEEE 802.11n HT20: 2412MHz ~ 2462MHz IEEE 802.11n HT40: 2422MHz ~ 2452MHz		
Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)		
Power Supply	DC State	Rate Input:	DC 5 V
Wireless Module	SKI.WB8822CU.1		

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	17.16
g	2412 ~ 2462	1-11[11]	15.14
n HT20	2412 ~ 2462	1-11[11]	18.54
n HT40	2422 ~ 2452	3-9[7]	18.08

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		MPTool					
Modulation Mode	Transmit Antenna Number	Test Software Setting Value					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	88	87	89	/		
	2	103	103	106			
802.11g	1	66	67	70			
	2	80	81	84			
802.11n HT20	1	77	77	80			
	2	91	91	95			
802.11n HT40	1	/			77	78	78
	2	/			92	92	93

Note: Antenna 1 and antenna 2 use the same power setting for both SISO and MIMO modes.

5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

IEEE 802.11b / SISO – DBPSK / 1 Mbps
IEEE 802.11g / SISO – BPSK / 6 Mbps
IEEE 802.11n HT20 / MIMO – BPSK / MCS0
IEEE 802.11n HT40 / MIMO – BPSK / MCS0



5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	FPC antenna	3.17
2	2412-2462	FPC antenna	3.75

Note: Directional gain= $10 \log [(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}] = 6.48 \text{ dBi}$

G_{ANT} : Average of the Antenna Gain

N_{ANT} : Antenna numbers

Note: The value of the antenna gain was declared by customer.

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 2TX, 2RX	ANT 1,2 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 2TX, 2RX	ANT 1,2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 2TX, 2RX	ANT 1,2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒ 2TX, 2RX	ANT 1,2 can be used as transmitting/receiving antenna.
Note: Only 802.11n HT20/HT40 support MIMO mode.		

Note: The EUT have two wireless modules, one is called module SKI.WB7668CU.1 and the other one called module SKI.WB8822CU.1.

Simultaneously transmission condition.

Condition	Technology				Support (YES/NO)
1 (Module SKI.WB7668CU.1)	WLAN(2.4G)		WLAN(5G)		NO
2 (Module SKI.WB8822CU.1)	BT	BLE	WLAN(2.4G)	WLAN(5G)	NO

Co-Location condition.

Condition	Technology (Module SKI.WB7668CU.1)	Technology (Module SKI.WB8822CU.1)	Support (YES/NO)
1	WLAN(2.4G)	BT	YES
2	WLAN(2.4G)	BLE	YES
3	WLAN(2.4G)	WLAN (2.4G)	YES
4	WLAN(2.4G)	WLAN (5G)	YES
5	WLAN (5G)	BT	YES
6	WLAN (5G)	BLE	YES
7	WLAN (5G)	WLAN (2.4G)	YES
8	WLAN (5G)	WLAN (5G)	YES

Note: For the Co-Location test result please refer to test report 4789708215-10.



5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Dell	Vostro 3902	8KNDDDB2

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

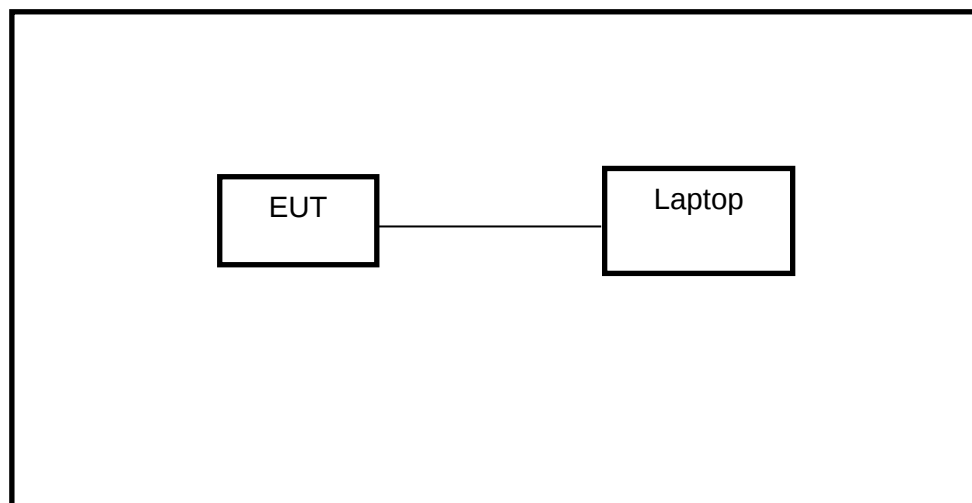

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
Software						
Used	Description			Manufacturer	Name	Version
☒	Test Software for Conducted disturbance			Farad	EZ-EMC	Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.05,2020
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17,2018	Sep.17,2021
☒	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
☒	Horn Antenna	TDK	HRN-0118	130939	Sep.17,2018	Sep.17,2021
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11,2018	Aug.11,2021
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00067	Dec.05,2019	Dec.05,2020
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020
☒	Loop antenna	Schwarzbeck	1519B	00008	Jan.07,2019	Jan.07,2022
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.05,2019	Dec.05,2020
Software						
Used	Description			Manufacturer	Name	Version
☒	Test Software for Radiated disturbance			Farad	EZ-EMC	Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.05,2020
☒	Power sensor, Power Meter	R&S	OSP120	100921	Dec.06,2019	Dec.06,2020



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	27.3°C	Relative Humidity	47.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix G.

7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



TEST SETUP

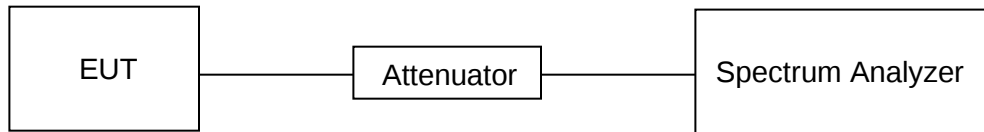

TEST ENVIRONMENT

Temperature	27.3°C	Relative Humidity	47.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix A & B.



7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Conducted Output Power	1 watt or 30 dBm	2400-2483.5

Note:

The directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.9.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	27.3°C	Relative Humidity	47.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix C.



7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	27.3°C	Relative Humidity	47.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V



RESULTS

Please refer to appendix D.



7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span/RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.



TEST SETUP

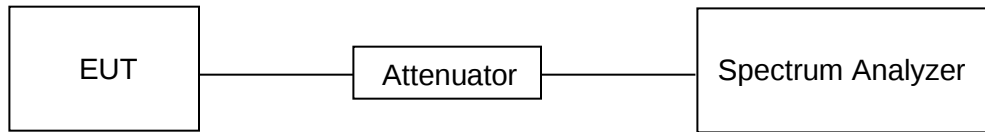

TEST ENVIRONMENT

Temperature	27.3°C	Relative Humidity	47.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix E & F.



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

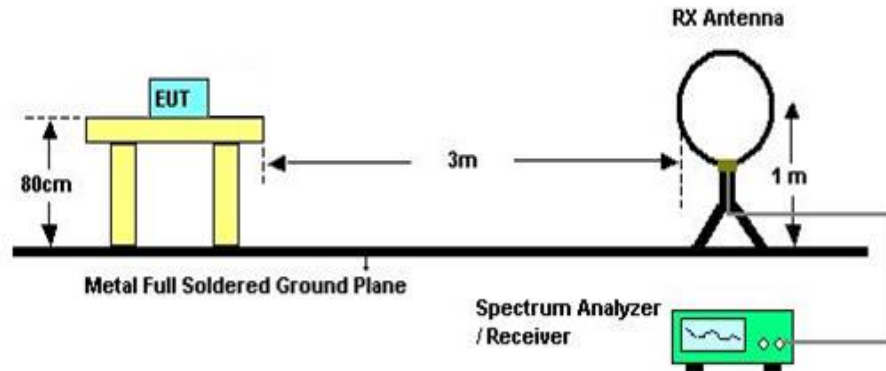


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

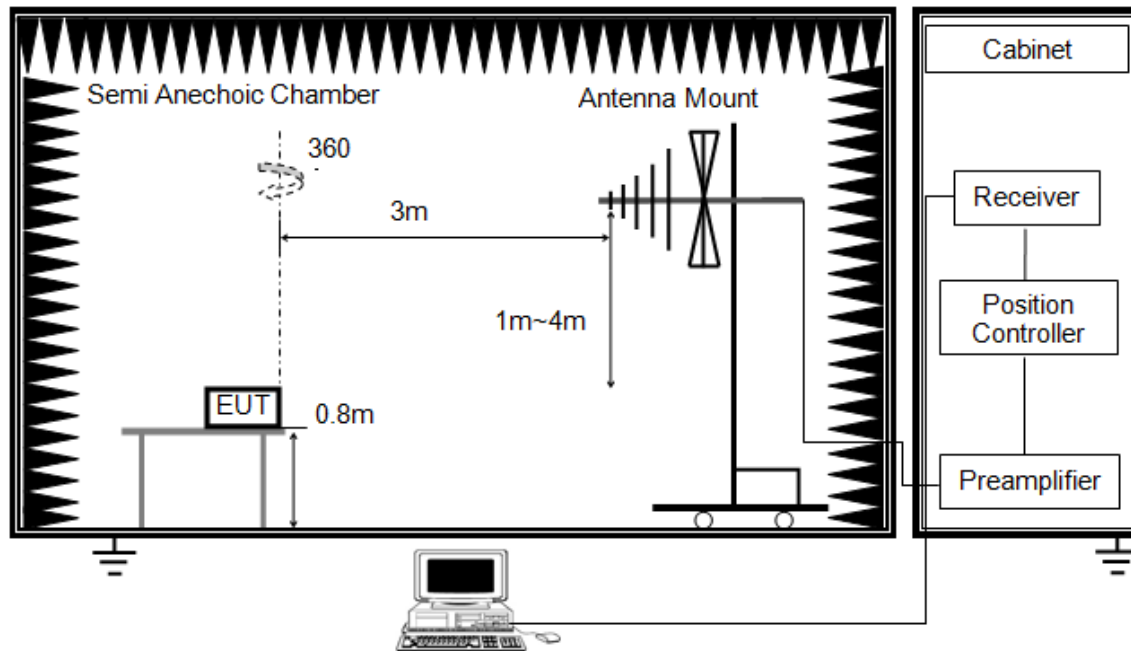


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

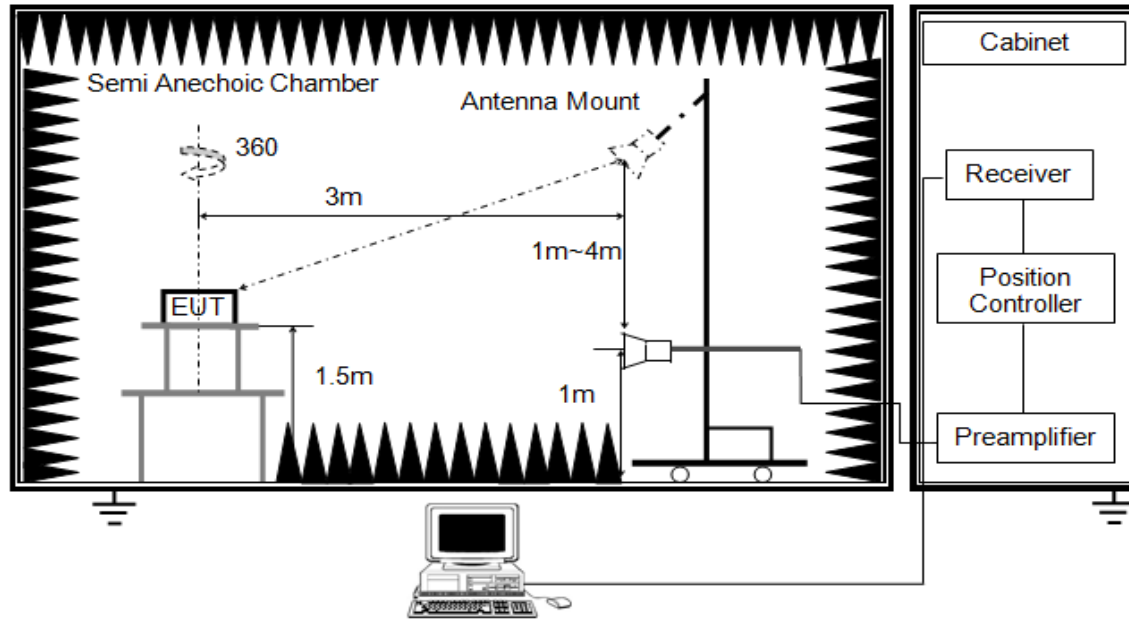


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

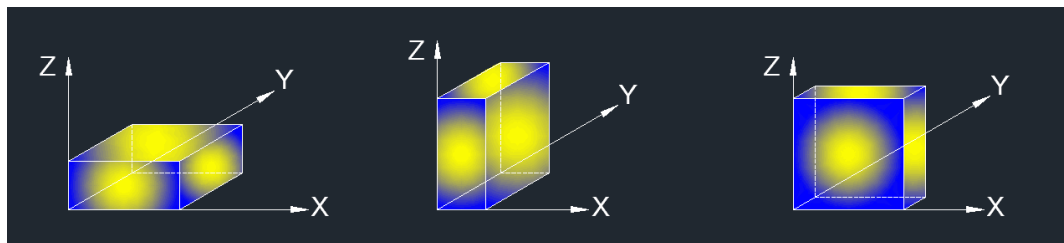

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: Simultaneous transmission had been evaluated with the 2.4 GHz WiFi, 5 GHz WiFi and BT transmitter and there were no any additional or worse emissions found. Only the worst data was recorded in the test report.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

Temperature	24.9 °C	Relative Humidity	57 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V


RESULTS

8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b SISO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

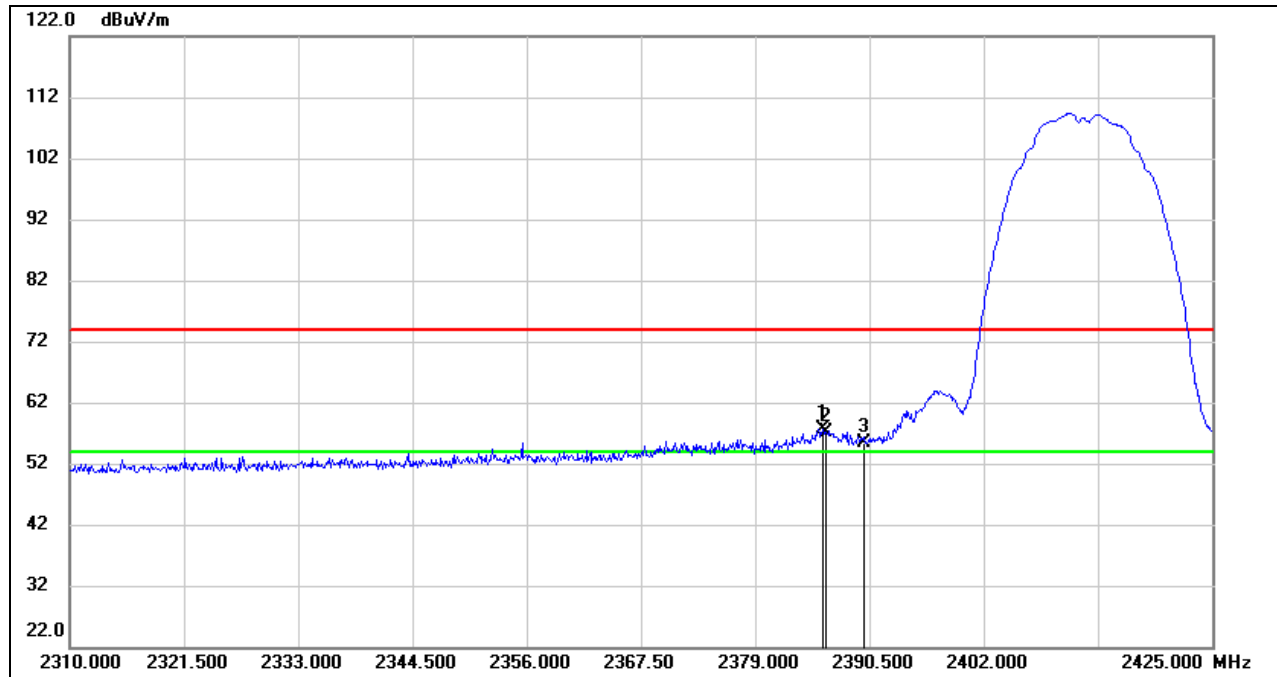

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.785	45.64	11.93	57.57	74.00	-16.43	peak
2	2386.130	45.20	11.93	57.13	74.00	-16.87	peak
3	2390.000	43.53	11.96	55.49	74.00	-18.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

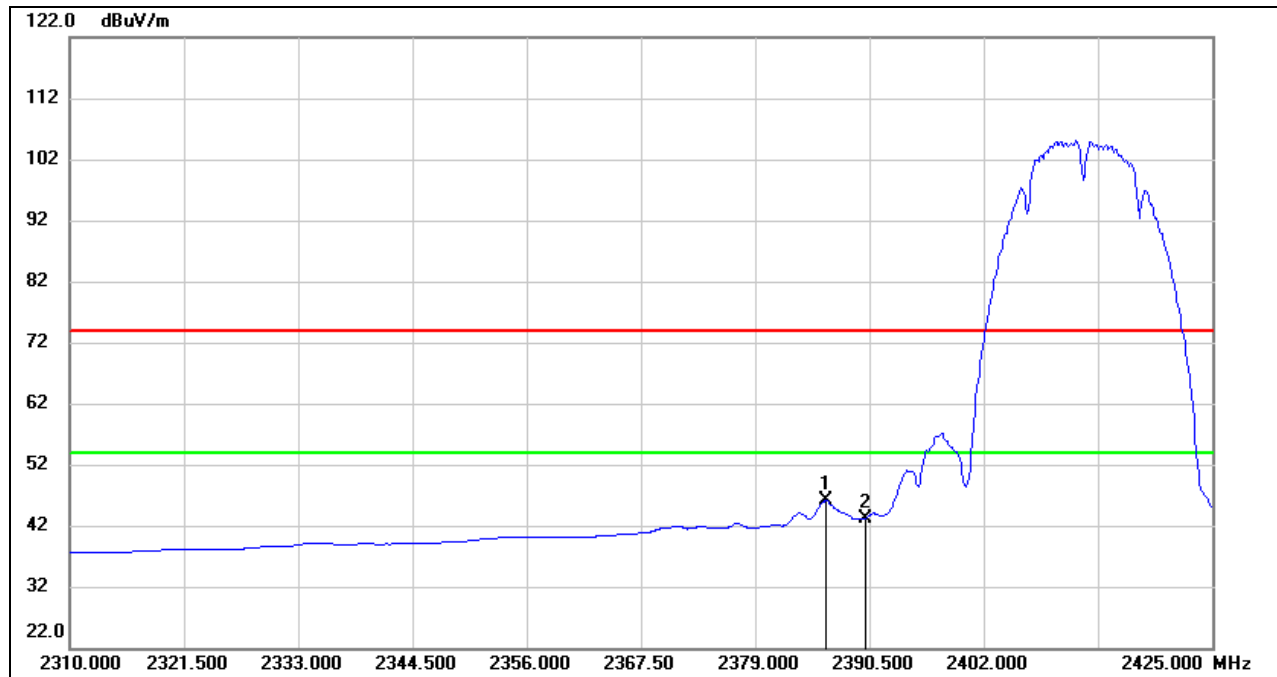


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.130	34.16	11.93	46.09	54.00	-7.91	AVG
2	2390.000	31.16	11.96	43.12	54.00	-10.88	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

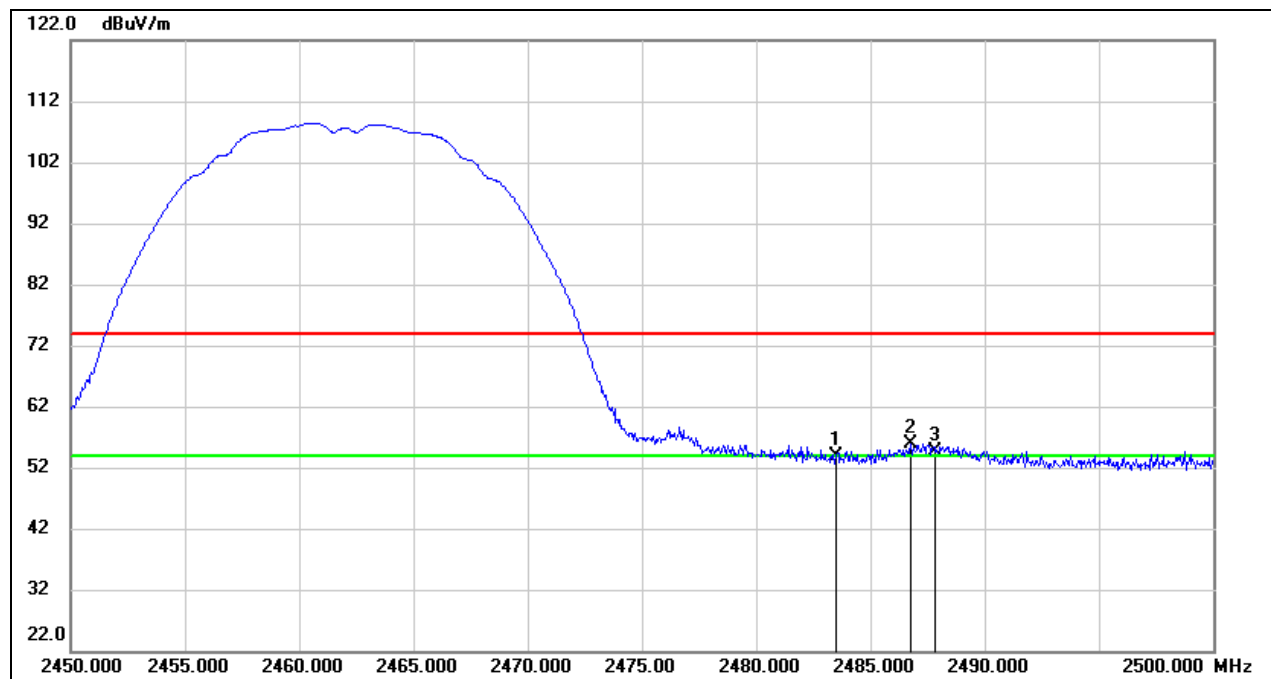

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	41.44	12.38	53.82	74.00	-20.18	peak
2	2486.750	43.58	12.39	55.97	74.00	-18.03	peak
3	2487.850	42.25	12.39	54.64	74.00	-19.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

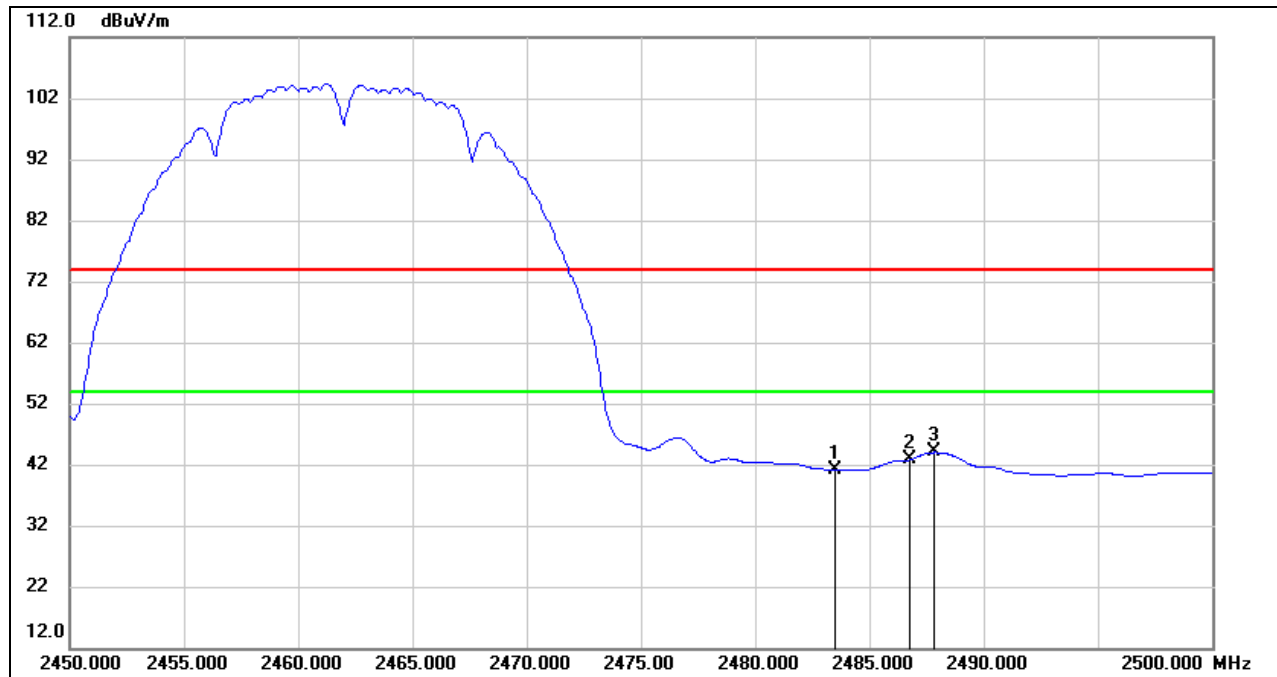


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.70	12.38	41.08	54.00	-12.92	AVG
2	2486.750	30.41	12.39	42.80	54.00	-11.20	AVG
3	2487.850	31.62	12.39	44.01	54.00	-9.99	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.1.2. 802.11g SISO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

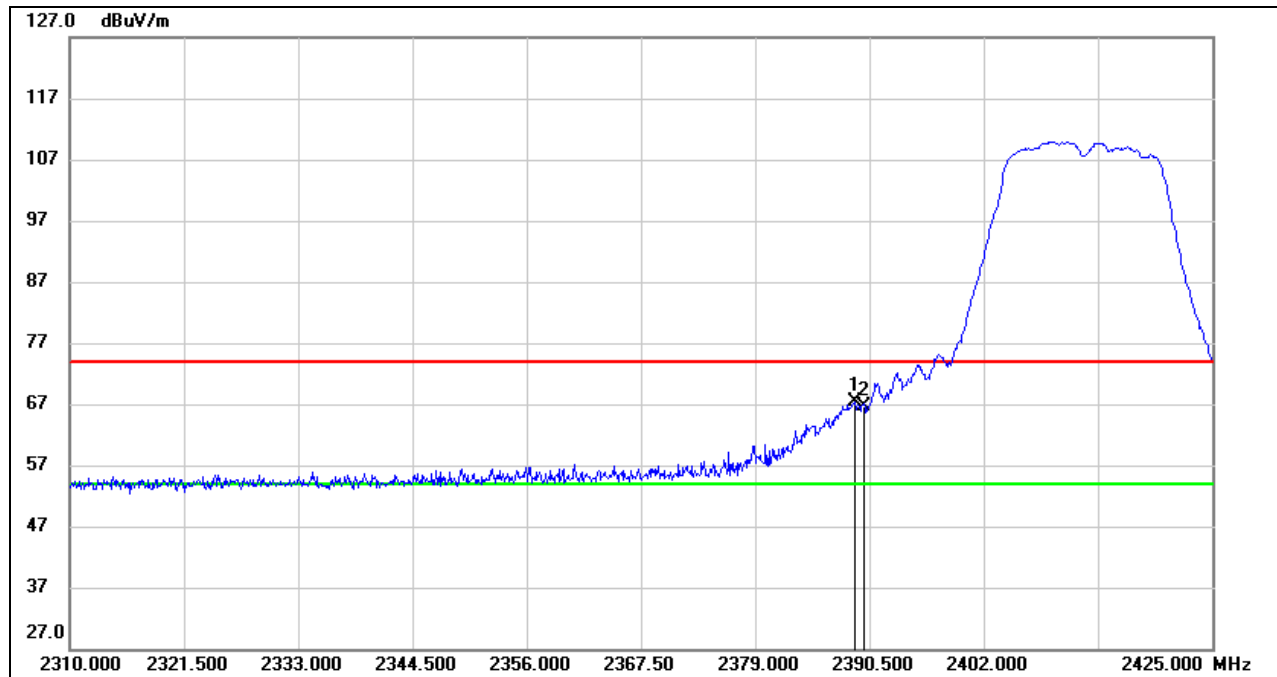

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	55.41	11.95	67.36	74.00	-6.64	peak
2	2390.000	54.56	11.96	66.52	74.00	-7.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

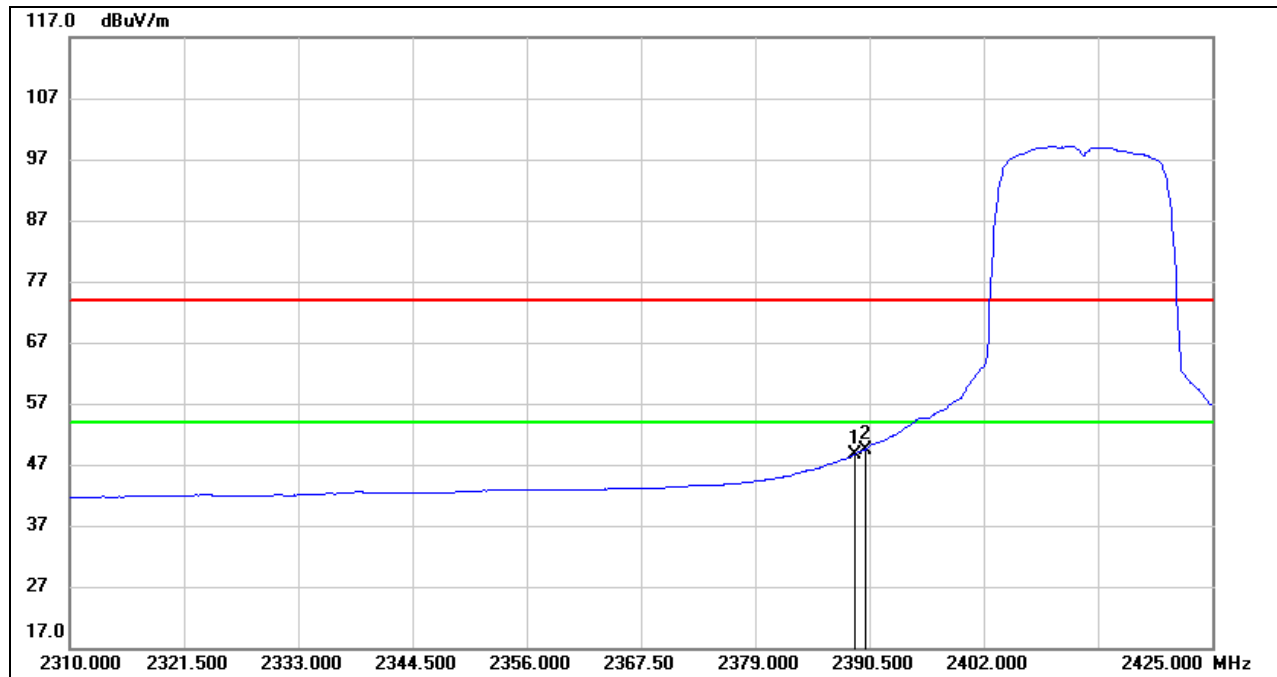


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	36.74	11.95	48.69	54.00	-5.31	AVG
2	2390.000	37.52	11.96	49.48	54.00	-4.52	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

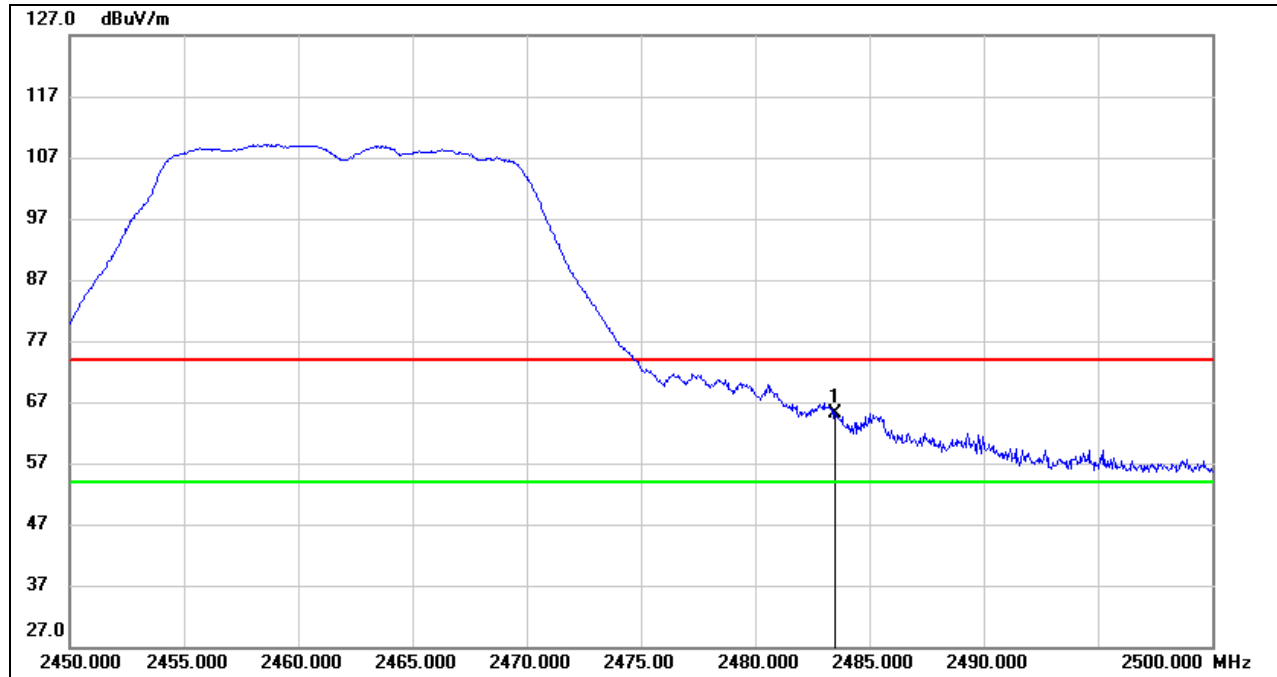

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.71	12.38	65.09	74.00	-8.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

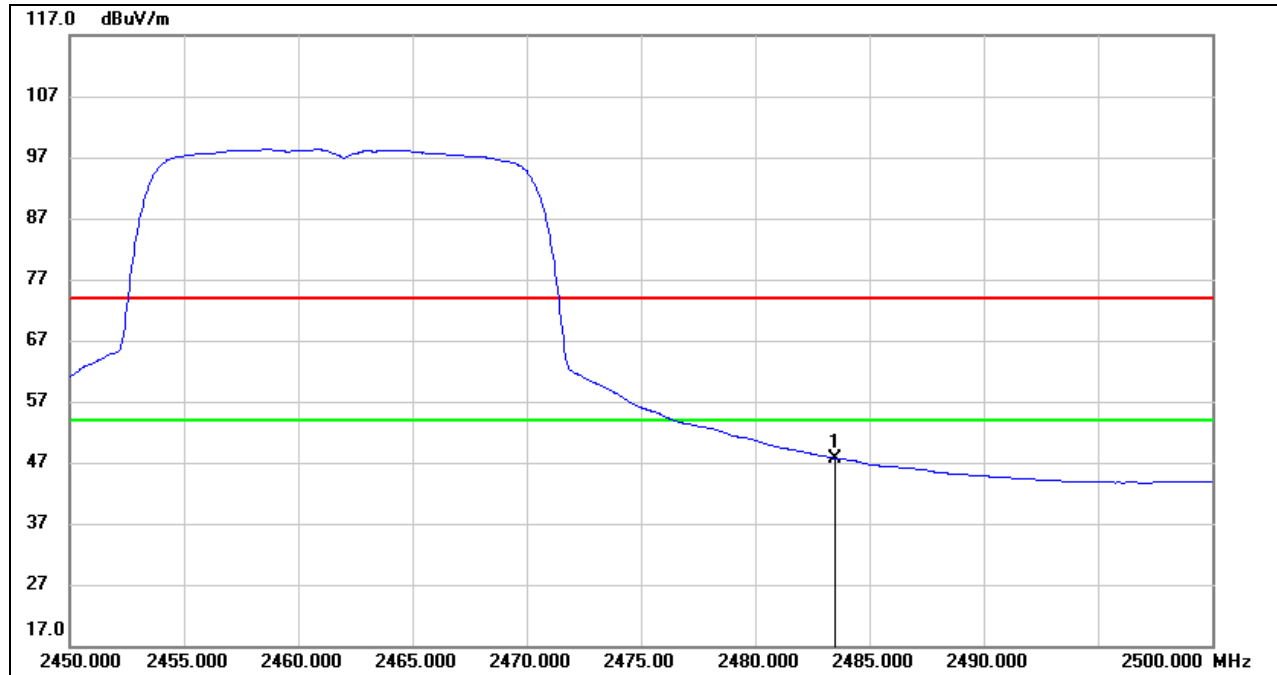

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.36	12.38	47.74	54.00	-6.26	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.


4. For the transmitting duration, please refer to clause 7.1.

5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.1.3. 802.11n HT20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

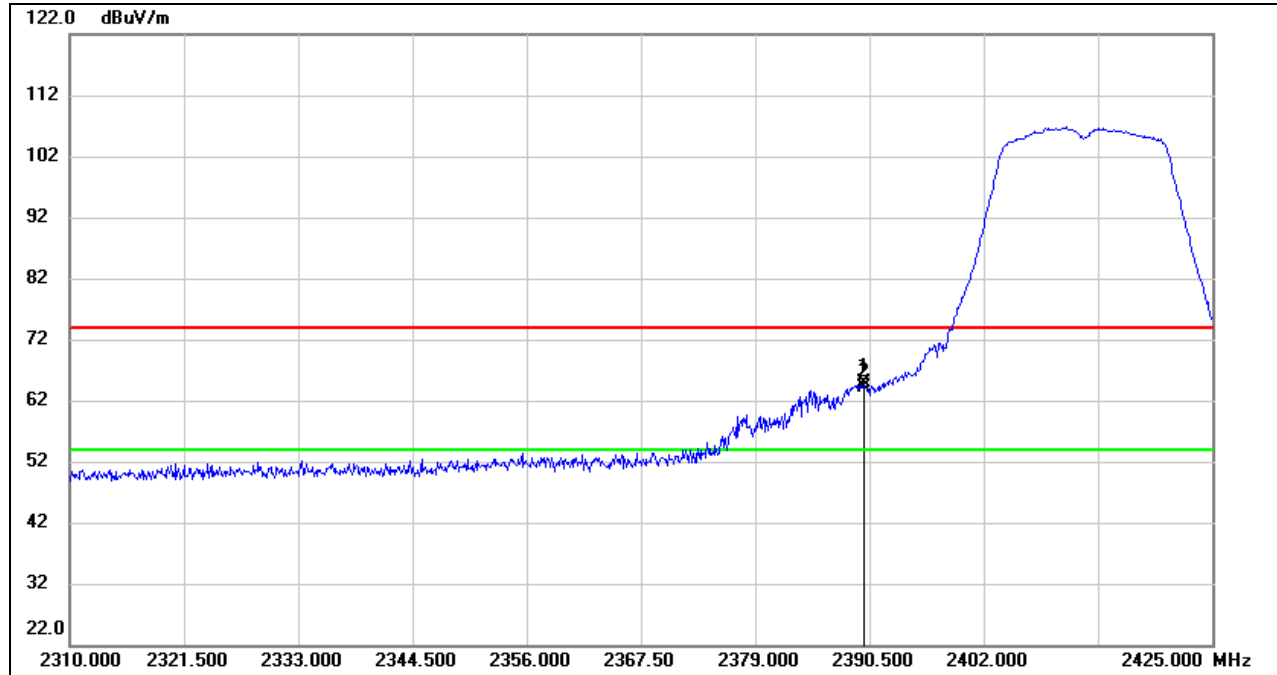

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	52.82	11.96	64.78	74.00	-9.22	peak
2	2390.000	52.28	11.96	64.24	74.00	-9.76	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

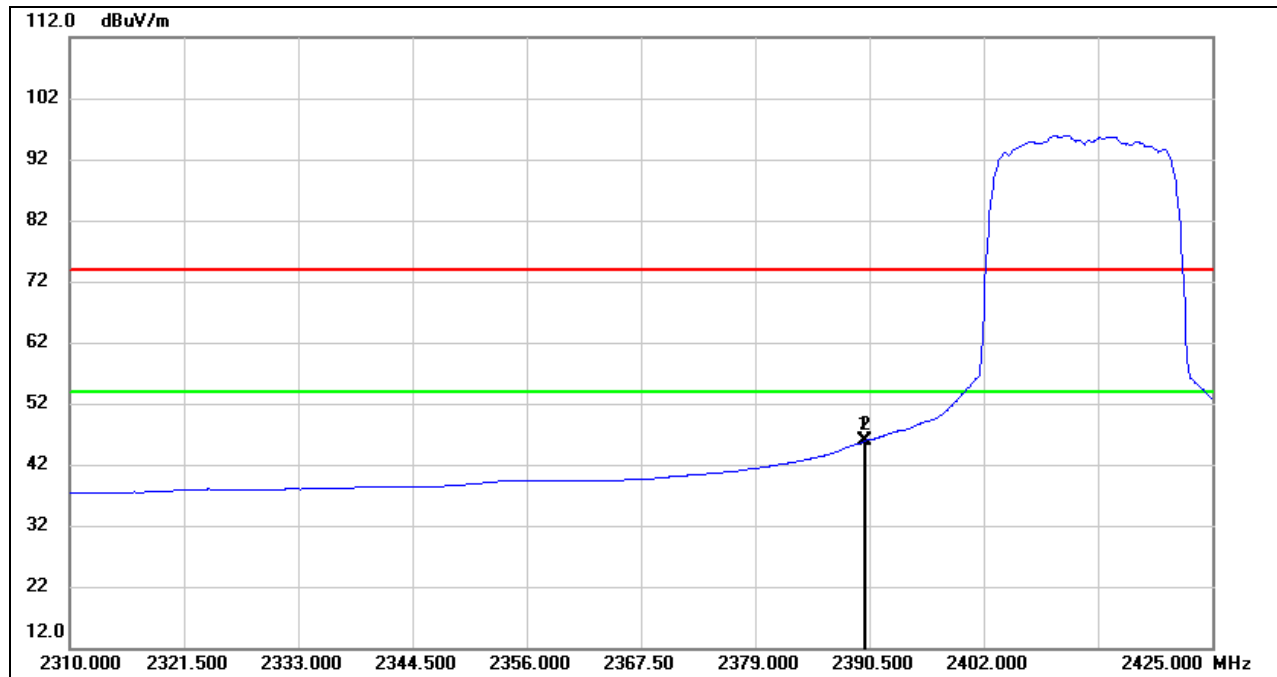


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	33.83	11.96	45.79	54.00	-8.21	AVG
2	2390.000	33.92	11.96	45.88	54.00	-8.12	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

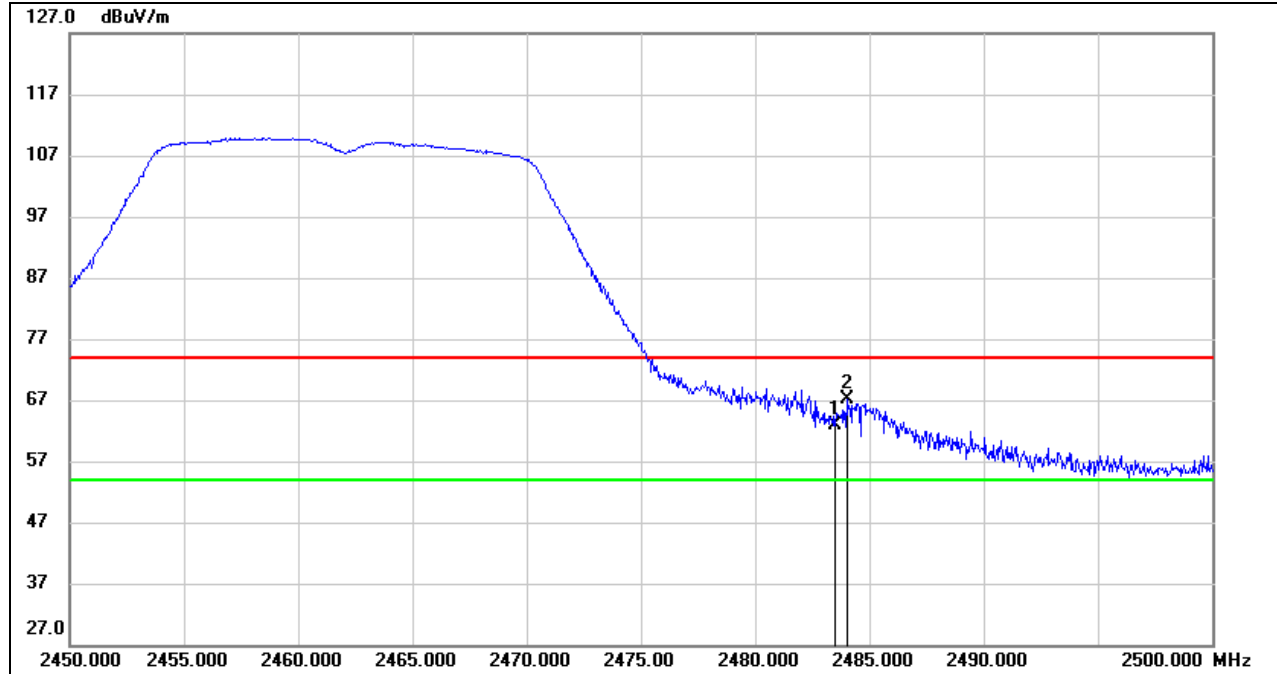

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.61	12.38	62.99	74.00	-11.01	peak
2	2484.000	54.66	12.38	67.04	74.00	-6.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

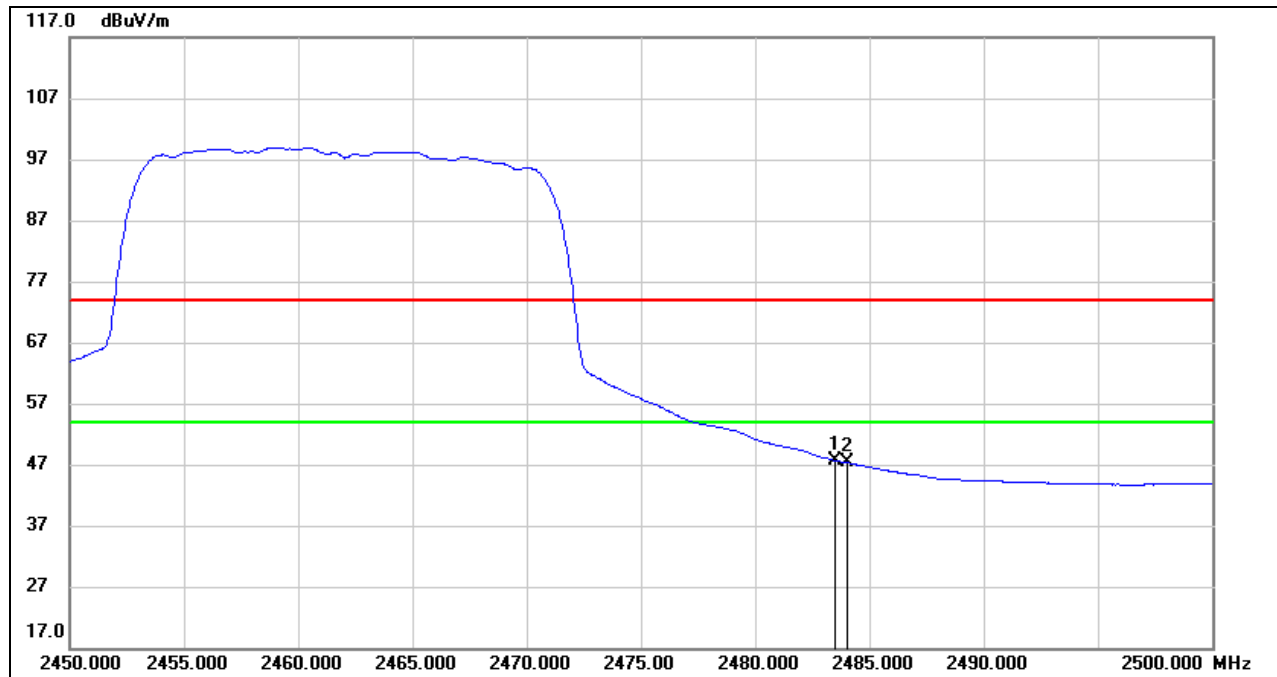AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.36	12.38	47.74	54.00	-6.26	AVG
2	2484.000	35.05	12.38	47.43	54.00	-6.57	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

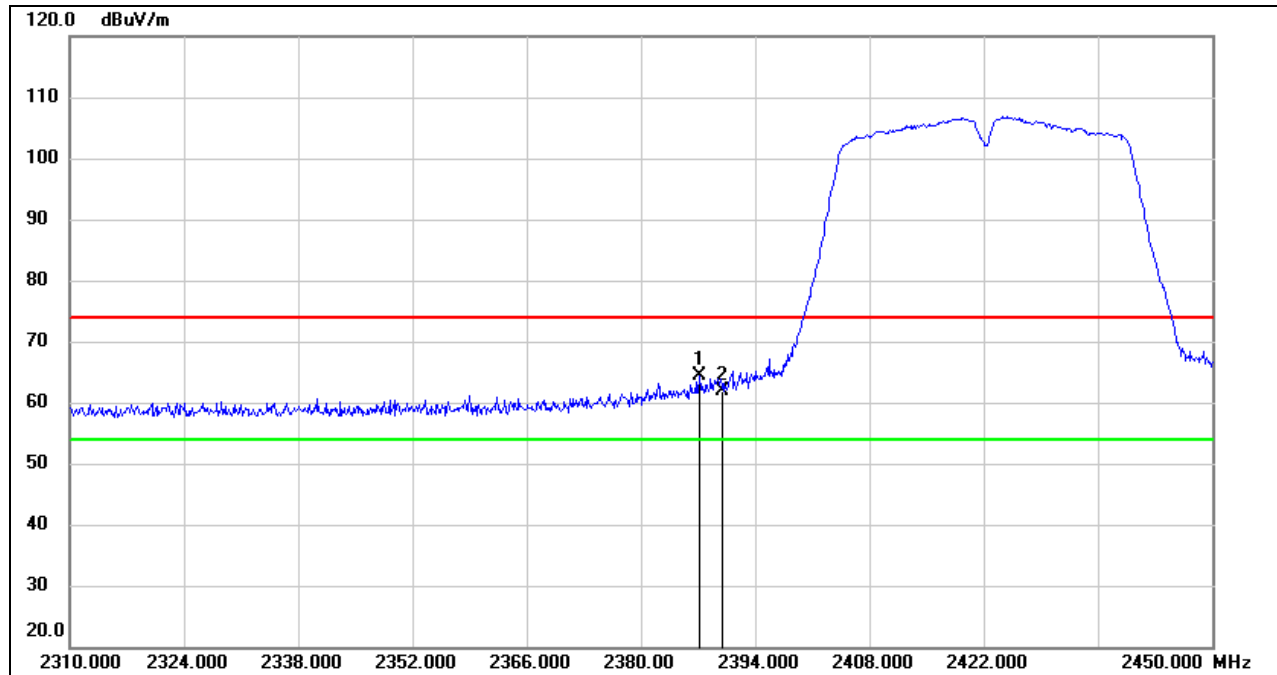

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.140	52.45	11.95	64.40	74.00	-9.60	peak
2	2390.000	49.90	11.96	61.86	74.00	-12.14	peak


- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

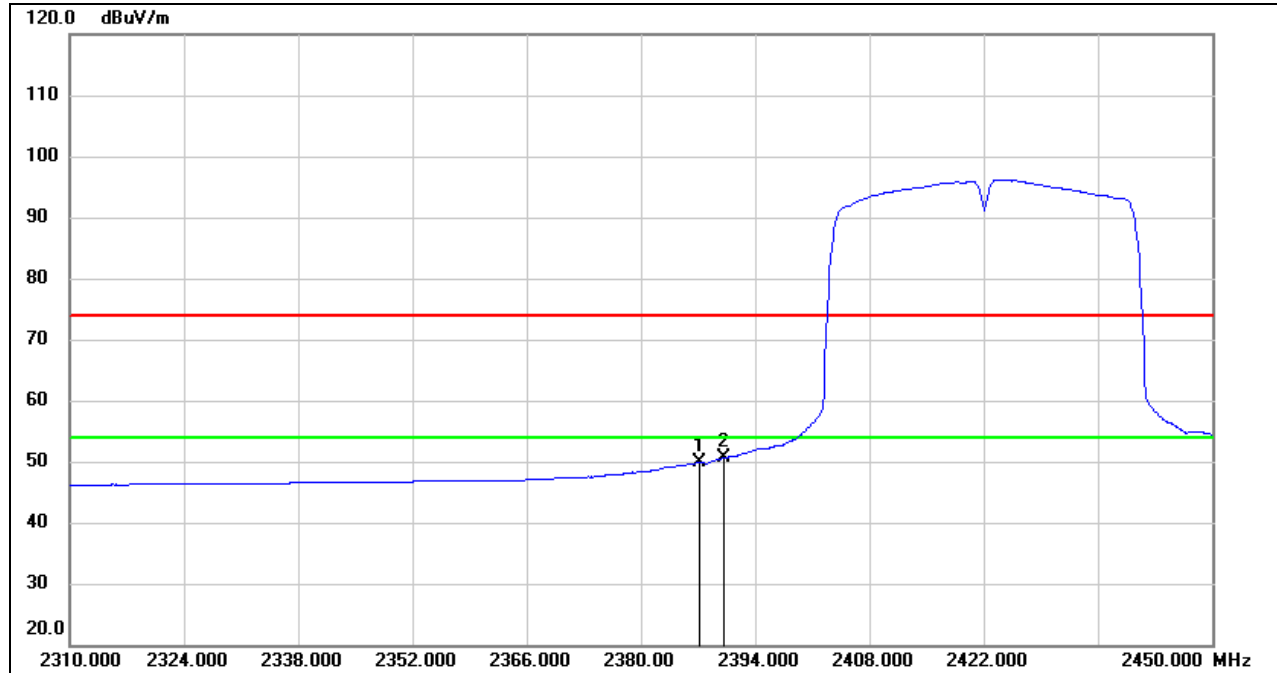

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.140	37.92	11.95	49.87	54.00	-4.13	AVG
2	2390.000	38.58	11.96	50.54	54.00	-3.46	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

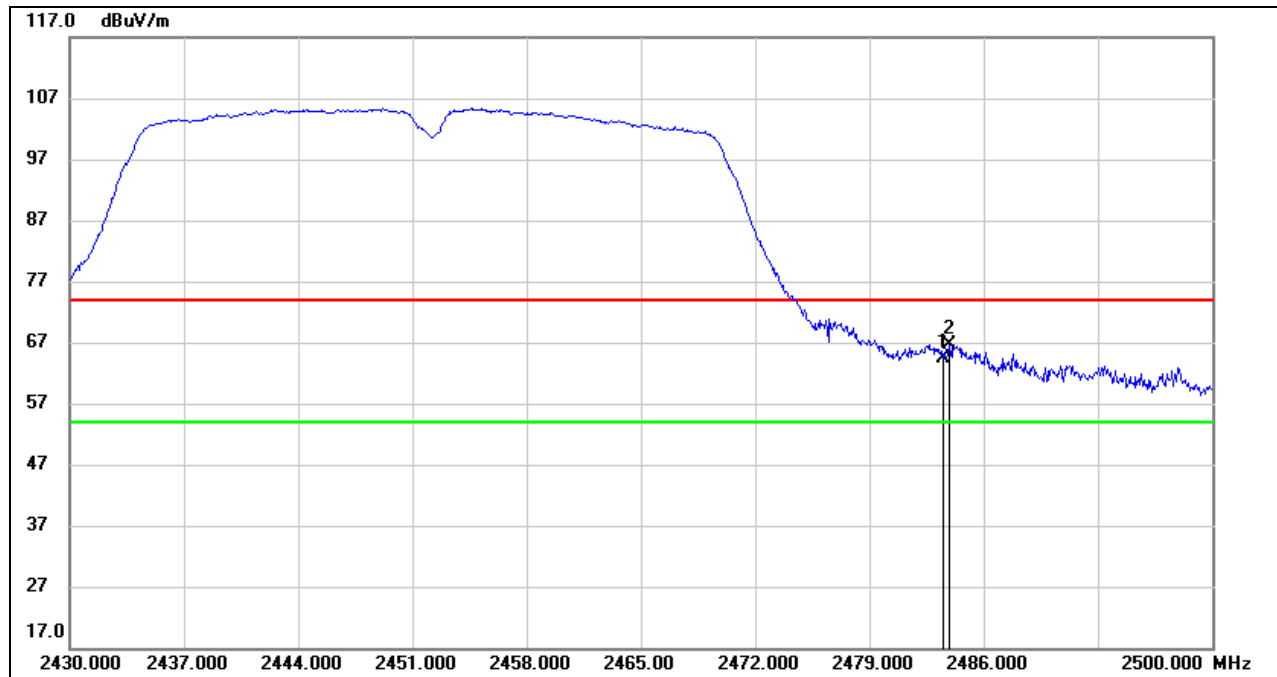**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.97	12.38	64.35	74.00	-9.65	peak
2	2483.900	54.32	12.38	66.70	74.00	-7.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

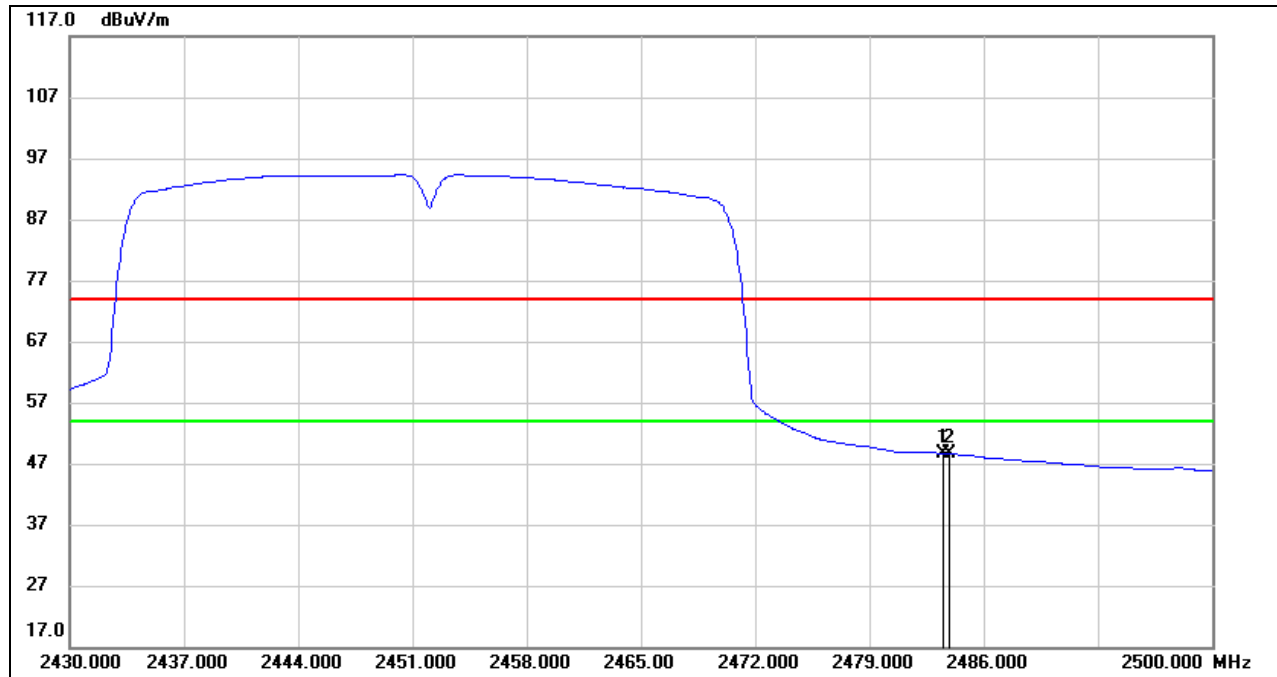

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.20	12.38	48.58	54.00	-5.42	AVG
2	2483.900	36.20	12.38	48.58	54.00	-5.42	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities had been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. 802.11n HT20 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

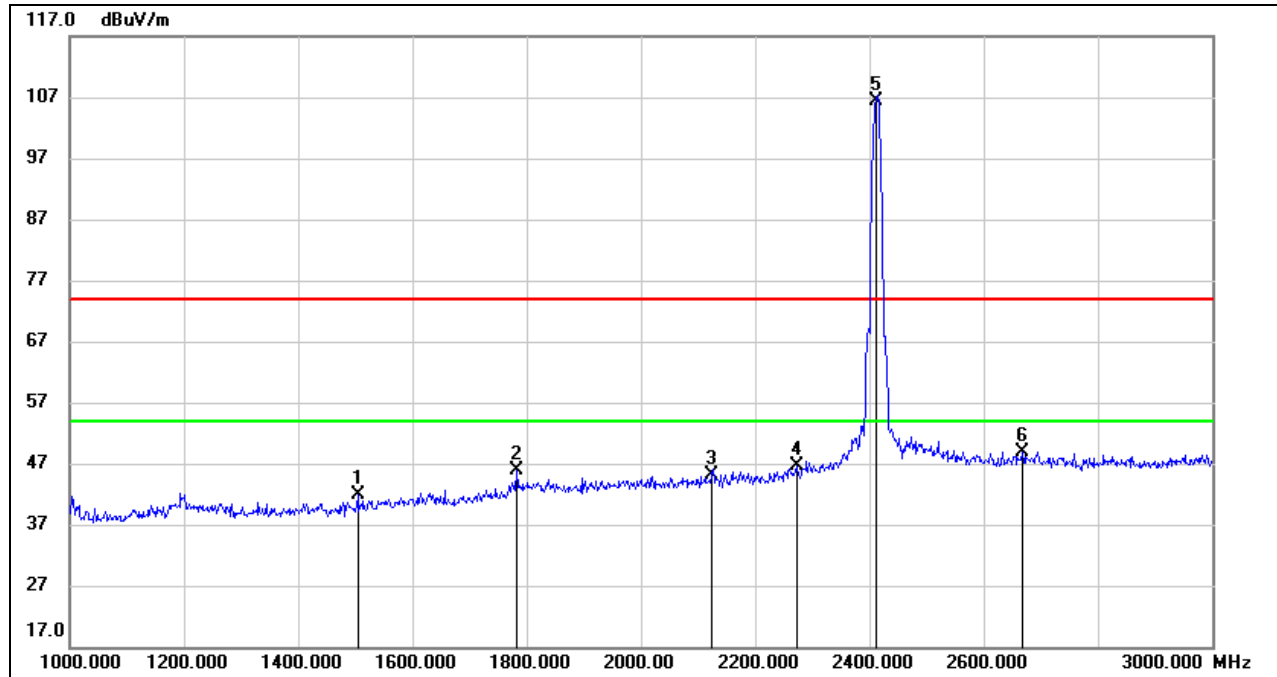


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1504.000	34.90	7.01	41.91	74.00	-32.09	peak
2	1782.000	36.44	9.50	45.94	74.00	-28.06	peak
3	2124.000	33.91	11.10	45.01	74.00	-28.99	peak
4	2272.000	35.24	11.33	46.57	74.00	-27.43	peak
5	2412.000	94.20	12.08	106.28	/	/	fundamental
6	2668.000	36.15	12.80	48.95	74.00	-25.05	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

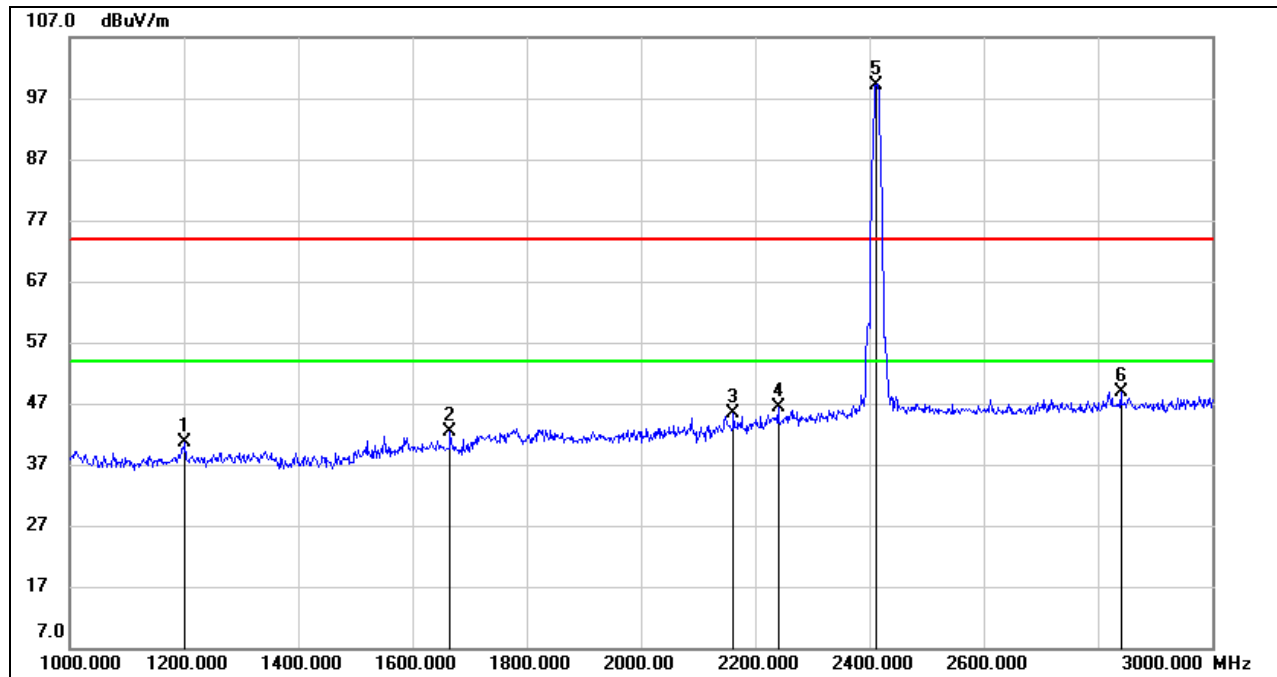**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	34.24	6.41	40.65	74.00	-33.35	peak
2	1666.000	34.36	8.13	42.49	74.00	-31.51	peak
3	2162.000	34.14	11.21	45.35	74.00	-28.65	peak
4	2240.000	35.06	11.32	46.38	74.00	-27.62	peak
5	2412.000	87.11	12.08	99.19	/	/	fundamental
6	2840.000	35.06	13.86	48.92	74.00	-25.08	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

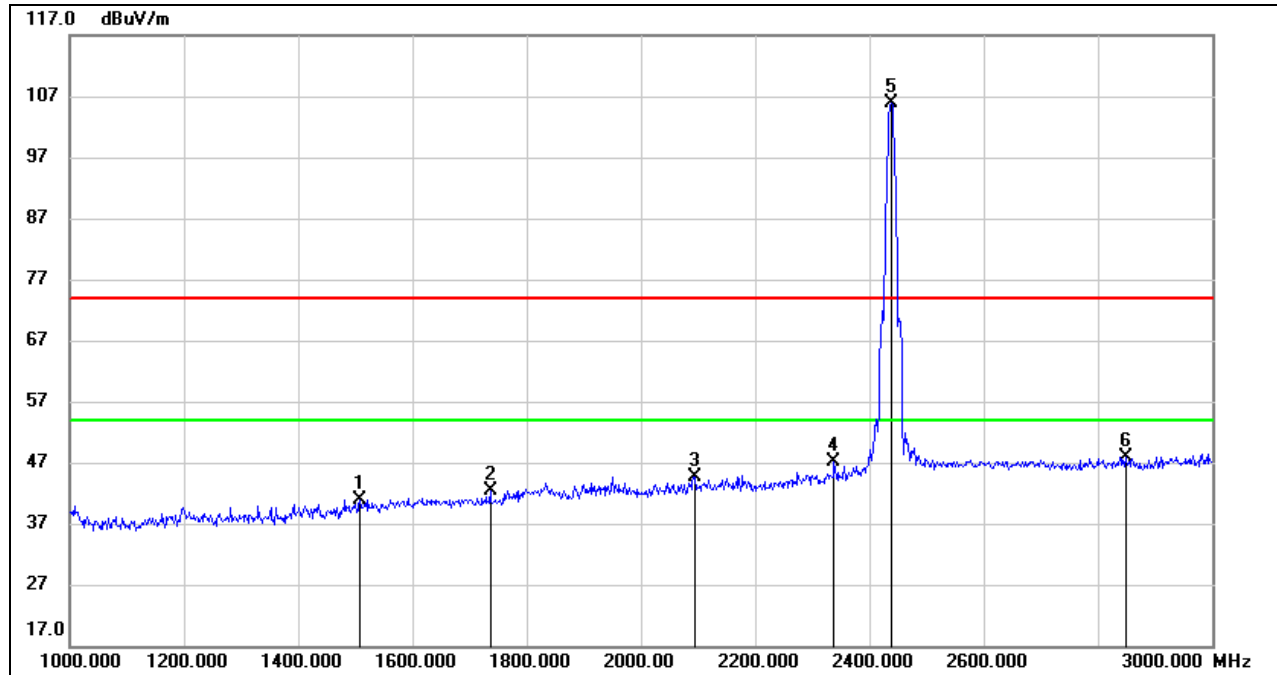


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1508.000	33.83	7.04	40.87	74.00	-33.13	peak
2	1736.000	33.60	8.78	42.38	74.00	-31.62	peak
3	2094.000	33.73	10.99	44.72	74.00	-29.28	peak
4	2338.000	35.45	11.60	47.05	74.00	-26.95	peak
5	2437.000	93.66	12.19	105.85	/	/	fundamental
6	2848.000	34.01	13.89	47.90	74.00	-26.10	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

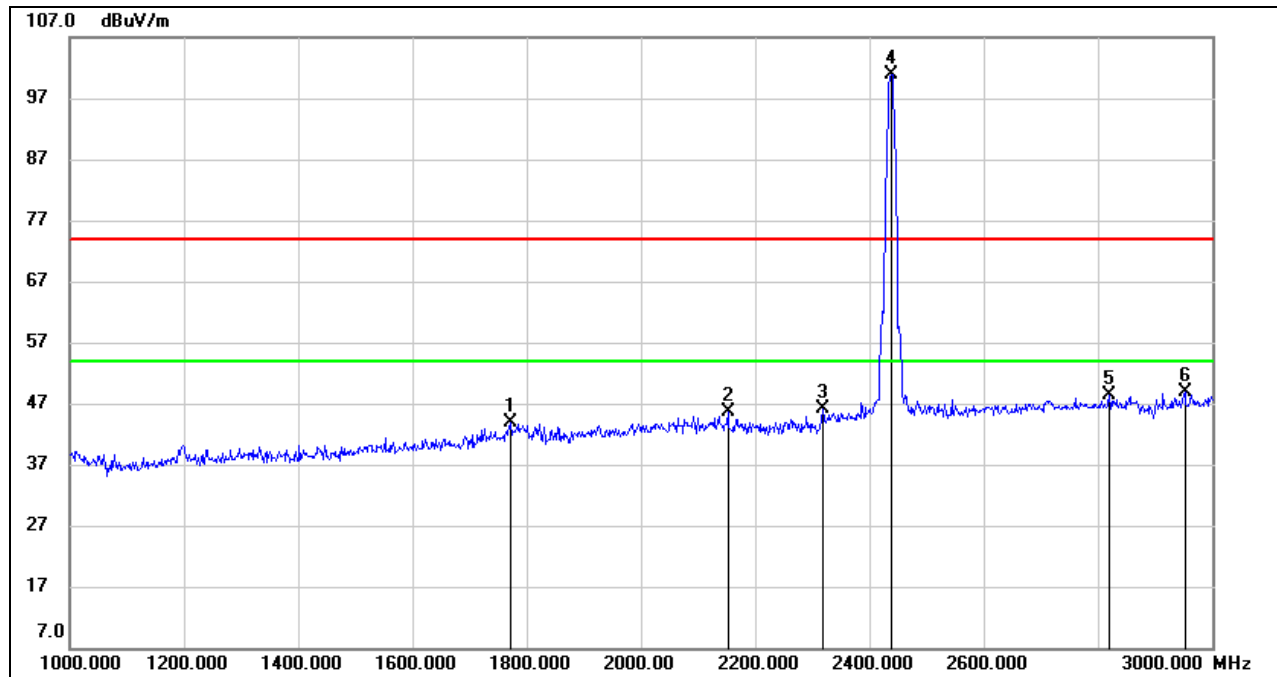
**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1772.000	34.55	9.35	43.90	74.00	-30.10	peak
2	2152.000	34.44	11.18	45.62	74.00	-28.38	peak
3	2318.000	34.61	11.45	46.06	74.00	-27.94	peak
4	2437.000	88.76	12.19	100.95	/	/	fundamental
5	2820.000	34.61	13.81	48.42	74.00	-25.58	peak
6	2952.000	34.45	14.38	48.83	74.00	-25.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

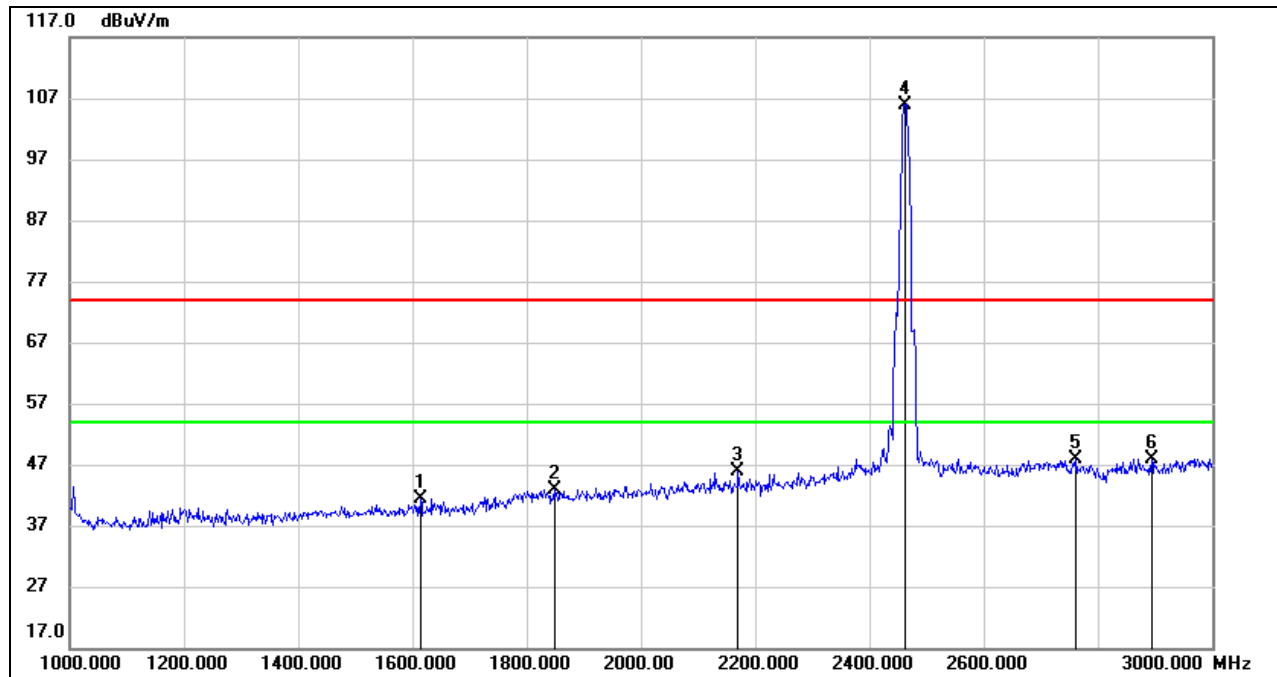**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1614.000	33.43	8.01	41.44	74.00	-32.56	peak
2	1848.000	33.10	9.88	42.98	74.00	-31.02	peak
3	2170.000	34.68	11.24	45.92	74.00	-28.08	peak
4	2462.000	93.71	12.29	106.00	/	/	fundamental
5	2762.000	34.53	13.47	48.00	74.00	-26.00	peak
6	2894.000	33.95	14.02	47.97	74.00	-26.03	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

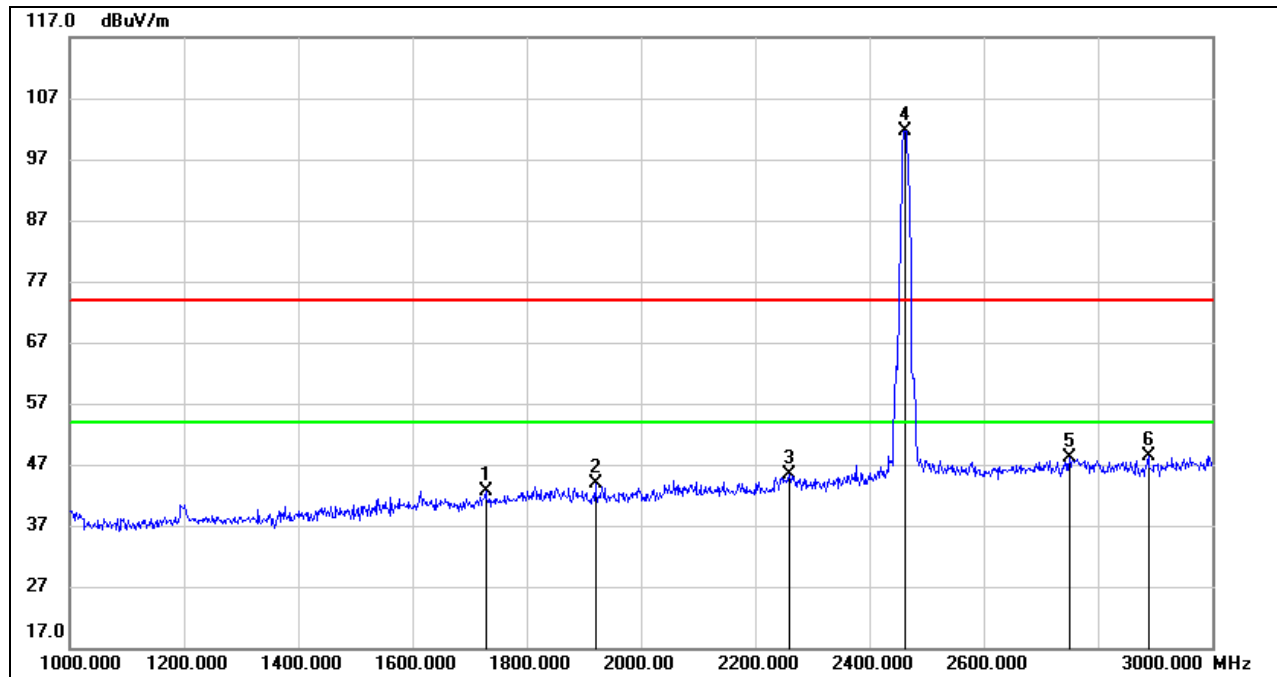**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1728.000	34.01	8.65	42.66	74.00	-31.34	peak
2	1920.000	33.76	10.03	43.79	74.00	-30.21	peak
3	2260.000	33.94	11.32	45.26	74.00	-28.74	peak
4	2462.000	89.38	12.29	101.67	/	/	fundamental
5	2750.000	34.77	13.38	48.15	74.00	-25.85	peak
6	2888.000	34.34	14.00	48.34	74.00	-25.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.



8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. 802.11b SISO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

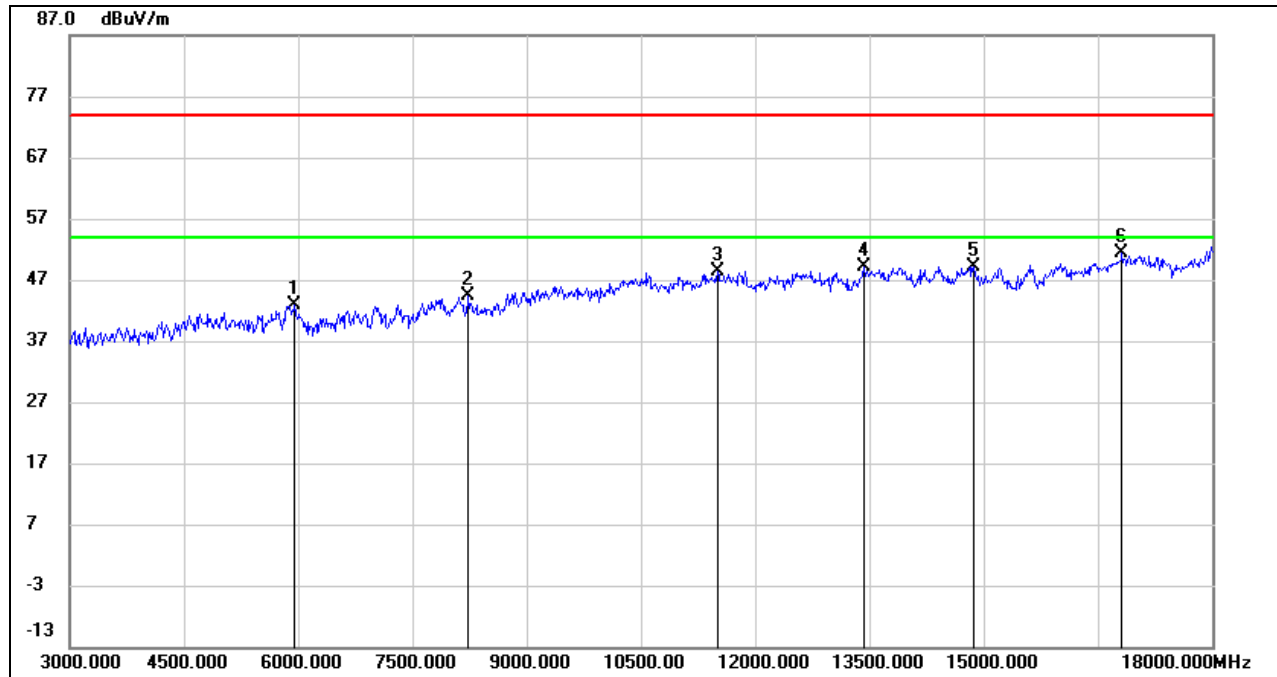

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5955.000	38.80	4.04	42.84	74.00	-31.16	peak
2	8235.000	36.21	8.06	44.27	74.00	-29.73	peak
3	11505.000	34.89	13.42	48.31	74.00	-25.69	peak
4	13425.000	32.99	16.02	49.01	74.00	-24.99	peak
5	14865.000	33.21	15.98	49.19	74.00	-24.81	peak
6	16815.000	31.32	19.96	51.28	74.00	-22.72	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

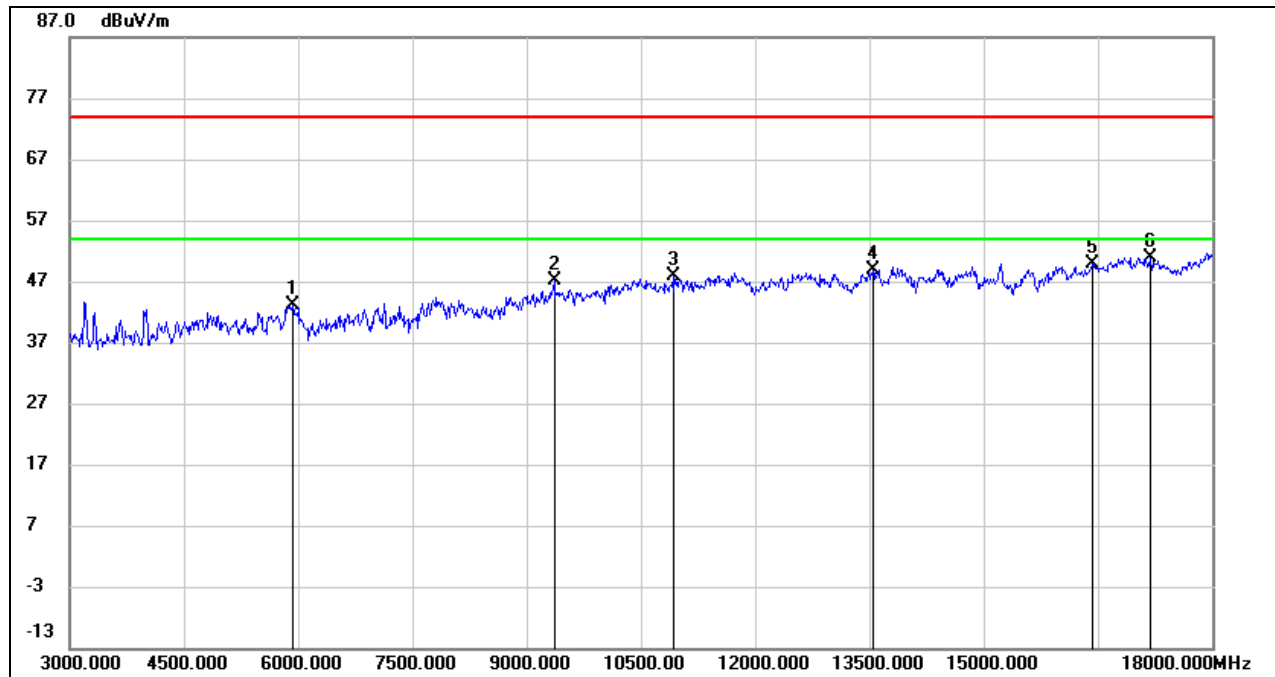**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	38.59	4.54	43.13	74.00	-30.87	peak
2	9360.000	37.65	9.36	47.01	74.00	-26.99	peak
3	10920.000	36.09	11.90	47.99	74.00	-26.01	peak
4	13545.000	32.93	15.89	48.82	74.00	-25.18	peak
5	16425.000	31.03	18.88	49.91	74.00	-24.09	peak
6	17190.000	30.12	20.88	51.00	74.00	-23.00	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

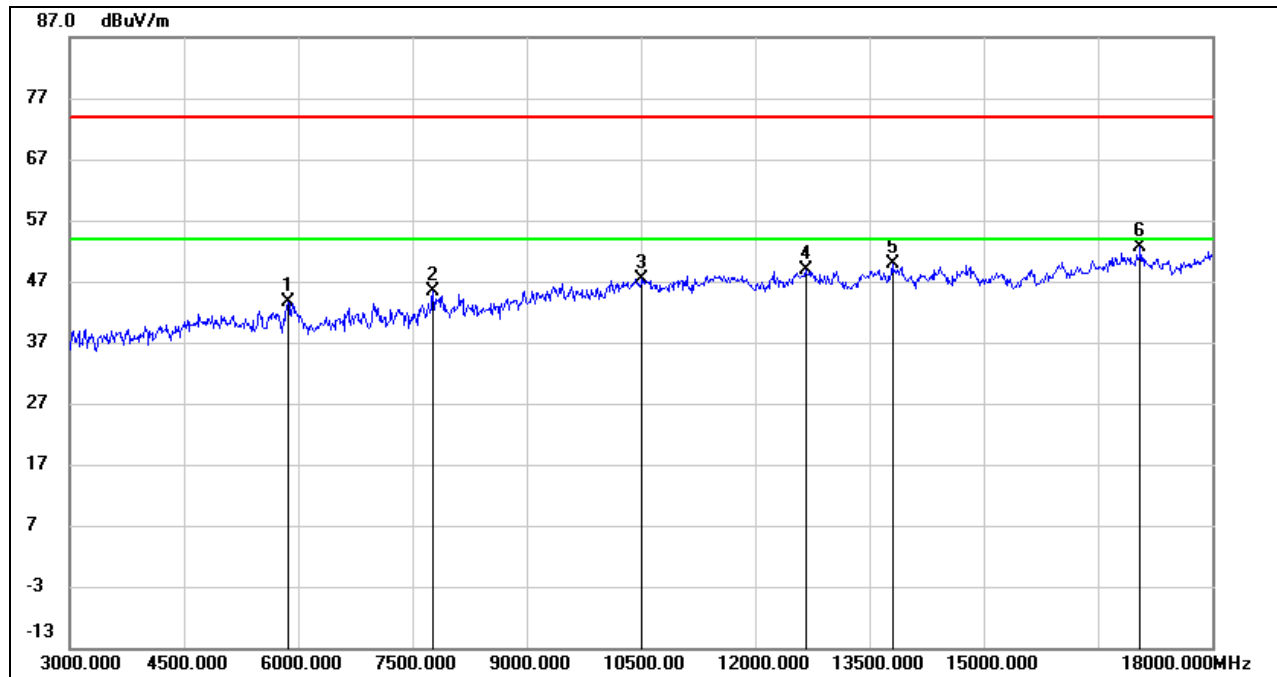**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	39.39	4.30	43.69	74.00	-30.31	peak
2	7770.000	37.87	7.50	45.37	74.00	-28.63	peak
3	10515.000	35.93	11.47	47.40	74.00	-26.60	peak
4	12660.000	34.82	14.18	49.00	74.00	-25.00	peak
5	13800.000	32.82	17.10	49.92	74.00	-24.08	peak
6	17055.000	32.01	20.53	52.54	74.00	-21.46	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

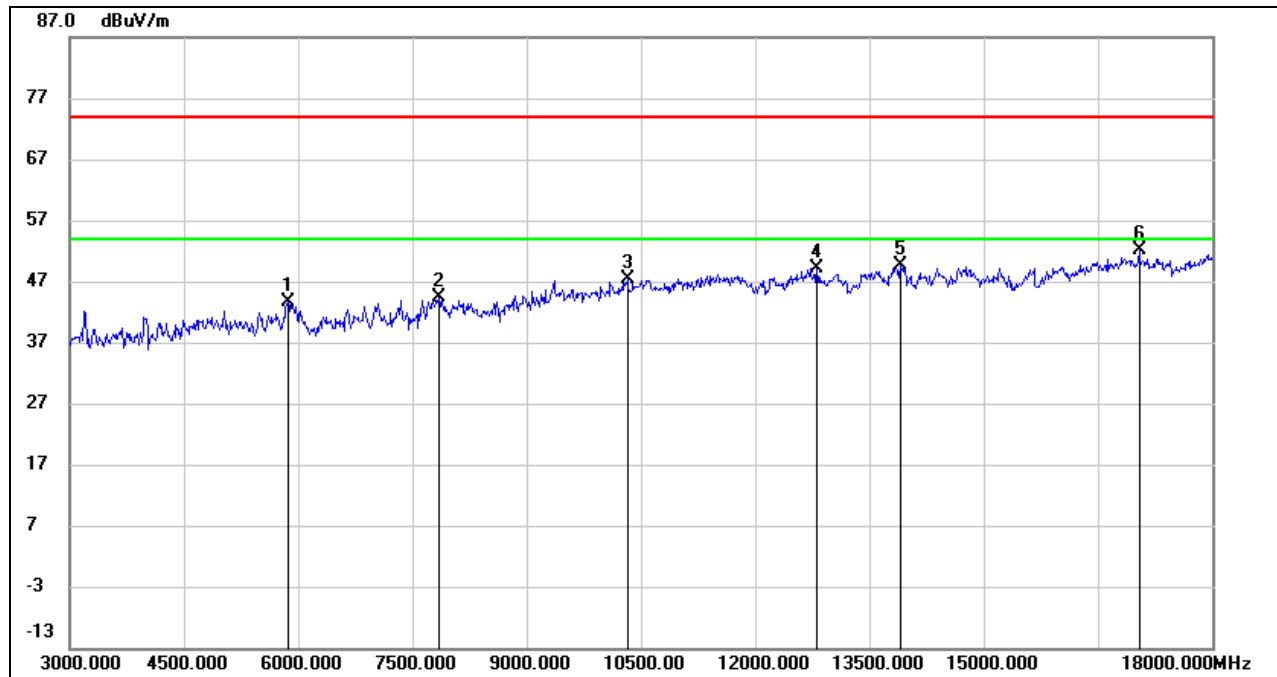**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	39.28	4.30	43.58	74.00	-30.42	peak
2	7845.000	36.71	7.62	44.33	74.00	-29.67	peak
3	10320.000	36.44	11.05	47.49	74.00	-26.51	peak
4	12810.000	33.63	15.59	49.22	74.00	-24.78	peak
5	13905.000	33.34	16.20	49.54	74.00	-24.46	peak
6	17040.000	31.60	20.49	52.09	74.00	-21.91	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

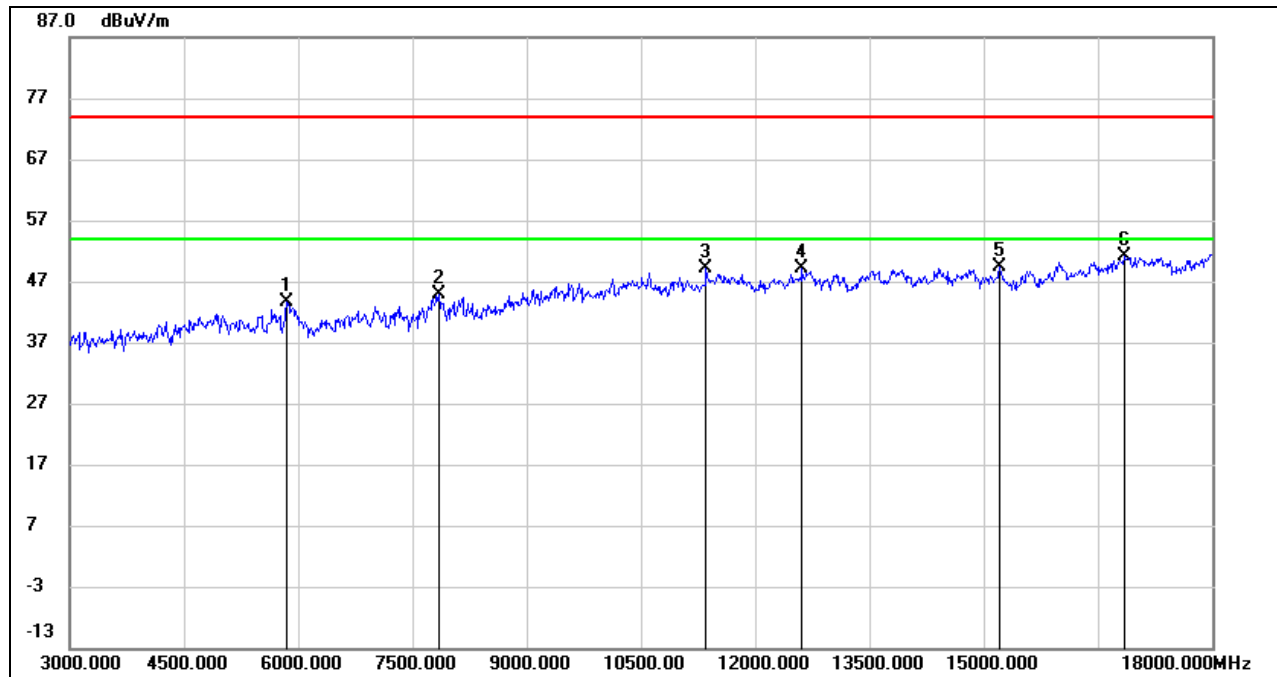**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.67	4.02	43.69	74.00	-30.31	peak
2	7845.000	37.36	7.62	44.98	74.00	-29.02	peak
3	11355.000	36.61	12.48	49.09	74.00	-24.91	peak
4	12615.000	35.16	14.03	49.19	74.00	-24.81	peak
5	15210.000	33.38	16.11	49.49	74.00	-24.51	peak
6	16845.000	31.07	19.96	51.03	74.00	-22.97	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

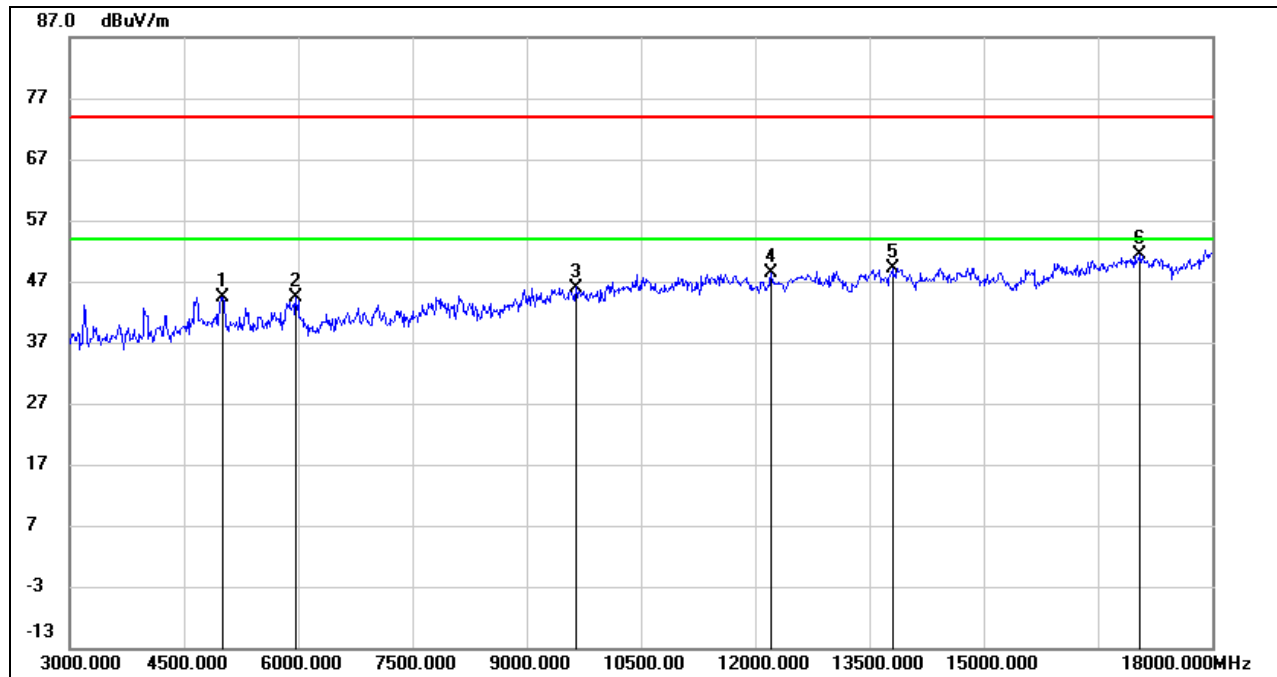


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5010.000	43.02	1.42	44.44	74.00	-29.56	peak
2	5970.000	40.65	3.79	44.44	74.00	-29.56	peak
3	9645.000	36.34	9.66	46.00	74.00	-28.00	peak
4	12210.000	34.53	13.75	48.28	74.00	-25.72	peak
5	13800.000	32.11	17.10	49.21	74.00	-24.79	peak
6	17040.000	30.98	20.49	51.47	74.00	-22.53	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.2. 802.11g SISO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

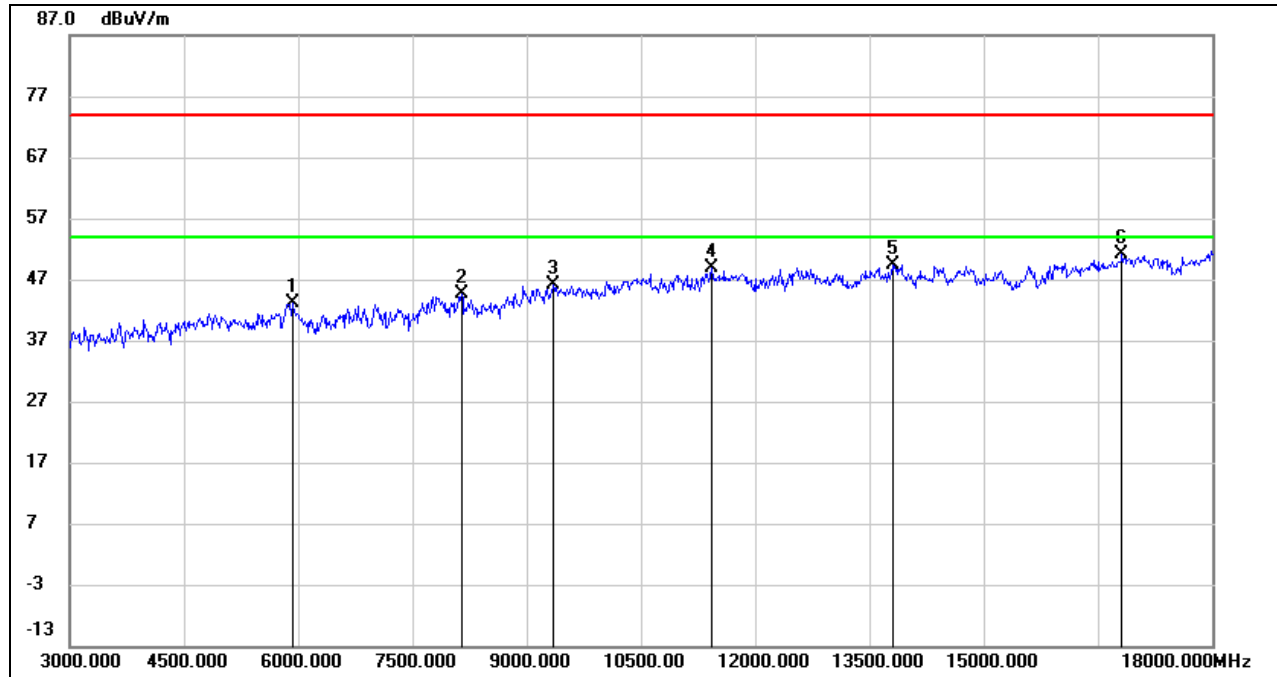

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	38.63	4.54	43.17	74.00	-30.83	peak
2	8145.000	36.48	8.08	44.56	74.00	-29.44	peak
3	9345.000	36.83	9.26	46.09	74.00	-27.91	peak
4	11430.000	36.08	12.85	48.93	74.00	-25.07	peak
5	13800.000	32.28	17.10	49.38	74.00	-24.62	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

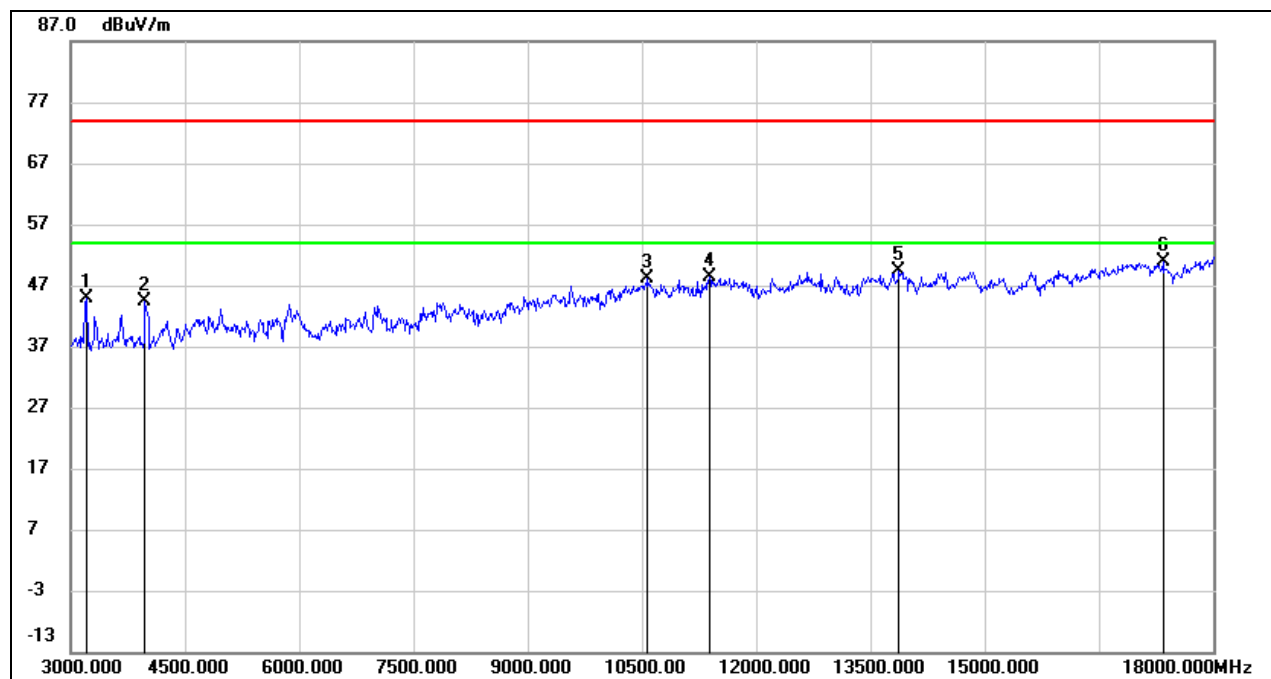**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3210.000	49.37	-4.43	44.94	74.00	-29.06	peak
2	3975.000	47.28	-2.90	44.38	74.00	-29.62	peak
3	10575.000	36.24	11.81	48.05	74.00	-25.95	peak
4	11385.000	35.77	12.58	48.35	74.00	-25.65	peak
5	13875.000	32.93	16.44	49.37	74.00	-24.63	peak
6	17340.000	29.38	21.61	50.99	74.00	-23.01	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

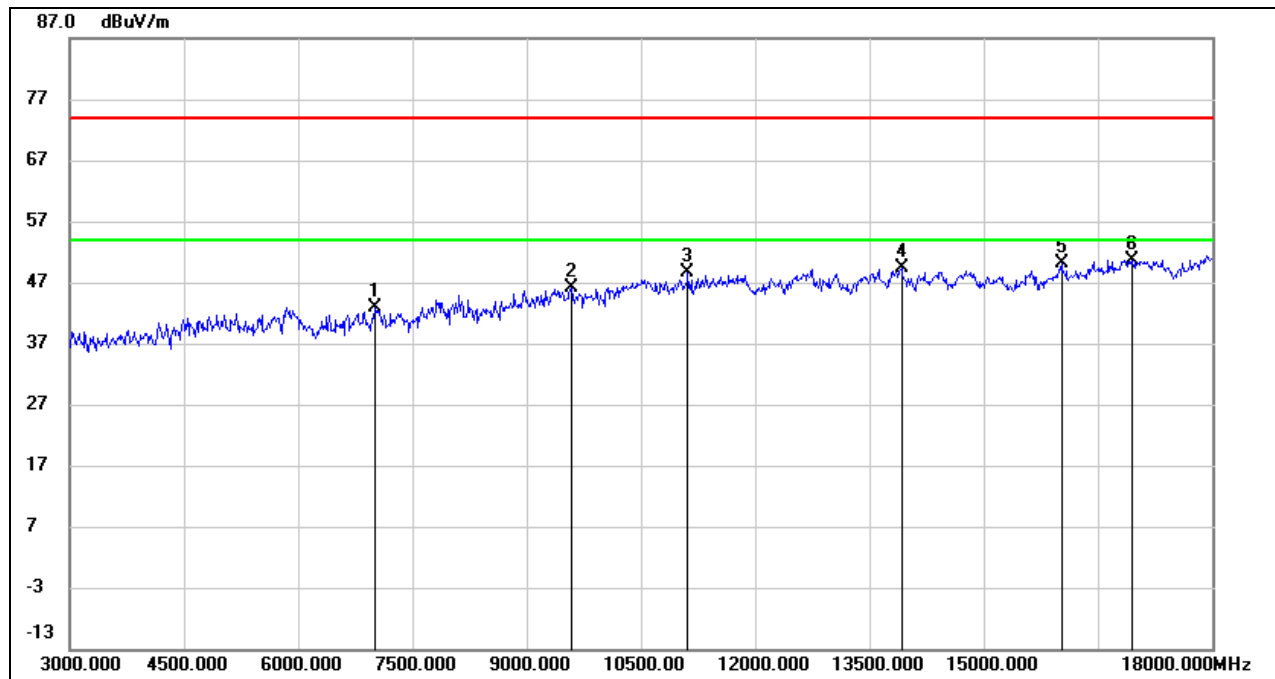**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7005.000	37.23	5.76	42.99	74.00	-31.01	peak
2	9585.000	36.56	9.67	46.23	74.00	-27.77	peak
3	11115.000	36.00	12.55	48.55	74.00	-25.45	peak
4	13920.000	33.11	16.17	49.28	74.00	-24.72	peak
5	16020.000	32.36	17.78	50.14	74.00	-23.86	peak
6	16950.000	30.43	20.18	50.61	74.00	-23.39	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

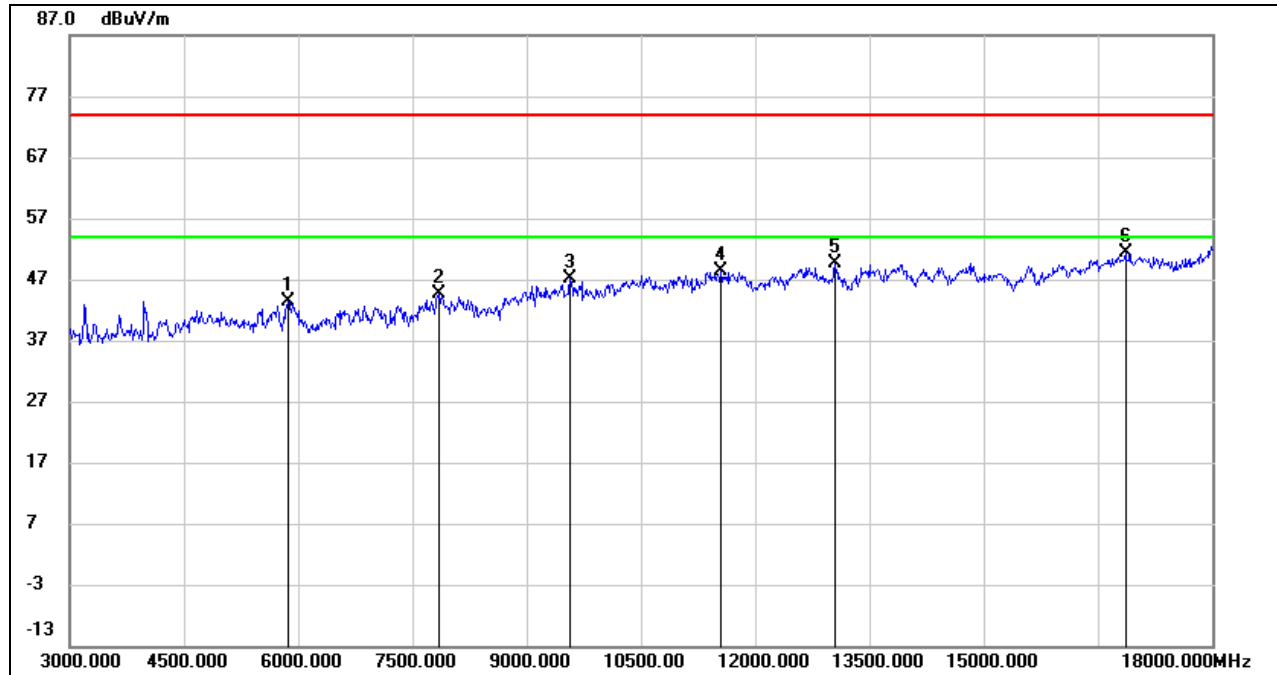

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	39.18	4.30	43.48	74.00	-30.52	peak
2	7845.000	37.03	7.62	44.65	74.00	-29.35	peak
3	9570.000	37.60	9.64	47.24	74.00	-26.76	peak
4	11550.000	34.97	13.30	48.27	74.00	-25.73	peak
5	13050.000	34.64	15.07	49.71	74.00	-24.29	peak
6	16860.000	31.34	19.95	51.29	74.00	-22.71	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

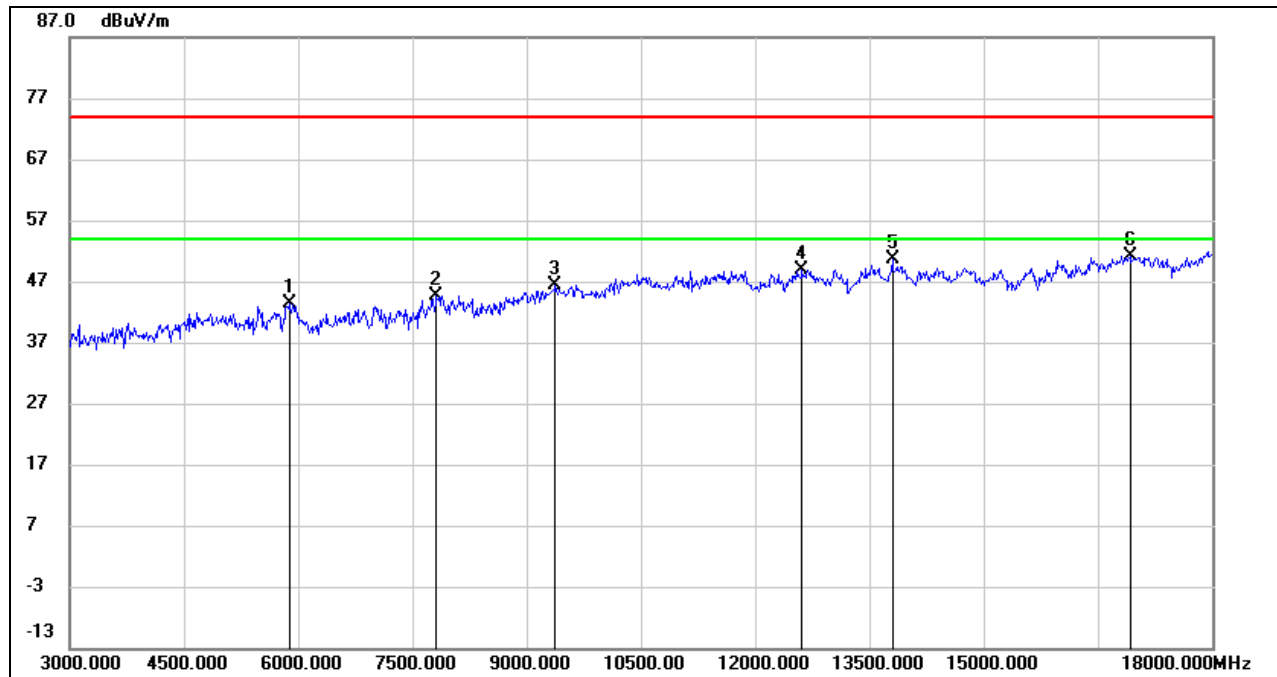

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.89	4.59	43.48	74.00	-30.52	peak
2	7815.000	36.86	7.83	44.69	74.00	-29.31	peak
3	9375.000	36.81	9.45	46.26	74.00	-27.74	peak
4	12615.000	34.80	14.03	48.83	74.00	-25.17	peak
5	13800.000	33.54	17.10	50.64	74.00	-23.36	peak
6	16920.000	31.09	20.06	51.15	74.00	-22.85	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

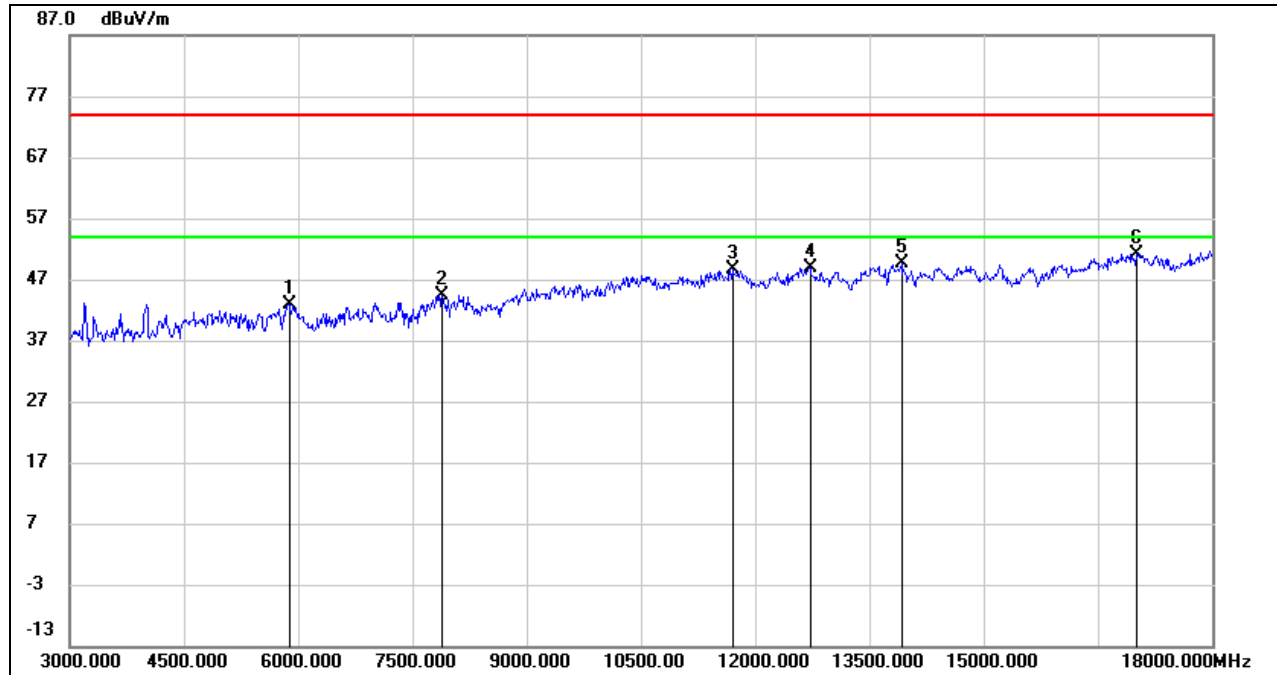

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.34	4.59	42.93	74.00	-31.07	peak
2	7890.000	37.20	7.30	44.50	74.00	-29.50	peak
3	11700.000	35.57	12.95	48.52	74.00	-25.48	peak
4	12720.000	34.30	14.57	48.87	74.00	-25.13	peak
5	13920.000	33.43	16.17	49.60	74.00	-24.40	peak
6	17010.000	30.78	20.43	51.21	74.00	-22.79	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.3. 802.11n HT20 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

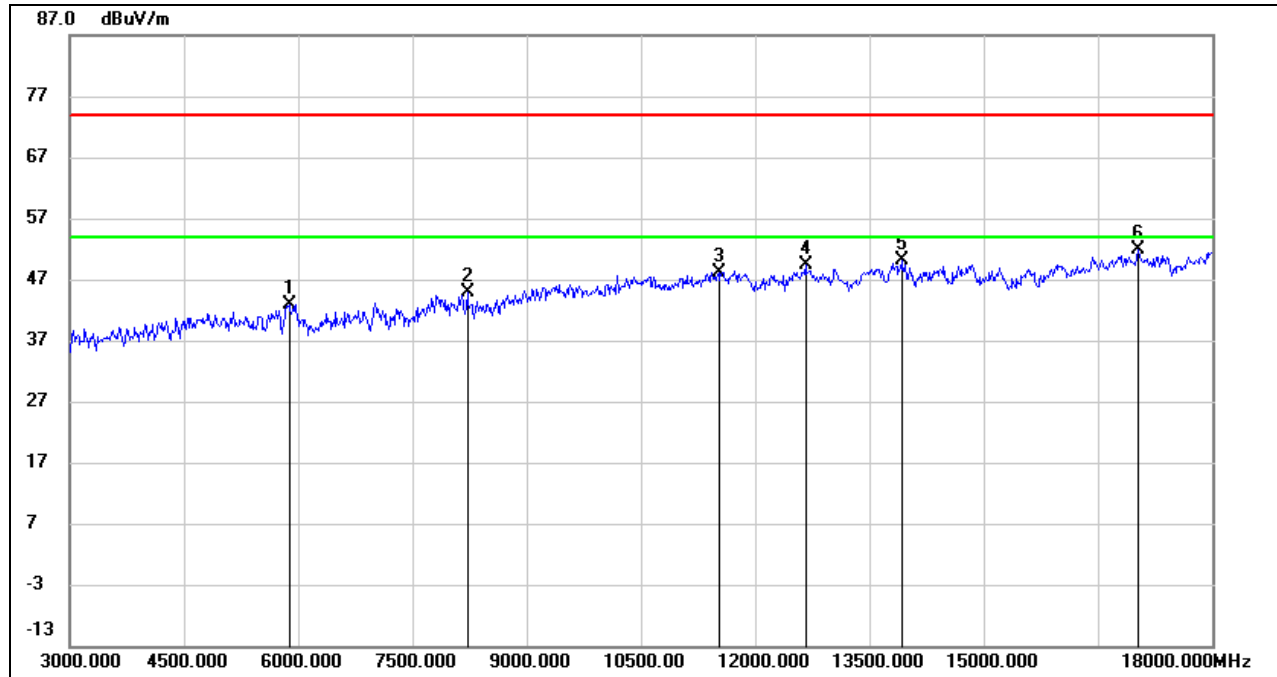

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.34	4.59	42.93	74.00	-31.07	peak
2	8220.000	36.77	8.22	44.99	74.00	-29.01	peak
3	11520.000	34.75	13.38	48.13	74.00	-25.87	peak
4	12660.000	35.20	14.18	49.38	74.00	-24.62	peak
5	13920.000	33.90	16.17	50.07	74.00	-23.93	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

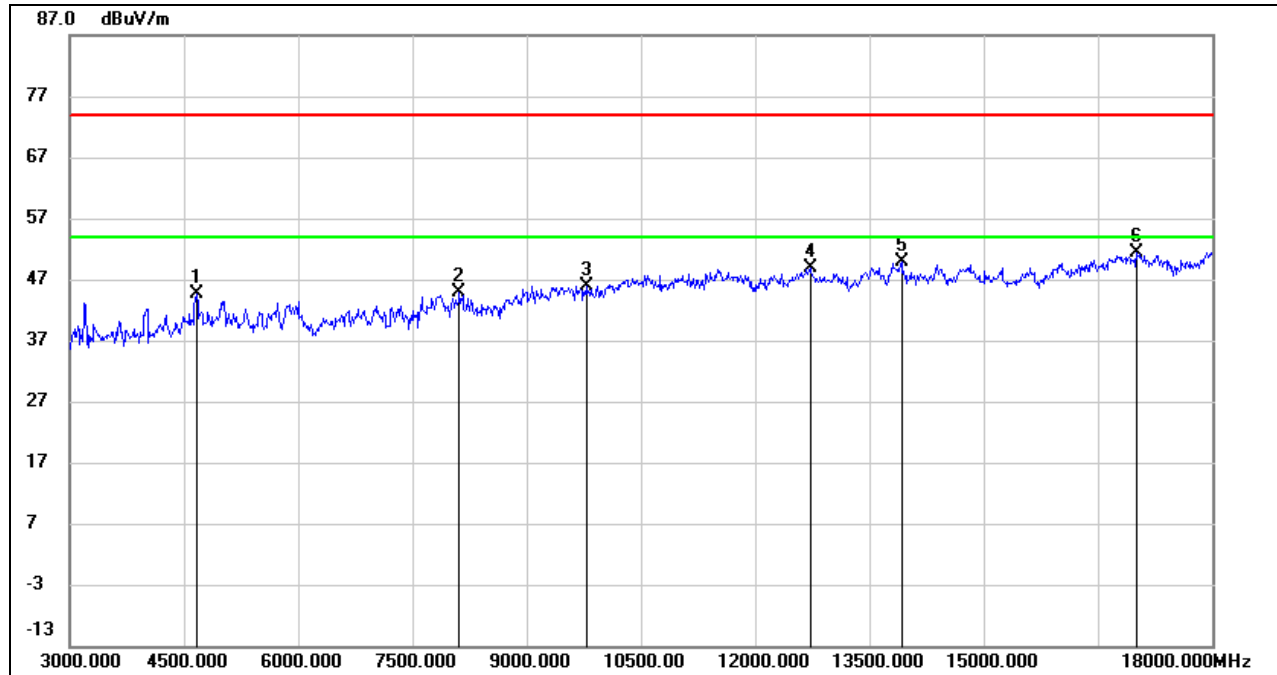

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	44.64	-0.03	44.61	74.00	-29.39	peak
2	8115.000	36.88	7.90	44.78	74.00	-29.22	peak
3	9780.000	36.25	9.71	45.96	74.00	-28.04	peak
4	12720.000	34.32	14.57	48.89	74.00	-25.11	peak
5	13920.000	33.74	16.17	49.91	74.00	-24.09	peak
6	17010.000	31.01	20.43	51.44	74.00	-22.56	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

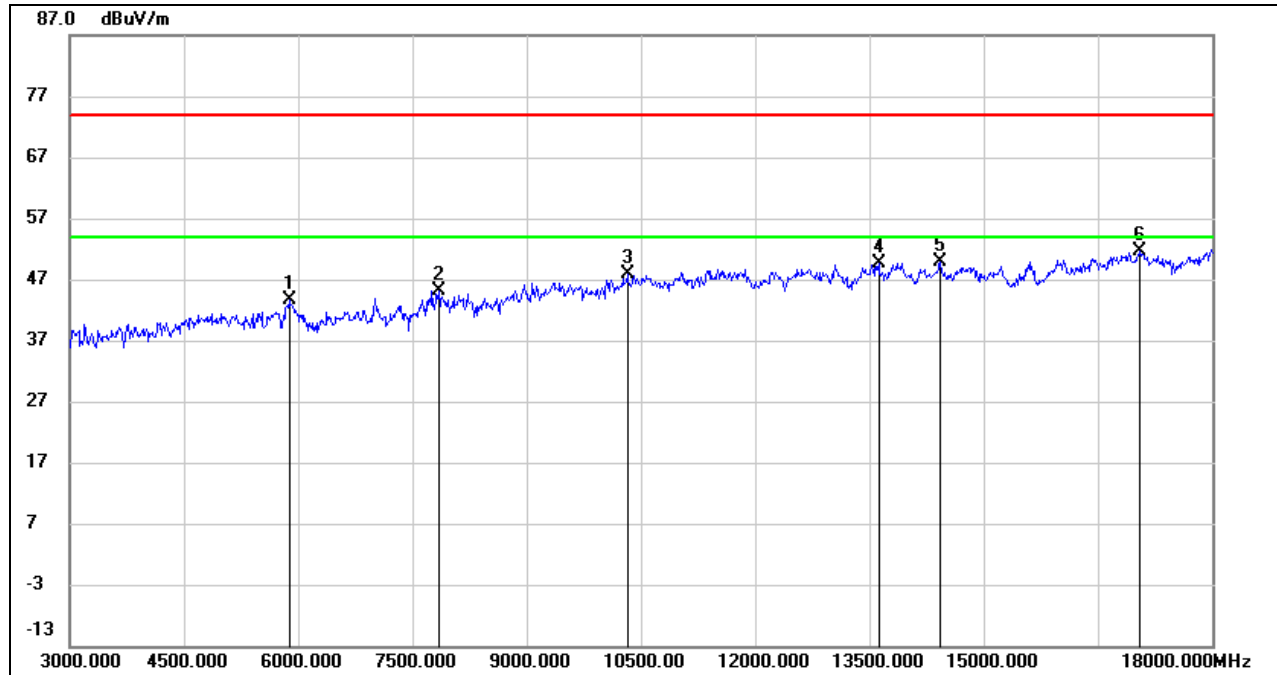

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.97	4.59	43.56	74.00	-30.44	peak
2	7845.000	37.59	7.62	45.21	74.00	-28.79	peak
3	10320.000	36.87	11.05	47.92	74.00	-26.08	peak
4	13620.000	33.71	15.99	49.70	74.00	-24.30	peak
5	14430.000	33.45	16.35	49.80	74.00	-24.20	peak
6	17055.000	30.99	20.53	51.52	74.00	-22.48	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

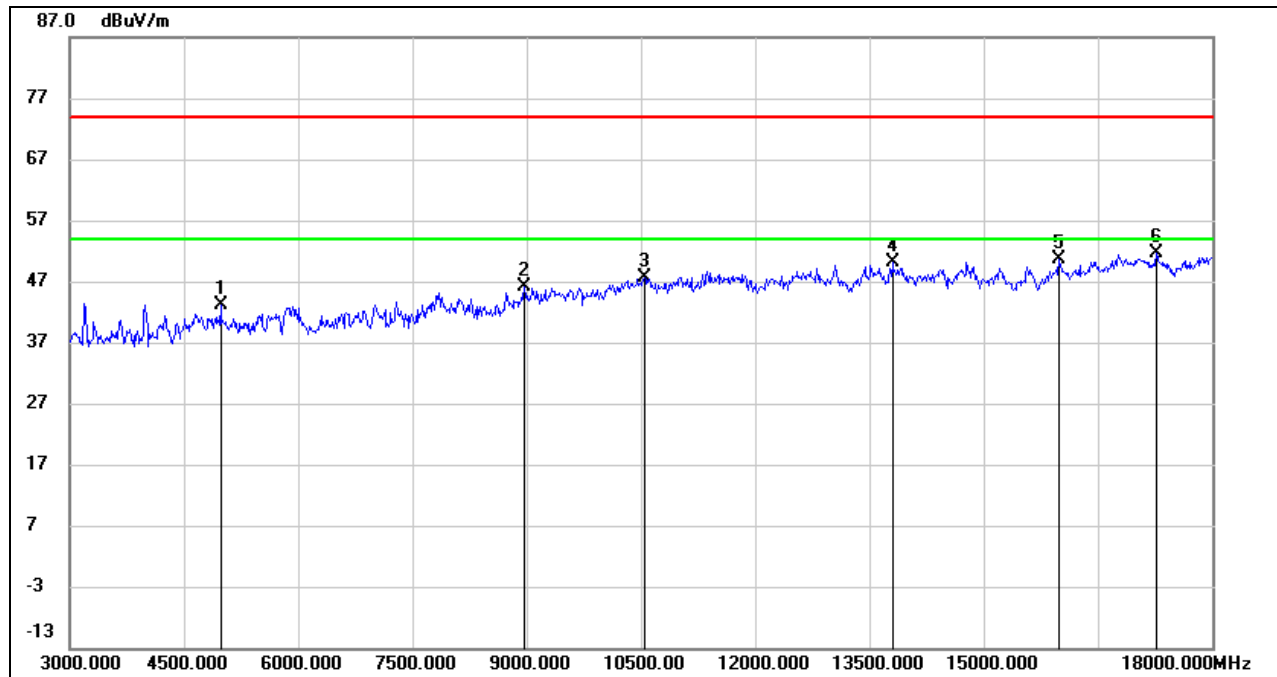**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4980.000	41.93	1.29	43.22	74.00	-30.78	peak
2	8970.000	37.21	9.00	46.21	74.00	-27.79	peak
3	10545.000	36.08	11.64	47.72	74.00	-26.28	peak
4	13800.000	32.91	17.10	50.01	74.00	-23.99	peak
5	15990.000	33.00	17.68	50.68	74.00	-23.32	peak
6	17265.000	30.10	21.46	51.56	74.00	-22.44	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

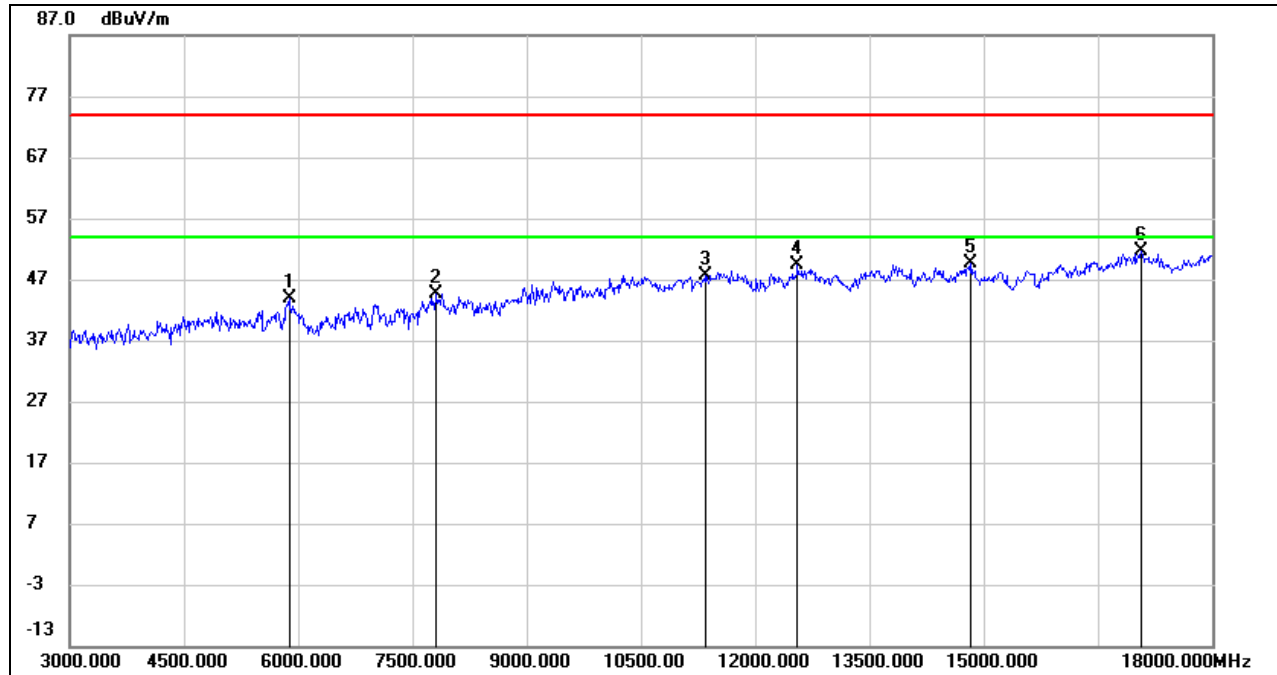

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	39.24	4.59	43.83	74.00	-30.17	peak
2	7815.000	36.86	7.83	44.69	74.00	-29.31	peak
3	11355.000	35.19	12.48	47.67	74.00	-26.33	peak
4	12555.000	35.17	14.24	49.41	74.00	-24.59	peak
5	14835.000	33.66	15.95	49.61	74.00	-24.39	peak
6	17070.000	31.02	20.57	51.59	74.00	-22.41	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

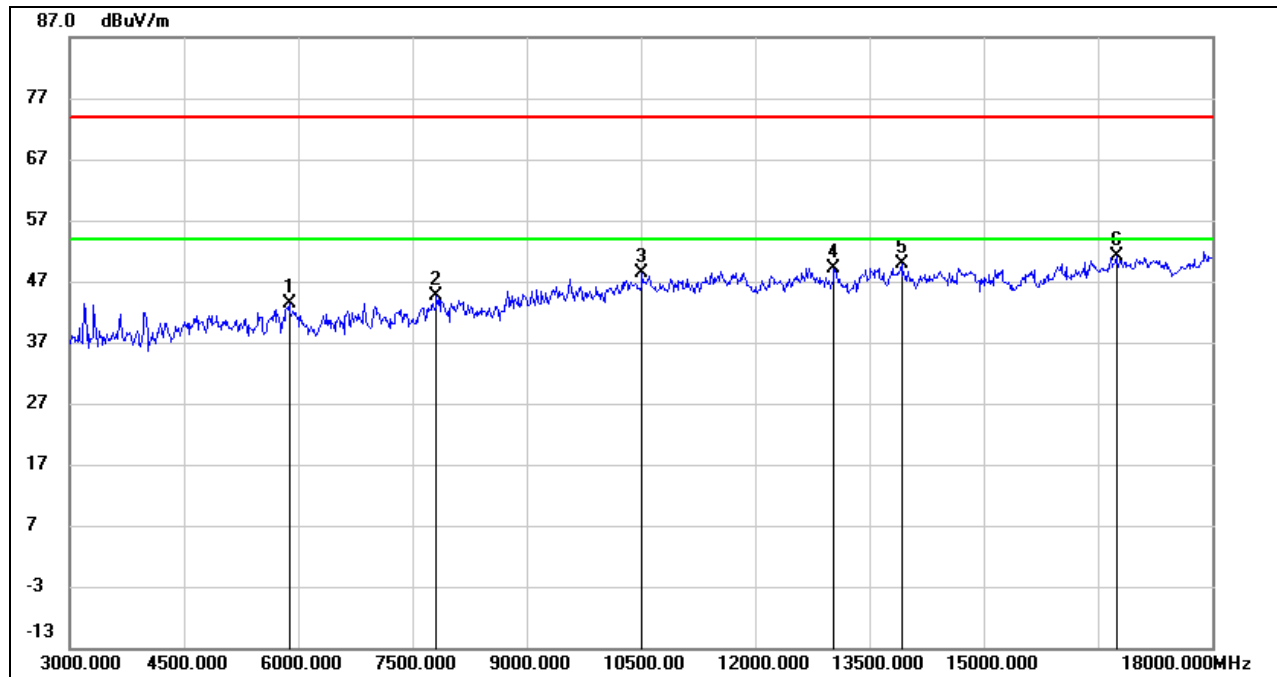**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.81	4.59	43.40	74.00	-30.60	peak
2	7815.000	36.83	7.83	44.66	74.00	-29.34	peak
3	10515.000	36.84	11.47	48.31	74.00	-25.69	peak
4	13035.000	34.13	15.03	49.16	74.00	-24.84	peak
5	13920.000	33.66	16.17	49.83	74.00	-24.17	peak
6	16740.000	31.17	19.94	51.11	74.00	-22.89	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.4. 802.11n HT40 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

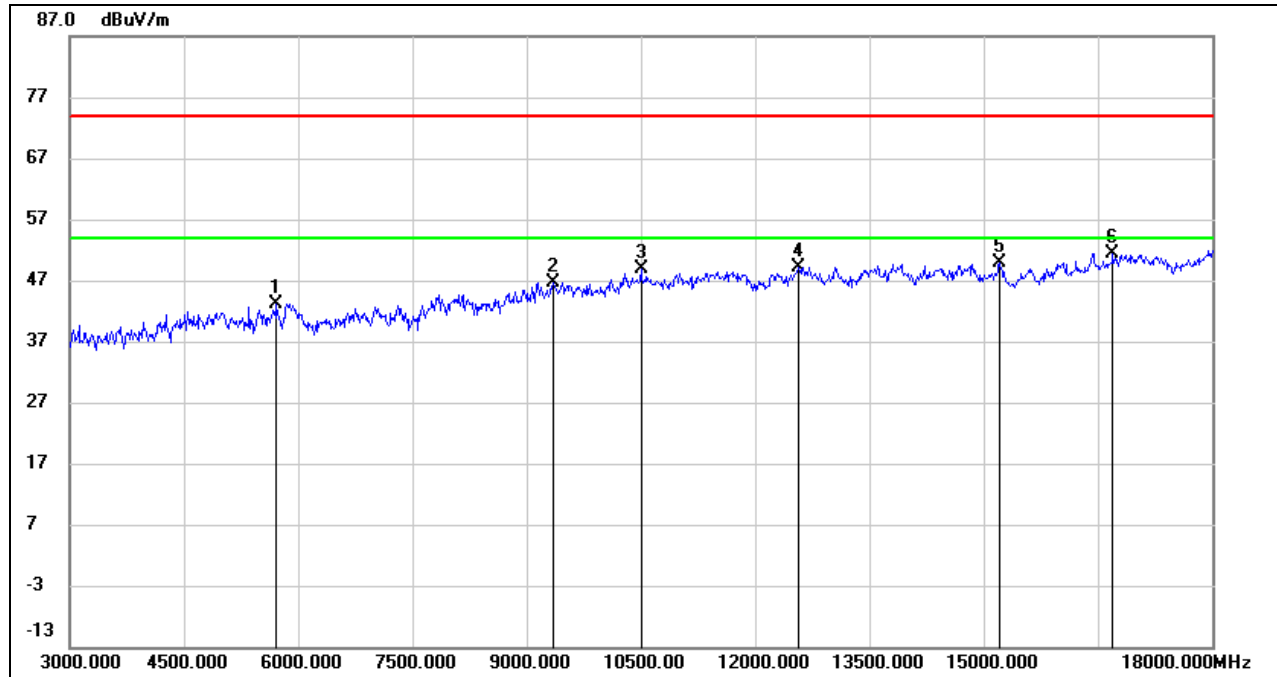

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	40.38	2.78	43.16	74.00	-30.84	peak
2	9345.000	37.45	9.26	46.71	74.00	-27.29	peak
3	10500.000	37.41	11.38	48.79	74.00	-25.21	peak
4	12570.000	35.06	14.17	49.23	74.00	-24.77	peak
5	15210.000	33.87	16.11	49.98	74.00	-24.02	peak
6	16695.000	31.58	19.92	51.50	74.00	-22.50	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

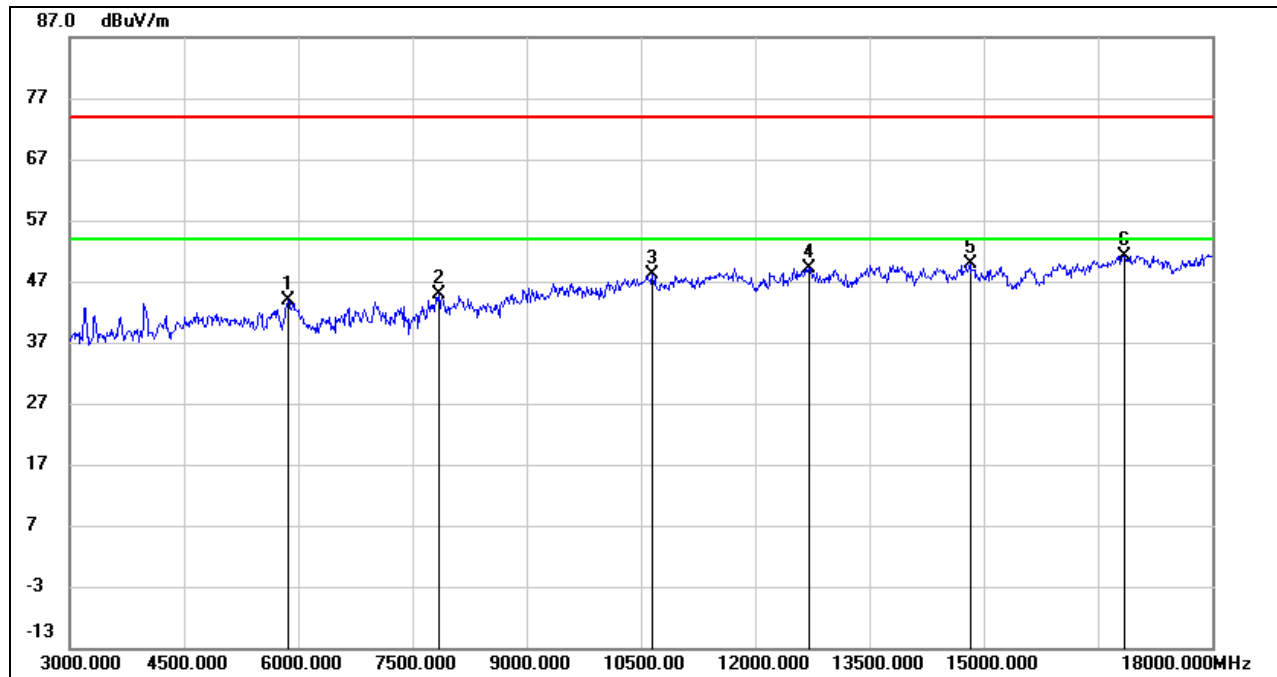

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	39.47	4.30	43.77	74.00	-30.23	peak
2	7845.000	37.26	7.62	44.88	74.00	-29.12	peak
3	10650.000	36.39	11.80	48.19	74.00	-25.81	peak
4	12705.000	34.78	14.35	49.13	74.00	-24.87	peak
5	14820.000	33.98	15.94	49.92	74.00	-24.08	peak
6	16845.000	31.25	19.96	51.21	74.00	-22.79	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

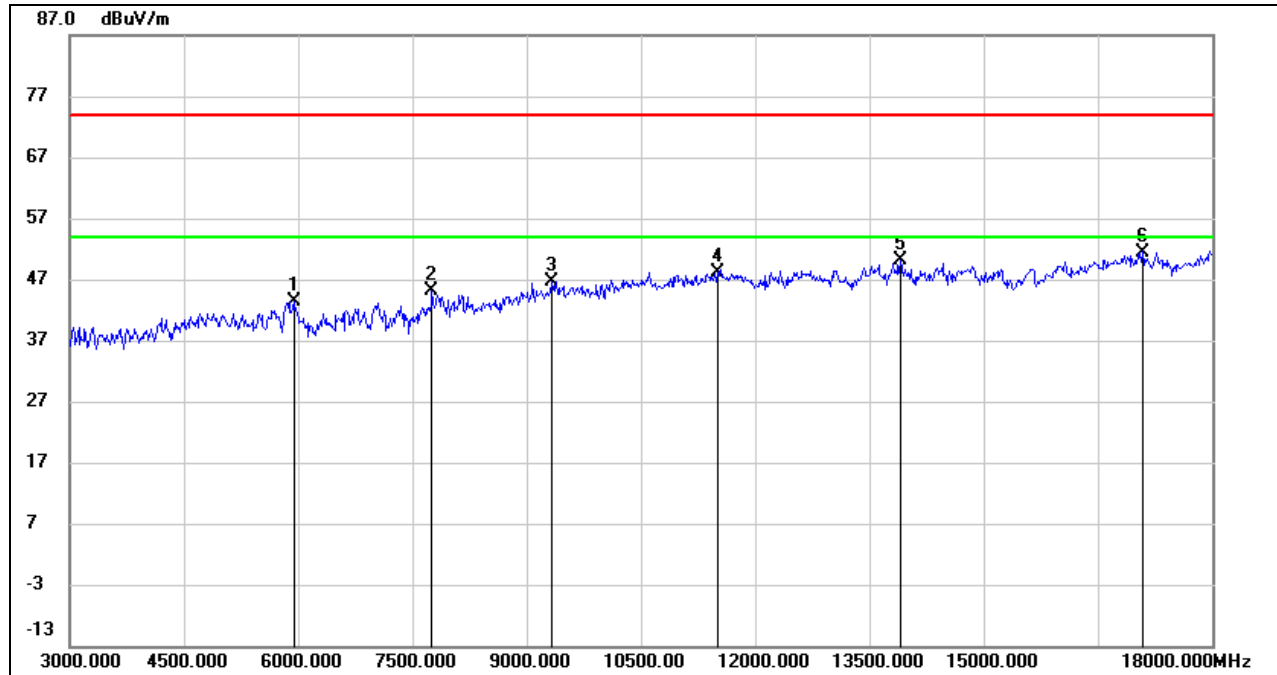

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	39.18	4.30	43.48	74.00	-30.52	peak
2	7755.000	37.83	7.29	45.12	74.00	-28.88	peak
3	9330.000	37.57	9.16	46.73	74.00	-27.27	peak
4	11505.000	34.80	13.42	48.22	74.00	-25.78	peak
5	13905.000	33.84	16.20	50.04	74.00	-23.96	peak
6	17085.000	30.90	20.60	51.50	74.00	-22.50	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

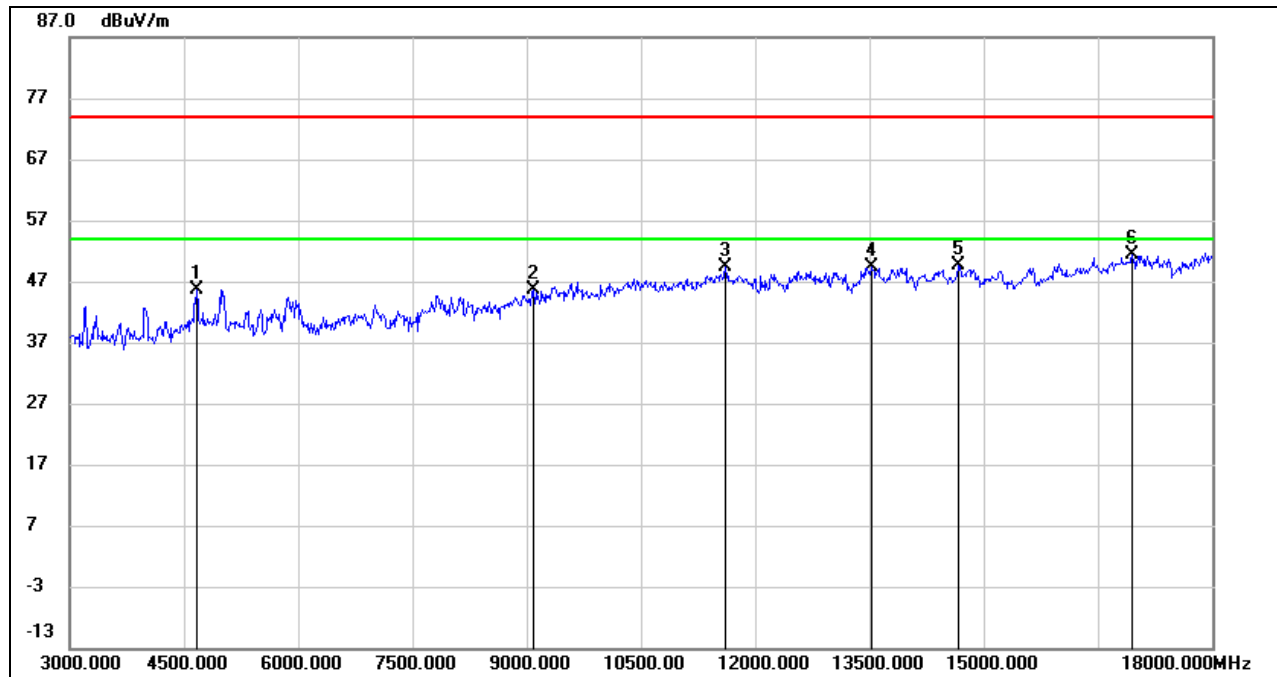

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	45.61	-0.03	45.58	74.00	-28.42	peak
2	9090.000	36.32	9.28	45.60	74.00	-28.40	peak
3	11610.000	36.12	13.15	49.27	74.00	-24.73	peak
4	13530.000	33.49	15.86	49.35	74.00	-24.65	peak
5	14670.000	33.63	16.01	49.64	74.00	-24.36	peak
6	16950.000	31.22	20.18	51.40	74.00	-22.60	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

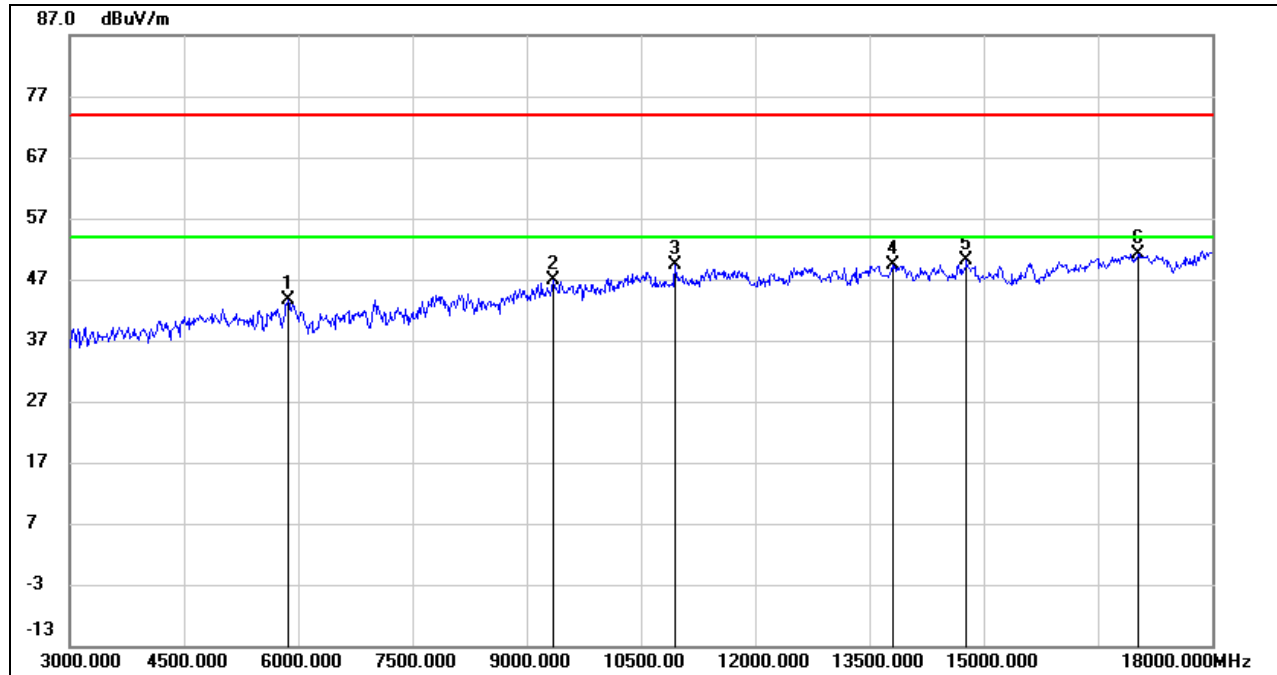

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	39.43	4.30	43.73	74.00	-30.27	peak
2	9345.000	37.67	9.26	46.93	74.00	-27.07	peak
3	10950.000	37.19	12.18	49.37	74.00	-24.63	peak
4	13800.000	32.39	17.10	49.49	74.00	-24.51	peak
5	14775.000	34.21	15.95	50.16	74.00	-23.84	peak
6	17025.000	30.79	20.46	51.25	74.00	-22.75	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

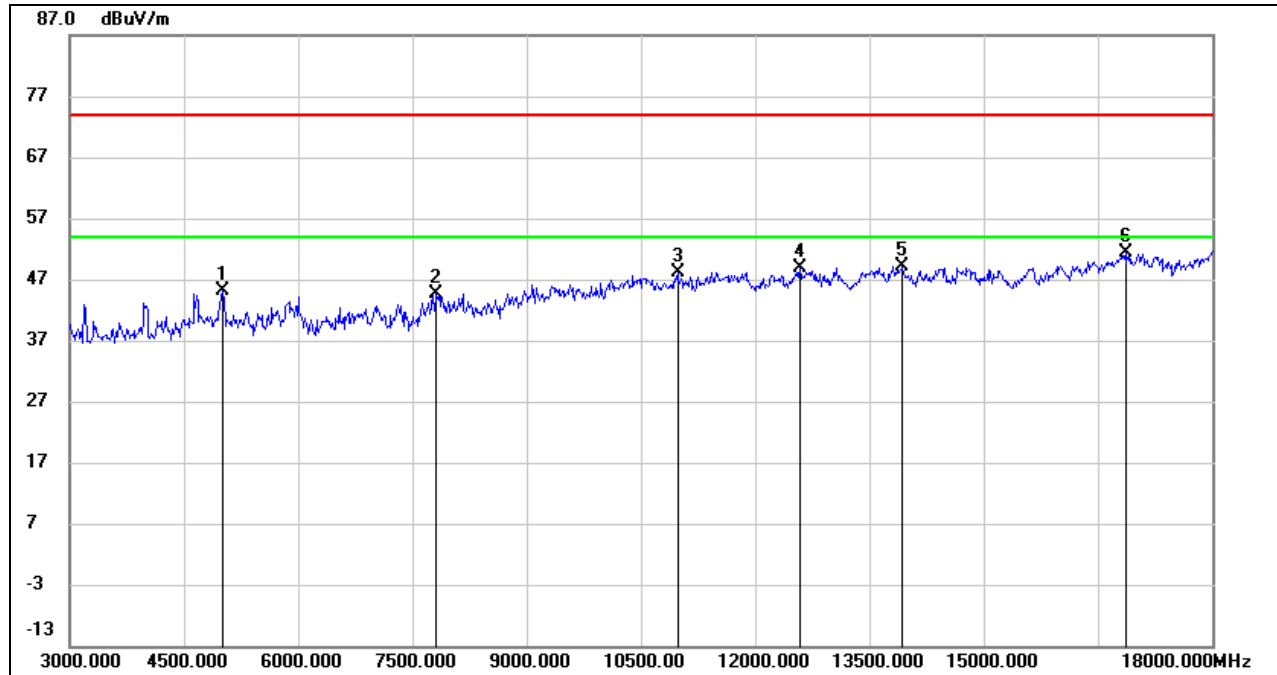

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5010.000	43.76	1.42	45.18	74.00	-28.82	peak
2	7800.000	36.74	7.93	44.67	74.00	-29.33	peak
3	10980.000	35.66	12.46	48.12	74.00	-25.88	peak
4	12585.000	34.77	14.08	48.85	74.00	-25.15	peak
5	13935.000	33.05	16.15	49.20	74.00	-24.80	peak
6	16860.000	31.33	19.95	51.28	74.00	-22.72	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both STBC and CDD modes had been tested, only the worst data was recorded in the report.

8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.5.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

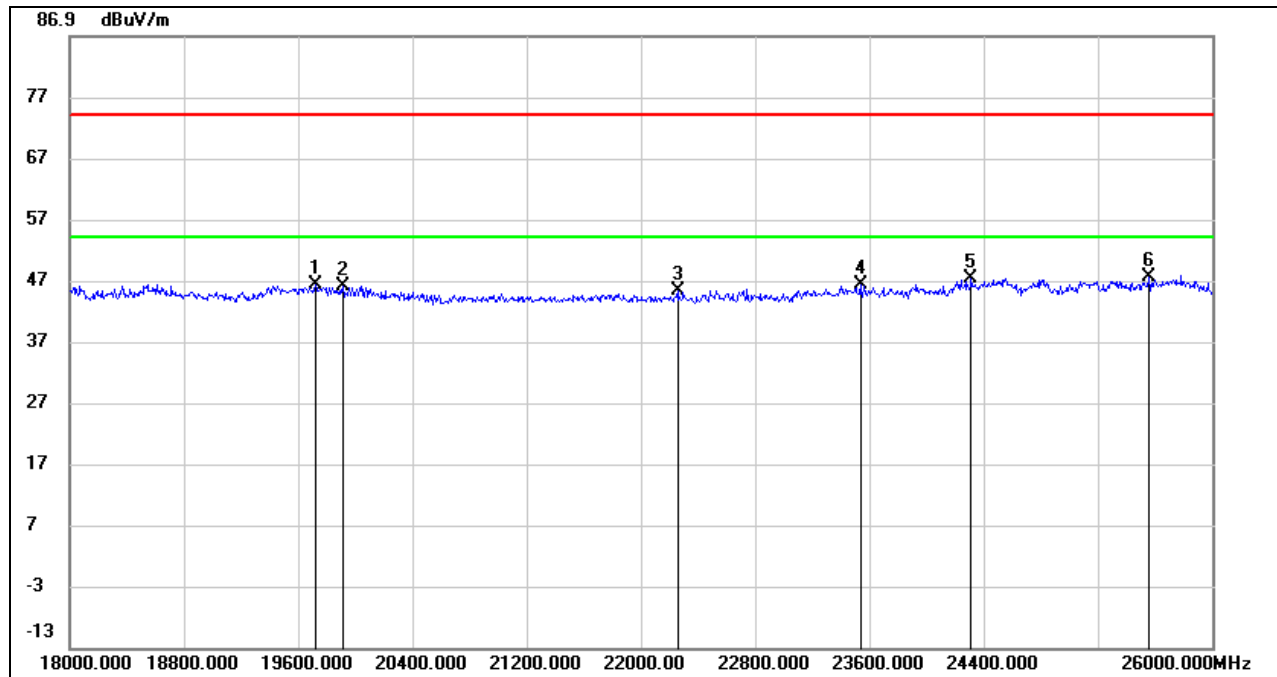


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19720.000	50.58	-4.39	46.19	74.00	-27.81	peak
2	19912.000	50.41	-4.36	46.05	74.00	-27.95	peak
3	22256.000	51.45	-6.06	45.39	74.00	-28.61	peak
4	23536.000	50.96	-4.74	46.22	74.00	-27.78	peak
5	24312.000	50.60	-3.35	47.25	74.00	-26.75	peak
6	25560.000	49.27	-1.70	47.57	74.00	-26.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

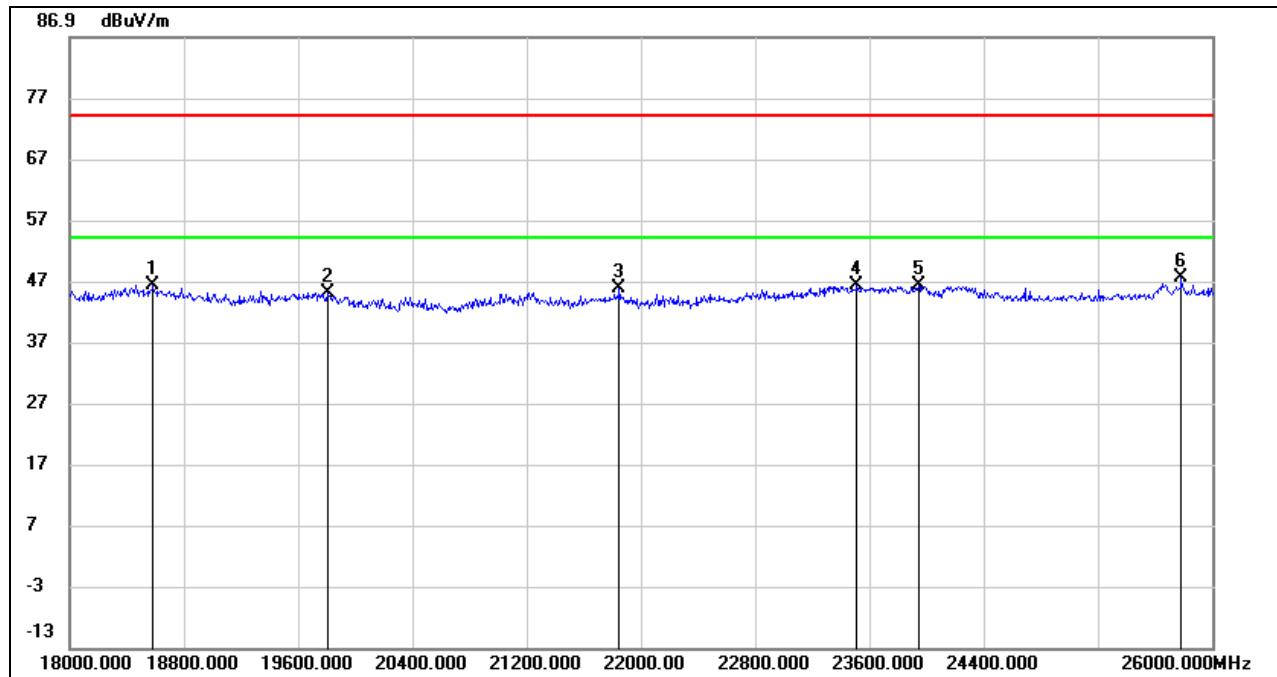**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18584.000	50.69	-4.53	46.16	74.00	-27.84	peak
2	19808.000	49.33	-4.34	44.99	74.00	-29.01	peak
3	21848.000	51.76	-5.95	45.81	74.00	-28.19	peak
4	23512.000	51.01	-4.76	46.25	74.00	-27.75	peak
5	23944.000	50.45	-4.14	46.31	74.00	-27.69	peak
6	25784.000	49.08	-1.49	47.59	74.00	-26.41	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


Note: All the modes had been tested, but only the worst data was recorded in the report.



8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.6.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

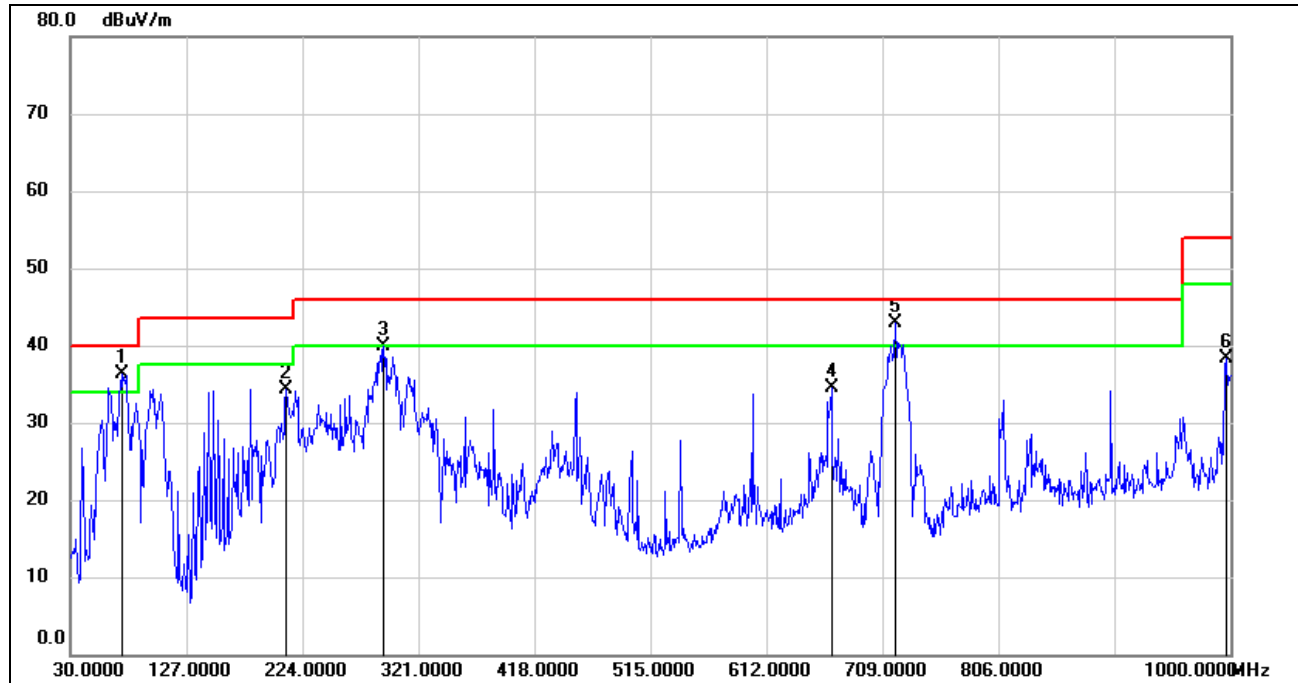


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	73.6500	56.53	-20.17	36.36	40.00	-3.64	QP
2	210.4200	51.26	-16.87	34.39	43.50	-9.11	QP
3	291.9000	54.55	-14.65	39.90	46.00	-6.10	QP
4	666.3200	42.10	-7.65	34.45	46.00	-11.55	QP
5	719.6700	49.28	-6.45	42.83	46.00	-3.17	QP
6	996.1200	41.55	-3.29	38.26	54.00	-15.74	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

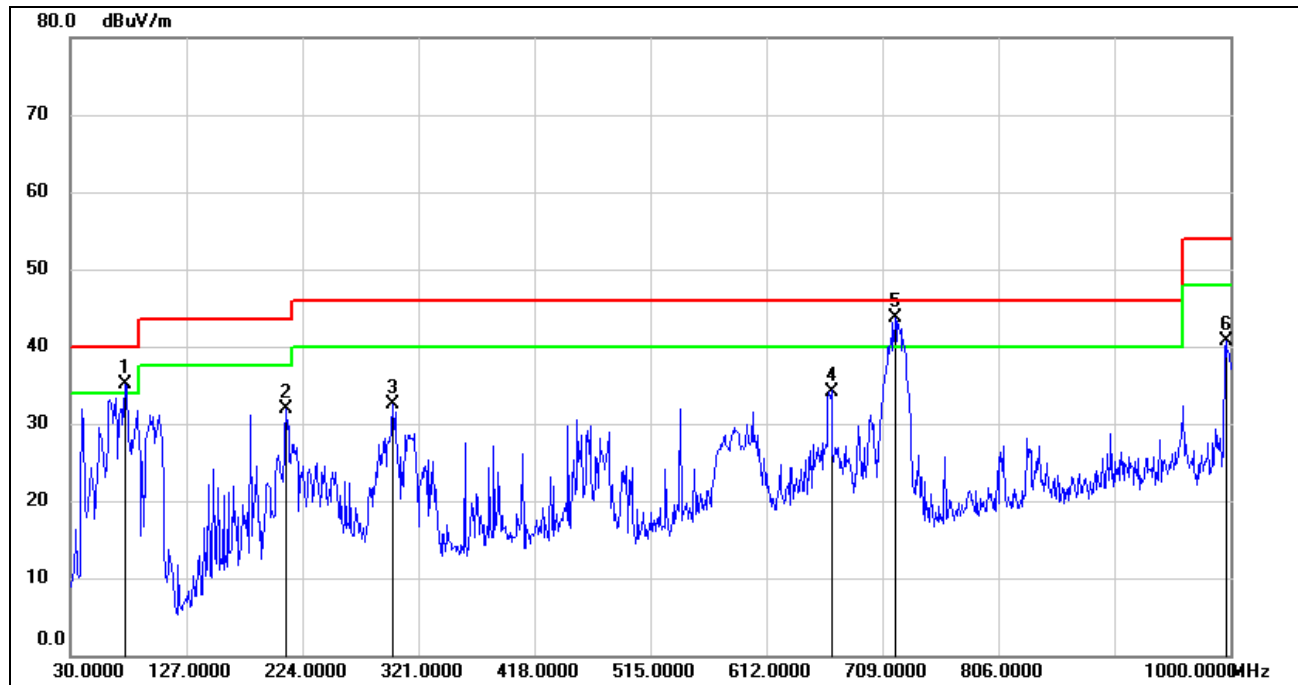

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	75.5899	55.50	-20.35	35.15	40.00	-4.85	QP
2	210.4200	48.69	-16.87	31.82	43.50	-11.68	QP
3	299.6600	46.92	-14.39	32.53	46.00	-13.47	QP
4	666.3200	41.85	-7.65	34.20	46.00	-11.80	QP
5	719.6700	50.06	-6.45	43.61	46.00	-2.39	QP
6	996.1200	43.95	-3.29	40.66	54.00	-13.34	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes had been tested, but only the worst data was recorded in the report.

8.7. SPURIOUS EMISSIONS BELOW 30 MHz

8.7.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

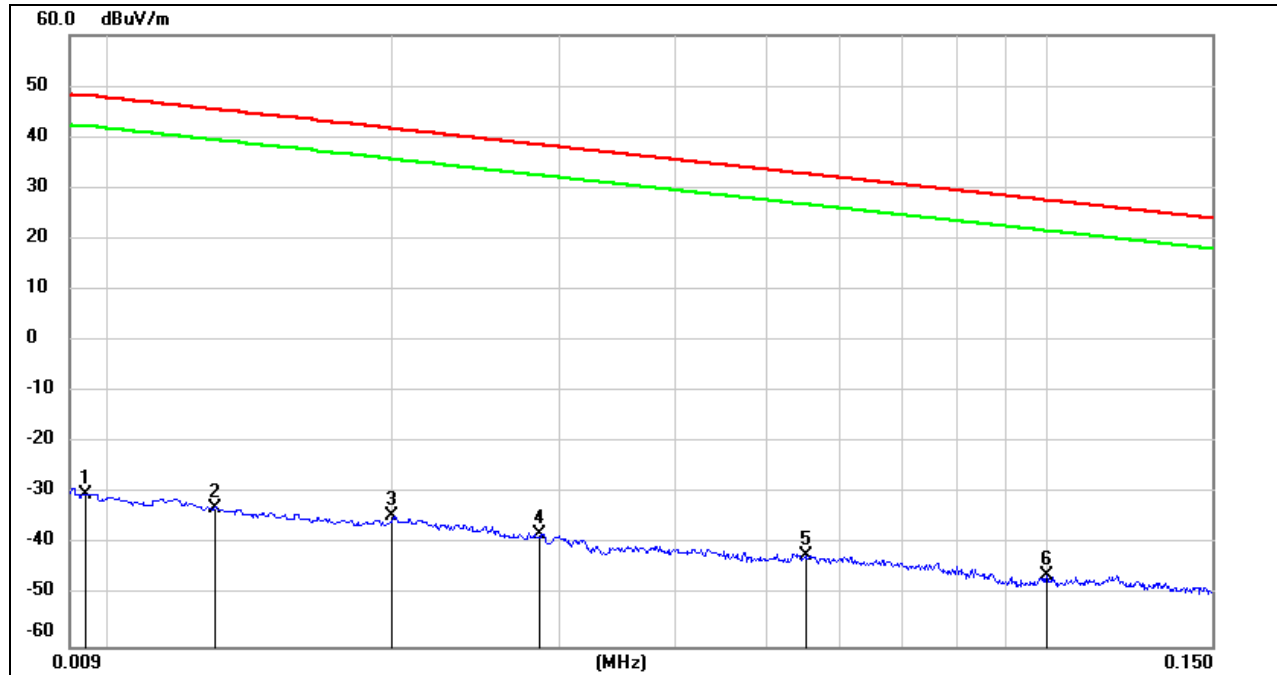


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	71.16	-101.35	-30.19	48.05	-81.69	-3.45	-78.24	peak
2	0.0129	68.68	-101.38	-32.7	45.39	-84.20	-6.11	-78.09	peak
3	0.0200	66.86	-101.34	-34.48	41.58	-85.98	-9.92	-76.06	peak
4	0.0286	63.46	-101.38	-37.92	38.47	-89.42	-13.03	-76.39	peak
5	0.0551	59.45	-101.50	-42.05	32.78	-93.55	-18.72	-74.83	peak
6	0.1000	55.67	-101.80	-46.13	27.6	-97.63	-23.90	-73.73	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

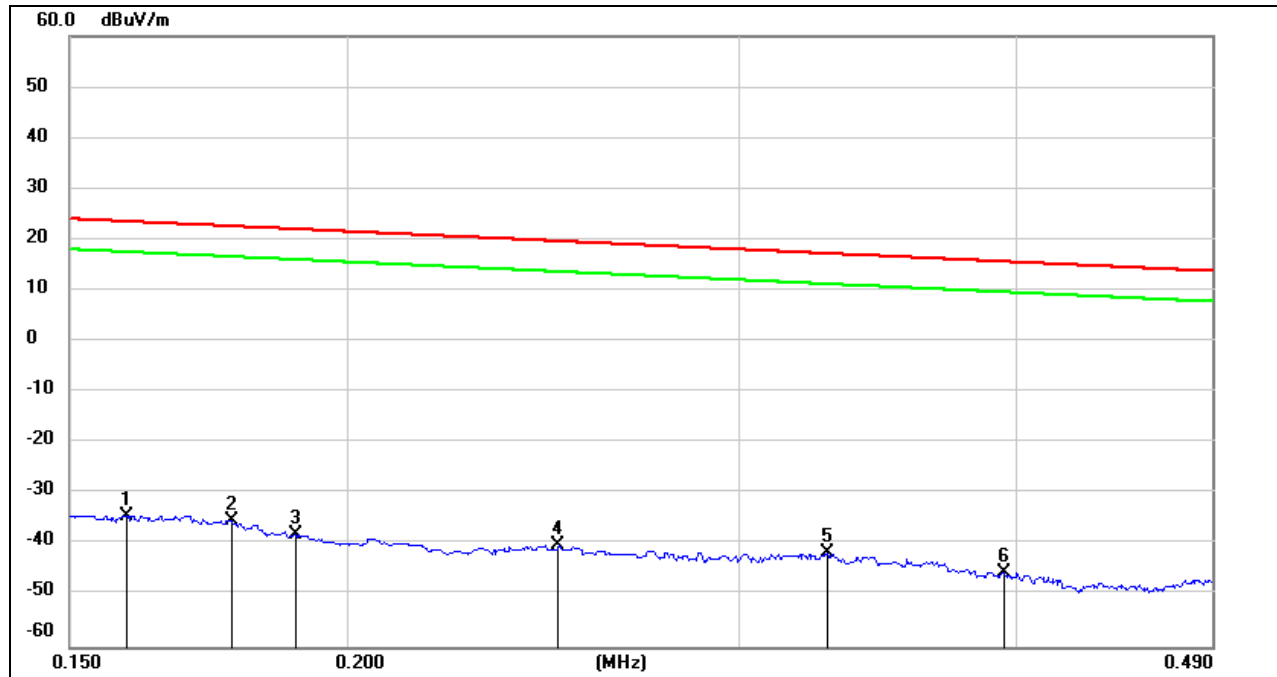150 kHz ~ 490 kHz


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1592	67.35	-101.65	-34.3	23.56	-85.80	-27.94	-57.86	peak
2	0.1774	66.47	-101.68	-35.21	22.63	-86.71	-28.87	-57.84	peak
3	0.1895	63.65	-101.70	-38.05	22.05	-89.55	-29.45	-60.10	peak
4	0.2489	61.69	-101.80	-40.11	19.68	-91.61	-31.82	-59.79	peak
5	0.3286	60.21	-101.88	-41.67	17.27	-93.17	-34.23	-58.94	peak
6	0.3951	56.48	-101.96	-45.48	15.67	-96.98	-35.83	-61.15	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120 π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

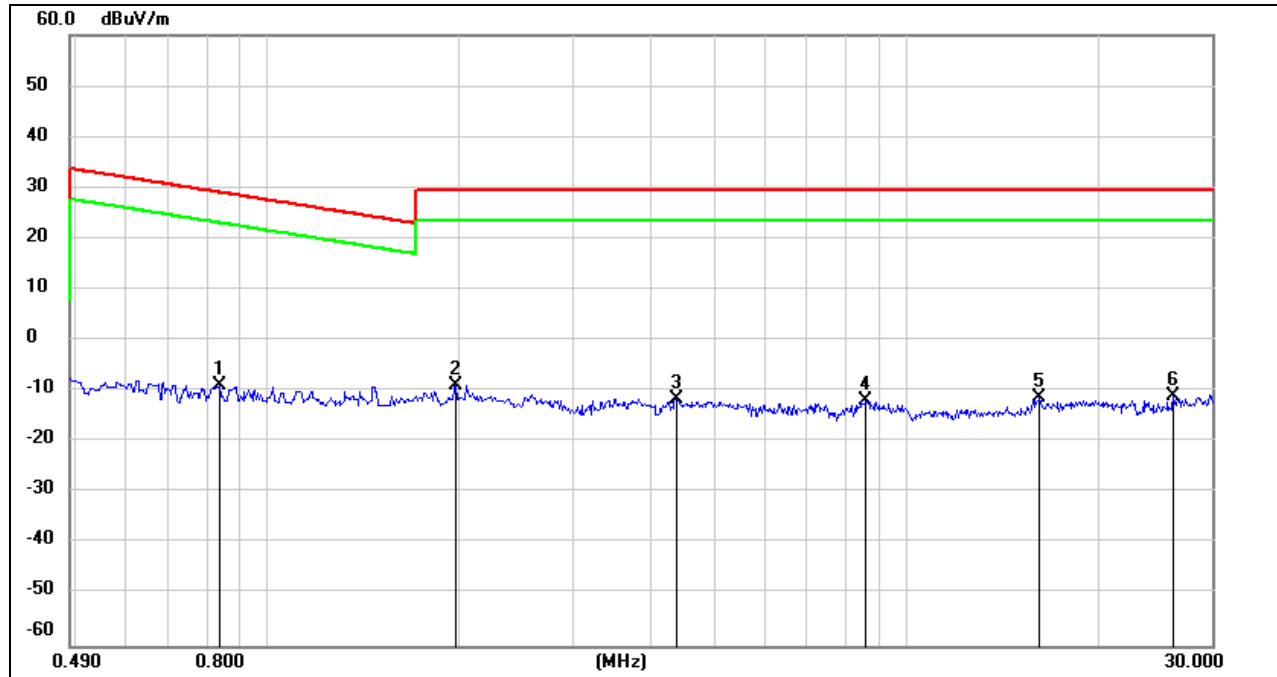

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.8400	53.21	-62.17	-8.96	29.12	-60.46	-22.38	-38.08	peak
2	1.9681	53.00	-61.83	-8.83	29.54	-60.33	-21.96	-38.37	peak
3	4.3558	49.77	-61.39	-11.62	29.54	-63.12	-21.96	-41.16	peak
4	8.6348	49.10	-60.99	-11.89	29.54	-63.39	-21.96	-41.43	peak
5	16.1598	49.61	-60.97	-11.36	29.54	-62.86	-21.96	-40.90	peak
6	26.1047	49.48	-60.34	-10.86	29.54	-62.36	-21.96	-40.40	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, but only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

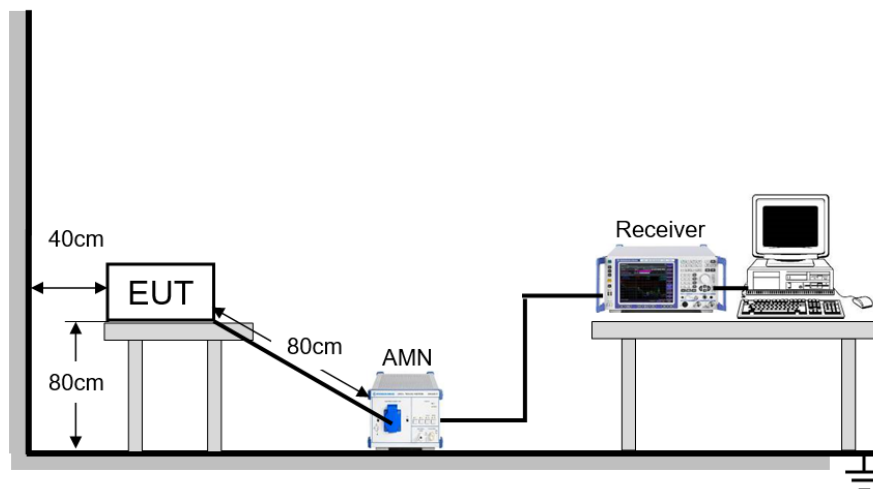

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	23.1 °C	Relative Humidity	56 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

9.1. 802.11n HT20 MIMO MODE LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

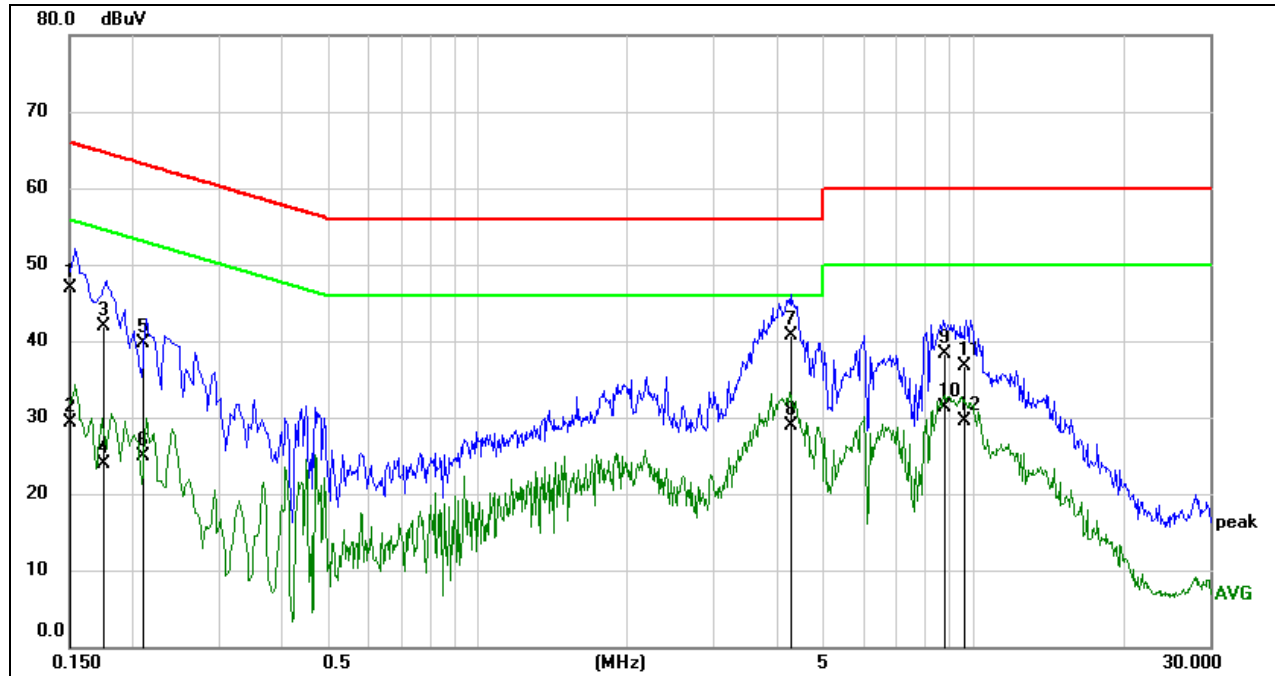

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1505	37.32	9.60	46.92	65.97	-19.05	QP
2	0.1505	19.71	9.60	29.31	55.97	-26.66	AVG
3	0.1756	32.40	9.60	42.00	64.69	-22.69	QP
4	0.1756	14.31	9.60	23.91	54.69	-30.78	AVG
5	0.2102	30.03	9.60	39.63	63.20	-23.57	QP
6	0.2102	15.26	9.60	24.86	53.20	-28.34	AVG
7	4.2621	31.08	9.66	40.74	56.00	-15.26	QP
8	4.2621	19.24	9.66	28.90	46.00	-17.10	AVG
9	8.7627	28.56	9.74	38.30	60.00	-21.70	QP
10	8.7627	21.58	9.74	31.32	50.00	-18.68	AVG
11	9.5935	26.99	9.75	36.74	60.00	-23.26	QP
12	9.5935	19.77	9.75	29.52	50.00	-20.48	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

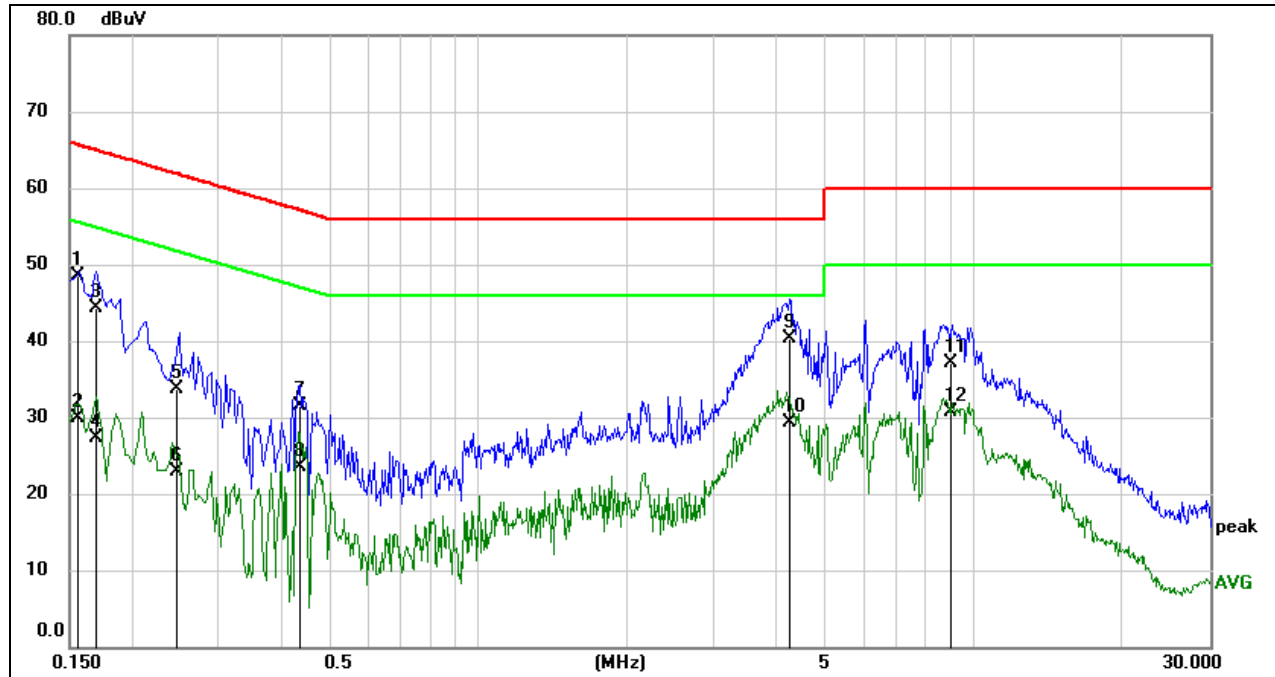

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1553	38.88	9.61	48.49	65.71	-17.22	QP
2	0.1553	20.32	9.61	29.93	55.71	-25.78	AVG
3	0.1702	34.64	9.61	44.25	64.95	-20.70	QP
4	0.1702	17.68	9.61	27.29	54.95	-27.66	AVG
5	0.2462	24.05	9.60	33.65	61.88	-28.23	QP
6	0.2462	13.34	9.60	22.94	51.88	-28.94	AVG
7	0.4362	21.99	9.60	31.59	57.13	-25.54	QP
8	0.4362	13.94	9.60	23.54	47.13	-23.59	AVG
9	4.2379	30.67	9.66	40.33	56.00	-15.67	QP
10	4.2379	19.74	9.66	29.40	46.00	-16.60	AVG
11	8.9971	27.45	9.73	37.18	60.00	-22.82	QP
12	8.9971	20.99	9.73	30.72	50.00	-19.28	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes had been tested, but only the worst data was recorded in the report.



10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies



Appendix

Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.160	2406.960	2417.120	0.5	PASS
	Ant2	2412	10.120	2406.960	2417.080	0.5	PASS
	Ant1	2437	10.120	2432.000	2442.120	0.5	PASS
	Ant2	2437	10.160	2431.960	2442.120	0.5	PASS
	Ant1	2462	10.200	2456.920	2467.120	0.5	PASS
	Ant2	2462	10.160	2456.920	2467.080	0.5	PASS
11G	Ant1	2412	16.440	2403.800	2420.240	0.5	PASS
	Ant2	2412	16.440	2403.800	2420.240	0.5	PASS
	Ant1	2437	16.400	2428.840	2445.240	0.5	PASS
	Ant2	2437	16.440	2428.800	2445.240	0.5	PASS
	Ant1	2462	16.440	2453.800	2470.240	0.5	PASS
	Ant2	2462	16.440	2453.800	2470.240	0.5	PASS
11N20MIMO	Ant1	2412	17.680	2403.200	2420.880	0.5	PASS
	Ant2	2412	17.640	2403.240	2420.880	0.5	PASS
	Ant1	2437	17.680	2428.200	2445.880	0.5	PASS
	Ant2	2437	17.680	2428.240	2445.920	0.5	PASS
	Ant1	2462	17.640	2453.240	2470.880	0.5	PASS
	Ant2	2462	17.680	2453.240	2470.920	0.5	PASS
11N40MIMO	Ant1	2422	36.560	2403.760	2440.320	0.5	PASS
	Ant2	2422	36.480	2403.840	2440.320	0.5	PASS
	Ant1	2437	36.480	2418.840	2455.320	0.5	PASS
	Ant2	2437	36.480	2418.840	2455.320	0.5	PASS
	Ant1	2452	36.480	2433.840	2470.320	0.5	PASS
	Ant2	2452	36.480	2433.840	2470.320	0.5	PASS




Test Graphs






11B_Ant2_2437

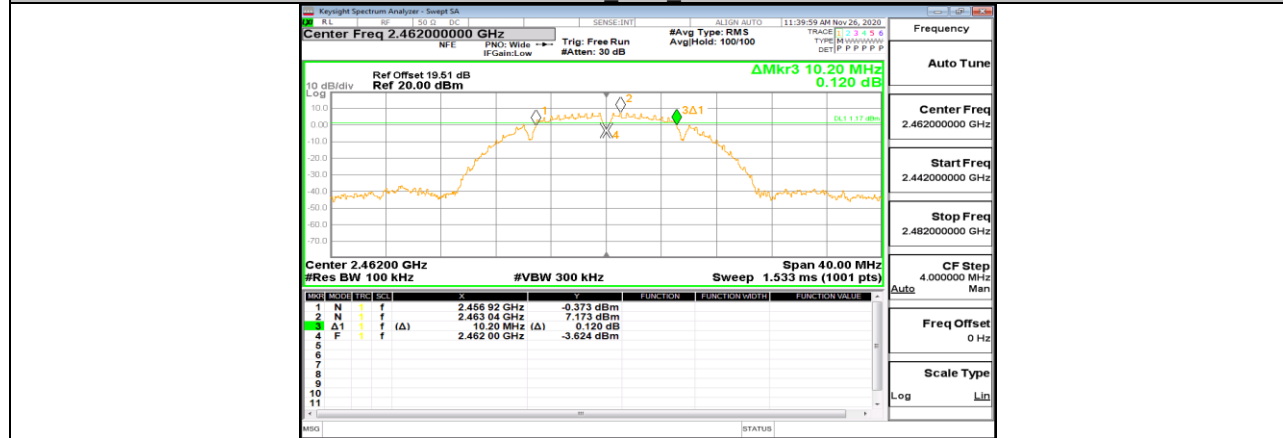

11B_Ant1_2462

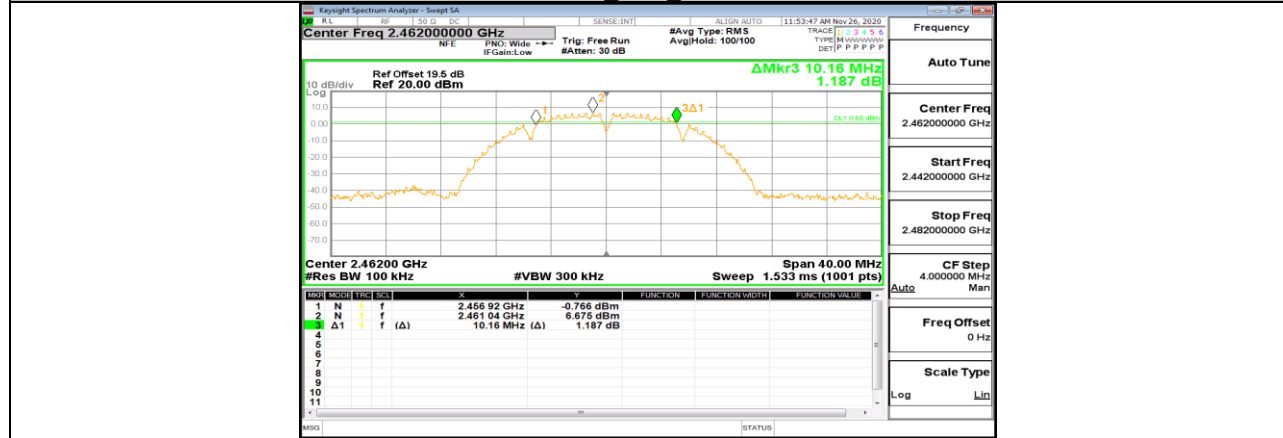

11B_Ant2_2462






11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462

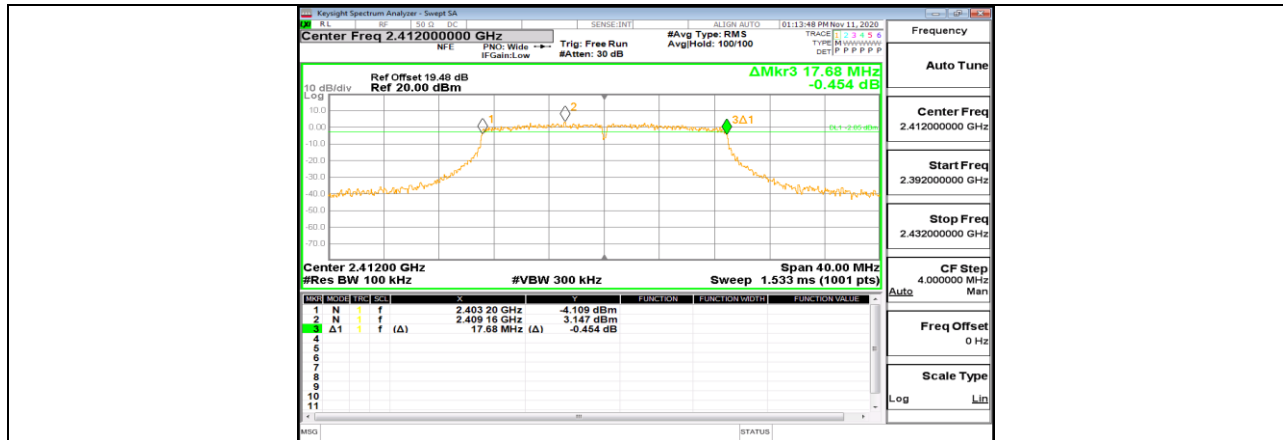

11N20MIMO Ant1 2412



11N20MIMO Ant2 2412



11N20MIMO Ant1 2437









Appendix B: Occupied Channel Bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.574	2404.728	2419.302	PASS
	Ant2	2412	14.623	2404.683	2419.306	PASS
	Ant1	2437	14.573	2429.784	2444.357	PASS
	Ant2	2437	14.528	2429.813	2444.341	PASS
	Ant1	2462	14.652	2454.716	2469.368	PASS
	Ant2	2462	14.670	2454.747	2469.417	PASS
11G	Ant1	2412	16.748	2403.582	2420.330	PASS
	Ant2	2412	16.767	2403.553	2420.320	PASS
	Ant1	2437	16.708	2428.644	2445.352	PASS
	Ant2	2437	16.695	2428.644	2445.339	PASS
	Ant1	2462	16.766	2453.598	2470.364	PASS
	Ant2	2462	16.761	2453.595	2470.356	PASS
11N20MIMO	Ant1	2412	17.858	2403.143	2421.001	PASS
	Ant2	2412	17.850	2403.120	2420.970	PASS
	Ant1	2437	17.798	2428.157	2445.955	PASS
	Ant2	2437	17.802	2428.172	2445.974	PASS
	Ant1	2462	17.899	2453.165	2471.064	PASS
	Ant2	2462	17.870	2453.161	2471.031	PASS
11N40MIMO	Ant1	2422	36.249	2404.045	2440.294	PASS
	Ant2	2422	36.348	2403.986	2440.334	PASS
	Ant1	2437	36.107	2419.114	2455.221	PASS
	Ant2	2437	36.073	2419.106	2455.179	PASS
	Ant1	2452	36.290	2433.995	2470.285	PASS
	Ant2	2452	36.260	2433.985	2470.245	PASS