

Prüfbericht-Nr.: <i>Test Report No.:</i>	10050448 001	Auftrags-Nr.: <i>Order No.:</i>	114032973	Seite 1 von 32 Page 1 of 32
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	25-Feb-2015	
Auftraggeber: <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek Nedap, Parallelweg 2, NL-7141 DC, Groenlo, The Netherlands			
Prüfgegenstand: <i>Test item:</i>	Electronic Parking License			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	SENSIT EPL US			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247 RSS-247 (05-2015)			
Wareneingangsdatum: <i>Date of receipt:</i>	2-Mar-2015			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000178390-001			
Prüfzeitraum: <i>Testing period:</i>	2-Mar-2015 - 25-Jun-2015			
Ort der Prüfung: <i>Place of testing:</i>	EMC Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
07-Jul-2015	Ryan W. T. Chen / Project Engineer	07-Jul-2015	Rene Charton/Senior Project Manager	
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
				Unterschrift <i>Signature</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				



TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 PEAK OUTPUT POWER

RESULT: Passed

5.1.3 20dB BANDWIDTH

RESULT: Passed

5.1.4 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH

RESULT: Passed

5.1.5 SPURIOUS EMISSION

RESULT: Passed

5.1.6 FREQUENCY SEPARATION

RESULT: Passed

5.1.7 NUMBER OF HOPPING FREQUENCY

RESULT: Passed

5.1.8 TIME OF OCCUPANCY

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	SYSTEM DETAILS AND RATINGS.....	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power</i>	<i>14</i>
5.1.3	<i>20dB Bandwidth</i>	<i>16</i>
5.1.4	<i>99% Bandwidth</i>	<i>19</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>22</i>
5.1.6	<i>Spurious Emission</i>	<i>25</i>
5.1.7	<i>Frequency Separation.....</i>	<i>26</i>
5.1.8	<i>Number of hopping frequency.....</i>	<i>28</i>
5.1.9	<i>Time of Occupancy</i>	<i>30</i>
6.	LIST OF TABLES	32

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix P: Photo Documentation

(File Name: 10050448APPENDIX P)

Appendix D: Test Result of Radiated Emissions

(File Name: 10050448APPENDIX D)

Test Specifications

The following standards were applied

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247 RSS-247 Issue 1 May 2015 RSS-Gen, Issue 4, November 2014 ANSI C63.4:2014, ANSI C63.10:2013 Public Notice DA 00-705

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759

TAF Accreditation effective period: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	R&S	ESR7	101062	30-Aug-15
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-15
Spectrum Analyzer	R&S	FSV 40	100921	16-Dec-15
Horn Antenna	ETS-Lindgren	3117	138160	11-Jan-16
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	29-Oct-15
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	22-Aug-15
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	25-Aug-15
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	3-Nov-15
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	21-Oct-15
EMI Test Receiver	R&S	ESCI7	100797	27-Dec-15

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements:

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
DC and low frequency voltages	± 3 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a device for parking occupancy detection of individual spaces through identification of the car. It can communicate with a Datacollector through a wireless interface.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Electronic Parking License
Type Designation	SENSIT EPL US
FCC ID	CGDSENSITEPL
Canada ID	1444A-SENSITEPL

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	902.4MHz - 927.6MHz
Channel Spacing	400 kHz
Channel number	63 (hopping)
Operation Voltage	3 V
Modulation	GFSK
Antenna gain	-2 dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 4. All testing were performed according to the procedures in ANSI C63.10 and DA 00-705 of March 30, 2000.

The samples were used as follows:

Conducted: None

Radiation: A000178390-001

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


None

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested containing the noise suppression parts as in the Photo Appendix and the Test Setup Photos. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

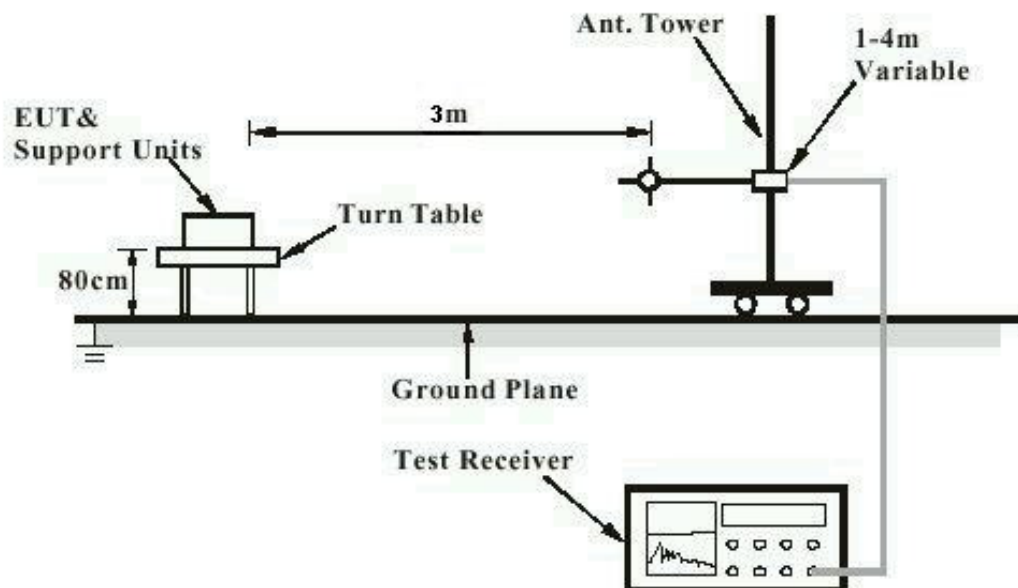

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard	:	FCC Part 15.247(b)(4), Part 15.203 and RSS-Gen 8.3
Requirement	:	use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -2 dBi. The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:**Passed**

Test standard : FCC Part 15.247(b)(1),
RSS-247 5.4(2)

Basic standard : DA 00-705 of March 30, 2000
LP0002(2011) Appendix II

Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24 °C

Relative humidity : 50-65 %

Atmospheric pressure : 100-103 kPa

Table 6: Test result of Peak Output

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	902.4 MHz	2.76	0.00189	1
Middle Channel	915 MHz	5.32	0.00340	1
High Channel	927.6 MHz	3.54	0.00226	1

Test procedure:

Public notice DA 00-705 March 30, 2000 Alternative Test Procedure.

Since the EUT has no connector port available for conducted measurements the test results are obtained by radiated measurement using the setup for radiated emissions. From the measured radiated field strength at a distance of 3m and the antenna gain **G** (as provided by the applicant, see attachment for datasheet) the peak conducted output power value is calculated. This value is calculated using the formula:

E is the measured maximum fundamental field strength in V/m

-> -24 dBV/m = 0.063 V/m @ 902.4 MHz
 -> -21.4 dBV/m = 0.085 V/m @ 915 MHz
 -> -23.2 dBV/m = 0.069 V/m @ 927.6 MHz

G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.

-> -2 dBi => 0.631

d is the distance in meters from which the field strength was measured.

-> 3m

P is the power in watts:

$$P = \frac{(E \cdot d)^2}{30G}$$

@ 902.4 MHz $SQ(0.063 \cdot 3) / 18.93 = 0.00189 \text{ W} = 2.76 \text{ dBm}$
 @ 915 MHz $SQ(0.085 \cdot 3) / 18.93 = 0.0034 \text{ W} = 5.32 \text{ dBm}$
 @ 927.6 MHz $SQ(0.069 \cdot 3) / 18.93 = 0.00226 \text{ W} = 3.54 \text{ dBm}$

For details refer to Appendix D.

5.1.3 20dB Bandwidth

RESULT:**Passed**

Test standard : FCC Part 15.247(a)(1),
RSS-247 5.1(1)
Basic standard : DA 00-705 of March 30, 2000
Kind of test site : Shielded room

Test setup


Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 20-24°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103kPa

Table 7: Test result of 20dB Bandwidth,

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	902.4 MHz	239.8	< 500	Pass
Mid Channel	915.12MHz	235.8	< 500	Pass
High Channel	927.6 MHz	237.8	< 500	Pass


Test Plot of 20dB Bandwidth

Low Channel

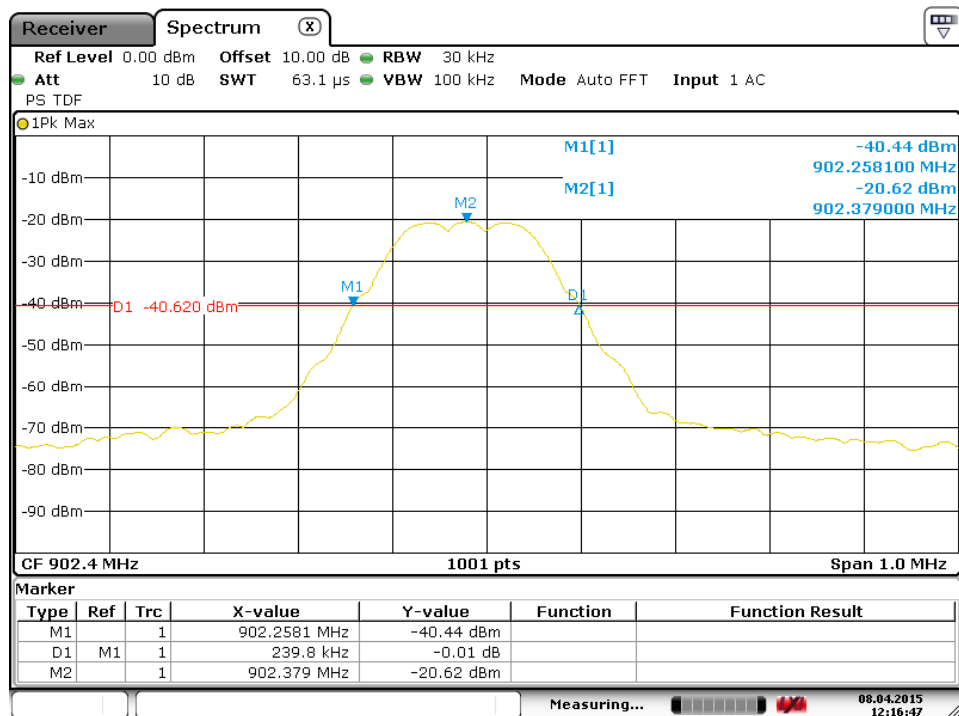


Date: 8.APR.2015 12:16:47

Middle Channel

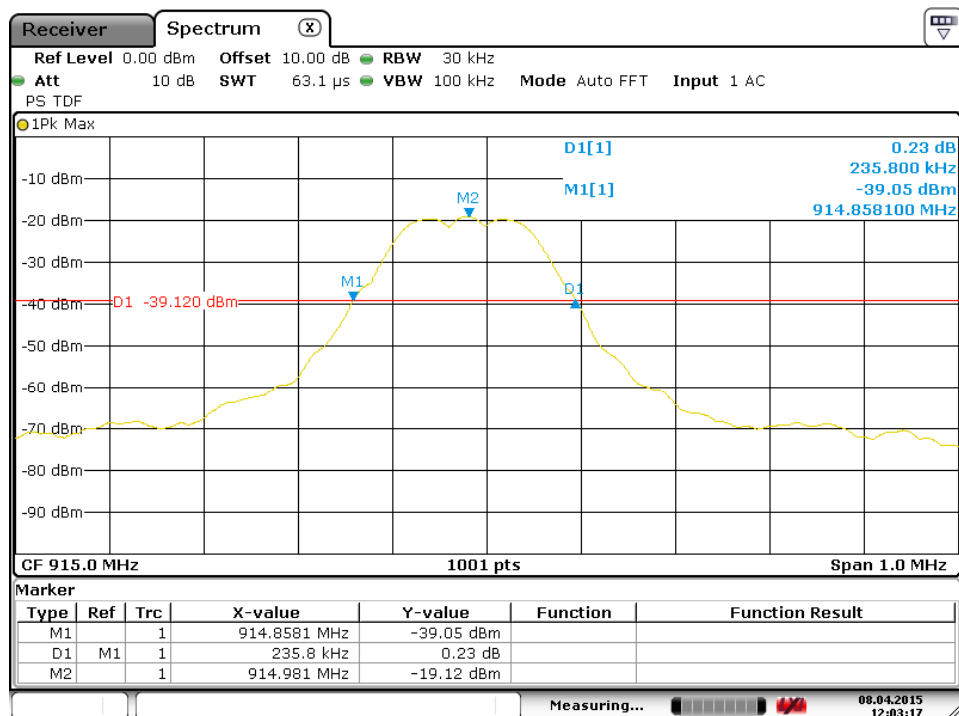

Date: 8.APR.2015 12:03:17

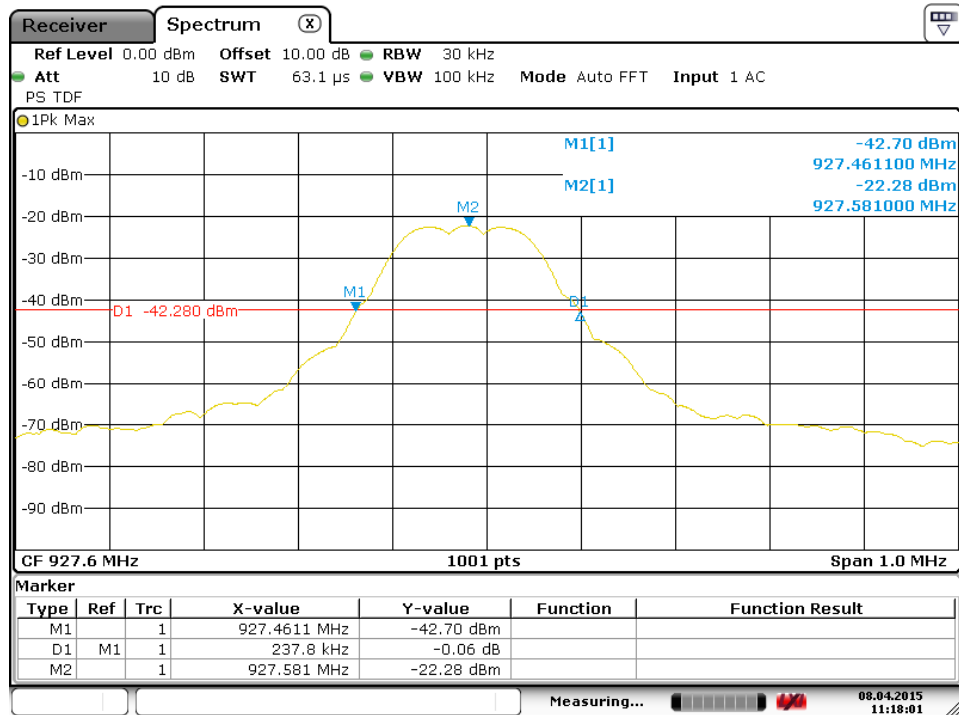High Channel


Date: 8.APR.2015 11:18:01

5.1.4 99% Bandwidth

RESULT:**Passed**

Test standard : RSS-Gen, Issue 4, November 2014
Basic standard : ANSI C63.10:2013
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A


Ambient temperature : 20-24°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Table 8: Test result of 99% Bandwidth, GFSK modulation

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	902.4 MHz	193
Mid Channel	915.14 MHz	194
High Channel	927.6 MHz	192


Test Plot of 99% Bandwidth

Low Channel

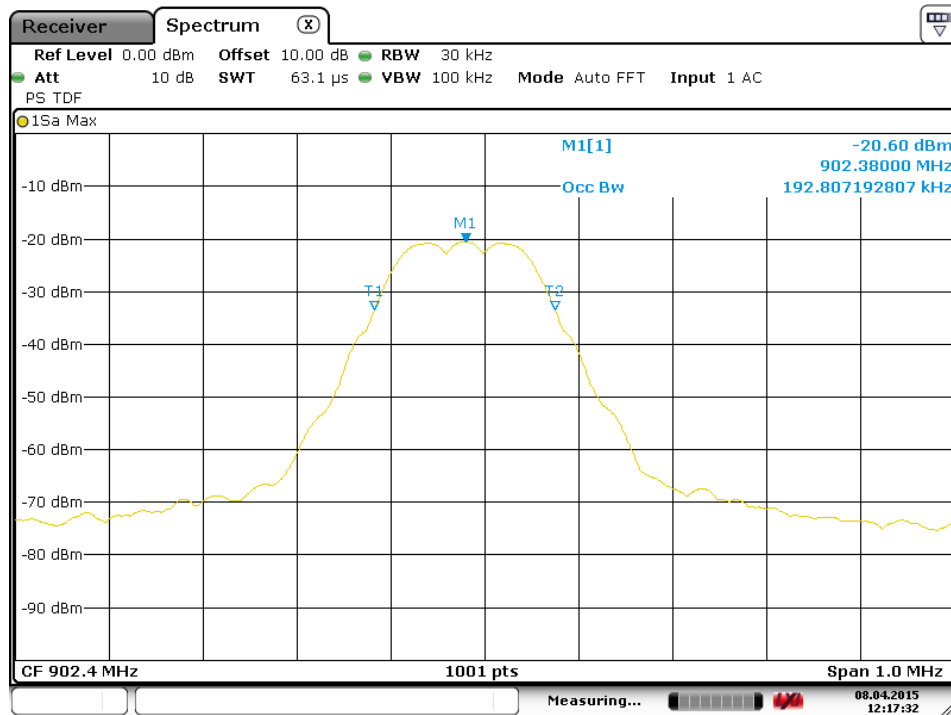


Date: 8.APR.2015 12:17:31

Middle Channel

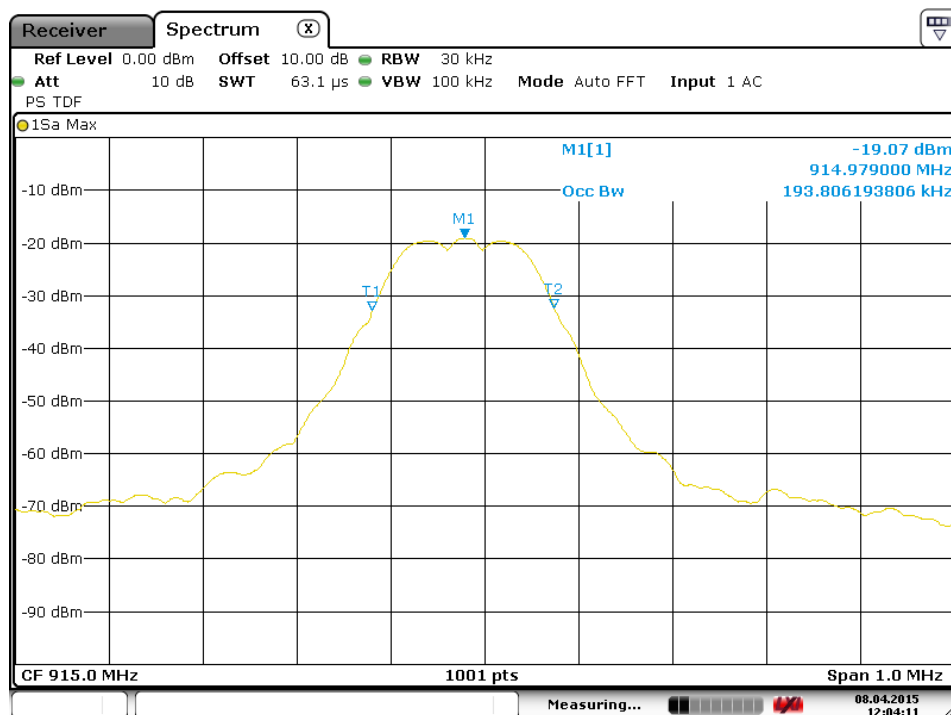

Date: 8.APR.2015 12:04:11

High Channel

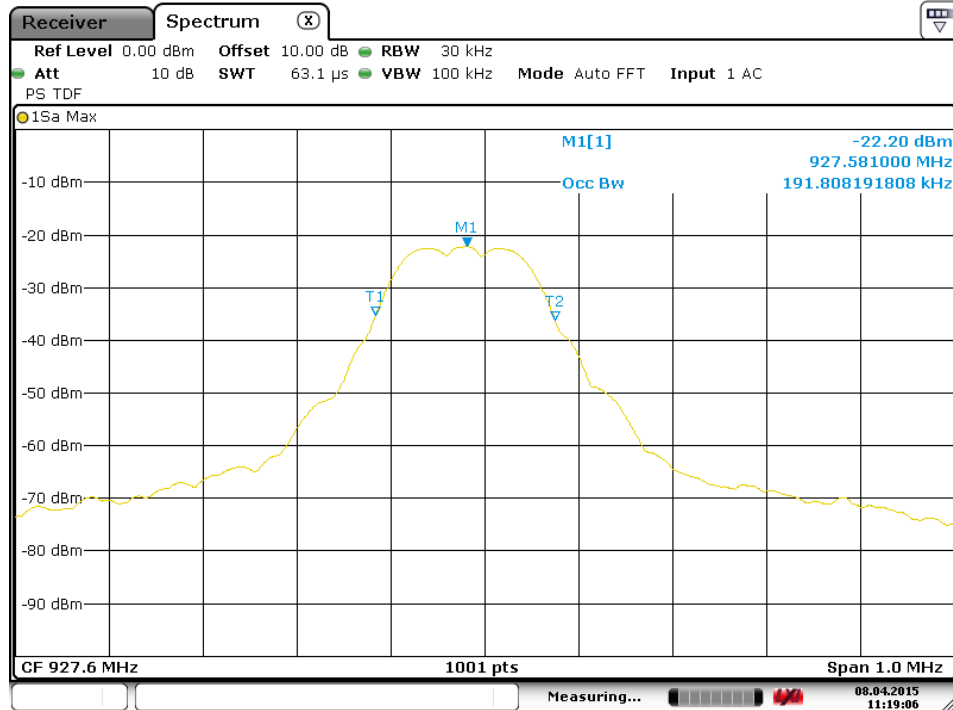

Date: 8.APR.2015 11:19:06

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	DA 00-705 of March 30, 2000
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/High/Hopping
Operation Mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.


Test Plot of 100kHz Bandwidth of Frequency Band Edge

Low Channel

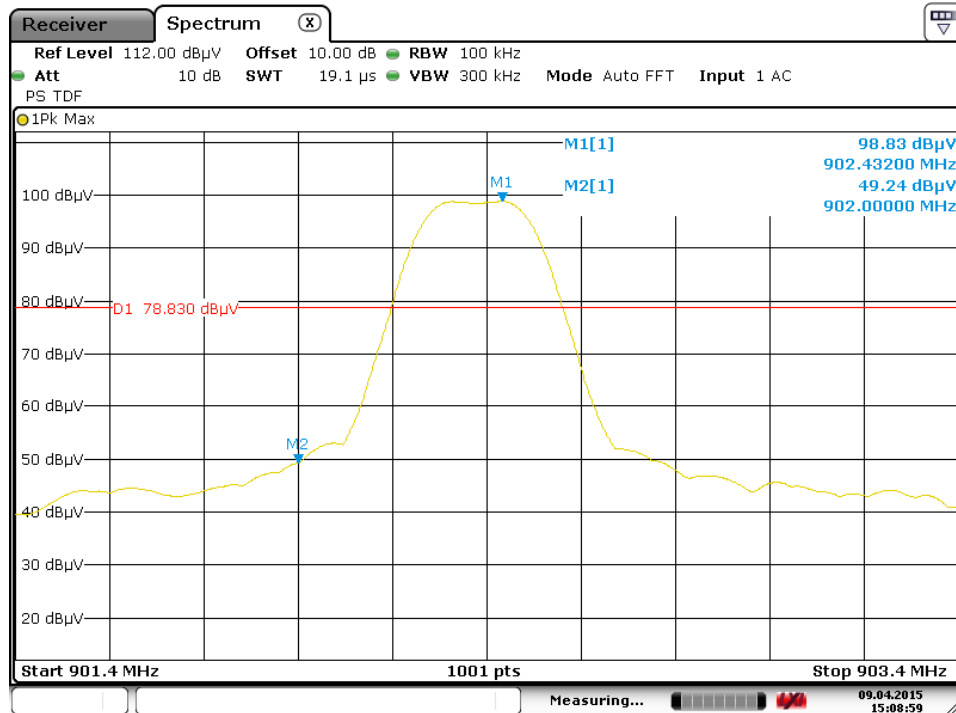


Date: 9.APR.2015 15:08:59

High Channel

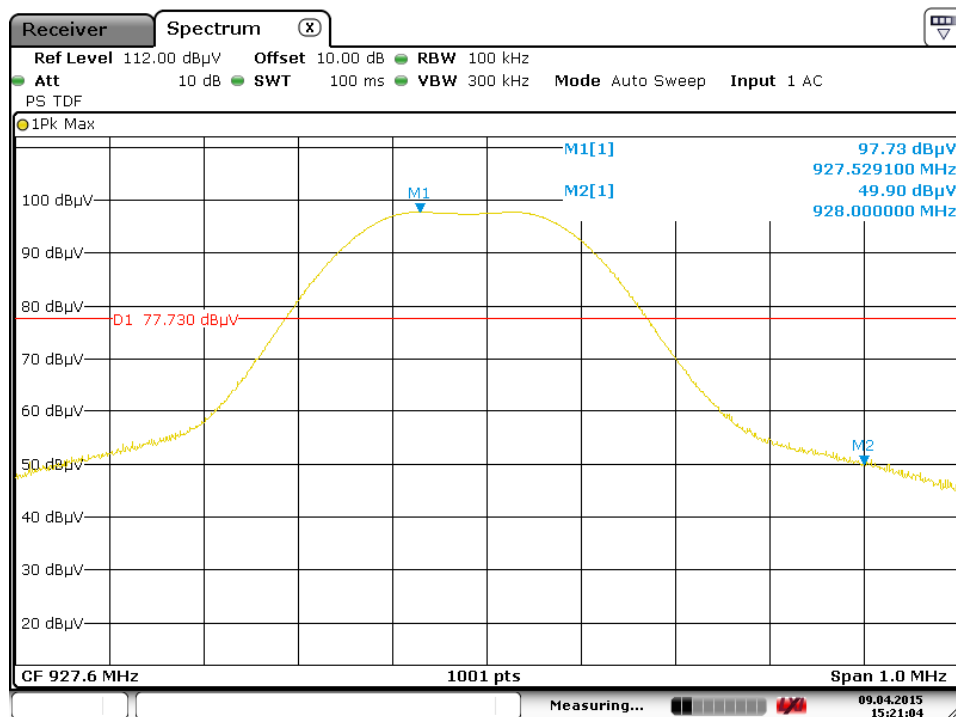

Date: 9.APR.2015 15:21:04

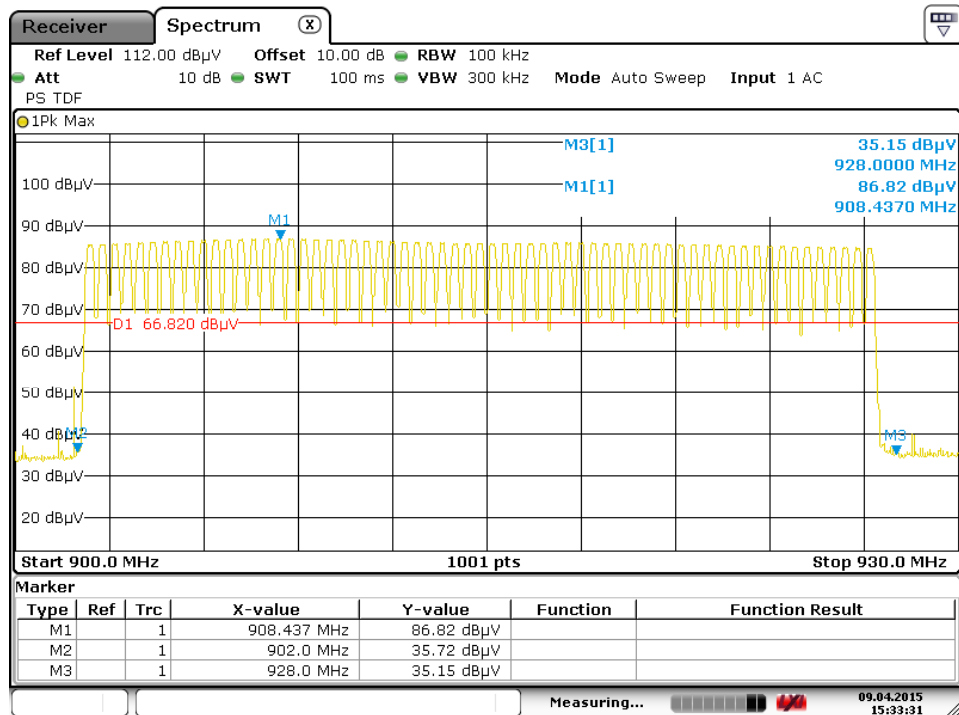Hopping Mode


Date: 9.APR.2015 15:33:31

5.1.6 Spurious Emission

RESULT:

Passed

Test standard : FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-247 5.5 and RSS-Gen 8.9

Basic standard : ANSI C63.10: 2013
Limits : Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-210 2.7 (Table 1), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-210 2.7 (Table 2 and 3).
Emission radiated outside the specified frequency bands must comply with the -20dBc emission limits specified in FCC 15.247 and RSS-210 A8.5

Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.1.7 Frequency Separation

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)
 RSS-247 5.1

Basic standard : DA 00-705 of March 30, 2000

Limit : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A


Ambient temperature : 24°C

Relative humidity : 53%

Table 9: Test result of Frequency Separation

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Record Channel	915.2	0.4	$\geq 115\text{ kHz}$	Pass
Record Channel adj 1	914.77			
Record Channel adj 2	915.55			

Test Plot of Frequency Separation

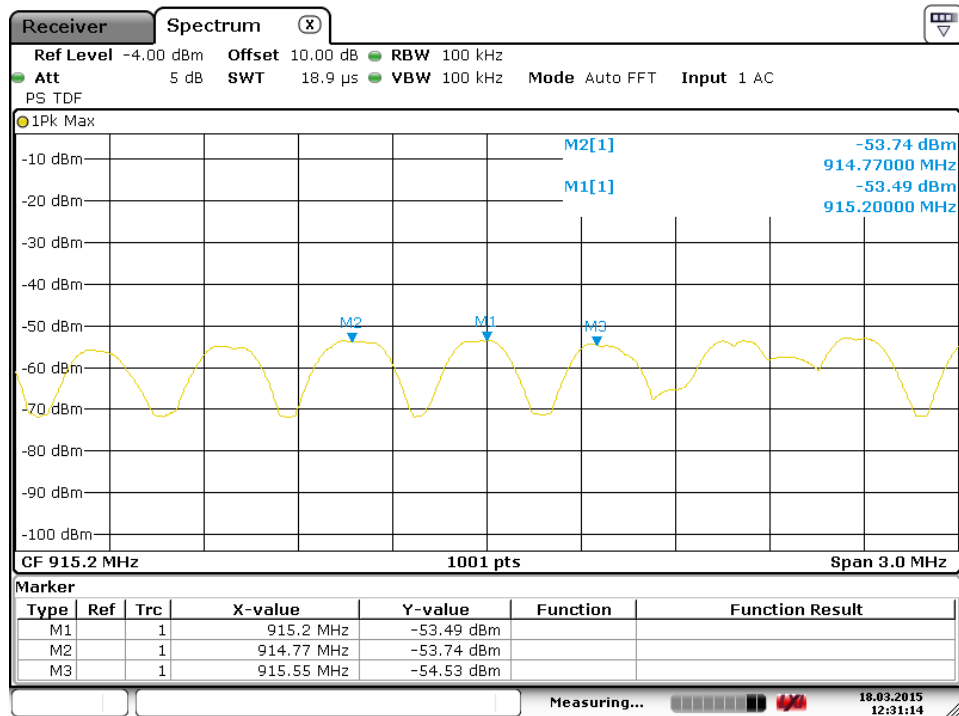

Date: 18.MAR.2015 12:31:14

5.1.8 Number of hopping frequency

RESULT:**Passed**

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 5.1(5)

Basic standard : DA 00-705 of March 30, 2000

Limits : ≥ 15 non-overlapping channels

Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24°C


Relative humidity : 50-65%

Atmospheric pressure : 100-103 kPa

Table 10: Test result of Number of hopping frequency

Frequency Range	Measured Number of Hopping Channel	Limit	Result
902 to 928 MHz	63	≥ 50	Pass

Test Plot of Number of hopping frequencies

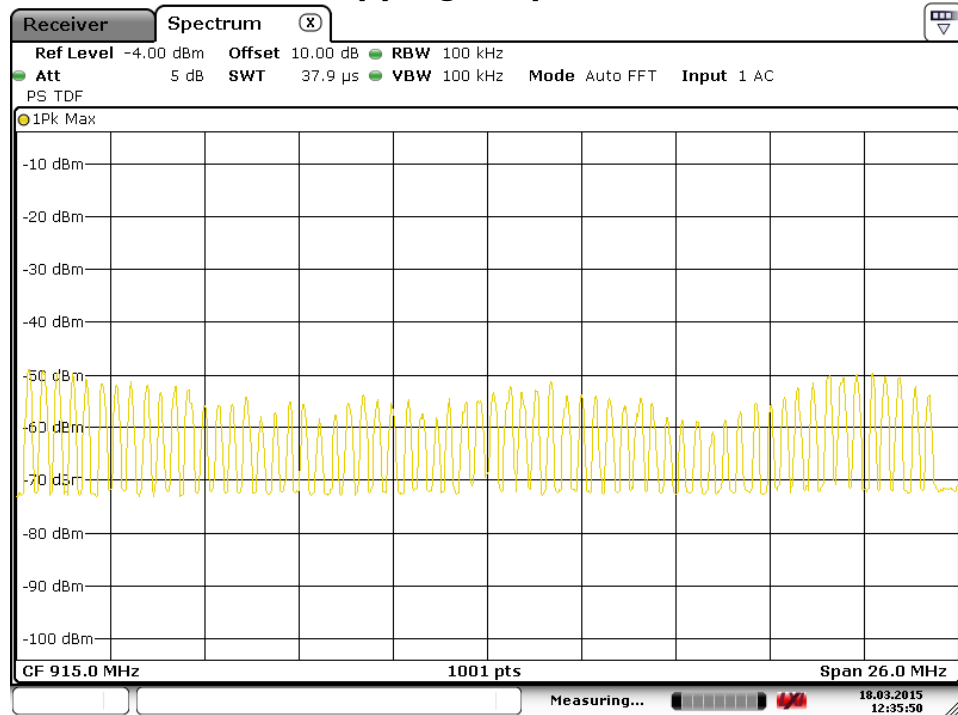

Date: 18.MAR.2015 12:35:51

5.1.9 Time of Occupancy

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)(iii)
 RSS-247 5.1(5)
 LP0002(2011): 3.10.1, (6.1.2)
 Basic standard : DA 00-705 of March 30, 2000
 LP0002(2011) Appendix II
 Limits : 0.4s
 Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 20-24°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 11: Test result of Time of Occupancy

Data Mode	Captured Burst (s)	Dwell time (s)	On+Off time (s)	Limit (s)	Result
--	0.25850	0.0309	3.34800	0.4	Pass


Note:

Dwell time = Pulse width x (Hopping rate / Number of channels) x Period


Period = 0.4 (seconds/ channel) x 63 (channel) = 25.2 seconds.

Hopping rate = 1 / (On+Off time) = 0.298 Hz

Test Plot of Time of Occupancy

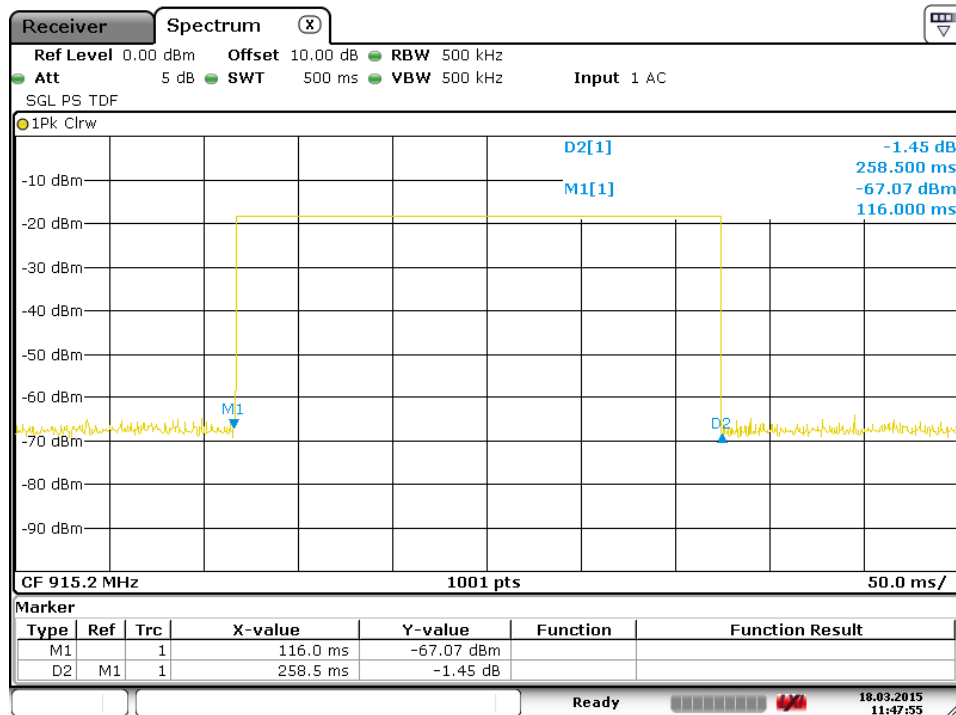

Date: 18.MAR.2015 11:47:55

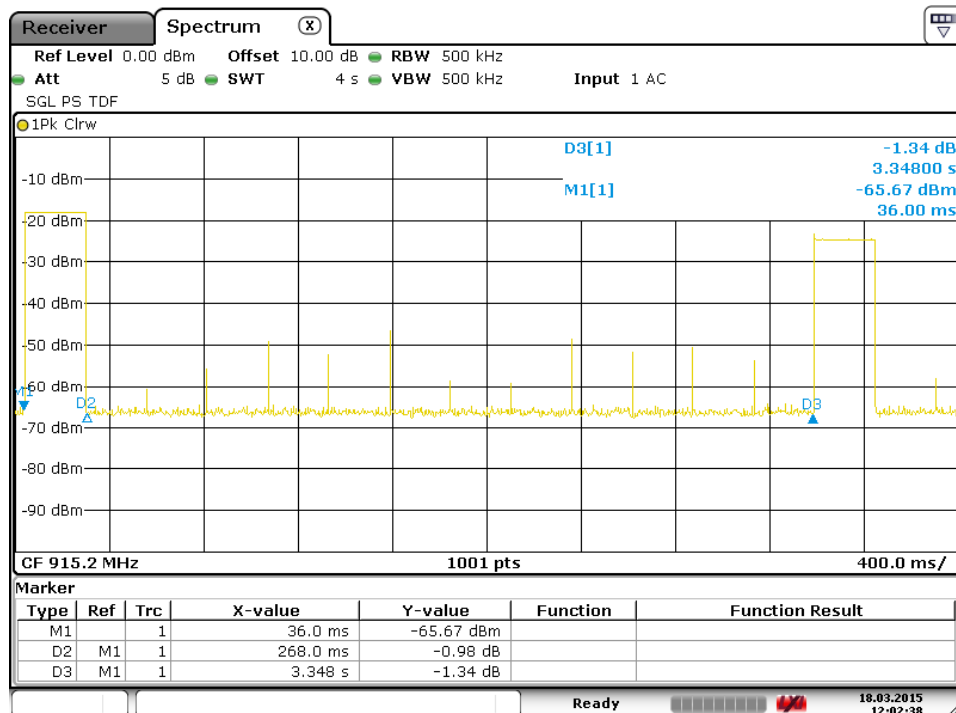

Date: 18.MAR.2015 12:02:38

6. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	8
Table 5: Technical Specification of EUT	8
Table 6: Test result of Peak Output.....	15
Table 7: Test result of 20dB Bandwidth,	16
Table 8: Test result of 99% Bandwidth, GFSK modulation	19
Table 8: Test result of Frequency Separation	26
Table 9: Test result of Number of hopping frequency	28
Table 10: Test result of Time of Occupancy.....	30