






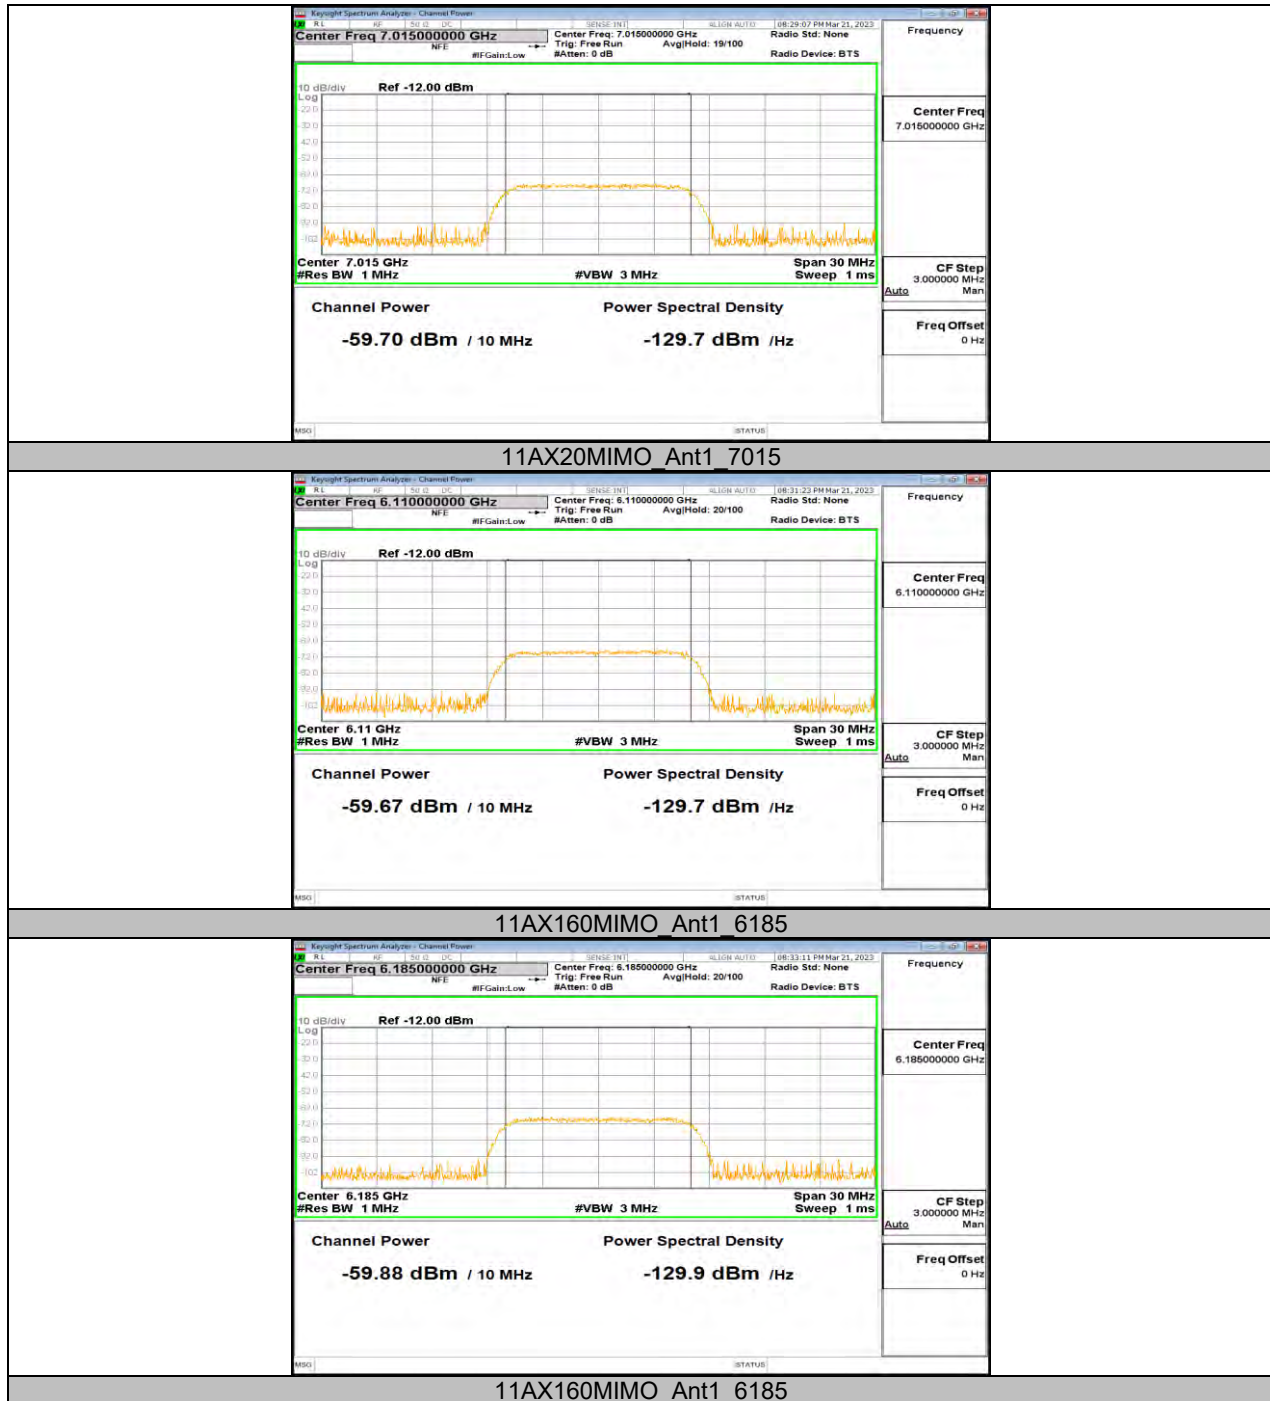


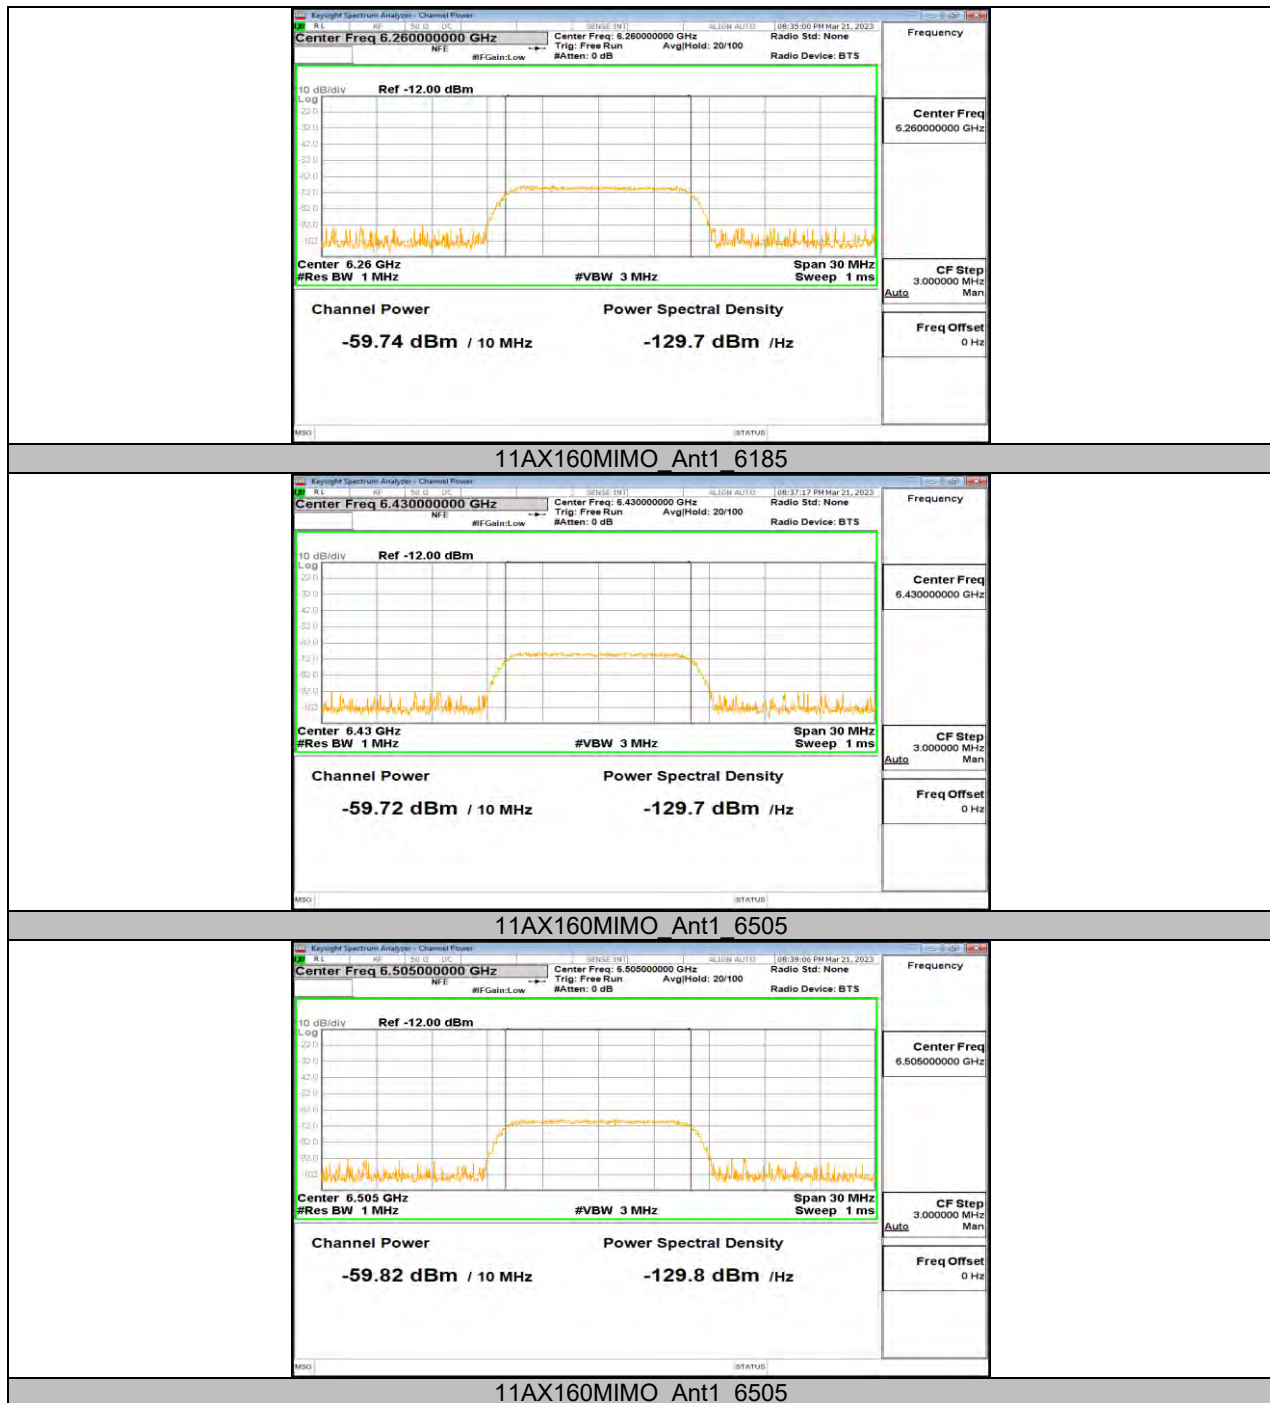


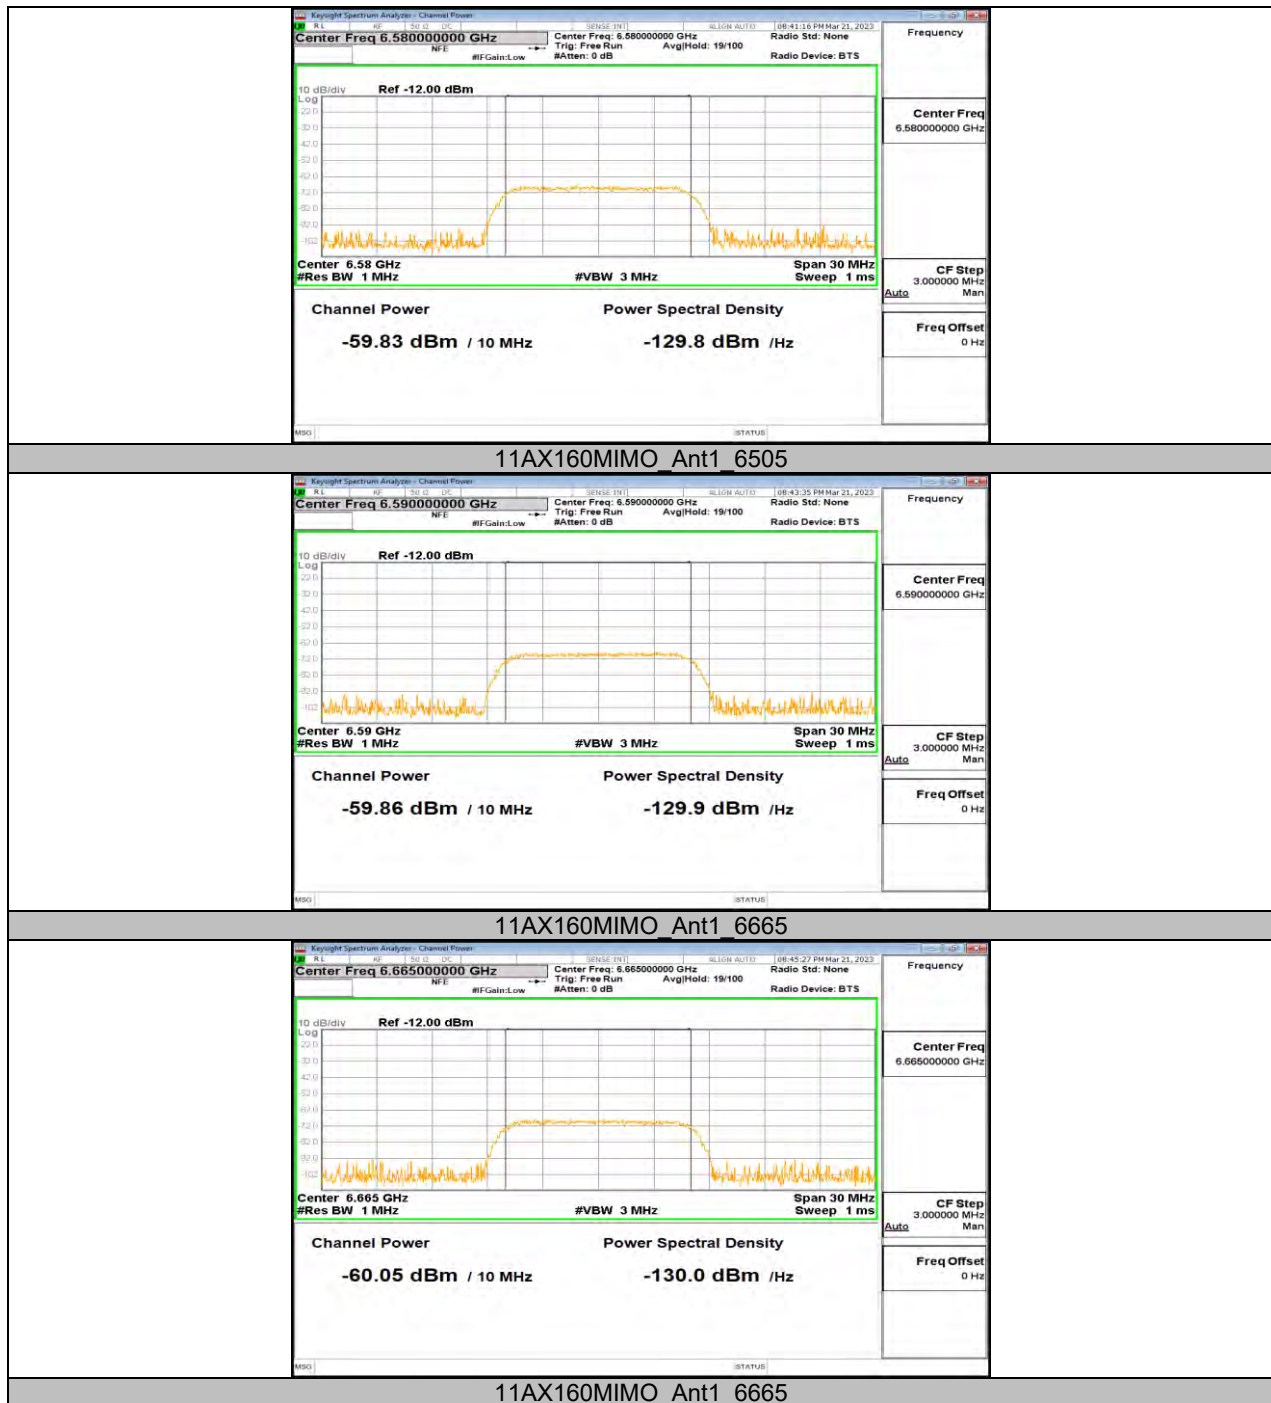


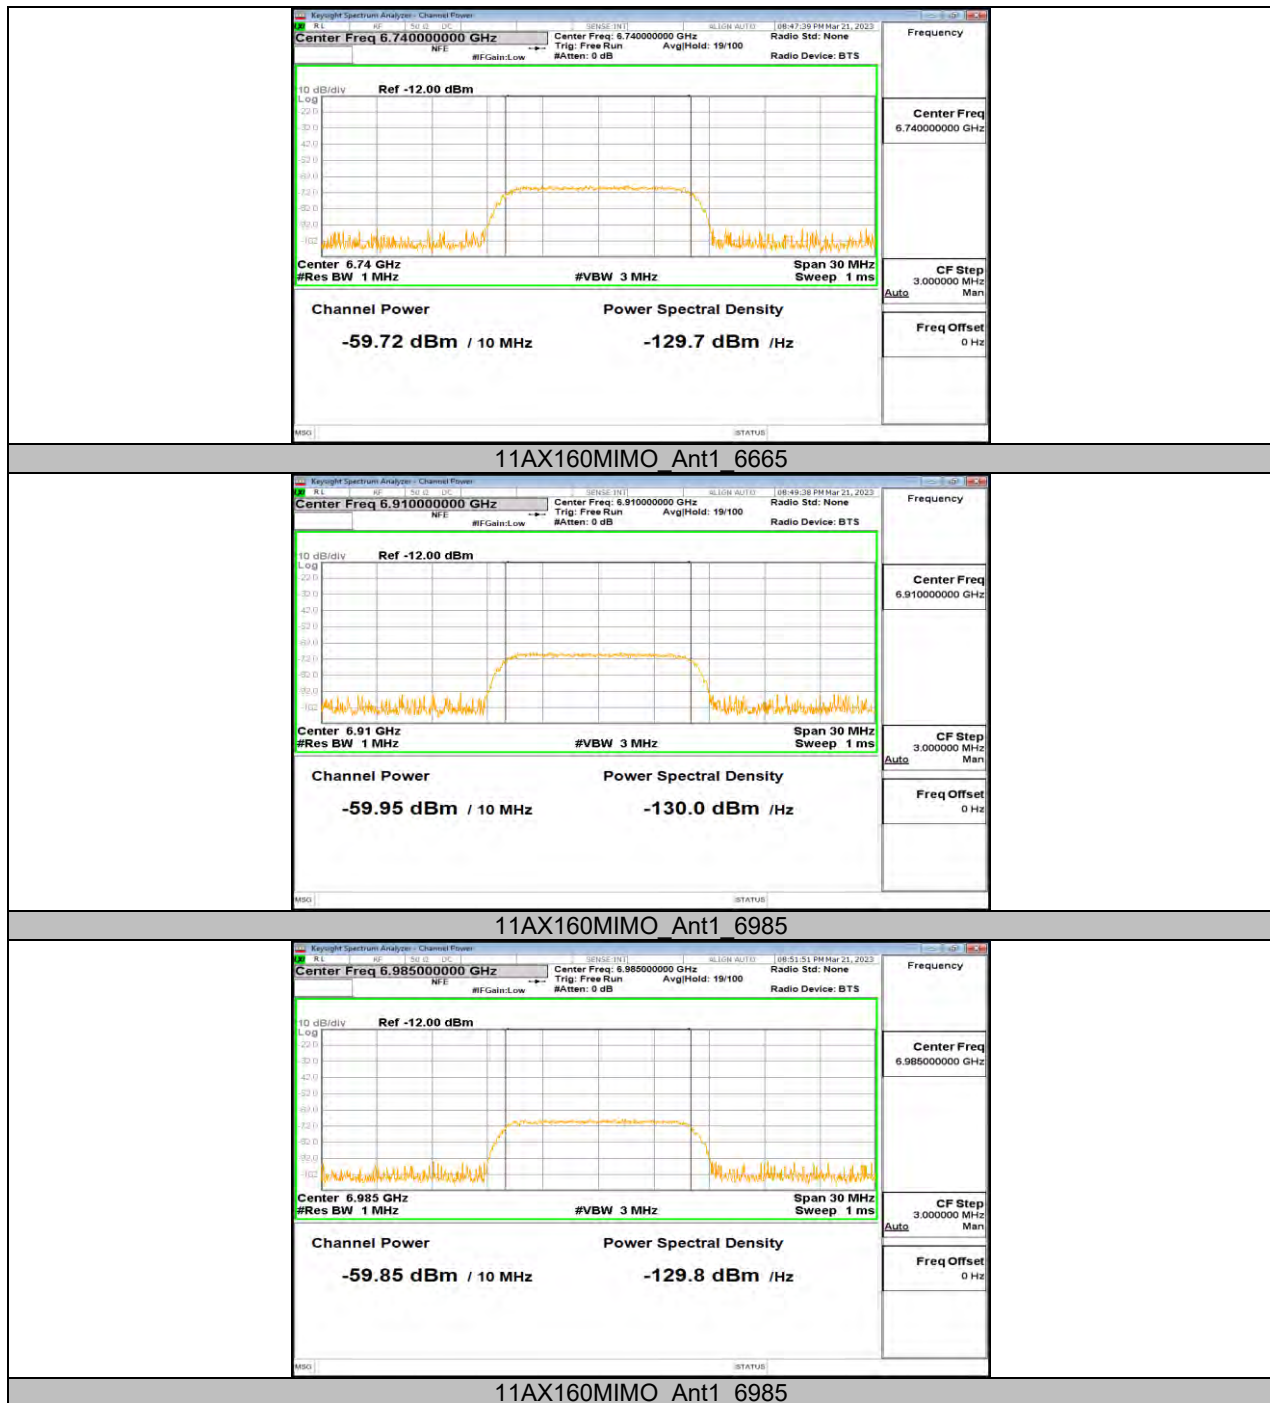


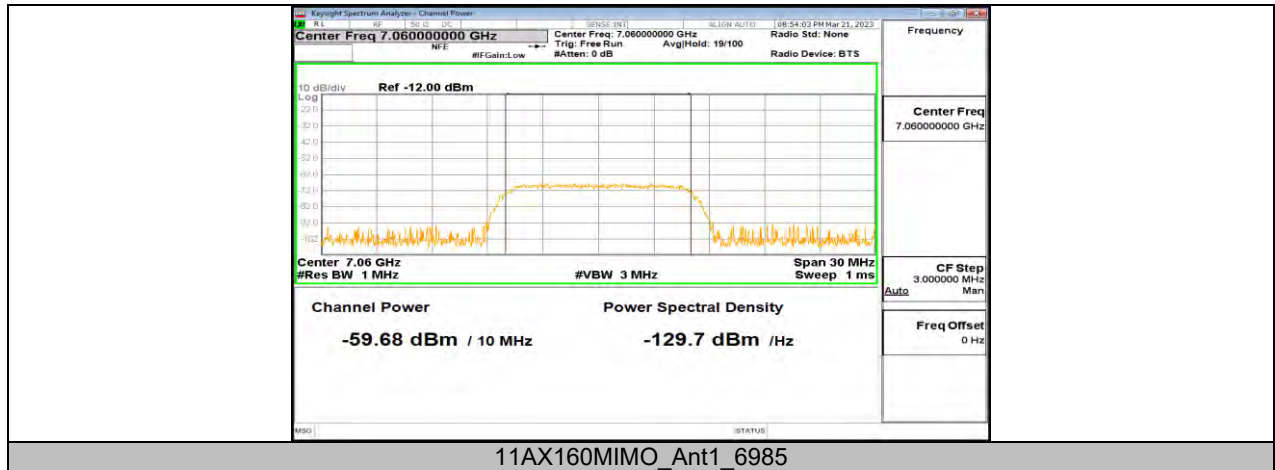


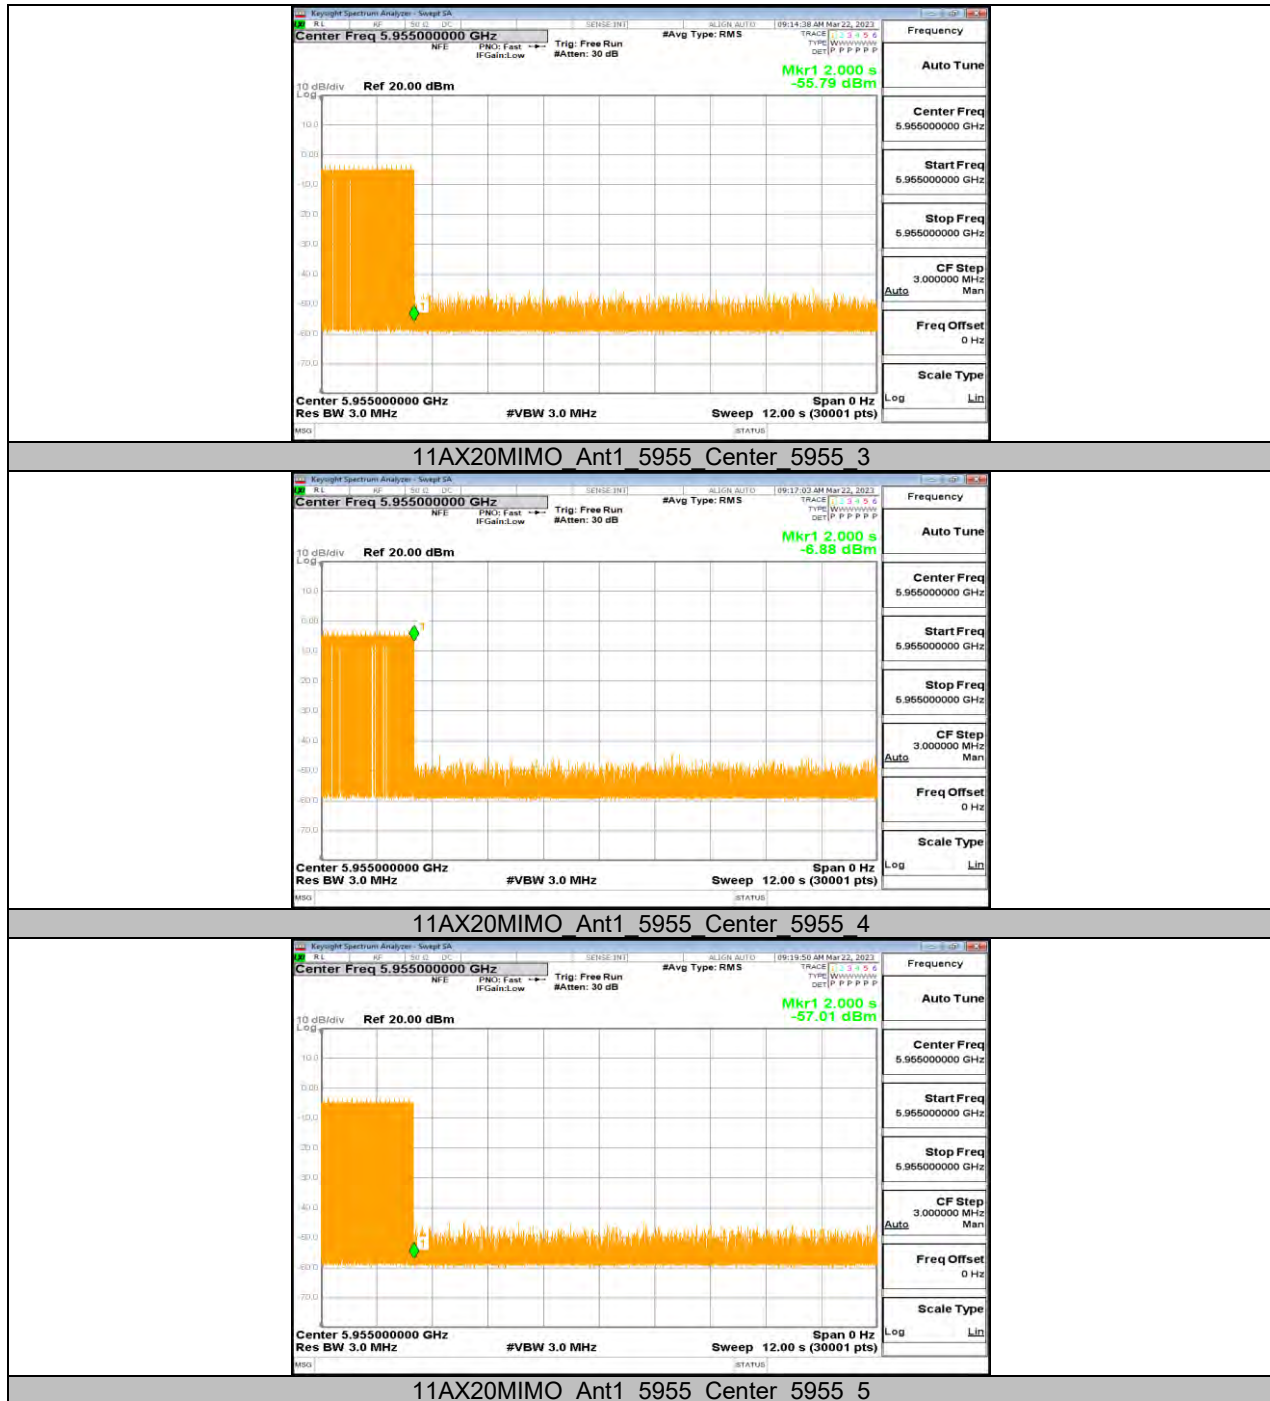


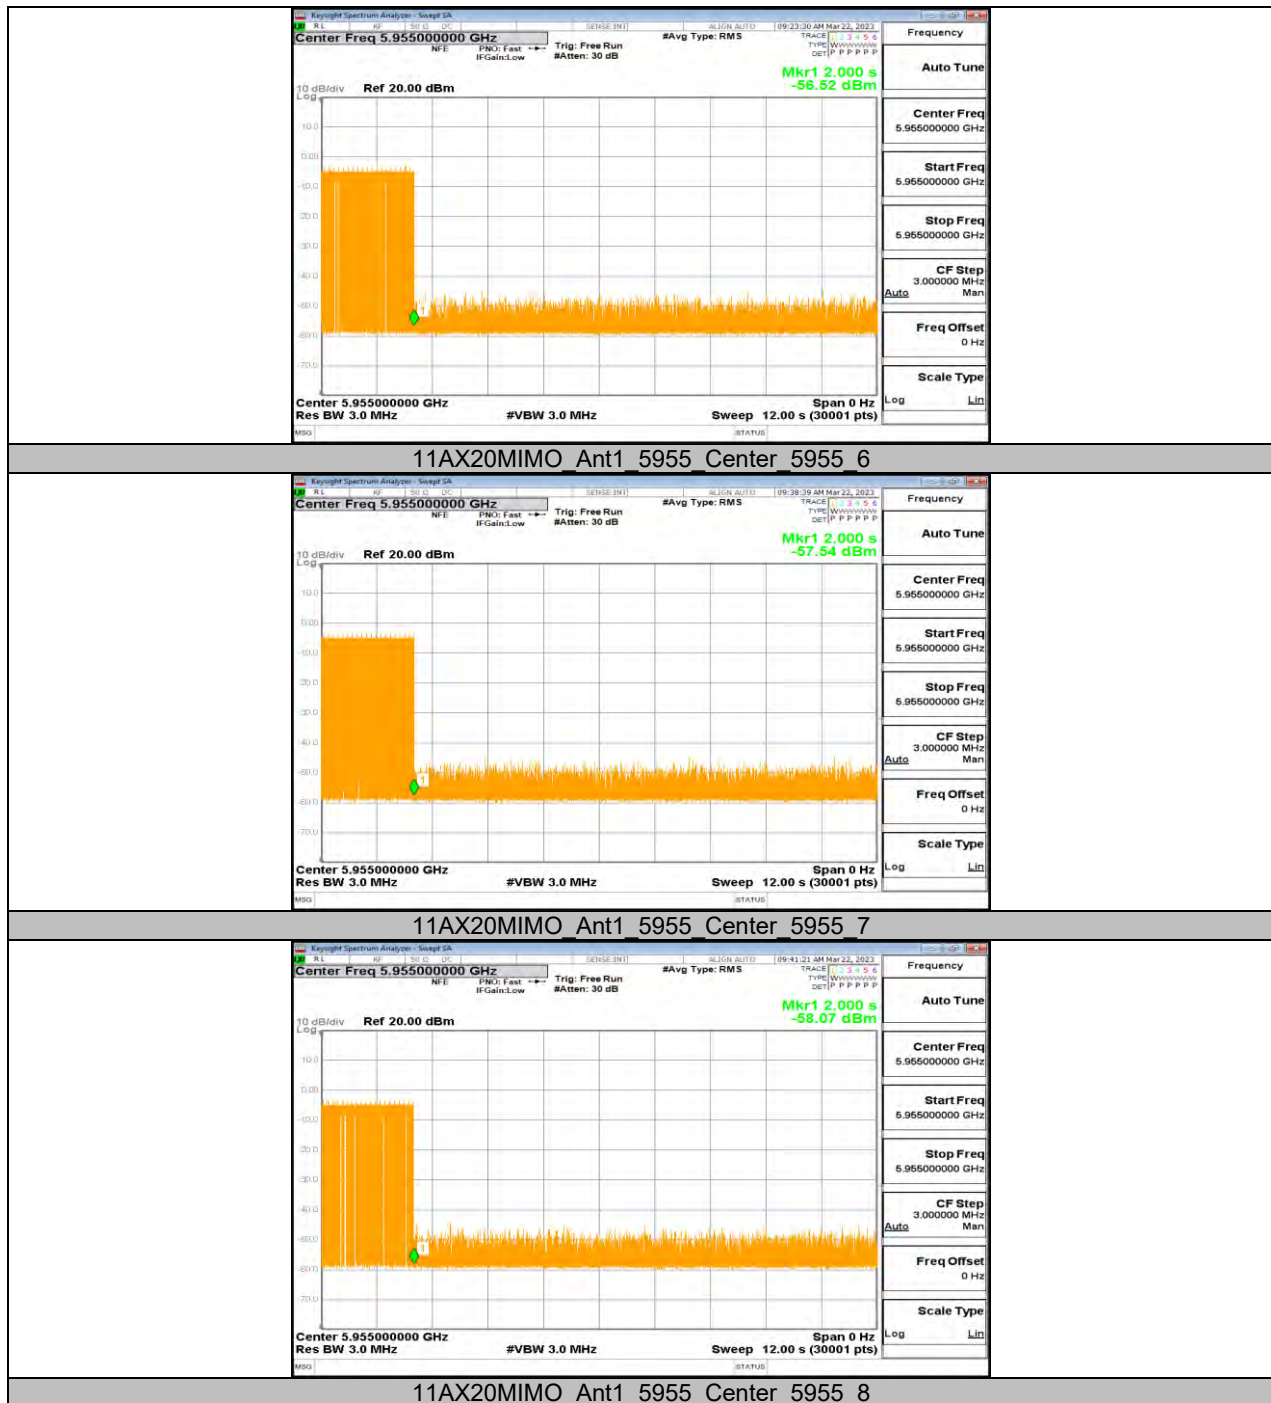


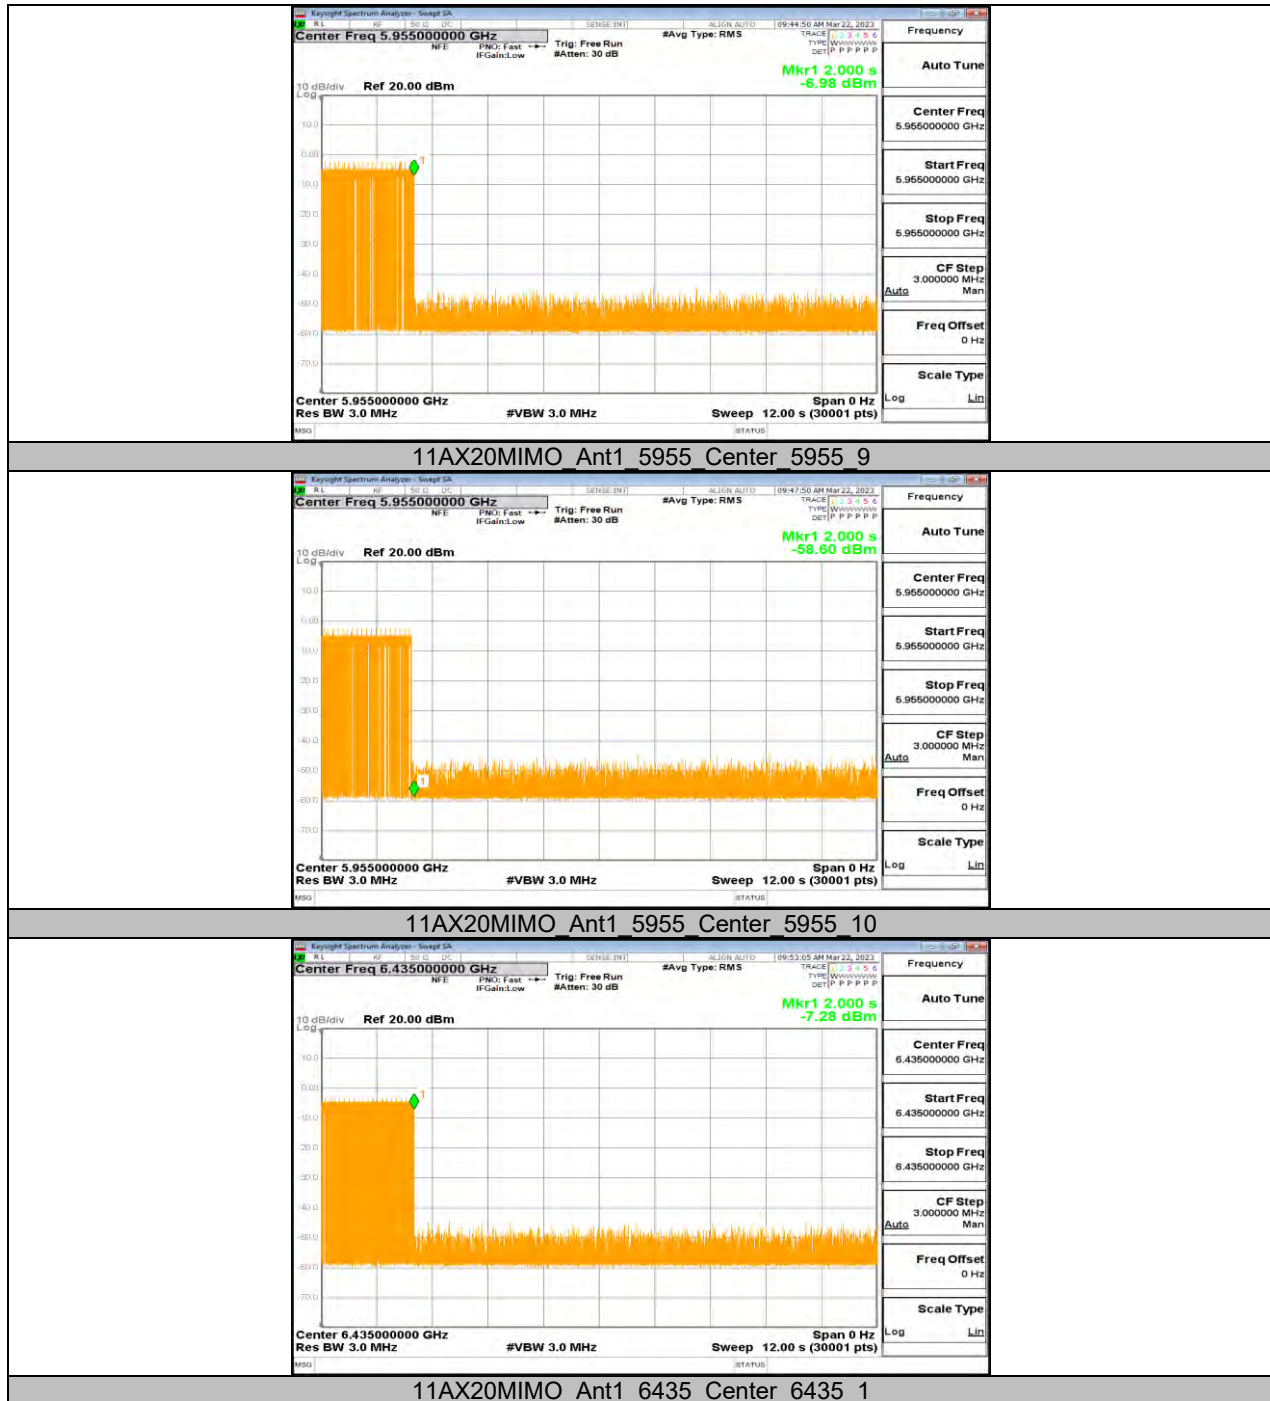


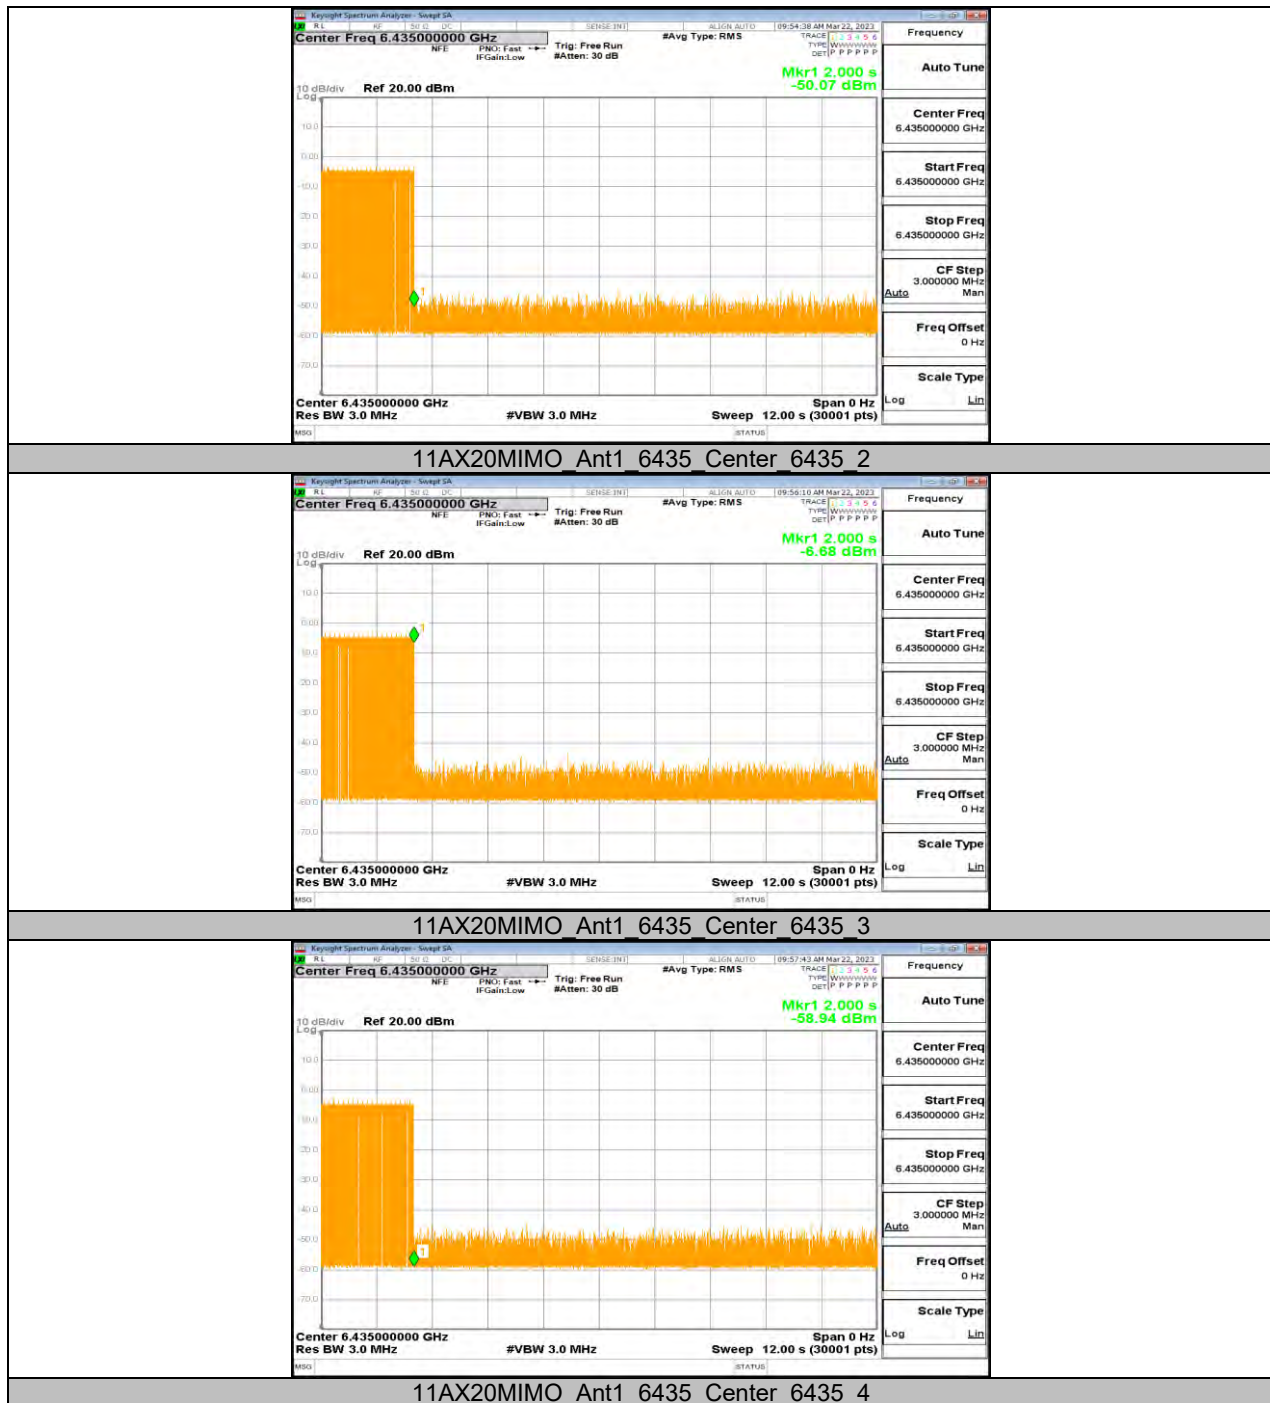


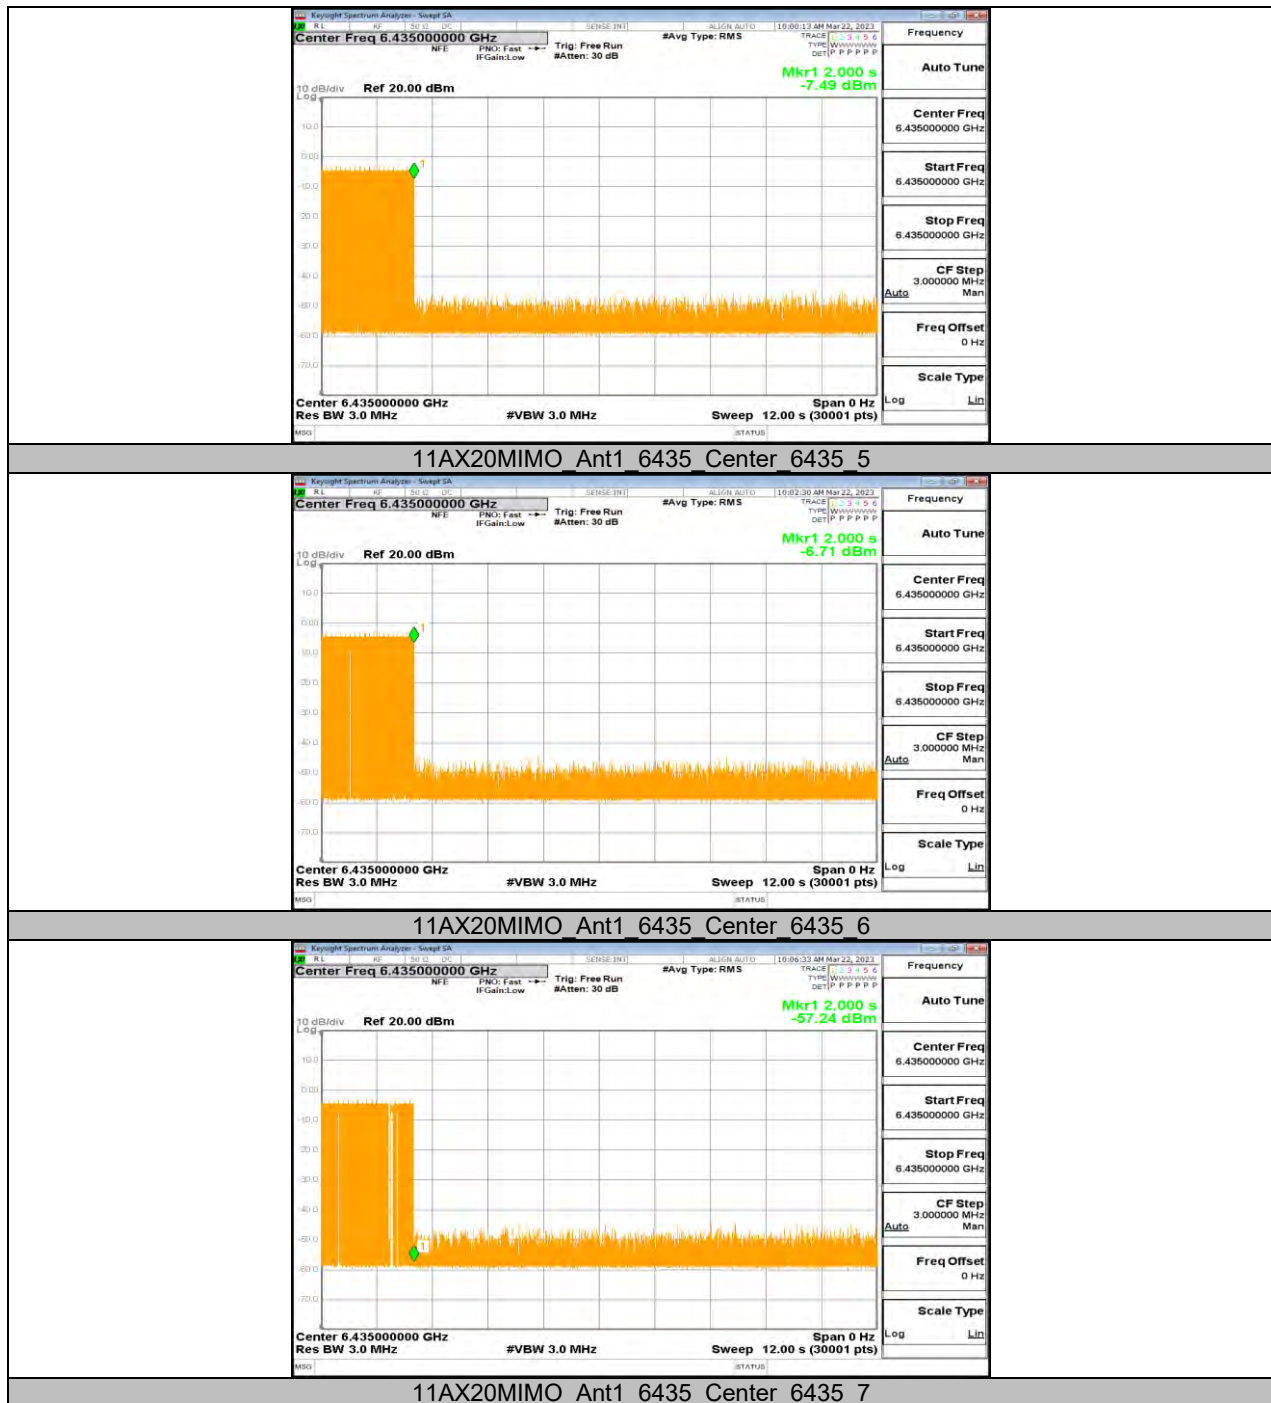


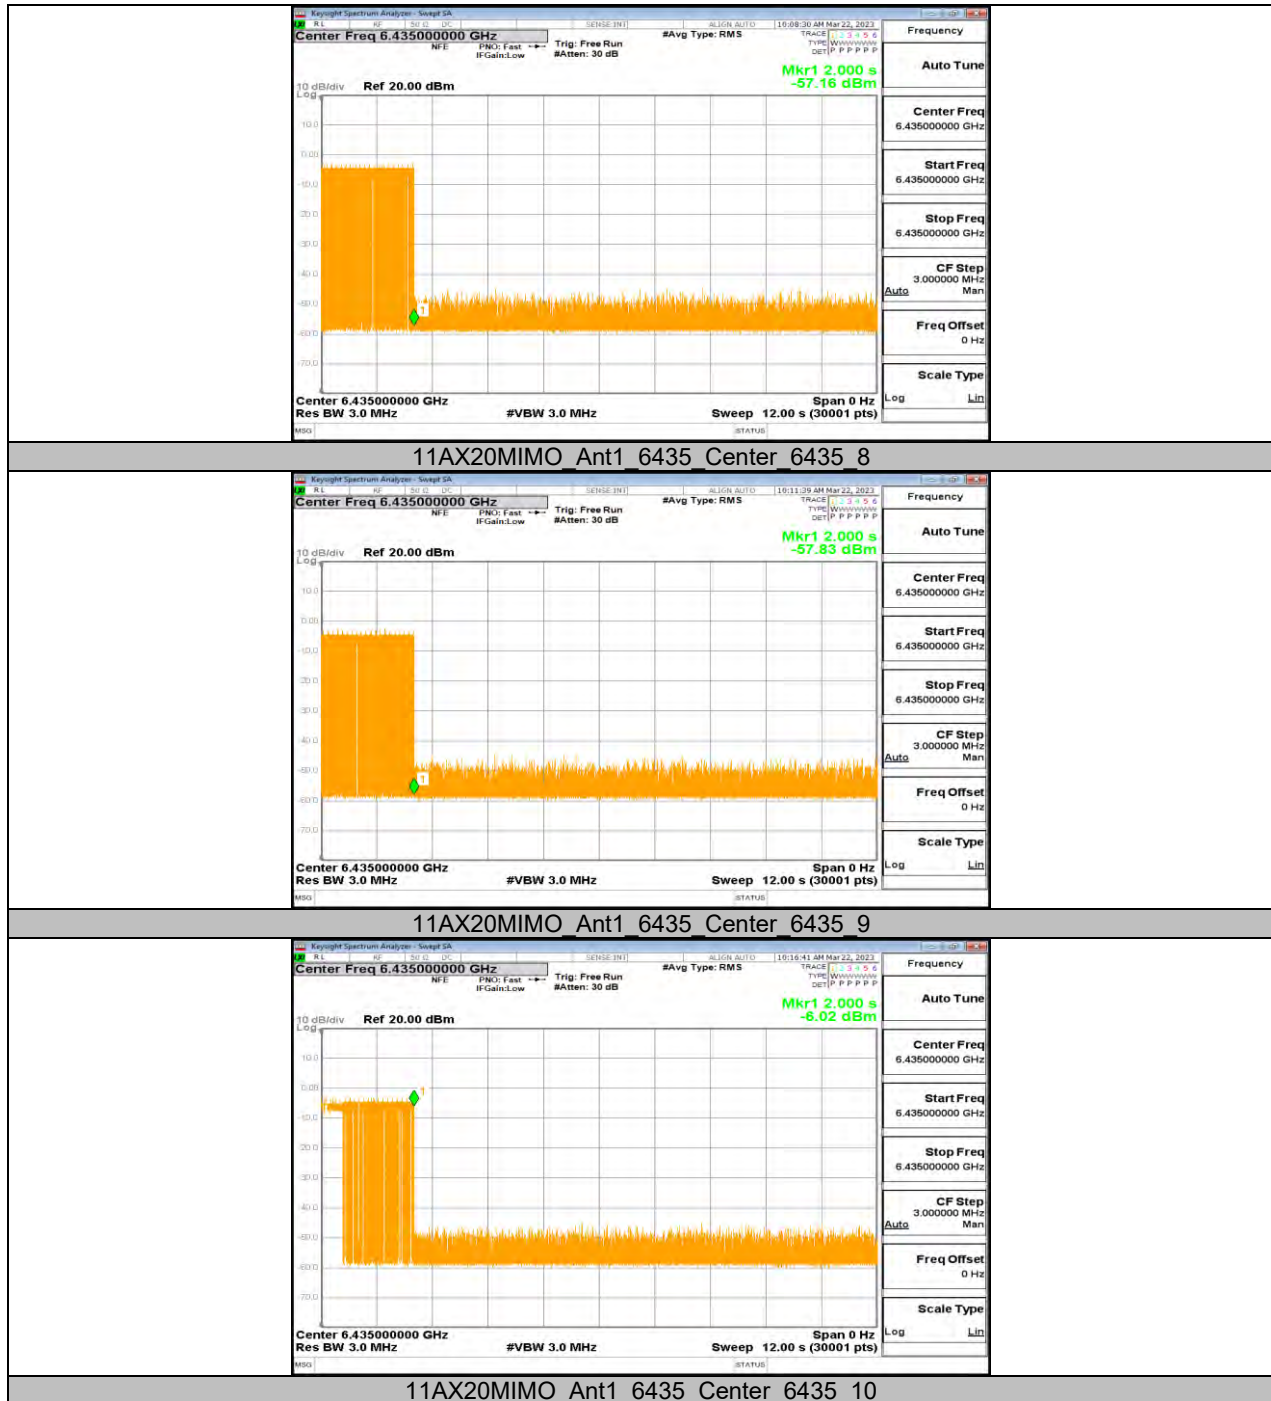


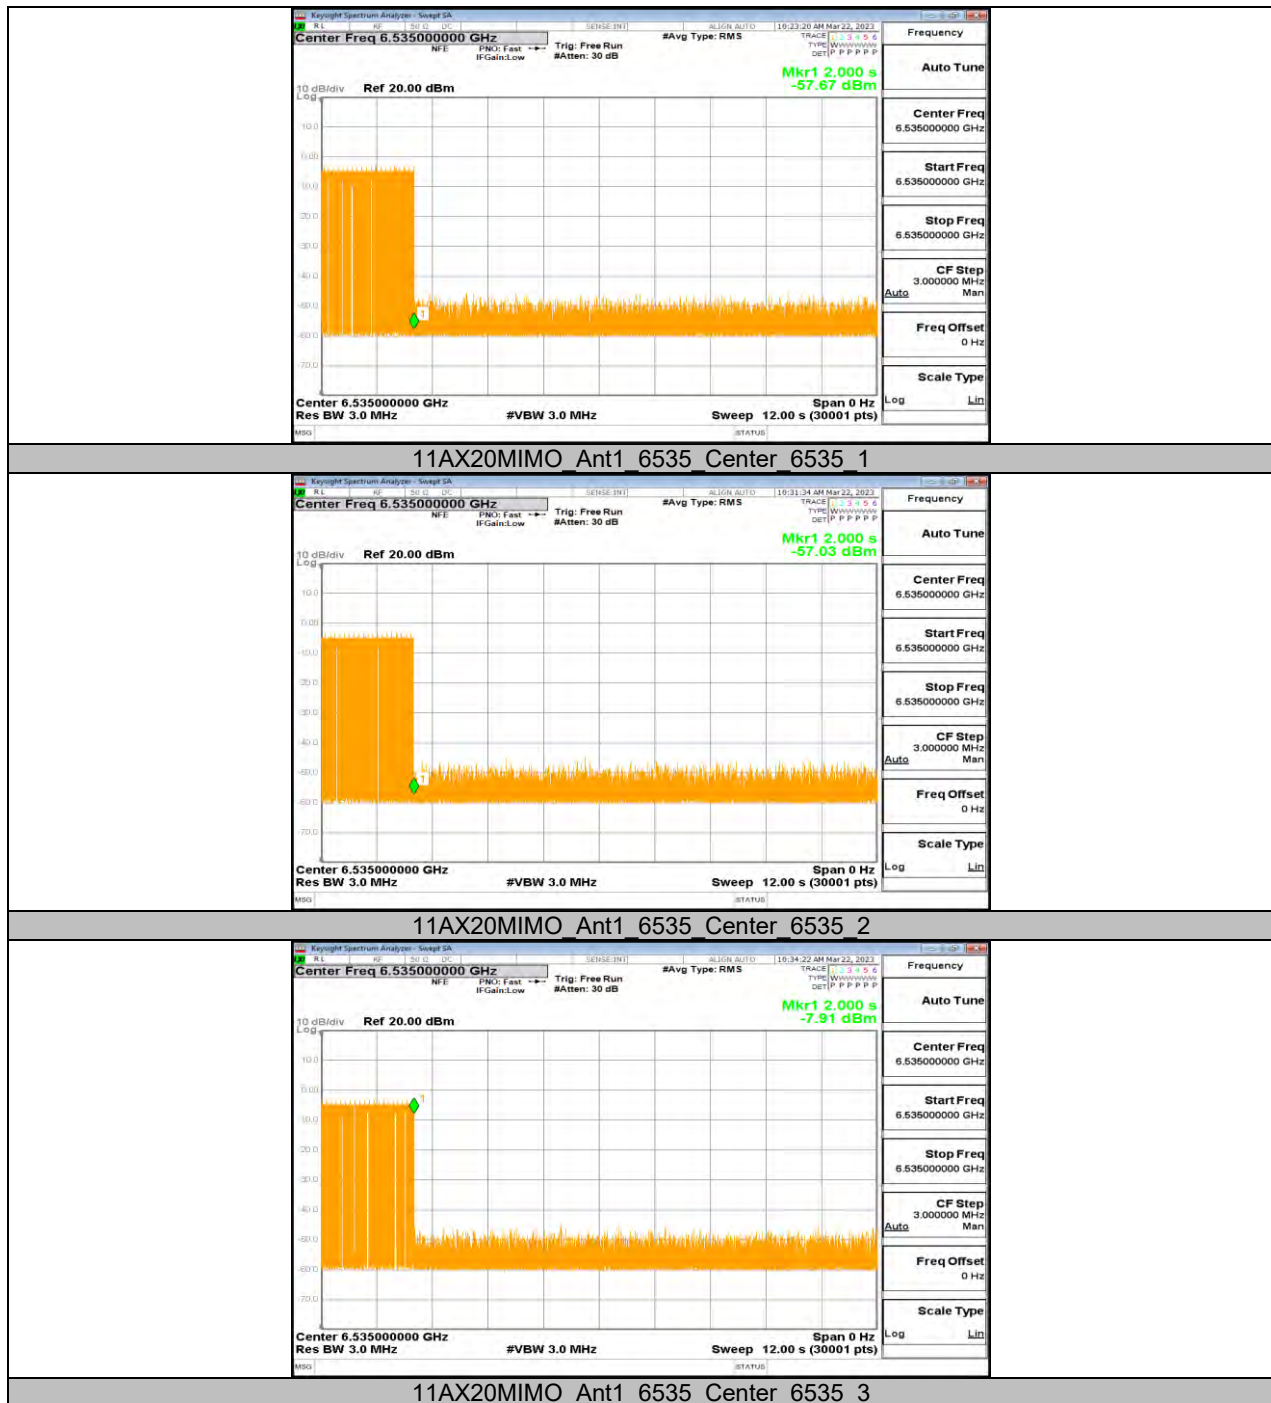


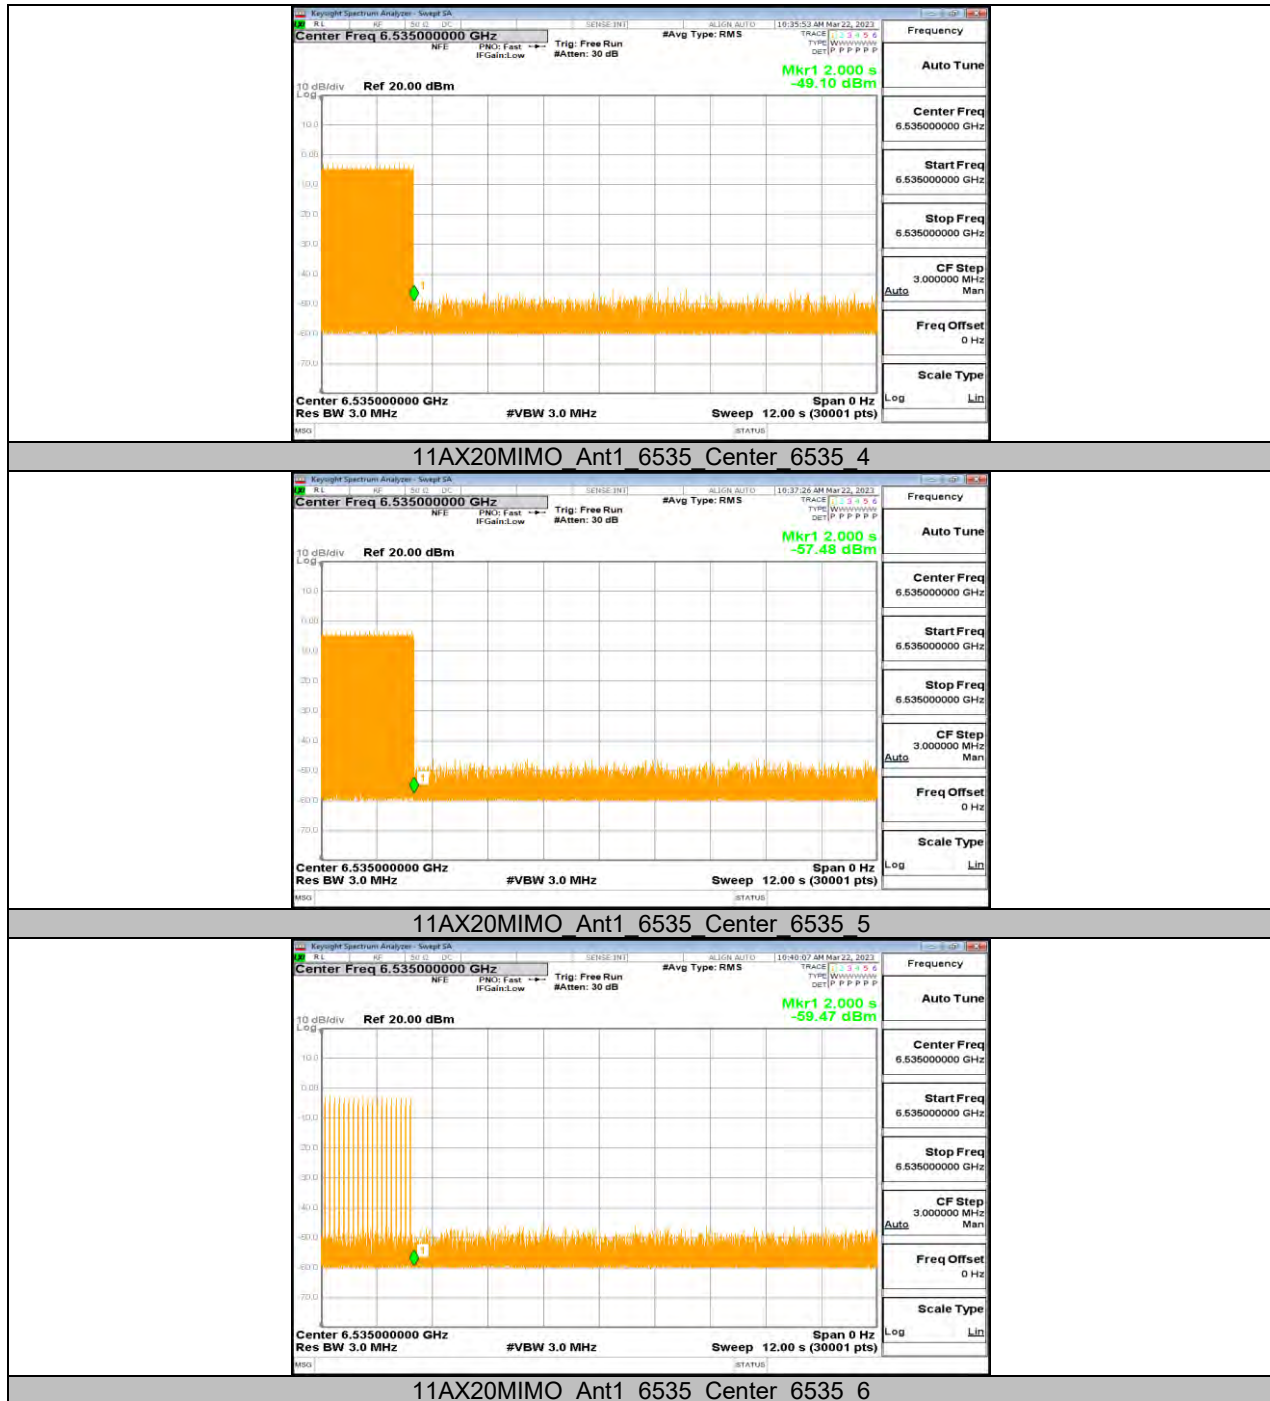


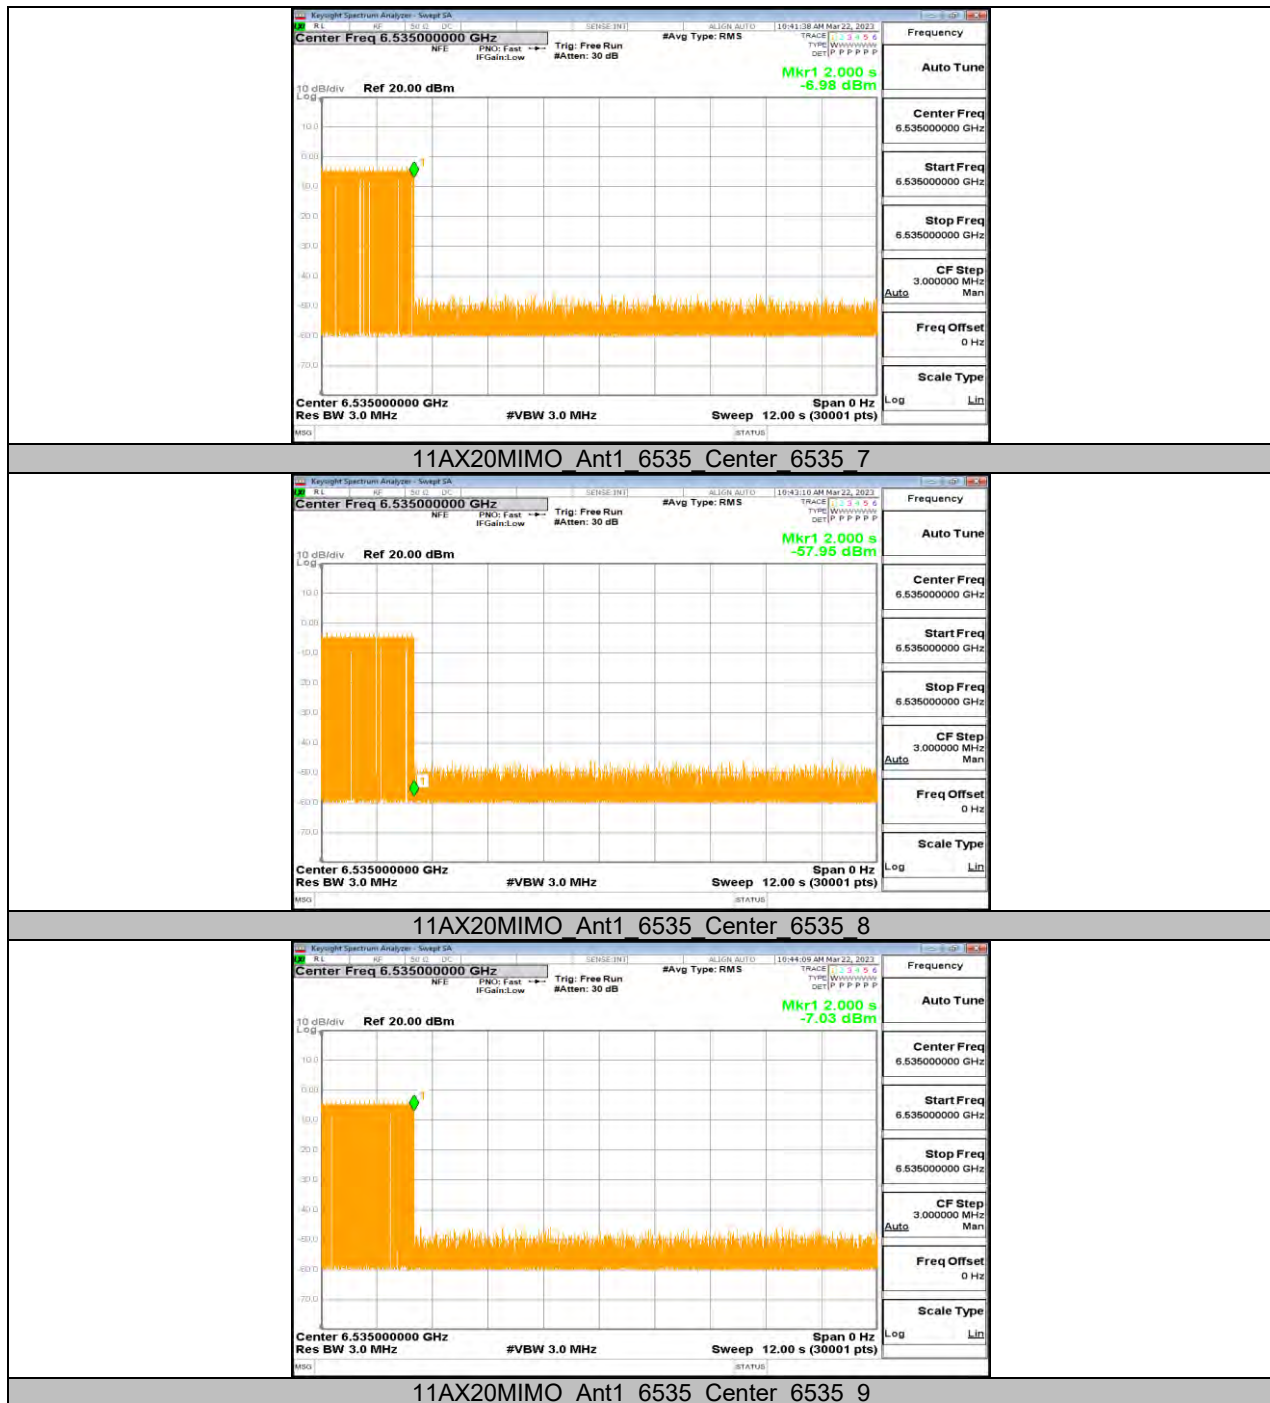

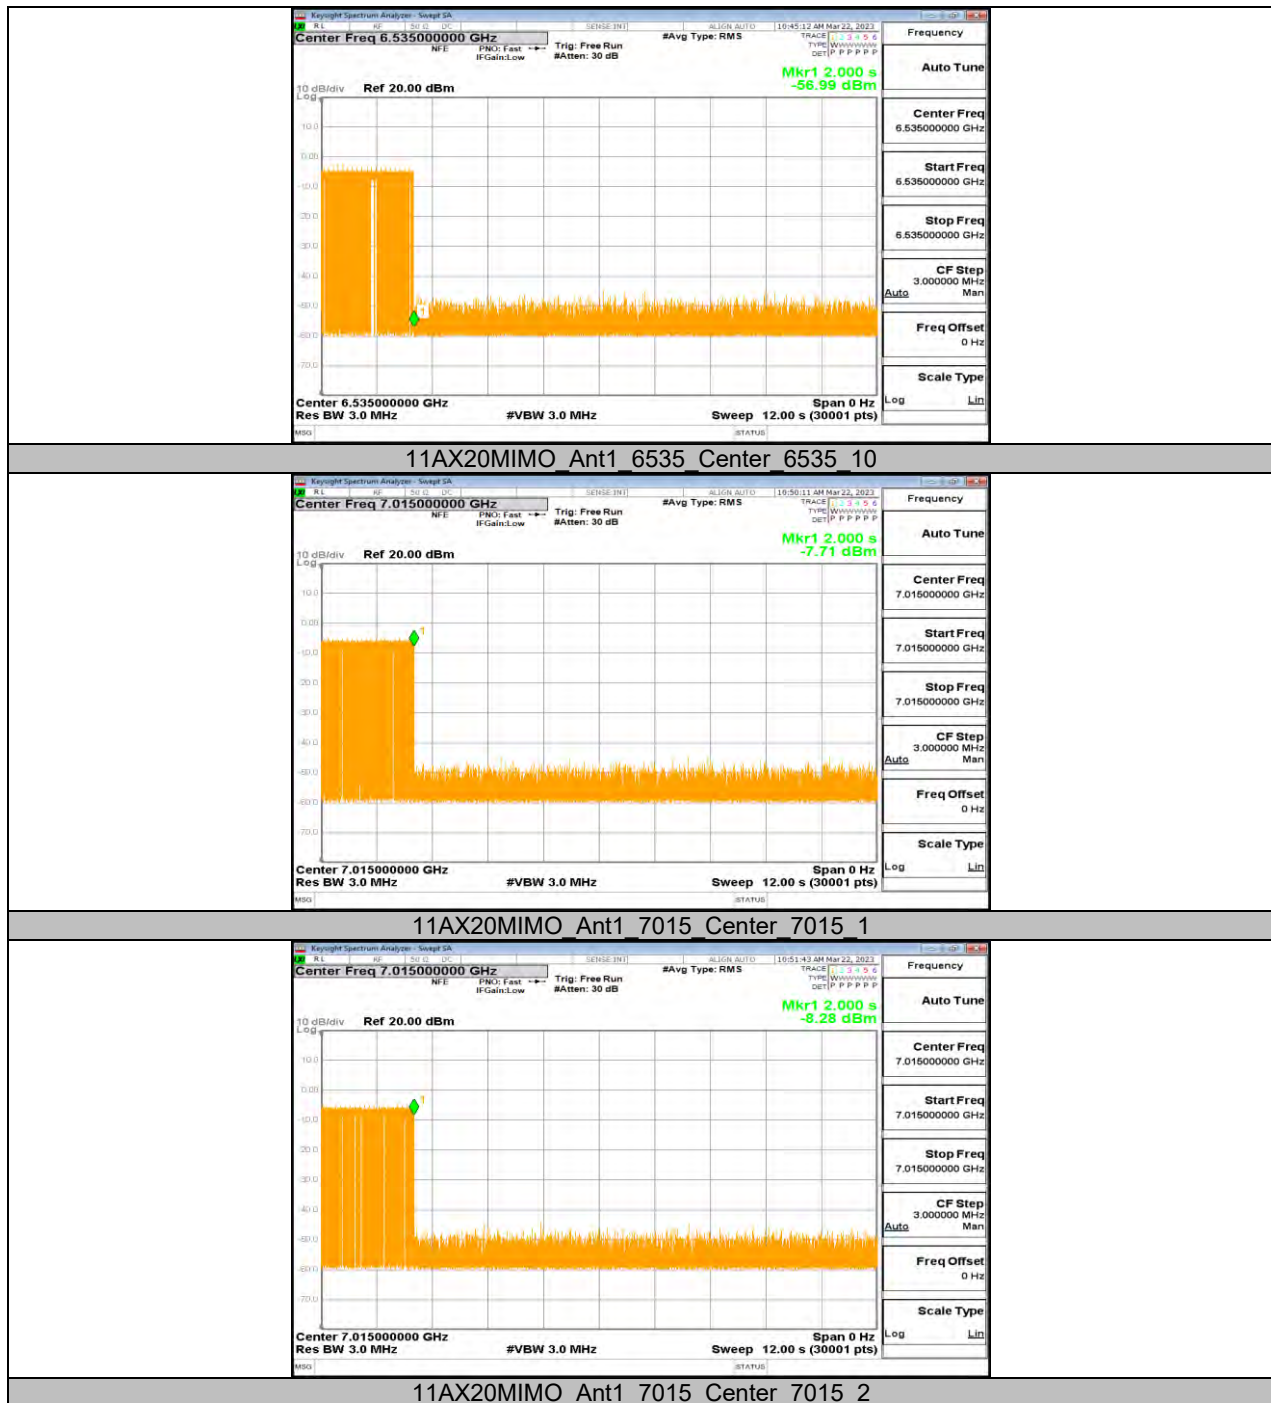

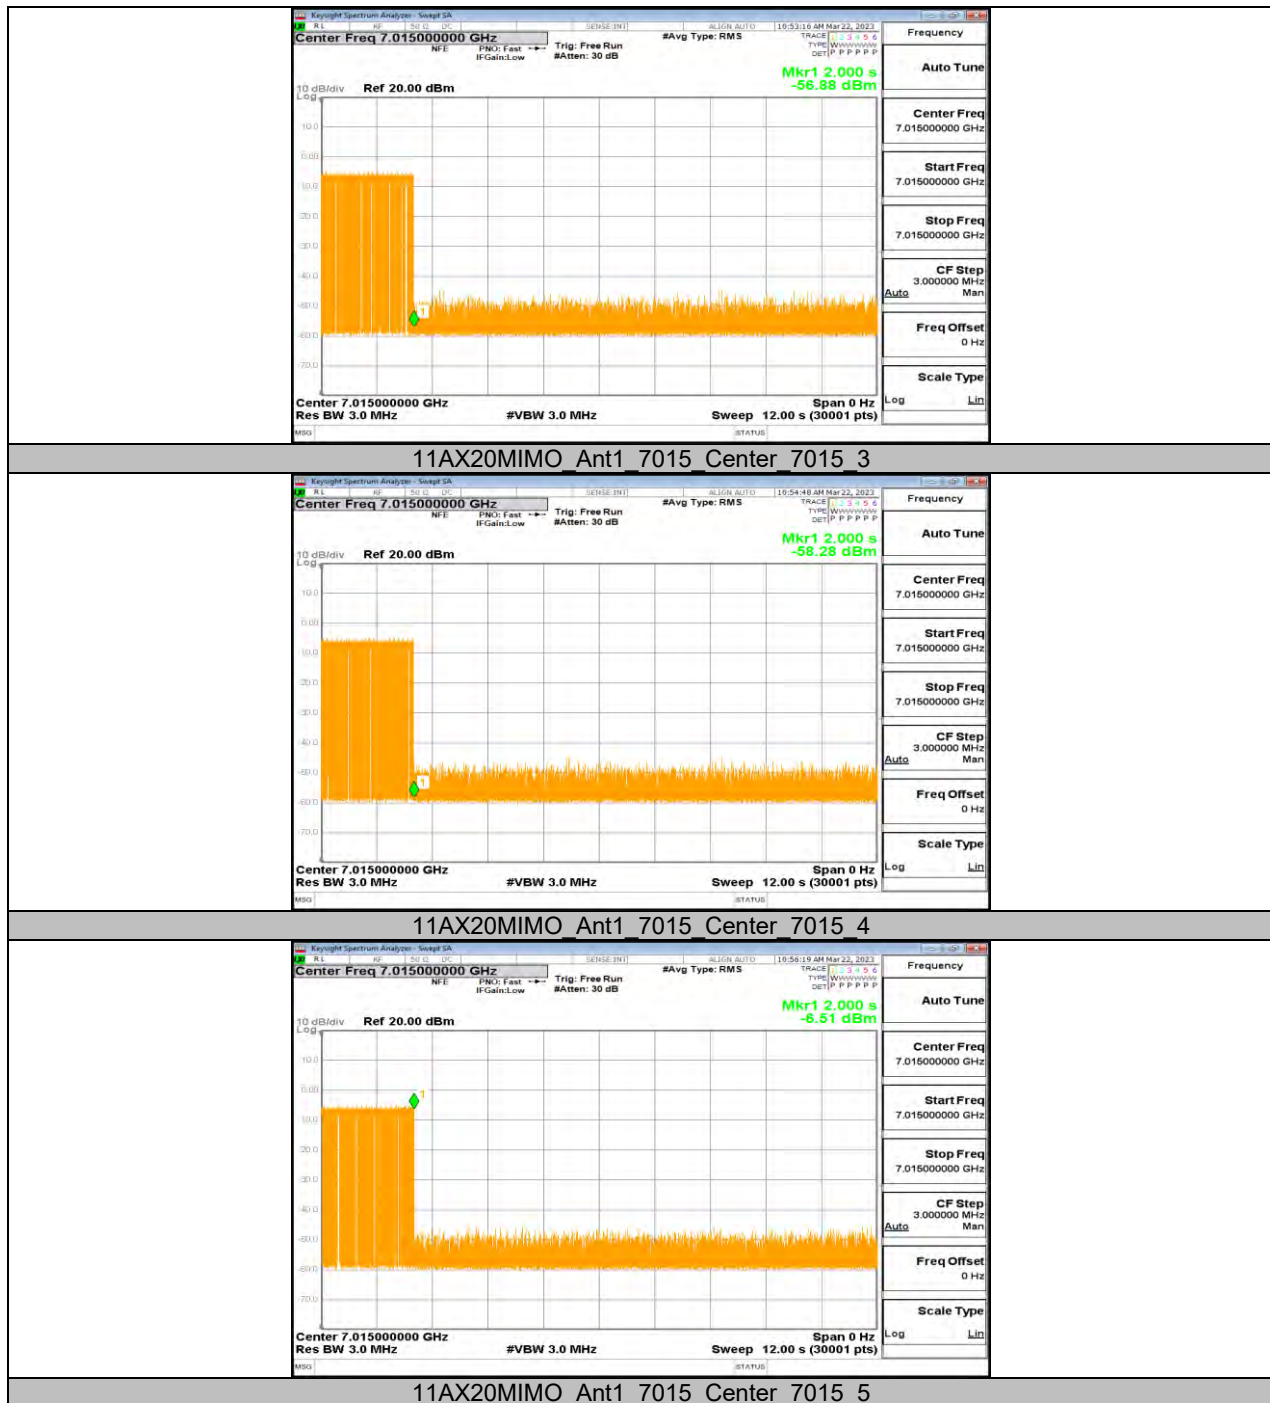

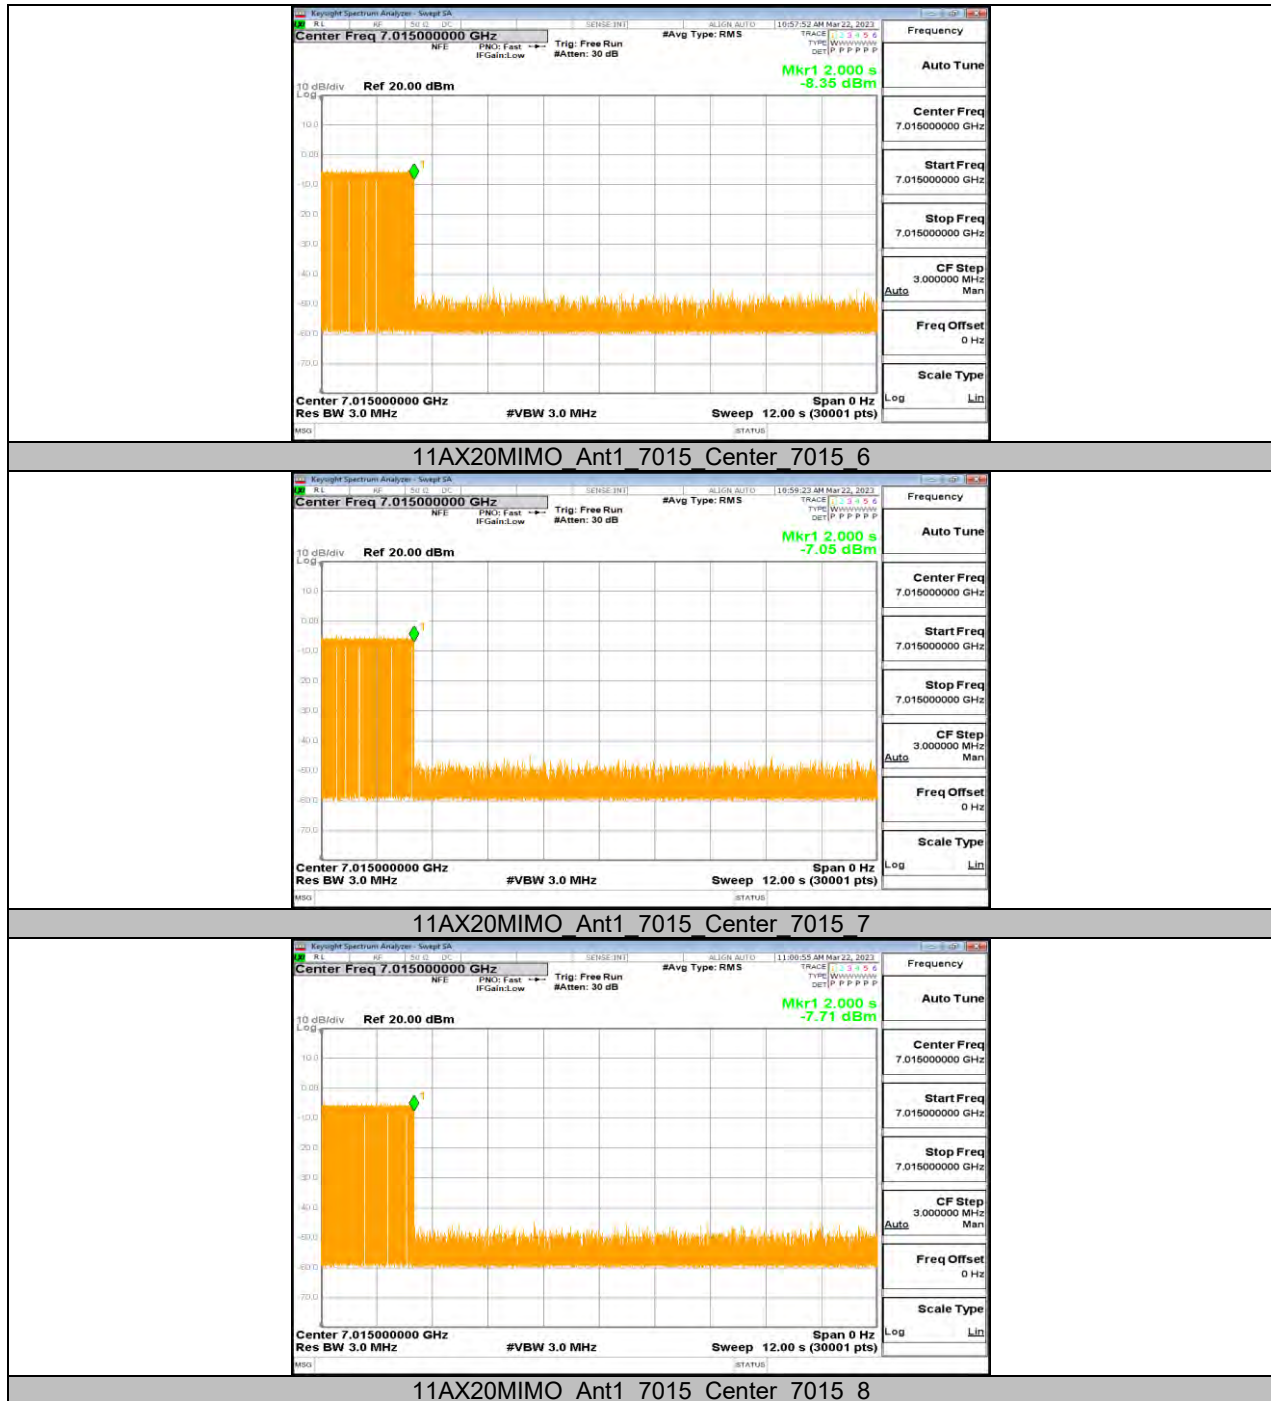

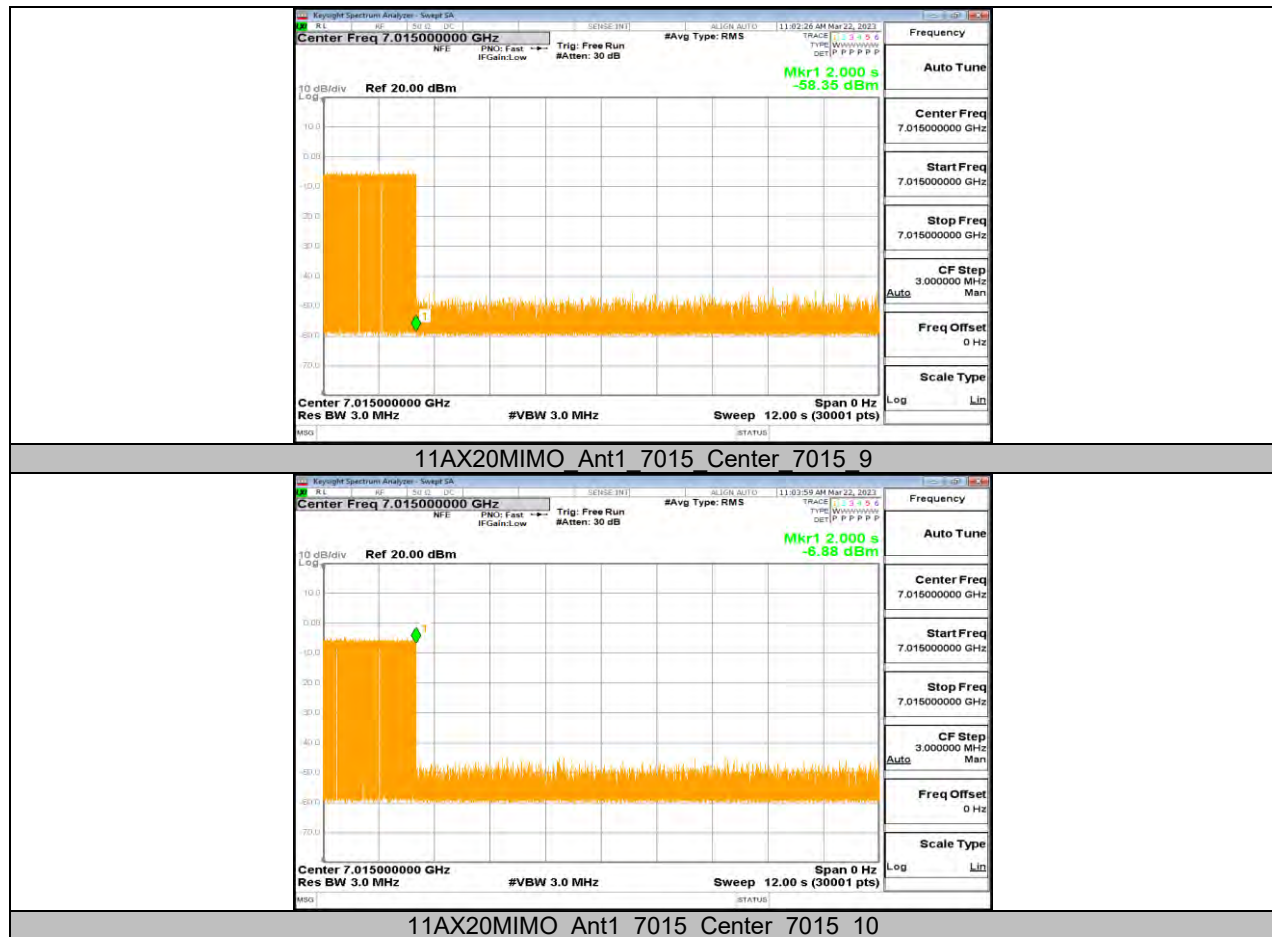

Note: All the modes had been tested, but only the worst data was recorded in the report.

## 11.8. APPENDIX H: FREQUENCY STABILITY

### 11.8.1. Test Result

| Frequency Error vs. Voltage     |       |                  |                 |                  |                 |                  |                 |                  |                 |
|---------------------------------|-------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 802.11ax HE20: 6195 MHz         |       |                  |                 |                  |                 |                  |                 |                  |                 |
| Temp.                           | Volt. | 0 Minute         |                 | 2 Minute         |                 | 5 Minute         |                 | 10 Minute        |                 |
|                                 |       | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) |
| TN                              | VL    | 6194.9926        | -1.20           | 6194.9865        | -2.17           | 6194.9760        | -3.88           | 6195.0130        | 2.09            |
| TN                              | VN    | 6194.9955        | -0.72           | 6194.9862        | -2.22           | 6195.0010        | 0.17            | 6194.9786        | -3.46           |
| TN                              | VH    | 6195.0176        | 2.85            | 6195.0235        | 3.80            | 6194.9763        | -3.83           | 6195.0149        | 2.41            |
| Frequency Error vs. Temperature |       |                  |                 |                  |                 |                  |                 |                  |                 |
| 802.11ax HE20: 6195 MHz         |       |                  |                 |                  |                 |                  |                 |                  |                 |
| Temp.                           | Volt. | 0 Minute         |                 | 2 Minute         |                 | 5 Minute         |                 | 10 Minute        |                 |
|                                 |       | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) |
| 40                              | VN    | 6194.9836        | -2.64           | 6194.9920        | -1.29           | 6195.0244        | 3.94            | 6194.9987        | -0.22           |
| 30                              | VN    | 6194.9969        | -0.51           | 6195.0093        | 1.50            | 6194.9822        | -2.88           | 6195.0209        | 3.38            |
| 20                              | VN    | 6195.0227        | 3.66            | 6195.0053        | 0.85            | 6195.0037        | 0.59            | 6194.9932        | -1.09           |
| 10                              | VN    | 6194.9813        | -3.03           | 6195.0057        | 0.92            | 6194.9954        | -0.75           | 6195.0101        | 1.64            |
| 0                               | VN    | 6195.0116        | 1.87            | 6195.0203        | 3.28            | 6195.0174        | 2.81            | 6194.9946        | -0.87           |

| Frequency Error vs. Voltage     |       |                  |                 |                  |                 |                  |                 |                  |                 |
|---------------------------------|-------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 802.11ax HE20: 6995 MHz         |       |                  |                 |                  |                 |                  |                 |                  |                 |
| Temp.                           | Volt. | 0 Minute         |                 | 2 Minute         |                 | 5 Minute         |                 | 10 Minute        |                 |
|                                 |       | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) |
| TN                              | VL    | 6995.0099        | 1.42            | 6995.0212        | 3.03            | 6994.9958        | -0.61           | 6995.0037        | 0.53            |
| TN                              | VN    | 6995.0208        | 2.97            | 6994.9978        | -0.31           | 6994.9938        | -0.89           | 6995.0191        | 2.73            |
| TN                              | VH    | 6994.9782        | -3.12           | 6994.9759        | -3.44           | 6994.9770        | -3.28           | 6994.9985        | -0.22           |
| Frequency Error vs. Temperature |       |                  |                 |                  |                 |                  |                 |                  |                 |
| 802.11ax HE20: 6995 MHz         |       |                  |                 |                  |                 |                  |                 |                  |                 |
| Temp.                           | Volt. | 0 Minute         |                 | 2 Minute         |                 | 5 Minute         |                 | 10 Minute        |                 |
|                                 |       | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) | Freq.Error (MHz) | Tolerance (ppm) |
| 40                              | VN    | 6995.0099        | 1.42            | 6995.0212        | 3.03            | 6994.9958        | -0.61           | 6995.0037        | 0.53            |
| 30                              | VN    | 6995.0208        | 2.97            | 6994.9978        | -0.31           | 6994.9938        | -0.89           | 6995.0191        | 2.73            |
| 20                              | VN    | 6994.9782        | -3.12           | 6994.9759        | -3.44           | 6994.9770        | -3.28           | 6994.9985        | -0.22           |
| 10                              | VN    | 6995.0004        | 0.06            | 6995.0014        | 0.20            | 6995.0203        | 2.91            | 6995.0027        | 0.39            |
| 0                               | VN    | 6995.0110        | 1.58            | 6995.0223        | 3.18            | 6994.9835        | -2.36           | 6995.0105        | 1.51            |

Note:

1. All antennas and test modes have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.6.

---

**END OF REPORT**