



REPORT No.: SZ24050138W02

TEST REPORT

APPLICANT : Grace Digital Inc.

PRODUCT NAME : Defender Portable Speaker

MODEL NAME : GDI-EXDFNR01

BRAND NAME : N/A

TRADE NAME : ECOXGEAR

FCC ID : 2AAUI-GDIEXDFNR01

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-05-20

TEST DATE : 2024-05-29 to 2024-07-05

ISSUE DATE : 2024-08-06



Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Hopping Mechanism	15
3.3. Number of Hopping Frequency	16
3.4. Duty Cycle of Test Signal	17
3.5. Maximum Peak Conducted Output Power	18
3.6. Maximum Average Conducted Output Power	19
3.7. 20 dB Bandwidth	20
3.8. Carried Frequency Separation	21
3.9. Time of Occupancy (Dwell time)	22
3.10. Conducted Spurious Emissions and Band Edge	23
3.11. Conducted Emission	24
3.12. Restricted Frequency Bands	25
3.13. Radiated Emission	26



Annex A Test Data and Result 28

Change History		
Version	Date	Reason for change
1.0	2024-08-06	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Jun. 03, 2024	Lin Haoyang	PASS	No deviation
11	15.207	Conducted Emission	May 29, 2024 to Jul. 05, 2024	Wang Deyong	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Jun. 07, 2024	Li Hanbin	PASS	No deviation



13	15.209, 15.247(d)	Radiated Emission	Jun. 07, 2024	Li Hanbin	PASS	No deviation
----	----------------------	----------------------	---------------	-----------	------	--------------

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
				2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
				2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
				2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
				2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
				2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
				2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
				2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	N/A	N/A
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	N/A	N/A
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Grace Digital Inc.
Applicant Address	10531 4S Commons Drive #166, Suite #430, San Diego, California, United States, 92127
Manufacturer	Xingtel Xiamen Group Co., Ltd.
Manufacturer Address	Xingtel Building,Chuangxin Road, Torch Hi-Tech Industrial District,Xiamen 361006, P R China

2.2. Information of EUT

Product Name:	Defender Portable Speaker	
Sample No.:	3#	
Hardware Version:	BT380-M V2.1	
Software Version:	V1.20	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	5.1	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PCB Antenna	
Antenna Gain:	0dBi	
Accessory Information:	Battery	
	Brand Name:	GREAT POWER
	Model No.:	ICR18650 4S2P
	Serial No.:	N/A
	Capacity:	5200mAh
	Rated Voltage:	14.8V
	Charge Limit:	16.8V
	Manufacturer:	Guangzhou Great Power Energy & Technology CO., Ltd



Accessory Information:	AC Adapter	
	Brand Name:	KEYU
	Model No.:	KA1801A-1801000US
	Serial No.:	N/A
	Rated Output:	18V \equiv 1A
	Rated Input:	100-240V \sim 50/60Hz, 0.5A
	Manufacturer:	Shenzhen Keyu Power Supply Technology Co., Ltd.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions

Temperature (°C)	15–35
Relative Humidity (%)	30–60
Atmospheric Pressure (kPa)	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

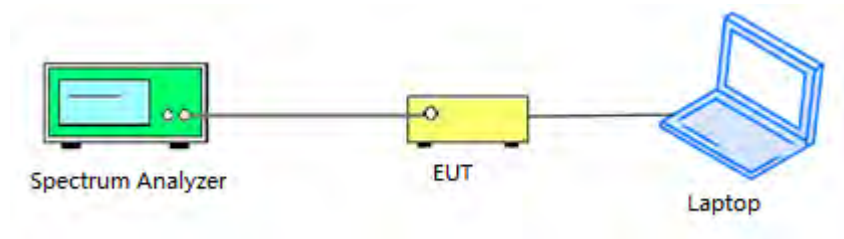


2.6.2. Conducted Emission Measurement




2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

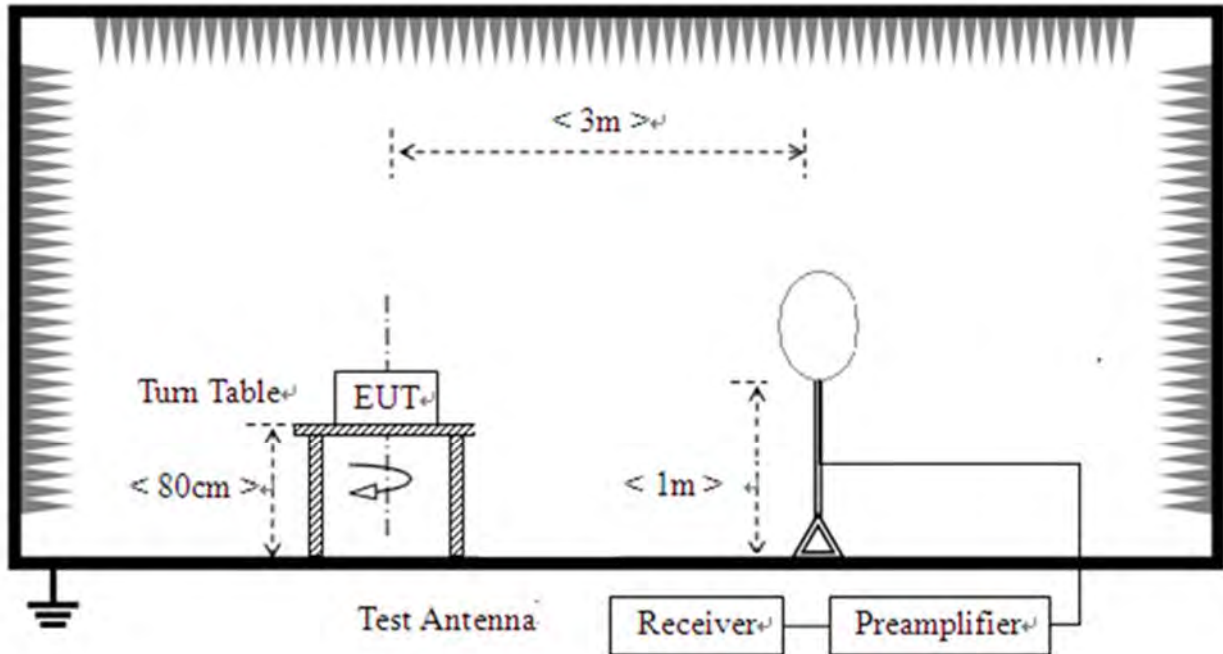

2) For radiated emissions from 30MHz to 1GHz

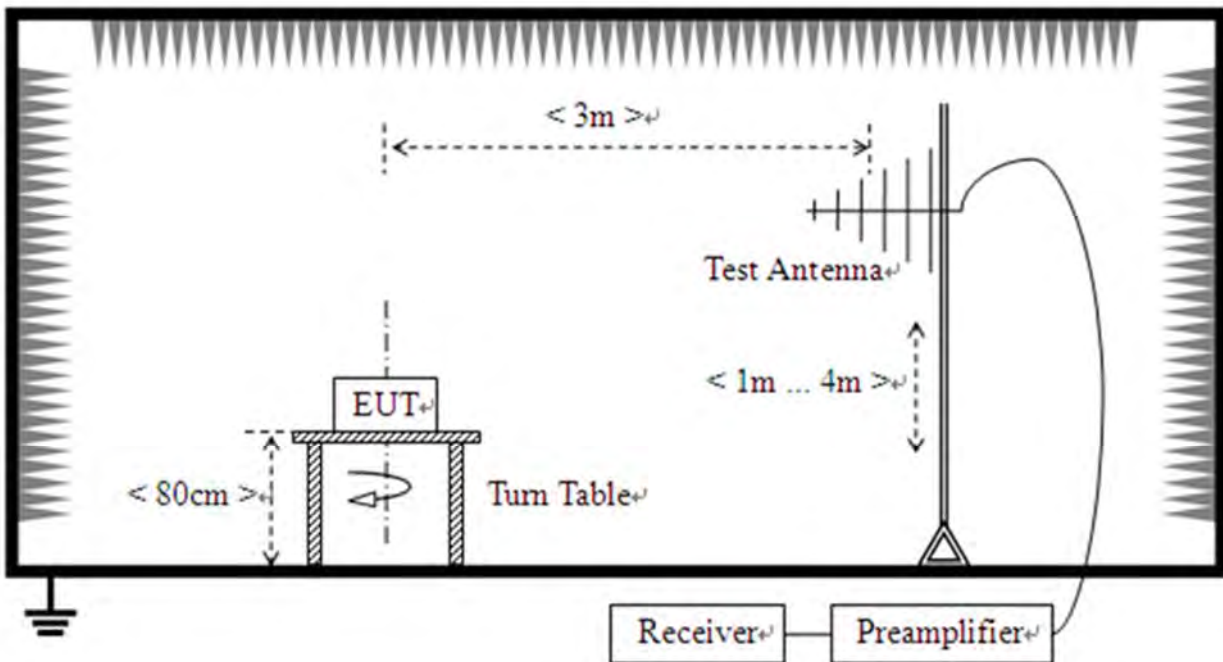

3) For radiated emissions above 1GHz

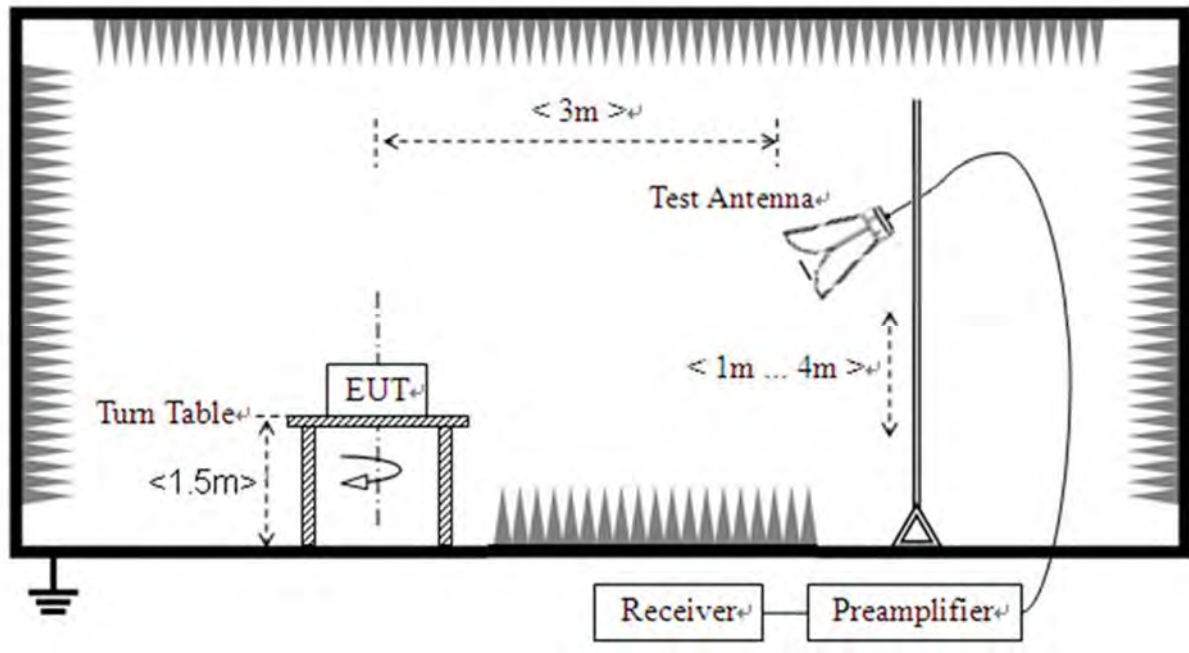



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

3.2. Hopping Mechanism

3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".



3.3. Number of Hopping Frequency

3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.1 in this report.



3.4. Duty Cycle of Test Signal

3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2. Test Result

Refer to Annex A.2 in this report.



3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.



3.6. Maximum Average Conducted Output Power

3.6.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.4 in this report.



3.7.20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20 \text{ dB}$) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



3.8. Carried Frequency Separation

3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.6 in this report.



3.9. Time of Occupancy (Dwell time)

3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (1600 / 2 / 79) \times 31.6$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (1600 / 4 / 79) \times 31.6$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (1600 / 6 / 79) \times 31.6$ Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (800 / 2 / 20) \times (0.4 \times 20)$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (800 / 4 / 20) \times (0.4 \times 20)$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (800 / 6 / 20) \times (0.4 \times 20)$ Millisecond.

3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4. Test Result

Refer to Annex A.7 in this report.

3.10. Conducted Spurious Emissions and Band Edge

3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.

3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

Refer to Annex A.10 in this report.



3.12. Restricted Frequency Bands

3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4.Test Result

Refer to Annex A.11 in this report.

3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4.Test Result

Refer to Annex A.12 in this report.



Annex A Test Data and Result


A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

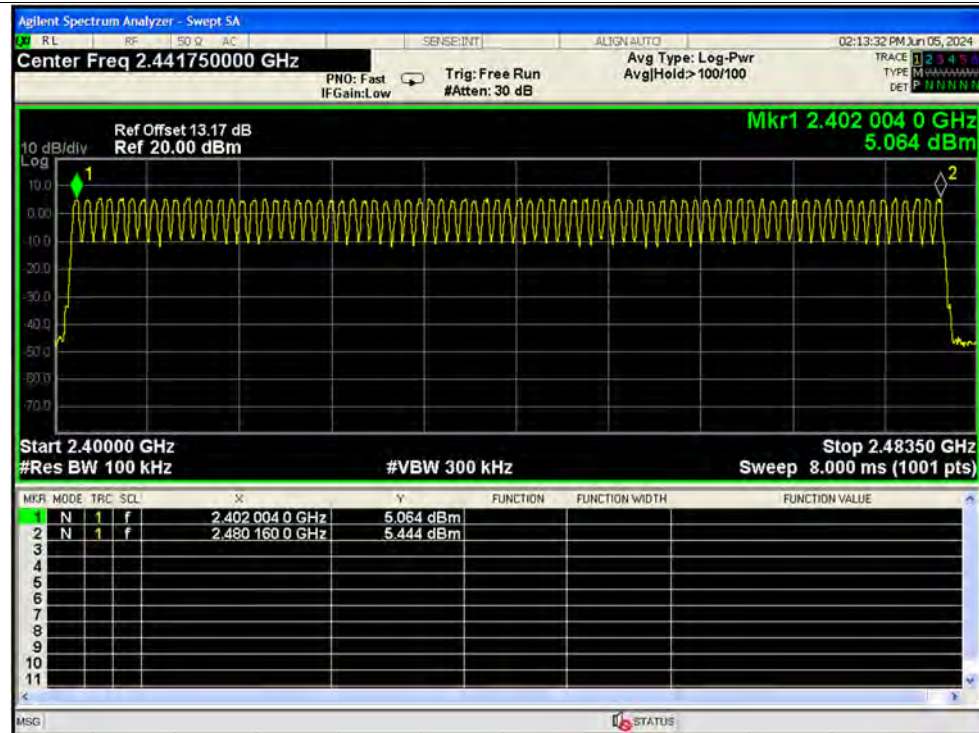


Hopping No. NVNT 2-DH5 2402MHz Ant1

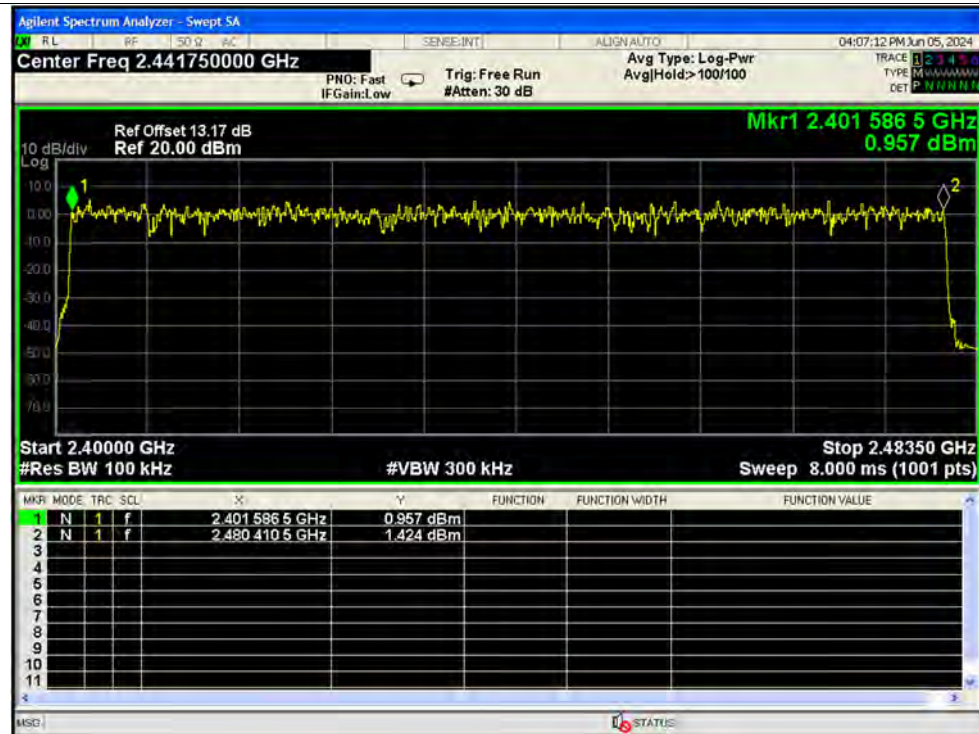



Hopping No. NVNT 3-DH5 2402MHz Ant1

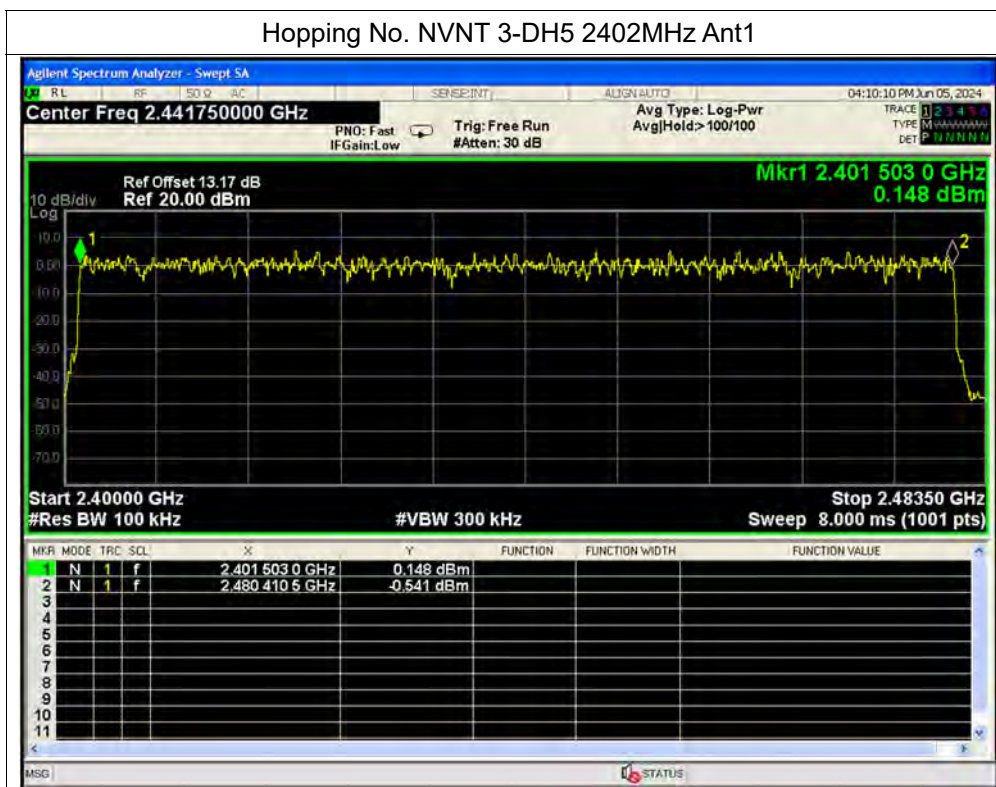


**A.2. Duty Cycle of Test Signal**


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.01	1.13	0.35
NVNT	1-DH5	2441	Ant1	77.15	1.13	0.35
NVNT	1-DH5	2480	Ant1	77.15	1.13	0.35
NVNT	2-DH5	2402	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2480	Ant1	77.25	1.12	0.35
NVNT	3-DH5	2402	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2480	Ant1	77.31	1.12	0.34

Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

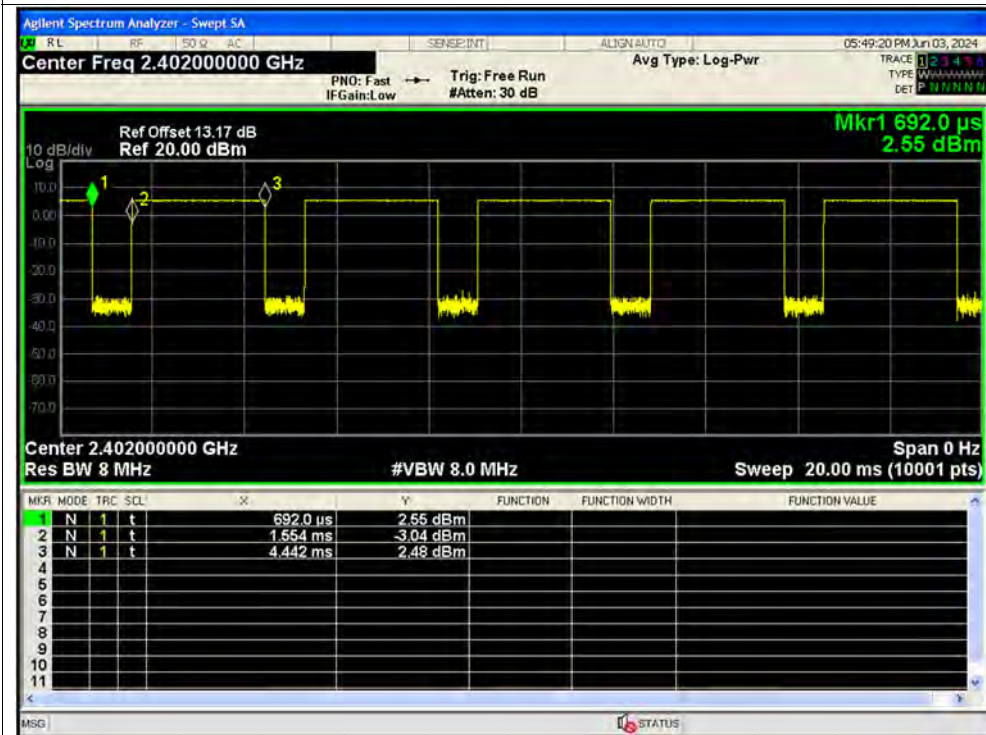

Duty Cycle NVNT 1-DH5 2441MHz Ant1

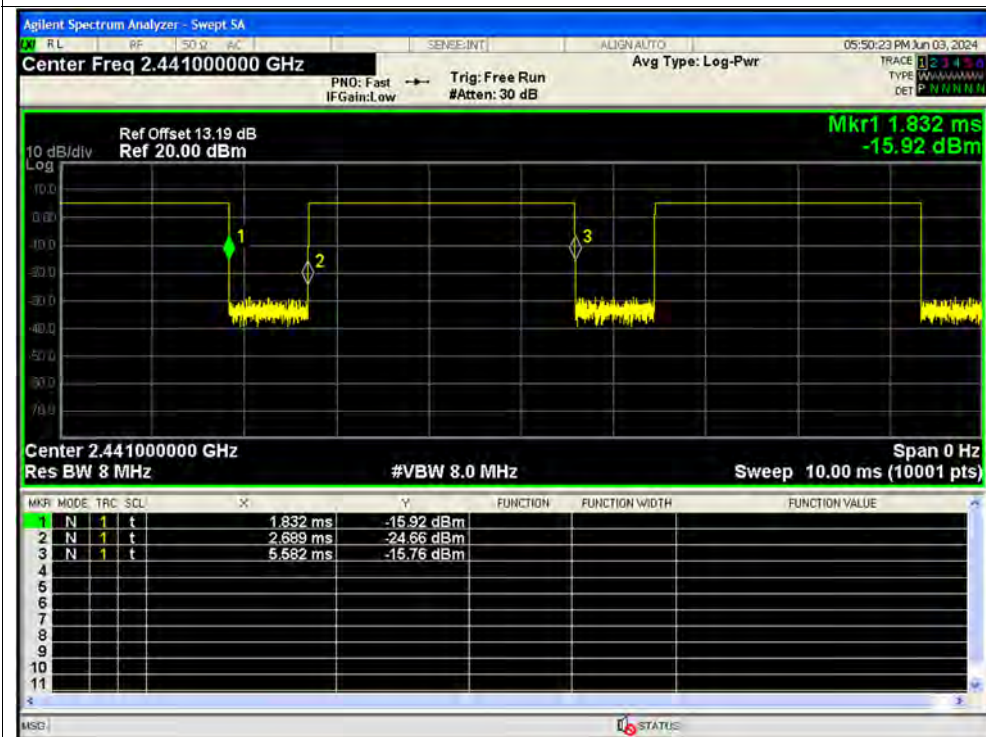




Duty Cycle NVNT 1-DH5 2480MHz Ant1




Duty Cycle NVNT 2-DH5 2402MHz Ant1

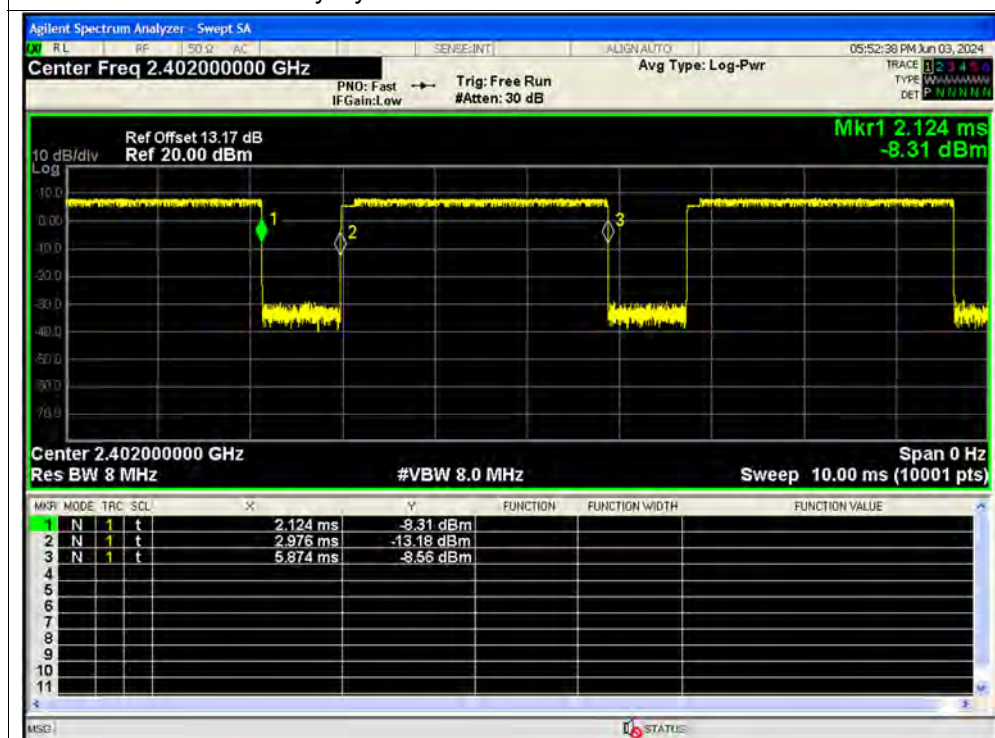

Duty Cycle NVNT 2-DH5 2441MHz Ant1




Duty Cycle NVNT 2-DH5 2480MHz Ant1

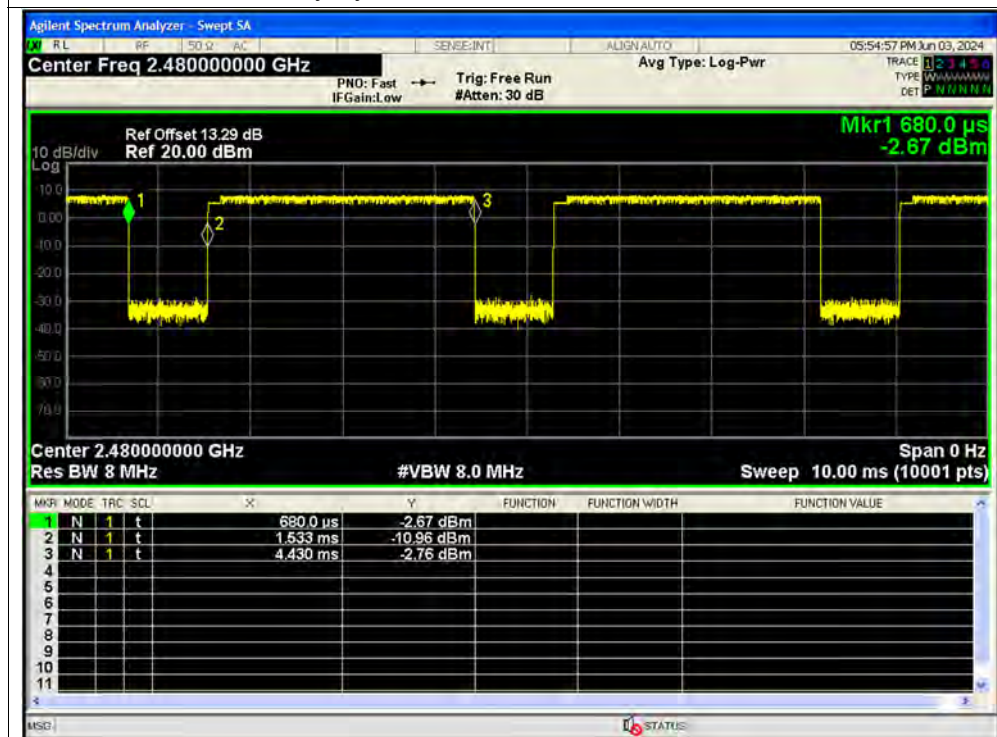

Duty Cycle NVNT 3-DH5 2402MHz Ant1




Duty Cycle NVNT 3-DH5 2441MHz Ant1

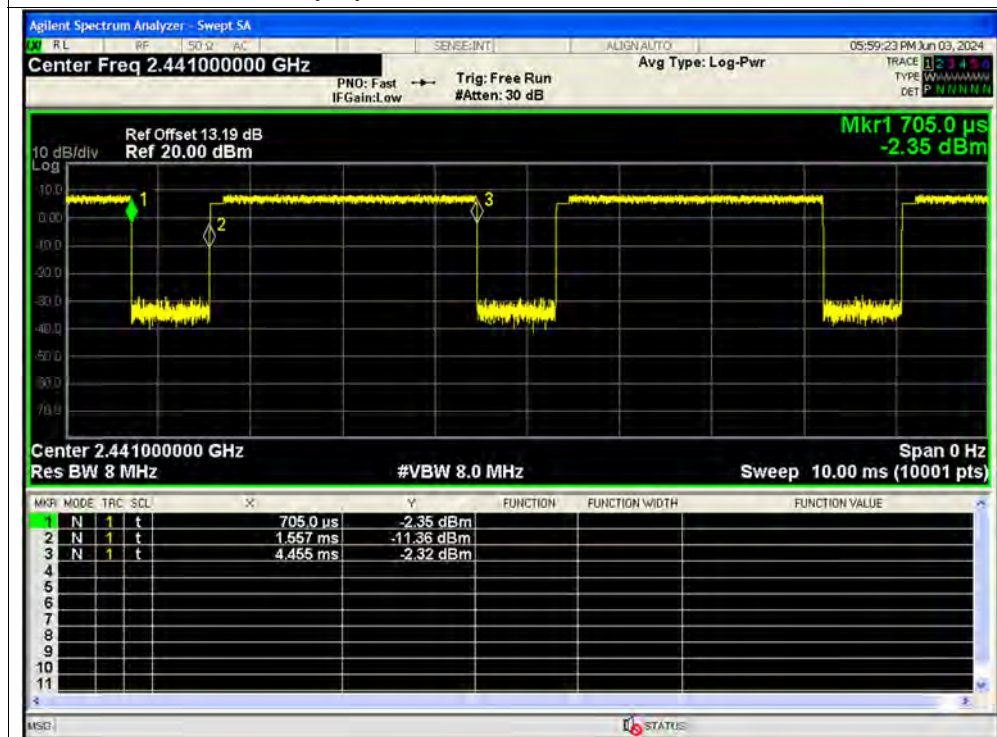



Duty Cycle NVNT 3-DH5 2480MHz Ant1

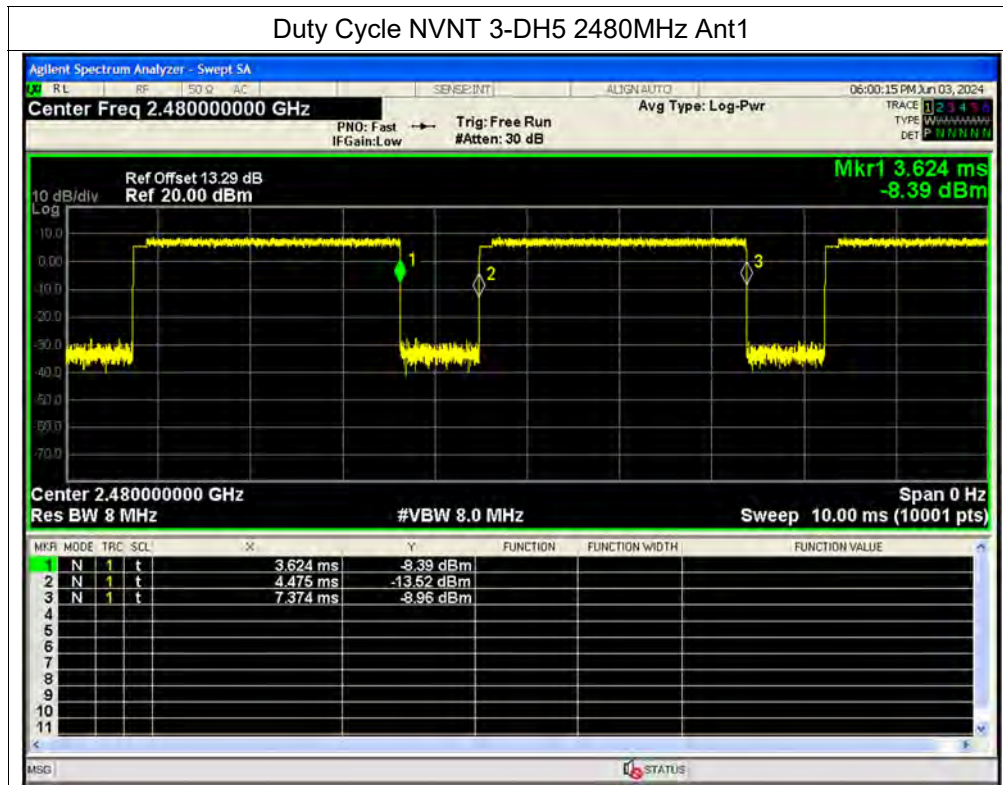

**A.3. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	5.52	0	5.52	0.00356	30	Pass
NVNT	1-DH5	2441	Ant1	5.19	0	5.19	0.0033	30	Pass
NVNT	1-DH5	2480	Ant1	5.45	0	5.45	0.00351	30	Pass
NVNT	2-DH5	2402	Ant1	7.71	0	7.71	0.0059	30	Pass
NVNT	2-DH5	2441	Ant1	7.57	0	7.57	0.00571	30	Pass
NVNT	2-DH5	2480	Ant1	7.75	0	7.75	0.00596	30	Pass
NVNT	3-DH5	2402	Ant1	8.38	0	8.38	0.00689	30	Pass
NVNT	3-DH5	2441	Ant1	8.2	0	8.2	0.00661	30	Pass
NVNT	3-DH5	2480	Ant1	8.54	0	8.54	0.00714	30	Pass

Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1



Peak Power NVNT 1-DH5 2441MHz Ant1




Peak Power NVNT 1-DH5 2480MHz Ant1



Peak Power NVNT 2-DH5 2402MHz Ant1



Peak Power NVNT 2-DH5 2441MHz Ant1

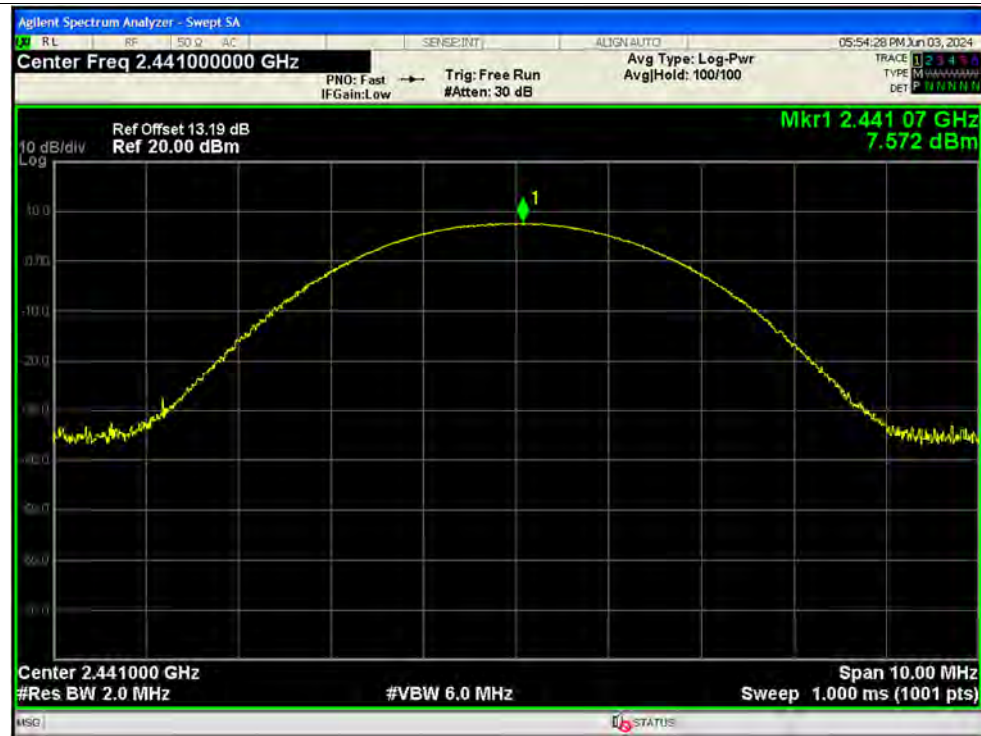

Peak Power NVNT 2-DH5 2480MHz Ant1





Peak Power NVNT 3-DH5 2402MHz Ant1



Peak Power NVNT 3-DH5 2441MHz Ant1





Peak Power NVNT 3-DH5 2480MHz Ant1



**A.4. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	4.24	1.13	5.37	0.00344	30	Pass
NVNT	1-DH5	2441	Ant1	3.9	1.13	5.03	0.00318	30	Pass
NVNT	1-DH5	2480	Ant1	4.06	1.13	5.19	0.0033	30	Pass
NVNT	2-DH5	2402	Ant1	3.98	1.12	5.1	0.00324	30	Pass
NVNT	2-DH5	2441	Ant1	3.68	1.12	4.8	0.00302	30	Pass
NVNT	2-DH5	2480	Ant1	4.15	1.12	5.27	0.00337	30	Pass
NVNT	3-DH5	2402	Ant1	4.14	1.12	5.26	0.00336	30	Pass
NVNT	3-DH5	2441	Ant1	4.08	1.12	5.2	0.00331	30	Pass
NVNT	3-DH5	2480	Ant1	4.12	1.12	5.24	0.00334	30	Pass



Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1




Average Power NVNT 1-DH5 2480MHz Ant1




Average Power NVNT 2-DH5 2402MHz Ant1

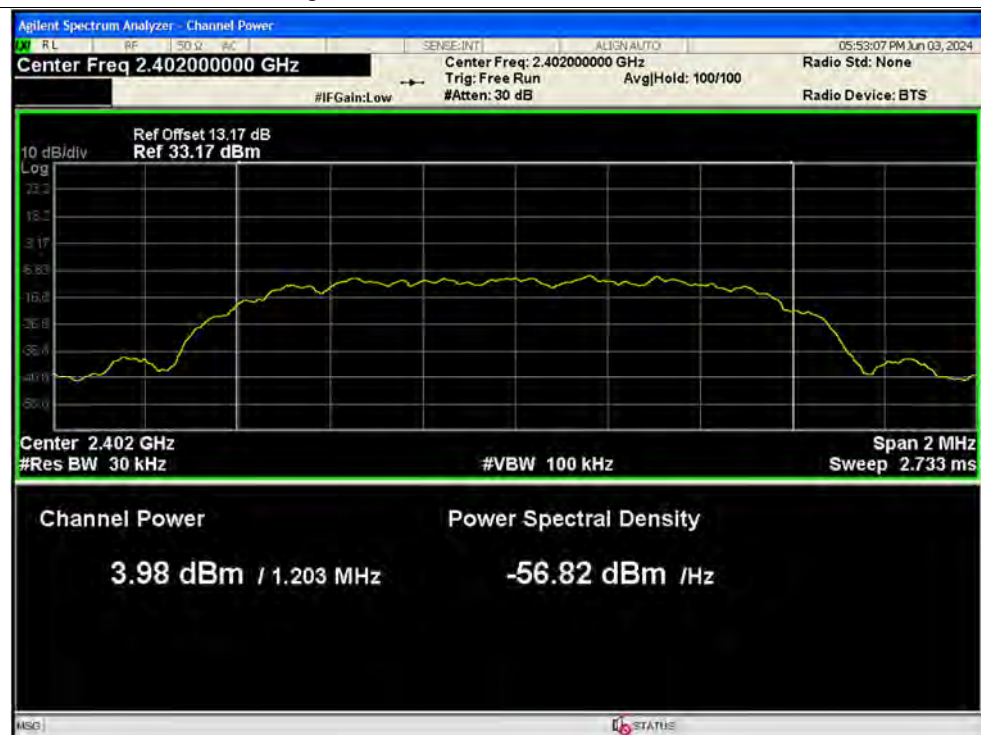

Average Power NVNT 2-DH5 2441MHz Ant1

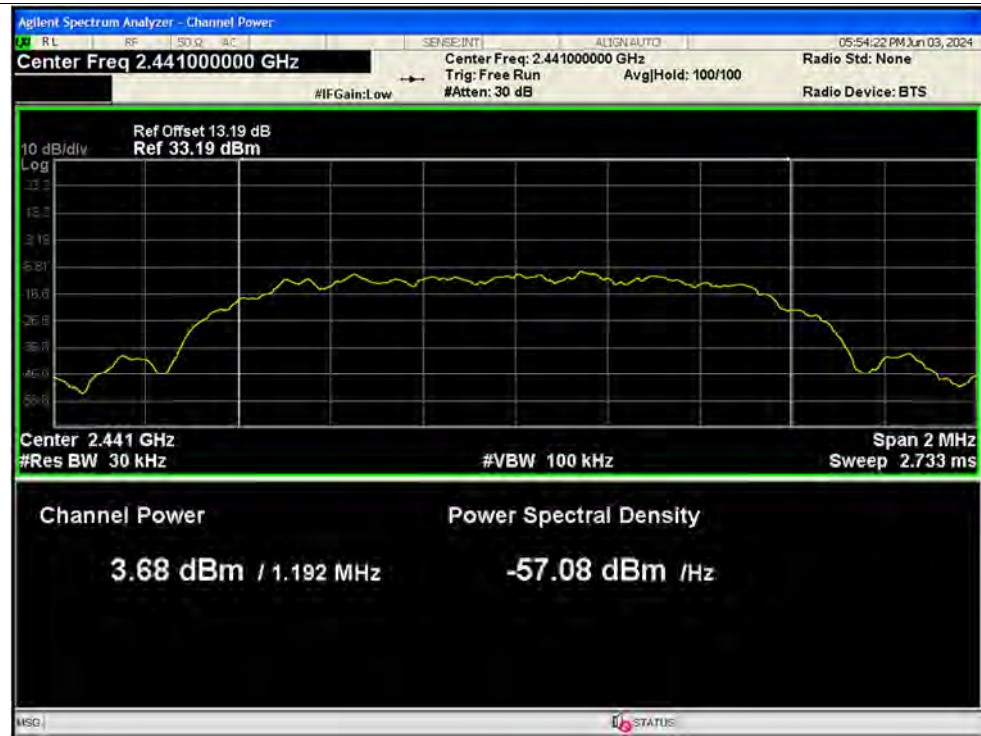

Average Power NVNT 2-DH5 2480MHz Ant1

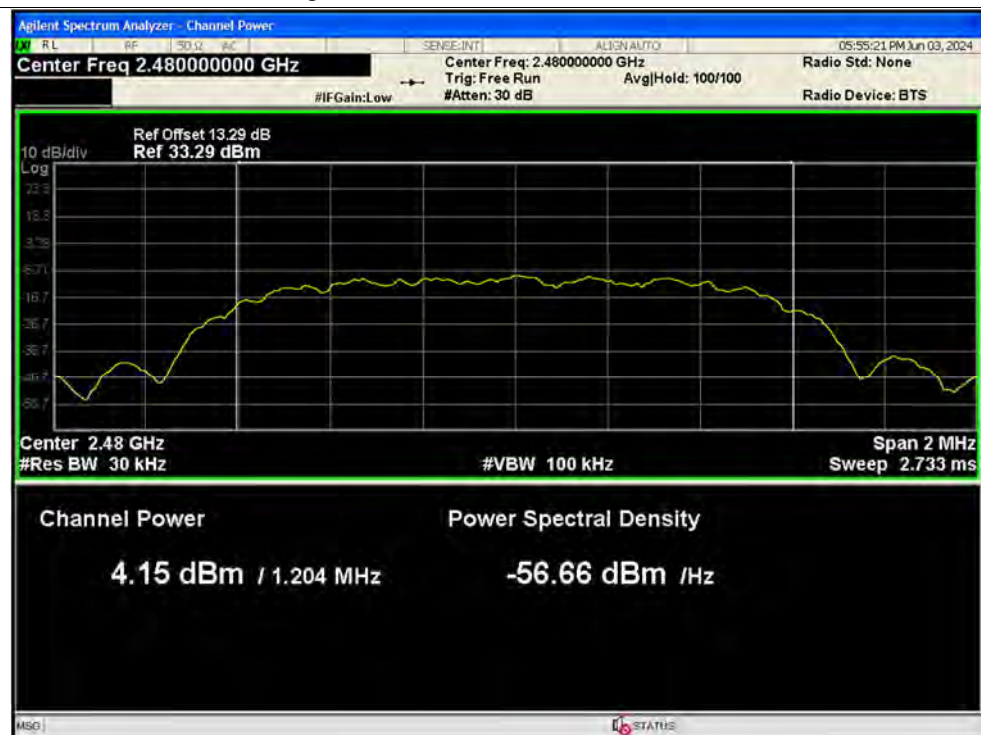

Average Power NVNT 3-DH5 2402MHz Ant1




Average Power NVNT 3-DH5 2441MHz Ant1





Average Power NVNT 3-DH5 2480MHz Ant1

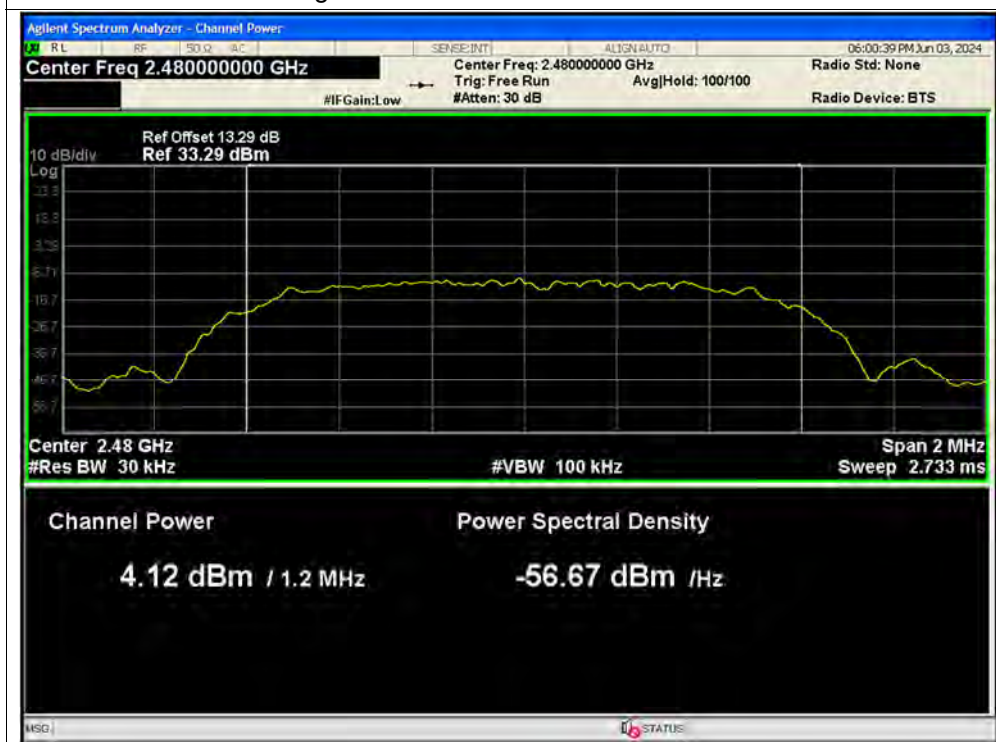

**A.5. 20 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.959
NVNT	1-DH5	2441	Ant1	0.955
NVNT	1-DH5	2480	Ant1	0.943
NVNT	2-DH5	2402	Ant1	1.337
NVNT	2-DH5	2441	Ant1	1.335
NVNT	2-DH5	2480	Ant1	1.362
NVNT	3-DH5	2402	Ant1	1.307
NVNT	3-DH5	2441	Ant1	1.294
NVNT	3-DH5	2480	Ant1	1.3



Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

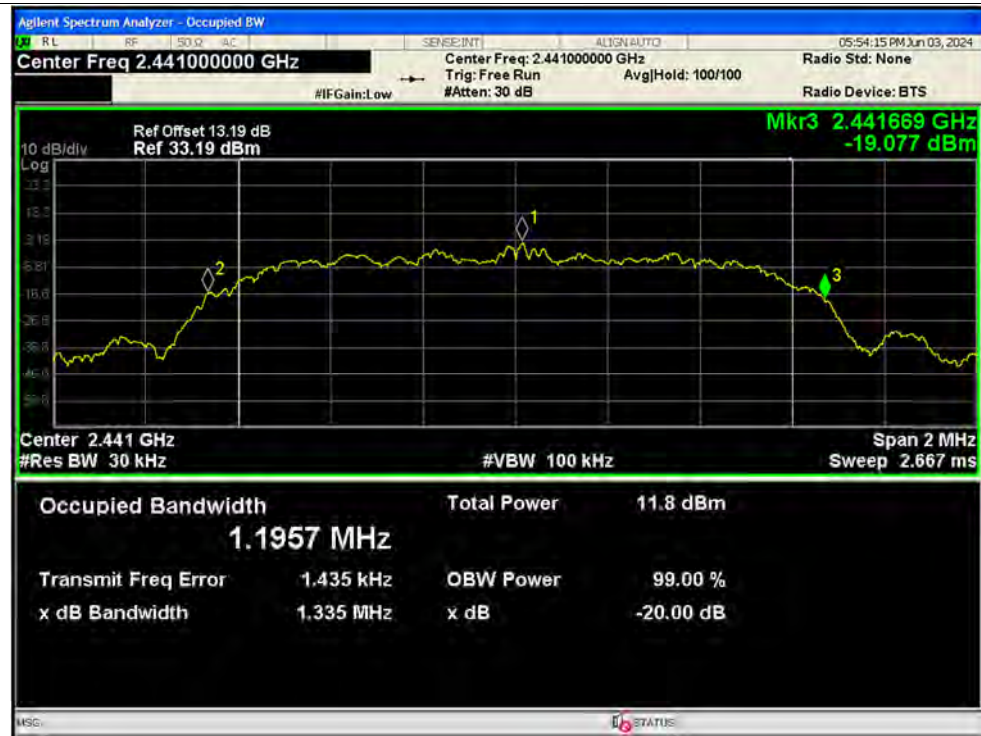


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

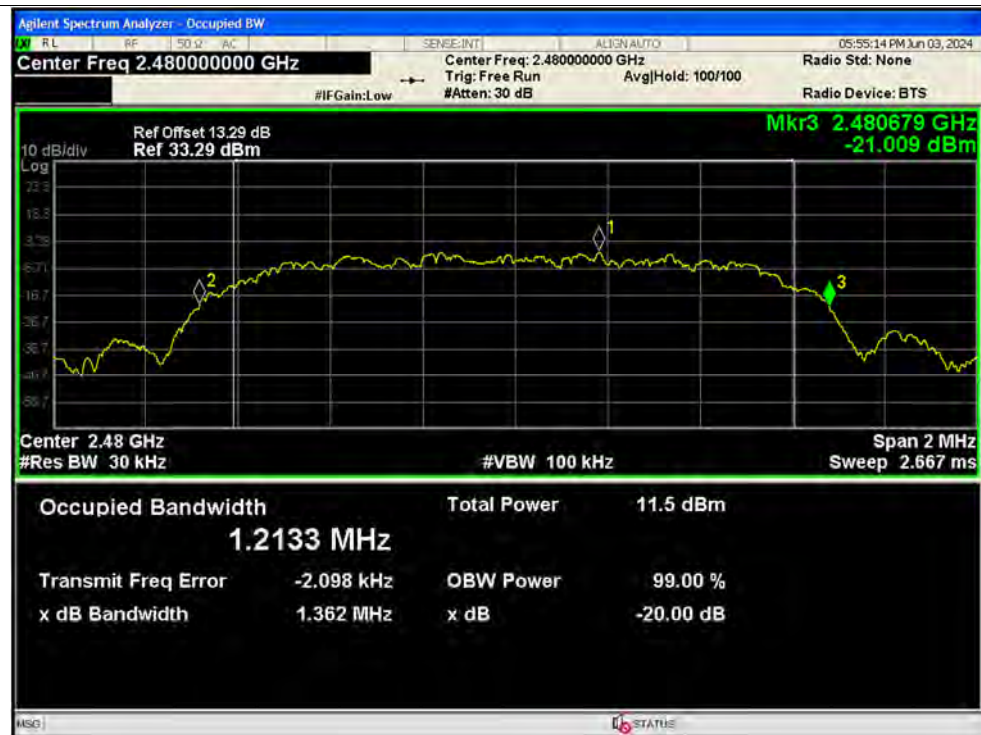

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

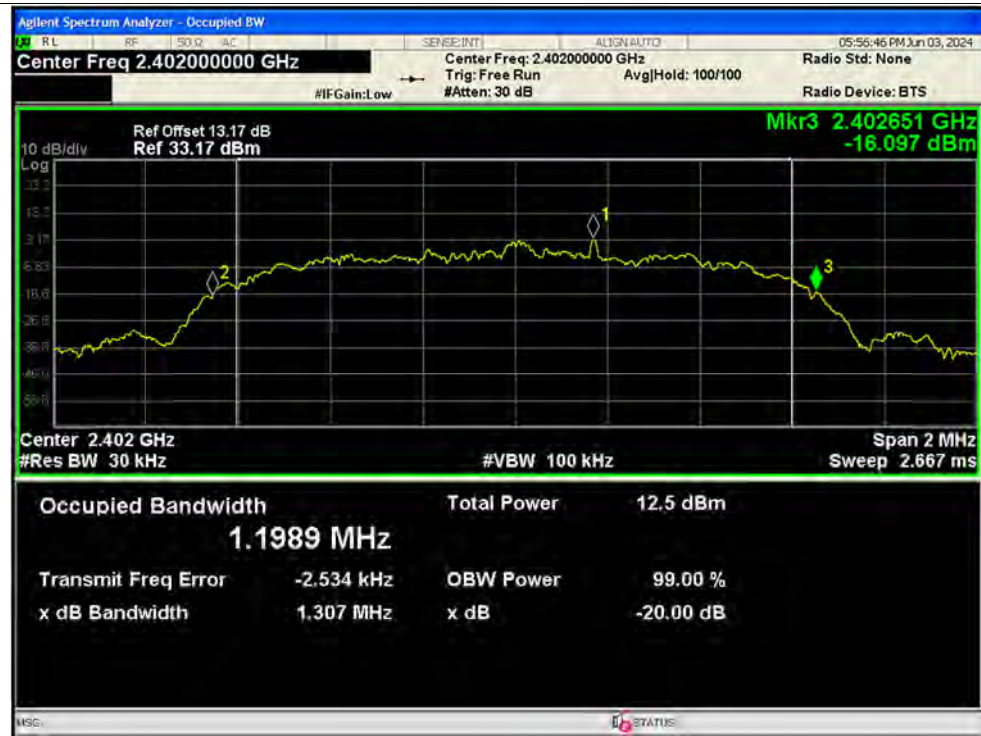

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

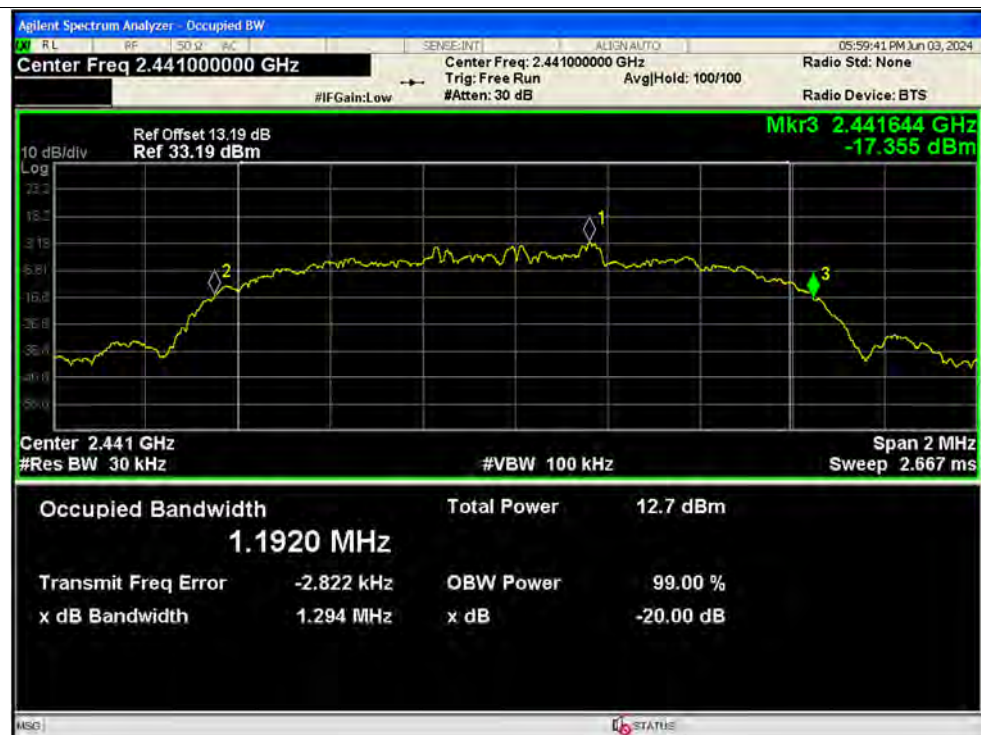


-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1




**A.6. Carried Frequency Separation**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.97	2402.978	1.008	0.639	Pass
NVNT	2-DH5	Ant1	2401.822	2403.162	1.34	0.891	Pass
NVNT	3-DH5	Ant1	2402.024	2402.944	0.92	0.871	Pass

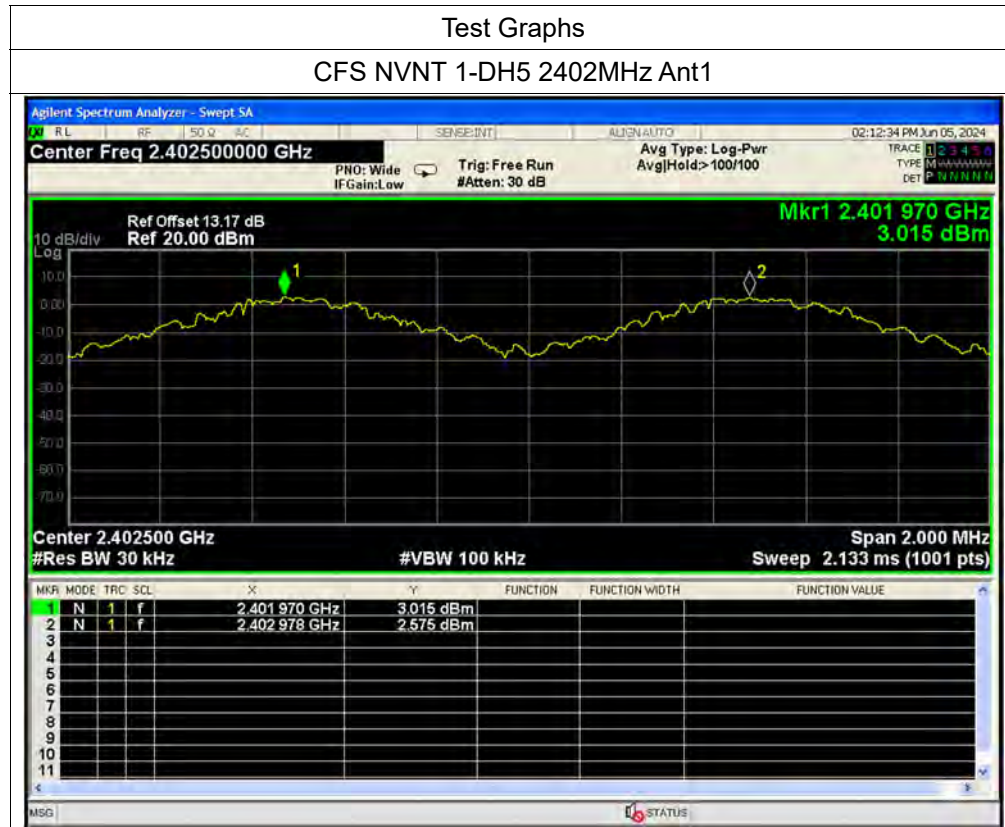




CFS NVNT 2-DH5 2402MHz Ant1

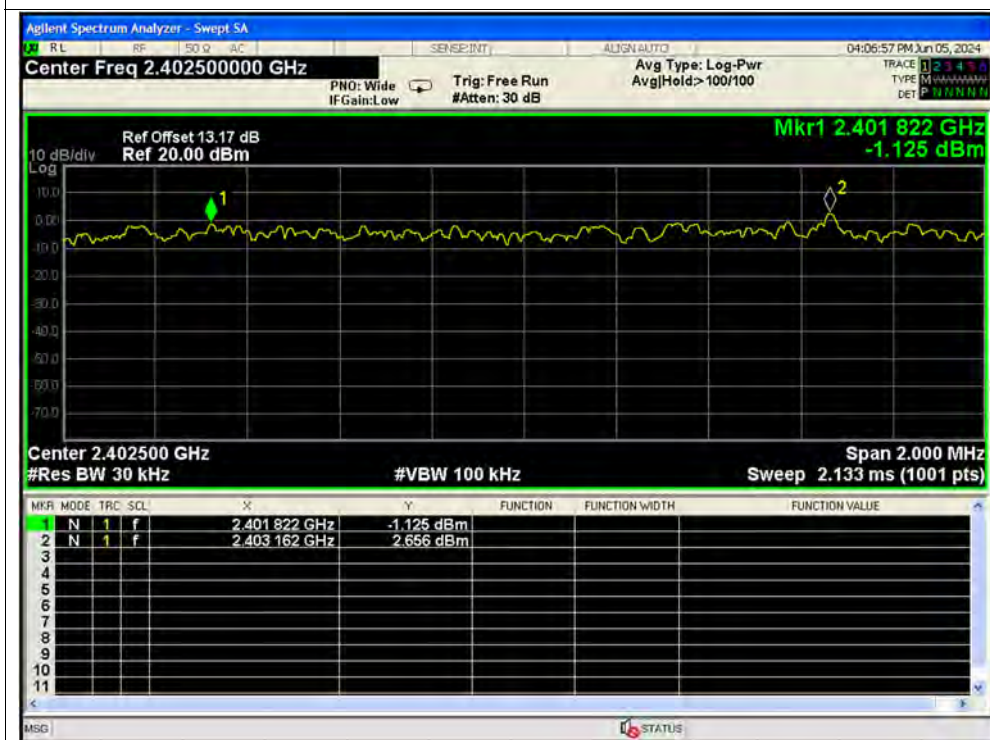

CFS NVNT 3-DH5 2402MHz Ant1

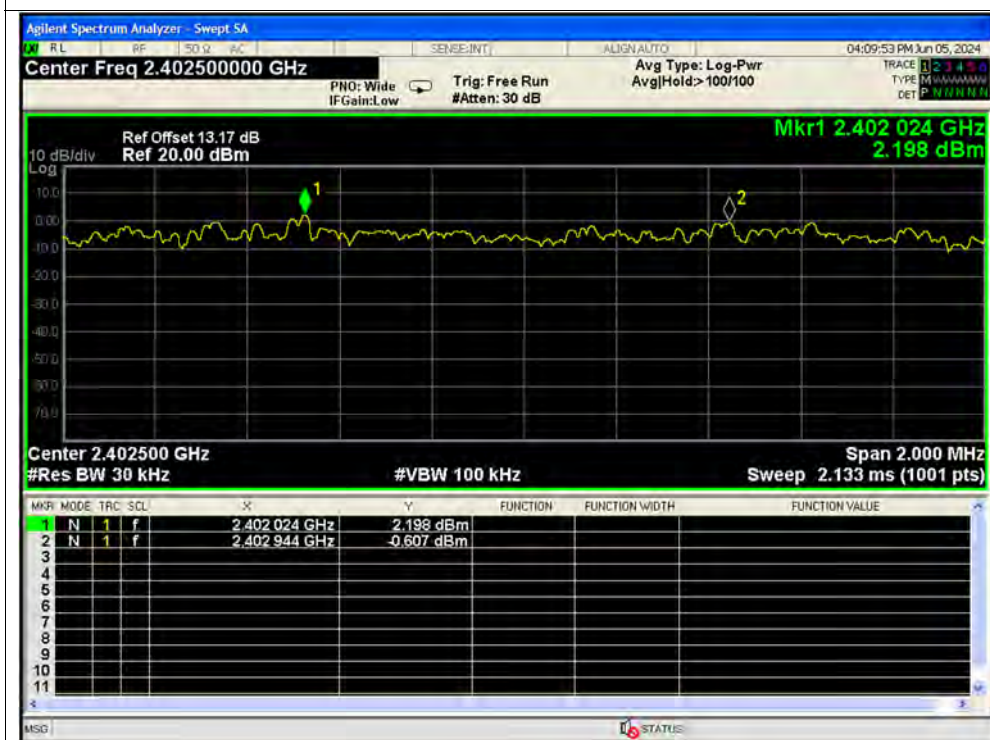


**A.7. Time of Occupancy (Dwell time)**


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.304	96.976	319	31600	400	Pass
NVNT	1-DH3	2402	Ant1	1.64	262.4	160	31600	400	Pass
NVNT	1-DH5	2402	Ant1	2.887	308.909	107	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.393	125.367	319	31600	400	Pass
NVNT	2-DH3	2402	Ant1	1.64	262.4	160	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.894	309.658	107	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.393	125.76	320	31600	400	Pass
NVNT	3-DH3	2402	Ant1	1.643	262.88	160	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.894	309.658	107	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH1 2402MHz Ant1 One Burst

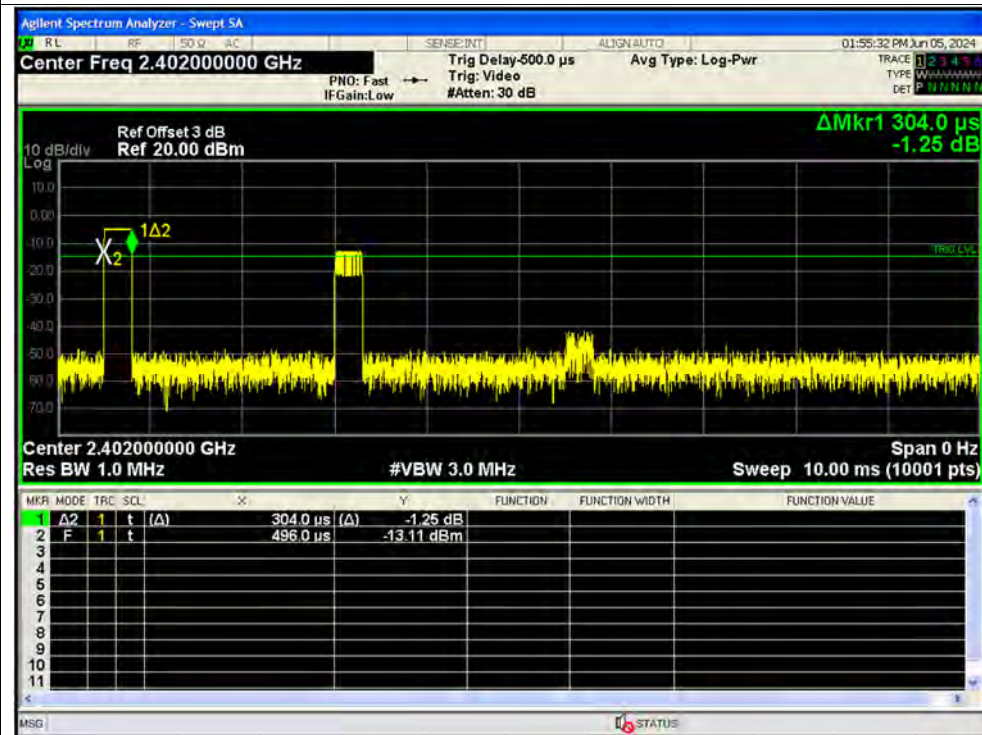


Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated

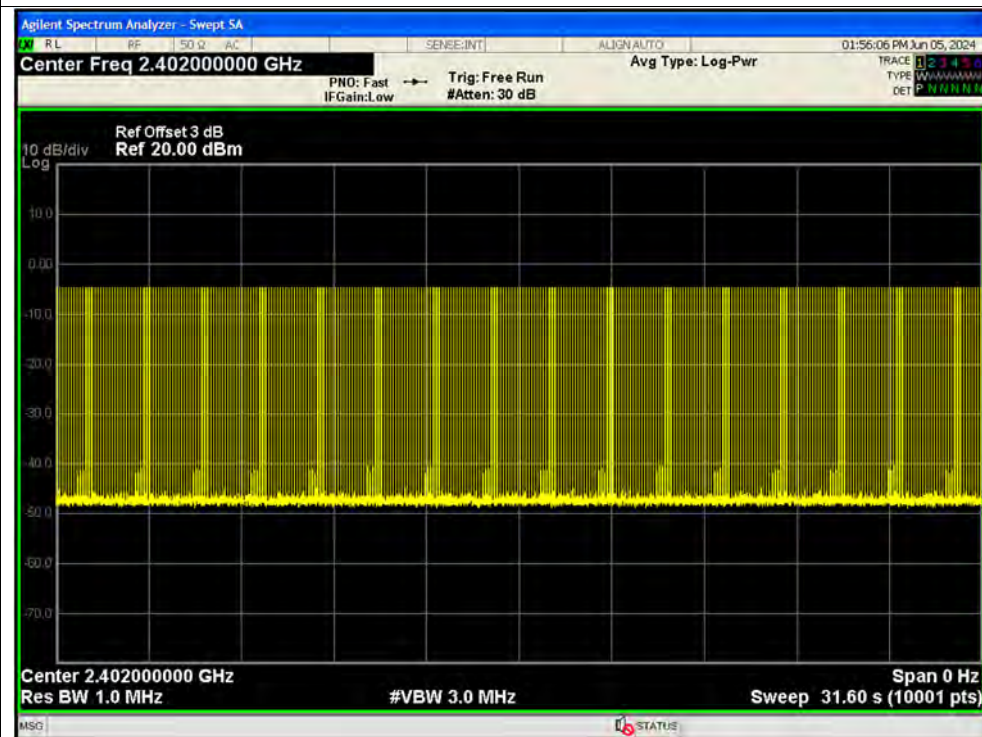




Dwell NVNT 1-DH3 2402MHz Ant1 One Burst

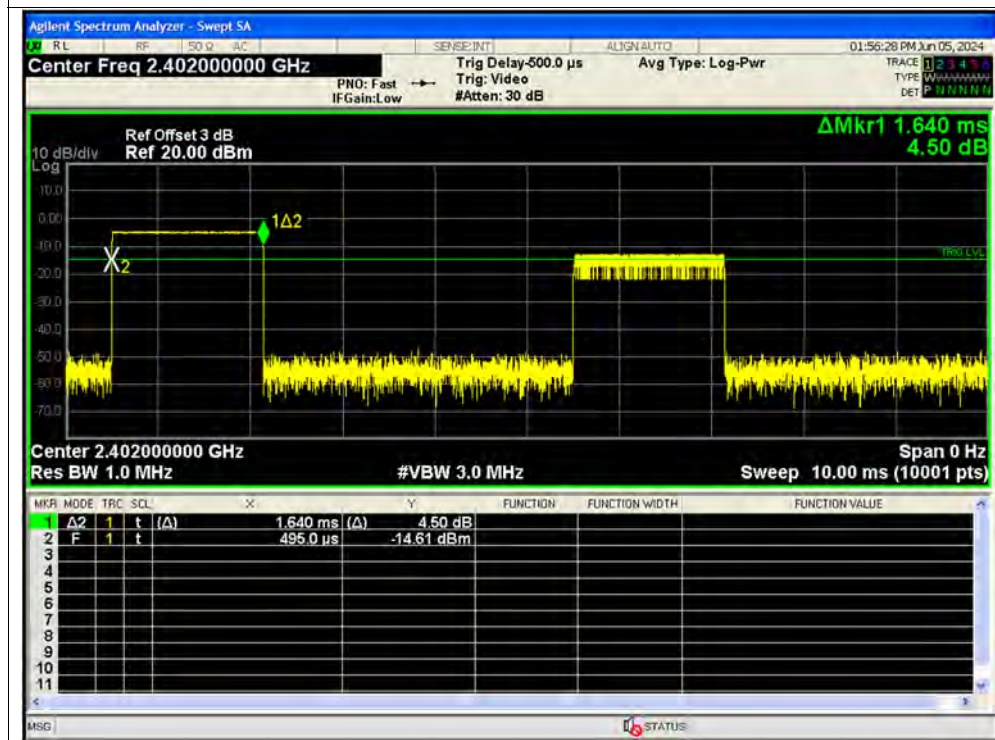


Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated

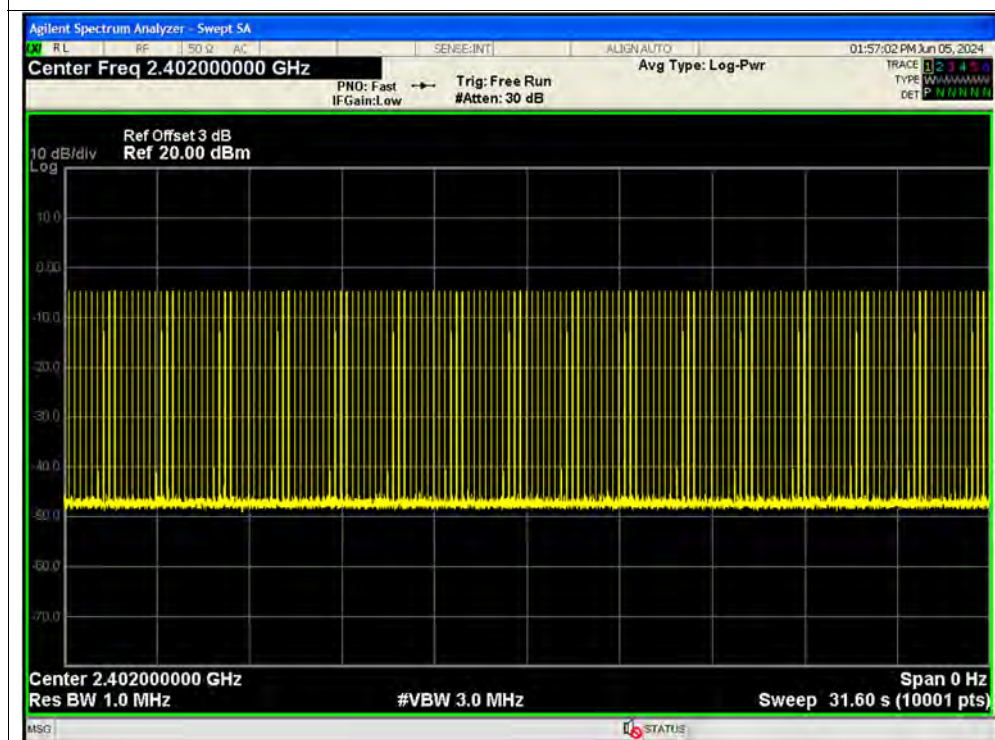




Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

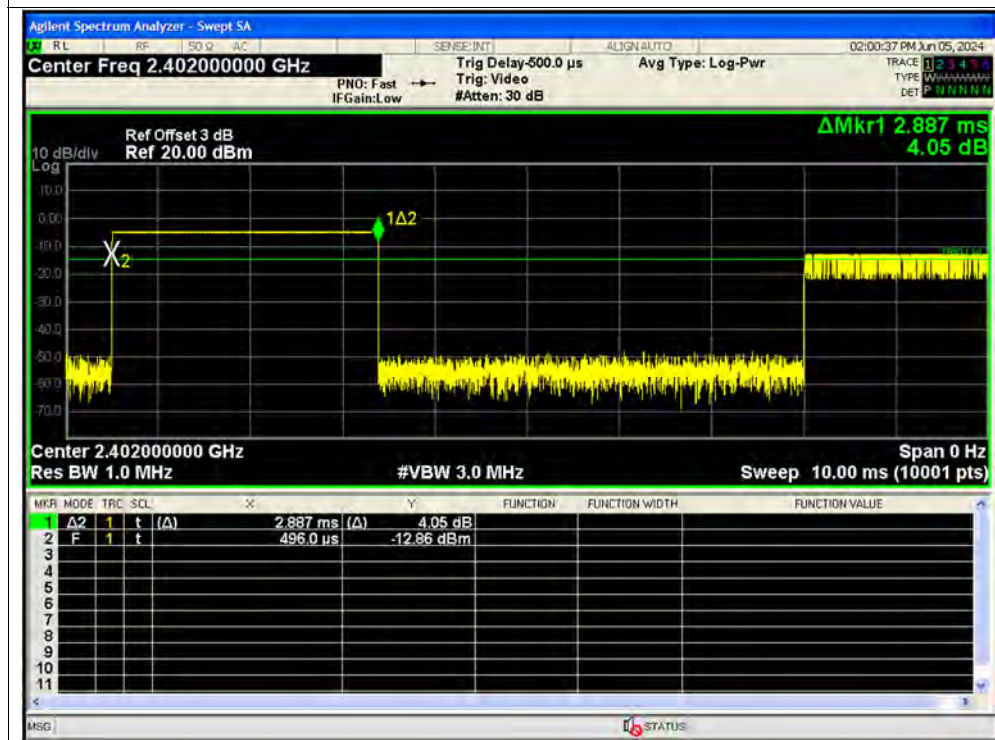


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

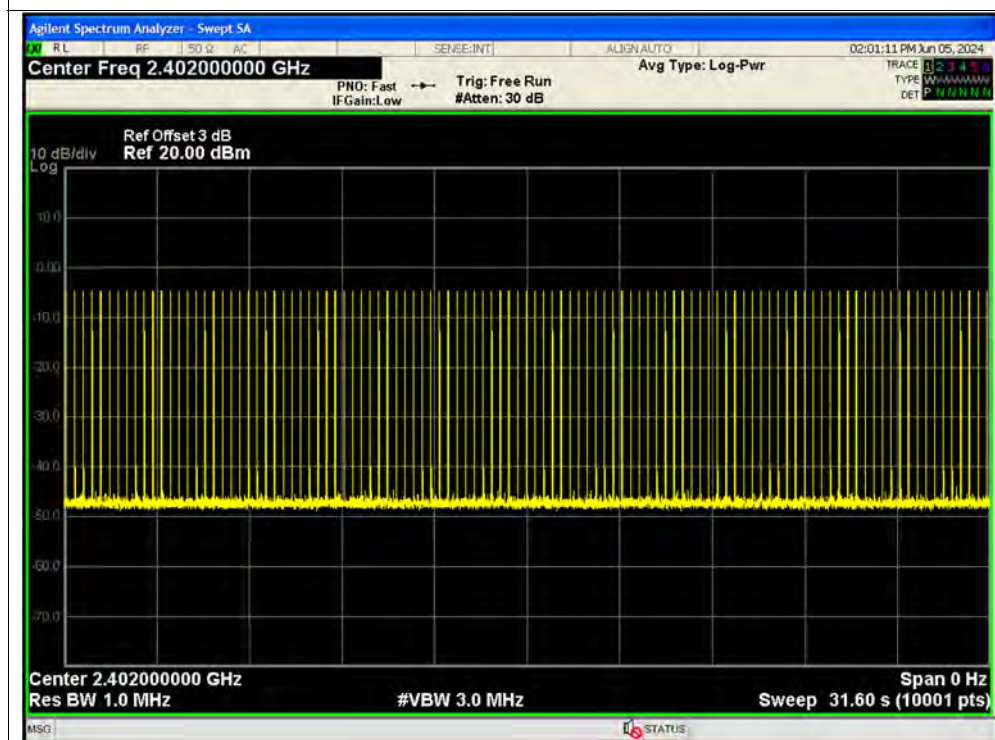




Dwell NVNT 2-DH1 2402MHz Ant1 One Burst

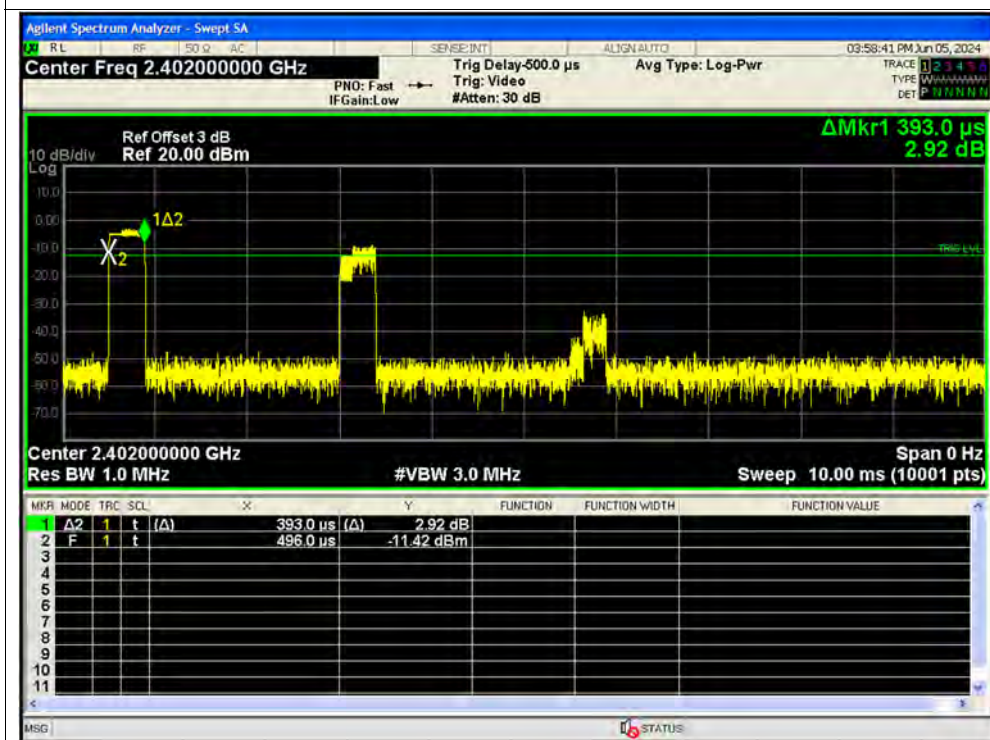


Dwell NVNT 2-DH1 2402MHz Ant1 Accumulated

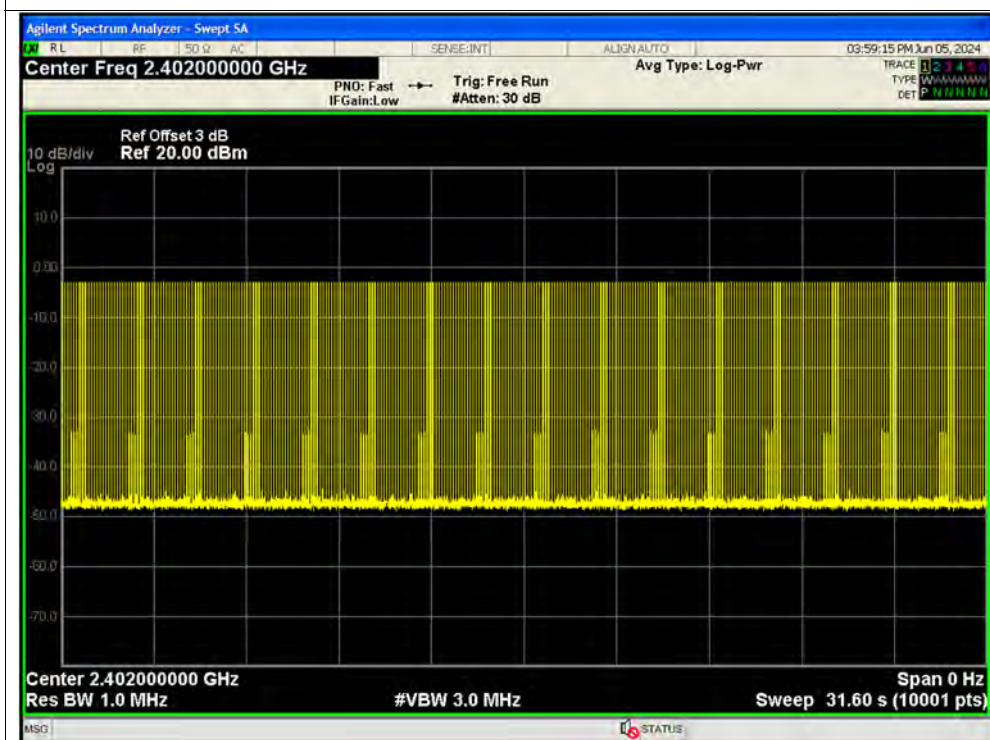




Dwell NVNT 2-DH3 2402MHz Ant1 One Burst

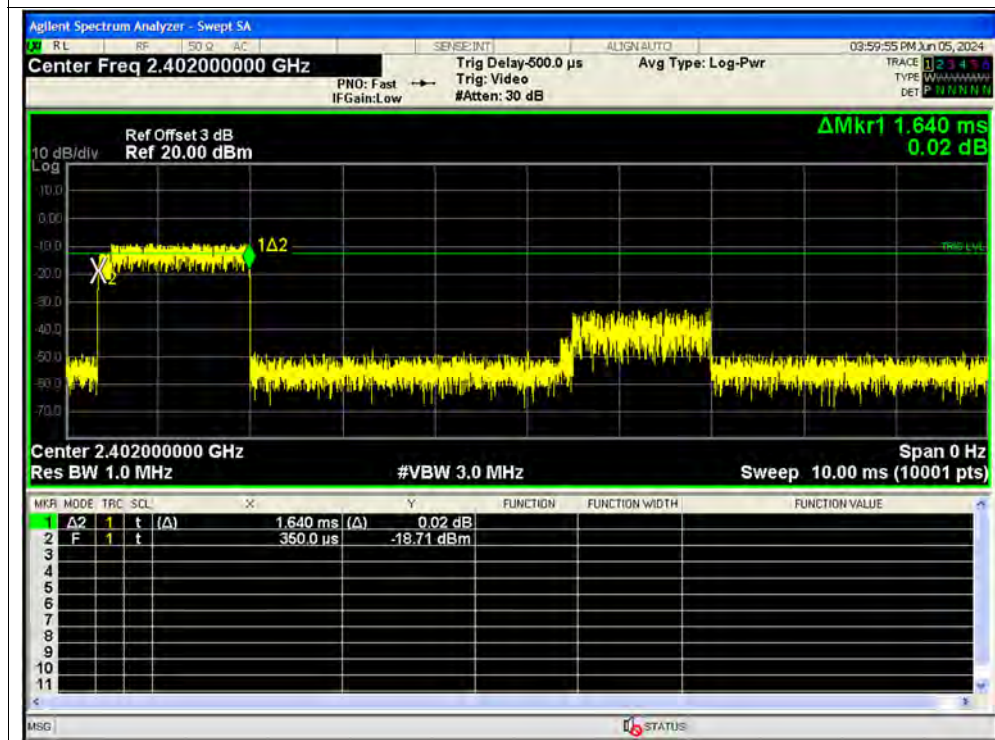


Dwell NVNT 2-DH3 2402MHz Ant1 Accumulated

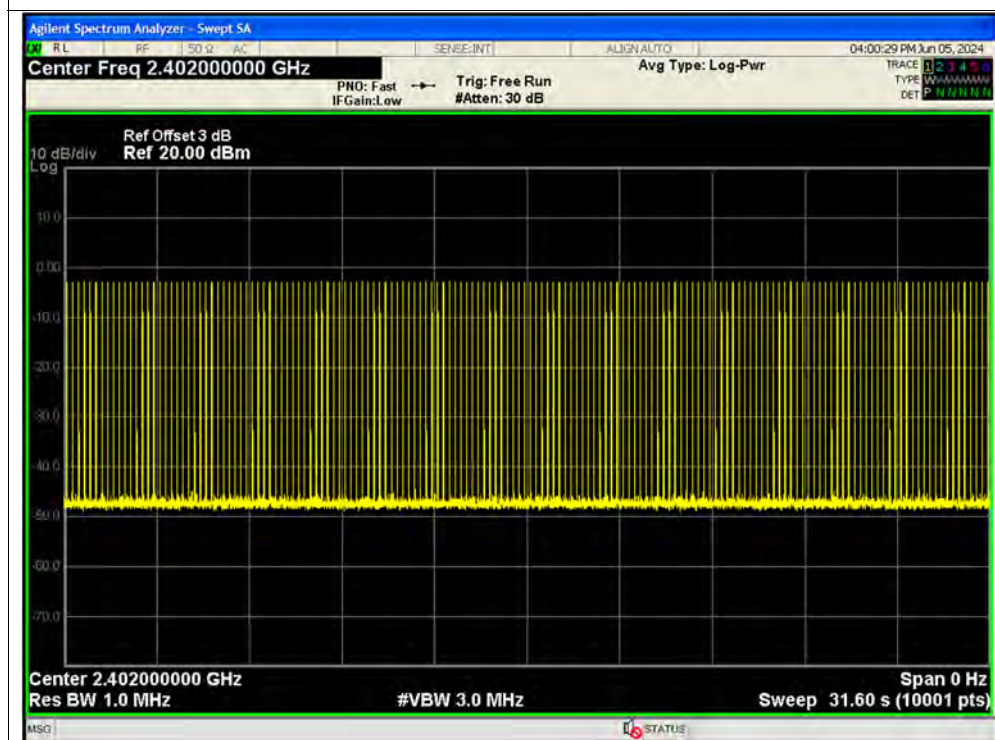




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

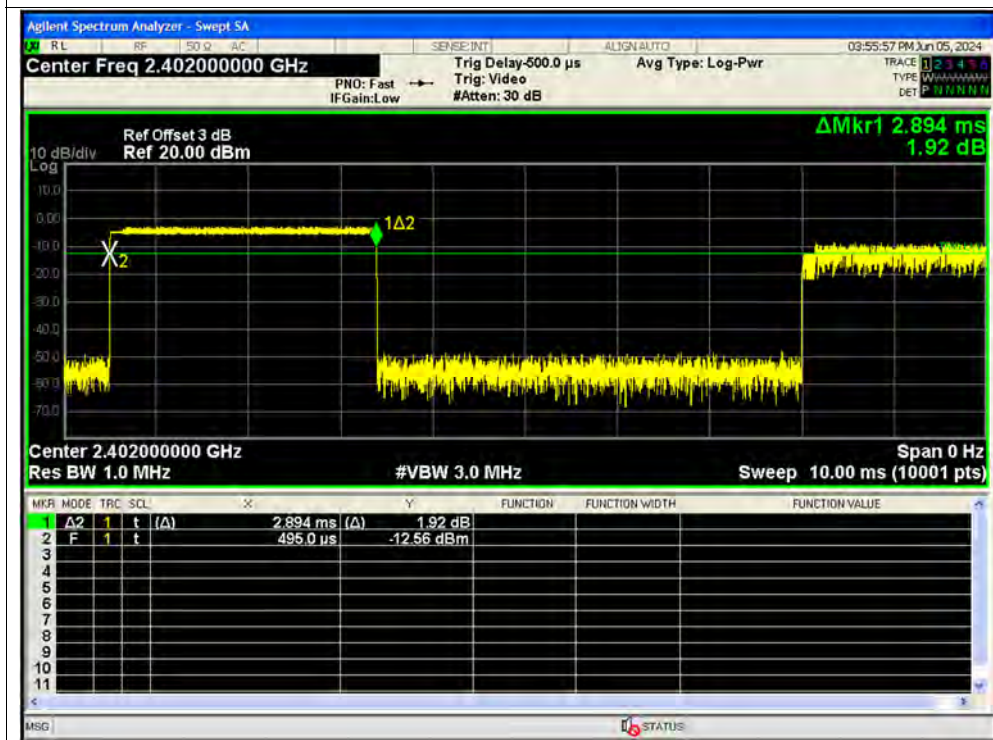


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

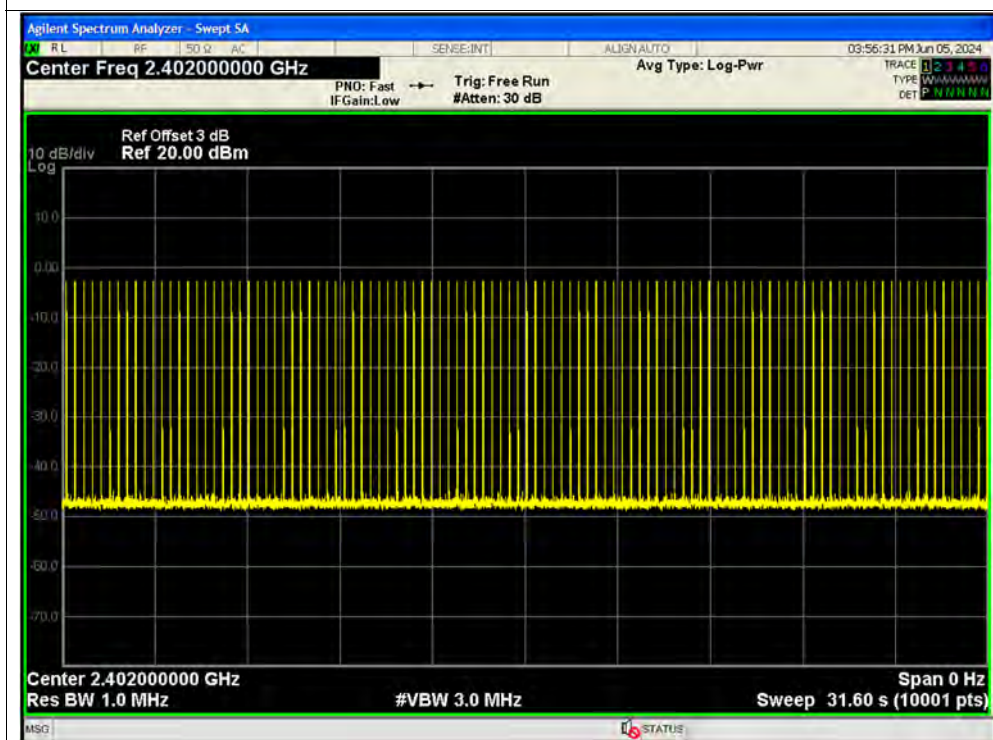




Dwell NVNT 3-DH1 2402MHz Ant1 One Burst

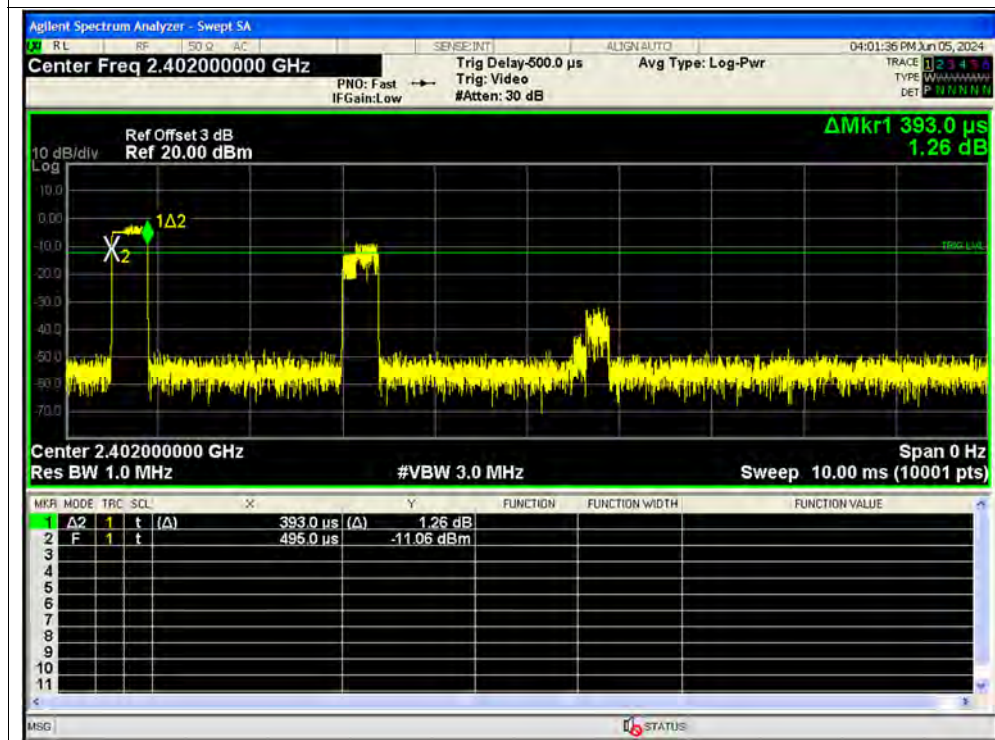


Dwell NVNT 3-DH1 2402MHz Ant1 Accumulated

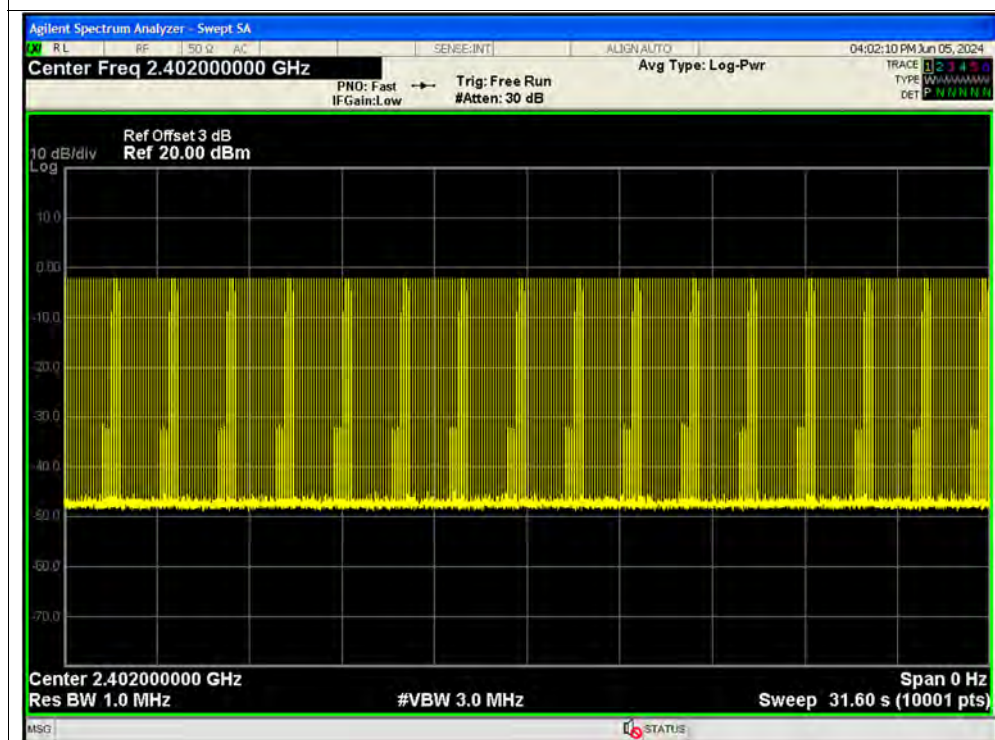




Dwell NVNT 3-DH3 2402MHz Ant1 One Burst

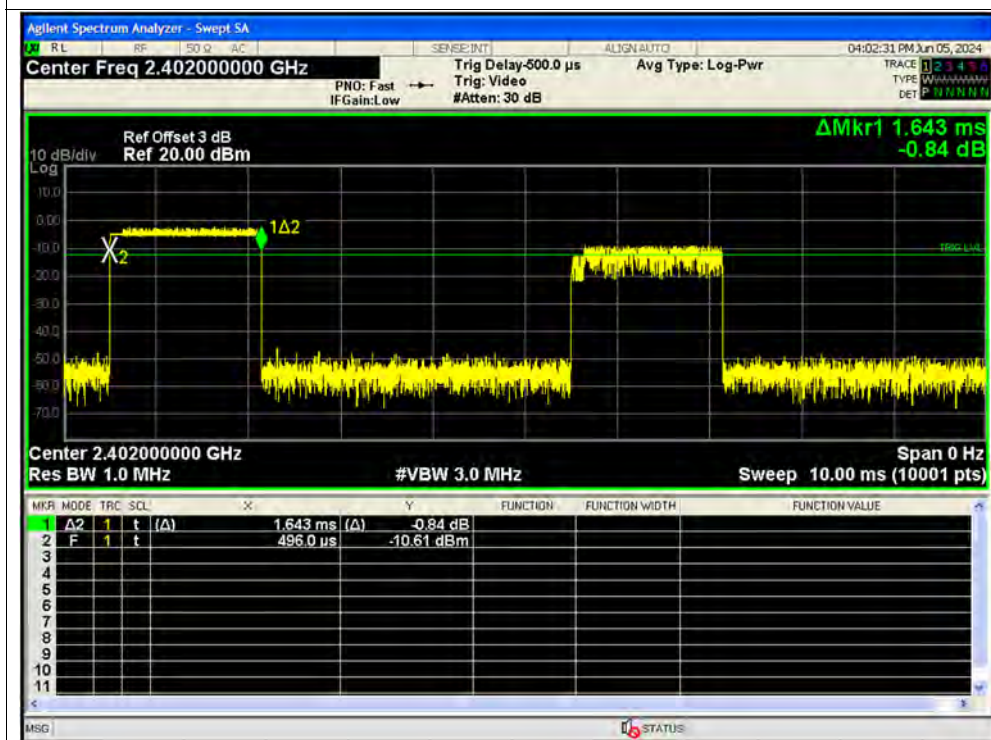


Dwell NVNT 3-DH3 2402MHz Ant1 Accumulated

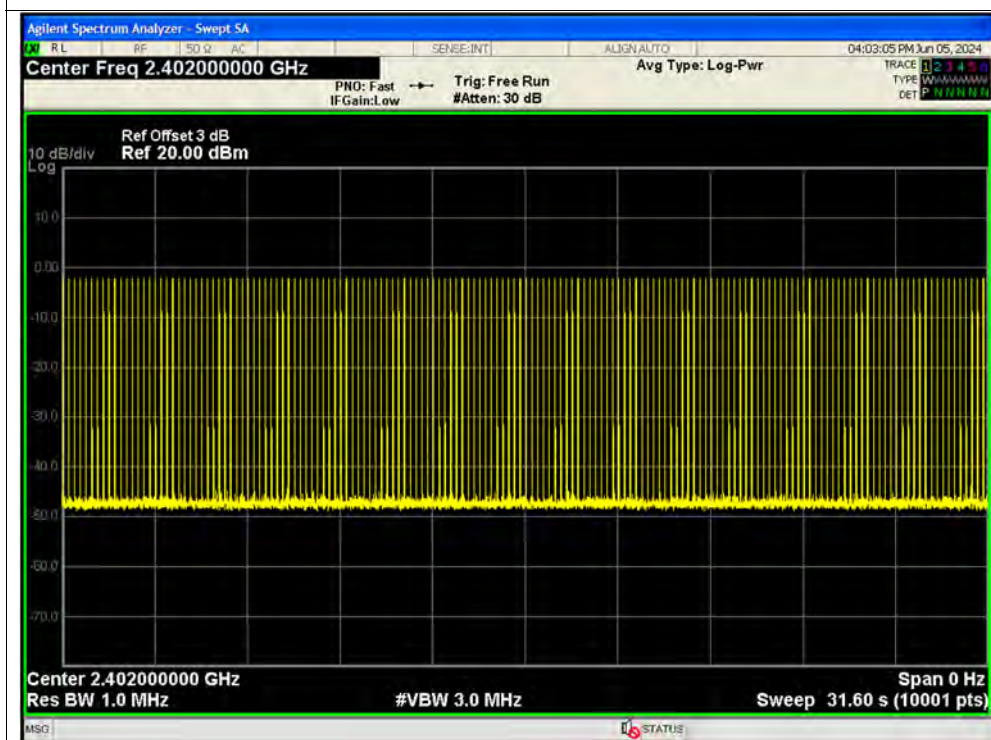




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

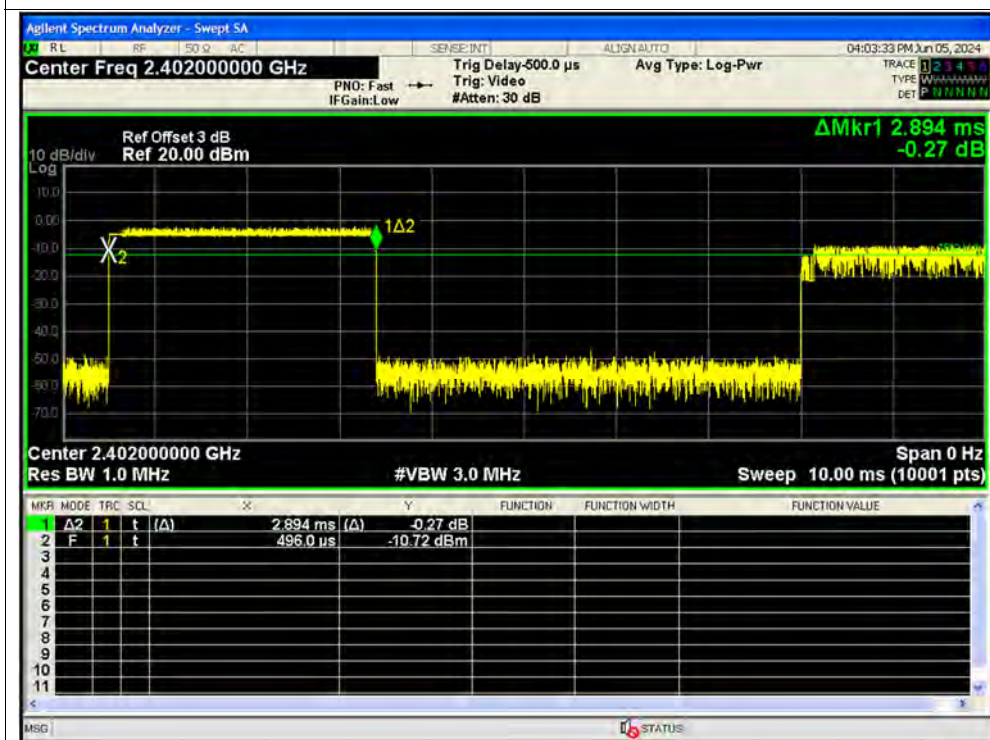

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

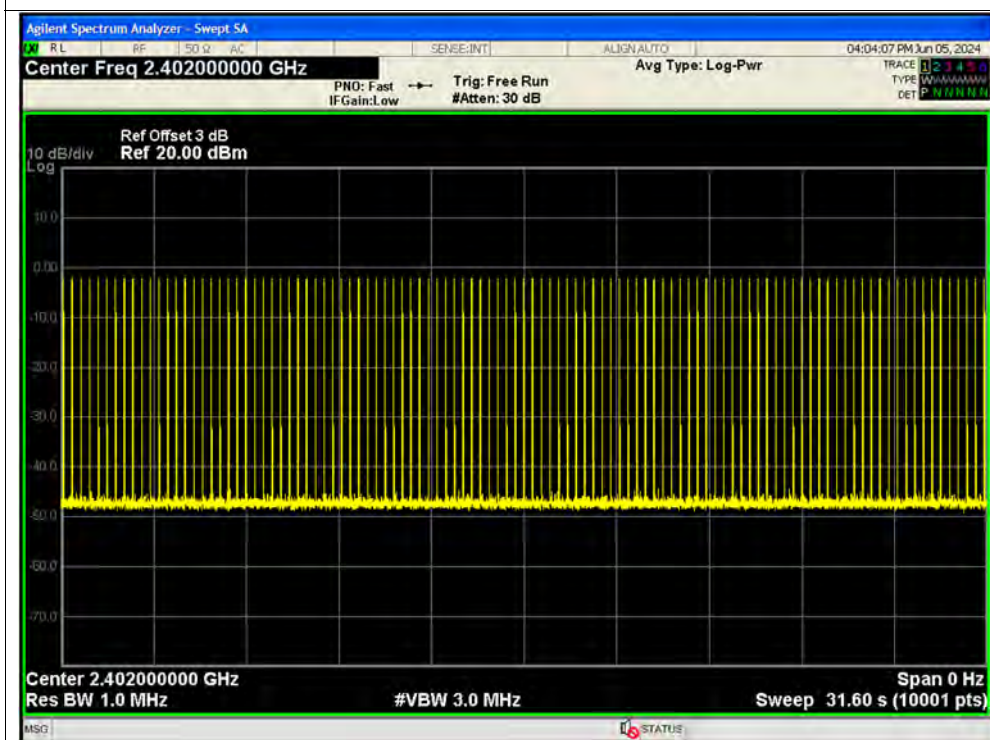

**A.8. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-43.7	-20	Pass
NVNT	1-DH5	2441	Ant1	-43.96	-20	Pass
NVNT	1-DH5	2480	Ant1	-43.77	-20	Pass
NVNT	2-DH5	2402	Ant1	-43.66	-20	Pass
NVNT	2-DH5	2441	Ant1	-43.64	-20	Pass
NVNT	2-DH5	2480	Ant1	-44.16	-20	Pass
NVNT	3-DH5	2402	Ant1	-43.85	-20	Pass
NVNT	3-DH5	2441	Ant1	-43.7	-20	Pass
NVNT	3-DH5	2480	Ant1	-44.31	-20	Pass

Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

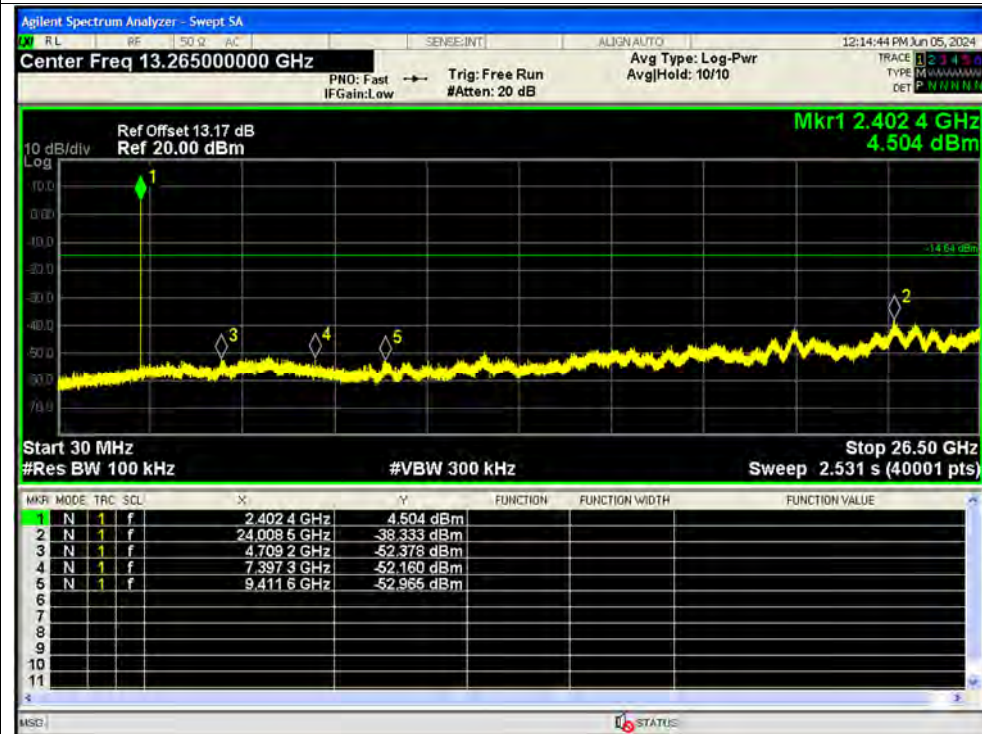

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

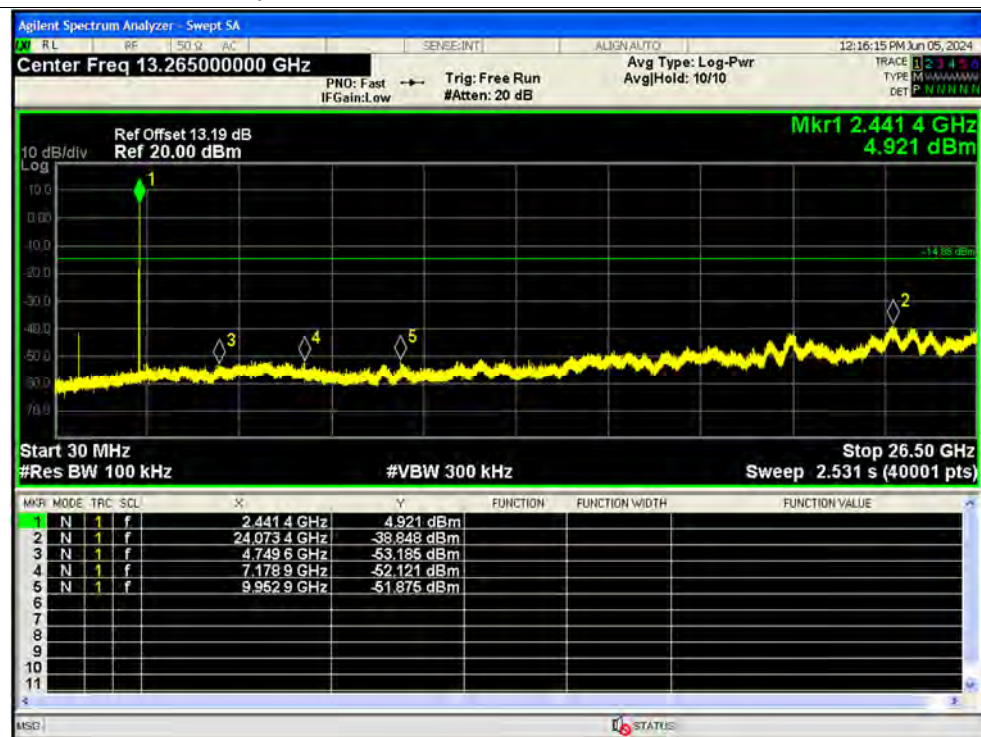

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

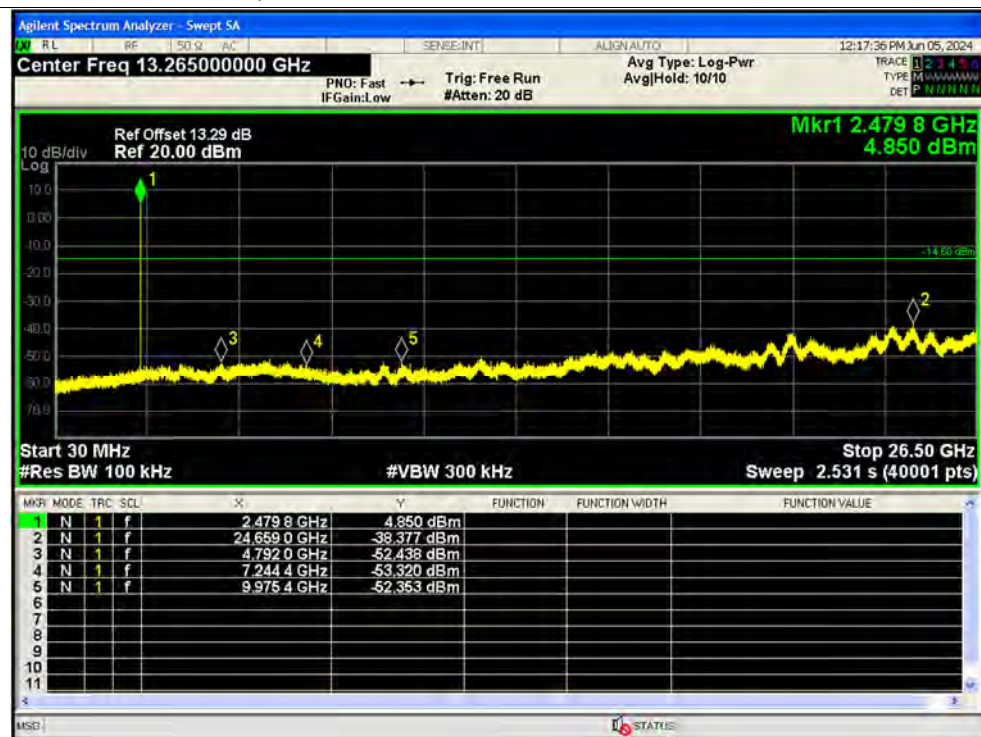

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

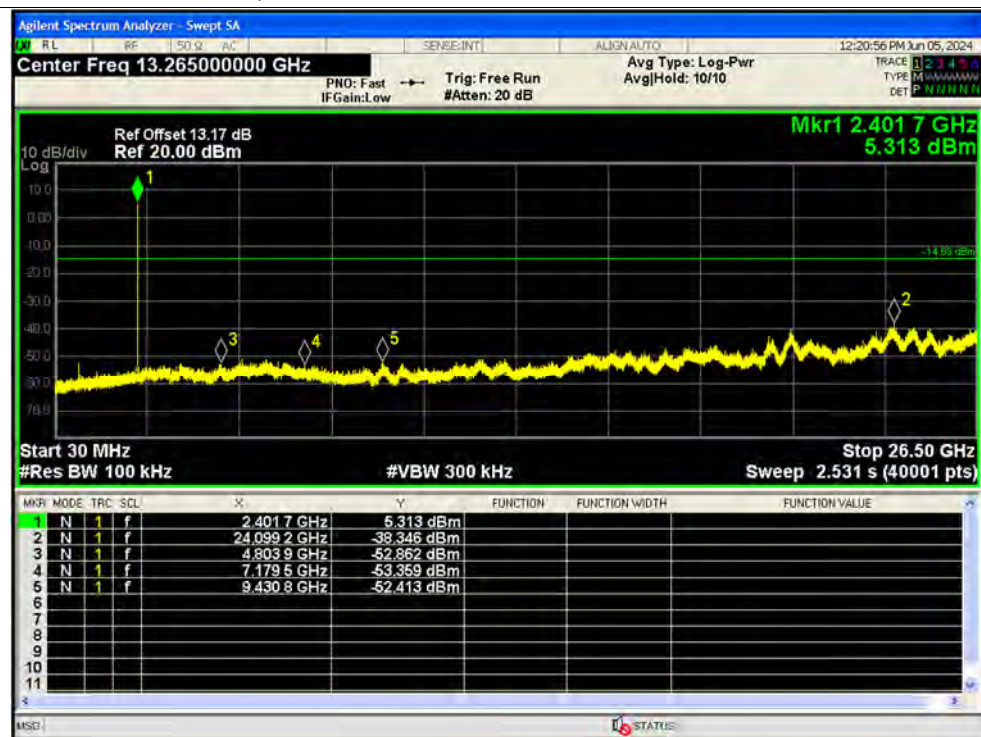

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

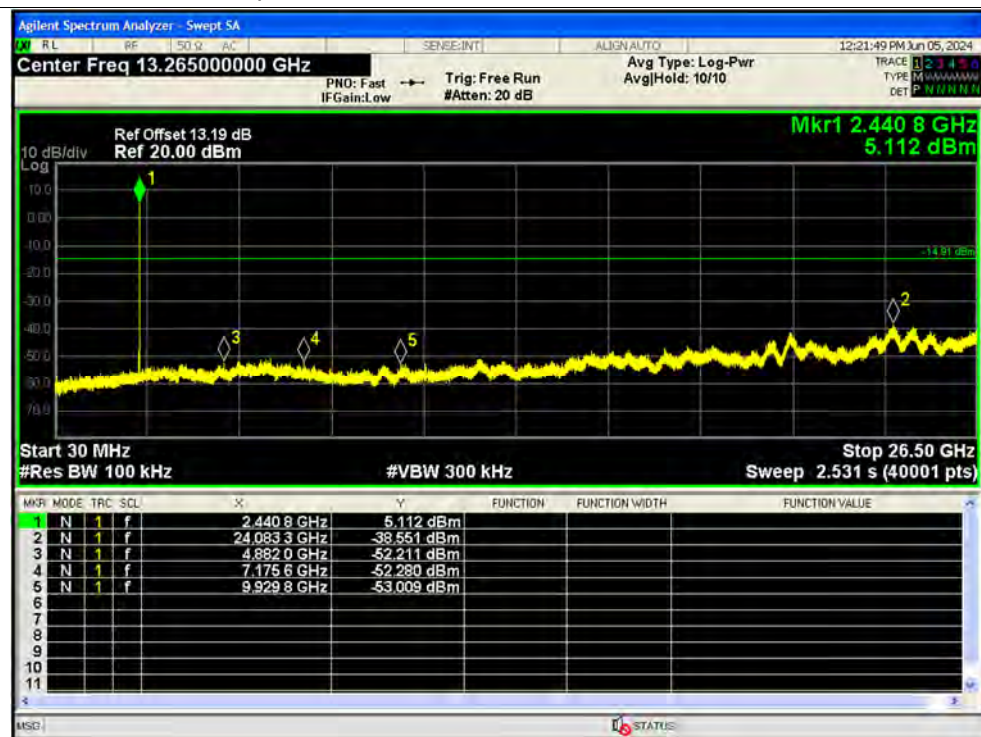

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

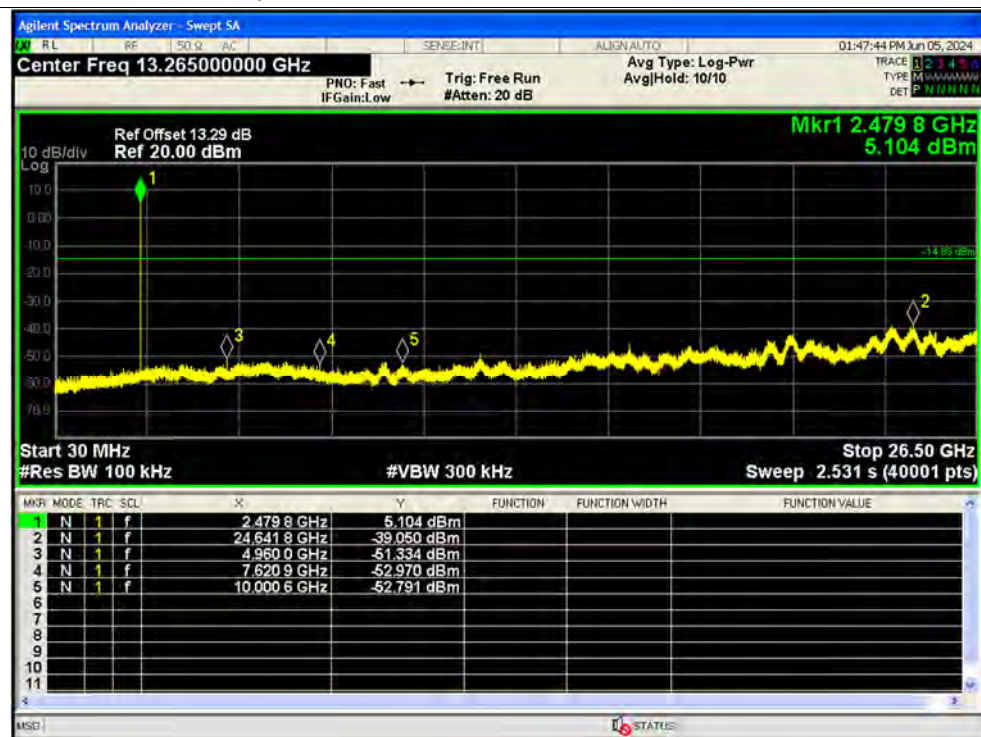

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

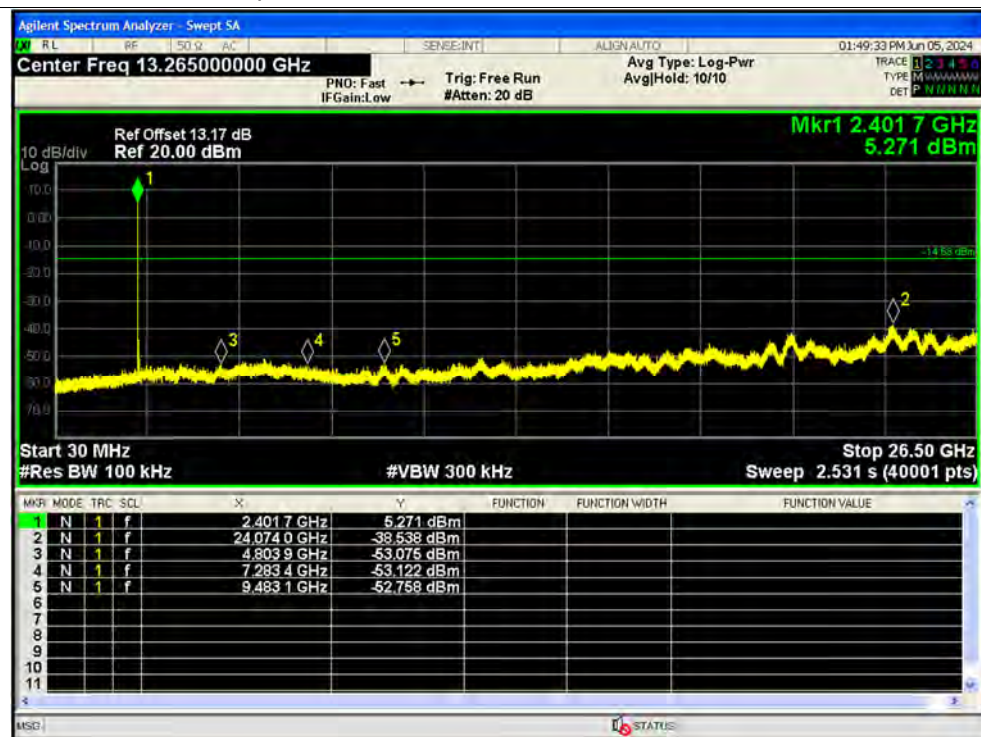

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

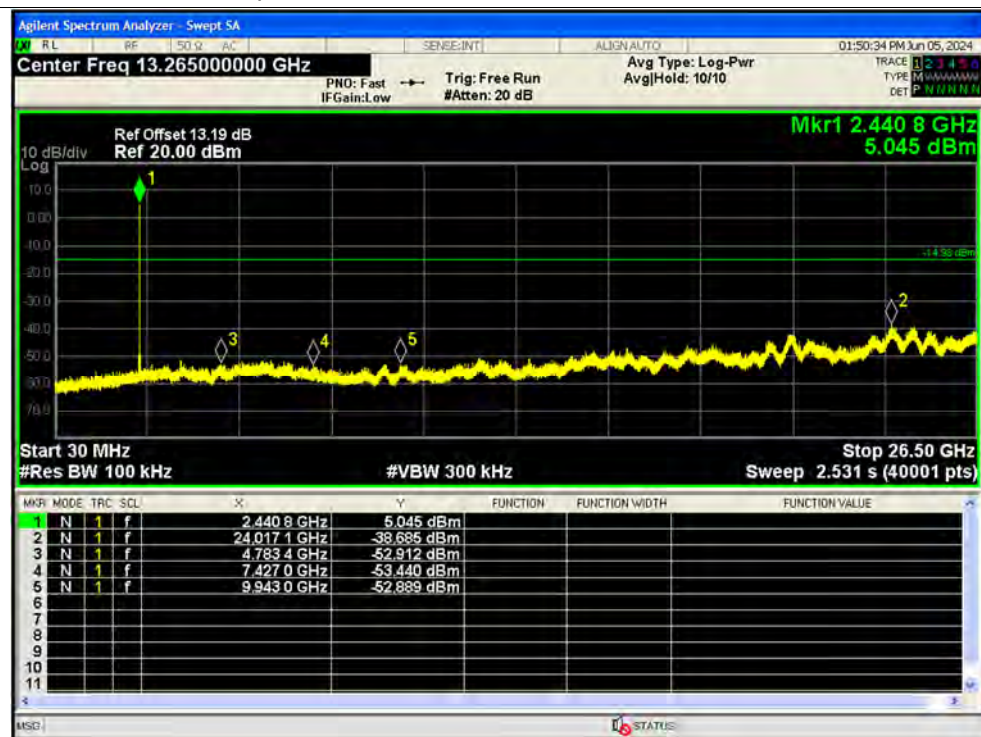

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

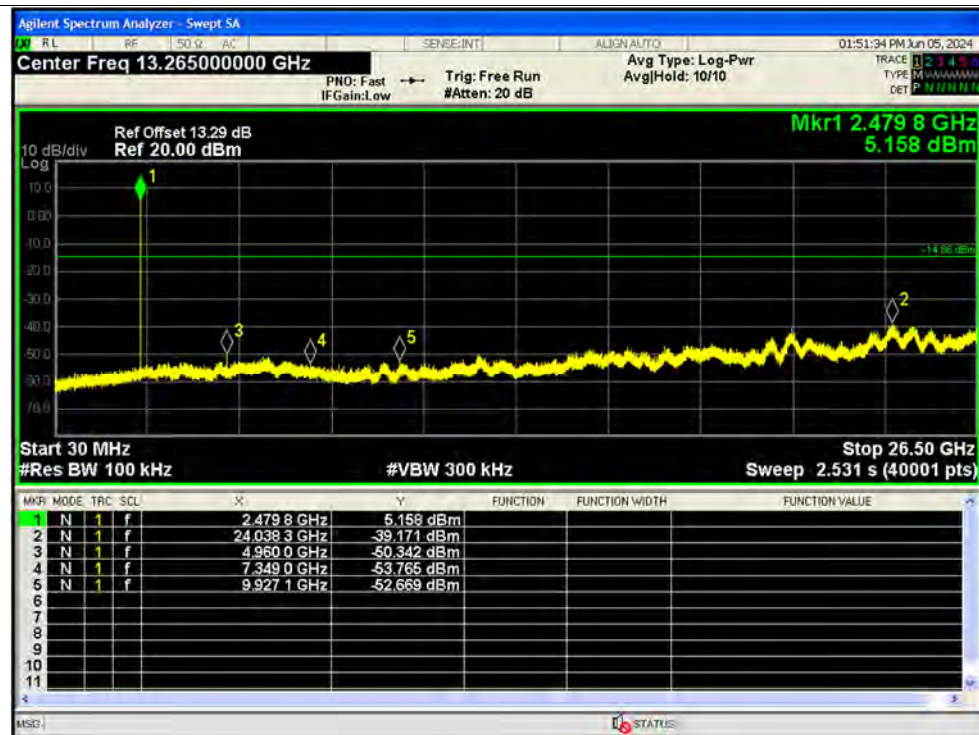


**A.9. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-51.75	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-51.04	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-50.95	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-51.32	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-50.68	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-50.84	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-49.94	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-49.24	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.04	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-49.71	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-50.8	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-40.82	-20	Pass

Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

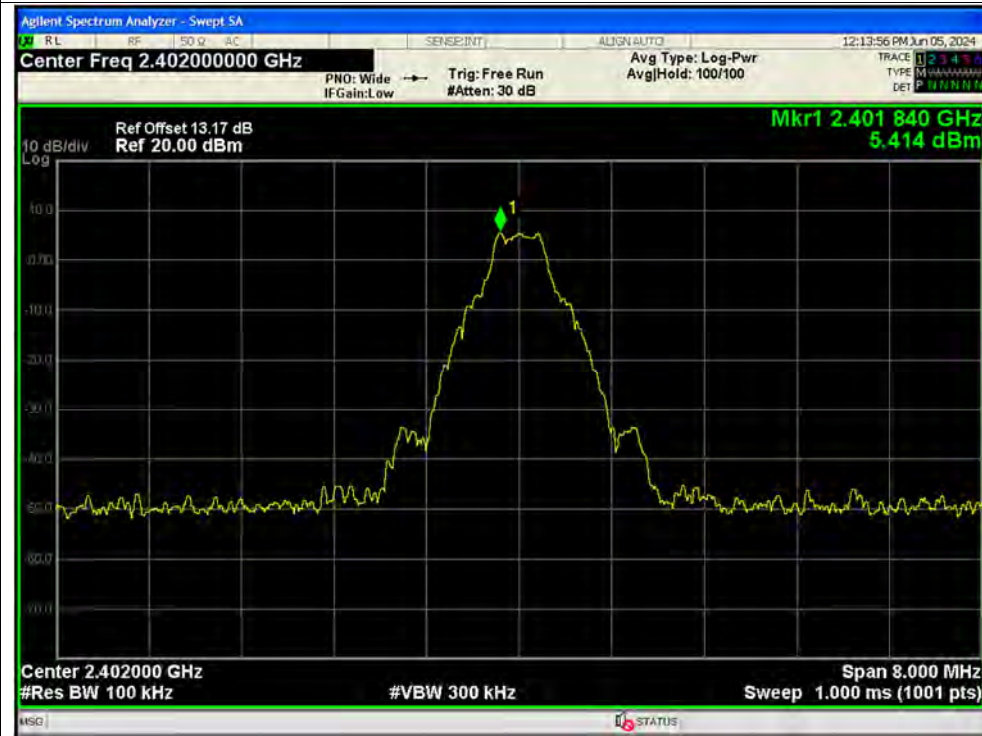


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

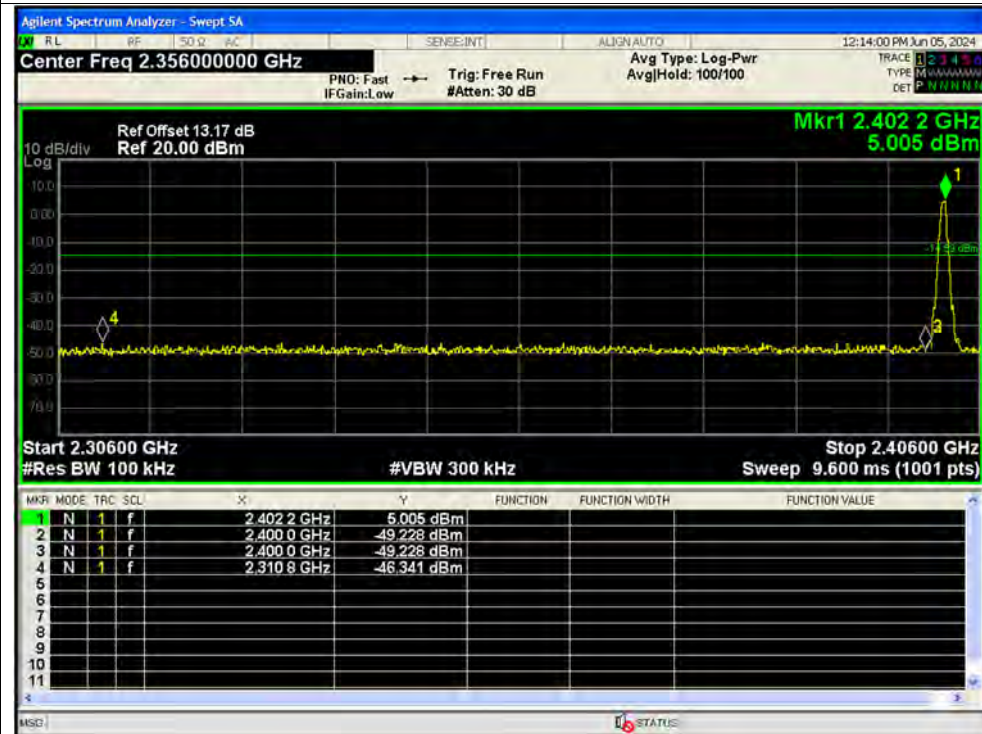

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

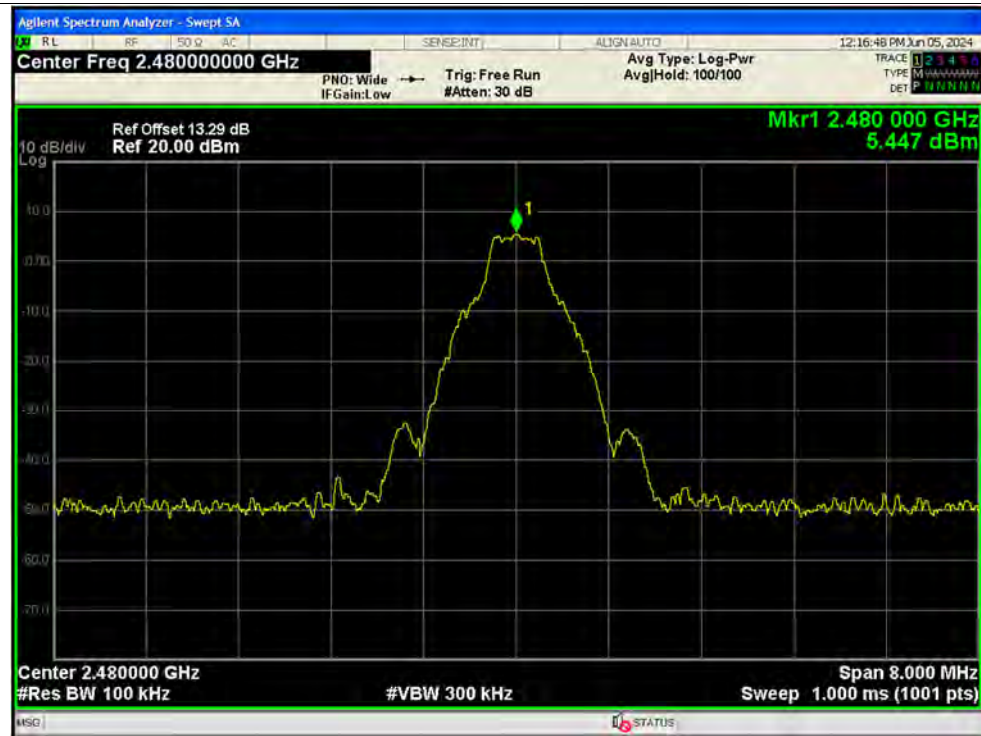


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

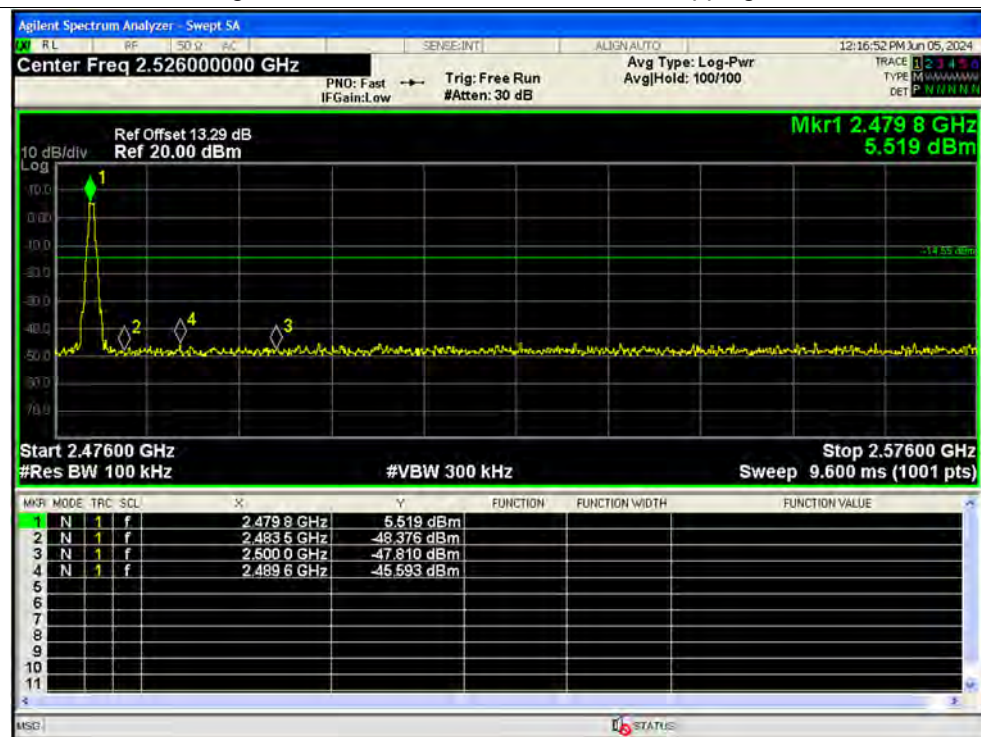

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

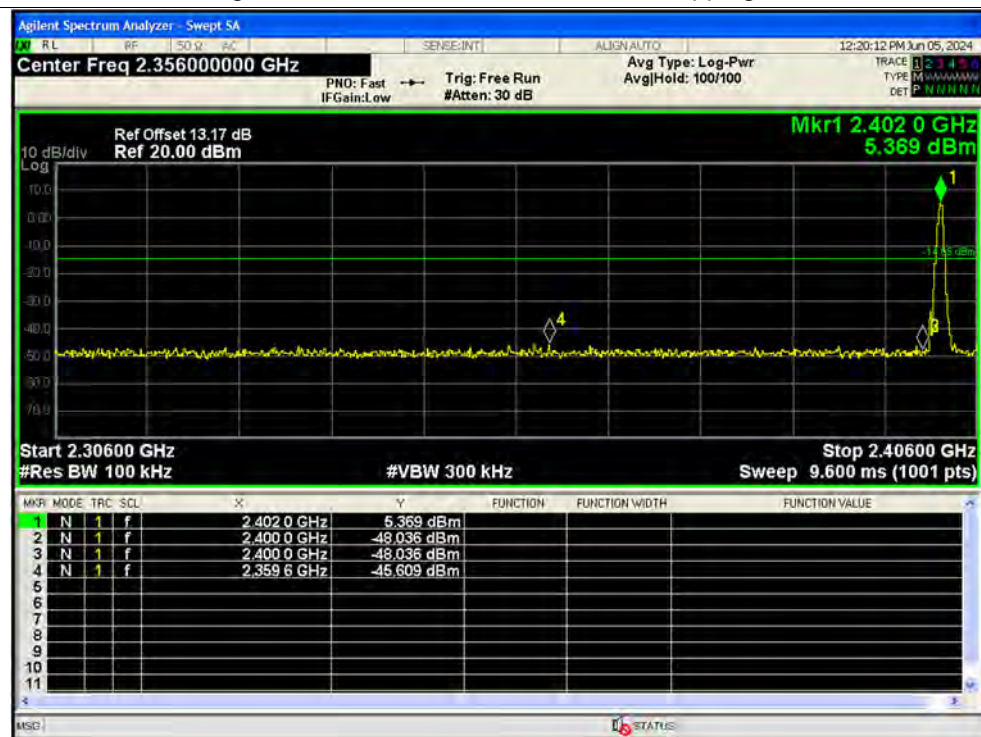

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

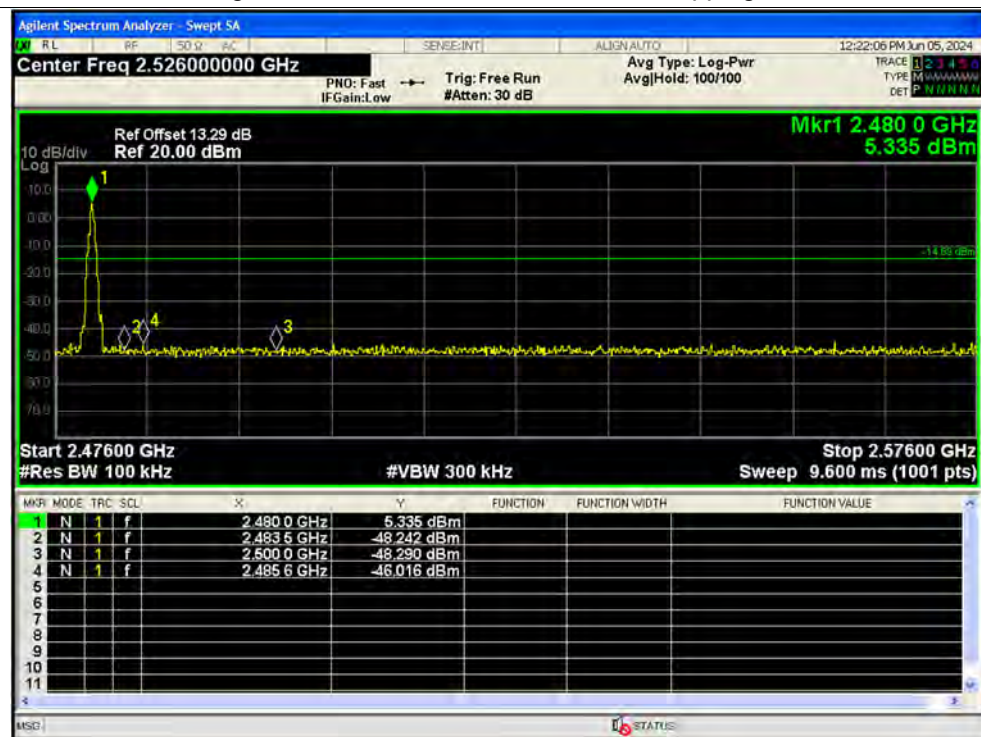

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

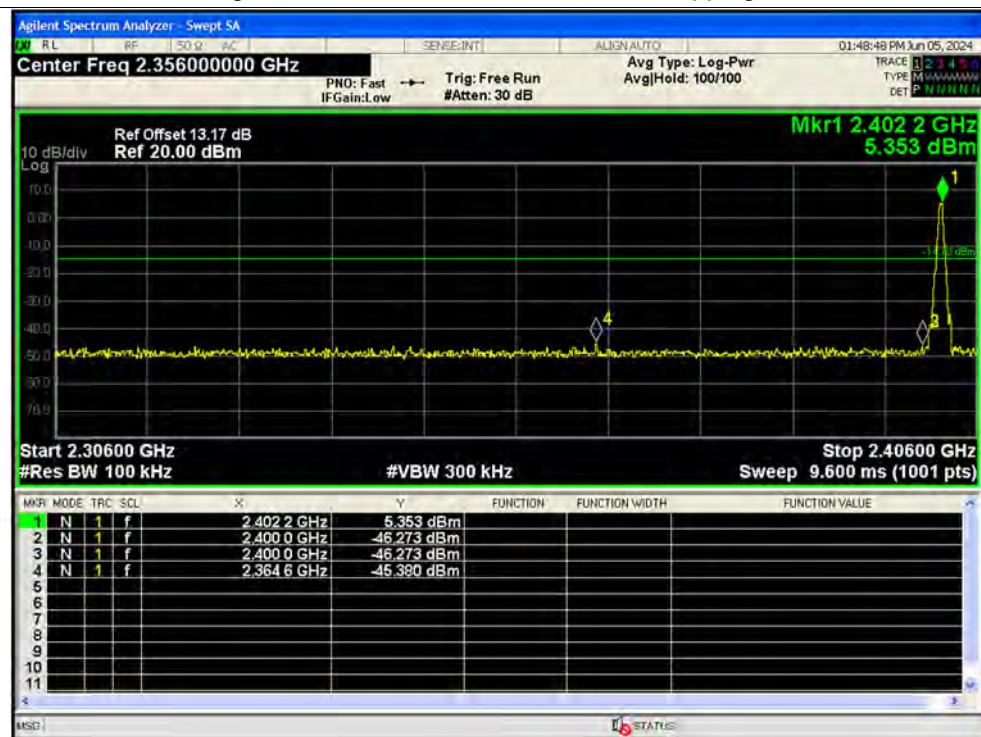

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

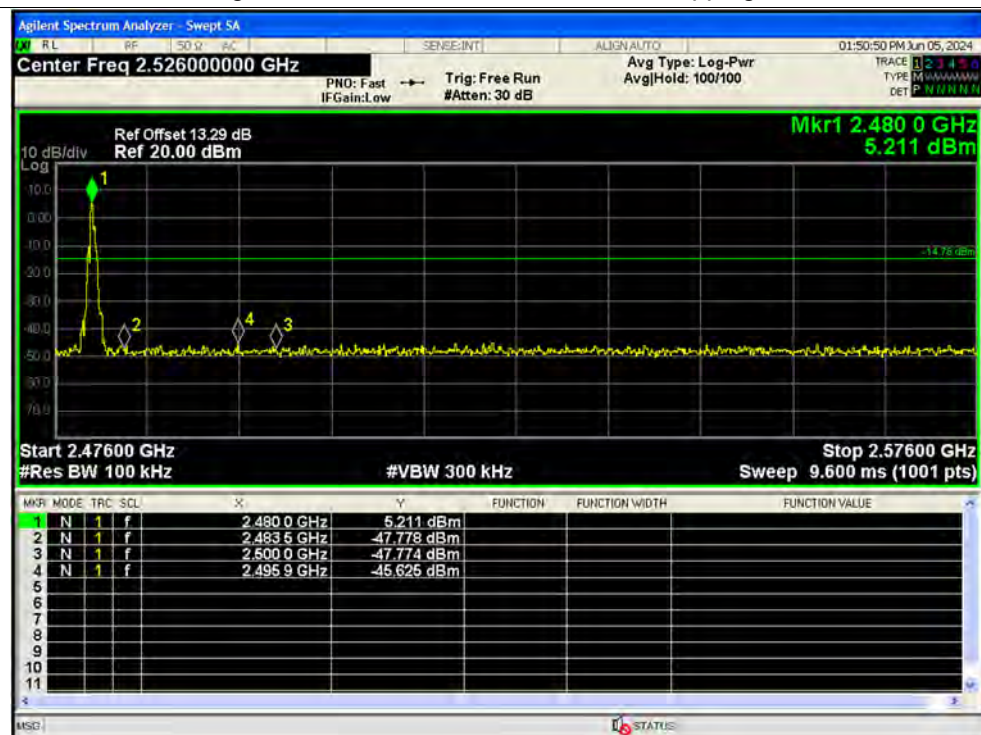


Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

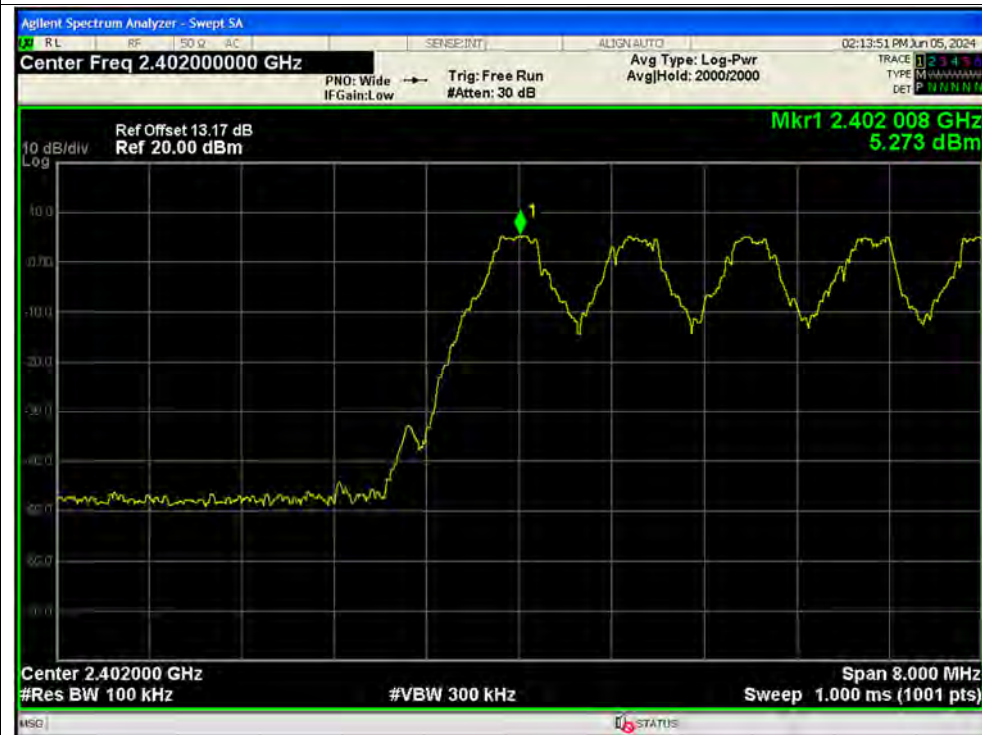


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

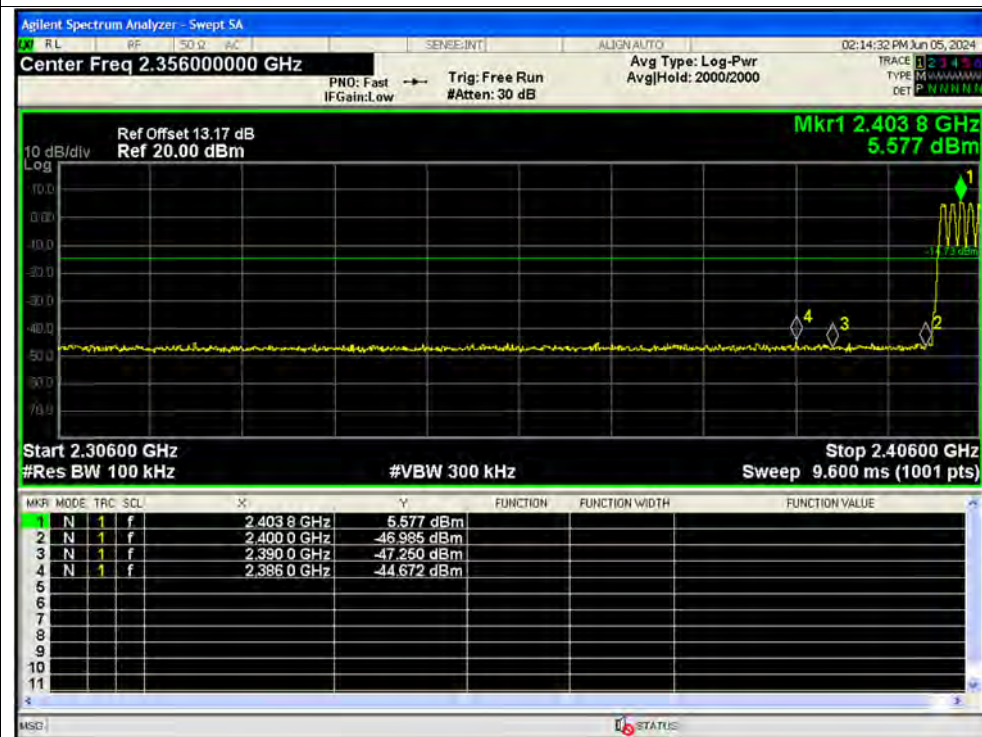

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

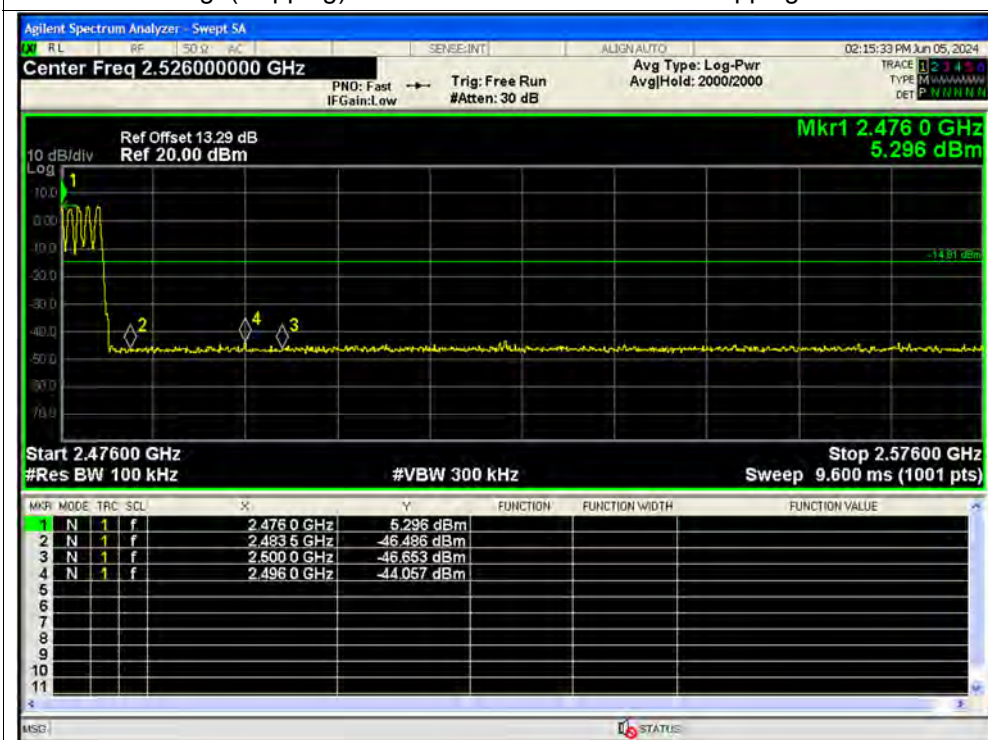




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

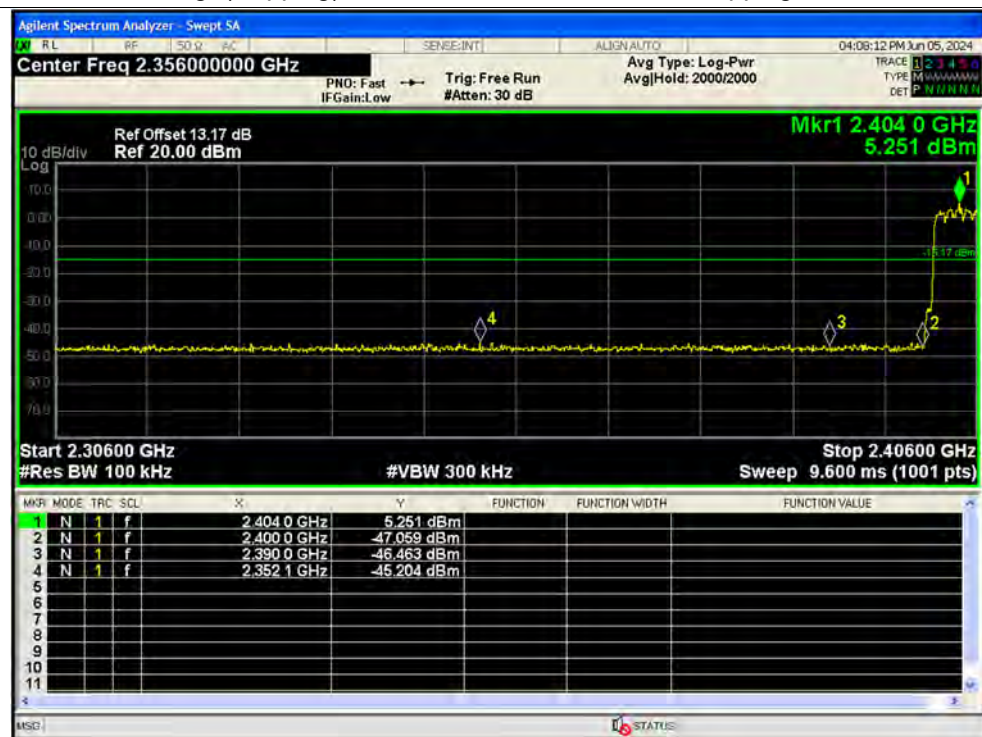

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

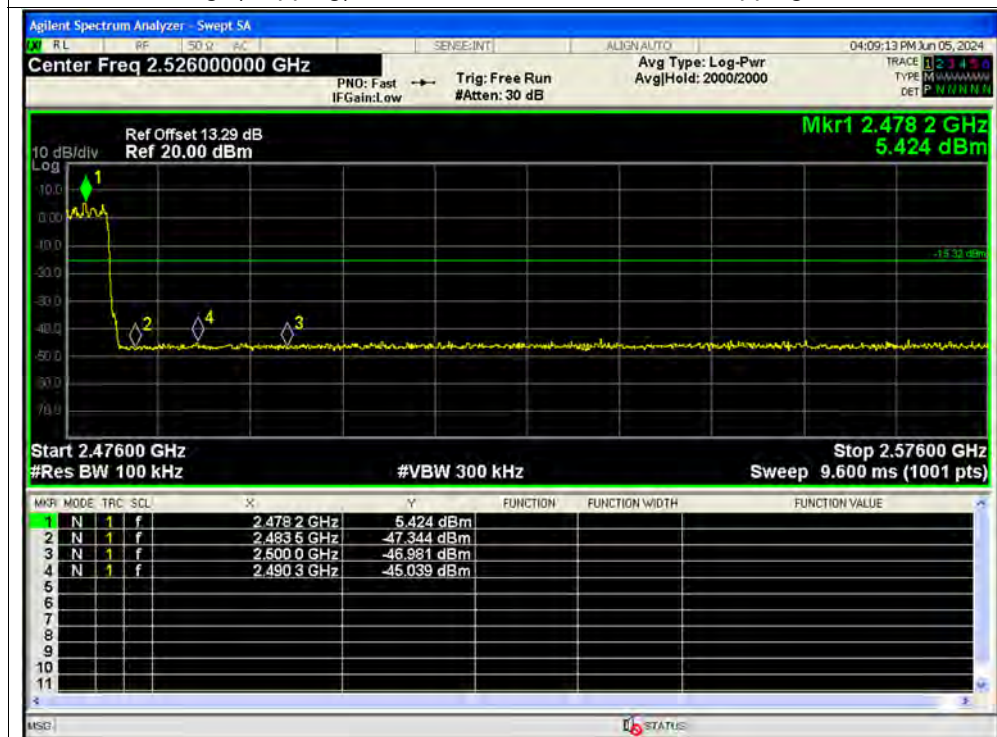

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

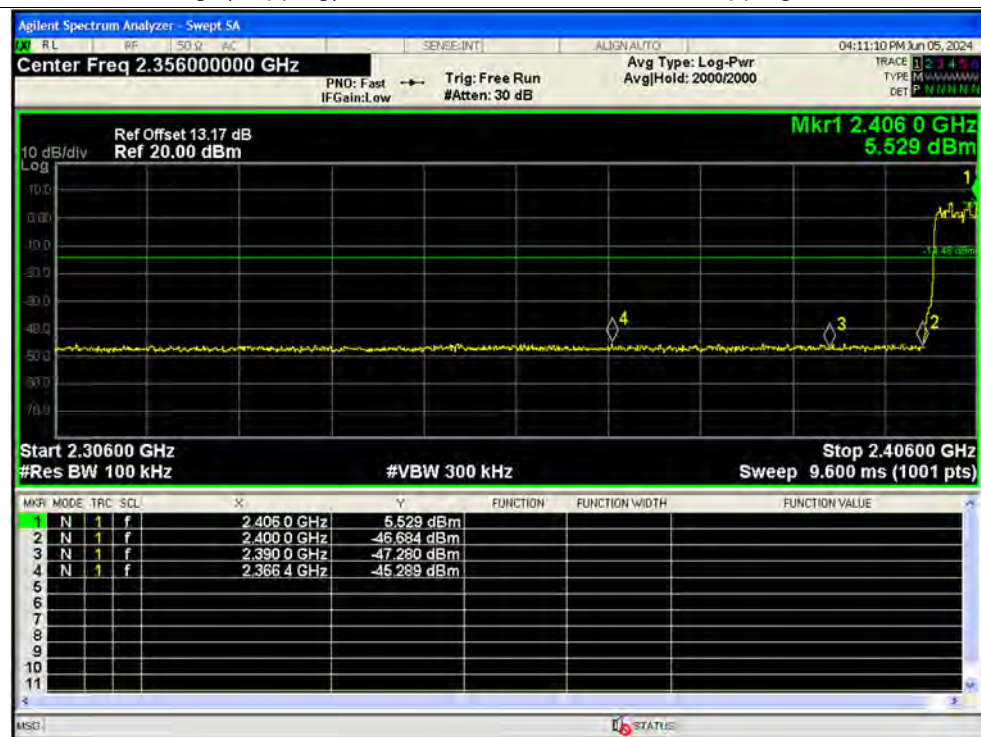




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

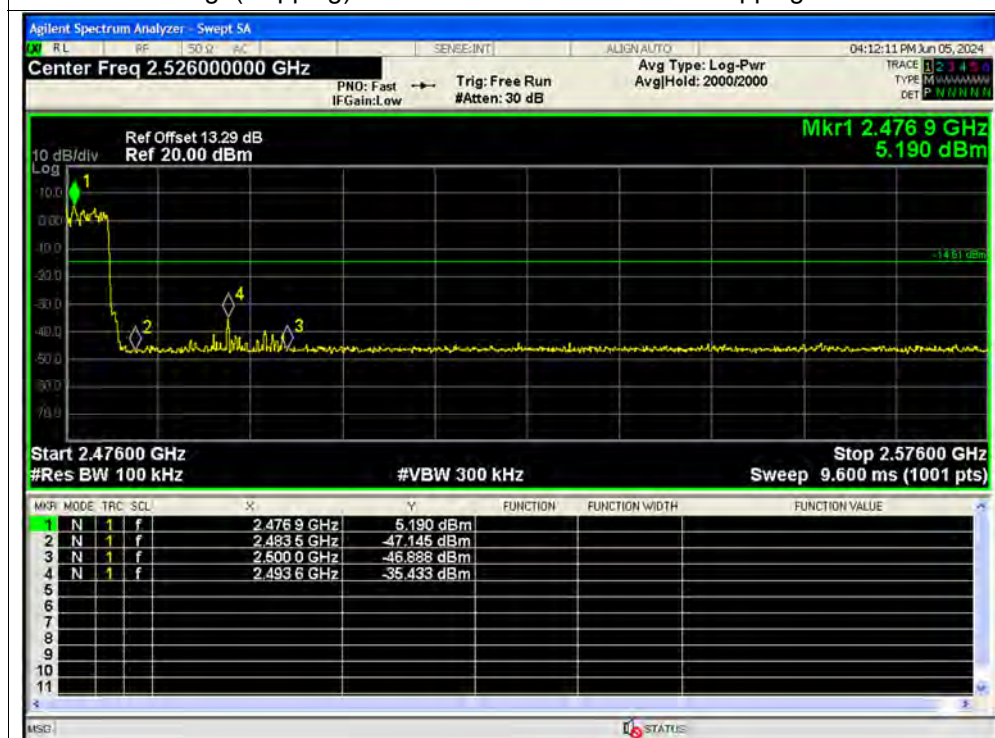



A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + PC + PC Adapter + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

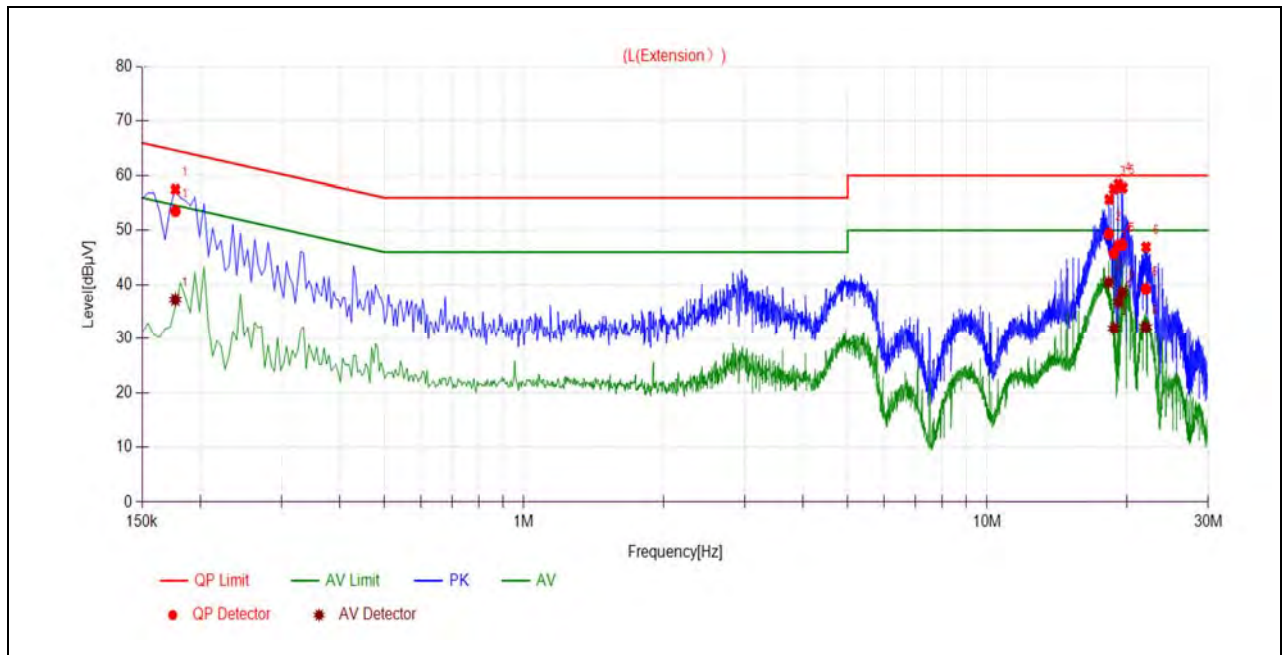

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1769	53.57	37.25	64.63	54.63	Line	PASS
2	18.3079	49.35	40.44	60.00	50.00		PASS
3	18.7800	45.81	31.95	60.00	50.00		PASS
4	19.2119	47.31	36.84	60.00	50.00		PASS
5	19.5607	47.33	38.56	60.00	50.00		PASS
6	21.9933	39.22	32.17	60.00	50.00		PASS

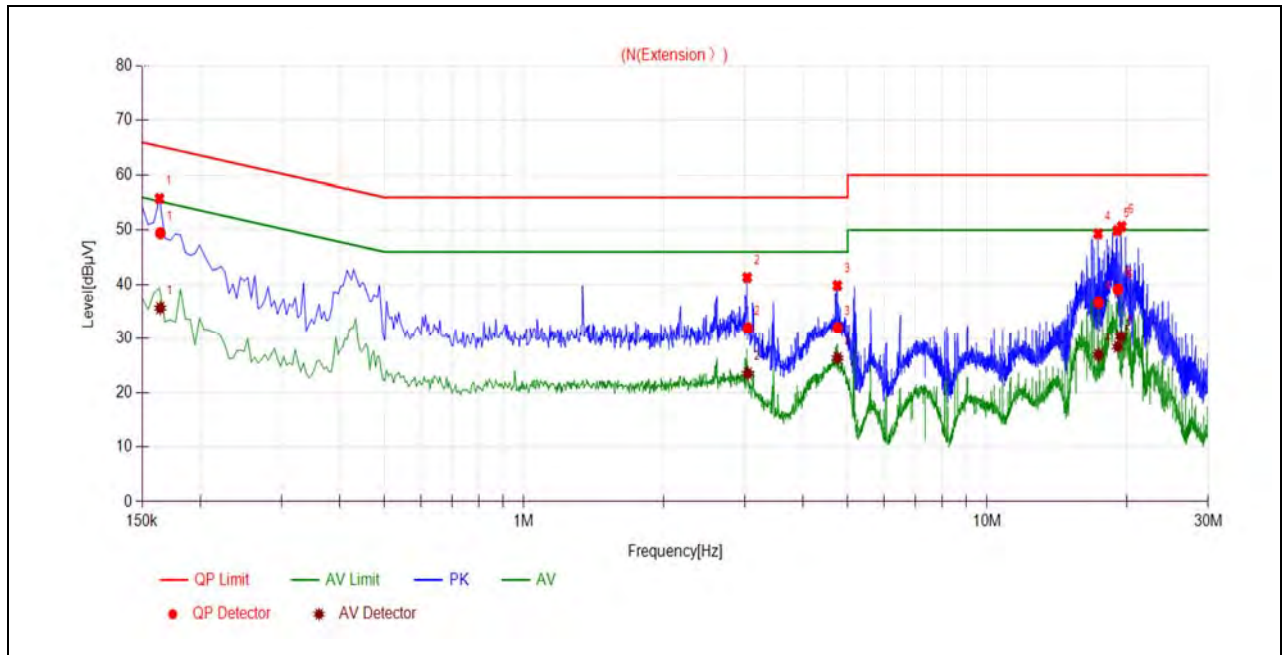

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1642	49.44	35.71	65.25	55.25	Neutral	PASS
2	3.0441	31.96	23.49	56.00	46.00		PASS
3	4.7561	31.99	26.35	56.00	46.00		PASS
4	17.4038	36.72	26.96	60.00	50.00		PASS
5	19.1436	39.12	28.46	60.00	50.00		PASS
6	19.4269	38.80	30.33	60.00	50.00		PASS

**A.11. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2374.26	PK	23.67	6.74	27.20	57.61	74	PASS
0	2374.57	AV	11.37	6.74	27.20	45.31	54	PASS
78	2496.81	PK	23.85	6.74	27.20	57.79	74	PASS
78	2483.52	AV	11.16	6.74	27.20	45.10	54	PASS

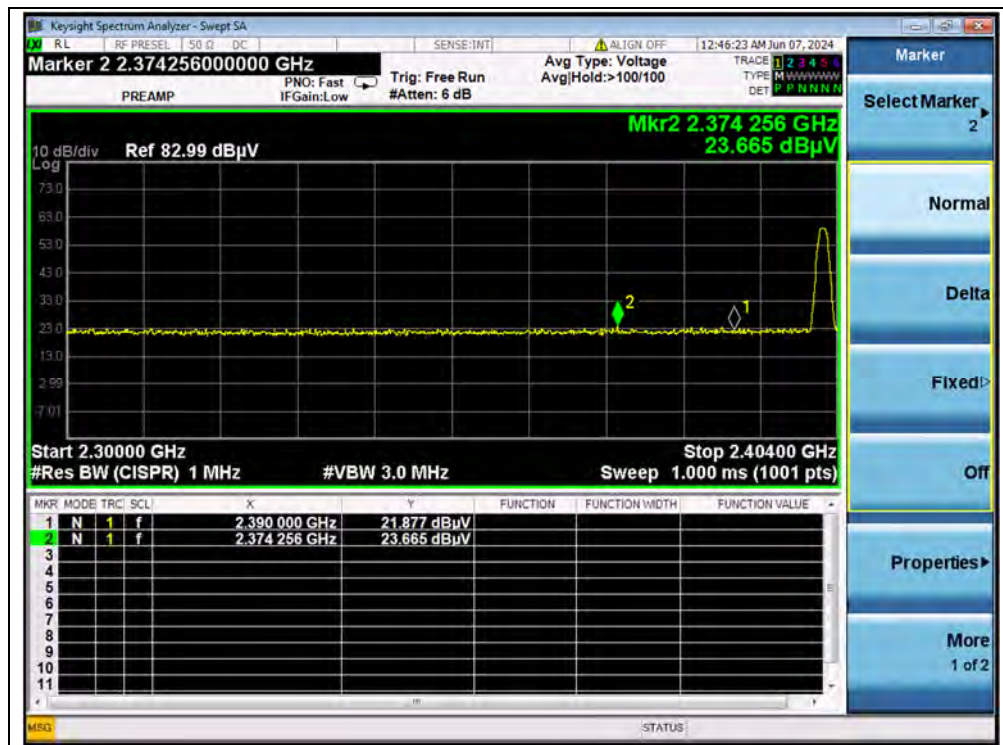


(PEAK, Channel 0, GFSK)

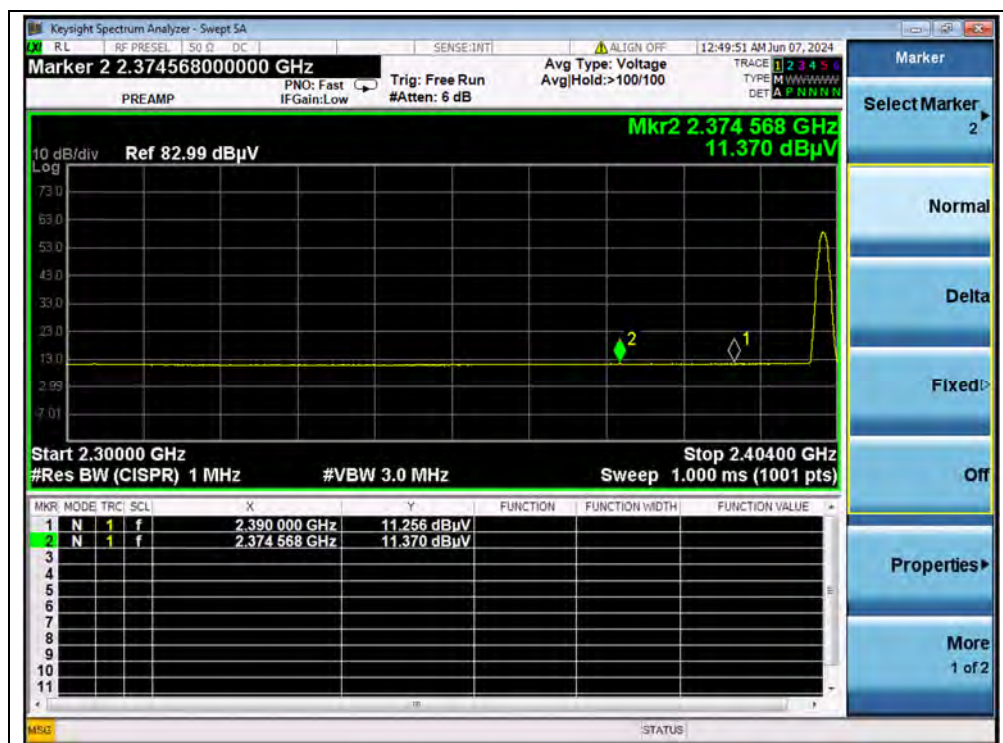

(AVERAGE, Channel 0, GFSK)

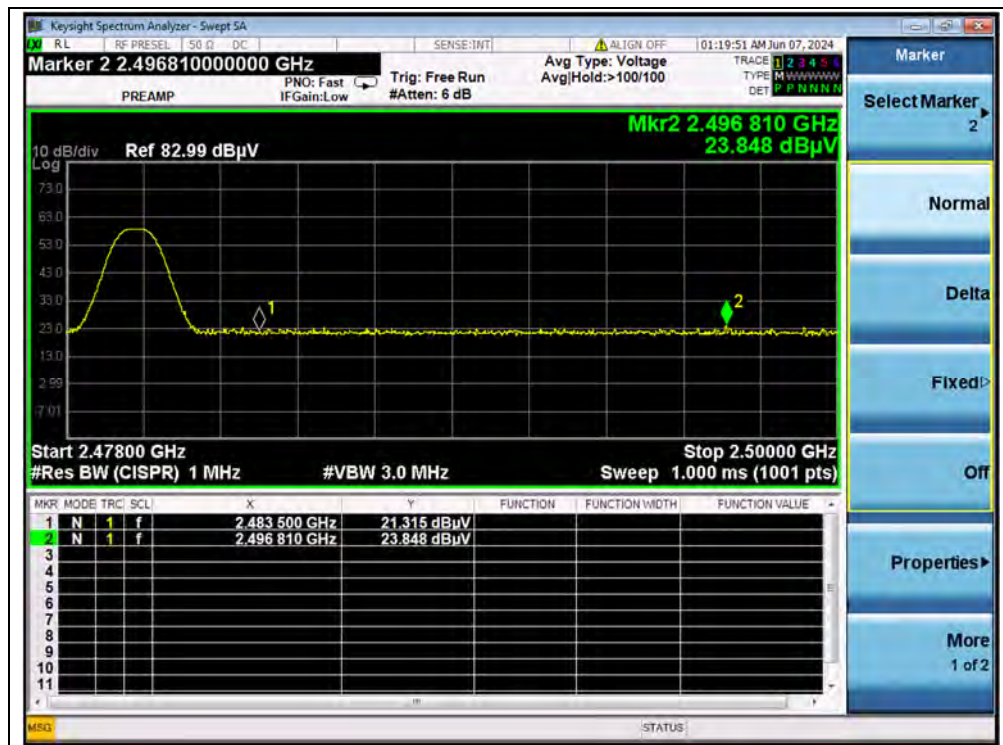

(PEAK, Channel 78, GFSK)

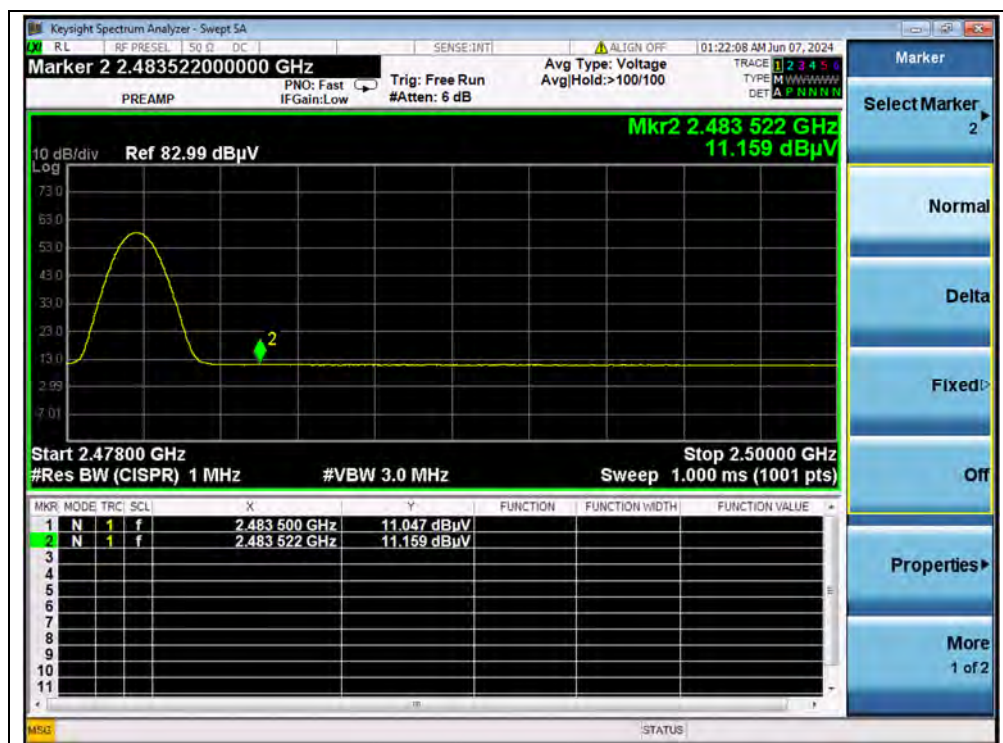


(AVERAGE, Channel 78, GFSK)






$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2376.02	PK	23.89	6.74	27.20	57.83	74	PASS
0	2377.79	AV	11.35	6.74	27.20	45.29	54	PASS
78	2489.70	PK	23.27	6.74	27.20	57.21	74	PASS
78	2483.81	AV	11.21	6.74	27.20	45.15	54	PASS

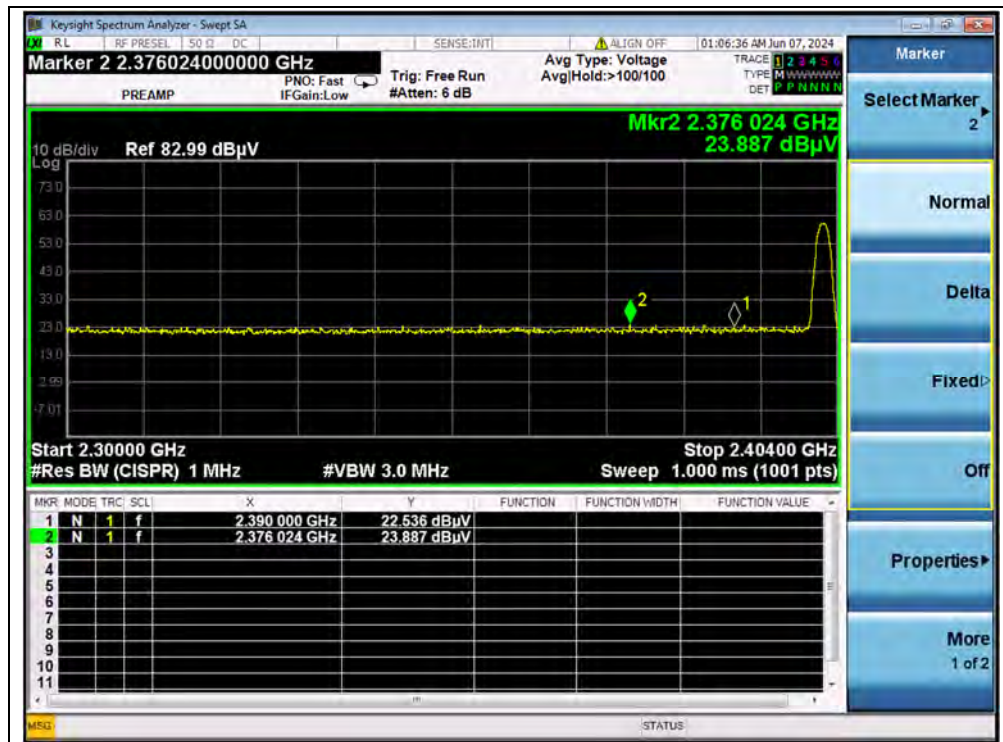


(PEAK, Channel 0, $\pi/4$ -DQPSK)

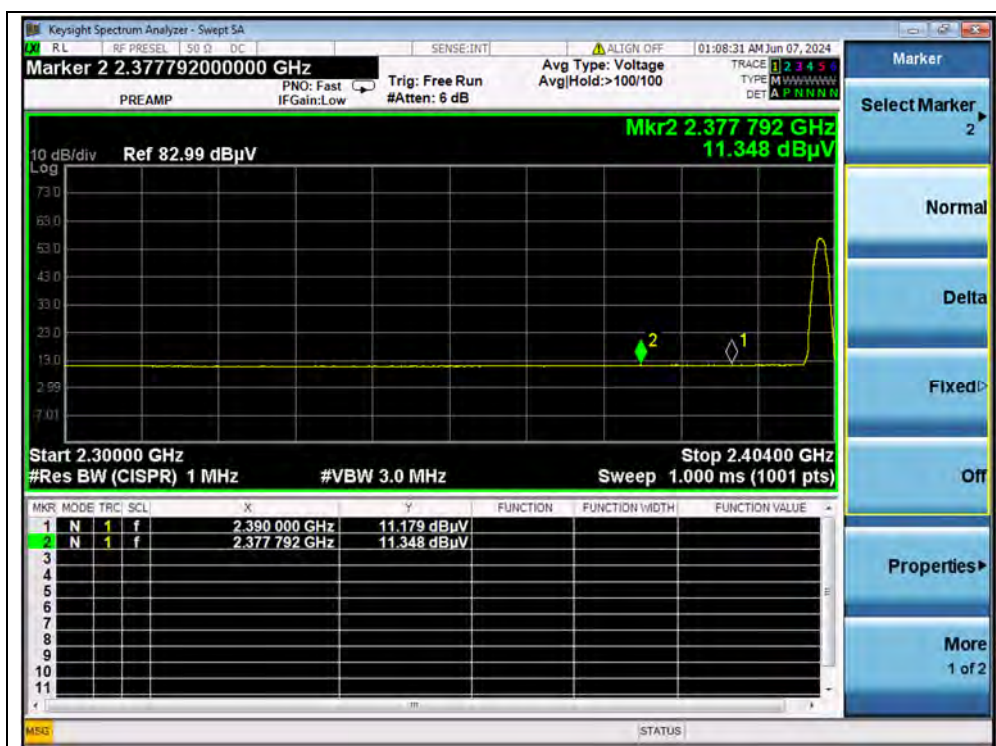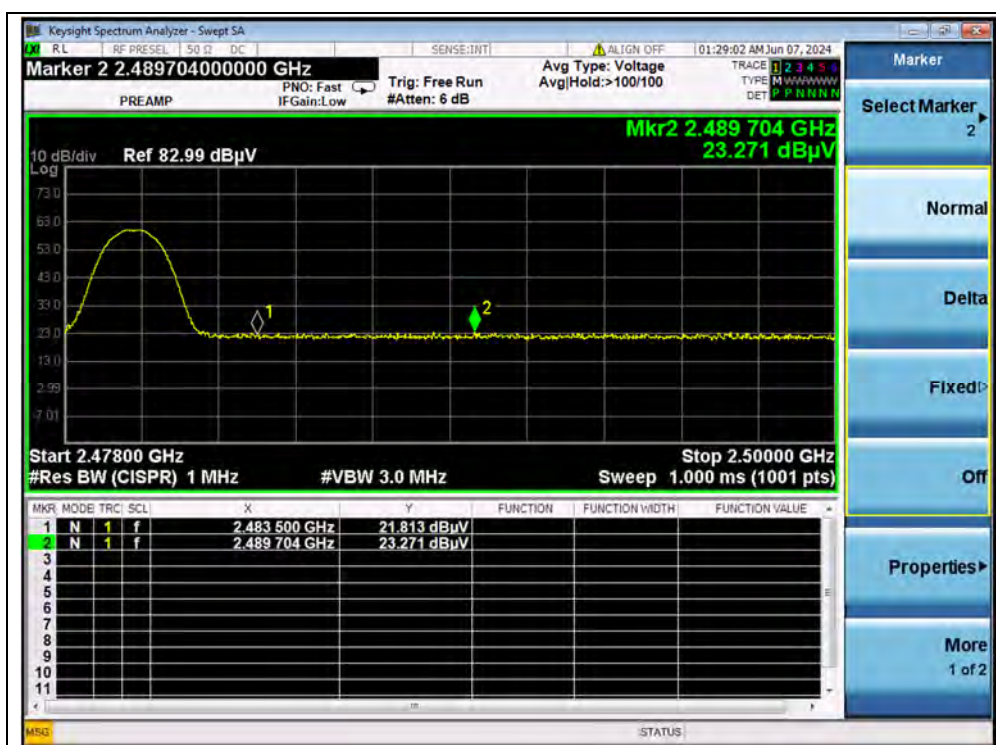
(AVERAGE, Channel 0, $\pi/4$ -DQPSK)

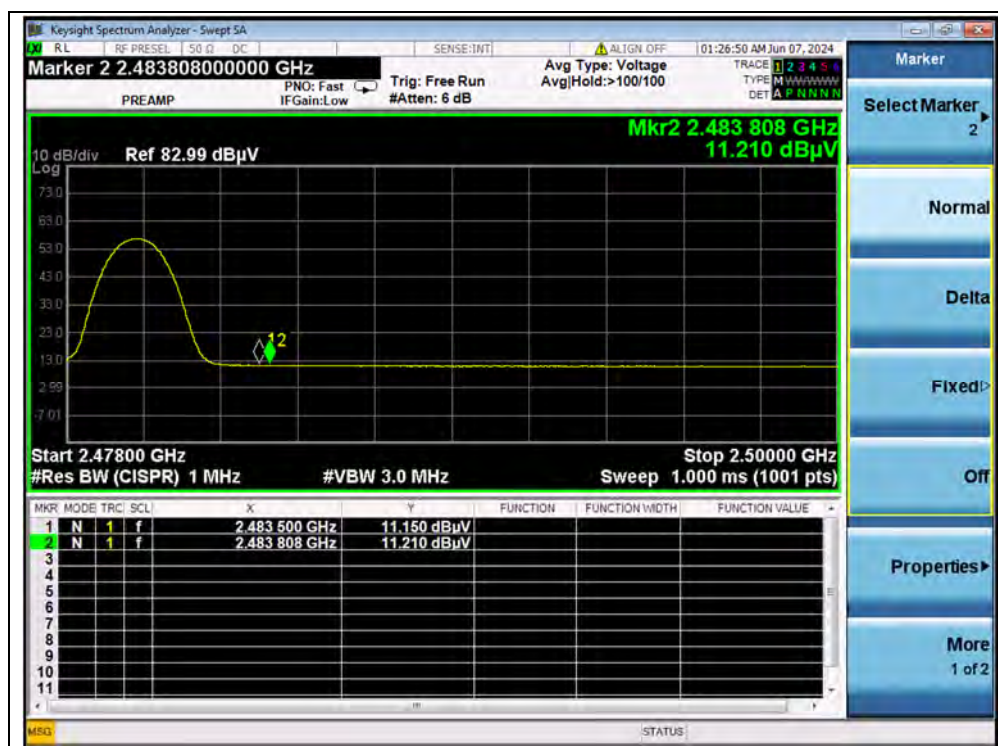(PEAK, Channel 78, $\pi/4$ -DQPSK)


(AVERAGE, Channel 78, $\pi/4$ -DQPSK)

**8-DPSK Mode**

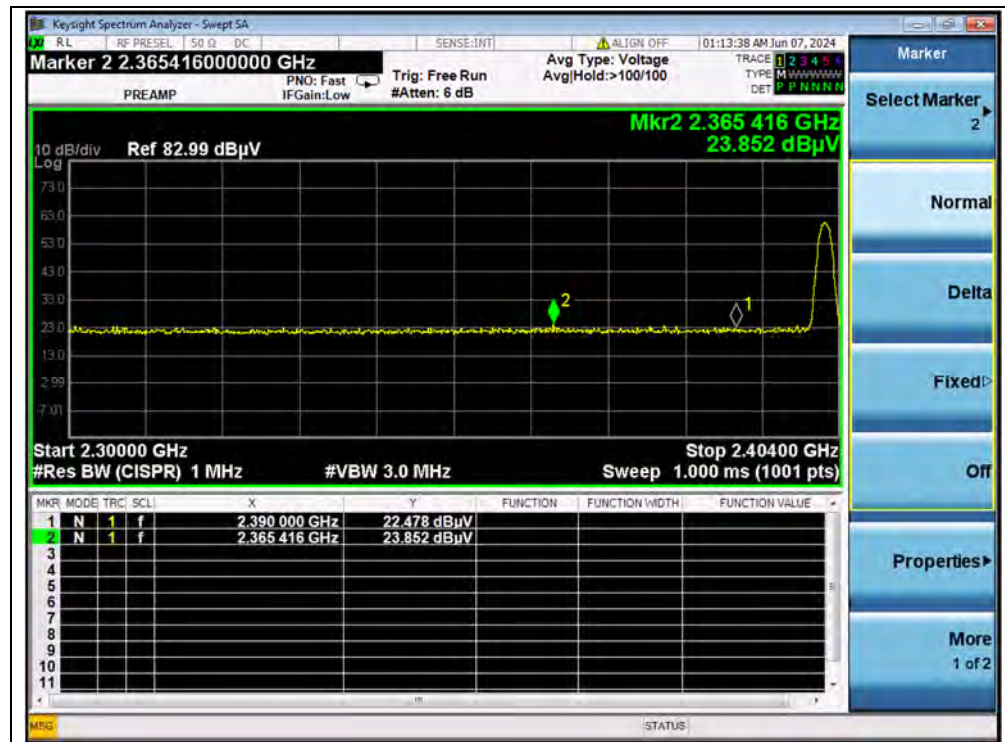
Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2365.42	PK	23.85	6.74	27.20	57.79	74	PASS
0	2390.00	AV	11.21	6.74	27.20	45.15	54	PASS
78	2492.41	PK	23.48	6.74	27.20	57.42	74	PASS
78	2483.81	AV	11.23	6.74	27.20	45.17	54	PASS




(PEAK, Channel 0, 8-DPSK)

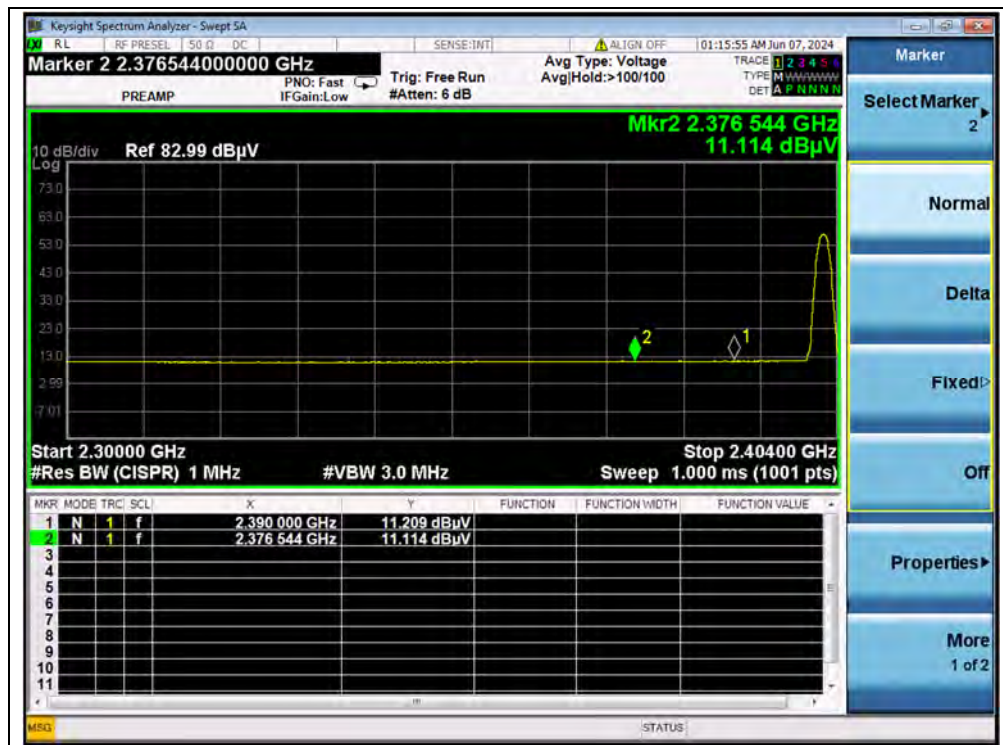

(AVERAGE, Channel 0, 8-DPSK)

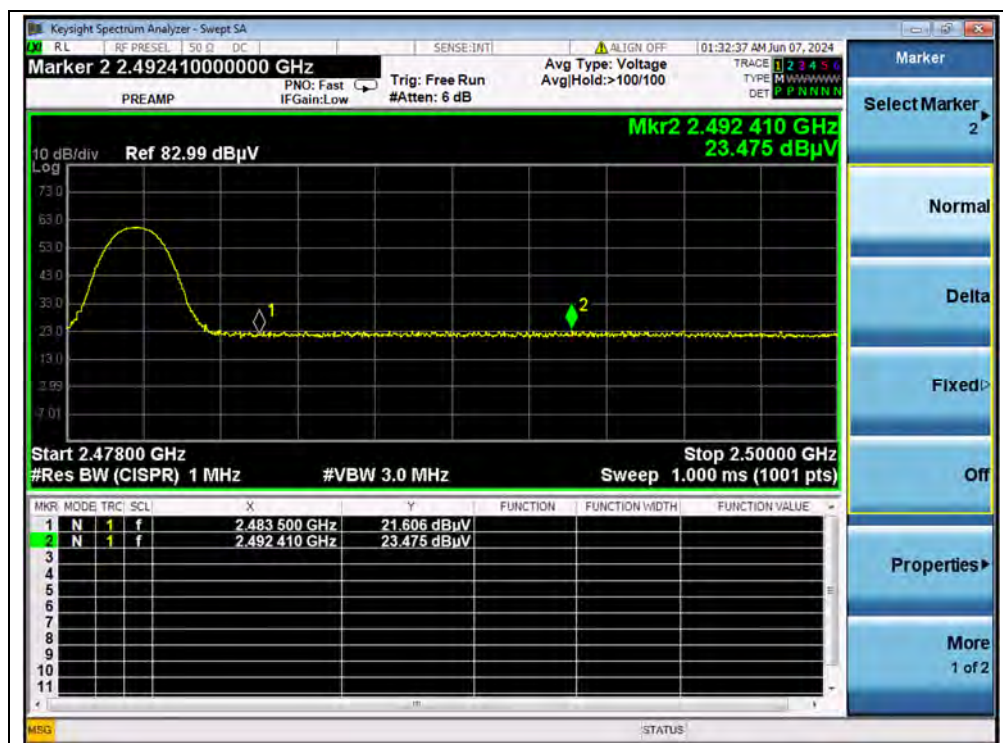

(PEAK, Channel 78, 8-DPSK)

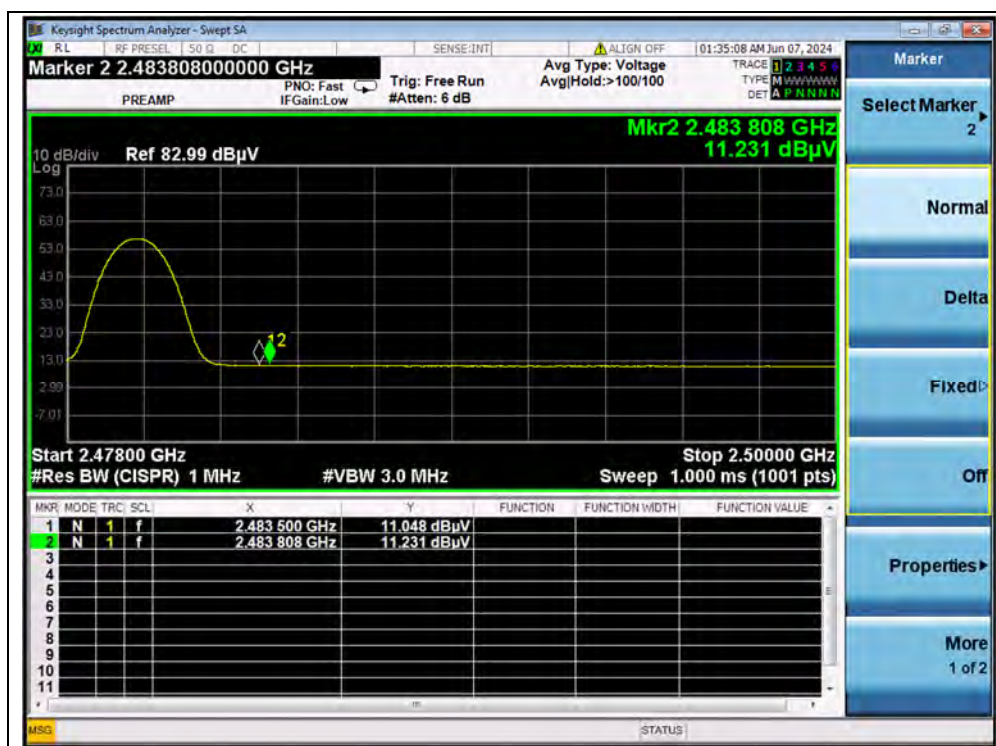

(AVERAGE, Channel 78, 8-DPSK)



A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dB μ V/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dB μ V/m)	Antenna Polarity
2441.13	59.79	27.20	6.74	93.73	Horizontal
2441.15	58.10	27.20	6.74	92.04	Vertical

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).


**GFSK Mode**

Plots for Channel 0

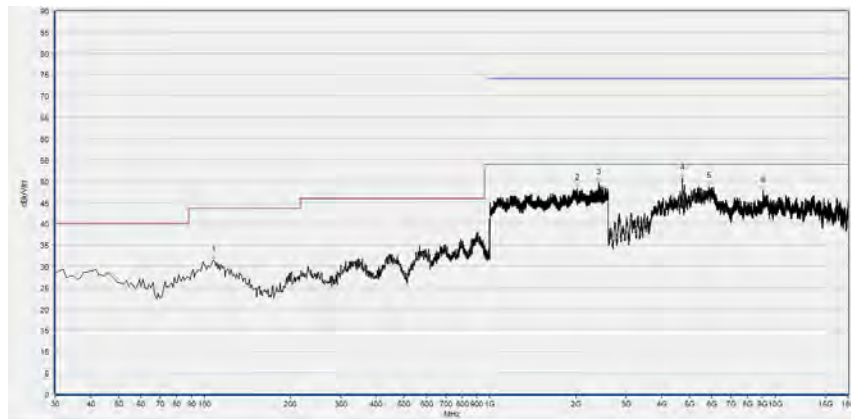

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	31.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2027.733	48.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2405.333	49.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.360	50.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5846.320	48.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9077.240	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

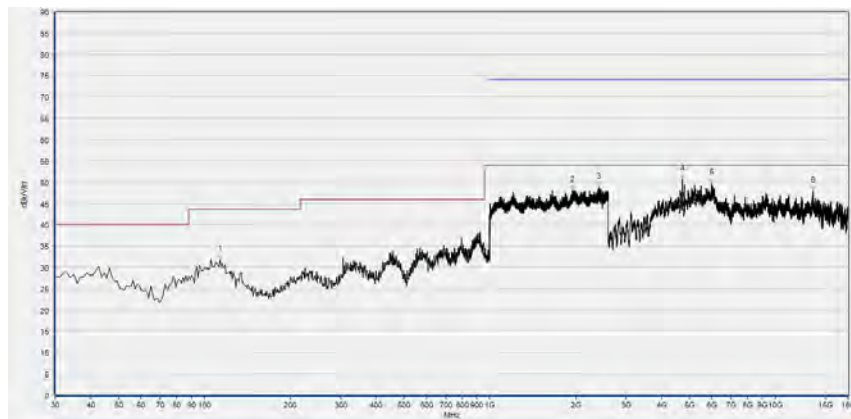


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	31.88	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1946.133	48.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2413.867	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4734.440	50.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6000.320	49.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13583.280	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

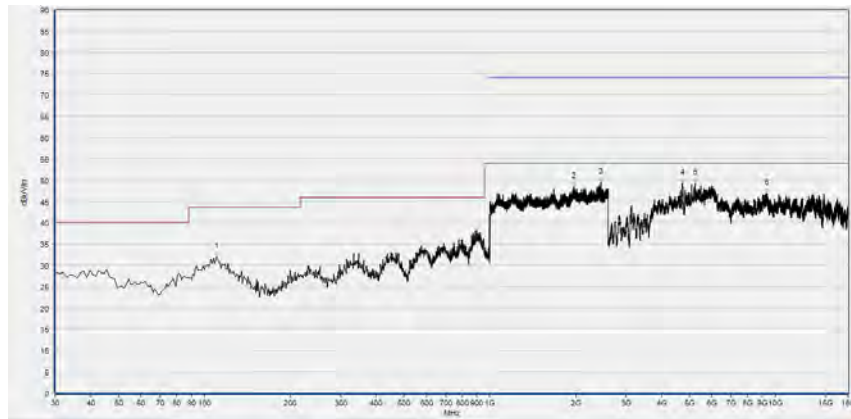

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.01	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1971.733	48.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2448.533	49.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.360	49.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5230.320	49.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9357.520	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

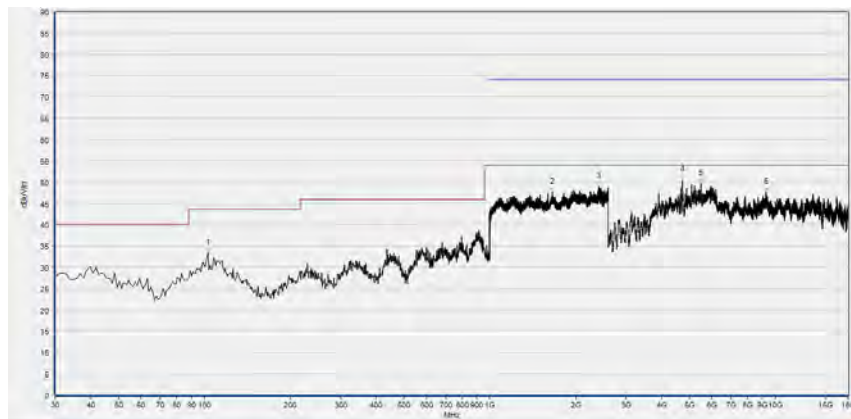


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	33.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1653.867	47.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2409.600	48.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4737.520	50.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5485.960	49.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9280.520	47.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

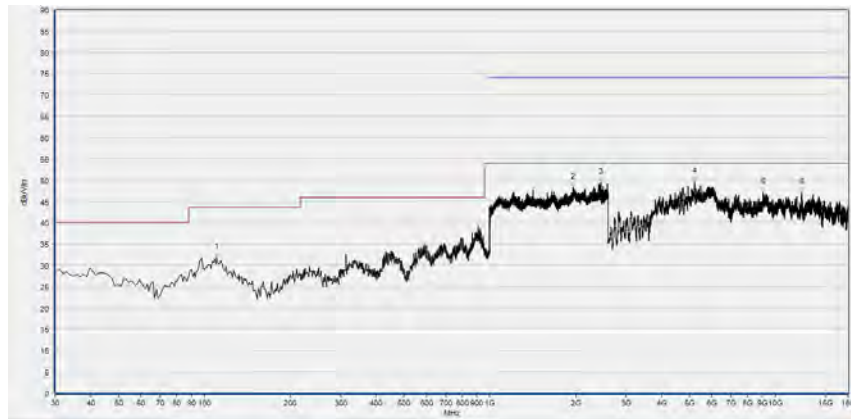

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	31.86	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1955.200	48.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2445.867	49.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5211.840	49.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9080.320	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12375.920	47.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

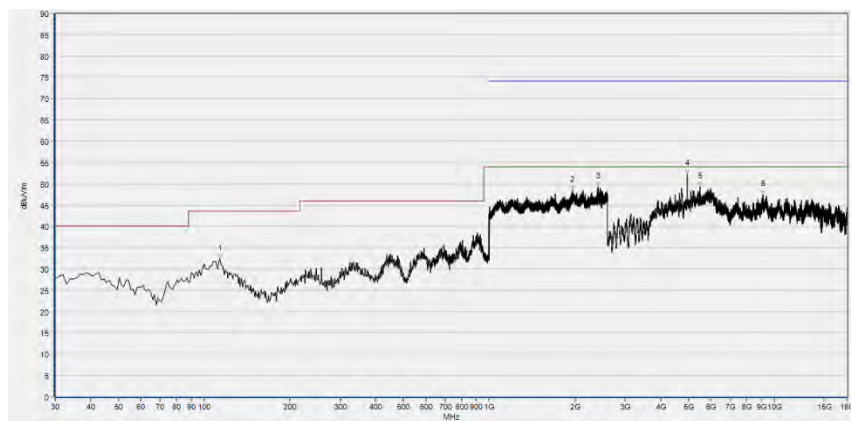


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	32.43	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1954.667	48.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2411.733	49.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.280	52.26	N/A	46.27	74.00	N/A	54.00	Vertical	PASS
5476.720	49.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9108.040	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


 **$\pi/4$ -DQPSK Mode**

Plots for Channel 0

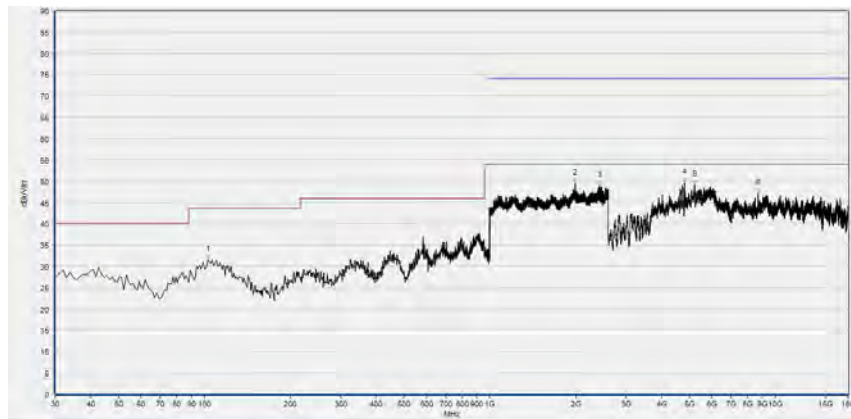

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	31.53	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1987.200	49.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2417.600	48.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4805.280	49.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5202.600	49.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8726.120	47.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

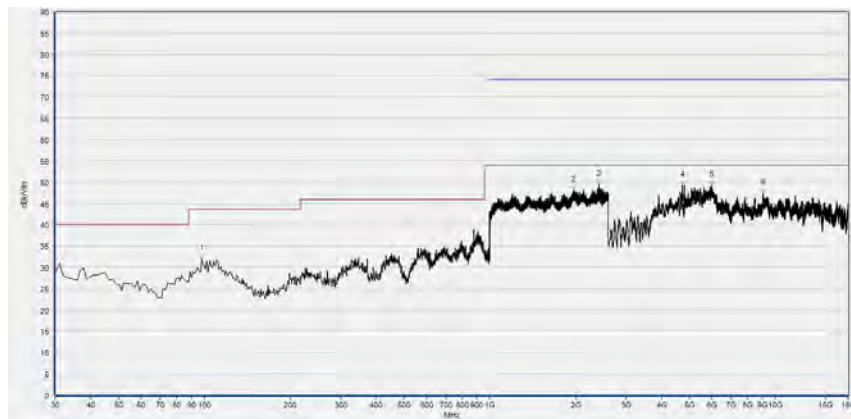


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	32.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1964.800	48.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2405.867	49.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4737.520	49.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5978.760	49.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9080.320	47.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

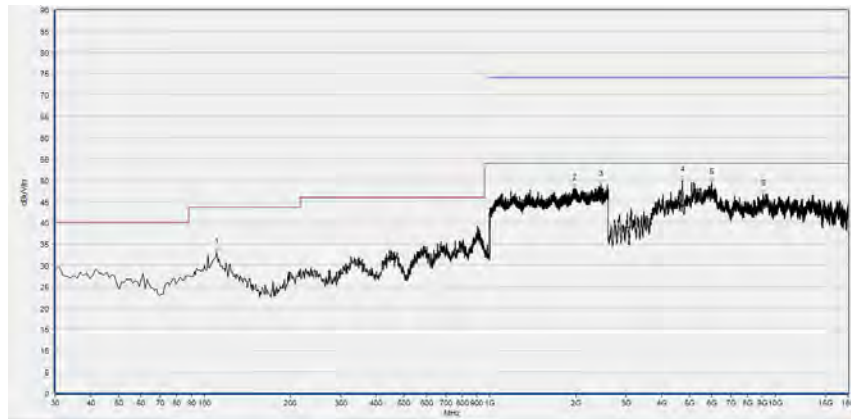

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	33.07	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1974.933	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2454.933	48.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4737.520	49.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5972.600	49.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9086.480	46.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

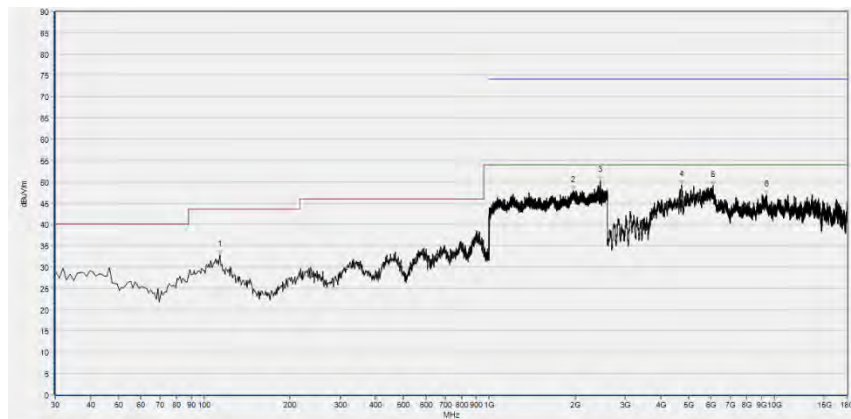


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	32.78	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1963.733	47.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2457.067	50.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4734.440	49.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6080.400	49.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9388.320	47.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

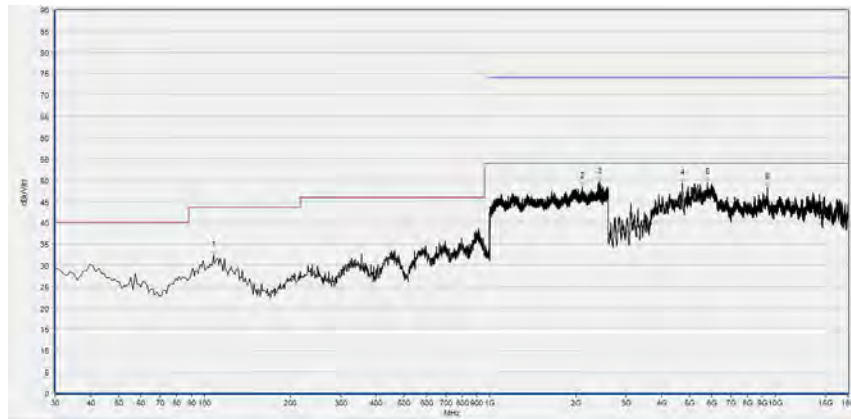

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.30	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2106.133	48.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2419.200	49.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.360	49.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5781.640	49.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9366.760	48.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

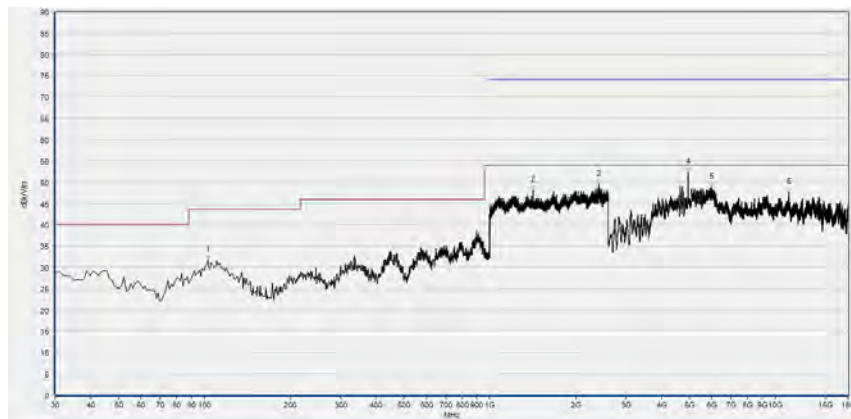


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	31.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1420.267	48.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2414.933	49.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.280	52.34	N/A	44.59	74.00	N/A	54.00	Vertical	PASS
6000.320	48.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11131.600	47.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**8-DPSK Mode**

Plots for Channel 0

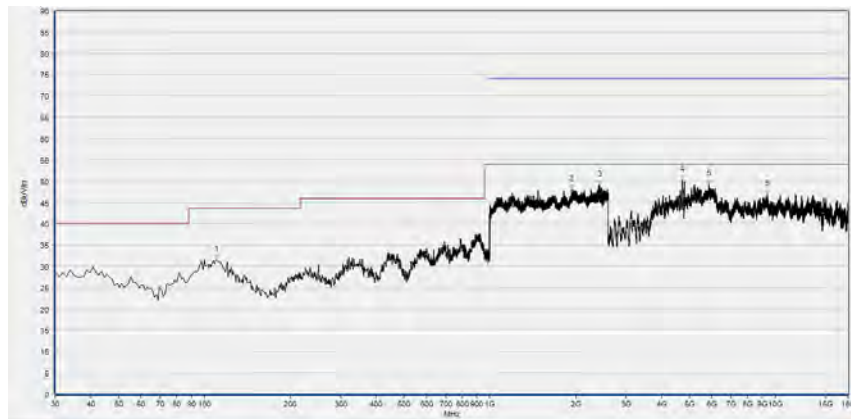

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	31.55	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1930.667	48.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2418.133	49.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4734.440	50.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5858.640	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9400.640	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

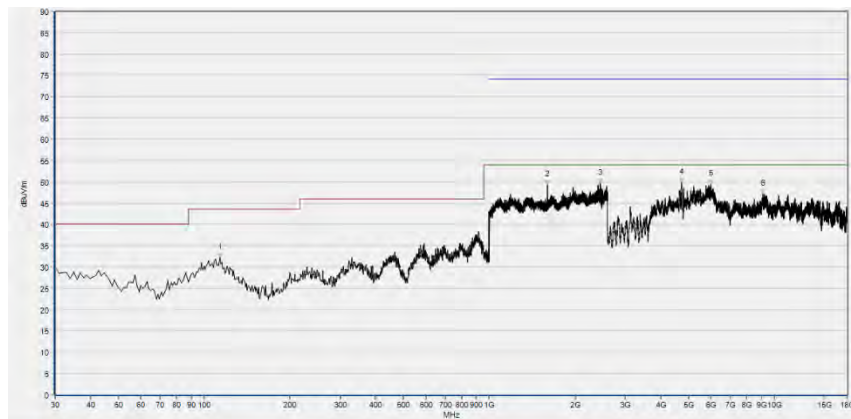


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	32.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1596.800	49.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2446.933	49.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4731.360	49.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6000.320	49.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9132.680	47.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

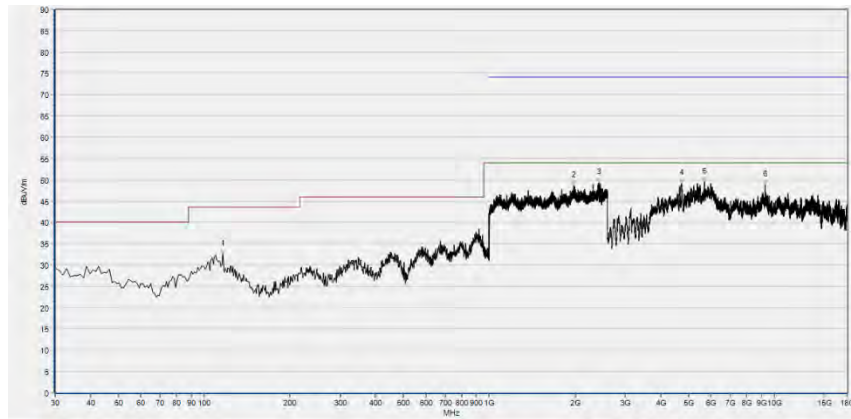

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.330	32.53	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1984.000	48.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2421.333	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.360	49.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.400	49.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9277.440	48.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

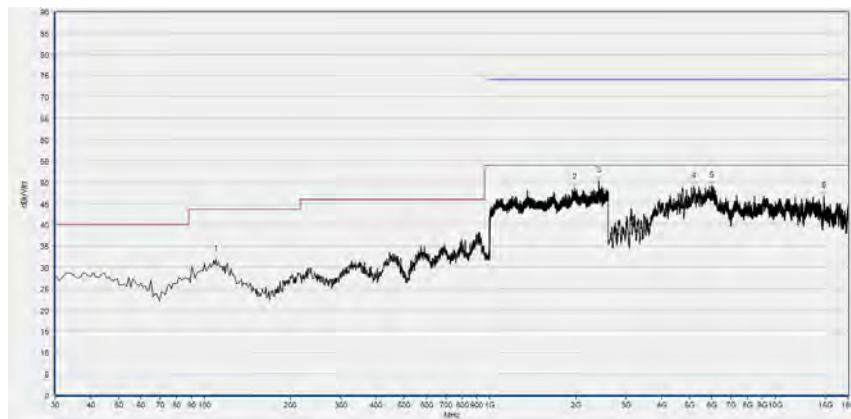


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	31.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1985.600	48.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2408.533	50.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5196.440	48.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6000.320	49.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14830.680	46.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

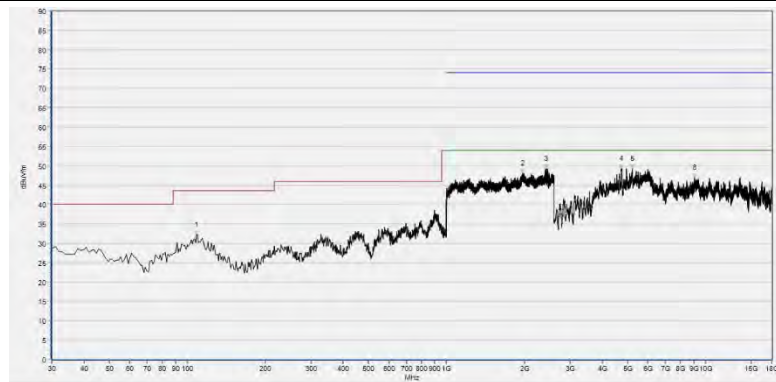

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	32.22	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1973.867	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2417.600	49.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4737.520	49.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5202.600	49.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9077.240	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

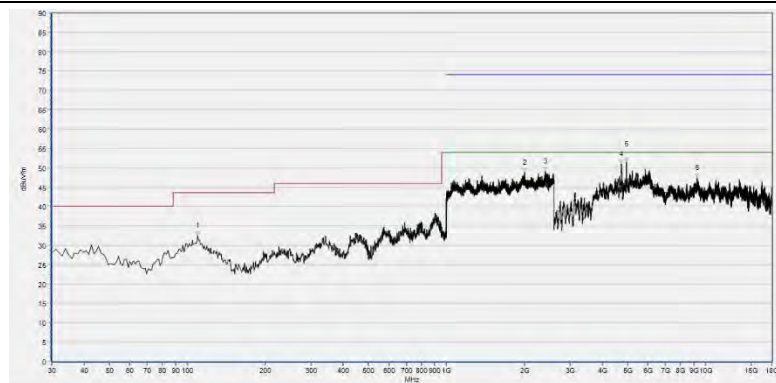

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.44	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2002.667	48.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2413.867	49.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4740.600	50.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.280	51.44	N/A	44.55	74.00	N/A	54.00	Vertical	PASS
9286.680	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT