



FCC SAR TEST REPORT


FCC ID : 2AJN7-TP00109A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00109A
Applicant : LC Future Center Limited Taiwan Branch
7F., No.780, Bei'an Rd., Zhongshan Dist., Taipei City 104,
Taiwan (R.O.C.)
Manufacturer : LC Future Center Limited Taiwan Branch
7F., No.780, Bei'an Rd., Zhongshan Dist., Taipei City 104,
Taiwan (R.O.C.)
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

Equipment : Fibocom L860-GL tested inside of Lenovo Notebook.

The product was received on Mar. 13, 2019 and testing was started from Mar. 26, 2019 and completed on Mar. 29, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	5
3. Equipment Under Test (EUT) Information.....	6
3.1 General Information	6
3.2 General LTE SAR Test and Reporting Considerations	8
4. Proximity Sensor Triggering Test.....	11
5. RF Exposure Limits.....	14
5.1 Uncontrolled Environment.....	14
5.2 Controlled Environment.....	14
6. Specific Absorption Rate (SAR).....	15
6.1 Introduction	15
6.2 SAR Definition.....	15
7. System Description and Setup	16
7.1 E-Field Probe	17
7.2 Data Acquisition Electronics (DAE)	17
7.3 Phantom.....	18
7.4 Device Holder.....	19
8. Measurement Procedures	20
8.1 Spatial Peak SAR Evaluation.....	20
8.2 Power Reference Measurement.....	21
8.3 Area Scan	21
8.4 Zoom Scan.....	22
8.5 Volume Scan Procedures.....	22
8.6 Power Drift Monitoring.....	22
9. Test Equipment List.....	23
10. System Verification	24
10.1 Tissue Simulating Liquids.....	24
10.2 Tissue Verification	25
10.3 System Performance Check Results.....	26
11. Conducted RF Output Power (Unit: dBm).....	27
12. SAR Test Results	95
12.1 Body SAR	97
12.2 Repeated SAR Measurement	100
13. Simultaneous Transmission Analysis.....	101
13.1 Body Exposure Conditions.....	102
13.2 SPLSR Evaluation and Analysis.....	103
14. Uncertainty Assessment	110
15. References	110
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Antenna Location & Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA931312	01	Initial issue of report	Apr. 30, 2019

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **LC Future Center Limited Taiwan Branch, Notebook Computer, TP00109A**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
		Body	
		1g SAR (W/kg)	
Licensed	WCDMA II	1.15	1.56
	WCDMA IV	1.17	
	WCDMA V	1.11	
	LTE Band 7	1.18	
	LTE Band 12 / 17	1.08	
	LTE Band 13	1.14	
	LTE Band 14	1.17	
	LTE Band 2 / 25	1.07	
	LTE Band 5 / 26	1.12	
	LTE Band 30	1.02	
	LTE Band 38 / 41	1.07	
	LTE Band 4 / 66	1.16	
Date of Testing:		2019/3/26 ~ 2019/3/29	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng



2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00109A
FCC ID	2AJN7-TP00109A
Integrated WWAN Module	Brand Name: Fibocom Model Name: L860-GL
Integrated NFC Module	Brand Name: FOXCONN Model Name: T77H747
Wireless Technology and Frequency Range	WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz NFC: 13.56MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM NFC: ASK
EUT Stage	Production Unit
Remark: 1. For WWAN RF exposure evaluation is selected antenna vendor of "Amphenol" as the main tested and spot check antenna vendor of "Speedwire" to ensure both antenna vendors are compliant.	

WWAN Antenna Information				
Antenna 1	Manufacturer	Amphenol	Peak gain (dbi)	CE:1.17 FCC:1.12
	Part number	LXA113-16-000-C	Type	PIFA
Antenna 2	Manufacturer	SPEEDWIRE	Peak gain (dbi)	CE:1.25 FCC:1.63
	Part number	F.0G.ZV-0009-001-00	Type	PIFA



WLAN Module Information	
Brand Name	Intel
Model Name	9560D2W
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	802.11a/b/g/n/ac Bluetooth BR/EDR/LE
EUT Stage	Production Unit
Remark:	
1. The Intel 9560D2W WLAN/BT module integrated in this host, the 2.4GHz/5 GHz WLAN and Bluetooth SAR results are referenced from the report of FCC ID: PD99560D2 (SAR Report No. 170919-03.TR11), and these SAR results are also used to perform simultaneous transmission analysis.	

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05									
FCC ID		2AJN7-TP00109A							
Equipment Name		Notebook Computer							
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz							
Channel Bandwidth		LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used		QPSK / 16QAM /64QAM							
LTE Voice / Data requirements		Data only							
LTE MPR permanently built-in by design		Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
		Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
			1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
		QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
		16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
		64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
		64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
		256 QAM						≥ 1	≤ 5
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance		Yes, Proximity Sensor and G-sensor							
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 11.							
LTE Carrier Aggregation Additional Information		This device supports maximum of 5 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band														
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 5														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829						
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844						
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510						
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560						
LTE Band 12														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704						
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711						
LTE Band 13														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)							
L	23205		779.5		23230		782							
M	23230		782											
H	23255		784.5											
LTE Band 14														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Channel #		Channel #		Freq.(MHz)							
L	23305		790.5		23330		793							
M	23330		793											
H	23355		795.5											
LTE Band 17														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)							
L	23755		706.5		23780		709							
M	23790		710		23790		710							
H	23825		713.5		23800		711							


LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	839
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #			Freq.(MHz)		Channel #				Freq.(MHz)		
L	27685			2307.5		27710				2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37875	2582.5	37900	2585
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38125	2607.5	38100	2605
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39775	2508.5	39800	2511
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40197	2550.7	40210	2552
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41042	2635.2	41030	2634
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41465	2677.5	41440	2675
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated in the exhibit “P-Sensor operational description”, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

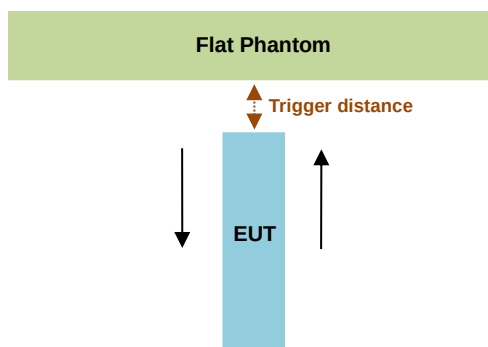

Proximity Sensor Trigger Distance (mm)		
Position	Bottom of Laptop	
Position	Moving towards	Moving away
Minimum	11	12

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.

Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.



Proximity sensor power reduction

Exposure Position / wireless mode	Bottom of Laptop ⁽¹⁾
WCDMA Band V	2.0 dB
WCDMA Band II	6.5 dB
WCDMA Band IV	6.5 dB
LTE Band 2	6.0 dB
LTE Band 4	7.0 dB
LTE Band 5	3.0 dB
LTE Band 7	7.5 dB
LTE Band 12	1.5 dB
LTE Band 13	2.0 dB
LTE Band 14	2.0 dB
LTE Band 17	1.5 dB
LTE Band 25	6.0 dB
LTE Band 26	3.0 dB
LTE Band 30	6.5 dB
LTE Band 38	6.0 dB
LTE Band 41	7.0 dB
LTE Band 66	7.0 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor and G-Sensor
- Power reduction is not applicable for WLAN and Bluetooth.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:
 - Bottom of Laptop: [10 mm](#)

<Sensor triggers distance V.S Measure power>

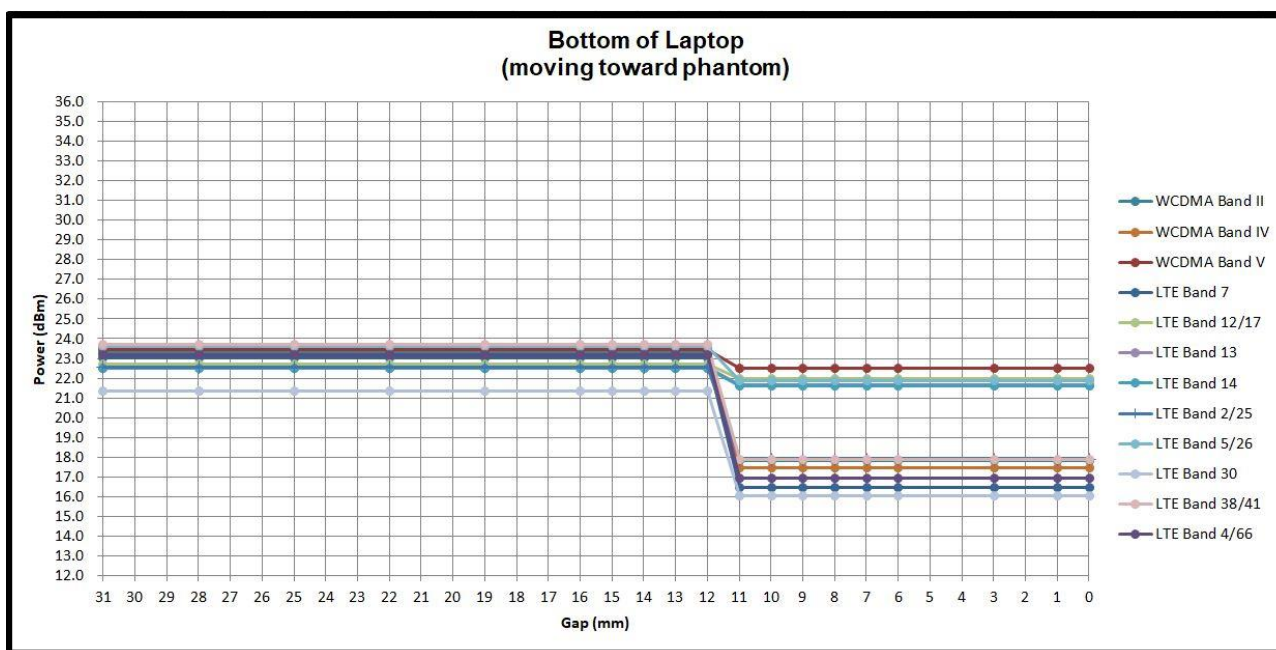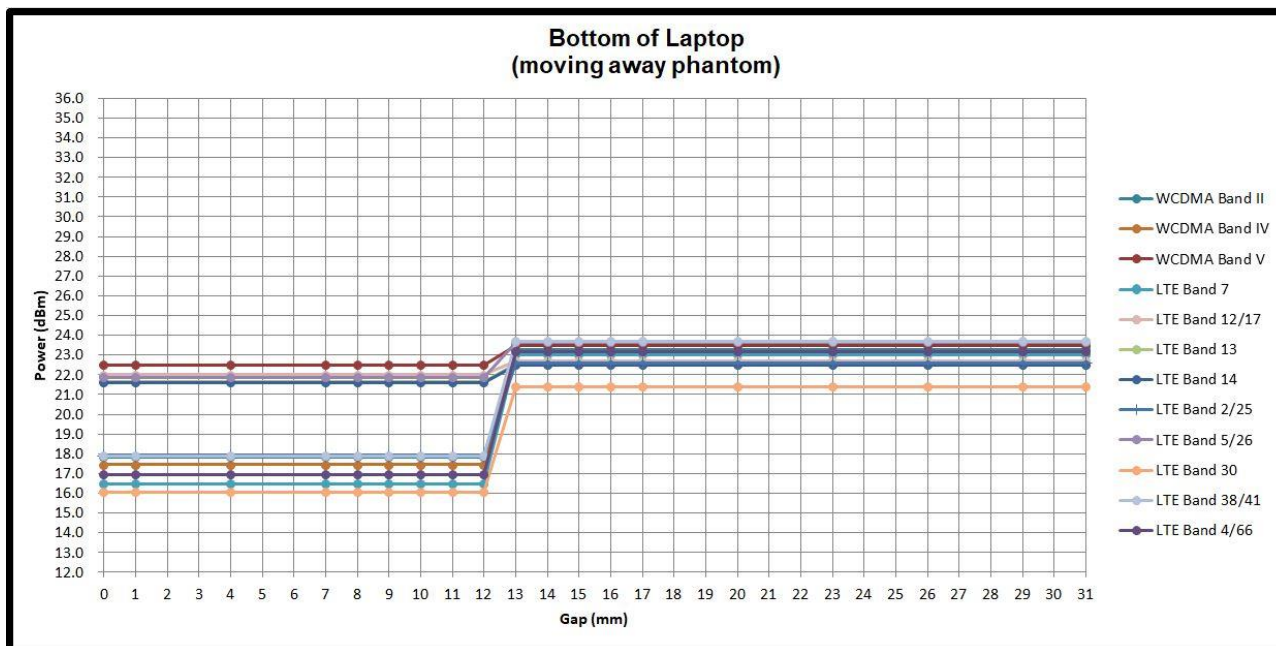

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

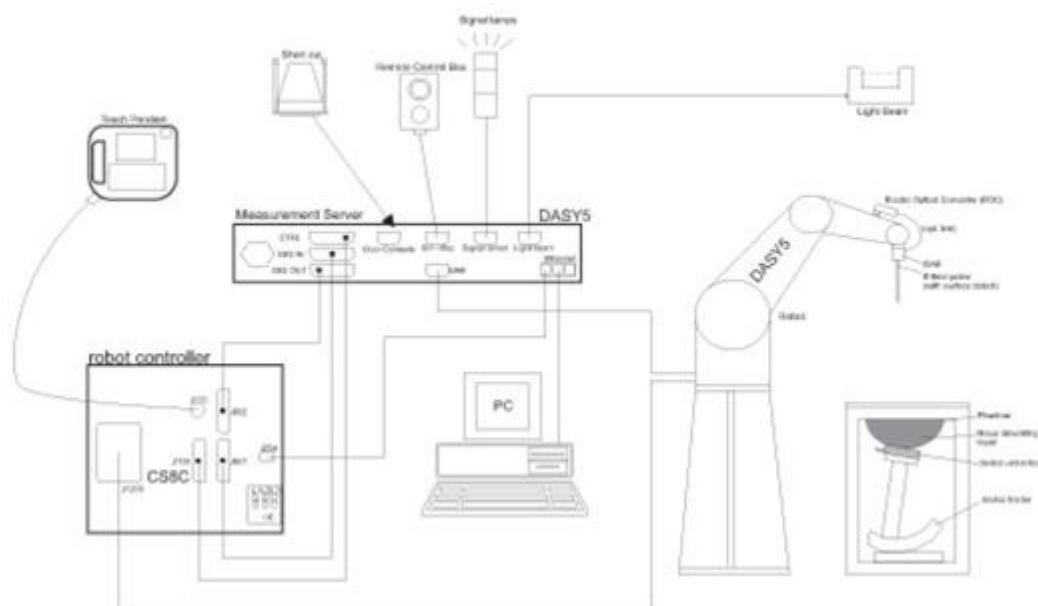

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

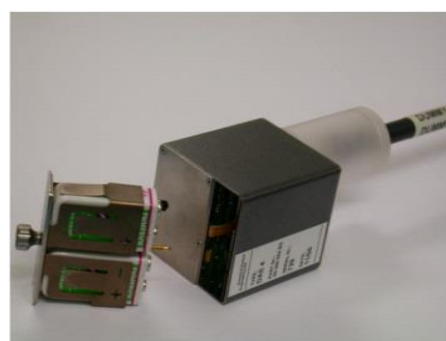


Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Sep. 05, 2018	Sep. 04, 2019
SPEAG	835MHz System Validation Kit	D835V2	499	Sep. 06, 2018	Sep. 05, 2019
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 19, 2018	Nov. 18, 2019
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2019
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Jan. 28, 2019	Jan. 27, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 31, 2018	Aug. 30, 2019
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Data Acquisition Electronics	DAE4	1326	Sep. 18, 2018	Sep. 17, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 28, 2018	May. 27, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2018	Sep. 23, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 17, 2018	Apr. 16, 2019
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 21, 2018	May. 20, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 11, 2018	Dec. 10, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 18, 2018	May. 17, 2019
Anritsu	Power Sensor	MA2411B	1339124	May. 18, 2018	May. 17, 2019
Anritsu	Power Meter	ML2495A	1240001	Sep. 13, 2018	Sep. 12, 2019
Anritsu	Power Sensor	MA2411B	1207349	Sep. 13, 2018	Sep. 12, 2019
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

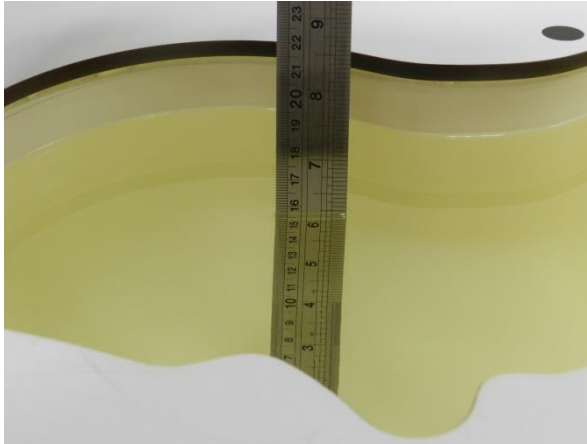


Fig 10.1Photo of Liquid Height for Head SAR

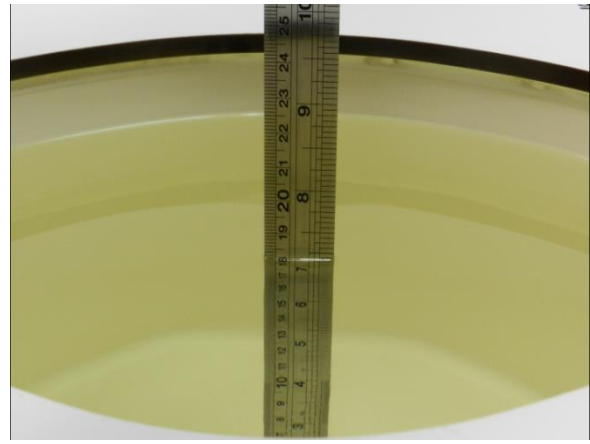


Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	MSL	22.7	0.967	55.253	0.96	55.50	0.73	-0.45	±5	2019/3/26
835	MSL	22.2	0.977	55.810	0.97	55.20	0.72	1.11	±5	2019/3/27
1750	MSL	22.2	1.489	54.653	1.49	53.40	-0.07	2.35	±5	2019/3/28
1900	MSL	22.2	1.554	54.418	1.52	53.30	2.24	2.10	±5	2019/3/27
2300	MSL	22.5	1.784	53.159	1.81	52.90	-1.44	0.49	±5	2019/3/29
2600	MSL	22.5	2.187	52.394	2.16	52.50	1.25	-0.20	±5	2019/3/28
2600	MSL	22.5	2.203	52.224	2.16	52.50	1.99	-0.53	±5	2019/3/29

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/3/26	750	MSL	250	D750V3-1012	ES3DV3 - SN3270	DAE3 Sn577	2.24	8.76	8.96	2.28
2019/3/27	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE3 Sn577	2.57	9.82	10.28	4.68
2019/3/28	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE3 Sn577	9.59	37.00	38.36	3.68
2019/3/27	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn577	10.70	40.20	42.8	6.47
2019/3/29	2300	MSL	250	D2300V2-1006	ES3DV3 - SN3169	DAE4 Sn1326	11.90	47.20	47.6	0.85
2019/3/28	2600	MSL	250	D2600V2-1008	ES3DV3 - SN3270	DAE3 Sn577	14.10	55.30	56.4	1.99
2019/3/29	2600	MSL	250	D2600V2-1008	ES3DV3 - SN3270	DAE3 Sn577	14.20	55.30	56.8	2.71

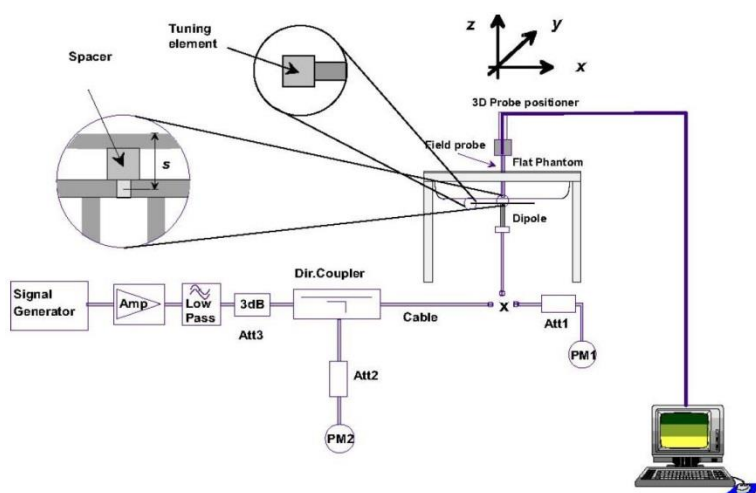


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

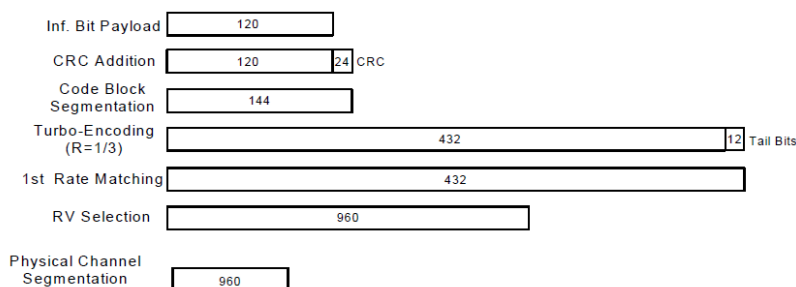
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Default Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.27	23.27	23.19	24.50	23.60	23.55	23.68	24.50	23.42	23.46	23.48	24.50
3GPP Rel 6	HSDPA Subtest-1	23.07	23.09	22.98	24.50	23.06	23.03	23.12	24.50	23.12	23.11	23.01	24.50
3GPP Rel 6	HSDPA Subtest-2	23.06	23.04	23.01	24.50	23.08	23.05	23.02	24.50	22.11	22.08	22.07	24.50
3GPP Rel 6	HSDPA Subtest-3	22.40	22.36	22.34	24.00	22.58	22.57	22.49	24.00	21.59	21.62	21.53	24.00
3GPP Rel 6	HSDPA Subtest-4	22.34	22.26	22.28	24.00	22.25	22.36	22.27	24.00	21.35	21.36	21.33	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.03	23.02	22.88	24.50	23.05	23.03	22.96	24.50	23.08	23.09	22.98	24.50
3GPP Rel 8	DC-HSDPA Subtest-2	23.01	22.97	23.03	24.50	23.00	22.97	22.97	24.50	22.08	22.06	22.04	24.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.53	22.24	22.40	24.00	22.50	22.57	22.41	24.00	21.57	21.60	21.50	24.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.32	22.26	22.22	24.00	22.28	22.26	22.27	24.00	21.33	21.35	21.29	24.00
3GPP Rel 6	HSUPA Subtest-1	22.99	22.99	22.98	24.50	22.98	23.00	22.95	24.50	22.06	22.07	22.05	24.50
3GPP Rel 6	HSUPA Subtest-2	20.81	20.96	20.51	22.50	19.79	20.00	20.01	21.50	19.85	20.00	20.03	21.50
3GPP Rel 6	HSUPA Subtest-3	21.58	21.80	21.83	23.50	20.53	20.85	20.92	22.50	20.58	20.89	20.92	22.50
3GPP Rel 6	HSUPA Subtest-4	21.11	21.01	21.05	22.50	20.10	20.09	20.05	21.50	20.12	20.11	20.08	21.50
3GPP Rel 6	HSUPA Subtest-5	23.01	22.98	22.95	24.50	22.09	21.99	21.99	23.50	22.10	22.00	22.01	23.50


Reduced Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	17.76	17.82	17.71	18.00	17.40	17.44	17.50	18.00	22.45	22.50	22.47	22.50
3GPP Rel 6	HSDPA Subtest-1	17.61	17.66	17.53	18.00	17.39	17.42	17.42	18.00	22.27	22.16	21.92	22.50
3GPP Rel 6	HSDPA Subtest-2	17.40	17.50	17.31	18.00	17.40	17.43	17.49	18.00	22.27	22.15	22.02	22.50
3GPP Rel 6	HSDPA Subtest-3	17.54	17.55	17.42	18.00	17.37	17.36	17.48	18.00	22.28	22.15	21.92	22.50
3GPP Rel 6	HSDPA Subtest-4	17.56	17.64	17.44	18.00	17.34	17.42	17.42	18.00	22.29	22.12	21.99	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.30	17.40	17.21	18.00	17.39	17.38	17.45	18.00	22.28	22.13	21.89	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	17.63	17.57	17.44	18.00	17.40	17.40	17.42	18.00	22.31	22.10	21.91	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	17.30	17.49	17.22	18.00	17.38	17.33	17.39	18.00	22.29	22.14	21.96	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	17.53	17.45	17.32	18.00	17.39	17.38	17.47	18.00	22.33	22.12	21.93	22.50
3GPP Rel 6	HSUPA Subtest-1	17.51	17.54	17.42	18.00	17.33	17.35	17.41	18.00	22.27	22.07	21.92	22.50
3GPP Rel 6	HSUPA Subtest-2	17.53	17.56	17.44	18.00	17.28	17.33	17.41	18.00	22.21	22.12	21.92	22.50
3GPP Rel 6	HSUPA Subtest-3	17.36	17.41	17.28	18.00	17.36	17.29	17.38	18.00	22.30	22.06	21.94	22.50
3GPP Rel 6	HSUPA Subtest-4	17.50	17.54	17.34	18.00	17.38	17.37	17.35	18.00	22.30	22.16	22.03	22.50
3GPP Rel 6	HSUPA Subtest-5	17.51	17.57	17.40	18.00	17.31	17.29	17.31	18.00	22.20	22.14	22.02	22.50

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2 / 4 / 5 / 17 SAR test was covered by Band 12 / 25 / 26 / 66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

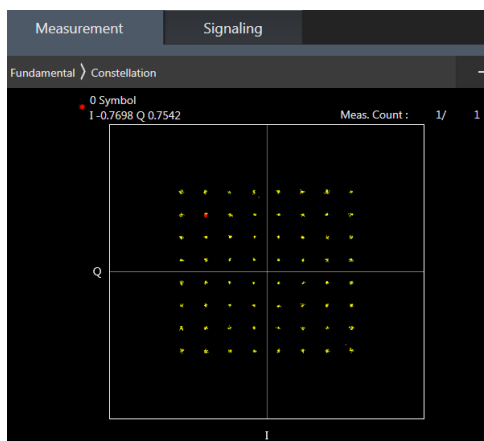

64QAM



16QAM

Default Power Mode
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.53	22.74	22.64		
20	QPSK	1	49	22.55	22.65	22.65	24	0
20	QPSK	1	99	22.37	22.65	22.46		
20	QPSK	50	0	21.60	21.62	21.43		
20	QPSK	50	24	21.51	21.54	21.47	23	1
20	QPSK	50	50	21.43	21.51	21.71		
20	QPSK	100	0	21.57	21.54	21.60		
20	16QAM	1	0	21.98	21.67	21.95	23	1
20	16QAM	1	49	21.93	21.36	21.58		
20	16QAM	1	99	21.72	21.73	21.69		
20	16QAM	50	0	20.64	20.63	20.54	22	2
20	16QAM	50	24	20.47	20.66	20.58		
20	16QAM	50	50	20.53	20.53	20.67		
20	16QAM	100	0	20.60	20.62	20.62	22	2
20	64QAM	1	0	20.83	20.84	20.63		
20	64QAM	1	49	20.55	20.58	20.83		
20	64QAM	1	99	20.52	20.94	20.71	21	3
20	64QAM	50	0	19.74	19.65	19.52		
20	64QAM	50	24	19.62	19.65	19.58		
20	64QAM	50	50	19.47	19.59	19.60	21	3
20	64QAM	100	0	19.61	19.59	19.60		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.43	22.62	22.58		
15	QPSK	1	37	22.38	22.73	22.58	24	0
15	QPSK	1	74	22.29	22.60	22.41		
15	QPSK	36	0	21.53	21.55	21.40		
15	QPSK	36	20	21.46	21.50	21.46	23	1
15	QPSK	36	39	21.35	21.51	21.63		
15	QPSK	75	0	21.49	21.54	21.56		
15	16QAM	1	0	21.92	21.57	21.95	23	1
15	16QAM	1	37	22.00	21.31	21.58		
15	16QAM	1	74	21.70	21.68	21.66		
15	16QAM	36	0	20.64	20.55	20.50	22	2
15	16QAM	36	20	20.40	20.65	20.50		
15	16QAM	36	39	20.51	20.51	20.66		
15	16QAM	75	0	20.54	20.56	20.56	22	2
15	64QAM	1	0	20.83	20.83	20.59		
15	64QAM	1	37	20.51	20.50	20.74		
15	64QAM	1	74	20.47	20.84	20.66	21	3
15	64QAM	36	0	19.69	19.59	19.51		
15	64QAM	36	20	19.61	19.62	19.55		
15	64QAM	36	39	19.44	19.58	19.60	21	3
15	64QAM	75	0	19.57	19.58	19.54		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.41	22.60	22.56	24	0
10	QPSK	1	25	22.27	22.65	22.51		
10	QPSK	1	49	22.23	22.50	22.33		
10	QPSK	25	0	21.54	21.56	21.36	23	1
10	QPSK	25	12	21.49	21.41	21.45		
10	QPSK	25	25	21.37	21.41	21.55		
10	QPSK	50	0	21.44	21.43	21.55	23	1
10	16QAM	1	0	21.88	21.57	21.89		
10	16QAM	1	25	21.98	21.31	21.40		
10	16QAM	1	49	21.54	21.67	21.55	22	2
10	16QAM	25	0	20.60	20.56	20.42		
10	16QAM	25	12	20.37	20.52	20.49		
10	16QAM	25	25	20.47	20.45	20.53	22	2
10	16QAM	50	0	20.46	20.52	20.55		
10	64QAM	1	0	20.79	20.73	20.56		
10	64QAM	1	25	20.50	20.47	20.73	22	2
10	64QAM	1	49	20.44	20.88	20.64		
10	64QAM	25	0	19.62	19.53	19.47		
10	64QAM	25	12	19.51	19.62	19.40	21	3
10	64QAM	25	25	19.34	19.52	19.42		
10	64QAM	50	0	19.49	19.44	19.53		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.44	22.63	22.55	24	0
5	QPSK	1	12	22.29	22.65	22.48		
5	QPSK	1	24	22.24	22.52	22.41		
5	QPSK	12	0	21.45	21.53	21.41	23	1
5	QPSK	12	7	21.43	21.39	21.33		
5	QPSK	12	13	21.27	21.34	21.65		
5	QPSK	25	0	21.46	21.38	21.50	23	1
5	16QAM	1	0	21.96	21.56	21.88		
5	16QAM	1	12	21.87	21.27	21.54		
5	16QAM	1	24	21.64	21.61	21.54	22	2
5	16QAM	12	0	20.60	20.59	20.48		
5	16QAM	12	7	20.29	20.58	20.42		
5	16QAM	12	13	20.40	20.43	20.51	22	2
5	16QAM	25	0	20.50	20.55	20.43		
5	64QAM	1	0	20.78	20.69	20.55		
5	64QAM	1	12	20.50	20.45	20.81	22	2
5	64QAM	1	24	20.35	20.83	20.63		
5	64QAM	12	0	19.66	19.59	19.47		
5	64QAM	12	7	19.56	19.51	19.49	21	3
5	64QAM	12	13	19.37	19.47	19.51		
5	64QAM	25	0	19.52	19.41	19.45		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.36	22.53	22.43	24	0
3	QPSK	1	8	22.21	22.66	22.42		
3	QPSK	1	14	22.28	22.54	22.24		
3	QPSK	8	0	21.44	21.49	21.30	23	1
3	QPSK	8	4	21.38	21.45	21.37		
3	QPSK	8	7	21.32	21.22	21.52		
3	QPSK	15	0	21.47	21.38	21.46	23	1
3	16QAM	1	0	21.92	21.42	21.77		
3	16QAM	1	8	21.89	21.34	21.36		
3	16QAM	1	14	21.63	21.56	21.54	22	2
3	16QAM	8	0	20.48	20.55	20.32		
3	16QAM	8	4	20.29	20.55	20.51		
3	16QAM	8	7	20.41	20.40	20.41	22	2
3	16QAM	15	0	20.51	20.45	20.47		
3	64QAM	1	0	20.65	20.75	20.50	22	2
3	64QAM	1	8	20.35	20.43	20.67		
3	64QAM	1	14	20.35	20.85	20.51		
3	64QAM	8	0	19.58	19.51	19.43	21	3
3	64QAM	8	4	19.53	19.48	19.50		
3	64QAM	8	7	19.35	19.47	19.47		
3	64QAM	15	0	19.43	19.42	19.46	21	3
Channel				18607	18900	19193		
Frequency (MHz)				1850.7	1880	1909.3	Tune-up limit (dBm)	MPR (dB)
1.4	QPSK	1	0	22.44	22.45	22.49		
1.4	QPSK	1	3	22.22	22.49	22.40	24	0
1.4	QPSK	1	5	22.28	22.46	22.18		
1.4	QPSK	3	0	22.31	22.48	22.12		
1.4	QPSK	3	1	22.25	22.39	22.26	23	1
1.4	QPSK	3	3	22.19	22.24	22.36		
1.4	QPSK	6	0	21.38	21.26	21.39		
1.4	16QAM	1	0	21.77	21.55	21.79	23	1
1.4	16QAM	1	3	21.81	21.25	21.43		
1.4	16QAM	1	5	21.60	21.48	21.43		
1.4	16QAM	3	0	21.41	21.44	21.31	22	2
1.4	16QAM	3	1	21.21	21.41	21.42		
1.4	16QAM	3	3	21.39	21.40	21.59		
1.4	16QAM	6	0	20.47	20.44	20.33	22	2
1.4	64QAM	1	0	20.61	20.55	20.44		
1.4	64QAM	1	3	20.36	20.42	20.74		
1.4	64QAM	1	5	20.23	20.69	20.47	22	2
1.4	64QAM	3	0	20.53	20.37	20.30		
1.4	64QAM	3	1	20.46	20.50	20.41		
1.4	64QAM	3	3	20.28	20.29	20.10	21	3
1.4	64QAM	6	0	19.44	19.50	19.30		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.85	22.79	22.69	24	0
20	QPSK	1	49	22.78	22.64	22.82		
20	QPSK	1	99	22.82	22.77	22.69		
20	QPSK	50	0	21.90	21.77	21.79	23	1
20	QPSK	50	24	21.66	21.73	21.86		
20	QPSK	50	50	21.61	21.64	21.78		
20	QPSK	100	0	21.65	21.77	21.89		
20	16QAM	1	0	21.95	21.58	21.57	23	1
20	16QAM	1	49	21.80	21.73	21.70		
20	16QAM	1	99	21.81	21.85	21.46		
20	16QAM	50	0	20.79	20.87	20.90	22	2
20	16QAM	50	24	20.83	20.90	20.96		
20	16QAM	50	50	20.79	20.81	20.90		
20	16QAM	100	0	20.72	20.95	20.94		
20	64QAM	1	0	20.83	20.98	20.86	22	2
20	64QAM	1	49	20.84	20.97	20.94		
20	64QAM	1	99	20.24	20.70	20.81		
20	64QAM	50	0	19.71	19.82	19.85	21	3
20	64QAM	50	24	19.64	19.83	19.87		
20	64QAM	50	50	19.77	19.77	19.91		
20	64QAM	100	0	19.83	19.79	19.92		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.76	22.74	22.67	24	0
15	QPSK	1	37	22.77	22.59	22.74		
15	QPSK	1	74	22.79	22.68	22.62		
15	QPSK	36	0	21.84	21.67	21.71	23	1
15	QPSK	36	20	21.61	21.63	21.81		
15	QPSK	36	39	21.53	21.62	21.69		
15	QPSK	75	0	21.57	21.75	21.86		
15	16QAM	1	0	21.95	21.48	21.47	23	1
15	16QAM	1	37	21.76	21.70	21.69		
15	16QAM	1	74	21.79	21.82	21.38		
15	16QAM	36	0	20.75	20.78	20.87	22	2
15	16QAM	36	20	20.83	20.84	20.94		
15	16QAM	36	39	20.76	20.75	20.88		
15	16QAM	75	0	20.66	20.94	20.86		
15	64QAM	1	0	20.80	20.94	20.81	22	2
15	64QAM	1	37	20.75	20.89	20.92		
15	64QAM	1	74	20.16	20.67	20.73		
15	64QAM	36	0	19.65	19.73	19.77	21	3
15	64QAM	36	20	19.56	19.77	19.87		
15	64QAM	36	39	19.68	19.76	19.91		
15	64QAM	75	0	19.82	19.72	19.85		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.67	22.66	22.57	24	0
10	QPSK	1	25	22.70	22.49	22.73		
10	QPSK	1	49	22.78	22.64	22.55		
10	QPSK	25	0	21.80	21.61	21.63	23	1
10	QPSK	25	12	21.53	21.55	21.81		
10	QPSK	25	25	21.46	21.56	21.69		
10	QPSK	50	0	21.56	21.73	21.81	23	1
10	16QAM	1	0	21.95	21.48	21.42		
10	16QAM	1	25	21.73	21.65	21.68		
10	16QAM	1	49	21.71	21.76	21.33	22	2
10	16QAM	25	0	20.75	20.74	20.87		
10	16QAM	25	12	20.79	20.79	20.89		
10	16QAM	25	25	20.66	20.67	20.84	22	2
10	16QAM	50	0	20.60	20.94	20.84		
10	64QAM	1	0	20.79	20.85	20.74		
10	64QAM	1	25	20.71	20.86	20.89	22	2
10	64QAM	1	49	20.07	20.60	20.70		
10	64QAM	25	0	19.55	19.68	19.67		
10	64QAM	25	12	19.56	19.67	19.83	21	3
10	64QAM	25	25	19.66	19.74	19.82		
10	64QAM	50	0	19.76	19.72	19.76		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.60	22.57	22.54	24	0
5	QPSK	1	12	22.66	22.47	22.65		
5	QPSK	1	24	22.76	22.60	22.48		
5	QPSK	12	0	21.72	21.59	21.59	23	1
5	QPSK	12	7	21.46	21.54	21.78		
5	QPSK	12	13	21.38	21.52	21.61		
5	QPSK	25	0	21.54	21.65	21.72	23	1
5	16QAM	1	0	21.86	21.39	21.35		
5	16QAM	1	12	21.69	21.64	21.62		
5	16QAM	1	24	21.69	21.76	21.32	22	2
5	16QAM	12	0	20.70	20.68	20.84		
5	16QAM	12	7	20.79	20.78	20.84		
5	16QAM	12	13	20.59	20.61	20.76	22	2
5	16QAM	25	0	20.53	20.90	20.83		
5	64QAM	1	0	20.73	20.76	20.68		
5	64QAM	1	12	20.69	20.81	20.86	22	2
5	64QAM	1	24	20.07	20.53	20.64		
5	64QAM	12	0	19.51	19.64	19.66		
5	64QAM	12	7	19.54	19.65	19.77	21	3
5	64QAM	12	13	19.59	19.65	19.81		
5	64QAM	25	0	19.76	19.69	19.76		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.55	22.61	22.53	24	0
3	QPSK	1	8	22.53	22.55	22.58		
3	QPSK	1	14	22.62	22.67	22.42		
3	QPSK	8	0	21.68	21.65	21.52	23	1
3	QPSK	8	4	21.48	21.53	21.75		
3	QPSK	8	7	21.27	21.48	21.67		
3	QPSK	15	0	21.55	21.50	21.65	23	1
3	16QAM	1	0	21.73	21.42	21.45		
3	16QAM	1	8	21.61	21.48	21.41		
3	16QAM	1	14	21.66	21.71	21.17	22	2
3	16QAM	8	0	20.67	20.61	20.62		
3	16QAM	8	4	20.74	20.80	20.77		
3	16QAM	8	7	20.62	20.58	20.60	22	2
3	16QAM	15	0	20.51	20.75	20.77		
3	64QAM	1	0	20.51	20.84	20.70		
3	64QAM	1	8	20.65	20.81	20.79	22	2
3	64QAM	1	14	20.12	20.53	20.60		
3	64QAM	8	0	19.49	19.56	19.60		
3	64QAM	8	4	19.43	19.62	19.67	21	3
3	64QAM	8	7	19.73	19.66	19.68		
3	64QAM	15	0	19.48	19.56	19.67		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.83	22.69	22.63	24	0
1.4	QPSK	1	3	22.74	22.43	22.76		
1.4	QPSK	1	5	22.75	22.80	22.58		
1.4	QPSK	3	0	22.78	22.79	22.76		
1.4	QPSK	3	1	22.57	22.62	22.77		
1.4	QPSK	3	3	22.51	22.66	22.71		
1.4	QPSK	6	0	21.58	21.73	21.83	23	1
1.4	16QAM	1	0	21.88	21.45	21.61	23	1
1.4	16QAM	1	3	21.68	21.80	21.62		
1.4	16QAM	1	5	21.77	21.80	21.60		
1.4	16QAM	3	0	21.61	21.74	21.91		
1.4	16QAM	3	1	21.79	21.89	21.74		
1.4	16QAM	3	3	21.49	21.73	21.81		
1.4	16QAM	6	0	21.79	20.82	20.89	22	2
1.4	64QAM	1	0	20.80	20.92	20.90	22	2
1.4	64QAM	1	3	20.72	20.88	20.79		
1.4	64QAM	1	5	20.20	20.63	20.74		
1.4	64QAM	3	0	20.61	20.81	20.87		
1.4	64QAM	3	1	20.58	20.67	20.67		
1.4	64QAM	3	3	20.78	20.66	20.83		
1.4	64QAM	6	0	19.80	19.73	19.79	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.68	23.70	23.67	25	0
10	QPSK	1	25	23.51	23.60	23.54		
10	QPSK	1	49	23.53	23.45	23.67		
10	QPSK	25	0	22.59	22.69	22.52	24	1
10	QPSK	25	12	22.59	22.66	22.64		
10	QPSK	25	25	22.55	22.60	22.58		
10	QPSK	50	0	22.57	22.65	22.59	24	1
10	16QAM	1	0	22.92	22.99	22.83		
10	16QAM	1	25	22.95	22.98	22.70		
10	16QAM	1	49	22.65	22.25	22.98	23	2
10	16QAM	25	0	21.72	21.77	21.56		
10	16QAM	25	12	21.66	21.79	21.70		
10	16QAM	25	25	21.68	21.68	21.68	23	2
10	16QAM	50	0	21.71	21.75	21.62		
10	64QAM	1	0	21.83	21.90	21.89		
10	64QAM	1	25	21.88	21.82	21.91	23	2
10	64QAM	1	49	21.46	21.86	22.04		
10	64QAM	25	0	20.61	20.78	20.84		
10	64QAM	25	12	20.61	20.79	20.82	22	3
10	64QAM	25	25	20.74	20.67	20.92		
10	64QAM	50	0	20.76	20.73	20.88		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.53	23.58	23.66	25	0
5	QPSK	1	12	23.51	23.60	23.53		
5	QPSK	1	24	23.50	23.42	23.58		
5	QPSK	12	0	22.57	22.61	22.52	24	1
5	QPSK	12	7	22.57	22.57	22.59		
5	QPSK	12	13	22.55	22.57	22.53		
5	QPSK	25	0	22.57	22.62	22.55	24	1
5	16QAM	1	0	22.90	22.93	22.80		
5	16QAM	1	12	22.91	22.90	22.68		
5	16QAM	1	24	22.59	22.15	22.88	23	2
5	16QAM	12	0	21.62	21.75	21.52		
5	16QAM	12	7	21.65	21.73	21.69		
5	16QAM	12	13	21.60	21.64	21.65	23	2
5	16QAM	25	0	21.68	21.70	21.57		
5	64QAM	1	0	21.81	21.86	21.85		
5	64QAM	1	12	21.79	21.75	21.83	23	2
5	64QAM	1	24	21.39	21.81	21.97		
5	64QAM	12	0	20.60	20.71	20.74		
5	64QAM	12	7	20.52	20.76	20.80	22	3
5	64QAM	12	13	20.72	20.59	20.88		
5	64QAM	25	0	20.69	20.71	20.83		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.46	23.52	23.61	25	0
3	QPSK	1	8	23.47	23.59	23.53		
3	QPSK	1	14	23.43	23.41	23.56		
3	QPSK	8	0	22.51	22.61	22.50	24	1
3	QPSK	8	4	22.47	22.55	22.53		
3	QPSK	8	7	22.50	22.57	22.44		
3	QPSK	15	0	22.56	22.57	22.54		
3	16QAM	1	0	22.86	22.91	22.72	24	1
3	16QAM	1	8	22.83	22.84	22.59		
3	16QAM	1	14	22.54	22.09	22.80		
3	16QAM	8	0	21.57	21.71	21.45	23	2
3	16QAM	8	4	21.58	21.72	21.69		
3	16QAM	8	7	21.57	21.63	21.60		
3	16QAM	15	0	21.66	21.60	21.57		
3	64QAM	1	0	21.75	21.79	21.77	23	2
3	64QAM	1	8	21.75	21.71	21.73		
3	64QAM	1	14	21.29	21.76	21.97		
3	64QAM	8	0	20.57	20.65	20.65	22	3
3	64QAM	8	4	20.46	20.72	20.79		
3	64QAM	8	7	20.62	20.54	20.82		
3	64QAM	15	0	20.68	20.71	20.73		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.40	23.34	23.53	25	0
1.4	QPSK	1	3	23.36	23.36	23.40		
1.4	QPSK	1	5	23.43	23.18	23.41		
1.4	QPSK	3	0	23.14	23.20	23.14		
1.4	QPSK	3	1	23.07	23.10	23.09		
1.4	QPSK	3	3	23.16	23.10	23.10		
1.4	QPSK	6	0	22.30	22.39	22.43	24	1
1.4	16QAM	1	0	22.68	22.95	22.57	24	1
1.4	16QAM	1	3	22.99	22.81	22.45		
1.4	16QAM	1	5	22.48	22.71	22.77		
1.4	16QAM	3	0	22.04	22.17	22.16		
1.4	16QAM	3	1	22.02	22.14	22.09		
1.4	16QAM	3	3	22.16	22.02	22.04		
1.4	16QAM	6	0	21.52	21.53	21.55	23	2
1.4	64QAM	1	0	21.92	21.94	21.82	23	2
1.4	64QAM	1	3	21.94	22.04	22.02		
1.4	64QAM	1	5	21.31	21.60	21.85		
1.4	64QAM	3	0	21.16	21.20	21.28		
1.4	64QAM	3	1	21.07	21.20	21.27		
1.4	64QAM	3	3	21.10	21.19	21.34		
1.4	64QAM	6	0	20.61	20.59	20.77	22	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.57	23.01	23.15	24	0
20	QPSK	1	49	22.72	22.78	22.79		
20	QPSK	1	99	23.10	22.65	23.03		
20	QPSK	50	0	21.62	21.78	22.06	23	1
20	QPSK	50	24	21.68	21.72	22.10		
20	QPSK	50	50	21.88	21.60	22.07		
20	QPSK	100	0	21.70	21.72	22.10		
20	16QAM	1	0	22.41	22.39	22.36	23	1
20	16QAM	1	49	22.19	22.34	22.39		
20	16QAM	1	99	22.23	21.87	22.26		
20	16QAM	50	0	20.81	20.91	21.10	22	2
20	16QAM	50	24	20.85	20.89	21.14		
20	16QAM	50	50	21.01	20.71	21.19		
20	16QAM	100	0	20.77	20.87	21.18		
20	64QAM	1	0	20.70	21.34	20.72	22	2
20	64QAM	1	49	20.98	21.43	21.42		
20	64QAM	1	99	21.43	21.15	21.19		
20	64QAM	50	0	19.74	19.89	20.14	21	3
20	64QAM	50	24	19.75	19.89	20.14		
20	64QAM	50	50	19.98	19.74	20.12		
20	64QAM	100	0	19.76	19.86	20.10		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.39	22.98	22.97	24	0
15	QPSK	1	37	22.47	22.68	23.08		
15	QPSK	1	74	23.01	22.75	22.94		
15	QPSK	36	0	21.59	21.69	21.99	23	1
15	QPSK	36	20	21.63	21.63	22.01		
15	QPSK	36	39	21.86	21.60	21.97		
15	QPSK	75	0	21.63	21.71	22.08		
15	16QAM	1	0	21.65	22.47	22.36	23	1
15	16QAM	1	37	21.79	22.27	22.47		
15	16QAM	1	74	22.23	21.84	22.20		
15	16QAM	36	0	20.75	20.81	21.01	22	2
15	16QAM	36	20	20.78	20.80	21.12		
15	16QAM	36	39	20.96	20.61	21.17		
15	16QAM	75	0	20.68	20.78	21.08		
15	64QAM	1	0	20.61	21.27	20.68	22	2
15	64QAM	1	37	20.90	21.36	21.33		
15	64QAM	1	74	21.50	21.10	21.13		
15	64QAM	36	0	19.65	19.80	20.07	21	3
15	64QAM	36	20	19.75	19.86	20.06		
15	64QAM	36	39	19.96	19.65	20.12		
15	64QAM	75	0	19.69	19.82	20.07		

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.30	22.92	22.91	24	0
10	QPSK	1	25	22.46	22.68	23.06		
10	QPSK	1	49	22.98	22.71	22.88		
10	QPSK	25	0	21.53	21.60	21.99	23	1
10	QPSK	25	12	21.54	21.55	21.92		
10	QPSK	25	25	21.76	21.55	21.90		
10	QPSK	50	0	21.58	21.63	22.01	23	1
10	16QAM	1	0	21.58	22.47	22.26		
10	16QAM	1	25	21.79	22.22	22.46		
10	16QAM	1	49	22.18	21.74	22.18	22	2
10	16QAM	25	0	20.68	20.71	20.98		
10	16QAM	25	12	20.78	20.78	21.05		
10	16QAM	25	25	20.92	20.54	21.15	22	2
10	16QAM	50	0	20.62	20.70	20.99		
10	64QAM	1	0	20.60	21.27	20.59		
10	64QAM	1	25	20.83	21.27	21.31	22	2
10	64QAM	1	49	21.42	21.01	21.08		
10	64QAM	25	0	19.60	19.76	19.98		
10	64QAM	25	12	19.73	19.76	20.01	21	3
10	64QAM	25	25	19.92	19.60	20.10		
10	64QAM	50	0	19.64	19.82	20.07		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.20	22.87	22.87	24	0
5	QPSK	1	12	22.44	22.64	22.99		
5	QPSK	1	24	22.98	22.67	22.80		
5	QPSK	12	0	21.50	21.53	21.94	23	1
5	QPSK	12	7	21.50	21.52	21.84		
5	QPSK	12	13	21.76	21.46	21.83		
5	QPSK	25	0	21.52	21.57	21.96	23	1
5	16QAM	1	0	21.48	22.41	22.16		
5	16QAM	1	12	21.72	22.19	22.34		
5	16QAM	1	24	22.13	21.71	22.10	22	2
5	16QAM	12	0	20.62	20.67	20.95		
5	16QAM	12	7	20.70	20.77	20.96		
5	16QAM	12	13	20.90	20.46	21.14	22	2
5	16QAM	25	0	20.58	20.66	20.95		
5	64QAM	1	0	20.55	21.22	20.50		
5	64QAM	1	12	20.81	21.26	21.30	22	2
5	64QAM	1	24	21.41	20.97	21.03		
5	64QAM	12	0	19.52	19.75	19.97		
5	64QAM	12	7	19.67	19.69	19.95	21	3
5	64QAM	12	13	19.88	19.60	20.05		
5	64QAM	25	0	19.60	19.79	20.05		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.72	22.71	22.73	24	0
10	QPSK	1	25	22.71	22.65	22.67		
10	QPSK	1	49	22.54	22.64	22.67		
10	QPSK	25	0	21.58	21.49	21.46	23	1
10	QPSK	25	12	21.59	21.44	21.42		
10	QPSK	25	25	21.52	21.39	21.57		
10	QPSK	50	0	21.66	21.43	21.50		
10	16QAM	1	0	21.66	21.77	21.79	23	1
10	16QAM	1	25	21.92	21.65	21.94		
10	16QAM	1	49	21.85	21.67	21.90		
10	16QAM	25	0	20.53	20.59	20.63	22	2
10	16QAM	25	12	20.65	20.54	20.60		
10	16QAM	25	25	20.56	20.50	20.67		
10	16QAM	50	0	20.56	20.52	20.60		
10	64QAM	1	0	20.90	20.97	20.94	22	2
10	64QAM	1	25	20.91	20.96	20.95		
10	64QAM	1	49	20.97	20.96	20.92		
10	64QAM	25	0	19.77	19.92	19.97	21	3
10	64QAM	25	12	19.78	19.92	19.86		
10	64QAM	25	25	19.99	19.77	19.76		
10	64QAM	50	0	19.79	19.89	19.79		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.48	22.42	22.34	24	0
5	QPSK	1	12	22.63	22.31	22.63		
5	QPSK	1	24	22.45	22.54	22.59		
5	QPSK	12	0	21.49	21.40	21.41	23	1
5	QPSK	12	7	21.58	21.44	21.38		
5	QPSK	12	13	21.44	21.29	21.48		
5	QPSK	25	0	21.62	21.36	21.47		
5	16QAM	1	0	21.60	21.68	21.76	23	1
5	16QAM	1	12	21.88	21.60	21.85		
5	16QAM	1	24	21.84	21.58	21.81		
5	16QAM	12	0	20.51	20.58	20.54	22	2
5	16QAM	12	7	20.65	20.50	20.56		
5	16QAM	12	13	20.47	20.44	20.64		
5	16QAM	25	0	20.49	20.47	20.52		
5	64QAM	1	0	20.81	20.95	20.85	22	2
5	64QAM	1	12	20.83	20.90	20.94		
5	64QAM	1	24	20.94	20.92	20.82		
5	64QAM	12	0	19.76	19.87	19.91	21	3
5	64QAM	12	7	19.76	19.88	19.82		
5	64QAM	12	13	19.96	19.74	19.69		
5	64QAM	25	0	19.77	19.85	19.72		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.44	22.40	22.25	24	0
3	QPSK	1	8	22.65	22.29	22.61		
3	QPSK	1	14	22.46	22.57	22.56		
3	QPSK	8	0	21.48	21.39	21.38	23	1
3	QPSK	8	4	21.58	21.39	21.33		
3	QPSK	8	7	21.39	21.25	21.50		
3	QPSK	15	0	21.53	21.34	21.36		
3	16QAM	1	0	21.56	21.68	21.64	23	1
3	16QAM	1	8	21.77	21.50	21.87		
3	16QAM	1	14	21.81	21.51	21.86		
3	16QAM	8	0	20.42	20.50	20.50	22	2
3	16QAM	8	4	20.59	20.44	20.42		
3	16QAM	8	7	20.48	20.45	20.51		
3	16QAM	15	0	20.51	20.49	20.57		
3	64QAM	1	0	20.87	20.85	20.87	22	2
3	64QAM	1	8	20.80	20.87	20.85		
3	64QAM	1	14	20.89	20.82	20.80		
3	64QAM	8	0	19.76	19.75	19.87	21	3
3	64QAM	8	4	19.65	19.82	19.81		
3	64QAM	8	7	19.91	19.73	19.71		
3	64QAM	15	0	19.72	19.74	19.69		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.56	22.34	22.20	24	0
1.4	QPSK	1	3	22.51	22.19	22.55		
1.4	QPSK	1	5	22.40	22.50	22.55		
1.4	QPSK	3	0	22.43	22.40	22.31		
1.4	QPSK	3	1	22.44	22.34	22.18		
1.4	QPSK	3	3	22.42	22.09	22.37		
1.4	QPSK	6	0	21.44	21.34	21.24	23	1
1.4	16QAM	1	0	21.49	21.65	21.57	23	1
1.4	16QAM	1	3	21.75	21.44	21.88		
1.4	16QAM	1	5	21.60	21.51	21.78		
1.4	16QAM	3	0	21.31	21.50	21.36		
1.4	16QAM	3	1	21.51	21.41	21.49		
1.4	16QAM	3	3	21.43	21.33	21.36		
1.4	16QAM	6	0	20.55	20.41	20.56	22	2
1.4	64QAM	1	0	20.80	20.85	20.80	22	2
1.4	64QAM	1	3	20.71	20.77	20.81		
1.4	64QAM	1	5	20.81	20.76	20.80		
1.4	64QAM	3	0	20.63	20.75	20.71		
1.4	64QAM	3	1	20.68	20.73	20.73		
1.4	64QAM	3	3	20.91	20.63	20.67		
1.4	64QAM	6	0	19.72	19.77	19.65	21	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		22.53		24	0
10	QPSK	1	25		22.51			
10	QPSK	1	49		22.45			
10	QPSK	25	0		21.62		23	1
10	QPSK	25	12		21.53			
10	QPSK	25	25		21.61			
10	QPSK	50	0		21.48		23	1
10	16QAM	1	0		21.98			
10	16QAM	1	25		21.67			
10	16QAM	1	49		21.56		22	2
10	16QAM	25	0		20.77			
10	16QAM	25	12		20.68			
10	16QAM	25	25		20.67		22	2
10	16QAM	50	0		20.64			
10	64QAM	1	0		20.46			
10	64QAM	1	25		20.76		22	2
10	64QAM	1	49		20.64			
10	64QAM	25	0		19.84			
10	64QAM	25	12		19.70		21	3
10	64QAM	25	25		19.81			
10	64QAM	50	0		19.66			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.47	22.46	22.27	24	0
5	QPSK	1	12	22.38	22.48	22.22		
5	QPSK	1	24	22.47	22.37	22.46		
5	QPSK	12	0	21.50	21.53	21.36	23	1
5	QPSK	12	7	21.57	21.42	21.36		
5	QPSK	12	13	21.44	21.58	21.54		
5	QPSK	25	0	21.66	21.43	21.45	23	1
5	16QAM	1	0	21.60	21.79	21.72		
5	16QAM	1	12	21.82	21.62	21.94		
5	16QAM	1	24	21.77	21.95	21.94	22	2
5	16QAM	12	0	20.48	20.74	20.62		
5	16QAM	12	7	20.58	20.64	20.56		
5	16QAM	12	13	20.47	20.65	20.65	22	2
5	16QAM	25	0	20.46	20.57	20.58		
5	64QAM	1	0	20.94	20.97	20.94		
5	64QAM	1	12	20.94	20.97	20.91	22	2
5	64QAM	1	24	20.94	20.98	20.99		
5	64QAM	12	0	19.76	19.91	19.87		
5	64QAM	12	7	19.72	19.91	19.94	21	3
5	64QAM	12	13	19.92	19.70	19.83		
5	64QAM	25	0	19.71	19.83	19.87		



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		22.51		24	0
10	QPSK	1	25		22.38			
10	QPSK	1	49		22.47			
10	QPSK	25	0		21.46		23	1
10	QPSK	25	12		21.39			
10	QPSK	25	25		21.41			
10	QPSK	50	0		21.43		23	1
10	16QAM	1	0		21.95			
10	16QAM	1	25		21.61			
10	16QAM	1	49		21.70		22	2
10	16QAM	25	0		20.64			
10	16QAM	25	12		20.50			
10	16QAM	25	25		20.56		22	2
10	16QAM	50	0		20.43			
10	64QAM	1	0		20.95			
10	64QAM	1	25		20.98		22	2
10	64QAM	1	49		20.92			
10	64QAM	25	0		19.76		21	3
10	64QAM	25	12		19.77			
10	64QAM	25	25		19.98			
10	64QAM	50	0		19.78			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	22.39	22.40	22.26	24	0
5	QPSK	1	12	22.43	22.39	22.44		
5	QPSK	1	24	22.40	22.37	22.47		
5	QPSK	12	0	21.48	21.44	21.28	23	1
5	QPSK	12	7	21.52	21.35	21.26		
5	QPSK	12	13	21.43	21.50	21.52		
5	QPSK	25	0	21.66	21.35	21.36	23	1
5	16QAM	1	0	21.53	21.97	21.62		
5	16QAM	1	12	21.80	21.53	21.94		
5	16QAM	1	24	21.67	21.95	21.98	22	2
5	16QAM	12	0	20.43	20.65	20.57		
5	16QAM	12	7	20.51	20.59	20.51		
5	16QAM	12	13	20.43	20.64	20.60	22	2
5	16QAM	25	0	20.46	20.49	20.54		
5	64QAM	1	0	20.94	20.94	20.96		
5	64QAM	1	12	20.90	20.98	20.90	22	2
5	64QAM	1	24	20.84	20.99	20.94		
5	64QAM	12	0	19.68	19.91	19.85		
5	64QAM	12	7	19.63	19.89	19.87	21	3
5	64QAM	12	13	19.92	19.69	19.73		
5	64QAM	25	0	19.67	19.73	19.87		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.60	22.63	22.73	24	0
10	QPSK	1	25	22.44	22.51	22.61		
10	QPSK	1	49	22.53	22.41	22.43		
10	QPSK	25	0	21.38	21.36	21.50	23	1
10	QPSK	25	12	21.49	21.45	21.40		
10	QPSK	25	25	21.54	21.65	21.54		
10	QPSK	50	0	21.39	21.56	21.53	23	1
10	16QAM	1	0	21.79	21.90	21.80		
10	16QAM	1	25	21.62	21.98	21.86		
10	16QAM	1	49	21.81	21.71	21.87	22	2
10	16QAM	25	0	20.44	20.44	20.58		
10	16QAM	25	12	20.60	20.54	20.54		
10	16QAM	25	25	20.66	20.72	20.62	22	2
10	16QAM	50	0	20.42	20.47	20.54		
10	64QAM	1	0	20.68	20.85	20.82		
10	64QAM	1	25	20.98	20.99	20.97	22	2
10	64QAM	1	49	20.91	20.97	20.95		
10	64QAM	25	0	19.63	19.86	19.96		
10	64QAM	25	12	19.73	19.73	19.87	21	3
10	64QAM	25	25	19.89	19.83	19.83		
10	64QAM	50	0	19.95	19.86	19.91		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.49	22.44	22.72	24	0
5	QPSK	1	12	22.43	22.45	22.56		
5	QPSK	1	24	22.71	22.41	22.41		
5	QPSK	12	0	21.38	21.28	21.41	23	1
5	QPSK	12	7	21.43	21.35	21.31		
5	QPSK	12	13	21.51	21.61	21.49		
5	QPSK	25	0	21.39	21.50	21.45	23	1
5	16QAM	1	0	21.78	21.83	21.78		
5	16QAM	1	12	21.57	21.95	21.82		
5	16QAM	1	24	21.75	21.61	21.87	22	2
5	16QAM	12	0	20.42	20.40	20.50		
5	16QAM	12	7	20.53	20.49	20.51		
5	16QAM	12	13	20.57	20.68	20.60	22	2
5	16QAM	25	0	20.32	20.40	20.52		
5	64QAM	1	0	20.65	20.76	20.72		
5	64QAM	1	12	20.97	20.97	20.90	22	2
5	64QAM	1	24	20.85	20.92	20.91		
5	64QAM	12	0	19.61	19.80	19.91		
5	64QAM	12	7	19.69	19.69	19.80	21	3
5	64QAM	12	13	19.89	19.78	19.77		
5	64QAM	25	0	19.93	19.79	19.85		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.82	22.58	22.65	24	0
20	QPSK	1	49	22.48	22.50	22.64		
20	QPSK	1	99	22.56	22.38	22.38		
20	QPSK	50	0	21.66	21.50	21.63	23	1
20	QPSK	50	24	21.53	21.48	21.57		
20	QPSK	50	50	21.38	21.45	21.54		
20	QPSK	100	0	21.54	21.46	21.63		
20	16QAM	1	0	21.90	21.96	21.82	23	1
20	16QAM	1	49	21.91	21.67	21.90		
20	16QAM	1	99	21.86	21.71	21.74		
20	16QAM	50	0	20.71	20.50	20.67	22	2
20	16QAM	50	24	20.60	20.55	20.65		
20	16QAM	50	50	20.49	20.48	20.62		
20	16QAM	100	0	20.55	20.53	20.65		
20	64QAM	1	0	20.90	20.95	20.95	22	2
20	64QAM	1	49	20.53	20.15	20.74		
20	64QAM	1	99	20.64	20.59	20.74		
20	64QAM	50	0	19.75	19.62	19.68	21	3
20	64QAM	50	24	19.59	19.60	19.70		
20	64QAM	50	50	19.43	19.55	19.67		
20	64QAM	100	0	19.61	19.54	19.70		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.75	22.55	22.27	24	0
15	QPSK	1	37	22.44	22.50	22.63		
15	QPSK	1	74	22.49	22.36	22.32		
15	QPSK	36	0	21.58	21.41	21.59	23	1
15	QPSK	36	20	21.46	21.40	21.48		
15	QPSK	36	39	21.32	21.37	21.48		
15	QPSK	75	0	21.44	21.36	21.54		
15	16QAM	1	0	21.96	21.95	21.74	23	1
15	16QAM	1	37	21.99	21.62	21.95		
15	16QAM	1	74	21.79	21.69	21.74		
15	16QAM	36	0	20.71	20.46	20.60	22	2
15	16QAM	36	20	20.55	20.45	20.56		
15	16QAM	36	39	20.40	20.38	20.57		
15	16QAM	75	0	20.49	20.44	20.64		
15	64QAM	1	0	20.93	20.86	20.85	22	2
15	64QAM	1	37	20.49	20.12	20.73		
15	64QAM	1	74	20.58	20.52	20.66		
15	64QAM	36	0	19.69	19.56	19.63	21	3
15	64QAM	36	20	19.55	19.55	19.64		
15	64QAM	36	39	19.33	19.52	19.57		
15	64QAM	75	0	19.58	19.44	19.70		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.75	22.51	22.25	24	0
10	QPSK	1	25	22.39	22.42	22.58		
10	QPSK	1	49	22.49	22.34	22.25		
10	QPSK	25	0	21.55	21.38	21.54	23	1
10	QPSK	25	12	21.42	21.40	21.39		
10	QPSK	25	25	21.32	21.28	21.42		
10	QPSK	50	0	21.35	21.30	21.48	23	1
10	16QAM	1	0	21.89	21.89	21.69		
10	16QAM	1	25	21.97	21.59	21.85		
10	16QAM	1	49	21.76	21.69	21.64	22	2
10	16QAM	25	0	20.63	20.38	20.56		
10	16QAM	25	12	20.55	20.45	20.51		
10	16QAM	25	25	20.38	20.29	20.57	22	2
10	16QAM	50	0	20.47	20.39	20.59		
10	64QAM	1	0	20.87	20.83	20.77		
10	64QAM	1	25	20.44	20.08	20.69	22	2
10	64QAM	1	49	20.56	20.43	20.66		
10	64QAM	25	0	19.69	19.49	19.56		
10	64QAM	25	12	19.54	19.54	19.63	21	3
10	64QAM	25	25	19.32	19.45	19.55		
10	64QAM	50	0	19.58	19.37	19.70		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.65	22.49	22.15	24	0
5	QPSK	1	12	22.34	22.39	22.54		
5	QPSK	1	24	22.49	22.32	22.19		
5	QPSK	12	0	21.49	21.32	21.50	23	1
5	QPSK	12	7	21.41	21.36	21.37		
5	QPSK	12	13	21.22	21.22	21.39		
5	QPSK	25	0	21.25	21.25	21.39	23	1
5	16QAM	1	0	21.98	21.86	21.59		
5	16QAM	1	12	21.97	21.54	21.85		
5	16QAM	1	24	21.72	21.62	21.60	22	2
5	16QAM	12	0	20.63	20.29	20.53		
5	16QAM	12	7	20.51	20.44	20.44		
5	16QAM	12	13	20.33	20.21	20.50	22	2
5	16QAM	25	0	20.43	20.35	20.53		
5	64QAM	1	0	20.86	20.80	20.70		
5	64QAM	1	12	20.42	20.03	20.63	22	2
5	64QAM	1	24	20.50	20.33	20.64		
5	64QAM	12	0	19.62	19.39	19.51		
5	64QAM	12	7	19.47	19.45	19.63	21	3
5	64QAM	12	13	19.26	19.36	19.49		
5	64QAM	25	0	19.48	19.28	19.62		

Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.65	22.42	22.05	24	0
3	QPSK	1	8	22.31	22.29	22.51		
3	QPSK	1	14	22.44	22.29	22.10		
3	QPSK	8	0	21.40	21.30	21.43	23	1
3	QPSK	8	4	21.39	21.35	21.32		
3	QPSK	8	7	21.12	21.19	21.32		
3	QPSK	15	0	21.22	21.25	21.36	23	1
3	16QAM	1	0	21.98	21.77	21.56		
3	16QAM	1	8	21.94	21.47	21.85		
3	16QAM	1	14	21.62	21.56	21.56	22	2
3	16QAM	8	0	20.53	20.19	20.48		
3	16QAM	8	4	20.42	20.40	20.44		
3	16QAM	8	7	20.23	20.13	20.46	22	2
3	16QAM	15	0	20.36	20.25	20.47		
3	64QAM	1	0	20.91	20.76	20.64		
3	64QAM	1	8	20.39	20.00	20.59	22	2
3	64QAM	1	14	20.48	20.23	20.57		
3	64QAM	8	0	19.62	19.39	19.44		
3	64QAM	8	4	19.42	19.40	19.58	21	3
3	64QAM	8	7	19.19	19.32	19.49		
3	64QAM	15	0	19.39	19.18	19.58		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.65	22.33	22.46	24	0
1.4	QPSK	1	3	22.30	22.27	22.48		
1.4	QPSK	1	5	22.34	22.24	22.07		
1.4	QPSK	3	0	22.31	22.24	22.34		
1.4	QPSK	3	1	22.33	22.26	22.22		
1.4	QPSK	3	3	22.04	22.14	22.22		
1.4	QPSK	6	0	21.18	21.21	21.26	23	1
1.4	16QAM	1	0	21.98	21.73	21.54	23	1
1.4	16QAM	1	3	21.87	21.39	21.76		
1.4	16QAM	1	5	21.57	21.51	21.50		
1.4	16QAM	3	0	21.48	21.18	21.40		
1.4	16QAM	3	1	21.33	21.37	21.42		
1.4	16QAM	3	3	21.23	21.04	21.30		
1.4	16QAM	6	0	20.27	20.25	20.40	22	2
1.4	64QAM	1	0	20.93	20.68	20.61	22	2
1.4	64QAM	1	3	20.39	20.42	20.49		
1.4	64QAM	1	5	20.38	20.14	20.49		
1.4	64QAM	3	0	20.56	20.32	20.41		
1.4	64QAM	3	1	20.38	20.35	20.49		
1.4	64QAM	3	3	20.12	20.32	20.43		
1.4	64QAM	6	0	19.29	19.14	19.50	21	3

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.58	23.62	23.54		
15	QPSK	1	37	23.55	23.51	23.40	25	0
15	QPSK	1	74	23.54	23.41	23.38		
15	QPSK	36	0	22.24	22.28	22.34		
15	QPSK	36	20	22.25	22.25	22.23	24	1
15	QPSK	36	39	22.34	22.34	22.28		
15	QPSK	75	0	22.29	22.33	22.26		
15	16QAM	1	0	22.14	22.46	22.71	24	1
15	16QAM	1	37	22.66	22.17	22.69		
15	16QAM	1	74	22.70	22.73	22.66		
15	16QAM	36	0	21.43	21.28	21.43	23	2
15	16QAM	36	20	21.34	21.32	21.33		
15	16QAM	36	39	21.39	21.35	21.31		
15	16QAM	75	0	21.30	21.32	21.28	23	2
15	64QAM	1	0	21.69	21.63	21.68		
15	64QAM	1	37	21.21	21.13	21.42		
15	64QAM	1	74	21.32	21.27	21.42	22	3
15	64QAM	36	0	20.43	20.30	20.36		
15	64QAM	36	20	20.27	20.28	20.38		
15	64QAM	36	39	20.11	20.23	20.35	22	3
15	64QAM	75	0	20.29	20.22	20.38		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.20	23.17	23.38		
10	QPSK	1	25	23.22	23.51	23.25	25	0
10	QPSK	1	49	23.49	23.32	23.31		
10	QPSK	25	0	22.14	22.20	22.27		
10	QPSK	25	12	22.20	22.25	22.23	24	1
10	QPSK	25	25	22.34	22.29	22.25		
10	QPSK	50	0	22.28	22.23	22.23		
10	16QAM	1	0	22.14	22.39	22.44	24	1
10	16QAM	1	25	22.66	22.08	22.74		
10	16QAM	1	49	22.64	22.72	22.56		
10	16QAM	25	0	21.40	21.19	21.43	23	2
10	16QAM	25	12	21.31	21.26	21.28		
10	16QAM	25	25	21.38	21.31	21.27		
10	16QAM	50	0	21.27	21.24	21.20	23	2
10	64QAM	1	0	21.75	21.62	21.70		
10	64QAM	1	25	21.21	21.05	21.34		
10	64QAM	1	49	21.32	21.26	21.34	22	3
10	64QAM	25	0	20.35	20.29	20.35		
10	64QAM	25	12	20.24	20.20	20.30		
10	64QAM	25	25	20.03	20.20	20.29	22	3
10	64QAM	50	0	20.27	20.14	20.28		

Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.13	23.09	23.33	25	0
5	QPSK	1	12	23.15	23.41	23.25		
5	QPSK	1	24	23.39	23.32	23.27		
5	QPSK	12	0	22.12	22.15	22.21	24	1
5	QPSK	12	7	22.11	22.25	22.15		
5	QPSK	12	13	22.31	22.27	22.17		
5	QPSK	25	0	22.19	22.23	22.13	24	1
5	16QAM	1	0	22.10	22.32	22.74		
5	16QAM	1	12	22.62	22.07	22.65		
5	16QAM	1	24	22.63	22.66	22.50	23	2
5	16QAM	12	0	21.33	21.10	21.33		
5	16QAM	12	7	21.27	21.26	21.28		
5	16QAM	12	13	21.28	21.21	21.22	23	2
5	16QAM	25	0	21.20	21.18	21.12		
5	64QAM	1	0	21.70	21.61	21.69	23	2
5	64QAM	1	12	21.11	21.13	21.31		
5	64QAM	1	24	21.29	21.18	21.24		
5	64QAM	12	0	20.29	20.29	20.32	22	3
5	64QAM	12	7	20.16	20.15	20.30		
5	64QAM	12	13	20.03	20.19	20.22		
5	64QAM	25	0	20.19	20.11	20.20	22	3
5	64QAM	25	0	20.19	20.11	20.20		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.06	23.09	23.32	25	0
3	QPSK	1	8	23.09	23.33	23.18		
3	QPSK	1	14	23.30	23.30	23.27		
3	QPSK	8	0	22.12	22.13	22.12	24	1
3	QPSK	8	4	22.09	22.20	22.07		
3	QPSK	8	7	22.27	22.26	22.16		
3	QPSK	15	0	22.13	22.14	22.07	24	1
3	16QAM	1	0	22.09	22.24	22.72		
3	16QAM	1	8	22.59	22.09	22.55		
3	16QAM	1	14	22.58	22.66	22.46	23	2
3	16QAM	8	0	21.31	21.06	21.29		
3	16QAM	8	4	21.26	21.19	21.20		
3	16QAM	8	7	21.21	21.18	21.13	23	2
3	16QAM	15	0	21.16	21.13	21.08		
3	64QAM	1	0	21.67	21.57	21.64		
3	64QAM	1	8	21.09	21.00	21.30	23	2
3	64QAM	1	14	21.24	21.11	21.22		
3	64QAM	8	0	20.20	20.23	20.32		
3	64QAM	8	4	20.06	20.06	20.28	22	3
3	64QAM	8	7	19.97	20.13	20.14		
3	64QAM	15	0	20.13	20.05	20.12		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.05	23.08	23.30	25	0
1.4	QPSK	1	3	23.01	23.29	23.17		
1.4	QPSK	1	5	23.25	23.27	23.27		
1.4	QPSK	3	0	23.12	23.11	23.11		
1.4	QPSK	3	1	23.02	23.18	23.01		
1.4	QPSK	3	3	23.19	23.25	23.09		
1.4	QPSK	6	0	22.12	22.14	22.07	24	1
1.4	16QAM	1	0	22.16	22.14	22.71	24	1
1.4	16QAM	1	3	22.57	22.57	22.50		
1.4	16QAM	1	5	22.54	22.67	22.38		
1.4	16QAM	3	0	22.23	22.09	22.21		
1.4	16QAM	3	1	22.20	22.17	22.19		
1.4	16QAM	3	3	22.18	22.09	22.11		
1.4	16QAM	6	0	21.13	21.12	21.04	23	2
1.4	64QAM	1	0	21.58	21.47	21.63	23	2
1.4	64QAM	1	3	21.04	21.06	21.27		
1.4	64QAM	1	5	21.15	21.09	21.18		
1.4	64QAM	3	0	21.12	21.15	21.23		
1.4	64QAM	3	1	21.03	21.01	21.28		
1.4	64QAM	3	3	21.07	21.06	21.13		
1.4	64QAM	6	0	20.13	20.01	20.08	22	3



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		21.37		23	0
10	QPSK	1	25		21.34			
10	QPSK	1	49		21.20			
10	QPSK	25	0		20.41		22	1
10	QPSK	25	12		20.40			
10	QPSK	25	25		20.39			
10	QPSK	50	0		20.44		22	1
10	16QAM	1	0		20.55			
10	16QAM	1	25		20.82			
10	16QAM	1	49		20.77		21	2
10	16QAM	25	0		19.45			
10	16QAM	25	12		19.50			
10	16QAM	25	25		19.44		21	2
10	16QAM	50	0		19.47			
10	64QAM	1	0		19.86			
10	64QAM	1	25		19.65		21	2
10	64QAM	1	49		19.92			
10	64QAM	25	0		18.69			
10	64QAM	25	12		18.55		20	3
10	64QAM	25	25		18.60			
10	64QAM	50	0		18.54			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	21.03	21.12	21.04	23	0
5	QPSK	1	12	21.24	21.27	21.22		
5	QPSK	1	24	21.33	21.35	21.33		
5	QPSK	12	0	20.30	20.38	20.29	22	1
5	QPSK	12	7	20.21	20.30	20.20		
5	QPSK	12	13	20.34	20.35	20.32		
5	QPSK	25	0	20.33	20.39	20.32	22	1
5	16QAM	1	0	20.52	20.54	20.52		
5	16QAM	1	12	20.66	20.72	20.58		
5	16QAM	1	24	20.71	20.75	20.67	21	2
5	16QAM	12	0	19.34	19.44	19.27		
5	16QAM	12	7	19.47	19.50	19.47		
5	16QAM	12	13	19.30	19.40	19.22	21	2
5	16QAM	25	0	19.33	19.41	19.33		
5	64QAM	1	0	19.41	19.46	19.36		
5	64QAM	1	12	19.61	19.65	19.55	21	2
5	64QAM	1	24	19.82	19.90	19.72		
5	64QAM	12	0	18.89	18.94	18.96		
5	64QAM	12	7	18.47	18.51	18.47	20	3
5	64QAM	12	13	18.42	18.50	18.36		
5	64QAM	25	0	18.47	18.52	18.42		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.78	23.18	22.91	24	0
20	QPSK	1	49	22.80	23.14	22.92		
20	QPSK	1	99	22.75	23.05	22.76		
20	QPSK	50	0	21.84	21.87	21.83	23	1
20	QPSK	50	24	21.70	21.95	21.71		
20	QPSK	50	50	21.69	21.86	21.75		
20	QPSK	100	0	21.70	21.96	21.81		
20	16QAM	1	0	22.33	22.15	22.43	23	1
20	16QAM	1	49	21.96	22.50	22.42		
20	16QAM	1	99	22.13	22.04	22.12		
20	16QAM	50	0	20.88	20.91	20.89	22	2
20	16QAM	50	24	20.78	20.95	20.80		
20	16QAM	50	50	20.67	20.92	20.79		
20	16QAM	100	0	20.74	20.94	20.78		
20	64QAM	1	0	20.97	20.85	21.09	22	2
20	64QAM	1	49	21.29	21.33	21.21		
20	64QAM	1	99	21.07	21.17	20.73		
20	64QAM	50	0	19.86	19.97	19.86	21	3
20	64QAM	50	24	19.73	20.00	19.74		
20	64QAM	50	50	19.75	19.99	19.85		
20	64QAM	100	0	19.75	19.99	19.81		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.69	23.00	22.85	24	0
15	QPSK	1	37	22.60	23.09	22.66		
15	QPSK	1	74	22.71	23.01	22.69		
15	QPSK	36	0	21.84	21.78	21.80	23	1
15	QPSK	36	20	21.68	21.92	21.61		
15	QPSK	36	39	21.64	21.80	21.72		
15	QPSK	75	0	21.62	21.87	21.78		
15	16QAM	1	0	22.23	22.12	22.36	23	1
15	16QAM	1	37	21.95	22.45	22.34		
15	16QAM	1	74	22.12	21.98	22.04		
15	16QAM	36	0	20.87	20.83	20.87	22	2
15	16QAM	36	20	20.75	20.92	20.72		
15	16QAM	36	39	20.61	20.92	20.78		
15	16QAM	75	0	20.72	20.92	20.78		
15	64QAM	1	0	20.95	20.76	21.00	22	2
15	64QAM	1	37	21.22	21.33	21.14		
15	64QAM	1	74	21.05	21.13	20.69		
15	64QAM	36	0	19.82	19.90	19.81	21	3
15	64QAM	36	20	19.63	19.90	19.69		
15	64QAM	36	39	19.72	19.94	19.78		
15	64QAM	75	0	19.67	19.98	19.75		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.67	22.99	22.82	24	0
10	QPSK	1	25	22.58	22.99	22.56		
10	QPSK	1	49	22.69	23.01	22.59		
10	QPSK	25	0	21.77	21.69	21.70	23	1
10	QPSK	25	12	21.60	21.89	21.56		
10	QPSK	25	25	21.56	21.77	21.64		
10	QPSK	50	0	21.58	21.79	21.68	23	1
10	16QAM	1	0	22.19	22.09	22.49		
10	16QAM	1	25	21.95	22.35	22.30		
10	16QAM	1	49	22.08	21.92	21.94	22	2
10	16QAM	25	0	20.84	20.79	20.81		
10	16QAM	25	12	20.73	20.86	20.67		
10	16QAM	25	25	20.59	20.89	20.72	22	2
10	16QAM	50	0	20.71	20.82	20.69		
10	64QAM	1	0	20.87	20.74	20.92		
10	64QAM	1	25	21.20	21.33	21.13	22	2
10	64QAM	1	49	21.00	21.13	20.61		
10	64QAM	25	0	19.74	19.82	19.78		
10	64QAM	25	12	19.53	19.81	19.61	21	3
10	64QAM	25	25	19.70	19.91	19.71		
10	64QAM	50	0	19.67	19.94	19.67		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.65	22.98	22.82	24	0
5	QPSK	1	12	22.49	22.91	22.56		
5	QPSK	1	24	22.60	22.98	22.56		
5	QPSK	12	0	21.75	21.68	21.68	23	1
5	QPSK	12	7	21.57	21.79	21.54		
5	QPSK	12	13	21.47	21.69	21.64		
5	QPSK	25	0	21.50	21.70	21.67	23	1
5	16QAM	1	0	22.18	22.00	22.49		
5	16QAM	1	12	21.93	22.28	22.30		
5	16QAM	1	24	22.01	21.92	21.84	22	2
5	16QAM	12	0	20.74	20.77	20.71		
5	16QAM	12	7	20.64	20.82	20.59		
5	16QAM	12	13	20.51	20.85	20.72	22	2
5	16QAM	25	0	20.71	20.80	20.67		
5	64QAM	1	0	20.85	20.65	20.92		
5	64QAM	1	12	21.20	21.31	21.09	22	2
5	64QAM	1	24	20.99	21.13	20.59		
5	64QAM	12	0	19.73	19.82	19.77		
5	64QAM	12	7	19.45	19.73	19.60	21	3
5	64QAM	12	13	19.60	19.90	19.68		
5	64QAM	25	0	19.58	19.91	19.61		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.62	22.88	22.81	24	0
3	QPSK	1	8	22.45	22.87	22.55		
3	QPSK	1	14	22.52	22.90	22.51		
3	QPSK	8	0	21.72	21.68	21.68	23	1
3	QPSK	8	4	21.56	21.72	21.47		
3	QPSK	8	7	21.39	21.67	21.59		
3	QPSK	15	0	21.44	21.66	21.58	23	1
3	16QAM	1	0	22.12	21.93	22.39		
3	16QAM	1	8	21.83	22.26	22.28		
3	16QAM	1	14	21.92	21.86	21.81	22	2
3	16QAM	8	0	20.70	20.74	20.65		
3	16QAM	8	4	20.58	20.78	20.59		
3	16QAM	8	7	20.45	20.78	20.71	22	2
3	16QAM	15	0	20.61	20.78	20.58		
3	64QAM	1	0	20.75	20.56	20.83		
3	64QAM	1	8	21.18	21.22	21.06	22	2
3	64QAM	1	14	20.90	21.04	20.58		
3	64QAM	8	0	19.64	19.75	19.71		
3	64QAM	8	4	19.41	19.68	19.57	21	3
3	64QAM	8	7	19.53	19.83	19.60		
3	64QAM	15	0	19.53	19.90	19.52		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.53	22.82	22.71	24	0
1.4	QPSK	1	3	22.43	22.83	22.55		
1.4	QPSK	1	5	22.46	22.88	22.43		
1.4	QPSK	3	0	22.67	22.64	22.60		
1.4	QPSK	3	1	22.55	22.64	22.54		
1.4	QPSK	3	3	22.54	22.60	22.59		
1.4	QPSK	6	0	21.44	21.58	21.50	23	1
1.4	16QAM	1	0	22.09	21.83	22.34	23	1
1.4	16QAM	1	3	21.82	22.25	22.28		
1.4	16QAM	1	5	21.82	21.81	21.77		
1.4	16QAM	3	0	21.61	21.72	21.59		
1.4	16QAM	3	1	21.58	21.73	21.56		
1.4	16QAM	3	3	21.59	21.77	21.62		
1.4	16QAM	6	0	20.53	20.71	20.50	22	2
1.4	64QAM	1	0	20.65	20.47	20.81	22	2
1.4	64QAM	1	3	21.18	21.21	21.06		
1.4	64QAM	1	5	20.83	20.96	20.58		
1.4	64QAM	3	0	20.54	20.66	20.64		
1.4	64QAM	3	1	20.69	20.62	20.57		
1.4	64QAM	3	3	20.51	20.77	20.53		
1.4	64QAM	6	0	19.52	19.83	19.52	21	3

Reduced Power Mode
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	17.99	17.92	17.93	18	0
20	QPSK	1	49	17.64	17.61	17.61		
20	QPSK	1	99	17.58	17.64	17.63		
20	QPSK	50	0	17.70	17.55	17.55	18	0
20	QPSK	50	24	17.57	17.51	17.53		
20	QPSK	50	50	17.46	17.45	17.62		
20	QPSK	100	0	17.61	17.52	17.59		
20	16QAM	1	0	17.92	17.96	17.94	18	0
20	16QAM	1	49	17.66	17.89	17.95		
20	16QAM	1	99	17.84	17.61	17.90		
20	16QAM	50	0	17.74	17.58	17.60	18	0
20	16QAM	50	24	17.62	17.59	17.56		
20	16QAM	50	50	17.48	17.52	17.67		
20	16QAM	100	0	17.62	17.54	17.61		
20	64QAM	1	0	17.69	17.84	17.96	18	0
20	64QAM	1	49	17.79	17.80	17.52		
20	64QAM	1	99	17.82	17.89	17.89		
20	64QAM	50	0	17.75	17.58	17.60	18	0
20	64QAM	50	24	17.63	17.59	17.56		
20	64QAM	50	50	17.48	17.50	17.67		
20	64QAM	100	0	17.63	17.53	17.60		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	17.81	17.57	17.66	18	0
15	QPSK	1	37	17.82	17.50	17.59		
15	QPSK	1	74	17.57	17.61	17.50		
15	QPSK	36	0	17.65	17.51	17.49	18	0
15	QPSK	36	20	17.62	17.45	17.50		
15	QPSK	36	39	17.50	17.44	17.54		
15	QPSK	75	0	17.64	17.48	17.54		
15	16QAM	1	0	17.36	17.82	17.92	18	0
15	16QAM	1	37	17.63	17.85	17.86		
15	16QAM	1	74	17.60	17.69	17.83		
15	16QAM	36	0	17.75	17.55	17.59	18	0
15	16QAM	36	20	17.70	17.51	17.55		
15	16QAM	36	39	17.59	17.50	17.60		
15	16QAM	75	0	17.68	17.50	17.58		
15	64QAM	1	0	17.83	17.77	17.88	18	0
15	64QAM	1	37	17.70	17.72	17.79		
15	64QAM	1	74	17.76	17.87	17.77		
15	64QAM	36	0	17.74	17.56	17.59	18	0
15	64QAM	36	20	17.73	17.52	17.57		
15	64QAM	36	39	17.61	17.51	17.63		
15	64QAM	75	0	17.70	17.49	17.58		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	17.82	17.62	17.63	18	0
10	QPSK	1	25	17.77	17.52	17.60		
10	QPSK	1	49	17.64	17.52	17.52		
10	QPSK	25	0	17.70	17.53	17.53	18	0
10	QPSK	25	12	17.67	17.53	17.63		
10	QPSK	25	25	17.64	17.47	17.54		
10	QPSK	50	0	17.66	17.44	17.52		
10	16QAM	1	0	17.88	17.89	17.90	18	0
10	16QAM	1	25	17.77	17.90	17.92		
10	16QAM	1	49	17.74	17.87	17.86		
10	16QAM	25	0	17.81	17.60	17.63	18	0
10	16QAM	25	12	17.78	17.59	17.71		
10	16QAM	25	25	17.76	17.53	17.59		
10	16QAM	50	0	17.72	17.50	17.60		
10	64QAM	1	0	17.72	17.79	17.86	18	0
10	64QAM	1	25	17.75	17.77	17.77		
10	64QAM	1	49	17.97	17.78	17.75		
10	64QAM	25	0	17.79	17.59	17.61	18	0
10	64QAM	25	12	17.76	17.60	17.72		
10	64QAM	25	25	17.74	17.54	17.60		
10	64QAM	50	0	17.70	17.48	17.59		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	17.66	17.60	17.53	18	0
5	QPSK	1	12	17.65	17.52	17.49		
5	QPSK	1	24	17.67	17.55	17.45		
5	QPSK	12	0	17.70	17.64	17.60	18	0
5	QPSK	12	7	17.70	17.57	17.54		
5	QPSK	12	13	17.71	17.59	17.56		
5	QPSK	25	0	17.67	17.55	17.53		
5	16QAM	1	0	17.75	17.88	17.82	18	0
5	16QAM	1	12	17.71	17.85	17.77		
5	16QAM	1	24	17.99	17.88	17.81		
5	16QAM	12	0	17.80	17.71	17.64	18	0
5	16QAM	12	7	17.80	17.64	17.58		
5	16QAM	12	13	17.80	17.66	17.58		
5	16QAM	25	0	17.77	17.61	17.57		
5	64QAM	1	0	17.93	17.76	17.68	18	0
5	64QAM	1	12	17.94	17.74	17.68		
5	64QAM	1	24	17.98	17.87	17.64		
5	64QAM	12	0	17.83	17.71	17.69	18	0
5	64QAM	12	7	17.83	17.67	17.62		
5	64QAM	12	13	17.84	17.68	17.67		
5	64QAM	25	0	17.77	17.61	17.58		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	17.49	17.42	17.36	18	0
3	QPSK	1	8	17.53	17.41	17.41		
3	QPSK	1	14	17.48	17.37	17.30		
3	QPSK	8	0	17.53	17.46	17.38	18	0
3	QPSK	8	4	17.51	17.39	17.38		
3	QPSK	8	7	17.52	17.40	17.32		
3	QPSK	15	0	17.53	17.40	17.41		
3	16QAM	1	0	17.86	17.74	17.60	18	0
3	16QAM	1	8	17.90	17.66	17.81		
3	16QAM	1	14	17.90	17.64	17.61		
3	16QAM	8	0	17.61	17.49	17.40	18	0
3	16QAM	8	4	17.59	17.44	17.42		
3	16QAM	8	7	17.60	17.43	17.38		
3	16QAM	15	0	17.55	17.41	17.39		
3	64QAM	1	0	17.66	17.63	17.53	18	0
3	64QAM	1	8	17.86	17.66	17.62		
3	64QAM	1	14	17.78	17.60	17.57		
3	64QAM	8	0	17.59	17.49	17.40	18	0
3	64QAM	8	4	17.60	17.42	17.41		
3	64QAM	8	7	17.59	17.42	17.36		
3	64QAM	15	0	17.56	17.41	17.39		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	17.49	17.36	17.33	18	0
1.4	QPSK	1	3	17.52	17.34	17.31		
1.4	QPSK	1	5	17.44	17.30	17.27		
1.4	QPSK	3	0	17.43	17.40	17.36		
1.4	QPSK	3	1	17.48	17.30	17.35		
1.4	QPSK	3	3	17.46	17.37	17.29		
1.4	QPSK	6	0	17.50	17.38	17.33	18	0
1.4	16QAM	1	0	17.84	17.70	17.56	18	0
1.4	16QAM	1	3	17.80	17.62	17.71		
1.4	16QAM	1	5	17.80	17.64	17.59		
1.4	16QAM	3	0	17.59	17.40	17.34		
1.4	16QAM	3	1	17.58	17.34	17.35		
1.4	16QAM	3	3	17.59	17.36	17.37		
1.4	16QAM	6	0	17.54	17.33	17.36	18	0
1.4	64QAM	1	0	17.58	17.56	17.44	18	0
1.4	64QAM	1	3	17.86	17.57	17.52		
1.4	64QAM	1	5	17.69	17.53	17.48		
1.4	64QAM	3	0	17.54	17.40	17.35		
1.4	64QAM	3	1	17.58	17.38	17.32		
1.4	64QAM	3	3	17.50	17.36	17.34		
1.4	64QAM	6	0	17.56	17.33	17.34	18	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.94	16.79	16.81	17	0
20	QPSK	1	49	16.34	16.36	16.43		
20	QPSK	1	99	16.27	16.31	16.40		
20	QPSK	50	0	16.28	16.20	16.25	17	0
20	QPSK	50	24	16.17	16.23	16.31		
20	QPSK	50	50	16.16	16.18	16.29		
20	QPSK	100	0	16.19	16.29	16.34		
20	16QAM	1	0	16.87	16.63	16.72	17	0
20	16QAM	1	49	16.75	16.58	16.75		
20	16QAM	1	99	16.48	16.74	16.81		
20	16QAM	50	0	16.32	16.27	16.34	17	0
20	16QAM	50	24	16.23	16.29	16.39		
20	16QAM	50	50	16.22	16.25	16.36		
20	16QAM	100	0	16.22	16.33	16.40		
20	64QAM	1	0	16.75	16.52	16.65	17	0
20	64QAM	1	49	16.66	16.50	16.73		
20	64QAM	1	99	16.47	16.63	16.78		
20	64QAM	50	0	16.34	16.28	16.35	17	0
20	64QAM	50	24	16.23	16.28	16.41		
20	64QAM	50	50	16.21	16.26	16.36		
20	64QAM	100	0	16.22	16.32	16.40		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.46	16.24	16.44	17	0
15	QPSK	1	37	16.50	16.35	16.53		
15	QPSK	1	74	16.25	16.27	16.32		
15	QPSK	36	0	16.26	16.18	16.29	17	0
15	QPSK	36	20	16.24	16.23	16.31		
15	QPSK	36	39	16.12	16.16	16.21		
15	QPSK	75	0	16.25	16.26	16.32		
15	16QAM	1	0	16.89	16.66	16.82	17	0
15	16QAM	1	37	16.85	16.56	16.84		
15	16QAM	1	74	16.65	16.63	16.82		
15	16QAM	36	0	16.35	16.25	16.39	17	0
15	16QAM	36	20	16.35	16.30	16.42		
15	16QAM	36	39	16.20	16.23	16.33		
15	16QAM	75	0	16.33	16.30	16.39		
15	64QAM	1	0	16.77	16.50	16.60	17	0
15	64QAM	1	37	16.71	16.48	16.81		
15	64QAM	1	74	16.58	16.45	16.66		
15	64QAM	36	0	16.37	16.25	16.42	17	0
15	64QAM	36	20	16.35	16.29	16.44		
15	64QAM	36	39	16.22	16.23	16.33		
15	64QAM	75	0	16.29	16.29	16.39		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.42	16.33	16.51	17	0
10	QPSK	1	25	16.43	16.38	16.44		
10	QPSK	1	49	16.35	16.32	16.39		
10	QPSK	25	0	16.32	16.28	16.36	17	0
10	QPSK	25	12	16.29	16.26	16.31		
10	QPSK	25	25	16.28	16.26	16.27		
10	QPSK	50	0	16.31	16.24	16.30	17	0
10	16QAM	1	0	16.83	16.62	16.90		
10	16QAM	1	25	16.83	16.62	16.87		
10	16QAM	1	49	16.78	16.67	16.82	17	0
10	16QAM	25	0	16.45	16.33	16.50		
10	16QAM	25	12	16.44	16.35	16.45		
10	16QAM	25	25	16.39	16.34	16.42	17	0
10	16QAM	50	0	16.36	16.30	16.37		
10	64QAM	1	0	16.75	16.53	16.77		
10	64QAM	1	25	16.76	16.62	16.81	17	0
10	64QAM	1	49	16.65	16.60	16.74		
10	64QAM	25	0	16.46	16.34	16.50		
10	64QAM	25	12	16.45	16.35	16.49	17	0
10	64QAM	25	25	16.39	16.36	16.40		
10	64QAM	50	0	16.37	16.30	16.39		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.38	16.32	16.41	17	0
5	QPSK	1	12	16.40	16.30	16.36		
5	QPSK	1	24	16.38	16.36	16.32		
5	QPSK	12	0	16.33	16.36	16.34	17	0
5	QPSK	12	7	16.36	16.37	16.34		
5	QPSK	12	13	16.37	16.36	16.34		
5	QPSK	25	0	16.34	16.33	16.31	17	0
5	16QAM	1	0	16.78	16.59	16.87		
5	16QAM	1	12	16.88	16.64	16.81		
5	16QAM	1	24	16.82	16.66	16.81	17	0
5	16QAM	12	0	16.49	16.44	16.52		
5	16QAM	12	7	16.54	16.46	16.52		
5	16QAM	12	13	16.52	16.45	16.52	17	0
5	16QAM	25	0	16.49	16.40	16.45		
5	64QAM	1	0	16.63	16.56	16.73		
5	64QAM	1	12	16.71	16.51	16.64	17	0
5	64QAM	1	24	16.71	16.57	16.74		
5	64QAM	12	0	16.48	16.48	16.47		
5	64QAM	12	7	16.52	16.46	16.48	17	0
5	64QAM	12	13	16.54	16.46	16.52		
5	64QAM	25	0	16.50	16.41	16.44		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.25	16.20	16.25	17	0
3	QPSK	1	8	16.28	16.22	16.27		
3	QPSK	1	14	16.28	16.22	16.21		
3	QPSK	8	0	16.24	16.21	16.23	17	0
3	QPSK	8	4	16.22	16.21	16.22		
3	QPSK	8	7	16.27	16.21	16.16		
3	QPSK	15	0	16.20	16.21	16.20		
3	16QAM	1	0	16.61	16.49	16.72	17	0
3	16QAM	1	8	16.80	16.51	16.72		
3	16QAM	1	14	16.69	16.46	16.64		
3	16QAM	8	0	16.35	16.27	16.36	17	0
3	16QAM	8	4	16.39	16.29	16.38		
3	16QAM	8	7	16.37	16.29	16.29		
3	16QAM	15	0	16.27	16.22	16.27		
3	64QAM	1	0	16.54	16.43	16.57	17	0
3	64QAM	1	8	16.52	16.41	16.54		
3	64QAM	1	14	16.58	16.42	16.46		
3	64QAM	8	0	16.35	16.28	16.39	17	0
3	64QAM	8	4	16.31	16.27	16.36		
3	64QAM	8	7	16.41	16.26	16.31		
3	64QAM	15	0	16.29	16.23	16.28		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.15	16.19	16.16	17	0
1.4	QPSK	1	3	16.24	16.16	16.24		
1.4	QPSK	1	5	16.18	16.16	16.14		
1.4	QPSK	3	0	16.16	16.20	16.19		
1.4	QPSK	3	1	16.16	16.12	16.21		
1.4	QPSK	3	3	16.19	16.21	16.06		
1.4	QPSK	6	0	16.15	16.17	16.13	17	0
1.4	16QAM	1	0	16.58	16.43	16.70	17	0
1.4	16QAM	1	3	16.72	16.43	16.67		
1.4	16QAM	1	5	16.65	16.45	16.55		
1.4	16QAM	3	0	16.26	16.23	16.34		
1.4	16QAM	3	1	16.33	16.27	16.31		
1.4	16QAM	3	3	16.32	16.28	16.24		
1.4	16QAM	6	0	16.22	16.16	16.23	17	0
1.4	64QAM	1	0	16.51	16.38	16.49	17	0
1.4	64QAM	1	3	16.43	16.34	16.54		
1.4	64QAM	1	5	16.54	16.38	16.46		
1.4	64QAM	3	0	16.29	16.23	16.39		
1.4	64QAM	3	1	16.31	16.27	16.34		
1.4	64QAM	3	3	16.32	16.24	16.23		
1.4	64QAM	6	0	16.25	16.14	16.20	17	0

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.82	21.97	21.89	22	0
10	QPSK	1	25	21.89	21.91	21.91		
10	QPSK	1	49	21.88	21.78	21.86		
10	QPSK	25	0	21.79	21.88	21.78	22	0
10	QPSK	25	12	21.81	21.89	21.86		
10	QPSK	25	25	21.80	21.82	21.82		
10	QPSK	50	0	21.82	21.89	21.84		
10	16QAM	1	0	21.74	21.77	21.72	22	0
10	16QAM	1	25	21.73	21.76	21.79		
10	16QAM	1	49	21.75	21.66	21.60		
10	16QAM	25	0	20.88	20.98	20.86	22	0
10	16QAM	25	12	20.91	20.97	20.95		
10	16QAM	25	25	20.91	20.92	20.91		
10	16QAM	50	0	20.87	20.90	20.88		
10	64QAM	1	0	21.06	21.11	21.05	22	0
10	64QAM	1	25	21.13	21.16	21.12		
10	64QAM	1	49	21.11	20.93	21.03		
10	64QAM	25	0	20.18	20.18	20.14	22	0
10	64QAM	25	12	20.18	20.18	20.14		
10	64QAM	25	25	20.11	20.11	20.10		
10	64QAM	50	0	20.17	20.19	20.10		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.74	21.82	21.85	22	0
5	QPSK	1	12	21.89	21.92	21.84		
5	QPSK	1	24	21.83	21.71	21.85		
5	QPSK	12	0	21.74	21.79	21.68	22	0
5	QPSK	12	7	21.79	21.86	21.79		
5	QPSK	12	13	21.74	21.77	21.79		
5	QPSK	25	0	21.77	21.80	21.76		
5	16QAM	1	0	21.67	21.74	21.65	22	0
5	16QAM	1	12	21.63	21.76	21.76		
5	16QAM	1	24	21.65	21.64	21.58		
5	16QAM	12	0	20.88	20.98	20.76	22	0
5	16QAM	12	7	20.84	20.89	20.91		
5	16QAM	12	13	20.88	20.84	20.86		
5	16QAM	25	0	20.84	20.89	20.81		
5	64QAM	1	0	21.05	21.08	21.05	22	0
5	64QAM	1	12	21.10	21.08	21.03		
5	64QAM	1	24	21.03	20.84	21.03		
5	64QAM	12	0	20.14	20.16	20.05	22	0
5	64QAM	12	7	20.14	20.18	20.04		
5	64QAM	12	13	20.11	20.04	20.01		
5	64QAM	25	0	20.08	20.15	20.02		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.67	21.72	21.81	22	0
3	QPSK	1	8	21.85	21.83	21.84		
3	QPSK	1	14	21.75	21.68	21.84		
3	QPSK	8	0	21.67	21.74	21.63	22	0
3	QPSK	8	4	21.79	21.77	21.69		
3	QPSK	8	7	21.64	21.70	21.72		
3	QPSK	15	0	21.75	21.78	21.72	22	0
3	16QAM	1	0	21.67	21.73	21.64		
3	16QAM	1	8	21.60	21.69	21.69		
3	16QAM	1	14	21.56	21.61	21.58	22	0
3	16QAM	8	0	20.86	20.98	20.72		
3	16QAM	8	4	20.74	20.88	20.91		
3	16QAM	8	7	20.78	20.75	20.76	22	0
3	16QAM	15	0	20.75	20.82	20.73		
3	64QAM	1	0	20.99	21.07	21.00		
3	64QAM	1	8	21.07	21.03	21.02	22	0
3	64QAM	1	14	20.97	20.77	20.96		
3	64QAM	8	0	20.13	20.13	20.05		
3	64QAM	8	4	20.04	20.12	20.06	22	0
3	64QAM	8	7	20.10	20.10	20.00		
3	64QAM	15	0	20.03	20.11	20.07		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.78	21.90	21.87	22	0
1.4	QPSK	1	3	21.86	21.87	21.86		
1.4	QPSK	1	5	21.88	21.75	21.82		
1.4	QPSK	3	0	21.79	21.83	21.68		
1.4	QPSK	3	1	21.73	21.80	21.76		
1.4	QPSK	3	3	21.79	21.74	21.73		
1.4	QPSK	6	0	21.75	21.85	21.81	22	0
1.4	16QAM	1	0	21.73	21.75	21.64	22	0
1.4	16QAM	1	3	21.69	21.66	21.76		
1.4	16QAM	1	5	21.67	21.66	21.52		
1.4	16QAM	3	0	20.82	20.94	20.79		
1.4	16QAM	3	1	20.87	20.87	20.89		
1.4	16QAM	3	3	20.82	20.82	20.90		
1.4	16QAM	6	0	20.78	20.80	20.80	22	0
1.4	64QAM	1	0	21.01	21.07	21.02	22	0
1.4	64QAM	1	3	21.11	21.08	21.08		
1.4	64QAM	1	5	21.09	20.89	20.96		
1.4	64QAM	3	0	20.15	20.13	20.13		
1.4	64QAM	3	1	20.09	20.12	20.13		
1.4	64QAM	3	3	20.05	20.10	20.06		
1.4	64QAM	6	0	20.16	20.19	20.10	22	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	16.42	16.45	16.48	16.5	0
20	QPSK	1	49	15.79	15.98	16.18		
20	QPSK	1	99	16.06	15.99	16.17		
20	QPSK	50	0	15.85	15.98	16.14	16.5	0
20	QPSK	50	24	15.81	15.97	16.16		
20	QPSK	50	50	16.11	16.15	16.28		
20	QPSK	100	0	16.10	16.12	16.35		
20	16QAM	1	0	16.27	16.46	16.35	16.5	0
20	16QAM	1	49	16.10	16.31	16.27		
20	16QAM	1	99	16.24	16.31	16.21		
20	16QAM	50	0	15.87	16.04	16.18	16.5	0
20	16QAM	50	24	15.87	16.01	16.20		
20	16QAM	50	50	16.12	15.93	16.28		
20	16QAM	100	0	15.92	15.97	16.25		
20	64QAM	1	0	16.19	16.40	16.29	16.5	0
20	64QAM	1	49	16.00	16.23	16.46		
20	64QAM	1	99	16.32	16.23	16.23		
20	64QAM	50	0	15.87	16.05	16.20	16.5	0
20	64QAM	50	24	15.86	16.04	16.23		
20	64QAM	50	50	16.13	15.94	16.30		
20	64QAM	100	0	15.94	15.98	16.25		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	15.91	15.99	16.07	16.5	0
15	QPSK	1	37	15.77	15.93	16.17		
15	QPSK	1	74	16.05	15.94	16.07		
15	QPSK	36	0	15.86	15.98	16.10	16.5	0
15	QPSK	36	20	15.79	15.93	16.20		
15	QPSK	36	39	15.92	15.91	16.13		
15	QPSK	75	0	15.84	15.93	16.19		
15	16QAM	1	0	16.34	16.45	16.43	16.5	0
15	16QAM	1	37	16.04	16.36	16.43		
15	16QAM	1	74	16.41	16.30	16.32		
15	16QAM	36	0	15.90	16.06	16.16	16.5	0
15	16QAM	36	20	15.83	15.99	16.24		
15	16QAM	36	39	15.94	15.95	16.17		
15	16QAM	75	0	15.85	15.98	16.24		
15	64QAM	1	0	16.25	16.31	16.36	16.5	0
15	64QAM	1	37	15.99	16.25	16.32		
15	64QAM	1	74	16.24	16.22	16.40		
15	64QAM	36	0	15.90	16.06	16.15	16.5	0
15	64QAM	36	20	15.82	15.99	16.27		
15	64QAM	36	39	15.98	15.96	16.19		
15	64QAM	75	0	15.86	15.99	16.25		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	15.88	15.91	16.10	16.5	0
10	QPSK	1	25	15.81	15.82	16.12		
10	QPSK	1	49	15.75	15.81	16.07		
10	QPSK	25	0	15.87	15.92	16.14	16.5	0
10	QPSK	25	12	15.82	15.92	16.13		
10	QPSK	25	25	15.75	15.85	16.10		
10	QPSK	50	0	15.84	15.86	16.14	16.5	0
10	16QAM	1	0	16.33	16.40	16.34		
10	16QAM	1	25	16.13	16.23	16.21		
10	16QAM	1	49	16.14	16.14	16.47	16.5	0
10	16QAM	25	0	15.92	15.95	16.19		
10	16QAM	25	12	15.86	15.95	16.19		
10	16QAM	25	25	15.78	15.90	16.16	16.5	0
10	16QAM	50	0	15.87	15.89	16.20		
10	64QAM	1	0	16.26	16.22	16.31		
10	64QAM	1	25	16.02	16.07	16.40	16.5	0
10	64QAM	1	49	16.04	15.98	16.36		
10	64QAM	25	0	15.93	15.98	16.21		
10	64QAM	25	12	15.86	15.97	16.20	16.5	0
10	64QAM	25	25	15.77	15.90	16.16		
10	64QAM	50	0	15.86	15.90	16.21		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	15.83	15.92	16.09	16.5	0
5	QPSK	1	12	15.82	15.80	15.98		
5	QPSK	1	24	15.83	15.86	15.95		
5	QPSK	12	0	15.66	15.78	15.87	16.5	0
5	QPSK	12	7	15.69	15.71	15.88		
5	QPSK	12	13	15.69	15.71	15.83		
5	QPSK	25	0	15.70	15.74	15.90	16.5	0
5	16QAM	1	0	16.26	16.29	16.46		
5	16QAM	1	12	16.26	16.21	16.38		
5	16QAM	1	24	16.18	16.23	16.38	16.5	0
5	16QAM	12	0	15.71	15.78	15.86		
5	16QAM	12	7	15.72	15.71	15.90		
5	16QAM	12	13	15.72	15.73	15.84	16.5	0
5	16QAM	25	0	15.68	15.70	15.85		
5	64QAM	1	0	16.25	16.15	16.32		
5	64QAM	1	12	16.06	16.13	16.25	16.5	0
5	64QAM	1	24	16.07	16.12	16.18		
5	64QAM	12	0	15.67	15.79	15.89		
5	64QAM	12	7	15.69	15.71	15.88	16.5	0
5	64QAM	12	13	15.67	15.73	15.85		
5	64QAM	25	0	15.70	15.68	15.86		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	21.92	21.99	21.79	22.5	0
10	QPSK	1	25	21.81	21.84	21.90		
10	QPSK	1	49	21.89	21.89	21.96		
10	QPSK	25	0	21.87	21.87	21.80	22.5	0
10	QPSK	25	12	21.90	21.78	21.79		
10	QPSK	25	25	21.84	21.78	21.90		
10	QPSK	50	0	21.93	21.78	21.87	22.5	0
10	16QAM	1	0	21.86	21.85	21.87		
10	16QAM	1	25	21.88	21.86	21.84		
10	16QAM	1	49	21.84	21.31	21.30	22.5	0
10	16QAM	25	0	20.96	20.96	20.90		
10	16QAM	25	12	20.98	20.90	20.89		
10	16QAM	25	25	20.94	20.91	21.01	22.5	0
10	16QAM	50	0	20.99	20.83	20.91		
10	64QAM	1	0	21.02	21.12	21.01		
10	64QAM	1	25	21.26	21.11	21.10	22.5	0
10	64QAM	1	49	21.21	21.22	21.29		
10	64QAM	25	0	20.06	20.06	20.02		
10	64QAM	25	12	20.00	20.01	20.03	22.5	0
10	64QAM	25	25	20.06	20.01	20.01		
10	64QAM	50	0	20.02	20.04	20.01		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	21.77	21.89	21.83	22.5	0
5	QPSK	1	12	21.85	21.74	21.81		
5	QPSK	1	24	21.94	21.79	21.95		
5	QPSK	12	0	21.81	21.83	21.93	22.5	0
5	QPSK	12	7	21.91	21.83	21.86		
5	QPSK	12	13	21.95	21.89	21.80		
5	QPSK	25	0	21.91	21.82	21.87	22.5	0
5	16QAM	1	0	21.78	21.72	21.18		
5	16QAM	1	12	21.09	21.07	21.13		
5	16QAM	1	24	21.20	21.14	21.12	22.5	0
5	16QAM	12	0	20.91	20.95	21.05		
5	16QAM	12	7	20.95	20.93	20.95		
5	16QAM	12	13	21.00	21.01	21.04	22.5	0
5	16QAM	25	0	20.99	20.92	20.95		
5	64QAM	1	0	21.02	21.11	21.07		
5	64QAM	1	12	21.07	20.96	20.98	22.5	0
5	64QAM	1	24	21.15	21.09	21.19		
5	64QAM	12	0	20.02	20.05	20.03		
5	64QAM	12	7	20.03	20.03	20.07	22.5	0
5	64QAM	12	13	20.06	20.00	20.07		
5	64QAM	25	0	20.09	20.02	20.06		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	21.91	21.90	21.78	22.5	0
3	QPSK	1	8	21.72	21.83	21.88		
3	QPSK	1	14	21.91	21.96	21.94		
3	QPSK	8	0	21.83	21.77	21.77	22.5	0
3	QPSK	8	4	21.89	21.77	21.69		
3	QPSK	8	7	21.82	21.71	21.81		
3	QPSK	15	0	21.84	21.68	21.83	22.5	0
3	16QAM	1	0	21.83	21.81	21.86		
3	16QAM	1	8	21.83	21.83	21.77		
3	16QAM	1	14	21.77	21.24	21.21	22.5	0
3	16QAM	8	0	20.91	20.94	20.87		
3	16QAM	8	4	20.88	20.88	20.87		
3	16QAM	8	7	20.91	20.89	20.95	22.5	0
3	16QAM	15	0	20.98	20.80	20.88		
3	64QAM	1	0	21.00	21.02	20.97		
3	64QAM	1	8	21.24	21.02	21.09	22.5	0
3	64QAM	1	14	21.21	21.12	21.28		
3	64QAM	8	0	20.08	20.05	20.02		
3	64QAM	8	4	20.10	20.13	20.00	22.5	0
3	64QAM	8	7	20.14	20.12	20.16		
3	64QAM	15	0	20.10	20.19	20.13		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	21.91	21.83	21.71	22.5	0
1.4	QPSK	1	3	21.65	21.75	21.79		
1.4	QPSK	1	5	21.83	21.90	21.94		
1.4	QPSK	3	0	21.77	21.68	21.76		
1.4	QPSK	3	1	21.83	21.67	21.63		
1.4	QPSK	3	3	21.76	21.61	21.80		
1.4	QPSK	6	0	21.78	21.63	21.78	22.5	0
1.4	16QAM	1	0	21.82	21.79	21.78	22.5	0
1.4	16QAM	1	3	21.77	21.75	21.68		
1.4	16QAM	1	5	21.70	21.17	21.13		
1.4	16QAM	3	0	20.91	20.92	20.82		
1.4	16QAM	3	1	20.79	20.88	20.86		
1.4	16QAM	3	3	20.89	20.84	20.86		
1.4	16QAM	6	0	20.88	20.73	20.83	22.5	0
1.4	64QAM	1	0	21.00	20.96	20.96	22.5	0
1.4	64QAM	1	3	21.20	20.97	21.04		
1.4	64QAM	1	5	21.20	21.08	21.21		
1.4	64QAM	3	0	20.03	20.19	20.08		
1.4	64QAM	3	1	20.02	20.13	20.06		
1.4	64QAM	3	3	20.06	20.07	20.16		
1.4	64QAM	6	0	20.10	20.10	20.10	22.5	0



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		21.66		22	0
10	QPSK	1	25		21.40			
10	QPSK	1	49		21.42			
10	QPSK	25	0		21.49		22	0
10	QPSK	25	12		21.32			
10	QPSK	25	25		21.42			
10	QPSK	50	0		21.39		22	0
10	16QAM	1	0		21.41			
10	16QAM	1	25		21.42			
10	16QAM	1	49		21.40		22	0
10	16QAM	25	0		20.62			
10	16QAM	25	12		20.55			
10	16QAM	25	25		20.53		22	0
10	16QAM	50	0		20.52			
10	64QAM	1	0		20.69			
10	64QAM	1	25		20.63		22	0
10	64QAM	1	49		20.68			
10	64QAM	25	0		20.52			
10	64QAM	25	12		20.55		22	0
10	64QAM	25	25		20.52			
10	64QAM	50	0		20.53			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	21.26	21.41	21.33	22	0
5	QPSK	1	12	21.38	21.31	21.32		
5	QPSK	1	24	21.27	21.38	21.32		
5	QPSK	12	0	21.25	21.30	21.26	22	0
5	QPSK	12	7	21.31	21.24	21.28		
5	QPSK	12	13	21.31	21.27	21.35		
5	QPSK	25	0	21.35	21.25	21.28	22	0
5	16QAM	1	0	21.42	21.26	21.38		
5	16QAM	1	12	21.45	21.47	21.41		
5	16QAM	1	24	21.43	21.40	21.42	22	0
5	16QAM	12	0	20.61	20.61	20.60		
5	16QAM	12	7	20.71	20.60	20.61		
5	16QAM	12	13	20.58	20.68	20.88	22	0
5	16QAM	25	0	20.79	20.69	20.60		
5	64QAM	1	0	20.55	20.66	20.59		
5	64QAM	1	12	20.69	20.58	20.58	22	0
5	64QAM	1	24	20.54	20.59	20.55		
5	64QAM	12	0	20.58	20.56	20.59		
5	64QAM	12	7	20.59	20.58	20.56	22	0
5	64QAM	12	13	20.56	20.54	20.64		
5	64QAM	25	0	20.66	20.62	20.60		



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		21.60		22	0
10	QPSK	1	25		21.25			
10	QPSK	1	49		21.31			
10	QPSK	25	0		21.33		22	0
10	QPSK	25	12		21.26			
10	QPSK	25	25		21.28			
10	QPSK	50	0		21.22		22	0
10	16QAM	1	0		21.46			
10	16QAM	1	25		21.39			
10	16QAM	1	49		21.48		22	0
10	16QAM	25	0		20.65			
10	16QAM	25	12		20.55			
10	16QAM	25	25		20.57		22	0
10	16QAM	50	0		20.52			
10	64QAM	1	0		20.62			
10	64QAM	1	25		20.65		22	0
10	64QAM	1	49		20.54			
10	64QAM	25	0		20.64			
10	64QAM	25	12		20.55		22	0
10	64QAM	25	25		20.57			
10	64QAM	50	0		20.53			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	21.17	21.38	21.27	22	0
5	QPSK	1	12	21.33	21.19	21.24		
5	QPSK	1	24	21.38	21.29	21.42		
5	QPSK	12	0	21.29	21.27	21.33	22	0
5	QPSK	12	7	21.35	21.26	21.32		
5	QPSK	12	13	21.42	21.34	21.30		
5	QPSK	25	0	21.34	21.26	21.37	22	0
5	16QAM	1	0	21.27	21.22	20.59		
5	16QAM	1	12	20.57	20.57	20.53		
5	16QAM	1	24	20.66	20.62	20.59	22	0
5	16QAM	12	0	20.56	20.59	20.53		
5	16QAM	12	7	20.57	20.58	20.59		
5	16QAM	12	13	20.69	20.64	20.66	22	0
5	16QAM	25	0	20.67	20.62	20.56		
5	64QAM	1	0	20.69	20.56	20.52		
5	64QAM	1	12	20.54	20.61	20.61	22	0
5	64QAM	1	24	20.56	20.61	20.67		
5	64QAM	12	0	20.56	20.51	20.57		
5	64QAM	12	7	20.66	20.68	20.64	22	0
5	64QAM	12	13	20.55	20.54	20.50		
5	64QAM	25	0	20.69	20.59	20.57		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.99	21.87	21.98	22.5	0
10	QPSK	1	25	21.80	21.84	21.90		
10	QPSK	1	49	21.95	21.85	21.96		
10	QPSK	25	0	21.76	21.74	21.79	22.5	0
10	QPSK	25	12	21.83	21.72	21.78		
10	QPSK	25	25	21.90	21.95	21.89		
10	QPSK	50	0	21.77	21.81	21.86	22.5	0
10	16QAM	1	0	21.69	21.61	21.57		
10	16QAM	1	25	21.60	21.64	21.76		
10	16QAM	1	49	21.73	21.77	21.79	22.5	0
10	16QAM	25	0	20.87	20.83	20.90		
10	16QAM	25	12	20.93	20.83	20.91		
10	16QAM	25	25	21.00	21.08	20.98	22.5	0
10	16QAM	50	0	20.79	20.85	20.89		
10	64QAM	1	0	21.19	21.14	20.99		
10	64QAM	1	25	21.06	21.13	21.20	22.5	0
10	64QAM	1	49	21.16	21.28	21.28		
10	64QAM	25	0	20.55	20.51	20.53		
10	64QAM	25	12	19.94	19.83	19.92	22.5	0
10	64QAM	25	25	20.01	20.08	20.00		
10	64QAM	50	0	19.80	19.85	19.90		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	21.93	21.74	21.81	22.5	0
5	QPSK	1	12	21.77	21.79	21.81		
5	QPSK	1	24	21.86	21.92	21.94		
5	QPSK	12	0	21.91	21.83	21.90	22.5	0
5	QPSK	12	7	21.82	21.81	21.84		
5	QPSK	12	13	21.83	21.87	21.94		
5	QPSK	25	0	21.82	21.81	21.84	22.5	0
5	16QAM	1	0	21.70	21.56	21.60		
5	16QAM	1	12	21.56	21.56	21.58		
5	16QAM	1	24	21.70	21.73	21.66	22.5	0
5	16QAM	12	0	20.99	20.93	21.01		
5	16QAM	12	7	20.90	20.93	20.92		
5	16QAM	12	13	20.94	20.98	21.03	22.5	0
5	16QAM	25	0	20.89	20.90	20.92		
5	64QAM	1	0	21.15	20.93	21.03		
5	64QAM	1	12	21.01	21.06	21.01	22.5	0
5	64QAM	1	24	21.07	21.15	21.14		
5	64QAM	12	0	20.51	20.62	20.52		
5	64QAM	12	7	20.55	20.59	20.59	22.5	0
5	64QAM	12	13	20.52	20.57	20.52		
5	64QAM	25	0	20.59	20.61	20.61		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	17.99	17.91	17.93	18	0
20	QPSK	1	49	17.64	17.47	17.64		
20	QPSK	1	99	17.60	17.47	17.48		
20	QPSK	50	0	17.66	17.52	17.71	18	0
20	QPSK	50	24	17.65	17.51	17.65		
20	QPSK	50	50	17.61	17.51	17.55		
20	QPSK	100	0	17.65	17.49	17.64		
20	16QAM	1	0	17.66	17.79	17.73	18	0
20	16QAM	1	49	17.65	17.80	17.77		
20	16QAM	1	99	17.88	17.83	17.83		
20	16QAM	50	0	17.70	17.58	17.76	18	0
20	16QAM	50	24	17.71	17.58	17.71		
20	16QAM	50	50	17.66	17.56	17.59		
20	16QAM	100	0	17.70	17.55	17.70		
20	64QAM	1	0	17.86	17.76	17.75	18	0
20	64QAM	1	49	17.83	17.66	17.85		
20	64QAM	1	99	17.79	17.70	17.73		
20	64QAM	50	0	17.68	17.58	17.73	18	0
20	64QAM	50	24	17.72	17.57	17.69		
20	64QAM	50	50	17.68	17.57	17.58		
20	64QAM	100	0	17.70	17.55	17.71		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	17.74	17.59	17.66	18	0
15	QPSK	1	37	17.64	17.49	17.70		
15	QPSK	1	74	17.45	17.43	17.47		
15	QPSK	36	0	17.69	17.53	17.72	18	0
15	QPSK	36	20	17.65	17.52	17.70		
15	QPSK	36	39	17.60	17.51	17.55		
15	QPSK	75	0	17.61	17.50	17.70		
15	16QAM	1	0	17.58	17.54	17.55	18	0
15	16QAM	1	37	17.94	17.75	17.90		
15	16QAM	1	74	17.85	17.80	17.78		
15	16QAM	36	0	17.75	17.57	17.76	18	0
15	16QAM	36	20	17.71	17.57	17.76		
15	16QAM	36	39	17.65	17.55	17.59		
15	16QAM	75	0	17.66	17.54	17.73		
15	64QAM	1	0	17.91	17.81	17.93	18	0
15	64QAM	1	37	17.82	17.65	17.88		
15	64QAM	1	74	17.69	17.68	17.74		
15	64QAM	36	0	17.76	17.58	17.76	18	0
15	64QAM	36	20	17.72	17.59	17.76		
15	64QAM	36	39	17.65	17.56	17.61		
15	64QAM	75	0	17.67	17.55	17.74		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	17.70	17.51	17.80	18	0
10	QPSK	1	25	17.64	17.47	17.64		
10	QPSK	1	49	17.60	17.47	17.48		
10	QPSK	25	0	17.65	17.52	17.71	18	0
10	QPSK	25	12	17.66	17.51	17.65		
10	QPSK	25	25	17.61	17.51	17.55		
10	QPSK	50	0	17.65	17.49	17.65	18	0
10	16QAM	1	0	17.76	17.79	17.71		
10	16QAM	1	25	17.75	17.80	17.75		
10	16QAM	1	49	17.78	17.83	17.83	18	0
10	16QAM	25	0	17.70	17.58	17.76		
10	16QAM	25	12	17.71	17.58	17.71		
10	16QAM	25	25	17.66	17.56	17.59	18	0
10	16QAM	50	0	17.70	17.55	17.70		
10	64QAM	1	0	17.86	17.76	17.95		
10	64QAM	1	25	17.83	17.66	17.85	18	0
10	64QAM	1	49	17.79	17.70	17.73		
10	64QAM	25	0	17.68	17.58	17.73		
10	64QAM	25	12	17.72	17.57	17.69	18	0
10	64QAM	25	25	17.68	17.57	17.58		
10	64QAM	50	0	17.70	17.55	17.71		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	17.66	17.49	17.52	18	0
5	QPSK	1	12	17.57	17.44	17.45		
5	QPSK	1	24	17.58	17.48	17.45		
5	QPSK	12	0	17.55	17.40	17.36	18	0
5	QPSK	12	7	17.48	17.39	17.36		
5	QPSK	12	13	17.49	17.40	17.31		
5	QPSK	25	0	17.49	17.40	17.37	18	0
5	16QAM	1	0	17.98	17.80	17.86		
5	16QAM	1	12	17.84	17.80	17.76		
5	16QAM	1	24	17.88	17.77	17.78	18	0
5	16QAM	12	0	17.56	17.39	17.37		
5	16QAM	12	7	17.52	17.40	17.36		
5	16QAM	12	13	17.48	17.42	17.30	18	0
5	16QAM	25	0	17.49	17.38	17.35		
5	64QAM	1	0	17.84	17.59	17.74		
5	64QAM	1	12	17.81	17.64	17.68	18	0
5	64QAM	1	24	17.79	17.73	17.67		
5	64QAM	12	0	17.54	17.41	17.36		
5	64QAM	12	7	17.49	17.41	17.36	18	0
5	64QAM	12	13	17.50	17.41	17.30		
5	64QAM	25	0	17.46	17.39	17.35		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	17.53	17.39	17.34	18	0
3	QPSK	1	8	17.58	17.40	17.33		
3	QPSK	1	14	17.48	17.37	17.33		
3	QPSK	8	0	17.42	17.27	17.24	18	0
3	QPSK	8	4	17.41	17.26	17.17		
3	QPSK	8	7	17.35	17.26	17.20		
3	QPSK	15	0	17.45	17.29	17.22		
3	16QAM	1	0	17.79	17.66	17.69	18	0
3	16QAM	1	8	17.88	17.69	17.71		
3	16QAM	1	14	17.76	17.70	17.63		
3	16QAM	8	0	17.39	17.26	17.22	18	0
3	16QAM	8	4	17.41	17.22	17.14		
3	16QAM	8	7	17.34	17.24	17.16		
3	16QAM	15	0	17.36	17.21	17.15		
3	64QAM	1	0	17.72	17.50	17.57	18	0
3	64QAM	1	8	17.78	17.69	17.64		
3	64QAM	1	14	17.58	17.57	17.45		
3	64QAM	8	0	17.38	17.22	17.22	18	0
3	64QAM	8	4	17.37	17.21	17.13		
3	64QAM	8	7	17.31	17.22	17.11		
3	64QAM	15	0	17.37	17.21	17.12		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	17.51	17.31	17.33	18	0
1.4	QPSK	1	3	17.52	17.37	17.31		
1.4	QPSK	1	5	17.39	17.37	17.26		
1.4	QPSK	3	0	17.35	17.17	17.23		
1.4	QPSK	3	1	17.36	17.24	17.12		
1.4	QPSK	3	3	17.29	17.23	17.20		
1.4	QPSK	6	0	17.45	17.27	17.21	18	0
1.4	16QAM	1	0	17.71	17.61	17.59	18	0
1.4	16QAM	1	3	17.80	17.69	17.66		
1.4	16QAM	1	5	17.76	17.67	17.54		
1.4	16QAM	3	0	17.33	17.23	17.20		
1.4	16QAM	3	1	17.33	17.17	17.10		
1.4	16QAM	3	3	17.33	17.18	17.14		
1.4	16QAM	6	0	17.32	17.14	17.05	18	0
1.4	64QAM	1	0	17.69	17.47	17.52	18	0
1.4	64QAM	1	3	17.76	17.69	17.58		
1.4	64QAM	1	5	17.53	17.51	17.42		
1.4	64QAM	3	0	17.32	17.15	17.16		
1.4	64QAM	3	1	17.27	17.16	17.06		
1.4	64QAM	3	3	17.23	17.13	17.08		
1.4	64QAM	6	0	17.29	17.11	17.08	18	0

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.83	21.94	21.98	22	0
15	QPSK	1	37	21.90	21.85	21.88		
15	QPSK	1	74	21.78	21.86	21.84		
15	QPSK	36	0	21.80	21.81	21.75	22	0
15	QPSK	36	20	21.80	21.79	21.83		
15	QPSK	36	39	21.79	21.79	21.79		
15	QPSK	75	0	21.79	21.79	21.82	22	0
15	16QAM	1	0	21.67	21.68	21.68		
15	16QAM	1	37	21.74	21.72	21.69		
15	16QAM	1	74	21.46	21.42	21.59	22	0
15	16QAM	36	0	21.90	21.89	21.82		
15	16QAM	36	20	21.92	21.88	21.89		
15	16QAM	36	39	21.90	21.89	21.90	22	0
15	16QAM	75	0	21.82	21.83	21.86		
15	64QAM	1	0	21.11	21.11	21.07		
15	64QAM	1	37	21.16	21.14	21.09	22	0
15	64QAM	1	74	21.41	21.54	21.50		
15	64QAM	36	0	21.42	21.40	21.35		
15	64QAM	36	20	21.42	21.37	21.42	22	0
15	64QAM	36	39	21.40	21.40	21.39		
15	64QAM	75	0	21.34	21.35	21.37		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	21.81	21.78	21.97	22	0
10	QPSK	1	25	21.82	21.80	21.88		
10	QPSK	1	49	21.69	21.89	21.79		
10	QPSK	25	0	21.73	21.79	21.65	22	0
10	QPSK	25	12	21.75	21.79	21.74		
10	QPSK	25	25	21.70	21.70	21.73		
10	QPSK	50	0	21.74	21.77	21.76	22	0
10	16QAM	1	0	21.66	21.60	21.60		
10	16QAM	1	25	21.73	21.62	21.66		
10	16QAM	1	49	21.57	21.86	21.53	22	0
10	16QAM	25	0	21.82	21.88	21.81		
10	16QAM	25	12	21.90	21.87	21.82		
10	16QAM	25	25	21.83	21.74	21.79	22	0
10	16QAM	50	0	21.14	21.15	21.21		
10	64QAM	1	0	21.06	21.08	21.09		
10	64QAM	1	25	21.13	21.06	21.17	22	0
10	64QAM	1	49	21.16	21.13	21.01		
10	64QAM	25	0	21.34	21.35	21.32		
10	64QAM	25	12	20.40	20.30	20.42	22	0
10	64QAM	25	25	20.38	20.39	20.37		
10	64QAM	50	0	20.28	20.35	20.30		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	21.74	21.71	21.97	22	0
5	QPSK	1	12	21.77	21.78	21.83		
5	QPSK	1	24	21.66	21.79	21.73		
5	QPSK	12	0	21.68	21.76	21.56	22	0
5	QPSK	12	7	21.75	21.79	21.68		
5	QPSK	12	13	21.68	21.67	21.73		
5	QPSK	25	0	21.64	21.72	21.68	22	0
5	16QAM	1	0	21.66	21.57	21.51		
5	16QAM	1	12	21.68	21.58	21.56		
5	16QAM	1	24	21.49	21.76	21.43	22	0
5	16QAM	12	0	21.79	21.80	21.76		
5	16QAM	12	7	21.81	21.77	21.74		
5	16QAM	12	13	21.80	21.79	21.82	22	0
5	16QAM	25	0	21.76	21.64	21.75		
5	64QAM	1	0	21.03	21.19	21.42		
5	64QAM	1	12	21.13	21.00	21.18	22	0
5	64QAM	1	24	21.15	21.07	21.18		
5	64QAM	12	0	21.30	21.27	21.24		
5	64QAM	12	7	20.37	20.22	20.40	22	0
5	64QAM	12	13	20.29	20.39	20.29		
5	64QAM	25	0	20.21	20.29	20.29		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.67	21.61	21.91	22	0
3	QPSK	1	8	21.75	21.77	21.80		
3	QPSK	1	14	21.63	21.70	21.68		
3	QPSK	8	0	21.62	21.75	21.49	22	0
3	QPSK	8	4	21.73	21.70	21.68		
3	QPSK	8	7	21.67	21.65	21.63		
3	QPSK	15	0	21.62	21.65	21.67	22	0
3	16QAM	1	0	21.63	21.47	21.49		
3	16QAM	1	8	21.59	21.58	21.52		
3	16QAM	1	14	21.41	21.74	21.36	22	0
3	16QAM	8	0	21.42	21.43	21.31		
3	16QAM	8	4	21.46	21.40	21.41		
3	16QAM	8	7	21.47	21.42	21.33	22	0
3	16QAM	15	0	21.64	21.54	21.73		
3	64QAM	1	0	21.14	21.15	21.18		
3	64QAM	1	8	21.13	21.14	21.16	22	0
3	64QAM	1	14	21.14	21.19	21.17		
3	64QAM	8	0	21.27	21.22	21.21		
3	64QAM	8	4	20.36	20.15	20.40	22	0
3	64QAM	8	7	20.23	20.37	20.19		
3	64QAM	15	0	20.15	20.23	20.29		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	21.67	21.54	21.81	22	0
1.4	QPSK	1	3	21.72	21.77	21.77		
1.4	QPSK	1	5	21.62	21.62	21.60		
1.4	QPSK	3	0	21.59	21.73	21.46		
1.4	QPSK	3	1	21.71	21.67	21.58		
1.4	QPSK	3	3	21.64	21.59	21.56		
1.4	QPSK	6	0	21.59	21.58	21.64	22	0
1.4	16QAM	1	0	21.61	21.40	21.45	22	0
1.4	16QAM	1	3	21.57	21.49	21.43		
1.4	16QAM	1	5	21.36	21.69	21.31		
1.4	16QAM	3	0	21.68	21.70	21.64		
1.4	16QAM	3	1	21.69	21.68	21.64		
1.4	16QAM	3	3	21.71	21.68	21.71		
1.4	16QAM	6	0	21.59	21.48	21.63	22	0
1.4	64QAM	1	0	21.73	21.79	21.80	22	0
1.4	64QAM	1	3	21.13	21.10	21.13		
1.4	64QAM	1	5	21.18	21.19	21.13		
1.4	64QAM	3	0	21.28	21.22	21.24		
1.4	64QAM	3	1	21.33	21.07	21.40		
1.4	64QAM	3	3	21.18	21.34	21.13		
1.4	64QAM	6	0	21.13	21.14	21.27	22	0



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		16.06		16.5	0
10	QPSK	1	25		15.80			
10	QPSK	1	49		16.03			
10	QPSK	25	0		15.82		16.5	0
10	QPSK	25	12		15.82			
10	QPSK	25	25		15.78			
10	QPSK	50	0		15.84		16.5	0
10	16QAM	1	0		15.90			
10	16QAM	1	25		15.95			
10	16QAM	1	49		15.91		16.5	0
10	16QAM	25	0		15.86			
10	16QAM	25	12		15.85			
10	16QAM	25	25		15.82		16.5	0
10	16QAM	50	0		15.84			
10	64QAM	1	0		15.94			
10	64QAM	1	25		15.93		16.5	0
10	64QAM	1	49		16.01			
10	64QAM	25	0		15.82			
10	64QAM	25	12		15.84		16.5	0
10	64QAM	25	25		15.79			
10	64QAM	50	0		15.84			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	15.68	15.67	15.69	16.5	0
5	QPSK	1	12	15.77	15.71	15.74		
5	QPSK	1	24	15.84	15.89	15.88		
5	QPSK	12	0	15.81	15.80	15.74	16.5	0
5	QPSK	12	7	15.72	15.74	15.72		
5	QPSK	12	13	15.71	15.75	15.76		
5	QPSK	25	0	15.81	15.75	15.75	16.5	0
5	16QAM	1	0	15.85	15.87	15.87		
5	16QAM	1	12	15.93	15.94	15.94		
5	16QAM	1	24	15.85	15.82	15.81	16.5	0
5	16QAM	12	0	15.80	15.86	15.80		
5	16QAM	12	7	15.83	15.82	15.76		
5	16QAM	12	13	15.81	15.75	15.73	16.5	0
5	16QAM	25	0	15.76	15.84	15.81		
5	64QAM	1	0	15.88	15.88	15.89		
5	64QAM	1	12	15.86	15.86	15.87	16.5	0
5	64QAM	1	24	15.95	15.95	15.98		
5	64QAM	12	0	15.72	15.79	15.73		
5	64QAM	12	7	15.82	15.79	15.74	16.5	0
5	64QAM	12	13	15.69	15.71	15.70		
5	64QAM	25	0	15.76	15.84	15.82		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	16.70	16.93	16.82	17	0
20	QPSK	1	49	16.30	16.45	16.25		
20	QPSK	1	99	16.26	16.41	16.21		
20	QPSK	50	0	16.29	16.29	16.24	17	0
20	QPSK	50	24	16.16	16.26	16.14		
20	QPSK	50	50	16.13	16.26	16.18		
20	QPSK	100	0	16.18	16.33	16.20		
20	16QAM	1	0	16.86	16.72	16.81	17	0
20	16QAM	1	49	16.68	16.81	16.49		
20	16QAM	1	99	16.51	16.78	16.54		
20	16QAM	50	0	16.36	16.33	16.32	17	0
20	16QAM	50	24	16.23	16.35	16.20		
20	16QAM	50	50	16.21	16.31	16.24		
20	16QAM	100	0	16.20	16.37	16.24		
20	64QAM	1	0	16.72	16.63	16.71	17	0
20	64QAM	1	49	16.60	16.69	16.53		
20	64QAM	1	99	16.41	16.68	16.49		
20	64QAM	50	0	16.33	16.33	16.30	17	0
20	64QAM	50	24	16.19	16.36	16.22		
20	64QAM	50	50	16.18	16.32	16.25		
20	64QAM	100	0	16.22	16.38	16.25		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	16.37	16.35	16.40	17	0
15	QPSK	1	37	16.42	16.45	16.33		
15	QPSK	1	74	16.23	16.35	16.23		
15	QPSK	36	0	16.24	16.23	16.18	17	0
15	QPSK	36	20	16.22	16.29	16.20		
15	QPSK	36	39	16.08	16.23	16.10		
15	QPSK	75	0	16.22	16.31	16.23		
15	16QAM	1	0	16.81	16.72	16.72	17	0
15	16QAM	1	37	16.76	16.84	16.68		
15	16QAM	1	74	16.50	16.80	16.67		
15	16QAM	36	0	16.34	16.32	16.24	17	0
15	16QAM	36	20	16.31	16.40	16.26		
15	16QAM	36	39	16.17	16.33	16.19		
15	16QAM	75	0	16.29	16.36	16.26		
15	64QAM	1	0	16.67	16.62	16.60	17	0
15	64QAM	1	37	16.63	16.72	16.52		
15	64QAM	1	74	16.44	16.70	16.48		
15	64QAM	36	0	16.34	16.33	16.24	17	0
15	64QAM	36	20	16.32	16.40	16.28		
15	64QAM	36	39	16.18	16.35	16.20		
15	64QAM	75	0	16.27	16.38	16.25		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.35	16.40	16.32	17	0
10	QPSK	1	25	16.32	16.42	16.26		
10	QPSK	1	49	16.28	16.44	16.22		
10	QPSK	25	0	16.25	16.32	16.23	17	0
10	QPSK	25	12	16.25	16.31	16.20		
10	QPSK	25	25	16.23	16.33	16.15		
10	QPSK	50	0	16.25	16.31	16.12	17	0
10	16QAM	1	0	16.77	16.75	16.59		
10	16QAM	1	25	16.81	16.90	16.58		
10	16QAM	1	49	16.72	16.90	16.59	17	0
10	16QAM	25	0	16.41	16.44	16.30		
10	16QAM	25	12	16.37	16.45	16.29		
10	16QAM	25	25	16.39	16.46	16.25	17	0
10	16QAM	50	0	16.29	16.38	16.18		
10	64QAM	1	0	16.63	16.65	16.55		
10	64QAM	1	25	16.74	16.72	16.57	17	0
10	64QAM	1	49	16.58	16.76	16.53		
10	64QAM	25	0	16.39	16.45	16.31		
10	64QAM	25	12	16.40	16.44	16.30	17	0
10	64QAM	25	25	16.39	16.48	16.26		
10	64QAM	50	0	16.30	16.39	16.21		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.37	16.38	16.26	17	0
5	QPSK	1	12	16.37	16.33	16.23		
5	QPSK	1	24	16.38	16.37	16.22		
5	QPSK	12	0	16.33	16.38	16.25	17	0
5	QPSK	12	7	16.37	16.37	16.25		
5	QPSK	12	13	16.37	16.38	16.20		
5	QPSK	25	0	16.35	16.34	16.22	17	0
5	16QAM	1	0	16.75	16.78	16.64		
5	16QAM	1	12	16.77	16.73	16.62		
5	16QAM	1	24	16.77	16.83	16.62	17	0
5	16QAM	12	0	16.50	16.51	16.37		
5	16QAM	12	7	16.50	16.50	16.36		
5	16QAM	12	13	16.54	16.49	16.35	17	0
5	16QAM	25	0	16.47	16.45	16.33		
5	64QAM	1	0	16.68	16.66	16.47		
5	64QAM	1	12	16.67	16.66	16.55	17	0
5	64QAM	1	24	16.72	16.66	16.53		
5	64QAM	12	0	16.47	16.52	16.42		
5	64QAM	12	7	16.51	16.52	16.40	17	0
5	64QAM	12	13	16.51	16.56	16.34		
5	64QAM	25	0	16.46	16.45	16.33		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.26	16.25	16.19	17	0
3	QPSK	1	8	16.24	16.31	16.16		
3	QPSK	1	14	16.26	16.25	16.10		
3	QPSK	8	0	16.22	16.26	16.17	17	0
3	QPSK	8	4	16.21	16.26	16.11		
3	QPSK	8	7	16.26	16.27	16.11		
3	QPSK	15	0	16.20	16.26	16.10		
3	16QAM	1	0	16.69	16.66	16.59	17	0
3	16QAM	1	8	16.68	16.73	16.64		
3	16QAM	1	14	16.71	16.73	16.57		
3	16QAM	8	0	16.36	16.36	16.28	17	0
3	16QAM	8	4	16.29	16.35	16.21		
3	16QAM	8	7	16.40	16.41	16.19		
3	16QAM	15	0	16.28	16.32	16.17		
3	64QAM	1	0	16.46	16.48	16.45	17	0
3	64QAM	1	8	16.57	16.68	16.44		
3	64QAM	1	14	16.58	16.56	16.48		
3	64QAM	8	0	16.34	16.38	16.29	17	0
3	64QAM	8	4	16.29	16.36	16.20		
3	64QAM	8	7	16.40	16.40	16.22		
3	64QAM	15	0	16.26	16.31	16.16		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.19	16.22	16.10	17	0
1.4	QPSK	1	3	16.23	16.25	16.09		
1.4	QPSK	1	5	16.21	16.23	16.07		
1.4	QPSK	3	0	16.17	16.16	16.12		
1.4	QPSK	3	1	16.14	16.23	16.05		
1.4	QPSK	3	3	16.19	16.25	16.07		
1.4	QPSK	6	0	16.17	16.16	16.04	17	0
1.4	16QAM	1	0	16.60	16.60	16.49	17	0
1.4	16QAM	1	3	16.68	16.68	16.63		
1.4	16QAM	1	5	16.70	16.64	16.49		
1.4	16QAM	3	0	16.28	16.27	16.20		
1.4	16QAM	3	1	16.24	16.28	16.15		
1.4	16QAM	3	3	16.39	16.40	16.17		
1.4	16QAM	6	0	16.23	16.26	16.08	17	0
1.4	64QAM	1	0	16.39	16.44	16.40	17	0
1.4	64QAM	1	3	16.51	16.65	16.42		
1.4	64QAM	1	5	16.54	16.48	16.45		
1.4	64QAM	3	0	16.32	16.29	16.21		
1.4	64QAM	3	1	16.23	16.30	16.15		
1.4	64QAM	3	3	16.38	16.32	16.16		
1.4	64QAM	6	0	16.17	16.28	16.09	17	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

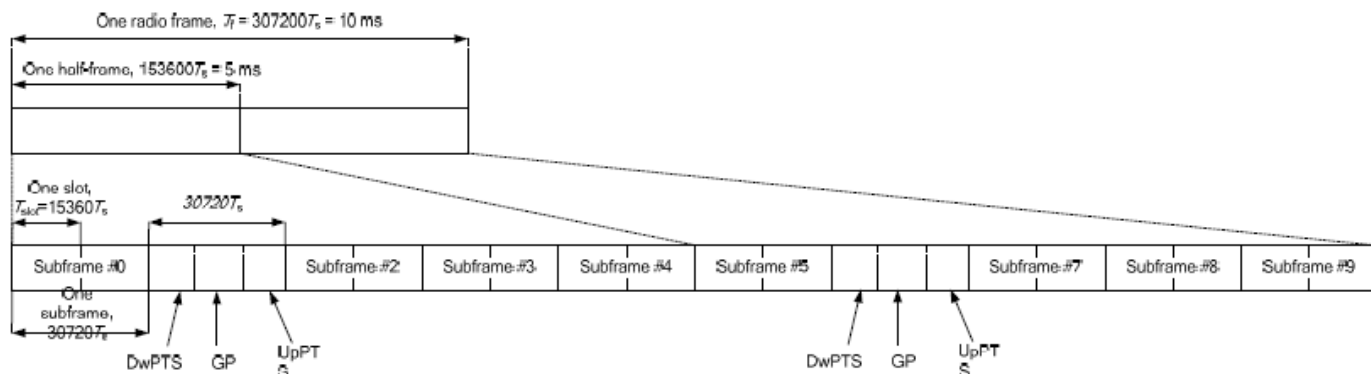


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

Default Power Mode
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.48	22.49	22.61	24	0
20	QPSK	1	49	22.51	22.45	22.29		
20	QPSK	1	99	22.53	22.26	22.39		
20	QPSK	50	0	21.49	21.34	21.34	23	1
20	QPSK	50	24	21.51	21.32	21.35		
20	QPSK	50	50	21.41	21.36	21.39		
20	QPSK	100	0	21.53	21.37	21.39	23	1
20	16QAM	1	0	21.66	21.71	21.36		
20	16QAM	1	49	21.56	21.89	21.45		
20	16QAM	1	99	21.84	21.62	21.86	22	2
20	16QAM	50	0	20.48	20.34	20.39		
20	16QAM	50	24	20.46	20.34	20.42		
20	16QAM	50	50	20.46	20.42	20.41	22	2
20	16QAM	100	0	20.51	20.34	20.37		
20	64QAM	1	0	20.82	20.56	20.52		
20	64QAM	1	49	20.68	20.86	20.47	22	2
20	64QAM	1	99	20.89	20.82	20.51		
20	64QAM	50	0	19.54	19.43	19.39		
20	64QAM	50	24	19.55	19.40	19.50	21	3
20	64QAM	50	50	19.56	19.51	19.46		
20	64QAM	100	0	19.53	19.43	19.42		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.39	22.36	22.35	24	0
15	QPSK	1	37	22.51	22.40	22.21		
15	QPSK	1	74	22.48	22.32	22.59		
15	QPSK	36	0	21.49	21.25	21.25	23	1
15	QPSK	36	20	21.42	21.30	21.33		
15	QPSK	36	39	21.38	21.34	21.39		
15	QPSK	75	0	21.47	21.29	21.35	23	1
15	16QAM	1	0	21.57	21.65	21.36		
15	16QAM	1	37	21.50	21.84	21.37		
15	16QAM	1	74	21.75	21.58	21.78	22	2
15	16QAM	36	0	20.39	20.34	20.29		
15	16QAM	36	20	20.45	20.28	20.42		
15	16QAM	36	39	20.44	20.38	20.35	22	2
15	16QAM	75	0	20.43	20.24	20.35		
15	64QAM	1	0	20.77	20.50	20.48		
15	64QAM	1	37	20.61	20.86	20.47	22	2
15	64QAM	1	74	20.87	20.74	20.50		
15	64QAM	36	0	19.52	19.42	19.39		
15	64QAM	36	20	19.48	19.38	19.46	21	3
15	64QAM	36	39	19.46	19.49	19.44		
15	64QAM	75	0	19.48	19.33	19.33		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.31	22.27	22.30	24	0
10	QPSK	1	25	22.41	22.33	22.19		
10	QPSK	1	49	22.38	22.28	22.58		
10	QPSK	25	0	21.41	21.24	21.24	23	1
10	QPSK	25	12	21.32	21.22	21.30		
10	QPSK	25	25	21.31	21.29	21.29		
10	QPSK	50	0	21.47	21.22	21.29	23	1
10	16QAM	1	0	21.57	21.58	21.30		
10	16QAM	1	25	21.47	21.74	21.31		
10	16QAM	1	49	21.69	21.48	21.68	22	2
10	16QAM	25	0	20.30	20.34	20.28		
10	16QAM	25	12	20.36	20.25	20.33		
10	16QAM	25	25	20.35	20.32	20.33	22	2
10	16QAM	50	0	20.39	20.22	20.25		
10	64QAM	1	0	20.67	20.44	20.38		
10	64QAM	1	25	20.61	20.79	20.42	22	2
10	64QAM	1	49	20.84	20.64	20.44		
10	64QAM	25	0	19.51	19.41	19.32		
10	64QAM	25	12	19.46	19.31	19.41	21	3
10	64QAM	25	25	19.45	19.43	19.34		
10	64QAM	50	0	19.48	19.31	19.25		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.24	22.21	22.29	24	0
5	QPSK	1	12	22.39	22.33	22.12		
5	QPSK	1	24	22.36	22.26	22.50		
5	QPSK	12	0	21.41	21.15	21.14	23	1
5	QPSK	12	7	21.30	21.19	21.20		
5	QPSK	12	13	21.30	21.25	21.22		
5	QPSK	25	0	21.37	21.19	21.24	23	1
5	16QAM	1	0	21.56	21.54	21.27		
5	16QAM	1	12	21.45	21.64	21.22		
5	16QAM	1	24	21.62	21.42	21.59	22	2
5	16QAM	12	0	20.23	20.33	20.19		
5	16QAM	12	7	20.30	20.19	20.31		
5	16QAM	12	13	20.28	20.25	20.29	22	2
5	16QAM	25	0	20.38	20.14	20.17		
5	64QAM	1	0	20.58	20.41	20.37		
5	64QAM	1	12	20.51	20.69	20.39	22	2
5	64QAM	1	24	20.84	20.62	20.36		
5	64QAM	12	0	19.41	19.36	19.23		
5	64QAM	12	7	19.38	19.31	19.37	21	3
5	64QAM	12	13	19.36	19.33	19.33		
5	64QAM	25	0	19.42	19.26	19.20		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.61	23.63	23.70	23.40	23.46	25	0
20	QPSK	1	49	23.52	23.59	23.38	23.31	23.40		
20	QPSK	1	99	23.60	23.51	23.55	23.35	23.42		
20	QPSK	50	0	22.51	22.56	22.58	22.20	22.28	24	1
20	QPSK	50	24	22.56	22.58	22.31	22.17	22.27		
20	QPSK	50	50	22.50	22.54	22.33	22.21	22.31		
20	QPSK	100	0	22.55	22.64	22.36	22.22	22.32	24	1
20	16QAM	1	0	22.64	23.00	22.50	22.43	22.29		
20	16QAM	1	49	22.92	22.91	22.17	22.34	22.71		
20	16QAM	1	99	22.95	22.97	22.51	22.29	22.35	23	2
20	16QAM	50	0	21.51	21.62	21.37	21.28	21.30		
20	16QAM	50	24	21.51	21.65	21.36	21.20	21.34		
20	16QAM	50	50	21.56	21.64	21.39	21.27	21.39	23	2
20	16QAM	100	0	21.53	21.60	21.32	21.19	21.31		
20	64QAM	1	0	21.73	21.74	21.40	21.26	21.58		
20	64QAM	1	49	22.00	21.49	21.76	21.40	21.33	23	2
20	64QAM	1	99	21.69	21.53	21.34	21.58	21.68		
20	64QAM	50	0	20.53	20.57	20.43	20.35	20.38		
20	64QAM	50	24	20.61	20.65	20.41	20.29	20.37	22	3
20	64QAM	50	50	20.49	20.70	20.37	20.33	20.44		
20	64QAM	100	0	20.53	20.62	20.33	20.27	20.38		
Channel				39725	40173	40620	41068	41515		
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.51	23.48	23.32	23.29	23.24	25	0
15	QPSK	1	37	23.46	23.55	23.28	23.26	23.33		
15	QPSK	1	74	23.64	23.61	23.55	23.14	23.34		
15	QPSK	36	0	22.44	22.51	22.30	22.19	22.27	24	1
15	QPSK	36	20	22.47	22.58	22.31	22.08	22.22		
15	QPSK	36	39	22.48	22.57	22.29	22.18	22.25		
15	QPSK	75	0	22.46	22.64	22.27	22.15	22.24	24	1
15	16QAM	1	0	22.55	22.92	22.42	22.42	22.23		
15	16QAM	1	37	22.92	22.92	22.15	22.33	22.61		
15	16QAM	1	74	22.98	22.90	22.48	22.23	22.25	23	2
15	16QAM	36	0	21.45	21.56	21.29	21.21	21.25		
15	16QAM	36	20	21.50	21.62	21.32	21.13	21.31		
15	16QAM	36	39	21.55	21.58	21.35	21.22	21.32	23	2
15	16QAM	75	0	21.44	21.50	21.27	21.18	21.22		
15	64QAM	1	0	21.64	21.66	21.31	21.18	21.54		
15	64QAM	1	37	21.99	21.42	21.73	21.33	21.33	23	2
15	64QAM	1	74	21.62	21.51	21.29	21.50	21.60		
15	64QAM	36	0	20.44	20.50	20.35	20.30	20.33		
15	64QAM	36	20	20.58	20.59	20.38	20.28	20.29	22	3
15	64QAM	36	39	20.49	20.64	20.32	20.29	20.42		
15	64QAM	75	0	20.48	20.60	20.26	20.23	20.35		

Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.46	23.39	23.28	23.24	23.16	25	0
10	QPSK	1	25	23.44	23.45	23.22	23.19	23.33		
10	QPSK	1	49	23.57	23.69	23.37	23.03	23.29		
10	QPSK	25	0	22.47	22.49	22.19	22.17	22.23	24	1
10	QPSK	25	12	22.46	22.48	22.23	22.04	22.13		
10	QPSK	25	25	22.42	22.50	22.26	22.11	22.18		
10	QPSK	50	0	22.44	22.55	22.25	22.15	22.27	24	1
10	16QAM	1	0	22.55	22.82	22.44	22.30	22.23		
10	16QAM	1	25	22.83	22.93	22.07	22.31	22.52		
10	16QAM	1	49	23.01	22.86	22.44	22.27	22.35	23	2
10	16QAM	25	0	21.46	21.47	21.27	21.24	21.19		
10	16QAM	25	12	21.38	21.50	21.24	21.13	21.23		
10	16QAM	25	25	21.40	21.57	21.28	21.17	21.23	23	2
10	16QAM	50	0	21.38	21.48	21.17	21.02	21.18		
10	64QAM	1	0	21.69	21.65	21.32	21.07	21.50		
10	64QAM	1	25	21.93	21.42	21.65	21.25	21.29	23	2
10	64QAM	1	49	21.59	21.47	21.20	21.51	21.61		
10	64QAM	25	0	20.39	20.47	20.31	20.28	20.22		
10	64QAM	25	12	20.52	20.56	20.29	20.24	20.25	22	3
10	64QAM	25	25	20.31	20.60	20.33	20.18	20.31		
10	64QAM	50	0	20.42	20.55	20.23	20.23	20.23		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.39	23.31	23.24	23.06	23.16	25	0
5	QPSK	1	12	23.36	23.48	23.25	23.13	23.30		
5	QPSK	1	24	23.66	23.61	23.39	23.06	23.27		
5	QPSK	12	0	22.34	22.44	22.03	22.07	22.13	24	1
5	QPSK	12	7	22.36	22.42	22.17	22.08	22.23		
5	QPSK	12	13	22.40	22.48	22.22	22.07	22.21		
5	QPSK	25	0	22.29	22.56	22.19	22.09	22.18	24	1
5	16QAM	1	0	22.46	22.80	22.36	22.25	22.12		
5	16QAM	1	12	22.80	22.88	22.08	22.23	22.54		
5	16QAM	1	24	23.00	22.86	22.30	22.14	22.19	23	2
5	16QAM	12	0	21.29	21.57	21.19	21.10	21.22		
5	16QAM	12	7	21.46	21.52	21.16	21.11	21.28		
5	16QAM	12	13	21.36	21.57	21.21	21.09	21.33	23	2
5	16QAM	25	0	21.39	21.45	21.10	21.10	21.20		
5	64QAM	1	0	21.67	21.59	21.23	21.05	21.46		
5	64QAM	1	12	21.86	21.28	21.50	21.29	21.26	23	2
5	64QAM	1	24	21.48	21.42	21.28	21.38	21.51		
5	64QAM	12	0	20.40	20.46	20.31	20.25	20.19		
5	64QAM	12	7	20.53	20.57	20.24	20.10	20.18	22	3
5	64QAM	12	13	20.44	20.52	20.24	20.25	20.33		
5	64QAM	25	0	20.50	20.50	20.22	20.14	20.12		

Reduced Power Mode
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	17.92	17.82	17.84	18	0
20	QPSK	1	49	17.79	17.67	17.73		
20	QPSK	1	99	17.73	17.72	17.70		
20	QPSK	50	0	17.75	17.68	17.74	18	0
20	QPSK	50	24	17.74	17.63	17.70		
20	QPSK	50	50	17.67	17.61	17.68		
20	QPSK	100	0	17.75	17.66	17.73	18	0
20	16QAM	1	0	17.90	17.87	17.72		
20	16QAM	1	49	17.80	17.65	17.63		
20	16QAM	1	99	17.77	17.69	17.58	18	0
20	16QAM	50	0	17.85	17.75	17.79		
20	16QAM	50	24	17.88	17.67	17.75		
20	16QAM	50	50	17.87	17.67	17.73	18	0
20	16QAM	100	0	17.88	17.67	17.74		
20	64QAM	1	0	17.90	17.82	17.87		
20	64QAM	1	49	17.76	17.64	17.65	18	0
20	64QAM	1	99	17.90	17.74	17.71		
20	64QAM	50	0	17.86	17.73	17.80		
20	64QAM	50	24	17.85	17.68	17.74	18	0
20	64QAM	50	50	17.90	17.64	17.70		
20	64QAM	100	0	17.83	17.64	17.72		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	17.86	17.82	17.82	18	0
15	QPSK	1	37	17.77	17.64	17.70		
15	QPSK	1	74	17.68	17.68	17.70		
15	QPSK	36	0	17.74	17.66	17.71	18	0
15	QPSK	36	20	17.70	17.60	17.67		
15	QPSK	36	39	17.58	17.53	17.64		
15	QPSK	75	0	17.68	17.66	17.71	18	0
15	16QAM	1	0	17.80	17.83	17.68		
15	16QAM	1	37	17.73	17.61	17.55		
15	16QAM	1	74	17.67	17.67	17.49	18	0
15	16QAM	36	0	17.85	17.65	17.75		
15	16QAM	36	20	17.87	17.65	17.69		
15	16QAM	36	39	17.85	17.57	17.69	18	0
15	16QAM	75	0	17.82	17.59	17.65		
15	64QAM	1	0	17.84	17.79	17.78		
15	64QAM	1	37	17.66	17.63	17.58	18	0
15	64QAM	1	74	17.90	17.71	17.70		
15	64QAM	36	0	17.78	17.65	17.79		
15	64QAM	36	20	17.84	17.63	17.64	18	0
15	64QAM	36	39	17.90	17.60	17.70		
15	64QAM	75	0	17.75	17.63	17.70		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	17.91	17.73	17.76	18	0
10	QPSK	1	25	17.73	17.57	17.66		
10	QPSK	1	49	17.72	17.64	17.60		
10	QPSK	25	0	17.69	17.60	17.64	18	0
10	QPSK	25	12	17.71	17.59	17.65		
10	QPSK	25	25	17.60	17.58	17.61		
10	QPSK	50	0	17.69	17.66	17.71	18	0
10	16QAM	1	0	17.81	17.86	17.68		
10	16QAM	1	25	17.70	17.57	17.59		
10	16QAM	1	49	17.68	17.69	17.51	18	0
10	16QAM	25	0	17.83	17.74	17.74		
10	16QAM	25	12	17.78	17.65	17.70		
10	16QAM	25	25	17.85	17.66	17.72	18	0
10	16QAM	50	0	17.80	17.65	17.73		
10	64QAM	1	0	17.81	17.72	17.81		
10	64QAM	1	25	17.74	17.59	17.58	18	0
10	64QAM	1	49	17.80	17.72	17.61		
10	64QAM	25	0	17.80	17.63	17.80		
10	64QAM	25	12	17.78	17.62	17.73	18	0
10	64QAM	25	25	17.81	17.57	17.67		
10	64QAM	50	0	17.83	17.54	17.68		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	17.83	17.74	17.83	18	0
5	QPSK	1	12	17.72	17.57	17.73		
5	QPSK	1	24	17.73	17.66	17.68		
5	QPSK	12	0	17.71	17.60	17.70	18	0
5	QPSK	12	7	17.71	17.59	17.62		
5	QPSK	12	13	17.63	17.56	17.59		
5	QPSK	25	0	17.70	17.61	17.69	18	0
5	16QAM	1	0	17.80	17.83	17.62		
5	16QAM	1	12	17.72	17.64	17.58		
5	16QAM	1	24	17.77	17.67	17.57	18	0
5	16QAM	12	0	17.85	17.74	17.70		
5	16QAM	12	7	17.83	17.58	17.67		
5	16QAM	12	13	17.86	17.61	17.72	18	0
5	16QAM	25	0	17.81	17.60	17.68		
5	64QAM	1	0	17.83	17.77	17.79		
5	64QAM	1	12	17.72	17.57	17.63	18	0
5	64QAM	1	24	17.83	17.70	17.69		
5	64QAM	12	0	17.83	17.63	17.79		
5	64QAM	12	7	17.83	17.64	17.73	18	0
5	64QAM	12	13	17.90	17.63	17.63		
5	64QAM	25	0	17.81	17.60	17.69		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	17.79	17.73	17.77	17.69	17.89	18	0
20	QPSK	1	49	17.71	17.69	17.65	17.60	17.80		
20	QPSK	1	99	17.71	17.72	17.73	17.64	17.83		
20	QPSK	50	0	17.73	17.70	17.69	17.61	17.79	18	0
20	QPSK	50	24	17.72	17.65	17.63	17.55	17.76		
20	QPSK	50	50	17.67	17.69	17.61	17.56	17.77		
20	QPSK	100	0	17.72	17.69	17.66	17.60	17.80	18	0
20	16QAM	1	0	17.87	17.68	17.82	17.73	17.83		
20	16QAM	1	49	17.78	17.76	17.70	17.55	17.71		
20	16QAM	1	99	17.76	17.82	17.67	17.52	17.77	18	0
20	16QAM	50	0	17.73	17.71	17.74	17.67	17.86		
20	16QAM	50	24	17.74	17.72	17.68	17.61	17.85		
20	16QAM	50	50	17.70	17.75	17.67	17.62	17.83	18	0
20	16QAM	100	0	17.73	17.71	17.67	17.60	17.81		
20	64QAM	1	0	17.78	17.71	17.84	17.55	17.88		
20	64QAM	1	49	17.70	17.75	17.61	17.66	17.73	18	0
20	64QAM	1	99	17.79	17.67	17.72	17.52	17.76		
20	64QAM	50	0	17.77	17.71	17.76	17.68	17.82		
20	64QAM	50	24	17.78	17.70	17.67	17.61	17.82	18	0
20	64QAM	50	50	17.73	17.74	17.66	17.60	17.83		
20	64QAM	100	0	17.77	17.70	17.69	17.58	17.80		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	17.78	17.64	17.74	17.62	17.85	18	0
15	QPSK	1	37	17.67	17.62	17.63	17.56	17.74		
15	QPSK	1	74	17.67	17.71	17.67	17.58	17.82		
15	QPSK	36	0	17.70	17.59	17.67	17.55	17.67	18	0
15	QPSK	36	20	17.69	17.59	17.57	17.55	17.69		
15	QPSK	36	39	17.65	17.67	17.53	17.52	17.72		
15	QPSK	75	0	17.62	17.66	17.60	17.50	17.74	18	0
15	16QAM	1	0	17.80	17.66	17.72	17.68	17.82		
15	16QAM	1	37	17.72	17.74	17.64	17.48	17.69		
15	16QAM	1	74	17.68	17.75	17.67	17.43	17.71	18	0
15	16QAM	36	0	17.70	17.61	17.74	17.67	17.79		
15	16QAM	36	20	17.74	17.62	17.63	17.60	17.77		
15	16QAM	36	39	17.65	17.72	17.62	17.58	17.73	18	0
15	16QAM	75	0	17.64	17.67	17.66	17.55	17.77		
15	64QAM	1	0	17.76	17.63	17.83	17.51	17.82		
15	64QAM	1	37	17.69	17.72	17.58	17.65	17.73	18	0
15	64QAM	1	74	17.76	17.61	17.65	17.52	17.67		
15	64QAM	36	0	17.68	17.64	17.71	17.61	17.72		
15	64QAM	36	20	17.74	17.67	17.65	17.56	17.72	18	0
15	64QAM	36	39	17.67	17.71	17.58	17.50	17.82		
15	64QAM	75	0	17.77	17.65	17.62	17.48	17.73		



FCC SAR TEST REPORT

Report No. : FA931312

Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	17.76	17.62	17.74	17.65	17.80	18	0
10	QPSK	1	25	17.66	17.65	17.55	17.50	17.79		
10	QPSK	1	49	17.63	17.66	17.71	17.56	17.82		
10	QPSK	25	0	17.69	17.55	17.62	17.58	17.76	18	0
10	QPSK	25	12	17.65	17.63	17.63	17.54	17.75		
10	QPSK	25	25	17.66	17.67	17.56	17.54	17.70		
10	QPSK	50	0	17.64	17.63	17.56	17.53	17.73	18	0
10	16QAM	1	0	17.86	17.58	17.78	17.66	17.78		
10	16QAM	1	25	17.75	17.67	17.65	17.53	17.62		
10	16QAM	1	49	17.75	17.77	17.67	17.43	17.75	18	0
10	16QAM	25	0	17.73	17.70	17.69	17.66	17.84		
10	16QAM	25	12	17.66	17.70	17.60	17.59	17.83		
10	16QAM	25	25	17.65	17.67	17.66	17.52	17.76	18	0
10	16QAM	50	0	17.64	17.69	17.61	17.58	17.72		
10	64QAM	1	0	17.69	17.67	17.80	17.45	17.78		
10	64QAM	1	25	17.64	17.73	17.57	17.65	17.65	18	0
10	64QAM	1	49	17.72	17.66	17.68	17.52	17.76		
10	64QAM	25	0	17.75	17.67	17.69	17.61	17.80		
10	64QAM	25	12	17.71	17.70	17.57	17.61	17.76	18	0
10	64QAM	25	25	17.73	17.71	17.56	17.52	17.77		
10	64QAM	50	0	17.73	17.61	17.63	17.53	17.71		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	17.75	17.65	17.67	17.60	17.81	18	0
5	QPSK	1	12	17.67	17.62	17.63	17.55	17.78		
5	QPSK	1	24	17.71	17.69	17.67	17.54	17.77		
5	QPSK	12	0	17.73	17.64	17.61	17.55	17.68	18	0
5	QPSK	12	7	17.67	17.57	17.55	17.46	17.68		
5	QPSK	12	13	17.63	17.67	17.58	17.53	17.73		
5	QPSK	25	0	17.72	17.68	17.61	17.53	17.72	18	0
5	16QAM	1	0	17.86	17.61	17.82	17.66	17.80		
5	16QAM	1	12	17.72	17.74	17.70	17.54	17.70		
5	16QAM	1	24	17.76	17.79	17.64	17.47	17.75	18	0
5	16QAM	12	0	17.67	17.70	17.74	17.62	17.78		
5	16QAM	12	7	17.64	17.67	17.64	17.54	17.76		
5	16QAM	12	13	17.64	17.75	17.65	17.61	17.74	18	0
5	16QAM	25	0	17.73	17.67	17.67	17.60	17.78		
5	64QAM	1	0	17.68	17.61	17.76	17.51	17.79		
5	64QAM	1	12	17.70	17.65	17.59	17.59	17.66	18	0
5	64QAM	1	24	17.79	17.59	17.67	17.52	17.69		
5	64QAM	12	0	17.71	17.70	17.71	17.58	17.72		
5	64QAM	12	7	17.72	17.62	17.64	17.60	17.76	18	0
5	64QAM	12	13	17.69	17.65	17.58	17.55	17.77		
5	64QAM	25	0	17.70	17.70	17.68	17.53	17.72		

<LTE Carrier Aggregation combinations>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
3. LTE Band 29A is limited to Scell.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation			4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
1	2A-4A	49	49	2A-4A-4A		108	2A-2A-5A-66A	142
2	2A-5A	50	50	2A-4A-5A		109	2A-2A-12A-30A	
3	2A-12A	51	51	2A-4A-12A		110	2A-2A-12A-66A	
4	2A-13A	52	52	2A-4A-13A		111	2A-12A-30A-66A	
5	2A-14A	58	53	2A-5A-30A	112	112	2A-5A-30A-66A	
6	2A-29A	55	54	2A-12A-30A	111	113	2A-2A-13A-66A	
7	2A-30A	55	55	2A-29A-30A		114	2A-5A-66A-66A	143
8	2A-66A	56	56	2A-5A-66A	112	115	2A-5B-30A	142
9	4A-5A	50	57	2A-13A-66A	113	116	2A-5B-66A	143
10	4A-12A	51	58	2A-14A-30A	121	117	2A-5A-66B	143
11	4A-13A	52	59	2A-14A-66A	121	118	2A-12A-66A-66A	
12	4A-29A	64	60	2A-30A-66A	121	119	2A-13A-66A-66A	
13	4A-30A	64	61	2A-66A-66A	118	120	2A-13A-66B	
14	5A-30A	62	62	4A-5A-30A		121	2A-14A-30A-66A	
15	5A-66A	77	63	4A-12A-30A		122	5A-30A-66A-66A	142
16	12A-30A	54	64	4A-29A-30A		123	5B-30A-66A	142
17	13A-66A	57	65	2A-2A-5A	108	124	5B-66A-66A	143
18	14A-30A	58	66	2A-2A-12A	109	125	25A-41D	
19	14A-66A	59	67	2A-2A-13A	113	126	41A-41D	144
20	29A-30A	55	68	2A-2A-30A	109	127	41C-41C	144
21	2A-2A	65	69	2A-2A-66A	110	128	2A-5A-46C	145
22	4A-4A	70	70	4A-4A-5A		129	2A-13A-46C	146
23	7A-7A		71	4A-4A-12A		130	2A-46A-46A-66A	147
24	25A-25A		72	4A-4A-13A		131	2A-46A-46C	155
25	25A-26A		73	13A-66A-66A	119	132	4A-46A-46C	148
26	25A-41A	125	74	14A-30A-66A	121	133	5A-46C-66A	149
27	26A-41A	81	75	2A-5B	115	134	5A-46D	150
28	41A-41A	126	76	2A-66C		135	13A-46C-66A	151
29	66A-66A	73	77	5A-66A-66A	122	136	13A-46D	151
30	2C		78	5B-30A	115	137	66A-46C-46A	
31	5B		79	5B-66A	116	138	66A-46D	
32	7C		80	25A-41C	125	139	2A-46C-66A	147
33	41C	84	81	26A-41C		140	2A-46D	154
34	66C		82	41A-41C	126	141	4A-46D	148
35	2A-46A	85	83	66A-66C				
36	4A-46A	90	84	41D				
37	7A-46A		85	2A-5A-46A	145			
38	13A-46A	93	86	2A-13A-46A	146			
39	25A-46A		87	2A-46A-46A	130			
40	41A-46A		88	2A-46A-66A	130	5CC Downlink Carrier Aggregation		
41	46A-66A	88	89	2A-46C	131	Number	Combination	Covered by Measurement Superset
42	5A-46A	85	90	4A-46A-46A	148	142	2A-5B-30A-66A	
43	5A-7A		91	4A-46C	132	143	2A-5B-66A-66A	
44			92	5A-46A-66A	149	144	41C-41D	
45	12A-66A	102	93	13A-46A-66A	151	145	2A-5A-46D	
46	29A-66A	105	94	13A-46C	136	146	2A-13A-46D	
47	30A-66A	106	95	66A-46A-46A	137	147	2A-46D-66A	
48	66B	34	96	5A-46C	150	148	4A-46A-46D	
			97	2A-12A-66A	118	149	5A-46D-66A	
			98	2A-66B	117	150	5A-46E	
			99	5A-30A-66A	112	151	13A-46D-66A	
			100	5A-66B	117	152	13A-46E	
			101	12A-30A-66A	111	153	46A-46D-66A	B46 RX Only
			102	12A-66A-66A	118	154	2A-2A-46D	
			103	13A-66B	120	155	2A-46A-46D	
			104	29A-30A-66A	B29 RX Only	156	2A-46C-46C	
			105	29A-66A-66A	B29 RX Only	157	2A-46E	
			106	30A-66A-66A	122	158	46C-46C-66A	B46 RX Only
			107	46C-66A	133	159	46D-66A-66A	B46 RX Only
						160	46E-66A	B46 RX Only

<Power verification when LTE Carrier Aggregation Active>
General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		5A (4x4 MIMO) -7A	5	10	836.5	20525	QPSK	1	0	7	20	2655	3100	23.91	24.00
		7A (4x4 MIMO) -46A	7	20	2535	21100	QPSK	1	0	46	20	5537.5	50665	23.05	23.25
		25A-26A	25	20	1880	26340	QPSK	1	0	26	15	876.5	8865	23.23	23.12
		25A-41A (4x4 MIMO)	25	20	1880	26340	QPSK	1	0	41	20	2593	40620	23.08	23.12
		25A-46A	25	20	1880	26340	QPSK	1	0	46	20	5537.5	50665	23.17	23.12
		41A (4x4 MIMO) -46A	41	20	2549.5	40185	QPSK	1	0	46	20	5537.5	50665	24.10	24.02
Intra-Band	Non-Contiguous	7A (4x4 MIMO) -7A	7	20	2535	21100	QPSK	1	0	7	20	2680	3350	22.98	23.25
		25A-25A	25	20	1880	26340	QPSK	1	0	25	20	1985	8590	23.04	23.12
	Contiguous	2C (4x4 MIMO)	2	20	1880	18900	QPSK	1	0	2	20	1979.8	1098	23.13	23.15
		5B	5	10	836.5	20525	QPSK	1	0	5	10	891.4	2624	23.78	24.00
		7C (4x4 MIMO)	7	20	2535	21100	QPSK	1	0	7	20	2674.8	3298	23.31	23.25
		66C	66	20	1770	132572	QPSK	1	0	66	20	2150.2	66838	23.12	23.16

<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2A-4A (4x4 MIMO)-4A	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	4	20	2300	2145	23.20	23.15
	2A-4A (4x4 MIMO)-5A	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	23.20	23.15
	2A-4A (4x4 MIMO)-12A	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	23.18	23.15
	2A-4A (4x4 MIMO)-13A	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	23.04	23.15
	2A-29A-30A (4x4 MIMO)	2	20	1880	18900	QPSK	1	0	29	10	722.5	9715	30	10	2355	9820	23.04	23.15
	2A-66C (4x4 MIMO)	2	20	1880	18900	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.15	23.15
	4A (4x4 MIMO)-4A-5A	4	20	1732.5	20175	QPSK	1	0	4	20	2300	2145	5	10	881.5	2525	23.18	23.29
	4A (4x4 MIMO)-4A-12A	4	20	1732.5	20175	QPSK	1	0	4	20	2300	2145	12	10	737.5	5095	23.10	23.29
	4A (4x4 MIMO)-4A-13A	4	20	1732.5	20175	QPSK	1	0	4	20	2300	2145	13	10	751	5230	23.17	23.29
	4A-5A-30A (4x4 MIMO)	4	20	1732.5	20175	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	23.15	23.29
	4A-12A-30A (4x4 MIMO)	4	20	1732.5	20175	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	23.06	23.29
	4A-29A-30A (4x4 MIMO)	4	20	1732.5	20175	QPSK	1	0	29	10	722.5	9715	30	10	2197.5	67311	23.04	23.29
Intra-Band	26A-41C (4x4 MIMO)	26	15	831.5	26865	QPSK	1	0	41	20	2593	40620	41	20	2612.3	40818	23.84	24.01
	66A (4x4 MIMO)-66C	66	20	1770	132572	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.17	23.16
Contiguous	41D	41	20	2549.5	40185	QPSK	1	0	41	20	2569.3	40383	41	20	2589.1	40581	23.93	24.02

<Four Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				SCC3				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2A-2A-12A-30A	2	20	1880	18900	QPSK	1	0	2	20	1960	900	12	10	737.5	5095	30	10	2355	9820	23.19	23.15
	2A-2A-12A-66A	2	20	1880	18900	QPSK	1	0	2	20	1960	900	12	10	737.5	5095	66	20	2155	66886	23.12	23.15
	2A-2A-13A-66A	2	20	1880	18900	QPSK	1	0	2	20	1960	900	13	10	751	5230	66	20	2155	66886	23.12	23.15
	2A-5A-30A-66A	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	66	20	2155	66886	23.08	23.15
	2A-12A-30A-66A	2	20	1880	18900	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	60	20	2155	66886	23.06	23.15
	2A-12A-66A-66A	2	20	1880	18900	QPSK	1	0	12	10	737.5	5095	66	20	2155	66886	60	20	2190	67236	23.05	23.15
	2A (4x4 MIMO)-13A-46C	2	20	1880	18900	QPSK	1	0	13	10	751	5230	46	20	5537.5	50665	46	20	5557.3	50863	23.18	23.15
	2A-13A-66A-66A	2	20	1880	18900	QPSK	1	0	13	10	751	5230	66	20	2155	66886	60	20	2190	67236	23.24	23.15
	2A (4x4 MIMO)-13A-66B	2	20	1880	18900	QPSK	1	0	13	10	751	5230	66	15	2155	66886	66	5	2164.3	66979	23.24	23.15
	2A-14A-30A-66A	2	20	1880	18900	QPSK	1	0	14	10	763	5330	30	10	2355	9820	66	20	2155	66886	23.12	23.15
	25A-41D	25	20	1880	26340	QPSK	1	0	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	23.17	23.12
	66A-46C-46A	66	20	1770	132572	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5915	54440	23.16	23.16
Intra-Band	66A-46D	66	20	1770	132572	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	22.99	23.16

<Five Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				SCC3				SCC4				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2A-2A-46D	2	20	1880	18900	QPSK	1	0	2	20	1960	900	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.05	23.15
	2A-5A-46D	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.13	23.15
	2A-5B-30A-66A	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	66	20	2155	66886	23.19	23.15
	2A-5B-66A-66A	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	20	2190	67236	23.20	23.15
	2A-13A-46D	2	20	1880	18900	QPSK	1	0	13	10	751	5230	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.06	23.15
	2A-46A-46D	2	20	1880	18900	QPSK	1	0	46	20	5537.5	50665	46	20	5915	54440	46	20	5895.2	54242	46	20	5785.4	54044	23.08	23.15
	2A-46C-46C	2	20	1880	18900	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5915	54440	46	20	5895.2	54242	23.22	23.15
	2A-46D-66A	2	20	1880	18900	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	23.01	23.15
	2A-46E	2	20	1880	18900	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	23.24	23.15
	4A-46A-46D	4	20	1732.5	20175	QPSK	1	0	46	20	5537.5	50665	46	20	5915	54440	46	20	5895.2	54242	46	20	5785.4	54044	23.10	23.29
	5A-46D-66A	5	10	836.5	20525	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	23.88	24.00
	5A-46E	5	10	836.5	20525	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	23.93	24.00
	13A-46D-66A	13	10	782	23230	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	22.69	22.97
	13A-46E	13	10	782	23230	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	22.82	22.97
	41C-41D	41	20	2549.5	40185	QPSK	1	0	41	20	2569.3	40383	41	20	2680	41490	41	20	2660.2	41292	41	20	2640.4	41094	23.99	24.02

12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 10mm for bottom of Laptop.
5. The proximity sensor is used to detect the human proximity, and the G-sensor is used to detect EUT motion and determine whether the proximity sensor is triggered by human or fixed objects such as the table. During SAR test for EUT at the power reduction mode, the EUT positioning was stationary for stable measurement, and G-sensor was manually set not enabled to successfully set EUT in the power reduction mode

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2 / 4 / 5 / 17 SAR test was covered by Band 12 / 25 / 26 / 66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



12.1 Body SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	AMP	OFF	9400	1880	23.27	24.50	1.327	0.07	0.542	0.719
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	9400	1880	17.82	18.00	1.042	0.07	0.923	0.962
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	9262	1852.4	17.76	18.00	1.057	0.14	0.897	0.948
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	9538	1907.6	17.71	18.00	1.069	0.01	0.950	1.016
01	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	9400	1880	17.82	18.00	1.042	0.07	1.100	1.147
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	9262	1852.4	17.76	18.00	1.057	0.13	0.977	1.033
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	9538	1907.6	17.71	18.00	1.069	0.11	1.060	1.133
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	AMP	OFF	1513	1752.6	23.68	24.50	1.208	0.05	0.807	0.975
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	AMP	OFF	1312	1712.4	23.60	24.50	1.230	0.06	0.804	0.989
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	AMP	OFF	1413	1732.6	23.55	24.50	1.245	0.04	0.813	1.012
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	1513	1752.6	17.50	18.00	1.122	0.11	0.893	1.002
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	1312	1712.4	17.40	18.00	1.148	0.07	0.856	0.983
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	1413	1732.6	17.44	18.00	1.138	0.05	0.892	1.015
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1513	1752.6	17.50	18.00	1.122	0.05	0.997	1.119
02	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1312	1712.4	17.40	18.00	1.148	0.05	1.020	1.171
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1413	1732.6	17.44	18.00	1.138	0.05	0.997	1.134
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	10mm	AMP	OFF	4233	846.6	23.48	24.50	1.265	0.08	0.410	0.519
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	4182	836.4	22.50	22.50	1.000	0.15	0.992	0.992
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	4132	826.4	22.45	22.50	1.012	-0.13	1.030	1.042
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	AMP	ON	4233	846.6	22.47	22.50	1.007	0.09	0.938	0.945
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4132	826.4	22.45	22.50	1.012	-0.11	1.030	1.042
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4182	836.4	22.50	22.50	1.000	-0.14	1.040	1.040
03	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4233	846.6	22.47	22.50	1.007	-0.17	1.100	1.108



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	21350	2560	23.15	24.00	1.216	0.06	0.777	0.945
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	21100	2535	23.01	24.00	1.256	-0.04	0.799	1.004
	LTE Band 7	20M	QPSK	1	99	Bottom of Laptop	10mm	AMP	OFF	20850	2510	23.10	24.00	1.230	0	0.739	0.909
	LTE Band 7	20M	QPSK	50	24	Bottom of Laptop	10mm	AMP	OFF	21350	2560	22.10	23.00	1.230	-0.05	0.601	0.739
	LTE Band 7	20M	QPSK	100	0	Bottom of Laptop	10mm	AMP	OFF	21350	2560	22.10	23.00	1.230	-0.03	0.606	0.746
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	21350	2560	16.48	16.50	1.005	-0.12	1.130	1.135
04	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	21100	2535	16.45	16.50	1.012	0.1	1.170	1.184
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	20850	2510	16.42	16.50	1.019	0.1	1.160	1.182
	LTE Band 7	20M	QPSK	50	50	Bottom of Laptop	0mm	AMP	ON	21350	2560	16.28	16.50	1.052	-0.14	1.080	1.136
	LTE Band 7	20M	QPSK	50	50	Bottom of Laptop	0mm	AMP	ON	21100	2535	16.15	16.50	1.084	0.02	1.070	1.160
	LTE Band 7	20M	QPSK	50	50	Bottom of Laptop	0mm	AMP	ON	20850	2510	16.11	16.50	1.094	-0.09	1.020	1.116
	LTE Band 7	20M	QPSK	100	0	Bottom of Laptop	0mm	AMP	ON	21350	2560	16.35	16.50	1.035	0.11	1.140	1.180
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	21100	2535	16.45	16.50	1.012	-0.13	0.860	0.870
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	20850	2510	16.42	16.50	1.019	0.17	0.781	0.796
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	21350	2560	16.48	16.50	1.005	0.02	0.775	0.779
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	23095	707.5	22.71	24.00	1.346	0.04	0.272	0.366
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	10mm	AMP	OFF	23095	707.5	21.49	23.00	1.416	0.08	0.226	0.320
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	23095	707.5	21.99	22.50	1.125	-0.08	0.895	1.007
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	0mm	AMP	ON	23095	707.5	21.87	22.50	1.156	0.1	0.857	0.991
	LTE Band 12	10M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	23095	707.5	21.78	22.50	1.180	0.13	0.836	0.987
05	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	23095	707.5	21.99	22.50	1.125	-0.13	0.958	1.077
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	23095	707.5	21.87	22.50	1.156	-0.03	0.778	0.899
	LTE Band 12	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	23095	707.5	21.78	22.50	1.180	-0.02	0.843	0.995
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	23230	782	22.53	24.00	1.403	0.04	0.410	0.575
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	10mm	AMP	OFF	23230	782	21.62	23.00	1.374	0.03	0.336	0.462
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	23230	782	21.66	22.00	1.081	-0.17	0.880	0.952
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	AMP	ON	23230	782	21.49	22.00	1.125	-0.13	0.952	1.071
	LTE Band 13	10M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	23230	782	21.39	22.00	1.151	0.05	0.916	1.054
06	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	23230	782	21.66	22.00	1.081	0.07	1.050	1.136
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	23230	782	21.49	22.00	1.125	0.04	0.975	1.096
	LTE Band 13	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	23230	782	21.39	22.00	1.151	-0.19	0.964	1.109
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	23330	793	22.51	24.00	1.409	0.03	0.338	0.476
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	10mm	AMP	OFF	23330	793	21.46	23.00	1.426	0.03	0.271	0.386
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	23330	793	21.60	22.00	1.096	-0.14	0.885	0.970
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	0mm	AMP	ON	23330	793	21.33	22.00	1.167	-0.18	0.831	0.970
	LTE Band 14	10M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	23330	793	21.22	22.00	1.197	0.03	0.786	0.941
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	23330	793	21.60	22.00	1.096	-0.03	0.959	1.052
07	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	23330	793	21.33	22.00	1.167	0	1.000	1.167
	LTE Band 14	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	23330	793	21.22	22.00	1.197	-0.04	0.951	1.138
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	26140	1860	22.82	24.00	1.312	0.05	0.478	0.627
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	10mm	AMP	OFF	26140	1860	21.66	23.00	1.361	0.04	0.374	0.509
08	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	26140	1860	17.99	18.00	1.002	0.07	1.070	1.072
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	26340	1880	17.91	18.00	1.021	-0.05	1.010	1.031
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	26590	1905	17.93	18.00	1.016	0	0.985	1.001
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	26140	1860	17.66	18.00	1.081	-0.01	0.877	0.948
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	26340	1880	17.52	18.00	1.117	-0.06	0.941	1.051
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	26590	1905	17.71	18.00	1.069	0.13	0.961	1.027
	LTE Band 25	20M	QPSK	100	0	Bottom of Laptop	0mm	AMP	ON	26140	1860	17.65	18.00	1.084	-0.02	0.939	1.018
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	26140	1860	17.99	18.00	1.002	0.06	0.944	0.946
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	26340	1880	17.91	18.00	1.021	0.04	0.975	0.995
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	26590	1905	17.93	18.00	1.016	-0.08	0.973	0.989



FCC SAR TEST REPORT

Report No. : FA931312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	26865	831.5	23.62	25.00	1.374	0.05	0.442	0.607
	LTE Band 26	15M	QPSK	36	39	Bottom of Laptop	10mm	AMP	OFF	26865	831.5	22.34	24.00	1.466	-0.03	0.389	0.570
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	26865	831.5	21.94	22.00	1.014	-0.01	1.050	1.065
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	AMP	ON	26865	831.5	21.81	22.00	1.045	0.06	0.987	1.031
09	LTE Band 26	15M	QPSK	75	0	Bottom of Laptop	0mm	AMP	ON	26865	831.5	21.79	22.00	1.050	-0.03	1.070	1.123
	LTE Band 26	15M	QPSK	75	0	Bottom of Laptop	0mm	Speed	ON	26865	831.5	21.79	22.00	1.050	-0.01	0.845	0.887
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	26865	831.5	21.94	22.00	1.014	0.07	0.871	0.883
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	Speed	ON	26865	831.5	21.81	22.00	1.045	0.19	0.869	0.908
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	27710	2310	21.37	23.00	1.455	0.08	0.553	0.805
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	10mm	AMP	OFF	27710	2310	20.41	22.00	1.442	-0.02	0.460	0.663
	LTE Band 30	10M	QPSK	50	0	Bottom of Laptop	10mm	AMP	OFF	27710	2310	20.44	22.00	1.432	0.03	0.472	0.676
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	27710	2310	16.06	16.50	1.107	0.04	0.864	0.956
10	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	AMP	ON	27710	2310	15.82	16.50	1.169	0.08	0.871	1.019
	LTE Band 30	10M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	27710	2310	15.84	16.50	1.164	0.15	0.869	1.012
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	27710	2310	16.06	16.50	1.107	-0.03	0.731	0.809
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	27710	2310	15.82	16.50	1.169	0.08	0.715	0.836
	LTE Band 30	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	27710	2310	15.84	16.50	1.164	0.15	0.726	0.845
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	132322	1745	23.18	24.00	1.208	0.12	0.661	0.798
	LTE Band 66	20M	QPSK	50	24	Bottom of Laptop	10mm	AMP	OFF	132322	1745	21.95	23.00	1.274	0.07	0.525	0.669
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	132322	1745	16.93	17.00	1.016	0.13	0.983	0.999
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	132072	1720	16.70	17.00	1.072	0.07	0.996	1.067
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	132572	1770	16.82	17.00	1.042	0.03	0.914	0.953
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	132322	1745	16.29	17.00	1.178	0	0.901	1.061
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	132072	1720	16.29	17.00	1.178	0.04	0.895	1.054
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	132572	1770	16.24	17.00	1.191	0.05	0.863	1.028
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	AMP	ON	132322	1745	16.33	17.00	1.167	0.02	0.889	1.037
11	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	132072	1720	16.70	17.00	1.072	0.07	1.080	1.157
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	132322	1745	16.93	17.00	1.016	0.05	1.030	1.047
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	132572	1770	16.82	17.00	1.042	0.03	1.040	1.084
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132322	1745	16.29	17.00	1.178	0.06	0.896	1.055
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132072	1720	16.29	17.00	1.178	-0.11	0.875	1.030
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132572	1770	16.24	17.00	1.191	-0.07	0.839	0.999
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	Speed	ON	132322	1745	16.33	17.00	1.167	-0.01	0.874	1.020



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	10mm	AMP	OFF	40620	2593	23.70	25.00	1.349	62.9	1.006	0.15	0.405	0.550
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	10mm	AMP	OFF	40620	2593	22.58	24.00	1.387	62.9	1.006	-0.09	0.326	0.455
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	41490	2680	17.89	18.00	1.026	62.9	1.006	-0.15	0.786	0.811
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	39750	2506	17.79	18.00	1.050	62.9	1.006	0.15	1.000	1.056
12	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	40185	2549.5	17.73	18.00	1.064	62.9	1.006	0.1	0.997	1.067
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	40620	2593	17.77	18.00	1.054	62.9	1.006	0.16	0.872	0.925
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	AMP	ON	41055	2636.5	17.69	18.00	1.074	62.9	1.006	0.12	0.729	0.788
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	41490	2680	17.79	18.00	1.050	62.9	1.006	0.01	0.690	0.729
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	39750	2506	17.73	18.00	1.064	62.9	1.006	-0.06	0.923	0.988
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	40185	2549.5	17.70	18.00	1.072	62.9	1.006	-0.02	0.608	0.655
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	40620	2593	17.69	18.00	1.074	62.9	1.006	-0.1	0.767	0.829
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	AMP	ON	41055	2636.5	17.61	18.00	1.094	62.9	1.006	-0.04	0.708	0.779
	LTE Band 41	20M	QPSK	100	0	Bottom of Laptop	0mm	AMP	ON	41490	2680	17.80	18.00	1.047	62.9	1.006	-0.13	0.672	0.708
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	39750	2506	17.79	18.00	1.050	62.9	1.006	0.08	0.870	0.919
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	41490	2680	17.89	18.00	1.026	62.9	1.006	0.05	0.842	0.869
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	40620	2593	17.77	18.00	1.054	62.9	1.006	-0.1	0.736	0.781
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	41055	2636.5	17.69	18.00	1.074	62.9	1.006	0.11	0.808	0.873
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	40185	2549.5	17.73	18.00	1.064	62.9	1.006	-0.04	0.760	0.814

12.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	9400	1880	17.82	18.00	1.042	0.07	1.100		1.147
2nd	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	9400	1880	17.82	18.00	1.042	0.02	1.040	1.06	1.084
1st	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4233	846.6	22.47	22.50	1.007	-0.17	1.100		1.108
2nd	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4233	846.6	22.47	22.50	1.007	-0.06	1.050	1.05	1.057
1st	LTE Band 7	20M_QPSK_1_0	Bottom of Laptop	0mm	AMP	ON	21100	2535	16.45	16.50	1.012	0.1	1.170		1.184
2nd	LTE Band 7	20M_QPSK_1_0	Bottom of Laptop	0mm	AMP	ON	21100	2535	16.45	16.50	1.012	-0.13	1.130	1.04	1.143
1st	LTE Band 13	10M_QPSK_1_0	Bottom of Laptop	0mm	Speed	ON	23230	782	21.66	22.00	1.081	0.07	1.050		1.136
2nd	LTE Band 13	10M_QPSK_1_0	Bottom of Laptop	0mm	Speed	ON	23230	782	21.66	22.00	1.081	-0.13	1.040	1.01	1.125
1st	LTE Band 30	10M_QPSK_25_0	Bottom of Laptop	0mm	AMP	ON	27710	2310	15.82	16.50	1.169	0.08	0.871		1.019
2nd	LTE Band 30	10M_QPSK_25_0	Bottom of Laptop	0mm	AMP	ON	27710	2310	15.82	16.50	1.169	0.16	0.867	1.00	1.014
1st	LTE Band 66	20M_QPSK_1_0	Bottom of Laptop	0mm	Speed	ON	132072	1720	16.70	17.00	1.072	0.07	1.080		1.157
2nd	LTE Band 66	20M_QPSK_1_0	Bottom of Laptop	0mm	Speed	ON	132072	1720	16.70	17.00	1.072	0.11	0.999	1.08	1.070

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + 2.4GHz WLAN ANT 1 + 2.4GHz WLAN ANT 2	Yes
2.	WWAN + 5GHz WLAN ANT 1 + 5GHz WLAN ANT 2	Yes
3.	WWAN + 2.4GHz WLAN ANT 1+ Bluetooth ANT 2	Yes
4.	WWAN + 5GHz WLAN ANT 1 + Bluetooth ANT 2	Yes
5.	WWAN + 5GHz WLAN ANT 1 + 5GHz WLAN ANT 2 + Bluetooth ANT 2	Yes

General Note:

1. 2.4GHz WLAN and Bluetooth share the same antenna 2, and cannot transmit simultaneously.
2. All licensed modes share the same antenna part and cannot transmit simultaneously
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.
 - v) The SPLSR calculated results please refer to section 14.2.



13.1 Body Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+6 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 2							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
WCDMA	WCDMA II	Bottom of Laptop at 0mm	1.147	0.240	0.300	0.710	0.730	0.030	1.687	2.587	1.417	1.887	2.617	0.04	Case 1
		Bottom of Laptop at 10mm	0.719	0.240	0.300	0.710	0.730	0.030	1.259	2.159	0.989	1.459	2.189	0.04	Case 2
	WCDMA IV	Bottom of Laptop at 0mm	1.171	0.240	0.300	0.710	0.730	0.030	1.711	2.611	1.441	1.911	2.641	0.04	Case 3
		Bottom of Laptop at 10mm	1.012	0.240	0.300	0.710	0.730	0.030	1.552	2.452	1.282	1.752	2.482	0.04	Case 4
	WCDMA V	Bottom of Laptop at 0mm	1.108	0.240	0.300	0.710	0.730	0.030	1.648	2.548	1.378	1.848	2.578	0.04	Case 5
		Bottom of Laptop at 10mm	0.519	0.240	0.300	0.710	0.730	0.030	1.059	1.959	0.789	1.259	1.989	0.04	Case 6
LTE	LTE Band 7	Bottom of Laptop at 0mm	1.184	0.240	0.300	0.710	0.730	0.030	1.724	2.624	1.454	1.924	2.654	0.04	Case 7
		Bottom of Laptop at 10mm	1.004	0.240	0.300	0.710	0.730	0.030	1.544	2.444	1.274	1.744	2.474	0.04	Case 8
	LTE Band 12	Bottom of Laptop at 0mm	1.077	0.240	0.300	0.710	0.730	0.030	1.617	2.517	1.347	1.817	2.547	0.04	Case 9
		Bottom of Laptop at 10mm	0.366	0.240	0.300	0.710	0.730	0.030	0.906	1.806	0.636	1.106	1.836	0.04	Case 10
	LTE Band 13	Bottom of Laptop at 0mm	1.136	0.240	0.300	0.710	0.730	0.030	1.676	2.576	1.406	1.876	2.606	0.04	Case 11
		Bottom of Laptop at 10mm	0.575	0.240	0.300	0.710	0.730	0.030	1.115	2.015	0.845	1.315	2.045	0.04	Case 12
	LTE Band 14	Bottom of Laptop at 0mm	1.167	0.240	0.300	0.710	0.730	0.030	1.707	2.607	1.437	1.907	2.637	0.04	Case 13
		Bottom of Laptop at 10mm	0.476	0.240	0.300	0.710	0.730	0.030	1.016	1.916	0.746	1.216	1.946	0.04	Case 14
	LTE Band 25	Bottom of Laptop at 0mm	1.072	0.240	0.300	0.710	0.730	0.030	1.612	2.512	1.342	1.812	2.542	0.04	Case 15
		Bottom of Laptop at 10mm	0.627	0.240	0.300	0.710	0.730	0.030	1.167	2.067	0.897	1.367	2.097	0.04	Case 16
	LTE Band 26	Bottom of Laptop at 0mm	1.123	0.240	0.300	0.710	0.730	0.030	1.663	2.563	1.393	1.863	2.593	0.04	Case 17
		Bottom of Laptop at 10mm	0.607	0.240	0.300	0.710	0.730	0.030	1.147	2.047	0.877	1.347	2.077	0.04	Case 18
	LTE Band 30	Bottom of Laptop at 0mm	1.019	0.240	0.300	0.710	0.730	0.030	1.559	2.459	1.289	1.759	2.489	0.04	Case 19
		Bottom of Laptop at 10mm	0.805	0.240	0.300	0.710	0.730	0.030	1.345	2.245	1.075	1.545	2.275	0.04	Case 20
	LTE Band 41	Bottom of Laptop at 0mm	1.067	0.240	0.300	0.710	0.730	0.030	1.607	2.507	1.337	1.807	2.537	0.04	Case 21
		Bottom of Laptop at 10mm	0.550	0.240	0.300	0.710	0.730	0.030	1.090	1.990	0.820	1.290	2.020	0.04	Case 22
	LTE Band 66	Bottom of Laptop at 0mm	1.157	0.240	0.300	0.710	0.730	0.030	1.697	2.597	1.427	1.897	2.627	0.04	Case 23
		Bottom of Laptop at 10mm	0.798	0.240	0.300	0.710	0.730	0.030	1.338	2.238	1.068	1.538	2.268	0.04	Case 24

13.2 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 1	WCDMA II	Bottom of Laptop	1.147	0	212.1	1.39	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA II	Bottom of Laptop	1.147	0	178.7	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA II	Bottom of Laptop	1.147	0	212.1	1.86	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA II	Bottom of Laptop	1.147	0	178.7	1.91	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
Case 2	WCDMA II	Bottom of Laptop	0.719	10	212.1	0.96	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA II	Bottom of Laptop	0.719	10	178.7	1.02	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA II	Bottom of Laptop	0.719	10	212.1	1.43	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA II	Bottom of Laptop	0.719	10	178.7	1.48	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
Case 3	WCDMA IV	Bottom of Laptop	1.171	0	212.1	1.41	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA IV	Bottom of Laptop	1.171	0	178.7	1.47	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA IV	Bottom of Laptop	1.171	0	212.1	1.88	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA IV	Bottom of Laptop	1.171	0	178.7	1.93	0.02	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 4	WCDMA IV	Bottom of Laptop	1.012	10	212.1	1.25	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA IV	Bottom of Laptop	1.012	10	178.7	1.31	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA IV	Bottom of Laptop	1.012	10	212.1	1.72	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA IV	Bottom of Laptop	1.012	10	178.7	1.77	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
Case 5	WCDMA V	Bottom of Laptop	1.108	0	212.1	1.35	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA V	Bottom of Laptop	1.108	0	178.7	1.41	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA V	Bottom of Laptop	1.108	0	212.1	1.82	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA V	Bottom of Laptop	1.108	0	178.7	1.87	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
Case 6	WCDMA V	Bottom of Laptop	0.519	10	212.1	0.76	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	WCDMA V	Bottom of Laptop	0.519	10	178.7	0.82	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WCDMA V	Bottom of Laptop	0.519	10	212.1	1.23	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	WCDMA V	Bottom of Laptop	0.519	10	178.7	1.28	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
Case 7	LTE B7	Bottom of Laptop	1.184	0	212.1	1.42	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B7	Bottom of Laptop	1.184	0	178.7	1.48	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B7	Bottom of Laptop	1.184	0	212.1	1.89	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B7	Bottom of Laptop	1.184	0	178.7	1.94	0.02	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 8	LTE B7	Bottom of Laptop	1.004	10	212.1	1.24	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B7	Bottom of Laptop	1.004	10	178.7	1.30	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B7	Bottom of Laptop	1.004	10	212.1	1.71	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B7	Bottom of Laptop	1.004	10	178.7	1.76	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 9	LTE B12	Bottom of Laptop	1.077	0	212.1	1.32	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B12	Bottom of Laptop	1.077	0	178.7	1.38	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B12	Bottom of Laptop	1.077	0	212.1	1.79	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B12	Bottom of Laptop	1.077	0	178.7	1.84	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 10	LTE B12	Bottom of Laptop	0.366	10	212.1	0.61	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B12	Bottom of Laptop	0.366	10	178.7	0.67	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B12	Bottom of Laptop	0.366	10	212.1	1.08	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B12	Bottom of Laptop	0.366	10	178.7	1.13	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 11	LTE B13	Bottom of Laptop	1.136	0	212.1	1.38	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B13	Bottom of Laptop	1.136	0	178.7	1.44	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B13	Bottom of Laptop	1.136	0	212.1	1.85	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B13	Bottom of Laptop	1.136	0	178.7	1.90	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 12	LTE B13	Bottom of Laptop	0.575	10	212.1	0.82	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B13	Bottom of Laptop	0.575	10	178.7	0.88	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B13	Bottom of Laptop	0.575	10	212.1	1.29	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B13	Bottom of Laptop	0.575	10	178.7	1.34	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 13	LTE B14	Bottom of Laptop	1.167	0	212.1	1.41	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B14	Bottom of Laptop	1.167	0	178.7	1.47	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B14	Bottom of Laptop	1.167	0	212.1	1.88	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B14	Bottom of Laptop	1.167	0	178.7	1.93	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 14	LTE B14	Bottom of Laptop	0.476	10	212.1	0.72	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B14	Bottom of Laptop	0.476	10	178.7	0.78	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B14	Bottom of Laptop	0.476	10	212.1	1.19	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B14	Bottom of Laptop	0.476	10	178.7	1.24	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 15	LTE B25	Bottom of Laptop	1.072	0	212.1	1.31	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B25	Bottom of Laptop	1.072	0	178.7	1.37	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B25	Bottom of Laptop	1.072	0	212.1	1.78	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B25	Bottom of Laptop	1.072	0	178.7	1.83	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 16	LTE B25	Bottom of Laptop	0.627	10	212.1	0.87	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B25	Bottom of Laptop	0.627	10	178.7	0.93	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B25	Bottom of Laptop	0.627	10	212.1	1.34	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B25	Bottom of Laptop	0.627	10	178.7	1.39	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 17	LTE B26	Bottom of Laptop	1.123	0	212.1	1.36	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B26	Bottom of Laptop	1.123	0	178.7	1.42	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B26	Bottom of Laptop	1.123	0	212.1	1.83	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B26	Bottom of Laptop	1.123	0	178.7	1.88	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 18	LTE B26	Bottom of Laptop	0.607	10	212.1	0.85	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B26	Bottom of Laptop	0.607	10	178.7	0.91	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B26	Bottom of Laptop	0.607	10	212.1	1.32	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B26	Bottom of Laptop	0.607	10	178.7	1.37	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 19	LTE B30	Bottom of Laptop	1.019	0	212.1	1.26	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B30	Bottom of Laptop	1.019	0	178.7	1.32	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B30	Bottom of Laptop	1.019	0	212.1	1.73	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B30	Bottom of Laptop	1.019	0	178.7	1.78	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 20	LTE B30	Bottom of Laptop	0.805	10	212.1	1.05	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B30	Bottom of Laptop	0.805	10	178.7	1.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B30	Bottom of Laptop	0.805	10	212.1	1.52	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B30	Bottom of Laptop	0.805	10	178.7	1.57	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 21	LTE B41	Bottom of Laptop	1.067	0	212.1	1.31	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B41	Bottom of Laptop	1.067	0	178.7	1.37	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B41	Bottom of Laptop	1.067	0	212.1	1.78	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B41	Bottom of Laptop	1.067	0	178.7	1.83	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 22	LTE B41	Bottom of Laptop	0.550	10	212.1	0.79	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B41	Bottom of Laptop	0.550	10	178.7	0.85	0.00	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B41	Bottom of Laptop	0.550	10	212.1	1.26	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B41	Bottom of Laptop	0.550	10	178.7	1.31	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 23	LTE B66	Bottom of Laptop	1.157	0	212.1	1.40	0.01	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B66	Bottom of Laptop	1.157	0	178.7	1.46	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B66	Bottom of Laptop	1.157	0	212.1	1.87	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B66	Bottom of Laptop	1.157	0	178.7	1.92	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 24	LTE B66	Bottom of Laptop	0.798	10	212.1	1.04	0.00	Not required
	WLAN2.4GHz_Ant 1		0.240	0				
	LTE B66	Bottom of Laptop	0.798	10	178.7	1.10	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	LTE B66	Bottom of Laptop	0.798	10	212.1	1.51	0.01	Not required
	WLAN5GHz_Ant 1		0.710	0				
	LTE B66	Bottom of Laptop	0.798	10	178.7	1.56	0.01	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.240	0	48.1	0.54	0.01	Not required
	WLAN2.4GHz_Ant 2		0.300	0				
	WLAN5GHz_Ant 1	Bottom of Laptop	0.710	0	48.1	1.47	0.04	Not required
	WLAN5GHz_Ant 2+BT Ant 2		0.760	0				

Test Engineer : Andy Jiang, White Huang, Ted Hsieh, Randy Lin, Lemon Su and Galen Chang

14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.