



RF Test Report

Issued Date: Nov. 21, 2019

Applicant : LEXON
Product Type : OSLO SOUND
Trade Name : LEXON
Model Number : LA115
FCC ID : 2ARD3-LA115
EUT Rated Voltage : DC 5.0V, 1.0A
Test Voltage : 120 Vac / 60 Hz
Receive Date : Jun. 01 , 2019
Test Period : Jul. 16 ~ Jul. 24, 2019
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Testing Laboratory

A Test Lab Techno Corp.

101-104, 1F, A building, Safflower ridge industrial area,
Taoyuan street, Nanshan district, Shenzhen

Tel : +86-755-23987770 / Fax : +86-755-26637771

<http://www.atl-lab.com.tw/e-index.htm>



American Association for Laboratory Accreditation number: 3464.02

Test Firm MRA designation number: CN1168

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA, or any government agencies. The test results in the report only apply to the tested sample.

Approved By

:

Jet Lu

(Manager)

Reviewed By

:

Louis Shen

(Testing Engineer)

(Louis Shen)



Revision History

Rev.	Issue Date	Revisions
00	Nov. 21, 2019	Initial Issue

TABLE OF CONTENTS

1	General Information.....	4
1.1.	Summary of Test Result.....	4
1.2.	Measurement Uncertainty.....	5
2	EUT Description.....	6
3	Test Methodology	7
3.1.	Mode of Operation	7
3.2.	EUT Exercise Software.....	8
3.3.	Configuration of Test System Details	9
3.4.	Test Instruments	10
3.5.	Test Site Environment.....	11
4	Measurement Procedure	12
4.1.	Maximum Conducted Output Power Measurement	12
4.2.	AC Power Line Conducted Emission Measurement	13
4.3.	Radiated Emission Measurement.....	15
4.4.	20dB RF Bandwidth Measurement.....	18
4.5.	Carrier Frequency Separation Measurement.....	19
4.6.	Number of Hopping Measurement.....	20
4.7.	Time of Occupancy (Dwell Time) Measurement	21
4.8.	Out of Band Conducted Emissions Measurement	22
4.9.	Antenna Measurement	22
5	Test Results	23
	Annex A. Conducted Emission.....	23
	Annex B. Conducted Test Results.....	25
	Annex C. Radiated Emission Measurement	43



1 General Information

1.1. Summary of Test Result

FCC Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----

Standard	Description
CFR47, Part 15, Subpart C §15.247	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63. 4: 2014	American National Standard for methods of measurement of radio – noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
KDB558074 D01 v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

A Test Lab Techno Corp. tested the above equipment under the requirements outlined in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. Based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

A Test Lab Techno Corp. will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	LEXON 91 avenue Jean-Baptiste Clément - 92100 Boulogne - FRANCE		
Manufacturer	LEXON 91 avenue Jean-Baptiste Clément - 92100 Boulogne - FRANCE		
Product	OSLO SOUND		
Trade Name	LEXON		
Model Number	LA115		
FCC ID	2ARD3-LA115		
Frequency Range	2402 ~ 2480 MHz		
Modulation Type	GFSK for 1Mbps		
	$\pi/4$ -DQPSK for 2Mbps		
	8DPSK for 3Mbps		
Operate Temp. Range	0 ~ +35 °C		
Antenna information	Type	Max. Gain (dBi)	
	PCB Antenna	1.08443	
RF Output Power (Conducted)	GFSK for 1Mbps	0.00392	W
	$\pi/4$ -DQPSK for 2Mbps	0.00571	W
	8DPSK for 3Mbps	0.006	W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in TX mode only. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.


3.2. EUT Exercise Software

1	Setup the EUT shown on “Configuration of Test System Details.”
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1 (for Conducted Emission)

3.3. Configuration of Test System Details

Conducted Emission

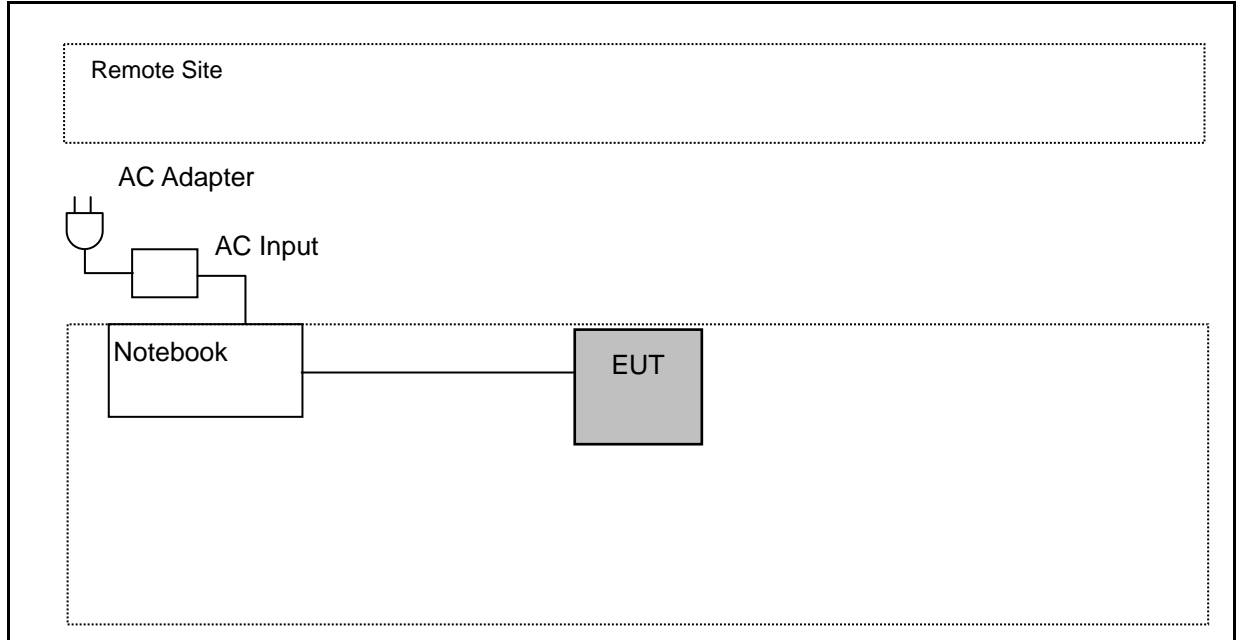

Radiated Emissions

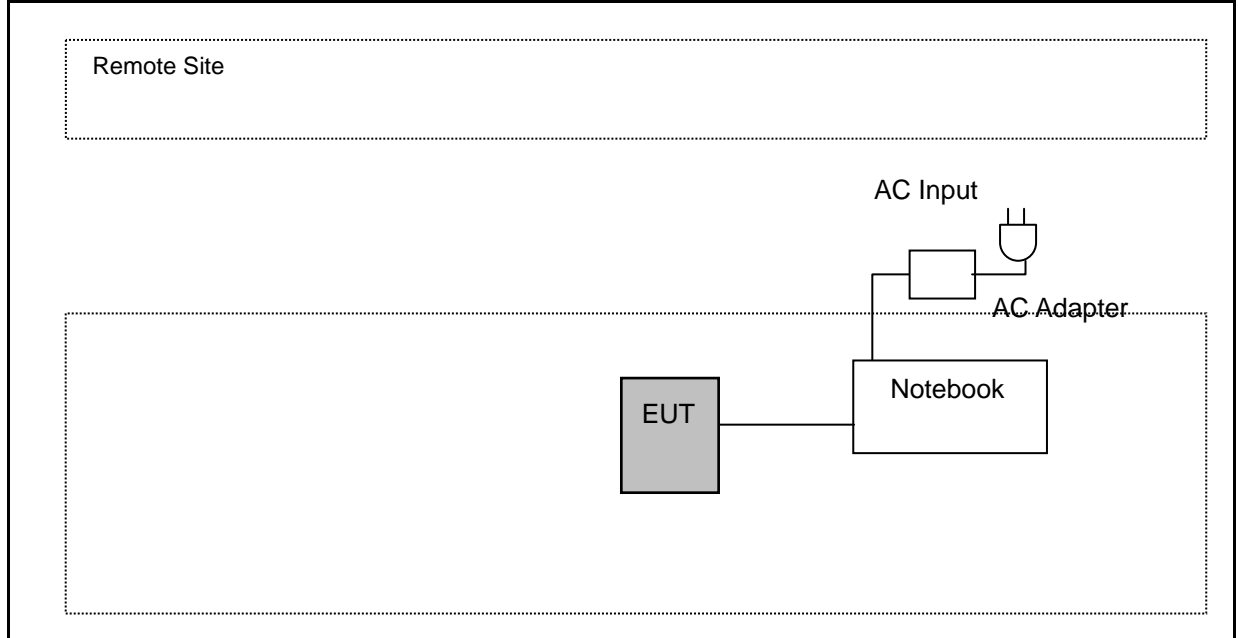

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	Lenovo	ThinkPad E560	2015AP4354	Non-Shielded,0.8 m



3.4. Test Instruments

For Conducted Emission

Test Period: Jul. 17, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESR3	101923	09/18/2018	1 year
LISN	R&S	ENV216	101942	09/18/2018	1 year
LISN	R&S	ENV216	101943	09/18/2018	1 year
RF Cable	EMCI	EMCCFD400	433LFC	09/18/2018	1 year
Test Site	ATL	CE	CE	N.C.R.	-----

For Radiated Emissions

Test Period: Jul. 16 ~ Jul. 17, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Preamplifier (10 kHz~3 GHz)	EMCI	EMC001330	980300	09/18/2018	1 year
Preamplifier (0.1 GHz~26.5 GHz)	EMCI	EMC012645SE	980318	09/18/2018	1 year
Bilog Antenna (30 MHz~1.4 GHz)	Schwarzbeck	VULB 9168	672	11/21/2018	1 year
Horn Antenna (1 GHz~18 GHz)	ETS	3117	00204949	11/05/2018	1 year
Horn Antenna (18 GHz~26.5 GHz)	ETS	3160-09	00202549	11/05/2018	1 year
Receiver (3 Hz~26.5 GHz)	Keysight	N9038A	MY51210179	09/18/2018	1 year
Spectrum Analyzer (3 Hz~43 GHz)	Keysight	N9030A	MY55410268	09/18/2018	1 year
Cable	EMCI	N/A	1066LFC	09/18/2018	1 year
Cable	EMCI	N/A	160719	09/18/2018	1 year
Cable	EMCI	N/A	160324	09/18/2018	1 year
Cable	EMCI	N/A	160322	09/18/2018	1 year
Loop Antenna	EMCI	LPA600	272	02/21/2019	1 year
Test Site	OuHeng	MFAC3M	RE-026	02/14/2019	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Jul. 24, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	U2021XA	SG54130003	09/18/2018	1 year
Power Sensor	Anritsu	U2021XA	SG54130004	09/18/2018	1 year
Spectrum Analyzer (10 Hz~26.5 GHz)	Agilent	N9020A	MY53420615	09/18/2018	1 year
Programmable temp & humi chamber	ETAI	9712A	647	11/15/2018	1 year
Signal Generator	Agilent	E8257D	MY53400659	09/18/2018	1 year
Signal Generator	Agilent	N5182B	MY53050940	09/18/2018	1 year
Test Site	ATL	RF	RF	-----	N.C.R.

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950


4 Measurement Procedure

4.1. Maximum Conducted Output Power Measurement

■ Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

■ Test Setup

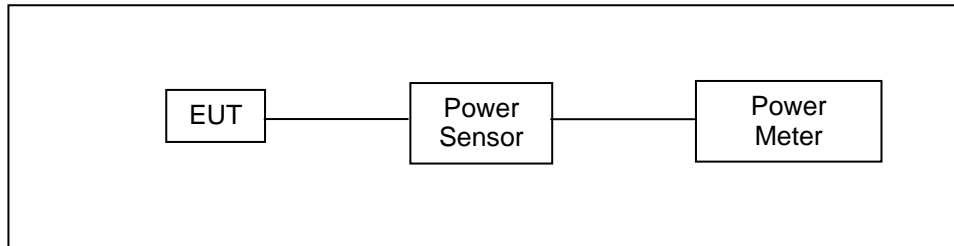

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.


Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(\text{GAIN} - 6)/3$ dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.2. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

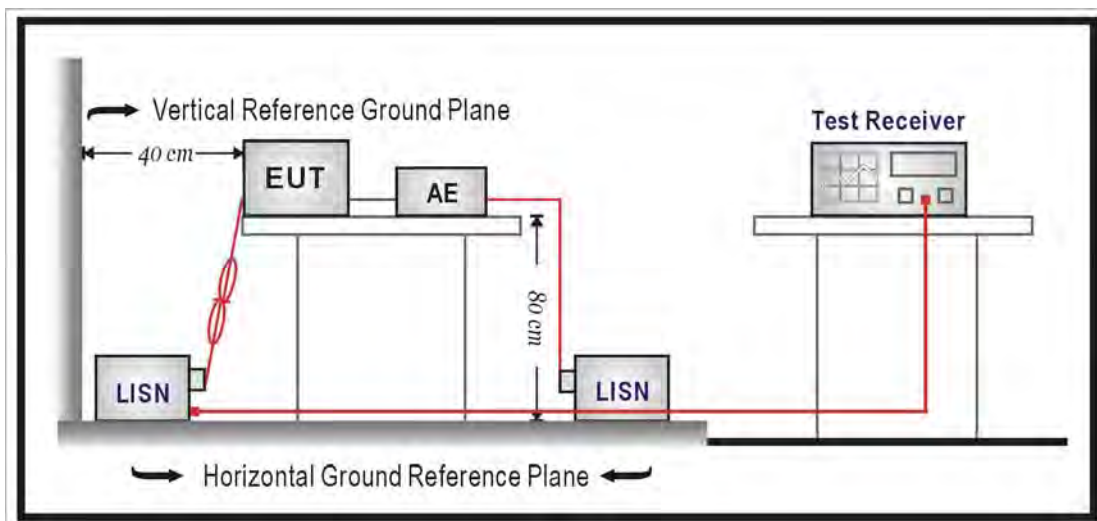

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega//50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega//50\mu\text{H}$ coupling impedance with 50Ω termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.3. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9kHz ~ 30MHz

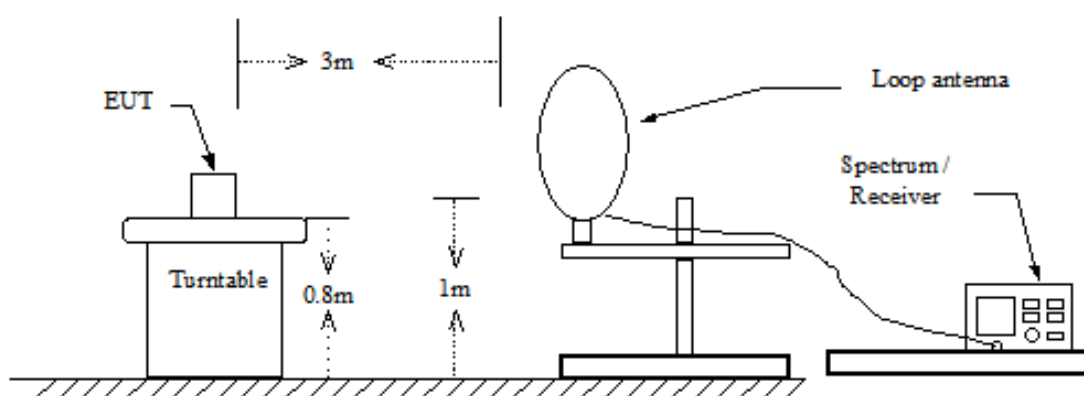

Below 1GHz

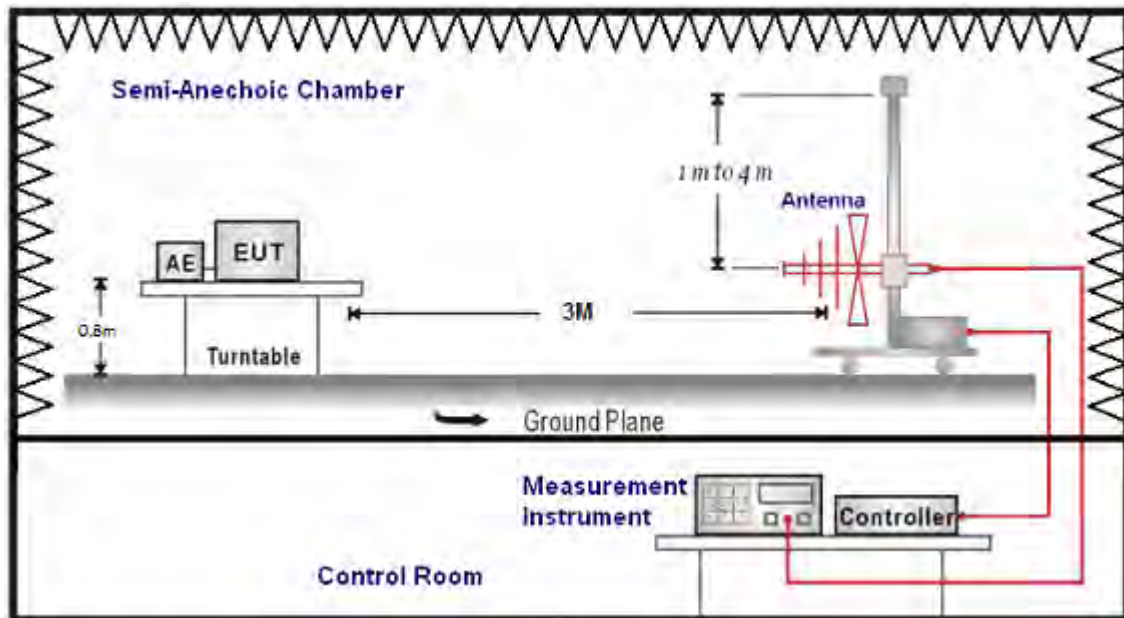

Above 1GHz

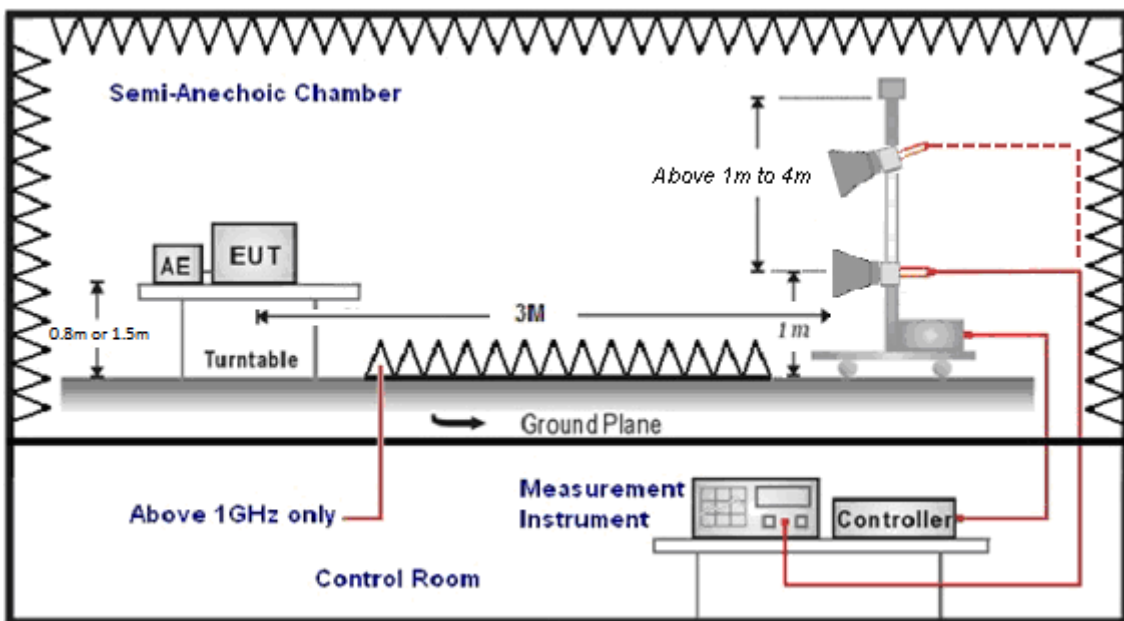

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4.4. 20dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

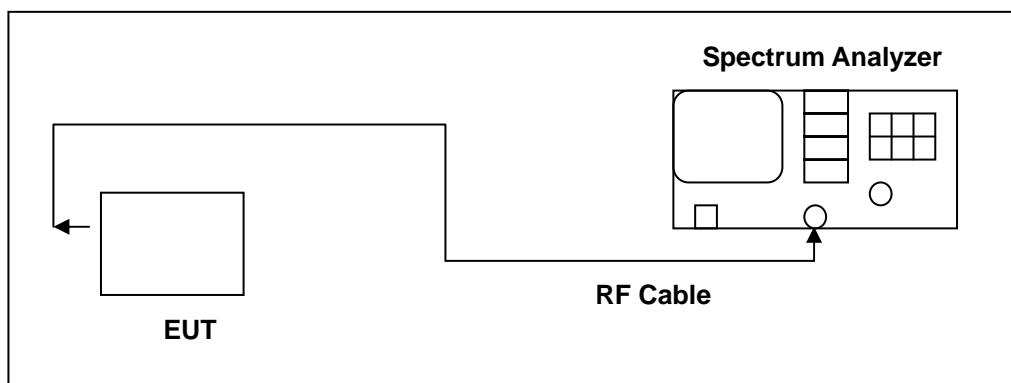

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

4.5. Carrier Frequency Separation Measurement

■ Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

■ Test Setup

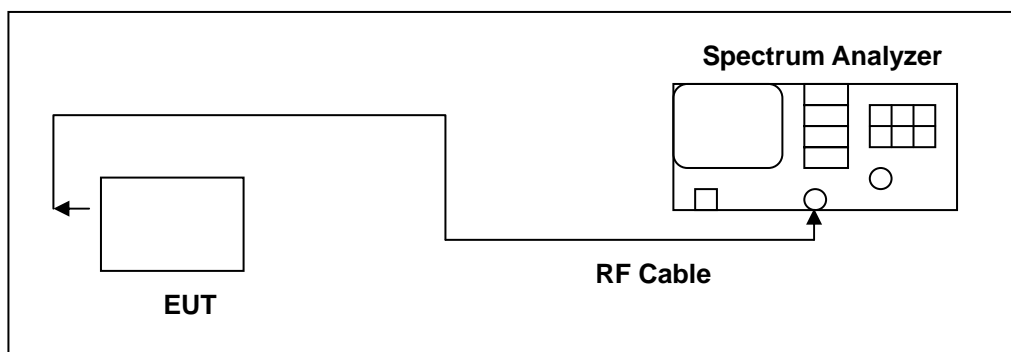

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

4.6. Number of Hopping Measurement

■ Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

■ Test Setup

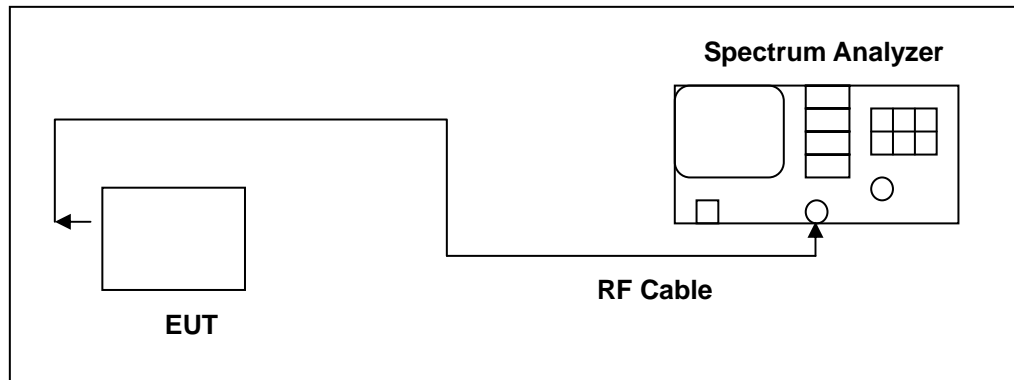

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

4.7. Time of Occupancy (Dwell Time) Measurement

■ Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

■ Test Setup

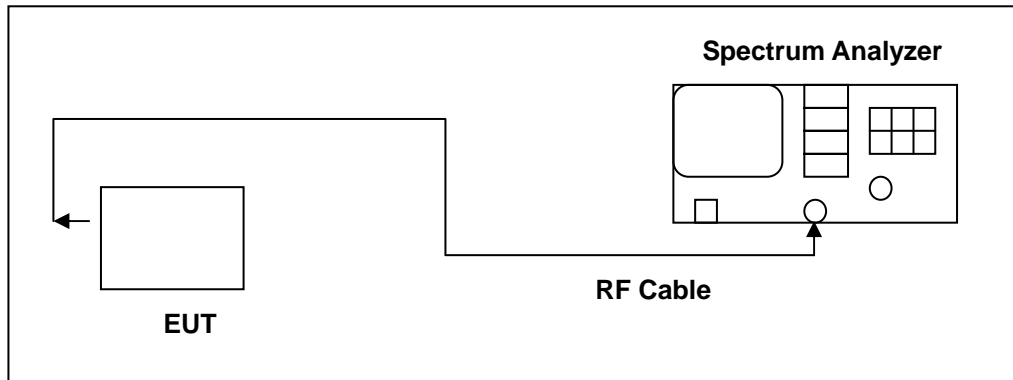

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.

4.8. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

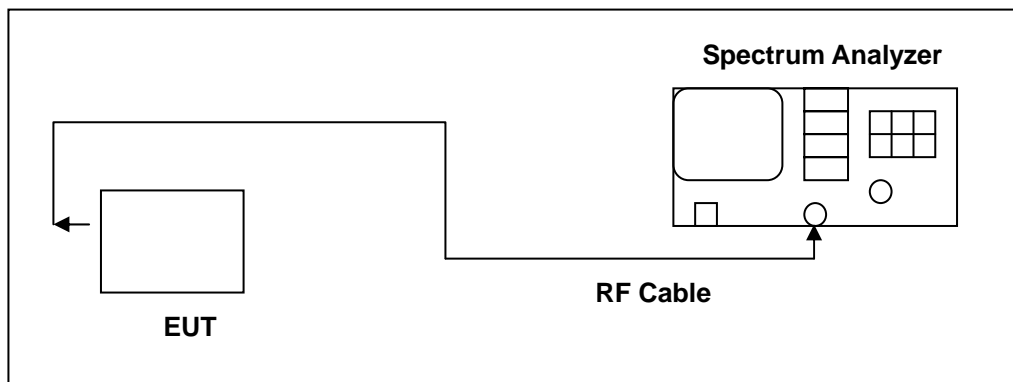

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

4.9. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

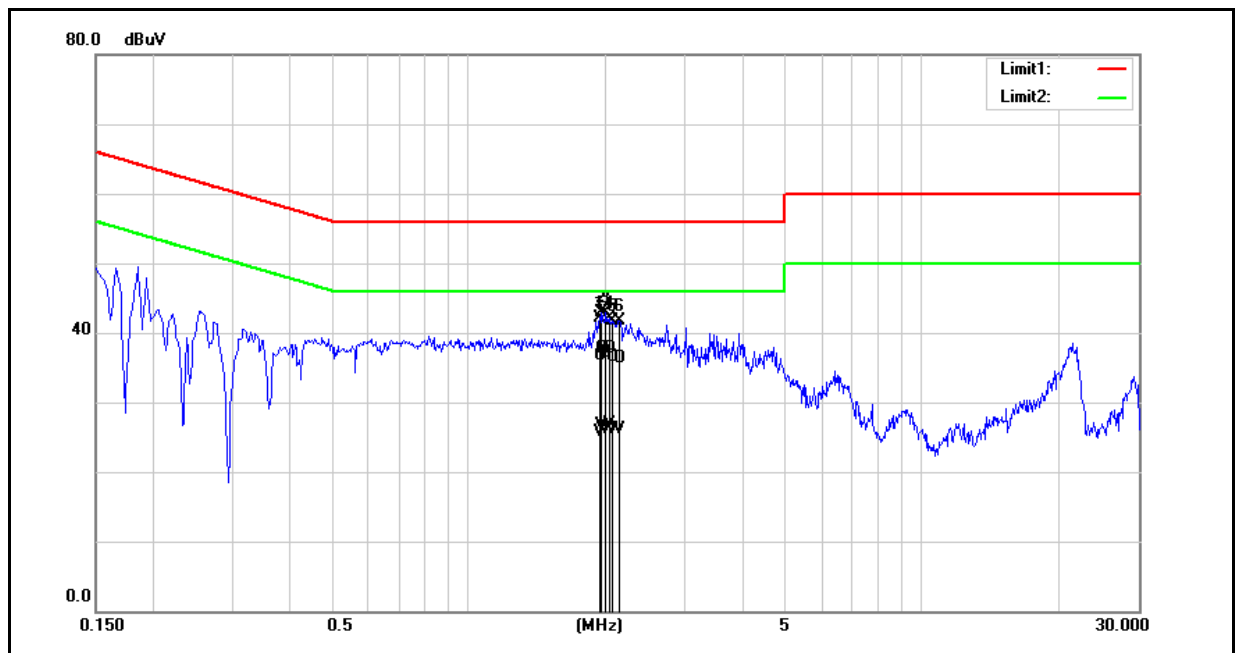


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	1.9460	27.00	16.00	9.75	36.75	25.75	56.00	46.00	-19.25	-20.25	Pass
2	1.9620	27.96	16.91	9.75	37.71	26.66	56.00	46.00	-18.29	-19.34	Pass
3	2.0020	27.31	16.32	9.75	37.06	26.07	56.00	46.00	-18.94	-19.93	Pass
4	2.0340	27.94	17.25	9.75	37.69	27.00	56.00	46.00	-18.31	-19.00	Pass
5	2.0660	26.73	16.29	9.75	36.48	26.04	56.00	46.00	-19.52	-19.96	Pass
6	2.1500	26.54	16.26	9.75	36.29	26.01	56.00	46.00	-19.71	-19.99	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

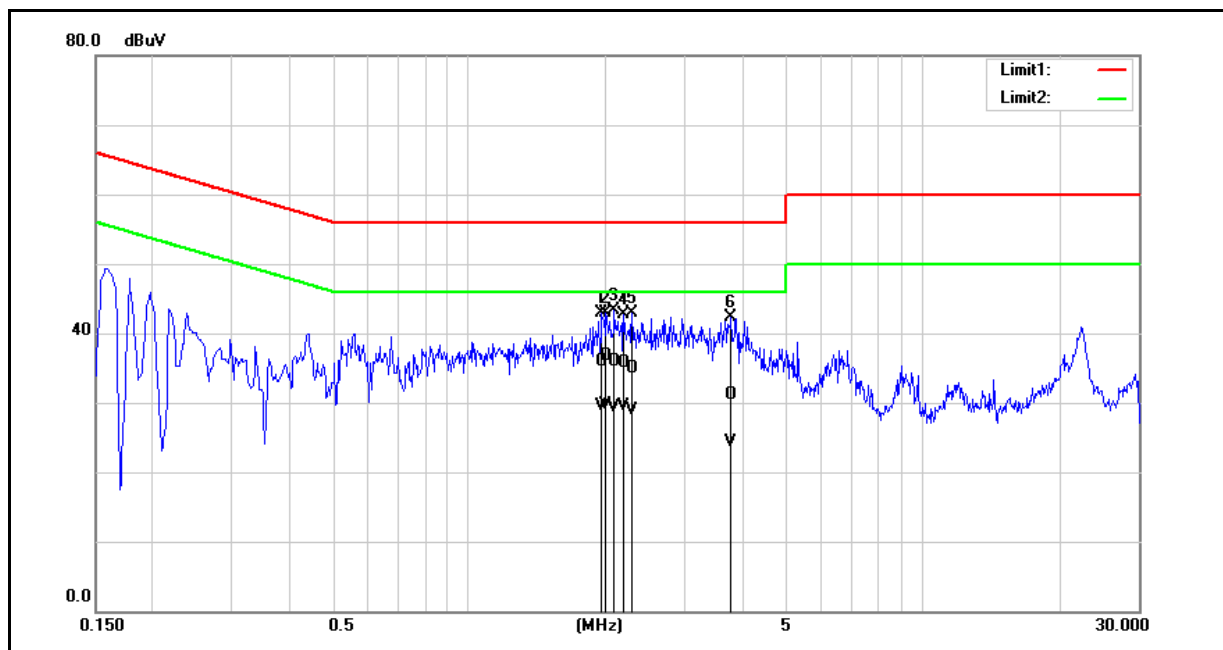

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	1.9660	26.04	19.62	9.84	35.88	29.46	56.00	46.00	-20.12	-16.54	Pass
2	2.0060	26.89	19.85	9.84	36.73	29.69	56.00	46.00	-19.27	-16.31	Pass
3	2.0940	26.00	19.44	9.84	35.84	29.28	56.00	46.00	-20.16	-16.72	Pass
4	2.1980	25.88	19.65	9.85	35.73	29.50	56.00	46.00	-20.27	-16.50	Pass
5	2.2900	25.04	18.99	9.85	34.89	28.84	56.00	46.00	-21.11	-17.16	Pass
6	3.7820	21.27	14.33	9.90	31.17	24.23	56.00	46.00	-24.83	-21.77	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH1	3.69	0.00234	4.73	0.00297	< 0.125
		DH3	3.72	0.00236	4.76	0.00299	< 0.125
		DH5	3.74	0.00237	4.81	0.00303	< 0.125
	2441	DH1	3.46	0.00222	4.15	0.00260	< 0.125
		DH3	3.50	0.00224	4.17	0.00261	< 0.125
		DH5	3.53	0.00225	4.20	0.00263	< 0.125
	2480	DH1	4.34	0.00272	5.85	0.00385	< 0.125
		DH3	4.38	0.00274	5.89	0.00388	< 0.125
		DH5	4.41	0.00276	5.93	0.00392	< 0.125
Mode 3	2402	2DH1	4.50	0.00282	7.45	0.00556	< 0.125
		2DH3	4.53	0.00284	7.49	0.00561	< 0.125
		2DH5	4.56	0.00286	7.51	0.00564	< 0.125
	2441	2DH1	4.04	0.00254	6.99	0.00500	< 0.125
		2DH3	4.07	0.00255	7.02	0.00504	< 0.125
		2DH5	4.11	0.00258	7.07	0.00509	< 0.125
	2480	2DH1	5.10	0.00324	7.51	0.00564	< 0.125
		2DH3	5.12	0.00325	7.55	0.00569	< 0.125
		2DH5	5.16	0.00328	7.57	0.00571	< 0.125
Mode 4	2402	3DH1	4.51	0.00282	7.53	0.00566	< 0.125
		3DH3	4.55	0.00285	7.56	0.00570	< 0.125
		3DH5	4.57	0.00286	7.61	0.00577	< 0.125
	2441	3DH1	4.06	0.00255	7.09	0.00512	< 0.125
		3DH3	4.10	0.00257	7.13	0.00516	< 0.125
		3DH5	4.13	0.00259	7.15	0.00519	< 0.125
	2480	3DH1	5.11	0.00324	7.70	0.00589	< 0.125
		3DH3	5.16	0.00328	7.73	0.00593	< 0.125
		3DH5	5.19	0.00330	7.78	0.00600	< 0.125

Note: The relevant measured result has the offset with cable loss already.



20dB RF Bandwidth Measurement

Test Mode	Frequency (MHz)	Measurement Results (MHz)
Mode 2	2402	0.930
	2441	0.925
	2480	0.932
Mode 4	2402	1.276
	2441	1.281
	2480	1.282

Test Graphs

Mode 2: GFSK Continuous TX mode

2402 MHz	 <p>Center Freq: 2402000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 865.24 kHz Total Power 10.3 dBm Transmit Freq Error 7.035 kHz % of OBW Power 99.00 % x dB Bandwidth 930.4 kHz x dB -20.00 dB</p>
2441 MHz	 <p>Center Freq: 2441000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 861.98 kHz Total Power 11.2 dBm Transmit Freq Error 8.560 kHz % of OBW Power 99.00 % x dB Bandwidth 925.2 kHz x dB -20.00 dB</p>
2480 MHz	 <p>Center Freq: 2480000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2480 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 863.01 kHz Total Power 12.2 dBm Transmit Freq Error 10.441 kHz % of OBW Power 99.00 % x dB Bandwidth 932.3 kHz x dB -20.00 dB</p>

Mode 4: 8DPSK Continuous TX mode




2402 MHz	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1827 MHz Total Power 10.7 dBm</p> <p>Transmit Freq Error 7.489 kHz % of OBW Power 99.00 % x dB Bandwidth 1.276 MHz x dB -20.00 dB</p> <p>Frequency Center Freq 2.40200000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz</p>
2441 MHz	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref 20.00 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1825 MHz Total Power 11.5 dBm</p> <p>Transmit Freq Error 9.812 kHz % of OBW Power 99.00 % x dB Bandwidth 1.281 MHz x dB -20.00 dB</p> <p>Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz</p>
2480 MHz	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref 20.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1849 MHz Total Power 12.6 dBm</p> <p>Transmit Freq Error 12.202 kHz % of OBW Power 99.00 % x dB Bandwidth 1.282 MHz x dB -20.00 dB</p> <p>Frequency Center Freq 2.480000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz</p>

Carrier Frequency Separation Measurement




Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	> 0.620
	2441	1.000	> 0.617
	2480	1.000	> 0.622
Mode 4	2402	1.000	> 0.851
	2441	1.000	> 0.854
	2480	1.000	> 0.855

Test Graphs

Mode 2: GFSK Continuous TX mode

2402 MHz	 <p>KeySight Spectrum Analyzer - Smp1 SA</p> <p>Ref Offset 11 dB Ref 20.00 dBm</p> <p>Mkr3 2.403 929 GHz 2.406 dBm</p> <p>Center 2.403000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 1.533 ms (1001 pts)</p> <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 929 GHz</td><td>2.689 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 929 GHz</td><td>2.456 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403 929 GHz</td><td>2.406 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 929 GHz	2.689 dBm				2	N	1	f	2.402 929 GHz	2.456 dBm				3	N	1	f	2.403 929 GHz	2.406 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401 929 GHz	2.689 dBm																																
2	N	1	f	2.402 929 GHz	2.456 dBm																																
3	N	1	f	2.403 929 GHz	2.406 dBm																																
2441 MHz	 <p>KeySight Spectrum Analyzer - Smp1 SA</p> <p>Ref Offset 11 dB Ref 20.00 dBm</p> <p>Mkr3 2.441 929 GHz 3.273 dBm</p> <p>Center 2.441000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 1.533 ms (1001 pts)</p> <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 929 GHz</td><td>3.346 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440 929 GHz</td><td>3.271 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441 929 GHz</td><td>3.273 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 929 GHz	3.346 dBm				2	N	1	f	2.440 929 GHz	3.271 dBm				3	N	1	f	2.441 929 GHz	3.273 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439 929 GHz	3.346 dBm																																
2	N	1	f	2.440 929 GHz	3.271 dBm																																
3	N	1	f	2.441 929 GHz	3.273 dBm																																
2480 MHz	 <p>KeySight Spectrum Analyzer - Smp1 SA</p> <p>Ref Offset 11 dB Ref 20.00 dBm</p> <p>Mkr3 2.479 929 GHz 3.883 dBm</p> <p>Center 2.479000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 1.533 ms (1001 pts)</p> <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477 929 GHz</td><td>4.473 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478 929 GHz</td><td>4.226 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479 929 GHz</td><td>3.883 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477 929 GHz	4.473 dBm				2	N	1	f	2.478 929 GHz	4.226 dBm				3	N	1	f	2.479 929 GHz	3.883 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.477 929 GHz	4.473 dBm																																
2	N	1	f	2.478 929 GHz	4.226 dBm																																
3	N	1	f	2.479 929 GHz	3.883 dBm																																

Mode 4: 8DPSK Continuous TX mode

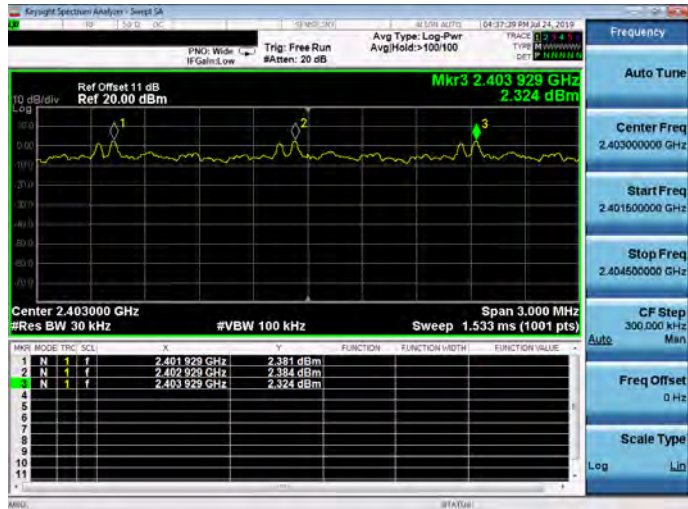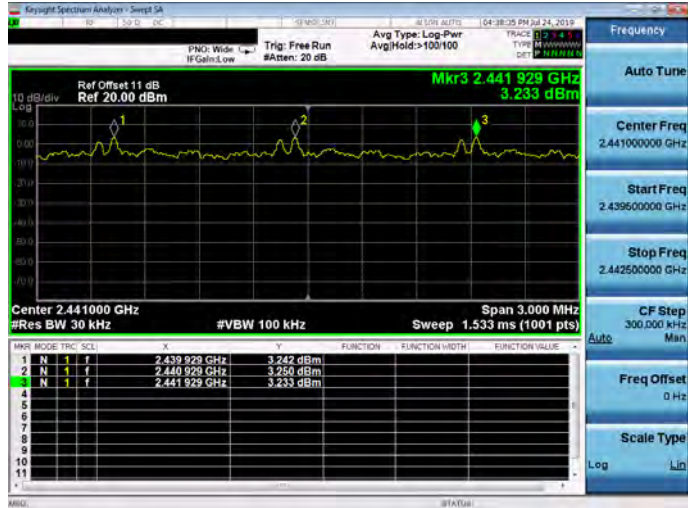2402 MHz	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401929 GHz</td><td>2.381 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402929 GHz</td><td>2.384 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403929 GHz</td><td>2.324 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401929 GHz	2.381 dBm				2	N	1	f	2.402929 GHz	2.384 dBm				3	N	1	f	2.403929 GHz	2.324 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401929 GHz	2.381 dBm																																
2	N	1	f	2.402929 GHz	2.384 dBm																																
3	N	1	f	2.403929 GHz	2.324 dBm																																
2441 MHz	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439929 GHz</td><td>3.242 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440929 GHz</td><td>3.250 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441929 GHz</td><td>3.233 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439929 GHz	3.242 dBm				2	N	1	f	2.440929 GHz	3.250 dBm				3	N	1	f	2.441929 GHz	3.233 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439929 GHz	3.242 dBm																																
2	N	1	f	2.440929 GHz	3.250 dBm																																
3	N	1	f	2.441929 GHz	3.233 dBm																																
2480 MHz	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477929 GHz</td><td>4.282 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478929 GHz</td><td>4.240 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479929 GHz</td><td>4.238 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477929 GHz	4.282 dBm				2	N	1	f	2.478929 GHz	4.240 dBm				3	N	1	f	2.479929 GHz	4.238 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.477929 GHz	4.282 dBm																																
2	N	1	f	2.478929 GHz	4.240 dBm																																
3	N	1	f	2.479929 GHz	4.238 dBm																																



Number of Hopping Measurement


Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	> 15
Mode 4	2402 - 2480	79	> 15



■ Test Graphs

Mode 2: GFSK Continuous TX mode

CH0~CH39

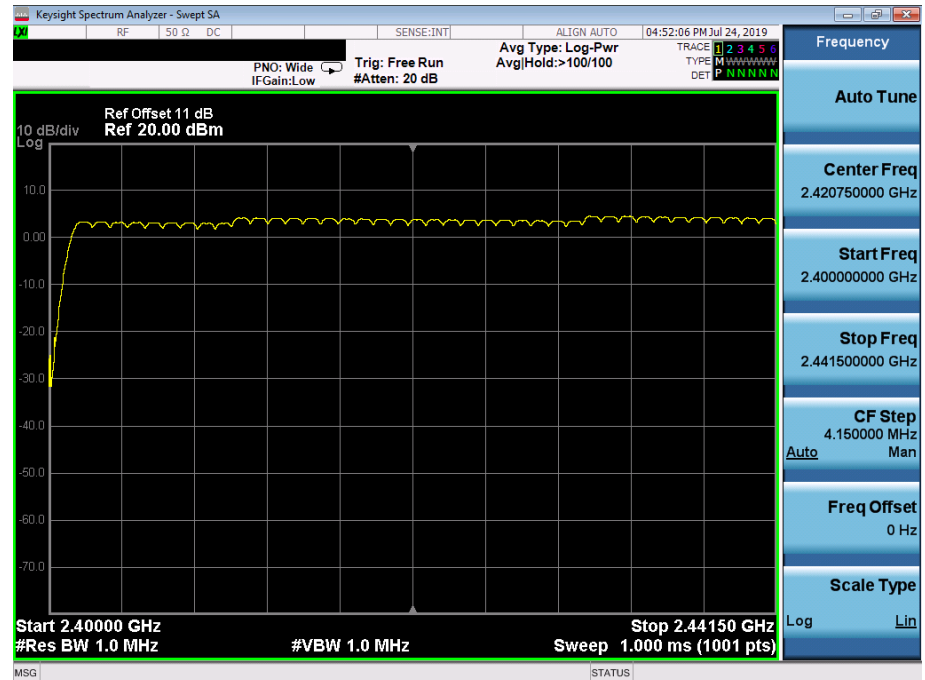


CH40~CH78






Mode 4: 8DPSK Continuous TX mode

CH0~CH39

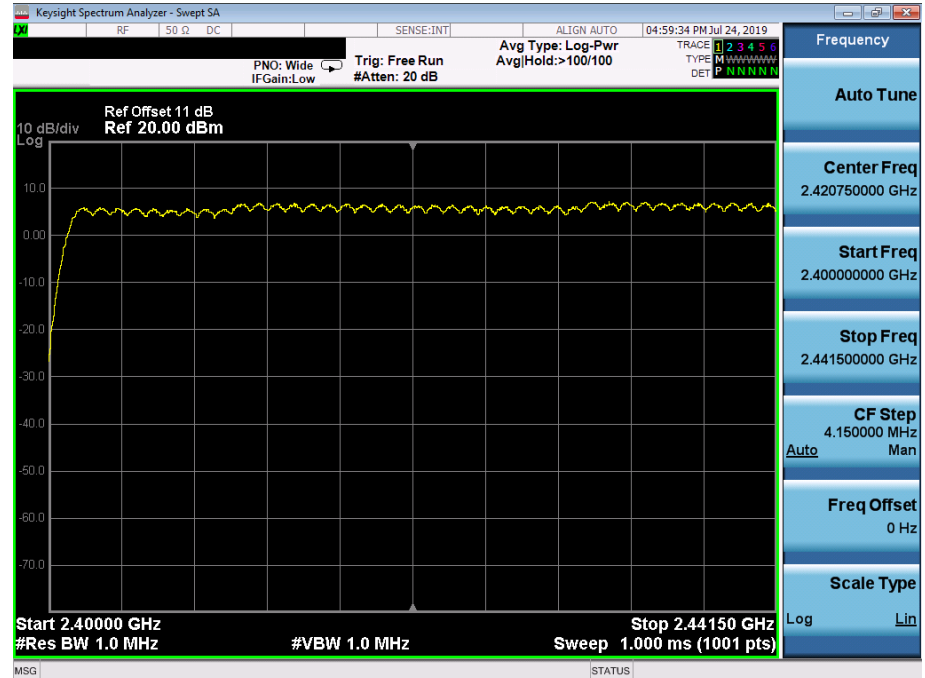

CH40~CH78

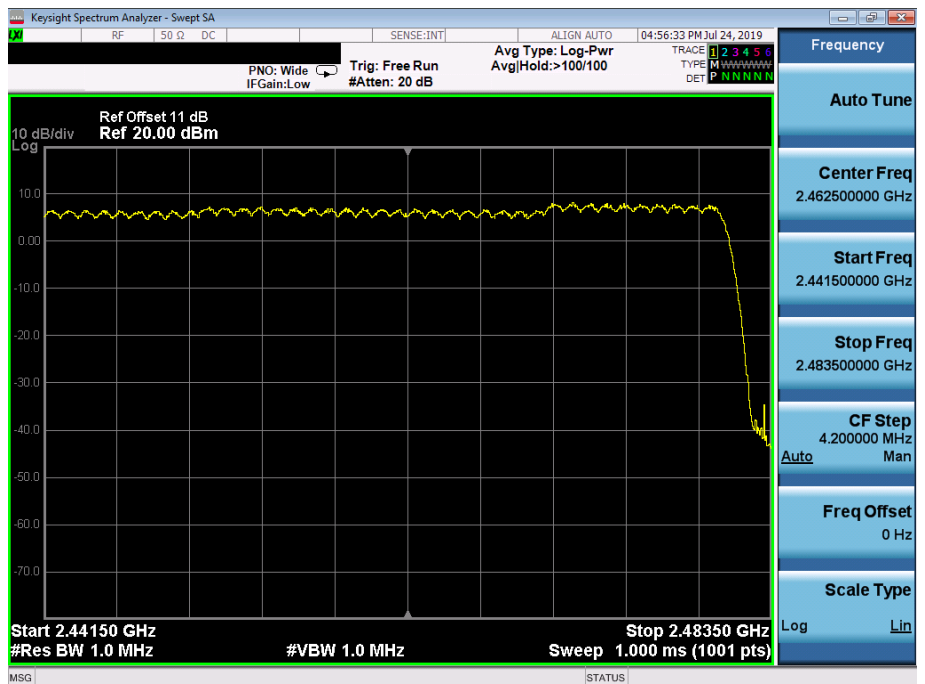

Time of Occupancy (Dwell Time) Measurement

Mode 2: GFSK Continuous TX mode	
DH1	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.440 ms (sec)
Dwell Times on Cycle (1) * (2)	140.848 ms (sec)
LIMIT(msec)	$< = 400$
DH3	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.700 ms (sec)
Dwell Times on Cycle (1) * (2)	271.823 ms (sec)
LIMIT(msec)	$< = 400$
DH5	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	2.940 ms (sec)
Dwell Times on Cycle (1) * (2)	314.016 ms (sec)
LIMIT(msec)	$< = 400$

Mode 4: 8DPSK Continuous TX mode	
3DH1	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.440 ms (sec)
Dwell Times on Cycle (1) * (2)	140.848 ms (sec)
LIMIT(msec)	$< = 400$
3DH3	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.700 ms (sec)
Dwell Times on Cycle (1) * (2)	271.823 ms (sec)
LIMIT(msec)	$< = 400$
3DH5	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	2.940 ms (sec)
Dwell Times on Cycle (1) * (2)	314.016 ms (sec)
LIMIT(msec)	$< = 400$

Test Graphs

Mode 2: GFSK Continuous TX mode

DH1



DH3



DH5



Mode 4: 8DPSK Continuous TX mode


3DH1



3DH3




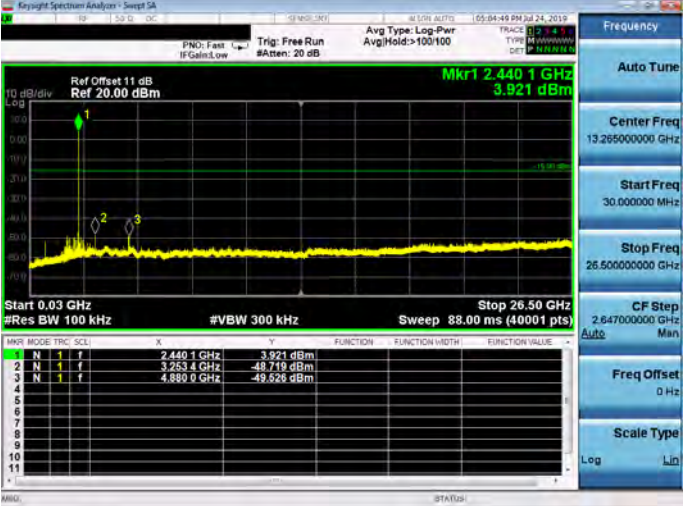

3DH5

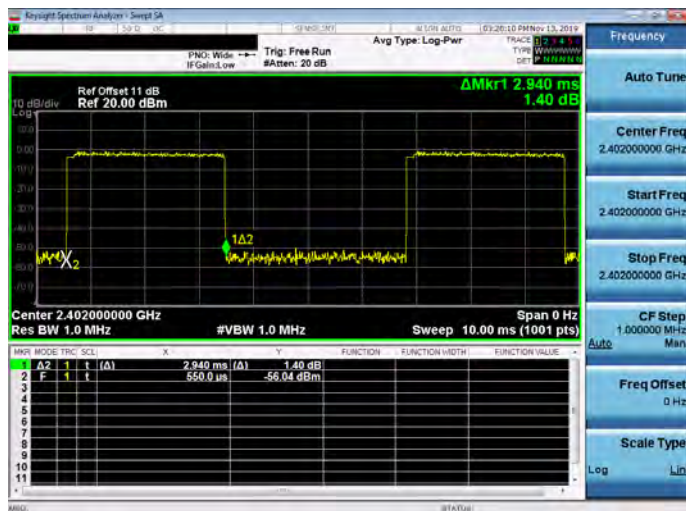



Out of Band Conducted Emissions Measurement

■ Test Graphs


Mode 2: GFSK Continuous TX mode

2402 MHz	 <p>Key parameters from the screenshot:</p> <ul style="list-style-type: none"> Center Freq: 13.26500000 GHz Start Freq: 30.000000 MHz Stop Freq: 26.50000000 GHz CF Step: 2.647000000 GHz Freq Offset: 0 Hz Scale Type: Log
2441 MHz	 <p>Key parameters from the screenshot:</p> <ul style="list-style-type: none"> Center Freq: 13.26500000 GHz Start Freq: 30.000000 MHz Stop Freq: 26.50000000 GHz CF Step: 2.647000000 GHz Freq Offset: 0 Hz Scale Type: Log
2480 MHz	 <p>Key parameters from the screenshot:</p> <ul style="list-style-type: none"> Center Freq: 13.26500000 GHz Start Freq: 30.000000 MHz Stop Freq: 26.50000000 GHz CF Step: 2.647000000 GHz Freq Offset: 0 Hz Scale Type: Log


Mode 4: 8DPSK Continuous TX mode

2402 MHz	 <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 7 GHz</td><td>3.008 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>3.202 4 GHz</td><td>-48.291 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.803 9 GHz</td><td>-48.530 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.401 7 GHz	3.008 dBm				2	N	1	f	3.202 4 GHz	-48.291 dBm				3	N	1	f	4.803 9 GHz	-48.530 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																													
1	N	1	f	2.401 7 GHz	3.008 dBm																																
2	N	1	f	3.202 4 GHz	-48.291 dBm																																
3	N	1	f	4.803 9 GHz	-48.530 dBm																																
2441 MHz	 <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 8 GHz</td><td>3.835 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>3.254 7 GHz</td><td>-48.846 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.882 0 GHz</td><td>-49.989 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.440 8 GHz	3.835 dBm				2	N	1	f	3.254 7 GHz	-48.846 dBm				3	N	1	f	4.882 0 GHz	-49.989 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																													
1	N	1	f	2.440 8 GHz	3.835 dBm																																
2	N	1	f	3.254 7 GHz	-48.846 dBm																																
3	N	1	f	4.882 0 GHz	-49.989 dBm																																
2480 MHz	 <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 8 GHz</td><td>4.795 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>3.386 3 GHz</td><td>-49.222 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.960 0 GHz</td><td>-49.748 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.479 8 GHz	4.795 dBm				2	N	1	f	3.386 3 GHz	-49.222 dBm				3	N	1	f	4.960 0 GHz	-49.748 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																													
1	N	1	f	2.479 8 GHz	4.795 dBm																																
2	N	1	f	3.386 3 GHz	-49.222 dBm																																
3	N	1	f	4.960 0 GHz	-49.748 dBm																																


Mode 2: GFSK Continuous TX mode _ Un-hopping

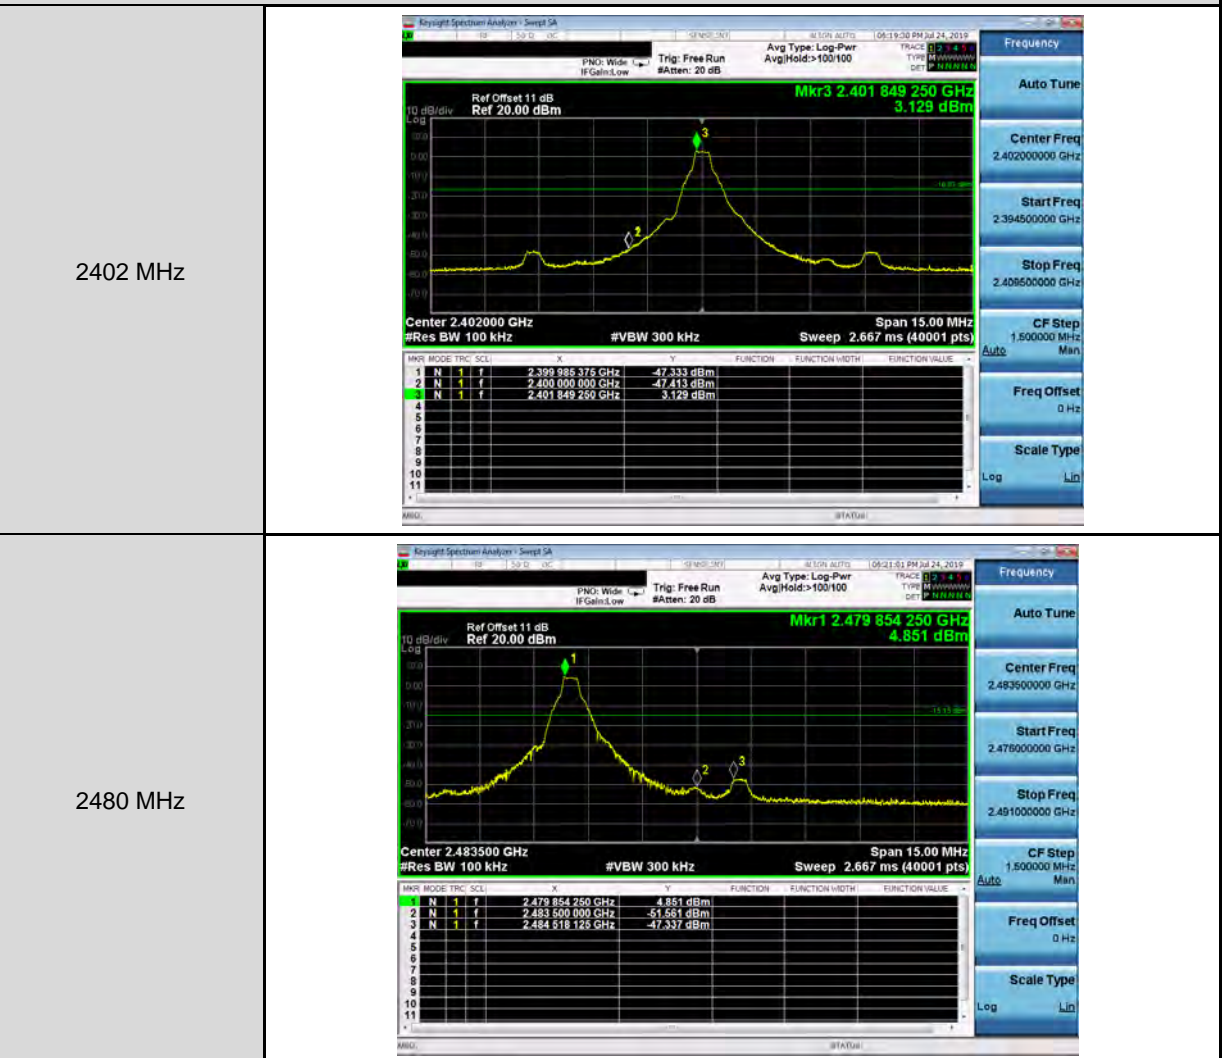


Mode 2: GFSK Continuous TX mode _ Hopping

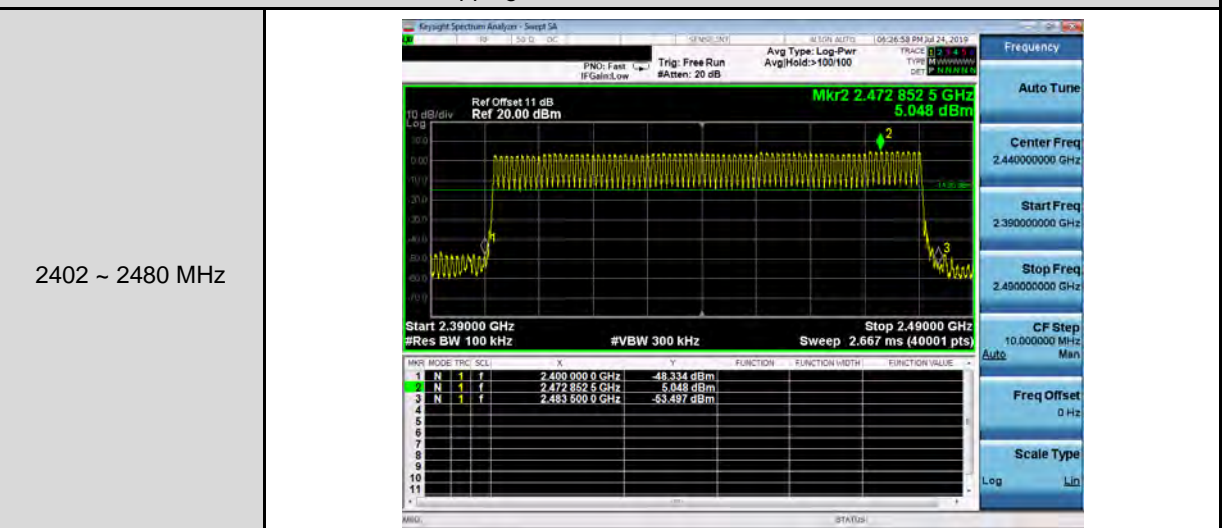

Mode 4: 8DPSK Continuous TX mode _ Un-hopping

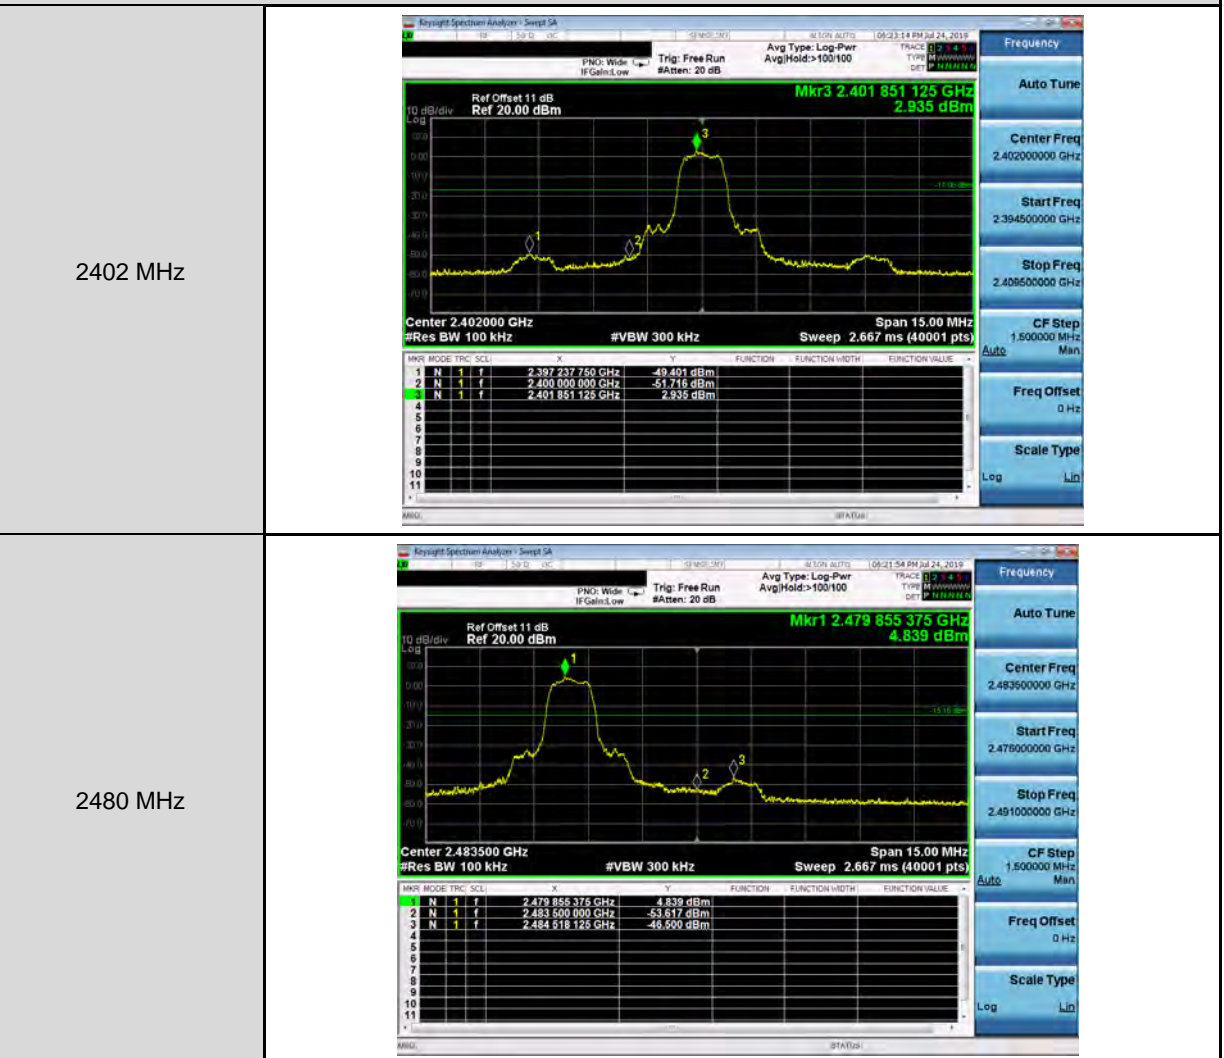

Mode 4: 8DPSK Continuous TX mode _ Hopping

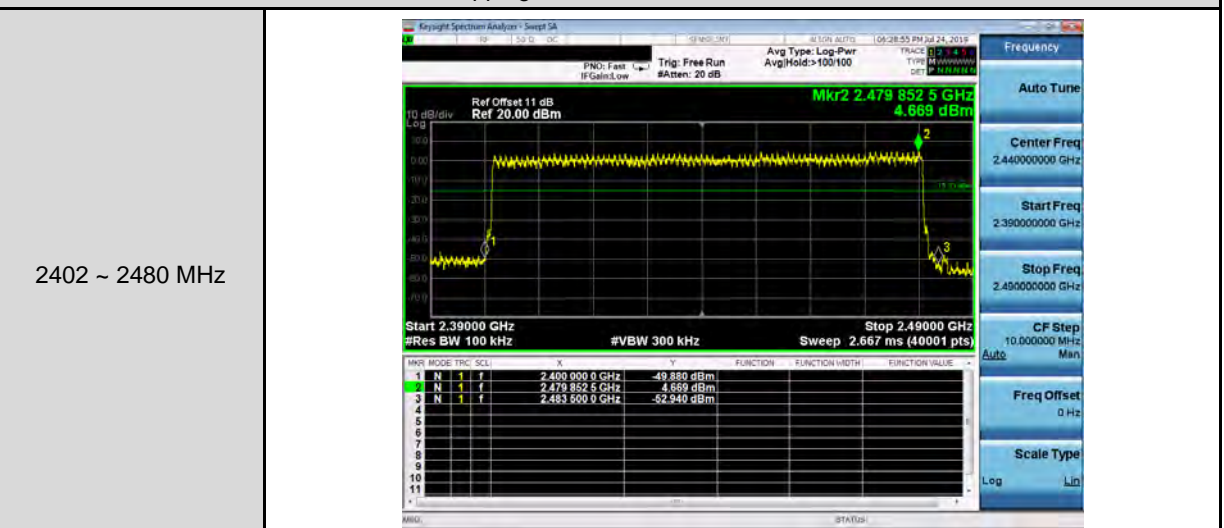

Annex C. Radiated Emission Measurement

Harmonic

Below 1GHz

Standard:		FCC Part 15.247		Test Distance:		3 m	
Test item:		Harmonic		Power:		AC 120 V/60 Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60 %RH	
Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark	Ant.Polar. H / V
144.4600	43.64	-11.61	32.03	43.50	-11.47	QP	H
191.9900	47.16	-13.93	33.23	43.50	-10.27	QP	H
240.4900	47.12	-12.64	34.48	46.00	-11.52	QP	H
288.0200	48.78	-11.00	37.78	46.00	-8.22	QP	H
336.5200	46.69	-9.97	36.72	46.00	-9.28	QP	H
359.8000	46.44	-9.44	37.00	46.00	-9.00	QP	H
144.4600	39.36	-11.61	27.75	43.50	-15.75	QP	V
191.9900	41.95	-13.93	28.02	43.50	-15.48	QP	V
336.5200	37.31	-9.97	27.34	46.00	-18.66	QP	V
455.8300	35.62	-7.00	28.62	46.00	-17.38	QP	V
799.2100	29.58	-0.70	28.88	46.00	-17.12	QP	V
897.1800	30.02	0.11	30.13	46.00	-15.87	QP	V


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

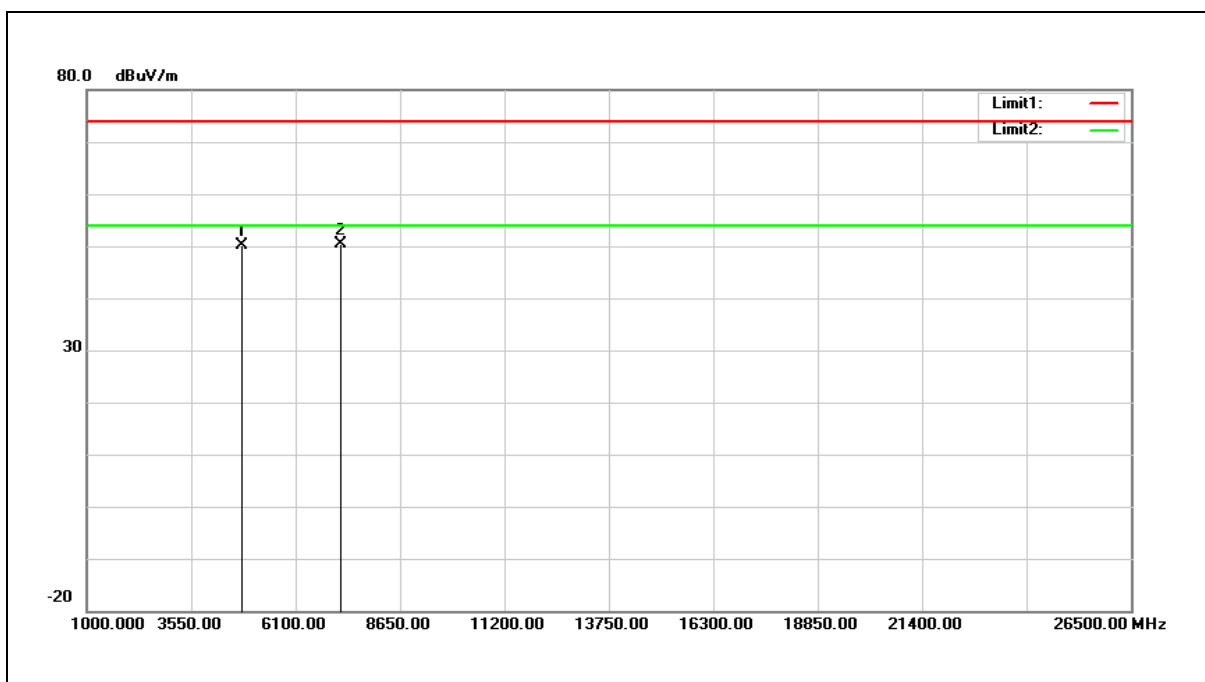


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	55.11	-5.03	50.08	74.00	-23.92	peak
2	7206.000	51.43	-0.97	50.46	74.00	-23.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

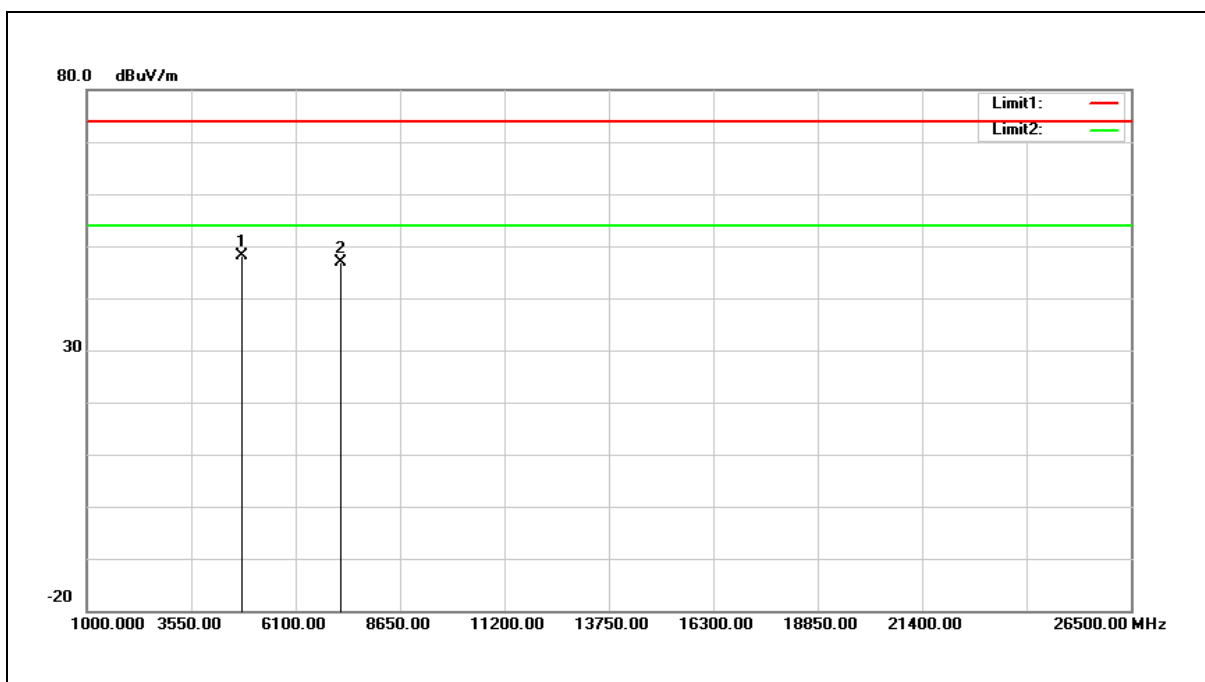

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	53.21	-5.03	48.18	74.00	-25.82	peak
2	7206.000	47.85	-0.97	46.88	74.00	-27.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		




No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	58.06	-5.10	52.96	74.00	-21.04	peak
2	4882.000	54.98	-5.10	49.88	54.00	-4.12	AVG
3	7323.000	47.65	-0.63	47.02	74.00	-26.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

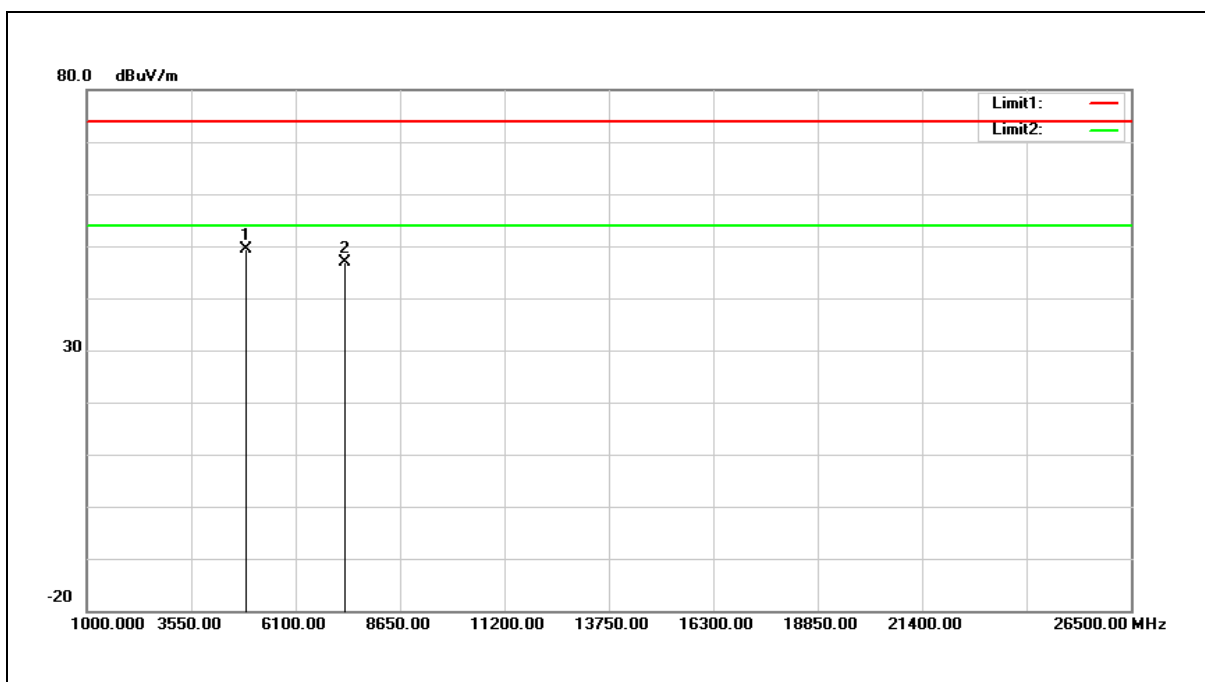


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	54.48	-5.10	49.38	74.00	-24.62	peak
2	7323.000	47.45	-0.63	46.82	74.00	-27.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

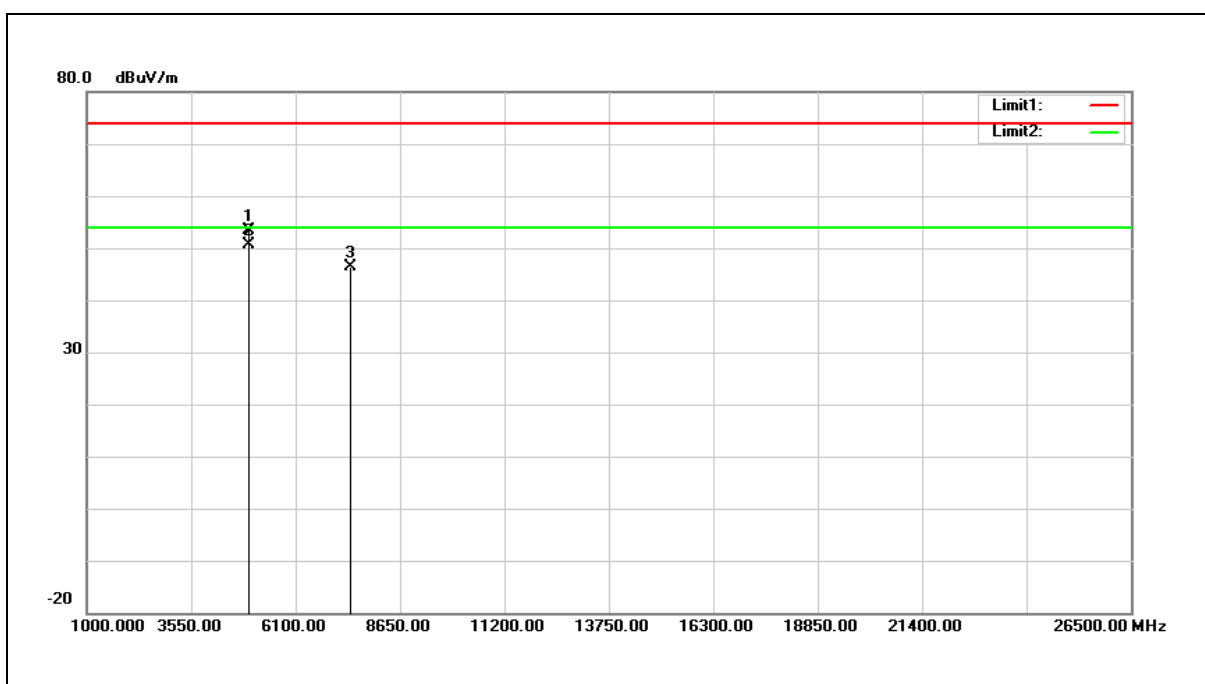

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	58.59	-5.17	53.42	74.00	-20.58	peak
2	4960.000	55.83	-5.17	50.66	54.00	-3.34	AVG
3	7440.000	46.65	-0.35	46.30	74.00	-27.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		




No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	54.28	-5.17	49.11	74.00	-24.89	peak
2	7440.000	46.32	-0.35	45.97	74.00	-28.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

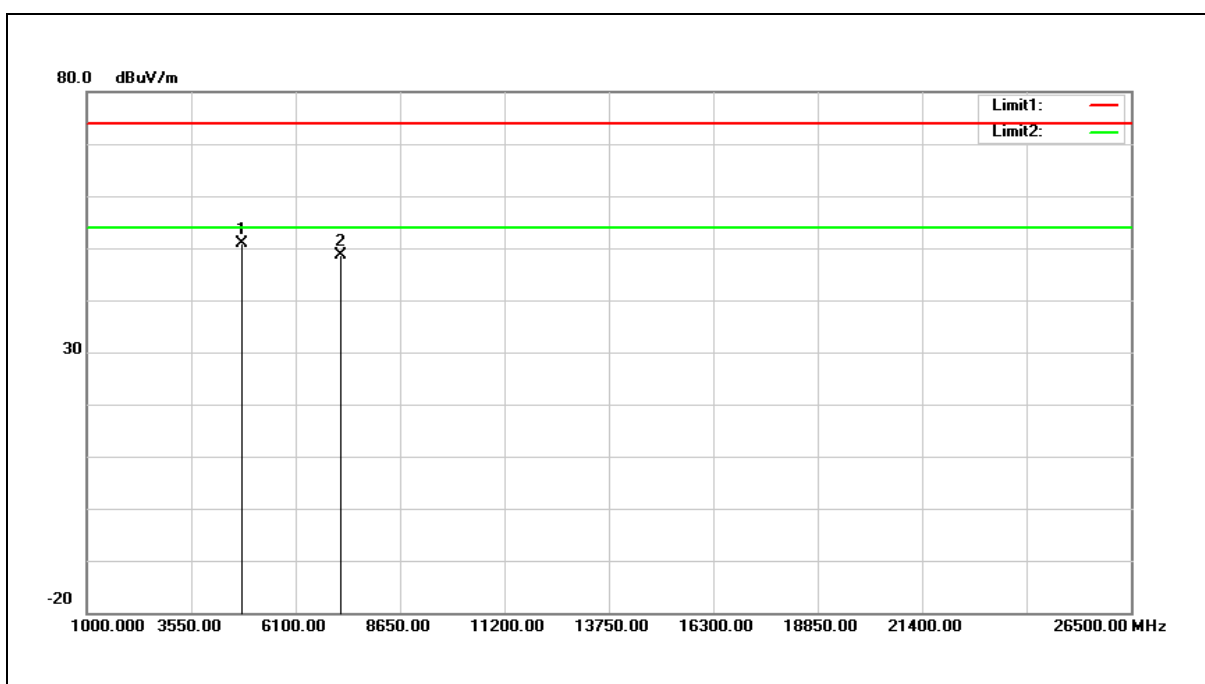


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	55.80	-5.03	50.77	74.00	-23.23	peak
2	7206.000	49.62	-0.97	48.65	74.00	-25.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

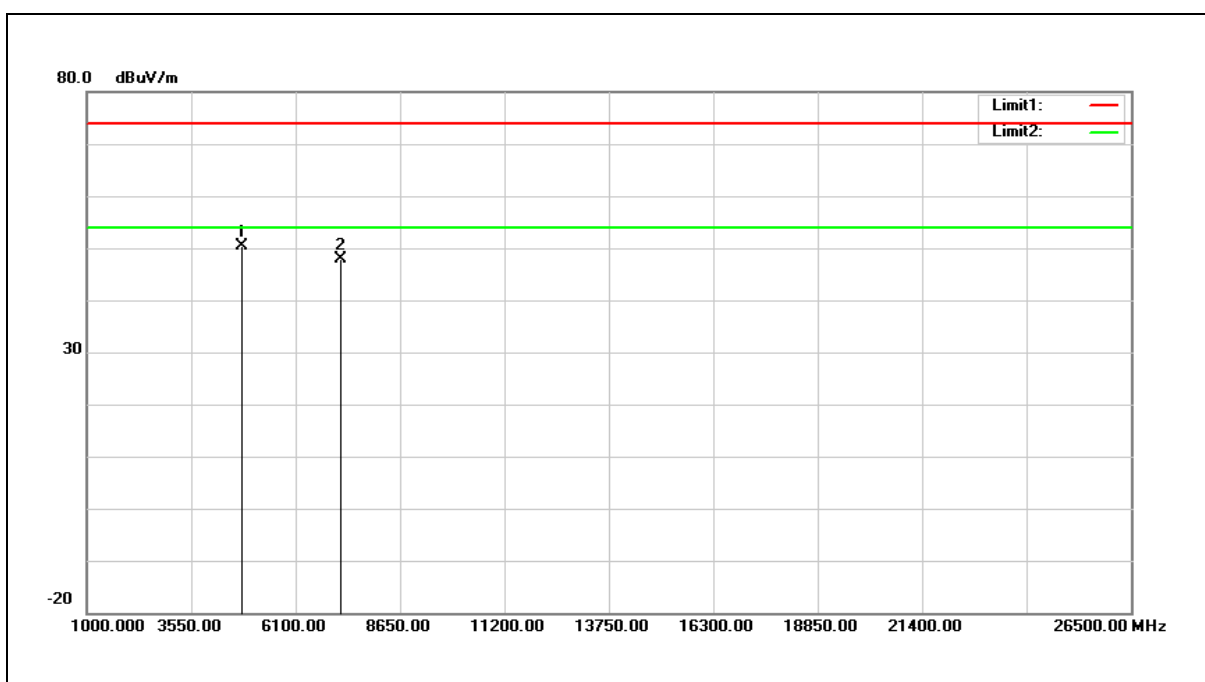


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	55.36	-5.03	50.33	74.00	-23.67	peak
2	7206.000	48.83	-0.97	47.86	74.00	-26.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

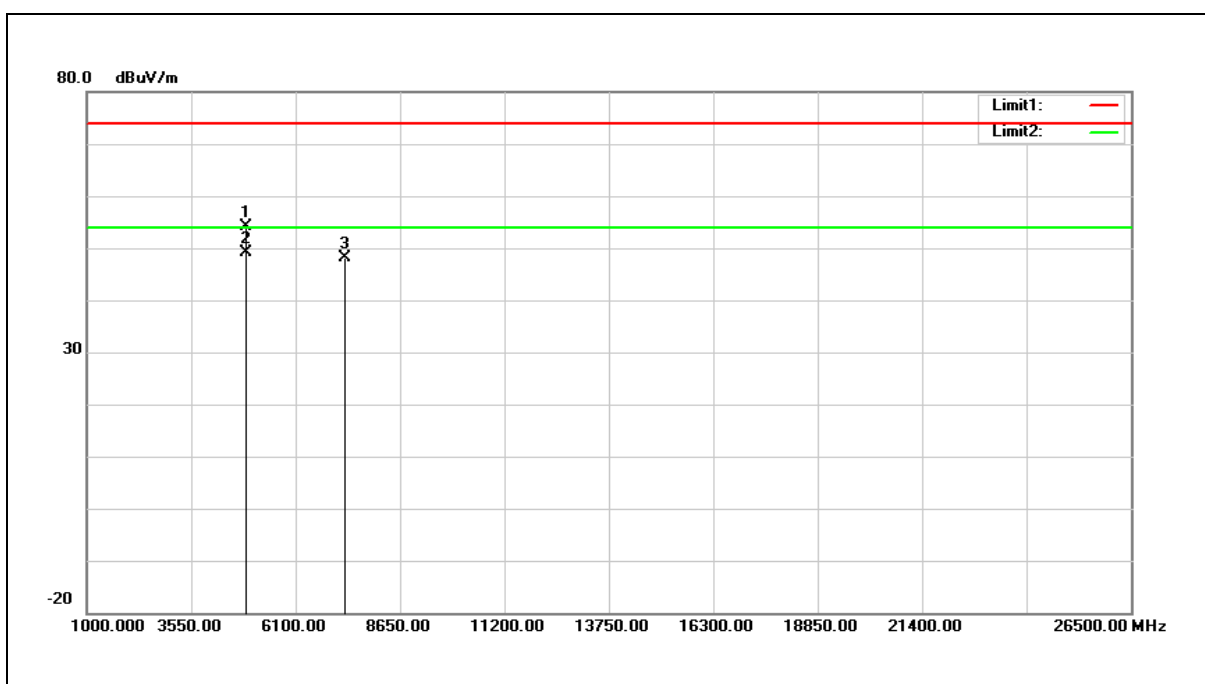


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	59.12	-5.10	54.02	74.00	-19.98	peak
2	4882.000	54.25	-5.10	49.15	54.00	-4.85	AVG
3	7323.000	48.78	-0.63	48.15	74.00	-25.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

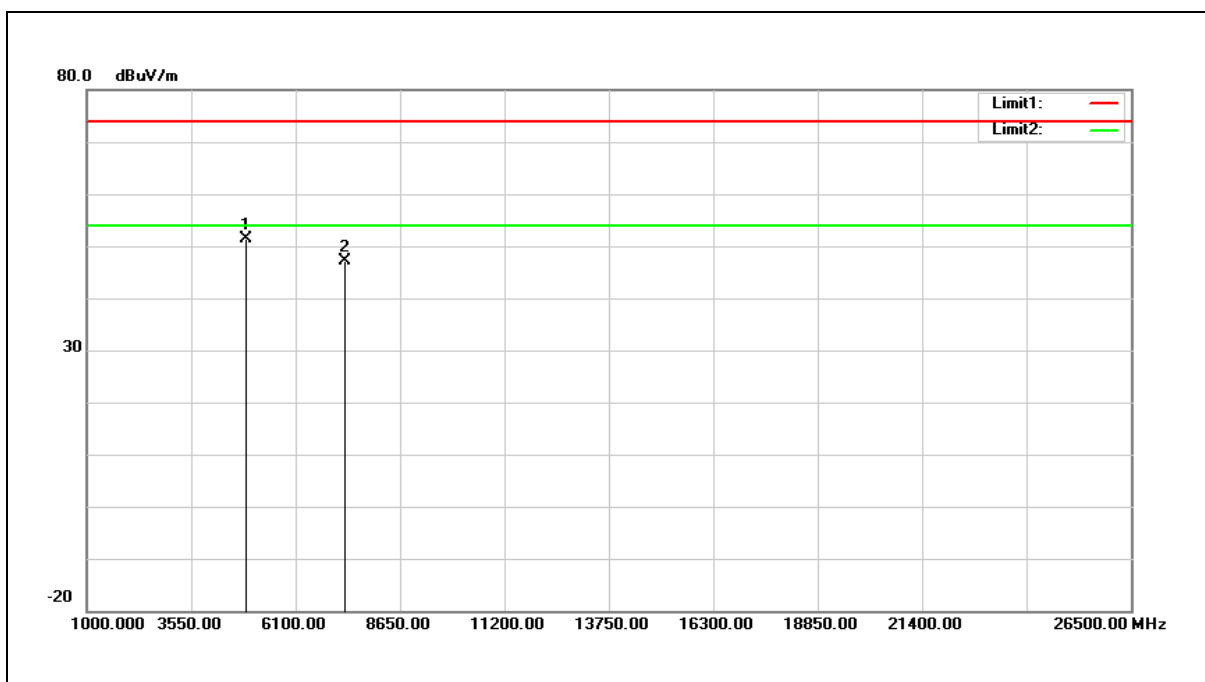


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.42	-5.10	51.32	74.00	-22.68	peak
2	7323.000	47.81	-0.63	47.18	74.00	-26.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

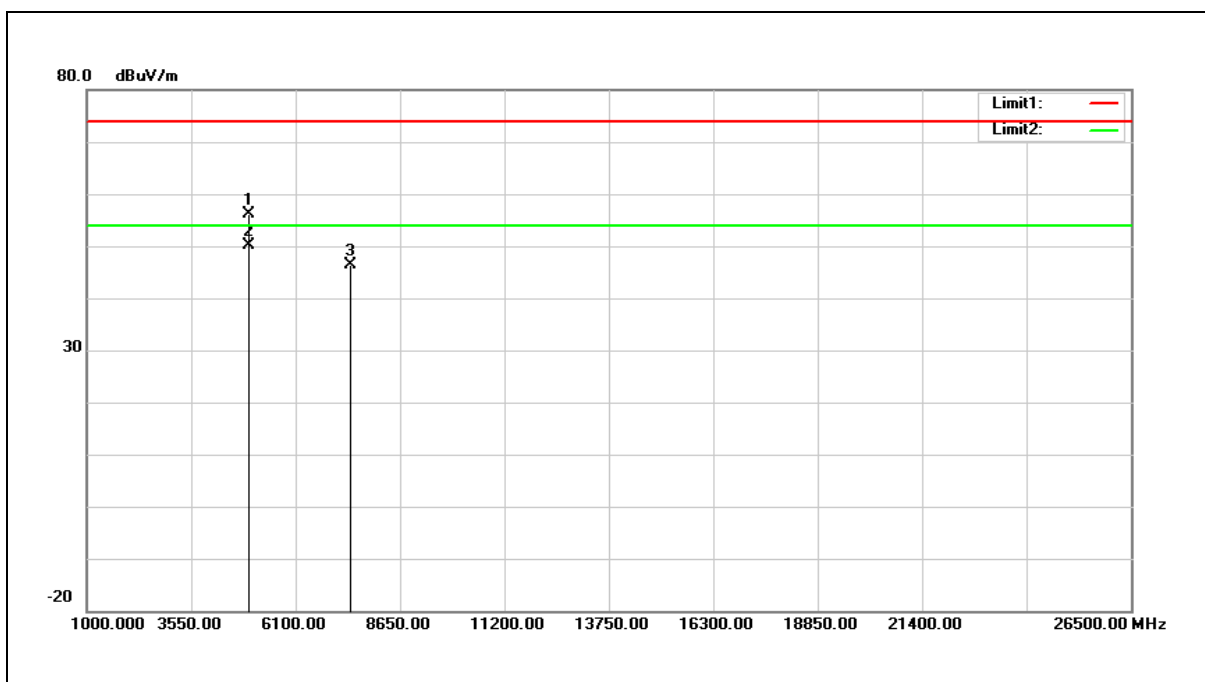


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	61.31	-5.17	56.14	74.00	-17.86	peak
2	4960.000	55.27	-5.17	50.10	54.00	-3.90	AVG
3	7440.000	46.70	-0.35	46.35	74.00	-27.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

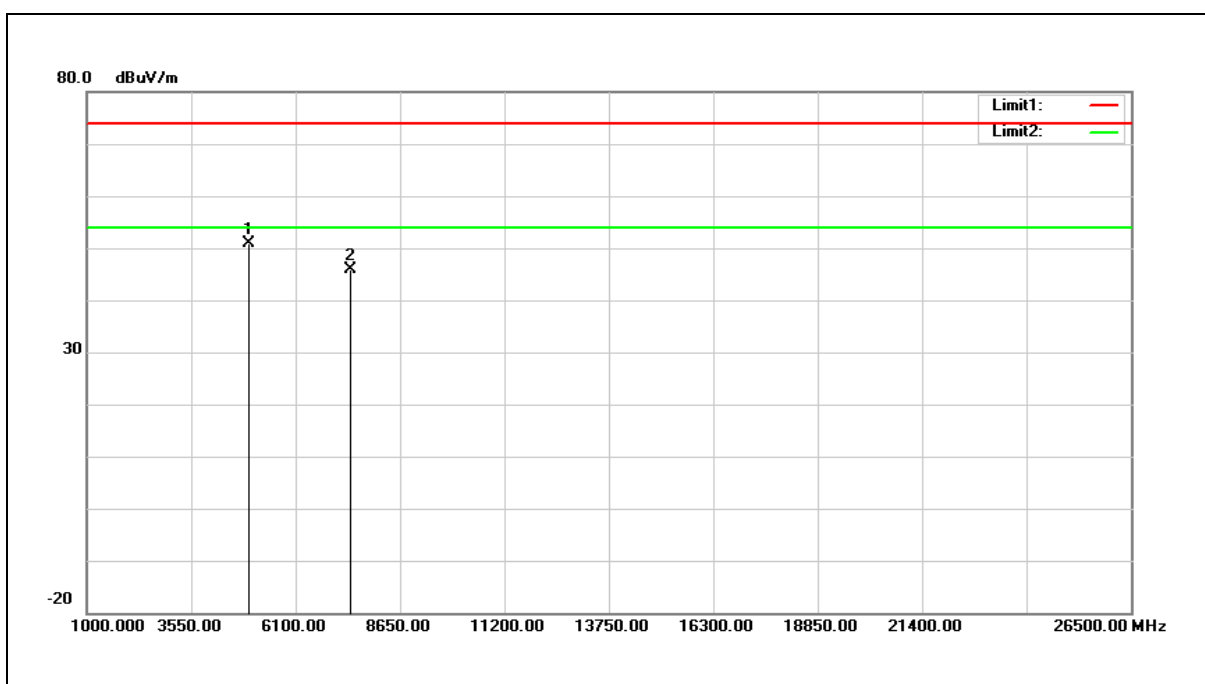

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.08	-5.17	50.91	74.00	-23.09	peak
2	7440.000	46.29	-0.35	45.94	74.00	-28.06	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

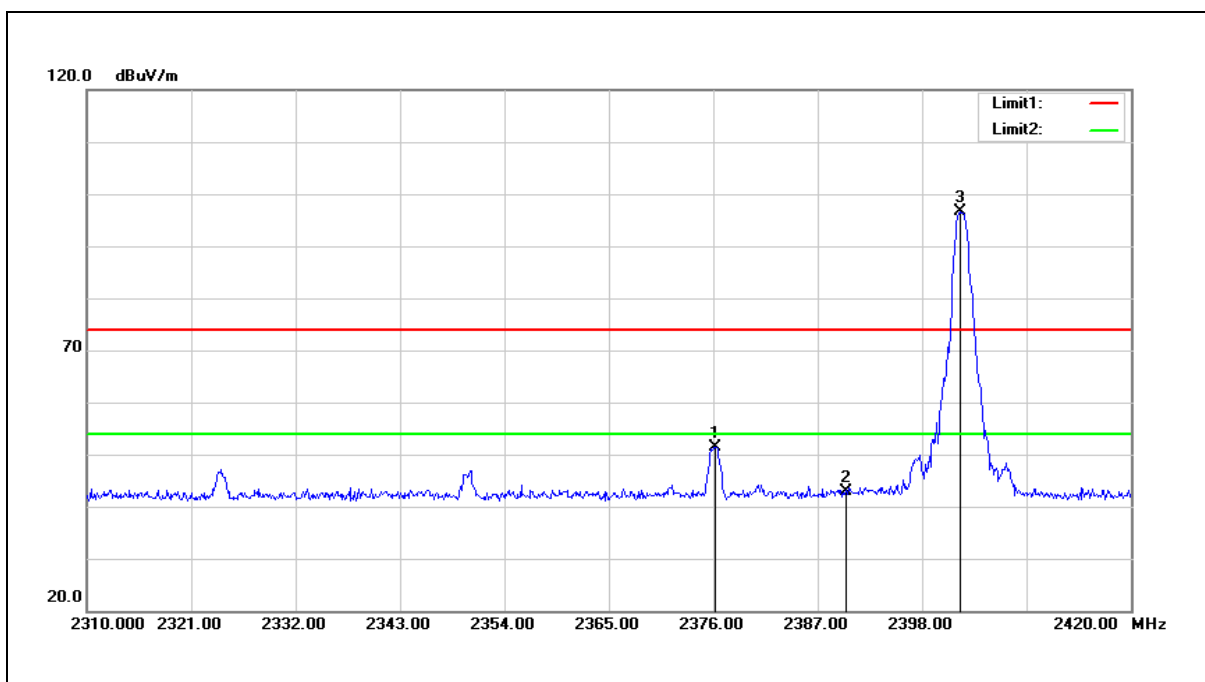


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.220	61.29	-9.83	51.46	74.00	-22.54	peak
2	2390.000	52.70	-9.78	42.92	74.00	-31.08	peak
3	2401.960	106.27	-9.75	96.52	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

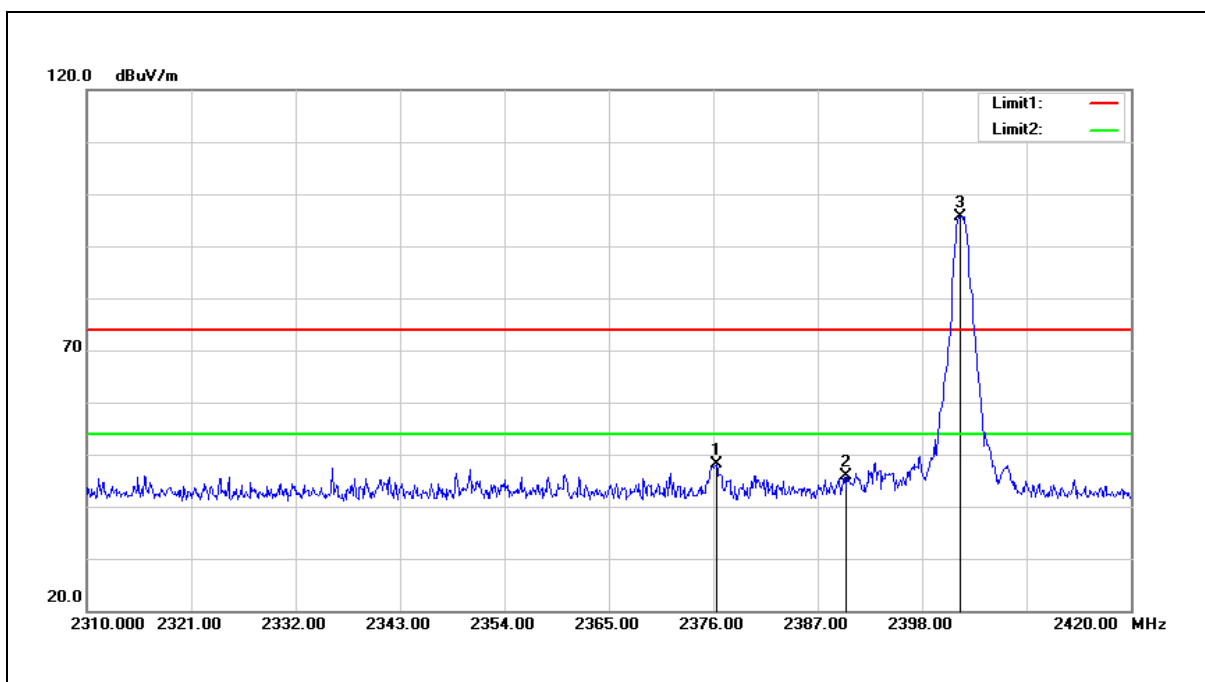


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.330	57.84	-9.83	48.01	74.00	-25.99	peak
2	2390.000	55.64	-9.78	45.86	74.00	-28.14	peak
3	2401.960	105.44	-9.75	95.69	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

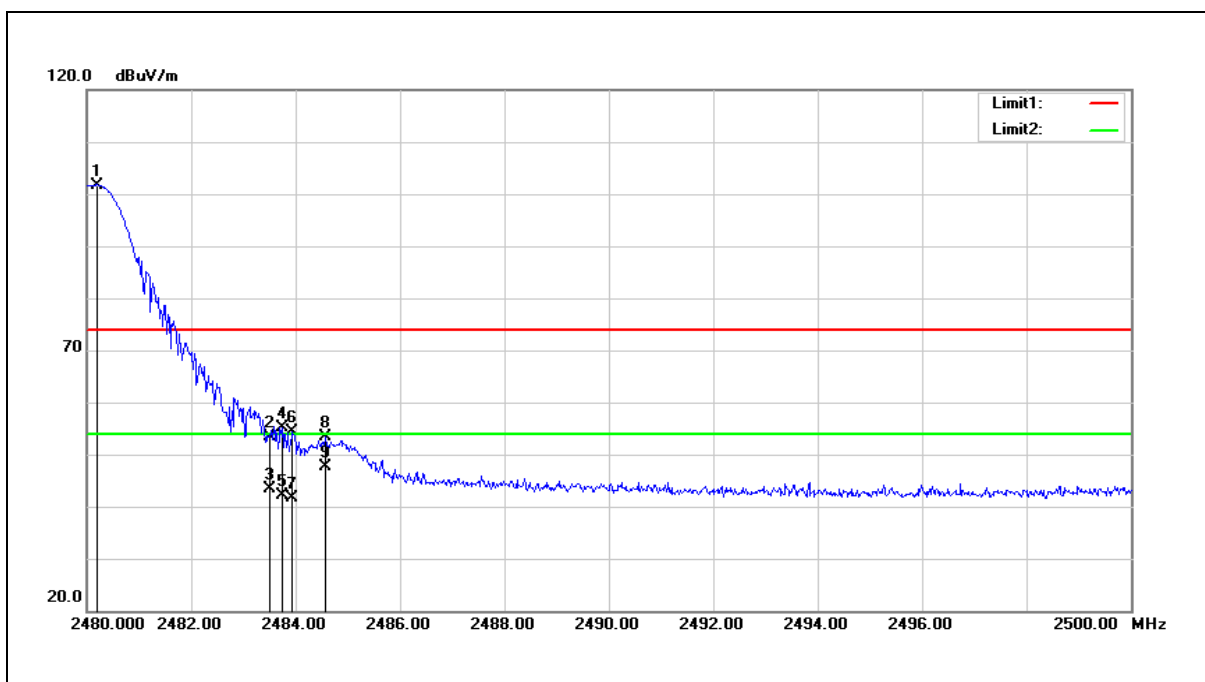


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.200	111.33	-9.58	101.75	---	---	peak
2	2483.500	62.82	-9.56	53.26	74.00	-20.74	peak
3	2483.500	52.90	-9.56	43.34	54.00	-10.66	AVG
4	2483.740	64.73	-9.56	55.17	74.00	-18.83	peak
5	2483.740	51.75	-9.56	42.19	54.00	-11.81	AVG
6	2483.940	63.83	-9.56	54.27	74.00	-19.73	peak
7	2483.940	51.22	-9.56	41.66	54.00	-12.34	AVG
8	2484.580	62.96	-9.56	53.40	74.00	-20.60	peak
9	2484.580	57.19	-9.56	47.63	54.00	-6.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

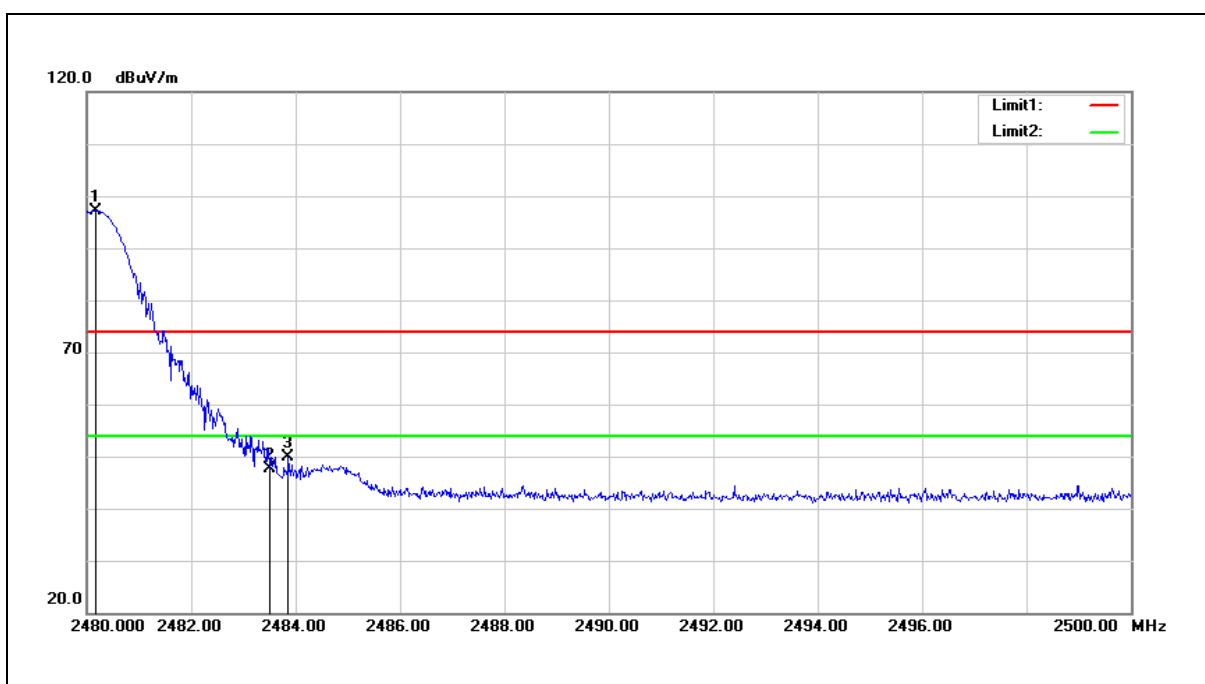


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.160	106.72	-9.58	97.14	---	---	peak
2	2483.500	57.21	-9.56	47.65	74.00	-26.35	peak
3	2483.860	59.43	-9.56	49.87	74.00	-24.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

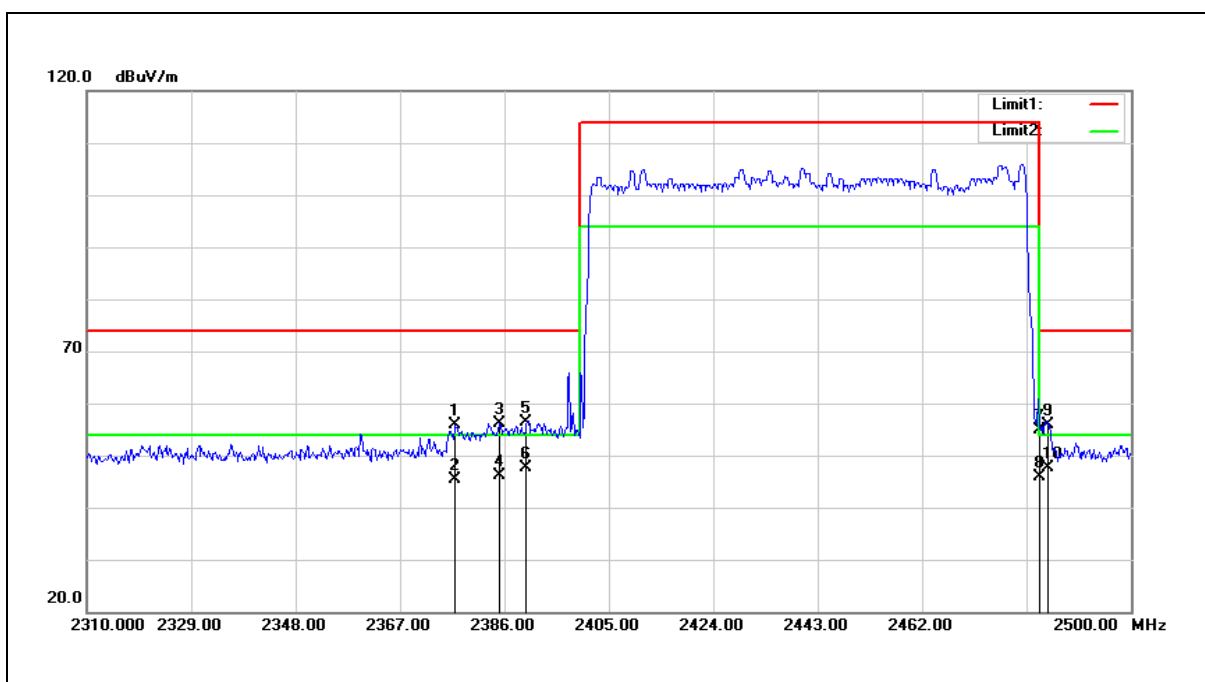


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.070	65.63	-9.83	55.80	74.00	-18.20	peak
2	2377.070	55.20	-9.83	45.37	54.00	-8.63	AVG
3	2385.050	65.85	-9.80	56.05	74.00	-17.95	peak
4	2385.050	55.95	-9.80	46.15	54.00	-7.85	AVG
5	2390.000	66.14	-9.78	56.36	74.00	-17.64	peak
6	2390.000	57.46	-9.78	47.68	54.00	-6.32	AVG
7	2483.500	64.54	-9.56	54.98	74.00	-19.02	peak
8	2483.500	55.43	-9.56	45.87	54.00	-8.13	AVG
9	2484.990	65.44	-9.56	55.88	74.00	-18.12	peak
10	2484.990	57.27	-9.56	47.71	54.00	-6.29	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

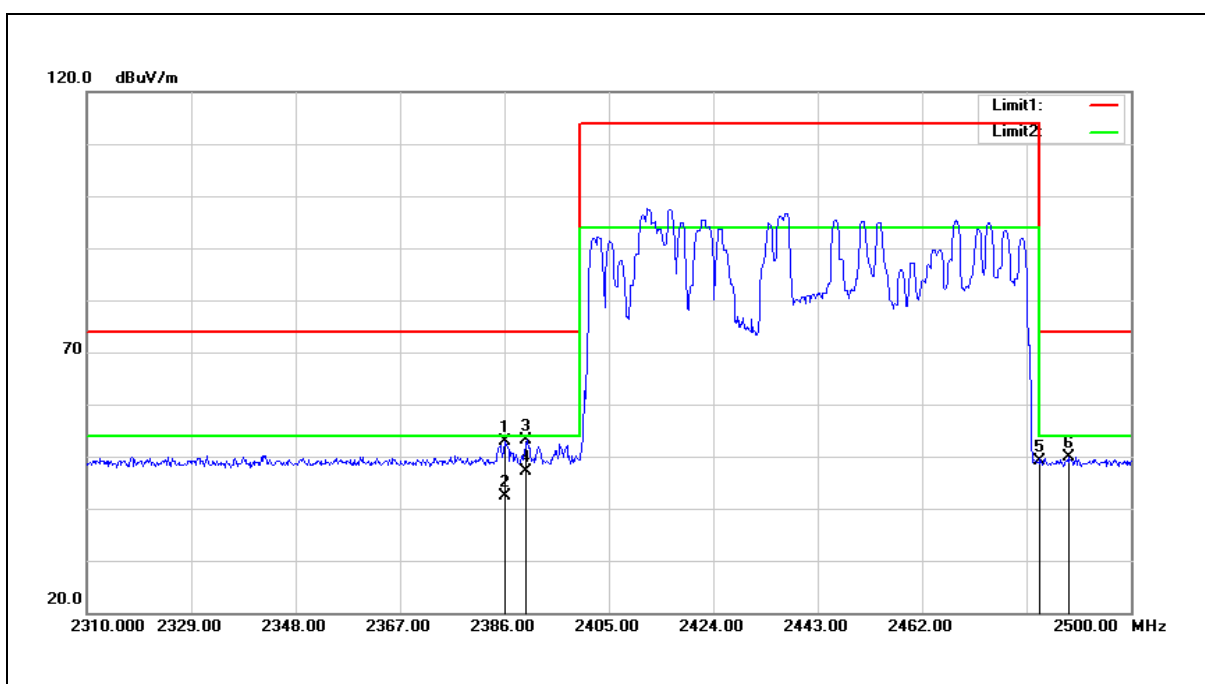


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.000	62.59	-9.79	52.80	74.00	-21.20	peak
2	2386.000	52.22	-9.79	42.43	54.00	-11.57	AVG
3	2390.000	62.87	-9.78	53.09	74.00	-20.91	peak
4	2390.000	57.03	-9.78	47.25	54.00	-6.75	AVG
5	2483.500	58.60	-9.56	49.04	74.00	-24.96	peak
6	2488.600	59.37	-9.56	49.81	74.00	-24.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

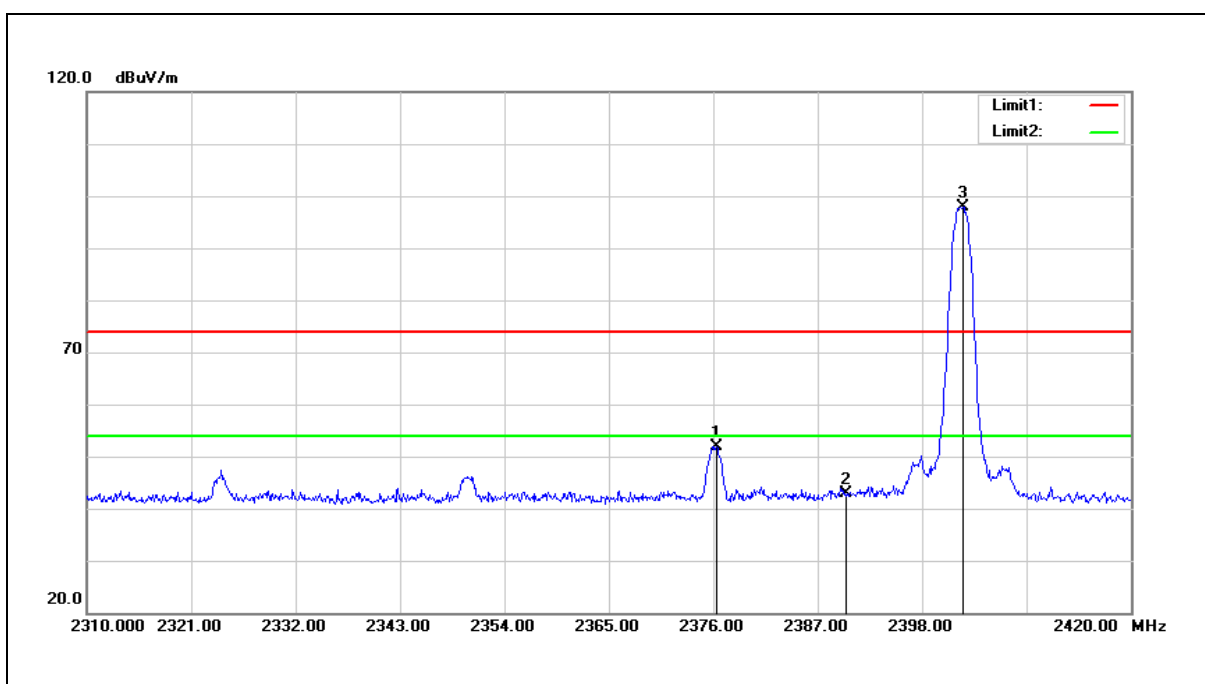


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.330	61.74	-9.83	51.91	74.00	-22.09	peak
2	2390.000	52.70	-9.78	42.92	74.00	-31.08	peak
3	2402.290	107.62	-9.75	97.87	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

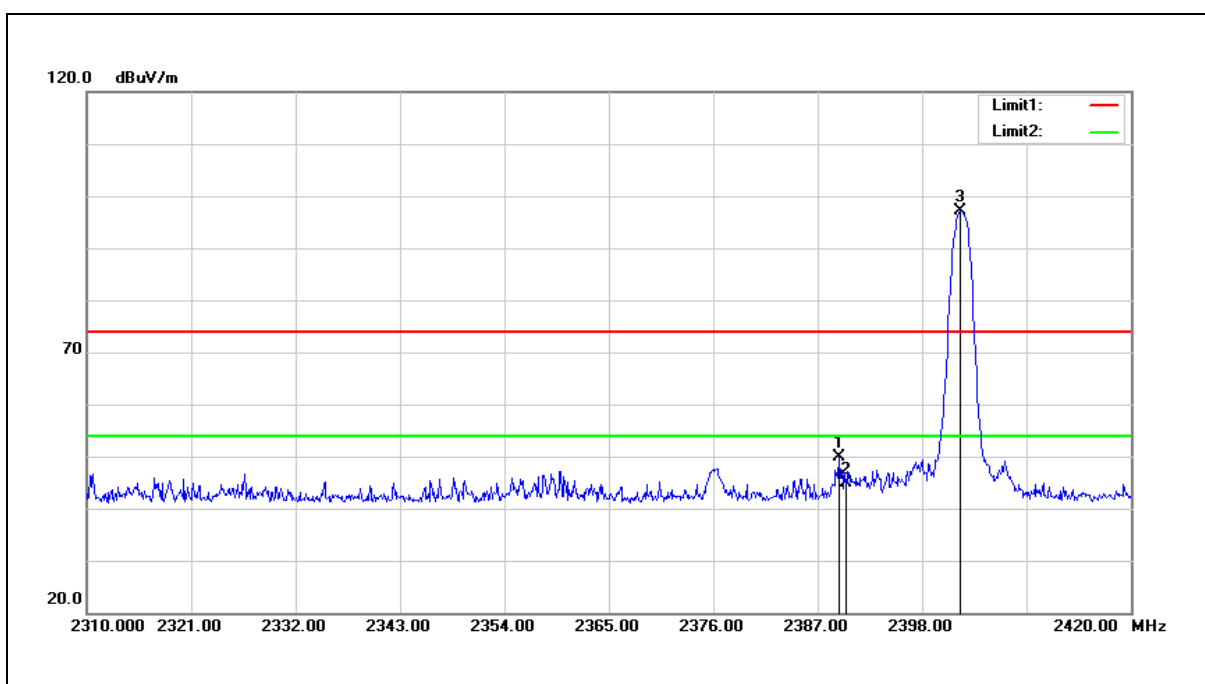


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	59.69	-9.79	49.90	74.00	-24.10	peak
2	2390.000	54.69	-9.78	44.91	74.00	-29.09	peak
3	2401.960	106.93	-9.75	97.18	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

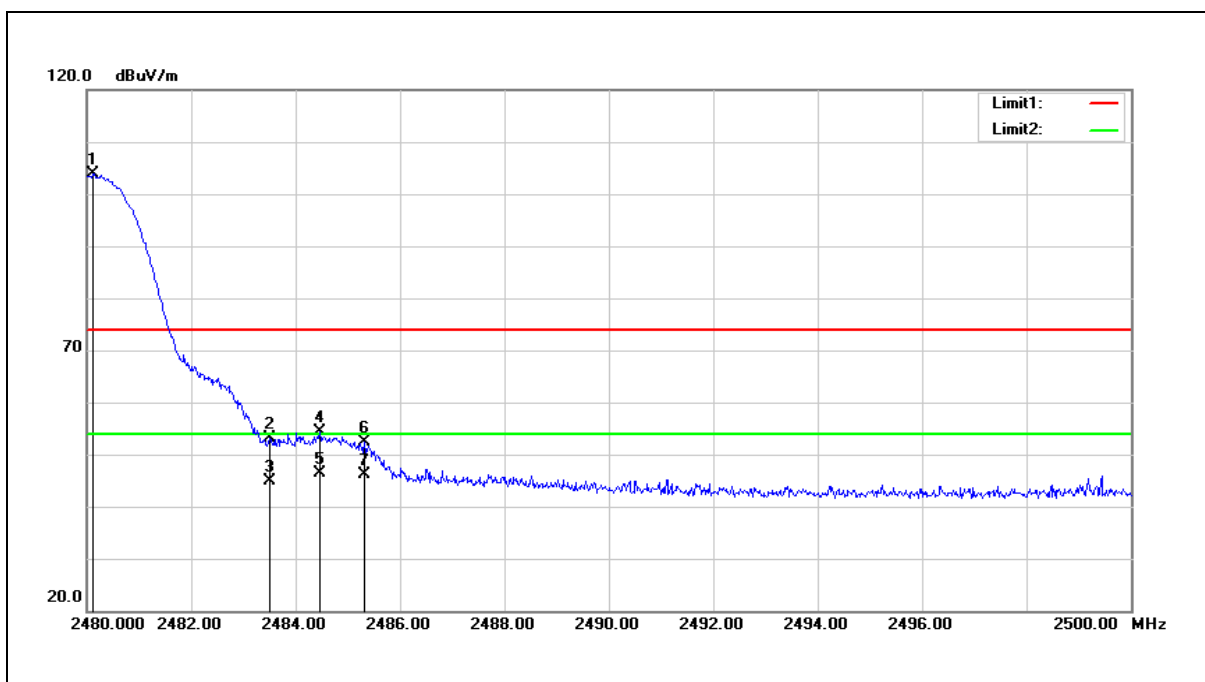


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.120	113.35	-9.58	103.77	---	---	peak
2	2483.500	62.78	-9.56	53.22	74.00	-20.78	peak
3	2483.500	54.33	-9.56	44.77	54.00	-9.23	AVG
4	2484.460	63.99	-9.56	54.43	74.00	-19.57	peak
5	2484.460	55.94	-9.56	46.38	54.00	-7.62	AVG
6	2485.320	61.82	-9.56	52.26	74.00	-21.74	peak
7	2485.320	55.81	-9.56	46.25	54.00	-7.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

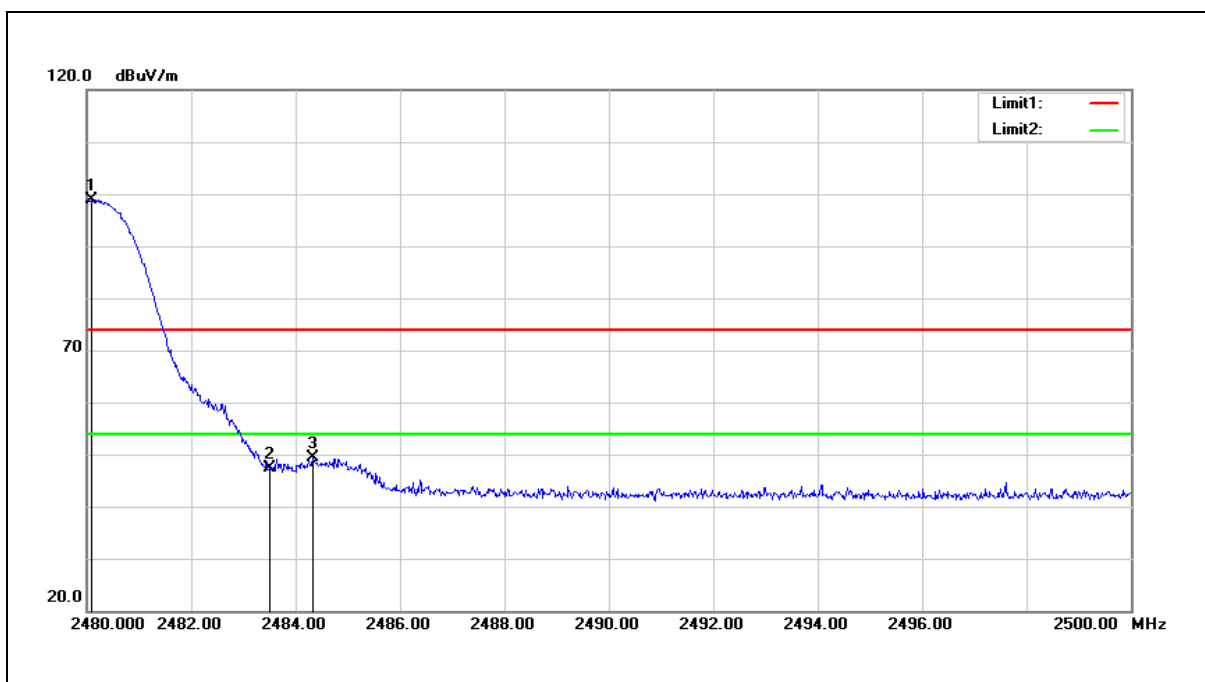


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.080	108.46	-9.58	98.88	---	---	peak
2	2483.500	56.99	-9.56	47.43	74.00	-26.57	peak
3	2484.340	58.96	-9.56	49.40	74.00	-24.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

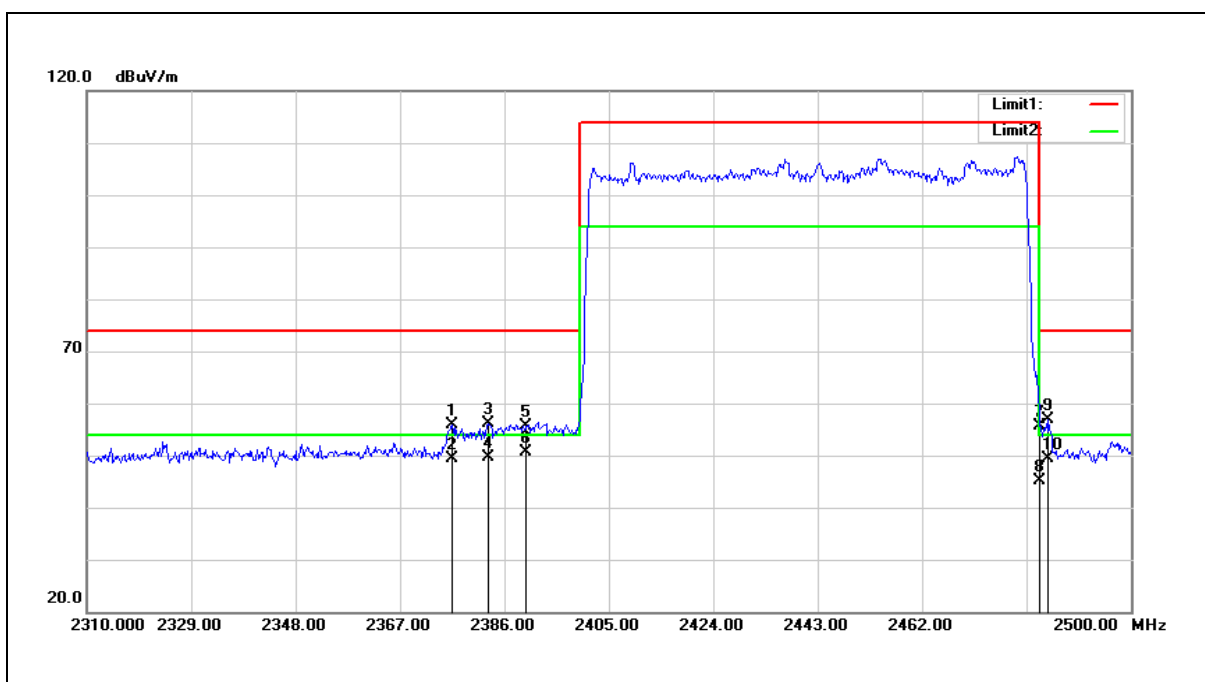


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.500	65.71	-9.83	55.88	74.00	-18.12	peak
2	2376.500	59.12	-9.83	49.29	54.00	-4.71	AVG
3	2382.960	66.04	-9.80	56.24	74.00	-17.76	peak
4	2382.960	59.40	-9.80	49.60	54.00	-4.40	AVG
5	2390.000	65.34	-9.78	55.56	74.00	-18.44	peak
6	2390.000	60.30	-9.78	50.52	54.00	-3.48	AVG
7	2483.500	65.13	-9.56	55.57	74.00	-18.43	peak
8	2483.500	54.66	-9.56	45.10	54.00	-8.90	AVG
9	2484.990	66.46	-9.56	56.90	74.00	-17.10	peak
10	2484.990	58.88	-9.56	49.32	54.00	-4.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

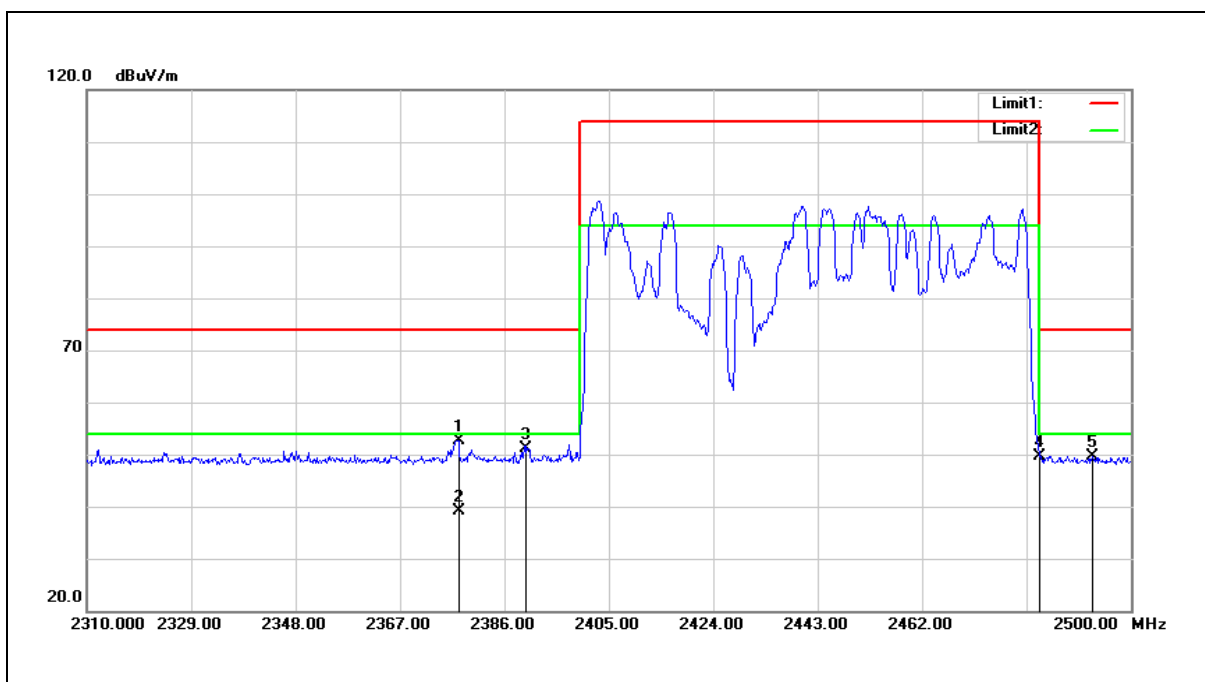

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.640	62.55	-9.82	52.73	74.00	-21.27	peak
2	2377.640	48.93	-9.82	39.11	54.00	-14.89	AVG
3	2390.000	60.90	-9.78	51.12	74.00	-22.88	peak
4	2483.500	59.10	-9.56	49.54	74.00	-24.46	peak
5	2492.970	59.18	-9.55	49.63	74.00	-24.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.