



REPORT No.: SZ24120252W02

# TEST REPORT

**APPLICANT** : Realme Chongqing Mobile  
Telecommunications Corp., Ltd.

**PRODUCT NAME** : Wireless Earphone

**MODEL NAME** : RMA2407

**BRAND NAME** : realme

**FCC ID** : 2AUYFRMA2407

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2024-12-30

**TEST DATE** : 2025-01-06 to 2025-02-16

**ISSUE DATE** : 2025-03-12

Edited by:

*Zeng Xiaoying*  
Zeng Xiaoying (Rapporteur)

Approved by:

*Shen Junsheng*  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





## DIRECTORY

|                                                  |    |
|--------------------------------------------------|----|
| 1. Summary of Test Result                        | 4  |
| 1.1. Testing Applied Standards                   | 5  |
| 1.2. Test Equipment List                         | 6  |
| 1.3. Measurement Uncertainty                     | 8  |
| 1.4. Testing Laboratory                          | 8  |
| 2. General Description                           | 9  |
| 2.1. Information of Applicant and Manufacturer   | 9  |
| 2.2. Information of EUT                          | 9  |
| 2.3. Channel List of EUT                         | 11 |
| 2.4. Test Configuration of EUT                   | 12 |
| 2.5. Test Conditions                             | 12 |
| 2.6. Test Setup Layout Diagram                   | 12 |
| 3. Test Results                                  | 15 |
| 3.1. Antenna Requirement                         | 15 |
| 3.2. Hopping Mechanism                           | 16 |
| 3.3. Number of Hopping Frequency                 | 17 |
| 3.4. Duty Cycle of Test Signal                   | 18 |
| 3.5. Maximum Peak Conducted Output Power         | 19 |
| 3.6. Maximum Average Conducted Output Power      | 20 |
| 3.7. 20 dB Bandwidth                             | 21 |
| 3.8. Carried Frequency Separation                | 22 |
| 3.9. Time of Occupancy (Dwell time)              | 23 |
| 3.10. Conducted Spurious Emissions and Band Edge | 24 |
| 3.11. Conducted Emission                         | 25 |
| 3.12. Restricted Frequency Bands                 | 26 |
| 3.13. Radiated Emission                          | 27 |



**Annex A Test Data and Result ..... 29**

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for change |
| 1.0            | 2025-03-12 | First edition     |
|                |            |                   |



# 1. Summary of Test Result

| No. | Section                | Description                            | Test Date                      | Test Engineer  | Result | Method Determination /Remark |
|-----|------------------------|----------------------------------------|--------------------------------|----------------|--------|------------------------------|
| 1   | 15.203                 | Antenna Requirement                    | N/A                            | N/A            | PASS   | No deviation                 |
| 2   | 15.247(a)<br>15.247(h) | Hopping Mechanism                      | N/A                            | N/A            | PASS   | No deviation                 |
| 3   | 15.247(a)              | Number of Hopping Frequency            | Jan. 14, 2025<br>Feb. 12, 2025 | Li Zikai       | PASS   | No deviation                 |
| 4   | ANSI C63.10            | Duty Cycle                             | Jan. 14, 2025<br>Feb. 12, 2025 | Li Zikai       | PASS   | No deviation                 |
| 5   | 15.247(b)              | Maximum Peak Conducted Output Power    | Jan. 14, 2025<br>Feb. 12, 2025 | Li Zikai       | PASS   | No deviation                 |
| 6   | 15.247(b)              | Maximum Average Conducted Output Power | Jan. 14, 2025<br>Feb. 12, 2025 | Li Zikai       | PASS   | No deviation                 |
| 7   | 15.247(a)              | 20dB Bandwidth                         | Jan. 14, 2025                  | Li Zikai       | PASS   | No deviation                 |
| 8   | 15.247(a)              | Carrier Frequency Separation           | Jan. 14, 2025                  | Li Zikai       | PASS   | No deviation                 |
| 9   | 15.247(a)              | Time of Occupancy (Dwell time)         | Jan. 14, 2025                  | Li Zikai       | PASS   | No deviation                 |
| 10  | 15.247(d)              | Conducted Spurious Emission            | Jan. 14, 2025<br>Feb. 12, 2025 | Li Zikai       | PASS   | No deviation                 |
| 11  | 15.207                 | Conducted Emission                     | Jan. 06, 2025                  | Fan Shengquan  | PASS   | No deviation                 |
| 12  | 15.247(d)              | Restricted Frequency Bands             | Jan. 06, 2025<br>Feb. 16, 2025 | Zhong Xiangyun | PASS   | No deviation                 |
| 13  | 15.209,                | Radiated                               | Jan. 06, 2025                  | Zhong          | PASS   | No deviation                 |



|  |           |          |               |          |  |  |
|--|-----------|----------|---------------|----------|--|--|
|  | 15.247(d) | Emission | Feb. 16, 2025 | Xiangyun |  |  |
|--|-----------|----------|---------------|----------|--|--|

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



## 1.2. Test Equipment List

### 1.2.1 Conducted Test Equipment

| Equipment                 | Serial No. | Type   | Manufacturer | Cal. Date  | Due Date   |
|---------------------------|------------|--------|--------------|------------|------------|
| EXA Signal Analyzer       | MY53470836 | N9010A | Agilent      | 2024.02.19 | 2025.02.18 |
| RF Cable<br>(30MHz-26GHz) | CB01       | RF01   | Morlab       | N/A        | N/A        |
| Coaxial Cable             | CB02       | RF02   | Morlab       | N/A        | N/A        |
| SMA Connector             | CN01       | RF03   | HUBER-SUHNER | N/A        | N/A        |

### 1.2.2 Conducted Emission Test Equipment

| Equipment                       | Serial No.         | Type           | Manufacturer | Cal. Date  | Due Date   |
|---------------------------------|--------------------|----------------|--------------|------------|------------|
| Receiver                        | MY56400093         | N9038A         | KEYSIGHT     | 2025.01.06 | 2026.01.05 |
| LISN                            | 8127449            | NSLK<br>8127   | Schwarzbeck  | 2024.02.02 | 2025.02.01 |
|                                 |                    |                |              | 2025.01.09 | 2026.01.18 |
| Pulse Limiter<br>(10dB)         | VTSD 9561 F-B #206 | VTSD<br>9561-F | Schwarzbeck  | 2024.05.30 | 2025.05.29 |
| RF Coaxial Cable<br>(DC-100MHz) | BNC                | MRE04          | Qualwave     | N/A        | N/A        |

### 1.2.3 List of Software Used

| Description    | Manufacturer | Software Version |
|----------------|--------------|------------------|
| Test System    | MaiWei       | 2.0.0.0          |
| JS32-RE        | Tonscend     | 5.0.0            |
| TS+ -[JS32-CE] | Tonscend     | 2.5.0.0          |

**1.2.4 Radiated Test Equipment**

| Equipment                   | Serial No.    | Type                  | Manufacturer | Cal. Date  | Due Date   |
|-----------------------------|---------------|-----------------------|--------------|------------|------------|
| Signal Analyzer             | MY56060145    | N9020A                | Agilent      | 2024.05.30 | 2025.05.29 |
| Test Antenna - Bi-Log       | 9163-519      | VULB 9163             | Schwarzbeck  | 2024.06.22 | 2025.06.21 |
| Test Antenna - Loop         | 1519-022      | FMZB1519              | Schwarzbeck  | 2024.06.03 | 2025.06.02 |
| Test Antenna – Horn         | 01774         | BBHA 9120D            | Schwarzbeck  | 2024.06.22 | 2025.06.21 |
| Test Antenna – Horn         | BBHA9170 #773 | BBHA9170              | Schwarzbeck  | 2024.06.22 | 2025.06.21 |
| Preamplifier (10MHz-6GHz)   | 46732         | S10M100L38 02         | LUCIX CORP.  | 2024.05.30 | 2025.05.29 |
| Preamplifier (2GHz-18GHz)   | 61171/61172   | S020180L32 03         | LUCIX CORP.  | 2024.05.30 | 2025.05.29 |
| Preamplifier (18GHz-40GHz)  | DS77209       | DCLNA0118-40C-S       | Decentest    | 2024.05.30 | 2025.05.29 |
| RF Coaxial Cable (DC-18GHz) | MRE001        | PE330                 | Pasternack   | 2024.05.30 | 2025.05.29 |
| RF Coaxial Cable (DC-18GHz) | MRE002        | CLU18                 | Pasternack   | 2024.05.30 | 2025.05.29 |
| RF Coaxial Cable (DC-18GHz) | MRE003        | CLU18                 | Pasternack   | 2024.05.30 | 2025.05.29 |
| RF Coaxial Cable (DC-40GHz) | 22290045      | QA360-40-KK-0.5       | Qualwave     | N/A        | N/A        |
| RF Coaxial Cable (DC-40GHz) | 22290046      | QA360-40-KKF-2        | Qualwave     | N/A        | N/A        |
| RF Coaxial Cable (DC-18GHz) | 22120181      | QA500-18-NN-5         | Qualwave     | N/A        | N/A        |
| Notch Filter                | N/A           | WRCG-2400-2483.5-60SS | Wainwright   | N/A        | N/A        |
| Anechoic Chamber            | N/A           | 9m*6m*6m              | CRT          | 2022.05.10 | 2025.05.09 |



### 1.3. Measurement Uncertainty

| Test Items                     | Uncertainty | Remark                   |
|--------------------------------|-------------|--------------------------|
| Number of Hopping Frequency    | ±5%         | Confidence levels of 95% |
| Peak Output Power              | ±2.22dB     | Confidence levels of 95% |
| Bandwidth                      | ±5%         | Confidence levels of 95% |
| Carrier Frequency Separation   | ±5%         | Confidence levels of 95% |
| Time of Occupancy (Dwell time) | ±5%         | Confidence levels of 95% |
| Conducted Spurious Emission    | ±2.77dB     | Confidence levels of 95% |
| Restricted Frequency Bands     | ±5%         | Confidence levels of 95% |
| Radiated Emission              | ±2.95dB     | Confidence levels of 95% |
| Conducted Emission             | ±2.44dB     | Confidence levels of 95% |

### 1.4. Testing Laboratory

|                                           |                                                                                                                                  |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Laboratory Name:</b>                   | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| <b>Laboratory Address:</b>                | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| <b>Telephone:</b>                         | +86 755 36698555                                                                                                                 |
| <b>Facsimile:</b>                         | +86 755 36698525                                                                                                                 |
| <b>FCC Designation Number:</b>            | CN1192                                                                                                                           |
| <b>FCC Test Firm Registration Number:</b> | 226174                                                                                                                           |



## 2. General Description

### 2.1. Information of Applicant and Manufacturer

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| <b>Applicant:</b>            | Realme Chongqing Mobile Telecommunications Corp., Ltd.             |
| <b>Applicant Address:</b>    | No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China |
| <b>Manufacturer:</b>         | Realme Chongqing Mobile Telecommunications Corp., Ltd.             |
| <b>Manufacturer Address:</b> | No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China |

### 2.2. Information of EUT

|                                   |                                                                     |                                     |
|-----------------------------------|---------------------------------------------------------------------|-------------------------------------|
| <b>Product Name:</b>              | Wireless Earphone                                                   |                                     |
| <b>Sample No.:</b>                | 1#, 2#, 5#, 11#, 13#                                                |                                     |
| <b>Hardware Version:</b>          | Earphone: V4<br>Charging case: V5                                   |                                     |
| <b>Software Version:</b>          | Earphone: V1.1.0.40<br>Charging case: V029                          |                                     |
| <b>Equipment Type:</b>            | Bluetooth classic                                                   |                                     |
| <b>Bluetooth Version:</b>         | 5.4                                                                 |                                     |
| <b>Modulation Type:</b>           | FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps),<br>8-DPSK(EDR 3Mbps)) |                                     |
| <b>Operating Frequency Range:</b> | 2402MHz-2480MHz                                                     |                                     |
| <b>Antenna Type:</b>              | FPC Antenna                                                         |                                     |
| <b>Antenna Gain:</b>              | Left: -1.61dBi; Right: -1.86dBi                                     |                                     |
| <b>Accessory Information:</b>     | Battery (Earphone)                                                  |                                     |
|                                   | Brand Name:                                                         | VDL                                 |
|                                   | Model No.:                                                          | 112570B                             |
|                                   | Serial No.:                                                         | N/A                                 |
|                                   | Capacity:                                                           | 62mAh                               |
|                                   | Rated Voltage:                                                      | 3.89V                               |
|                                   | Charge Limit:                                                       | 4.48V                               |
|                                   | Manufacturer:                                                       | Chongqing VDL Electronics Co., Ltd. |



|                               |                         |                                     |
|-------------------------------|-------------------------|-------------------------------------|
| <b>Accessory Information:</b> | Battery (Charging case) |                                     |
|                               | Brand Name:             | VDL                                 |
|                               | Model No.:              | 801830PF8                           |
|                               | Serial No.:             | N/A                                 |
|                               | Capacity:               | 530mAh                              |
|                               | Rated Voltage:          | 3.89V                               |
|                               | Charge Limit:           | 4.48V                               |
|                               | Manufacturer:           | Chongqing VDL Electronics Co., Ltd. |

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 2.3.Channel List of EUT

| Channel  | Frequency (MHz) | Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel   | Frequency (MHz) |
|----------|-----------------|-----------|-----------------|---------|-----------------|-----------|-----------------|
| <b>0</b> | <b>2402</b>     | 20        | 2422            | 40      | 2442            | 60        | 2462            |
| 1        | 2403            | 21        | 2423            | 41      | 2443            | 61        | 2463            |
| 2        | 2404            | 22        | 2424            | 42      | 2444            | 62        | 2464            |
| 3        | 2405            | 23        | 2425            | 43      | 2445            | 63        | 2465            |
| 4        | 2406            | 24        | 2426            | 44      | 2446            | 64        | 2466            |
| 5        | 2407            | 25        | 2427            | 45      | 2447            | 65        | 2467            |
| 6        | 2408            | 26        | 2428            | 46      | 2448            | 66        | 2468            |
| 7        | 2409            | 27        | 2429            | 47      | 2449            | 67        | 2469            |
| 8        | 2410            | 28        | 2430            | 48      | 2450            | 68        | 2470            |
| 9        | 2411            | 29        | 2431            | 49      | 2451            | 69        | 2471            |
| 10       | 2412            | 30        | 2432            | 50      | 2452            | 70        | 2472            |
| 11       | 2413            | 31        | 2433            | 51      | 2453            | 71        | 2473            |
| 12       | 2414            | 32        | 2434            | 52      | 2454            | 72        | 2474            |
| 13       | 2415            | 33        | 2435            | 53      | 2455            | 73        | 2475            |
| 14       | 2416            | 34        | 2436            | 54      | 2456            | 74        | 2476            |
| 15       | 2417            | 35        | 2437            | 55      | 2457            | 75        | 2477            |
| 16       | 2418            | 36        | 2438            | 56      | 2458            | 76        | 2478            |
| 17       | 2419            | 37        | 2439            | 57      | 2459            | 77        | 2479            |
| 18       | 2420            | 38        | 2440            | 58      | 2460            | <b>78</b> | <b>2480</b>     |
| 19       | 2421            | <b>39</b> | <b>2441</b>     | 59      | 2461            |           |                 |

**Note 1:** The black bold channels were selected for test.

## 2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

## 2.5. Test Conditions


|                            |        |
|----------------------------|--------|
| Temperature (°C)           | 15-35  |
| Relative Humidity (%)      | 30-60  |
| Atmospheric Pressure (kPa) | 86-106 |

## 2.6. Test Setup Layout Diagram

### 2.6.1. Conducted Measurement

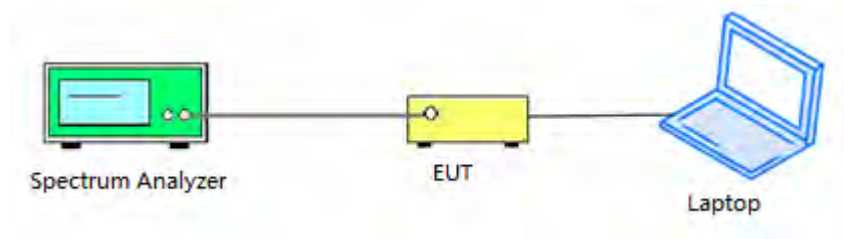


### 2.6.2. Conducted Emission Measurement

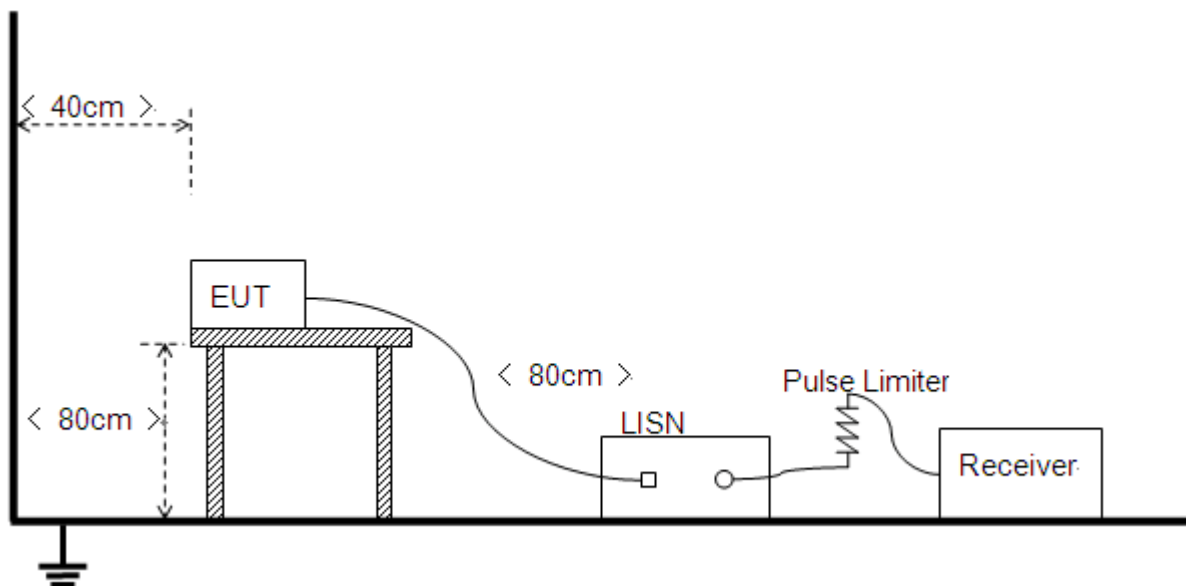


### 2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

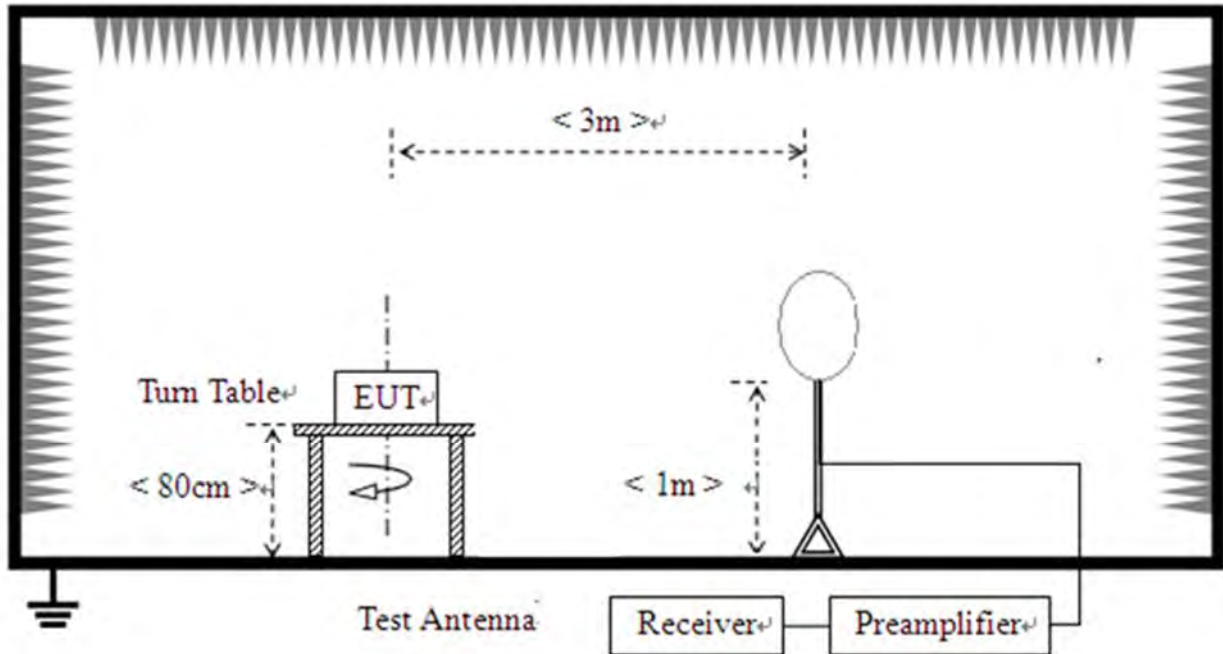

2) For radiated emissions from 30MHz to 1GHz

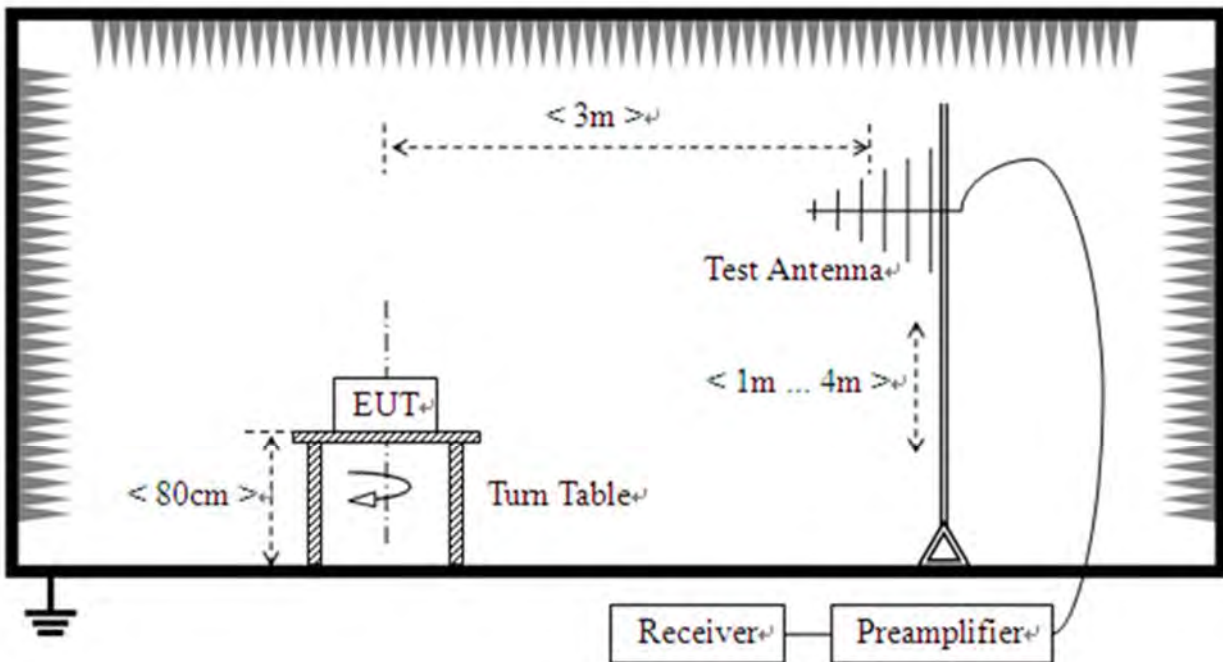

3) For radiated emissions above 1GHz

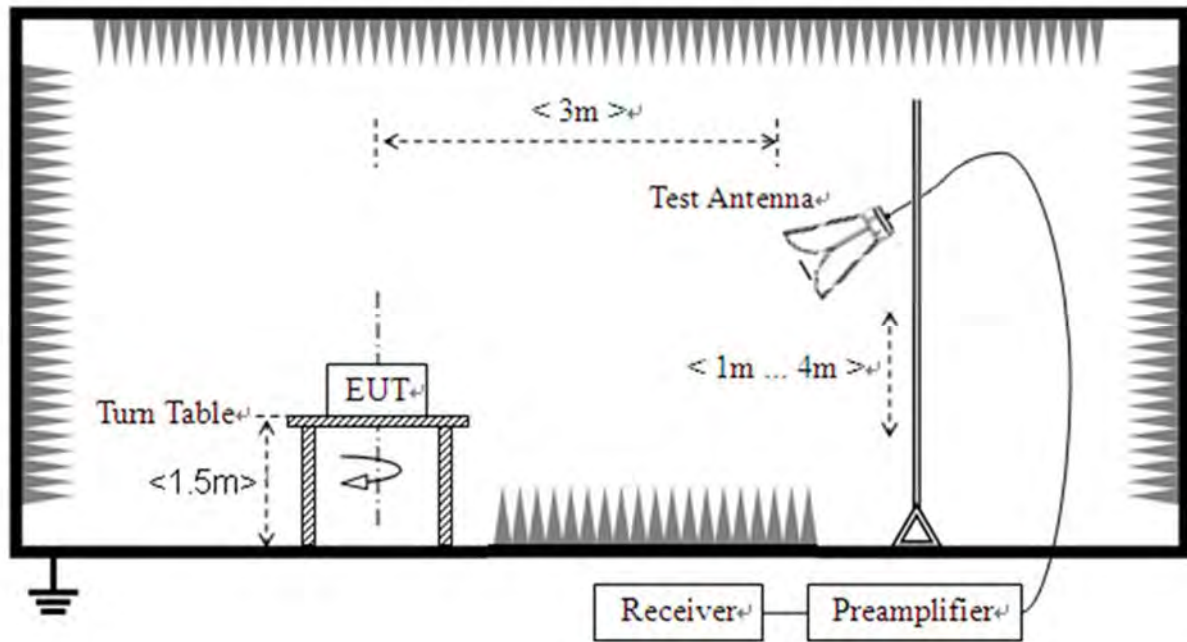



## 3. Test Results

### 3.1. Antenna Requirement

#### 3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.1.2. Test Result

| Antenna location                                                                  | Antenna Type                                                                                                                                                                                                                                                                                                                                                   | Coupling Method                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Internal<br><input type="checkbox"/> External | <input checked="" type="checkbox"/> FPC Antenna<br><input type="checkbox"/> Spring Antenna<br><input type="checkbox"/> Ceramic Antenna<br><input type="checkbox"/> Integrated Antenna<br><input type="checkbox"/> Dipole Antenna<br><input type="checkbox"/> PCB Antenna<br><input type="checkbox"/> PIFA Antenna<br><input type="checkbox"/> On-board Antenna | <input type="checkbox"/> I-PEX Connector<br><input type="checkbox"/> SMA Connector<br><input type="checkbox"/> RP-SMA Connector<br><input checked="" type="checkbox"/> Metal Shrapnel<br><input type="checkbox"/> Layout |



## 3.2. Hopping Mechanism

### 3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".



### 3.3. Number of Hopping Frequency

#### 3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

#### 3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

#### 3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.3.4. Test Result

Refer to Annex A.1 in this report.



### 3.4. Duty Cycle of Test Signal

#### 3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration ( $T$ ) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed  $T$  at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle ( $D$ ). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be non constant.

#### 3.4.2. Test Result

Refer to Annex A.2 in this report.



## **3.5. Maximum Peak Conducted Output Power**

### **3.5.1. Requirement**

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### **3.5.2. Test Procedures**

KDB 558074 Section 8.3.1 was used in order to prove compliance.

### **3.5.3. Test Setup Layout**

Refer to chapter 2.6.1 in this report.

### **3.5.4. Test Result**

Refer to Annex A.3 in this report.





## **3.6. Maximum Average Conducted Output Power**

### **3.6.1. Requirement**

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### **3.6.2. Test Procedures**

KDB 558074 Section 8.3.2 was used in order to prove compliance.

### **3.6.3. Test Setup Layout**

Refer to chapter 2.6.1 in this report.

### **3.6.4. Test Result**

Refer to Annex A.4 in this report.



## **3.7.20 dB Bandwidth**

### **3.7.1.Requirement**

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ( $10 \cdot \log 1\% = 20 \text{ dB}$ ) taking the total RF output power.

### **3.7.1.Test Procedures**

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW  $\geq 3 \times$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### **3.7.2.Test Setup Layout**

Refer to chapter 2.6.1 in this report.

### **3.7.3.Test Result**

Refer to Annex A.5 in this report.



## 3.8. Carried Frequency Separation

### 3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.8.4. Test Result

Refer to Annex A.6 in this report.



### 3.9. Time of Occupancy (Dwell time)

#### 3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms)  $\times (1600 / 2 / 79) \times 31.6$  Millisecond  
DH3: Dwell time equal to Pulse time (ms)  $\times (1600 / 4 / 79) \times 31.6$  Millisecond  
DH5: Dwell time equal to Pulse Time (ms)  $\times (1600 / 6 / 79) \times 31.6$  Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms)  $\times (800 / 2 / 20) \times (0.4 \times 20)$  Millisecond  
DH3: Dwell time equal to Pulse time (ms)  $\times (800 / 4 / 20) \times (0.4 \times 20)$  Millisecond  
DH5: Dwell time equal to Pulse Time (ms)  $\times (800 / 6 / 20) \times (0.4 \times 20)$  Millisecond.

#### 3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.9.4. Test Result

Refer to Annex A.7 in this report.



## 3.10. Conducted Spurious Emissions and Band Edge

### 3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.

## 3.11. Conducted Emission

### 3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

| Frequency Range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

### 3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

### 3.11.4.Test Result

Refer to Annex A.10 in this report.

## 3.12. Restricted Frequency Bands

### 3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

### 3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.12.4.Test Result

Refer to Annex A.11 in this report.

### 3.13. Radiated Emission

#### 3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V}/\text{m}$ ) | Measurement Distance (m) |
|-----------------|-------------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                               | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                              | 30                       |
| 1.705 - 30.0    | 30                                        | 30                       |
| 30 - 88         | 100                                       | 3                        |
| 88 - 216        | 150                                       | 3                        |
| 216 - 960       | 200                                       | 3                        |
| Above 960       | 500                                       | 3                        |

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



### 3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

### 3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.13.4.Test Result

Refer to Annex A.12 in this report.



## Annex A Test Data and Result

### A.1. Number of Hopping Frequency

#### Left

| Condition | Mode  | Antenna | Hopping Number | Limit | Verdict |
|-----------|-------|---------|----------------|-------|---------|
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |


#### Right

| Condition | Mode  | Antenna | Hopping Number | Limit | Verdict |
|-----------|-------|---------|----------------|-------|---------|
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |


Left

Test Graphs


Hopping No. NVNT 1-DH5 2402MHz Ant1 SISO

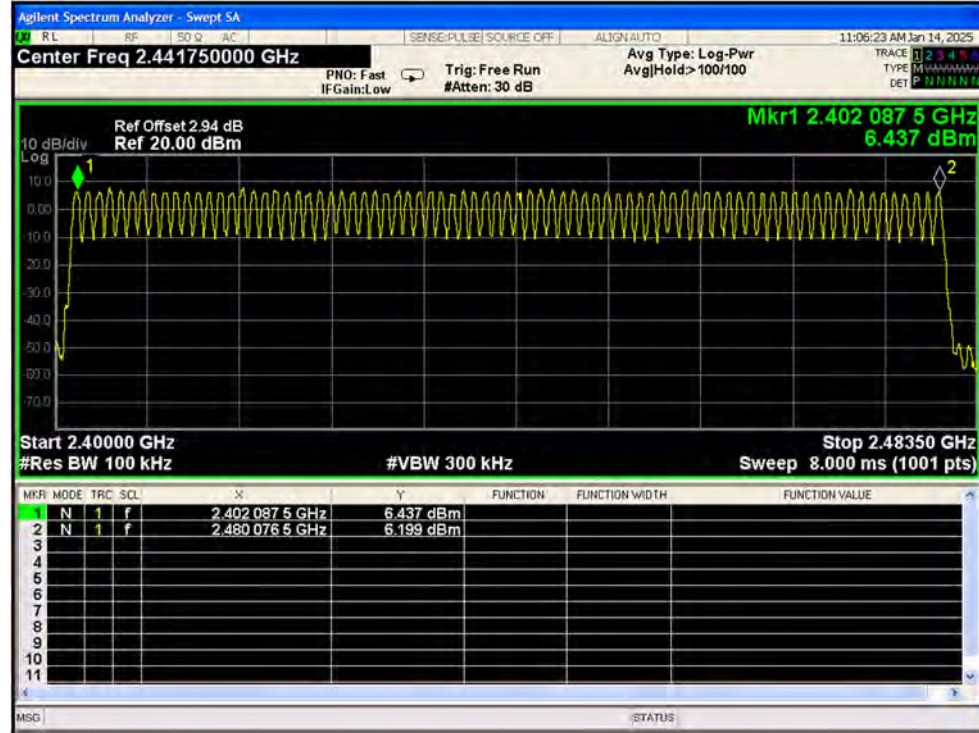


Hopping No. NVNT 1-DH5 2441MHz Ant1 SISO

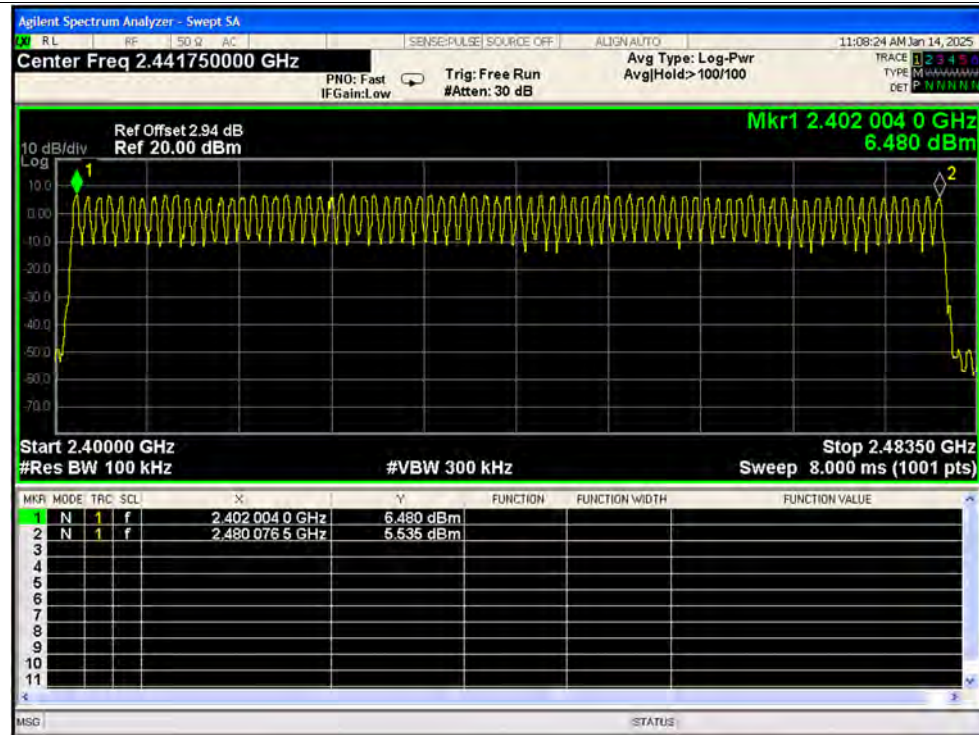


## Hopping No. NVNT 1-DH5 2480MHz Ant1 SISO

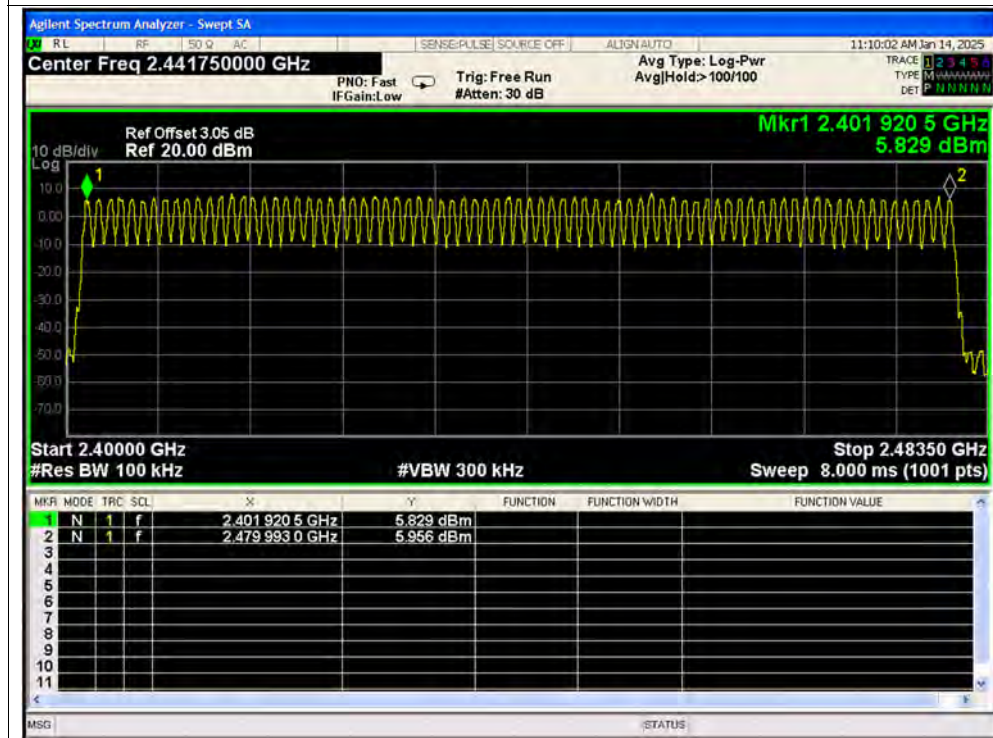


## Hopping No. NVNT 2-DH5 2402MHz Ant1 SISO

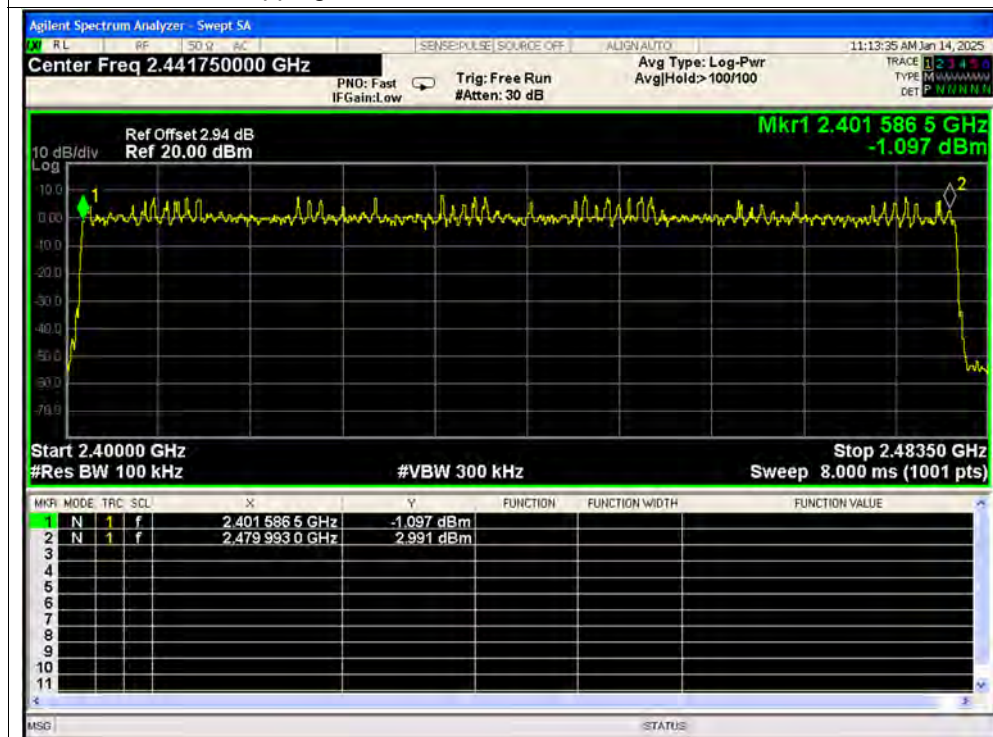


## Hopping No. NVNT 2-DH5 2441MHz Ant1 SISO

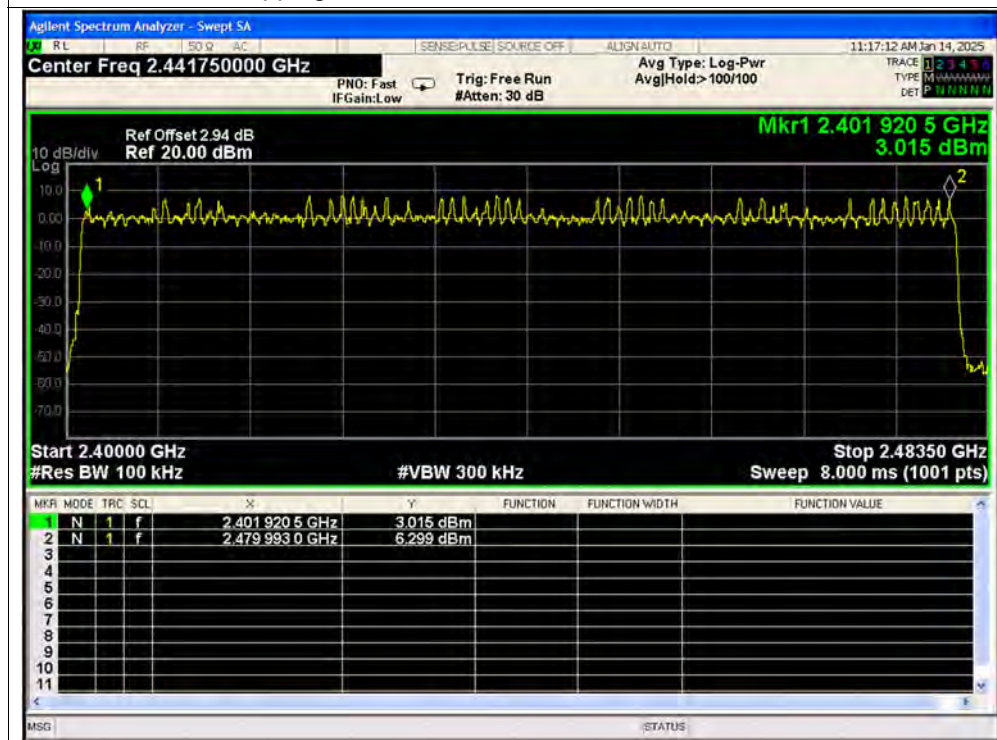


## Hopping No. NVNT 2-DH5 2480MHz Ant1 SISO

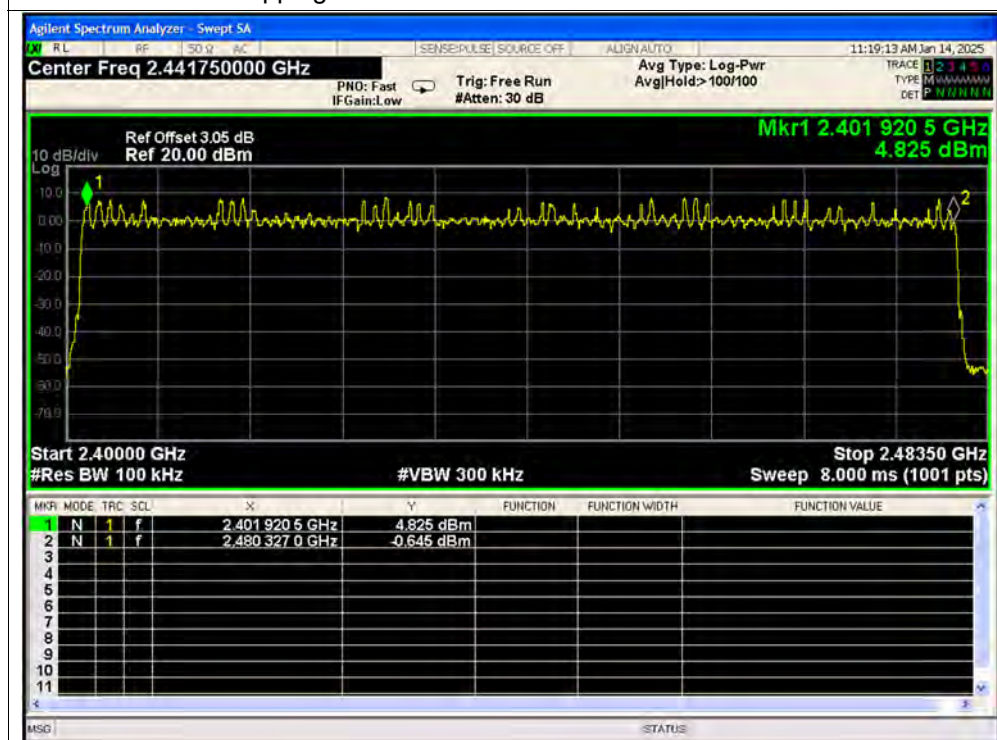

## Hopping No. NVNT 3-DH5 2402MHz Ant1 SISO

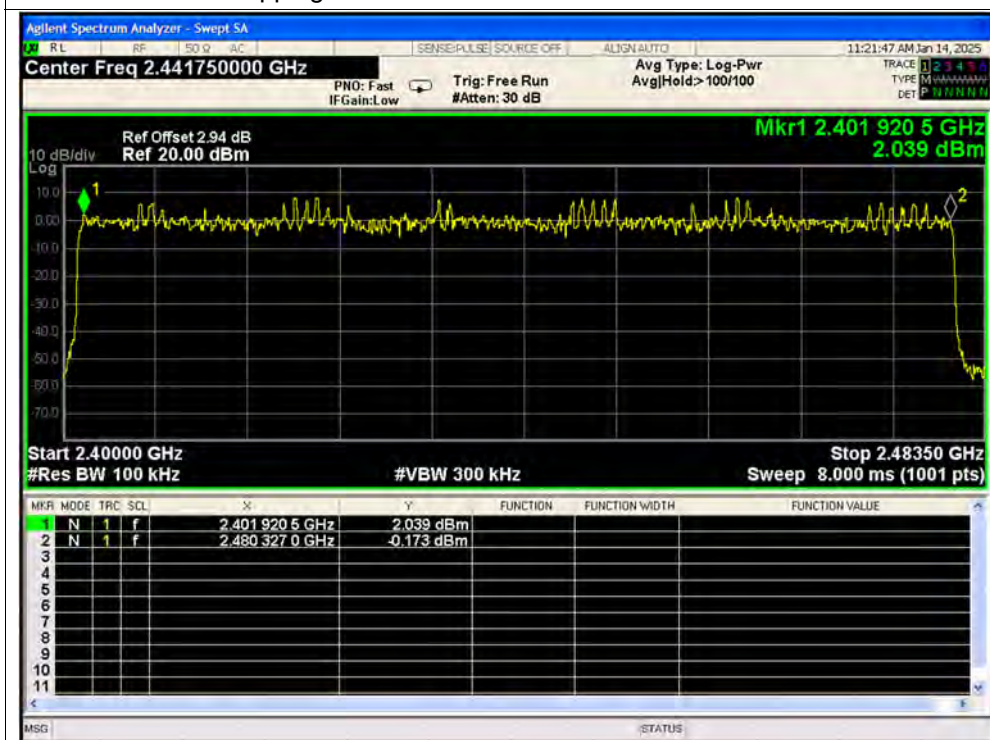


## Hopping No. NVNT 3-DH5 2441MHz Ant1 SISO

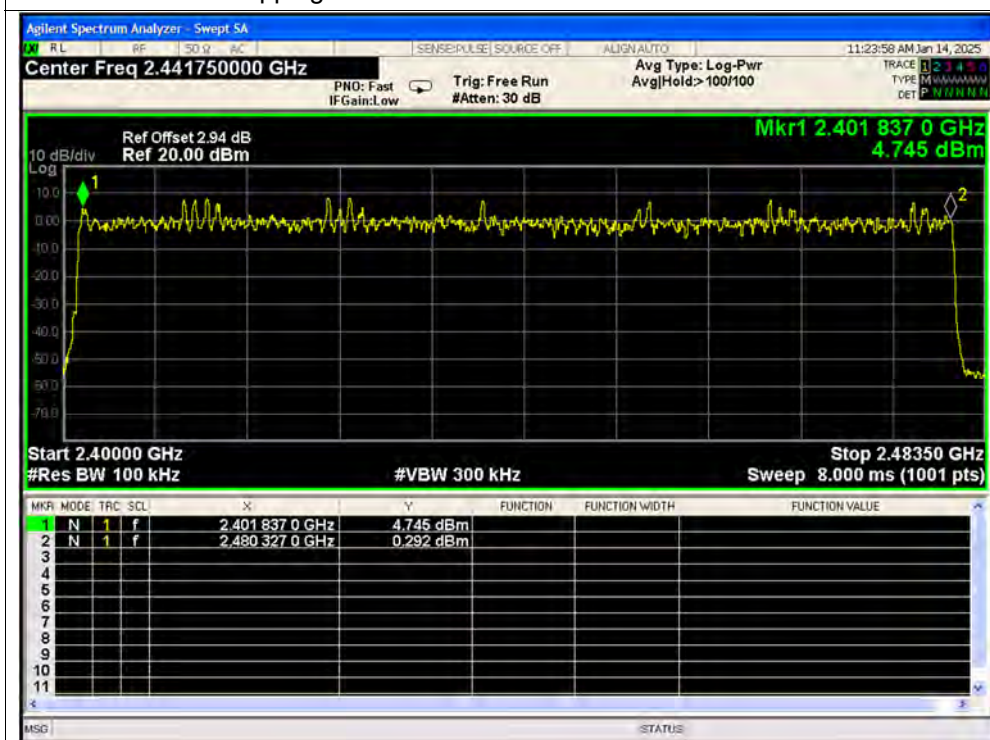




## Hopping No. NVNT 3-DH5 2480MHz Ant1 SISO

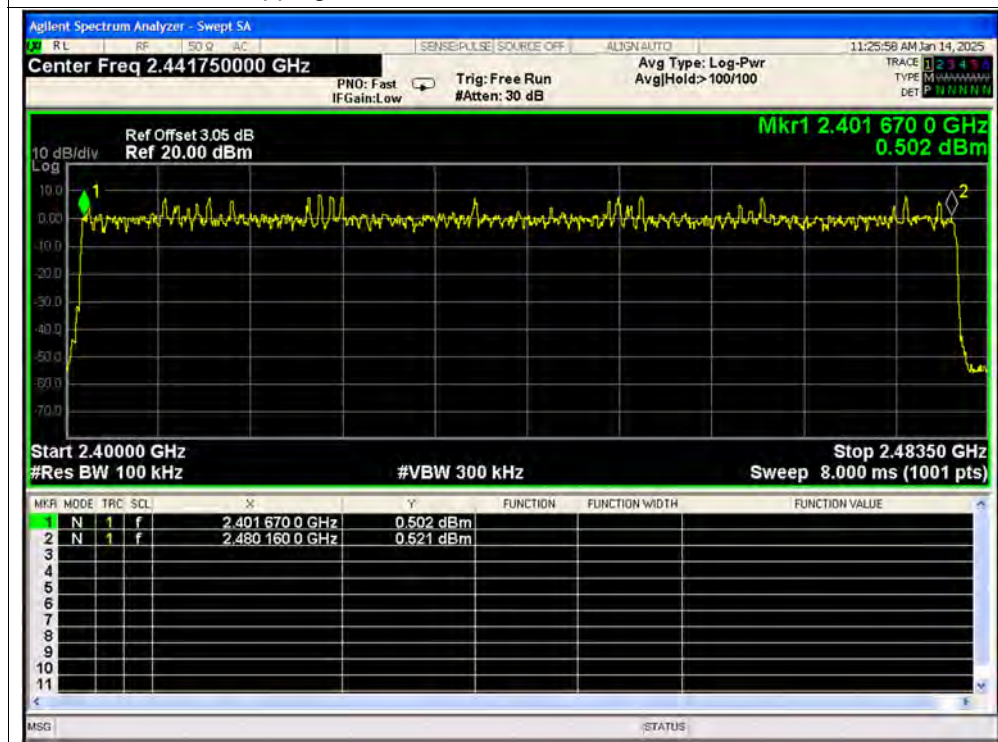


Right

Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

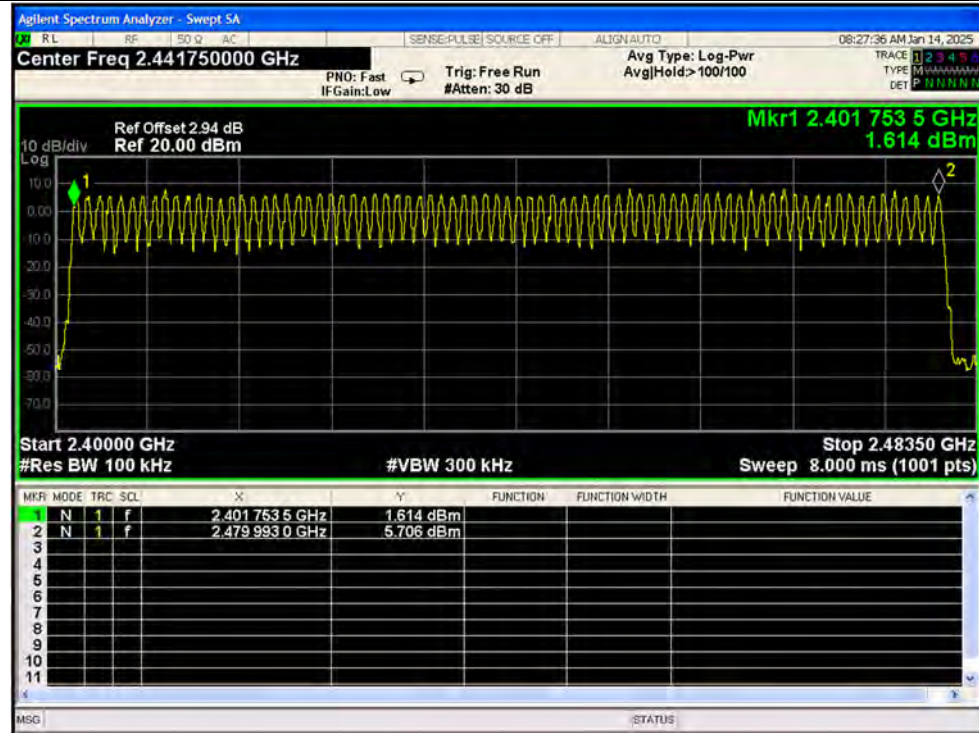


Hopping No. NVNT 1-DH5 2441MHz Ant1

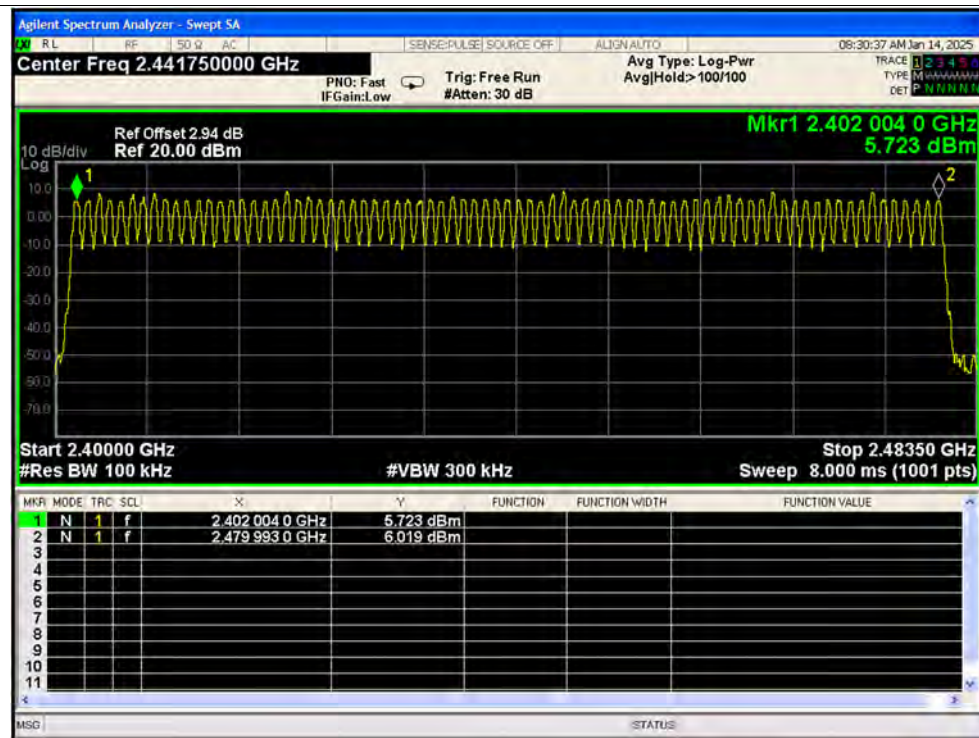




## Hopping No. NVNT 1-DH5 2480MHz Ant1

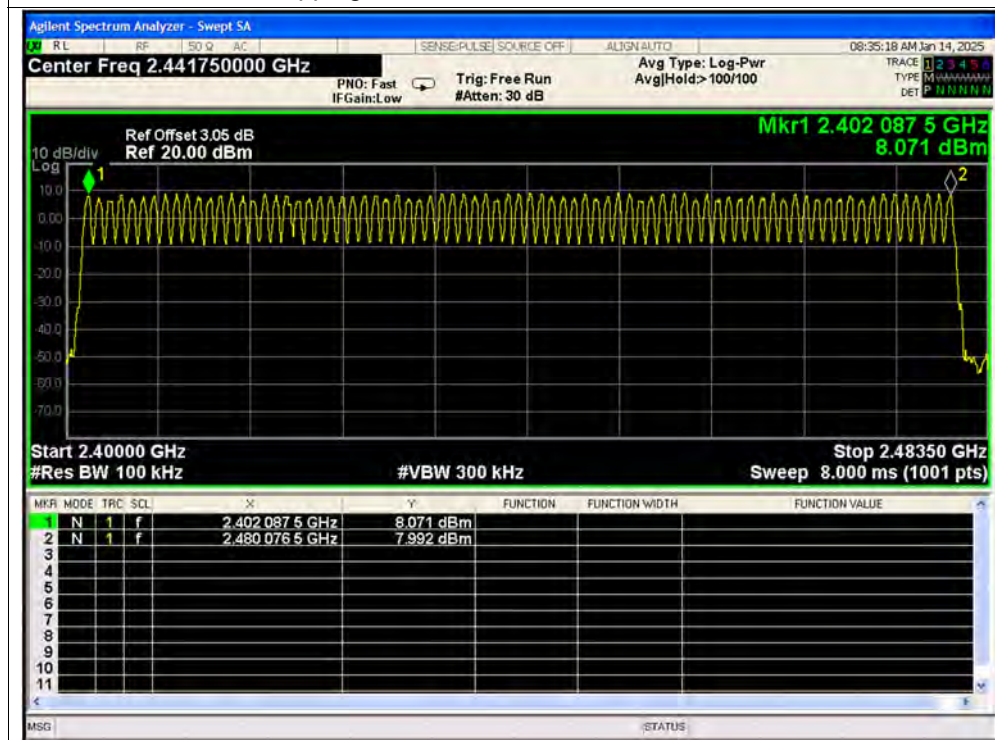


## Hopping No. NVNT 2-DH5 2402MHz Ant1

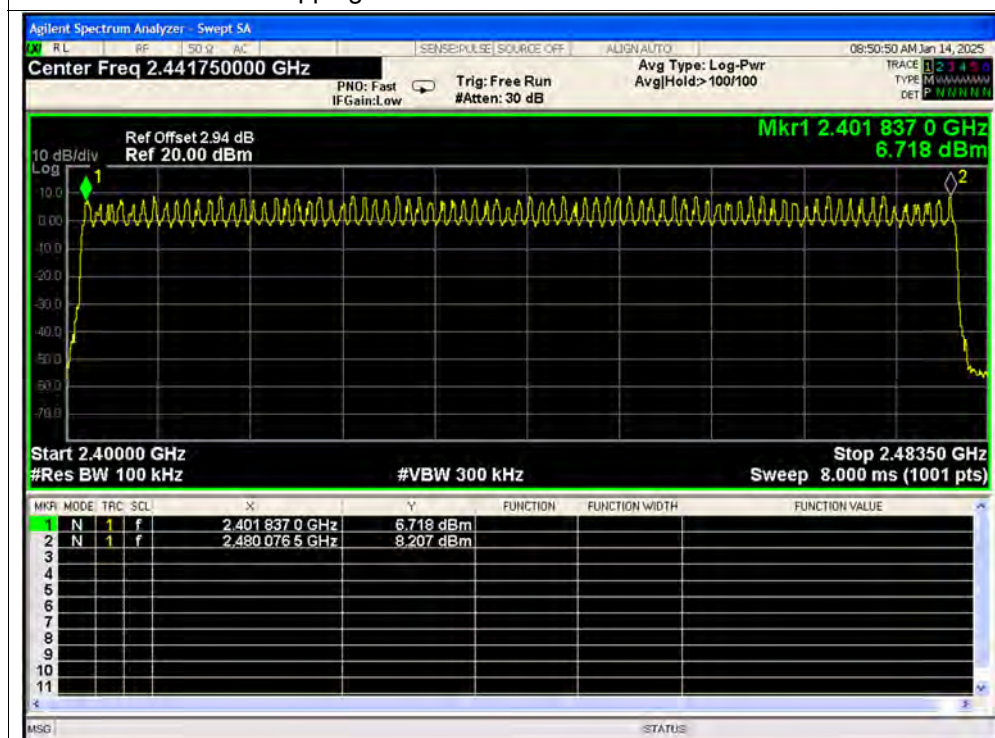





## Hopping No. NVNT 2-DH5 2441MHz Ant1

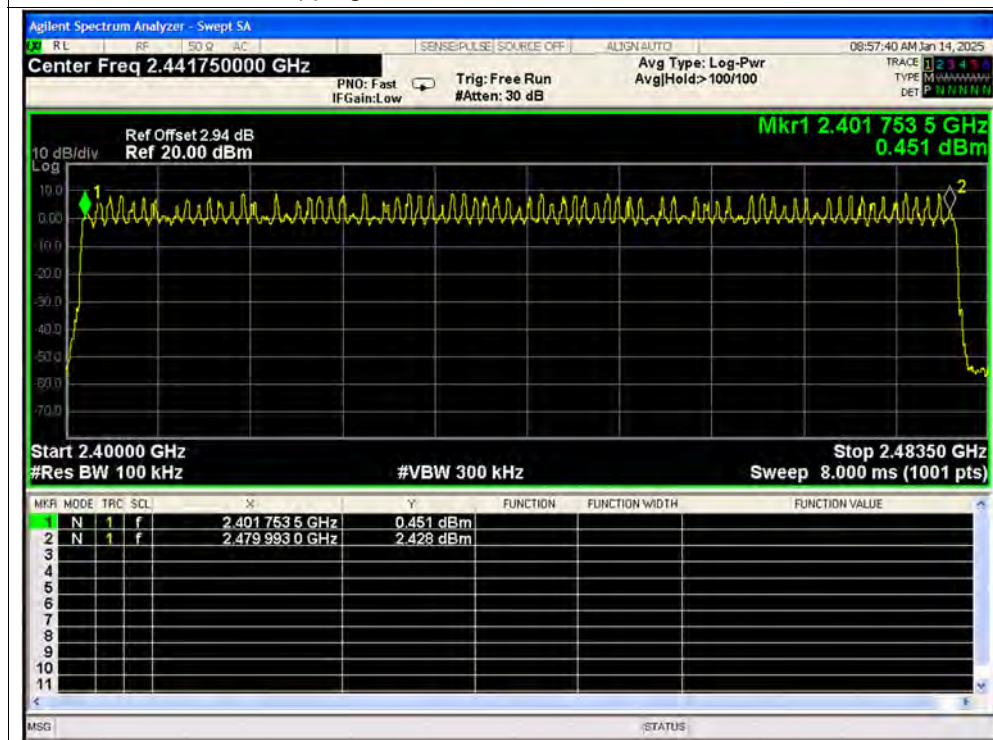


## Hopping No. NVNT 2-DH5 2480MHz Ant1

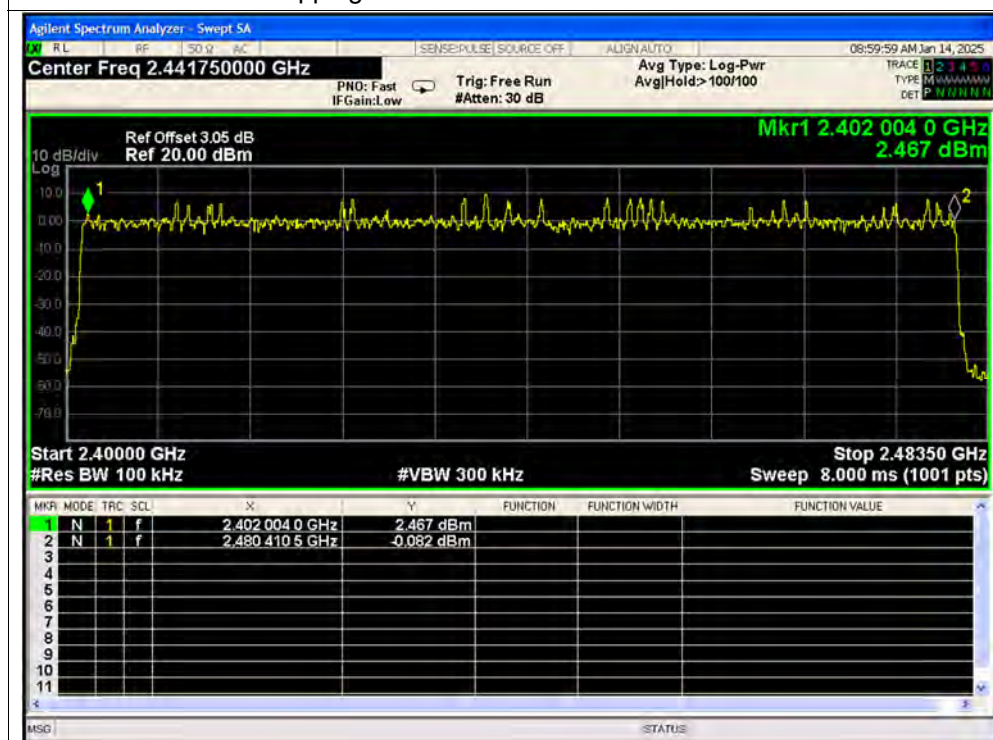

## Hopping No. NVNT 3-DH5 2402MHz Ant1

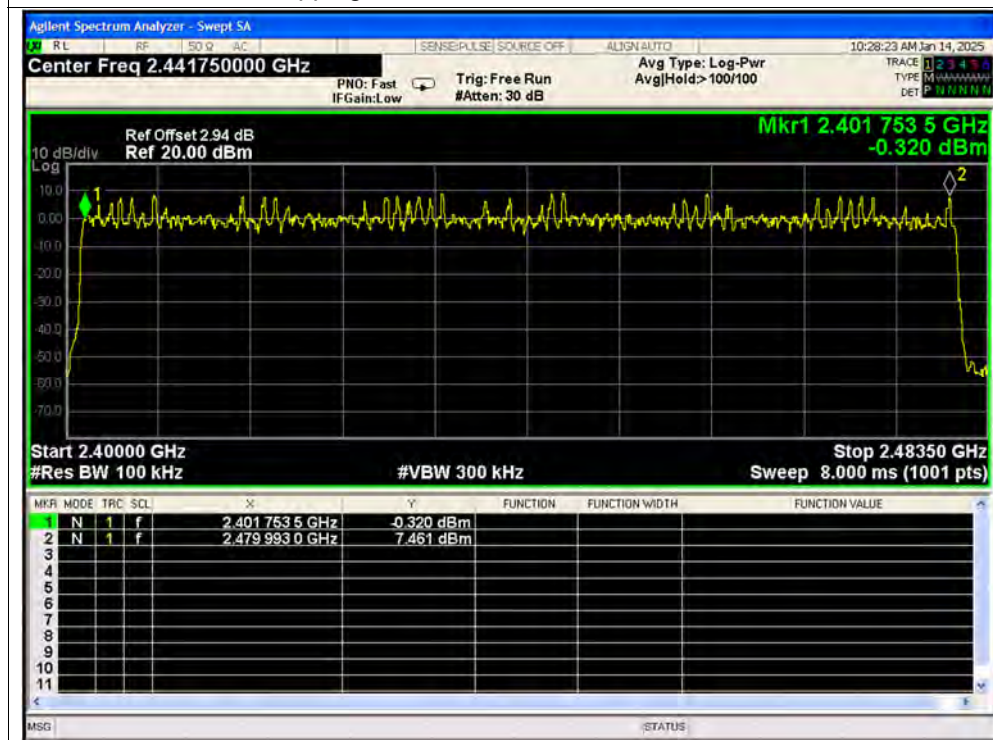


## Hopping No. NVNT 3-DH5 2441MHz Ant1

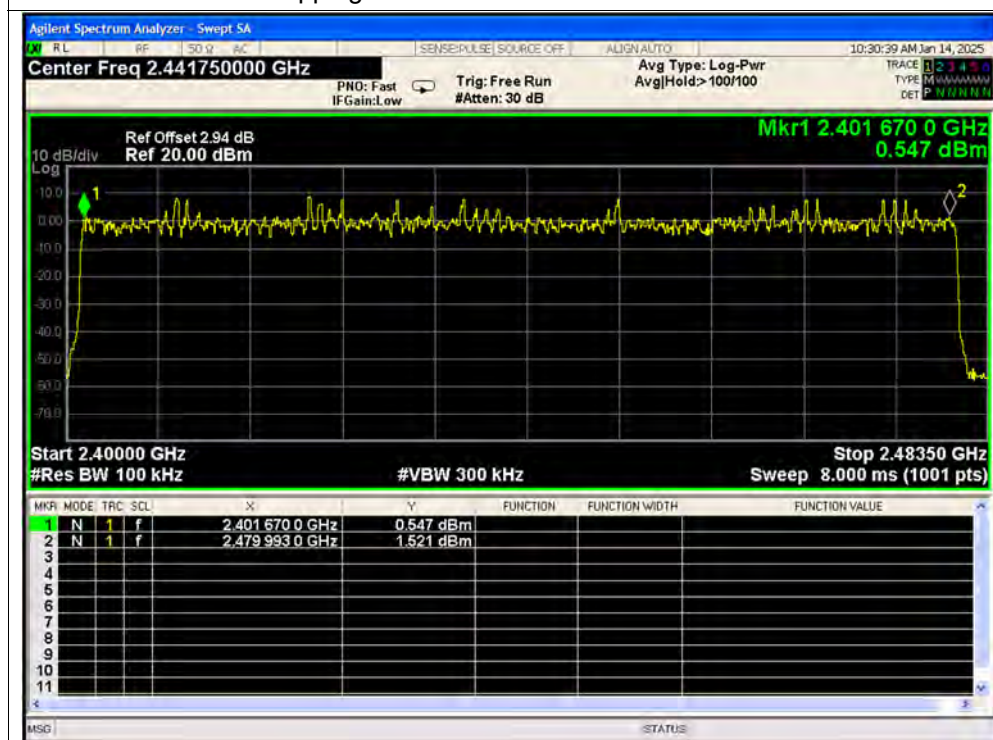



## Hopping No. NVNT 3-DH5 2480MHz Ant1

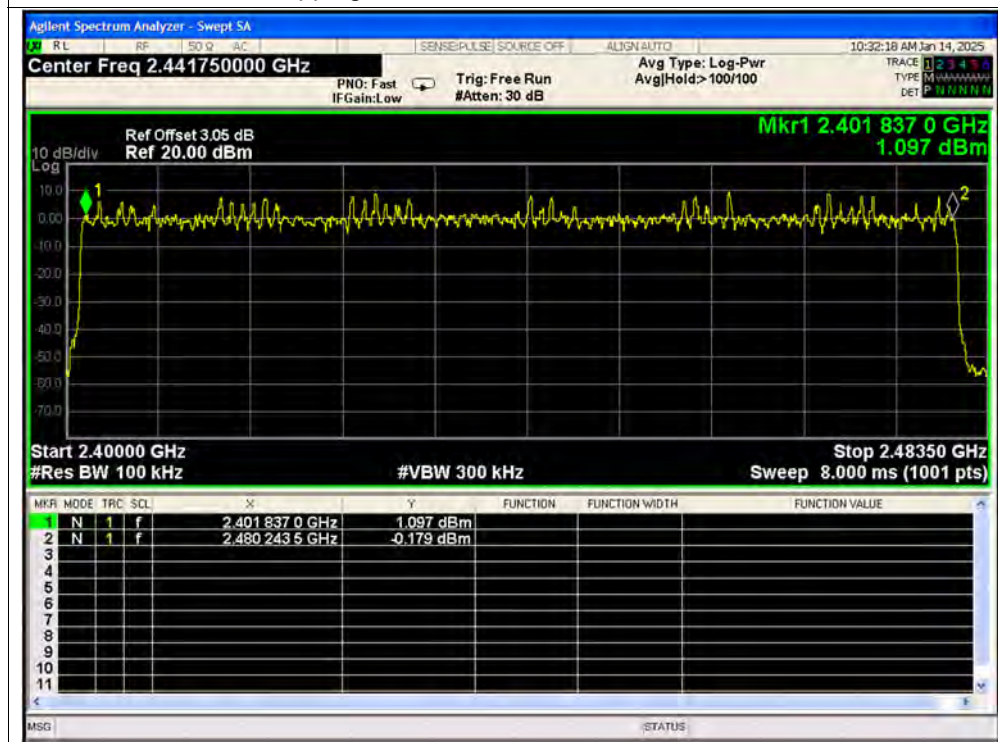

**A.2. Duty Cycle of Test Signal****Left**

| Condition | Mode  | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|-------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 57.68          | 2.39                   | 0.35      |
| NVNT      | 1-DH5 | 2441            | Ant1    | 57.68          | 2.39                   | 0.35      |
| NVNT      | 1-DH5 | 2480            | Ant1    | 57.72          | 2.39                   | 0.35      |
| NVNT      | 2-DH5 | 2402            | Ant1    | 57.83          | 2.38                   | 0         |
| NVNT      | 2-DH5 | 2441            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 2-DH5 | 2480            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2402            | Ant1    | 57.84          | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2441            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2480            | Ant1    | 57.8           | 2.38                   | 0.35      |


**Right**

| Condition | Mode  | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|-------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 57.72          | 2.39                   | 0.35      |
| NVNT      | 1-DH5 | 2441            | Ant1    | 57.72          | 2.39                   | 0.35      |
| NVNT      | 1-DH5 | 2480            | Ant1    | 57.68          | 2.39                   | 0.35      |
| NVNT      | 2-DH5 | 2402            | Ant1    | 57.82          | 2.38                   | 0.35      |
| NVNT      | 2-DH5 | 2441            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 2-DH5 | 2480            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2402            | Ant1    | 57.85          | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2441            | Ant1    | 57.8           | 2.38                   | 0.35      |
| NVNT      | 3-DH5 | 2480            | Ant1    | 57.8           | 2.38                   | 0.35      |


Left

Test Graphs


Duty Cycle NVNT 1-DH5 2402MHz Ant1 SISO

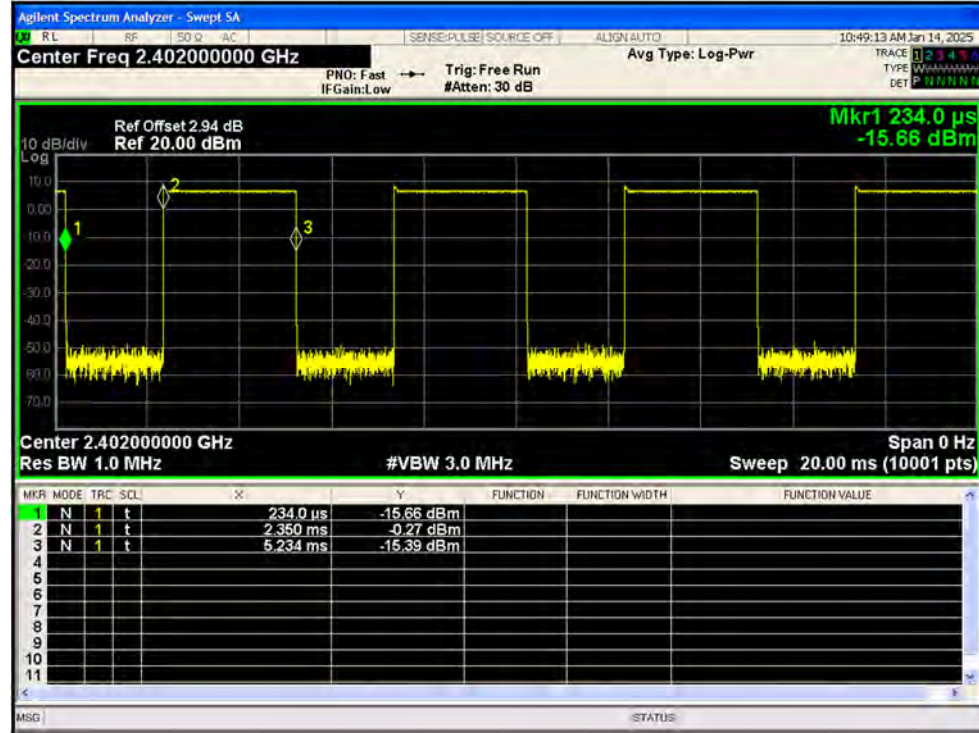


Duty Cycle NVNT 1-DH5 2441MHz Ant1 SISO

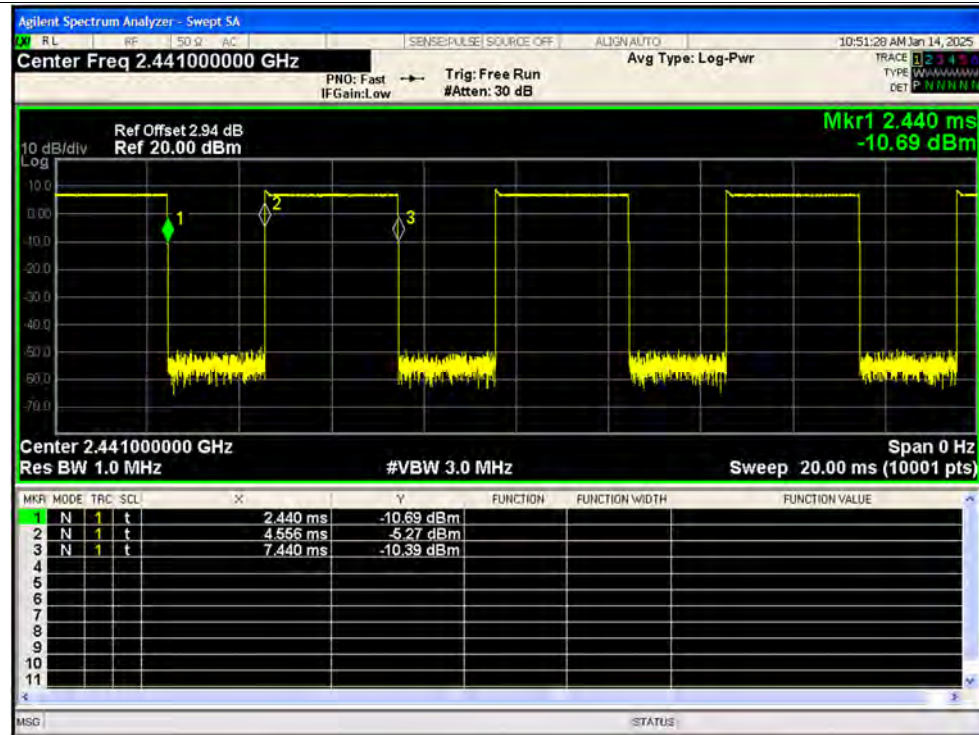


## Duty Cycle NVNT 1-DH5 2480MHz Ant1 SISO

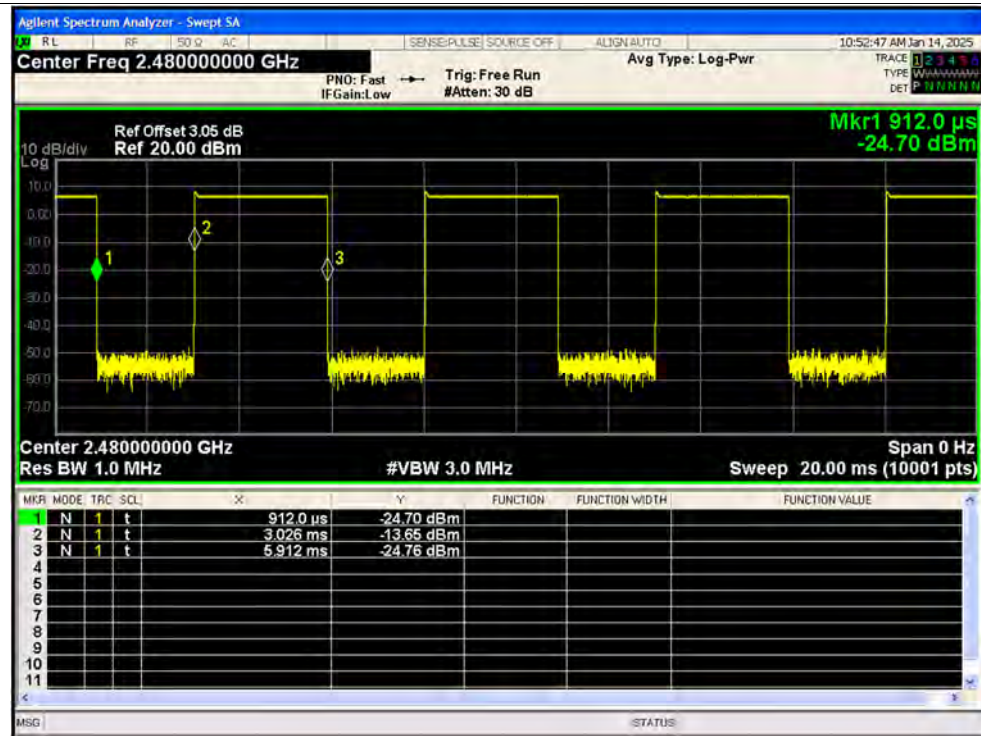


## Duty Cycle NVNT 2-DH5 2402MHz Ant1 SISO

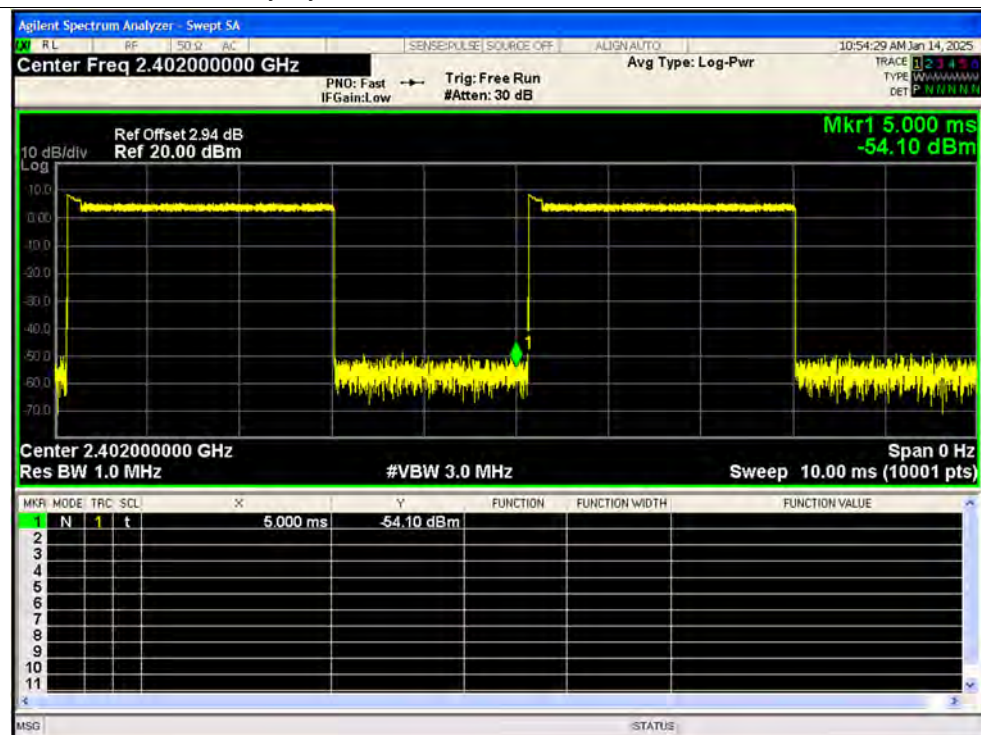


## Duty Cycle NVNT 2-DH5 2441MHz Ant1 SISO

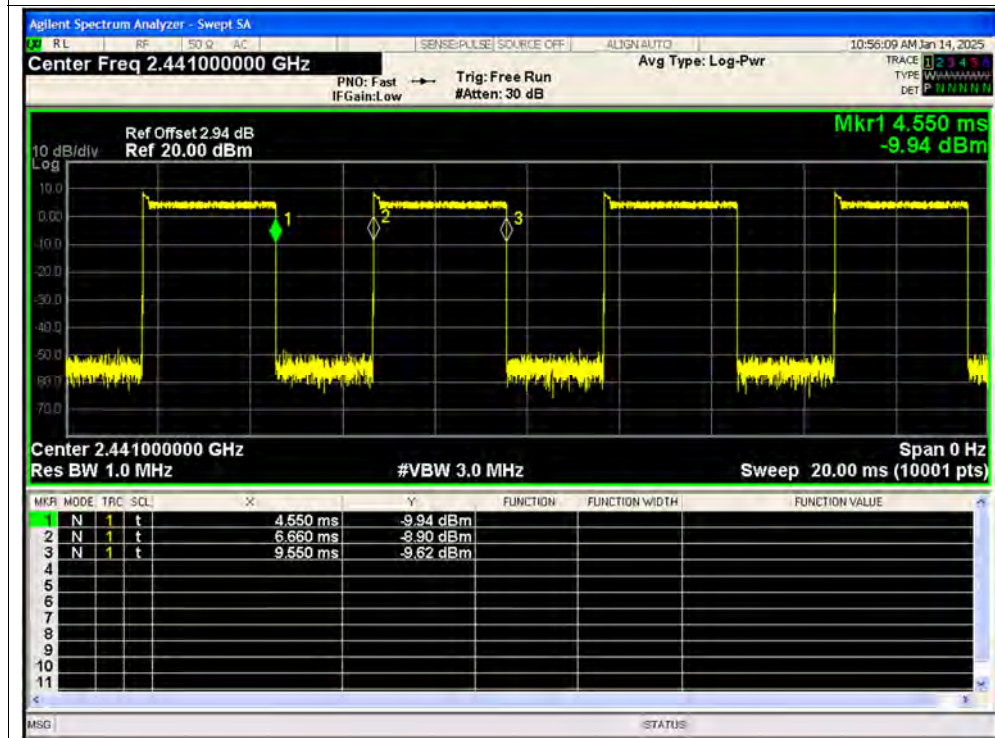


## Duty Cycle NVNT 2-DH5 2480MHz Ant1 SISO

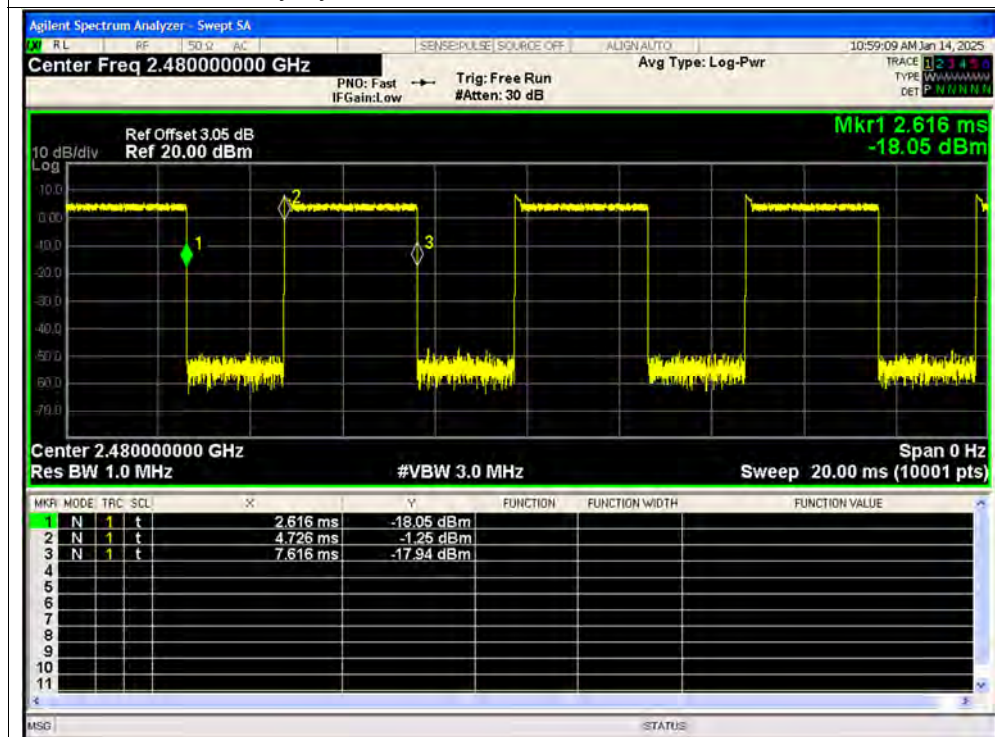

## Duty Cycle NVNT 3-DH5 2402MHz Ant1 SISO

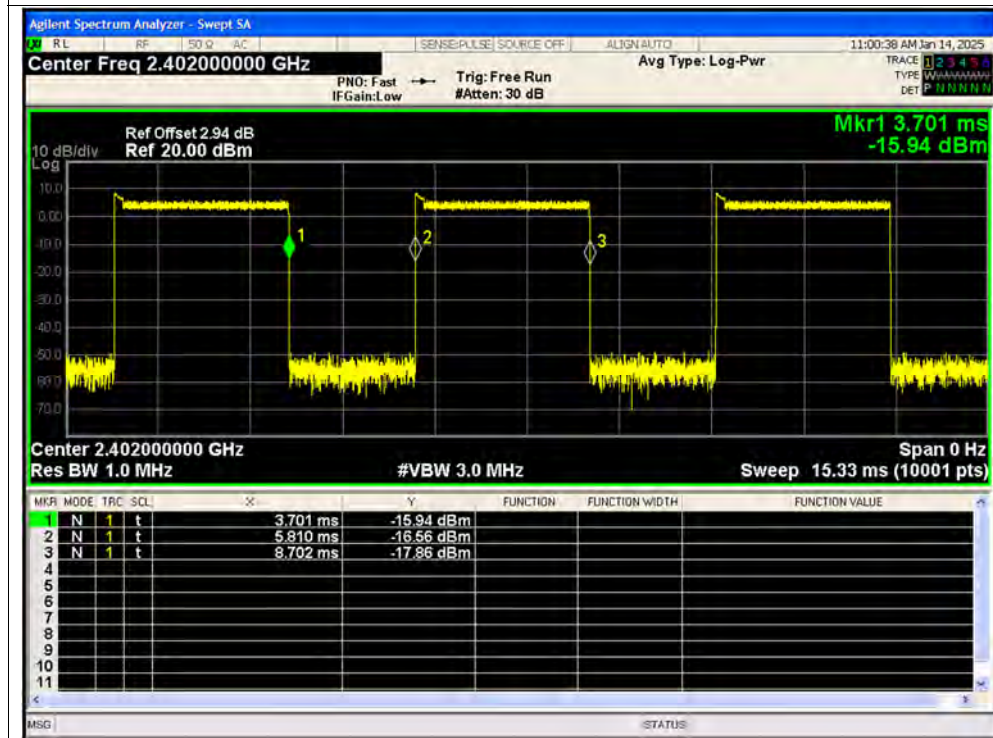


## Duty Cycle NVNT 3-DH5 2441MHz Ant1 SISO

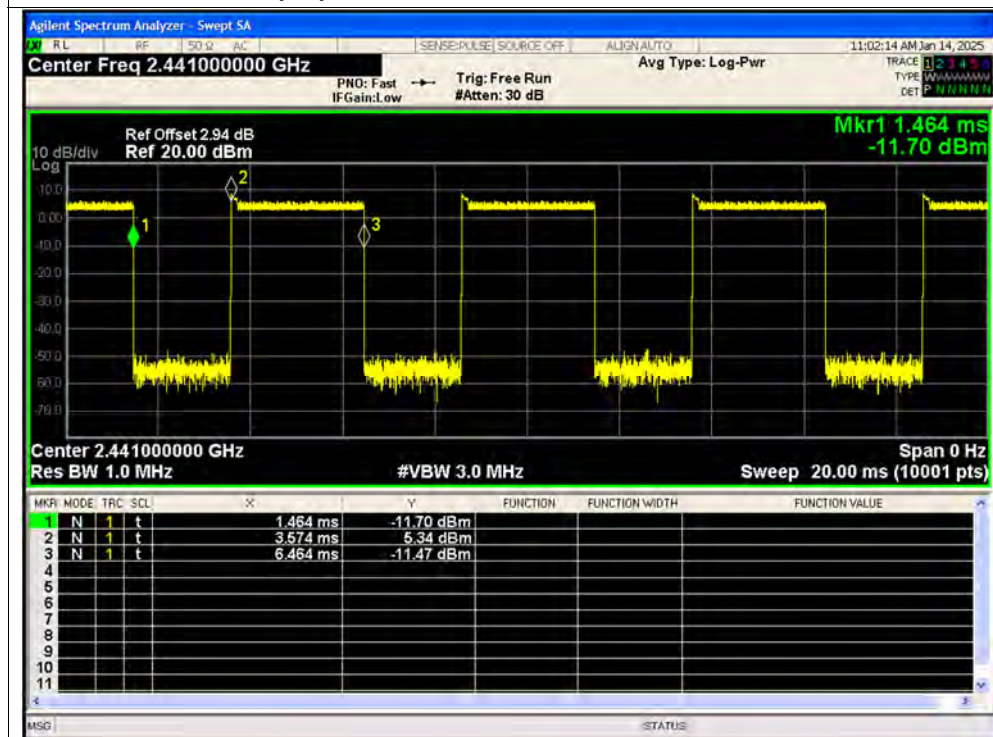




## Duty Cycle NVNT 3-DH5 2480MHz Ant1 SISO

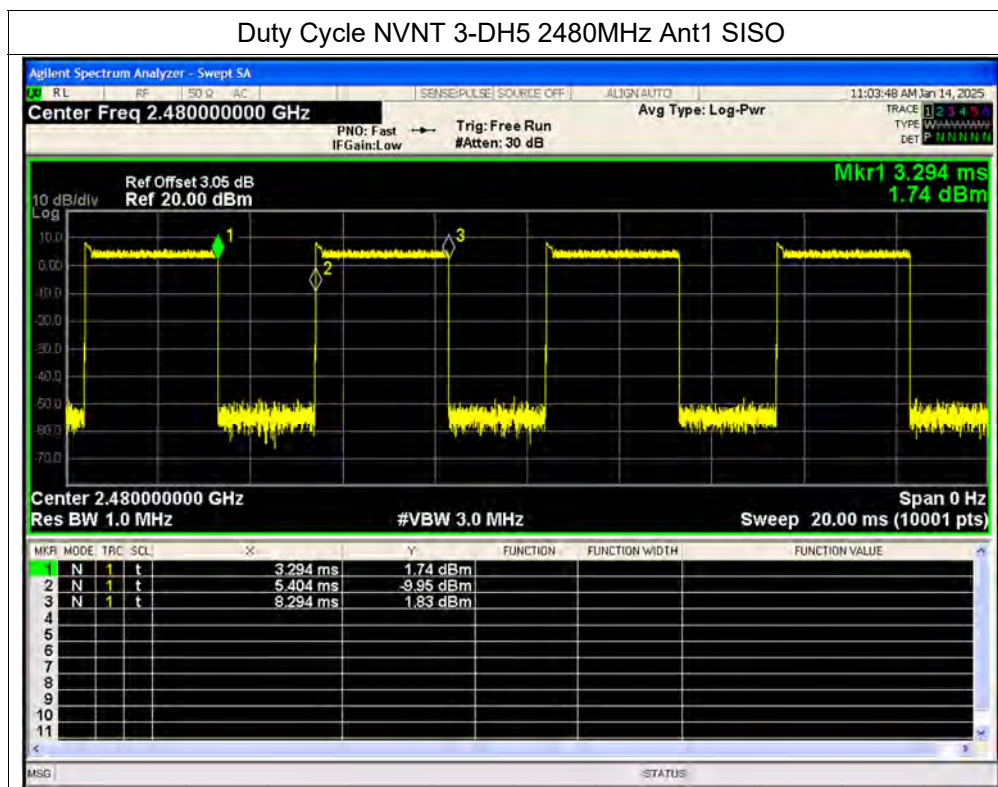


Right

Test Graphs


Duty Cycle NVNT 1-DH5 2402MHz Ant1

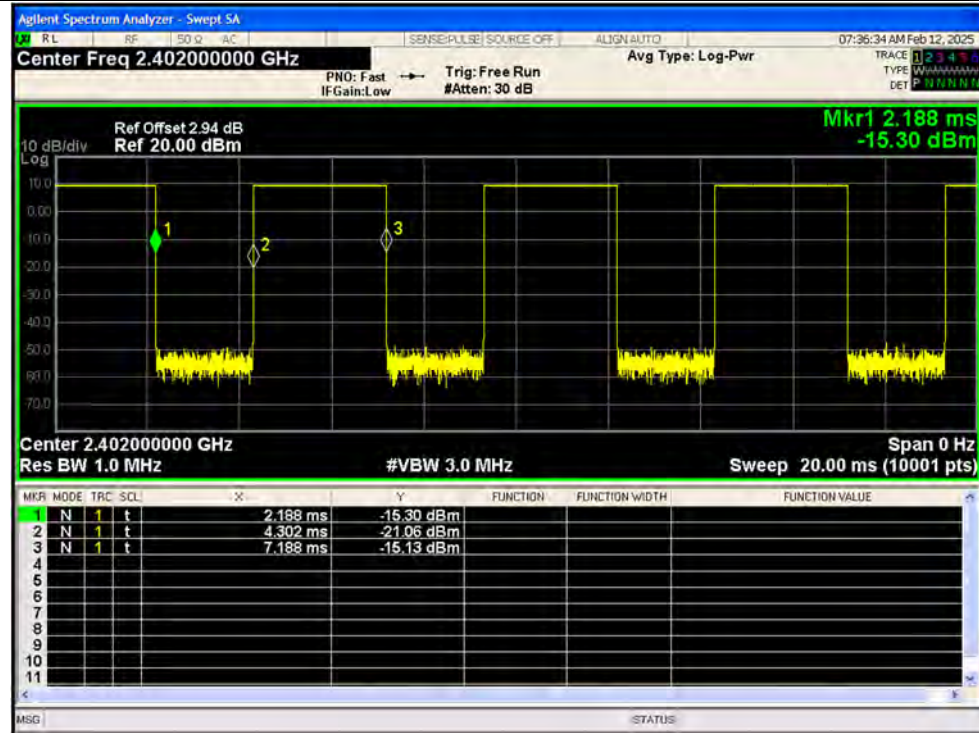


Duty Cycle NVNT 1-DH5 2441MHz Ant1

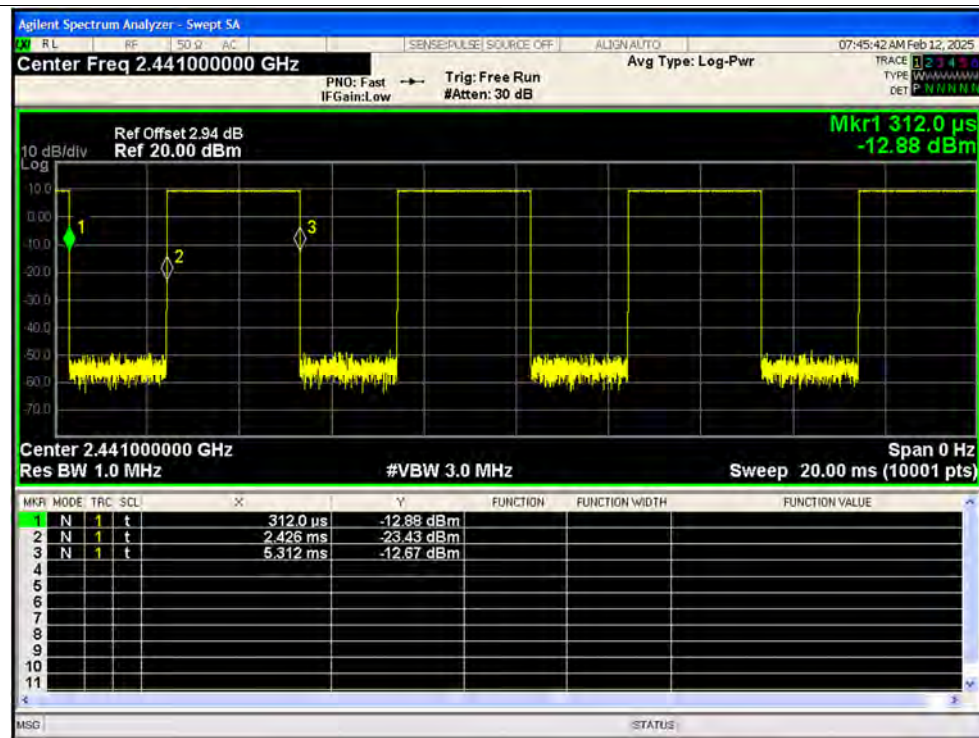


## Duty Cycle NVNT 1-DH5 2480MHz Ant1

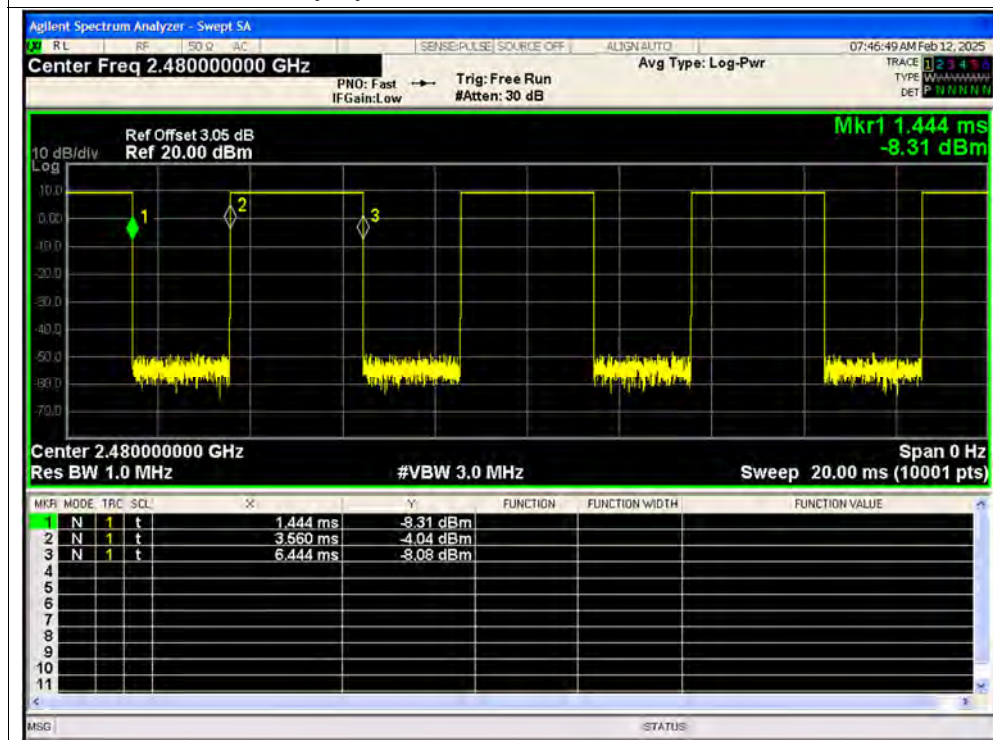


## Duty Cycle NVNT 2-DH5 2402MHz Ant1

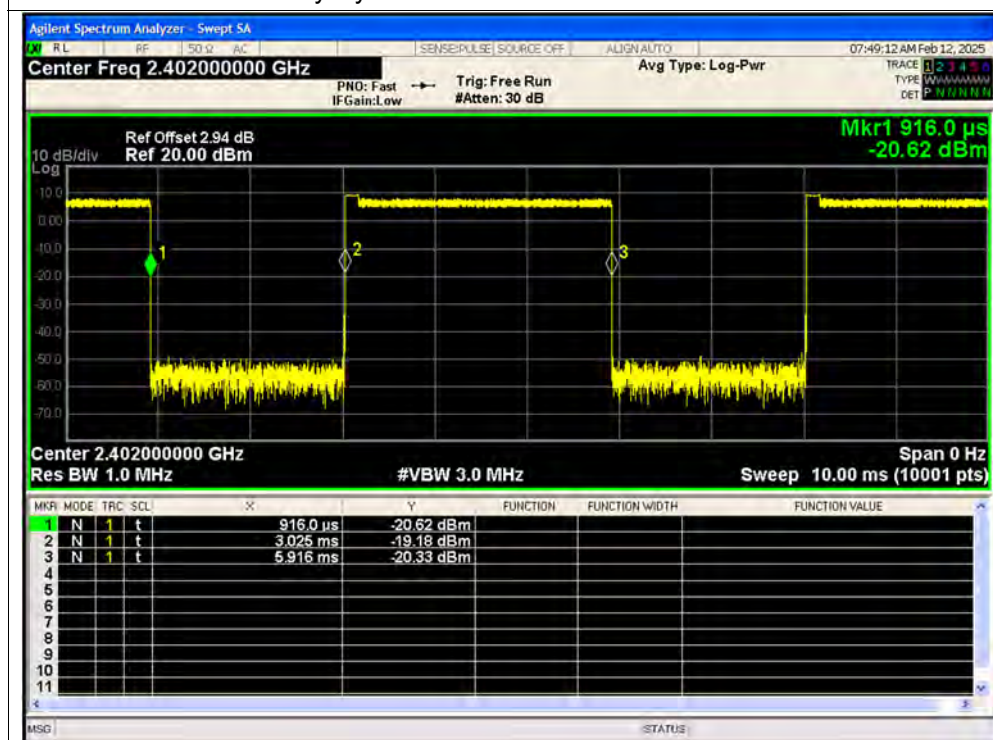


## Duty Cycle NVNT 2-DH5 2441MHz Ant1

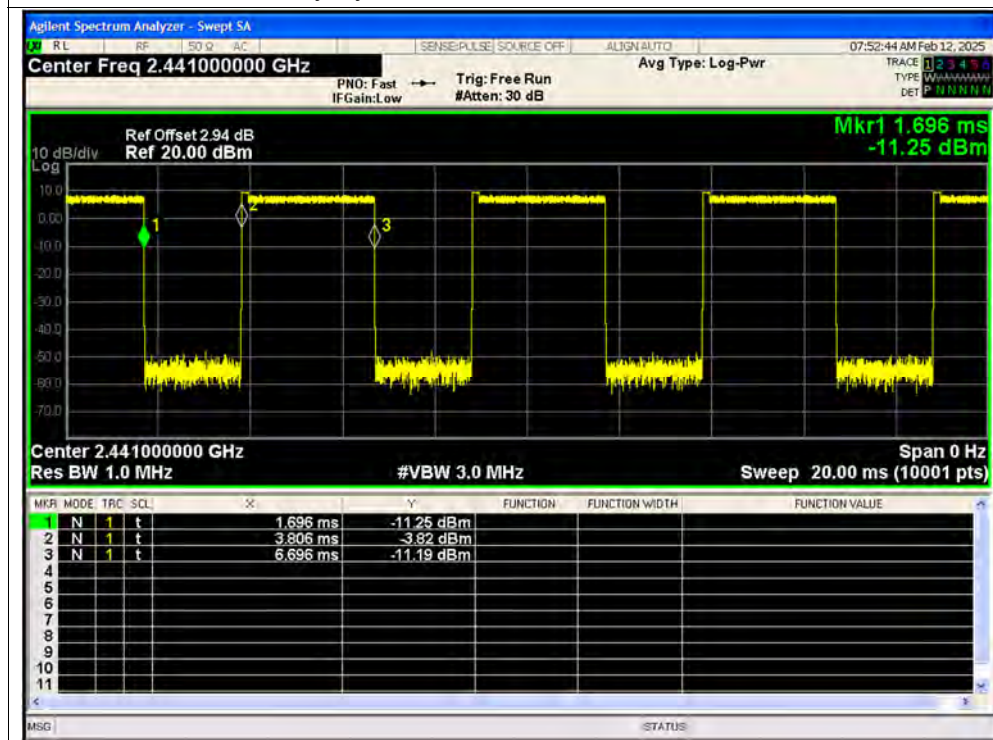


## Duty Cycle NVNT 2-DH5 2480MHz Ant1

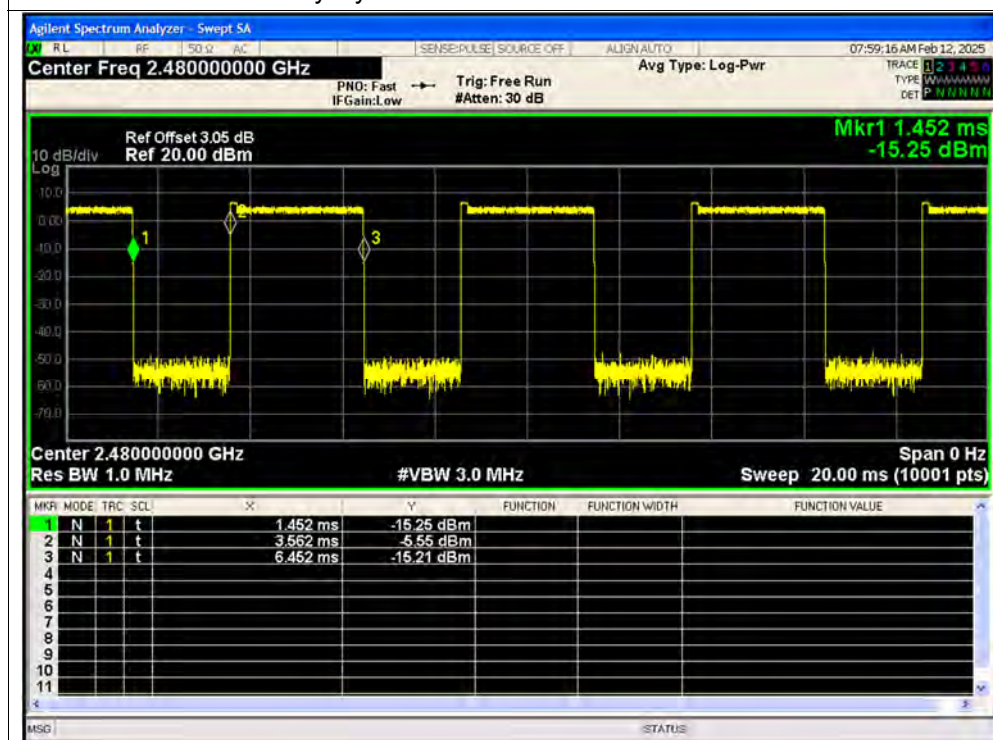

## Duty Cycle NVNT 3-DH5 2402MHz Ant1

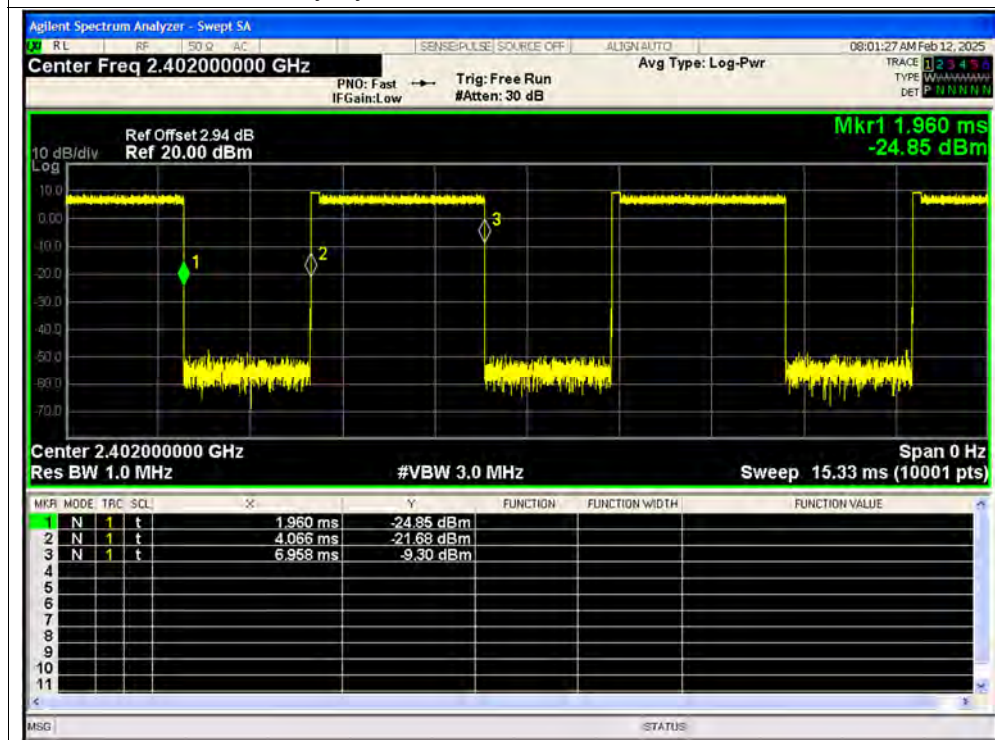


## Duty Cycle NVNT 3-DH5 2441MHz Ant1

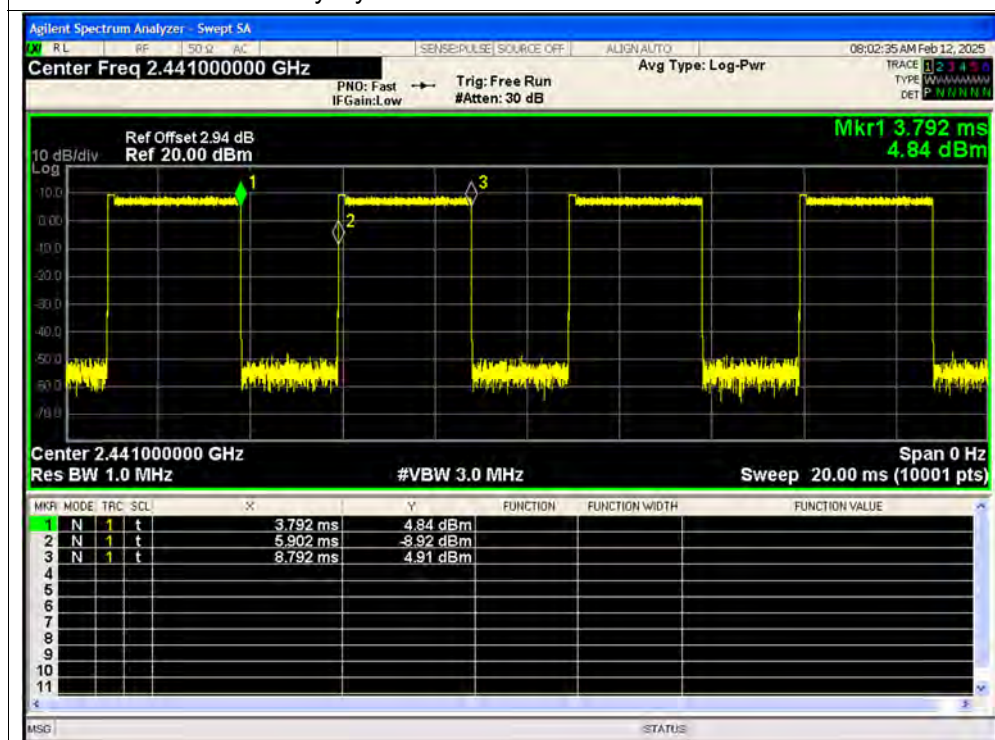



## Duty Cycle NVNT 3-DH5 2480MHz Ant1

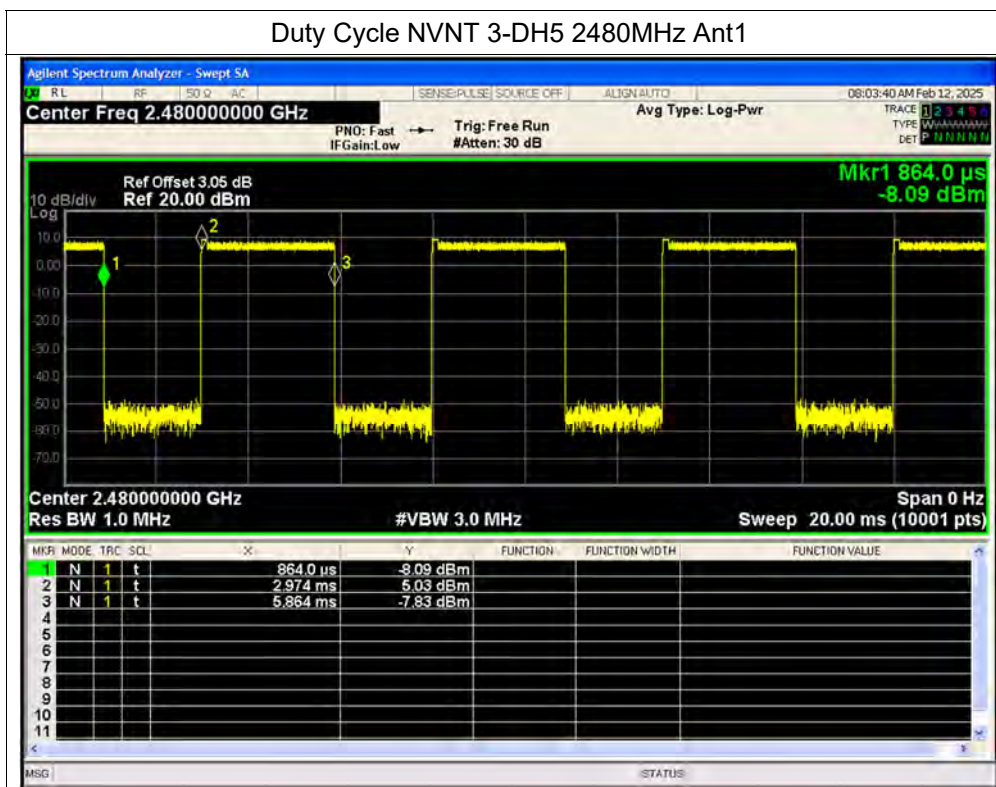

**A.3. Maximum Peak Conducted Output Power****Left**

| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Total Power (W) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 9.54                  | 0                | 9.54              | 0.00899         | 30          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 9.6                   | 0                | 9.6               | 0.00912         | 30          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 9.37                  | 0                | 9.37              | 0.00865         | 30          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 9.5                   | 0                | 9.5               | 0.00891         | 30          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 9.58                  | 0                | 9.58              | 0.00908         | 30          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 9.38                  | 0                | 9.38              | 0.00867         | 30          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 9.51                  | 0                | 9.51              | 0.00893         | 30          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 9.58                  | 0                | 9.58              | 0.00908         | 30          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 9.4                   | 0                | 9.4               | 0.00871         | 30          | Pass    |


**Right**

| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Total Power (W) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 9.36                  | 0                | 9.36              | 0.00863         | 30          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 9.48                  | 0                | 9.48              | 0.00887         | 30          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 9.43                  | 0                | 9.43              | 0.00877         | 30          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 9.29                  | 0                | 9.29              | 0.00849         | 30          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 9.55                  | 0                | 9.55              | 0.00902         | 30          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 9.57                  | 0                | 9.57              | 0.00906         | 30          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 9.34                  | 0                | 9.34              | 0.00859         | 30          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 9.53                  | 0                | 9.53              | 0.00897         | 30          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 9.45                  | 0                | 9.45              | 0.00881         | 30          | Pass    |

Left

Test Graphs


Peak Power NVNT 1-DH5 2402MHz Ant1 SISO

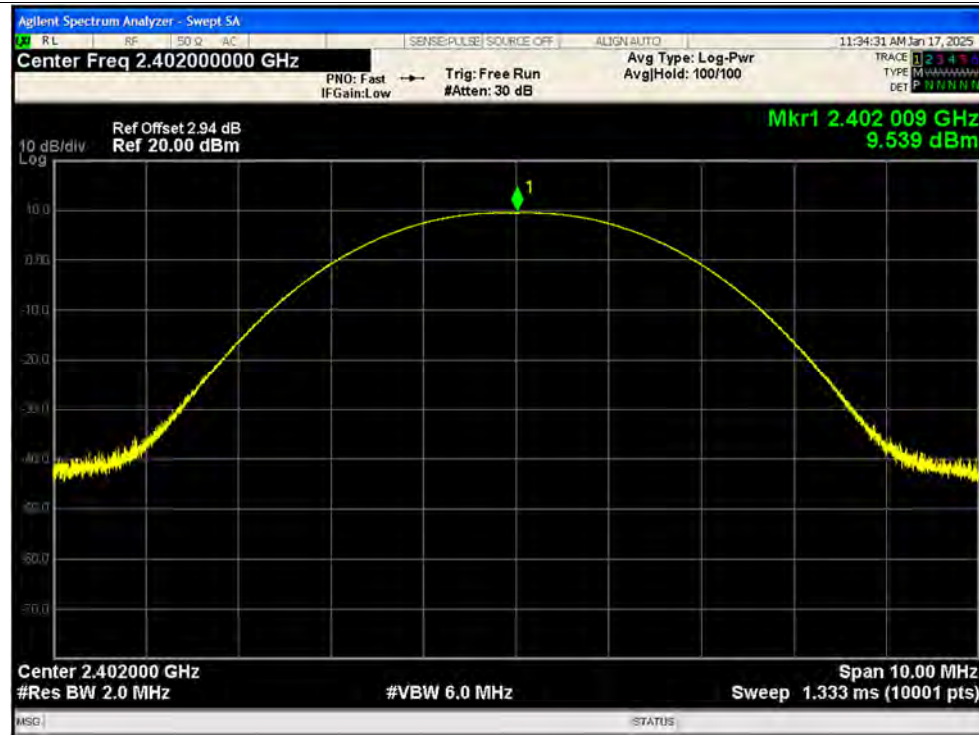

Peak Power NVNT 1-DH5 2441MHz Ant1 SISO



### Peak Power NVNT 1-DH5 2480MHz Ant1 SISO

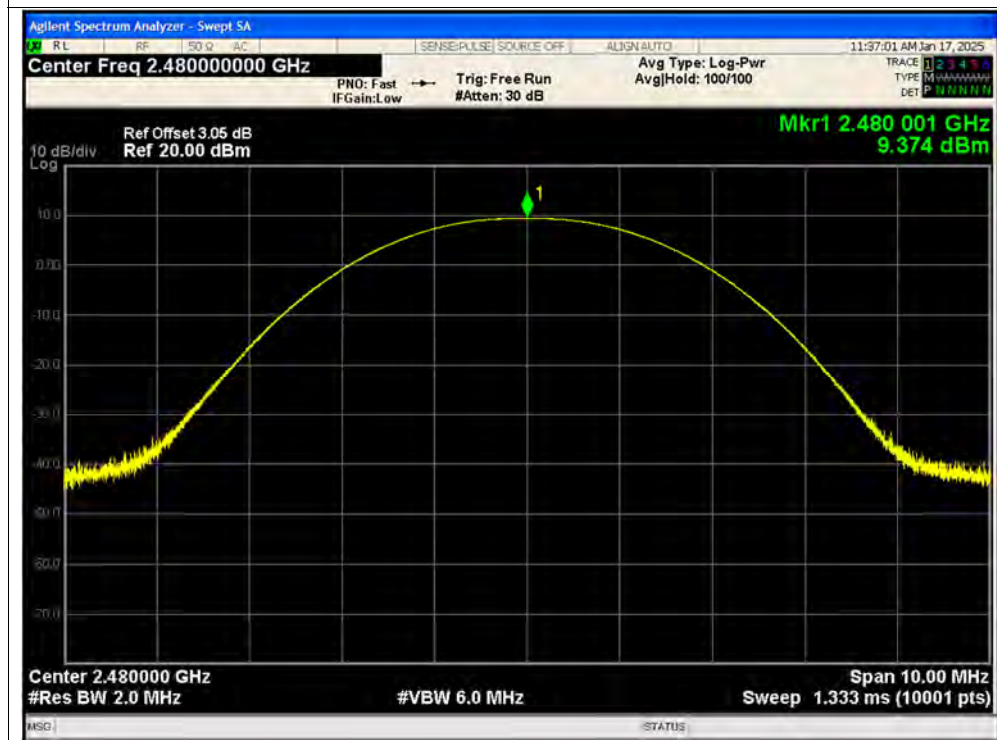

### Peak Power NVNT 2-DH5 2402MHz Ant1 SISO





## Peak Power NVNT 2-DH5 2441MHz Ant1 SISO




## Peak Power NVNT 2-DH5 2480MHz Ant1 SISO




### Peak Power NVNT 3-DH5 2402MHz Ant1 SISO



### Peak Power NVNT 3-DH5 2441MHz Ant1 SISO

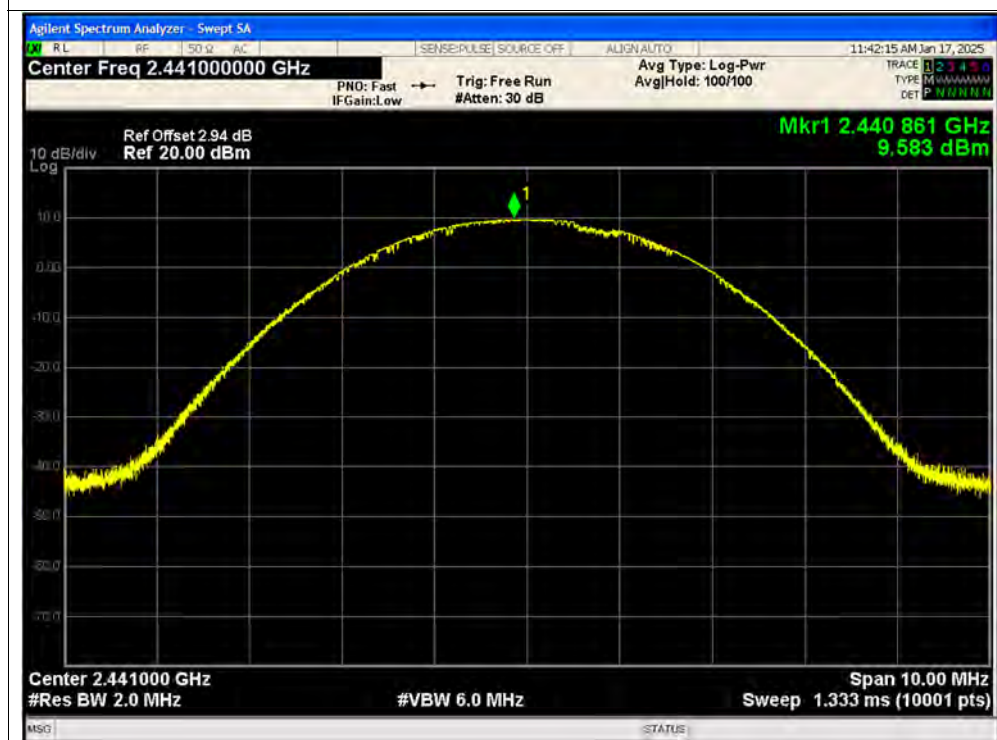

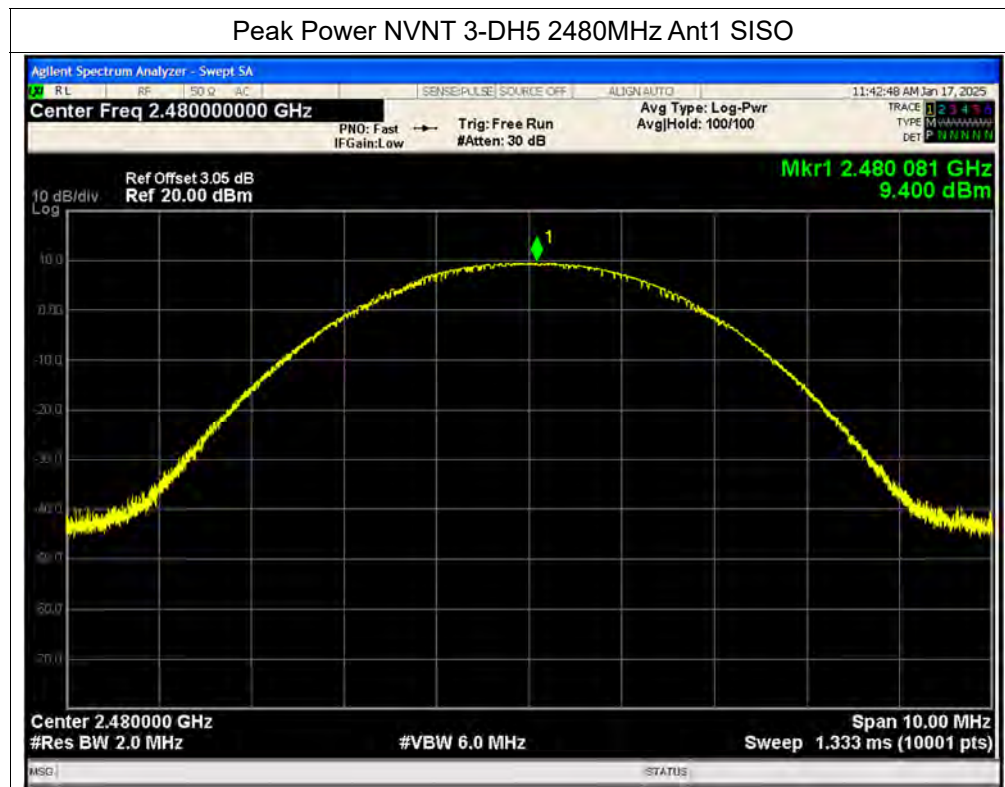


Right

Test Graphs


Peak Power NVNT 1-DH5 2402MHz Ant1



Peak Power NVNT 1-DH5 2441MHz Ant1

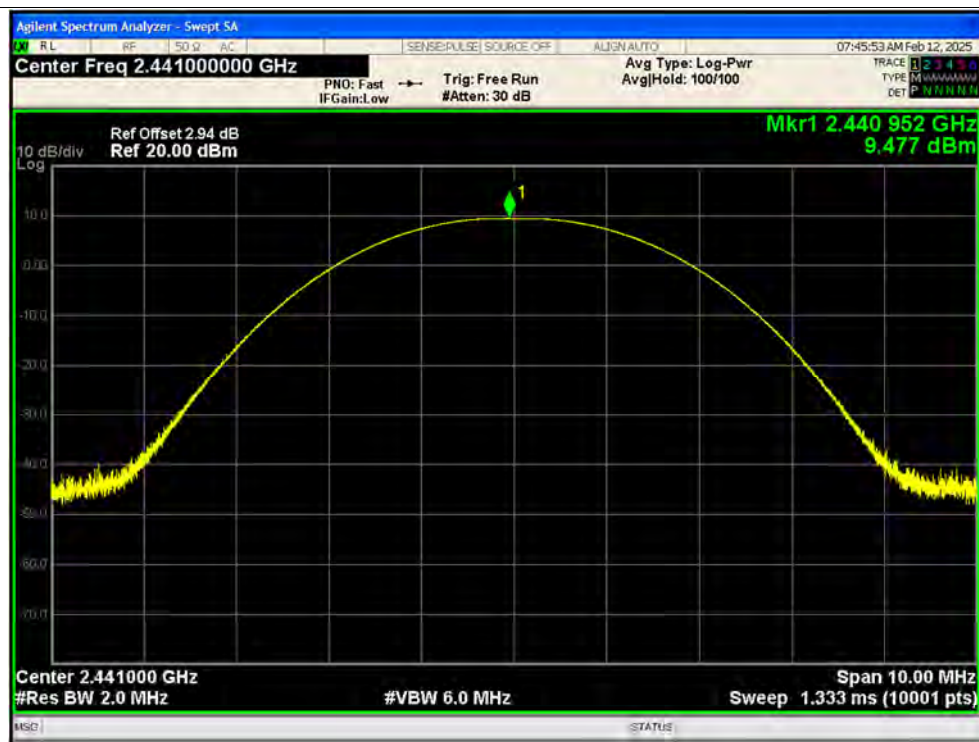

## Peak Power NVNT 1-DH5 2480MHz Ant1

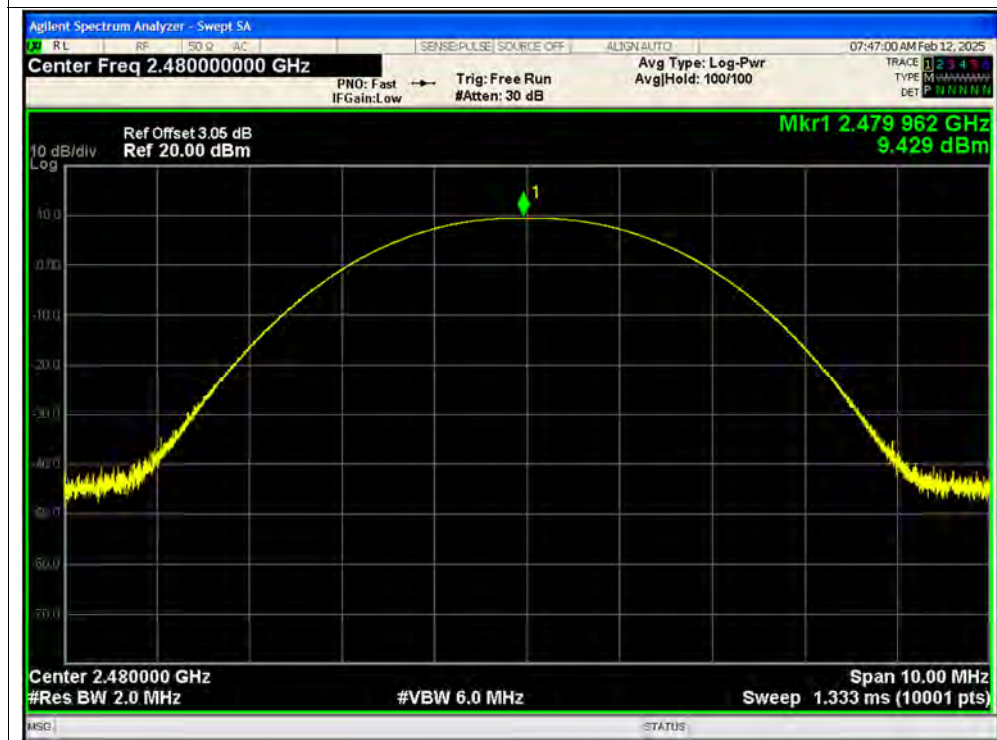


## Peak Power NVNT 2-DH5 2402MHz Ant1



## Peak Power NVNT 2-DH5 2441MHz Ant1




## Peak Power NVNT 2-DH5 2480MHz Ant1

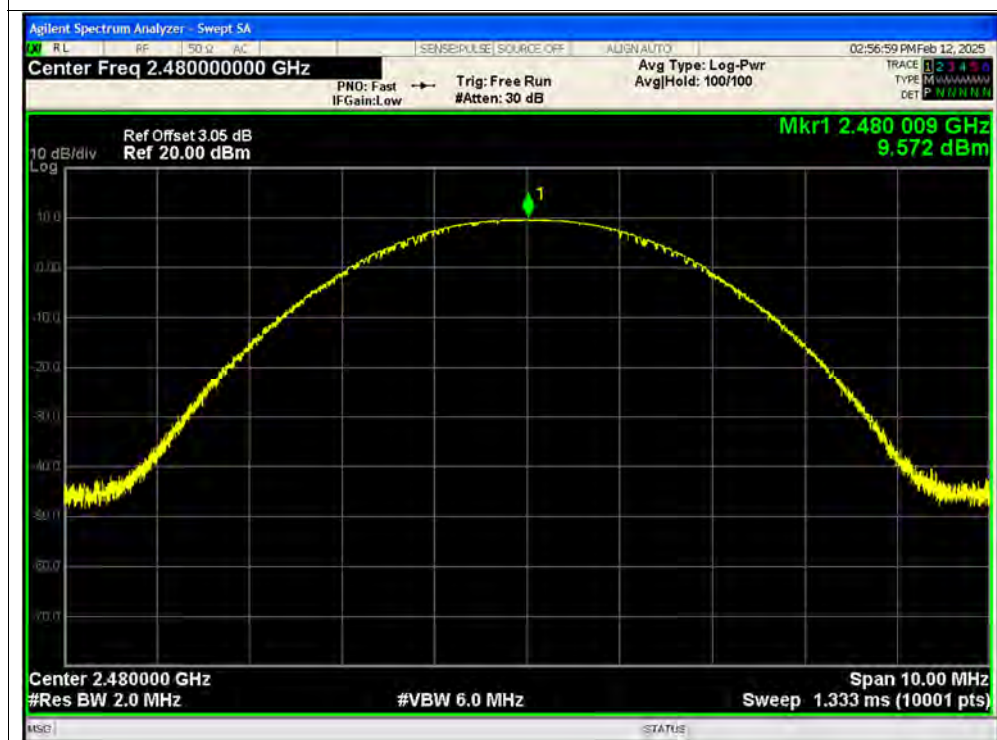

## Peak Power NVNT 3-DH5 2402MHz Ant1




## Peak Power NVNT 3-DH5 2441MHz Ant1

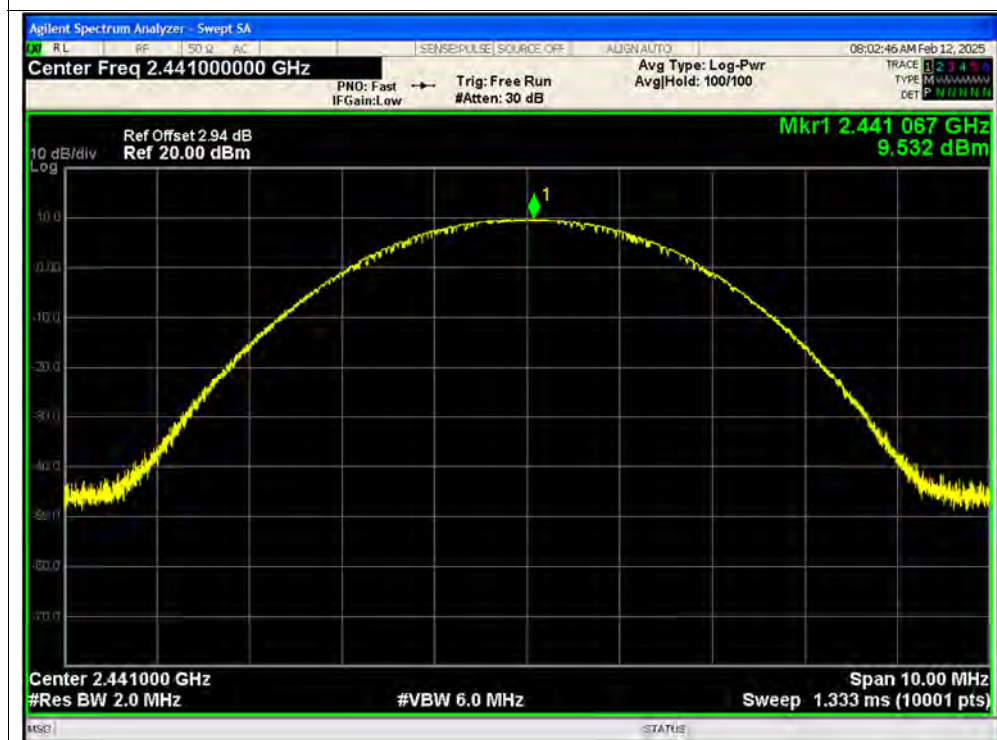



## Peak Power NVNT 3-DH5 2480MHz Ant1

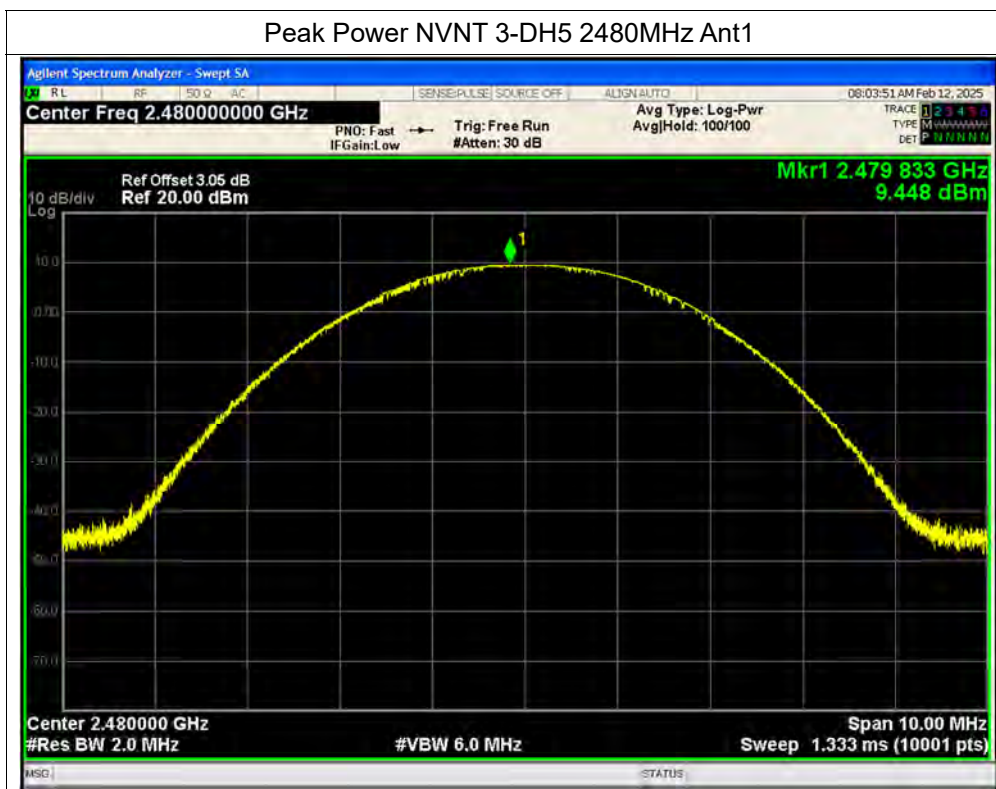

**A.4. Maximum Average Conducted Output Power****Left**

| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Total Power (W) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 6.93                  | 2.39             | 9.32              | 0.00855         | 30          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 6.79                  | 2.39             | 9.18              | 0.00828         | 30          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 6.96                  | 2.39             | 9.35              | 0.00861         | 30          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 3.97                  | 2.38             | 6.35              | 0.00432         | 30          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 4.36                  | 2.38             | 6.74              | 0.00472         | 30          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 3.83                  | 2.38             | 6.21              | 0.00418         | 30          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 3.84                  | 2.38             | 6.22              | 0.00419         | 30          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 4.17                  | 2.38             | 6.55              | 0.00452         | 30          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 3.82                  | 2.38             | 6.2               | 0.00417         | 30          | Pass    |

**Right**

| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Total Power (W) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 6.99                  | 2.39             | 9.38              | 0.00867         | 30          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 6.97                  | 2.39             | 9.36              | 0.00863         | 30          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 6.99                  | 2.39             | 9.38              | 0.00867         | 30          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 3.83                  | 2.38             | 6.21              | 0.00418         | 30          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 4                     | 2.38             | 6.38              | 0.00435         | 30          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 4.09                  | 2.38             | 6.47              | 0.00444         | 30          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 3.55                  | 2.38             | 5.93              | 0.00392         | 30          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 4.36                  | 2.38             | 6.74              | 0.00472         | 30          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 3.91                  | 2.38             | 6.29              | 0.00426         | 30          | Pass    |

Left

Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1 SISO



Average Power NVNT 1-DH5 2441MHz Ant1 SISO






## Average Power NVNT 1-DH5 2480MHz Ant1 SISO




## Average Power NVNT 2-DH5 2402MHz Ant1 SISO

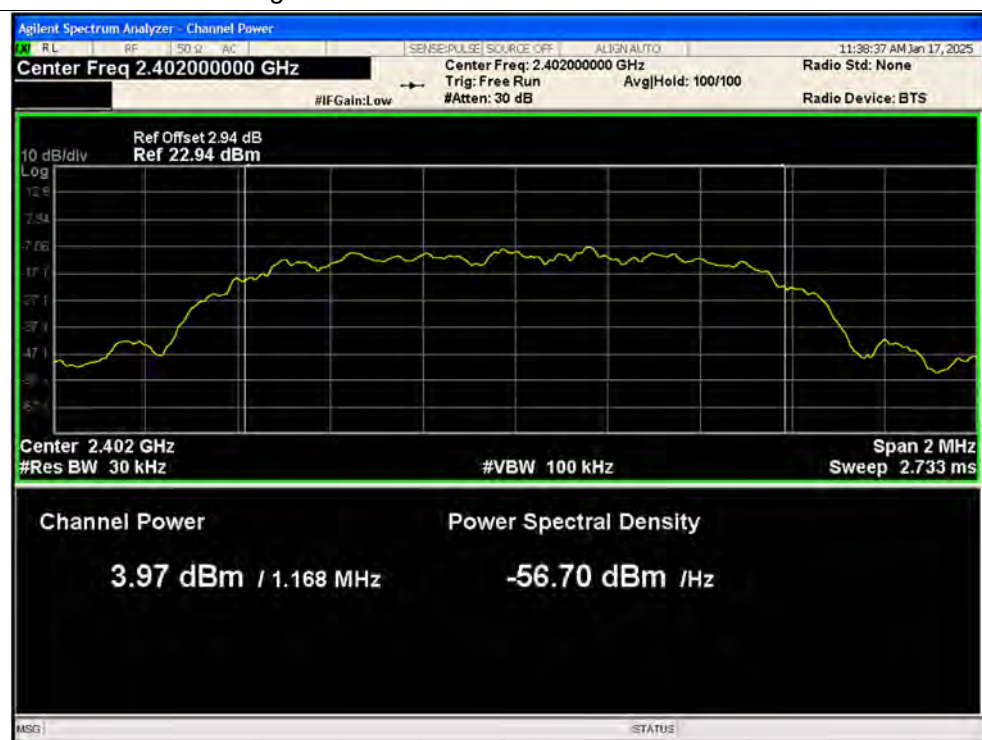




## Average Power NVNT 2-DH5 2441MHz Ant1 SISO

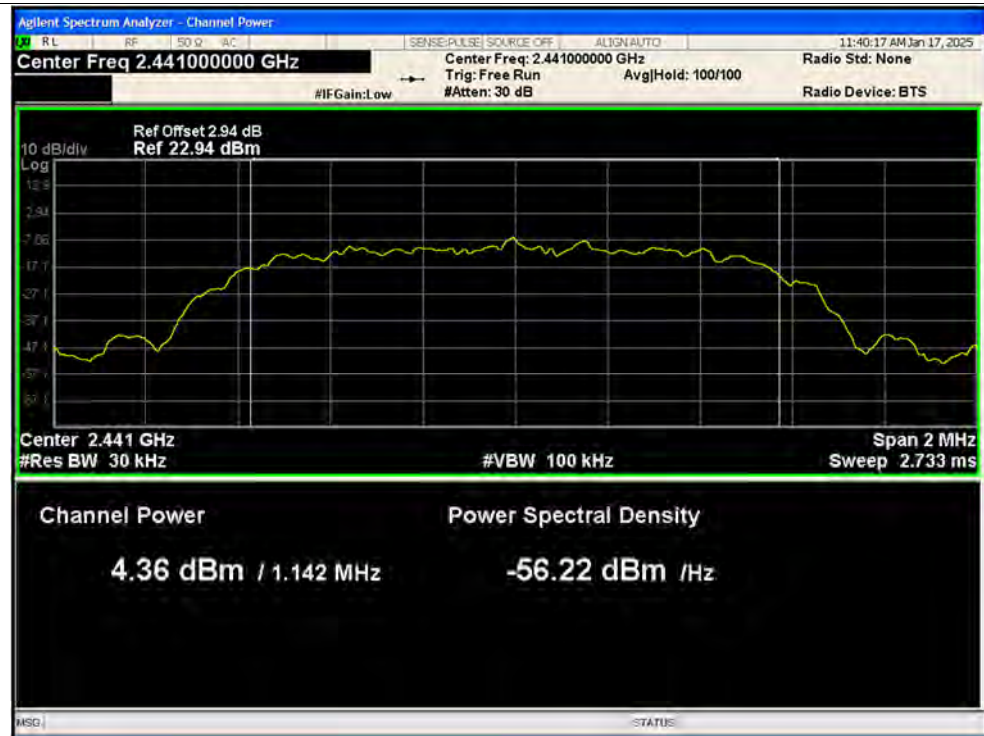


## Average Power NVNT 2-DH5 2480MHz Ant1 SISO

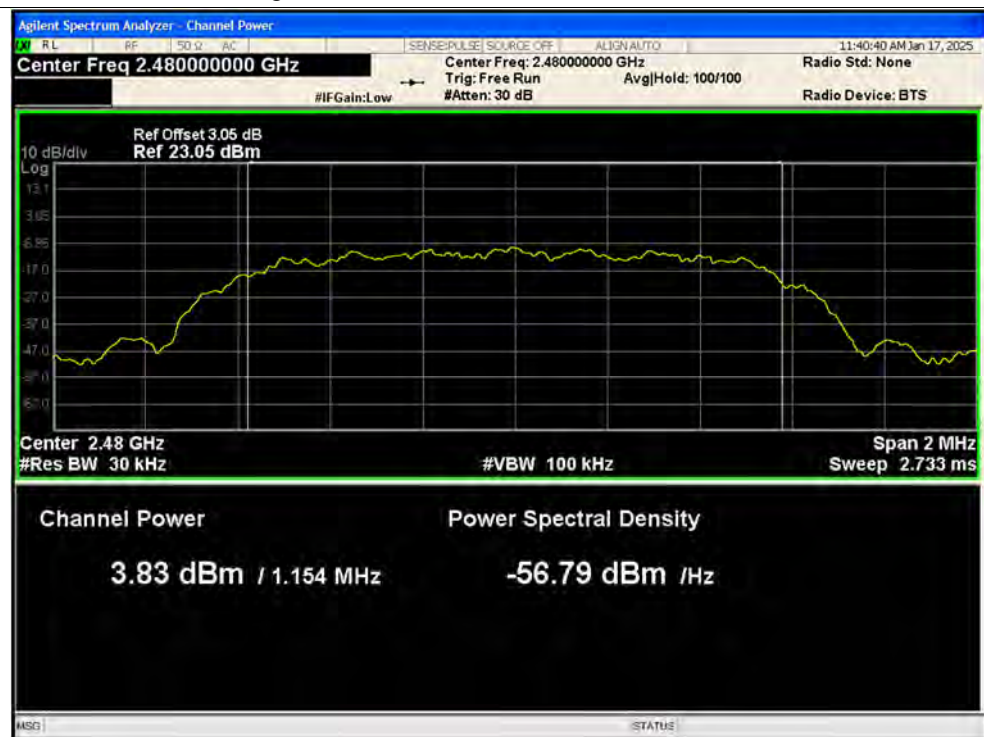





## Average Power NVNT 3-DH5 2402MHz Ant1 SISO

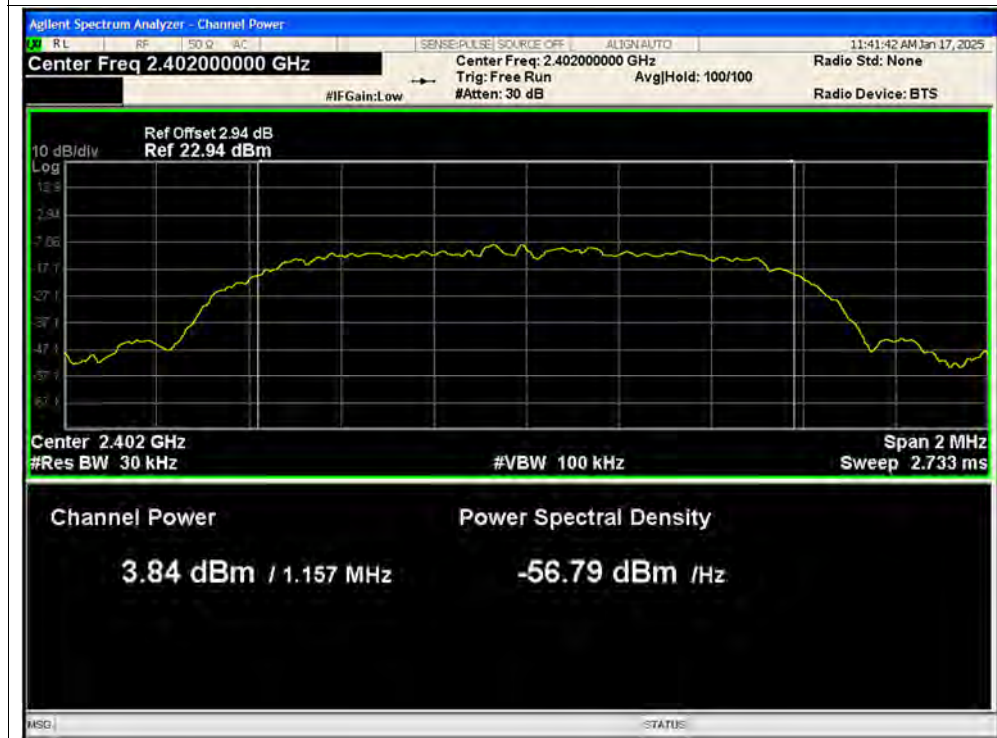

## Average Power NVNT 3-DH5 2441MHz Ant1 SISO

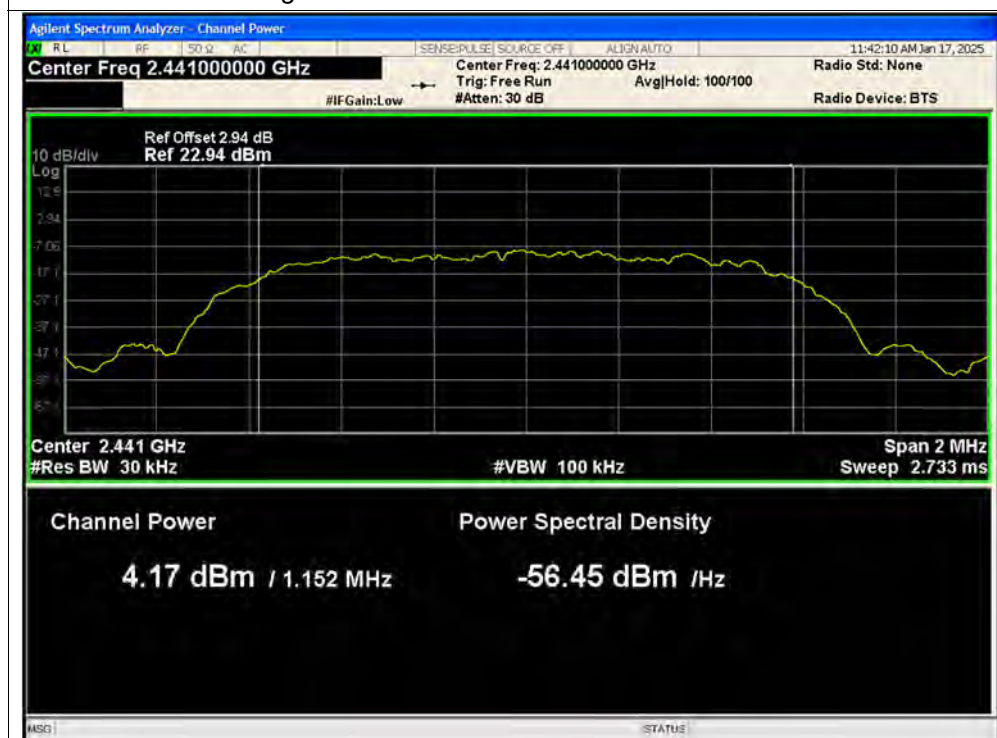


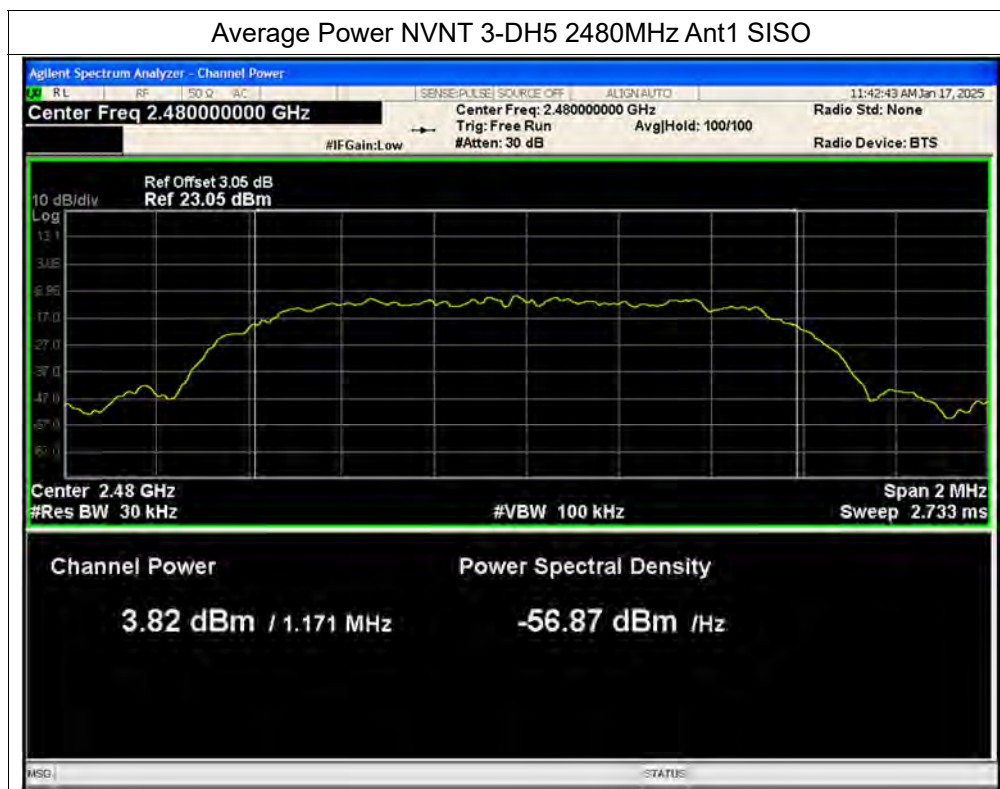

Right

Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1

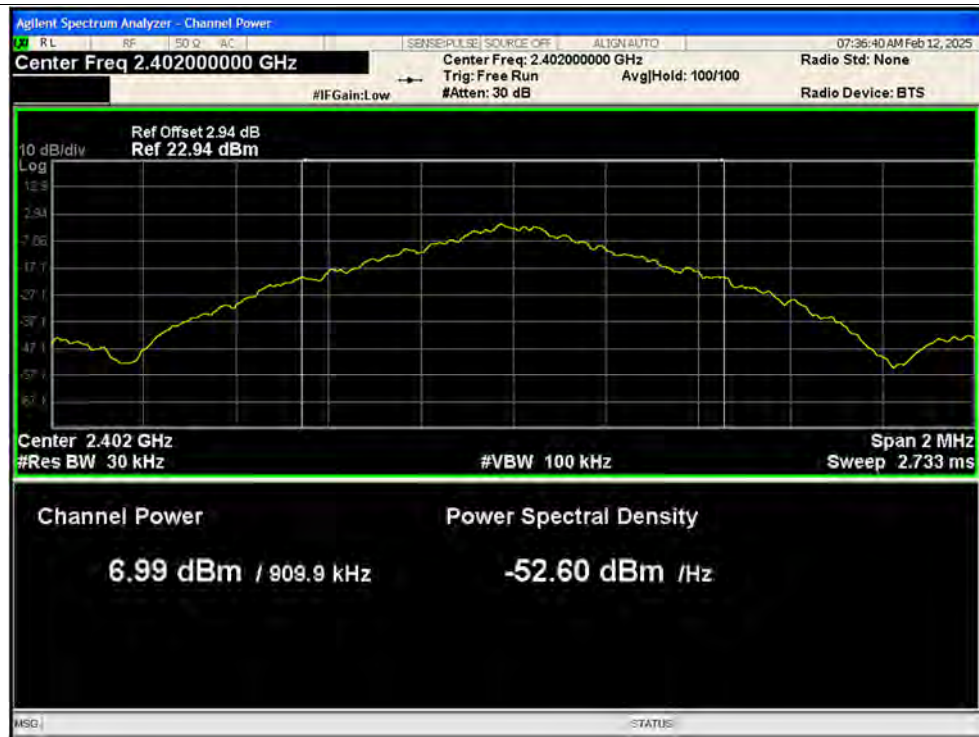

Average Power NVNT 1-DH5 2441MHz Ant1





## Average Power NVNT 1-DH5 2480MHz Ant1




## Average Power NVNT 2-DH5 2402MHz Ant1





## Average Power NVNT 2-DH5 2441MHz Ant1

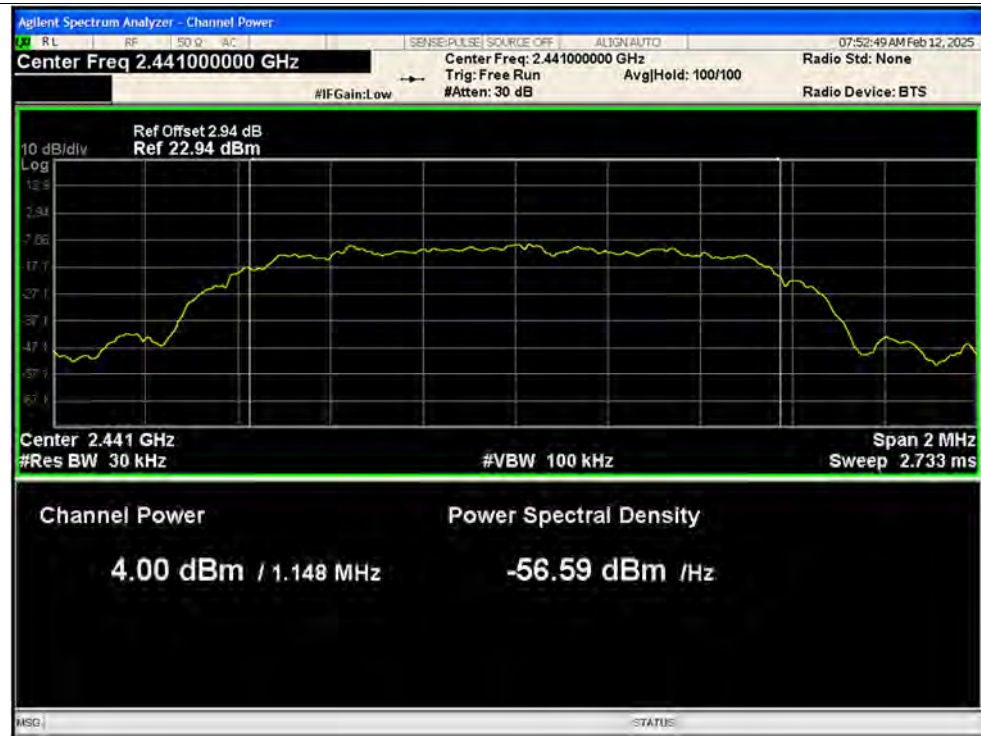


## Average Power NVNT 2-DH5 2480MHz Ant1






## Average Power NVNT 3-DH5 2402MHz Ant1

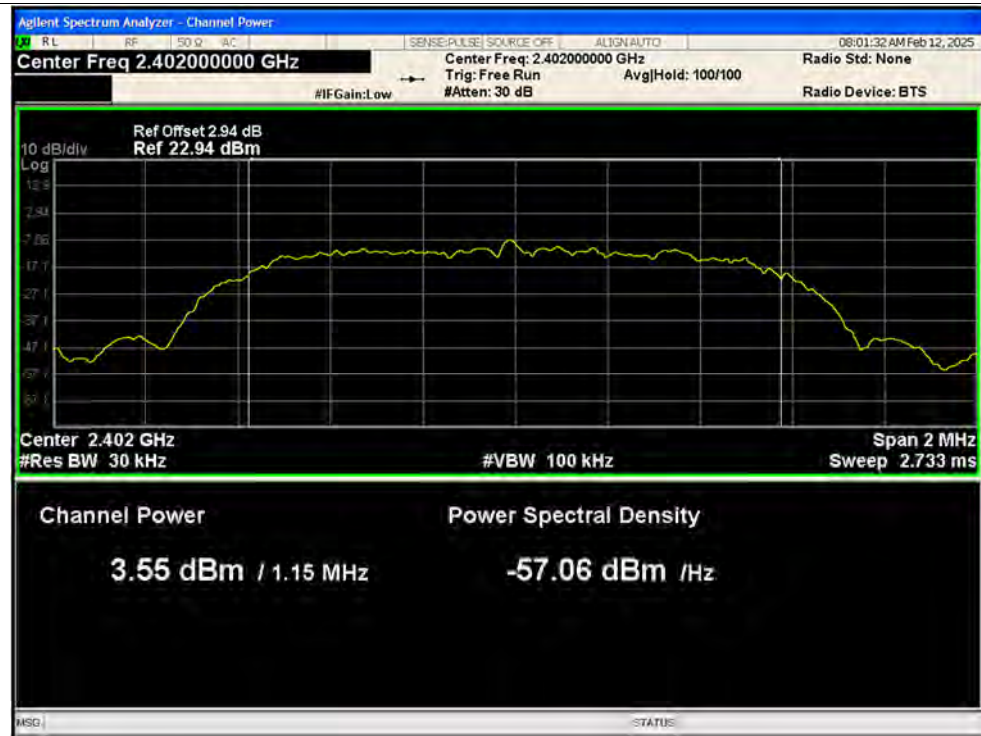

## Average Power NVNT 3-DH5 2441MHz Ant1

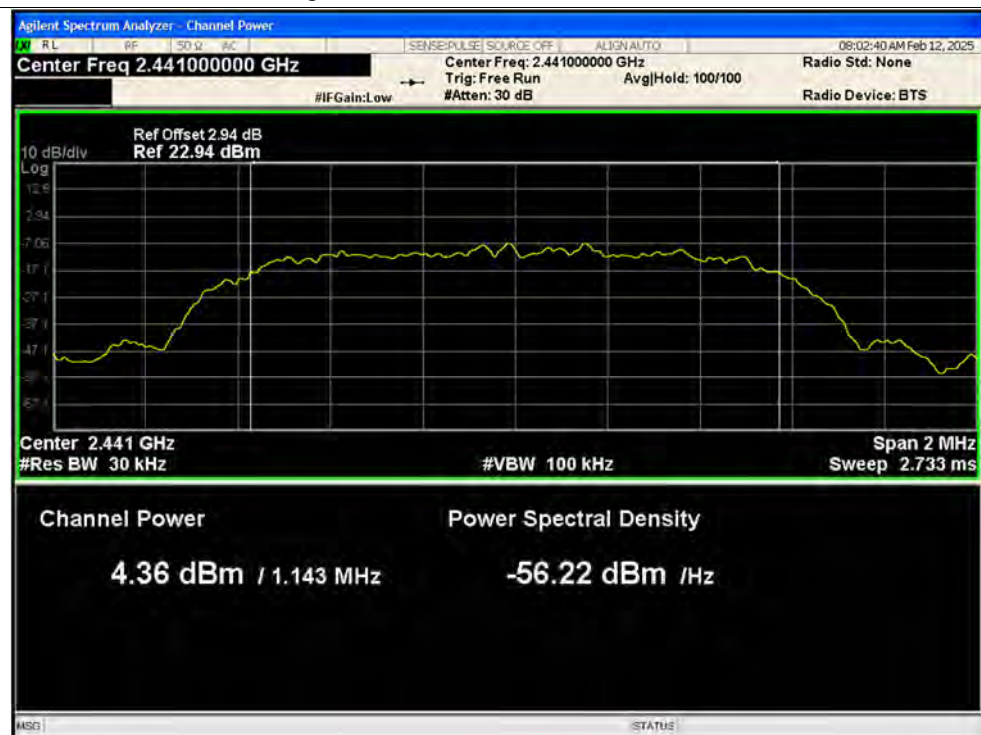



## Average Power NVNT 3-DH5 2480MHz Ant1



**A.5. 20 dB Bandwidth****Left**

| Condition | Mode  | Frequency (MHz) | Antenna | -20 dB Bandwidth (MHz) |
|-----------|-------|-----------------|---------|------------------------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 0.863                  |
| NVNT      | 1-DH5 | 2441            | Ant1    | 0.9913                 |
| NVNT      | 1-DH5 | 2480            | Ant1    | 1.028                  |
| NVNT      | 2-DH5 | 2402            | Ant1    | 1.183                  |
| NVNT      | 2-DH5 | 2441            | Ant1    | 1.183                  |
| NVNT      | 2-DH5 | 2480            | Ant1    | 1.175                  |
| NVNT      | 3-DH5 | 2402            | Ant1    | 1.251                  |
| NVNT      | 3-DH5 | 2441            | Ant1    | 1.218                  |
| NVNT      | 3-DH5 | 2480            | Ant1    | 1.185                  |

**Right**

| Condition | Mode  | Frequency (MHz) | Antenna | -20 dB Bandwidth (MHz) |
|-----------|-------|-----------------|---------|------------------------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 0.9167                 |
| NVNT      | 1-DH5 | 2441            | Ant1    | 1.01                   |
| NVNT      | 1-DH5 | 2480            | Ant1    | 1.01                   |
| NVNT      | 2-DH5 | 2402            | Ant1    | 1.165                  |
| NVNT      | 2-DH5 | 2441            | Ant1    | 1.21                   |
| NVNT      | 2-DH5 | 2480            | Ant1    | 1.172                  |
| NVNT      | 3-DH5 | 2402            | Ant1    | 1.175                  |
| NVNT      | 3-DH5 | 2441            | Ant1    | 1.177                  |
| NVNT      | 3-DH5 | 2480            | Ant1    | 1.169                  |

Left

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1 SISO




-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1 SISO



## -20dB Bandwidth NVNT 1-DH5 2480MHz Ant1 SISO




## -20dB Bandwidth NVNT 2-DH5 2402MHz Ant1 SISO

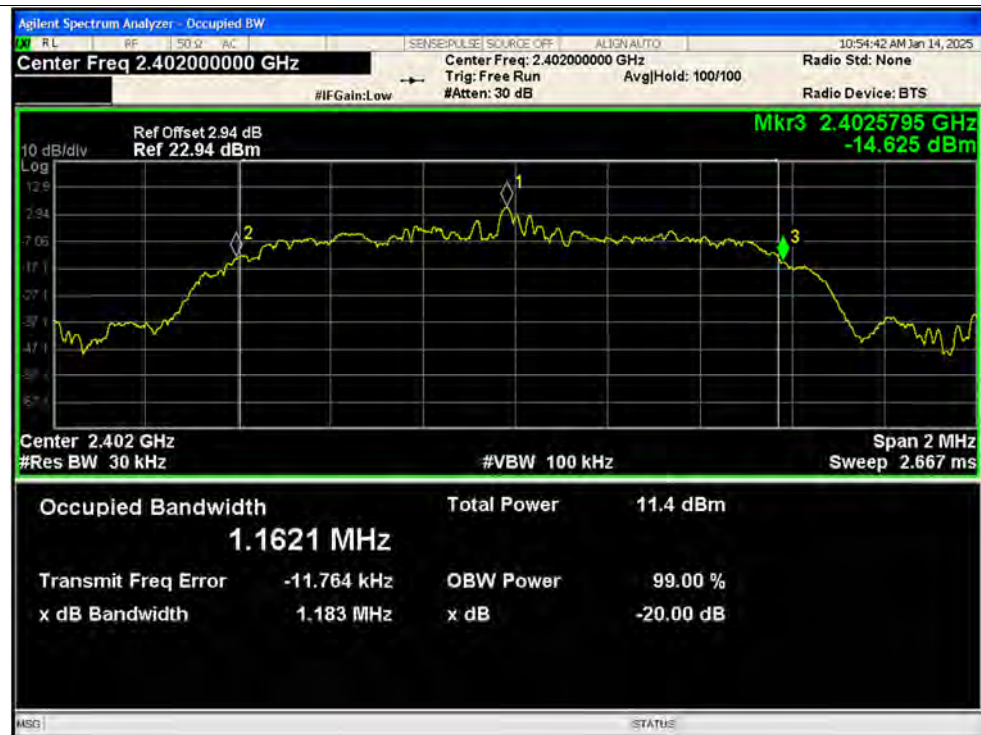





## -20dB Bandwidth NVNT 2-DH5 2441MHz Ant1 SISO

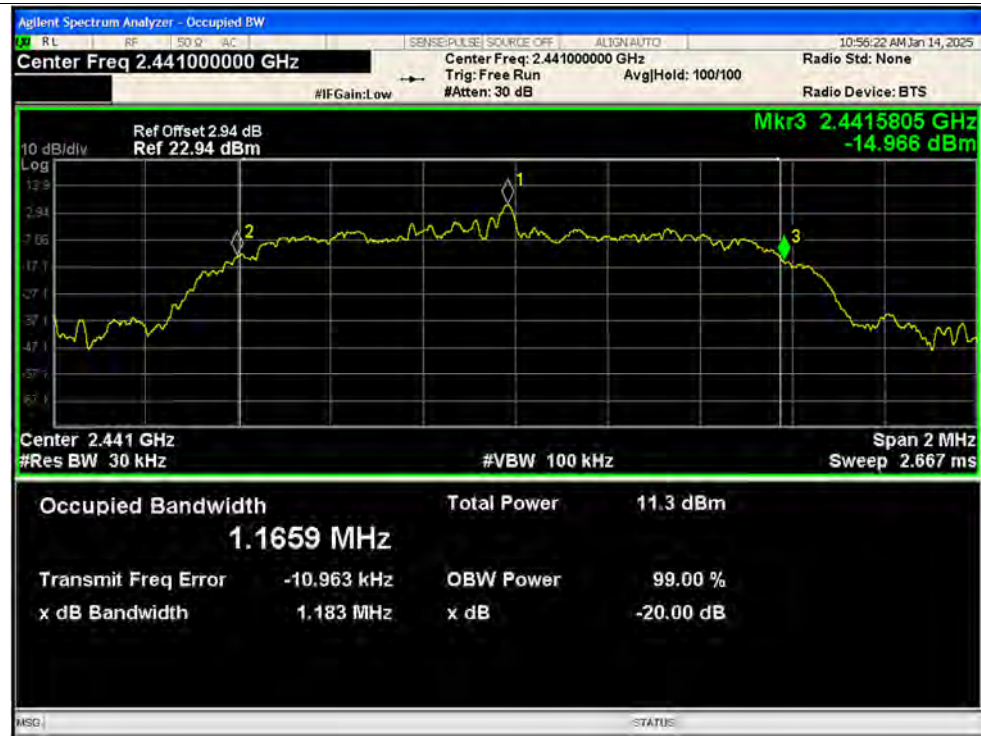


## -20dB Bandwidth NVNT 2-DH5 2480MHz Ant1 SISO

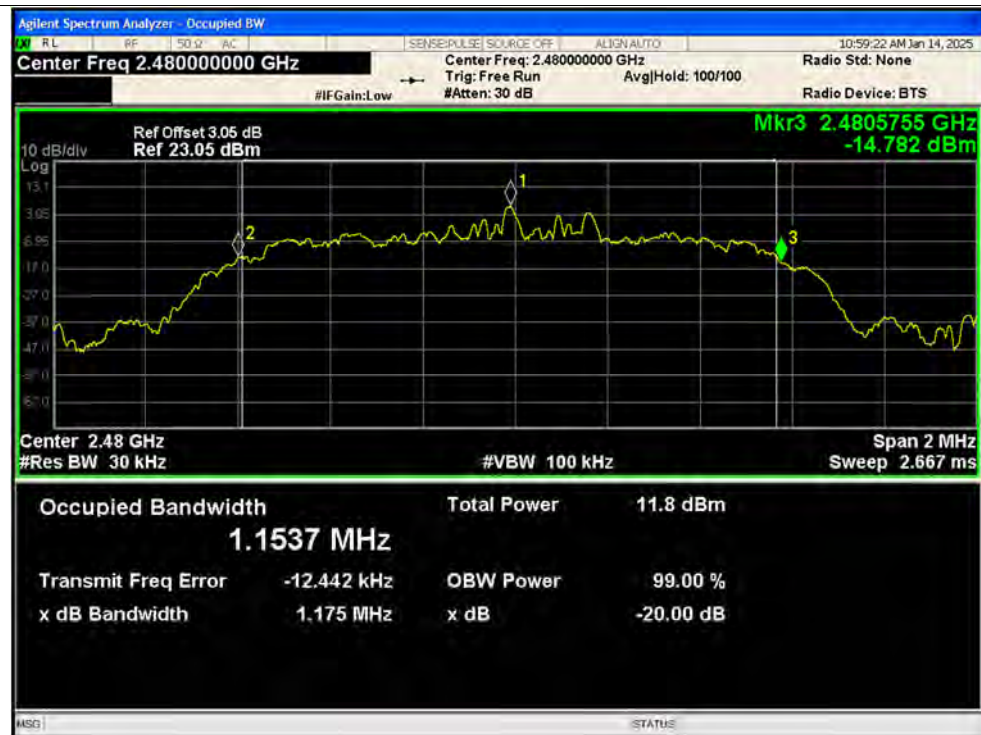

## -20dB Bandwidth NVNT 3-DH5 2402MHz Ant1 SISO

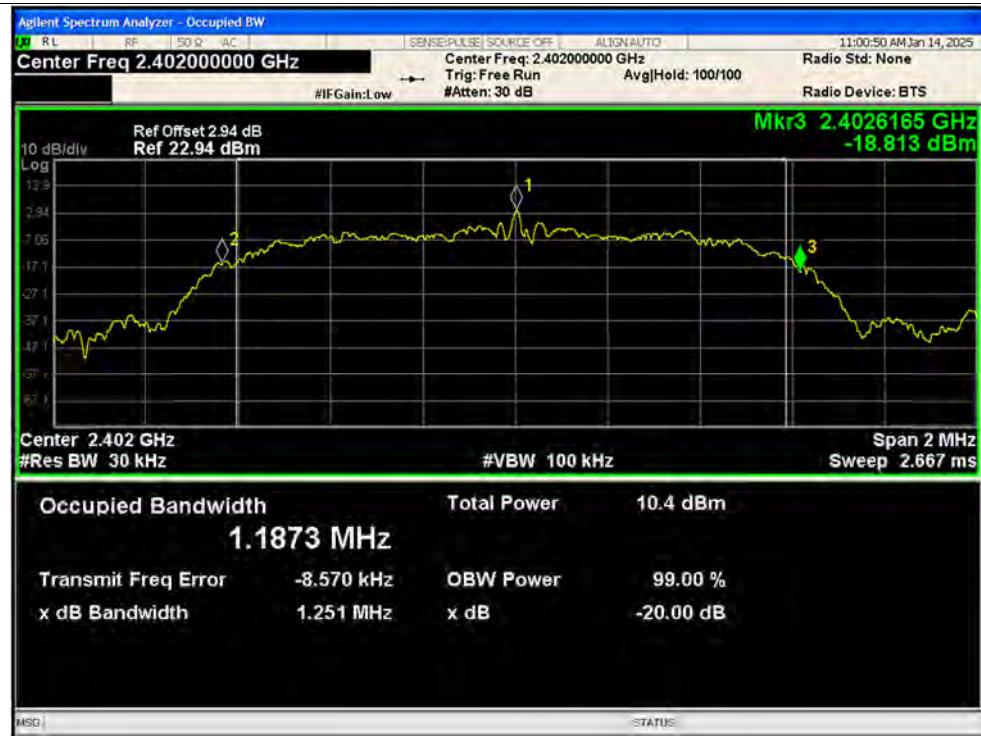


## -20dB Bandwidth NVNT 3-DH5 2441MHz Ant1 SISO

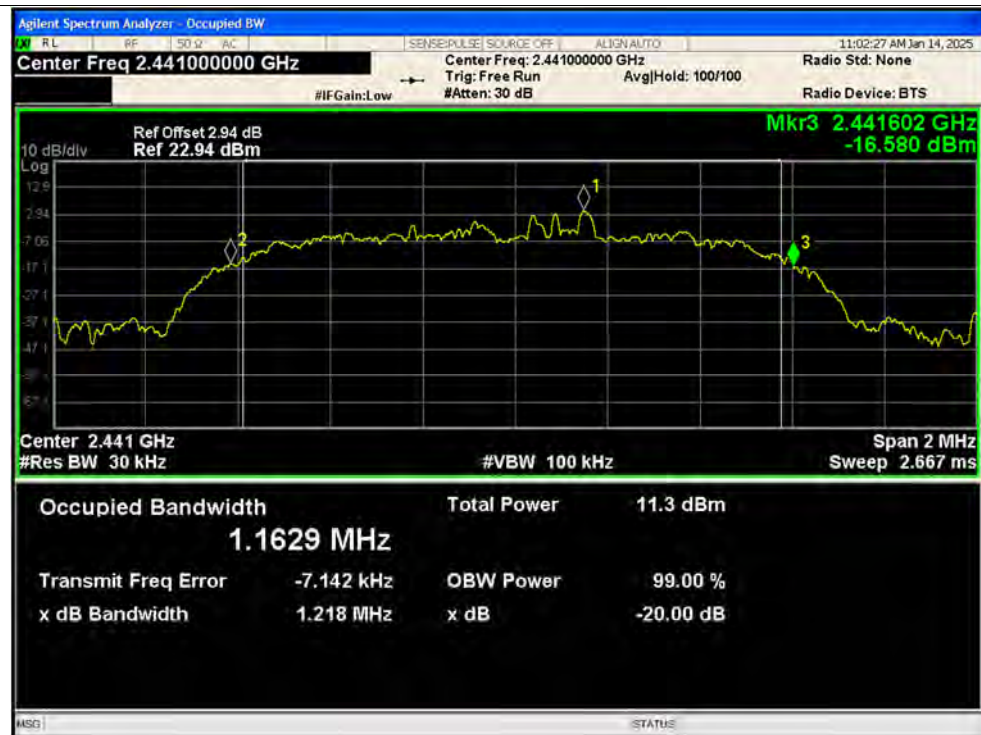



## -20dB Bandwidth NVNT 3-DH5 2480MHz Ant1 SISO

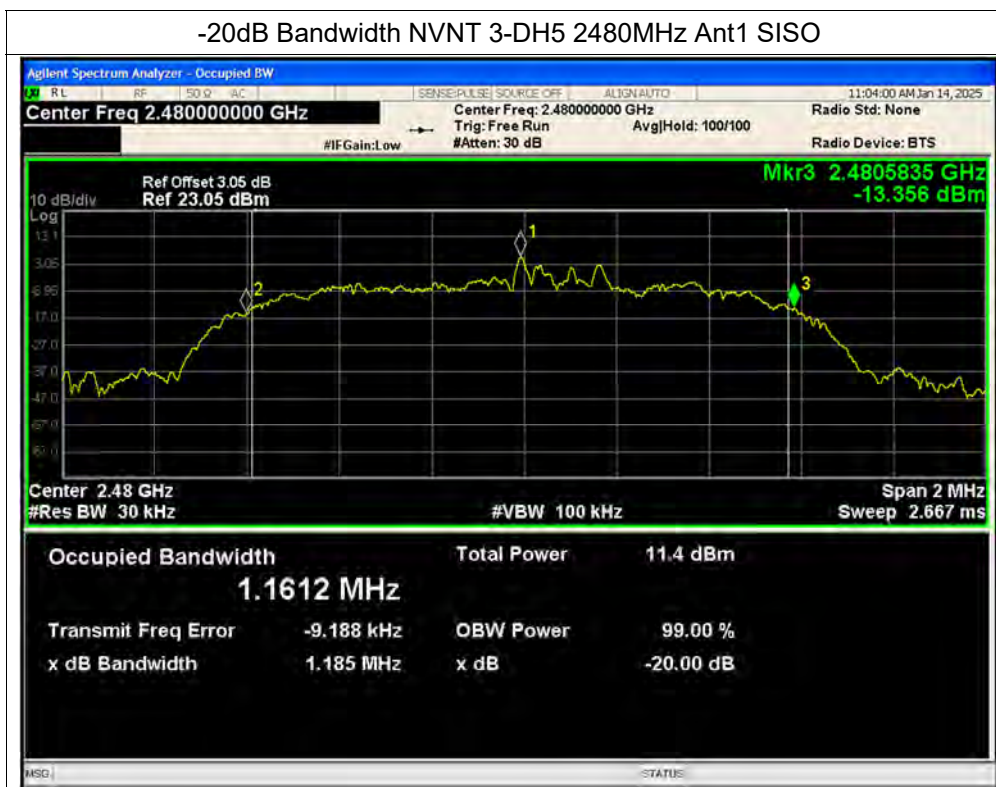

Right

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1



## -20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




## -20dB Bandwidth NVNT 2-DH5 2402MHz Ant1






## -20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

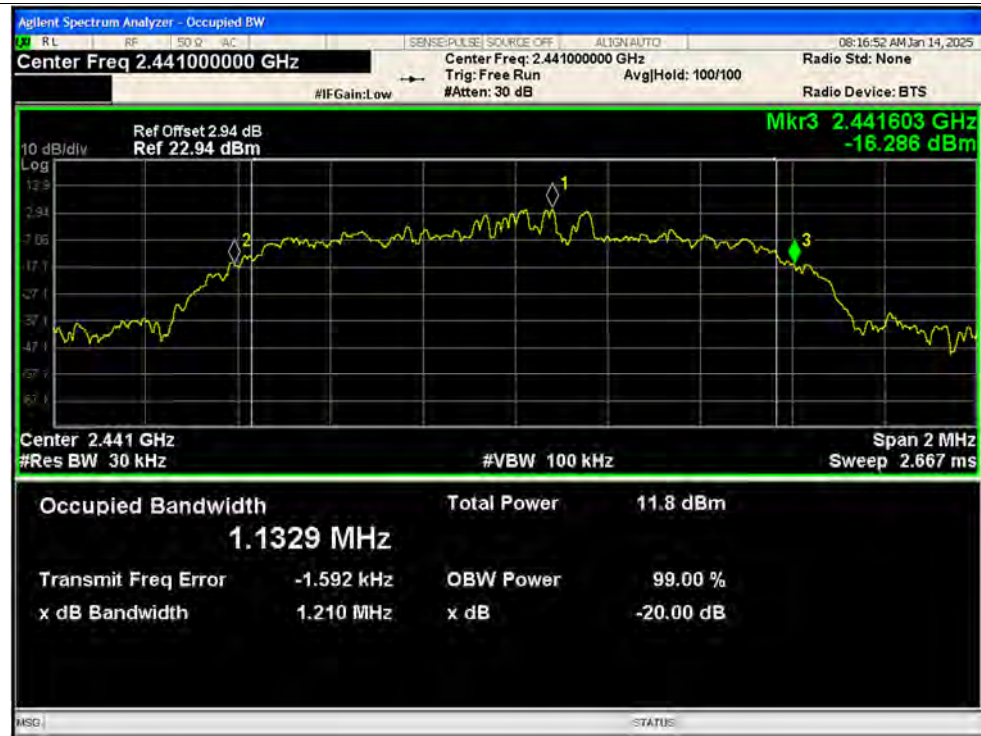


## -20dB Bandwidth NVNT 2-DH5 2480MHz Ant1




## -20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

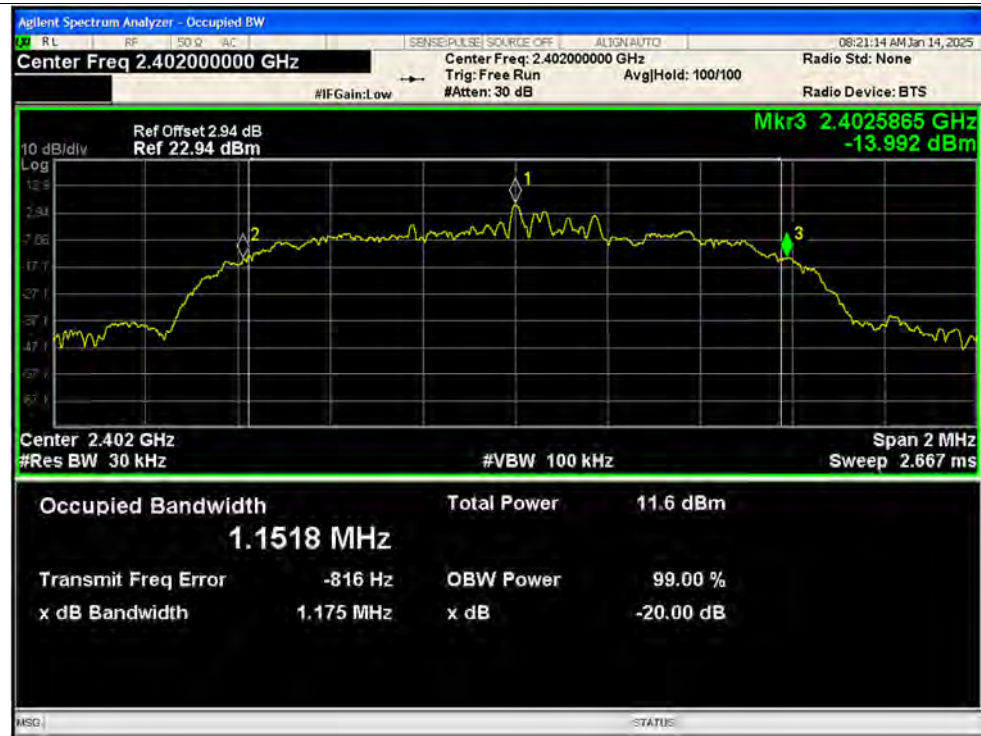

## -20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

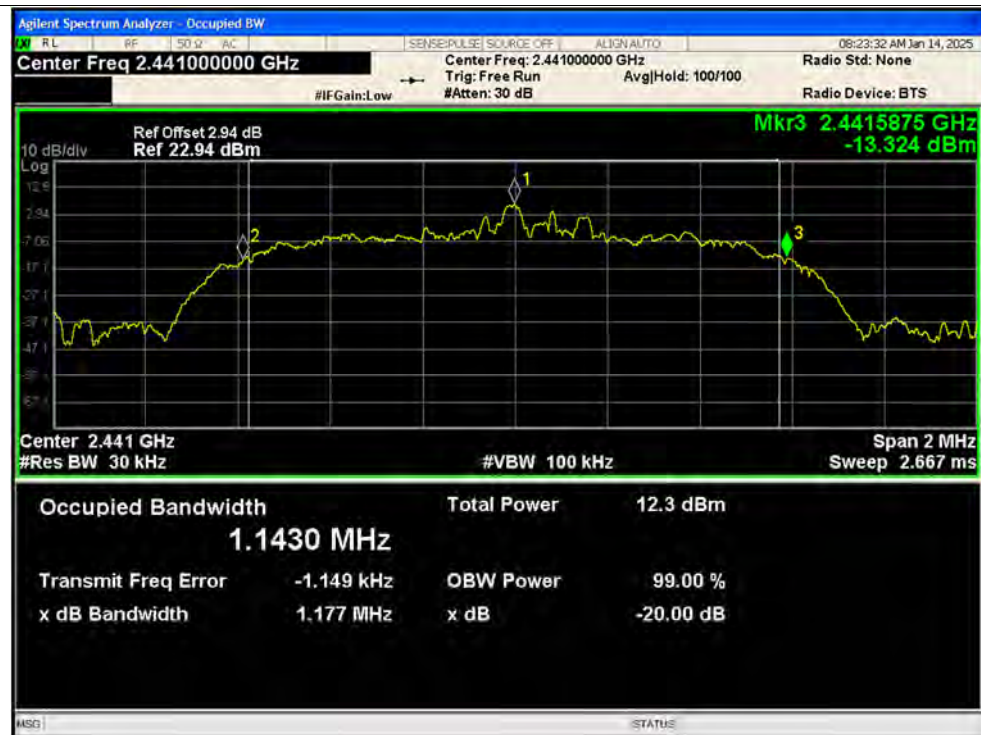

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

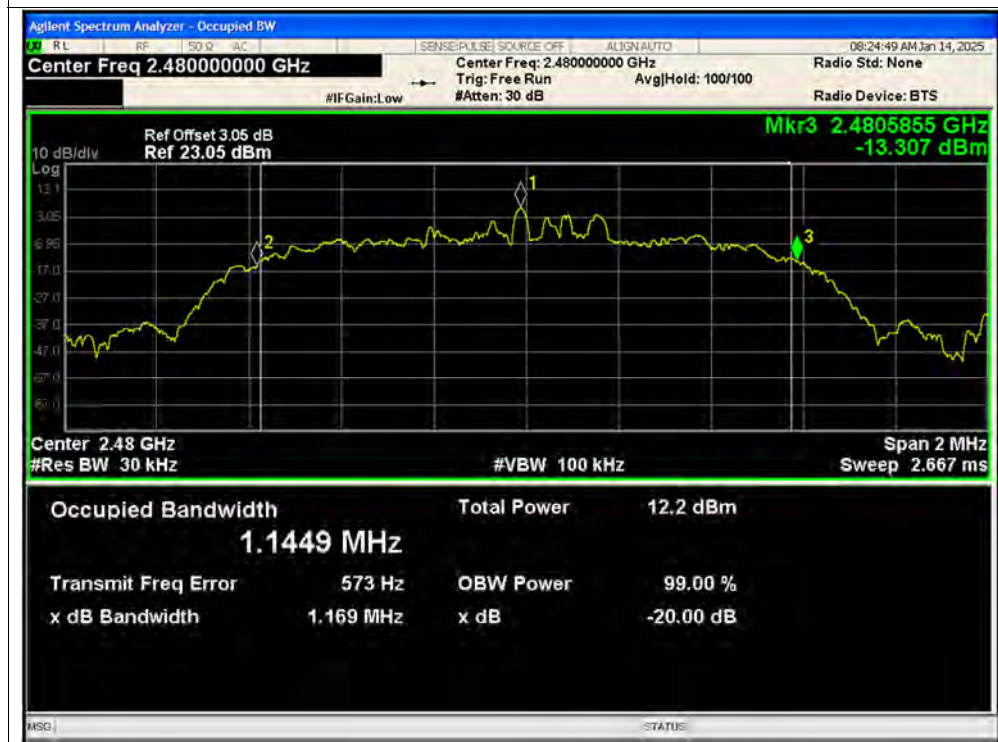

**A.6. Carried Frequency Separation****Left**

| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH5 | Ant1    | 2402.002            | 2402.954            | 0.952     | 0.575       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2440.964            | 2442.05             | 1.086     | 0.661       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2478.996            | 2479.984            | 0.988     | 0.685       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2402.04             | 2402.984            | 0.944     | 0.789       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2440.984            | 2442.154            | 1.17      | 0.789       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2479.006            | 2480.022            | 1.016     | 0.783       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2401.78             | 2402.8              | 1.02      | 0.834       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2440.774            | 2441.994            | 1.22      | 0.812       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2479.008            | 2480.156            | 1.148     | 0.79        | Pass    |

**Right**

| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH5 | Ant1    | 2402.002            | 2402.992            | 0.99      | 0.611       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2440.97             | 2441.99             | 1.02      | 0.673       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2478.996            | 2479.96             | 0.964     | 0.673       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2402.018            | 2403.156            | 1.138     | 0.777       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2440.984            | 2441.992            | 1.008     | 0.807       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2479.108            | 2479.992            | 0.884     | 0.781       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2401.9              | 2402.91             | 1.01      | 0.783       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2440.93             | 2441.994            | 1.064     | 0.785       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2478.978            | 2480.16             | 1.182     | 0.779       | Pass    |

Left

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1 SISO



CFS NVNT 1-DH5 2441MHz Ant1 SISO






## CFS NVNT 1-DH5 2480MHz Ant1 SISO




## CFS NVNT 2-DH5 2402MHz Ant1 SISO

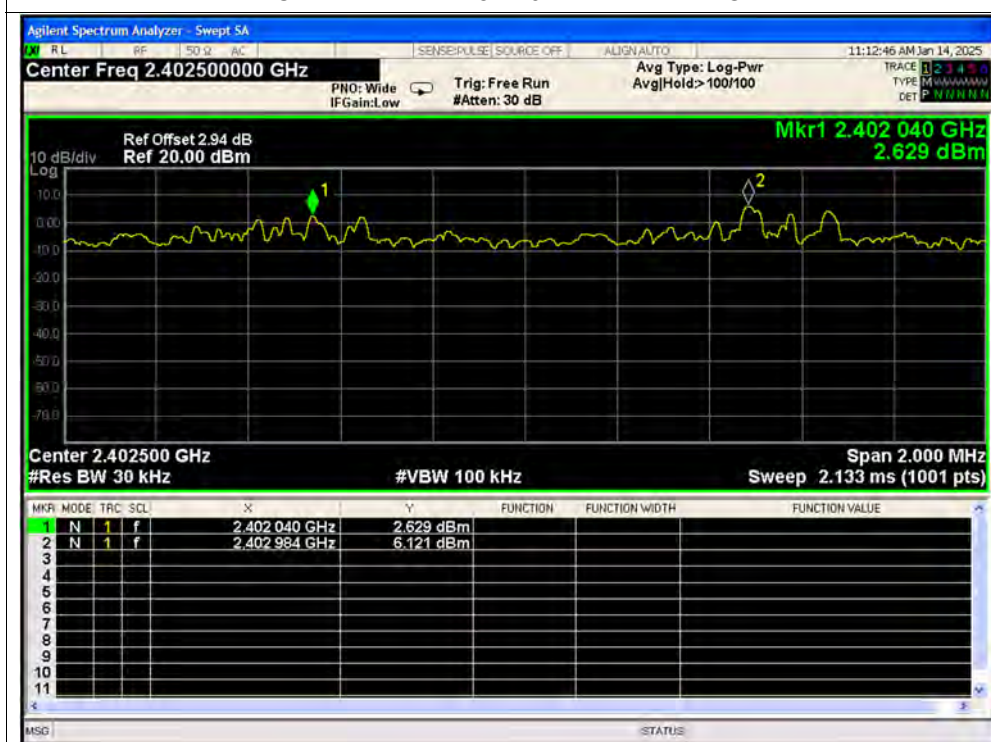




## CFS NVNT 2-DH5 2441MHz Ant1 SISO

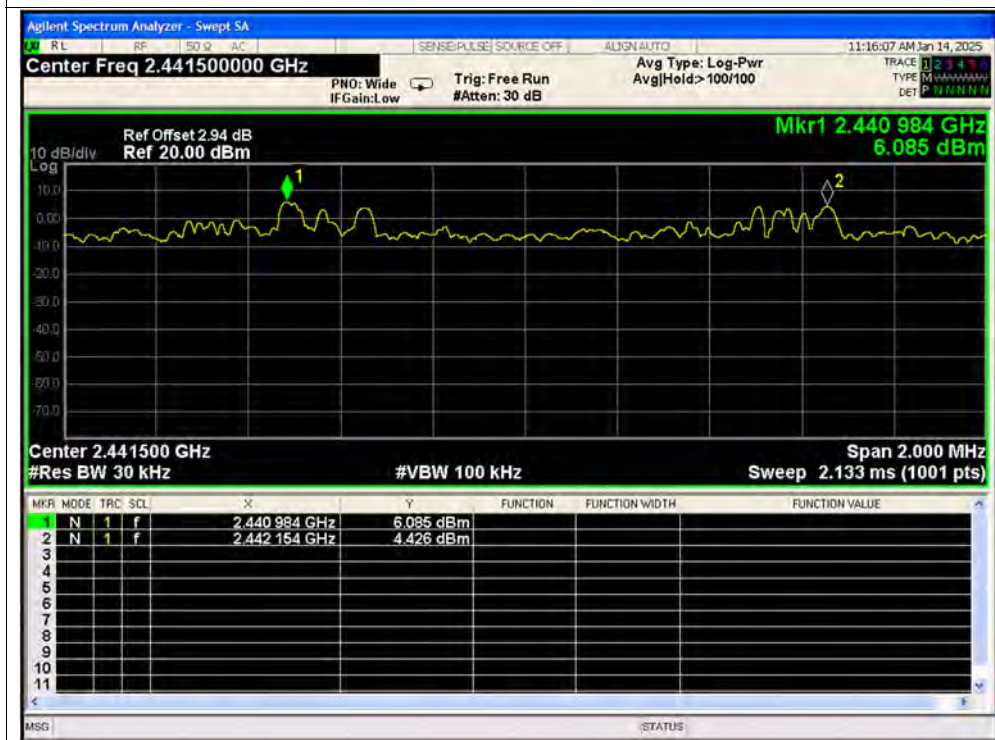


## CFS NVNT 2-DH5 2480MHz Ant1 SISO

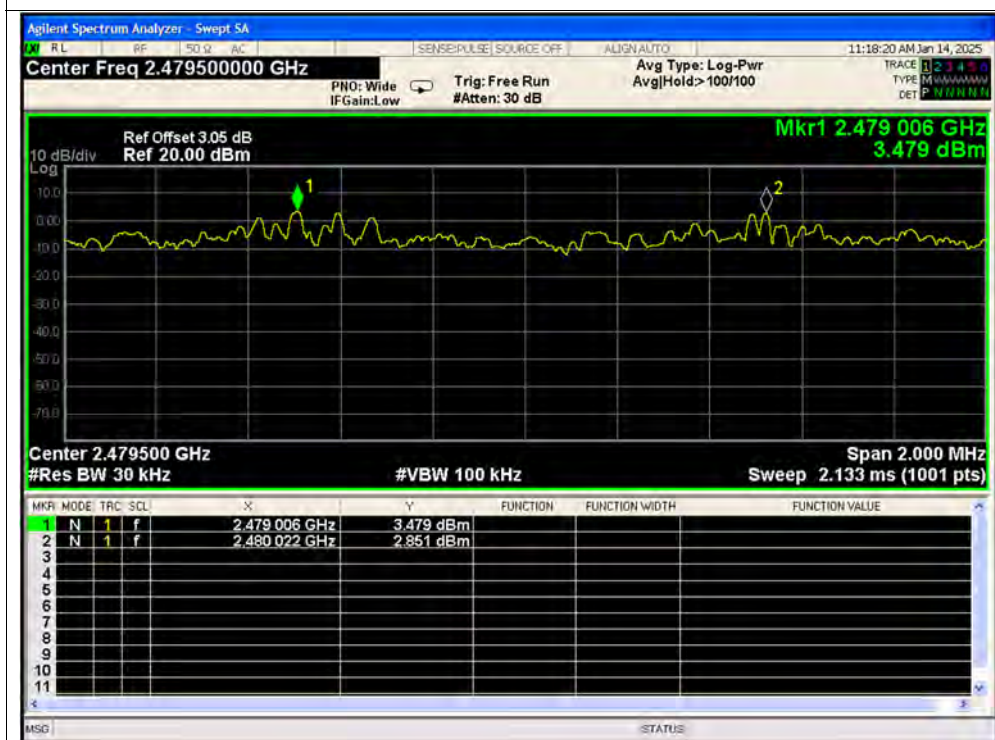




## CFS NVNT 3-DH5 2402MHz Ant1 SISO

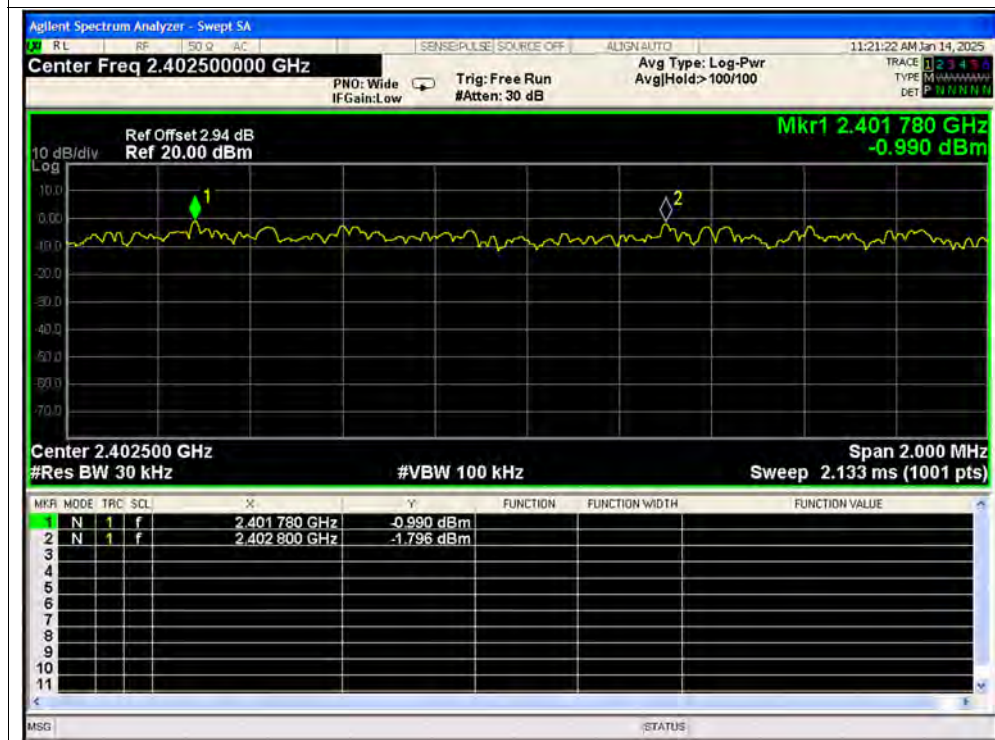


## CFS NVNT 3-DH5 2441MHz Ant1 SISO

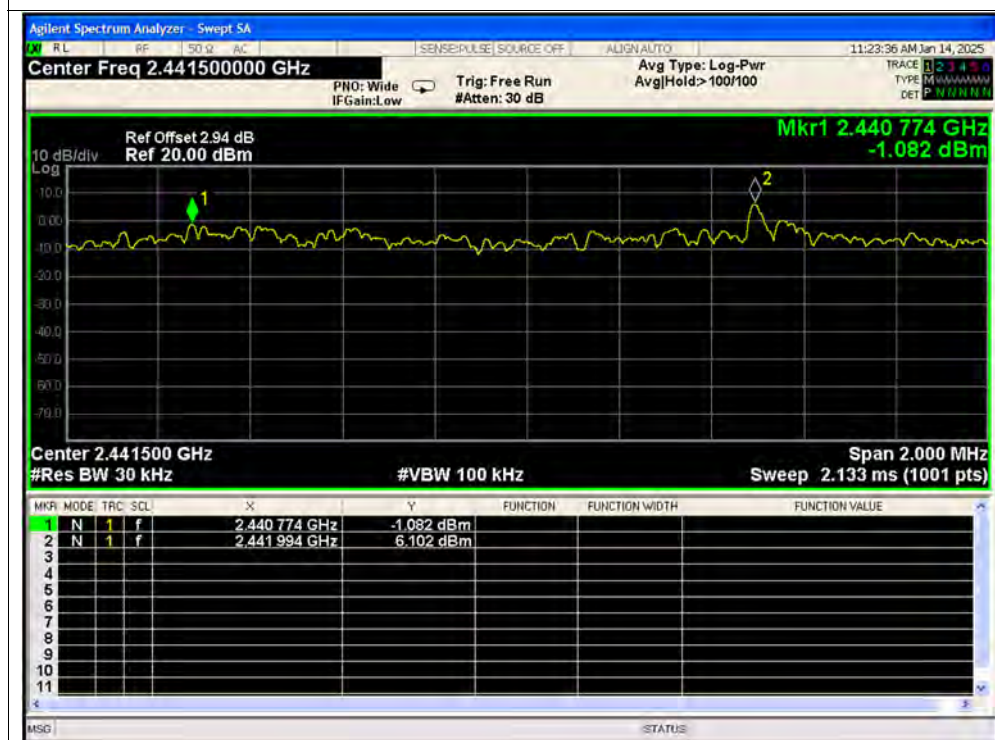



## CFS NVNT 3-DH5 2480MHz Ant1 SISO

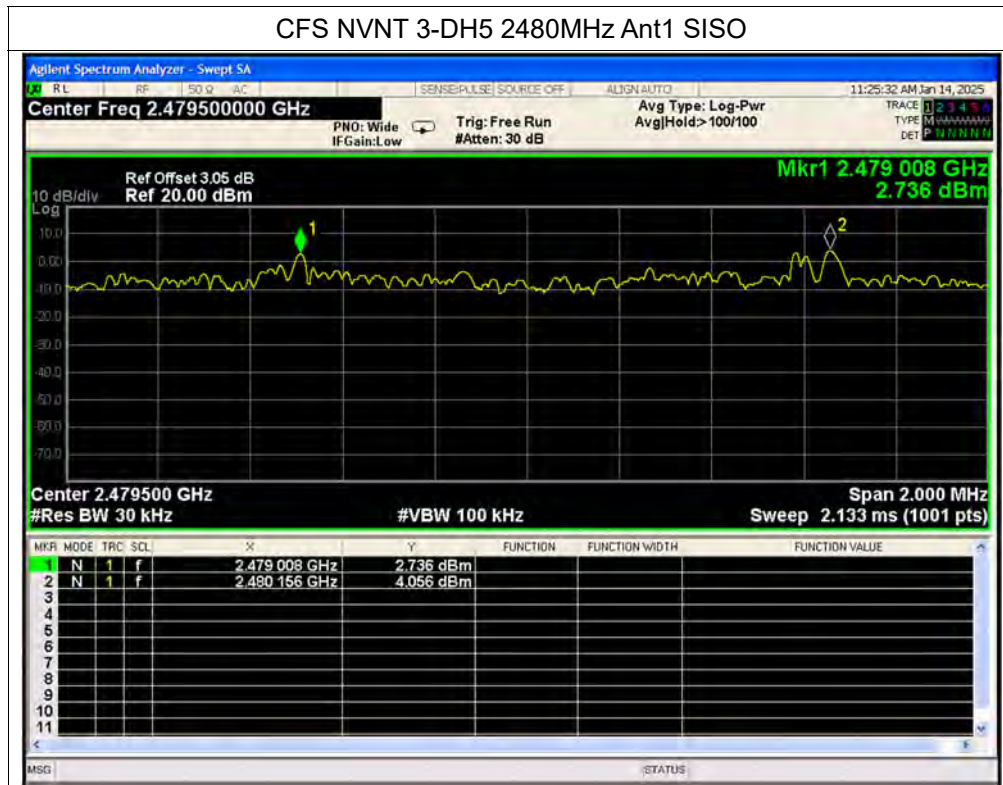

Right

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1



CFS NVNT 1-DH5 2441MHz Ant1






## CFS NVNT 1-DH5 2480MHz Ant1




## CFS NVNT 2-DH5 2402MHz Ant1

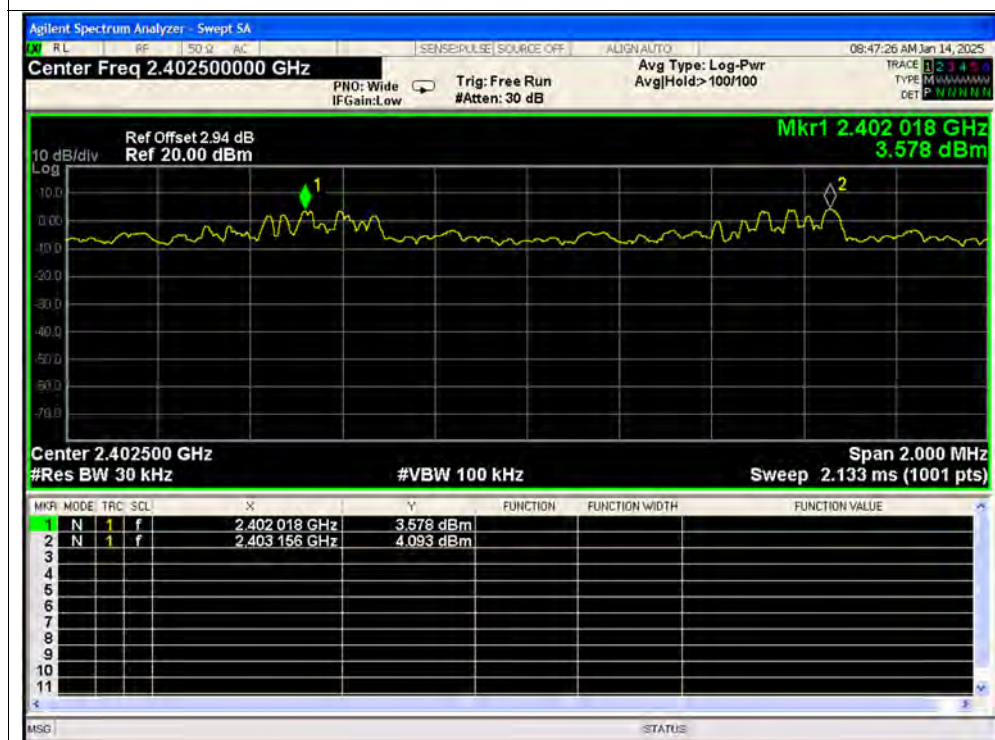




## CFS NVNT 2-DH5 2441MHz Ant1

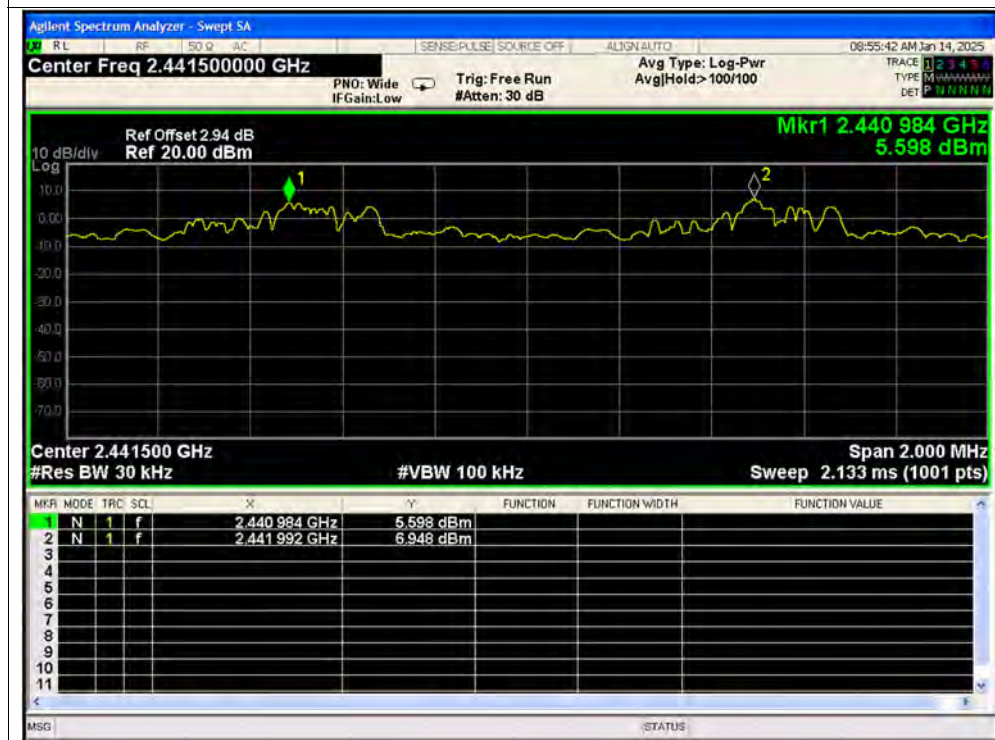


## CFS NVNT 2-DH5 2480MHz Ant1

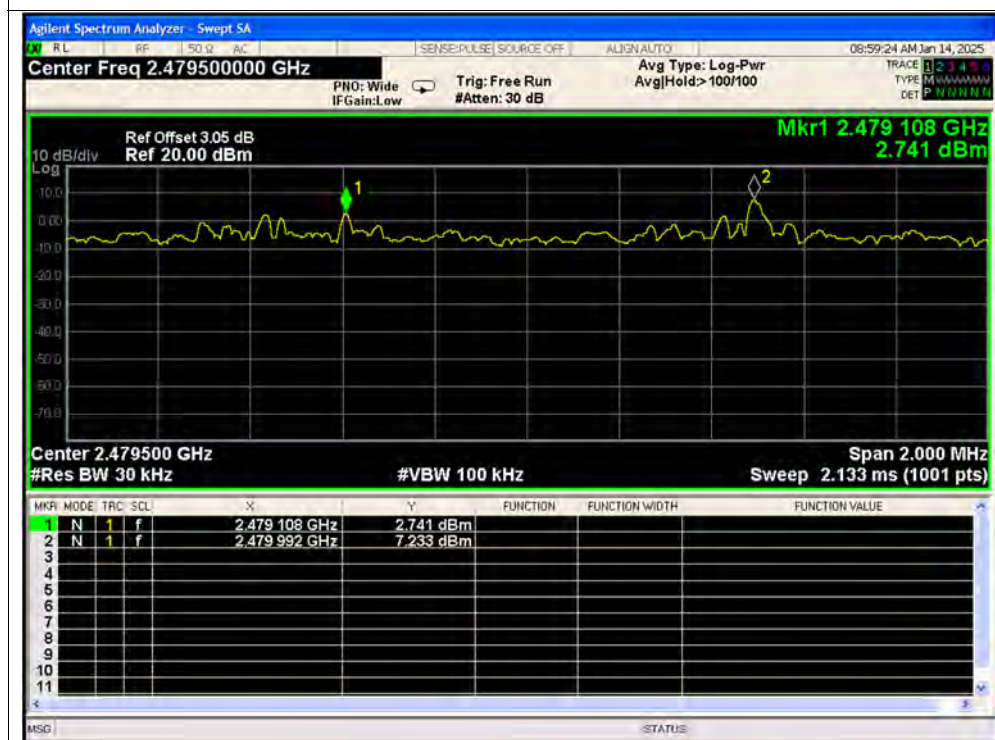




## CFS NVNT 3-DH5 2402MHz Ant1

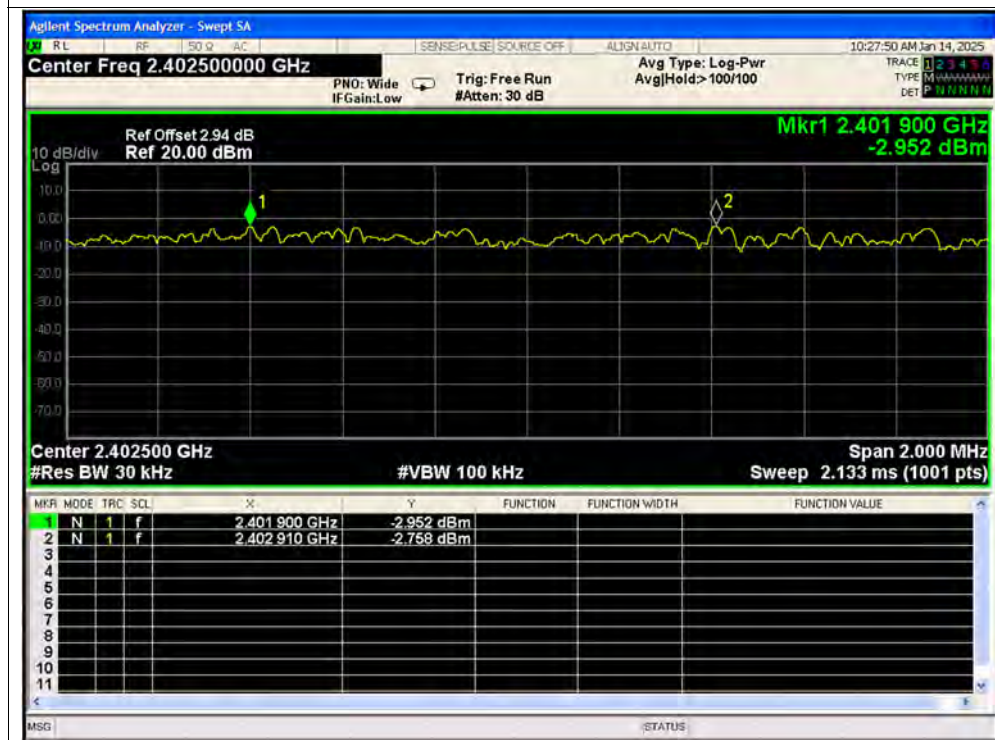


## CFS NVNT 3-DH5 2441MHz Ant1

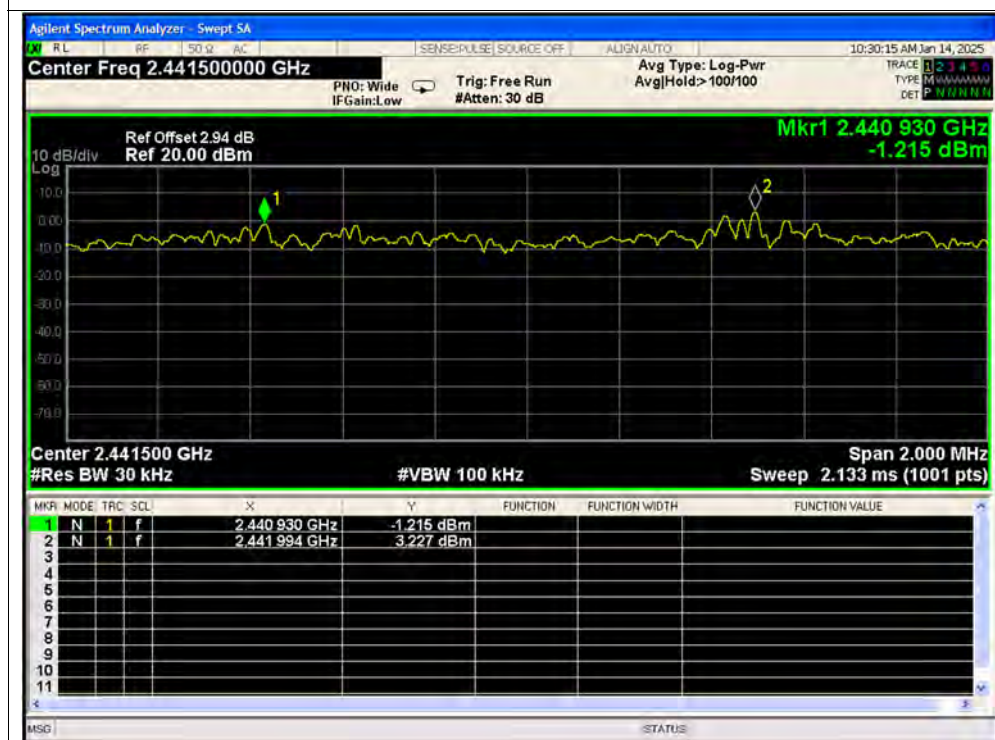



## CFS NVNT 3-DH5 2480MHz Ant1

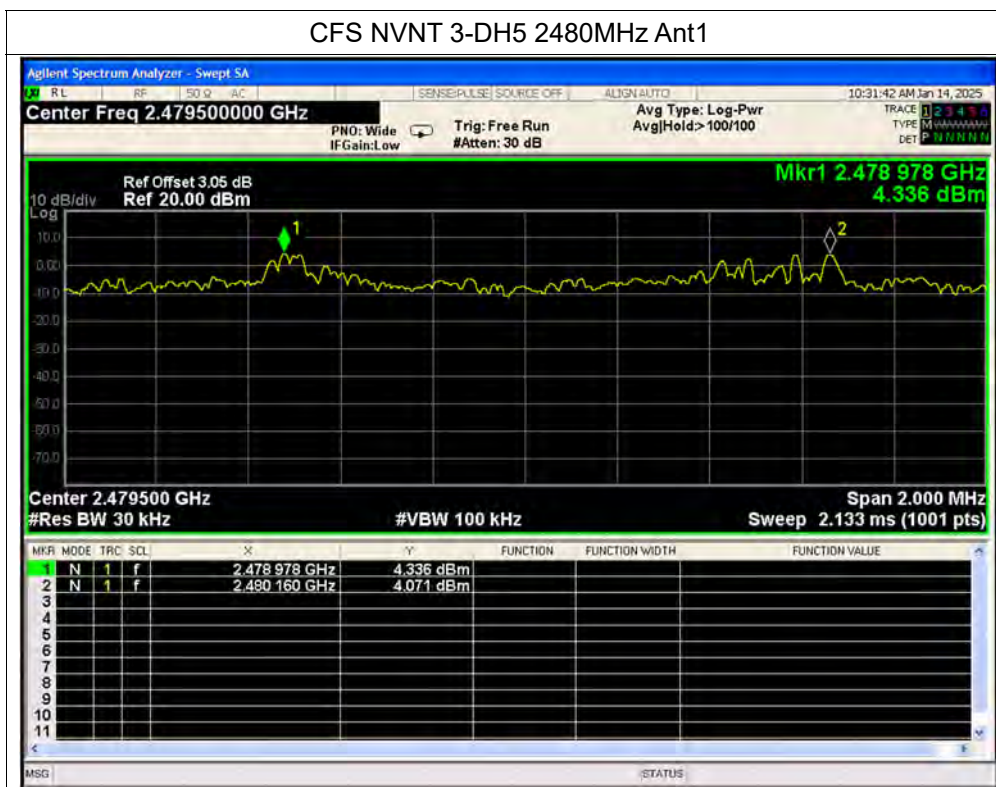

**A.7. Time of Occupancy (Dwell time)****Left**

| Condition | Mode  | Frequency (MHz) | Antenna | Pulse Time (ms) | Total Dwell Time (ms) | Burst Count | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-----------------------|-------------|------------------|------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 2.881           | 216.075               | 75          | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 2.88            | 218.88                | 76          | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 2.88            | 187.2                 | 65          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 2.884           | 213.416               | 74          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 2.884           | 219.184               | 76          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 2.884           | 210.532               | 73          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 2.886           | 236.652               | 82          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 2.884           | 245.14                | 85          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 2.886           | 242.424               | 84          | 31600            | 400        | Pass    |


**Right**

| Condition | Mode  | Frequency (MHz) | Antenna | Pulse Time (ms) | Total Dwell Time (ms) | Burst Count | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-----------------------|-------------|------------------|------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 2.88            | 256.32                | 89          | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 2.88            | 216                   | 75          | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 2.88            | 236.16                | 82          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 2.875           | 232.875               | 81          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 2.876           | 224.328               | 78          | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 2.867           | 232.227               | 81          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 2.882           | 253.616               | 88          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 2.88            | 230.4                 | 80          | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 2.874           | 232.794               | 81          | 31600            | 400        | Pass    |


Left

Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst SISO

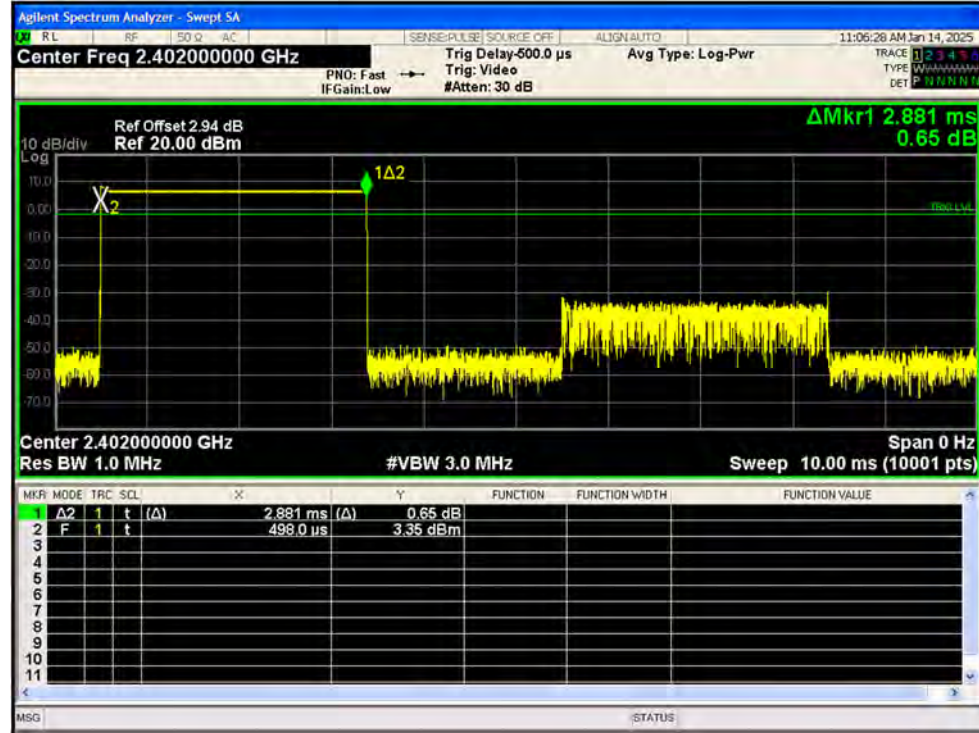


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated SISO

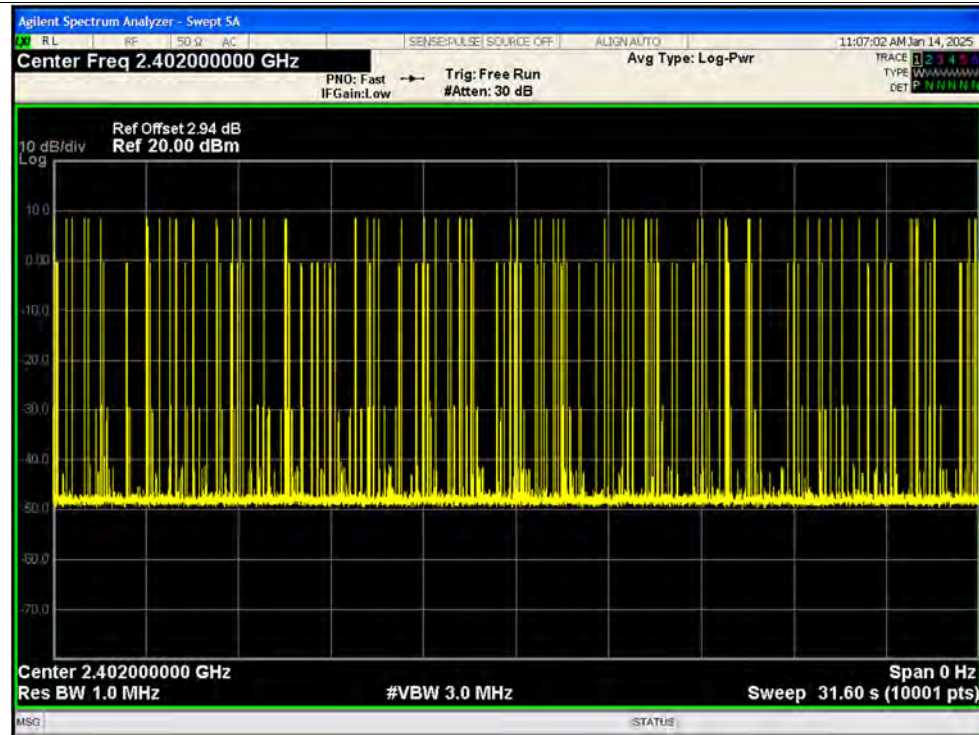



## Dwell NVNT 1-DH5 2441MHz Ant1 One Burst SISO

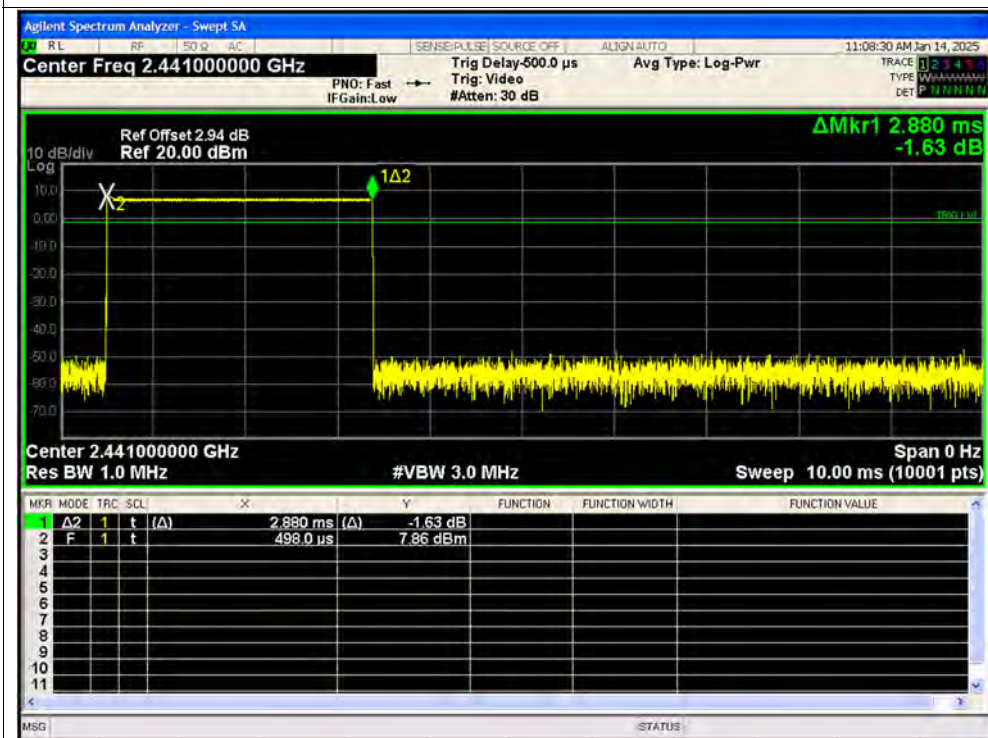


## Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated SISO







## Dwell NVNT 1-DH5 2480MHz Ant1 One Burst SISO

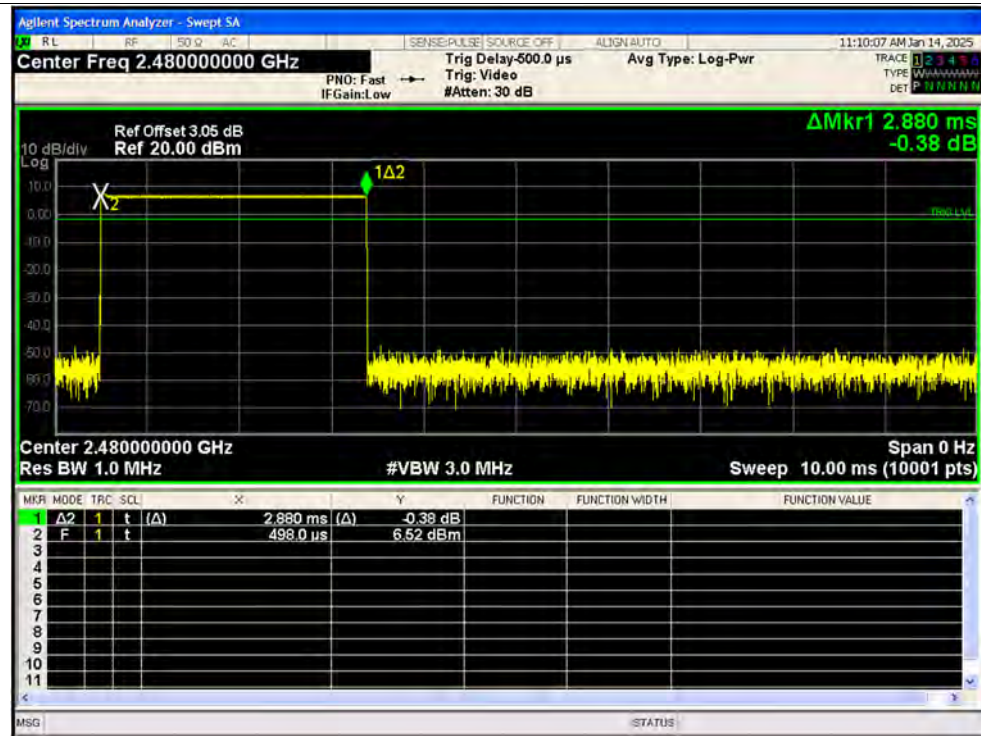


## Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated SISO

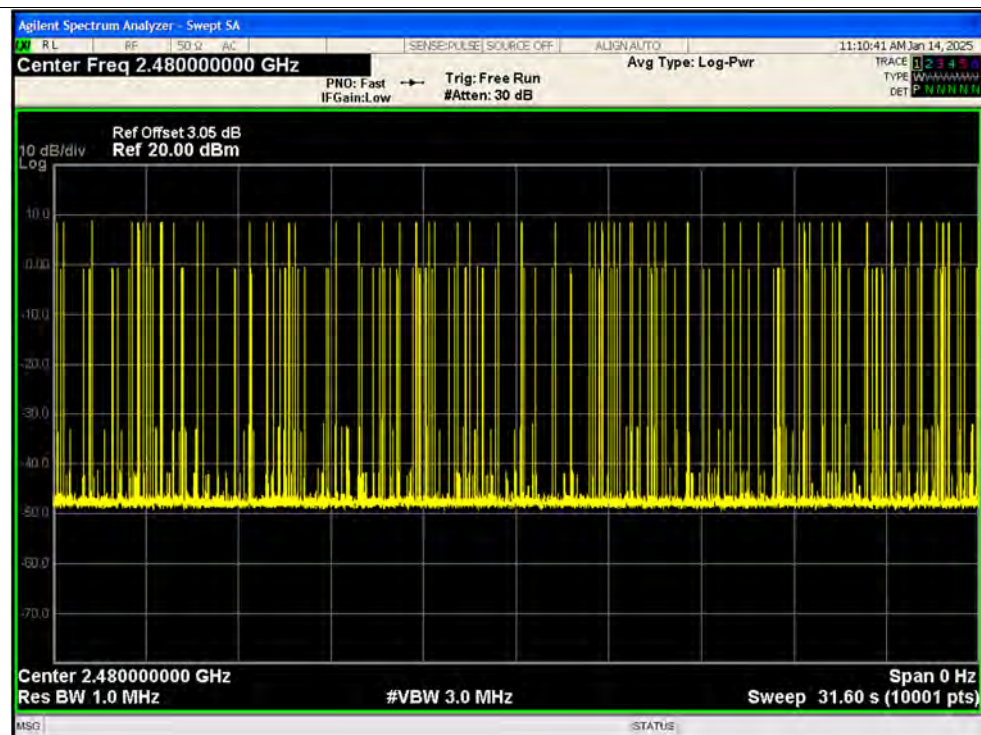

## Dwell NVNT 2-DH5 2402MHz Ant1 One Burst SISO

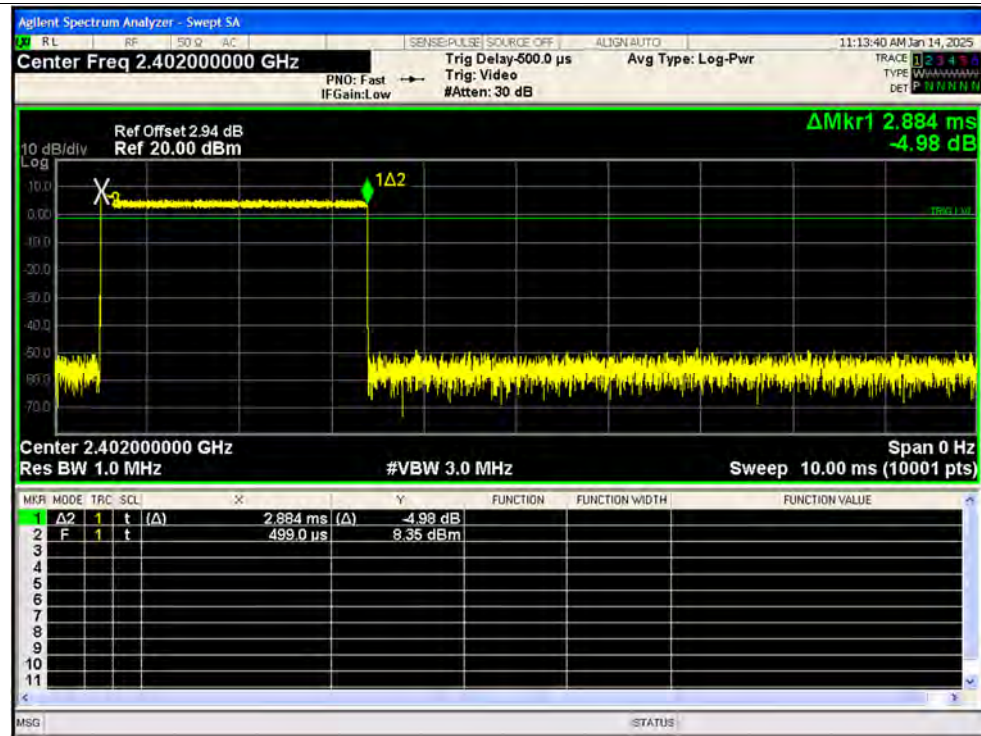


## Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated SISO

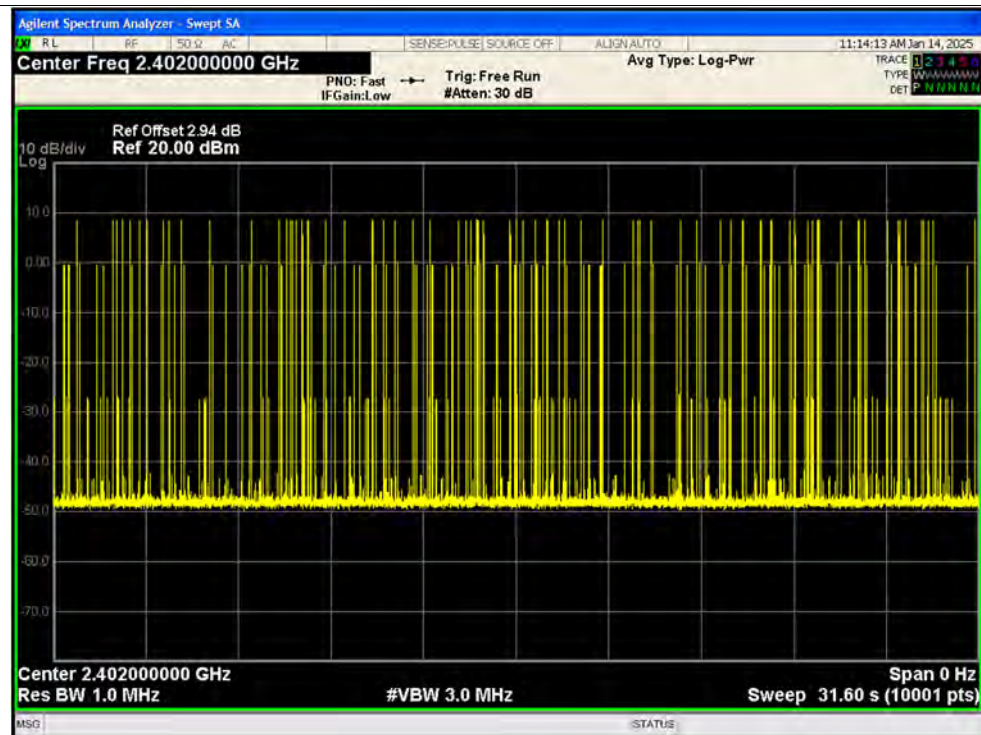



## Dwell NVNT 2-DH5 2441MHz Ant1 One Burst SISO

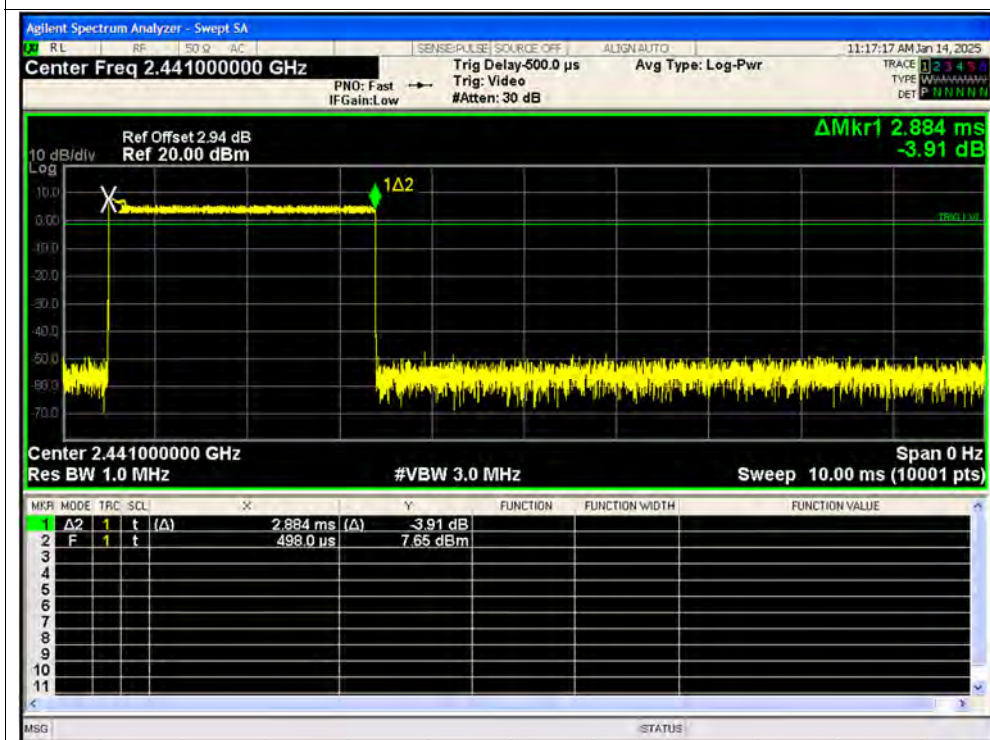

## Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated SISO

