


## Antenna 1


802.11a



802.11n HT20

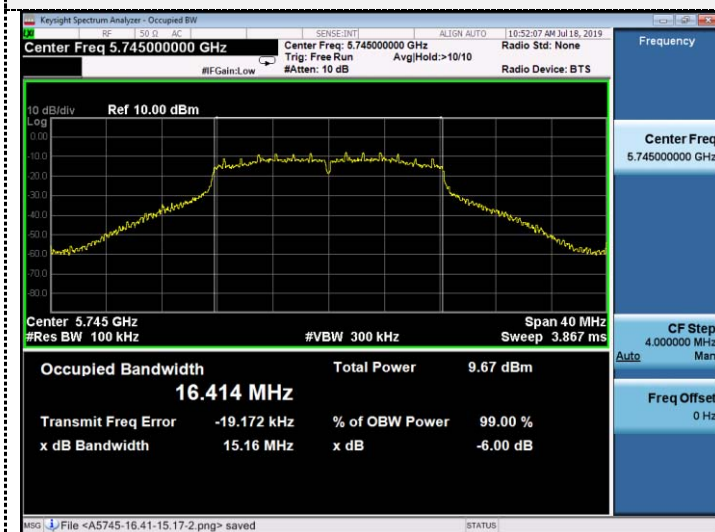

CH149

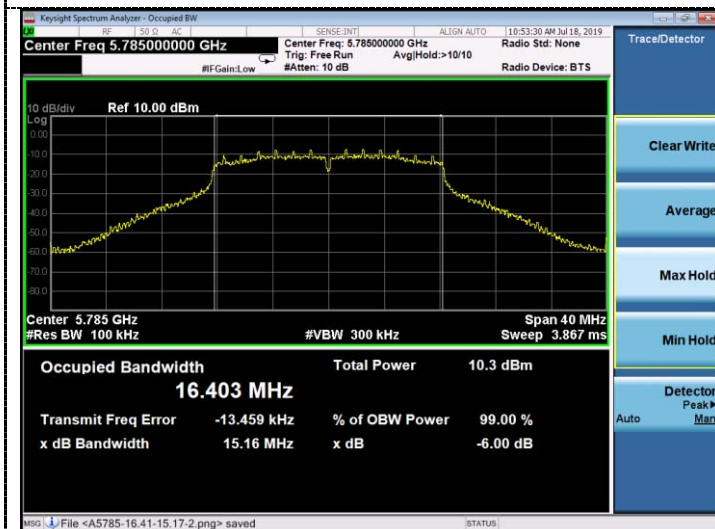

CH149




CH157




CH157



CH165




CH165



802.11ac20




802.11n HT40

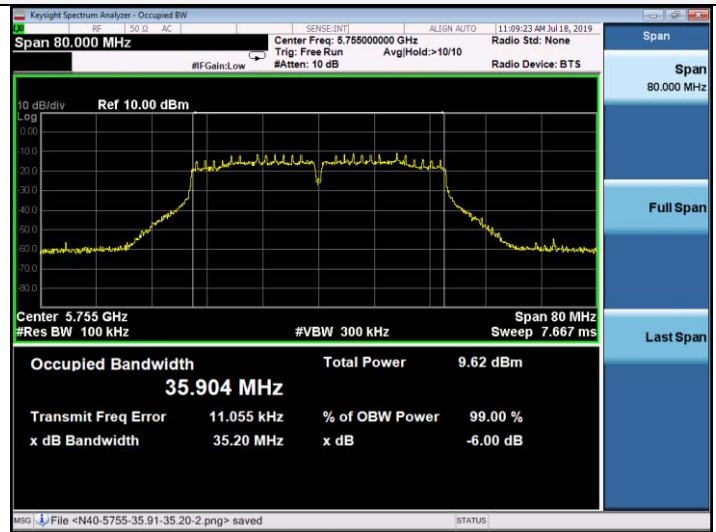


CH149




CH151

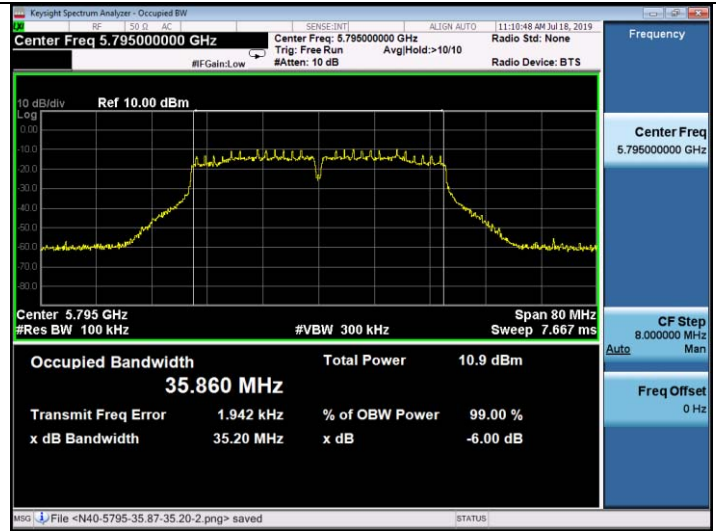

CH157

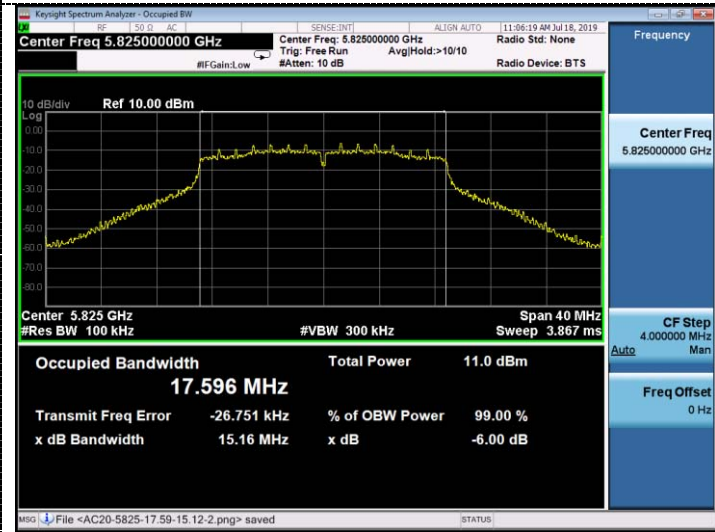

CH159




CH165



802.11ac40



802.11ac80

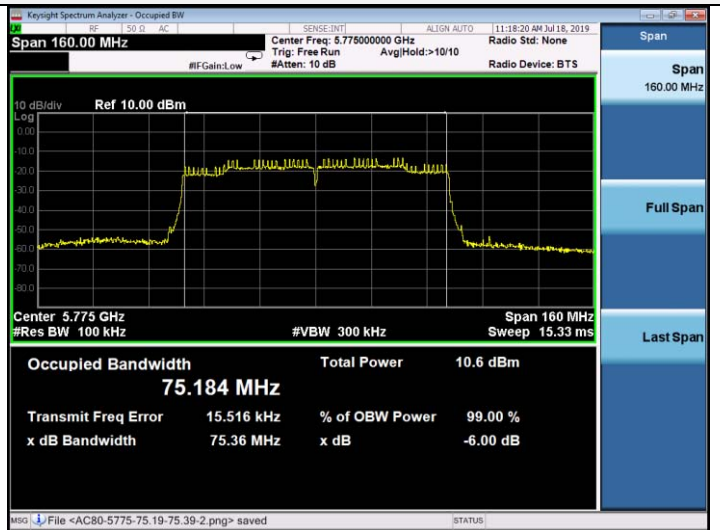


CH151



CH155




CH159



#### 4.7. 26dBc Bandwidth

##### TEST CONFIGURATION

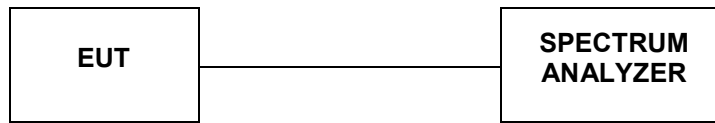

##### TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 for one of the following procedures may be used for Emission Bandwidth (EBW) measurement:

- a. Set RBW = 300 kHz (approximately 1% of the emission bandwidth).
- b. Set the video bandwidth (VBW) = 1000 KHz (VBW > RBW)
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize
- g. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

##### LIMIT

No Limits for 26dBc Bandwidth

##### TEST RESULTS

**Antenna 0**

Type	Channel	99%Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	149	16.591	23.57	-	Pass
	157	16.707	23.18		
	165	16.663	23.39		
802.11nHT20	149	17.821	24.57	-	Pass
	157	17.838	23.82		
	165	17.716	23.14		
802.11ac20	149	17.824	24.15	-	Pass
	157	17.811	23.45		
	165	17.815	23.84		
802.11n40	151	36.214	43.58	-	Pass
	159	36.201	43.51		
802.11ac40	151	36.124	42.90	-	Pass
	159	36.171	43.12		
802.11ac80	155	75.194	81.70	-	Pass

**Antenna 1**


Type	Channel	99%Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	149	16.639	23.90	-	Pass
	157	16.722	23.57		
	165	16.693	23.64		
802.11nHT20	149	17.836	24.71	-	Pass
	157	17.833	23.81		
	165	17.862	24.10		
802.11ac20	149	17.827	24.36	-	Pass
	157	17.807	23.54		
	165	17.804	23.59		
802.11n40	151	36.217	43.61	-	Pass
	159	36.210	43.68		
802.11ac40	151	36.125	42.90	-	Pass
	159	36.169	43.12		
802.11ac80	155	75.251	81.85	-	Pass

## Antenna 0

802.11a




802.11n HT20

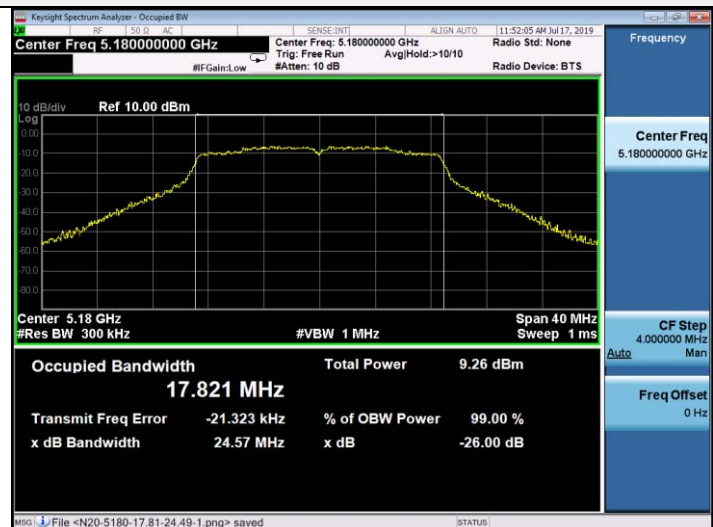

CH36



CH36

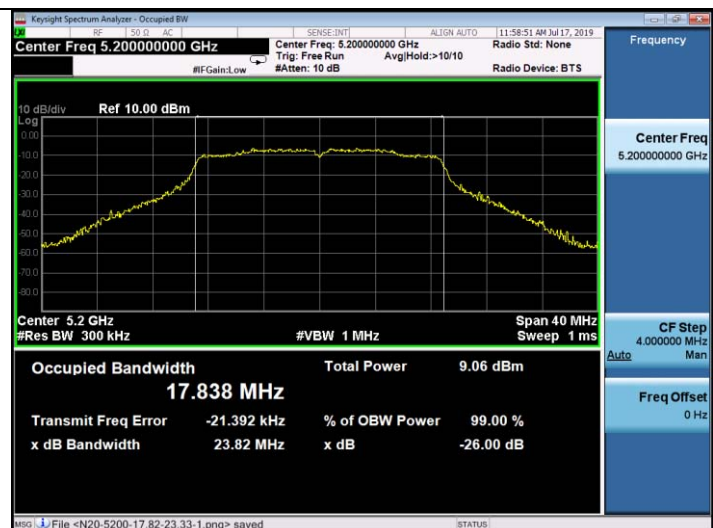

CH40



CH40



CH48


CH48



802.11ac20




802.11n HT40

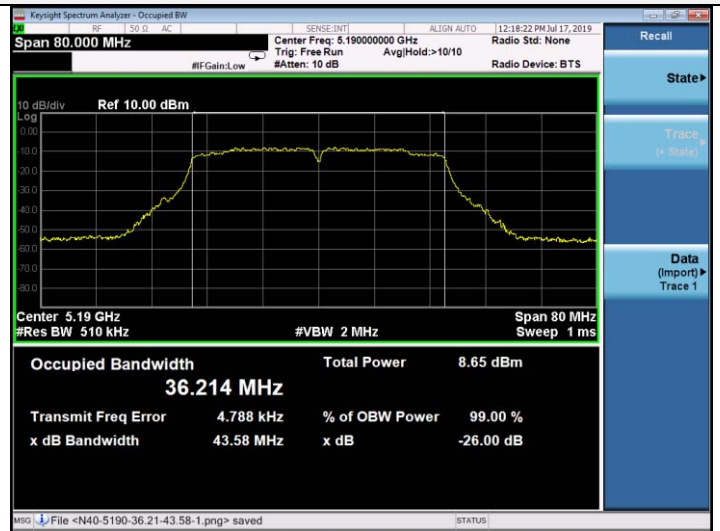


CH36




CH38

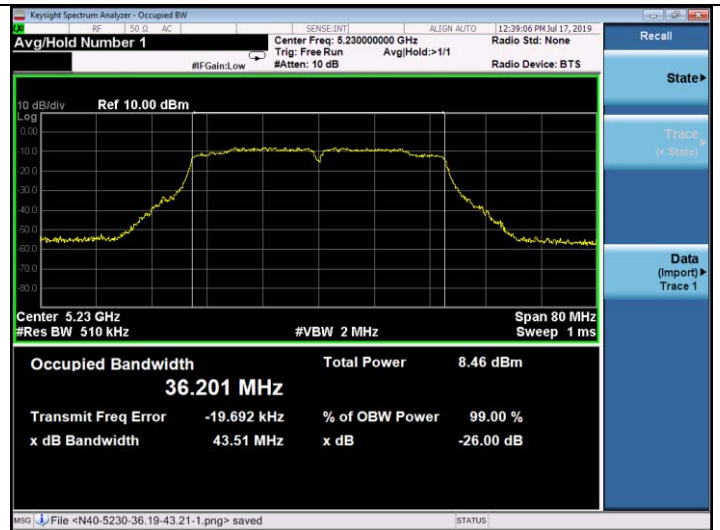

CH40

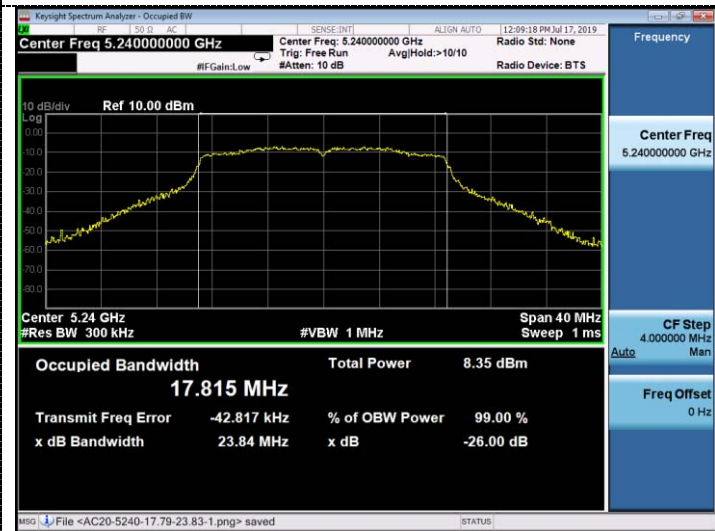


CH46




CH48

802.11ac40

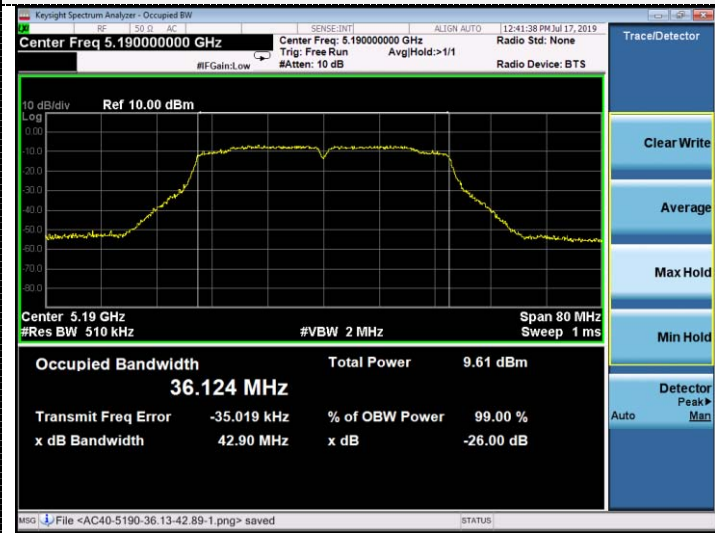

802.11ac80

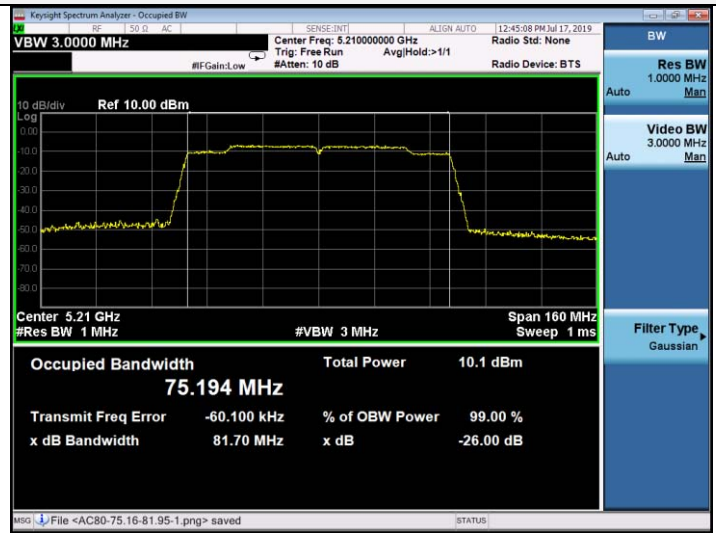

CH38



CH46

CH42





## Antenna 1

802.11a



802.11n HT20



CH36



CH36



CH40



CH40



CH48

CH48

802.11ac20



802.11n HT40



CH36




CH38



CH40



CH46




CH48

802.11ac40



802.11ac80

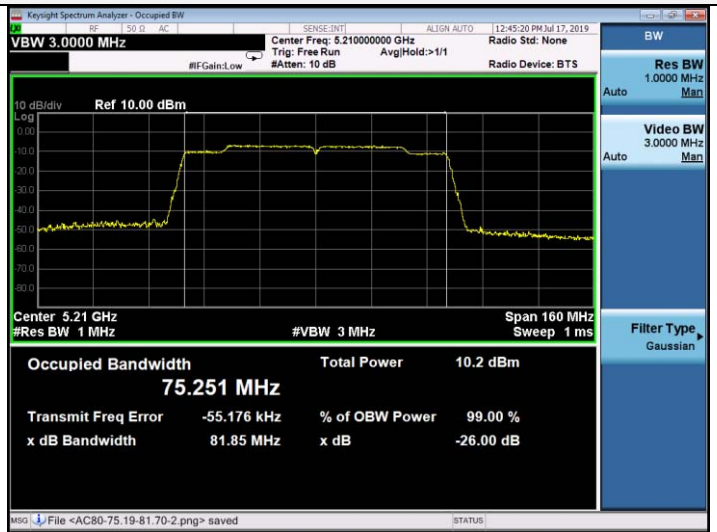

CH38



CH42




CH46



## 4.8. Band Edge Compliance

### TEST CONFIGURATION

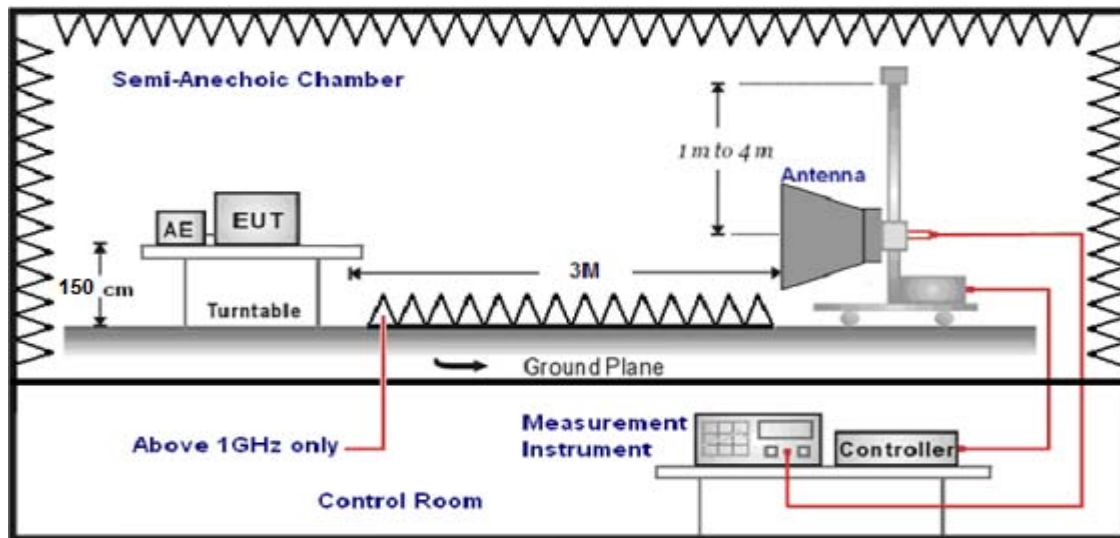

### LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
1GHz-18GHz	Double Ridged Horn Antenna	3

## 6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-18GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

**TEST RESULTS**

Remark:For radiated bandedge We measured at both mode, recorded worst case at **ant 0** 802.11 a mode;

**For Radiated Bandedge Measurement**

802.11 a/ Channel 36 :5180 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5148.26	34.05	35.58	29.04	8.28	48.87	74	25.13	Peak	Horizontal
5148.26	25.13	35.58	29.04	8.28	39.95	54	14.05	AV	Horizontal

802.11 a/ Channel 48 :5240 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5353.12	34.9	35.42	29.06	8.39	49.65	74	24.35	Peak	Horizontal
5353.12	25.15	35.42	29.06	8.39	39.9	54	14.1	AV	Horizontal

802.11 a/ Channel 149 :5745 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5687.28	39.78	35.29	29.13	8.65	54.59	95.8	41.21	Peak	Horizontal

802.11 a/ Channel 165 :5825 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5862.24	39.63	35.29	29.18	8.8	54.54	108.77	54.23	Peak	Horizontal

**REMARKS:**

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;




For Conducted Band edge Measurement  
The test results have included the antenna gain


Antenna 0

5150-5250MHz:

### 802.11a

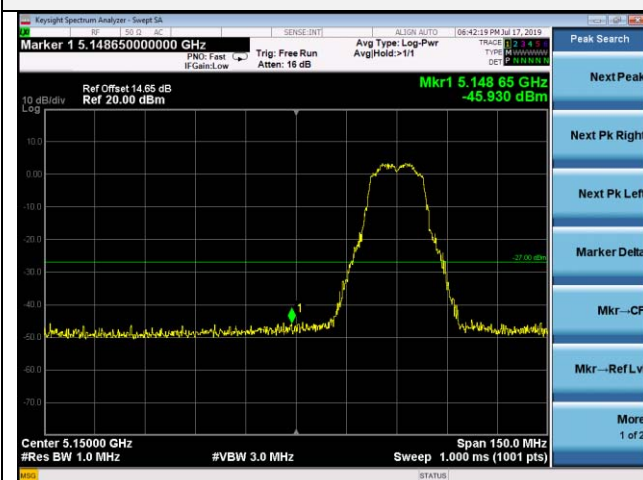


5180 MHz

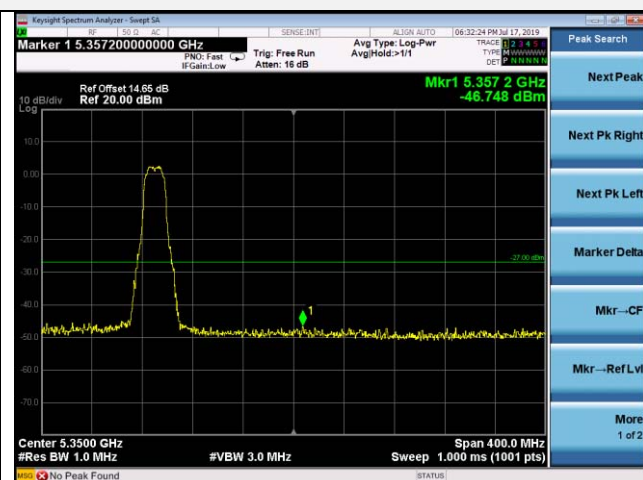


5240 MHz

### 802.11n HT20

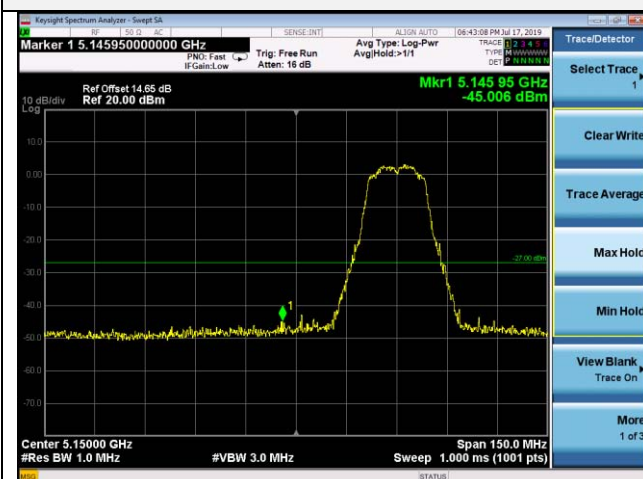


5180 MHz

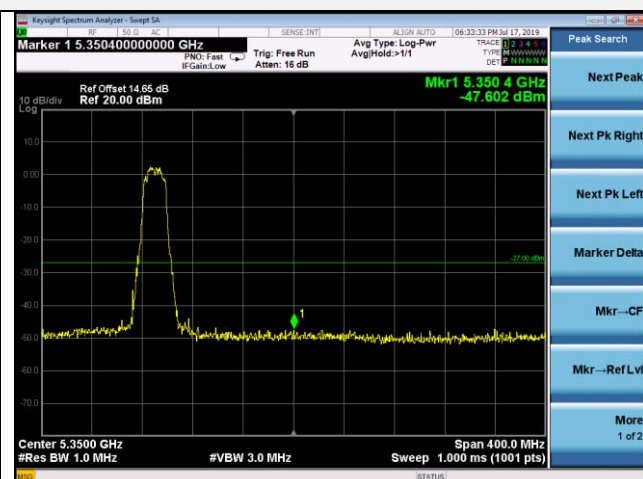


5240 MHz

### 802.11ac20

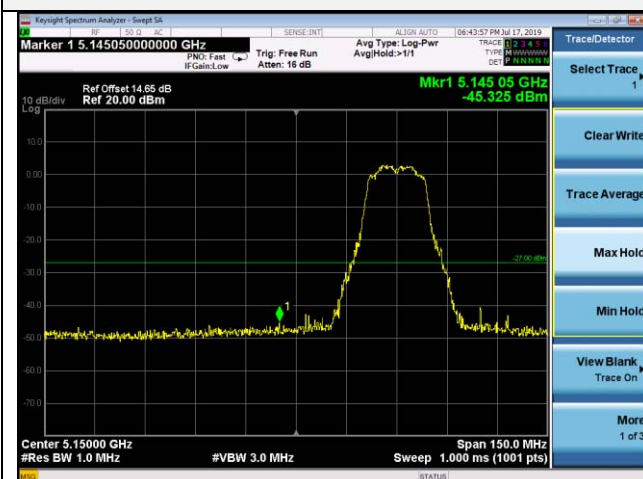


5180 MHz

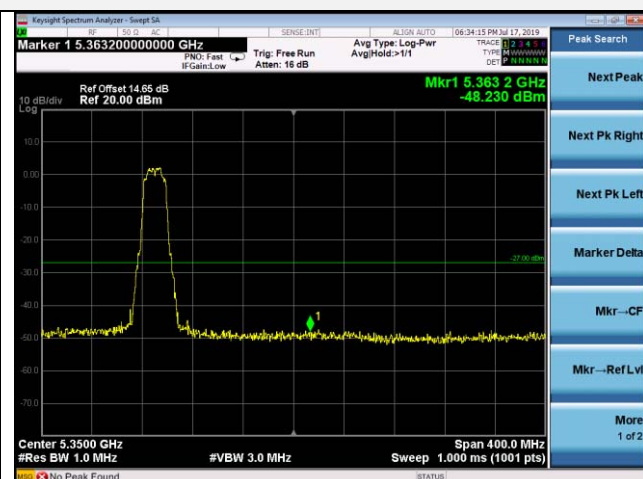


5240 MHz




802.11n HT40

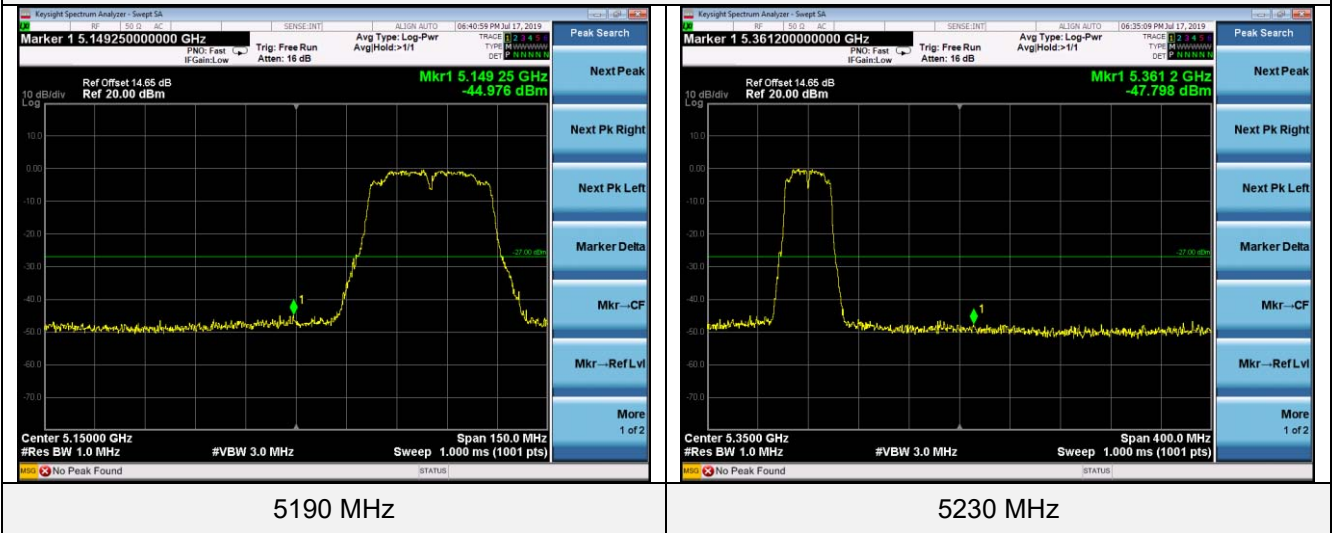




802.11ac40

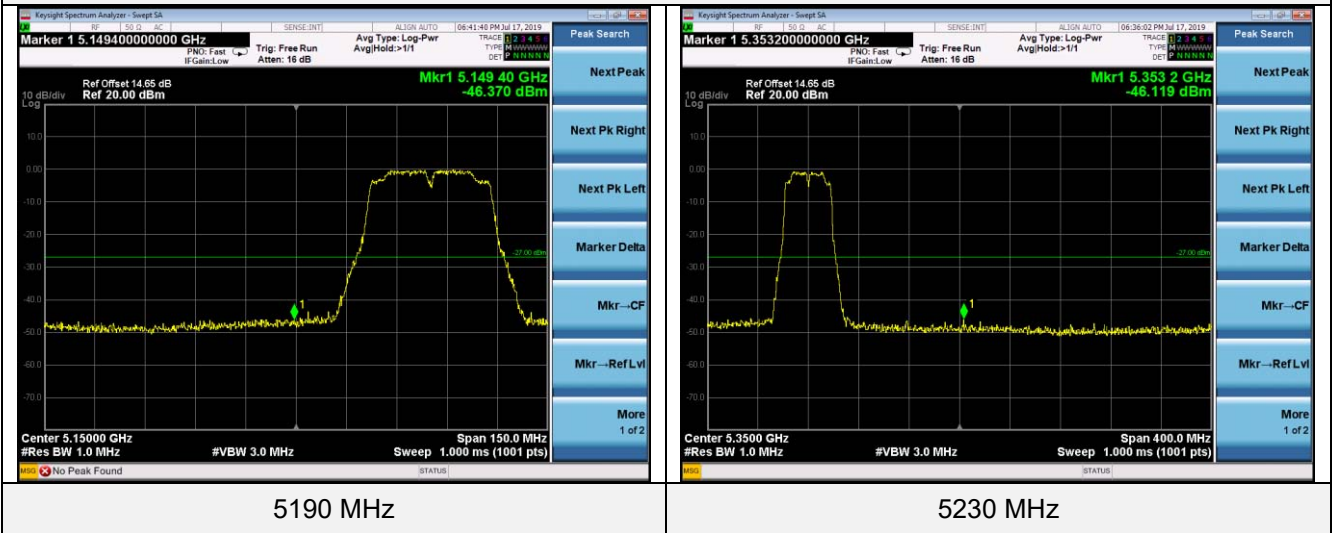


802.11ac80

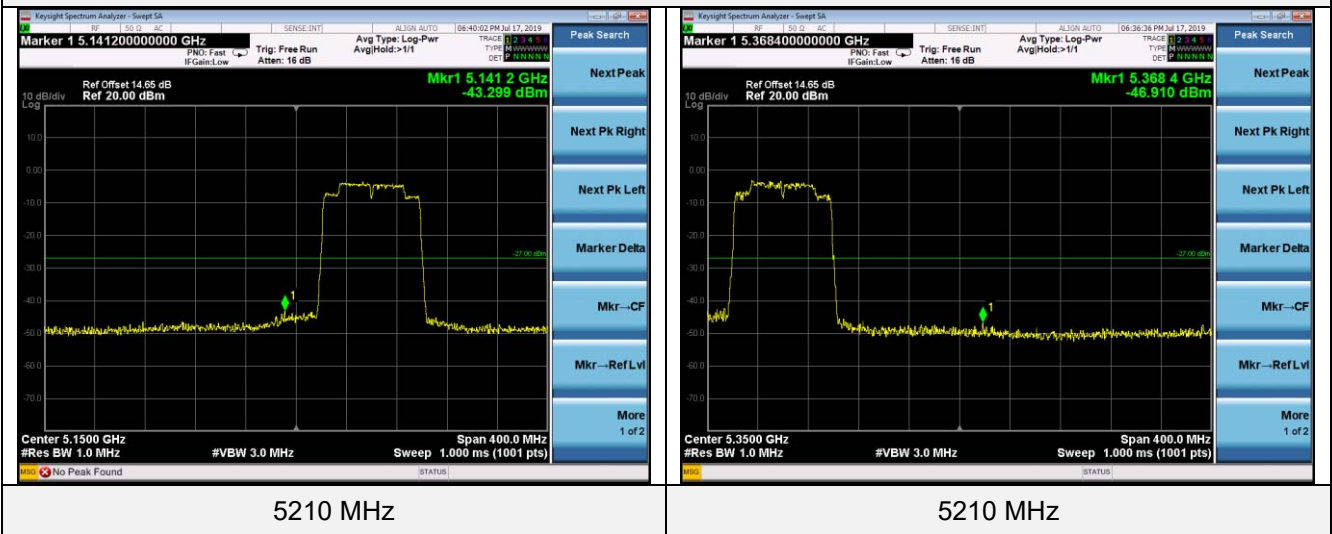


5725-5850MHz:

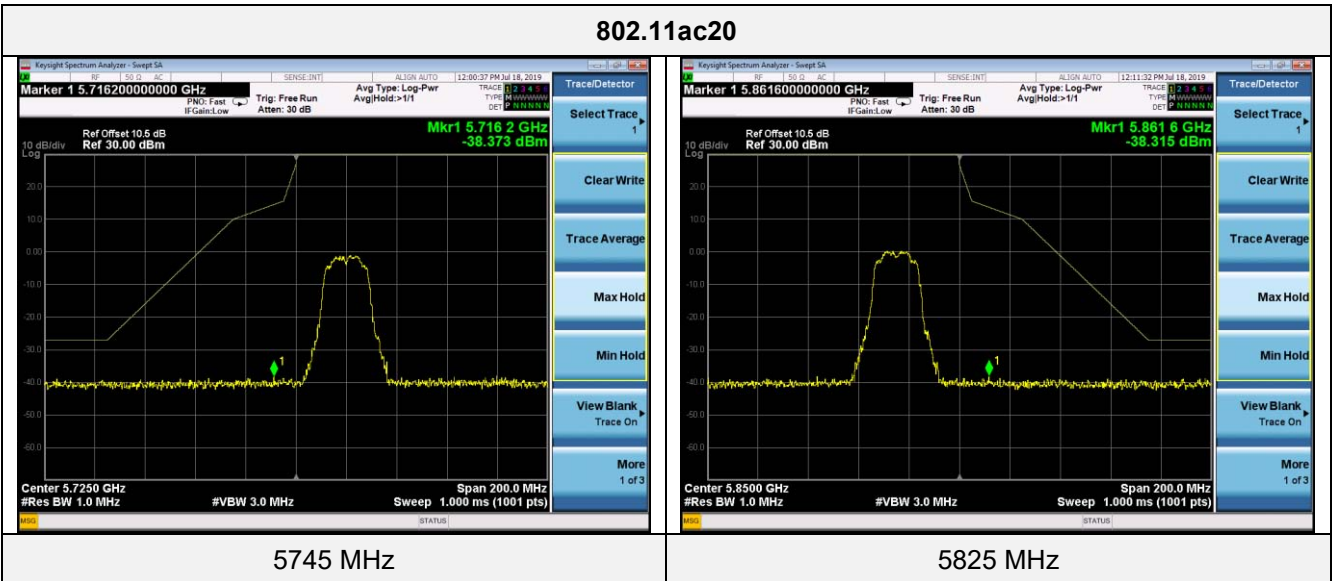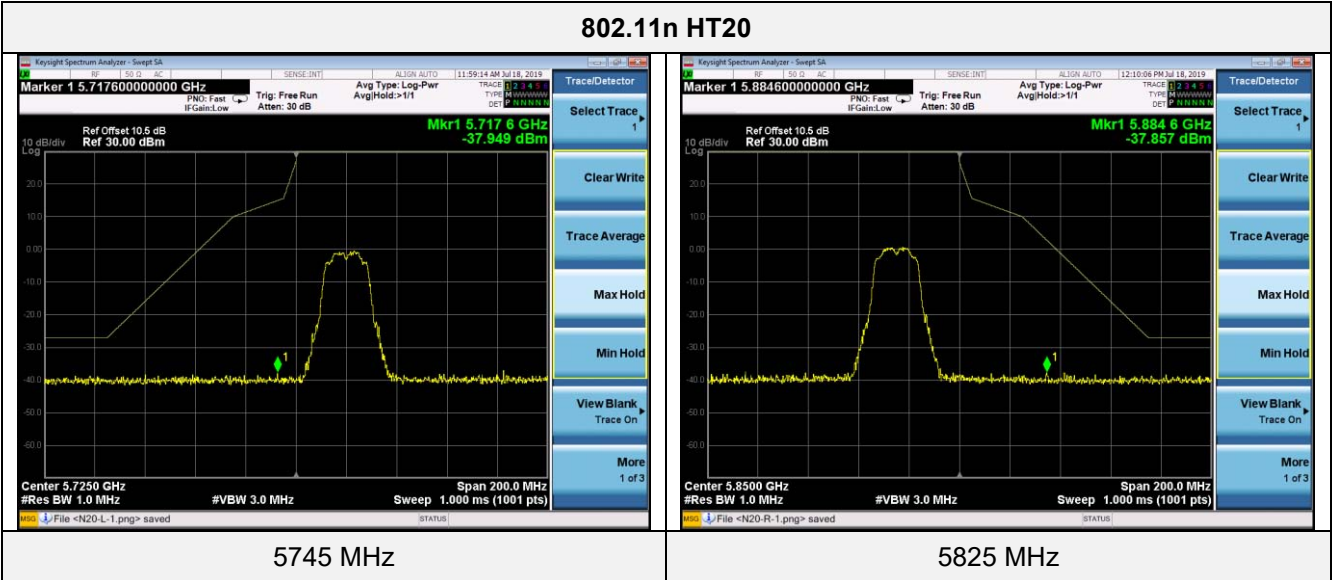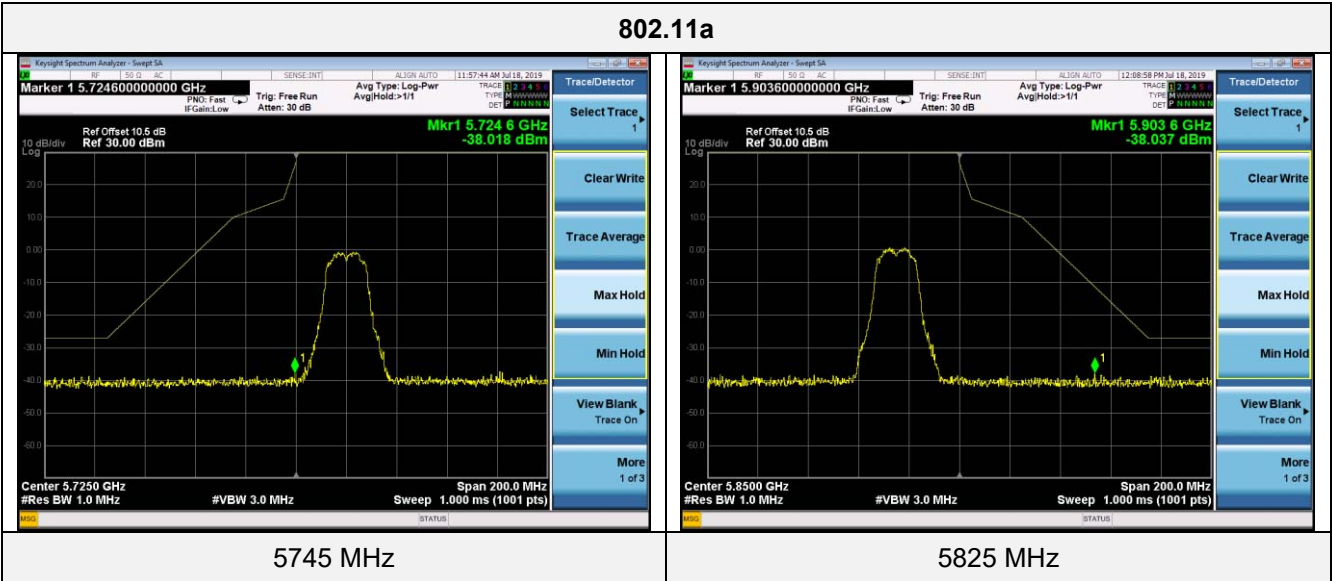


802.11n HT40

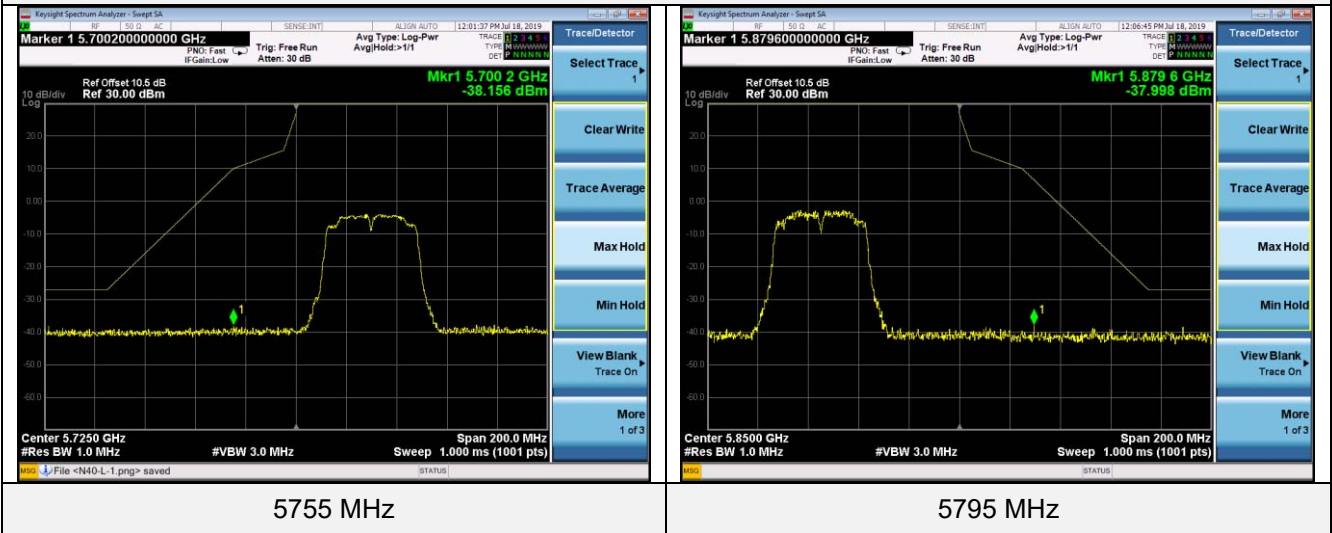

802.11ac40

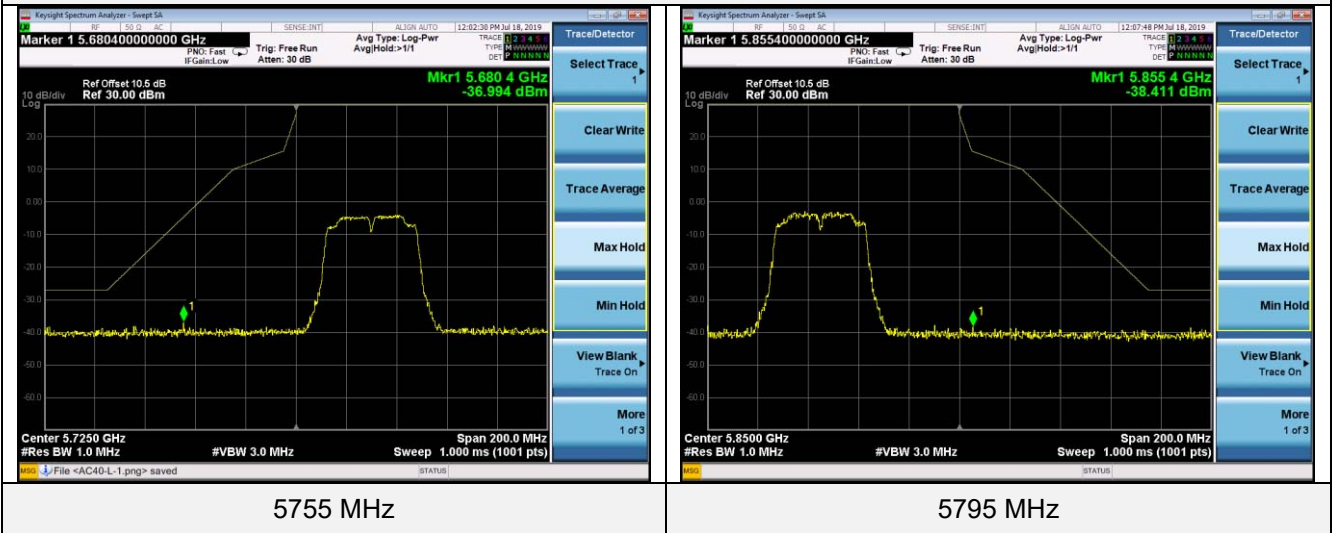




802.11ac80

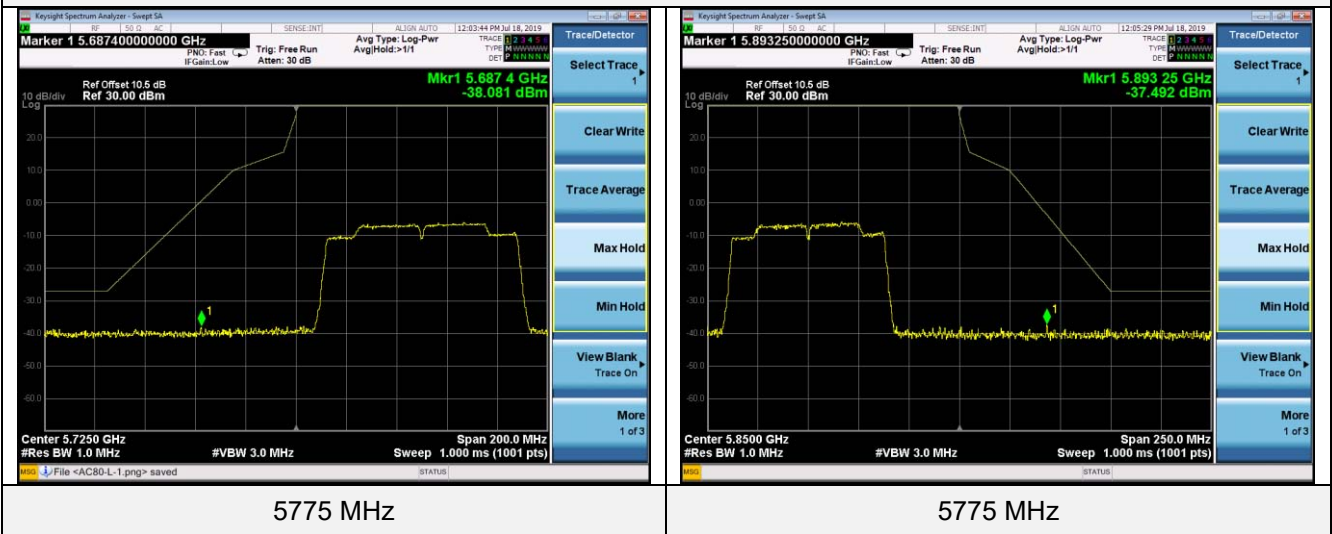




Antenna 1


5150-5250MHz:

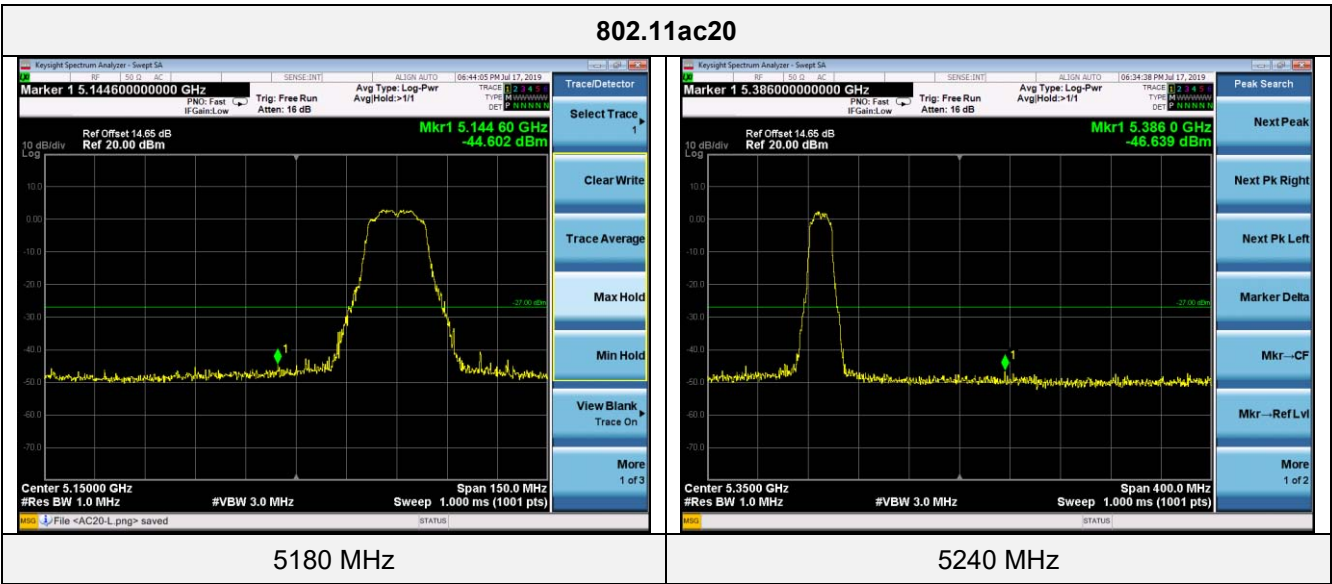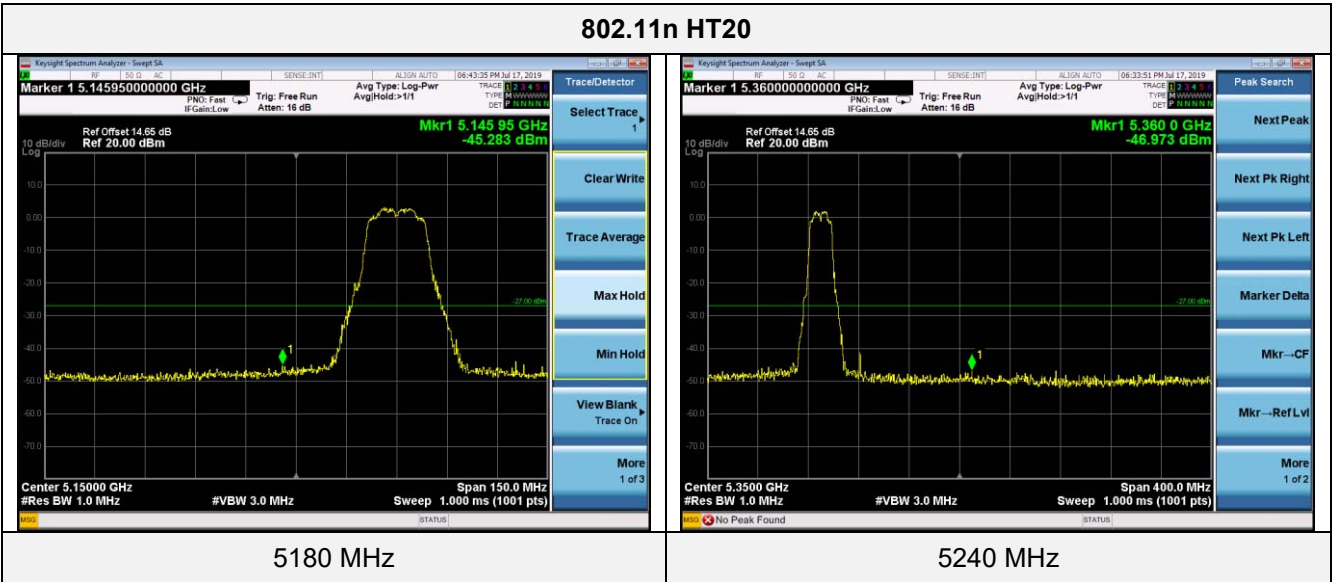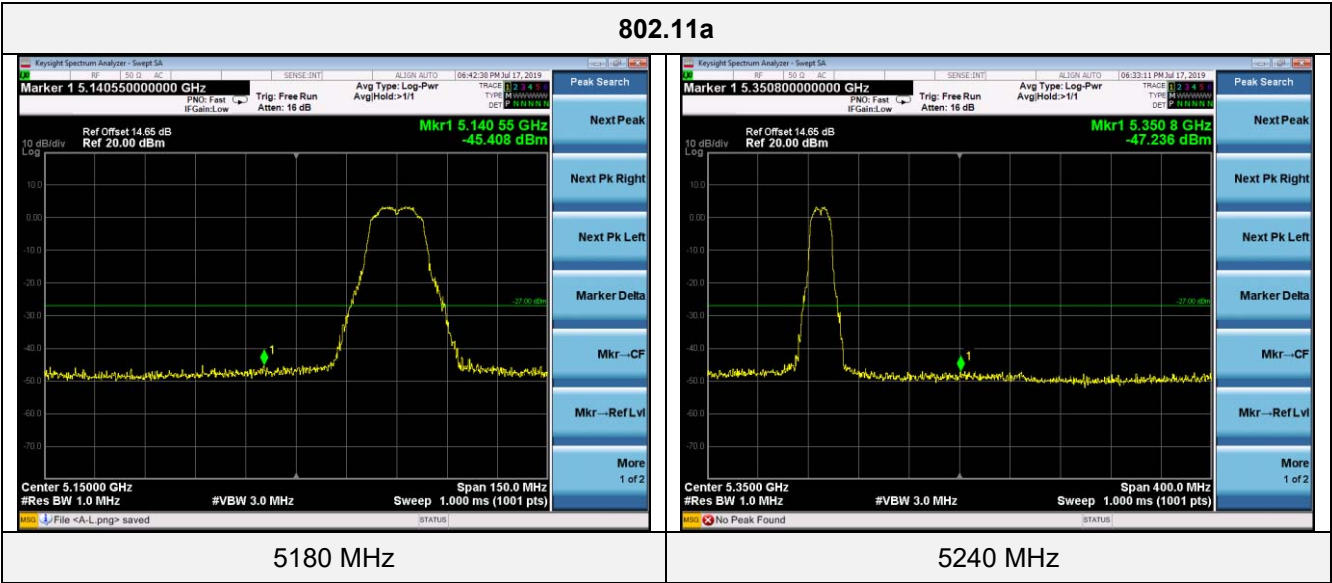


802.11n HT40

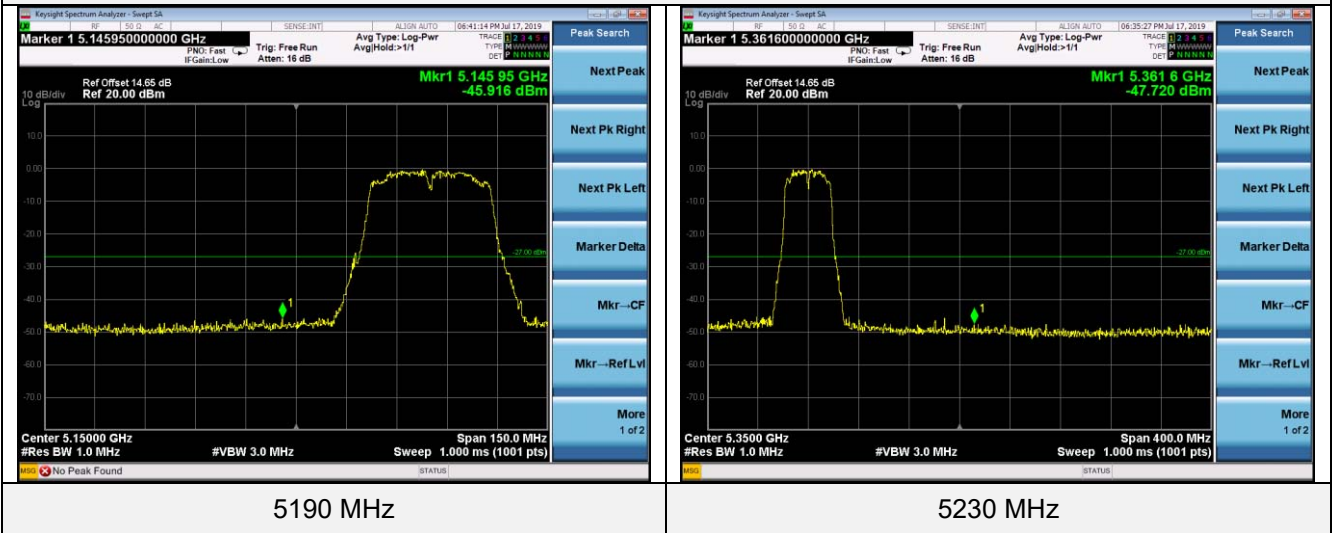




802.11ac40

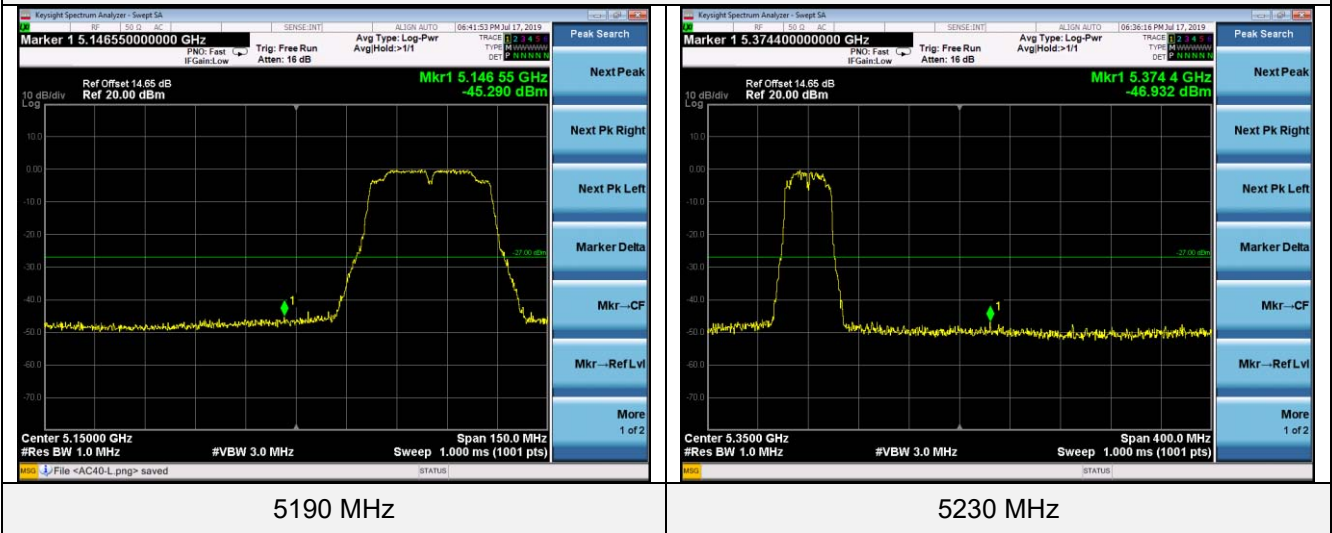

802.11ac80

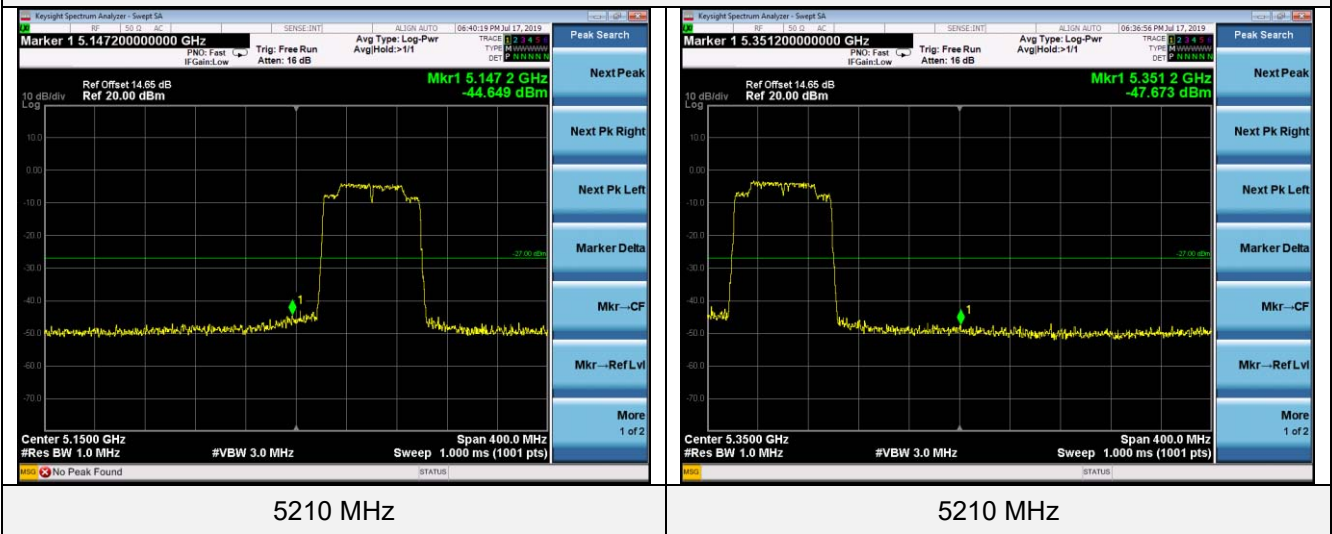


5725-5850MHz:

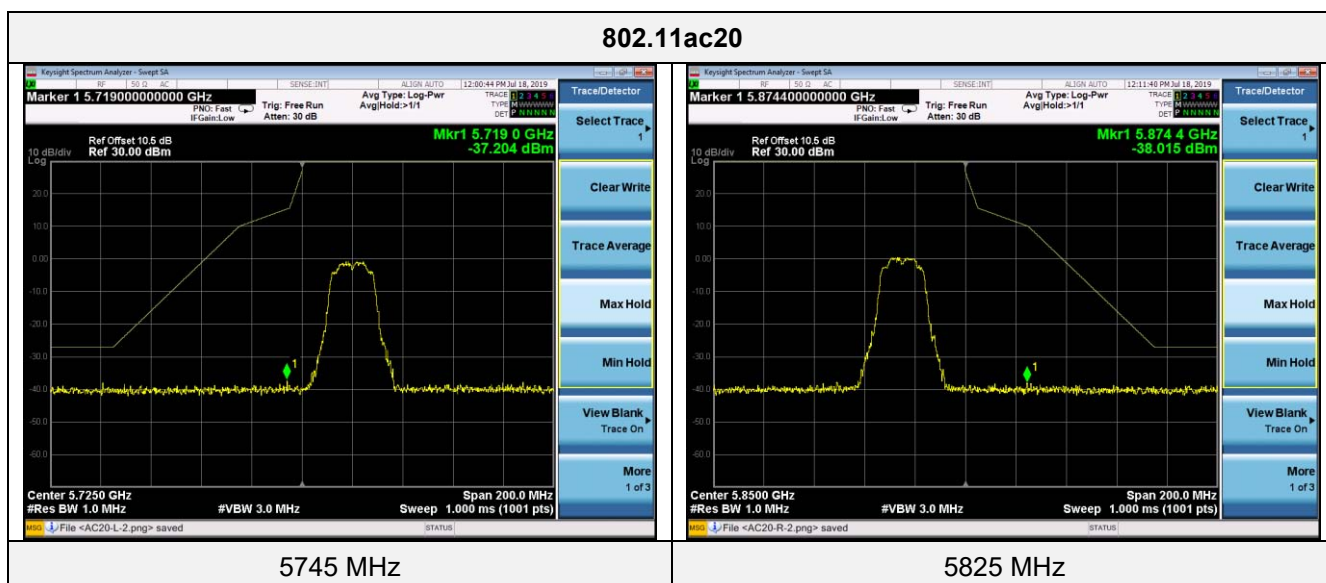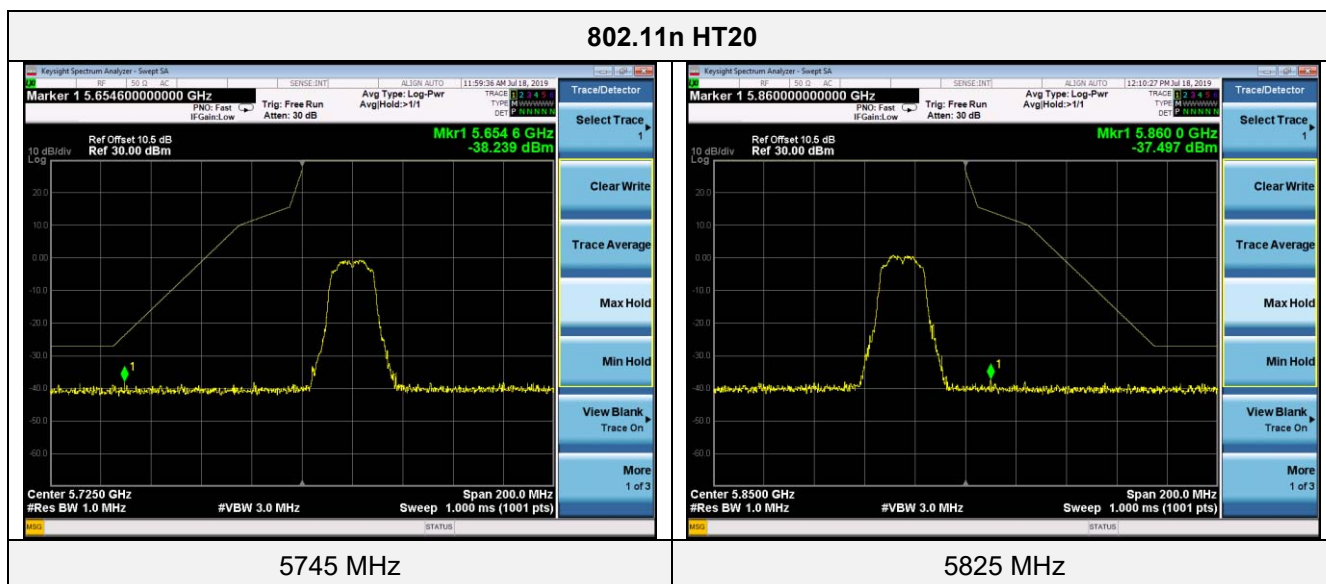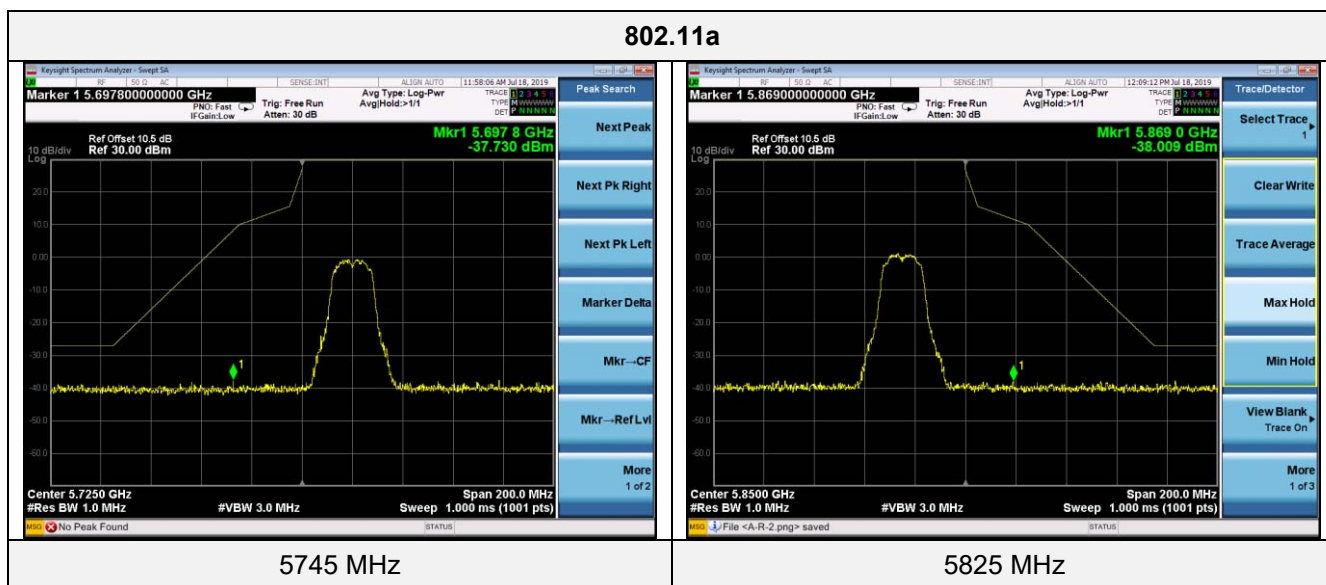




802.11n HT40

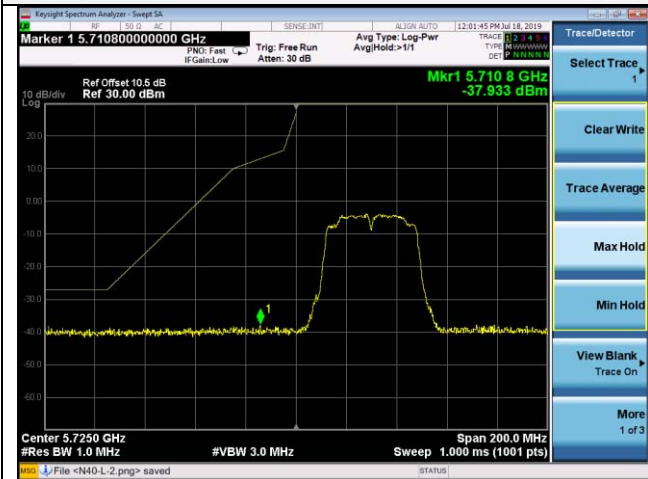


5755 MHz

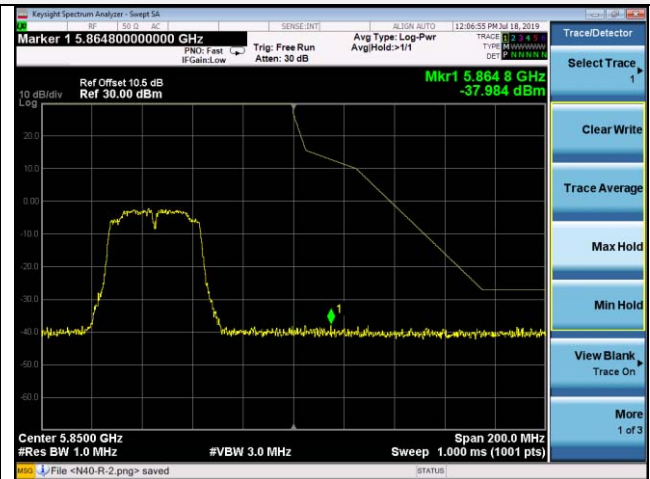


5795 MHz

802.11ac40

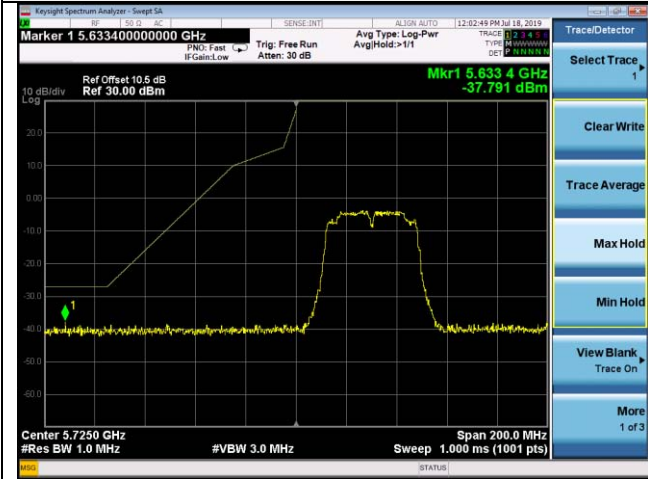

5755 MHz

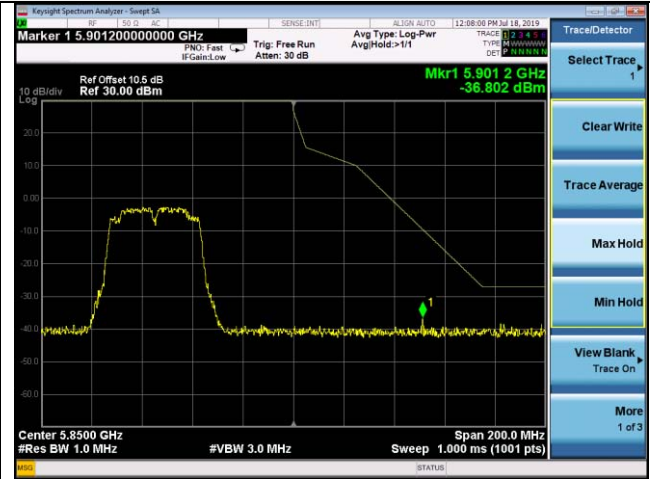

5795 MHz

802.11ac80



5775 MHz



5775 MHz

#### **4.9. Antenna Requirement**

##### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

##### **Antenna Information**

The antenna is FPC antenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 4.80dBi.

Reference to the test report No. **GTS20190612005-1-6**

## 5. Test Setup Photos of the EUT

Radiated Emission Test



Conducted Emission



## **6. External and Internal Photos of the EUT**

Reference to the test report No. GTS20190612005-1-6

.....**End of Report**.....