












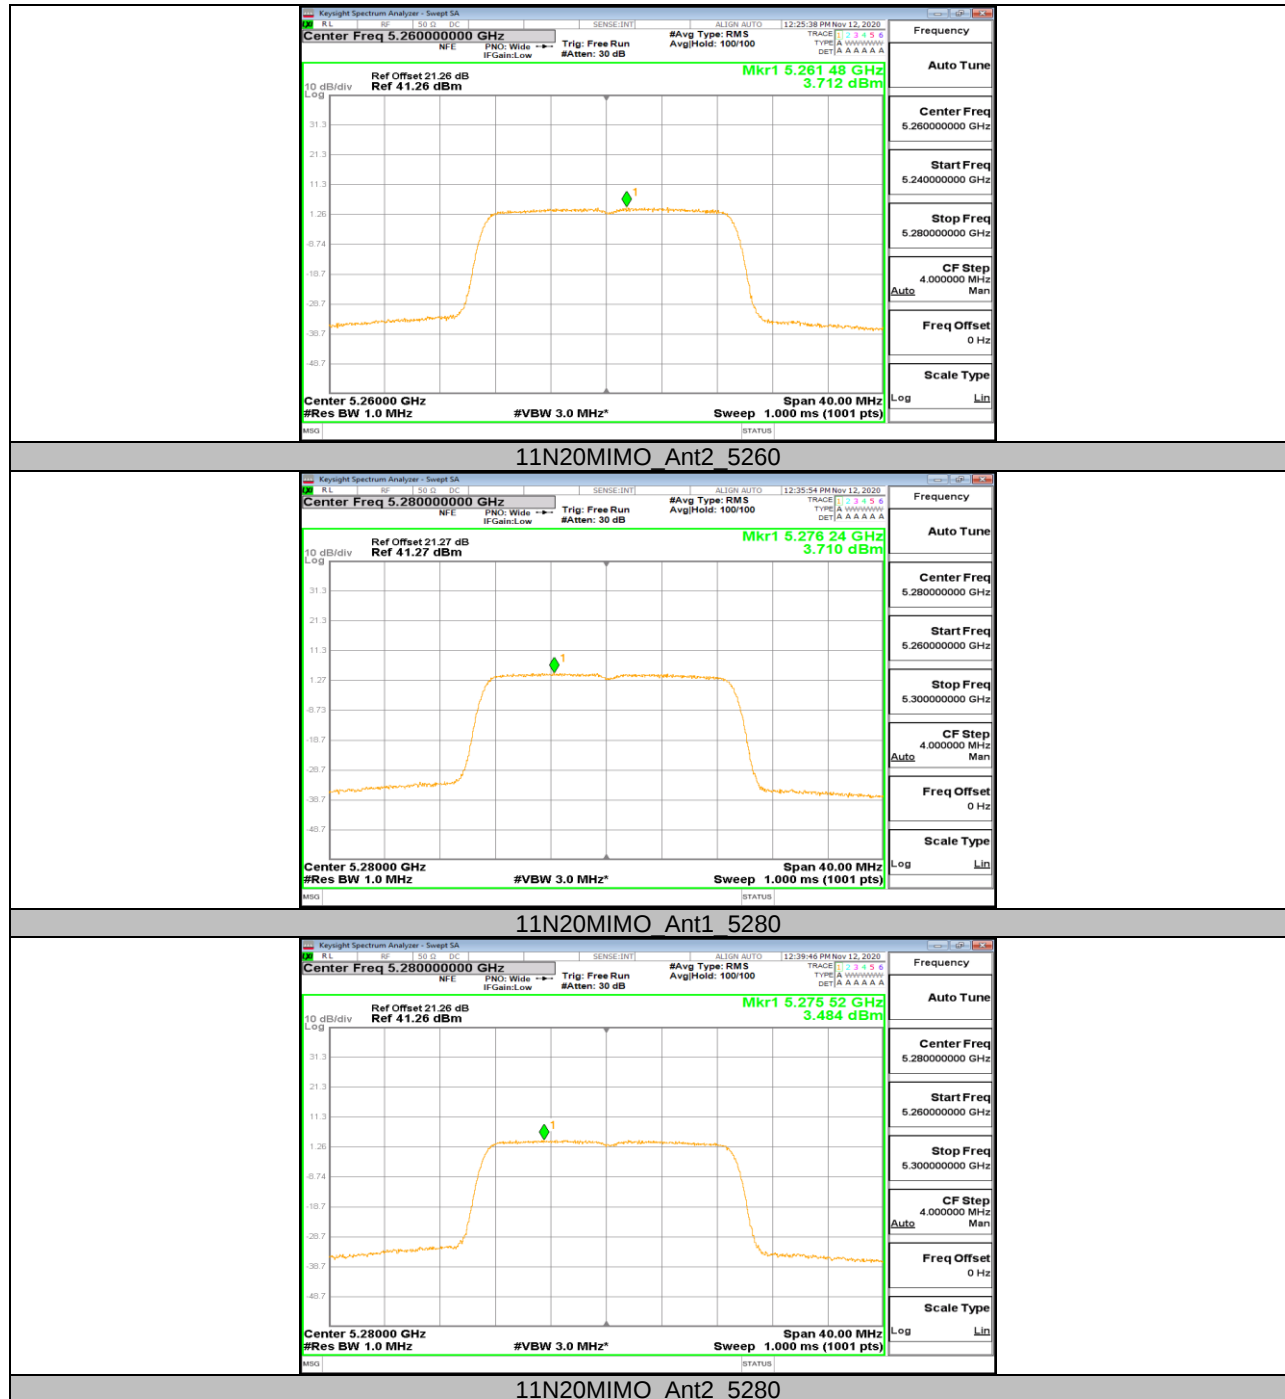


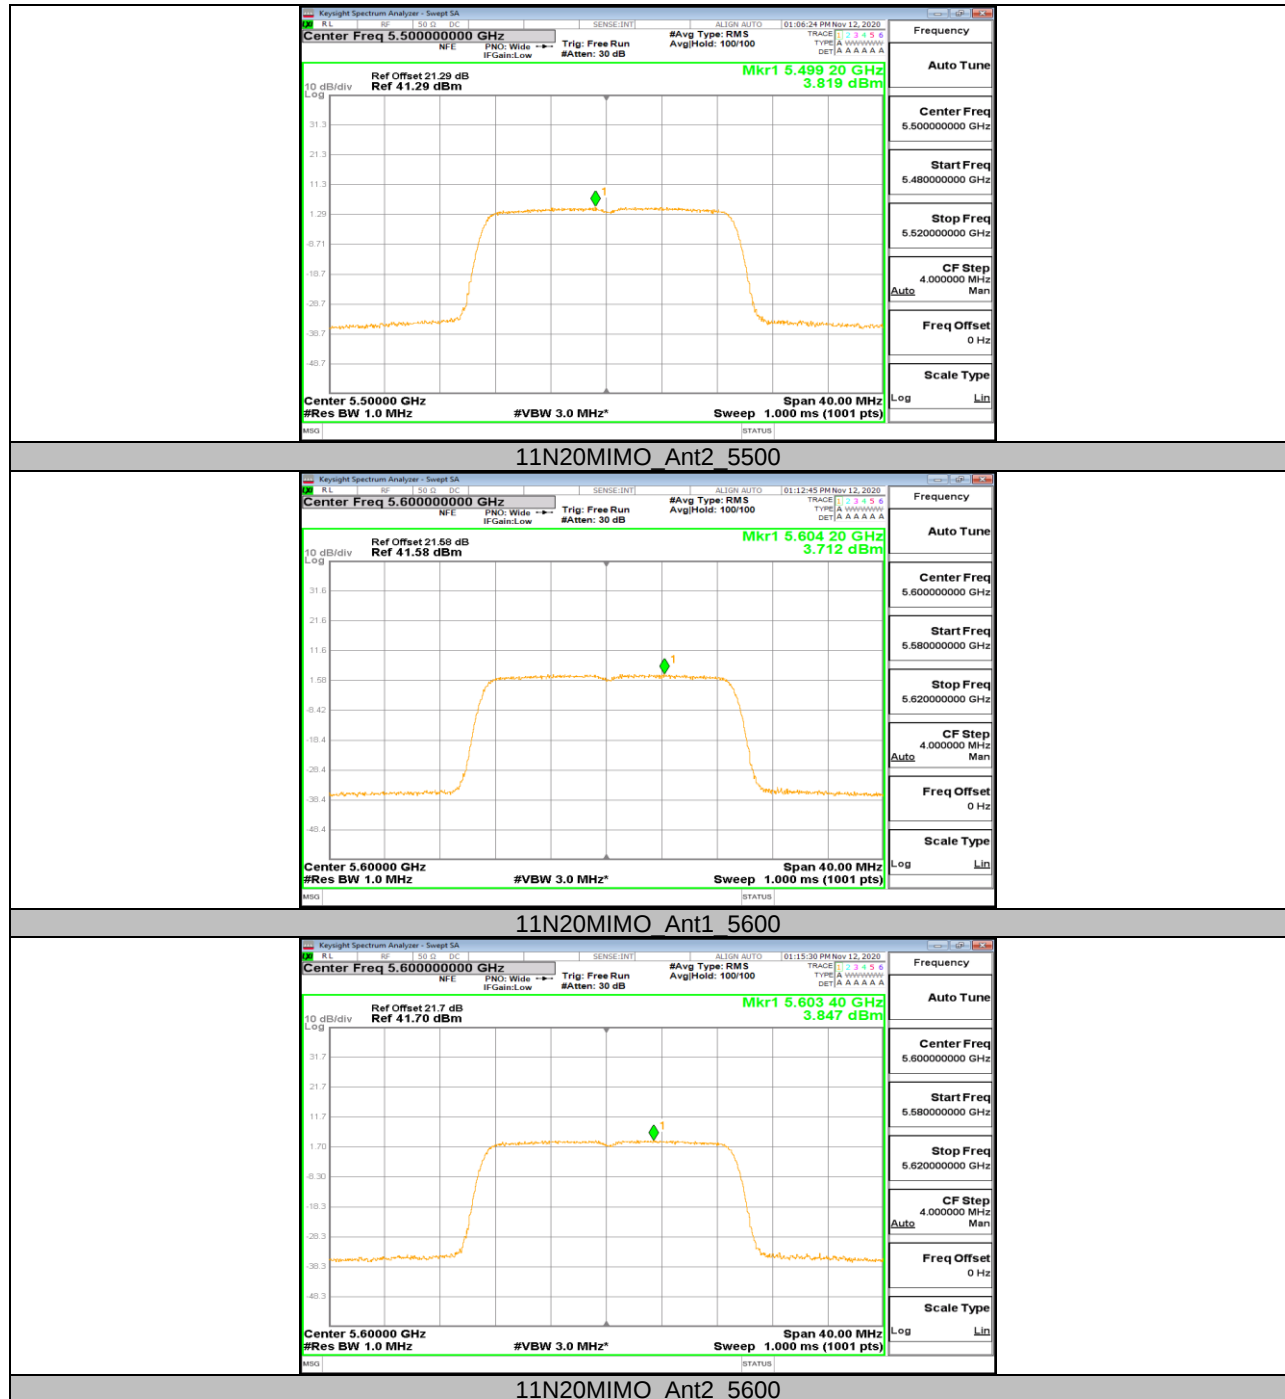





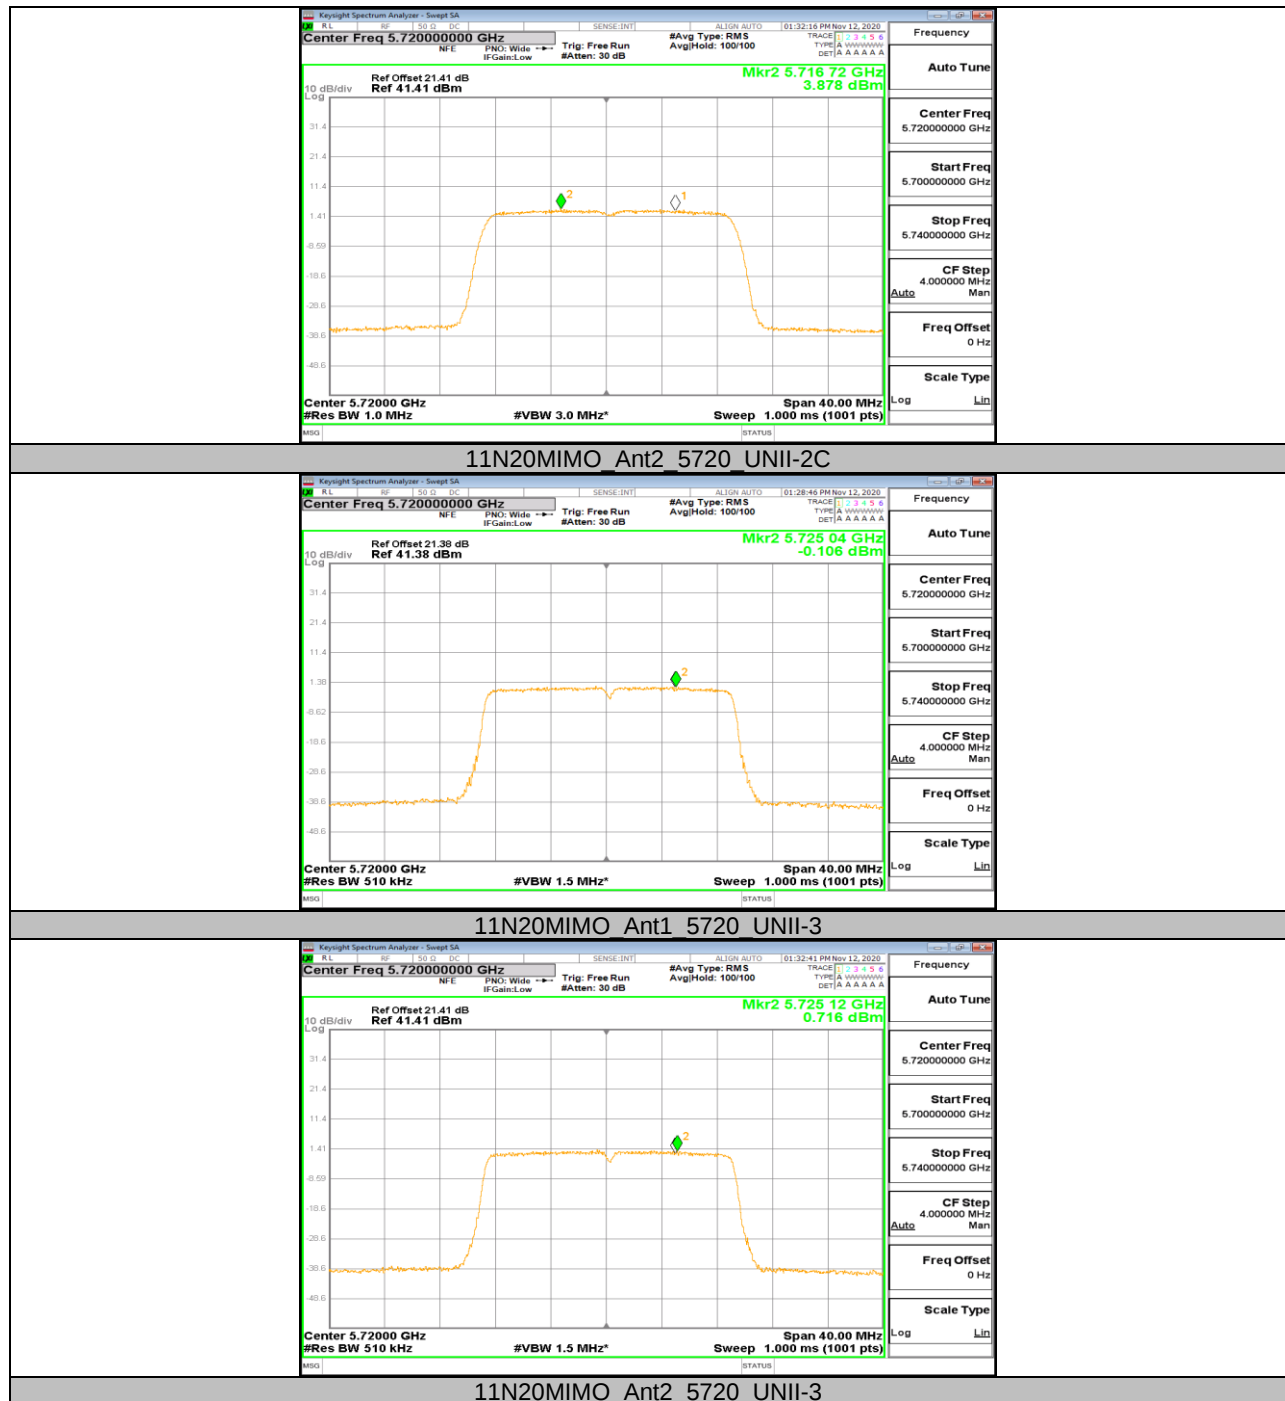





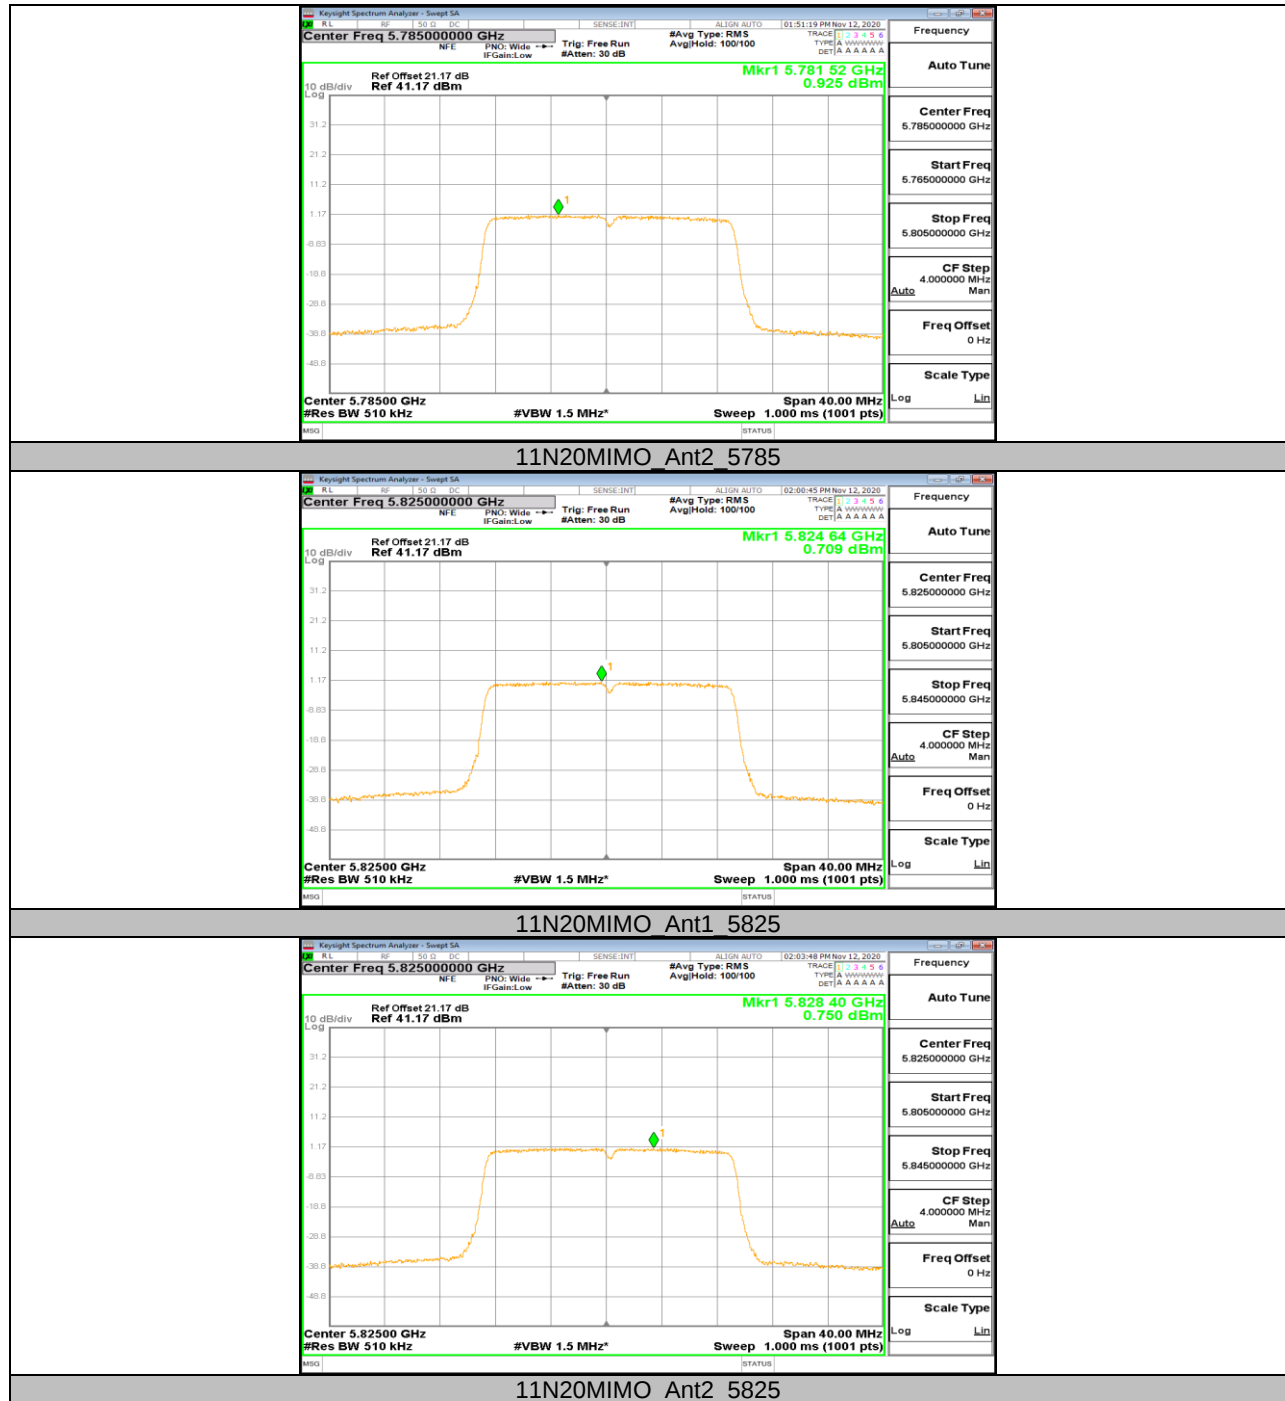


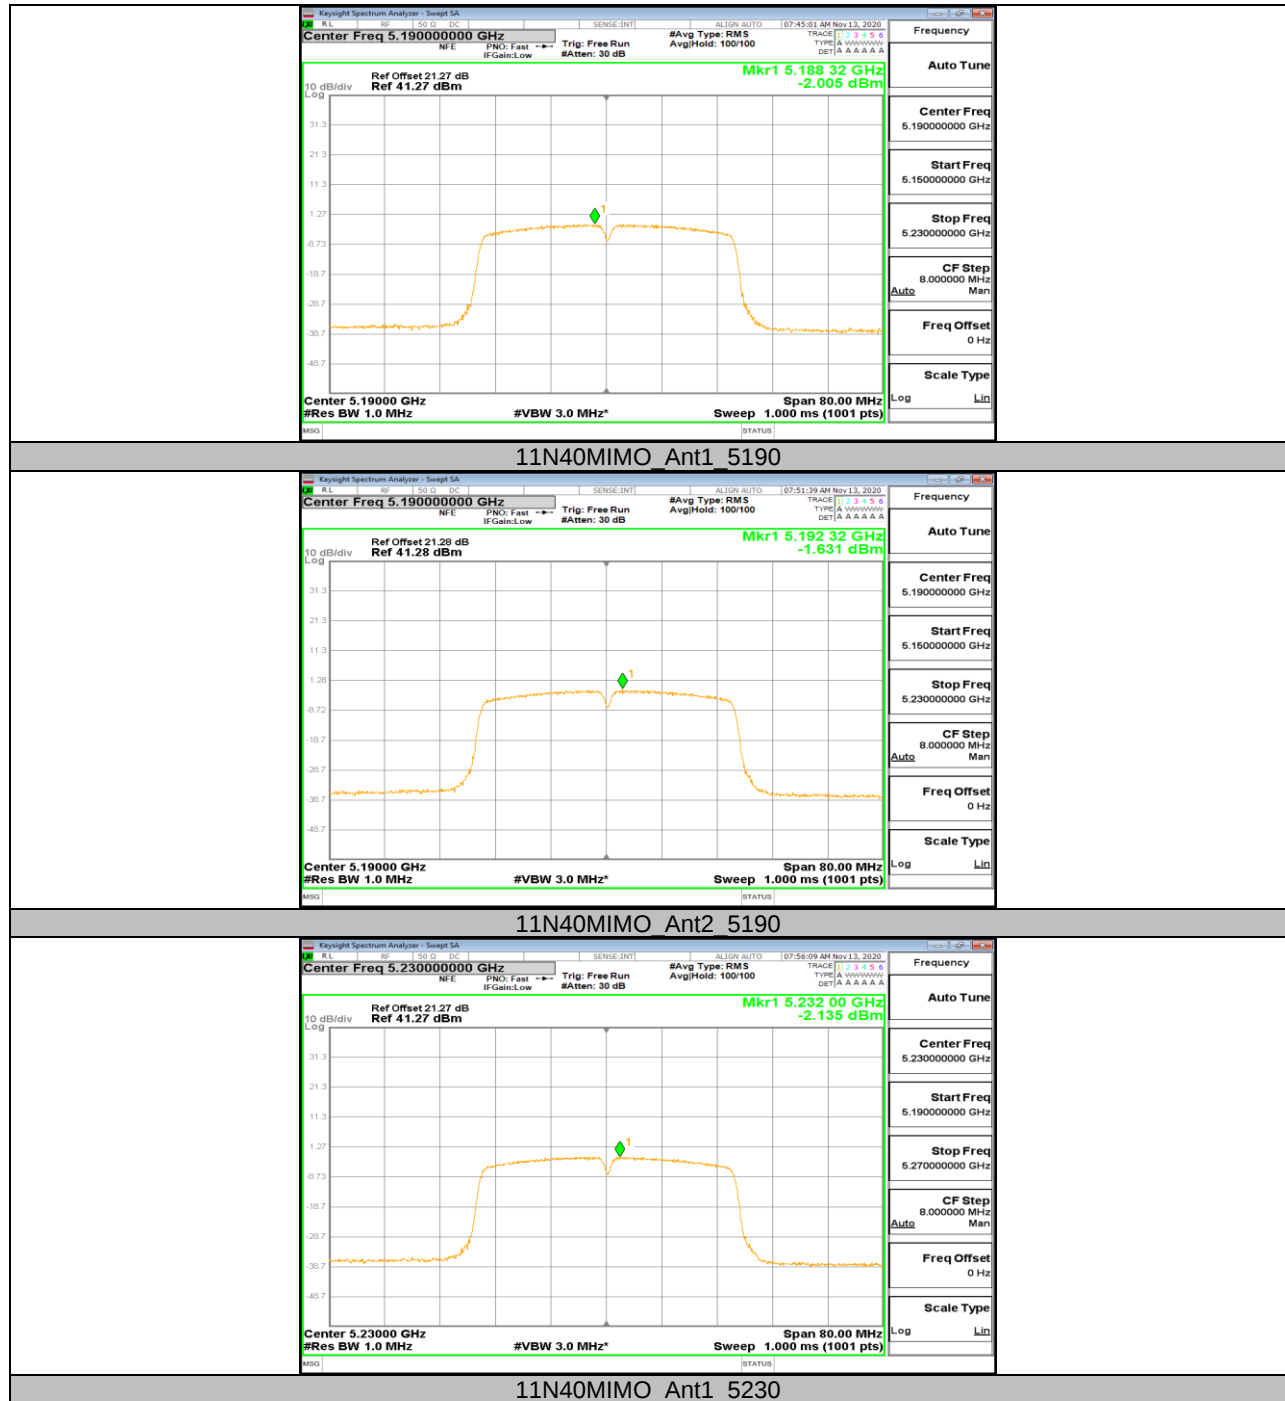


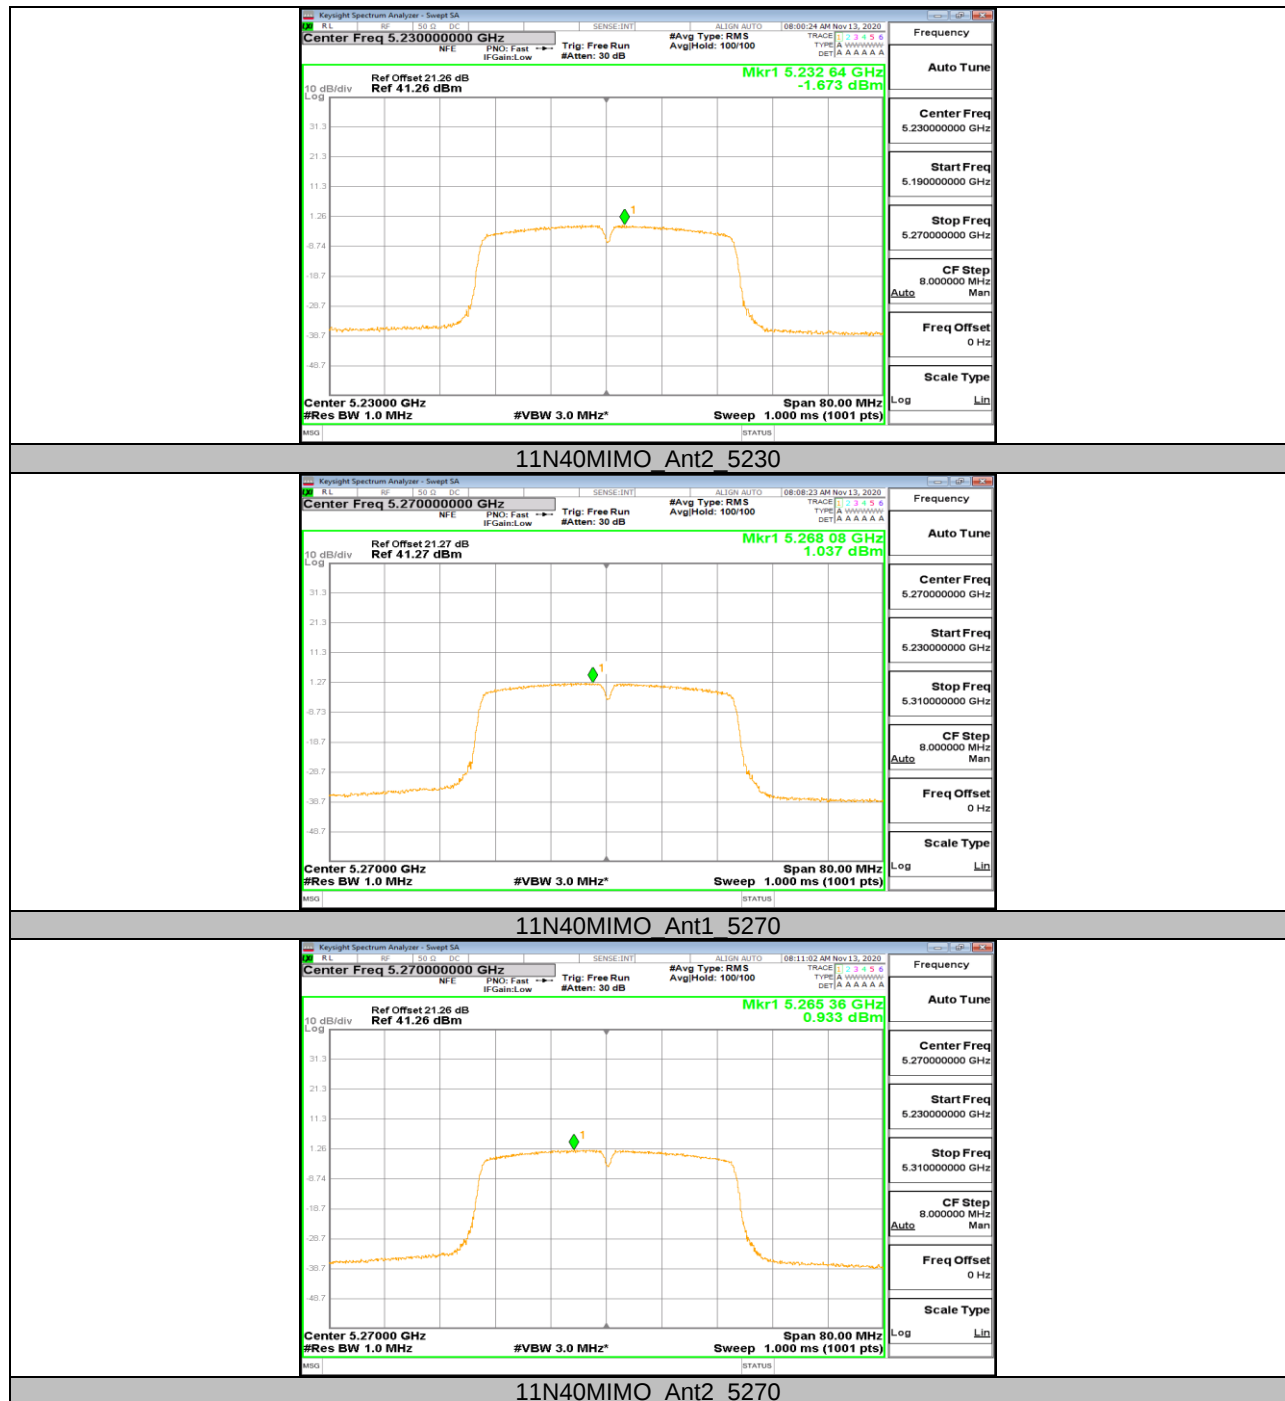


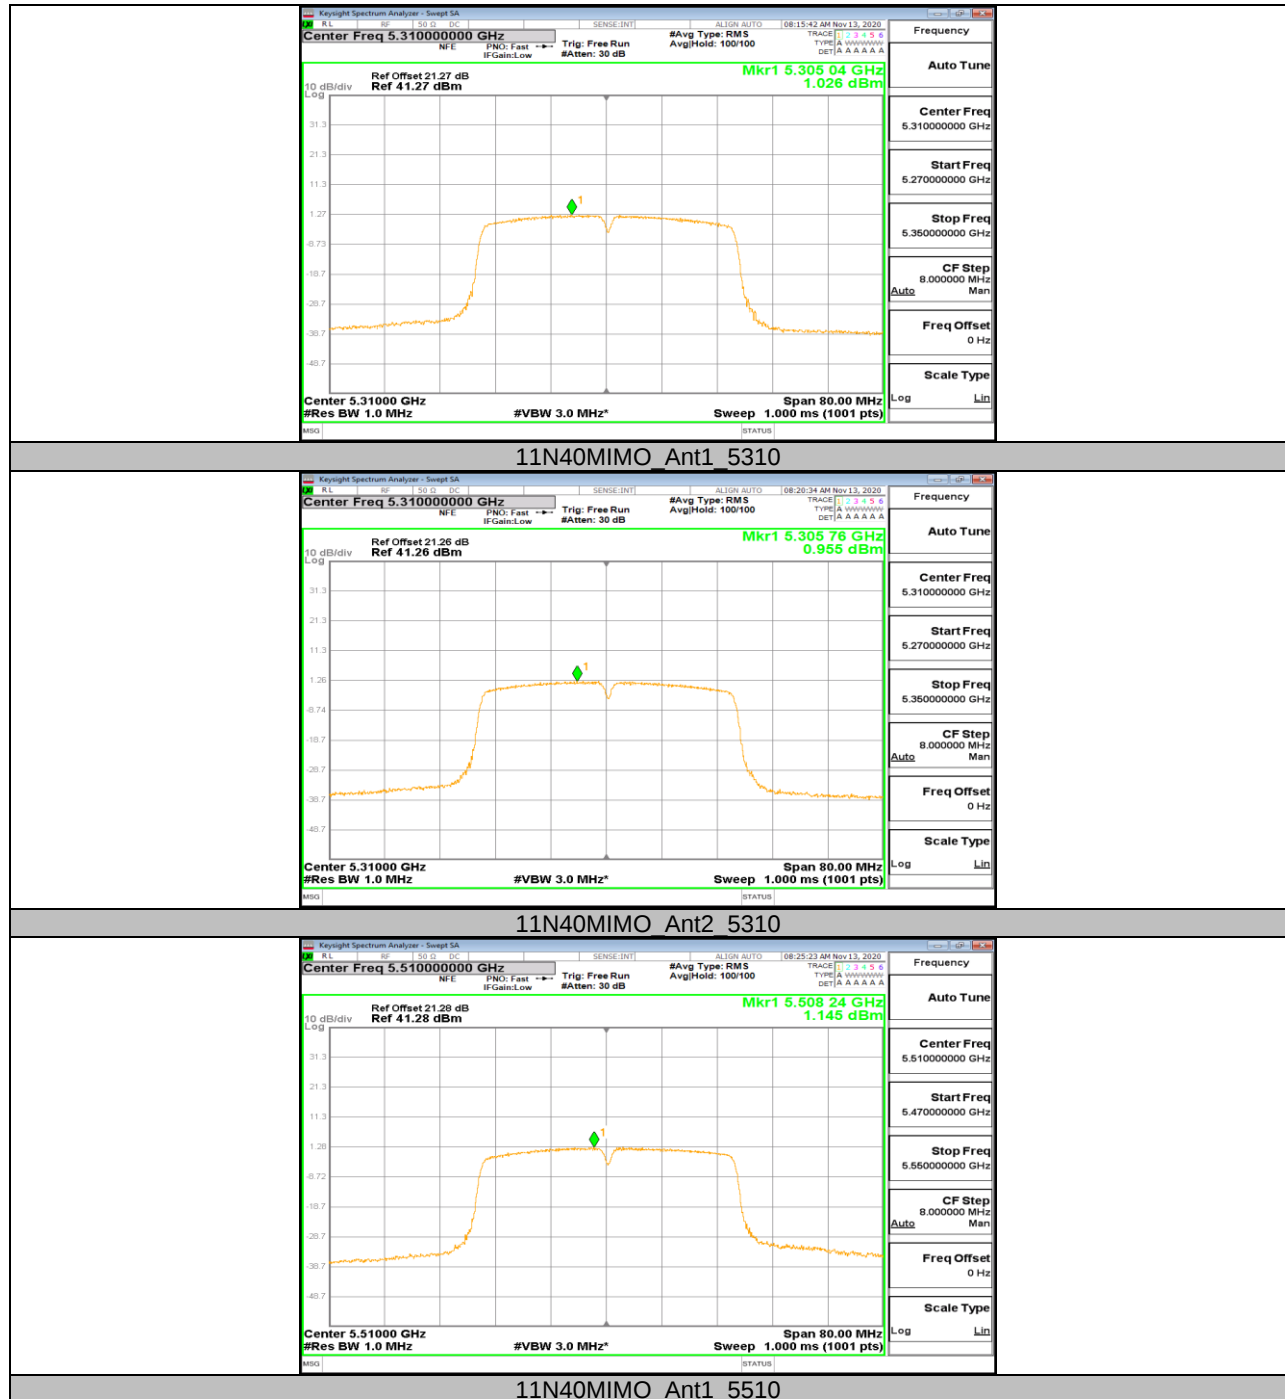


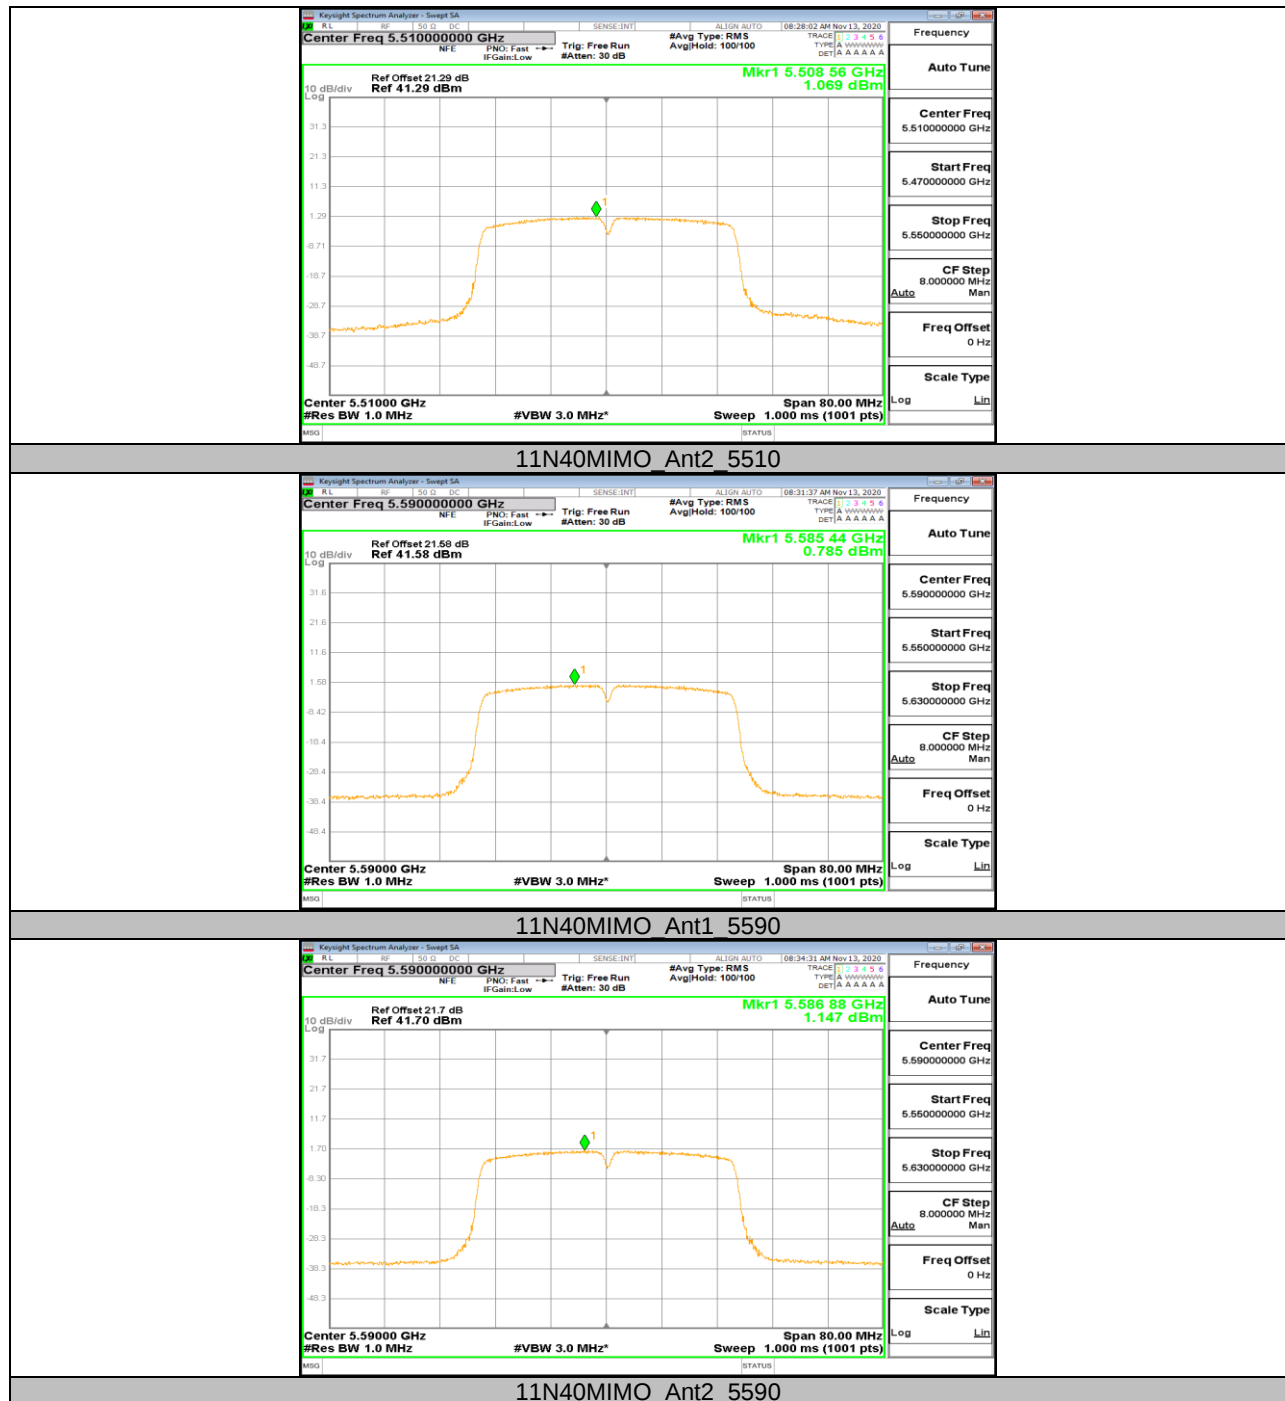

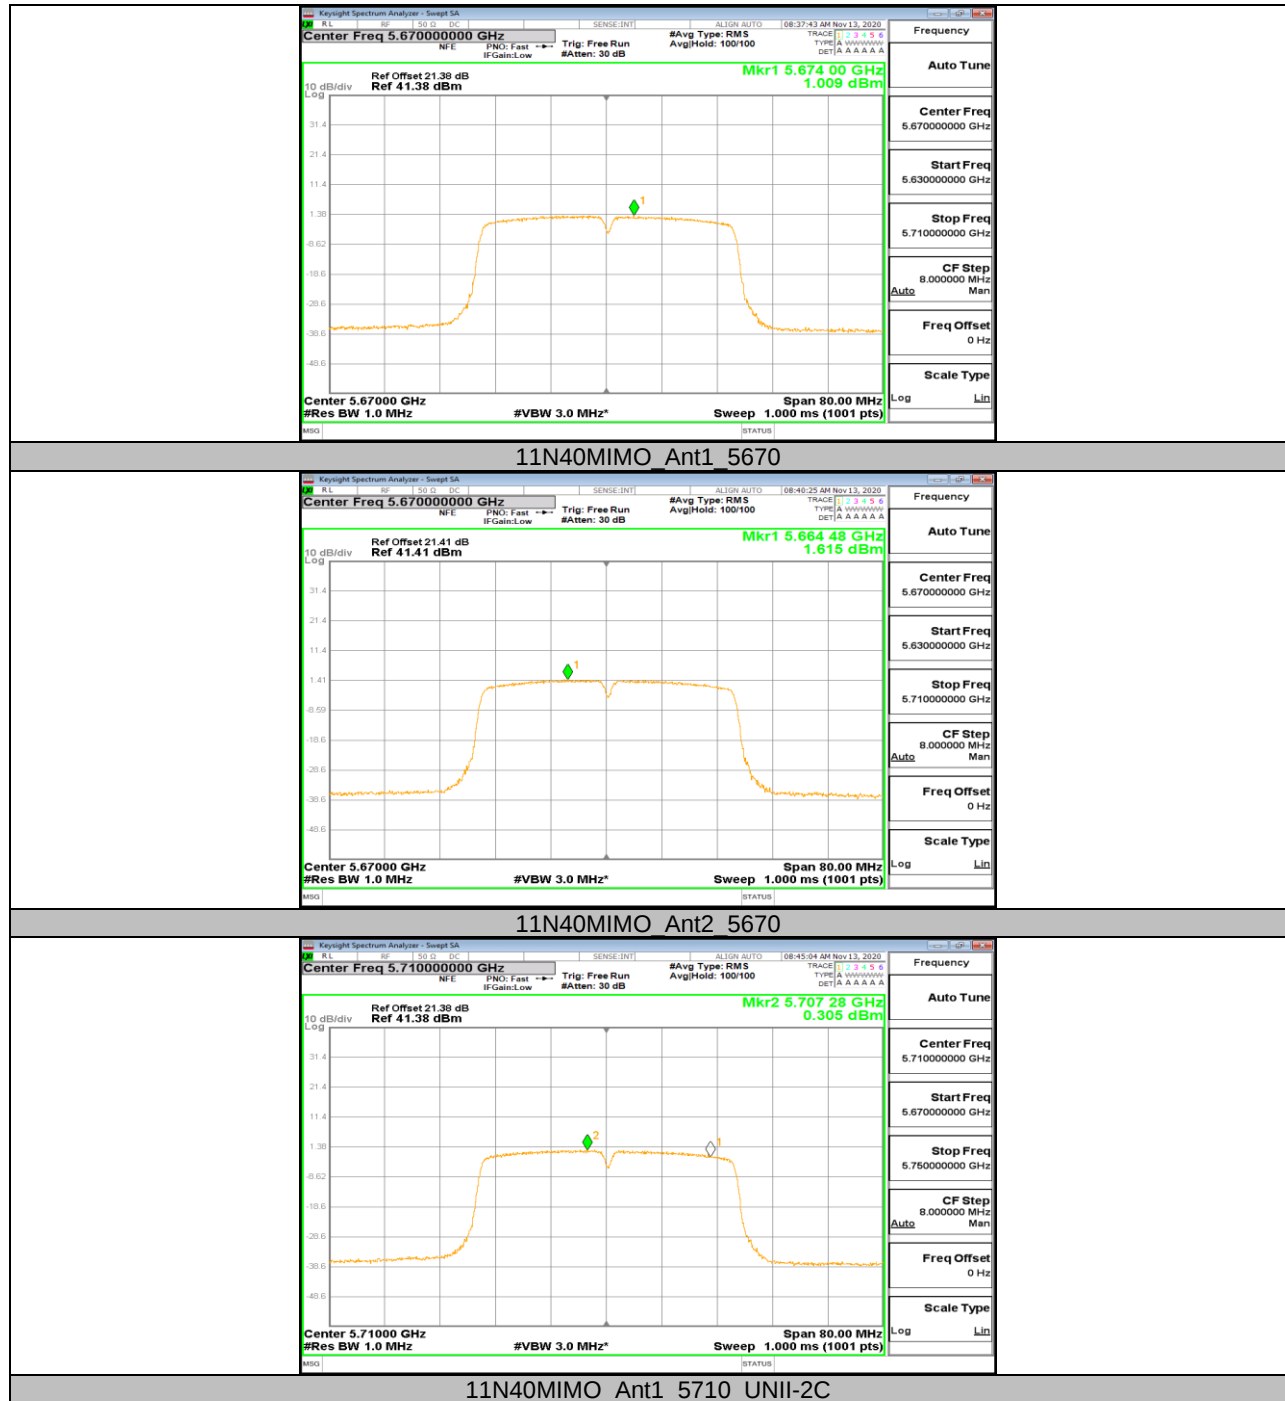


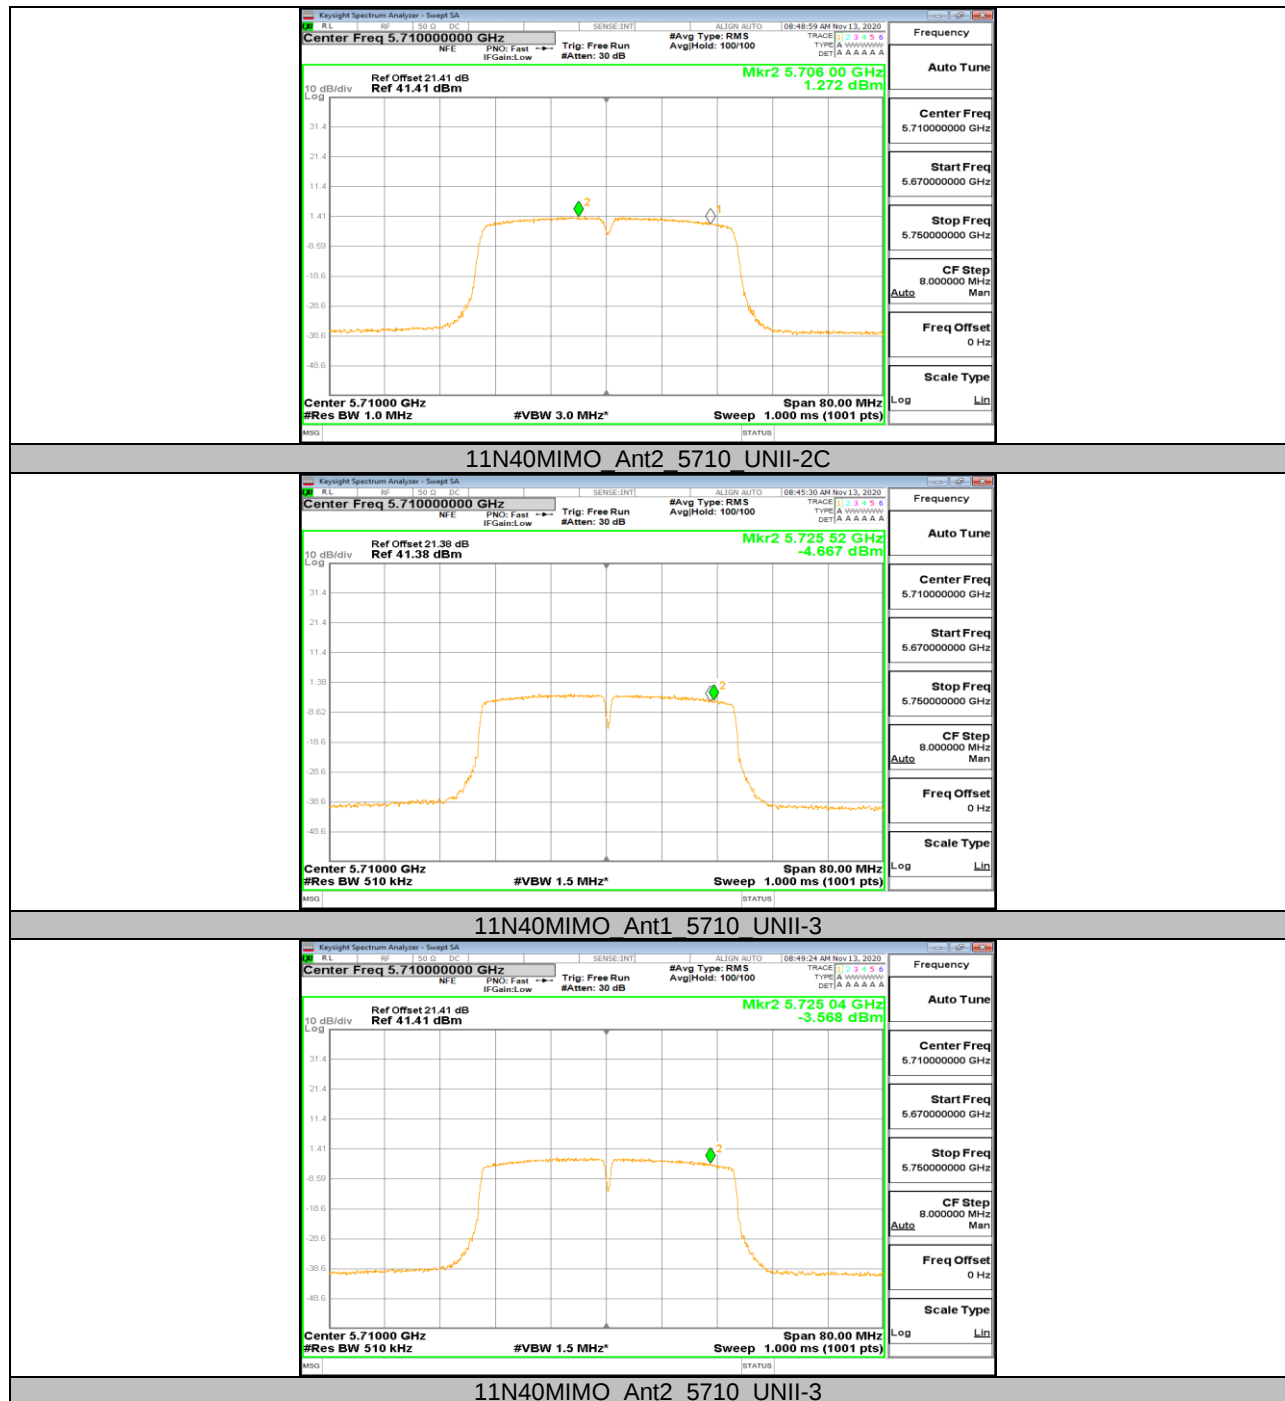

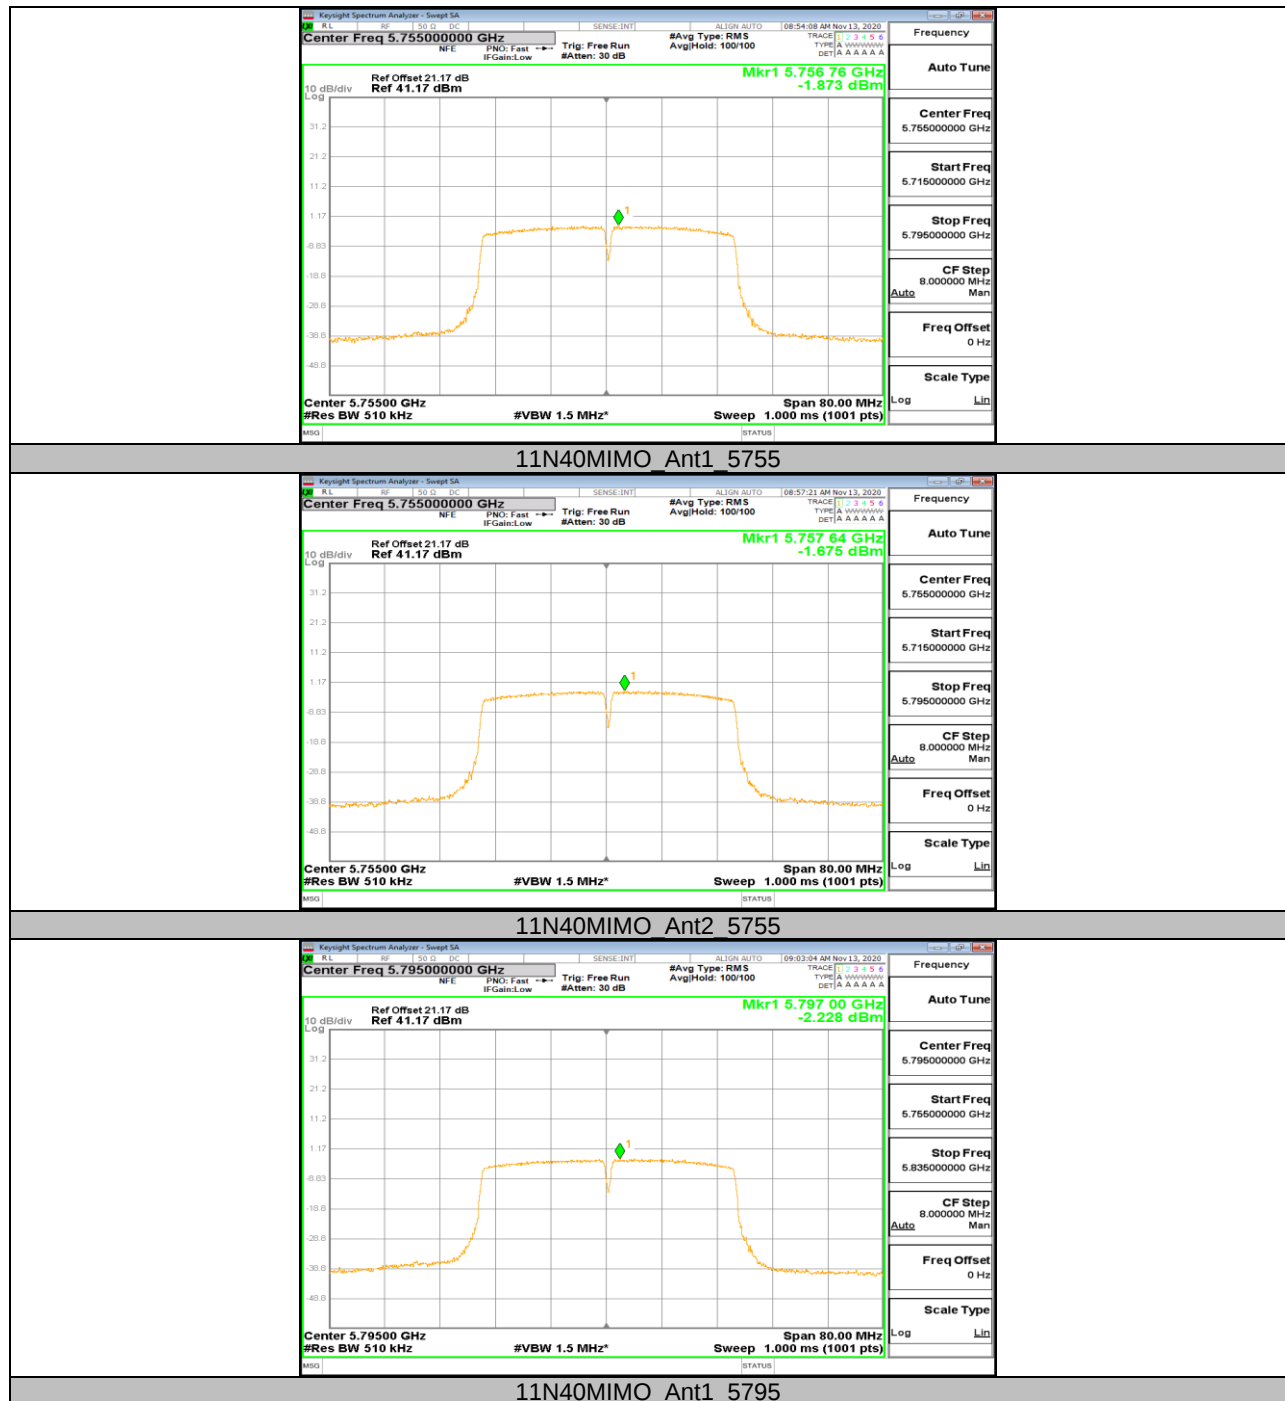

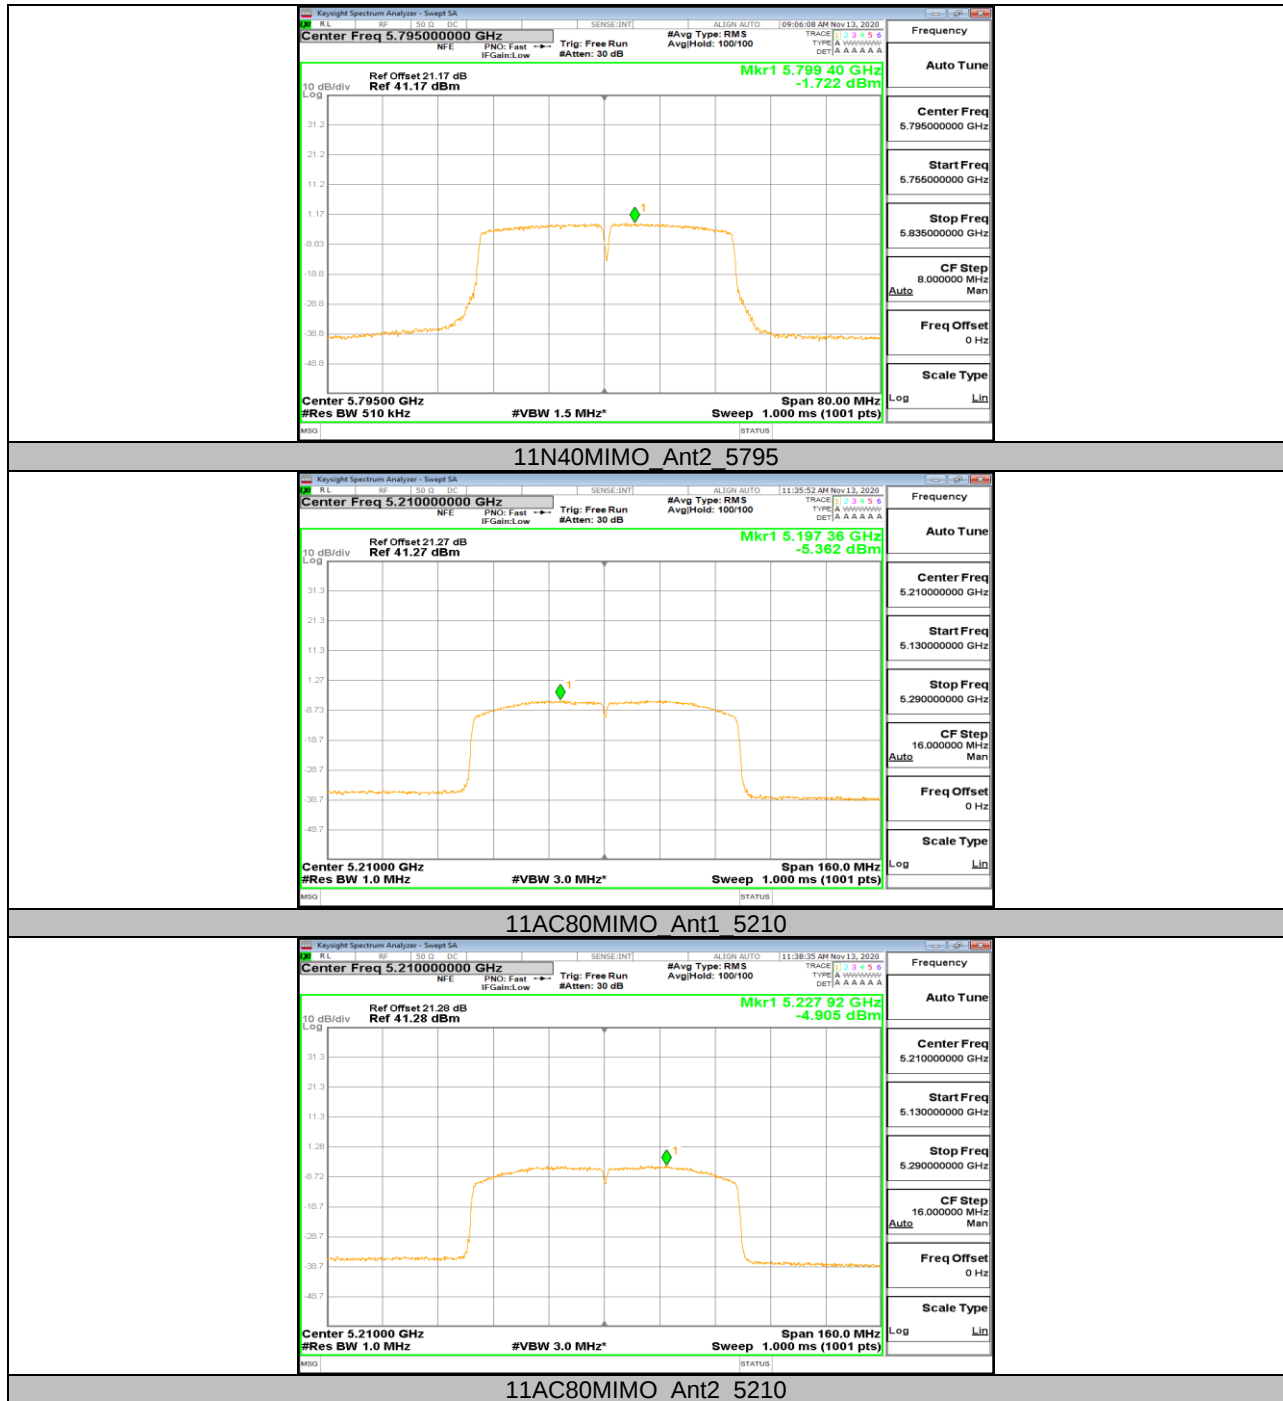



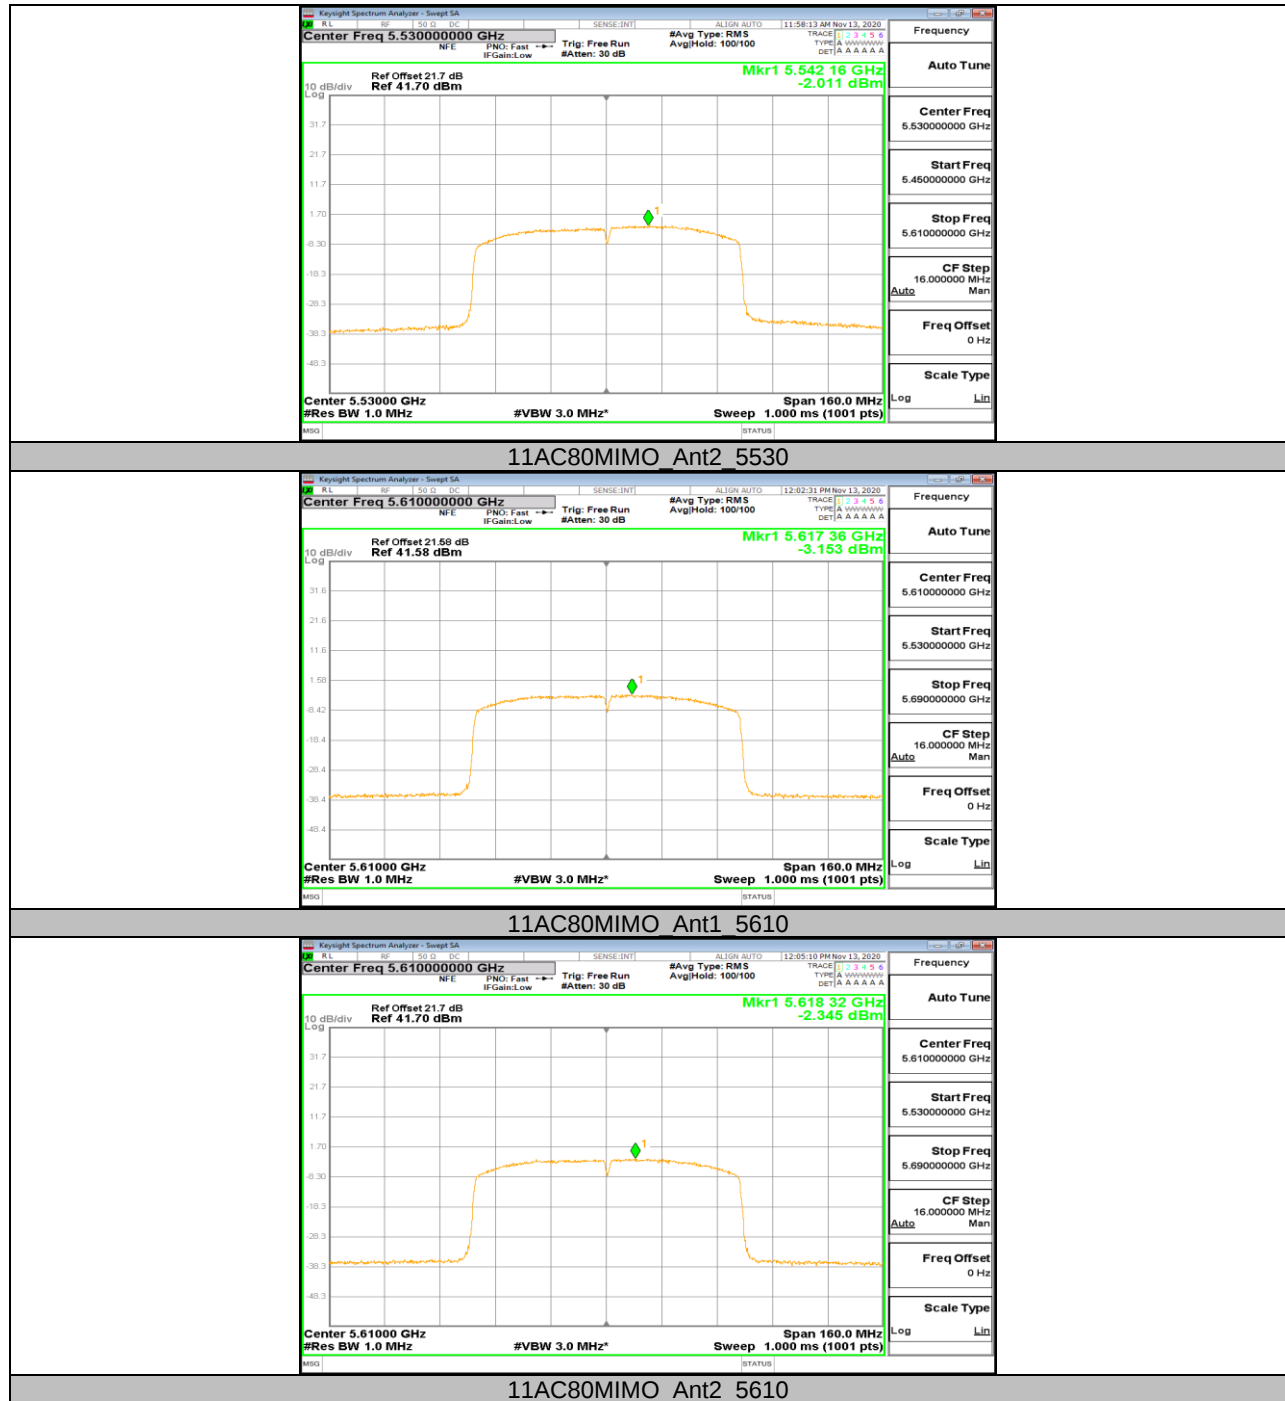







Appendix D: Duty Cycle Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	100.1	100.1	1	100	0	0.01	0.01
11N20MIMO	100.1	100.1	1	100	0	0.01	0.01
11N40MIMO	100.1	100.1	1	100	0	0.01	0.01
11AC80MIMO	100.1	100.1	1	100	0	0.01	0.01

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.