


GIGMASTER

GM-LEGION
GM-LEGION MAX
GM-LEGION XL MAX

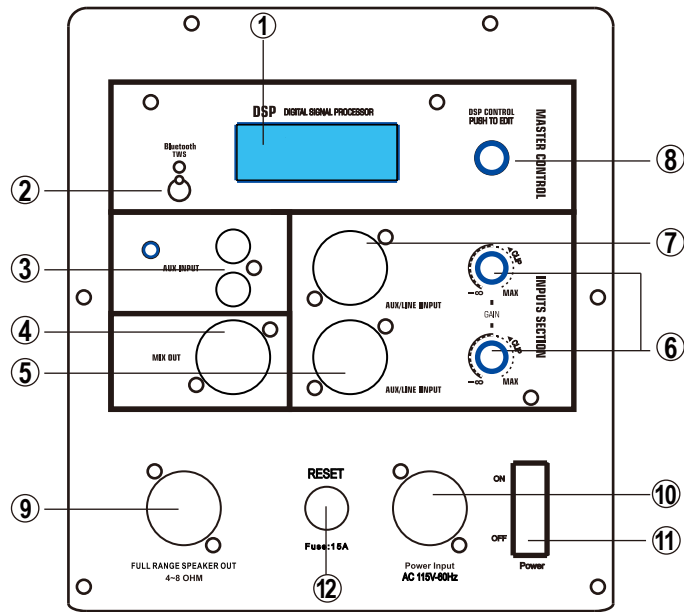

1.DIGITAL SIGNAL PROCESSOR

Please refer to the next page for details of this digital signal processor.

2.BT / TWSSWITCH BUTTON

Press this button in when connecting to BT/TWS.

3.AUX INPUT

Use this RCA input to connect the powered system to a computer, mobile device, etc.

4.XLR OUTPUT

Use these XLR connectors to link system to the additional powered speakers or amplifier.

5.MIC/LINE INPUT

Use this combo input(XLR/TS) to connect the MIC or other devices to the speaker.

6.GAIN CONTROL KNOBS

The rotating gain control knobs allow you to set the gain for the input signals. Make sure they are set correctly to avoid distortions or dangerous signal peaks that could damage the speaker. We suggest not to exceed the level indicated as CLIP.

7.AUX/LINE INPUT

Use these XLR/TS combo jack to connect an audio interface or mixer to speaker.

8.MASTER VOLUME

This button is used to adjust the master volume.

9.SPEAKON OUT

Connect to a 8ohm passive speaker

10.POWER INPUT

Connection to an AC power supply is made via an CON socket. It complies with applicable safety regulations.

11.POWER SWITCH

This switches the product on /off. When the unit is on the Power led illuminates.

12.FUSE 15A

Bluetooth connection

Press the Bluetooth button, the indicator flashes, and search for device connection

SPECIFICATION	
Type	18" 1.1 Active SubWoofer
Frequency	Sub 25-220Hz + Full range 62-20KHz
Power Rating	Sub 1000W RMS + Full range 500W RMS
Woofer	18"(V.C: 76mm+ 80 oz Magnet)
Amplifier	Class/D BI-AMP
Function	Color LCD + DSP (4 model dsp)+ Bluetooth
Line input	XLR
Line output	XLR
Enclosure Material	18mm Plywood
Enclosure Finish	Black-carborundum Paint
Package	Carton packing(765x612x655mm)
Type	Double 8" 2-Way Array Passive Speakers
Frequency Range	62-20KHz
Power Rating RMS	LF 300W + HF 75W
Woofer	2x8"(V.C:50.5mm+ 400z Magnet)
Tweeter	1.35 (34mm) Titanium
Crossover frequency	2000Hz (Variable)
Connectors input	2 x Speakon
Enclosure Material	15mm Plywood
Enclosure Finish	Black acrylic lacquer
Package	Carton packing (645x595x415mm)

FCC Information

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.