



TEST REPORT

- APPLICANT : General Procurement, Inc
- **PRODUCT NAME** : 7inch wifi tablet
- MODEL NAME : DT0706W08
- BRAND NAME : DENALI
- FCC ID : 2AIOHDT0706W08
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **TEST DATE** : 2018-10-16 to 2018-11-06
- **ISSUE DATE** : 2018-11-06

Tested by:

Zhou ZI jiang

Zhou Zijiang (Test Engineer)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





DIRECTORY

1. Technical Information 4
1.1. Applicant and Manufacturer Information 4
1.2. Equipment Under Test (EUT) Description 4
1.3. Test Standards and Results 6
1.4. Environmental Conditions 6
2. 47 CFR Part 15C Requirements 7
2.1. Antenna requirement7
2.2. Number of Hopping Frequency7
2.3. Peak Output Power ······11
2.4. 20dB Bandwidth
2.5. Carried Frequency Separation25
2.6. Time of Occupancy (Dwell time)28
2.7. Conducted Spurious Emissions35
2.8. Conducted Emission48
2.9. Restricted Frequency Bands52
2.10. Radiated Emission61
Annex A Test Uncertainty74
Annex B Testing Laboratory Information75





Change History								
Issue	Date	Reason for change						
1.0	2018-11-06	First edition						



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	General Procurement, Inc
Applicant Address:	800 E Dyer Road , Santa Ana, California 92705, United States
Manufacturer:	XIAMEN CANDOUR CO.,LTD.
Manufacturer Address:	19/F,C&D International Building, No.1699 Huandao East Road,
	Xiamen, China

1.2. Equipment Under Test (EUT) Description

Product Name:	7inch wifi tablet						
Serial No:	(N/A, marked #1 by test site)	(N/A, marked #1 by test site)					
Hardware Version:	TH863_V2.0						
Software Version:	Android Go						
Modulation Type:	FHSS (GFSK(1Mbps), π/4-DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))						
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz);						
Bluetooth Version:	Bluetooth classic						
Antenna Type:	FPC Antenna						
Antenna Gain:	-4.5 dBi						
	Battery						
	Brand Name:	JJY					
	Model No.:	317090					
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)					
	Capacity:	2000mAh					
	Rated Voltage:	3.7V					
	Charge Limit: 4.2V						





Accessory Information:	AC Adapter				
	Brand Name:	DENALI			
	Model No.:	JML-0500150Z-LW			
	Serial No.:	(N/A, marked #1 by test site)			
	Rated Input:	~ 100-240V, 50/60Hz, 0.2A			
	Rated Output:	==5V, 1.5A			

Note 1: This test report is updated from original report SZ18100035W01(Model: HT1004X16, FCC ID: 2AIOHHT1004X16). According to the certificate holder, they declared that the model DT0706W08 in this report only the product name, the model name, the brand name, the antenna wiring, the battery capacity and the adaptor are changed. The two models are accordant in both hardware and software, the whole circuit board is exactly the same.

The changes only affect the test results of restricted frequency bands and radiated emission.

Note 2: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is F(MHz)=2402+1*n (0<=n<=78). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

1 47 CFR Part 15 Radio Frequency Devices	

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS _{Note1}
2	15.247(a)	Number of Hopping Frequency	Nov 01, 2018	Zhou Zijiang	PASS _{Note1}
3	15.247(b)	Peak Output Power	Nov 01, 2018	Zhou Zijiang	PASS _{Note1}
4	15.247(a)	20dB Bandwidth	Oct 29, 2018	Zhou Zijiang	PASS _{Note1}
5	15.247(a)	Carrier Frequency Separation	Nov 01, 2018	Zhou Zijiang	PASS _{Note1}
6	15.247(a)	Time of Occupancy (Dwell time)	Nov 01, 2018	Zhou Zijiang	PASS _{Note1}
7	15.247(d)	Conducted Spurious Emission	Nov 01, 2018	Zhou Zijiang	PASS _{Note1}
8	15.207	Conducted Emission	Oct 16, 2018	Wang Dalong	PASS _{Note1}
9	15.247(d)	Restricted Frequency Bands	Nov 06, 2018	Wang Dalong	PASS
10	15.209, 15.247(d)	Radiated Emission	Nov 06, 2018	Wang Dalong	PASS

Note1: The test results of these test items in this report refer to the test report (Report No.: SZ18100035W01).

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106







2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

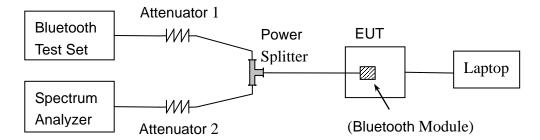

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



B. Equipments List:

Please reference ANNEX B(4).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation RBW \geq 1% of the span VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize

2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
π/4-DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

A. Test Verdict:






B. Test Plots:

Marker 1 Δ 7	50 Q AC 9.408500000 I	MHz PNO: Fast	Trig: Free Run	ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>10/10	06:11:06 PMNov 01, 2018 TRACE 1 2 3 4 5 6 TYPE MWWWWW	Marker
10 dB/div Rei	⁵ Offset 1.5 dB f 15.00 dBm	IFGain:Low	Atten: 24 dB	ΔMkr	DET P NNNNN 1 79.408 5 MHz 2.206 dB	Select Marker
5.00 X2		~~~~~		m	······	Norma
-5.00						Delta
-25.0						Fixed
-45.0						Of
65.0						Properties
-75.0 Start 2.40000 #Res BW 1.0 I		#VBM	7 3.0 MHz	Sweep 1	Stop 2.48350 GHz .000 ms (1001 pts)	More 1 of 2

(GFSK)

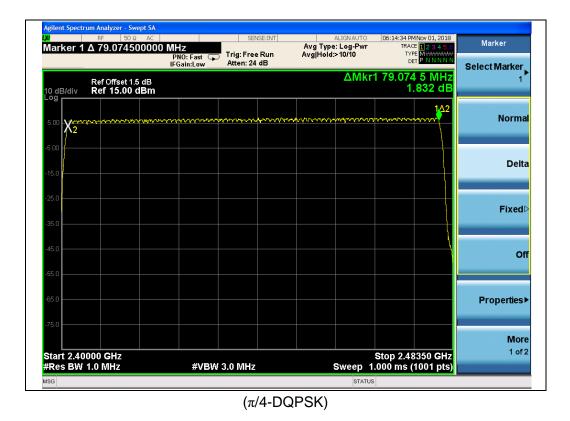



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



XI	RF 50 9	Q AC		SEN	VSE:INT		ALIGN AUTO	06:25:31 PM	Nov 01, 2018	
Marker 1	Δ 79.2415	F	PNO: Fast 🖕	Trig: Free	e Run	Avg Type Avg Hold:	e: Log-Pwr >10/10	TYPE	123456 M WWWWW PNNNNN	Marker
		IF	Gain:Low	Atten: 24	dB		Abdlen	79.241		Select Marker
10 dB/div Log	Ref Offset 1 Ref 15.00	dBm						-0.	225 dB	1
5.00	ᠰᡎᢦᠮᠮᠮᡟᡘ᠉᠕	የምዋን ^ም ንንሻቸንም	የሥነዋዋ የ	ᠵᡟᠰ᠈᠋ᡢᠰᠬ	ᡗᡃᠬᡟᠮᢦ᠋ᠮᢦᡪᠰ	᠕᠕᠕᠆ᢛ᠕᠕᠕	ᡰᢊ᠋ᡗ᠈᠋ᡝᢦᠰᢦ	ᡟᡩᢧᡘᡀᡀᡘᢧ	₩₩ 1 <u>4</u> 2	Norm
-5.00 X2										
-15.0										Deli
-25.0										Fixed
-35.0										TIXCO
-45.0									\ \	o
-55.0										
-65.0										Properties
-75.0										
Start 2.4	0000 GHz							Stop 2.48	350 GHz	Mo i 1 of
#Res BW	300 kHz		#VBW	/ 1.0 MHz			Sweep 1.	.000 ms (1	001 pts)	

(8- DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

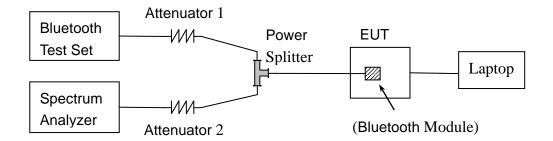

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX B(4).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.





GFSK Mode

A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lin	nit	Verdict
Channel	(MHz)	dBm	W	dBm	W	verdict
0	2402	2.54	0.002			PASS
39	2441	3.34	0.002	20.97	0.125	PASS
78	2480	3.47	0.002			PASS


B. Test Plots:



(GFSK, Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



π/4-DQPSK Mode

A. Test Verdict:

Channel	Frequency	Measured Output Peak Power		Limit		Verdict	
Channel	(MHz)	dBm	W	dBm	W	verdict	
0	2402	3.71	0.002			PASS	
39	2441	4.44	0.003	20.97	0.125	PASS	
78	2480	4.74	0.003			PASS	

B. Test Plots:




(π/4-DQPSK, Channel 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn

emonab.cm





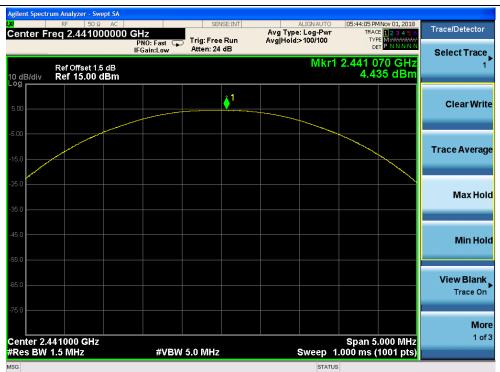

(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



8-DPSK Mode

A. Test Verdict:

Channel	Frequency	Measured Outp	ut Peak Power	Lin	nit	Verdict
Channel	(MHz)	dBm	W	dBm	W	verdici
0	2402	4.05	0.003			PASS
39	2441	4.74	0.003	20.97	0.125	PASS
78	2480	4.93	0.003			PASS

B. Test Plots:




(8-DPSK, Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn







(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




2.4.1. Definition

According to FCC 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth (10*log1% = 20dB) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

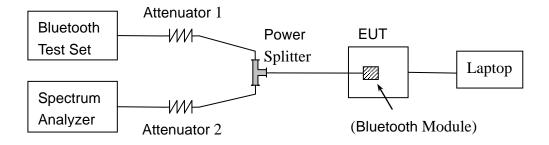

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX B(4).

2.4.3. Test Procedure

Use the following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW \geq 1% of the 20 dB bandwidth VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold





2.4.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.029	PASS
39	2441	1.027	PASS
78	2480	1.028	PASS

B. Test Plots:




(GFSK, Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China









(GFSK, Channel 78, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



π/4-DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.330	PASS
39	2441	1.329	PASS
78	2480	1.328	PASS

B. Test Plots:




(π/4-DQPSK, Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China









(π/4-DQPSK, Channel 78, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.319	PASS
39	2441	1.320	PASS
78	2480	1.321	PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China









(8-DPSK, Channel 78, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

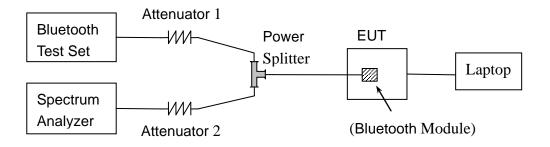

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX B(4).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto


Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

	Measured	Carried Frequency	20dB		
Test Mode	Channel		bandwidth	Min. Limit	Verdict
	Numbers	Separation	(MHz)		
GFSK	39 and 40	1.011	1.027	two thirds of the	PASS
π/4-DQPSK	39 and 40	1.002	1.328	two-thirds of the	PASS
8-DPSK	39 and 40	1.008	1.319	20dB bandwidth	PASS



(GFSK)





larker 1		Ω AC 00000 MHz P	Z NO: Fast 🗔	Trig: Free	Run		ALIGNAUTO : Log-Pwr > 10/10	TRAC	1Nov 01, 2018 E 1 2 3 4 5 6 E M WWWWWW T P N N N N N	Marker
0 dB/div	Ref Offset Ref 15.00	1.5 dB	Gain:Low	Atten: 24	dB		ΔN	1kr1 1.0		Select Marker 1
. og 5.00	and the second			~~~~>	(<u>2</u> ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	why man		1Δ2	and the second s	Norm
5.00										Del
25.0										Fixed
45.0										
55.0										C
65.0 <u> </u>										Properties
	462250 GH 300 kHz	Iz	#\/B\/	V 1.0 MHz			Sween 1	Span 3	.000 MHz 1001 pts)	Mo 1 of

(π/4-DQPSK)



(8-DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

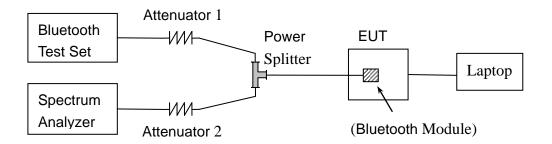

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX B(4).

2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) *(1600 / 2 /79)*31.6 Millisecond DH3: Dwell time equal to Pulse time (ms) * (1600 /4 /79) *31.6 Millisecond DH5: Dwell time equal to Pulse Time (ms)* (1600 / 6 /79) *31.6 Millisecond





AFH Mode:

DH1: Dwell time equal to Pulse time (ms) (800 / 2 / 20)(0.4 + 20) Millisecond DH3: Dwell time equal to Pulse time (ms) (800 / 4 / 20)(0.4 + 20) Millisecond DH5: Dwell time equal to Pulse Time (ms) (800 / 6 / 20)(0.4 + 20) Millisecond

2.6.4. Test Result

GFSK Mode

A. Test Verdict:

DH Pulse Width	Dwell T	Limit (sec)	Verdict		
Packet	(ms)	Normal Mode	AFH Mode		Vertici
DH1	0.39	124.80	62.40		PASS
DH3	1.62	259.20	129.60	0.4	PASS
DH5	2.88	307.20	153.60	1	PASS

B. Test Plots:




(DH1, GFSK)


MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



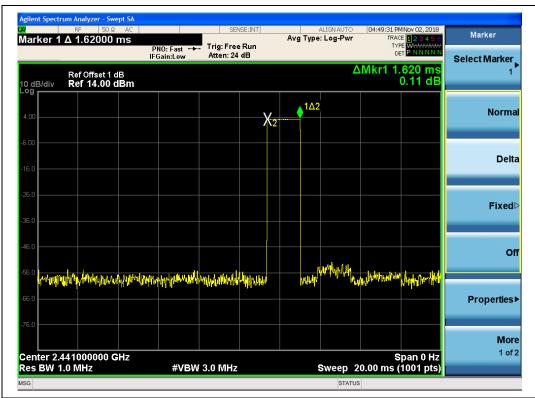

(DH3, GFSK)

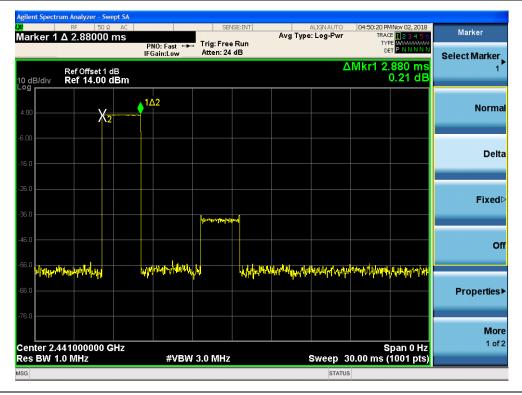

(DH5, GFSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




π/4-DQPSK Mode

A. Test Verdict:

DH Pulse Width Packet (ms)	Dwell T	Limit (sec)	Verdict		
	Normal Mode	AFH Mode	Linii (Sec)	verdict	
DH1	0.39	124.80	62.40		PASS
DH3	1.64	262.40	131.20	0.4	PASS
DH5	2.88	307.20	153.60		PASS

B. Test Plots:

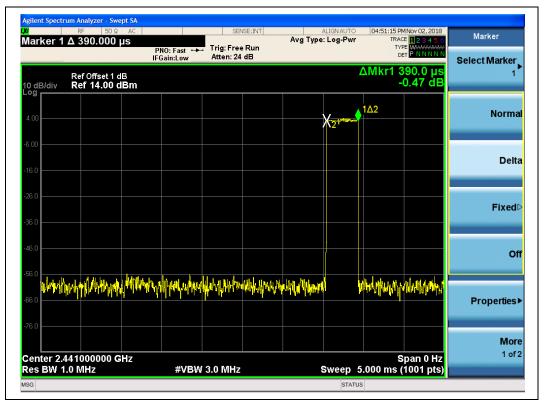


(DH1, π/4-DQPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



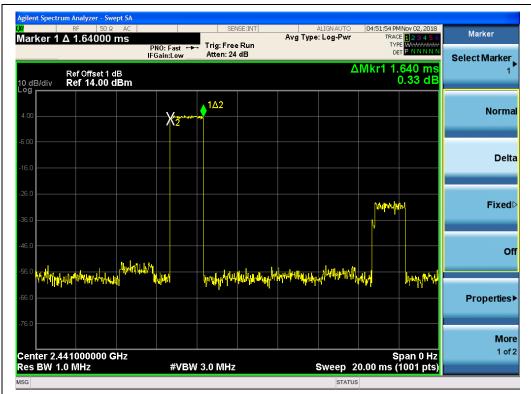

(DH3, π/4-DQPSK)



(DH5, *π*/4-DQPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




8-DPSK mode

A. Test Verdict:

DH Pulse Width Packet (ms)	Dwell T	Limit (sec)	Vardiat		
	Normal Mode	AFH Mode	Linii (Sec)	Verdict	
DH1	0.39	124.80	62.40		PASS
DH3	1.64	262.40	131.20	0.4	PASS
DH5	2.88	307.20	153.60]	PASS

B. Test Plots:

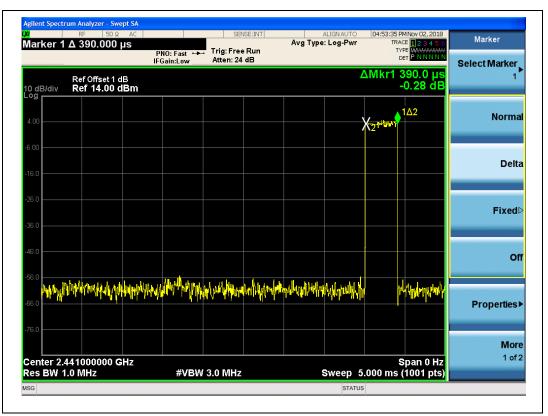

(DH1, 8-DPSK)





SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



MORL

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



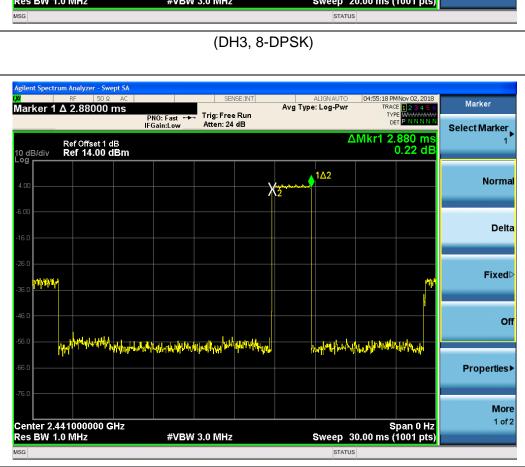

04:54:21 PMM TRACE TYPE DET Marker Marker 1 Δ 1.64000 ms Avg Type: Log-Pwr Trig: Free Run PNO: Fast +++ IFGain:Low Atten: 24 dB Select Marker 1.640 ms -0.11 dB ΔMkr1 Ref Offset 1 dB Ref 14.00 dBm 10 dB/div 1<u>Δ</u>2 Normal Xž Delta **Fixed**⊳ 4.144 Off MAN HAMAN HAL hand the second (ringh) h Marthan Why N 11-11 W. Properties► More 1 of 2 Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 20.00 ms (1001 pts) #VBW 3.0 MHz

REPORT No.: SZ18100034W01




2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

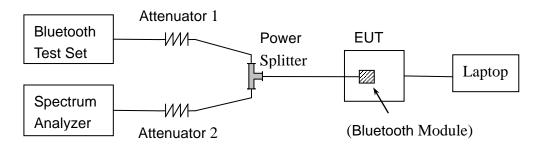

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX B(4).


2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz VBW ≥ RBW Sweep = auto Detector function = peak







Trace = max hold Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

GFSK Mode

A. Test Verdict:

Channel	Frequency	Measured Max. Out of Band	Limit		
	Frequency	Emission (dBm)	Carrier Level	Calculated	Verdict
	(MHz)		Camer Lever	-20dBc Limit	
0	2402	-49.53	1.51	-18.49	PASS
39	2441	-48.57	2.11	-17.89	PASS
78	2480	-48.74	2.51	-17.49	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.




(Channel = 0, 30MHz to 25GHz, GFSK Mode)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



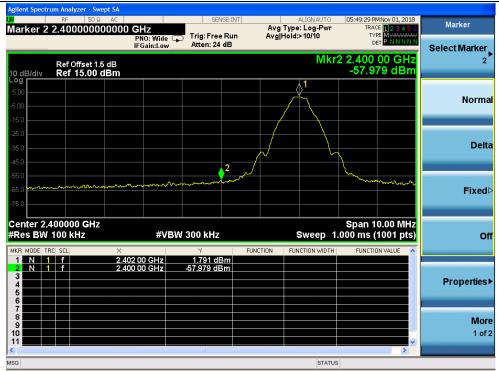

(Channel = 0, Band edge, GFSK Mode)




(Channel = 0, Band edge with hopping on, GFSK Mode)


MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



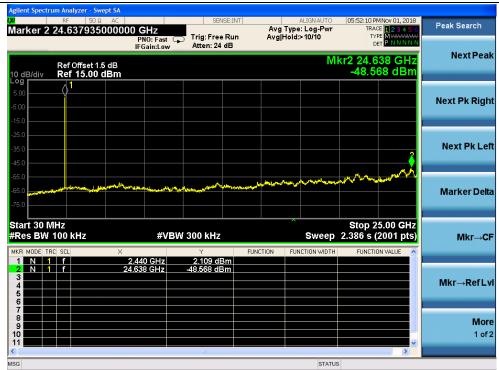

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

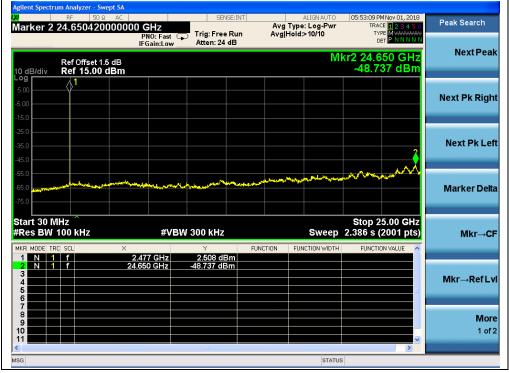

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Agilent Spectrum Analyzer - Swept SA				
RF 50 Ω AC Mankan 2 2 4225 000000000 CUI	SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	05:53:38 PMNov 01, 2018 TRACE 1 2 3 4 5 6	Marker
Marker 2 2.483500000000 GHz PNO: Wide	🖵 Trig: Free Run	Avg Hold>10/10		
IFGain:Low	Atten: 24 dB			Select Marker
Ref Offset 1.5 dB		Mkr	2 2.483 50 GHz -61.749 dBm	2
10 dB/div Ref 15.00 dBm			-01.743 dBm	
5.00				
-5.00				Normal
-15.0				
-25.0				
-35.0				Delta
-45.0				
-55.0	2			
-65.0	man man marken and	mmm.	mann	Fixed⊳
-75.0				TINCUP
Center 2.483500 GHz			Span 10.00 MHz	
#Res BW 100 kHz #VE	3W 300 kHz	Sweep 1	.000 ms (1001 pts)	Off
		CTION FUNCTION WIDTH	FUNCTION VALUE	
2 N 1 f 2.483 50 GHz	2.667 dBm -61.749 dBm			
3 4				Properties►
5			=	•
8				More
10				1 of 2
11	ш.		× .	
MSG		STATUS		

(Channel = 78, Band edge, GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)

MORLAB



π/4-DQPSK Mode

A. Test Verdict:

	Channel Frequency (MHz)	Measured Max. Out of Band	Limit	(dBm)	
Channel		Emission (dBm)	Carrier	Calculated	Verdict
			Level	-20dBc Limit	
0	2402	-48.93	-1.84	-21.84	PASS
39	2441	-48.20	-0.32	-20.32	PASS
78	2480	-48.61	-0.73	-20.73	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.




(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China










(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

MORLAB


SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China








(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)

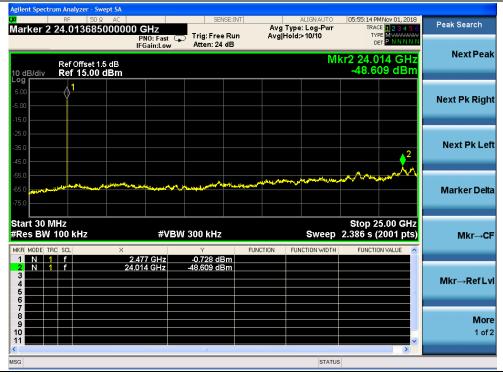

(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







(Channel = 78, Band edge, $\pi/4$ -DQPSK)



(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn



8-DPSK Mode

A. Test Verdict:

	Fraguanay	Measured Max. Out of Band	Limi		
Channel	Frequency (MHz)	Emission (dBm)	Carrier	Calculated	Verdict
			Level	-20dBc Limit	
0	2402	-48.98	-1.50	-21.50	PASS
39	2441	-48.17	-0.27	-20.27	PASS
78	2480	-48.65	0.04	-19.96	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.



(Channel = 0, 30MHz to 25GH, 8-DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





(Channel = 0, Band edge, 8-DPSK)



(Channel = 0, Band edge with hopping on, 8-DPSK)

MORLAB



Agilent Spectrum Analyzer - Swept SA				
Marker 2 24.725330000000 GHz PNO: F	ast 🕞 Trig: Free Run	ALIGN AUTO Avg Type: Log-Pwr Avg Hold>10/10	06:00:29 PMNov 01, 2018 TRACE 1 2 3 4 5 6 TYPE M WWWWWW DET P N N N N N	Peak Search
Ref Offset 1.5 dB 10 dB/div Ref 15.00 dBm	Atten: 24 dB	М	kr2 24.725 GHz -48.172 dBm	Next Peak
5.00 5.00 -15.0				Next Pk Right
-25.0 			3	Next Pk Left
-55.0 -65.0	and an and a second and a second s	ىلىرىلىكى بىلى بىلى بىلىكى بىلىكى يەلىرىلىكى بىلىكى بىل		Marker Delta
Start 30 MHz #Res BW 100 kHz MKR MODEL TRC SCL 1 1 1 1 2.440 GH		Sweep	Stop 25.00 GHz 2.386 s (2001 pts) FUNCTION VALUE	Mkr→CF
2 N 1 f 24.725 GF 3 4 5 5 6 6 4 4 4 4	iz -48.172 dBm			Mkr→RefLvl
7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9			×	More 1 of 2
MSG		STATU		

(Channel = 39, 30MHz to 25GHz, 8-DPSK)



(Channel = 78, 30MHz to 25GH, 8-DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





(Channel = 78, Band edge, 8-DPSK)



(Channel = 78, Band edge with hopping on, 8-DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency range	Conducted Limit (dBµV)						
(MHz)	Quai-peak	Average					
0.15 - 0.50	66 to 56	56 to 46					
0.50 - 5	56	46					
5- 30	60	50					


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

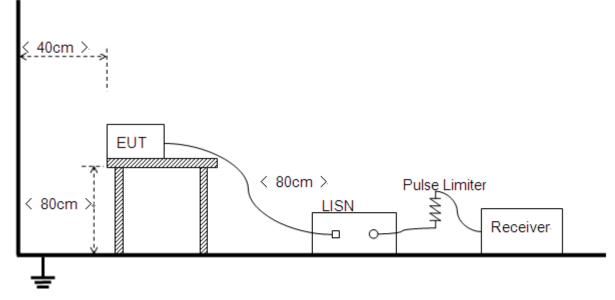

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX B(4)..

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is Adaptor + EUT + Link. **Note:** The test voltage is AC 120V/60Hz.





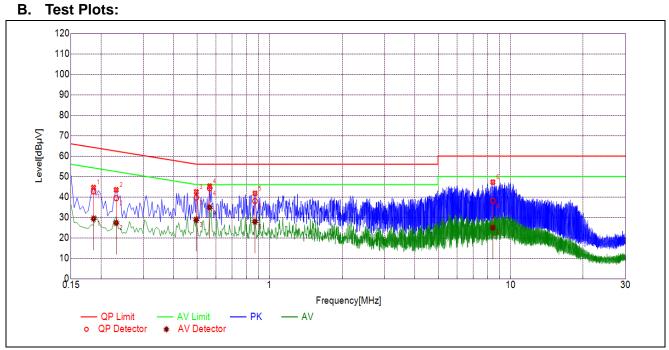


(L Phase)

NO.	Fre.	Emission Le	evel (dBµV)	Limit (dBµV)	Power-line	Verdict	
	(MHz)	Quai-peak	Quai-peak Average Quai-peak Average		Average			
1	0.1861	42.75	29.42	64.21	54.21		PASS	
2	0.2311	39.42	27.29	62.41	52.41		PASS	
3	0.4964	39.69	28.86	56.06	46.06	Line	PASS	
4	0.5644	44.28	34.92	56.00	46.00	LINE	PASS	
5	0.8696	38.03	27.92	56.00	46.00		PASS	
6	8.4388 38.1		25.00	60.00	50.00		PASS	






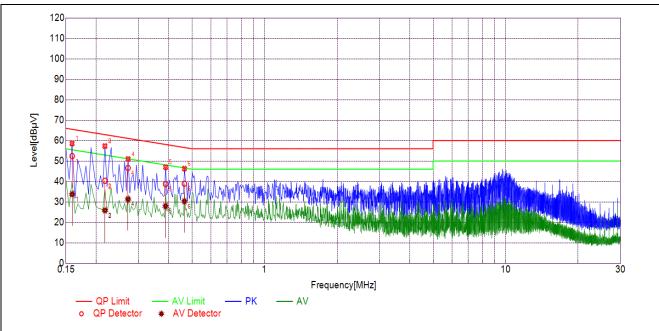

(N Phase)

NO.	Fre.			Limit (dBµV)	Power-line	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average			
1	0.1591	52.40	33.77	65.51	55.51		PASS	
2	0.2177	40.35	25.85	62.91	52.91		PASS	
3	0.2175	39.71	25.61	62.91	52.91	Neutral	PASS	
4	0.2713	46.63	31.38	61.08	51.08	neutrai	PASS	
5	0.3884	38.73	27.93	58.10	48.10		PASS	
6	0.4649	38.92	30.33	56.60	46.60		PASS	








2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description



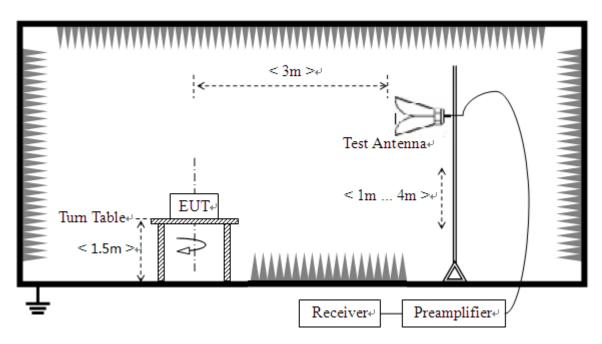

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power. For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



B. Equipments List:

Please refer ANNEX B(4).

2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 KHz for f < 1GHz VBW = 3 MHz for peak and 10Hz for average Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize.

2.9.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; AT = L_{Cable loss} [dB] - G_{preamp} [dB]$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector PK/ AV	Receiver Reading U _R (dBuV)	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBµV/m)	Limit (dBµV/m)	Verdict
0	2382.75	PK	47.65	-29.67	32.56	50.54	74	PASS
0	2390.00	AV	36.08	-29.67	32.56	38.97	54	PASS
78	2485.17	PK	47.68	-29.67	32.56	50.57	74	PASS
78	2483.50	AV	36.10	-29.67	32.56	38.99	54	PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



B. Test Plots:

🍺 Keysight Spectrum Analyzer - Swept SA 07:49:22 AM Nov 06, 2018 TRACE 1 2 3 4 5 6 TYPE M Avg Type: Voltage Avg|Hold:>100/100 D Marker Marker 1 2.382745600000 GHz Trig: Free Run #Atten: 6 dB PNO: Fast 😱 IFGain:Low Select Marker Mkr1 2.382 745 6 GHz 47.647 dBµV Ref 100.00 dBµV 10 dB/div Normal **∂**² Delta **Fixed** Start 2.30000 GHz #Res BW (CISPR) 1 MHz Stop 2.40400 GHz Sweep 1.000 ms (5001 pts) #VBW 3.0 MHz Off 2.382 745 6 GHz 2.390 000 0 GHz 47.647 dBµV 46.197 dBµV N 1 f **Properties** More 1 of 2


(Channel = 0, PEAK, GFSK)



(Channel = 0, AVERAGE, GFSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





v06.2018	08:12:30 AM Nov 06, 201	ALIGN OFF	NT	SENSE:			nalyzer - Swe 50 Ω	rum A RE	ht Spect	Keysigl R L
2 3 4 5 6 WWWW	TRACE 12345 TYPE MWWWW DET P P N N N	Type: Voltage Hold:>100/100	Avg		GHZ PNO: Fast IFGain:Low	00000			r 2 2	
GHz	485 167 6 GH 47.683 dBµ\	Mkr2 2				dBµV	100.00	Ref	liv	dB/d
Norm										
De	11 July - 10 J. 1. 10 Lag Pays - 1. 1. 1. 1. 19 Lag	مەر رومىيە ۋە يەۋە يەۋە يەر يەر يەر يەر يەر يەر يەر يەر يەر يە	ng din filo and a state of the st	ng dite discut of a des a sign of the	2	1).0
Fixe).0).0).0
	Stop 2.50000 GH .000 ms (5001 pts	Sweep 1		V 3.0 MHz	#VE	Hz	GHz PR) 1 M	cisi		es
	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	Y 46.982 dBµV 47.683 dBµV	0 0 GHz 7 6 GHz	× 2.483 50 2.485 16		f		R MOD
Propertie: ■										3 4 5
Mo 1 o										
										1

(Channel = 78, PEAK, GFSK)



(Channel = 78, AVERAGE, GFSK)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



π/4-DQPSK Mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict	
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	, or diot	
0	2381.31	PK	47.75	-29.67	32.56	50.64	74	Pass	
0	2386.26	AV	36.14	-29.67	32.56	39.03	54	Pass	
78	2485.40	PK	48.47	-29.67	32.56	51.36	74	Pass	
78	2483.50	AV	36.07	-29.67	32.56	38.96	54	Pass	

B. Test Plots:



(Channel = 0, PEAK, π /4-DQPSK)


MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Marker		RACE 1 2 TYPE M	TF	ALIGN OFF : Voltage 100/100				Trig: Fre	: Fast 🔾	00 GH	50 Ω DC	RF 2.3862		RL
Select Marke		021		Mkr1 2			6 dB	#Atten:	n:Low	IFG).00 dE	Ref 10	/div	dBi
Norm	\wedge													9).0).0
De		2												- 0. - 0.
Fixe								,,						1.0 - 1.0 - 1.0 -
c			Stop 2. 11.93 s	Sweep		^		10 Hz	#VBW			100 GHz CISPR)		
Properties	ALUE -	CTION VAL	FUNC	CTION WIDTH	IN FUI	FUNC	BµV BµV	Y 36.143 dl 36.093 dl		× 36 260 8 90 000 0	2.3	SCL f f	DE TR	DI N
Mo														
1 0														


(Channel = 0, AVERAGE, $\pi/4$ -DQPSK)

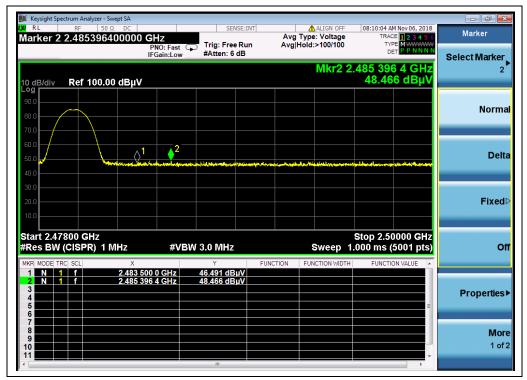

(Channel = 78, PEAK, $\pi/4$ -DQPSK)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





SENSE:INT ALIGN OFF 08:09:33 AM Nov 06,	2018
Avg Type: Voltage TRACE 1 2 3 Trig: Free Run Avg Hold: 100/100 TYPE M #Atten: 6 dB DET P.P.	156 Marker
Mkr2 2.484 617 6 G 36.065 dB	
	Norm
	Deli
	Fixed
Stop 2.50000 0 3W 10 Hz Sweep 2.523 s (5001	iHz its) C
Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	
36.065 dBµV	Properties
	Мо
	1 of

(Channel = 78, AVERAGE, $\pi/4$ -DQPSK)

8-DPSK Mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
(MHz)	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	voluiot
0	2380.37	PK	48.16	-29.67	32.56	51.05	74	Pass
0	2386.91	AV	36.19	-29.67	32.56	39.08	54	Pass
78	2484.37	PK	49.00	-29.67	32.56	51.89	74	Pass
78	2484.31	AV	36.12	-29.67	32.56	39.01	54	Pass



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



B. Test Plots:

📕 Keysight Spectrum Analyzer - Sw ALIGN OFF Avg Type: Voltage Avg|Hold:>100/100 07:54:38 AM Nov 06, 2018 TRACE 1 2 3 4 5 (TYPE MWWWW DET P P N N N D Marker Marker 1 2.380374400000 GHz Trig: Free Run #Atten: 6 dB PNO: Fast 🖵 IFGain:Low DET Select Marker Mkr1 2.380 374 4 GHz 48.160 dBµV Ref 100.00 dBµV 10 dB/div Log **r** Normal ▲1 Delta **Fixed** Start 2.30000 GHz #Res BW (CISPR) 1 MHz Stop 2.40400 GHz Sweep 1.000 ms (5001 pts) #VBW 3.0 MHz Off FUNCTION EUI 2.380 374 4 GHz 2.390 000 0 GHz 48.160 dBµV 46.329 dBµV **Properties**► More 1 of 2

(Channel = 0, PEAK, 8-DPSK)



(Channel = 0, AVERAGE, 8-DPSK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





									nalyzer - Swe		ht Spect	
Marker	Nov 06, 2018	TRACI	ALIGN OFF e: Voltage :>100/100			Trig: Free	NO:Fast (00000 G	50 Ω 437120	^{RF} 2.48	er 2 2	RL ark
Select Marker 2		484 371	Mkr2 2		dB	#Atten: 6	Gain:Low		100.00	Ref	div	0 dB/
Norm										-		og 20.0 -
Del	dah kacah ja ses	agina glas le alterati	a Martine in galage		in the second states	n fer et all and the state of the	2	¹			/	70.0 - 60.0 - 50.0 -
Fixed												+0.0 30.0 20.0
c	001 pts)	Stop 2.50 .000 ms (5	Sweep 1			/ 3.0 MHz	#VB	Hz	GHz PR) 1 M	CISI		Res
	VALUE A	FUNCTIO	NCTION WIDTH	CTION	υV	Y 46.089 dB 48.995 dB	0 GHz	× 2.483 500 2.484 371		f		
Properties	E					40.555 00		2.404 37 1				3 4 5 6
Mo 1 o												7 8 9
	-											1

(Channel = 78, PEAK, 8-DPSK)



(Channel = 78, AVERAGE, 8-DPSK)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- 1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)







2.10.2. Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

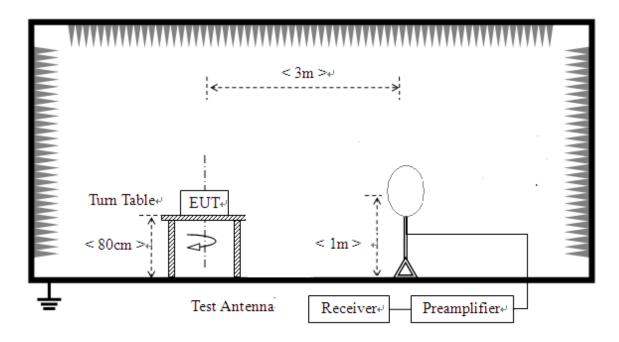

2) For radiated emissions from 30MHz to1GHz

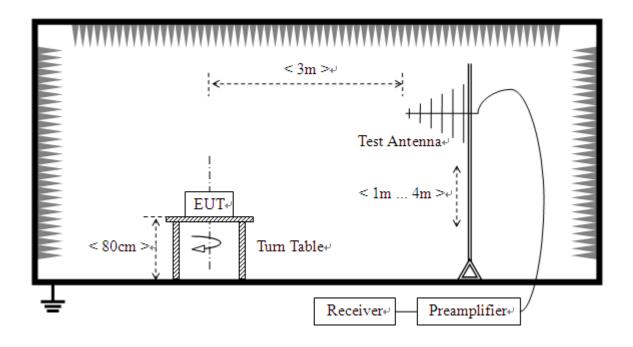




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

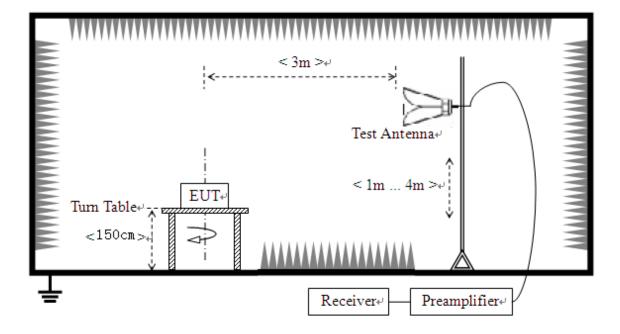

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX B(4).

2.10.3. Test Procedure

Use the following spectrum analyzer settings: Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz VBW \ge RBW Sweep = auto Detector function = peak Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

E $[dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A_T: Total correction Factor except Antenna U_R: Receiver Reading G_{preamp}: Preamplifier Gain A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor AT and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






GFSK Mode

Plots for Channel = 0

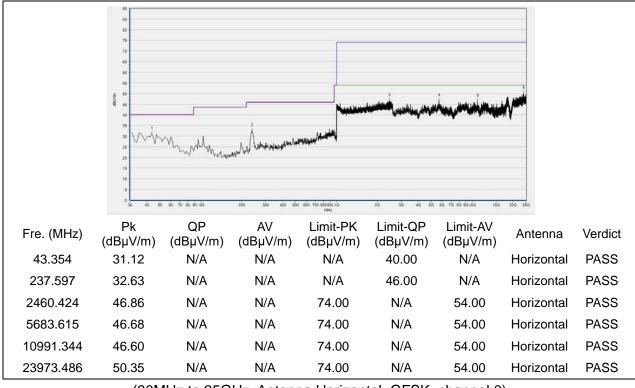

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)

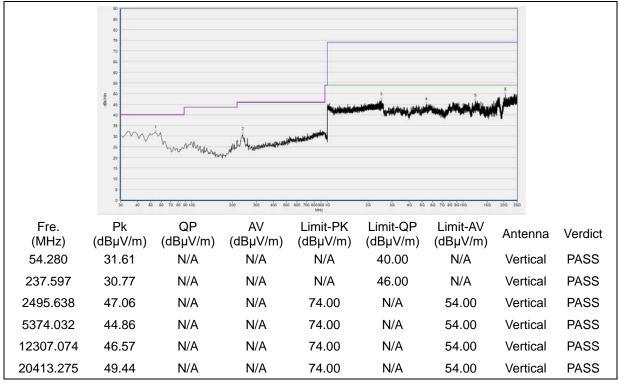


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

_






Plot for Channel = 39

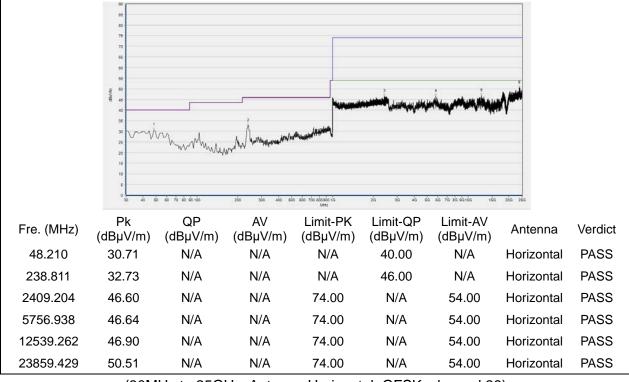

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

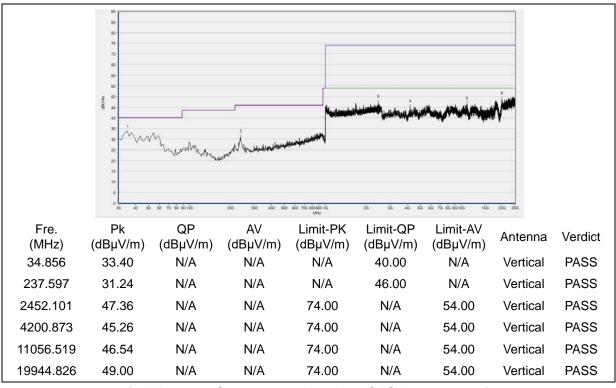


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525

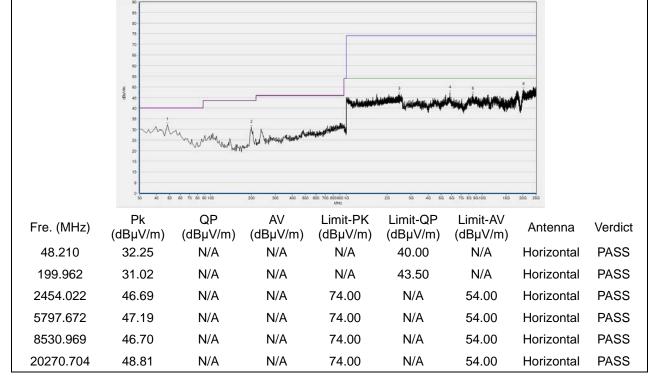

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)

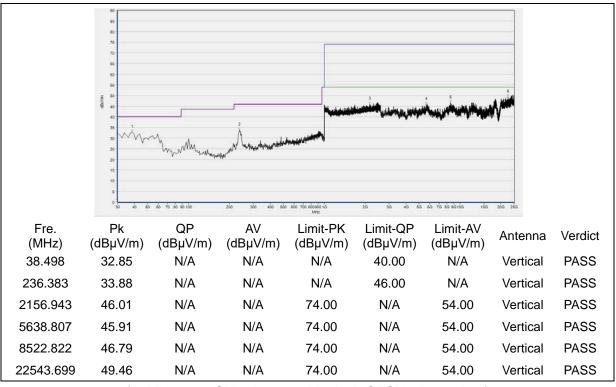

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

MORLAB

Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525






Plot for Channel = 78




π/4-DQPSK Mode

Plots for Channel = 0

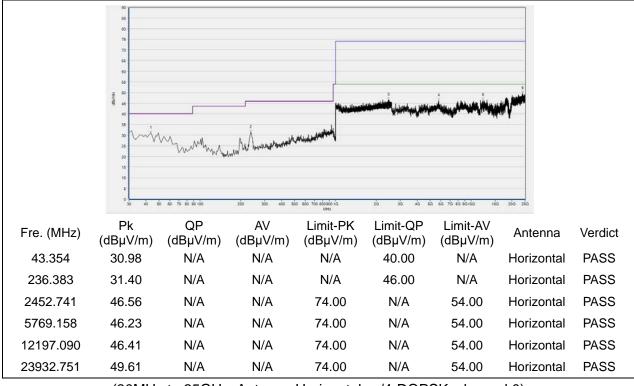

(30MHz to 25GHz, Antenna Horizontal, π /4-DQPSK, channel 0)

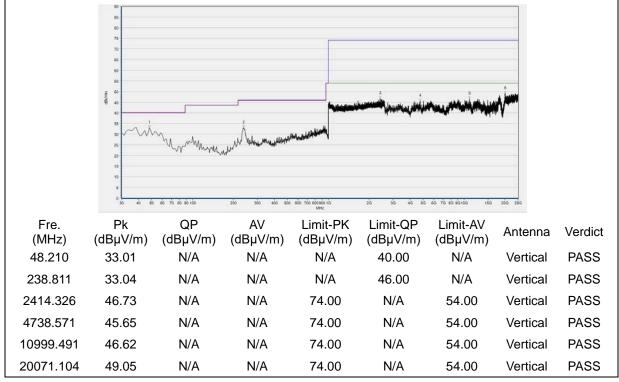


(30MHz to 25GHz, Antenna Vertical, π/4-DQPSK, channel 0)

MORLAB


SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



Plot for Channel = 39

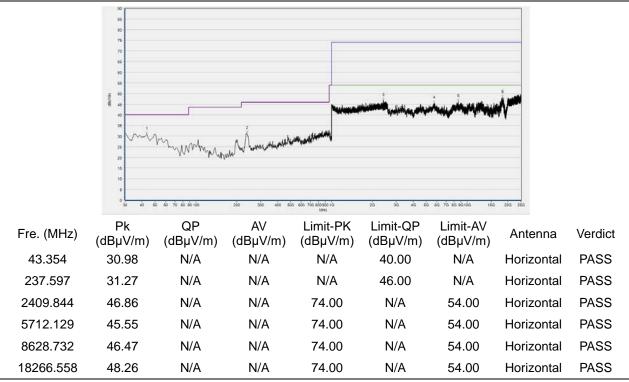

(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)

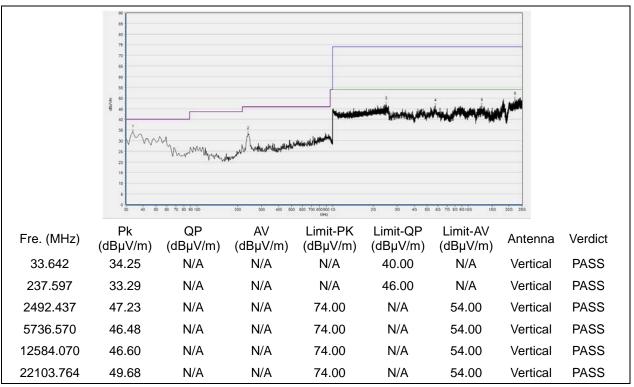

(30MHz to 25GHz, Antenna Vertical, π/4-DQPSK, channel 39)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn


Fax: 86-755-36698525



Plot for Channel = 78

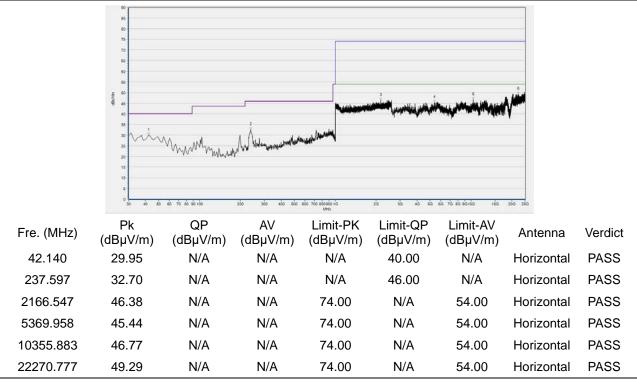

(30MHz to 25GHz, Antenna Horizontal, π /4-DQPSK, channel 78)

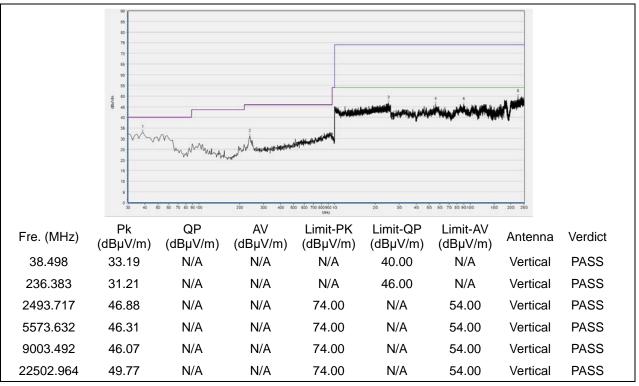

(30MHz to 25GHz, Antenna Vertical, π/4-DQPSK, channel 78)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn


Fax: 86-755-36698525

E-mail: service@morlab.cn




8-DPSK Mode

Plots for Channel = 0

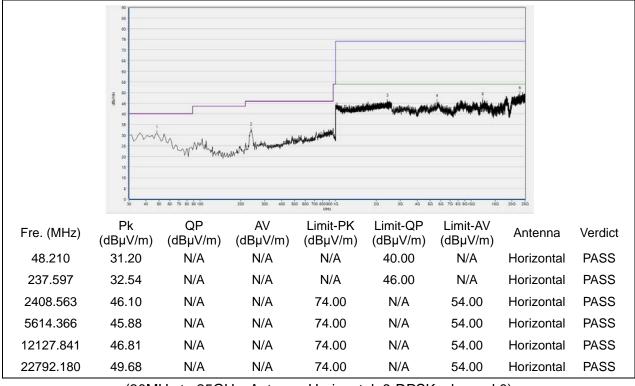

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 0)

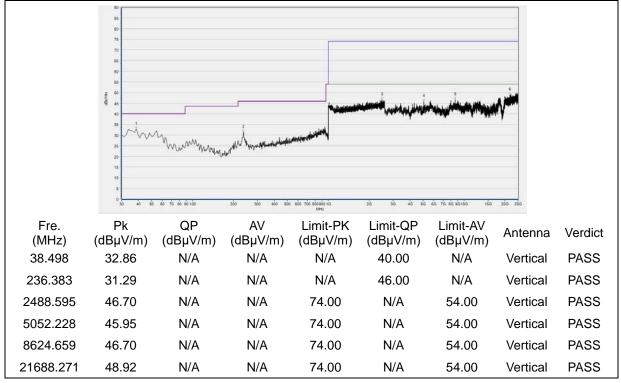


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

Plot for Channel = 39

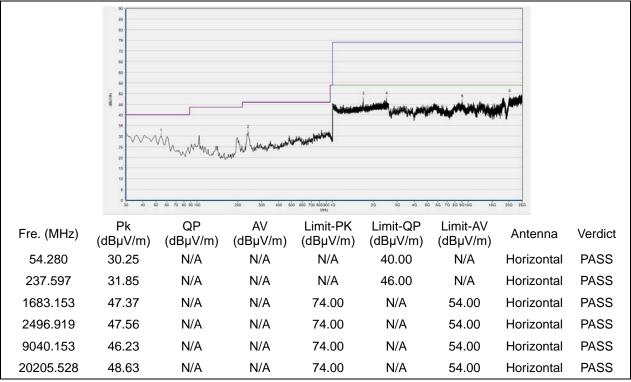

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 39)

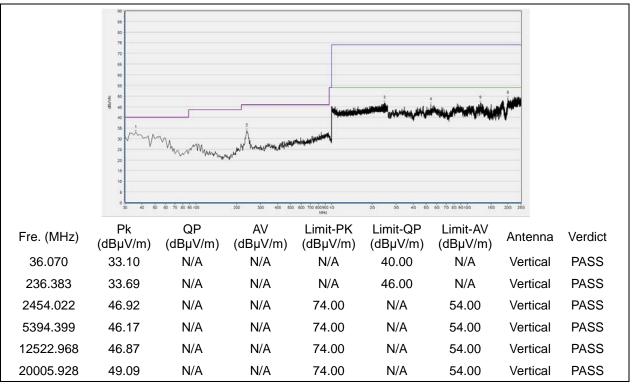


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 39)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn






Plot for Channel = 78

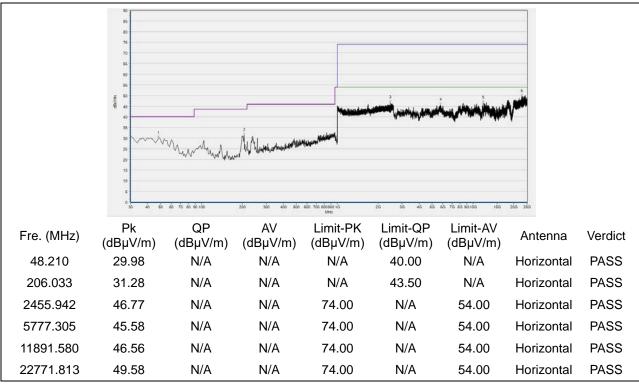

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 78)

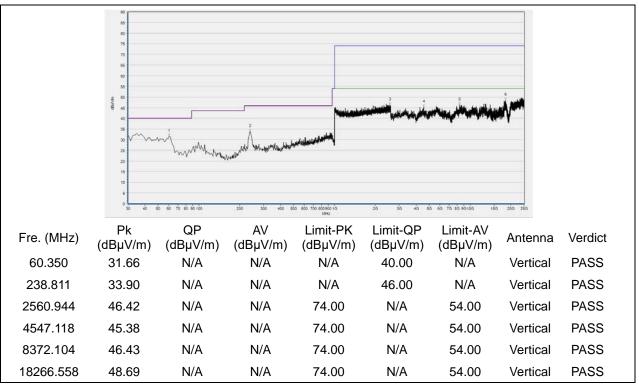

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 78)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Uncertainty
±5%
±2.22dB
±5%
±5%
±5%
±2.77 dB
±5%
±2.95dB
±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2





Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
Department:	Morlab Laboratory				
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				
Responsible Test Lab	Mr. Su Feng				
Manager:					
Telephone:	+86 755 36698555				
Facsimile:	+86 755 36698525				

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Name.	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter	0201	VTSD	Schwarzbeck	2018.05.08	2019.05.07
(20dB)	9391	9561-D			
Coaxial cable(BNC)		EMC01	Morlab		NI/A
(30MHz-26GHz)	CB01	ENICUT	denoivi	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0





4.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT

_



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China