


AUT Report

Product Model: EAP215-Bridge KIT

Manufacturer: BIG FIELD GLOBAL PTE. LTD

Test Date: 2023.8.21


Tested By: Chen Xuemeng 

BIG FIELD GLOBAL PTE. LTD.
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987,

Index

1. Antenna Distribution.....	3
2. Electrical Characteristics	3
3. Gain and Radiation Pattern	4
3.1 Measurement Procedure	4
3.2 Test Setup	5
3.3 S Parameter Test Data	6
3.4 Antenna Peak Gain	7
3.5 Antenna Radiation Pattern.....	7

1. Antenna Distribution

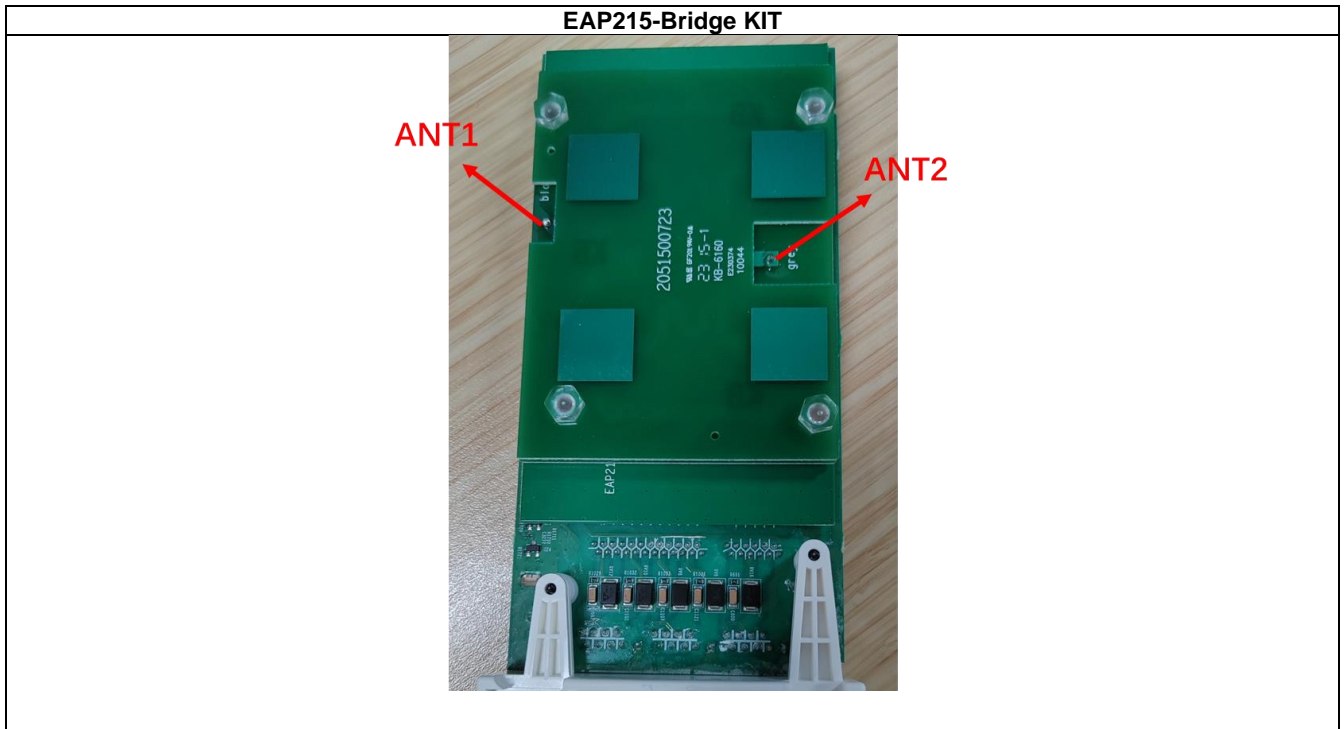

2. Electrical Characteristics

Ant1	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Microstrip
Antenna Gain	8.00dBi@5150~5850MHz
Radiation pattern	Directional
P/N	3101506510

Ant2	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Microstrip
Antenna Gain	8.00dBi@5150~5850MHz
Radiation pattern	Directional
P/N	3101506510

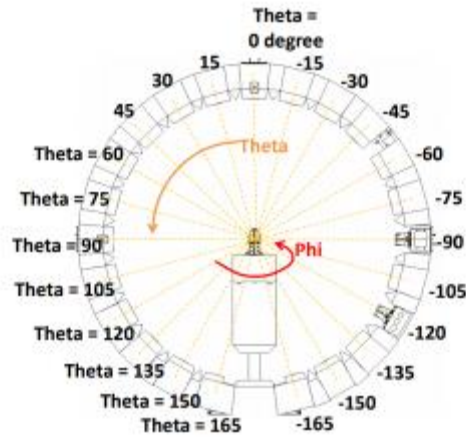


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY5347043 5	12months	2024/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2024/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:



Figure 3-3



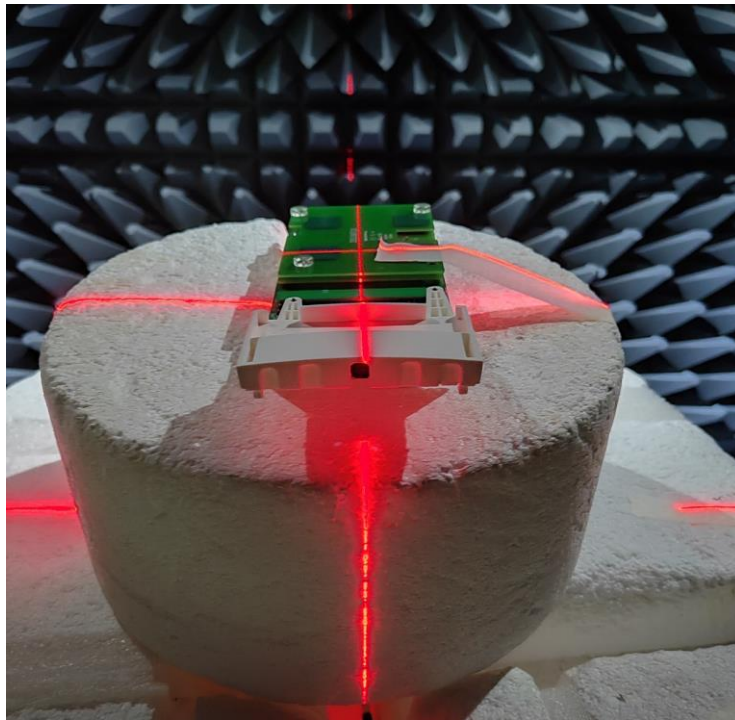


Figure 3-4


3.3 S Parameter Test Data

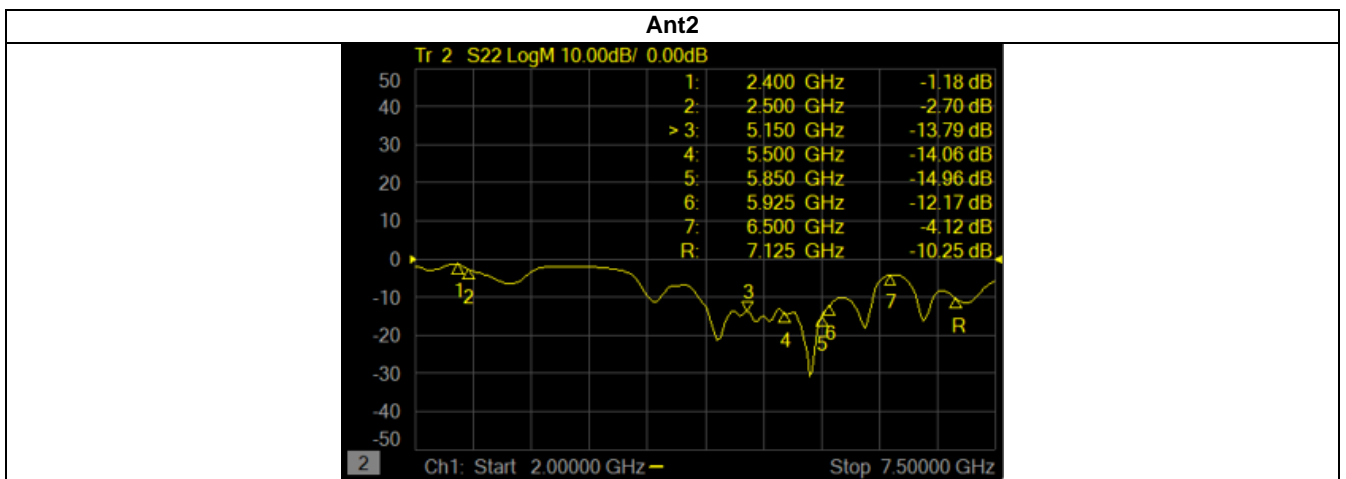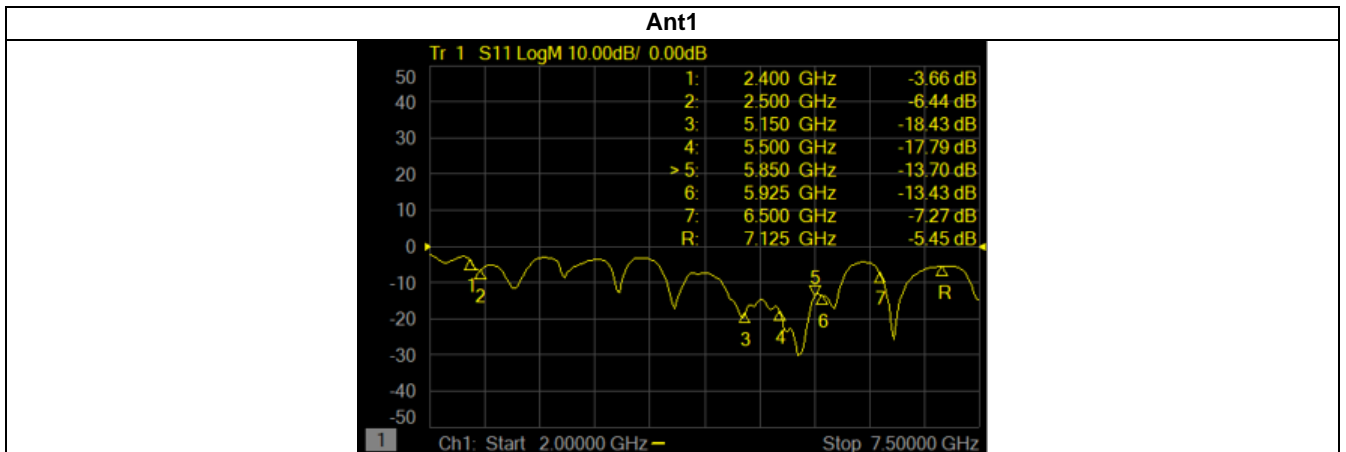

3.4 Antenna Peak Gain

Frequency(GHz)	5.25	5.40	5.50	5.75
Ant1 MaxGain(dBi)	7.90	8.00	7.55	7.01
Ant2 MaxGain(dBi)	7.54	7.78	8.00	7.44
Ant1 Polarization/ Φ (°)/ θ (°)	Theta/90/0	Theta/90/0	Theta/90/0	Theta/90/0
Ant2 Polarization/ Φ (°)/ θ (°)	Phi/0/0	Phi/0/0	Phi/0/0	Phi/0/0
Max Gain(dBi)	7.90	8.00	8.00	7.44

3.5 Antenna Radiation Pattern

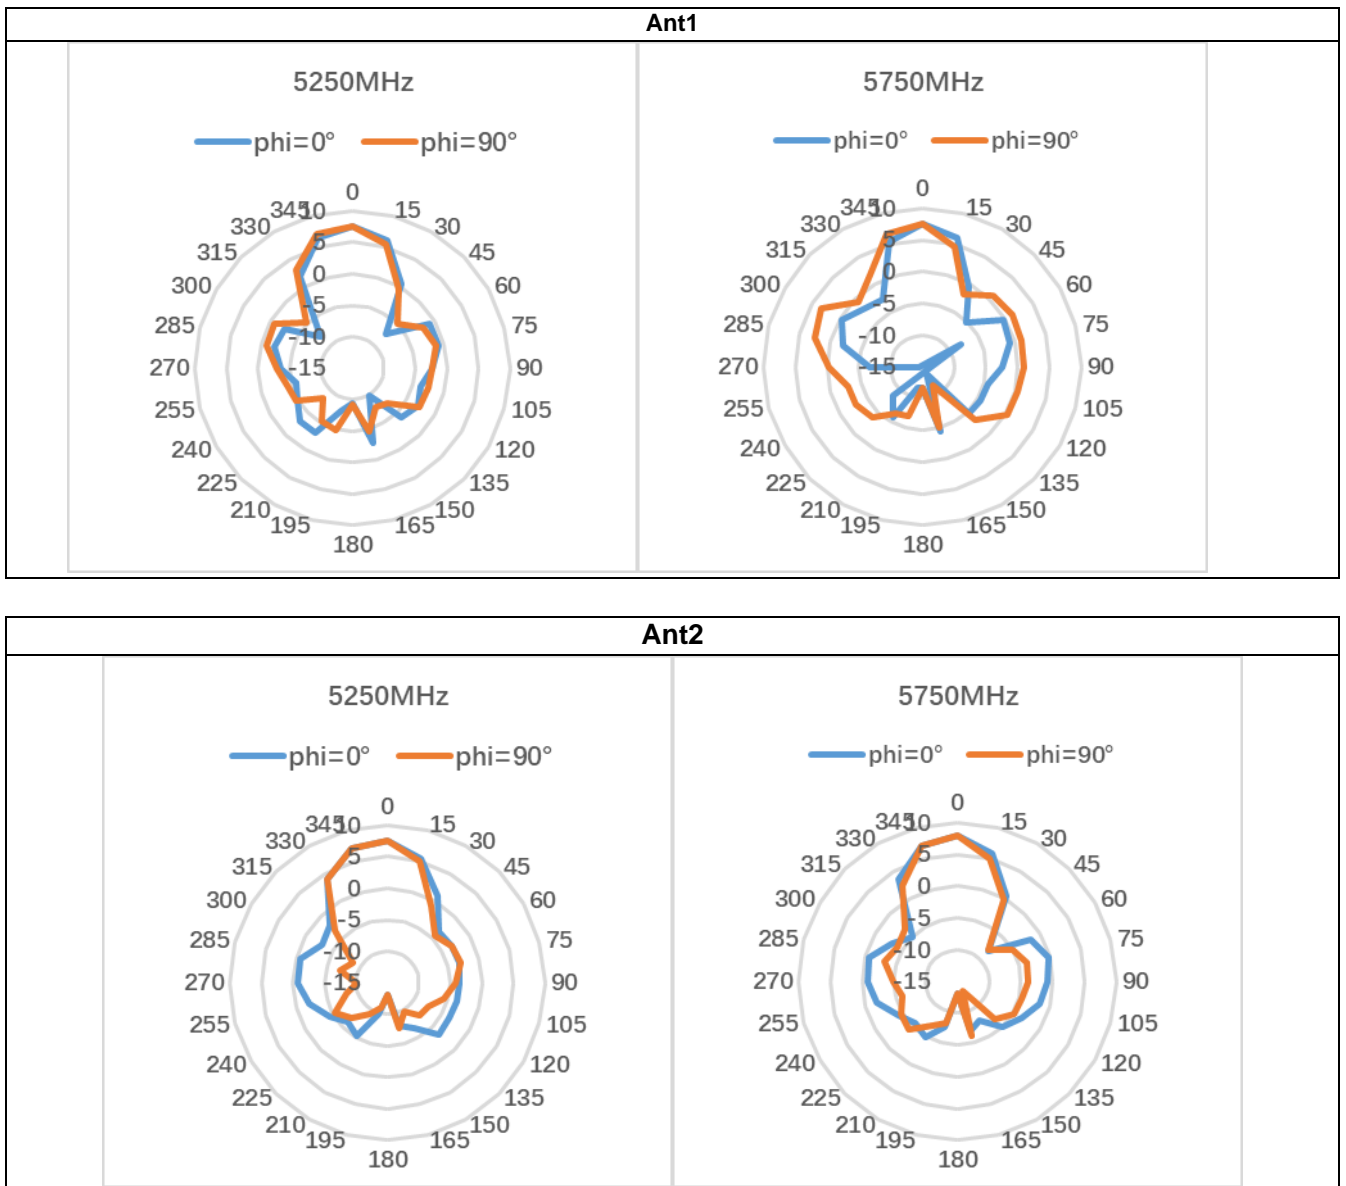

5.25GHz PeakGain at elevation angle above 30° = -2.03 dBi

