



WiFi 802.11b -Body Bottom CH1 Main Antenna	2
WiFi 802.11b -Body Bottom CH6 Main Antenna	3
WiFi 802.11a -Body Bottom CH60 Main Antenna	4
WiFi 802.11a -Body Bottom CH112 Main Antenna	5
WiFi 802.11a -Body Bottom CH149 Main Antenna	6
WiFi 802.11b -Body Bottom CH1 Main Antenna Repeated	7

Test Laboratory: Compliance Certification Services Inc.

Date: 8/6/2015

WiFi 802.11b -Body Bottom CH1 Main Antenna**DUT: Notebook computer; Type: Y700-15; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2412 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 50.58$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.31, 7.31, 7.31); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Bottom CH1 Main Antenna/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg


WiFi/Body Bottom CH1 Main Antenna/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.837 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

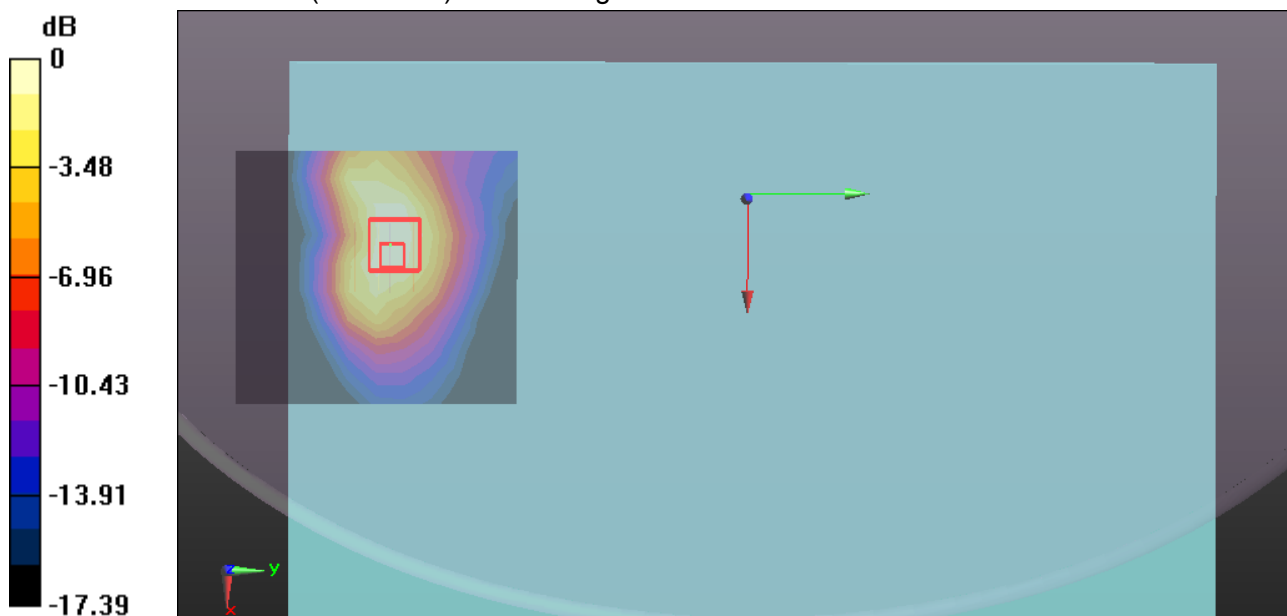

Test Laboratory: Compliance Certification Services Inc.

Date: 8/6/2015

WiFi 802.11b -Body Bottom CH6 Main Antenna**DUT: Notebook computer; Type: Y700-15; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2437 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2437$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 50.46$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.31, 7.31, 7.31); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WiFi/Body Bottom CH6 Main Antenna/Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.14 W/kg**WiFi/Body Bottom CH6 Main Antenna/Zoom Scan (7x7x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.904 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

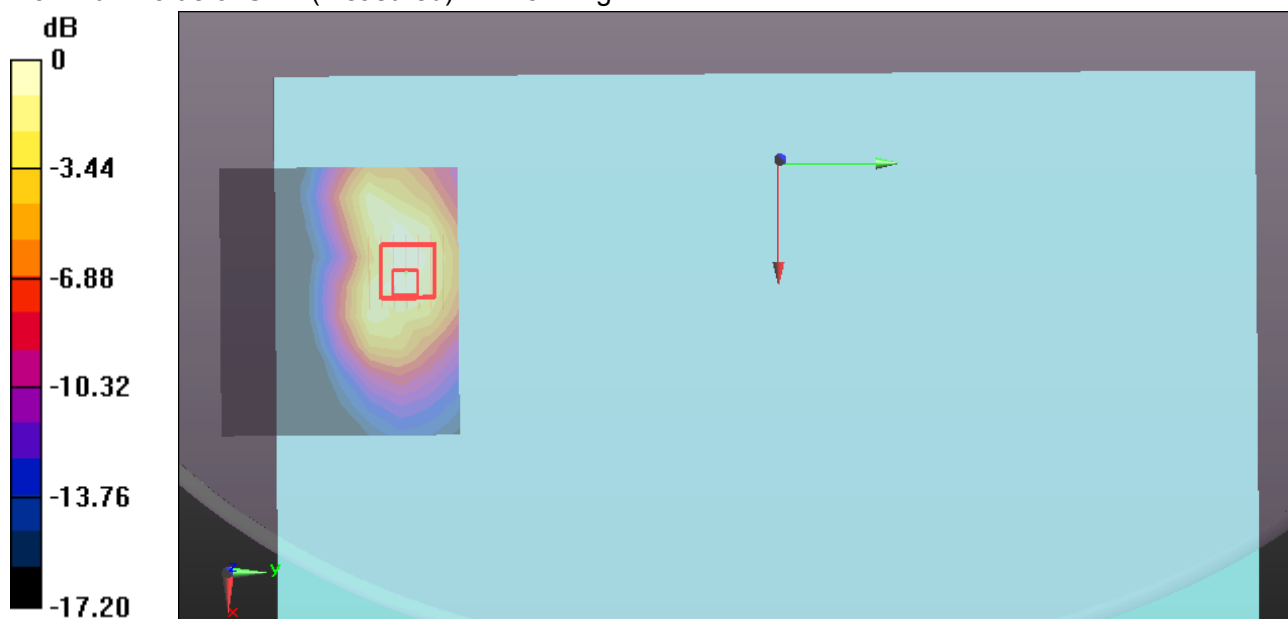

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/7/2015

WiFi 802.11a -Body Bottom CH60 Main Antenna**DUT: Notebook computer; Type: Y700-15; Serial: N/A**

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band II; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.436$ S/m; $\epsilon_r = 48.828$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(4.64, 4.64, 4.64); Calibrated: 4/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Bottom CH60 Main Antenna/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.577 W/kg


WiFi/Body Bottom CH60 Main Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.951 W/kg

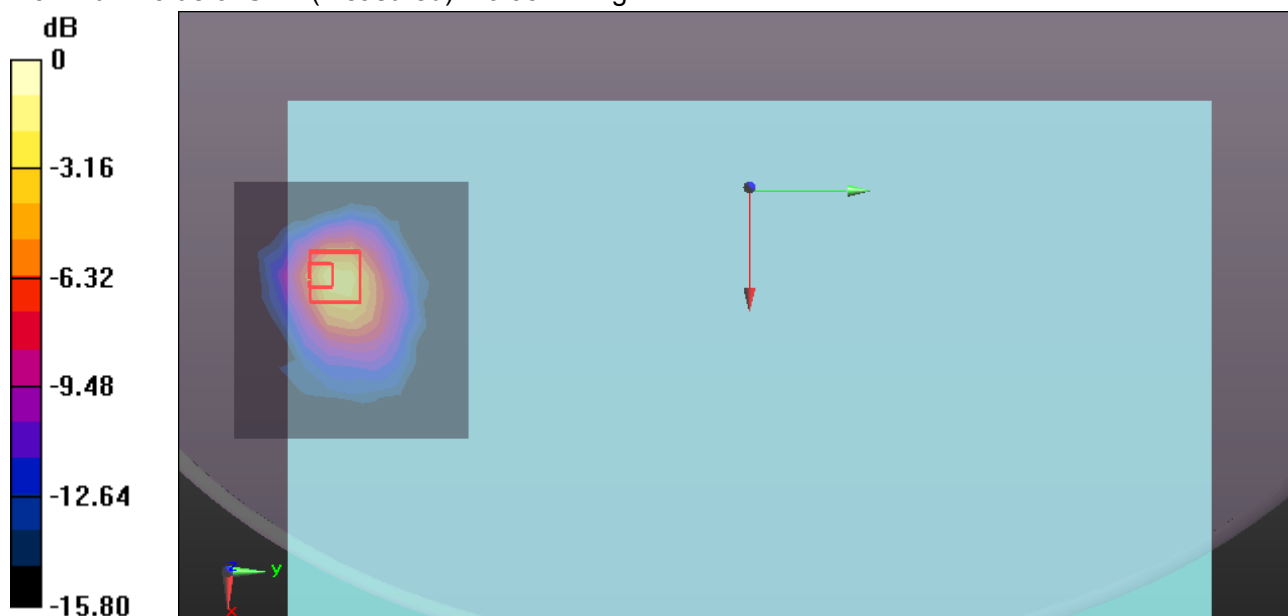

0 dB = 0.951 W/kg = -0.22 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/7/2015

WiFi 802.11a -Body Bottom CH112 Main Antenna**DUT: Notebook computer; Type: Y700-15; Serial: N/A**

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band III;

Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.82$ S/m; $\epsilon_r = 48.208$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(4.26, 4.26, 4.26); Calibrated: 4/11/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Bottom CH112 Main Antenna/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg


WiFi/Body Bottom CH112 Main Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

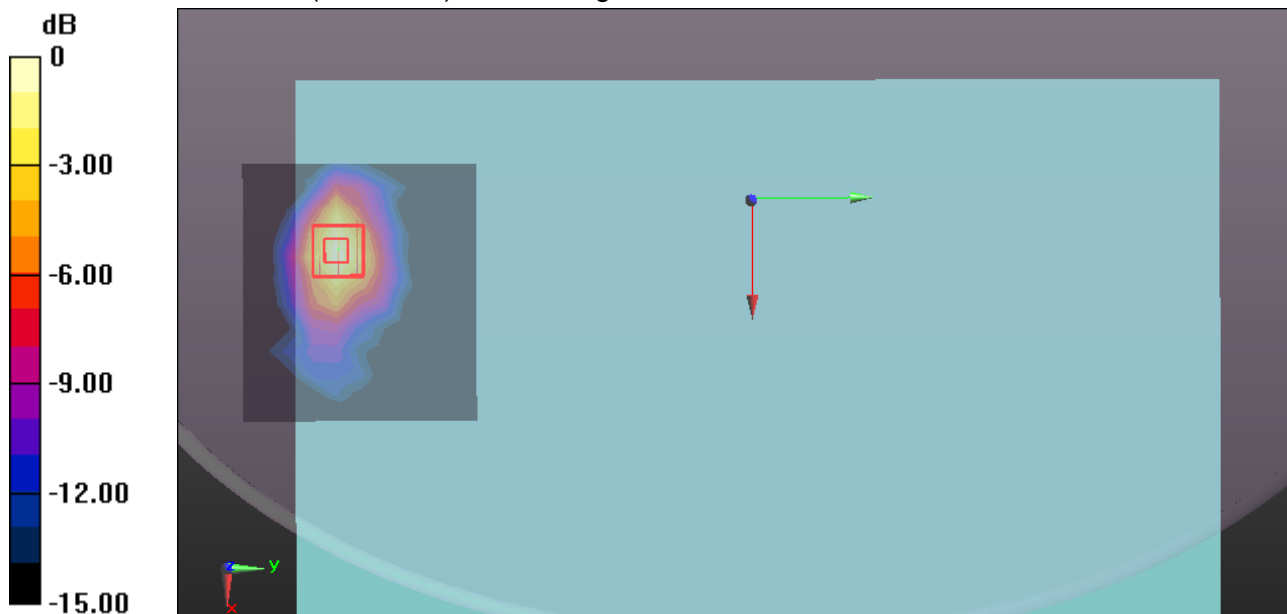

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/7/2015

WiFi 802.11a -Body Bottom CH149 Main Antenna**DUT: Notebook computer; Type: Y700-15; Serial: N/A**

Communication System: UID 0, IEEE 802.11 a (0); Communication System Band: 5G Band IV;

Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.093$ S/m; $\epsilon_r = 47.823$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(4.35, 4.35, 4.35); Calibrated: 4/11/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Bottom CH149 Main Antenna/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.804 W/kg


WiFi/Body Bottom CH149 Main Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.3940 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.849 W/kg

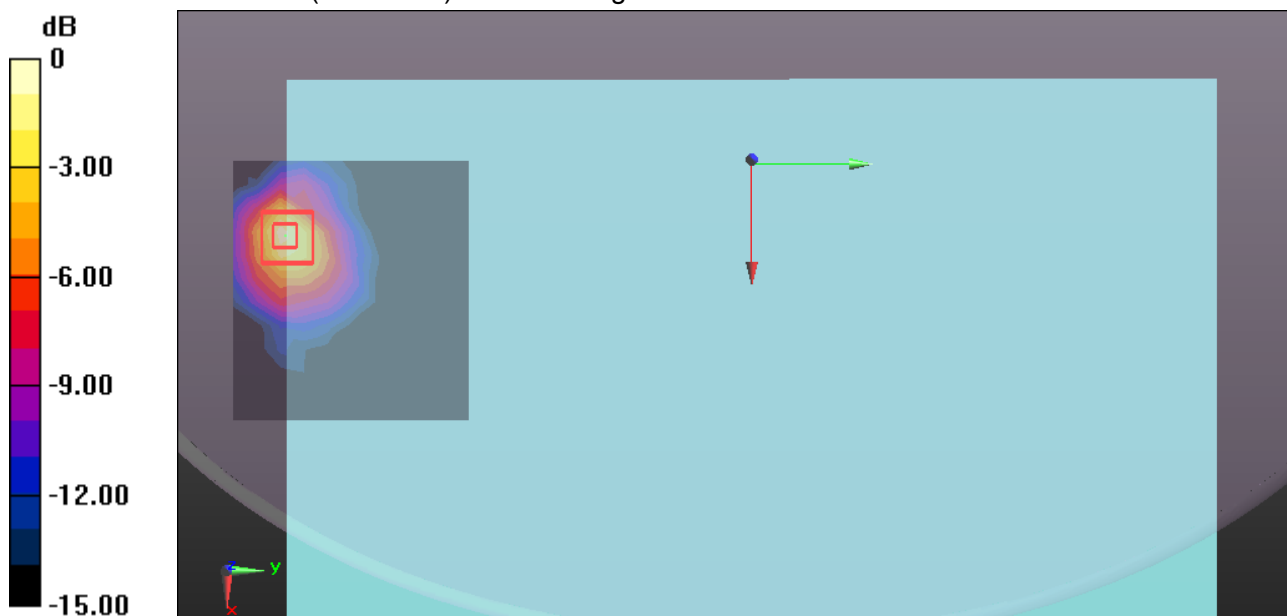

0 dB = 0.849 W/kg = -0.71 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/6/2015

WiFi 802.11b -Body Bottom CH1 Main Antenna Repeated**DUT: Notebook computer; Type: Y700-15; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2412 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 50.58$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.31, 7.31, 7.31); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Bottom CH1 Main Antenna Repeated/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.31 W/kg

WiFi/Body Bottom CH1 Main Antenna Repeated/Zoom Scan (7x7x5)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.318 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.461 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

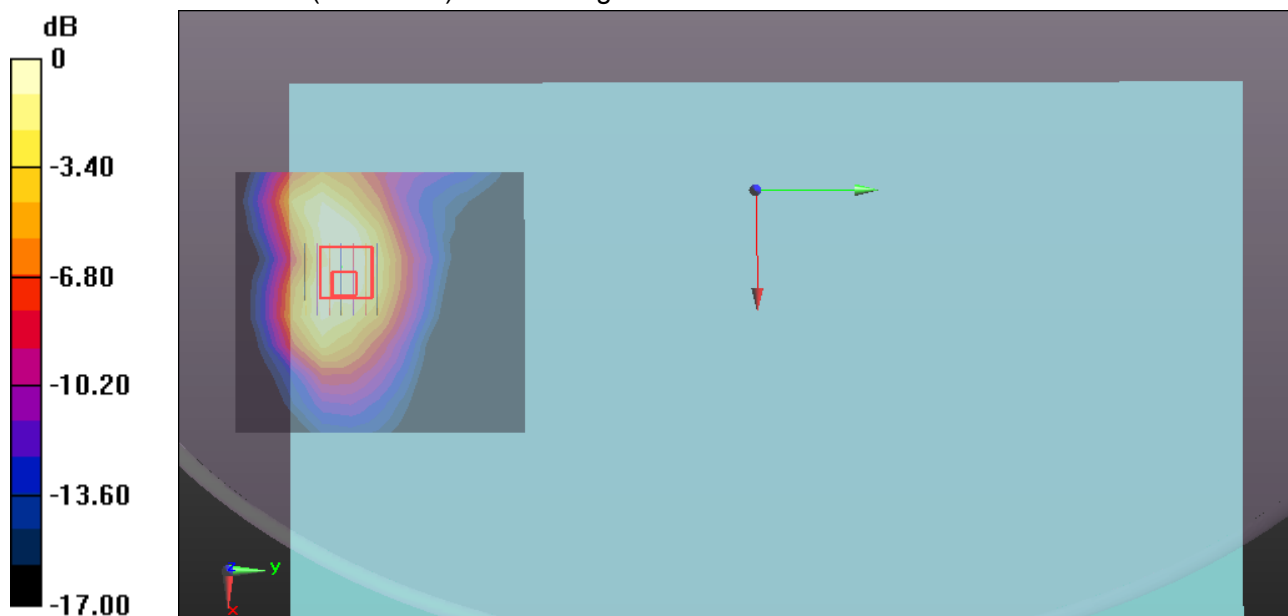

0 dB = 1.14 W/kg = 0.57 dBW/kg