

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.032	/	Pass
		2440	1	1.030	/	Pass
		2480	1	1.030	/	Pass

1.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.665	≥ 0.5	Pass
		2440	1	0.667	≥ 0.5	Pass
		2480	1	0.667	≥ 0.5	Pass

1.2 Test Graph


1.2.1 OBW

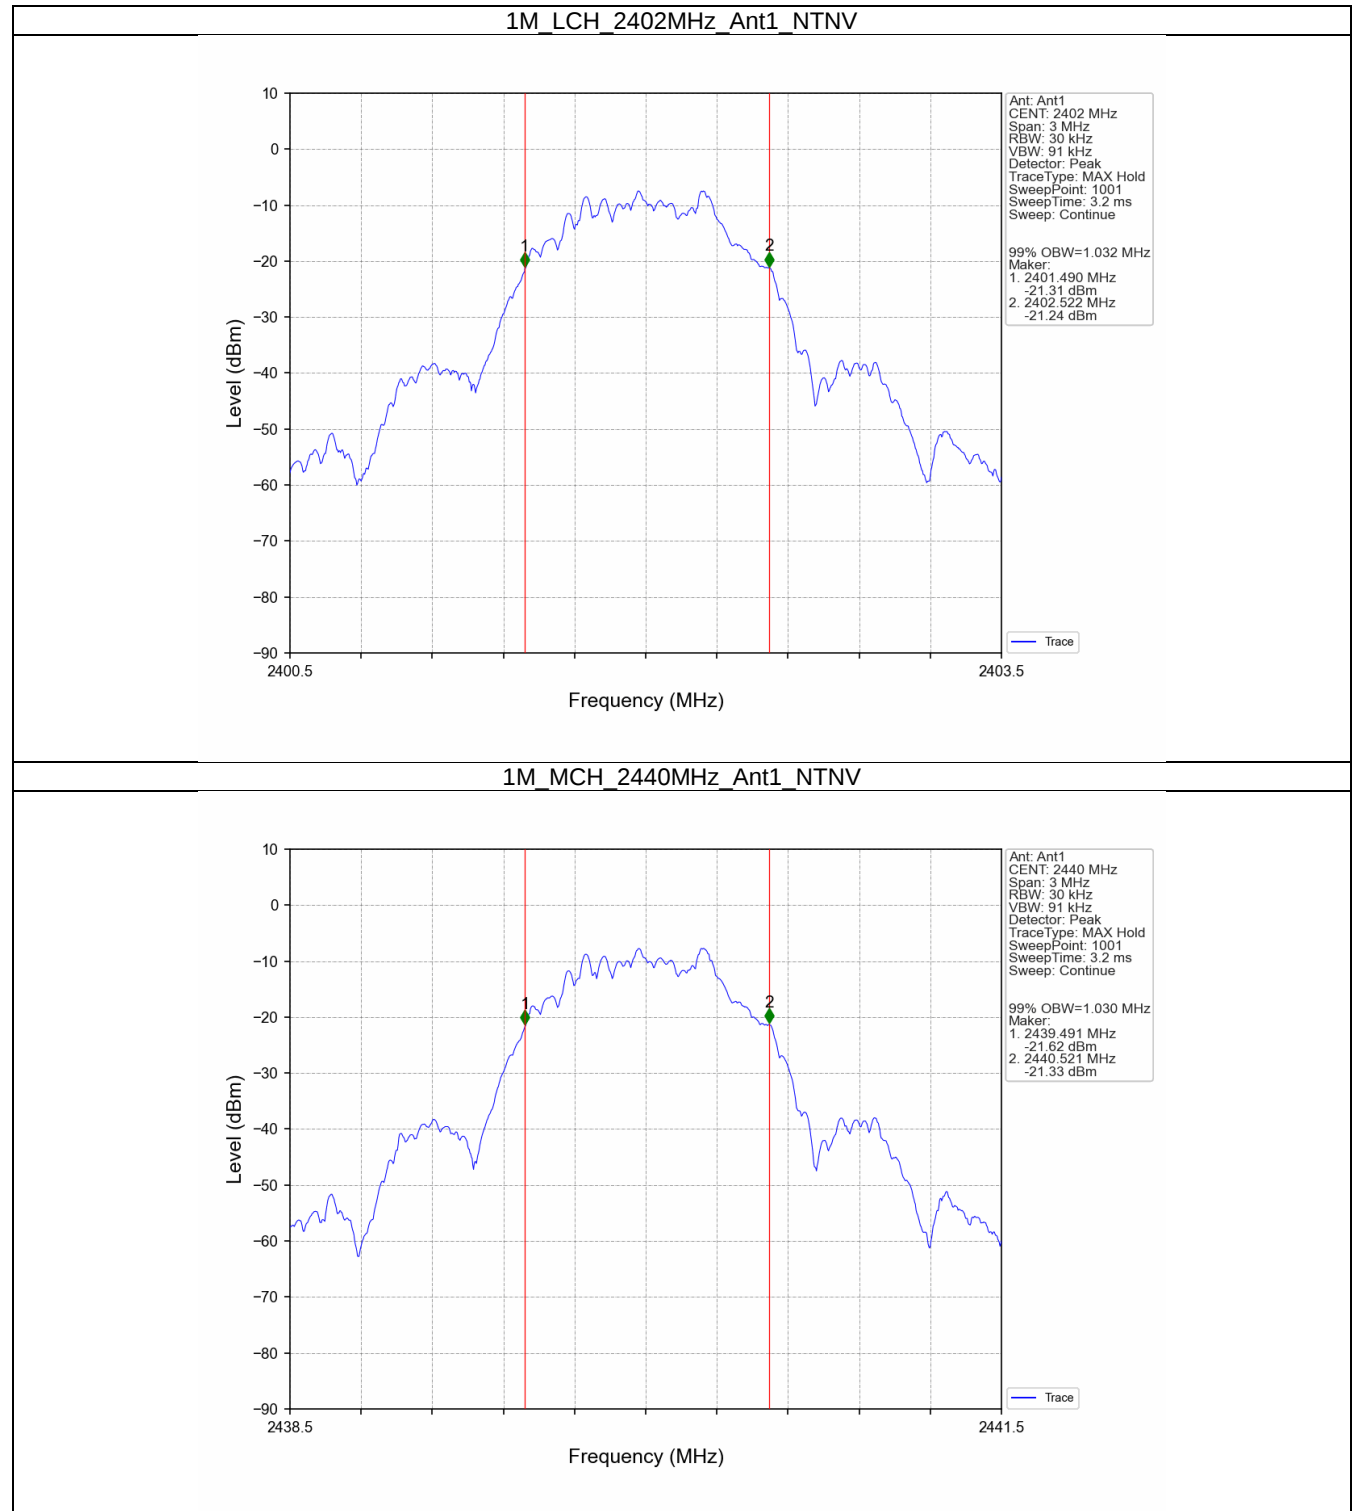


1M HCH 2480MHz Ant1 NTNV

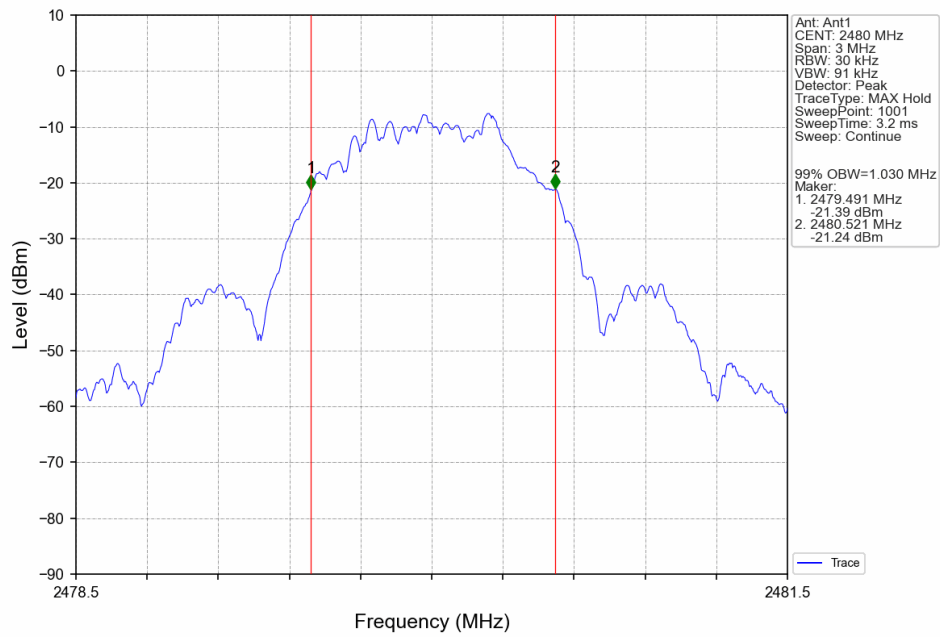

1.2.2 6dB BW

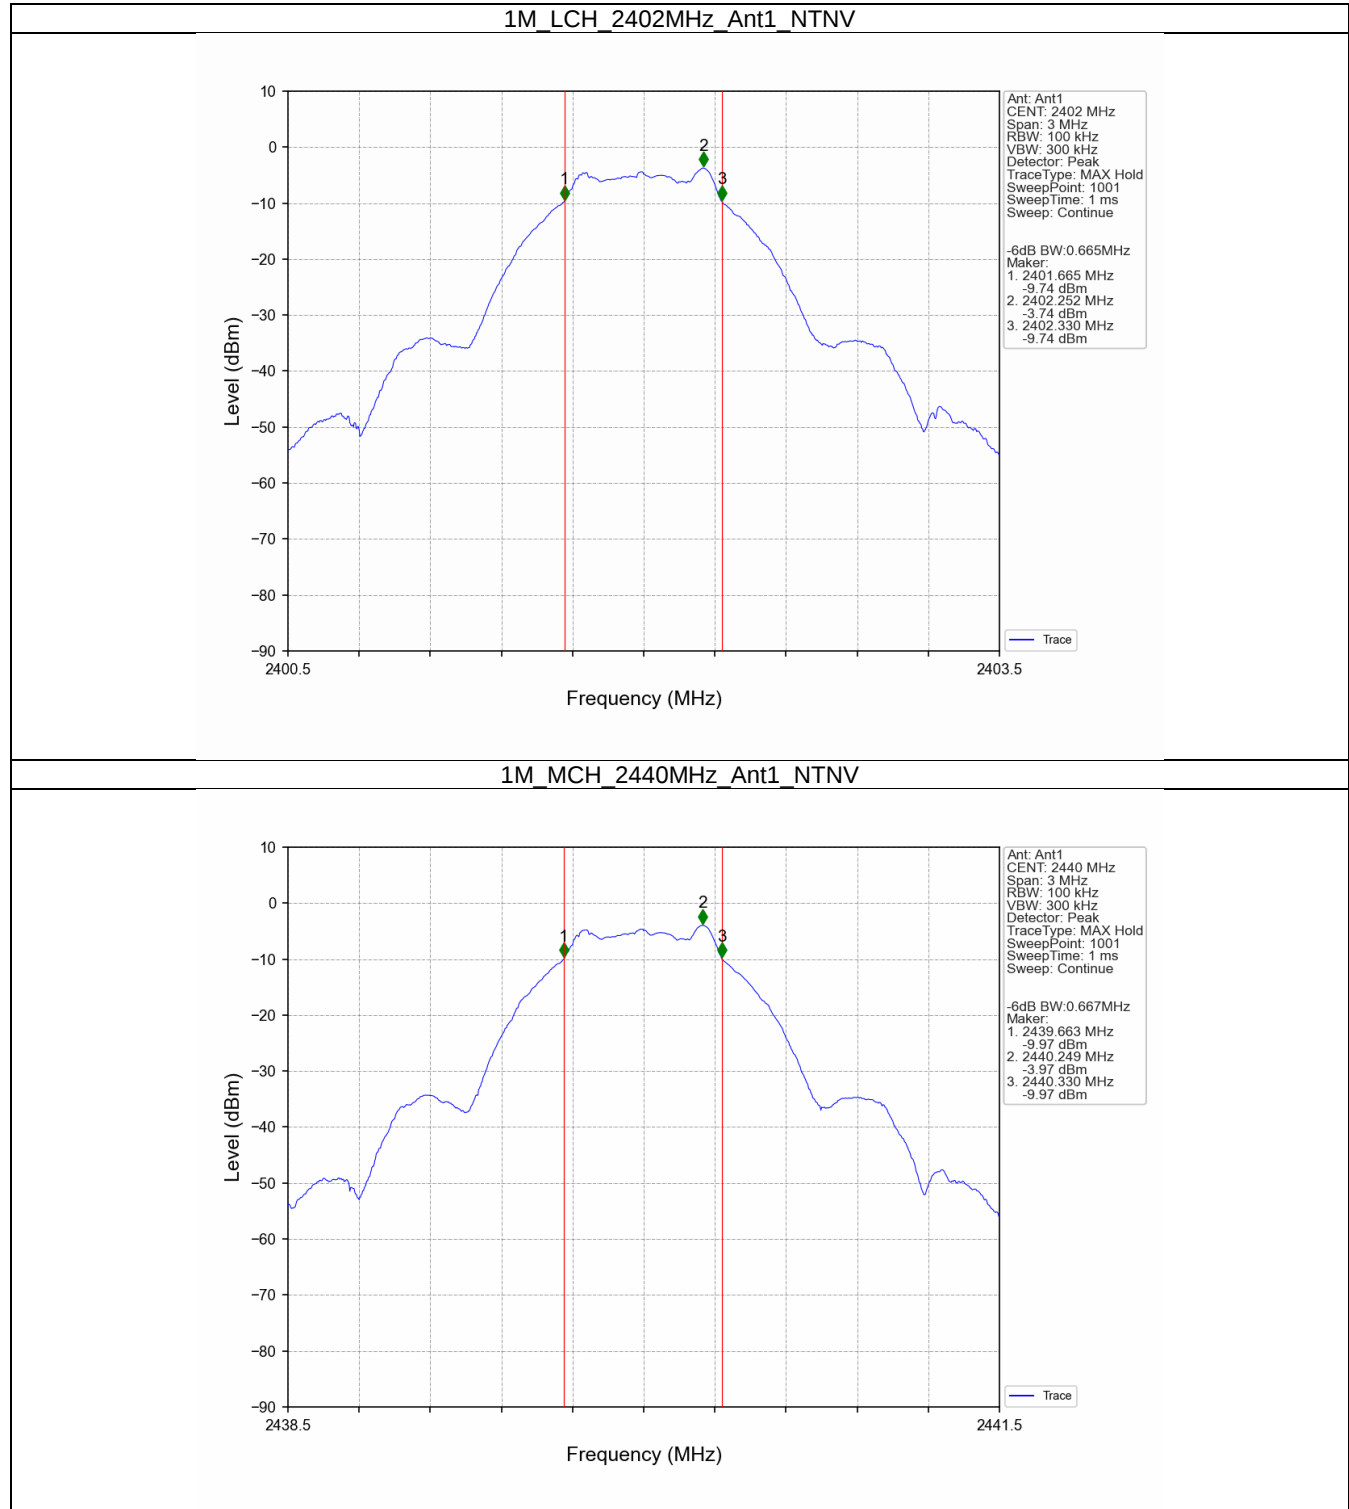

1M HCH 2480MHz Ant1 NTNV

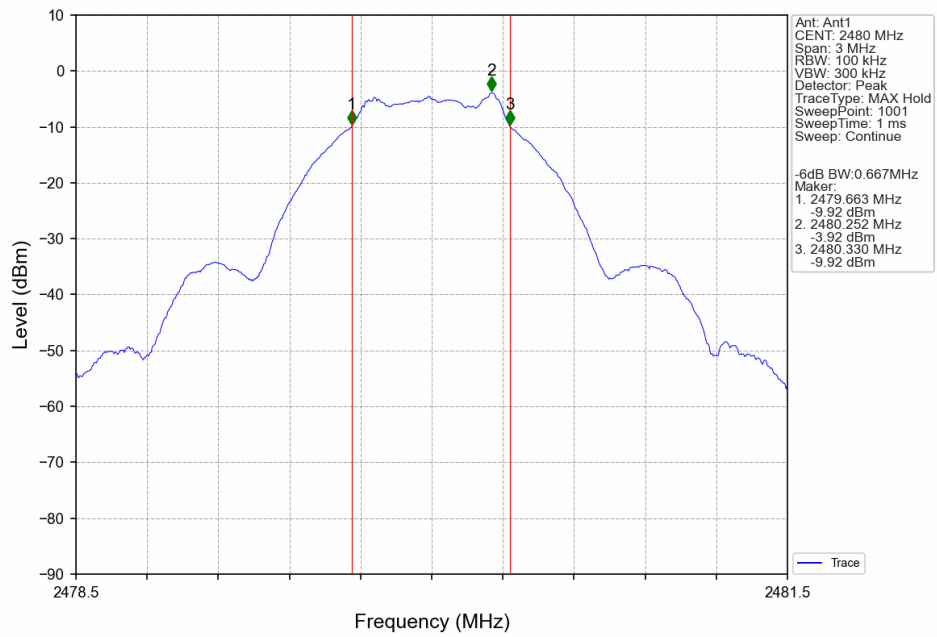

2. Maximum Conducted Output Power


2.1 Test Result

2.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-3.62	<=30	Pass
		2440	-3.89	<=30	Pass
		2480	-3.77	<=30	Pass
Note1: Antenna Gain: Ant1: 1.30dBi;					

2.2 Test Graph

2.2.1 Power

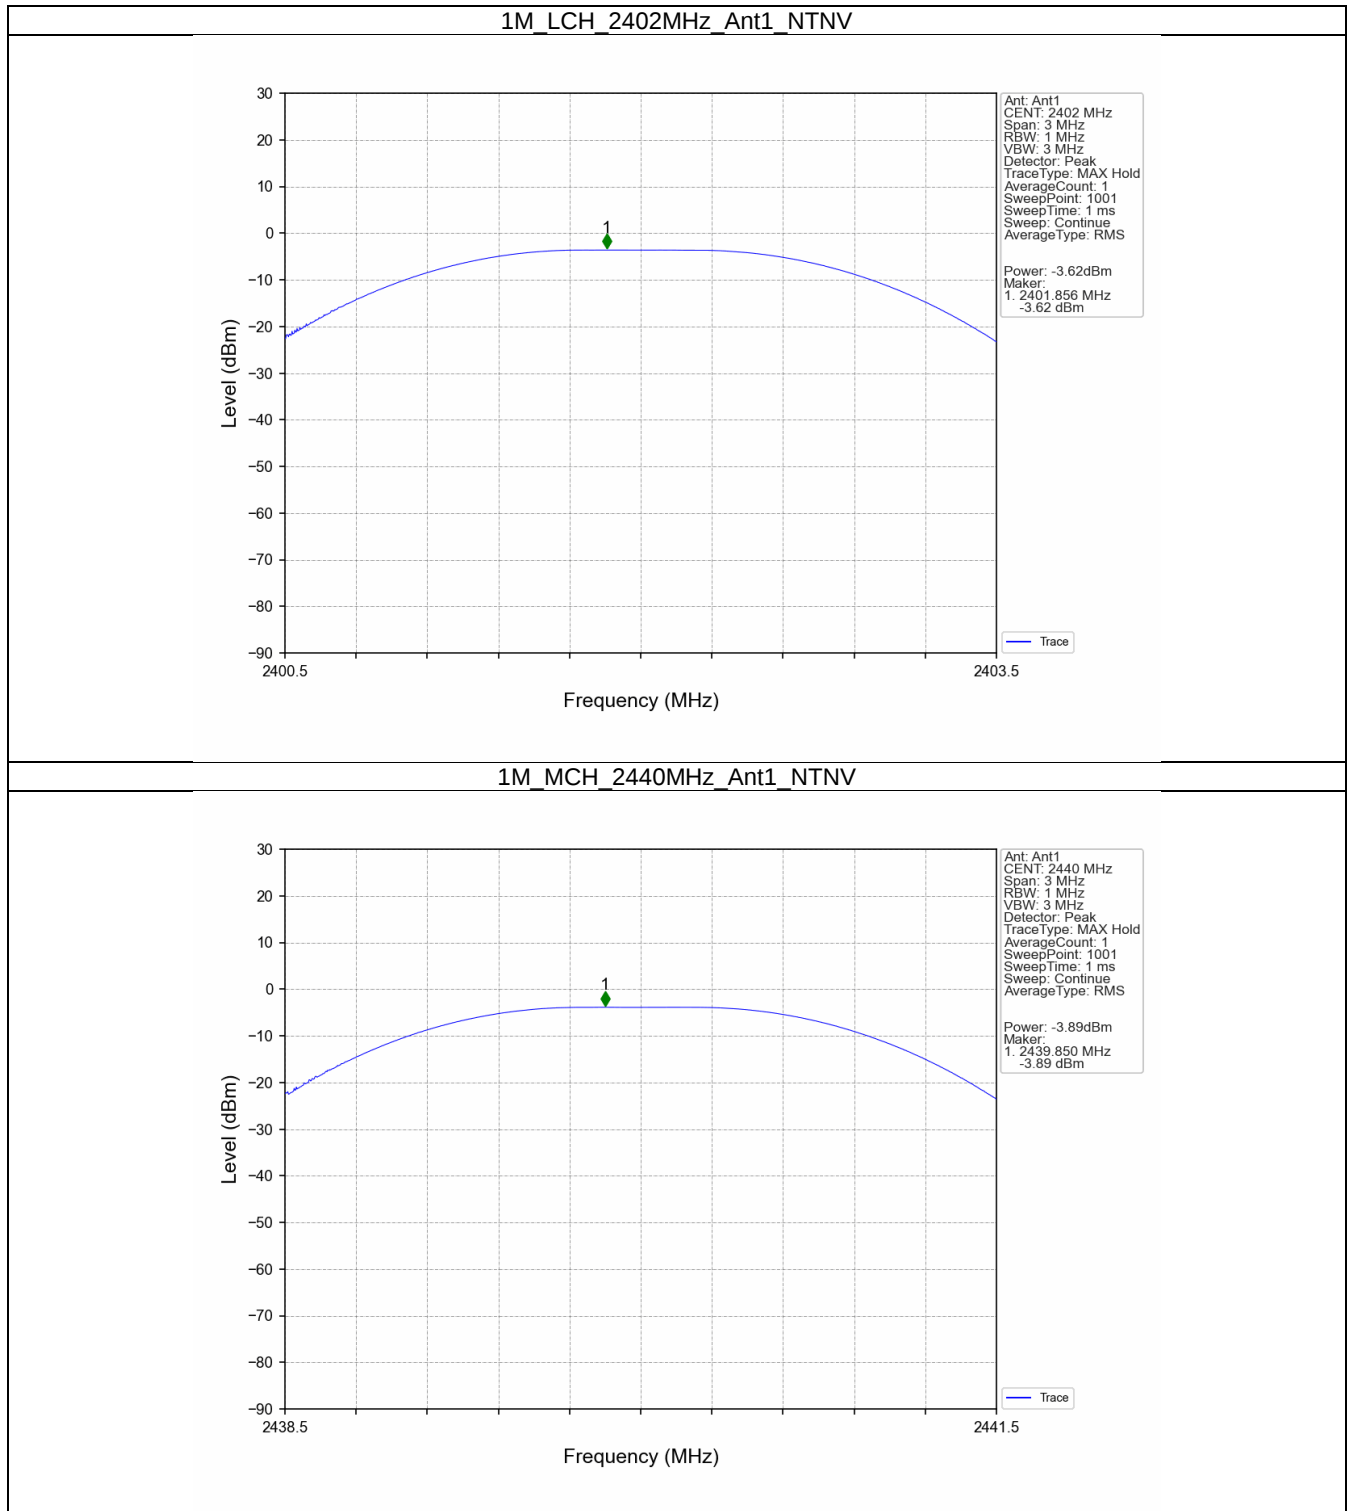

1M HCH 2480MHz Ant1 NTNV

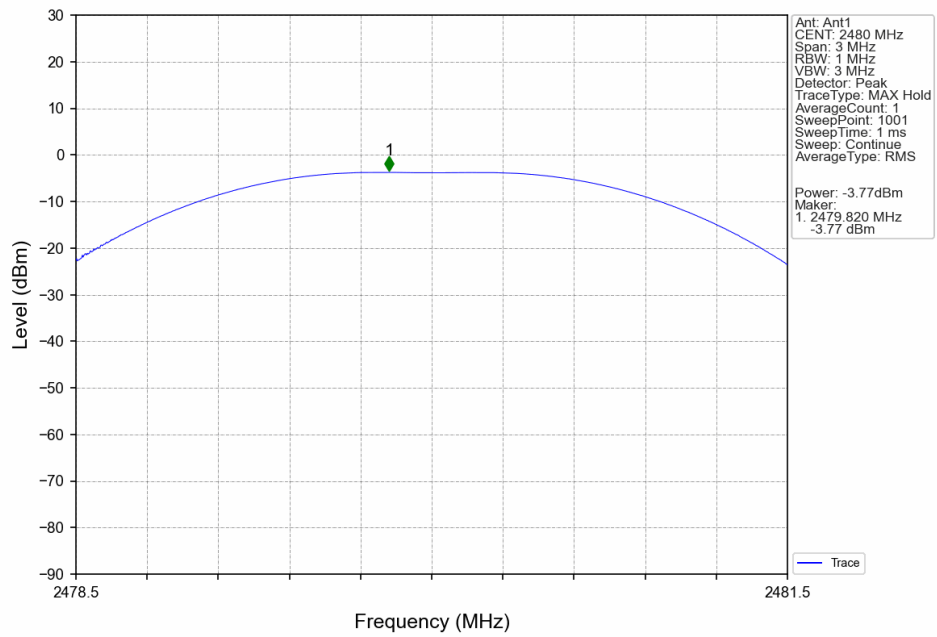

3. Maximum Power Spectral Density

3.1 Test Result


3.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-19.97	<=8	Pass
		2440	-20.04	<=8	Pass
		2480	-19.82	<=8	Pass


Note1: Antenna Gain: Ant1: 1.30dBi;


3.2 Test Graph

3.2.1 PSD

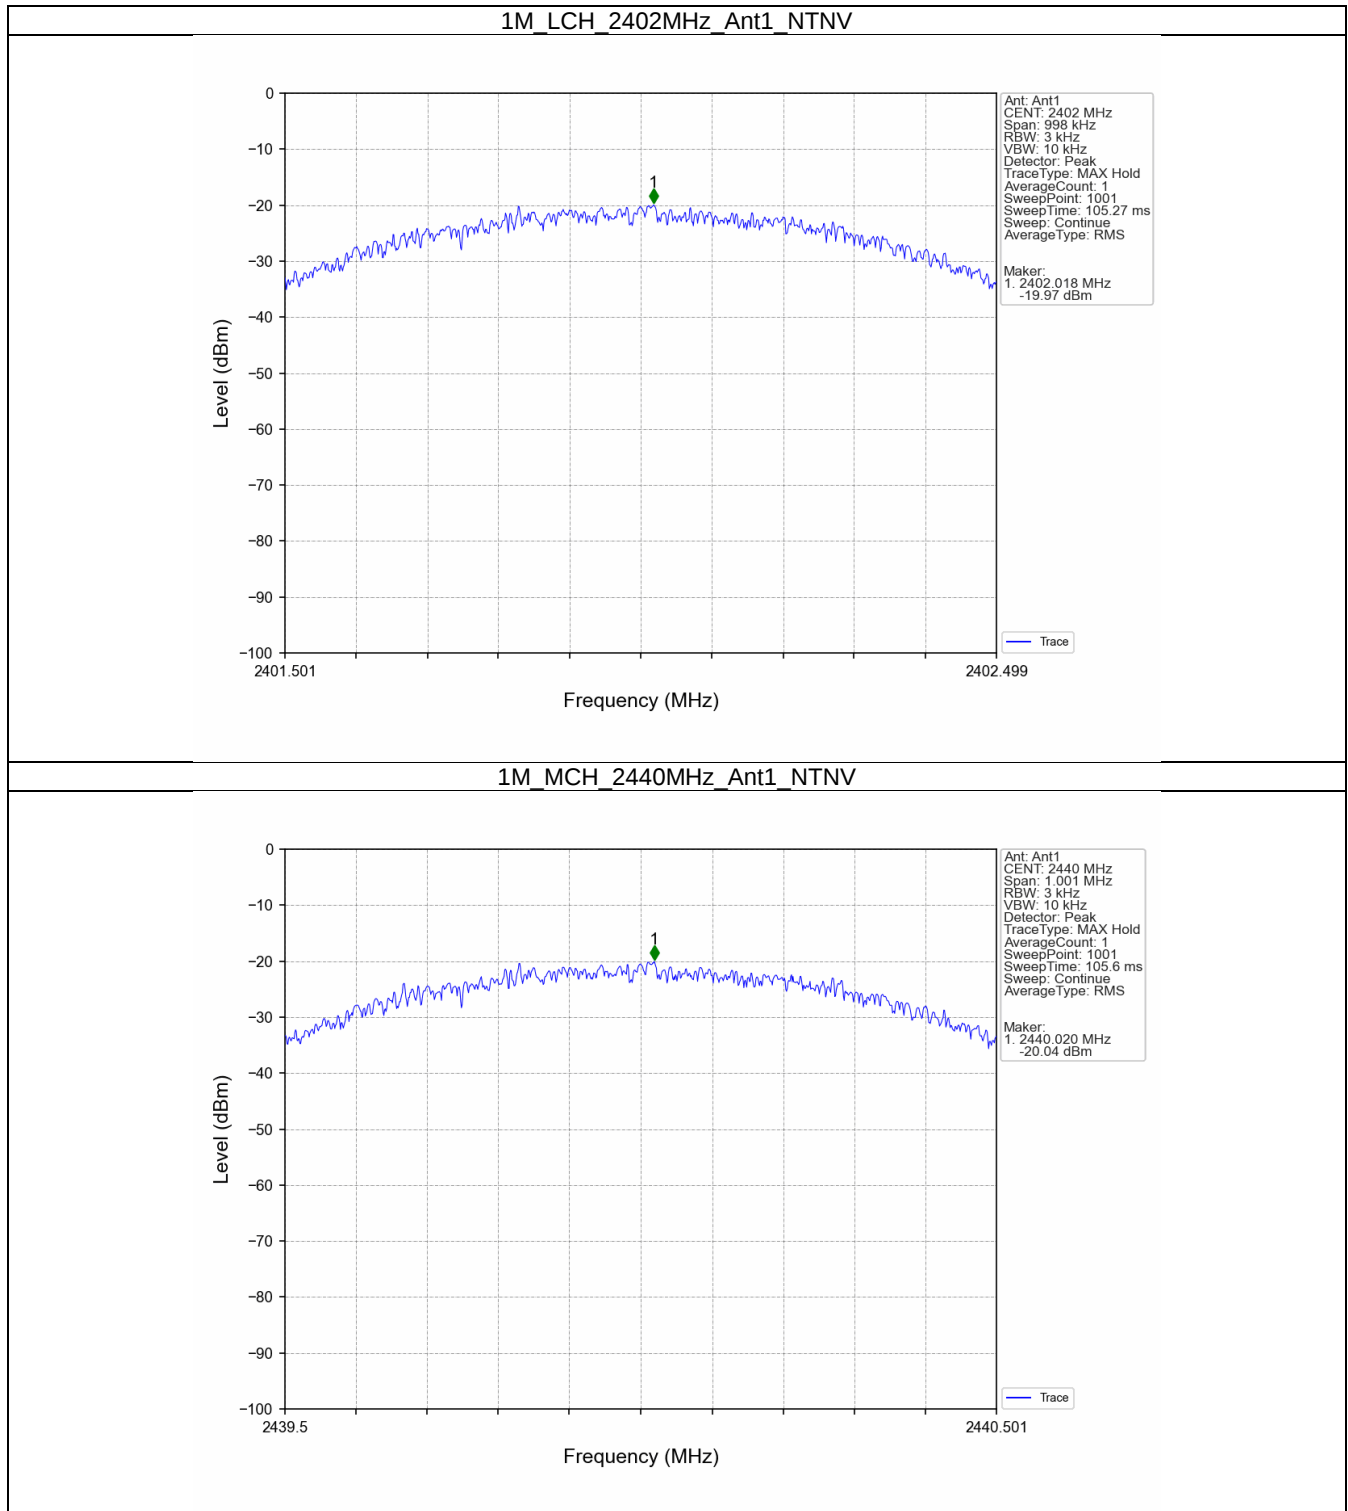

1M HCH 2480MHz Ant1 NTN

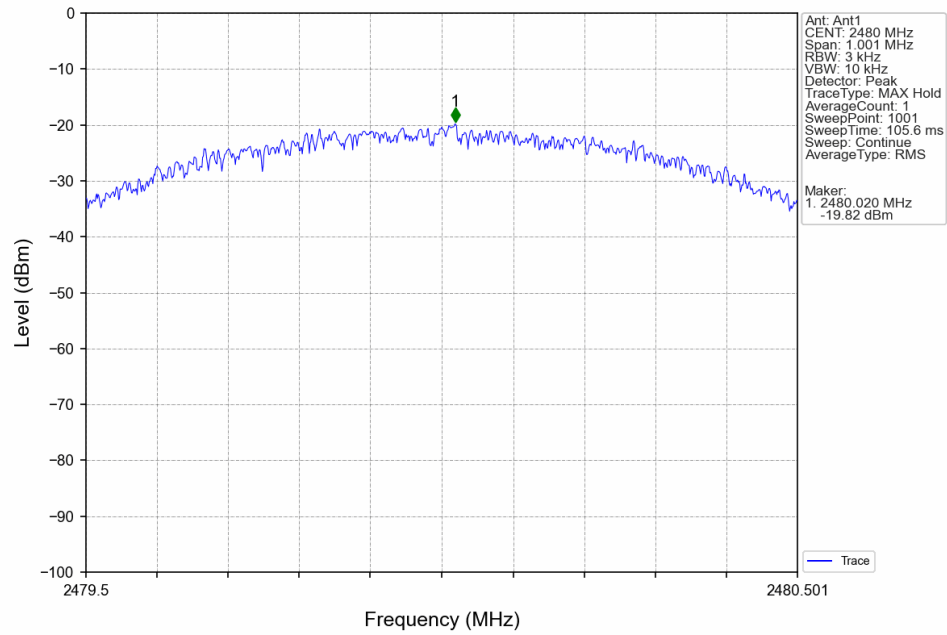





Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-3.75	-23.75	Pass
		2440	1	-3.98	-23.98	Pass
		2480	1	-3.90	-23.90	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph


5.2.1 Ref

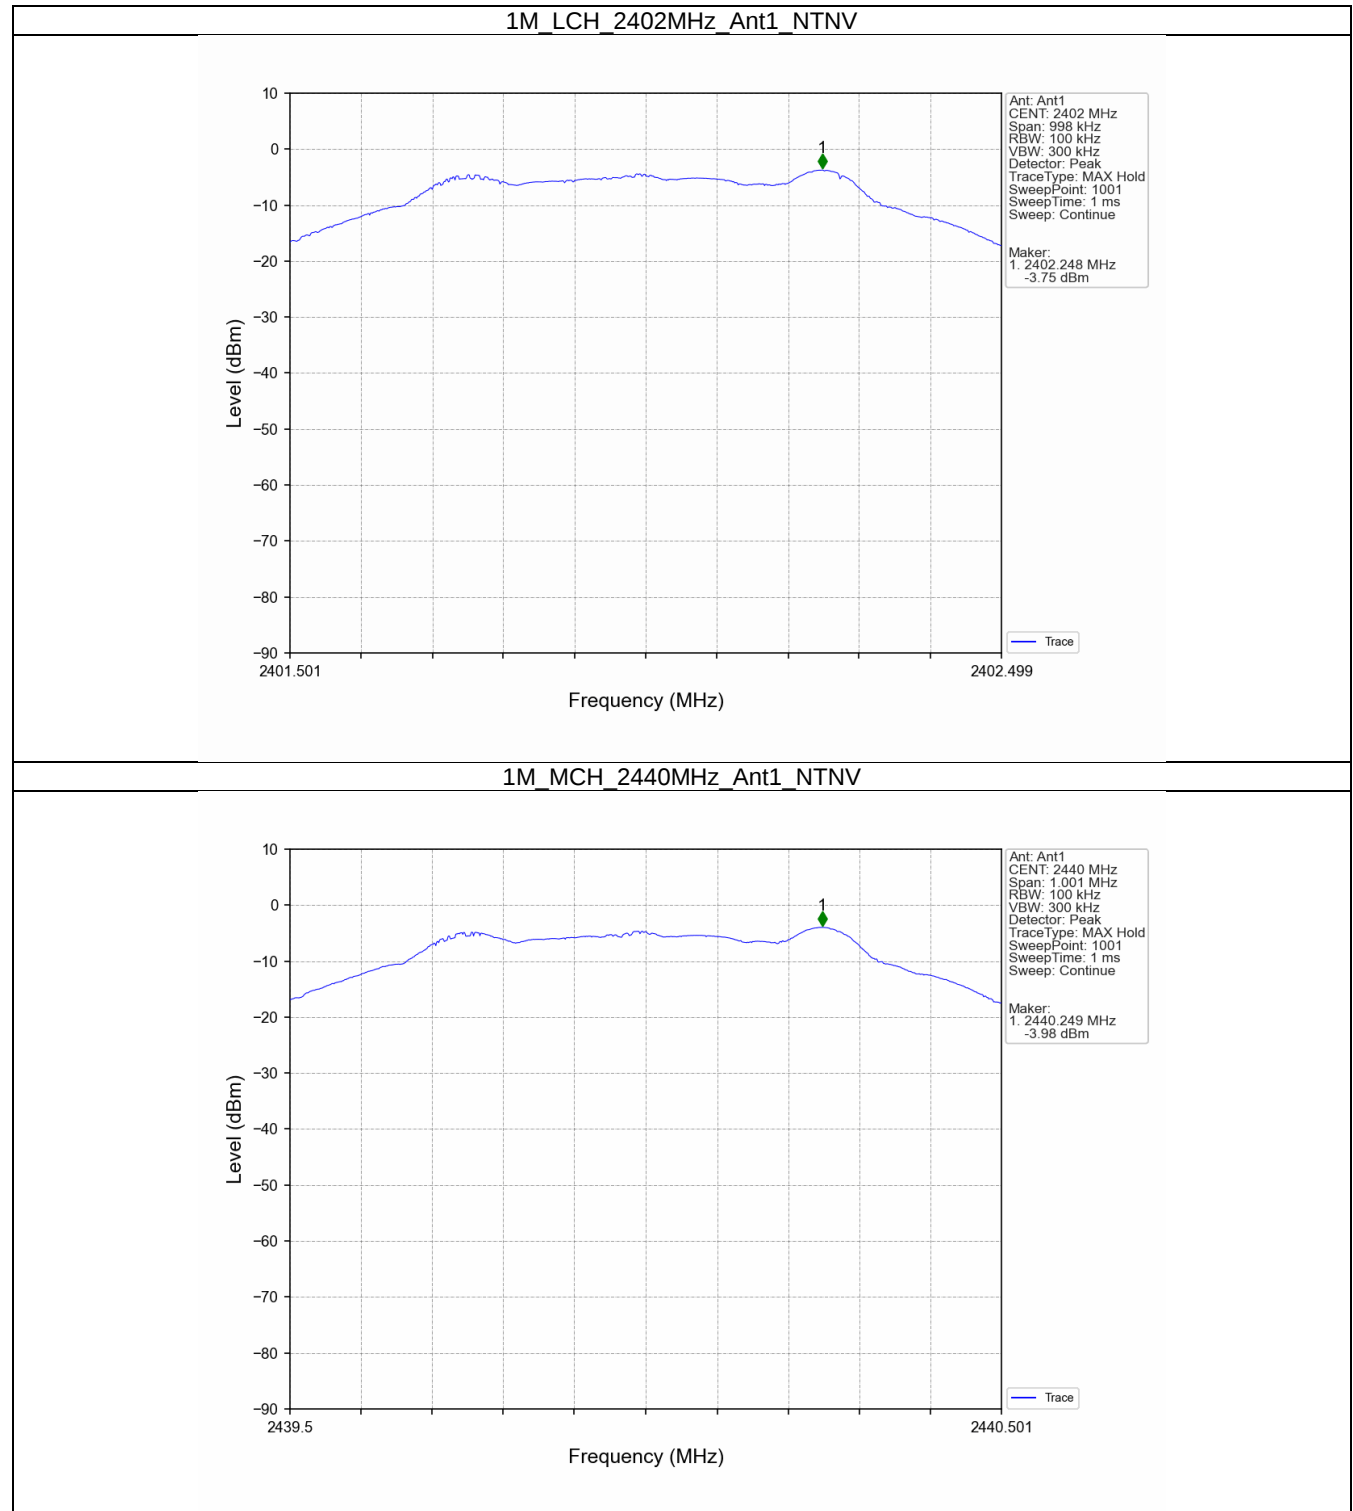


1M HCH 2480MHz Ant1 NTNV

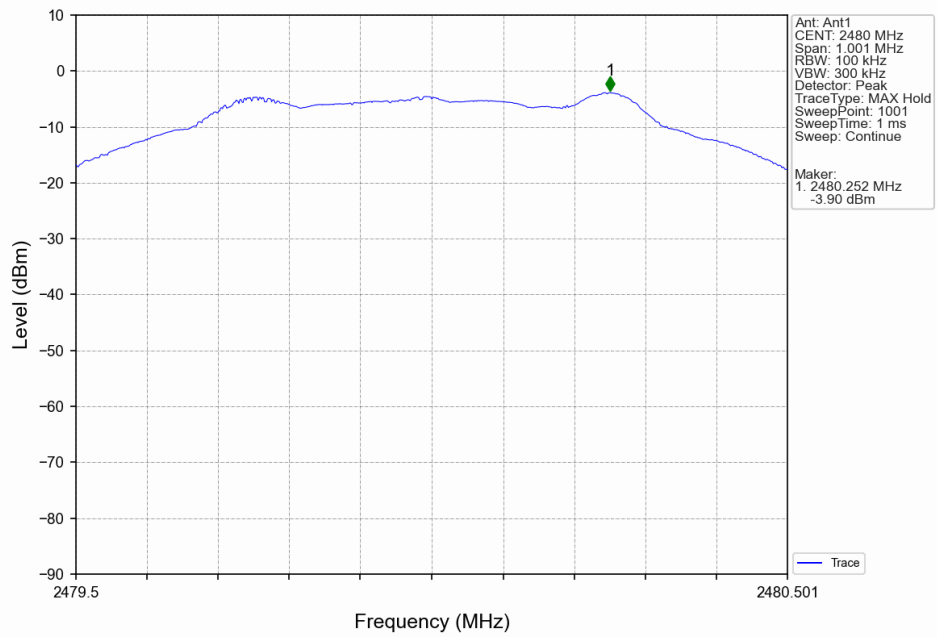


5.2.2 CSE

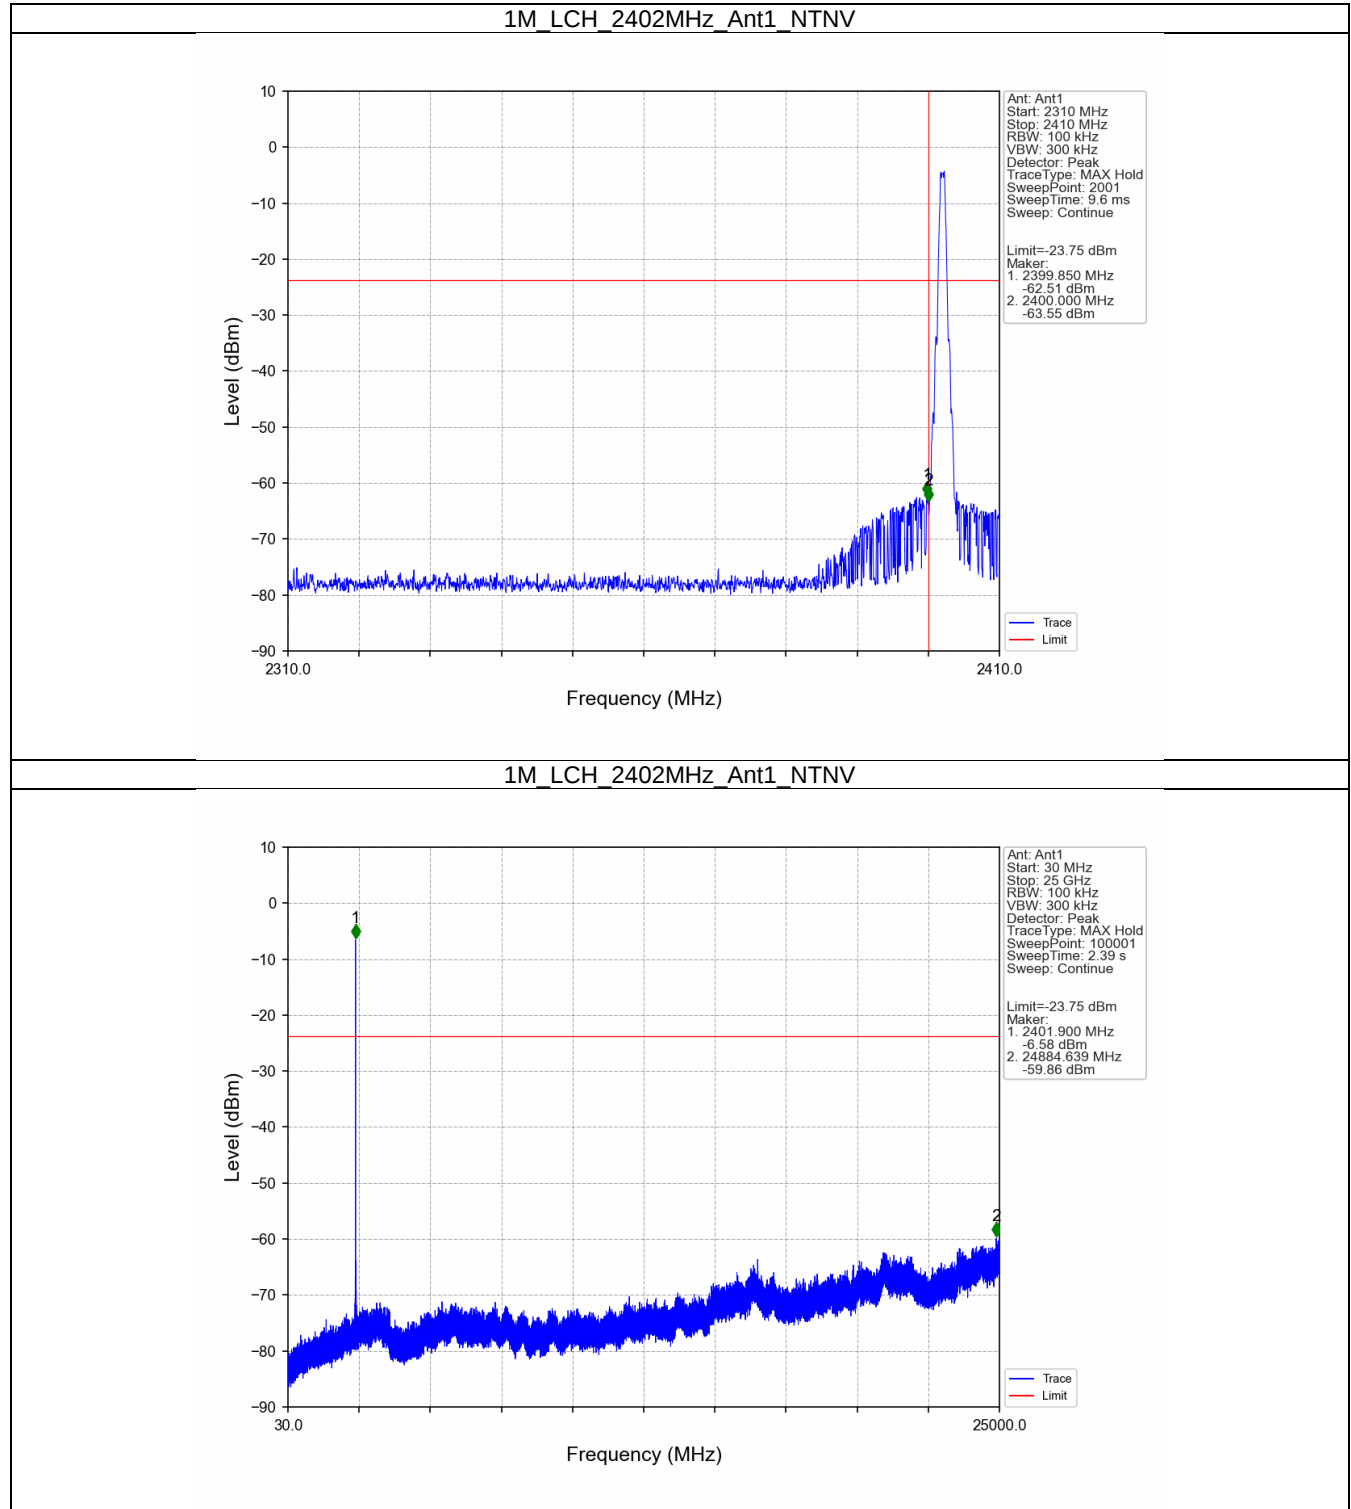


1M MCH 2440MHz Ant1 NTNV

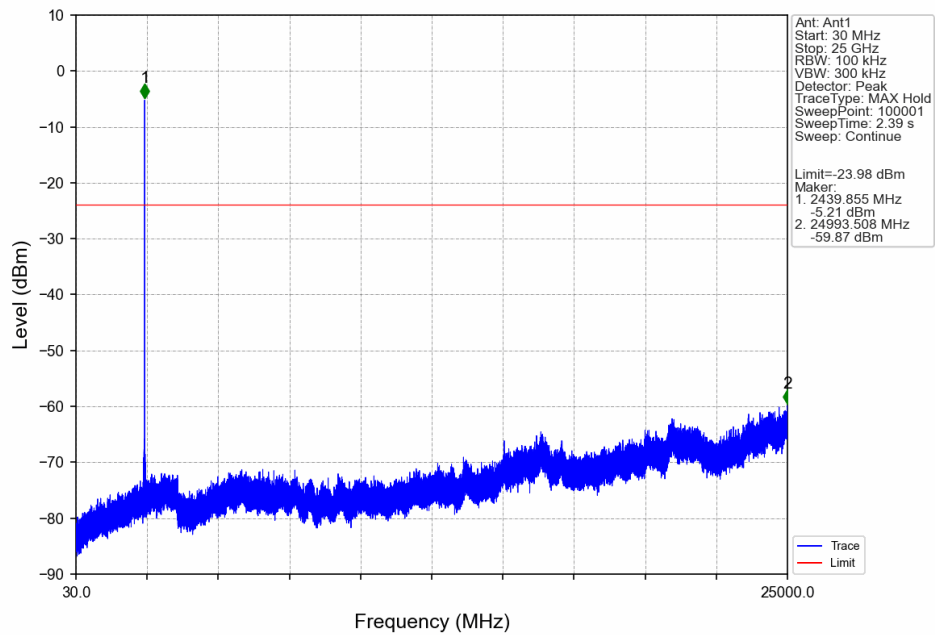

1M HCH 2480MHz Ant1 NTNV

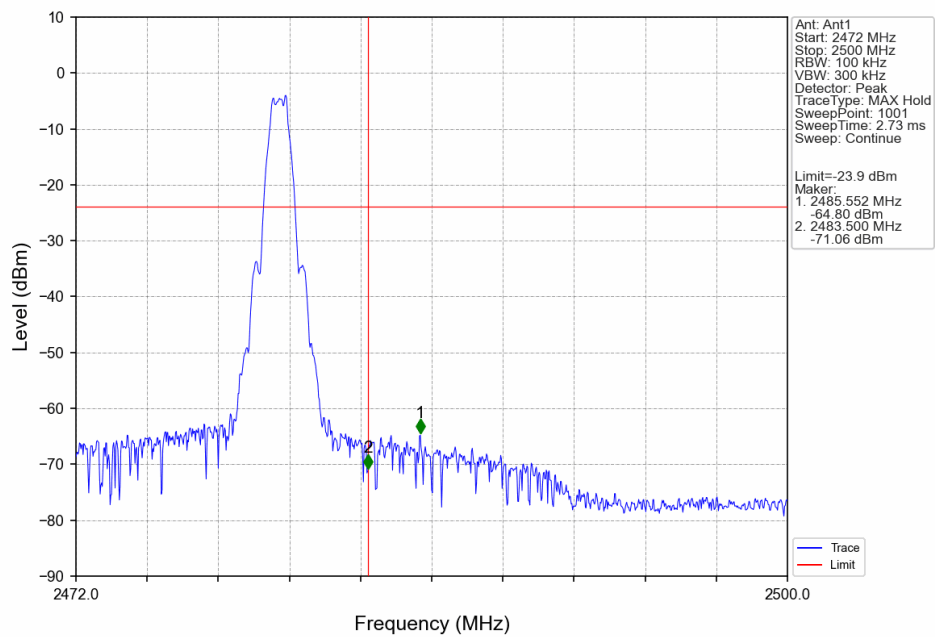

1M HCH 2480MHz Ant1 NTV

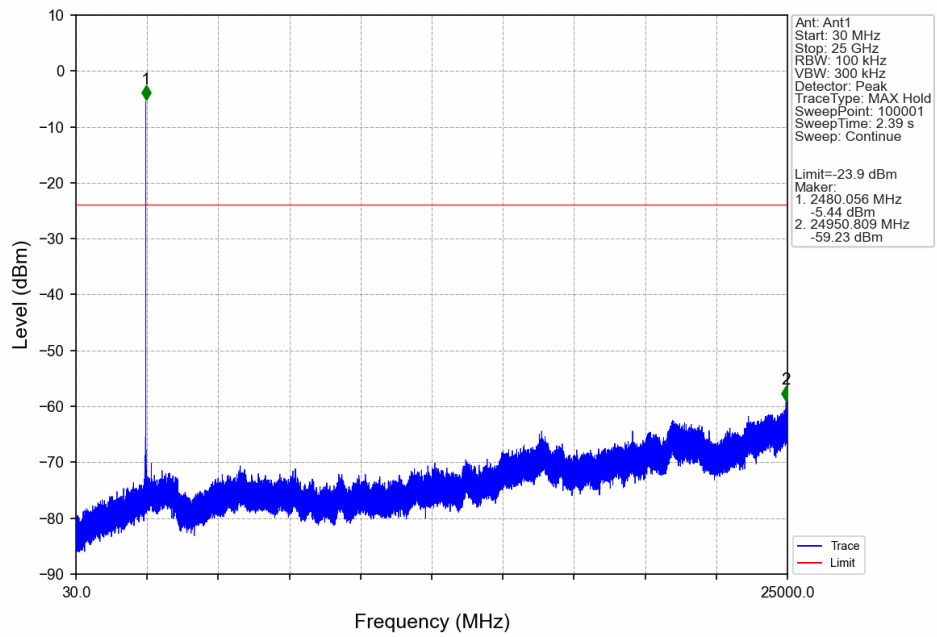

5. Form731

5.1 Test Result

5.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0004	-3.62