



Test Report

AIR-CAP3702P-A-K9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102087P
IC: 2461B-102087P

Also covers:

AIR-CAP3702P-D-K9,

AIR-CAP3702P-N-K9,

AIR-CAP3702P-Z-K9,

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

Cisco Systems

170 West Tasman Drive
San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING	5
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES	5
2.5 EQUIPMENT ASSESSED (EUT)	5
2.6 EUT DESCRIPTION	6
SECTION 4: SAMPLE DETAILS.....	7
APPENDIX A: EMISSION TEST RESULTS.....	8
TARGET MAXIMUM CHANNEL POWER	8
PEAK OUTPUT POWER	9
POWER SPECTRAL DENSITY	106
CONDUCTED SPURIOUS EMISSIONS	113
CONDUCTED BANDEDGE	120
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	250
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	252

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

22-May-2013 to 5-June-2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-SAP3702P-A-K9 Cisco Aironet 802.11ac Dual Band Access Point



2.6 EUT Description

The 3700 Series Cisco Aironet 802.11ac Dual Band Access Points support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT-20, One Antenna, 6 to 54 Mbps
 Non HT-20, Two Antennas, 6 to 54 Mbps
 Non HT-20, Three Antennas, 6 to 54 Mbps
 Non HT-20, Four Antennas, 6 to 54 Mbps

Non HT-20 Beam Forming, Two Antennas, 6 to 54 Mbps
 Non HT-20 Beam Forming, Three Antennas, 6 to 54 Mbps
 Non HT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT-20, One Antenna, M0 to M7
 HT-20, Two Antennas, M0 to M15
 HT-20, Three Antennas, M0 to M23
 HT-20, Four Antennas, M0 to M23

HT-20 STBC, Two Antennas, M0 to M7
 HT-20 STBC, Three Antennas, M0 to M7
 HT-20 STBC, Four Antennas, M0 to M7

HT-20 Beam Forming, Two Antennas, M0 to M15
 HT-20 Beam Forming, Three Antennas, M0 to M23
 HT-20 Beam Forming, Four Antennas, M0 to M23

The following antennas are supported by this product series.

The data included in this report represent the antennas in **bold** below.

Part Number	Antenna Type	Antenna Gain (dBi)
AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4
AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4
AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4
AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4
AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4
AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6
AIR-ANT2513P4M-N	Dual-resonant cross-pol "directional" antenna (4-pack)	13 / 13
AIR-ANT2534V4C-R	Dual-resonant ceiling mount omni (4-pack)	3 / 4



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-SAP3702P-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All tests in this report were performed as described in FCC KDB 662911 D01

Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	2412	2437	2462
Legacy CCK, 1 to 11 Mbps	21	21	21
Non HT-20, 6 to 54 Mbps	21	21	21
Non HT-20 Beam Forming, 6 to 54 Mbps	21	21	20
HT-20, M0 to M23	21	21	21
HT-20 STBC, M0 to M7	21	21	21
HT-20 Beam Forming, M0 to M23	21	21	20

Peak Output Power

15.247 / RSS-210 A8.4: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 2 dBi. The peak correlated gain for each mode is listed in the table below.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	2	14.3				14.3	30	15.7
	Legacy CCK, 1 to 11 Mbps	2	2	14.3	15.7			18.1	30	11.9
	Legacy CCK, 1 to 11 Mbps	3	2	14.3	15.7	14.8		19.7	30	10.3
	Legacy CCK, 1 to 11 Mbps	4	2	14.3	15.7	14.8	15.6	21.2	30	8.8
	Non HT-20, 6 to 54 Mbps	1	2	14.7				14.7	30	15.3
	Non HT-20, 6 to 54 Mbps	2	2	14.7	15.5			18.1	30	11.9
	Non HT-20, 6 to 54 Mbps	3	2	14.7	15.5	14.8		19.8	30	10.2
	Non HT-20, 6 to 54 Mbps	4	2	14.7	15.5	14.8	15.4	21.1	30	8.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	14.7	15.5			18.1	30	11.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	14.7	15.5	14.8		19.8	29.2	9.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	14.7	15.5	14.8	15.4	21.1	28	6.9
	HT-20, M0 to M7	1	2	14.1				14.1	30	15.9
	HT-20, M0 to M7	2	2	14.1	15.4			17.8	30	12.2
	HT-20, M8 to M15	2	2	14.1	15.4			17.8	30	12.2
	HT-20, M0 to M7	3	2	14.1	15.4	14.6		19.5	30	10.5
	HT-20, M8 to M15	3	2	14.1	15.4	14.6		19.5	30	10.5
	HT-20, M16 to M23	3	2	14.1	15.4	14.6		19.5	30	10.5
	HT-20, M0 to M7	4	2	14.1	15.4	14.6	15.1	20.8	30	9.2
	HT-20, M8 to M15	4	2	14.1	15.4	14.6	15.1	20.8	30	9.2
	HT-20, M16 to M23	4	2	14.1	15.4	14.6	15.1	20.8	30	9.2
	HT-20 Beam Forming, M0 to M7	2	5	14.1	15.4			17.8	30	12.2
	HT-20 Beam Forming, M8 to M15	2	2	14.1	15.4			17.8	30	12.2
	HT-20 Beam Forming, M0 to M7	3	7	14.1	15.4	14.6		19.5	29.2	9.7
	HT-20 Beam Forming, M8 to M15	3	4	14.1	15.4	14.6		19.5	30	10.5
	HT-20 Beam Forming, M16 to M23	3	2	14.1	15.4	14.6		19.5	30	10.5
	HT-20 Beam Forming, M0 to M7	4	8	13.1	14.1	13.6	14.2	19.8	28	8.2
	HT-20 Beam Forming, M8 to M15	4	5	14.1	15.4	14.6	15.1	20.8	30	9.2
	HT-20 Beam Forming, M16 to M23	4	3	14.1	15.4	14.6	15.1	20.8	30	9.2
	HT-20 STBC, M0 to M7	2	2	14.1	15.4			17.8	30	12.2
	HT-20 STBC, M0 to M7	3	2	14.1	15.4	14.6		19.5	30	10.5
	HT-20 STBC, M0 to M7	4	2	14.1	15.4	14.6	15.1	20.8	30	9.2

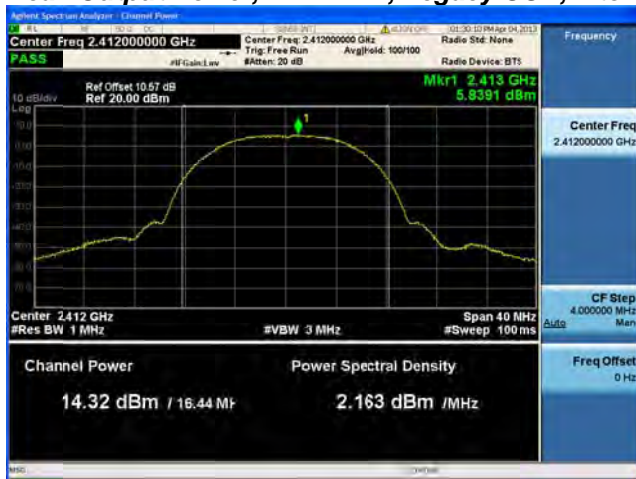


2437	Legacy CCK, 1 to 11 Mbps	1	2	<u>14.2</u>				14.2	30	15.8
	Legacy CCK, 1 to 11 Mbps	2	2	<u>14.2</u>	<u>15.5</u>			17.9	30	12.1
	Legacy CCK, 1 to 11 Mbps	3	2	<u>14.2</u>	<u>15.5</u>	<u>14.8</u>		19.6	30	10.4
	Legacy CCK, 1 to 11 Mbps	4	2	<u>14.2</u>	<u>15.5</u>	<u>14.8</u>	<u>15.6</u>	21.1	30	8.9
	Non HT-20, 6 to 54 Mbps	1	2	<u>14.4</u>				14.4	30	15.6
	Non HT-20, 6 to 54 Mbps	2	2	<u>14.4</u>	<u>15.6</u>			18.1	30	11.9
	Non HT-20, 6 to 54 Mbps	3	2	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>		19.7	30	10.3
	Non HT-20, 6 to 54 Mbps	4	2	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>	<u>15.5</u>	21.1	30	8.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	<u>14.4</u>	<u>15.6</u>			18.1	30	11.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>		19.7	29.2	9.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>	<u>15.5</u>	21.1	28	6.9
	HT-20, M0 to M7	1	2	<u>14.2</u>				14.2	30	15.8
	HT-20, M0 to M7	2	2	<u>14.2</u>	<u>15.4</u>			17.9	30	12.1
	HT-20, M8 to M15	2	2	<u>14.2</u>	<u>15.4</u>			17.9	30	12.1
	HT-20, M0 to M7	3	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M8 to M15	3	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M16 to M23	3	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M0 to M7	4	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1
	HT-20, M8 to M15	4	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1
	HT-20, M16 to M23	4	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1
	HT-20 Beam Forming, M0 to M7	2	5	<u>14.2</u>	<u>15.4</u>			17.9	30	12.1
	HT-20 Beam Forming, M8 to M15	2	2	<u>14.2</u>	<u>15.4</u>			17.9	30	12.1
	HT-20 Beam Forming, M0 to M7	3	7	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	29.2	9.6
	HT-20 Beam Forming, M8 to M15	3	4	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 Beam Forming, M16 to M23	3	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 Beam Forming, M0 to M7	4	8	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	28	7.1
	HT-20 Beam Forming, M8 to M15	4	5	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1
	HT-20 Beam Forming, M16 to M23	4	3	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1
	HT-20 STBC, M0 to M7	2	2	<u>14.2</u>	<u>15.4</u>			17.9	30	12.1
	HT-20 STBC, M0 to M7	3	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 STBC, M0 to M7	4	2	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.9	30	9.1

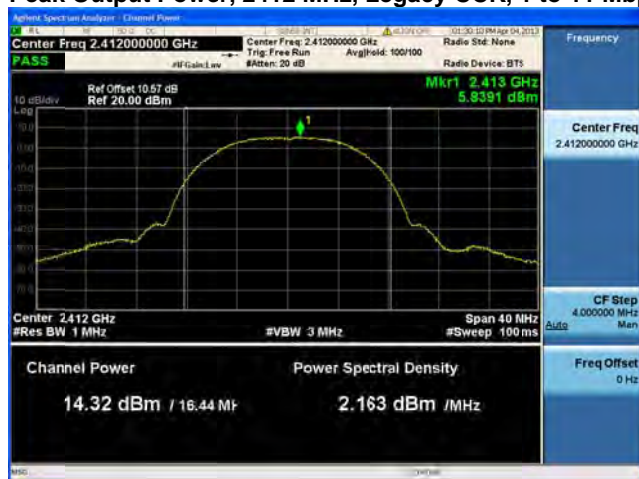


2462	Legacy CCK, 1 to 11 Mbps	1	2	<u>14.6</u>				14.6	30	15.4
	Legacy CCK, 1 to 11 Mbps	2	2	<u>14.6</u>	<u>15.6</u>			18.1	30	11.9
	Legacy CCK, 1 to 11 Mbps	3	2	<u>14.6</u>	<u>15.6</u>	<u>15.0</u>		19.9	30	10.1
	Legacy CCK, 1 to 11 Mbps	4	2	<u>14.6</u>	<u>15.6</u>	<u>15.0</u>	<u>15.3</u>	21.2	30	8.8
	Non HT-20, 6 to 54 Mbps	1	2	<u>14.5</u>				14.5	30	15.5
	Non HT-20, 6 to 54 Mbps	2	2	<u>14.5</u>	<u>15.5</u>			18.0	30	12.0
	Non HT-20, 6 to 54 Mbps	3	2	<u>14.5</u>	<u>15.5</u>	<u>14.9</u>		19.8	30	10.2
	Non HT-20, 6 to 54 Mbps	4	2	<u>14.5</u>	<u>15.5</u>	<u>14.9</u>	<u>15.2</u>	21.1	30	8.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	<u>14.5</u>	<u>15.5</u>			18.0	30	12.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	<u>14.5</u>	<u>15.5</u>	<u>14.9</u>		19.8	29.2	9.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	<u>13.5</u>	<u>14.1</u>	<u>14.0</u>	<u>14.4</u>	20.0	28	8.0
	HT-20, M0 to M7	1	2	<u>14.3</u>				14.3	30	15.7
	HT-20, M0 to M7	2	2	<u>14.3</u>	<u>15.3</u>			17.8	30	12.2
	HT-20, M8 to M15	2	2	<u>14.3</u>	<u>15.3</u>			17.8	30	12.2
	HT-20, M0 to M7	3	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M8 to M15	3	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M16 to M23	3	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20, M0 to M7	4	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>	<u>15.0</u>	20.9	30	9.1
	HT-20, M8 to M15	4	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>	<u>15.0</u>	20.9	30	9.1
	HT-20, M16 to M23	4	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>	<u>15.0</u>	20.9	30	9.1
	HT-20 Beam Forming, M0 to M7	2	5	<u>14.3</u>	<u>15.3</u>			17.8	30	12.2
	HT-20 Beam Forming, M8 to M15	2	2	<u>14.3</u>	<u>15.3</u>			17.8	30	12.2
	HT-20 Beam Forming, M0 to M7	3	7	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>		18.3	29.2	10.9
	HT-20 Beam Forming, M8 to M15	3	4	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 Beam Forming, M16 to M23	3	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 Beam Forming, M0 to M7	4	8	<u>12.4</u>	<u>12.9</u>	<u>12.4</u>	<u>12.7</u>	18.6	28	9.4
	HT-20 Beam Forming, M8 to M15	4	5	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.7	30	10.3
	HT-20 Beam Forming, M16 to M23	4	3	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.7	30	10.3
	HT-20 STBC, M0 to M7	2	2	<u>14.3</u>	<u>15.3</u>			17.8	30	12.2
	HT-20 STBC, M0 to M7	3	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.6	30	10.4
	HT-20 STBC, M0 to M7	4	2	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>	<u>15.0</u>	20.9	30	9.1

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps



Antenna A



Antenna B



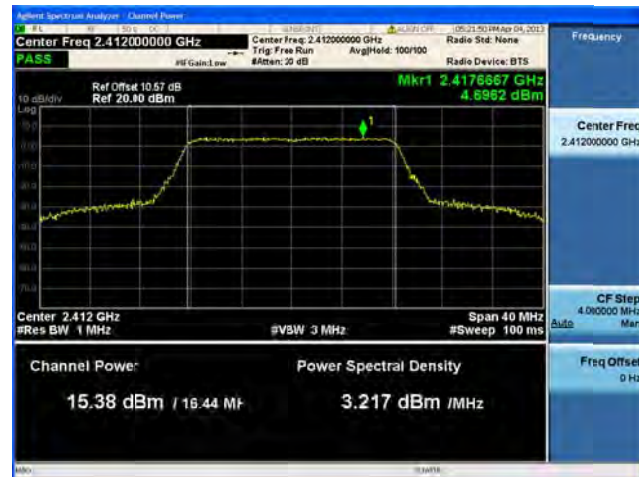
Antenna C

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps



Antenna A

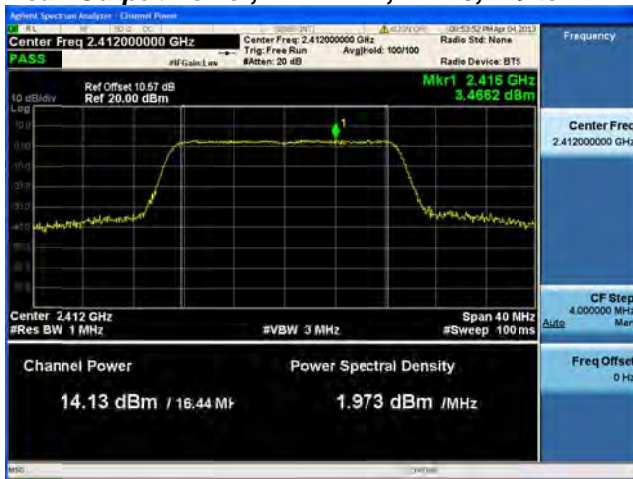


Antenna B



Antenna C

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

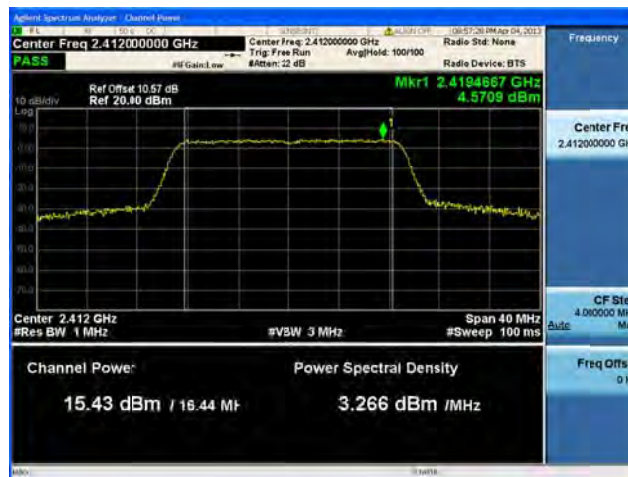
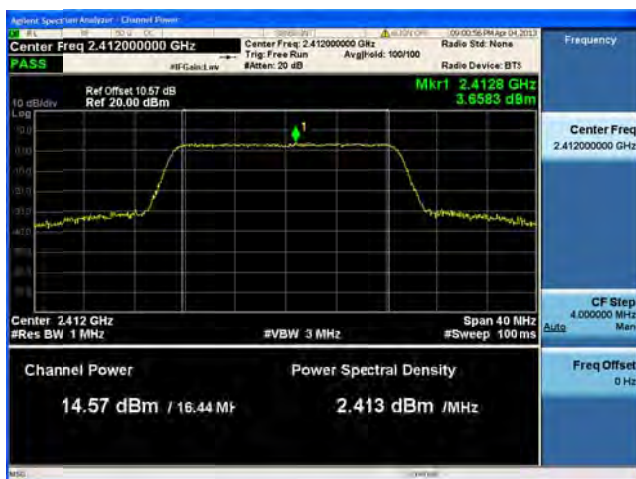
Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

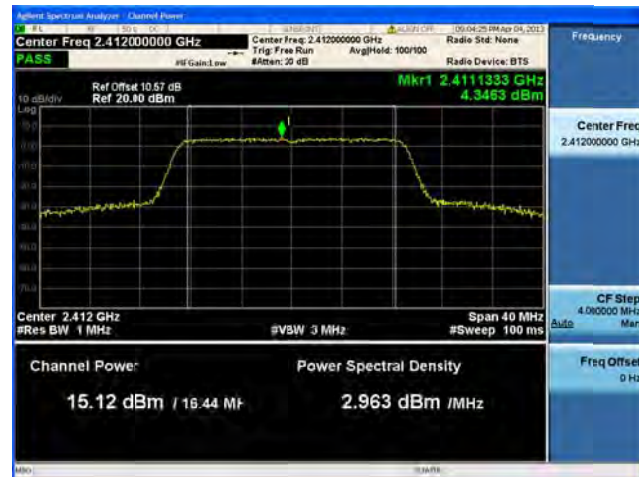
Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

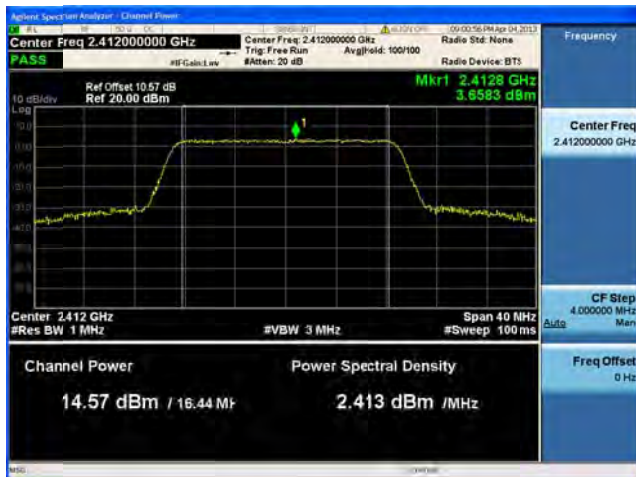
Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

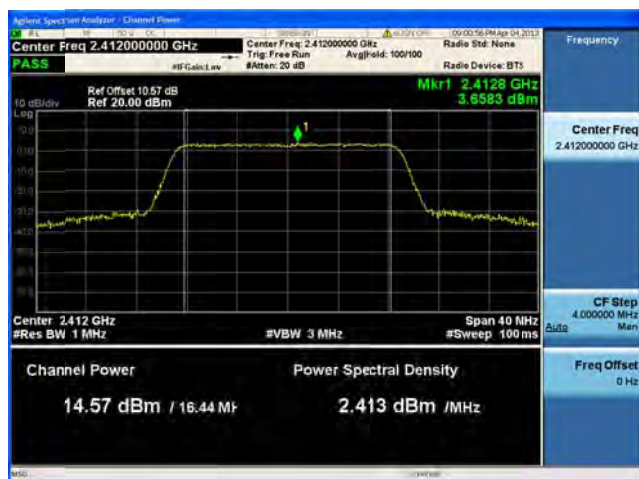
Peak Output Power, 2412 MHz, HT-20 Beam Forming, M0 to M7



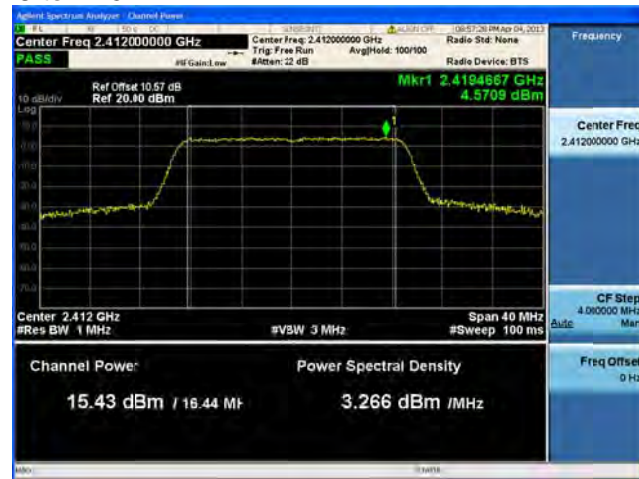
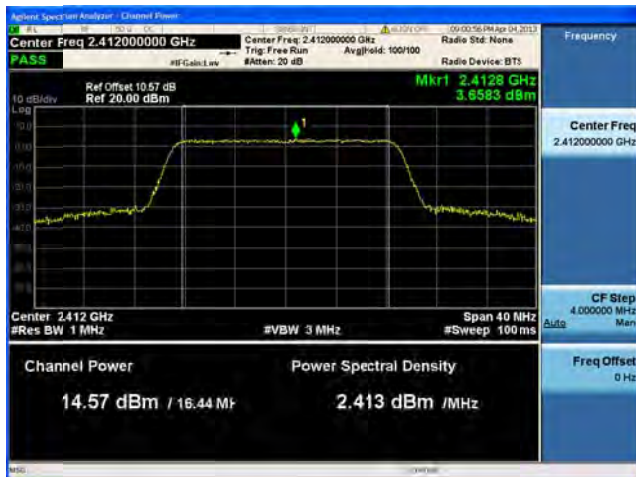
Antenna A

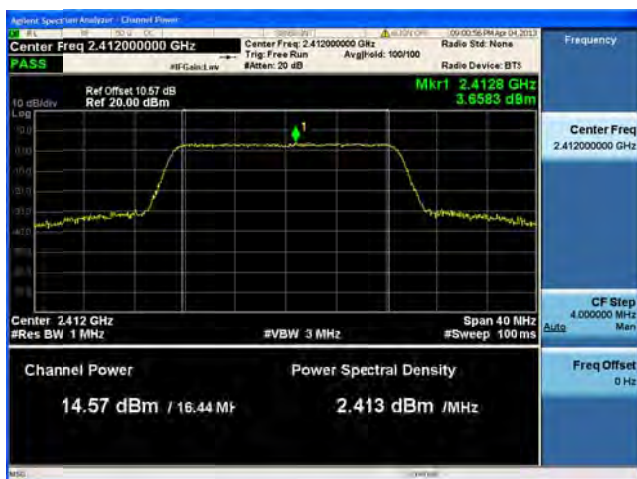


Antenna B

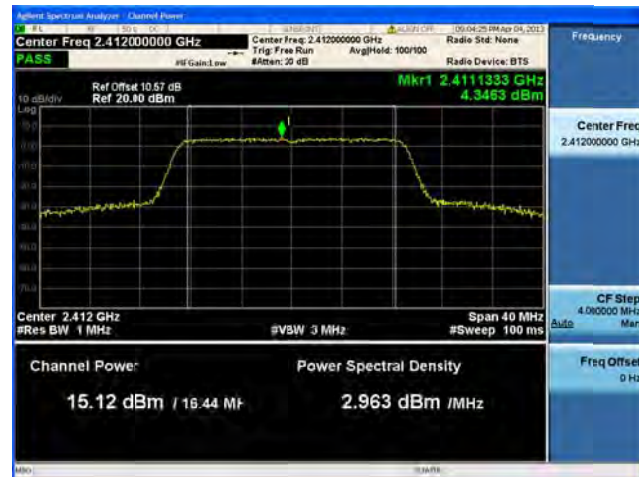


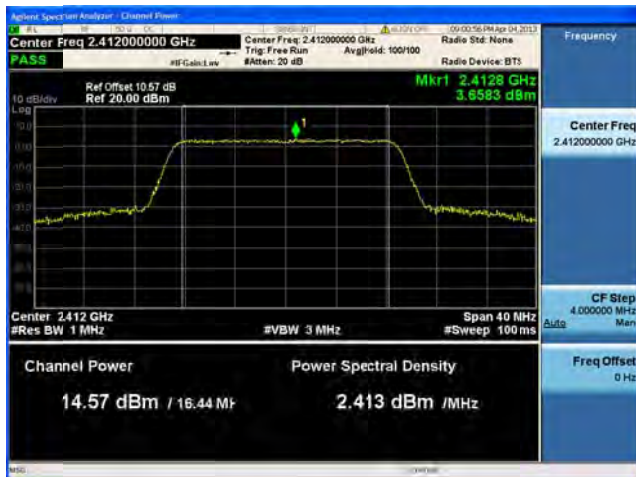
Antenna C

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

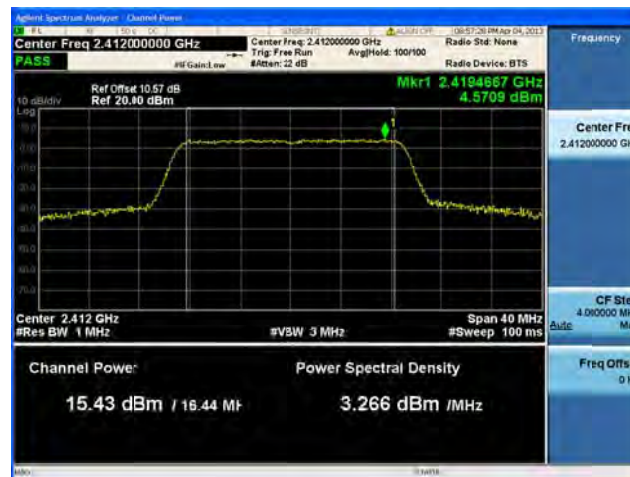
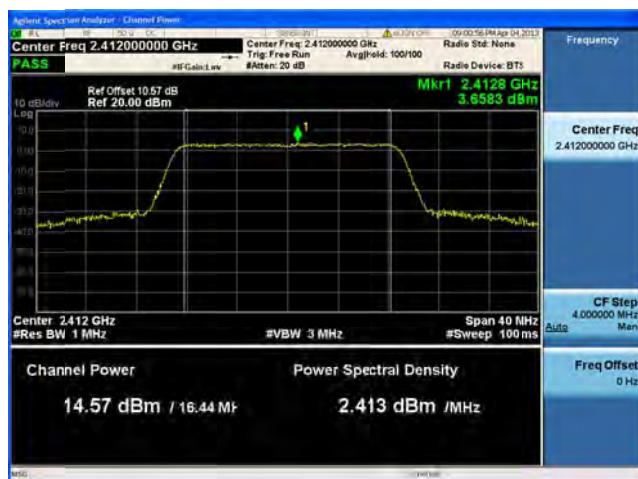
Peak Output Power, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

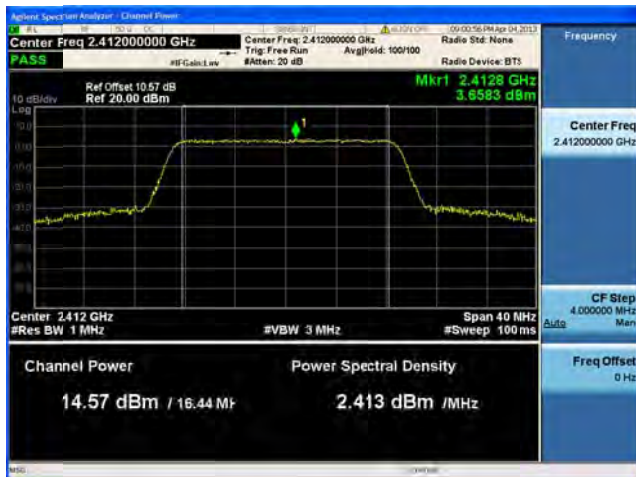
Peak Output Power, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

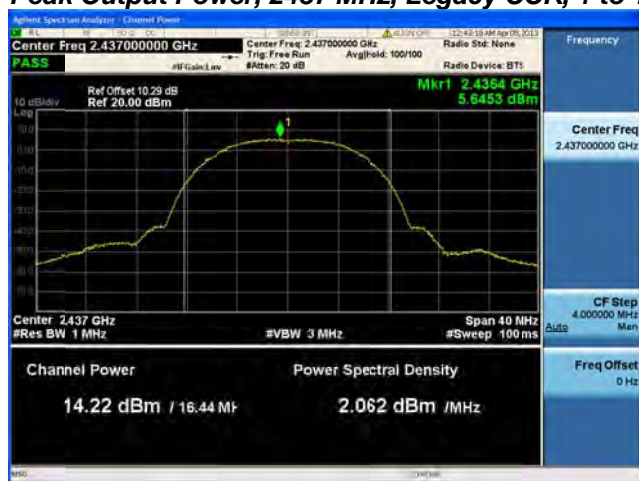
Peak Output Power, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

Default Search on Analyzer - Channel Power

Center Freq 2.437000000 GHz

Center Freq: 2.437000000 GHz
Trig: Free Run
#Attenu: 20 dB

Radio Std: None
Radio Device: BT

Frequency

Center Freq
2.437000000 GHz

CF Step
4.000000 MHz

Freq Offset
0 Hz

14.22 dBm / 16.44 MHz

2.062 dBm / MHz

Channel Power

Power Spectral Density

10 dB/div

Ref Offset 10.29 dB
Ref 20.00 dBm

Mkr1 2.4354 GHz
5.6453 dBm

Center 2437 GHz
#Res BW 1 MHz

#VBW 3 MHz

Span 40 MHz
#Sweep 100 ms

Center Freq 2.43700000 GHz
Ref Offset 10.28 dB
Ref 20.40 dBm
Center Freq: 2.437000000 GHz
Trig: Free Run
Avg/Hold: 100/100
Radio Std: None
Radio Device: BTS
Mkr1 2.4366 GHz
5.8951 dBm
15.50 dBm / 16.44 MHz
3.340 dBm / MHz
Span 40 MHz
#Res BW 1 MHz
#Sweep 100 ms
#VBW 3 MHz

The screenshot shows a Vector Signal Analyzer (VSA) interface with the following components:

- Top Panel:**
 - Left: "Ref Offset 10.29 dB", "Ref 20.00 dBm", "dB Gain: Low".
 - Center: "Center Freq: 2.437000000 GHz", "Trig: Free Run", "Avg/Hold: 100/100", "#Attenu: 20 dB".
 - Right: "Radio Std: None", "Radio Device: BT1".
- Plot Area:**
 - Y-axis: "10 dB/dBv" (range 0 to 10).
 - X-axis: Frequency plot with a peak marker labeled "Mkr1 2.43690667 GHz 5.2526 dBm".
 - Grid: 10 dB/dBv vertical scale, 30 MHz horizontal scale.
- Bottom Left Panel:**
 - Center: 2.437 GHz
 - Res BW: 1 MHz
 - #VBW: 3 MHz
 - Span: 40 MHz
 - #Sweep: 100 ms
- Bottom Right Panel:**
 - CF Step: 4.000000 MHz
 - Auto: [checked]
 - Freq Offset: 0 Hz
- Bottom Status Bar:**
 - Channel Power: 14.82 dBm / 16.44 MHz
 - Power Spectral Density: 2.659 dBm / MHz

Advent Spectrum Analyser - Channel Power

Center Freq 2.437000000 GHz
 Radio Std: None
 Radio Device: BT5

PASS

Ref Offset 10.29 dB
 Ref 20.90 dBm

Center Freq 2.437000000 GHz
 Trig Free Run
 Avg Hold: 100/100
 #Atten: 20 dB

Mkr1 2.4357333 GHz
 7.1699 dBm

Center Freq 2.437000000 GHz

Channel Power: 15.65 dBm / 16.44 MHz

Power Spectral Density 3.488 dBm / MHz

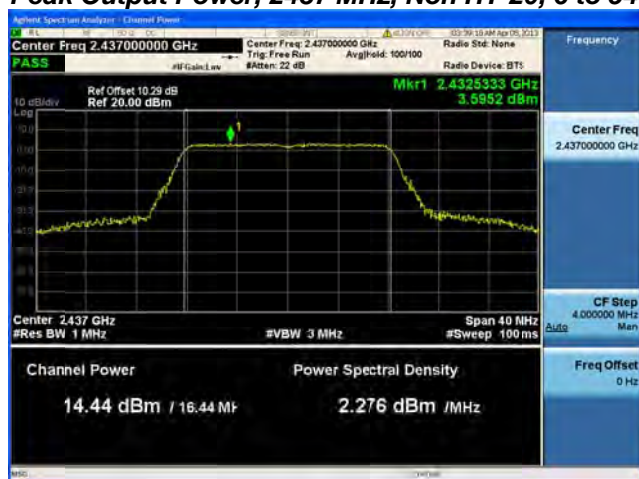
Span 40 MHz
 #Sweep 100 ms

CF Step 4.000000 MHz
 Man

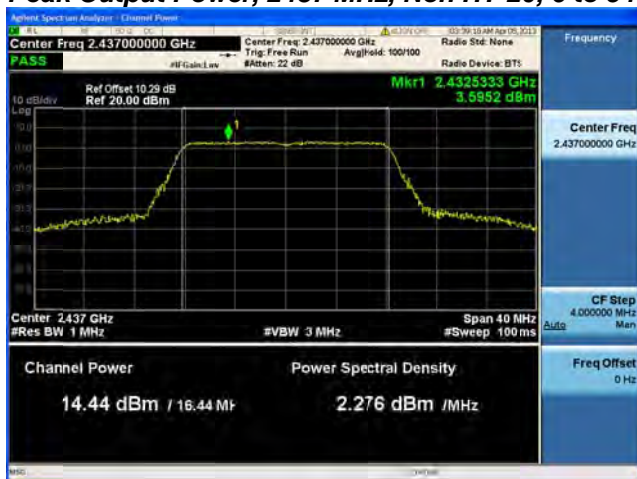
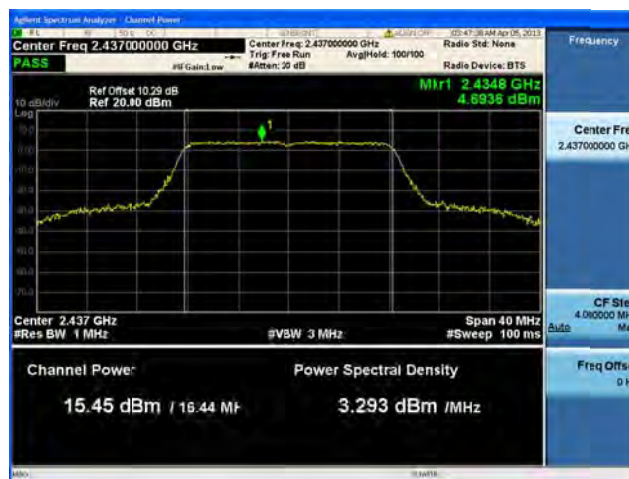
Freq Offset 0 Hz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

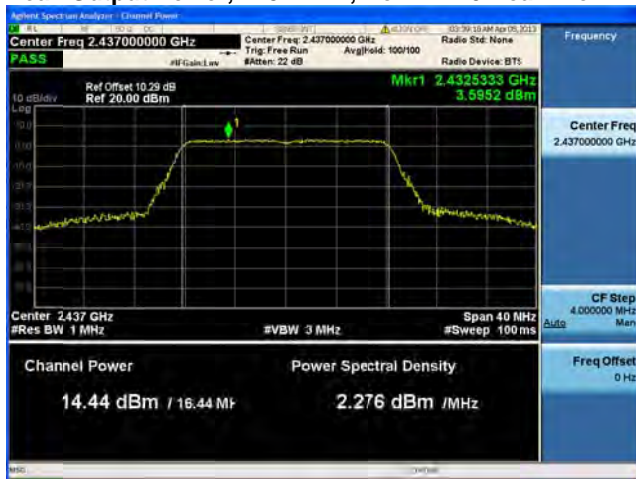
Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

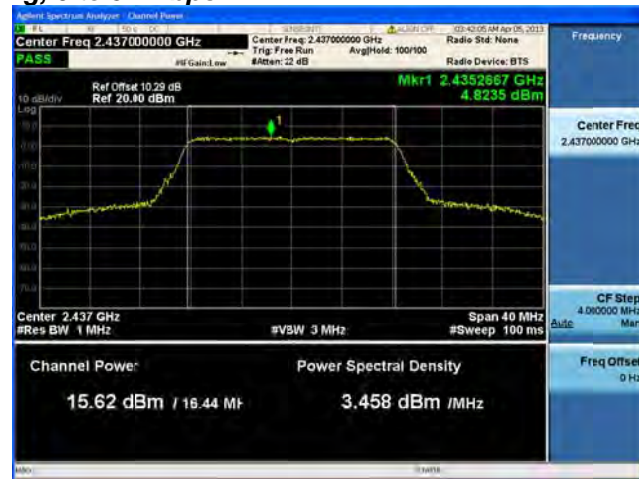
Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Peak Output Power, 2437 MHz, HT-20, M0 to M7



Antenna A



Antenna B



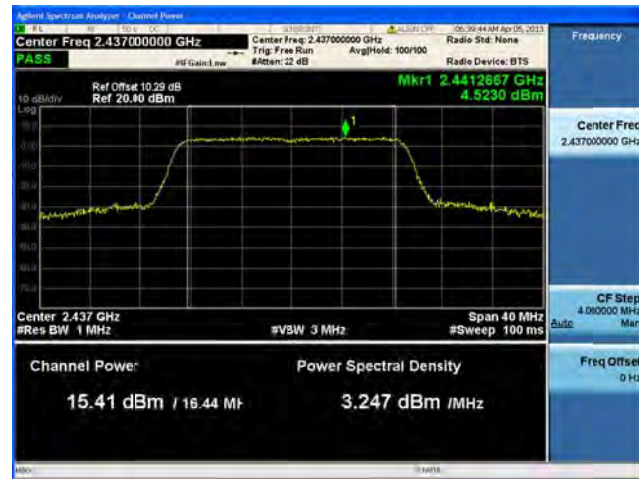
Antenna C

Peak Output Power, 2437 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M0 to M7



Antenna A

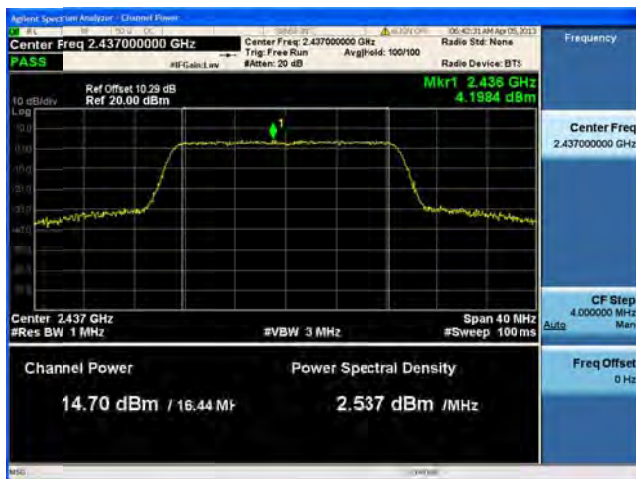


Antenna B



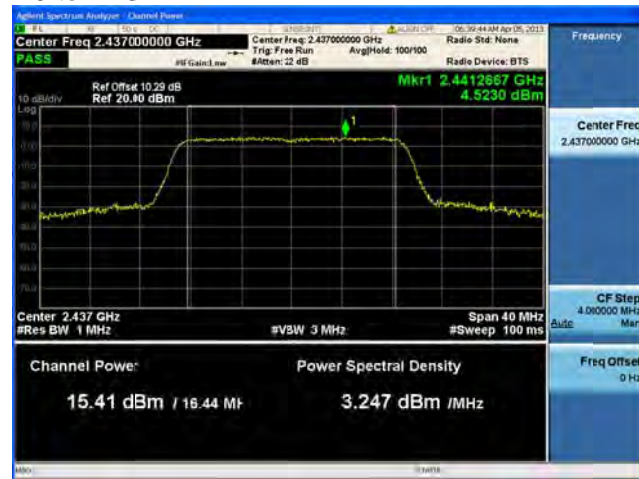
Antenna C

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

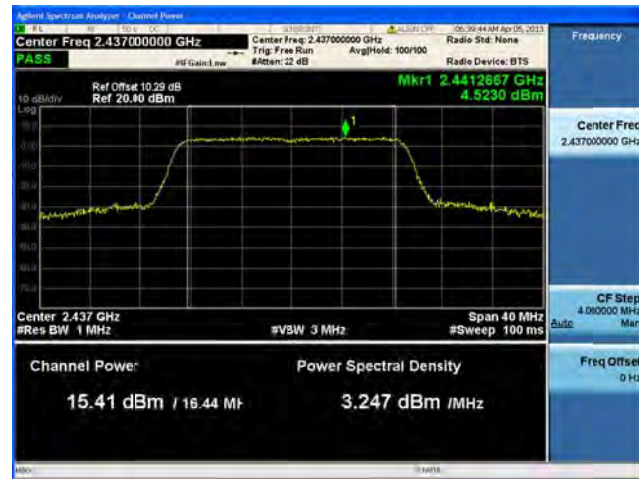
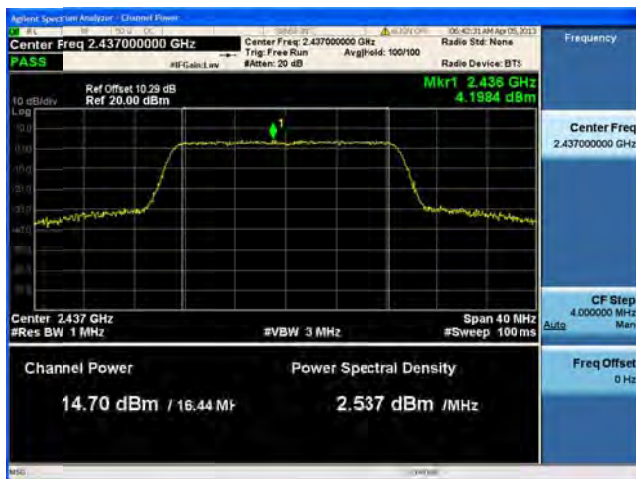
Peak Output Power, 2437 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

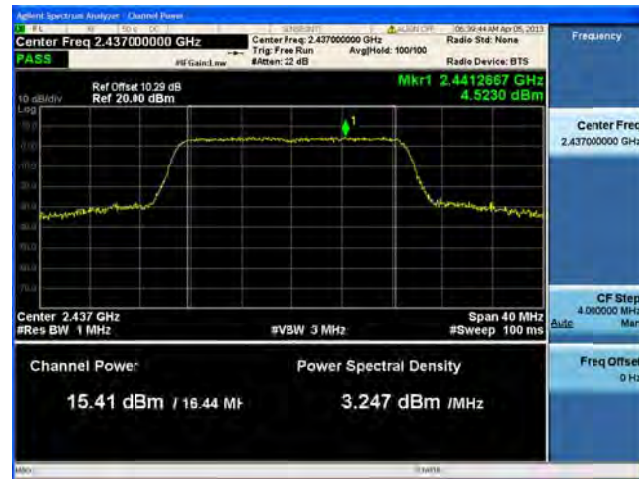
Peak Output Power, 2437 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

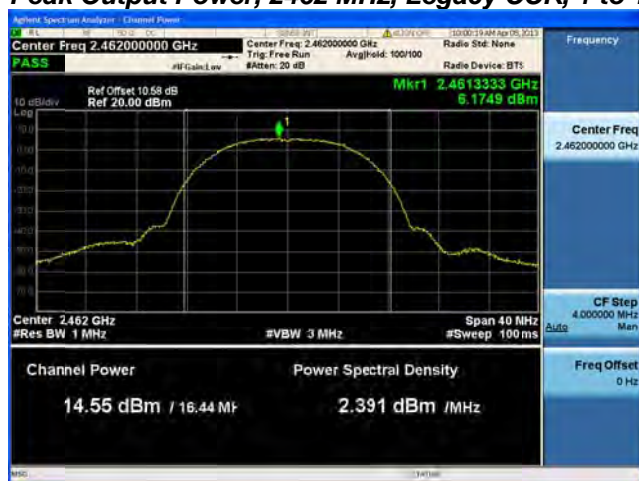
Peak Output Power, 2437 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

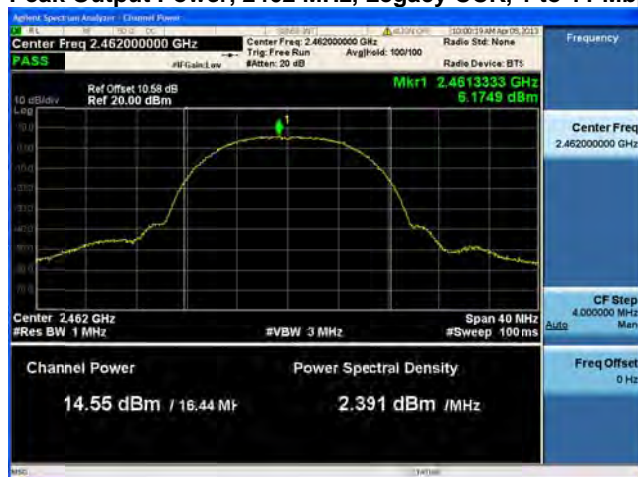
Peak Output Power, 2437 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps



Antenna A



Antenna B



Antenna C

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps



Antenna A



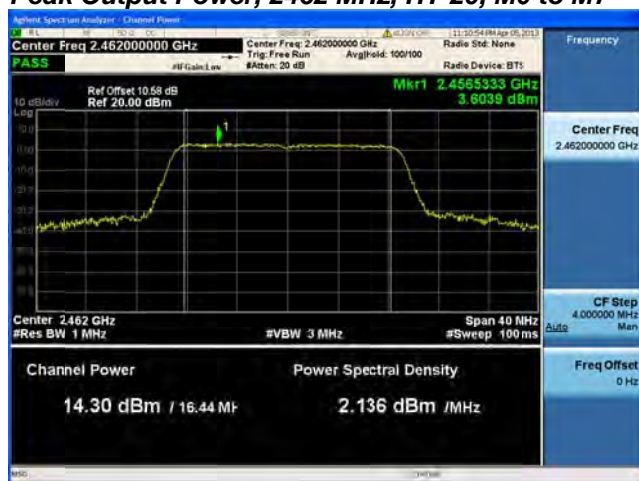
Antenna B



Antenna C

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

[illegible][illegible]

Vector Signal Analyzer - Channel Power

Center Freq: 2.462000000 GHz

Ref Offset 10.68 dB

Ref 20.00 dBm

Trig: Free Run

Avg/Std: 100/100

Radio Device: BT3

CF Step: 4.000000 MHz

Span 40 MHz

Res BW 1 MHz

Sweep 100 ms

Channel Power

Power Spectral Density

12.42 dBm / 16.44 MHz

0.2583 dBm / MHz

Frequency

Center Freq: 2.462000000 GHz

Mkr1 2.4631333 GHz 1.6638 dBm

10 dB/dBv

1

Advent Spectral Analyzer - Channel Power

Center Freq 2.46200000 GHz

Center Freq: 2.462000000 GHz

Trig: Free Run

Avg/Hold: 100/100

Radio Std: None

Radio Device: BTS

Ref Offset 10.58 dB

Ref 20.80 dBm

Mkr1 2.4551333 GHz

1.6329 dBm

10 dB/div

Center 2.462 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 40 MHz

#Sweep 100 ms

Channel Power:

12.68 dBm / 16.44 MHz

Power Spectral Density

0.5211 dBm / MHz

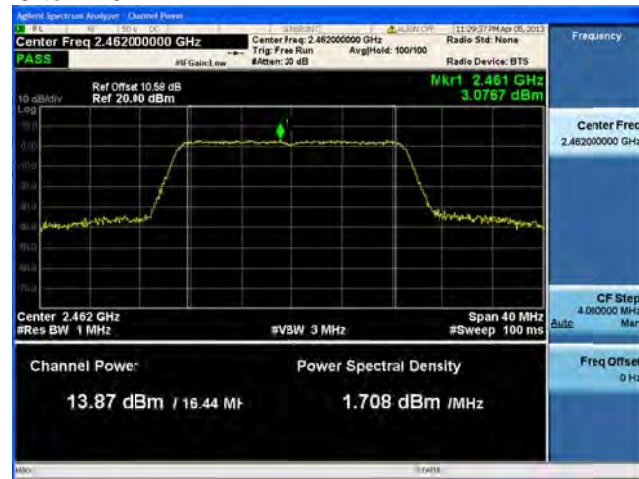
Frequency

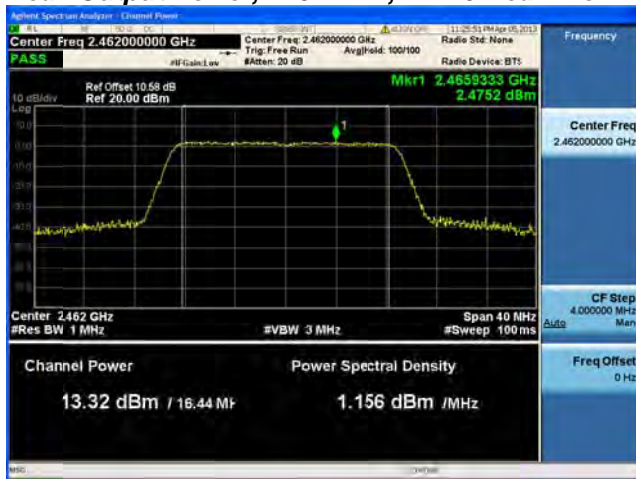
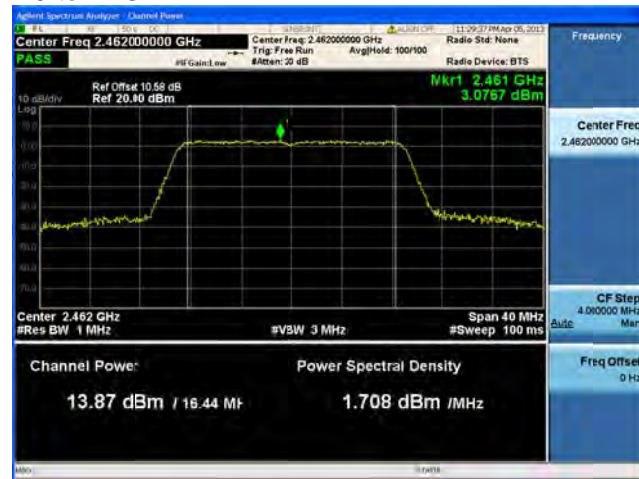
Center Freq 2.46200000 GHz

CF Step 4.000000 MHz

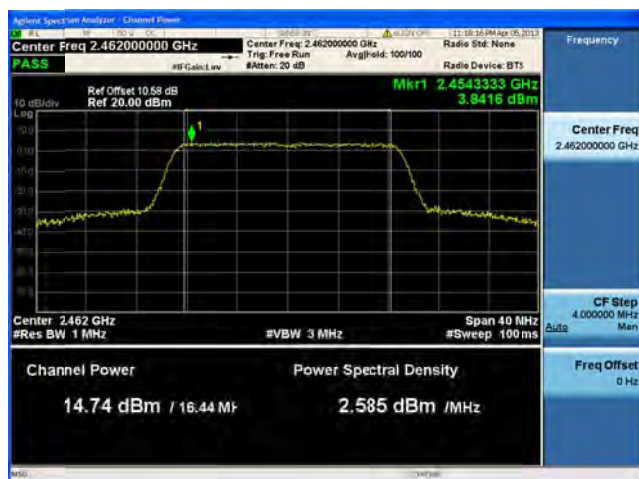
Freq Offset 0 Hz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



Power Spectral Density

15.247 / RSS-210 A8.2: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

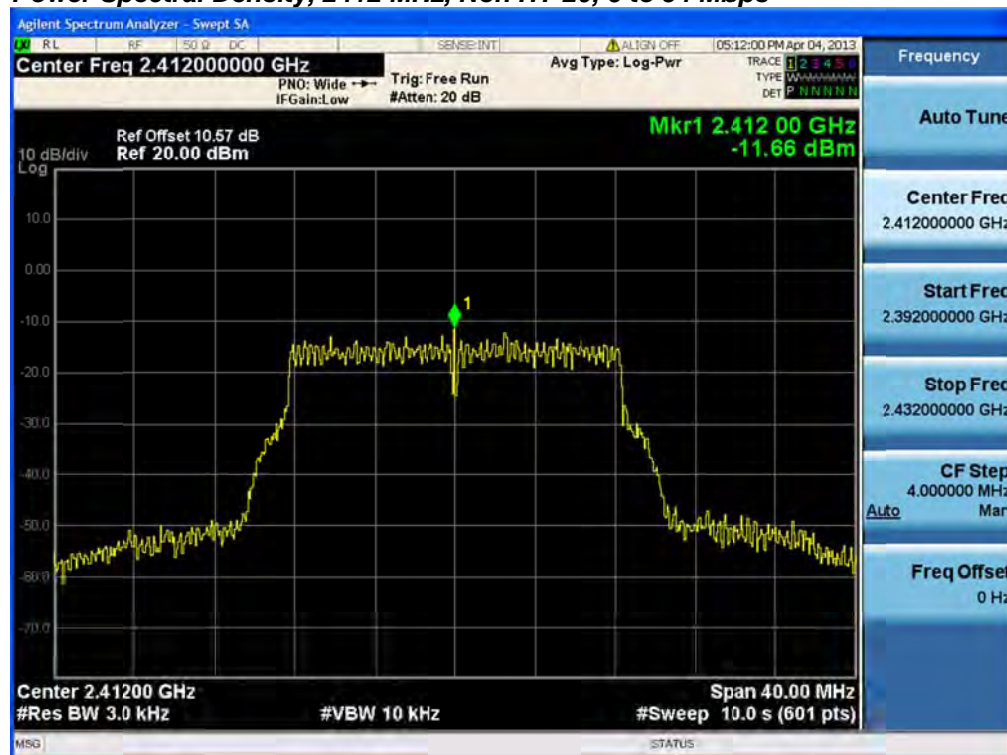
Center Frequency:	Frequency from table below
Span:	20 MHz
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	10s
Resolution Bandwidth:	3 kHz
Video Bandwidth:	10 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak Search

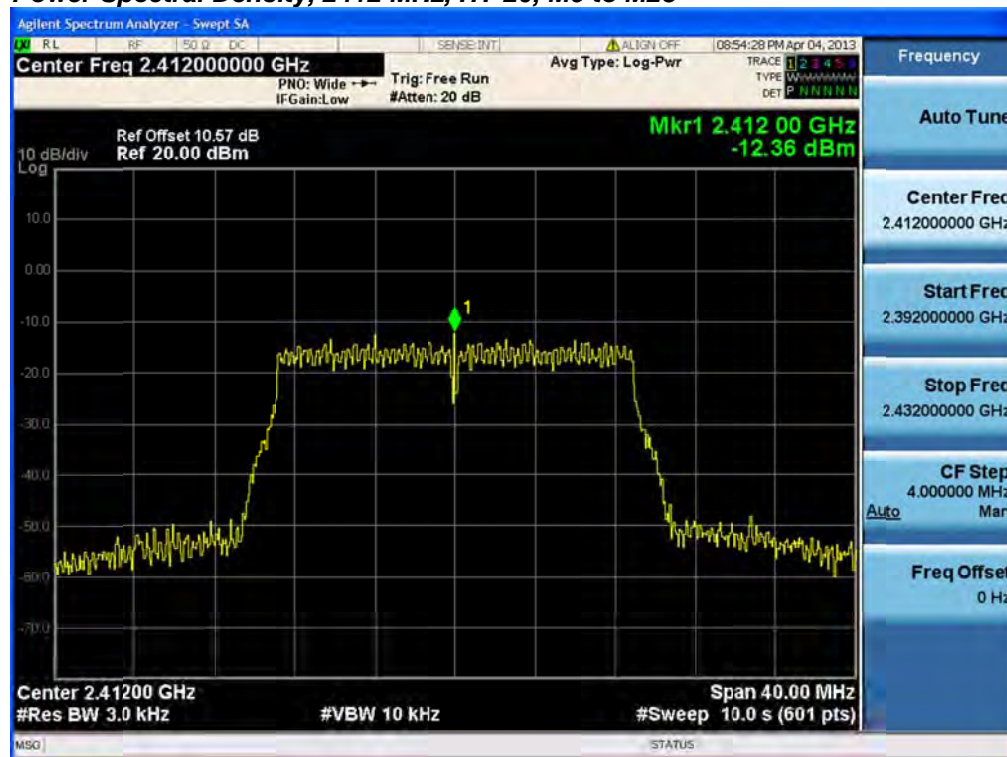
Record the Marker value.

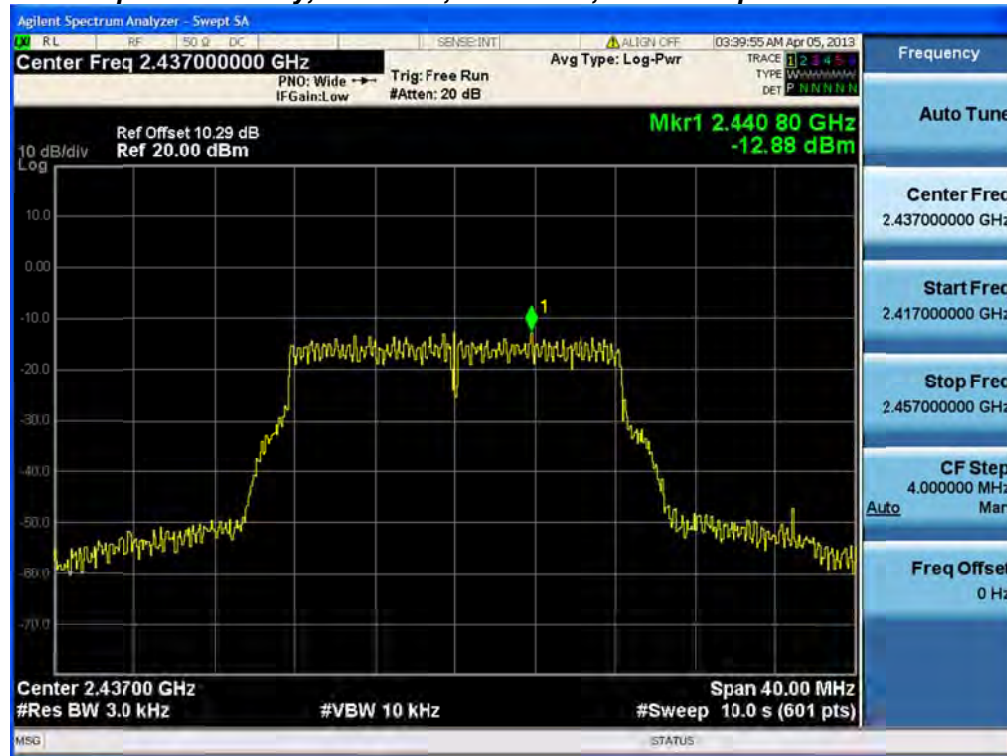
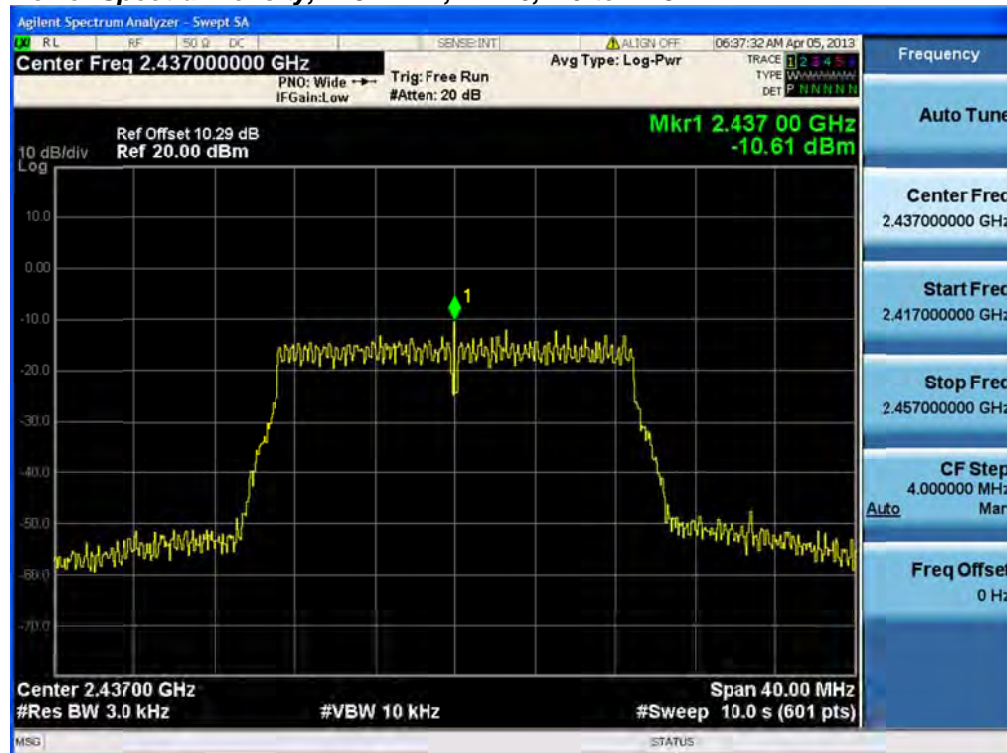
The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.

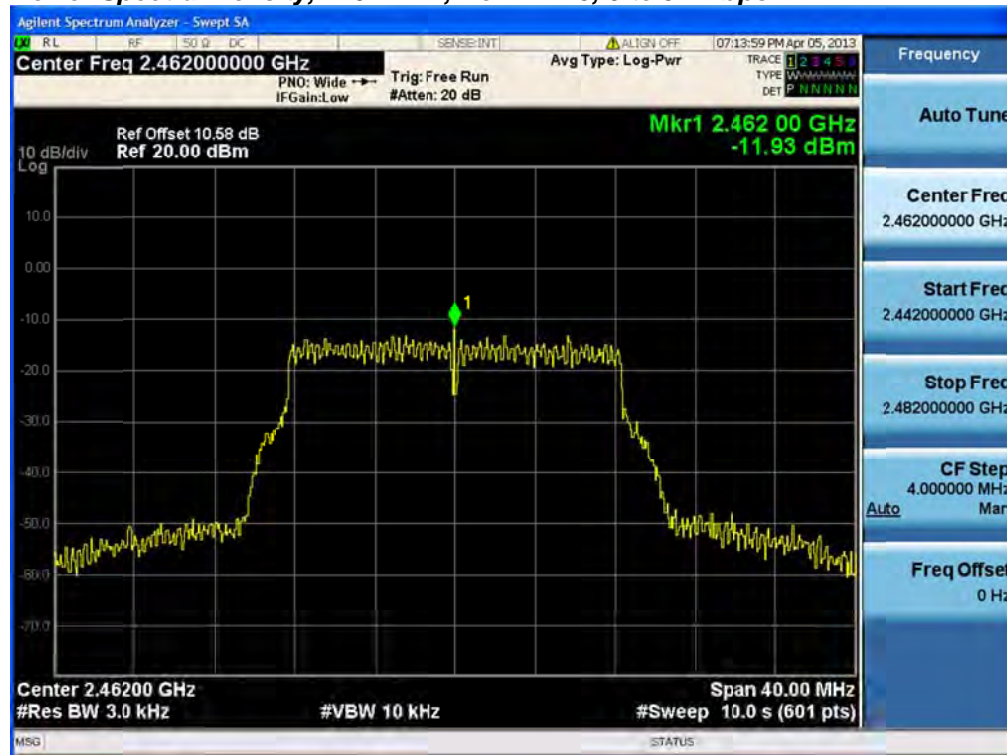


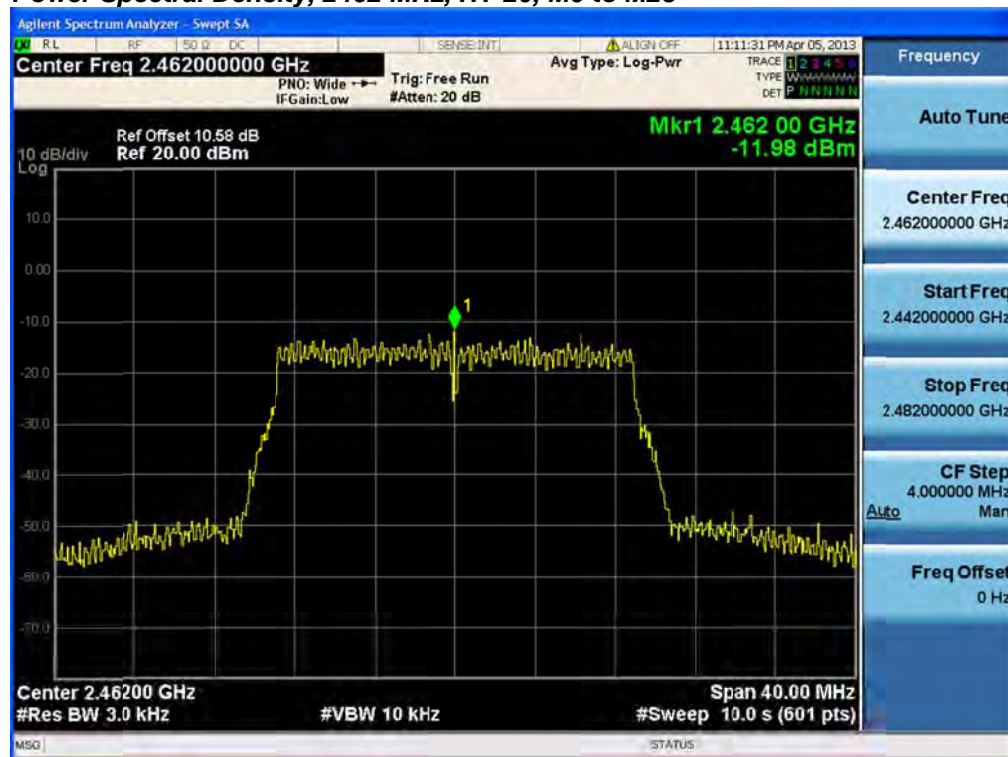
Frequency (MHz)	Mode	Data Rate (Mbps)	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>-8.7</u>	-2.7	8.0	10.7
	Non HT-20, 6 to 54 Mbps	6	<u>-11.7</u>	-5.7	8.0	13.7
	HT-20, M0 to M23	m0	<u>-12.4</u>	-6.4	8.0	14.4
2437	Legacy CCK, 1 to 11 Mbps	11	<u>-7.4</u>	-1.4	8.0	9.4
	Non HT-20, 6 to 54 Mbps	6	<u>-12.9</u>	-6.9	8.0	14.9
	HT-20, M0 to M23	m0	<u>-10.6</u>	-4.6	8.0	12.6
2462	Legacy CCK, 1 to 11 Mbps	11	<u>-8.7</u>	-2.7	8.0	10.7
	Non HT-20, 6 to 54 Mbps	6	<u>-11.9</u>	-5.9	8.0	13.9
	HT-20, M0 to M23	m0	<u>-12</u>	-6.0	8.0	14.0

Power Spectral Density, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Power Spectral Density, 2412 MHz, Non HT-20, 6 to 54 Mbps**

Power Spectral Density, 2412 MHz, HT-20, M0 to M23**Power Spectral Density, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

Power Spectral Density, 2437 MHz, Non HT-20, 6 to 54 Mbps**Power Spectral Density, 2437 MHz, HT-20, M0 to M23**

Power Spectral Density, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Power Spectral Density, 2462 MHz, Non HT-20, 6 to 54 Mbps**

Power Spectral Density, 2462 MHz, HT-20, M0 to M23



Conducted Spurious Emissions

15.247 / RSS-210 A8.5: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

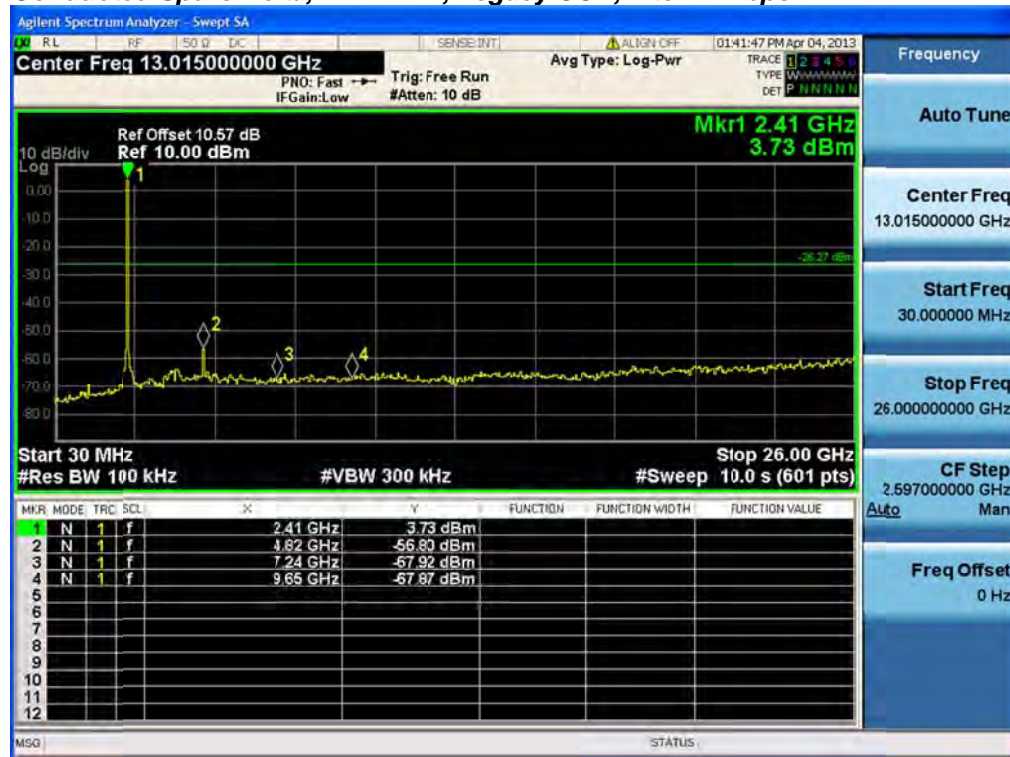
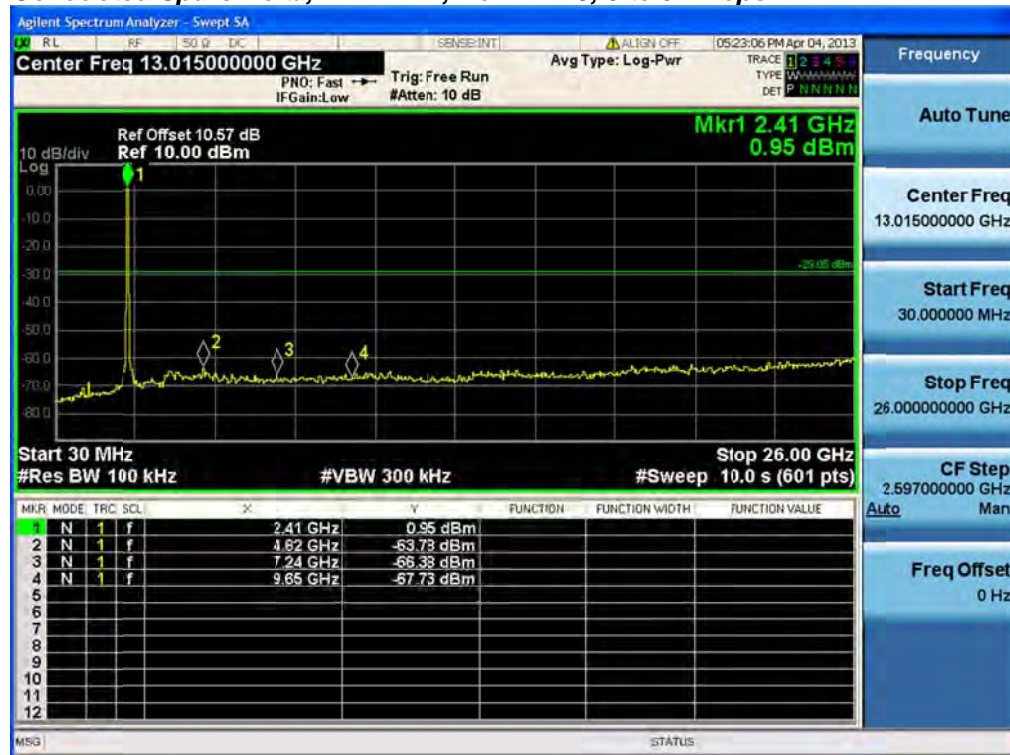
Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

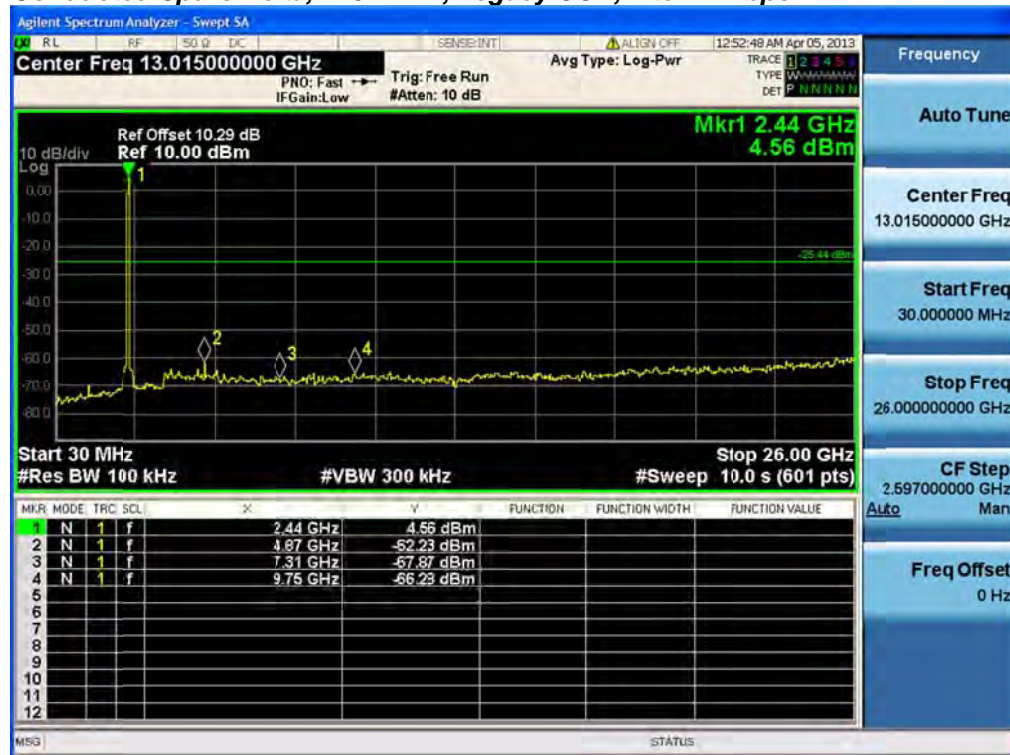
Record the marker waveform peak to spur difference

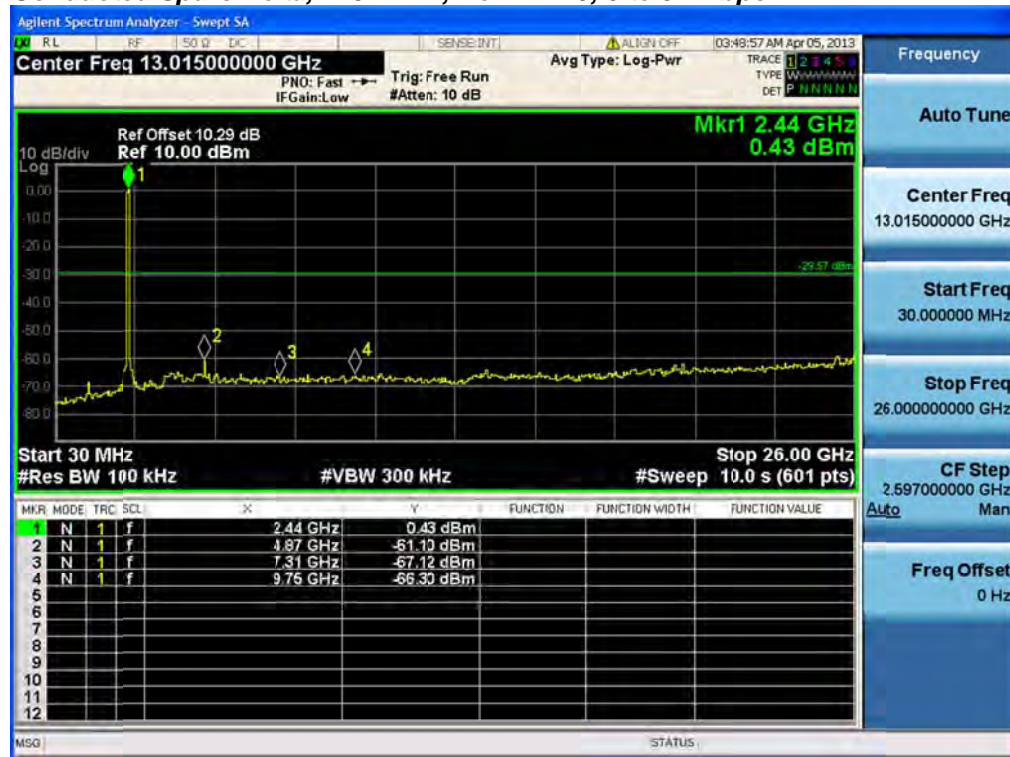
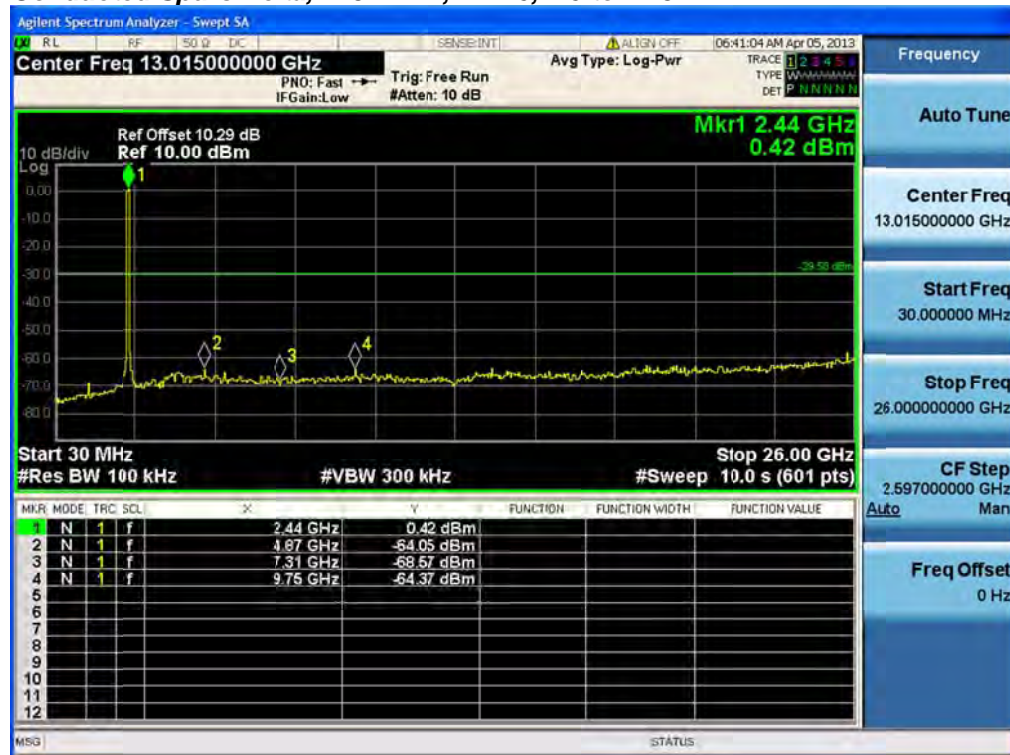
Out-of-band and spurious emissions tests are performed on each output individually without summing or adding $10 \log(N)$ since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.

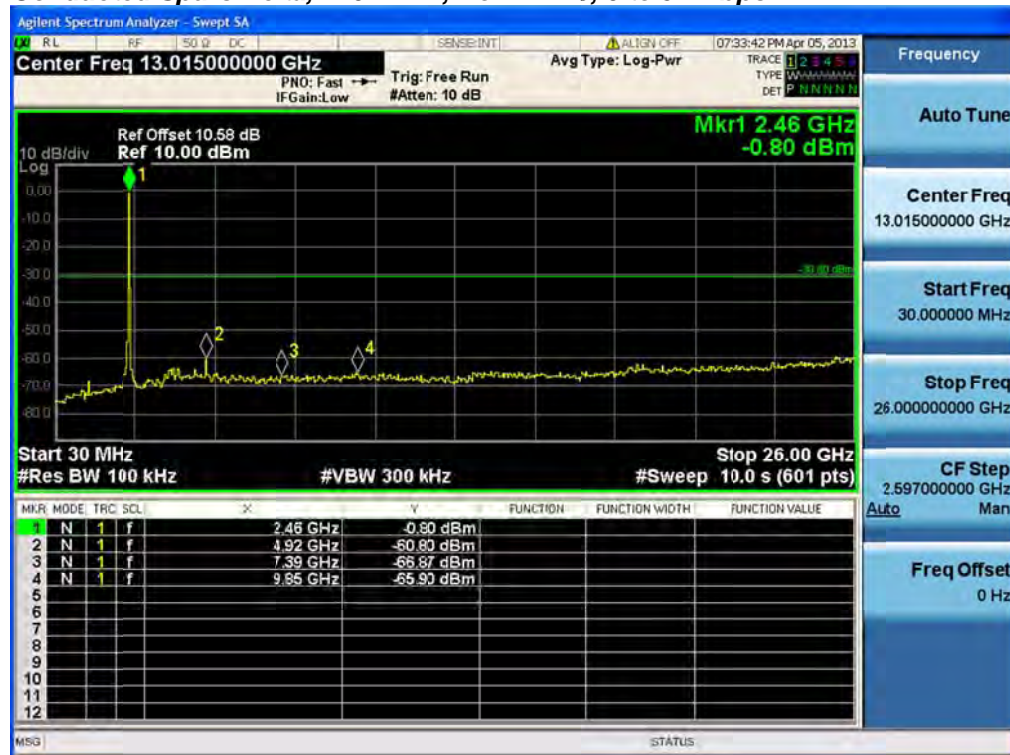


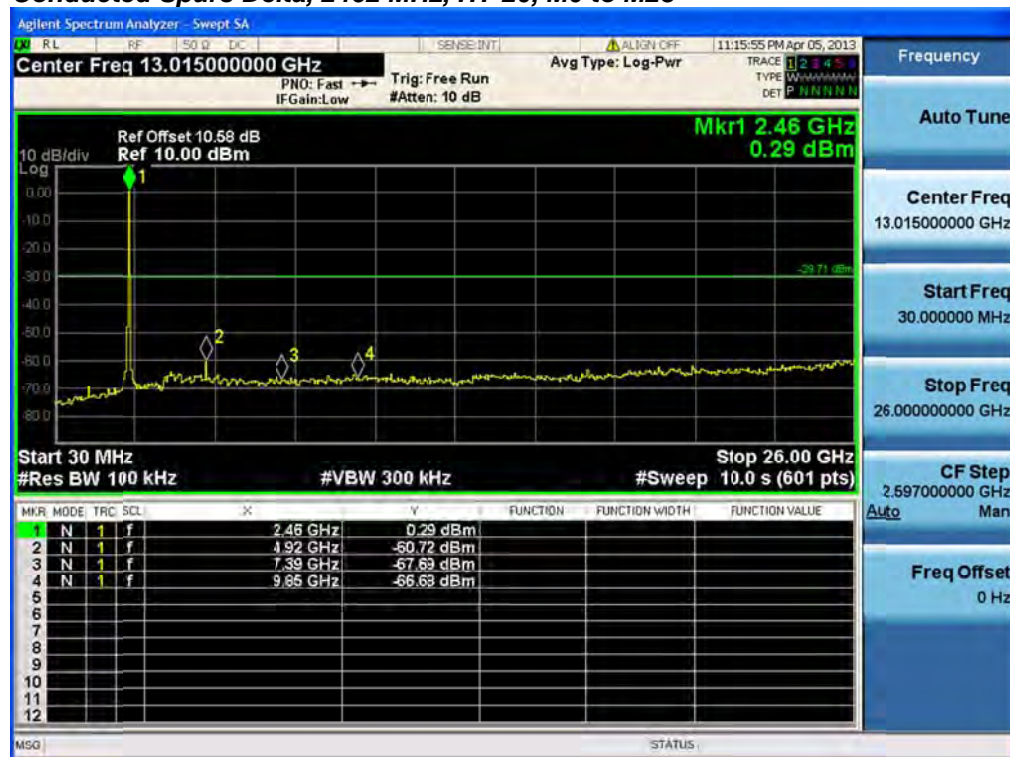
Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dB c)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>60.5</u>	30	30.5
	Non HT-20, 6 to 54 Mbps	6	<u>64.7</u>	30	34.7
	HT-20, M0 to M23	m0	<u>64.7</u>	30	34.7
2437	Legacy CCK, 1 to 11 Mbps	11	<u>66.8</u>	30	36.8
	Non HT-20, 6 to 54 Mbps	6	<u>61.5</u>	30	31.5
	HT-20, M0 to M23	m0	<u>64.5</u>	30	34.5
2462	Legacy CCK, 1 to 11 Mbps	11	<u>66.1</u>	30	36.1
	Non HT-20, 6 to 54 Mbps	6	<u>60</u>	30	30
	HT-20, M0 to M23	m0	<u>61</u>	30	31

Conducted Spurs Delta, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Conducted Spurs Delta, 2412 MHz, Non HT-20, 6 to 54 Mbps**

Conducted Spurs Delta, 2412 MHz, HT-20, M0 to M23**Conducted Spurs Delta, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

Conducted Spurs Delta, 2437 MHz, Non HT-20, 6 to 54 Mbps**Conducted Spurs Delta, 2437 MHz, HT-20, M0 to M23**

Conducted Spurs Delta, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Conducted Spurs Delta, 2462 MHz, Non HT-20, 6 to 54 Mbps**

Conducted Spurs Delta, 2462 MHz, HT-20, M0 to M23



Conducted Bandedge

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV/m @3m)
 2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV/m @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

This report represents the worst case data for all supported operating modes and antennas.

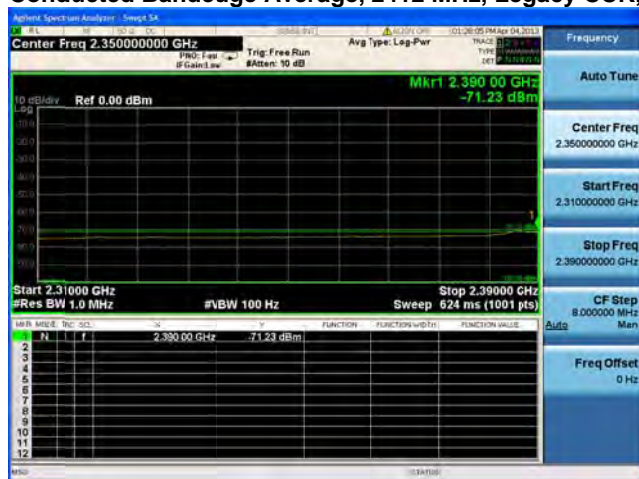


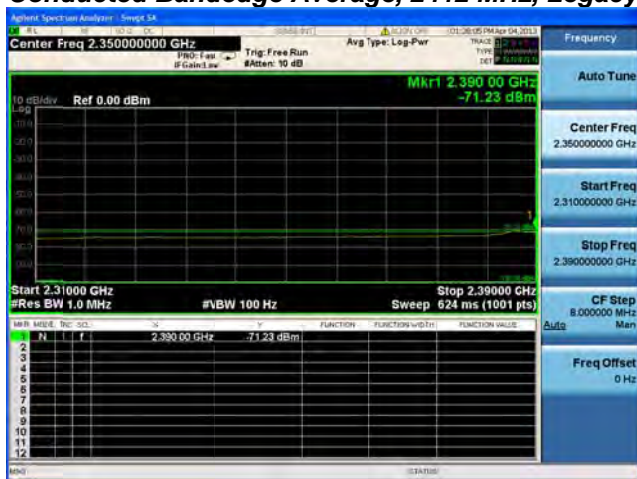
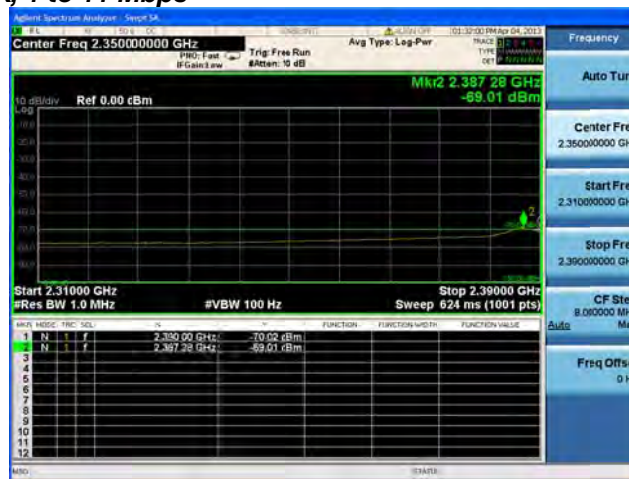
Average Bandedge Data

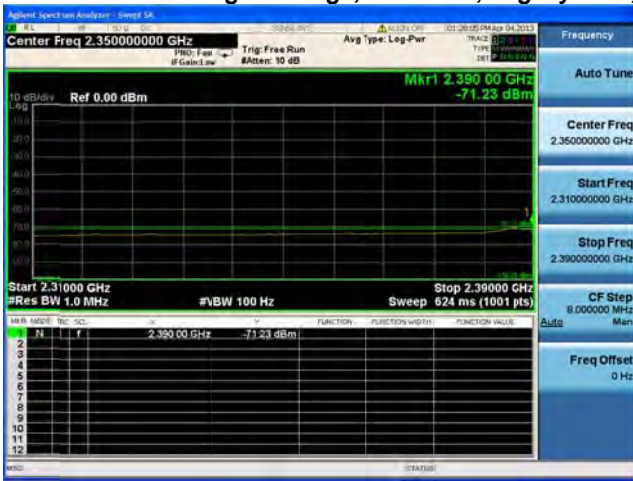
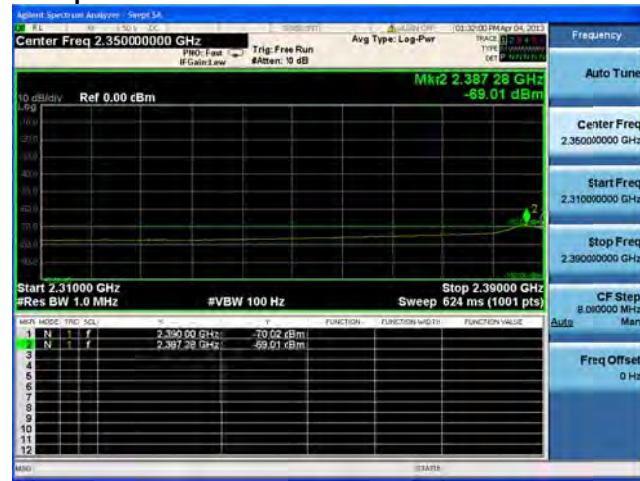
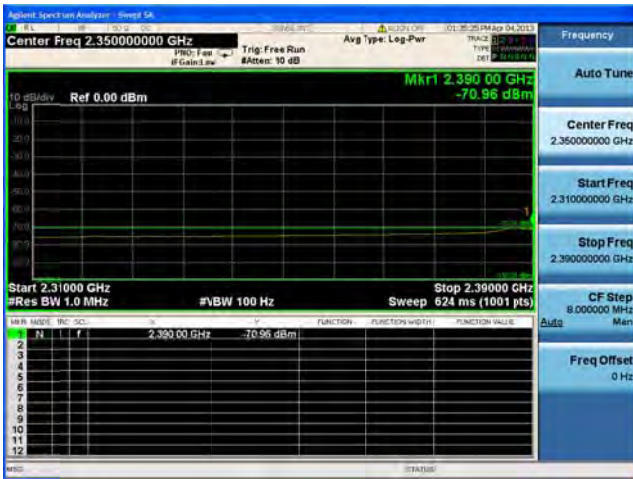
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	2	-71.2				-69.2	-41.25	28.0
	Legacy CCK, 1 to 11 Mbps	2	2	-71.2	-69.0			-65.0	-41.25	23.7
	Legacy CCK, 1 to 11 Mbps	3	2	-71.2	-69.0	-71.0		-63.5	-41.25	22.3
	Legacy CCK, 1 to 11 Mbps	4	2	-71.2	-69.0	-71.0	-70.2	-62.2	-41.25	21.0
	Non HT-20, 6 to 54 Mbps	1	2	-57.6				-55.6	-41.25	14.4
	Non HT-20, 6 to 54 Mbps	2	2	-57.6	-54.4			-50.7	-41.25	9.5
	Non HT-20, 6 to 54 Mbps	3	2	-57.6	-54.4	-57.1		-49.4	-41.25	8.1
	Non HT-20, 6 to 54 Mbps	4	2	-57.6	-54.4	-57.1	-54.4	-47.6	-41.25	6.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	-57.6	-54.4			-47.7	-41.25	6.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	-57.6	-54.4	-57.1		-44.6	-41.25	3.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	-57.6	-54.4	-57.1	-54.4	-41.6	-41.25	0.4
	HT-20, M0 to M7	1	2	-58.1				-56.1	-41.25	14.9
	HT-20, M0 to M7	2	2	-58.1	-52.4			-49.4	-41.25	8.1
	HT-20, M8 to M15	2	2	-58.1	-52.4			-49.4	-41.25	8.1
	HT-20, M0 to M7	3	2	-58.1	-52.4	-54.3		-47.6	-41.25	6.3
	HT-20, M8 to M15	3	2	-58.1	-52.4	-54.3		-47.6	-41.25	6.3
	HT-20, M16 to M23	3	2	-58.1	-52.4	-54.3		-47.6	-41.25	6.3
	HT-20, M0 to M7	4	2	-58.1	-52.4	-54.3	-52.5	-45.8	-41.25	4.5
	HT-20, M8 to M15	4	2	-58.1	-52.4	-54.3	-52.5	-45.8	-41.25	4.5
	HT-20, M16 to M23	4	2	-58.1	-52.4	-54.3	-52.5	-45.8	-41.25	4.5
	HT-20 Beam Forming, M0 to M7	2	5	-58.1	-52.4			-46.4	-41.25	5.1
	HT-20 Beam Forming, M8 to M15	2	2	-58.1	-52.4			-49.4	-41.25	8.1
	HT-20 Beam Forming, M0 to M7	3	7	-58.1	-52.4	-54.3		-42.8	-41.25	1.5
	HT-20 Beam Forming, M8 to M15	3	4	-58.1	-52.4	-54.3		-45.8	-41.25	4.5
	HT-20 Beam Forming, M16 to M23	3	2	-58.1	-52.4	-54.3		-47.6	-41.25	6.3
	HT-20 Beam Forming, M0 to M7	4	8	-61.7	-57.8	-57.7	-56.4	-44.0	-41.25	2.7
	HT-20 Beam Forming, M8 to M15	4	5	-58.1	-52.4	-54.3	-52.5	-42.8	-41.25	1.5
	HT-20 Beam Forming, M16 to M23	4	3	-58.1	-52.4	-54.3	-52.5	-44.6	-41.25	3.3
	HT-20 STBC, M0 to M7	2	2	-58.1	-52.4			-49.4	-41.25	8.1
	HT-20 STBC, M0 to M7	3	2	-58.1	-52.4	-54.3		-47.6	-41.25	6.3
	HT-20 STBC, M0 to M7	4	2	-58.1	-52.4	-54.3	-52.5	-45.8	-41.25	4.5



2462	Legacy CCK, 1 to 11 Mbps	1	2	<u>-71.8</u>				-69.8	-41.25	28.6
	Legacy CCK, 1 to 11 Mbps	2	2	<u>-71.8</u>	<u>-70.1</u>			-65.9	-41.25	24.6
	Legacy CCK, 1 to 11 Mbps	3	2	<u>-71.8</u>	<u>-70.1</u>	<u>-71.2</u>		-64.2	-41.25	23.0
	Legacy CCK, 1 to 11 Mbps	4	2	<u>-71.8</u>	<u>-70.1</u>	<u>-71.2</u>	<u>-71.1</u>	-63.0	-41.25	21.7
	Non HT-20, 6 to 54 Mbps	1	2	<u>-58.2</u>				-56.2	-41.25	15.0
	Non HT-20, 6 to 54 Mbps	2	2	<u>-58.2</u>	<u>-53.5</u>			-50.2	-41.25	9.0
	Non HT-20, 6 to 54 Mbps	3	2	<u>-58.2</u>	<u>-53.5</u>	<u>-56.2</u>		-48.8	-41.25	7.5
	Non HT-20, 6 to 54 Mbps	4	2	<u>-58.2</u>	<u>-53.5</u>	<u>-56.2</u>	<u>-52.5</u>	-46.5	-41.25	5.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	<u>-58.2</u>	<u>-53.5</u>			-47.2	-41.25	6.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	<u>-58.2</u>	<u>-53.5</u>	<u>-56.2</u>		-44.0	-41.25	2.7
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	<u>-62.2</u>	<u>-58.9</u>	<u>-59.6</u>	<u>-57.5</u>	-45.2	-41.25	4.0
	HT-20, M0 to M7	1	2	<u>-55.8</u>				-53.8	-41.25	12.6
	HT-20, M0 to M7	2	2	<u>-55.8</u>	<u>-50.9</u>			-47.7	-41.25	6.4
	HT-20, M8 to M15	2	2	<u>-55.8</u>	<u>-50.9</u>			-47.7	-41.25	6.4
	HT-20, M0 to M7	3	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-46.1	-41.25	4.8
	HT-20, M8 to M15	3	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-46.1	-41.25	4.8
	HT-20, M16 to M23	3	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-46.1	-41.25	4.8
	HT-20, M0 to M7	4	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>	<u>-50.7</u>	-44.2	-41.25	2.9
	HT-20, M8 to M15	4	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>	<u>-50.7</u>	-44.2	-41.25	2.9
	HT-20, M16 to M23	4	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>	<u>-50.7</u>	-44.2	-41.25	2.9
	HT-20 Beam Forming, M0 to M7	2	5	<u>-55.8</u>	<u>-50.9</u>			-44.7	-41.25	3.4
	HT-20 Beam Forming, M8 to M15	2	2	<u>-55.8</u>	<u>-50.9</u>			-47.7	-41.25	6.4
	HT-20 Beam Forming, M0 to M7	3	7	<u>-60.1</u>	<u>-57.2</u>	<u>-57.7</u>		-46.6	-41.25	5.3
	HT-20 Beam Forming, M8 to M15	3	4	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-44.3	-41.25	3.0
	HT-20 Beam Forming, M16 to M23	3	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-46.1	-41.25	4.8
	HT-20 Beam Forming, M0 to M7	4	8	<u>-64.1</u>	<u>-61.5</u>	<u>-62.1</u>	<u>-59.4</u>	-47.4	-41.25	6.2
	HT-20 Beam Forming, M8 to M15	4	5	<u>-60.1</u>	<u>-57.2</u>	<u>-57.7</u>	<u>-54.2</u>	-45.8	-41.25	4.5
	HT-20 Beam Forming, M16 to M23	4	3	<u>-60.1</u>	<u>-57.2</u>	<u>-57.7</u>	<u>-54.2</u>	-47.6	-41.25	6.3
	HT-20 STBC, M0 to M7	2	2	<u>-55.8</u>	<u>-50.9</u>			-47.7	-41.25	6.4
	HT-20 STBC, M0 to M7	3	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>		-46.1	-41.25	4.8
	HT-20 STBC, M0 to M7	4	2	<u>-55.8</u>	<u>-50.9</u>	<u>-53.2</u>	<u>-50.7</u>	-44.2	-41.25	2.9

Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

[illegible]

Keysight Spectrum Analyzer - Design SA

101.3750 PM Apr 04, 2013

Center Freq 2.35000000 GHz

PBU: Fast Trig: Free Run Avg Type: Log-Pwr

Mkr2 2.38728 GHz -69.01 dBm

10 dB/Div Ref 0.00 cBm

Start 2.31000 GHz Stop 2.39000 GHz

Res BW 1.0 MHz VBW 100 Hz Sweep 624 ms (1001 pts)

Frequency

Auto Tune

Center Freq 2.35000000 GHz

Start Freq 2.31000000 GHz

Stop Freq 2.39000000 GHz

CF Step 8.000000 MHz

Auto

Man

Freq Offset 0 Hz

File Edit View Window Help
 01/30/2014 10:25:24 AM 01/30/2014 10:25:24 AM 01/30/2014 10:25:24 AM
 Center Freq 2.350000000 GHz Trig: Free Run #Aver: 10 dB Avg Type: Log-Pwr TRACE 1 2.390 00 GHz
 FREQ: Free Run 10.00 dBm TYPE: Freq Freq: 2.390 00 GHz
 #F: 1001 pts
 10 dB/div Ref 0.00 dBm Mkr1 2.390 00 GHz -70.98 dBm
 10.00 dBm
 9.00 dBm
 8.00 dBm
 7.00 dBm
 6.00 dBm
 5.00 dBm
 4.00 dBm
 3.00 dBm
 2.00 dBm
 1.00 dBm
 0.00 dBm
 -1.00 dBm
 -2.00 dBm
 -3.00 dBm
 -4.00 dBm
 -5.00 dBm
 -6.00 dBm
 -7.00 dBm
 -8.00 dBm
 -9.00 dBm
 -10.00 dBm
 -11.00 dBm
 -12.00 dBm
 Start 2.31000 GHz #VBW 100 Hz Stop 2.39000 GHz
 Res BW 1.0 MHz Sweep 624 ms (1001 pts)
 2.390 00 GHz -70.98 dBm
 N F
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 LRB: MRE: 100.000
 2.390 00 GHz -70.98 dBm
 FUNCTION FUNCTIONS w/DBH FUNCTION VALUE
 Auto CF Step 8.000000 MHz
 Freq Offset 0 Hz
 01/30/2014

Agilent Spectrum Analyzer - Sergei Sh...

Center Freq 2.35000000 GHz

PRF: Fast Trig: Free Run

#Gain: Low #Atten: 10 dB

Avg Type: Log-Pwr

TRACE 1

TYPE

SET

Auto Tune

to dBm Ref 0.00 cBm

Mkr1 2.390 00 GHz -70.18 dBm

Start 2.31000 GHz Stop 2.39000 GHz

#Res BW 1.0 MHz #VBW 100 Hz Sweep 624 ms (1001 pts)

UNIT	MODE	TRIG	SOL	IN	F	FUNCTION	FUNCTION WITH	FUNCTION VALUE
dBm	N	1	F		2.390.00 GHz		-70.18 dBm	
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

CF Stop 8.080000 MHz

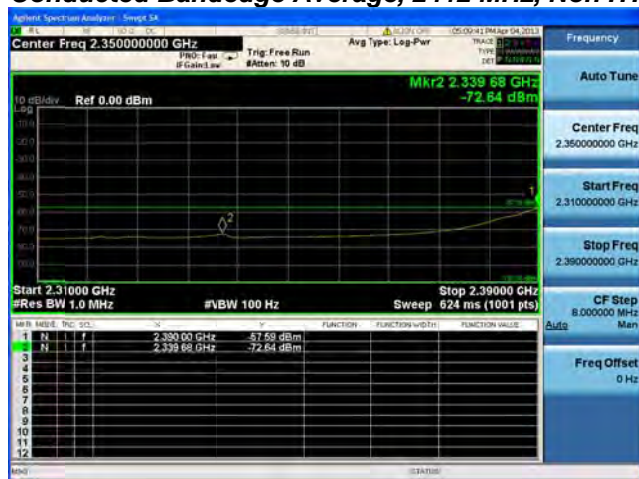
Freq Offset 0 Hz

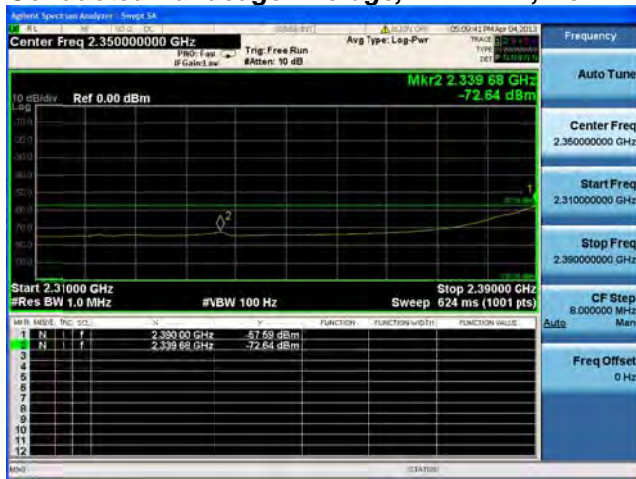
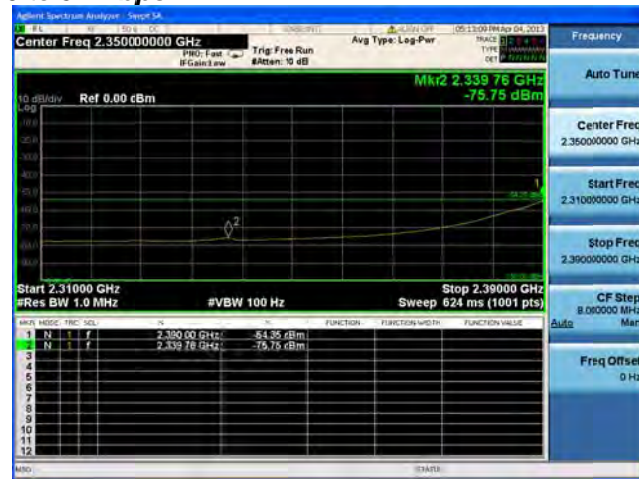
Auto

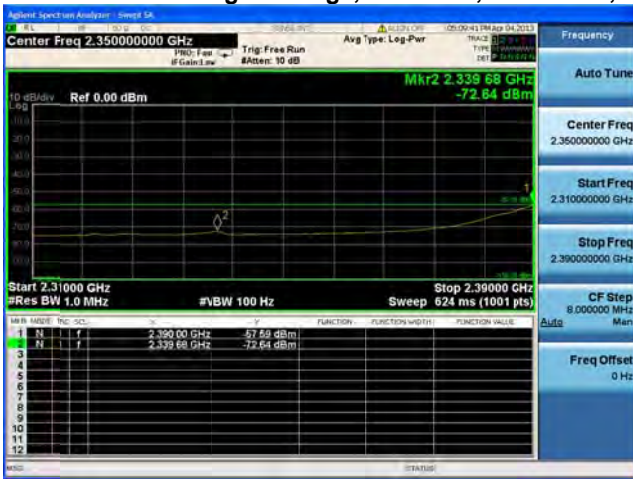
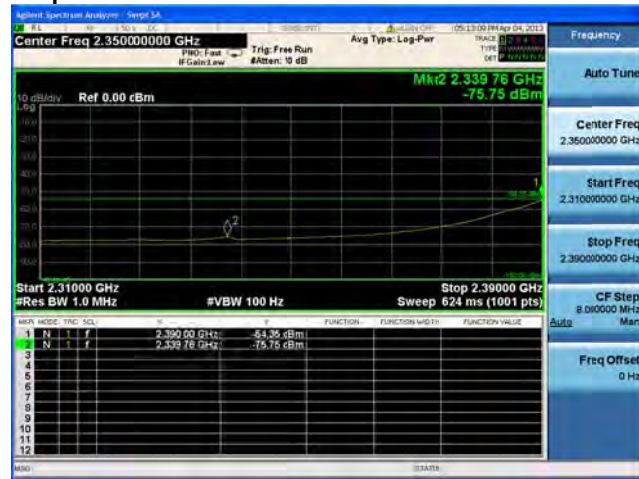
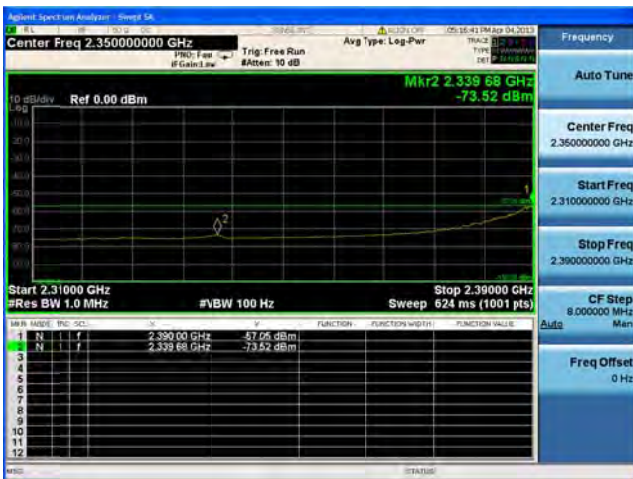
MAN

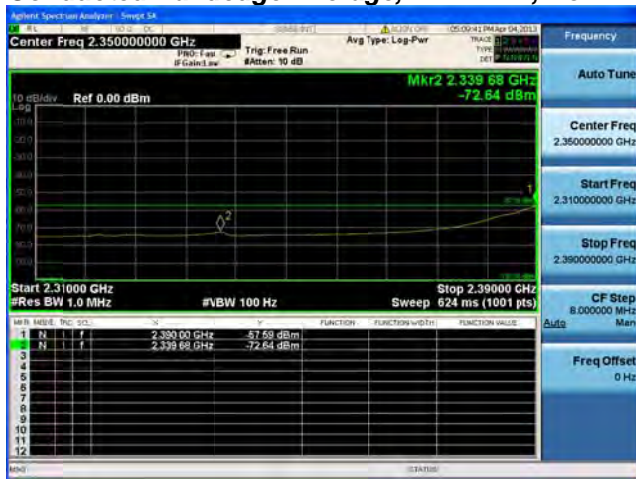
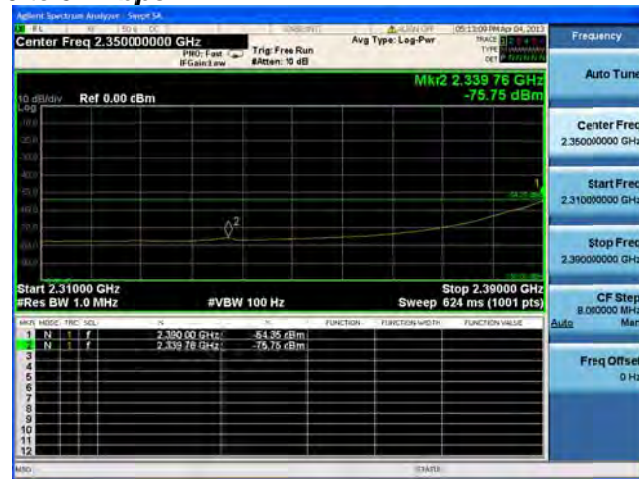
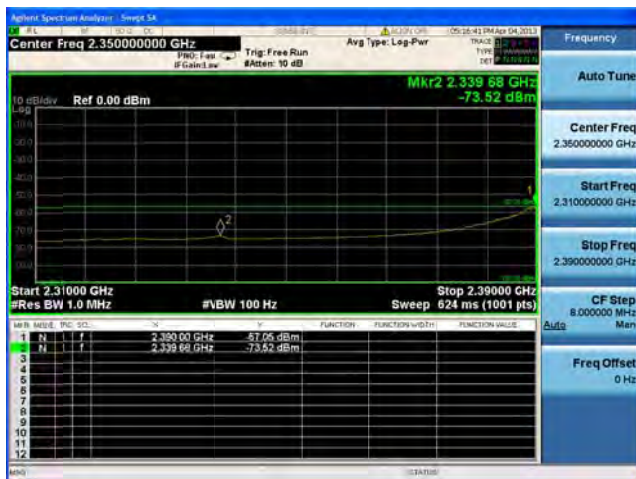
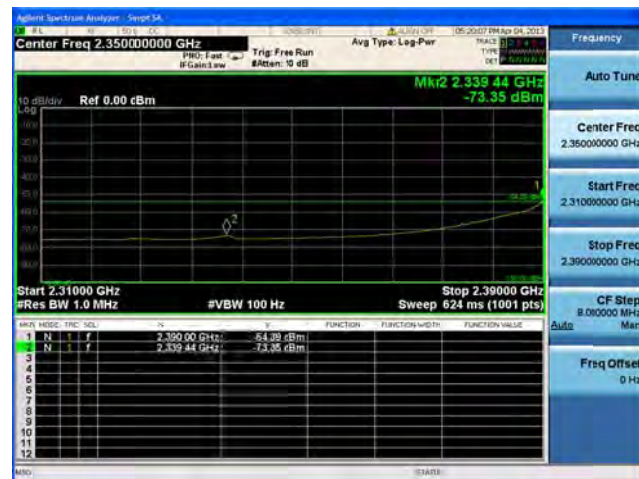
START:

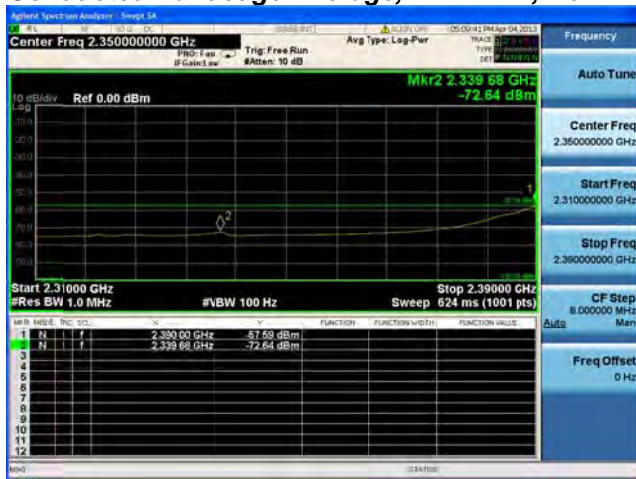
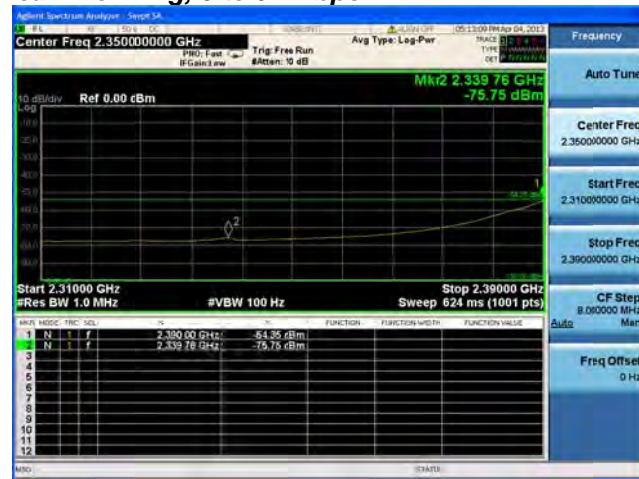
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

**Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

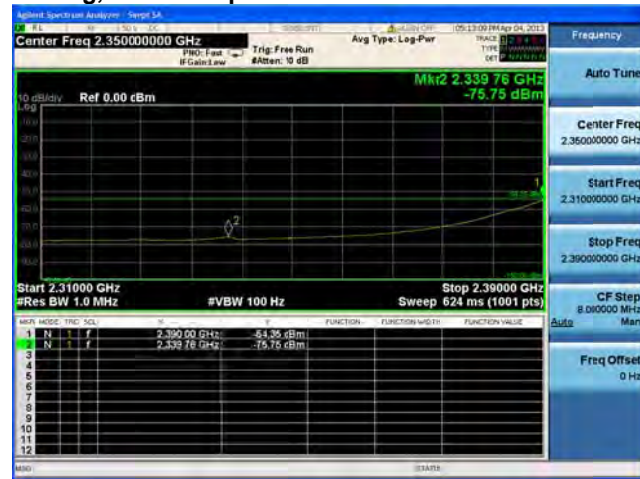
Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

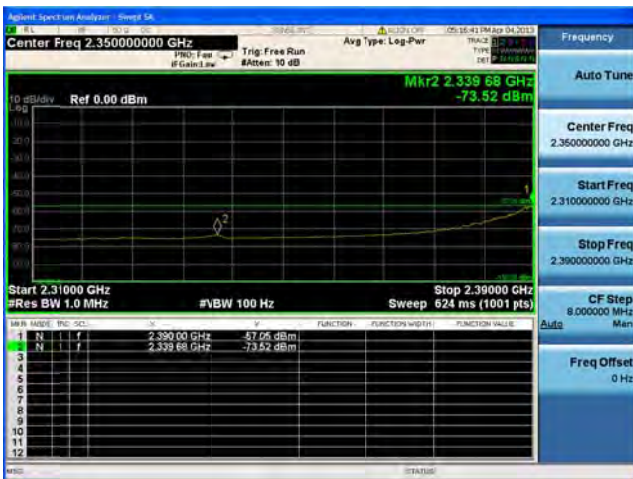
Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps



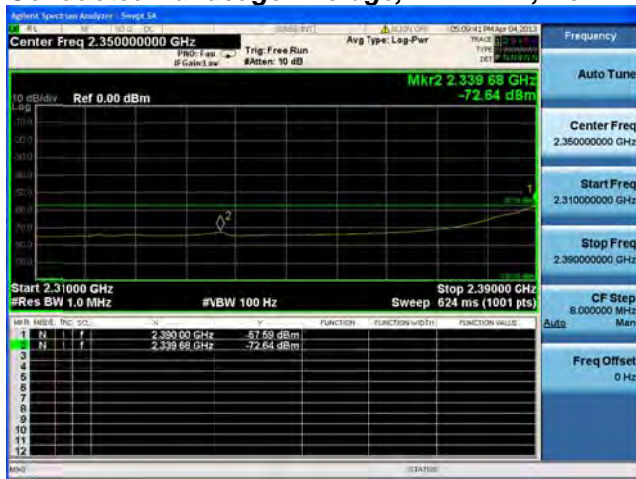
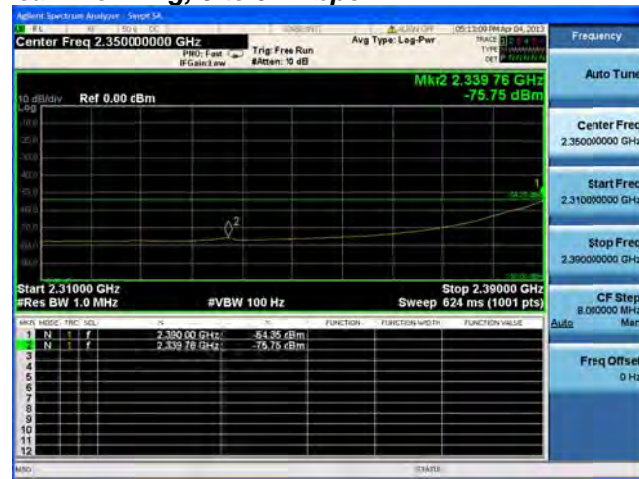
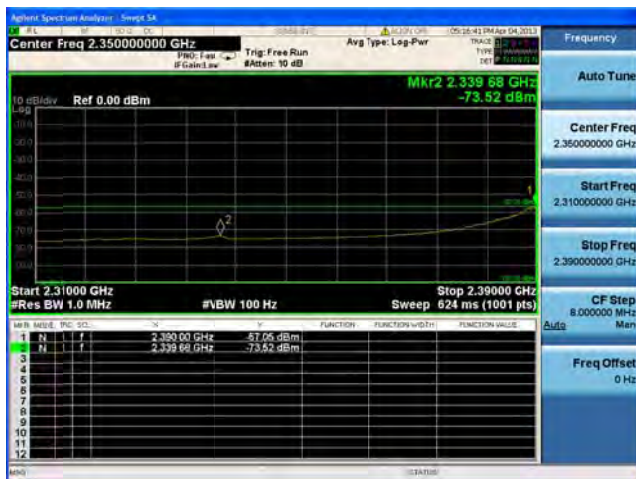
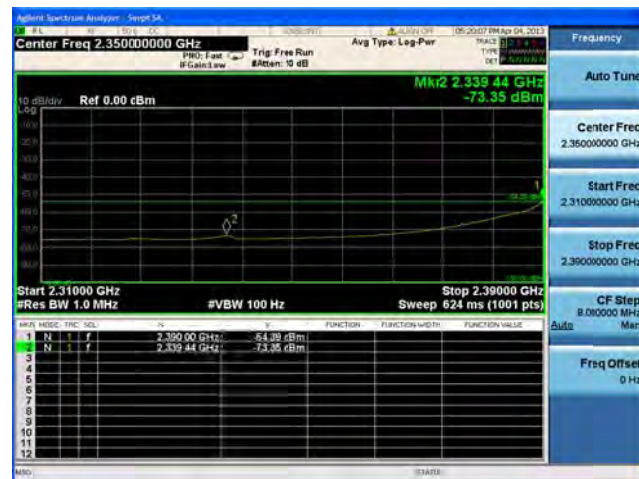
Antenna A

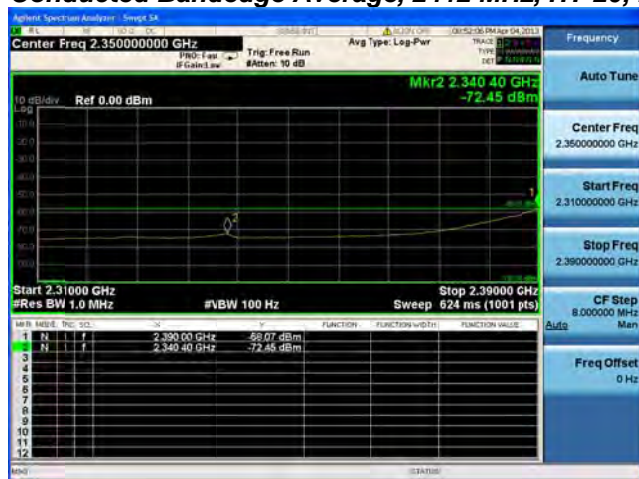


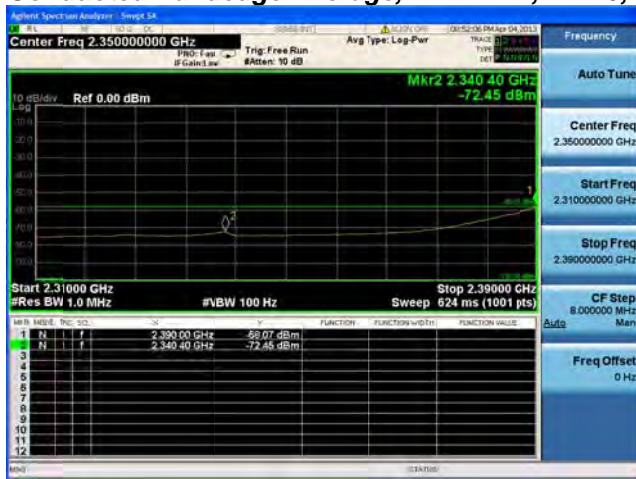
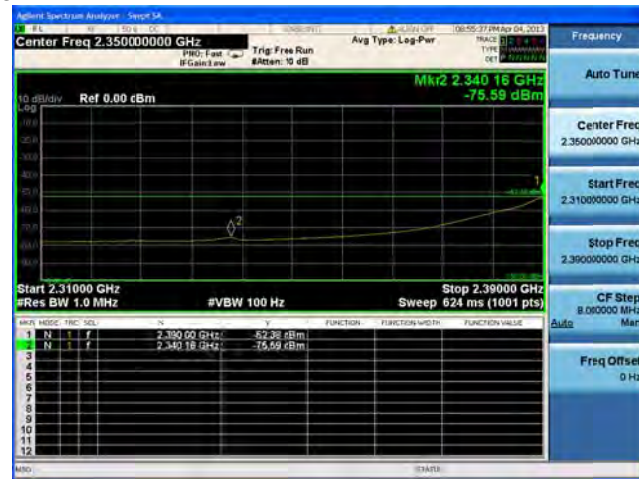
Antenna B



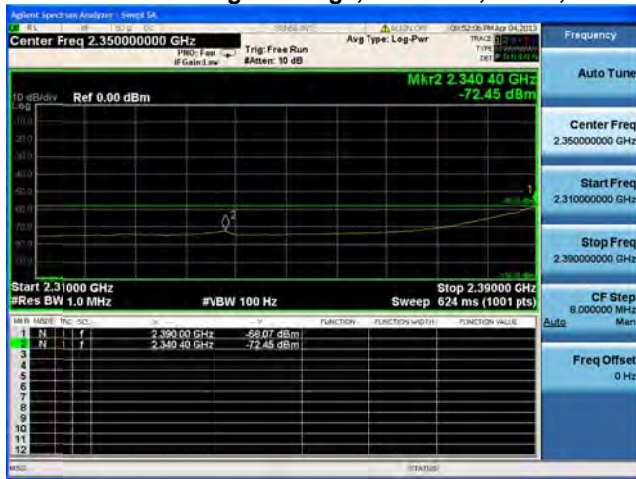
Antenna C

Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

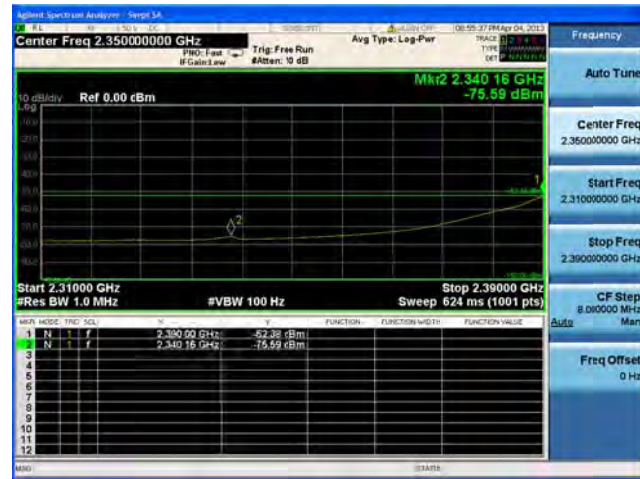
Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**Antenna A**

Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Agilent Spectrum Analyzer - Simul 5.0

File Edit View Settings Help

Center Freq 2.350000000 GHz

Span 10 dB

Trace 2: Freq Run

IF Center Freq 2.350 GHz

Attenu: 10 dB

Auto Tune

Frequency

Center Freq 2.350000000 GHz

Start Freq 2.310000000 GHz

Stop Freq 2.390000000 GHz

CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

Start 2.310000 GHz

Stop 2.390000 GHz

RBW 1.0 MHz

VBW 100 Hz

Sweep 624 ms (1001 pts)

Mkr2 2.340 40 GHz -72.45 dBm

Marker	Freq (GHz)	Power (dBm)
1	2.3400 GHz	-58.07 dBm
2	2.3404 GHz	-72.45 dBm

Center Freq 2.350000000 GHz

Auto Tune

Mkr2 2.340 16 GHz
-75.59 dBm

Ref 0.00 cBm

Start 2.310000 GHz
Stop 2.390000 GHz
Res BW 1.0 MHz
Sweep 624 ms (1001 pts)

CF Stop
8.000000 MHz

MARK	MODE	FREQ	SQL	UNIT	FUNCTION	FUNCTION VALUE	FUNCTION VALUE
1	N	2.310000 GHz	-52.38 dBm				
2	N	2.340 16 GHz	-75.59 cBm				
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							

Agilent Spectrum Analyzer - Sweep 54

Center Freq 2.350000000 GHz

PRF: 100 Hz

IF Gain: 1.0

Trig: Free Run

Attenu: 10 dB

AvG Type: Log-Pwr

Trace 2: 2.34032 GHz

Type: Power

Level: -73.35 dBm

10 dB/div Ref 0.00 dBm

Mkr2 2.34032 GHz

-73.35 dBm

Start 2.310000 GHz

Stop 2.390000 GHz

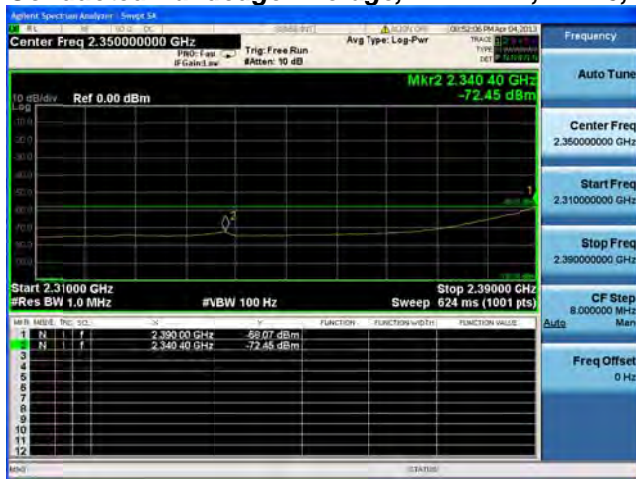
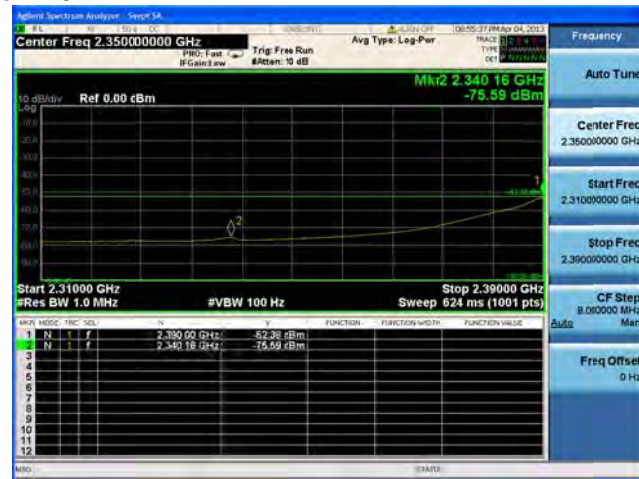
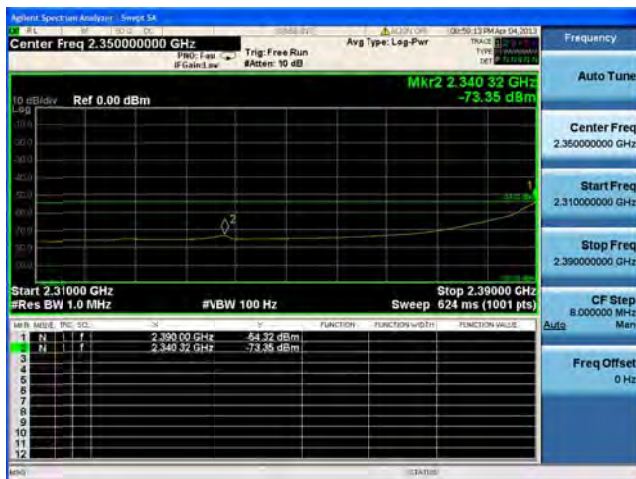
Res BW 1.0 MHz

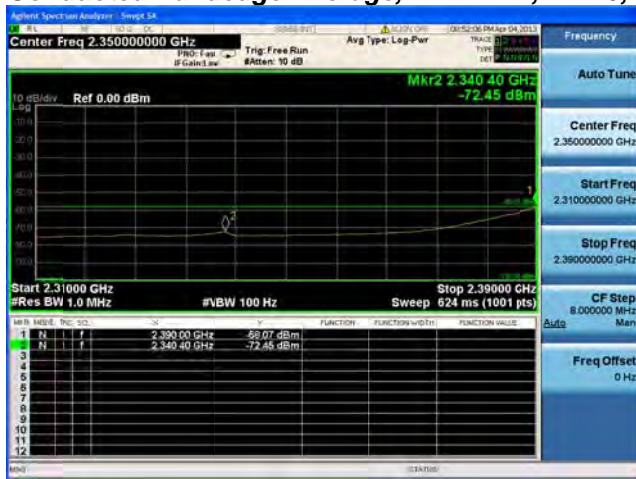
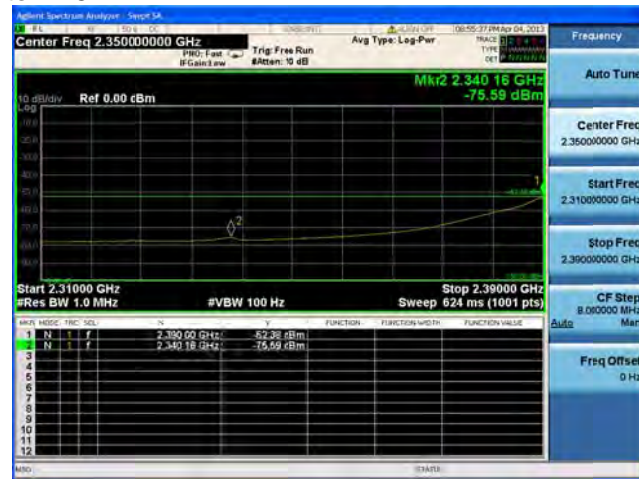
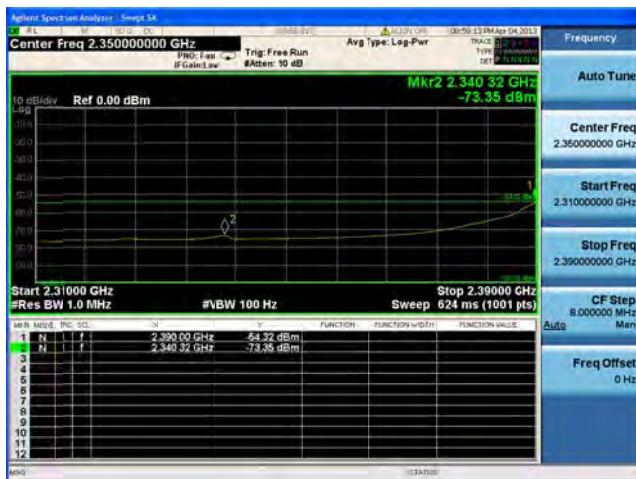
#VBW 100 Hz

Sweep 624 ms (1001 pts)

MARK	NAME	FREQ	POWER	FUNCTION	FUNCTIONS WIDTH	FUNCTION VALUE
1	N	2.340000 GHz	-54.32 dBm			
2	N	2.34032 GHz	-73.35 dBm			

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

[illegible]

Agilent Spectrum Analyzer - George Sh

Center Freq 2.350000000 GHz

Auto Tune

Frequency

Auto Tune

Center Freq 2.350000000 GHz

Start Freq 2.310000000 GHz

Stop Freq 2.390000000 GHz

CF Step 8.000000 MHz

Freq Offset 0 Hz

10 dB/div Ref 0.00 cBm

Mkr2 2.340 16 GHz -75.59 dBm

Start 2.31000 GHz Stop 2.39000 GHz

#VBW 100 Hz Sweep 624 ms (1001 pts)

MARK	MEAS	FREQ	SPAN	RES	UNIT	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	2.340 00 GHz			dBm			-52.26
2	N	2.340 16 GHz			dBm			-75.59

Agilent Spectrum Analyzer - Sweep 54

Center Freq 2.350000000 GHz

Trig: Free Run

Avg Type: Log-Pwr

09:50 13 May 04, 2013

Trace 1: 2.34032 GHz

Type: Power

Unit: dBm

Frequency

Auto Tune

Center Freq 2.350000000 GHz

Start Freq 2.310000000 GHz

Stop Freq 2.390000000 GHz

CF Step 8.000000000 MHz

Auto

Man

Freq Offset 0 Hz

Start 2.310000 GHz

Res BW 1.0 MHz

#BW 100 Hz

Sweep 624 ms (1001 pts)

Stop 2.390000 GHz

10 dB/div

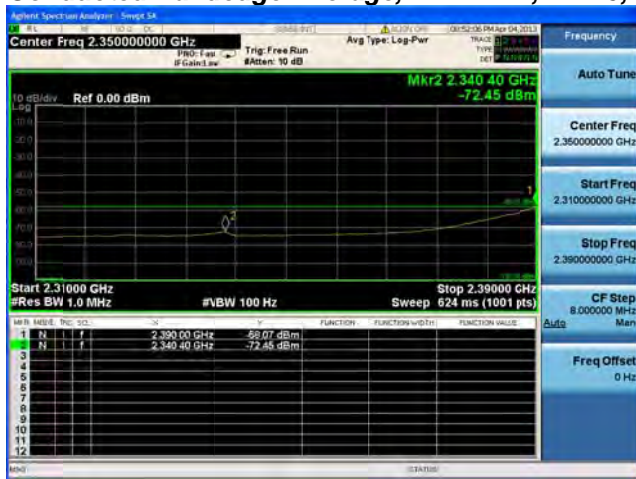
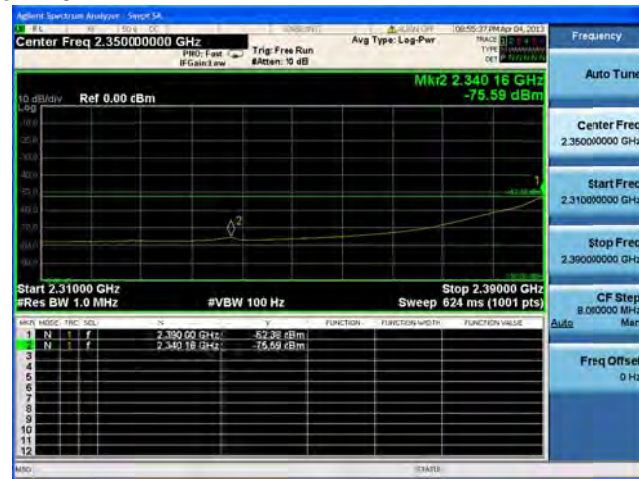
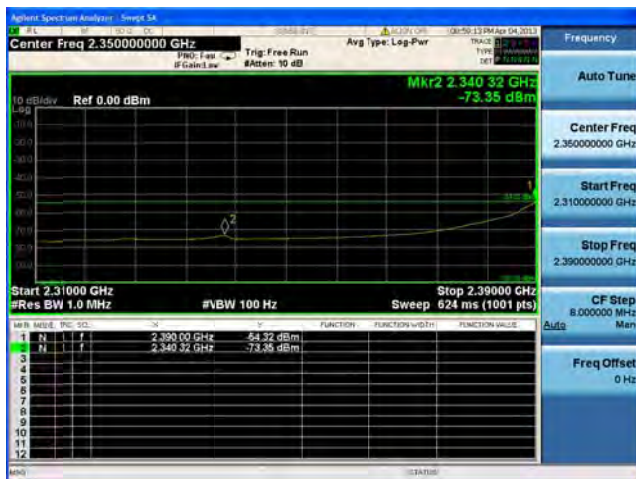
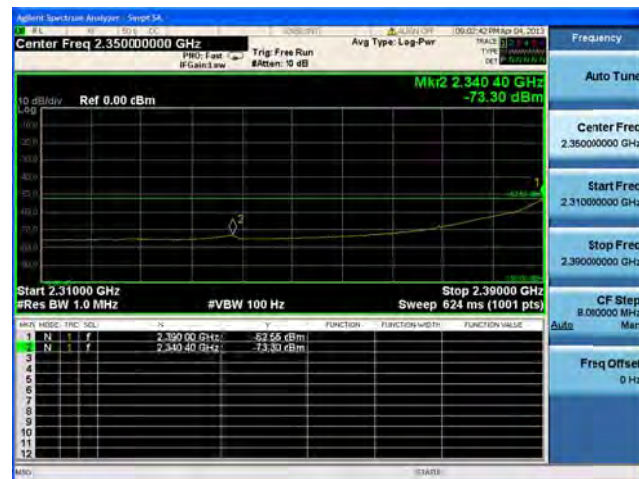
Ref 0.00 dBm

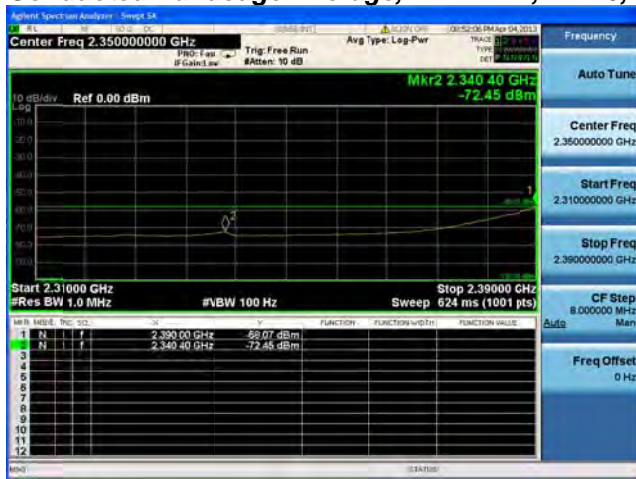
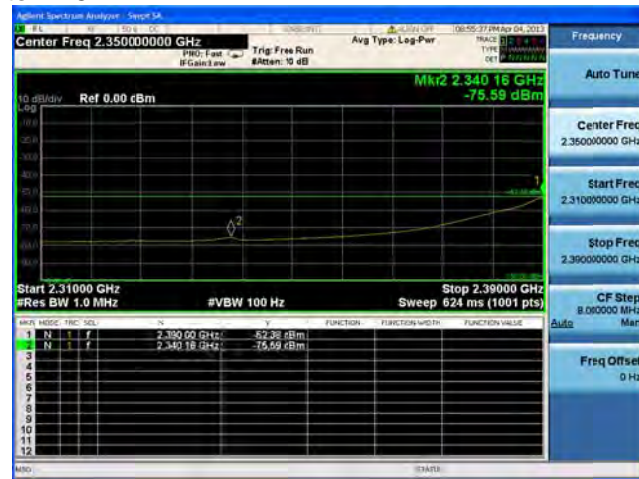
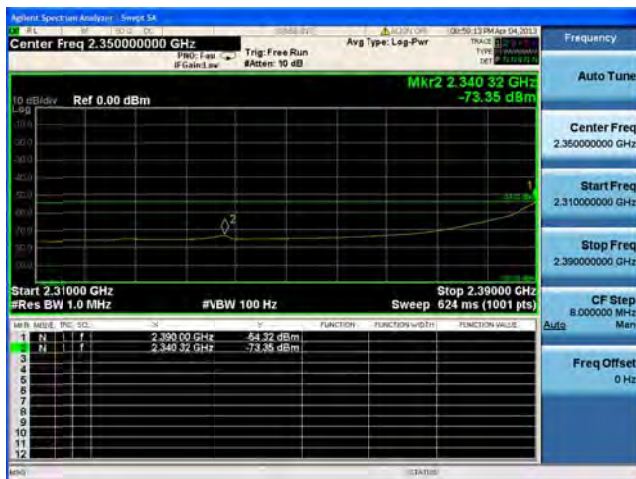
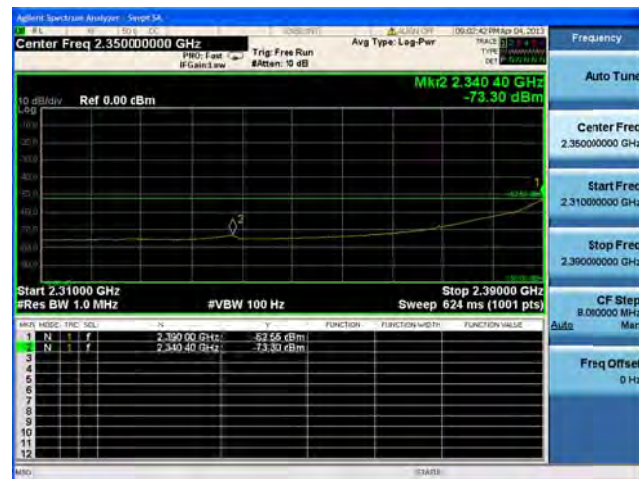
Mkr2 2.34032 GHz -73.35 dBm

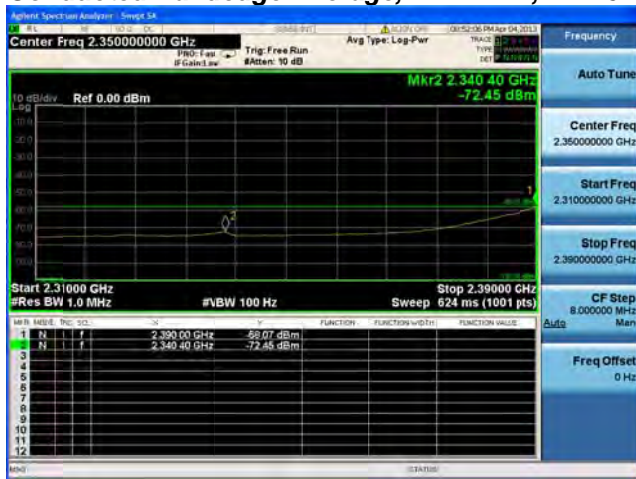
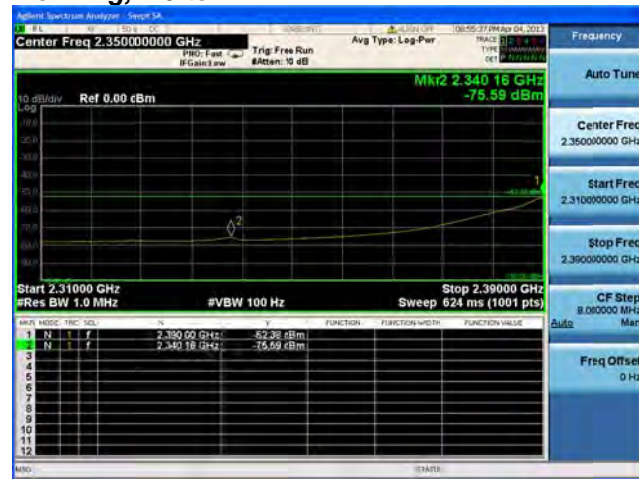
Line	Meas	Unit	Func	Value	Function	Function w/ dBm	Function Value
1	N	dBm	F	2.34032 GHz			
2	N	dBm	F	2.34032 GHz			

[illegible]

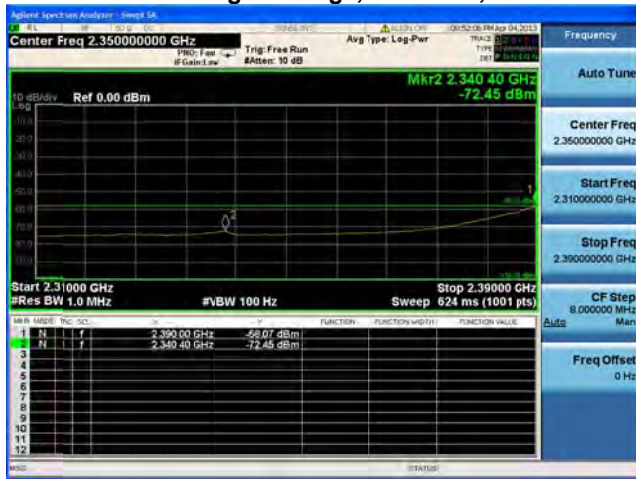
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

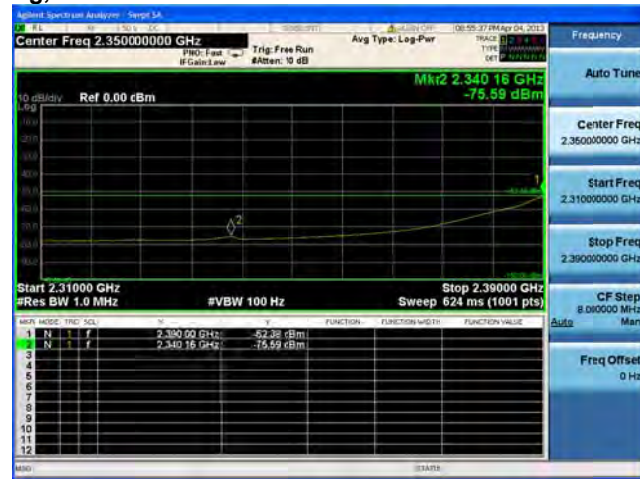
Conducted Bandedge Average, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

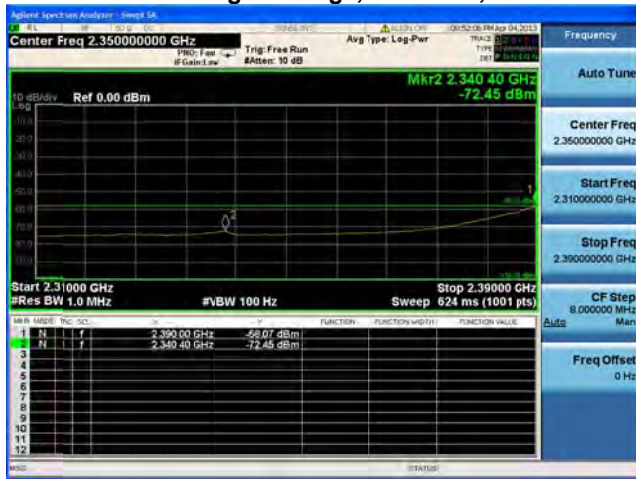
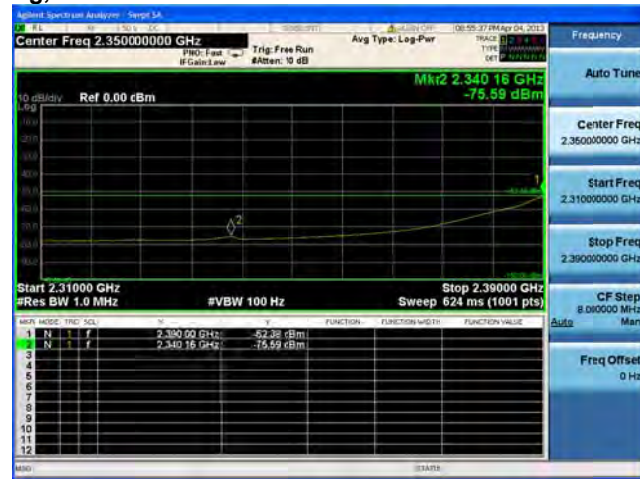
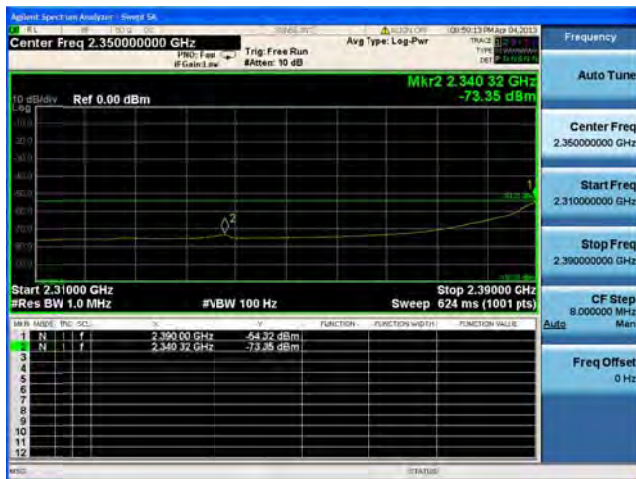
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15

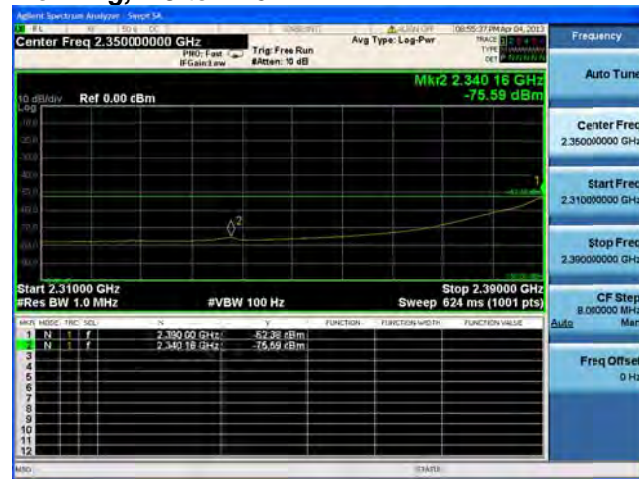
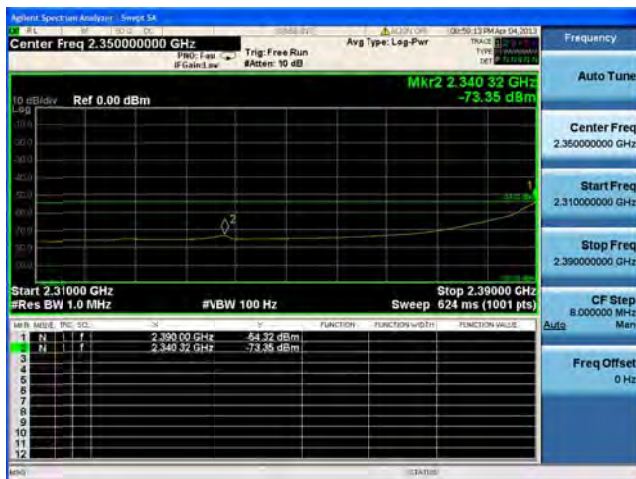


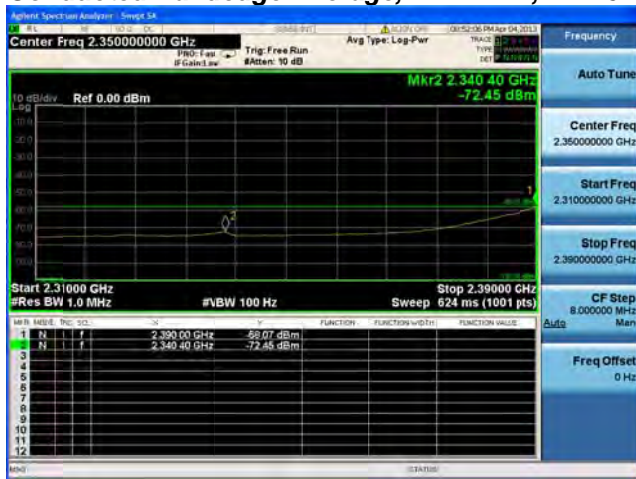
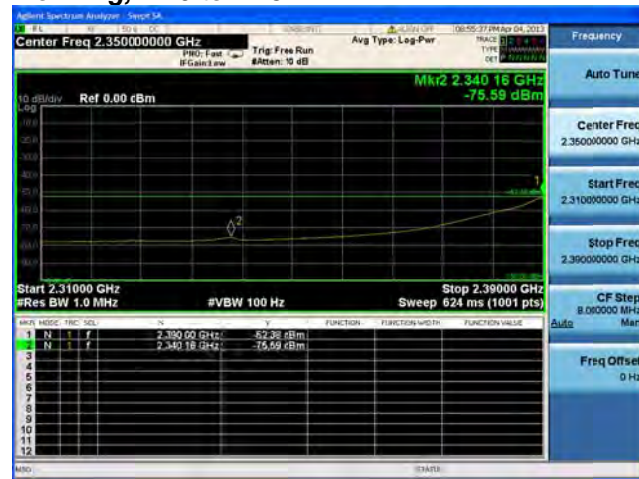
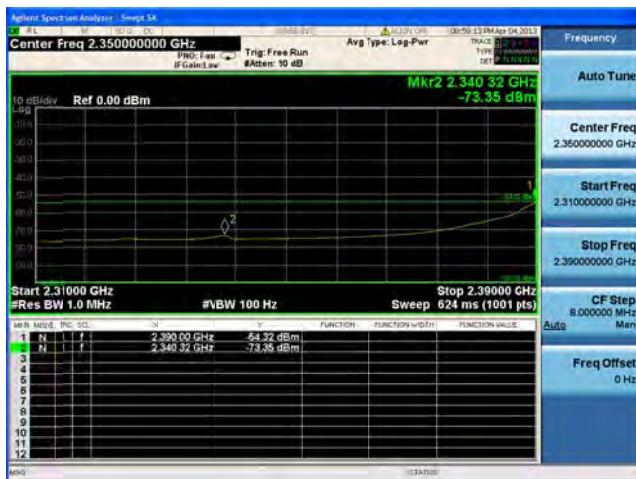
Antenna A

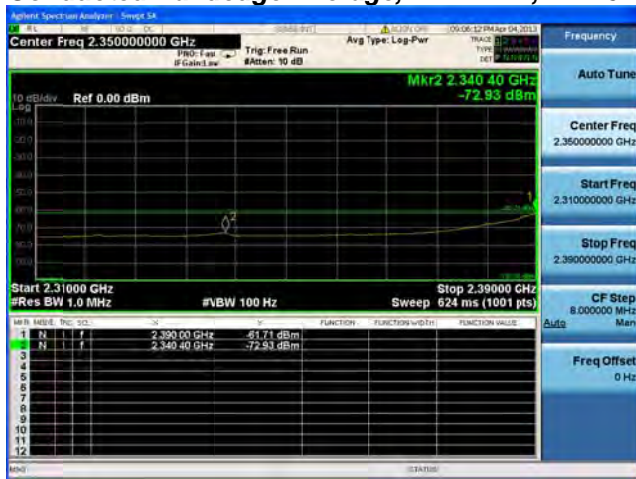
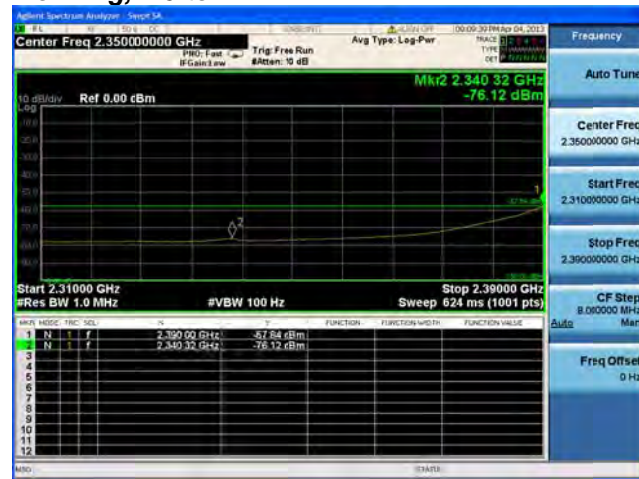
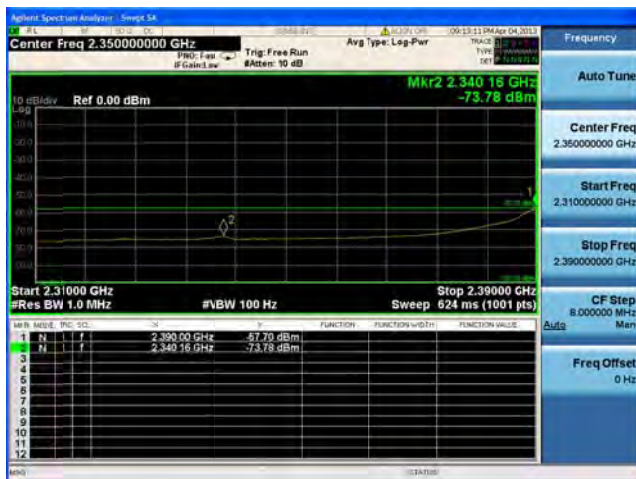
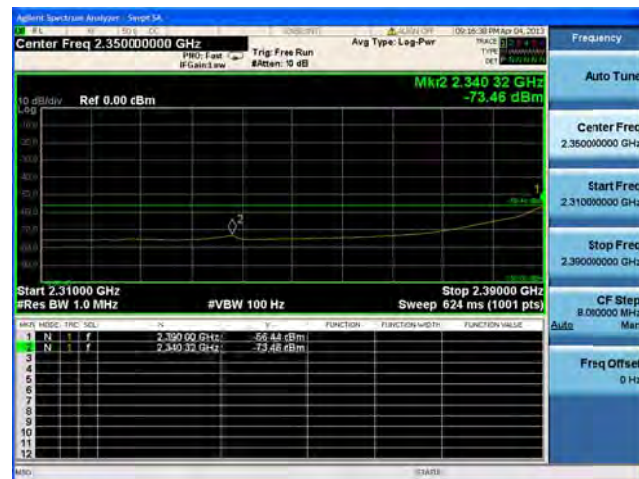


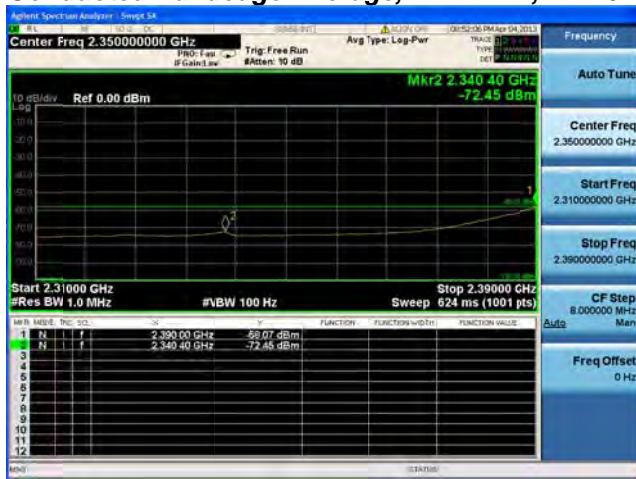
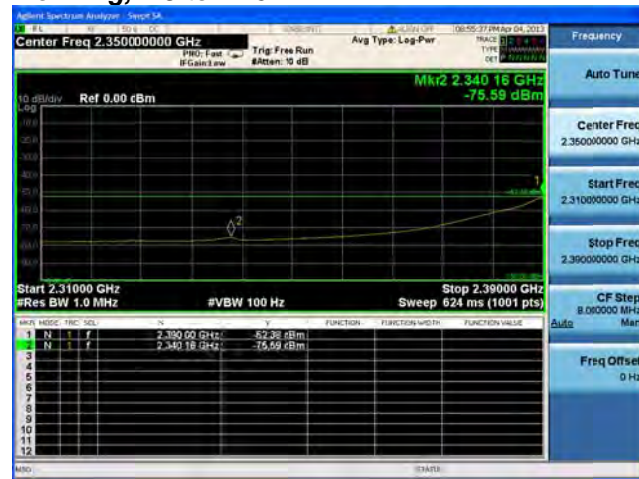
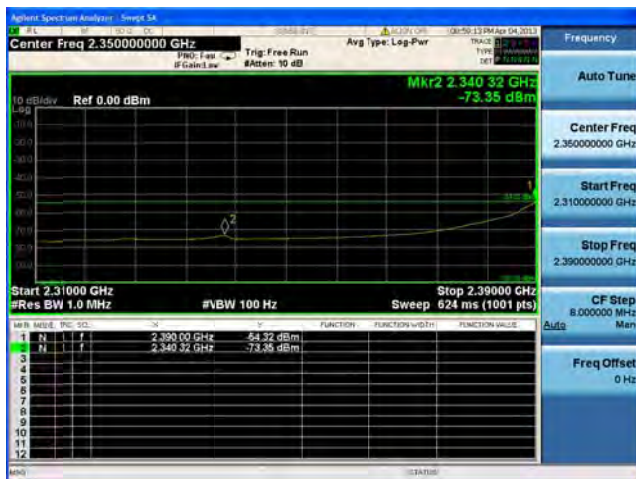
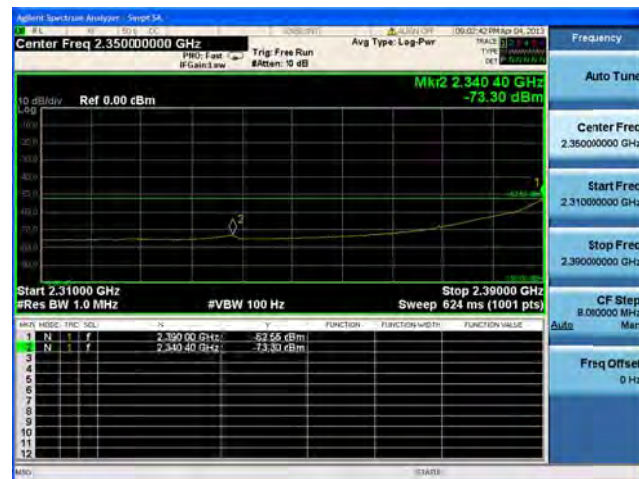
Antenna B

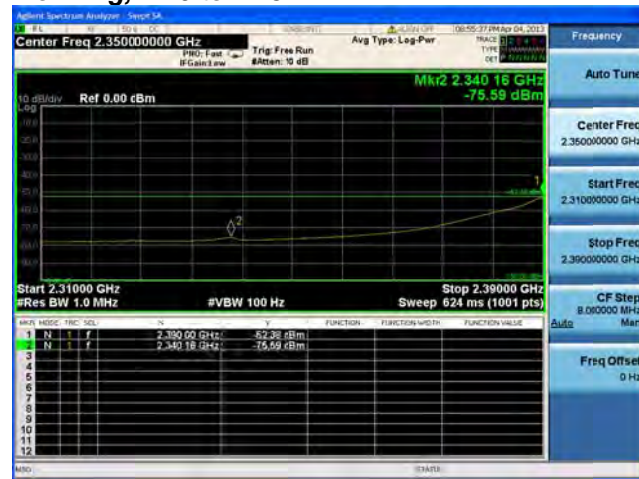
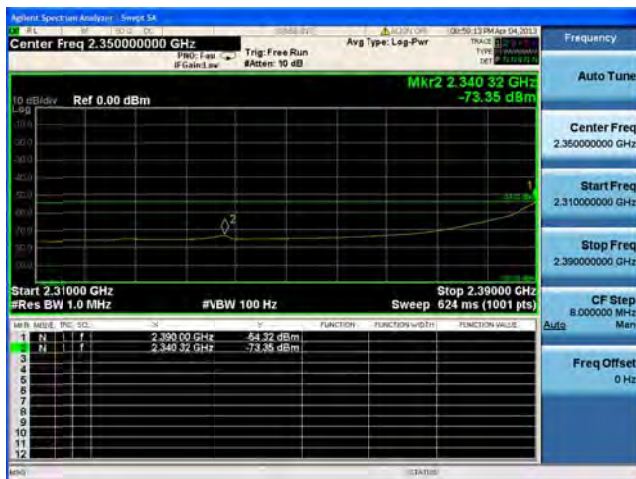
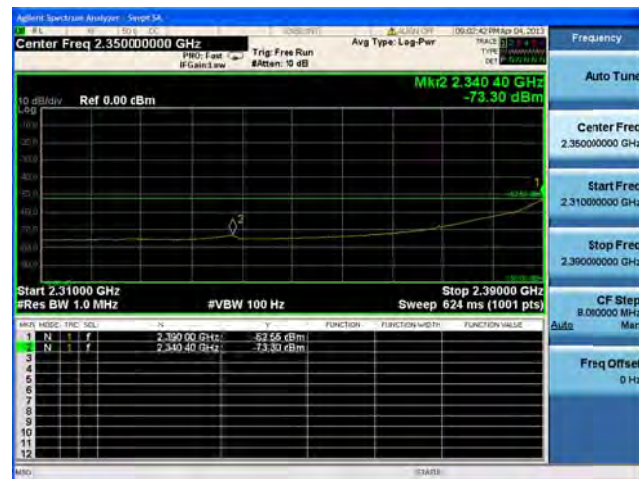
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

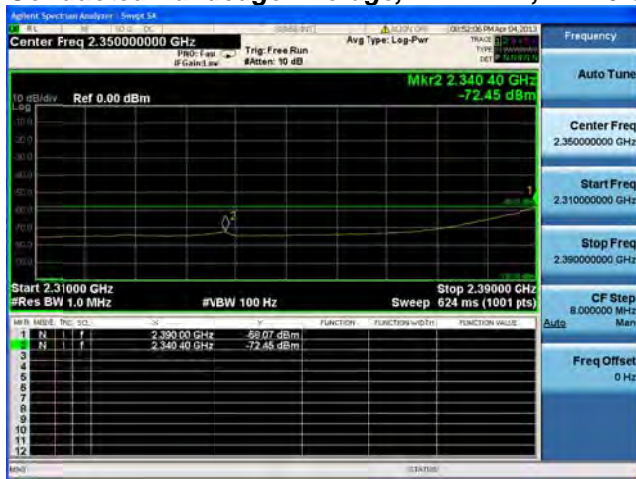
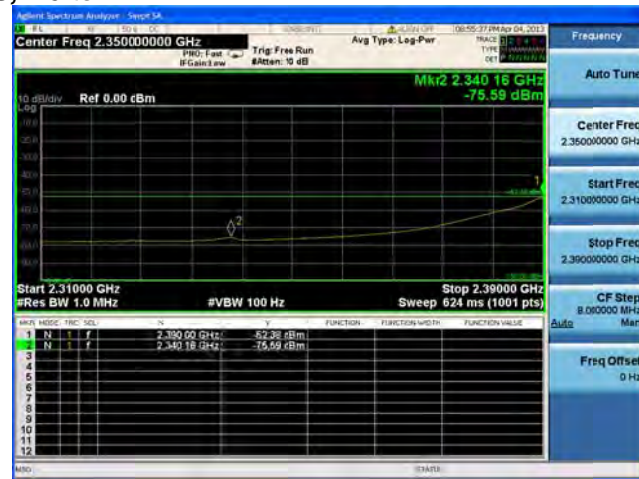
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

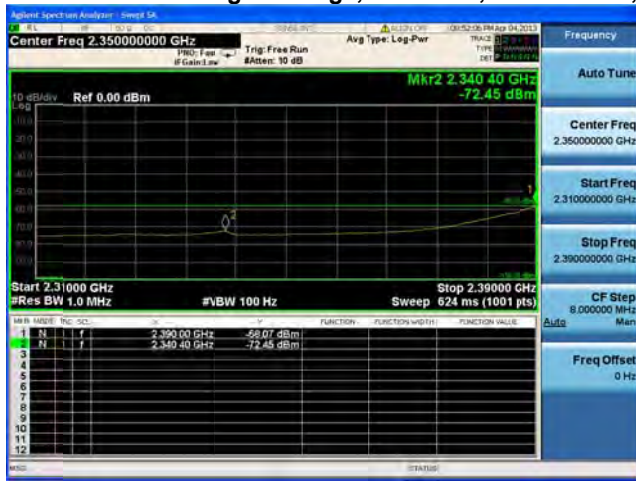
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

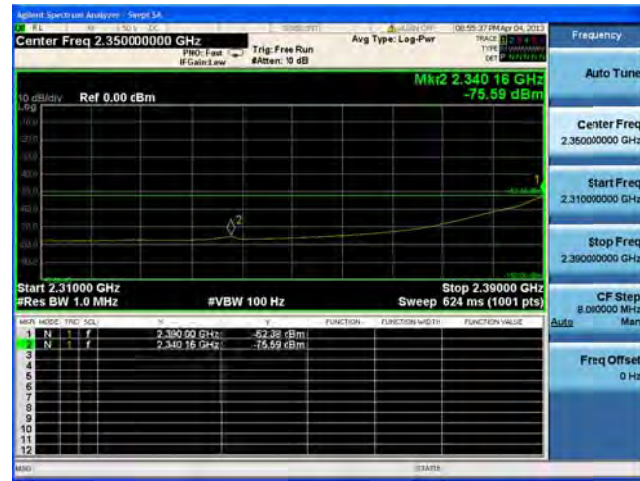
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

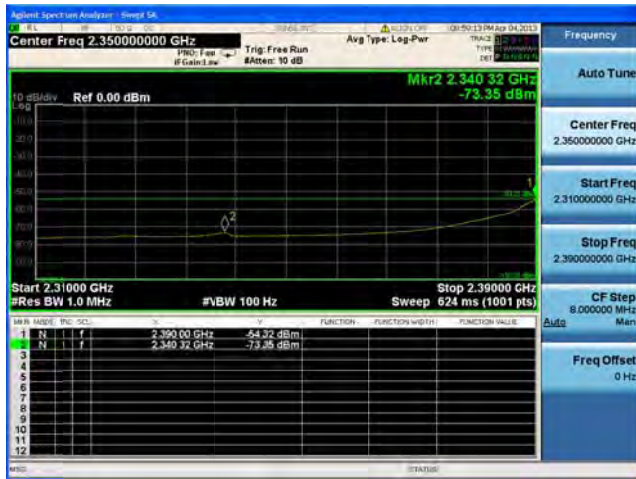
Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7



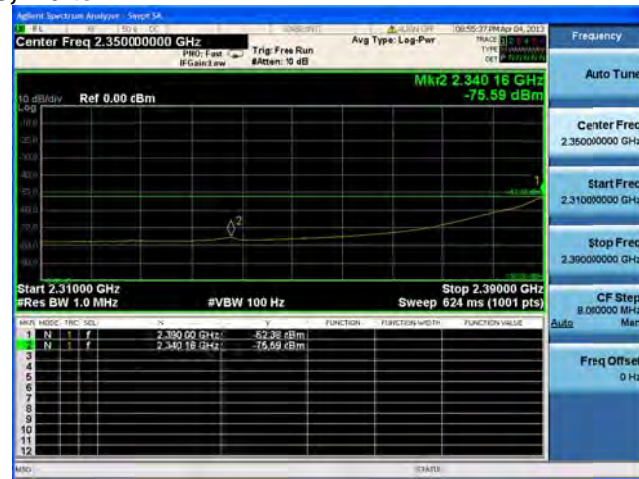
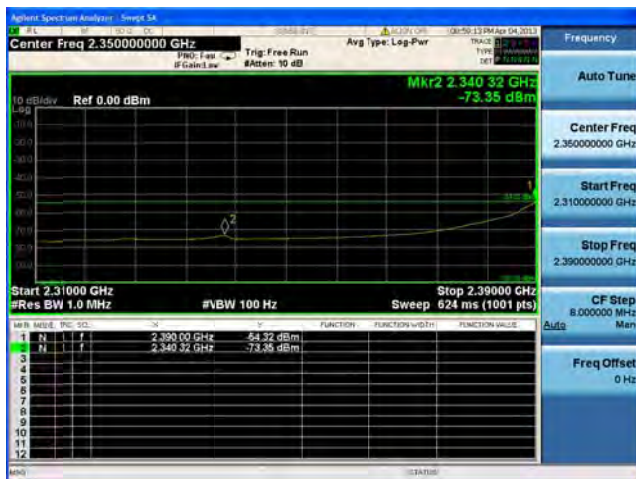
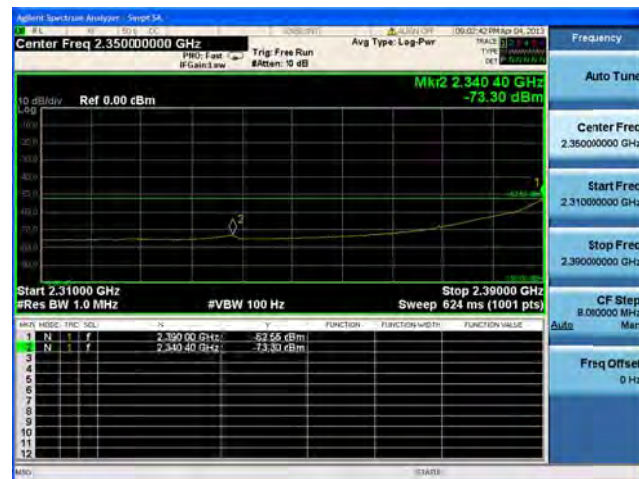
Antenna A

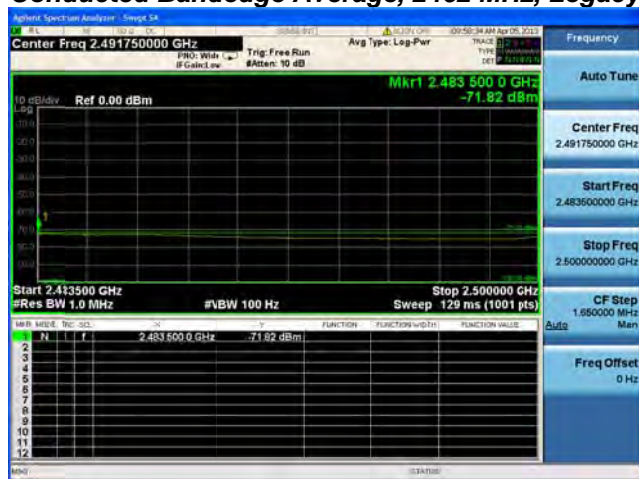


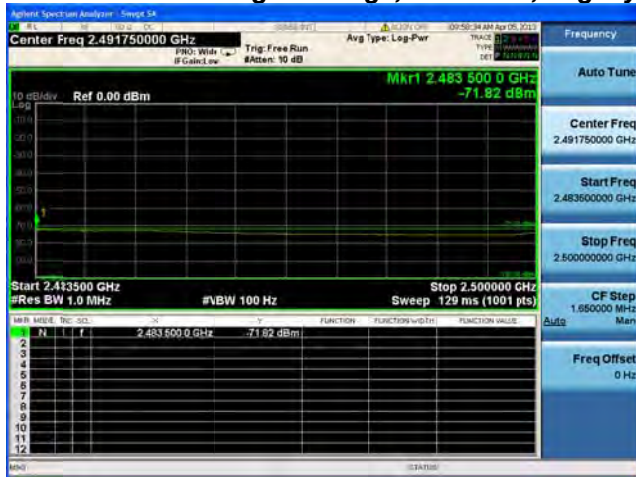
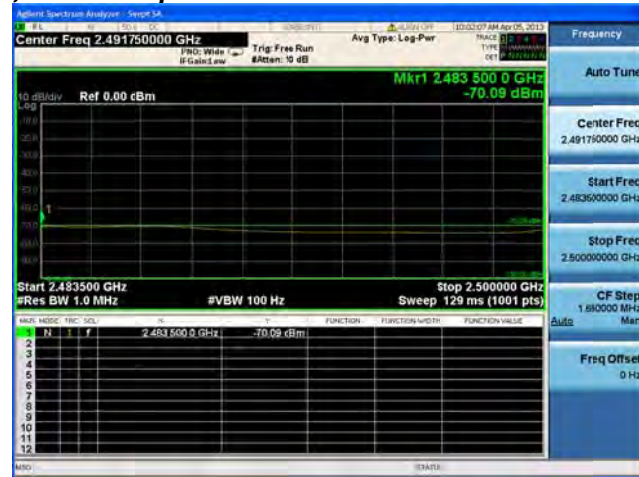
Antenna B

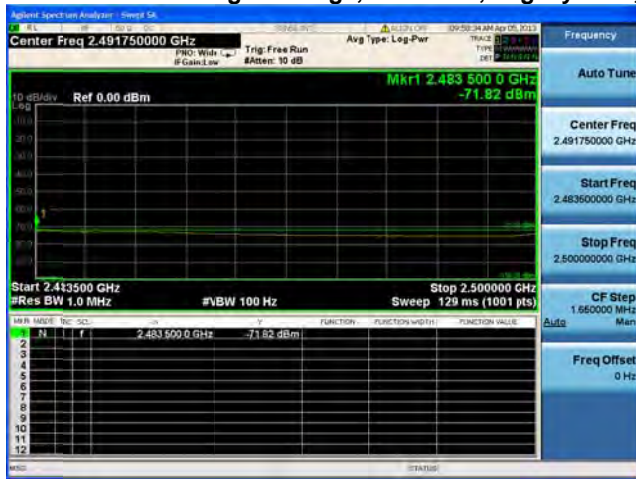
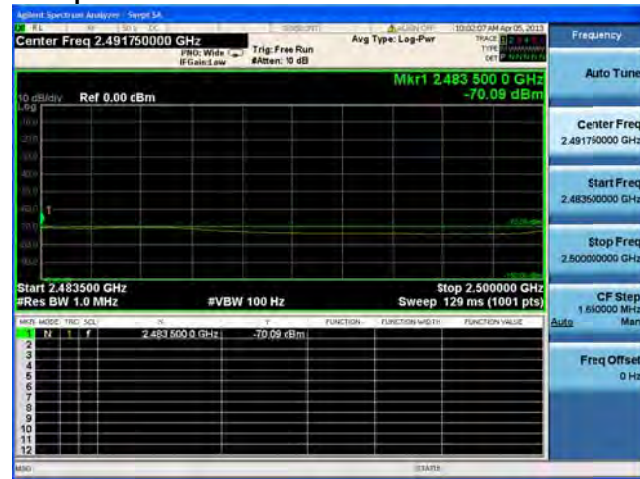
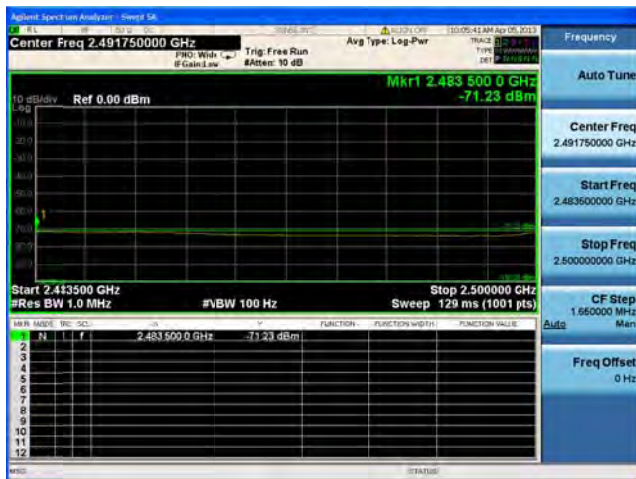


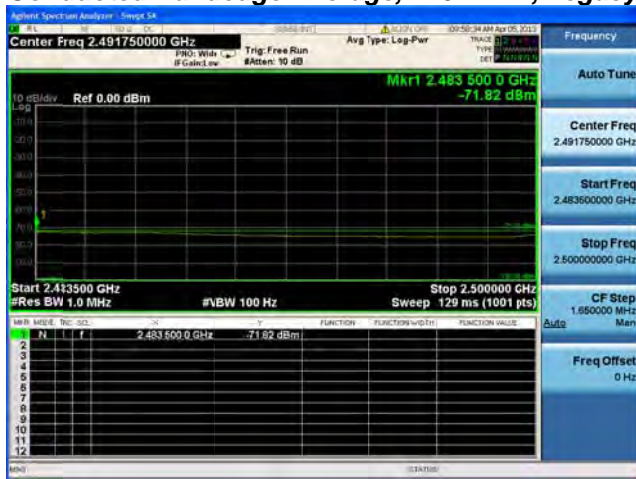
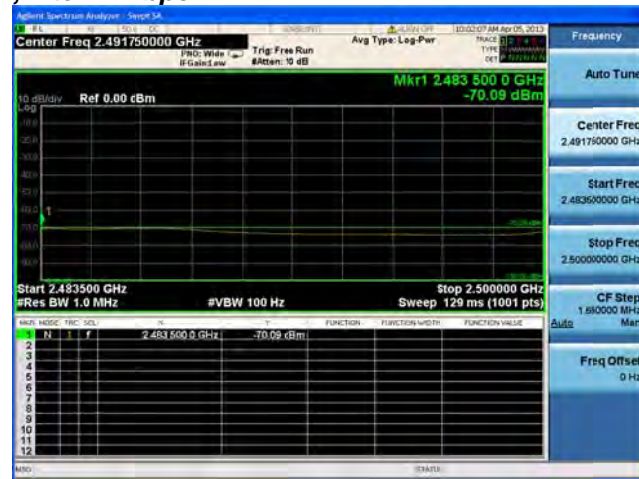
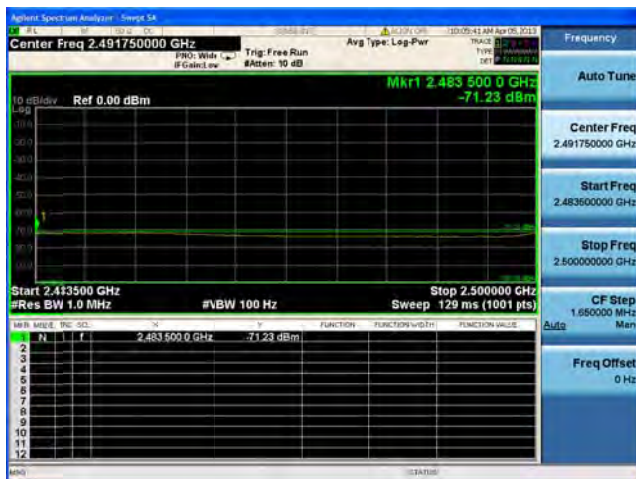
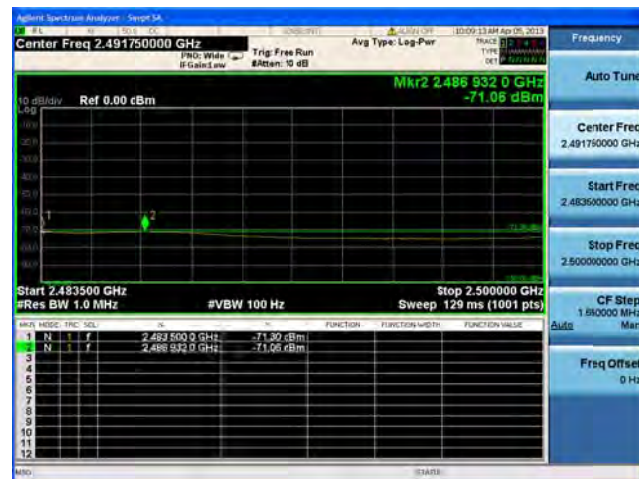
Antenna C

Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

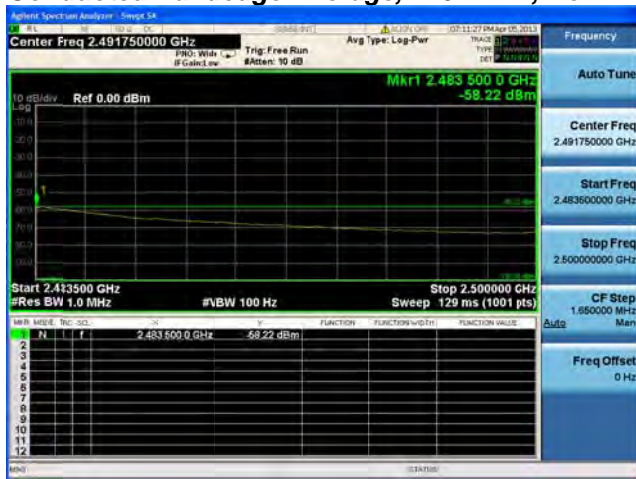
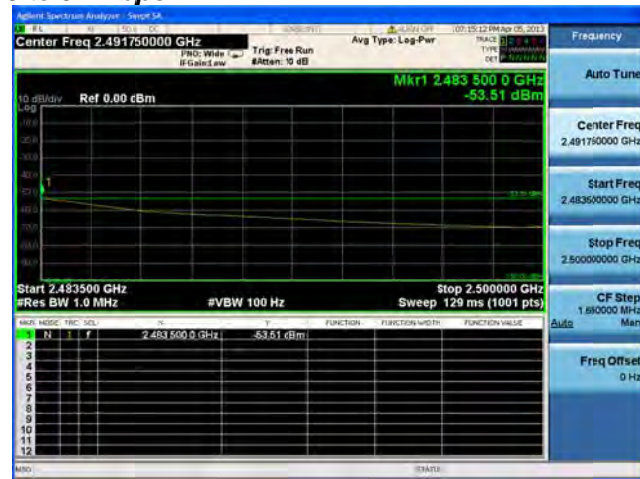
Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

**Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

[illegible]

Author: Spectral Analysis - Center Freq
 2.483500 GHz
 2.483500 GHz
 Center Freq 2.491750000 GHz
 Trig: Free Run
 #Attenu: 10 dB
 Avg Type: Log-Pwr
 TRACE 1 0 0 0
 TYPE: SSB
 Det: Peak
 Frequency
 Auto Tune
 Center Freq
 2.491750000 GHz
 Start Freq
 2.483500000 GHz
 Stop Freq
 2.500000000 GHz
 CF Step
 1.500000 MHz
 Auto Man
 Freq Offset
 0 Hz
 M100

Agilent Spectrum Analyzer - Sweep 54

2.483500 GHz

Center Freq 2.491750000 GHz

PRO: Wide 1.0 MHz

Trig: Free Run

Avg Type: Log-Pwr

TRACE 1

TYPE: F

DATE: 10/25/14

Frequency

Auto Tune

Center Freq 2.491750000 GHz

Start Freq 2.483600000 GHz

Stop Freq 2.500000000 GHz

CF Step 1.660000000 GHz

Auto

Menu

Freq Offset 0 Hz

Start 2.4f3500 GHz

Stop 2.5000000 GHz

Res BW 1.0 MHz

#VBW 100 Hz

Sweep 129 ns (1001 pts)

10 dB/div

Ref 0.00 dBm

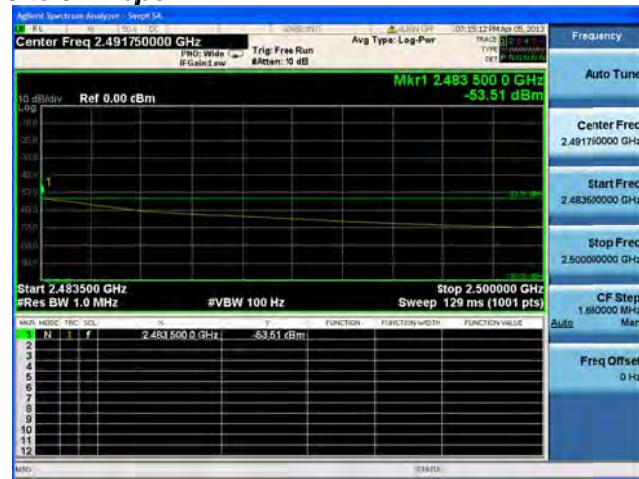
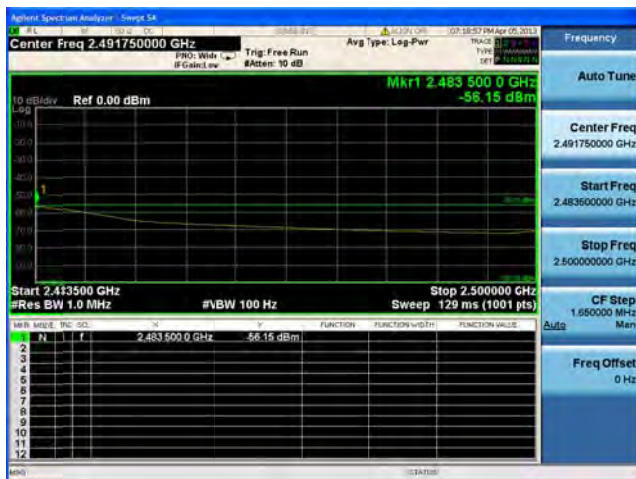
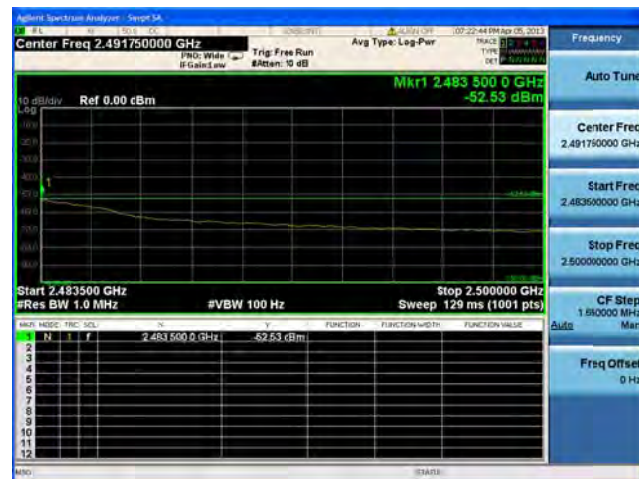
Mkr1 2.483 500 0 GHz -56.15 dBm

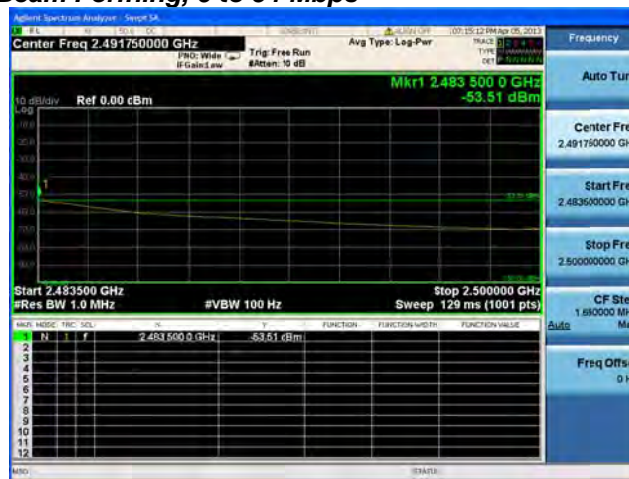
MARK IN NAME	FREQ	DBM	FUNCTION	FUNCTION'S WIDTH	FUNCTION'S VALUE
1	2.483 500 0 GHz	-56.15 dBm			
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					

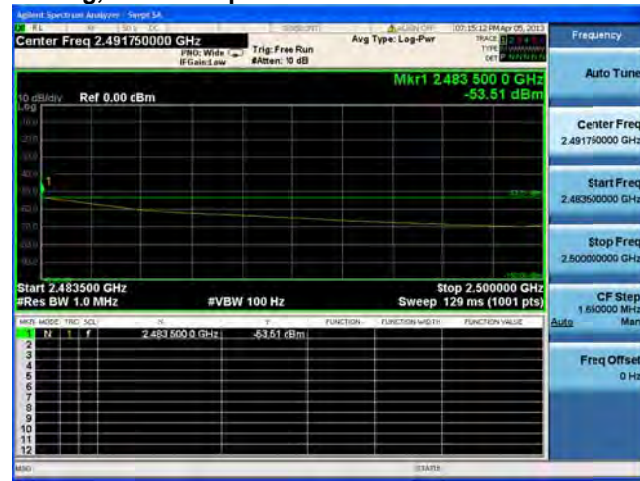
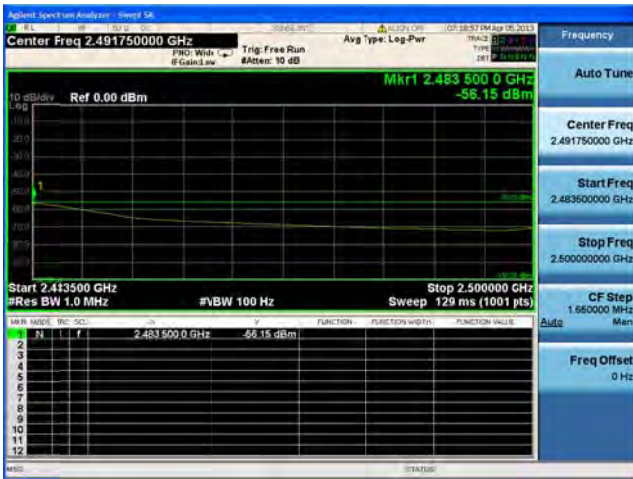
MARK

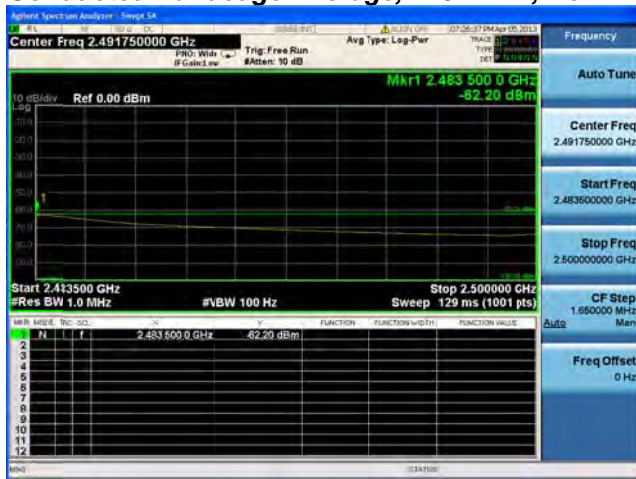
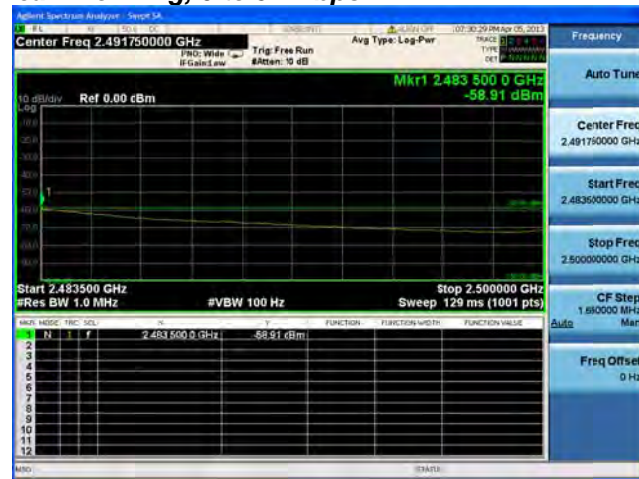
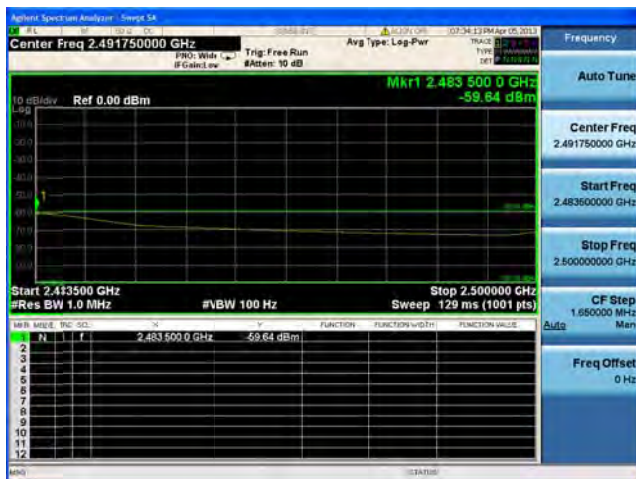
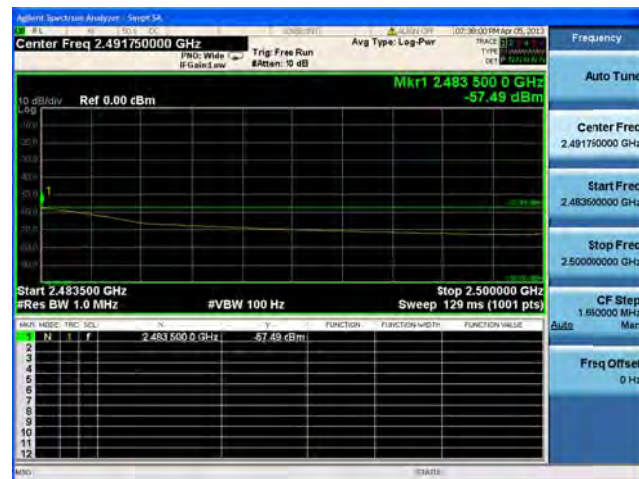
STATUS

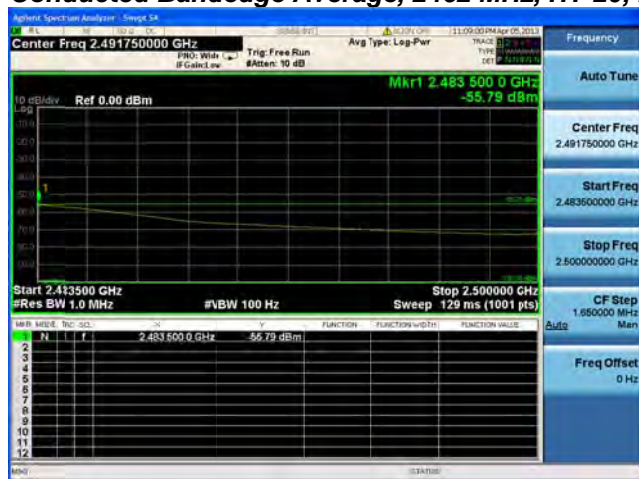
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

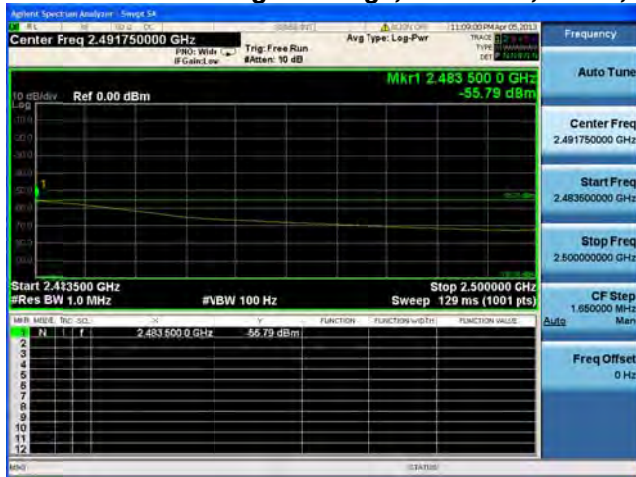
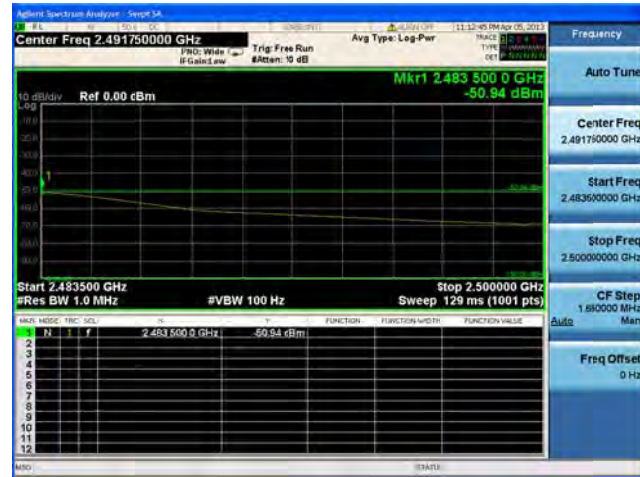
Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

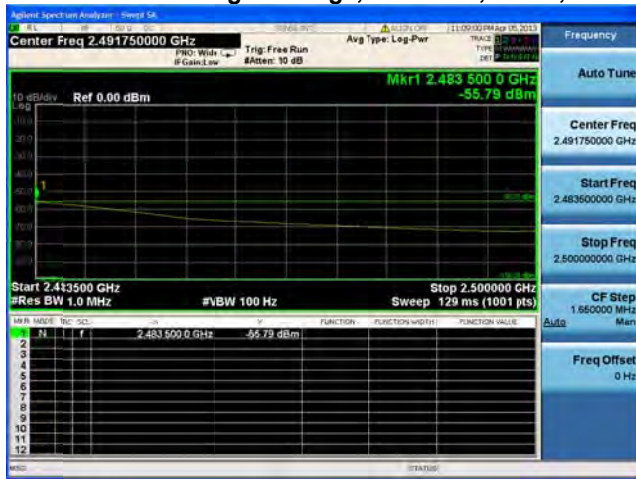
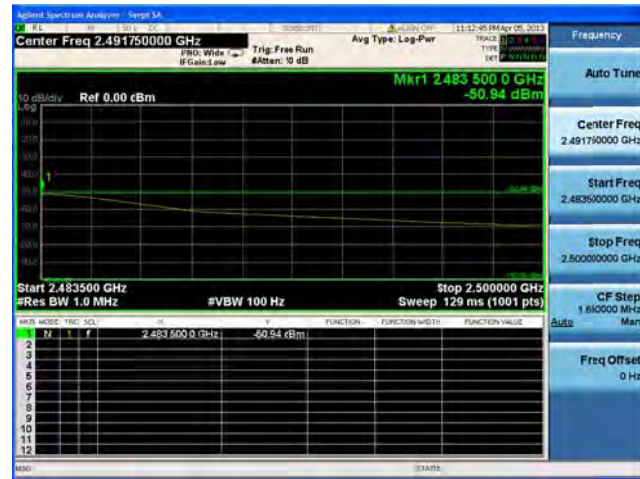
Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

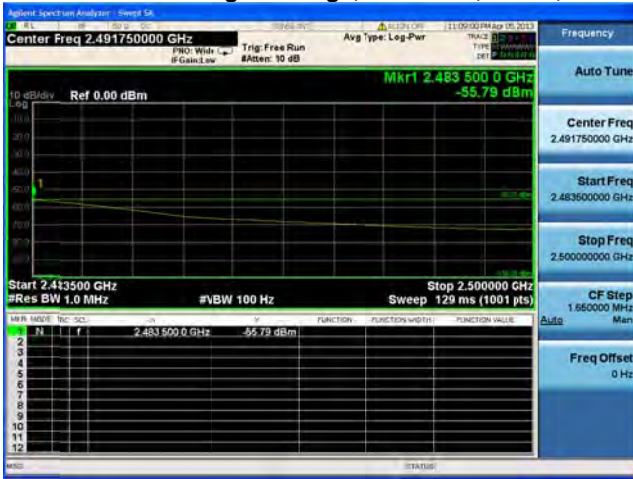
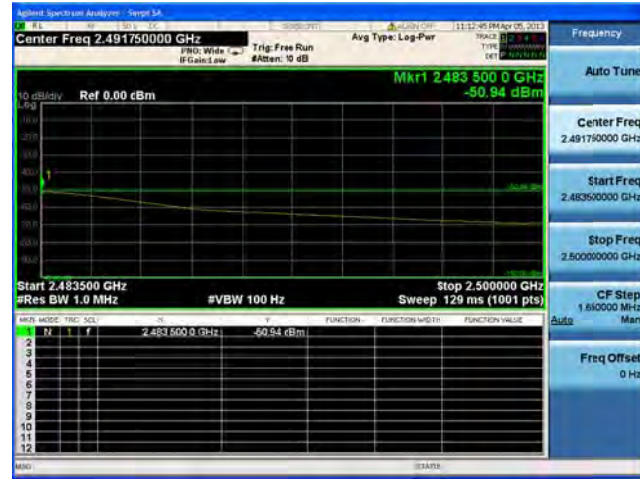
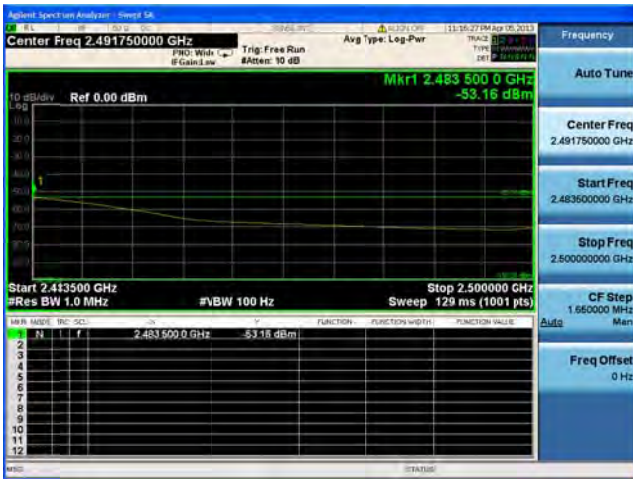
Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

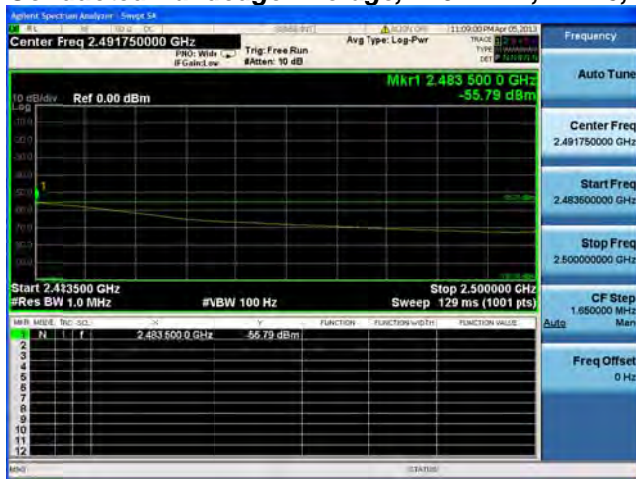
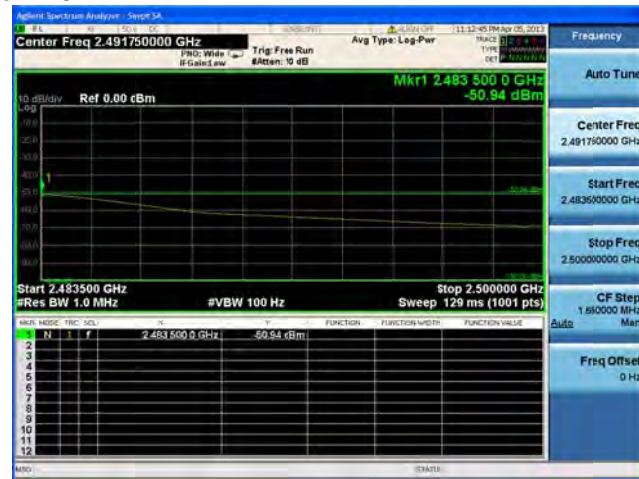
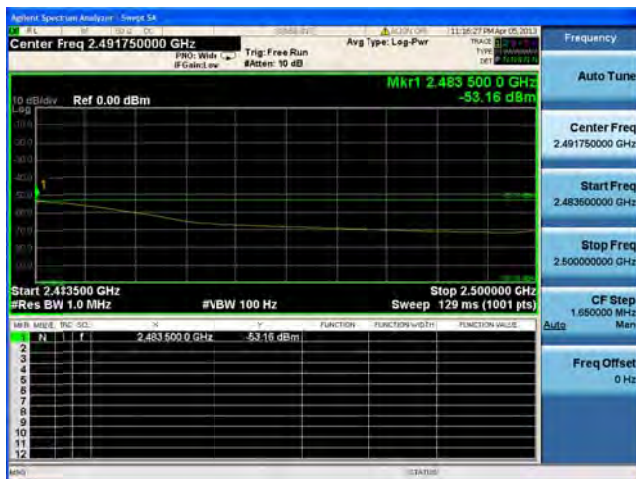
Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Center Freq 2.491750000 GHz

Auto Tune

Center Freq 2.491750000 GHz

Start Freq 2.483600000 GHz

Stop Freq 2.500000000 GHz

CF Step 1.6500000 MHz

Freq Offset 0 Hz

Start 2.4835000 GHz

Step 2.5000000 GHz

Res BW 1.0 MHz

NBW 100 Hz

Sweep 129 ms (1001 pts)

Mkr1 2.493 500 0 GHz

-55.79 dBm

W	M	F	Hz	dB	FUNCTION	FUNCTION=VdBm	FUNCTION VALUE
1	2	4	9	1	7	5	0
2	4	9	1	7	5	0	0
3	4	9	1	7	5	0	0
4	4	9	1	7	5	0	0
5	4	9	1	7	5	0	0
6	4	9	1	7	5	0	0
7	4	9	1	7	5	0	0
8	4	9	1	7	5	0	0
9	4	9	1	7	5	0	0
10	4	9	1	7	5	0	0
11	4	9	1	7	5	0	0
12	4	9	1	7	5	0	0

Keysight Spectrum Analyzer - Design SA

REF 0.00 cBm

Center Freq 2.491750000 GHz

Trig: Free Run

Avg Type: Log-Pwr

Trace 1: 2.483 500 0 GHz -50.94 dBm

10 dB/div

Ref 0.00 cBm

Mkr1 2.483 500 0 GHz -50.94 dBm

Start 2.483500 GHz

Stop 2.500000 GHz

FW: 1.0 MHz

VBW 100 Hz

Sweep 129 ms (1001 pts)

MARK	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	2.483 500 0 GHz	-50.94 dBm			

Auto Tune

Center Freq 2.491750000 GHz

Start Freq 2.483500000 GHz

Stop Freq 2.500000000 GHz

CF Step 1.580000 MHz

Auto

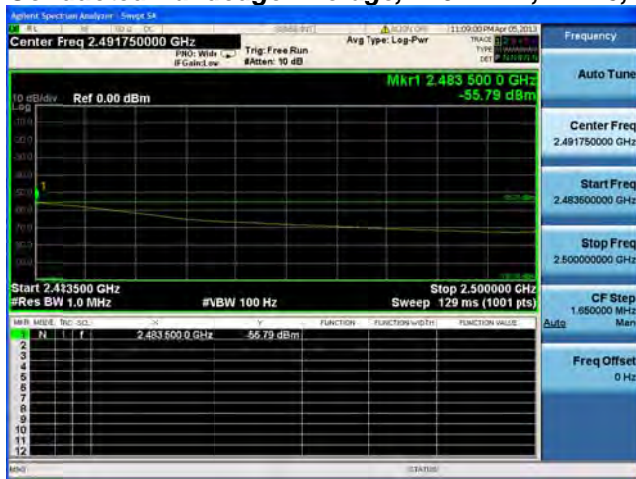
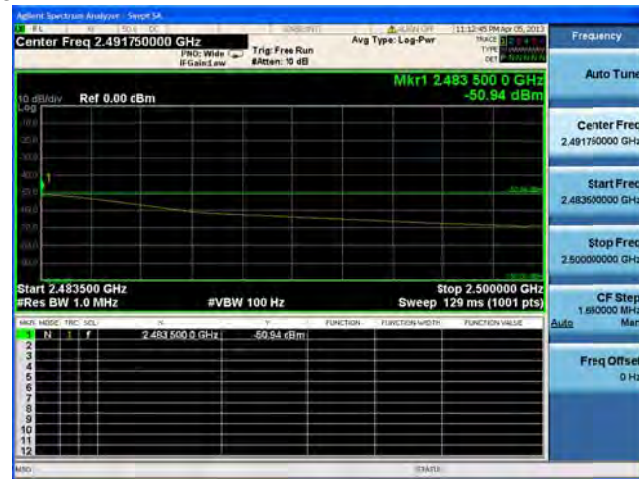
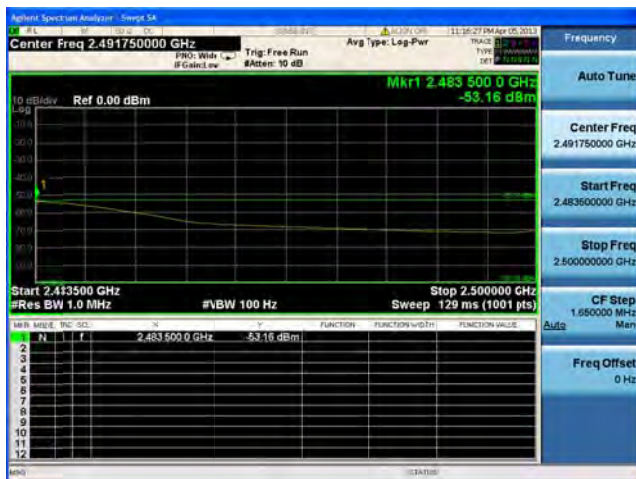
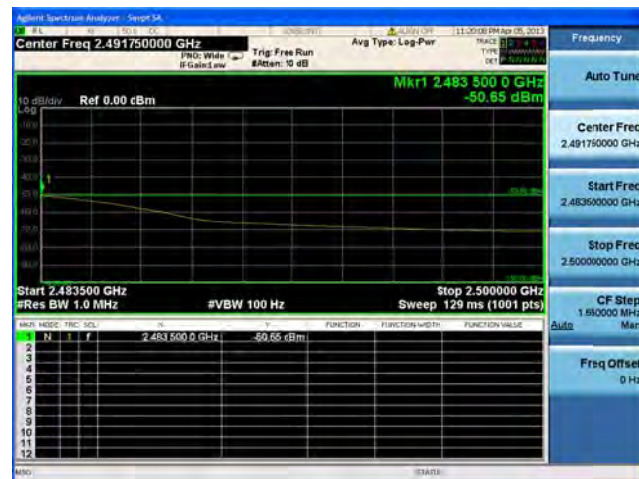
Freq Offset 0 Hz

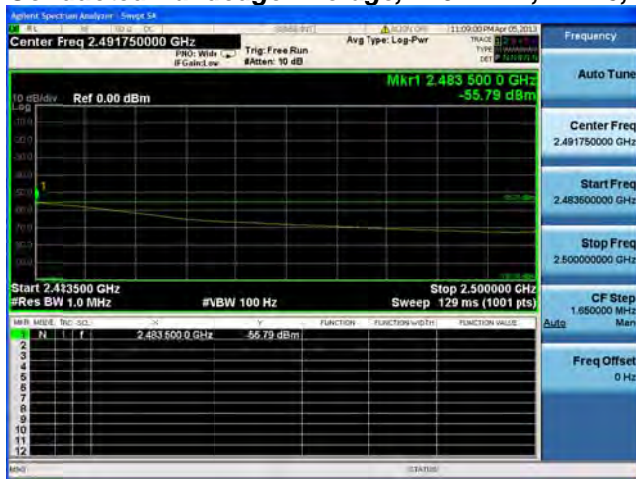
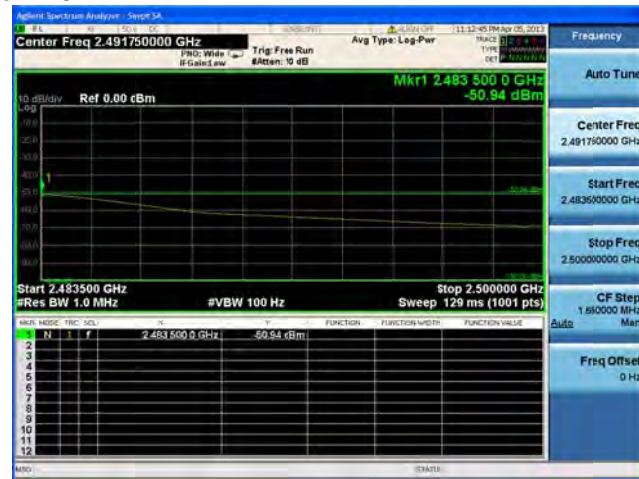
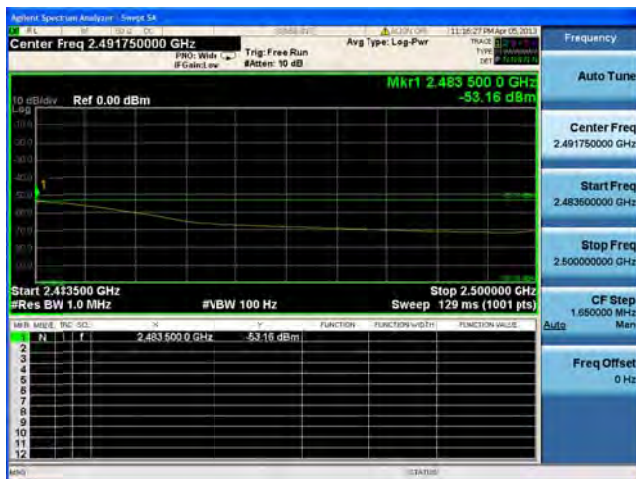
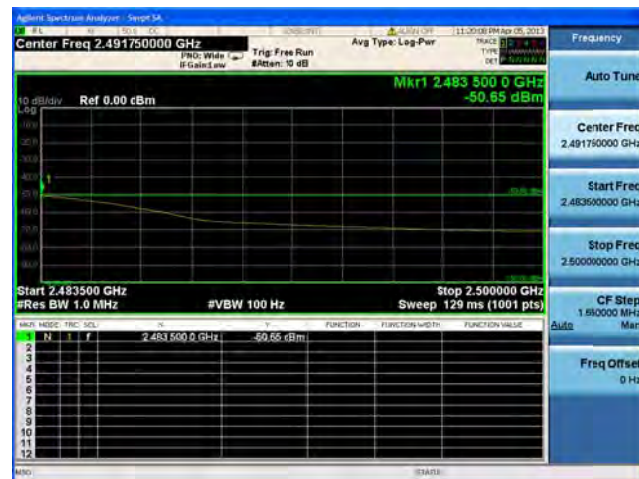
MSO

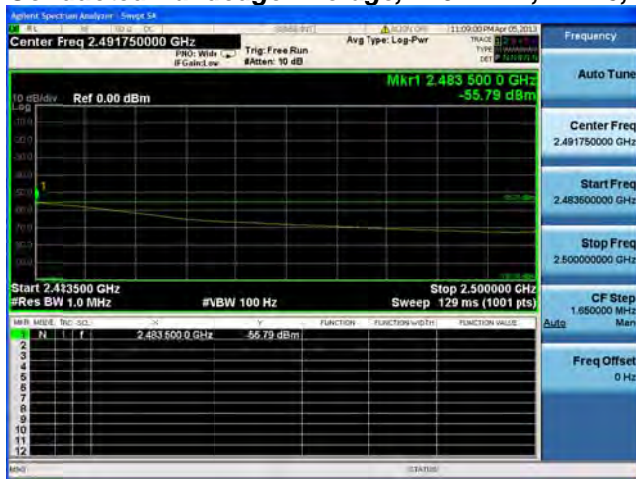
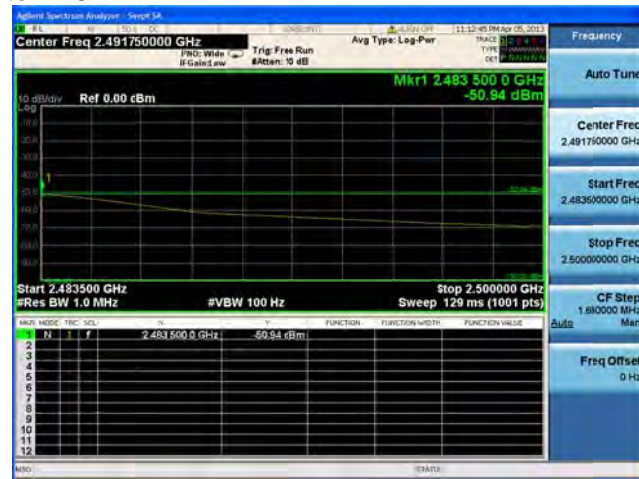
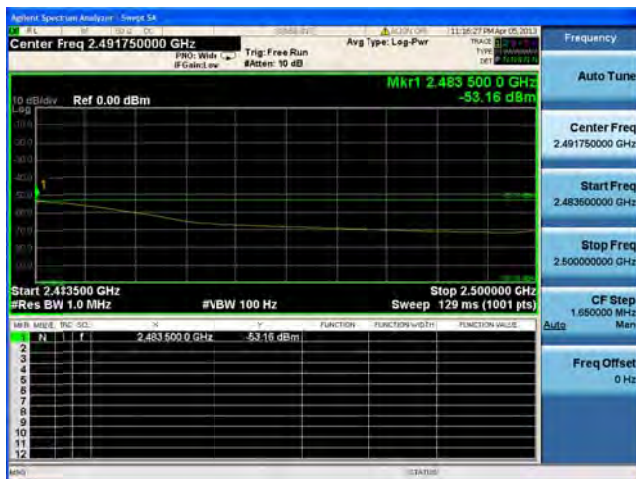
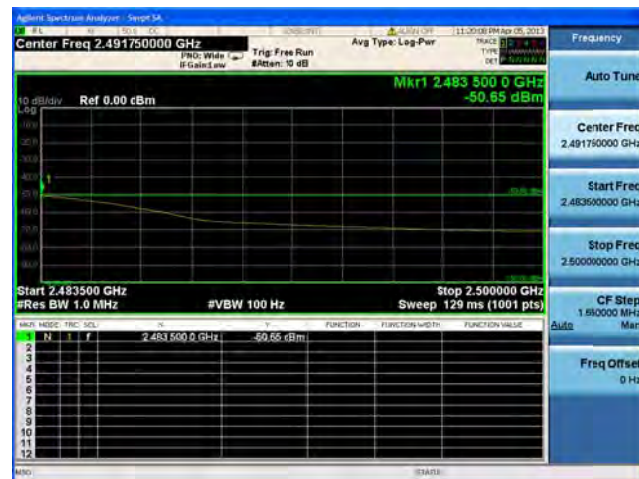
START

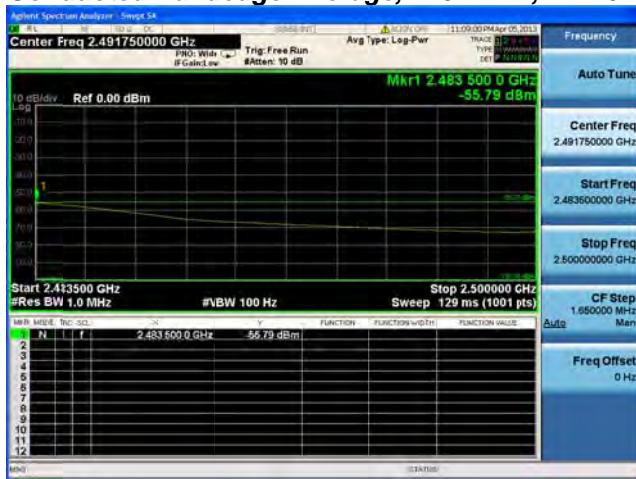
Figure 1: Spectrum Analyzer screenshot showing a signal at 2.4835000 GHz with a power level of -53.16 dBm. The plot shows a single peak at the center frequency. The x-axis is frequency in GHz, and the y-axis is power in dBm. The plot is titled "Center Freq 2.491750000 GHz".

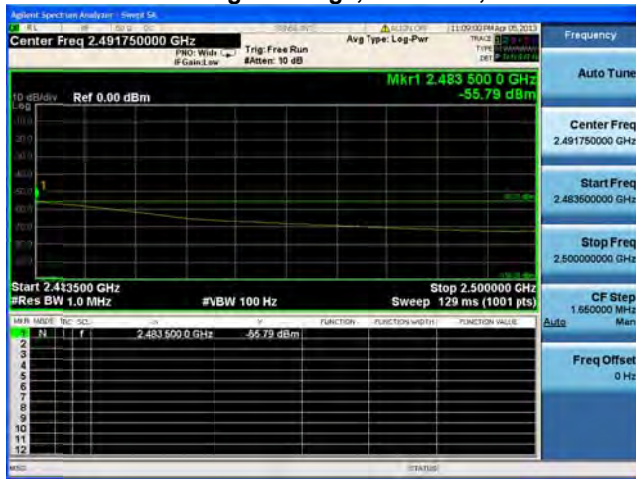
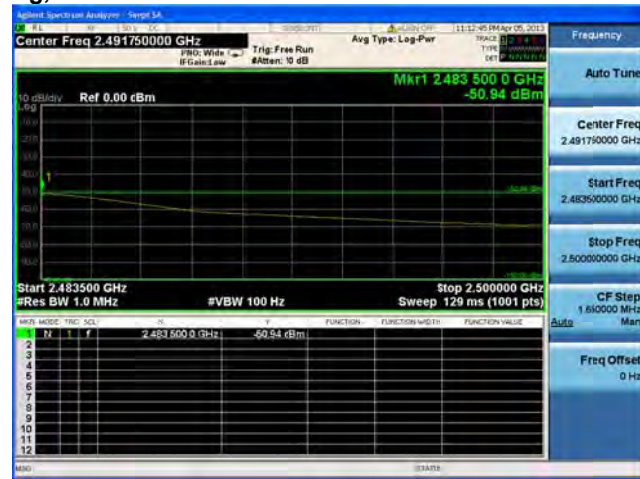
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

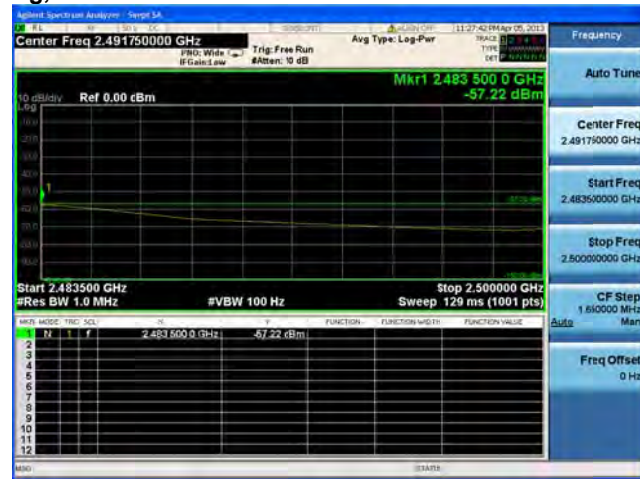
**Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7****Antenna A****Antenna B****Antenna C****Antenna D**

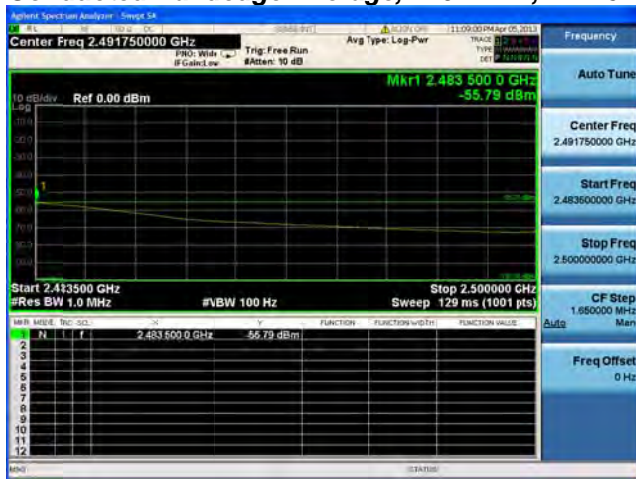
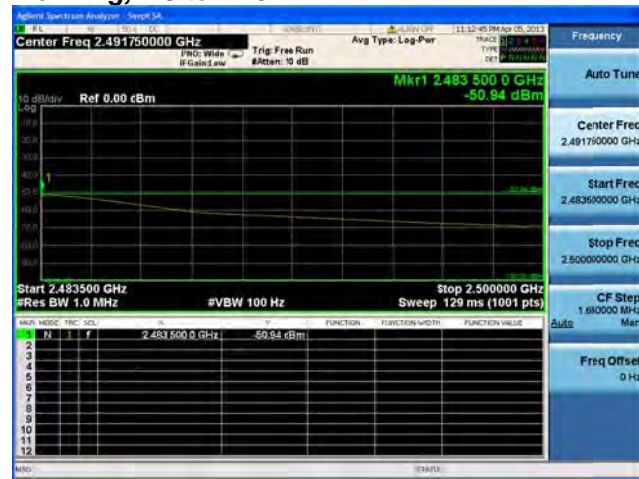
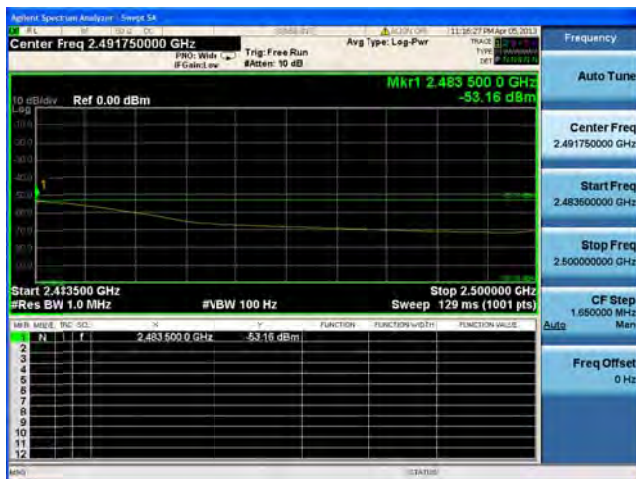
Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

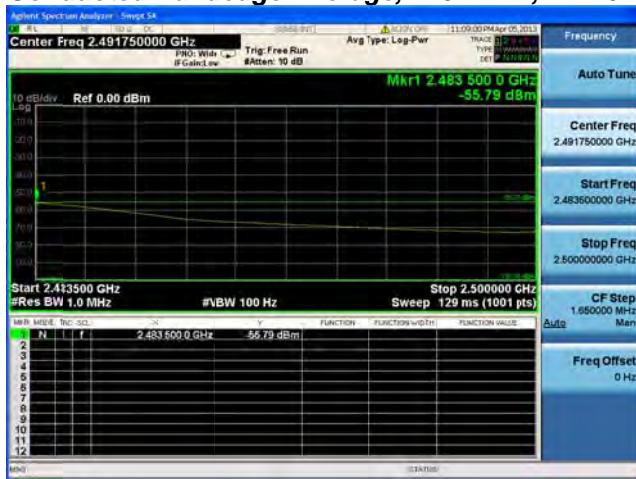
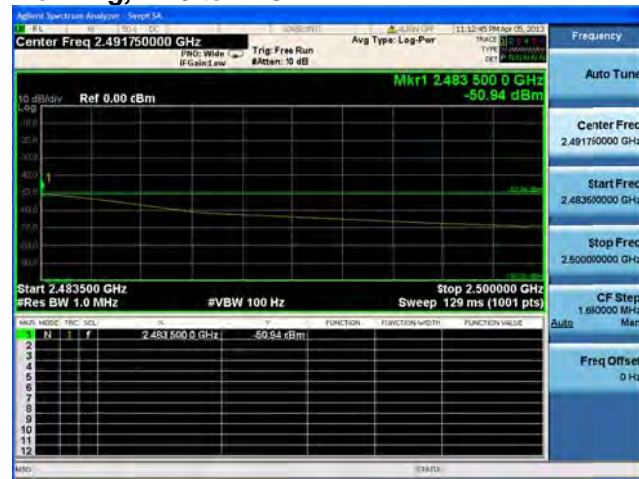
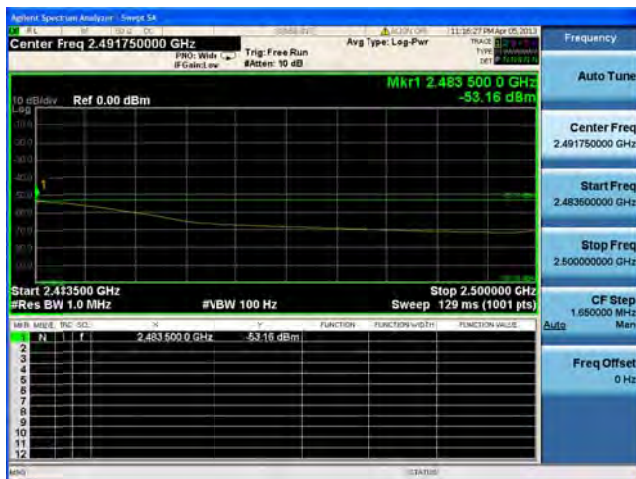
Conducted Bandedge Average, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

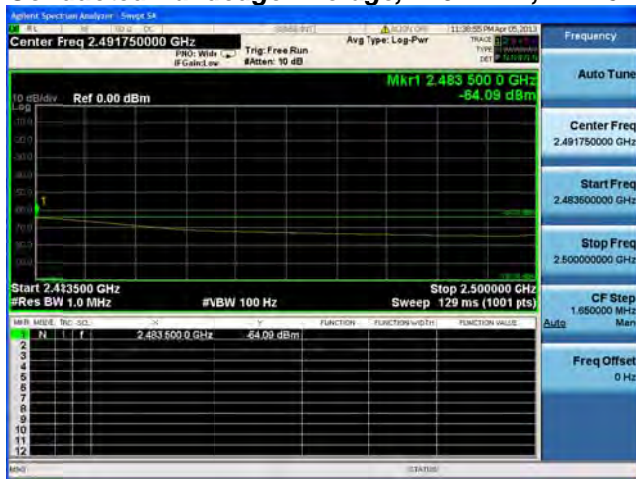
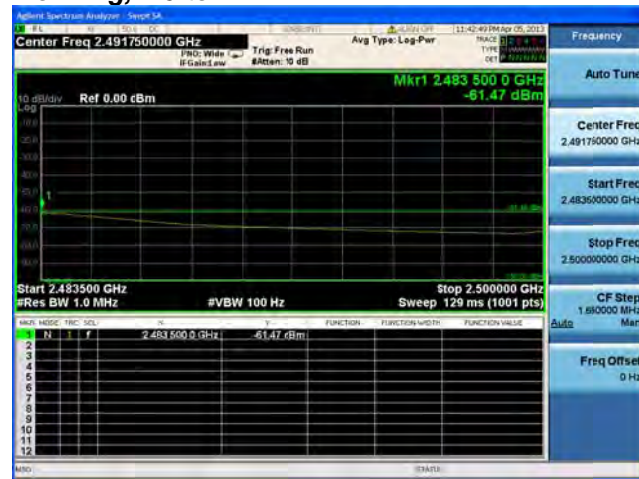
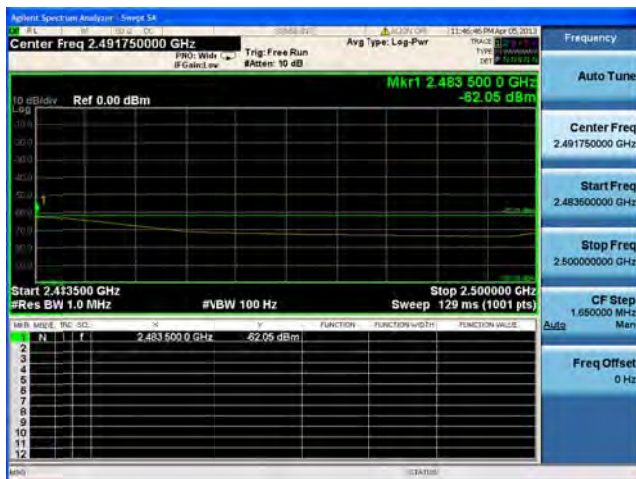
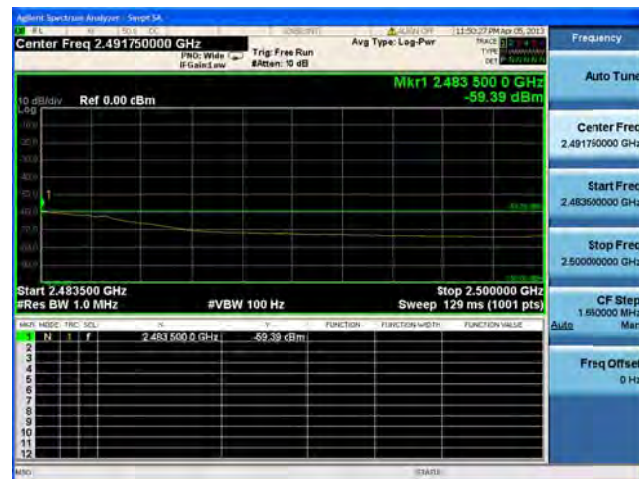
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

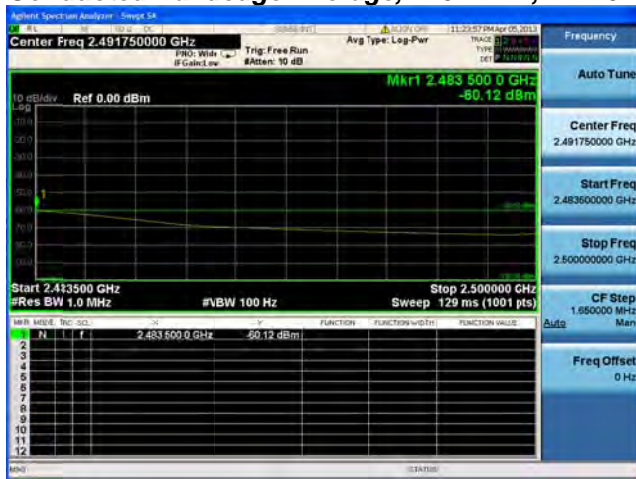
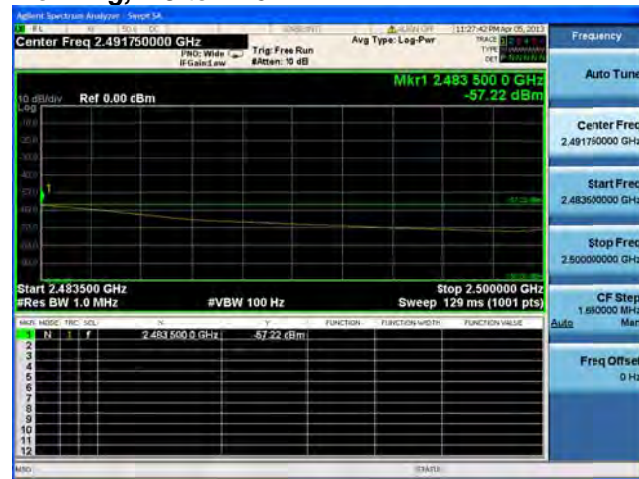
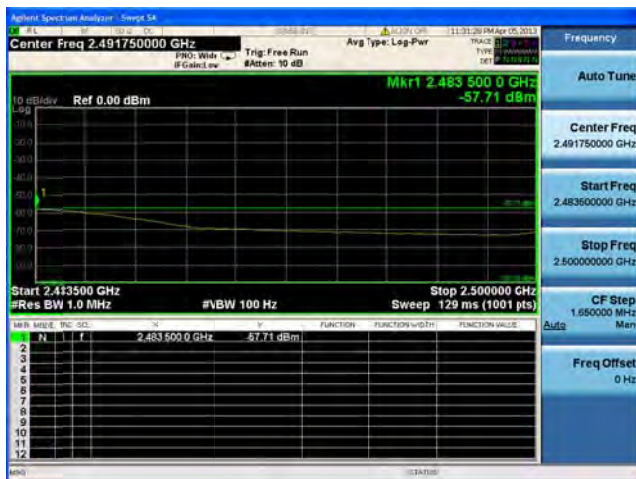
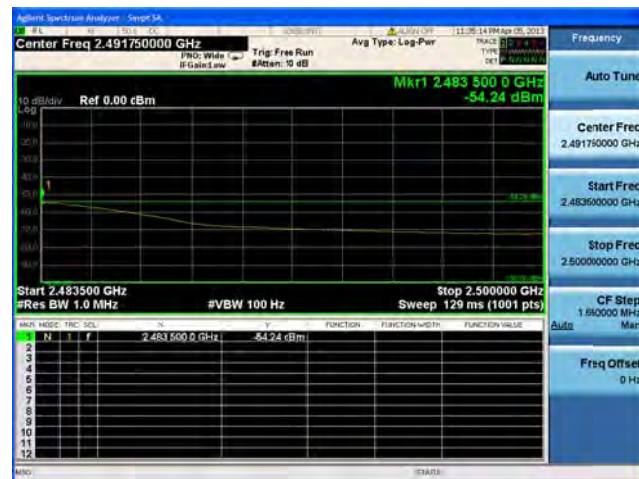
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

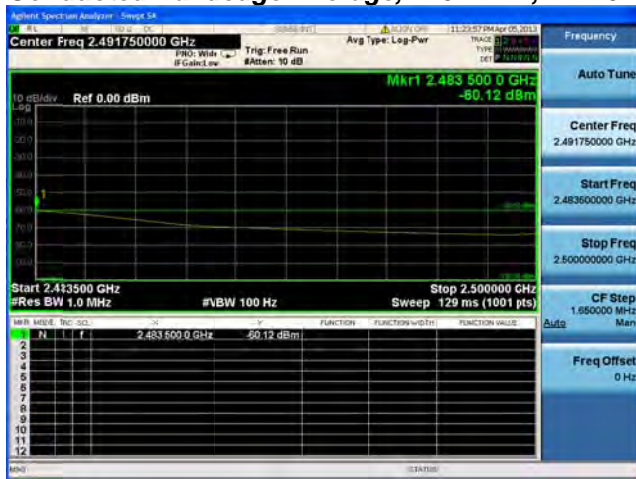
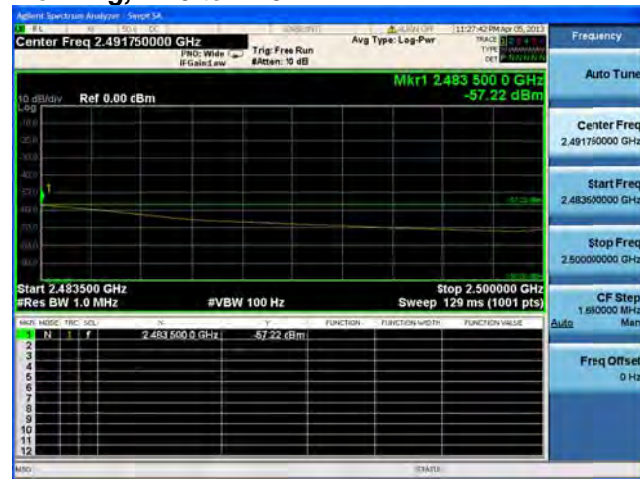
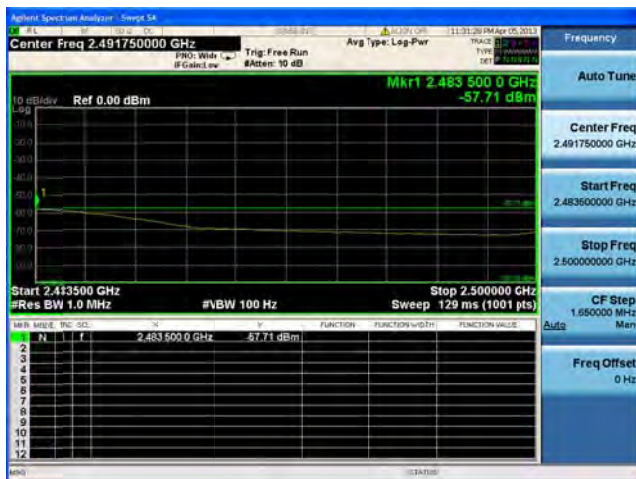
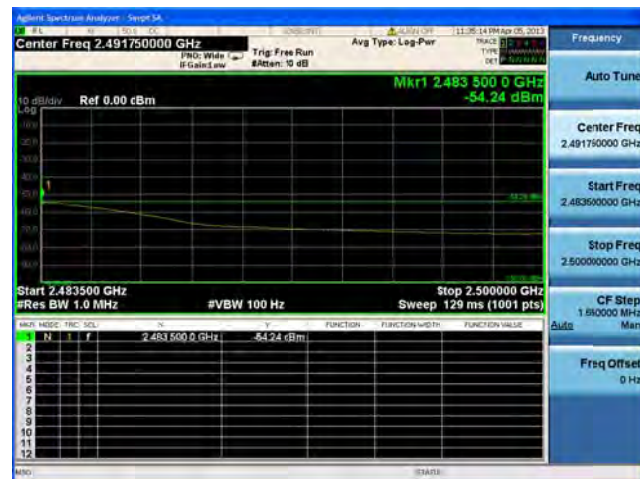
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

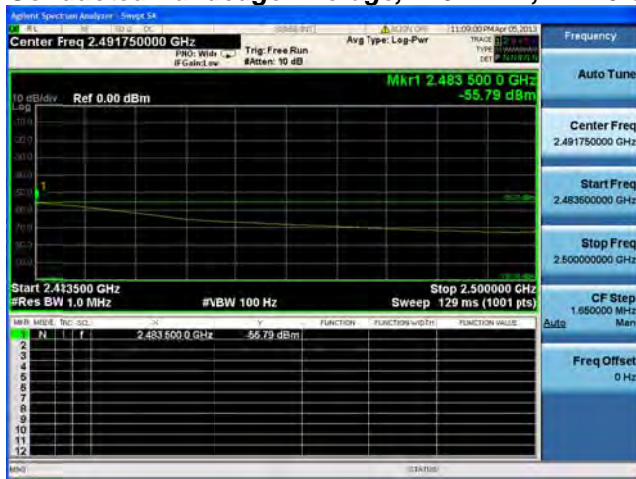
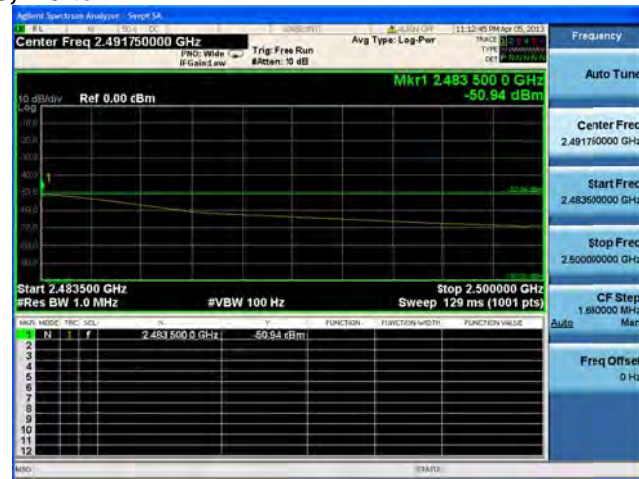
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

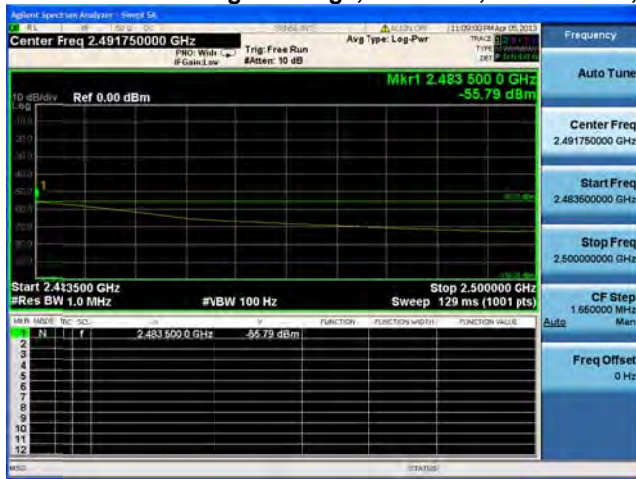
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

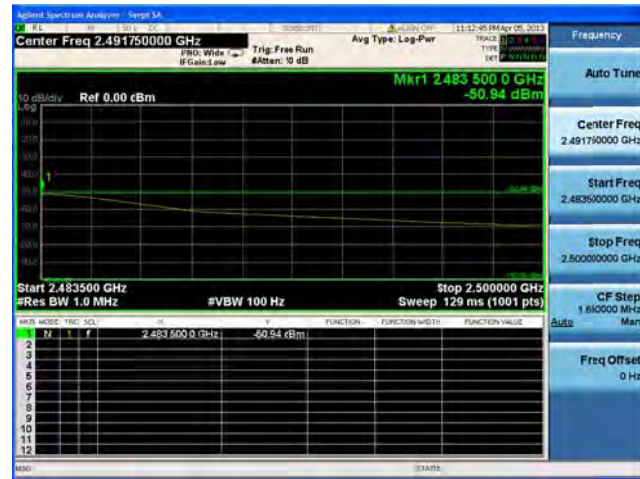
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

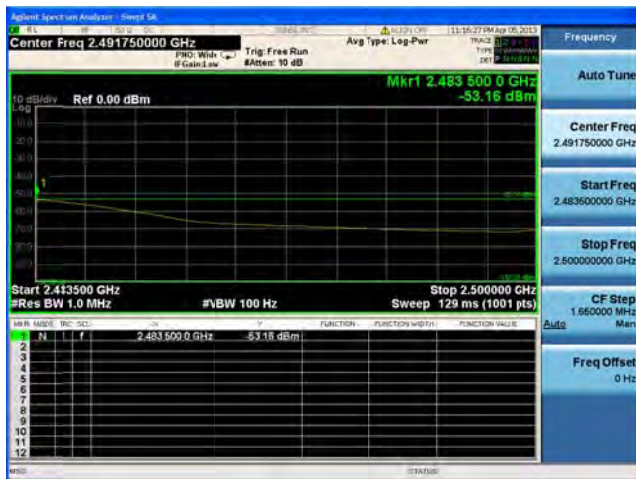
Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7



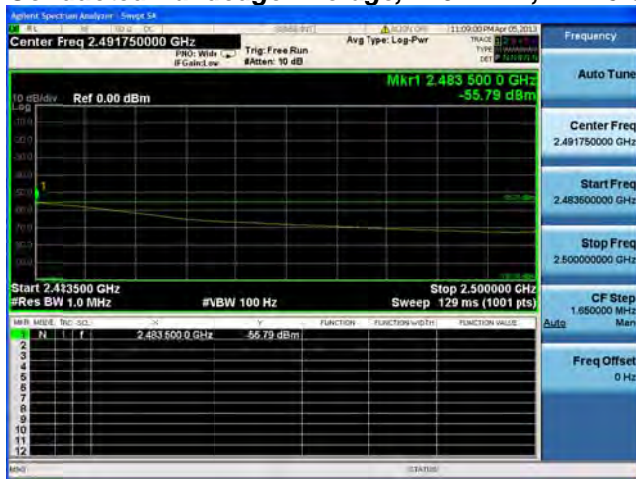
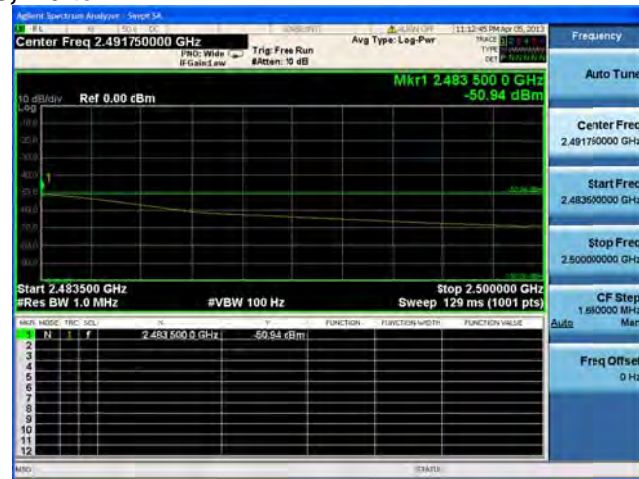
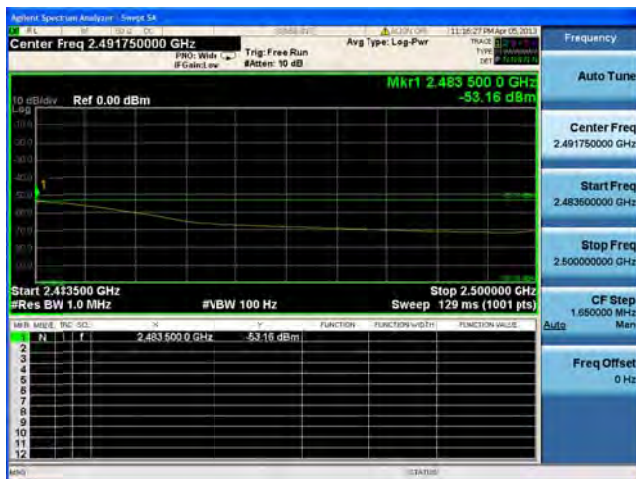
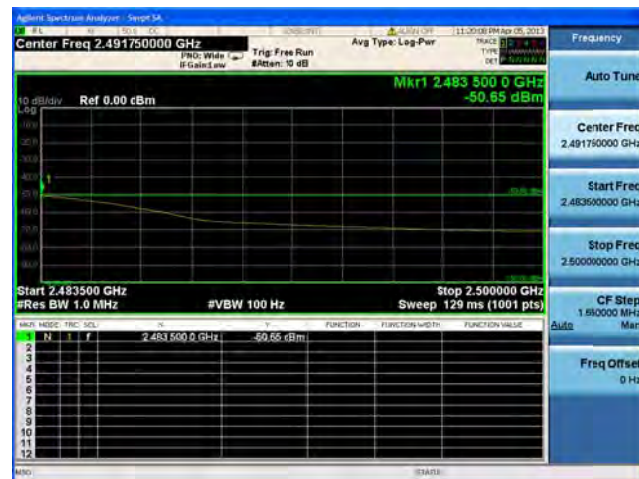
Antenna A



Antenna B



Antenna C

Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



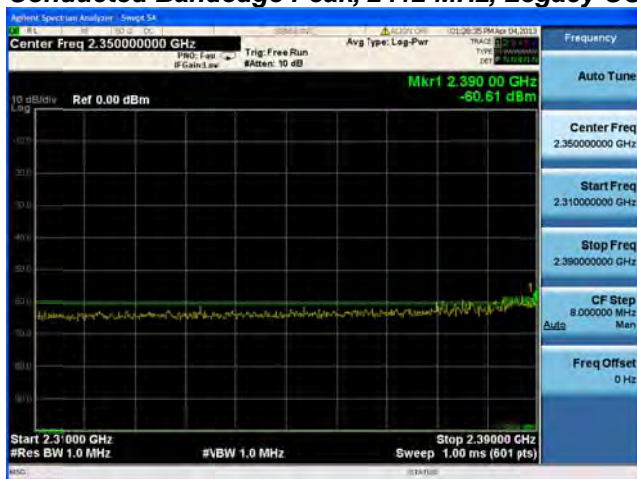
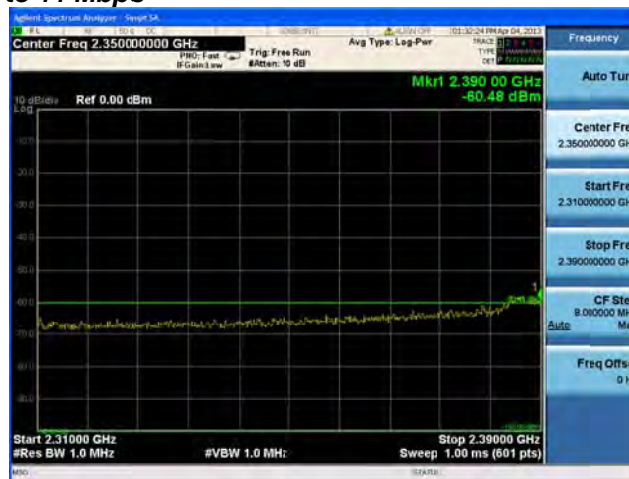
Peak Bandedge Data

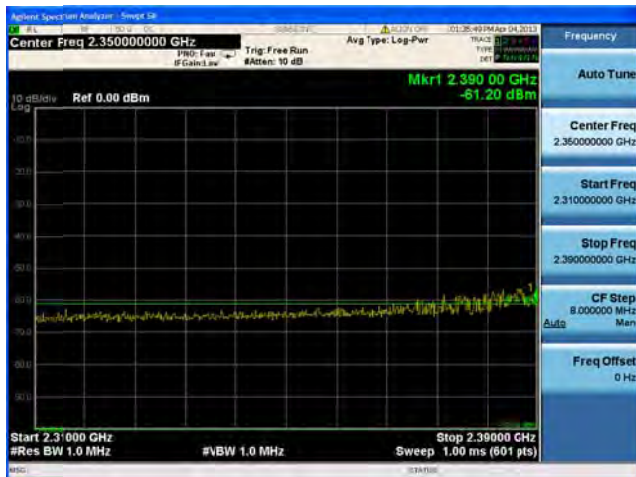
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	2	-60.6				-58.6	-21.25	37.4
	Legacy CCK, 1 to 11 Mbps	2	2	-60.6	-60.5			-55.5	-21.25	34.3
	Legacy CCK, 1 to 11 Mbps	3	2	-60.6	-60.5	-61.2		-54.0	-21.25	32.7
	Legacy CCK, 1 to 11 Mbps	4	2	-60.6	-60.5	-61.2	-59.3	-52.3	-21.25	31.1
	Non HT-20, 6 to 54 Mbps	1	2	-40.6				-38.6	-21.25	17.4
	Non HT-20, 6 to 54 Mbps	2	2	-40.6	-37.9			-34.0	-21.25	12.8
	Non HT-20, 6 to 54 Mbps	3	2	-40.6	-37.9	-39.9		-32.5	-21.25	11.3
	Non HT-20, 6 to 54 Mbps	4	2	-40.6	-37.9	-39.9	-36.9	-30.6	-21.25	9.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	-40.6	-37.9			-31.0	-21.25	9.8
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	-40.6	-37.9	-39.9		-27.7	-21.25	6.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	-40.6	-37.9	-39.9	-36.9	-24.6	-21.25	3.3
	HT-20, M0 to M7	1	2	-38.3				-36.3	-21.25	15.1
	HT-20, M0 to M7	2	2	-38.3	-36.2			-32.1	-21.25	10.9
	HT-20, M8 to M15	2	2	-38.3	-36.2			-32.1	-21.25	10.9
	HT-20, M0 to M7	3	2	-38.3	-36.2	-34.6		-29.3	-21.25	8.1
	HT-20, M8 to M15	3	2	-38.3	-36.2	-34.6		-29.3	-21.25	8.1
	HT-20, M16 to M23	3	2	-38.3	-36.2	-34.6		-29.3	-21.25	8.1
	HT-20, M0 to M7	4	2	-38.3	-36.2	-34.6	-30.8	-26.1	-21.25	4.8
	HT-20, M8 to M15	4	2	-38.3	-36.2	-34.6	-30.8	-26.1	-21.25	4.8
	HT-20, M16 to M23	4	2	-38.3	-36.2	-34.6	-30.8	-26.1	-21.25	4.8
	HT-20 Beam Forming, M0 to M7	2	5	-38.3	-36.2			-29.1	-21.25	7.9
	HT-20 Beam Forming, M8 to M15	2	2	-38.3	-36.2			-32.1	-21.25	10.9
	HT-20 Beam Forming, M0 to M7	3	7	-38.3	-36.2	-34.6		-24.5	-21.25	3.3
	HT-20 Beam Forming, M8 to M15	3	4	-38.3	-36.2	-34.6		-27.5	-21.25	6.3
	HT-20 Beam Forming, M16 to M23	3	2	-38.3	-36.2	-34.6		-29.3	-21.25	8.1
	HT-20 Beam Forming, M0 to M7	4	8	-39.2	-36.2	-40.1	-37.7	-24.0	-21.25	2.8
	HT-20 Beam Forming, M8 to M15	4	5	-38.3	-36.2	-34.6	-30.8	-23.1	-21.25	1.8
	HT-20 Beam Forming, M16 to M23	4	3	-38.3	-36.2	-34.6	-30.8	-24.9	-21.25	3.6
	HT-20 STBC, M0 to M7	2	2	-38.3	-36.2			-32.1	-21.25	10.9
	HT-20 STBC, M0 to M7	3	2	-38.3	-36.2	-34.6		-29.3	-21.25	8.1
	HT-20 STBC, M0 to M7	4	2	-38.3	-36.2	-34.6	-30.8	-26.1	-21.25	4.8

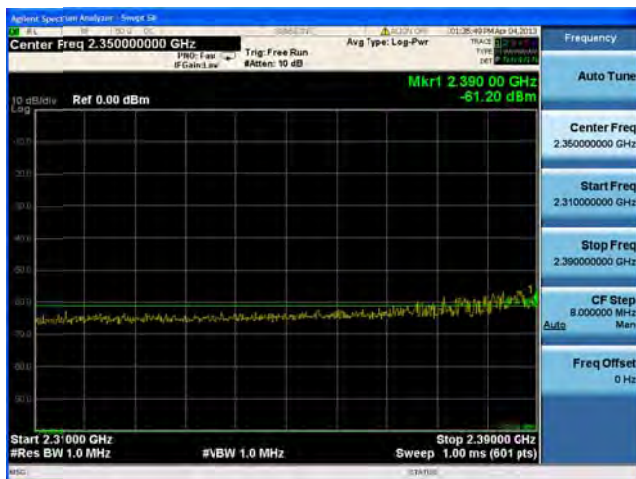


2462	Legacy CCK, 1 to 11 Mbps	1	2	<u>-61.2</u>				-59.2	-21.25	38.0
	Legacy CCK, 1 to 11 Mbps	2	2	<u>-61.2</u>	<u>-59.9</u>			-55.5	-21.25	34.2
	Legacy CCK, 1 to 11 Mbps	3	2	<u>-61.2</u>	<u>-59.9</u>	<u>-55.4</u>		-51.3	-21.25	30.1
	Legacy CCK, 1 to 11 Mbps	4	2	<u>-61.2</u>	<u>-59.9</u>	<u>-55.4</u>	<u>-59.6</u>	-50.4	-21.25	29.1
	Non HT-20, 6 to 54 Mbps	1	2	<u>-36.2</u>				-34.2	-21.25	13.0
	Non HT-20, 6 to 54 Mbps	2	2	<u>-36.2</u>	<u>-33.0</u>			-29.3	-21.25	8.1
	Non HT-20, 6 to 54 Mbps	3	2	<u>-36.2</u>	<u>-33.0</u>	<u>-37.8</u>		-28.4	-21.25	7.2
	Non HT-20, 6 to 54 Mbps	4	2	<u>-36.2</u>	<u>-33.0</u>	<u>-37.8</u>	<u>-32.6</u>	-26.4	-21.25	5.1
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	5	<u>-36.2</u>	<u>-33.0</u>			-26.3	-21.25	5.1
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	7	<u>-36.2</u>	<u>-33.0</u>	<u>-37.8</u>		-23.6	-21.25	2.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	8	<u>-44.8</u>	<u>-38.9</u>	<u>-42.4</u>	<u>-36.1</u>	-25.3	-21.25	4.1
	HT-20, M0 to M7	1	2	<u>-31.2</u>				-29.2	-21.25	8.0
	HT-20, M0 to M7	2	2	<u>-31.2</u>	<u>-31.1</u>			-26.1	-21.25	4.9
	HT-20, M8 to M15	2	2	<u>-31.2</u>	<u>-31.1</u>			-26.1	-21.25	4.9
	HT-20, M0 to M7	3	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-25.3	-21.25	4.1
	HT-20, M8 to M15	3	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-25.3	-21.25	4.1
	HT-20, M16 to M23	3	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-25.3	-21.25	4.1
	HT-20, M0 to M7	4	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>	<u>-27.6</u>	-22.4	-21.25	1.2
	HT-20, M8 to M15	4	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>	<u>-27.6</u>	-22.4	-21.25	1.2
	HT-20, M16 to M23	4	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>	<u>-27.6</u>	-22.4	-21.25	1.2
	HT-20 Beam Forming, M0 to M7	2	5	<u>-31.2</u>	<u>-31.1</u>			-23.1	-21.25	1.9
	HT-20 Beam Forming, M8 to M15	2	2	<u>-31.2</u>	<u>-31.1</u>			-26.1	-21.25	4.9
	HT-20 Beam Forming, M0 to M7	3	7	<u>-37.3</u>	<u>-34.9</u>	<u>-34.3</u>		-23.7	-21.25	2.5
	HT-20 Beam Forming, M8 to M15	3	4	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-23.5	-21.25	2.3
	HT-20 Beam Forming, M16 to M23	3	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-25.3	-21.25	4.1
	HT-20 Beam Forming, M0 to M7	4	8	<u>-42.7</u>	<u>-38.0</u>	<u>-42.4</u>	<u>-40.8</u>	-26.5	-21.25	5.3
	HT-20 Beam Forming, M8 to M15	4	5	<u>-37.3</u>	<u>-34.9</u>	<u>-34.9</u>	<u>-31.7</u>	-23.2	-21.25	2.0
	HT-20 Beam Forming, M16 to M23	4	3	<u>-37.3</u>	<u>-34.9</u>	<u>-34.3</u>	<u>-31.7</u>	-24.9	-21.25	3.6
	HT-20 STBC, M0 to M7	2	2	<u>-31.2</u>	<u>-31.1</u>			-26.1	-21.25	4.9
	HT-20 STBC, M0 to M7	3	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>		-25.3	-21.25	4.1
	HT-20 STBC, M0 to M7	4	2	<u>-31.2</u>	<u>-31.1</u>	<u>-34.9</u>	<u>-27.6</u>	-22.4	-21.25	1.2

Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

**Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

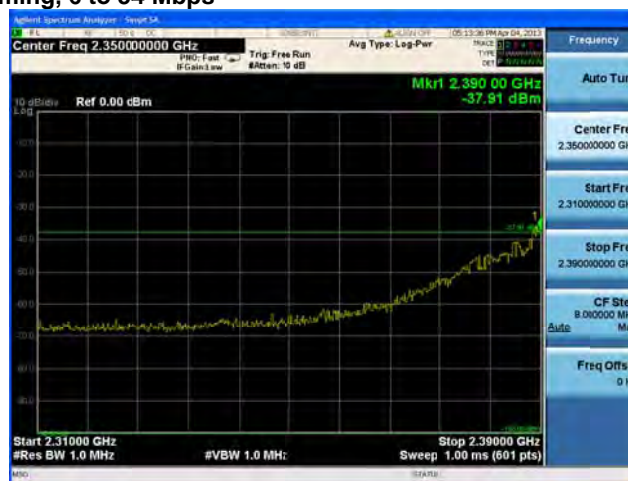
Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

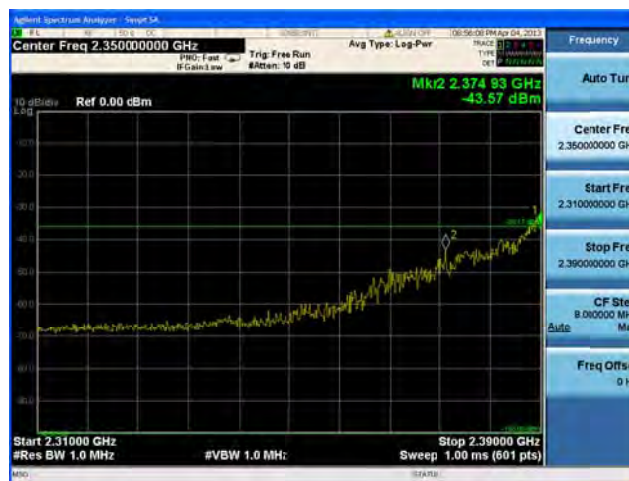
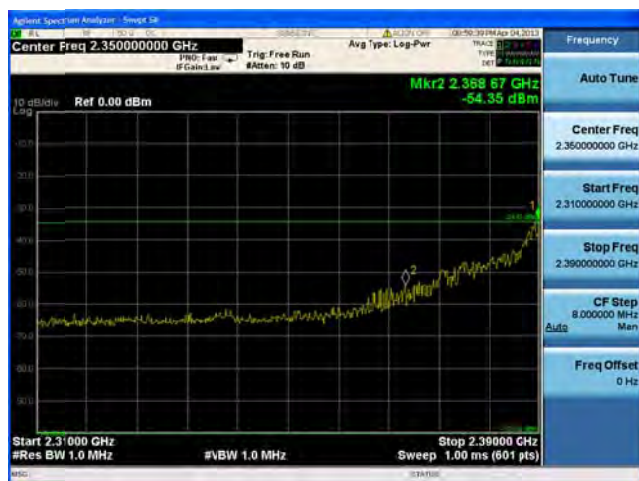
Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

**Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A**

Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

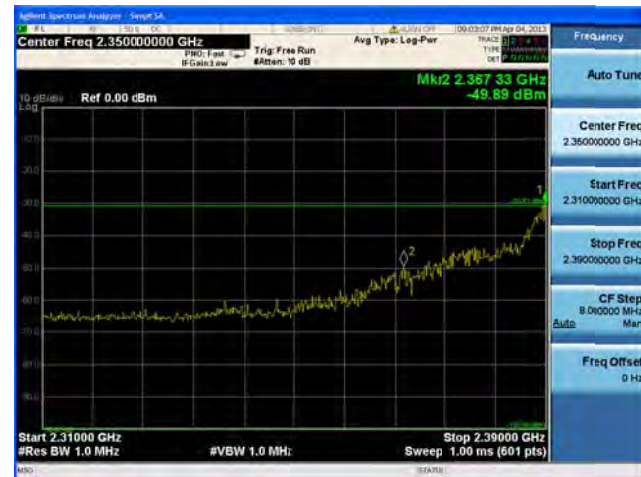
Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

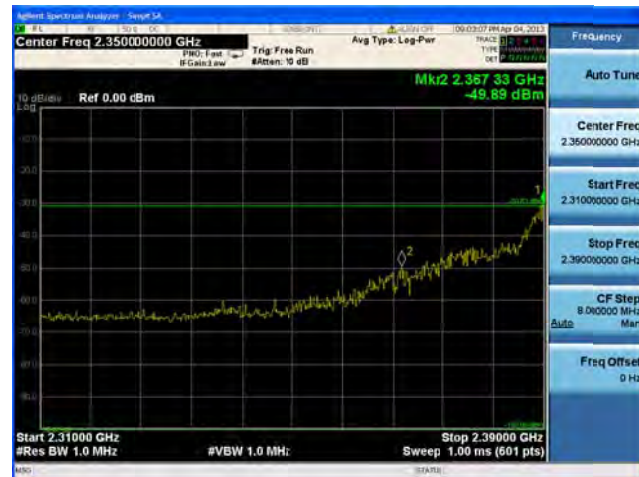
Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

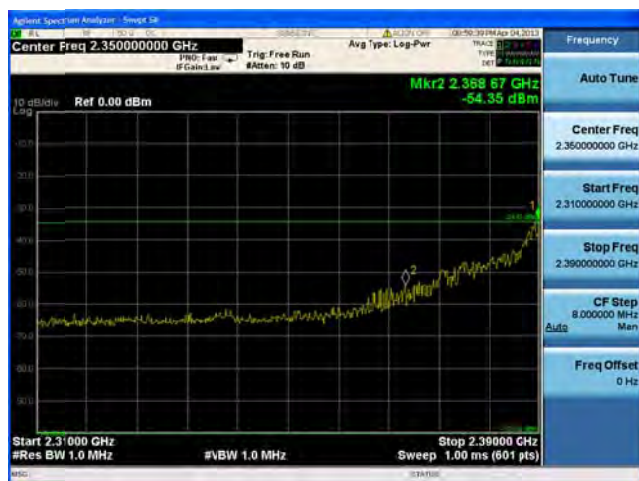
Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

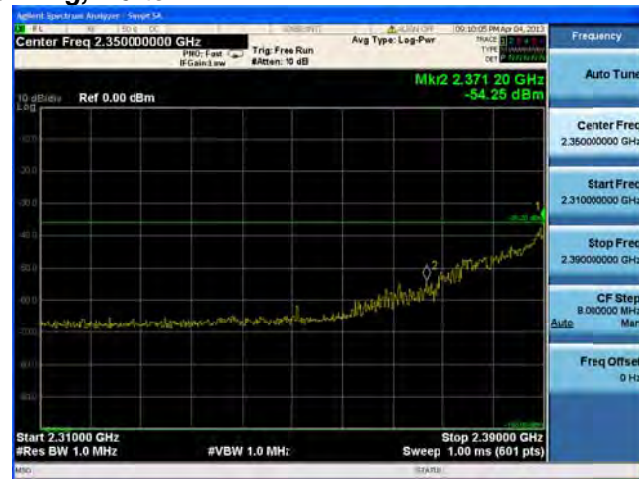
Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

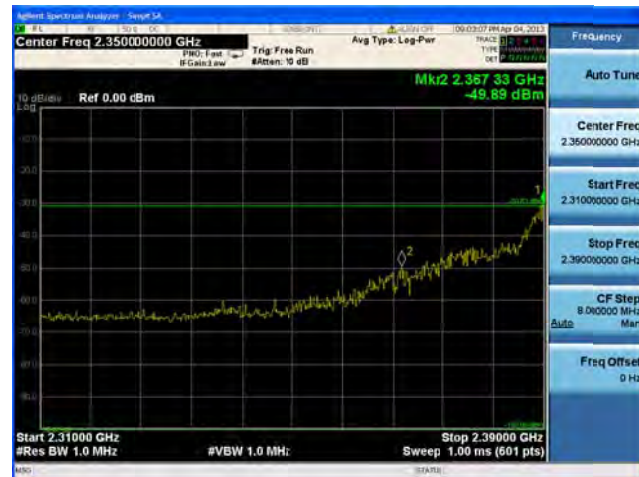
Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

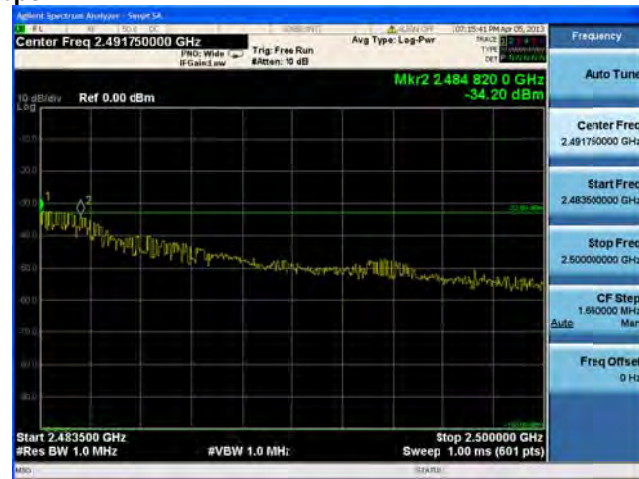
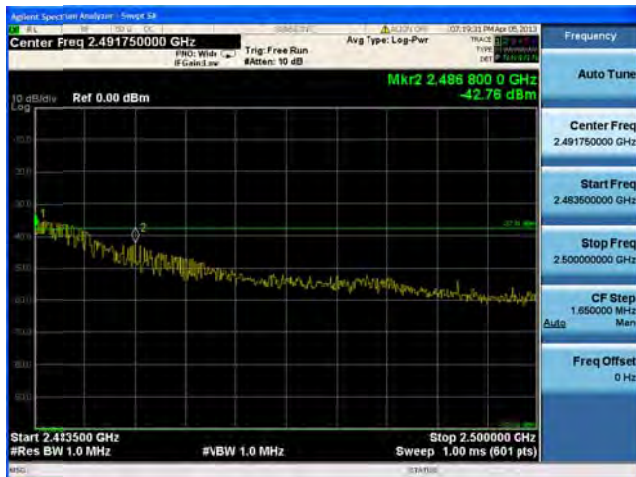
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

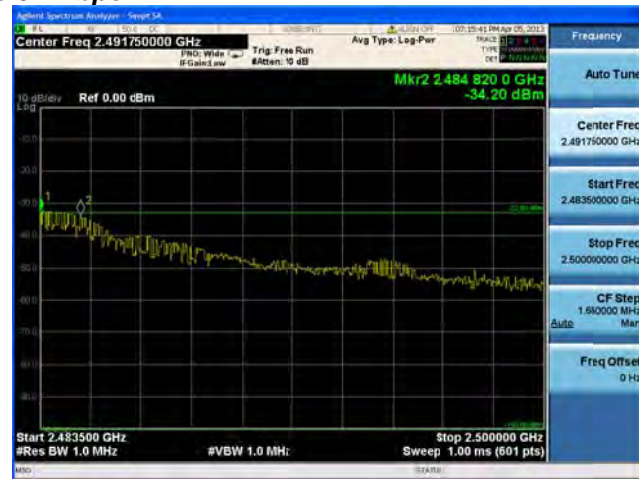
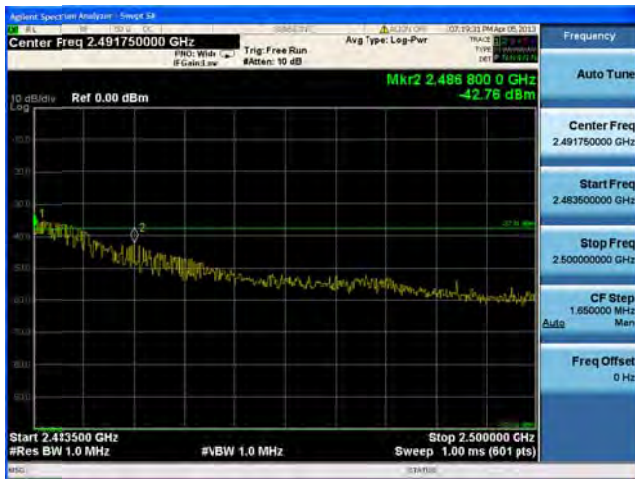
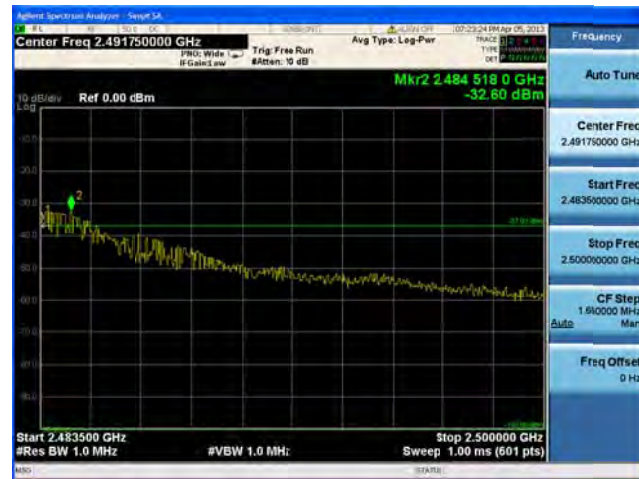
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

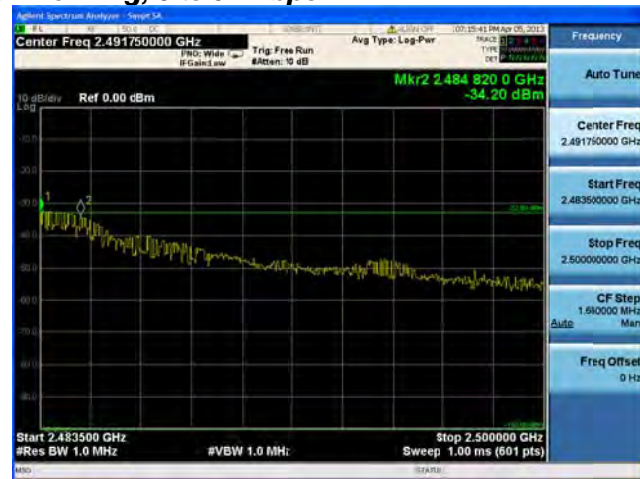
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

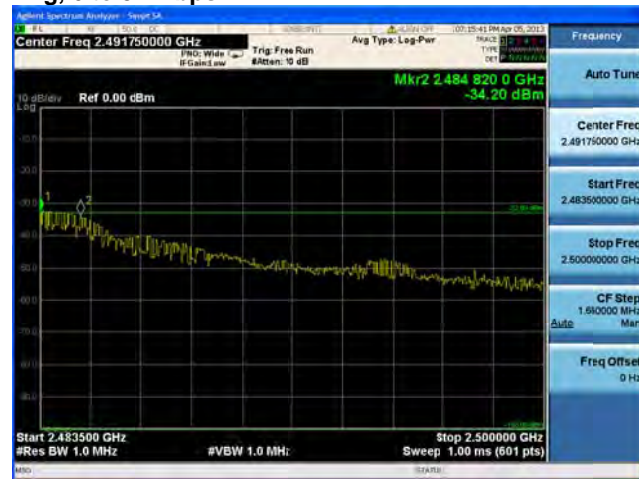
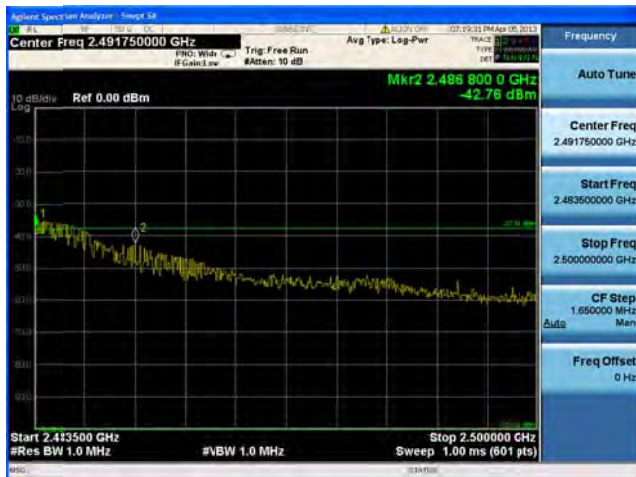
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

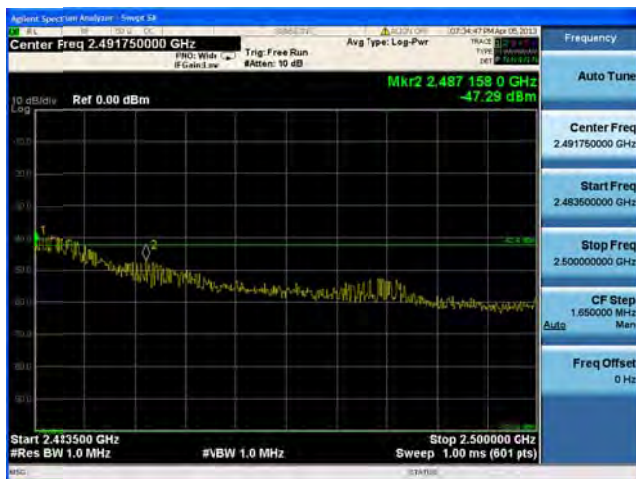
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

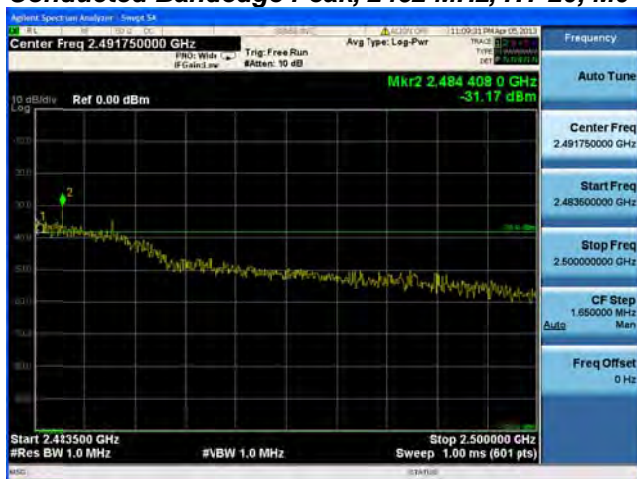
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

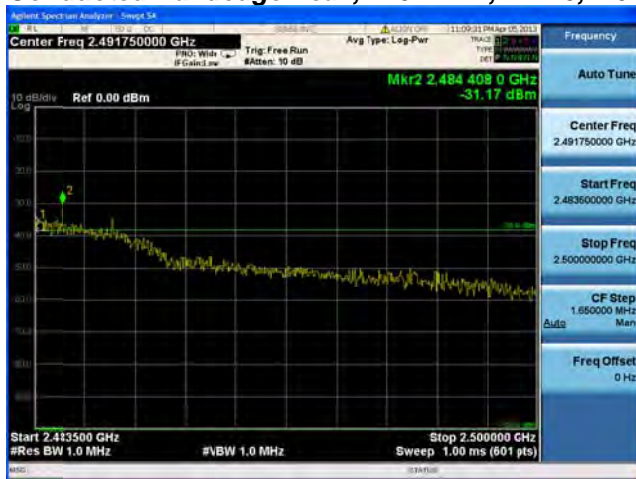
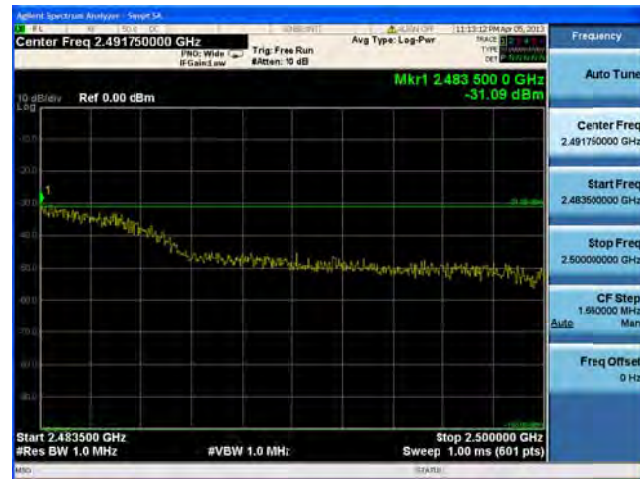
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

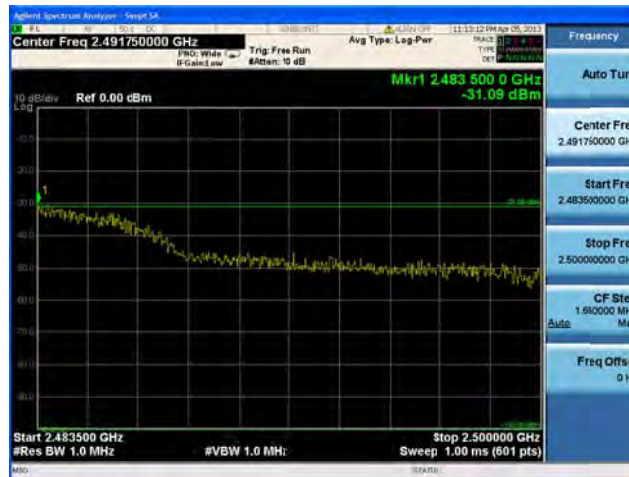
Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

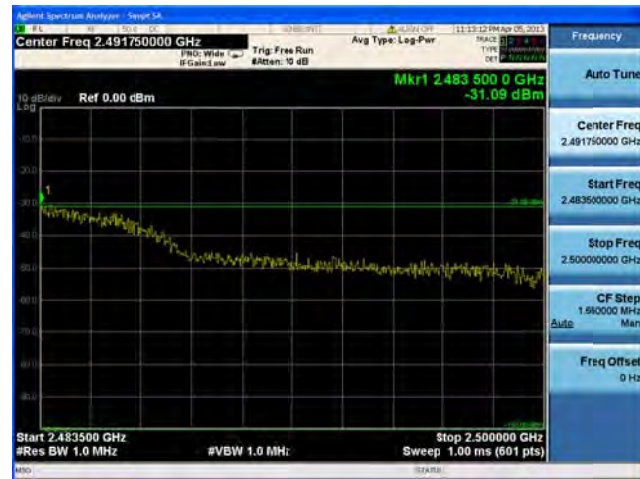
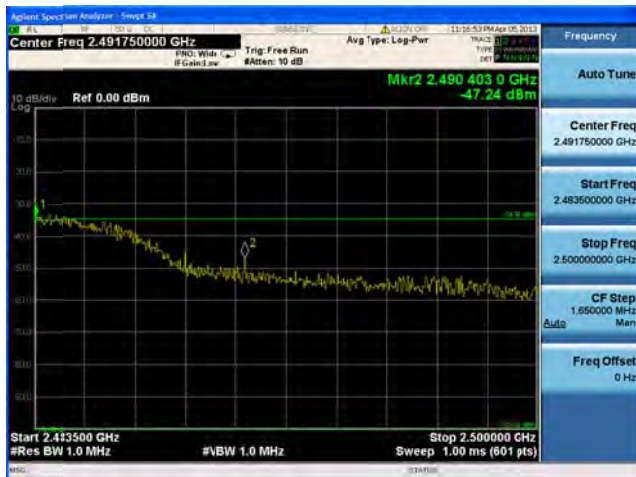
Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

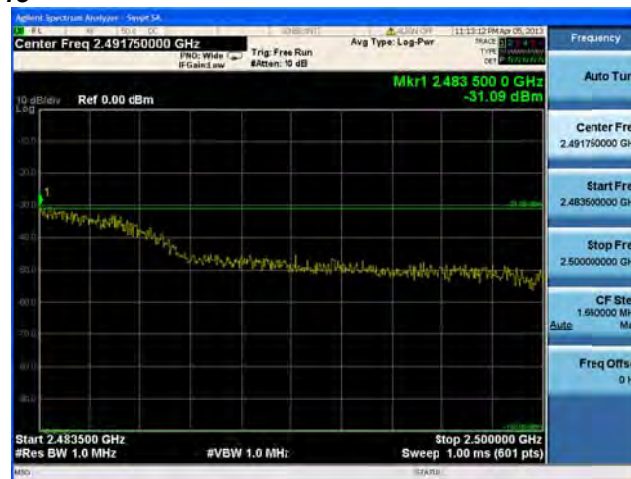
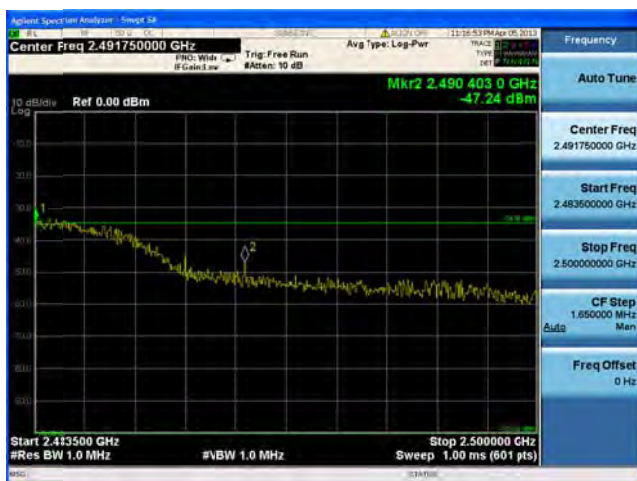
Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

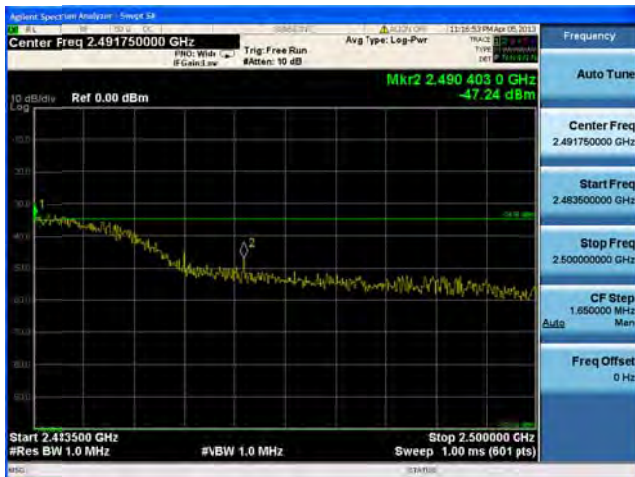
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A**

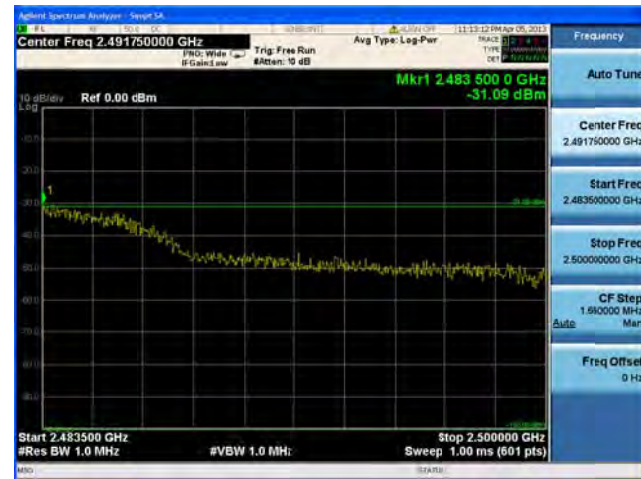
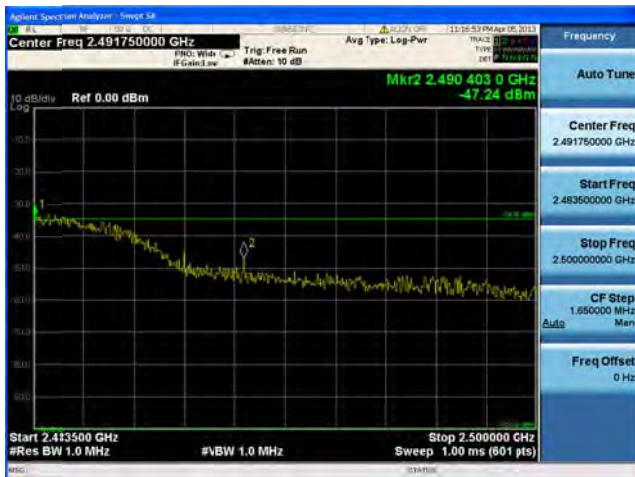
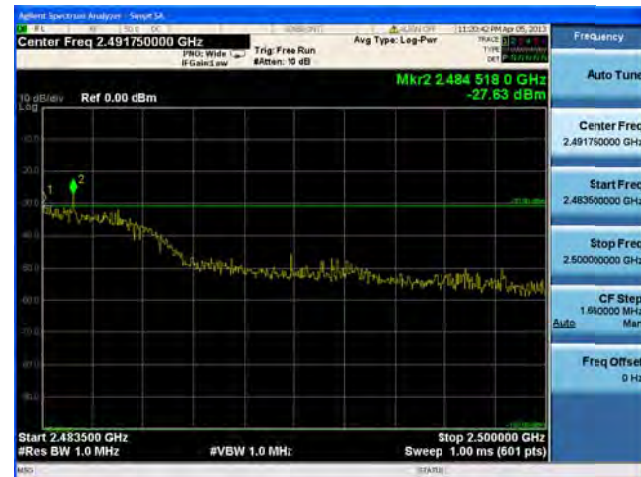
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

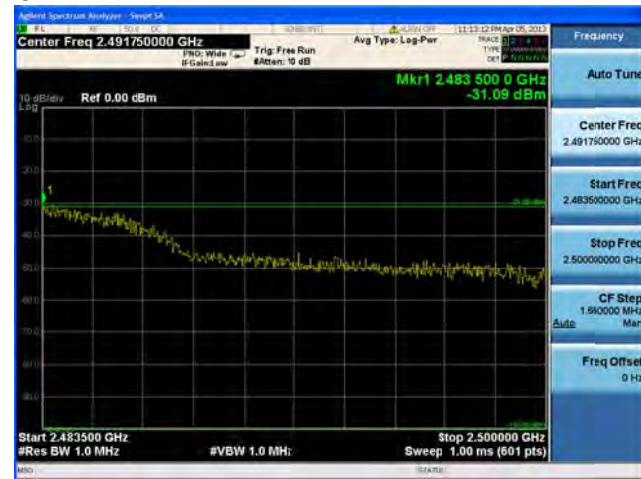
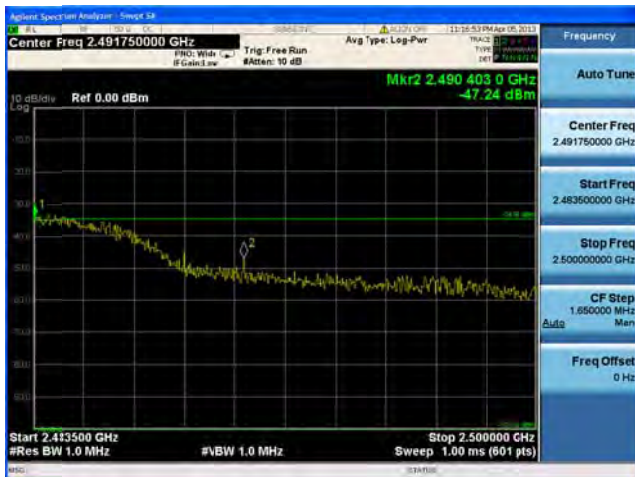
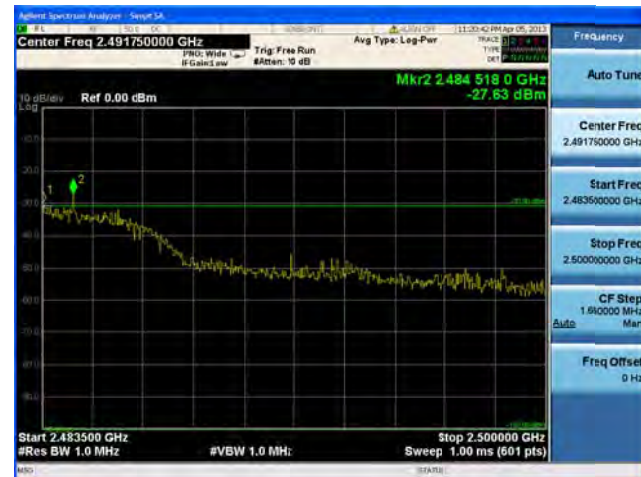
Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

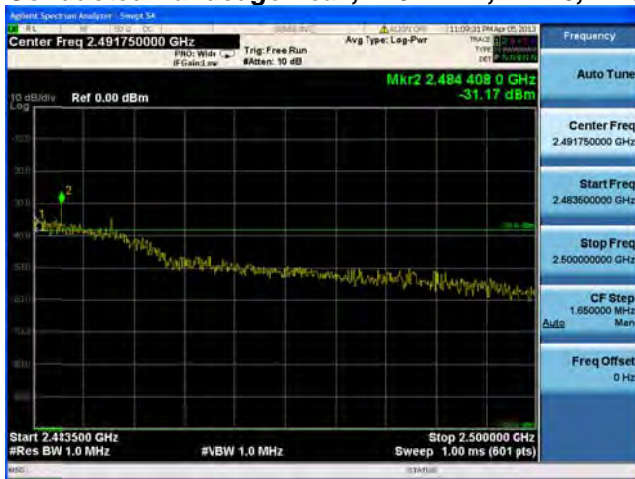
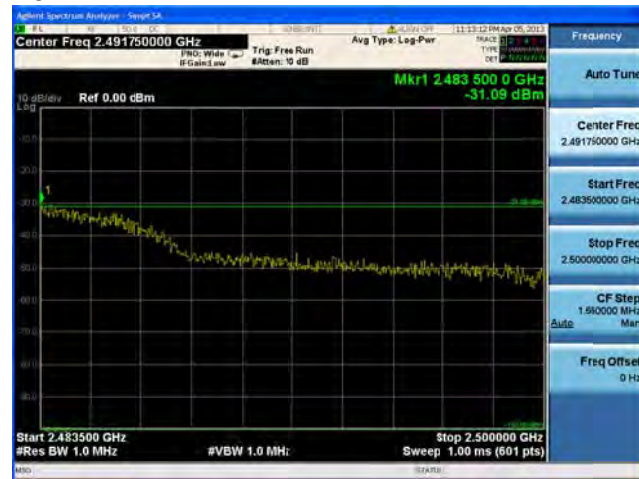
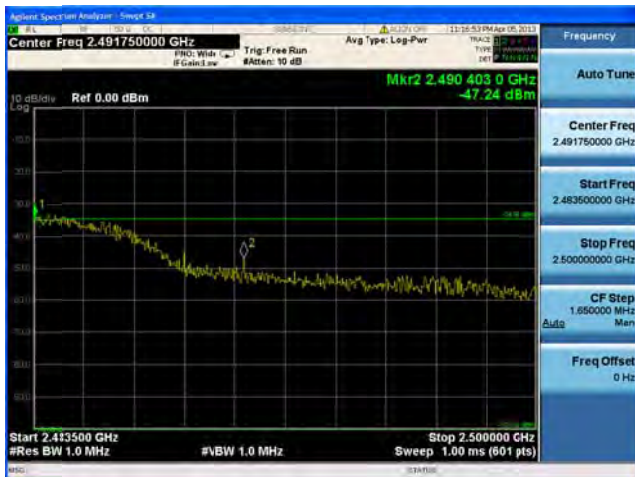
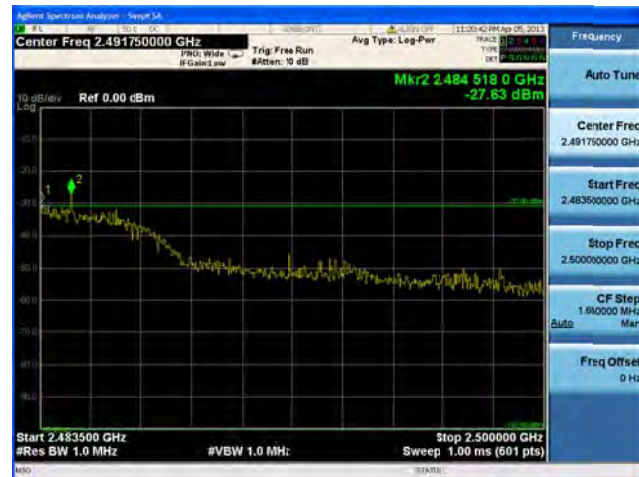
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

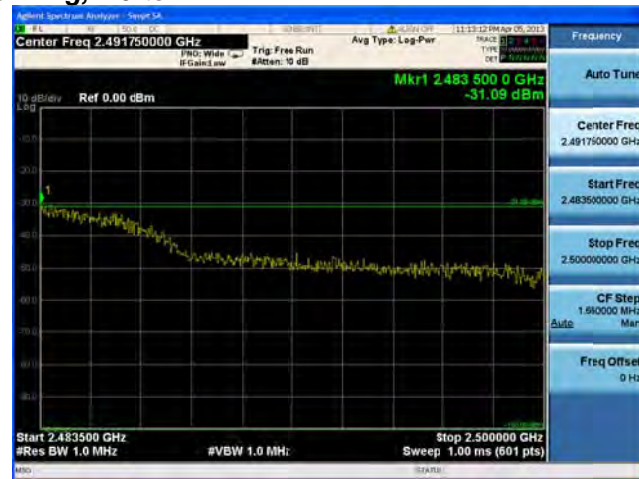
Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

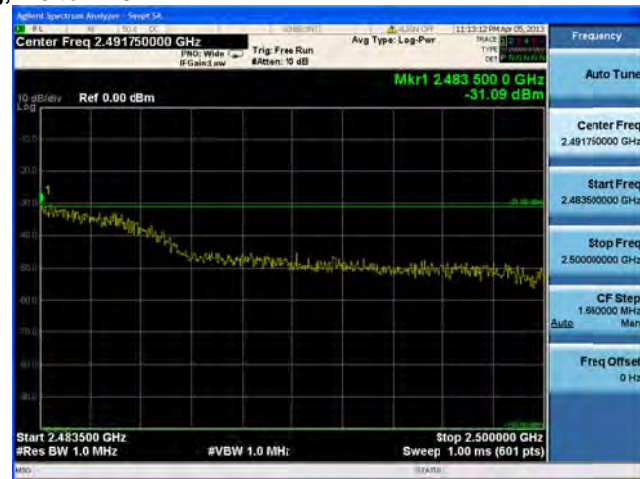
Conducted Bandedge Peak, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

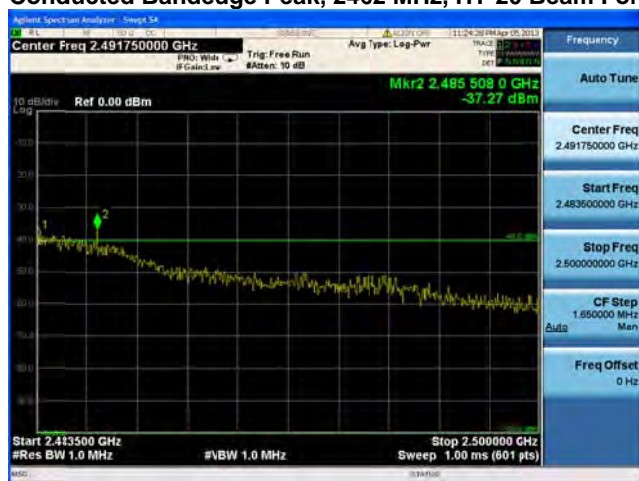
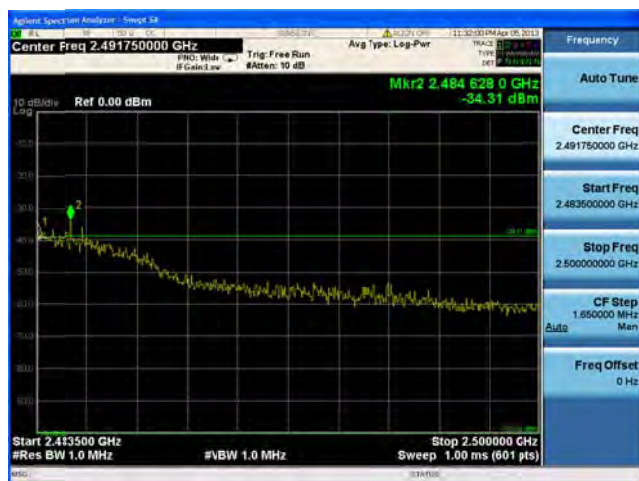
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

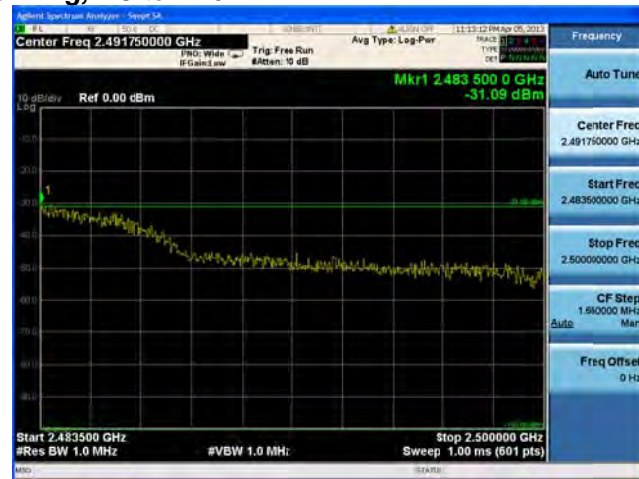
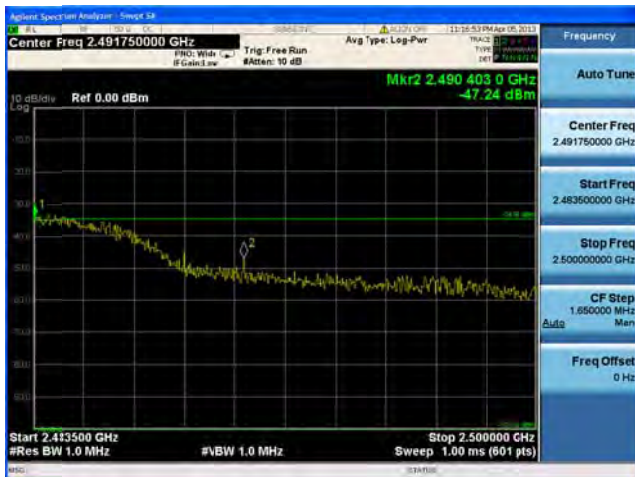
Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

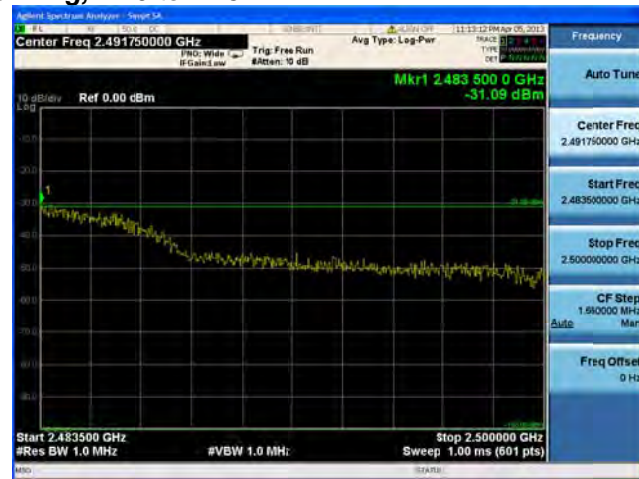
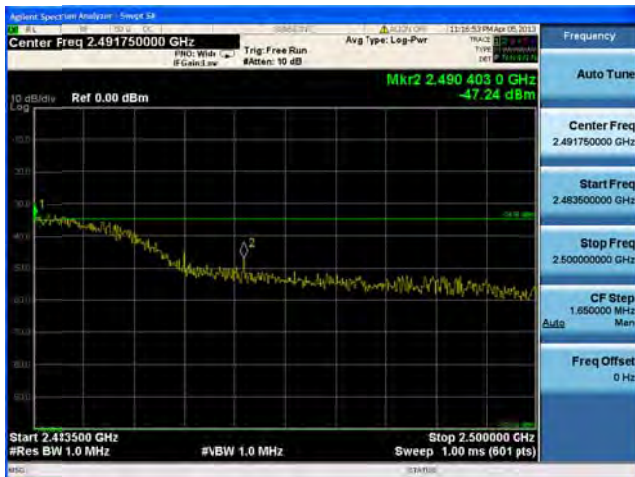
Conducted Bandedge Peak, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

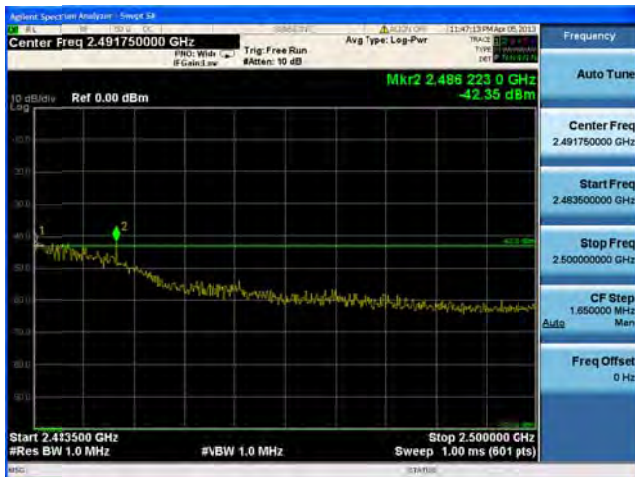
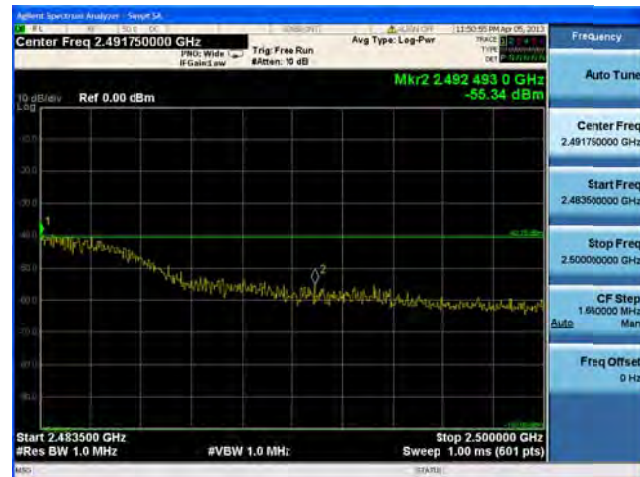
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

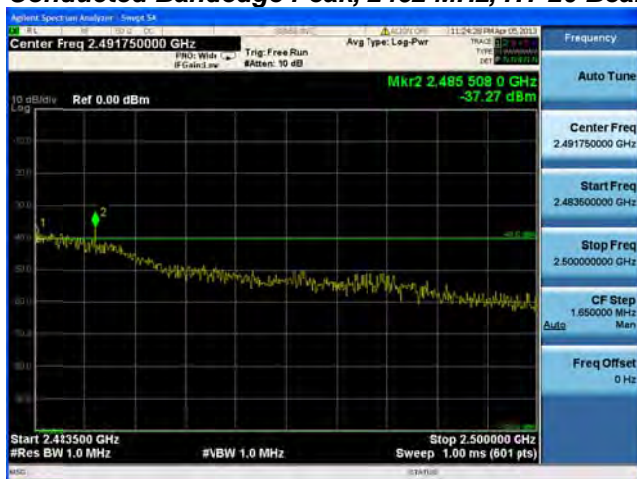
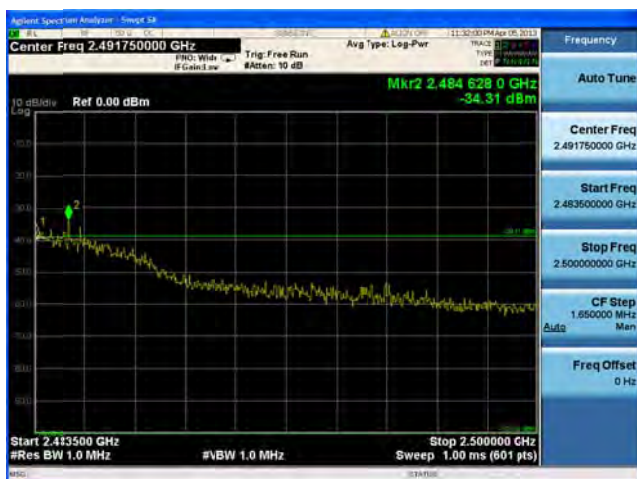
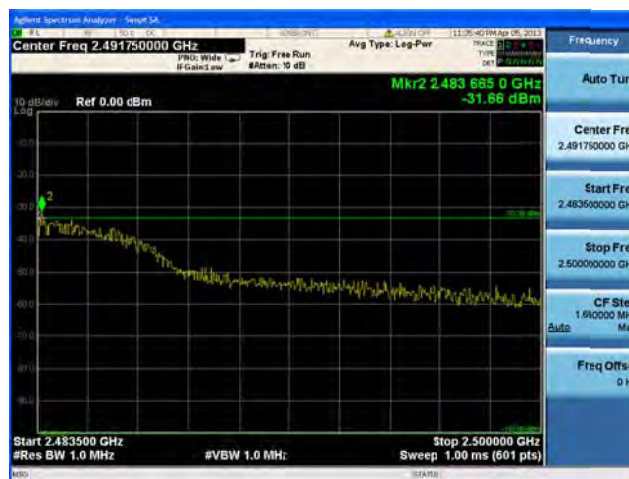
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

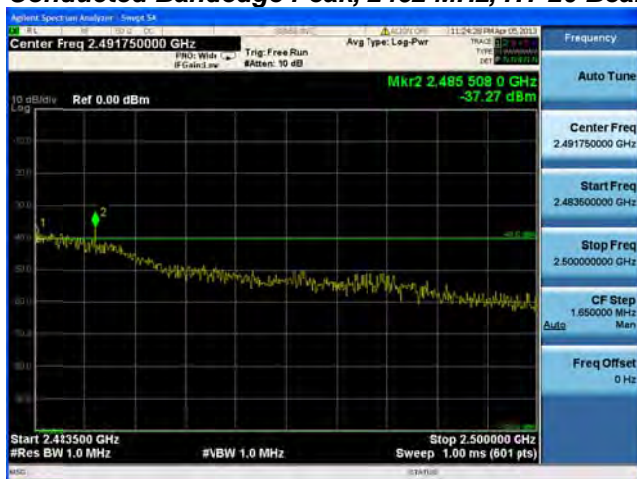
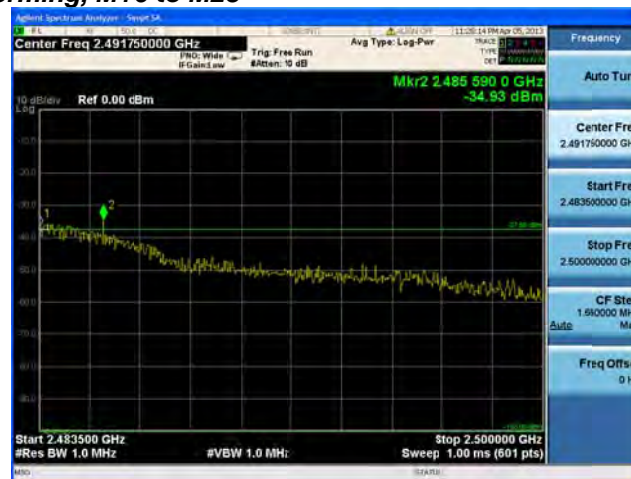
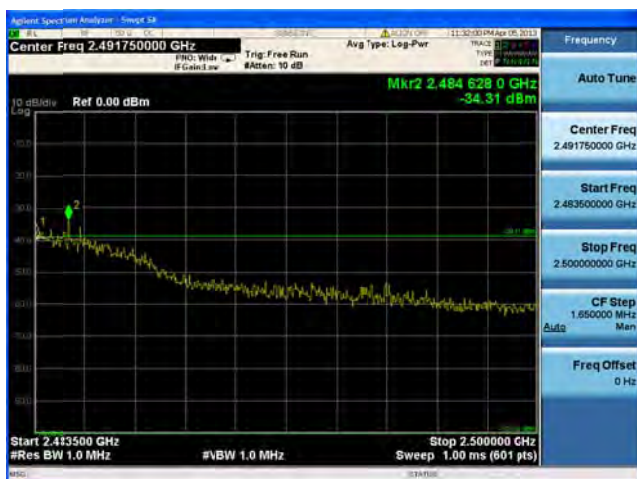
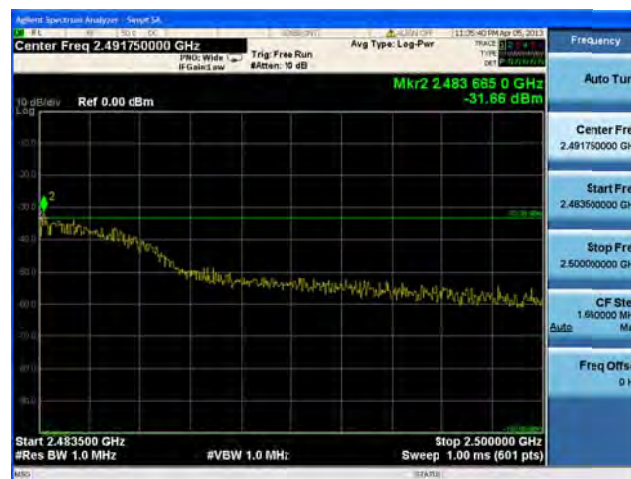
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

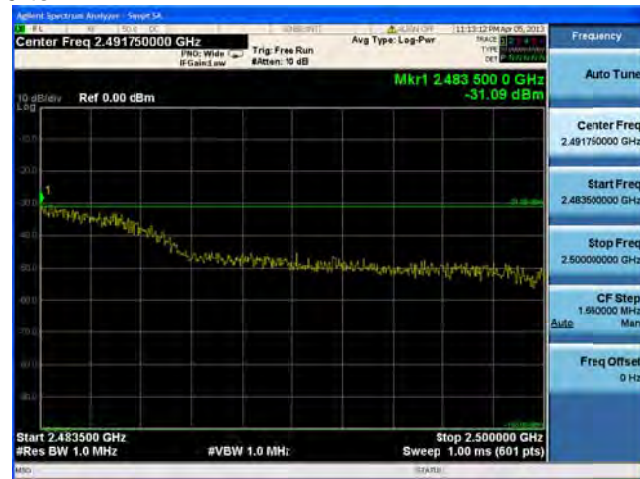
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

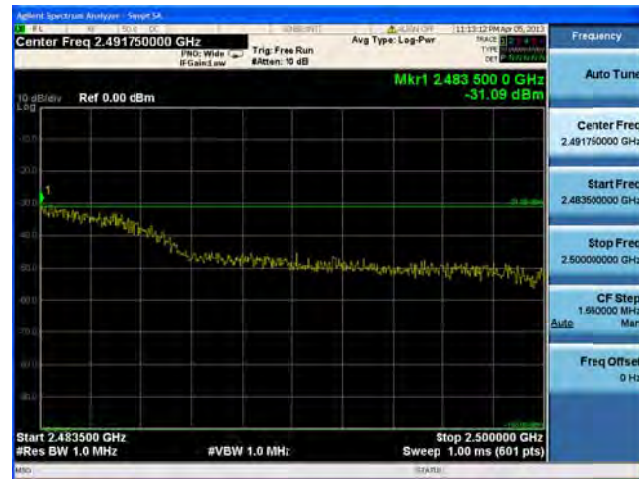
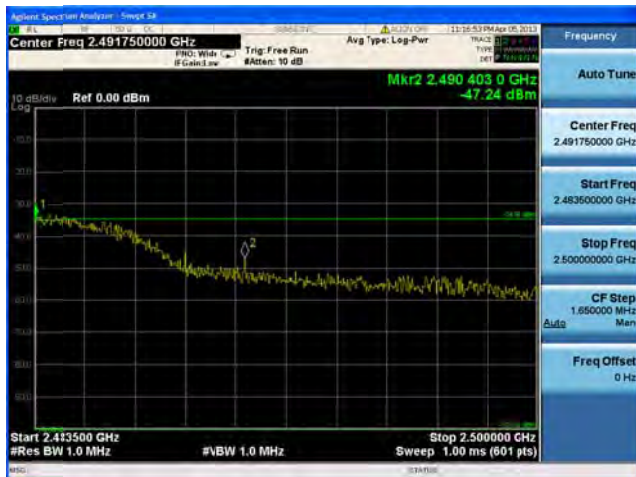
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

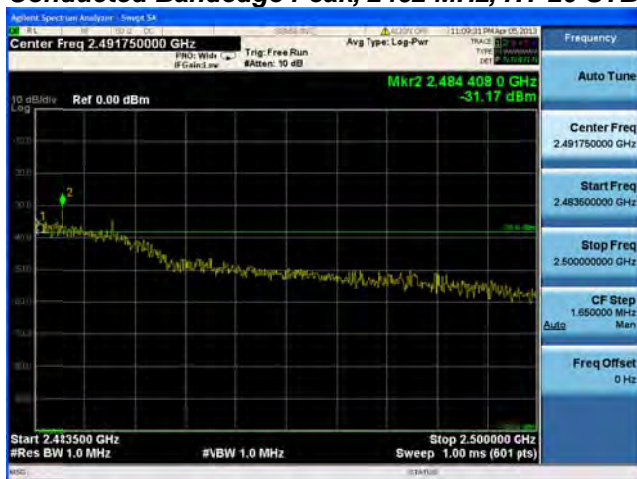
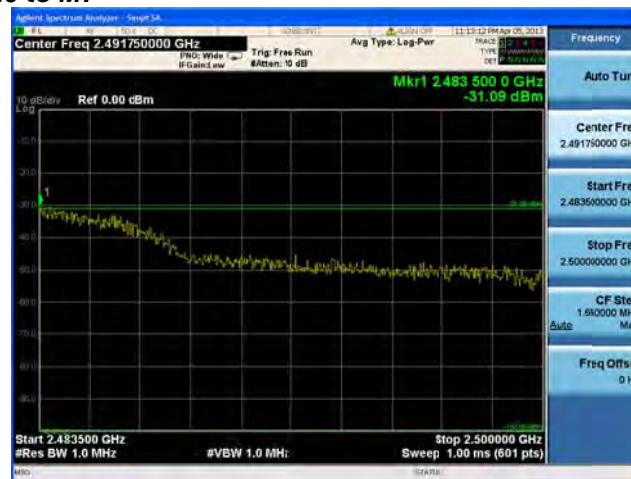
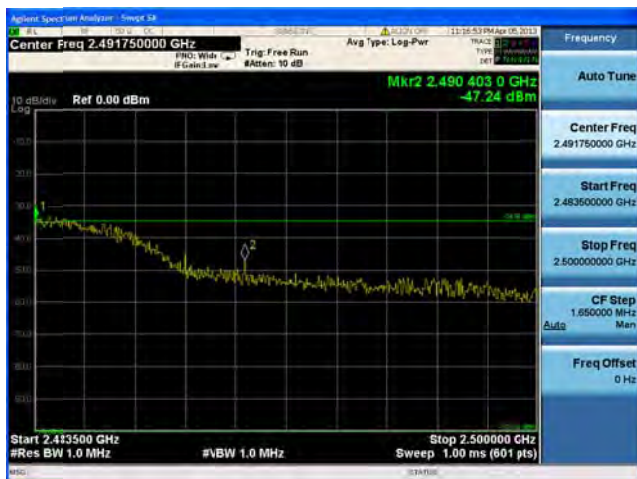
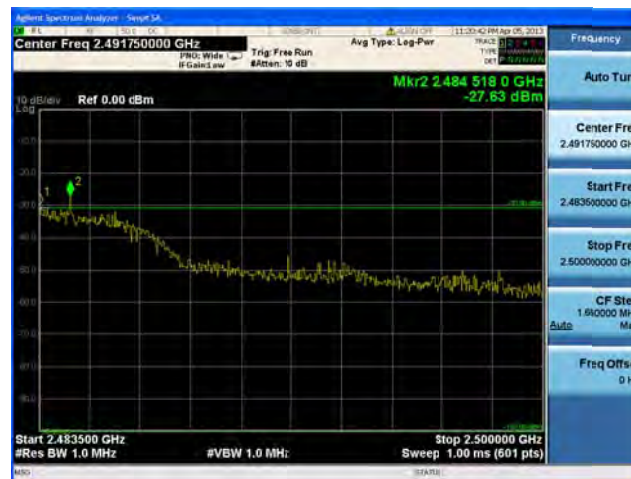
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



Conducted Test Setup Photo

Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \quad \text{and} \quad S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 \cdot 10^{((P+G)/20)})/d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²

Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 2 dBi (8 dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
2412	1	21.1	8	8.04	20	11.96

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
2412	20	21.1	8	0.16	1	0.84



Appendix C: Test Equipment/Software Used to perform the test

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS049381	Agilent	N9030A	Spectrum Analyzer	28-Aug-12	28-Aug-13