

FCC - TEST REPORT

Report Number : **68.950.24.0288.01** Date of Issue: 2024-04-26

Model : **EA-J100, 3WWDZ-45A**

Product Type : EA-J100 Agricultural Spraying Drone

Applicant : SUZHOU EAVISION ROBOTIC TECHNOLOGIES CO., LTD

Address : Room 504&505, Building 2, Nanopolis District II, No.333,
Xingpu Road, SIP Suzhou, Jiangsu, China

Manufacturer : SUZHOU EAVISION ROBOTIC TECHNOLOGIES CO., LTD

Address : Room 504&505, Building 2, Nanopolis District II, No.333,
Xingpu Road, SIP Suzhou, Jiangsu, China

Factory : SUZHOU EAVISION ROBOTIC TECHNOLOGIES CO., LTD

Address : Unit 1-A, No.3 Workshop, 28 Xiasheng Road, SIP, Suzhou, China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **118**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups.....	8
7.1	Radiated test setups	8
7.2	Conducted RF test setups	9
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted output power.....	10
9.2	6dB bandwidth.....	11
9.3	Power spectral density.....	26
9.4	Spurious RF conducted emissions	47
9.5	Band edge	77
9.6	Spurious radiated emissions for transmitter.....	88
10	Test Equipment List	117
11	System Measurement Uncertainty	118

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen
BR 5Mach
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: +86 755 8828 6998

Fax: +86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment under Test

Product:	EA-J100 Agricultural Spraying Drone
Model no.:	EA-J100, 3WWDZ-45A
Brand Name:	EAVISION
FCC ID:	2AXLB-EA-J100
Power Supply:	DC 52.22V by Lithium Ion Polymer Rechargeable Battery Battery model: EAV-CTB29000A Max Charge Voltage:59.92V Nominal Voltage:52.22V Rated Capacity:29000mAh
RF Transmission Frequency:	2405MHz-2465MHz
Operating Frequency Range(s):	5M:2405 -2465MHz 10M:2410 -2465MHz 20M:2415 -2460MHz 40M:2425 -2450MHz
Modulation:	OFDM
Antenna Type:	External antenna
Antenna Gain:	2.2dBi
Description of the EUT:	The EUT is a EA-J100 Agricultural Spraying Drone supports 2.4G function.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C 10-1-2021 Edition			
Test Condition		Test Result	Test Site
§15.207	Conducted emission AC power port	N/A	N/A
§15.247 (b) (3)	Conducted output power	Pass	Site 1
§15.247(e)	Power spectral density	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	Pass	Site 1
§15.247(a)(1)	20dB Occupied bandwidth	N/A	--
§15.247(a)(1)	Carrier frequency separation	N/A	--
§15.247(a)(1)(iii)	Number of hopping frequencies	N/A	--
§15.247(a)(1)(iii)	Dwell Time	N/A	--
§15.247(d)	Spurious RF conducted emissions	Pass	Site 1
§15.247(d)	Band edge	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Pass	Site 1
§15.203	Antenna requirement	Pass See note 1	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses External antenna, which gain is 2.2dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AXLB-EA-J100, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15 Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: March 01, 2024

Testing Start Date: March 01, 2024

Testing End Date: April 24, 2024

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen BR 5Mach –

Reviewed by:

Prepared by:

Tested by:



John Zhi
Project Manager



Sanvin Zheng
Project Engineer




Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz - 30MHz

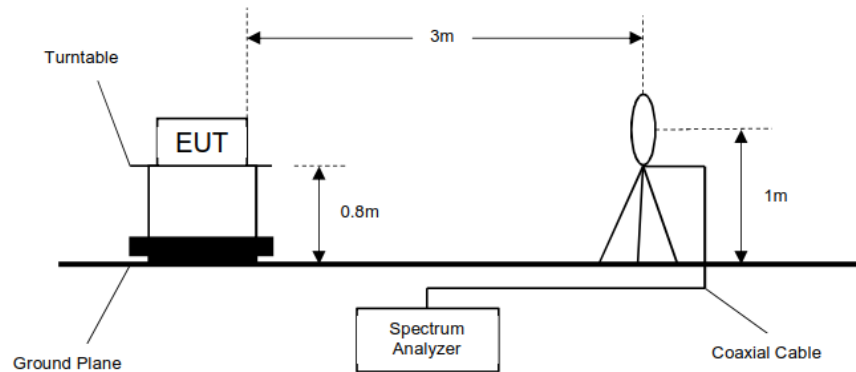


Below 1GHz

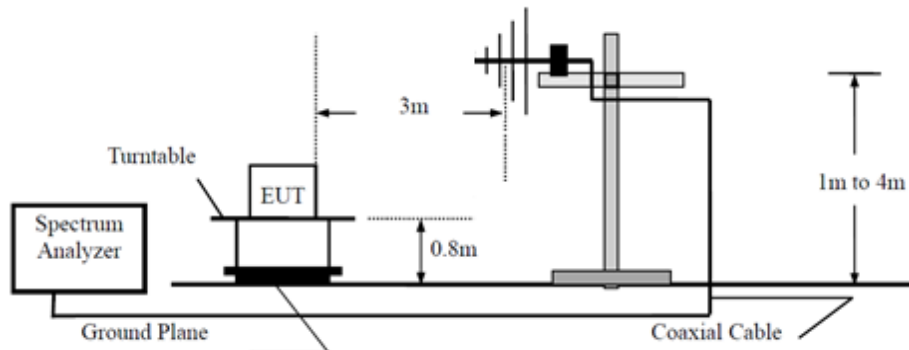

Above 1GHz

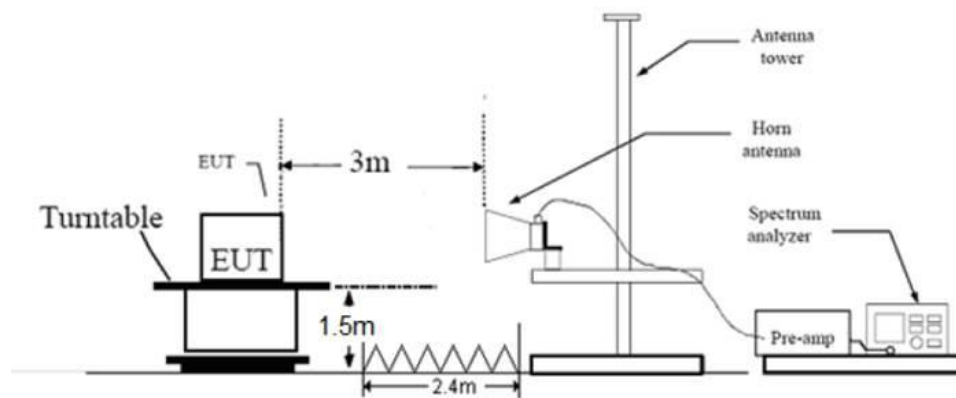

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
LAPTOP	LENOVO	X240	L34015282

Test Software Information:

Test Software Version	ARSirius-PC-Debug-Tool-v2.0.0	
Mode	Setting TX Power	Packet Type
BR 5M 5M	Power Index: 25	MCS0
Slot 5M	Power Index: 25	MCS0
Slot 10M	Power Index: 25	MCS0
Slot 20M	Power Index: 25	MCS0
Slot 40M	Power Index: 25	MCS0

Channel list:

2.4G	Mode	Bandwidth	Frequency(MHz)
	BR 5M	5M	2405
			2440
			2465
	Slot 5M	5M	2405
			2440
			2465
	Slot 10M	10M	2410
			2440
			2465
	Slot 20M	20M	2415
			2440
			2460
	Slot 40M	40M	2425
			2440
			2450


Note: The channel list interval of EUT is 5M step

9 Technical Requirement

9.1 Conducted output power

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

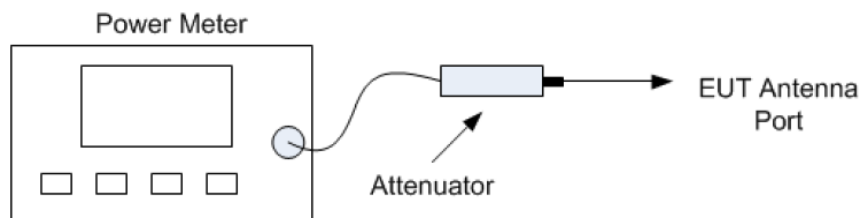

Power meter conducted test setup

Limits

According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test results

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
BR 5M	SISO	2405	21.60	≤30	Pass
		2440	21.48	≤30	Pass
		2465	22.45	≤30	Pass

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)				Verdict
			ANT1	ANT2	MIMO	Limit	
Slot 5M	MIMO	2405	25.32	23.66	27.58	≤30	Pass
		2440	24.37	23.03	26.76	≤30	Pass
		2465	23.60	22.91	26.28	≤30	Pass
Slot10M	MIMO	2410	23.36	23.32	26.35	≤30	Pass
		2440	23.04	23.07	26.07	≤30	Pass
		2465	23.51	22.87	26.21	≤30	Pass
Slot20M	MIMO	2415	23.49	23.58	26.55	≤30	Pass
		2440	23.16	23.54	26.36	≤30	Pass
		2460	23.66	23.46	26.57	≤30	Pass
Slot40M	MIMO	2425	23.93	24.35	27.16	≤30	Pass
		2440	24.20	24.16	27.19	≤30	Pass
		2450	24.06	24.10	27.09	≤30	Pass

9.2 6dB bandwidth

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW= RBW=1% to 5% of EBW, or a minimum of 1 MHz if this is not possible due to a large EBW, unless otherwise specified by the applicable rule, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

Limit [kHz]

≥ 500


Test results

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
BR 5M 5M	SISO	2405	1	4.564	≥ 0.5	Pass
		2440	1	4.595	≥ 0.5	Pass
		2465	1	4.526	≥ 0.5	Pass


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
Slot 5M	MIMO	2405	1	4.633	≥ 0.5	Pass
			2	4.614	≥ 0.5	Pass
		2440	1	4.564	≥ 0.5	Pass
			2	4.597	≥ 0.5	Pass
		2465	1	4.593	≥ 0.5	Pass
			2	4.585	≥ 0.5	Pass
Slot10M	MIMO	2410	1	9.295	≥ 0.5	Pass
			2	9.010	≥ 0.5	Pass
		2440	1	9.232	≥ 0.5	Pass
			2	9.178	≥ 0.5	Pass
		2465	1	9.202	≥ 0.5	Pass
			2	9.245	≥ 0.5	Pass
Slot20M	MIMO	2415	1	18.476	≥ 0.5	Pass
			2	18.009	≥ 0.5	Pass
		2440	1	17.979	≥ 0.5	Pass
			2	18.037	≥ 0.5	Pass
		2460	1	18.083	≥ 0.5	Pass
			2	18.044	≥ 0.5	Pass
Slot40M	MIMO	2425	1	35.000	≥ 0.5	Pass
			2	35.350	≥ 0.5	Pass
		2440	1	35.458	≥ 0.5	Pass
			2	35.426	≥ 0.5	Pass
		2450	1	35.206	≥ 0.5	Pass
			2	35.609	≥ 0.5	Pass

Test Graphs


BR:

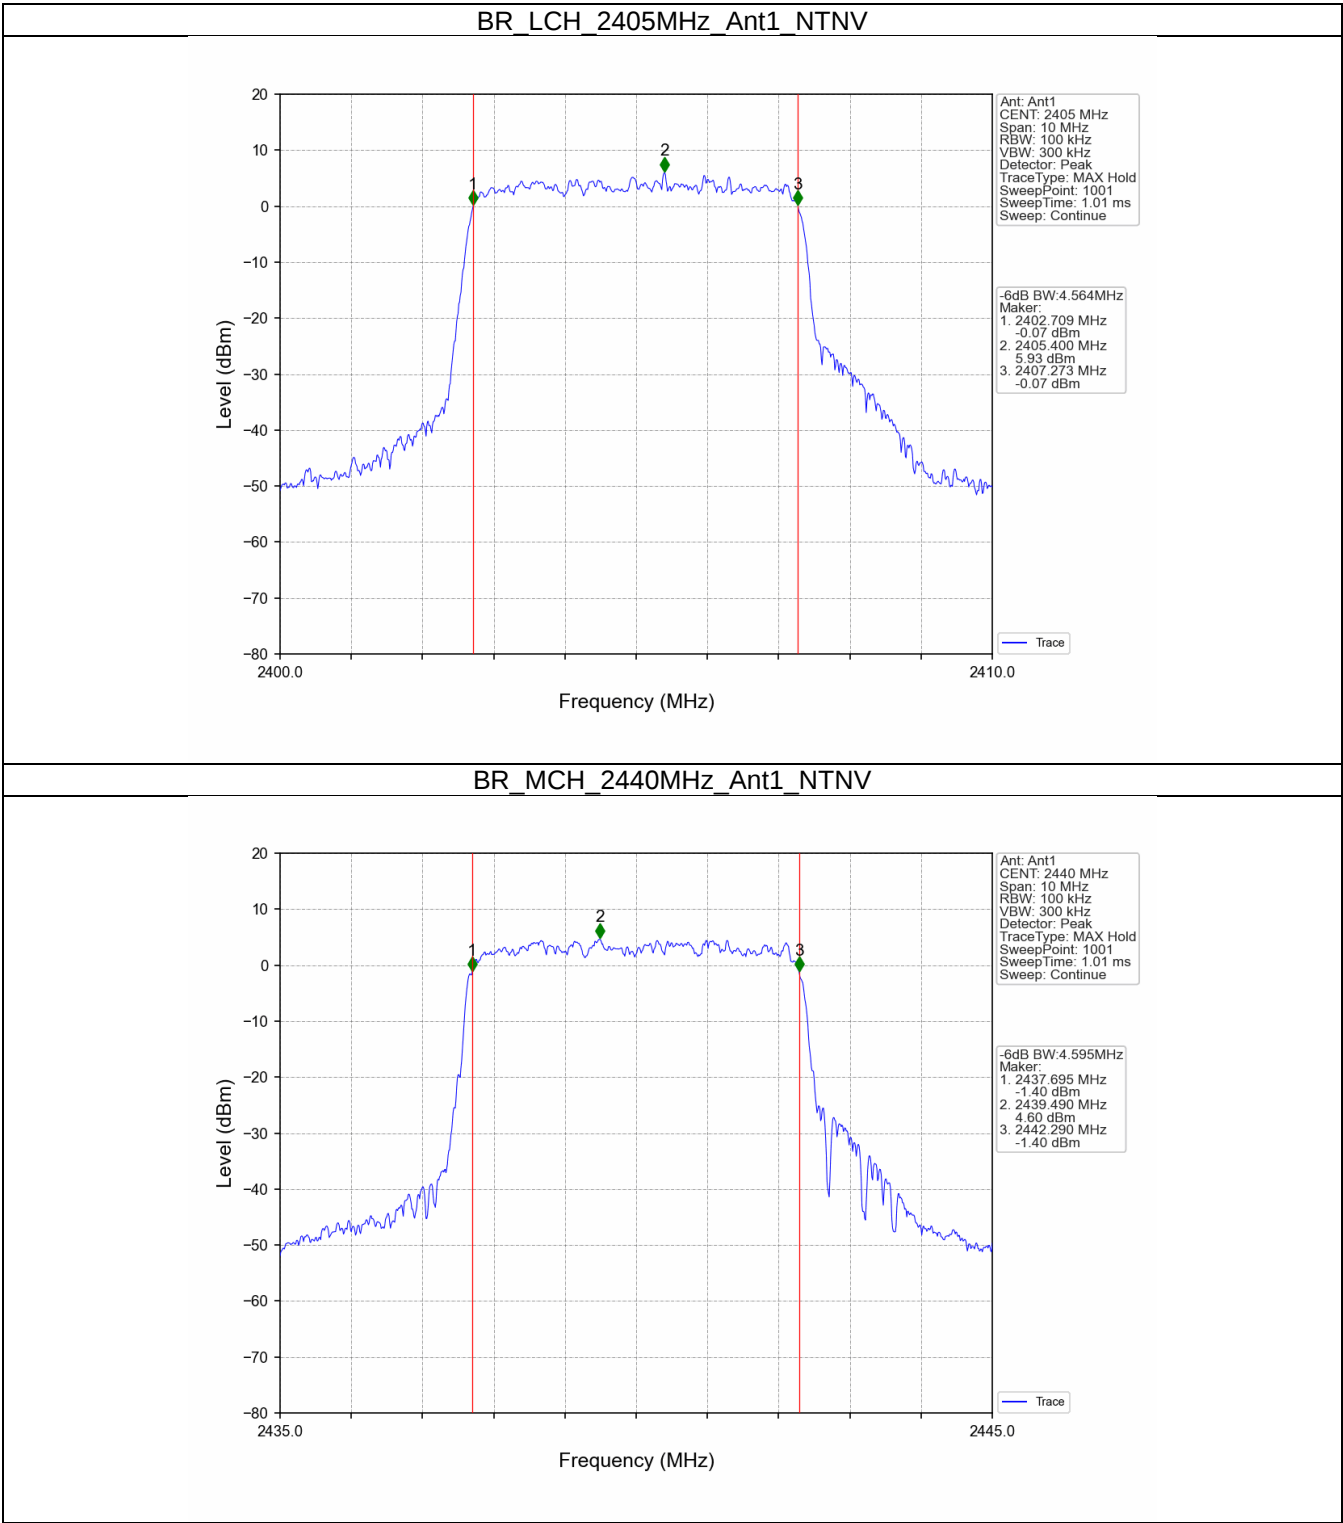

BR_HCH_2465MHz_Ant1_NTNV

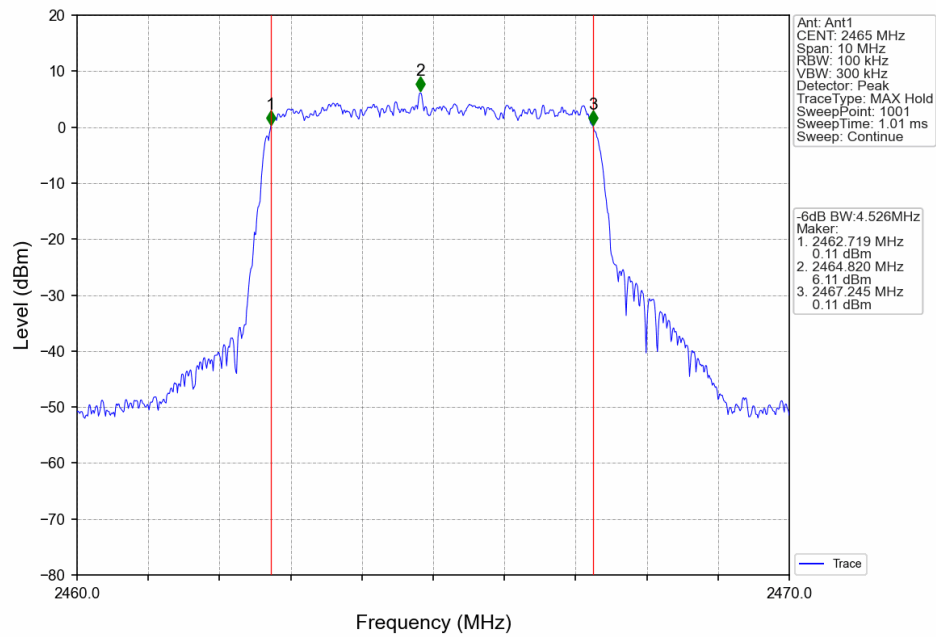


Slot:

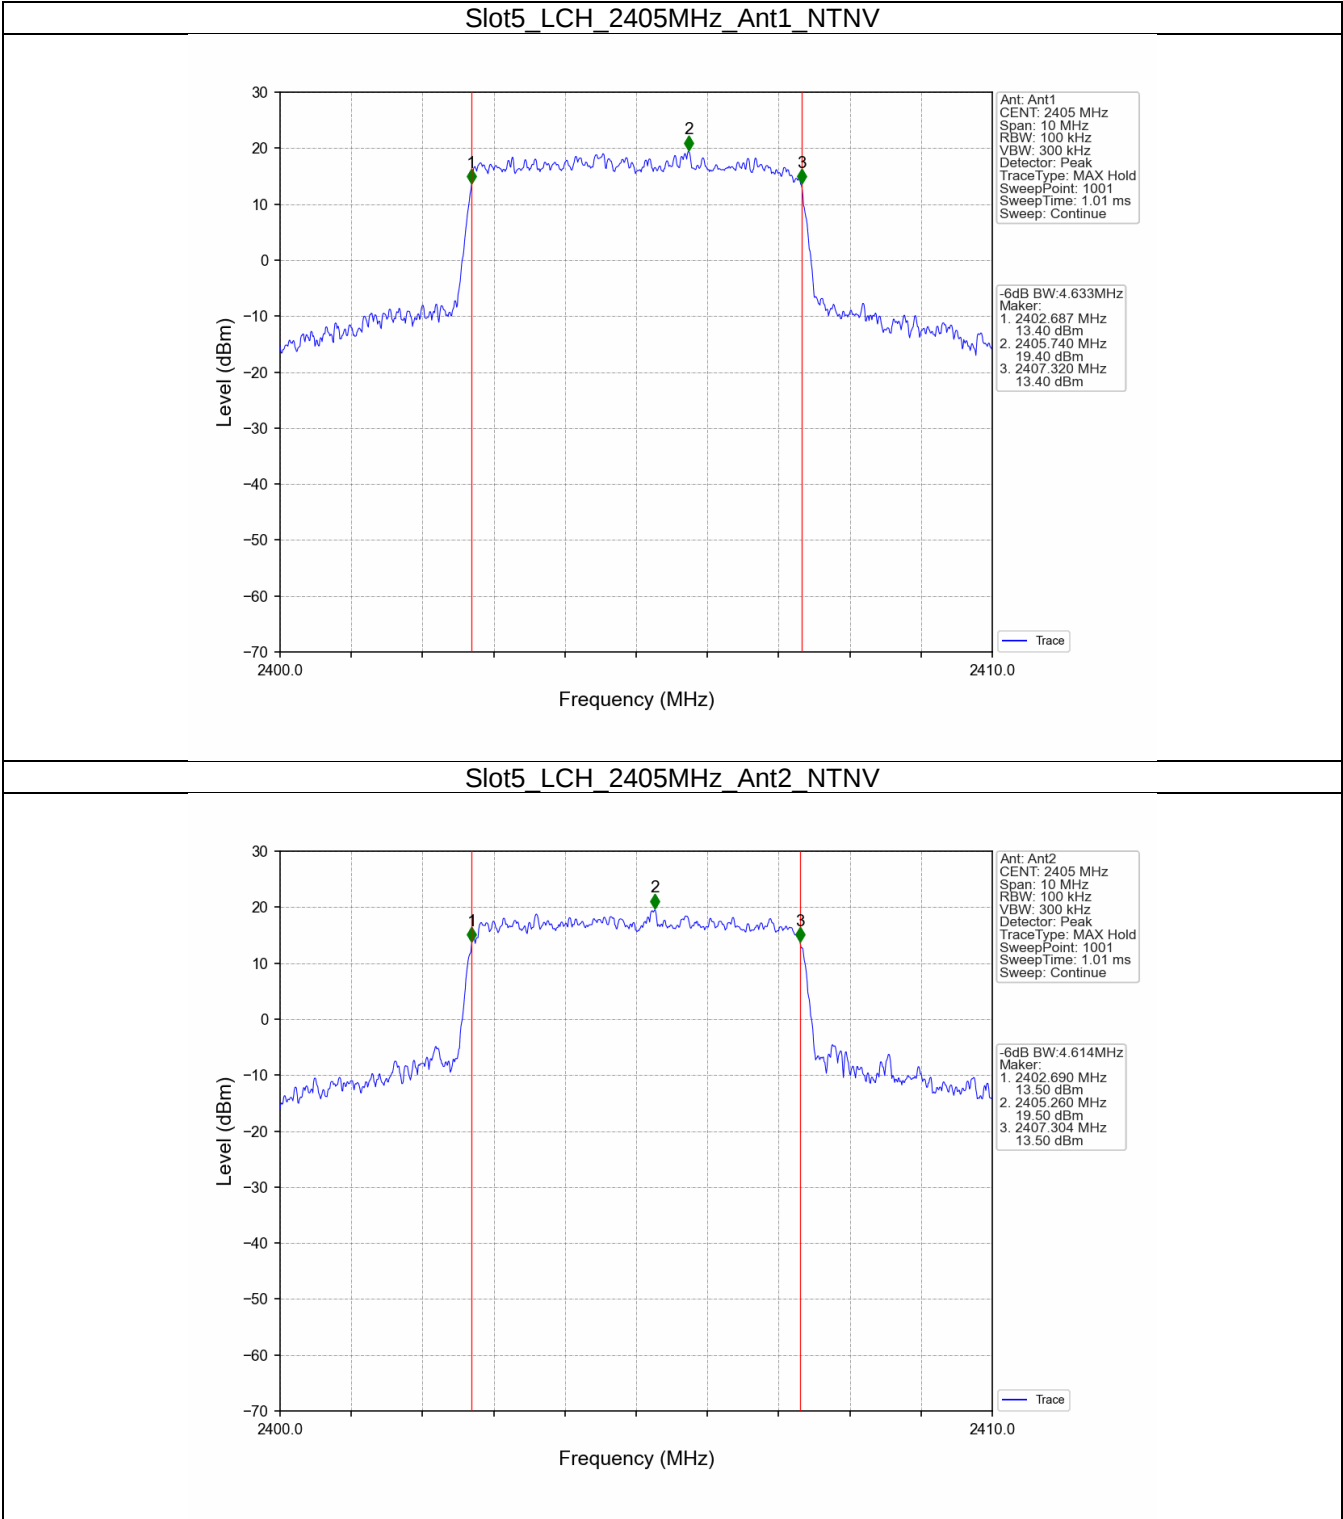





Slot5_MCH_2440MHz_Ant1_NTNV

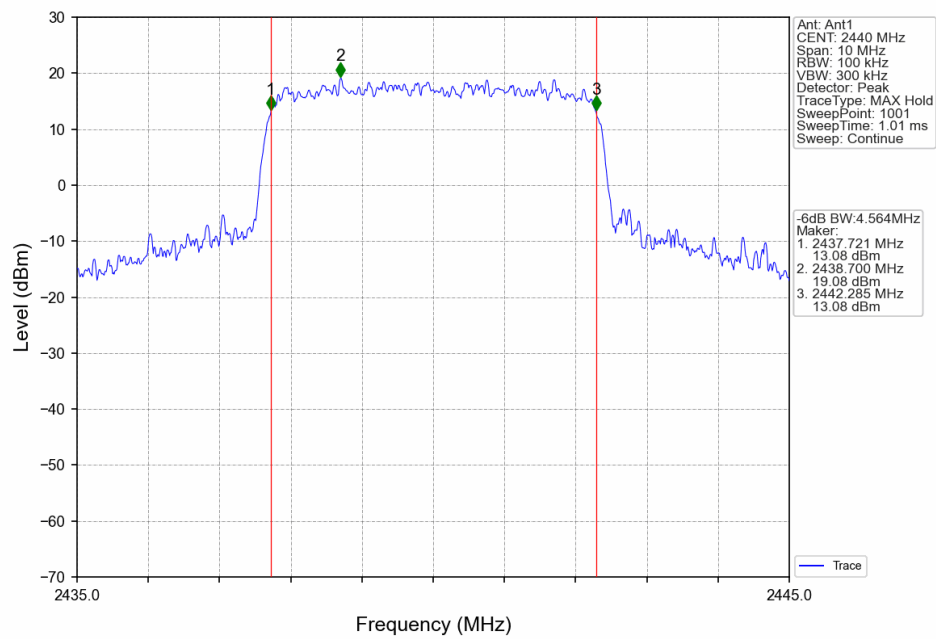


Slot5_MCH_2440MHz_Ant2_NTNV

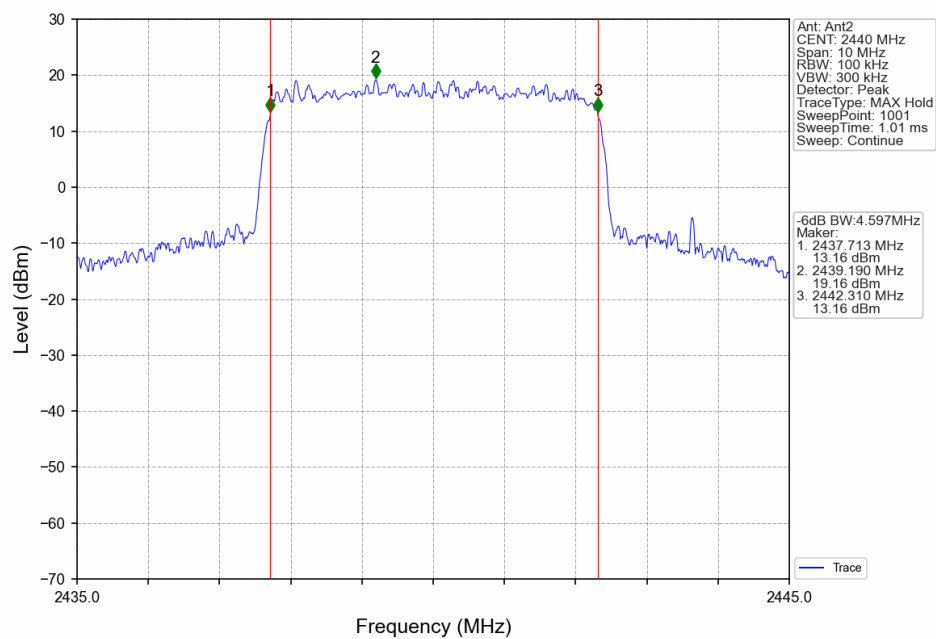


Slot5_HCH_2465MHz_Ant1_NTNV

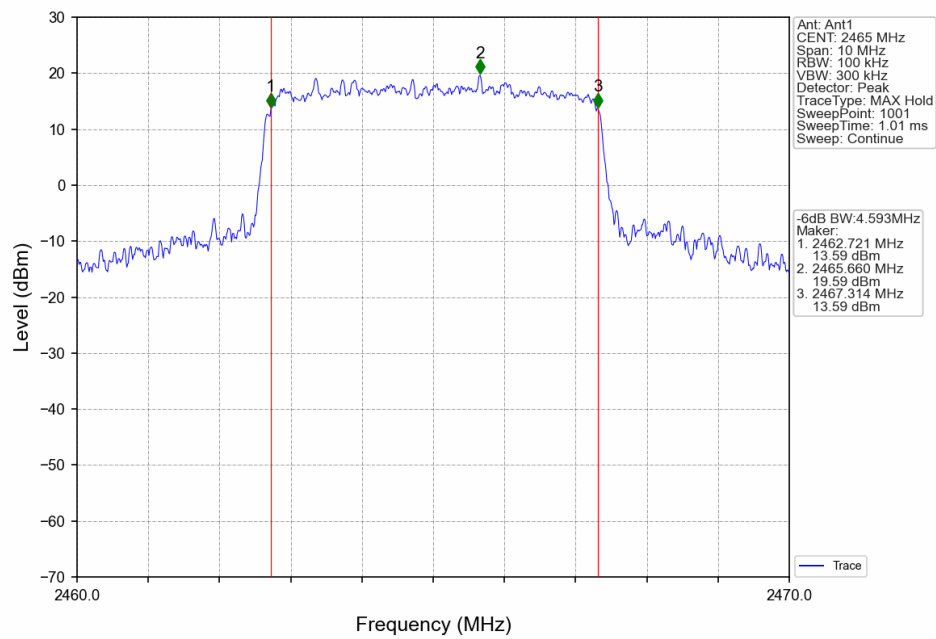


Slot5_HCH_2465MHz_Ant2_NTNV

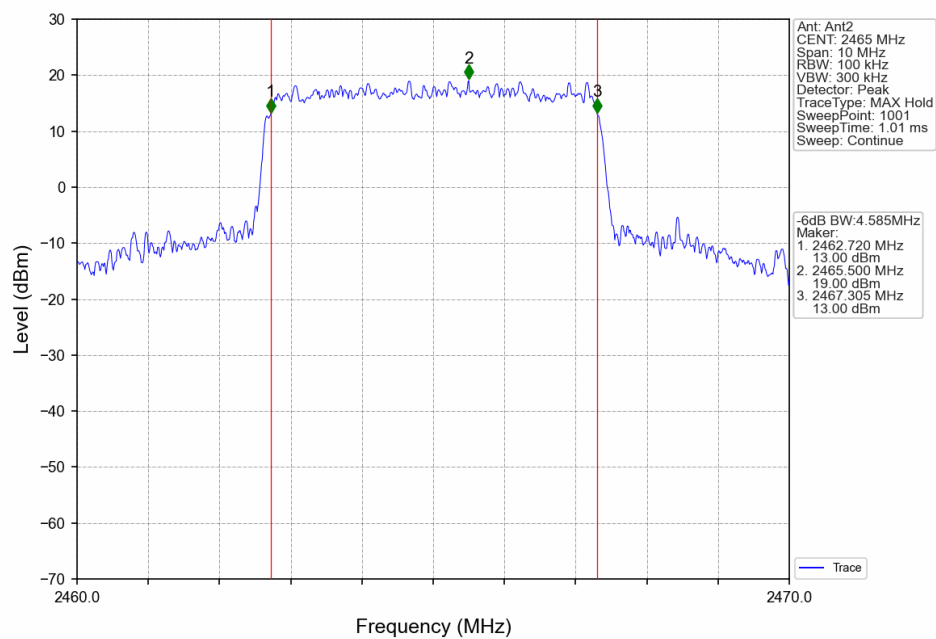


Slot10_LCH_2410MHz_Ant1_NTNV

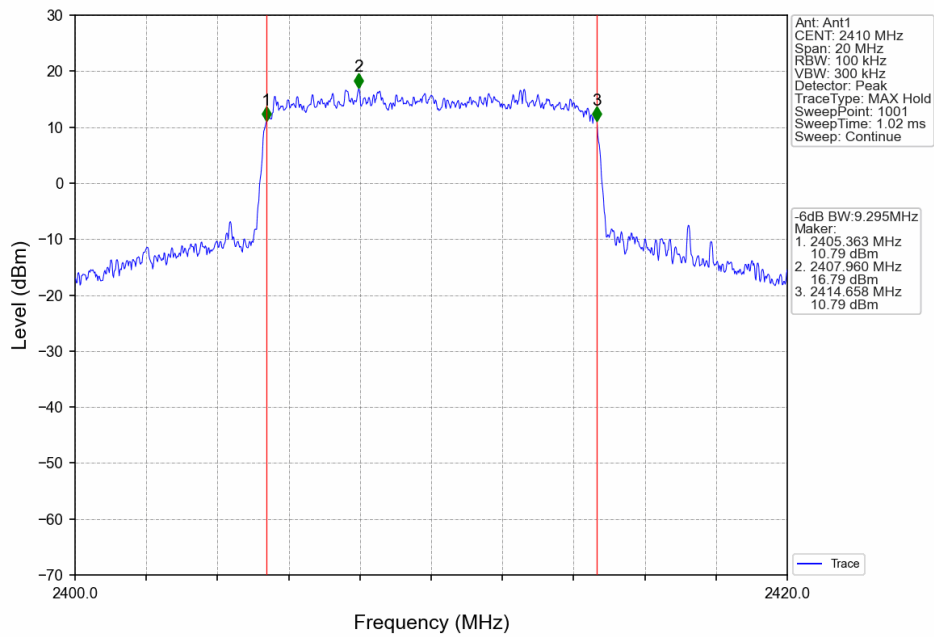


Slot10_LCH_2410MHz_Ant2_NTNV

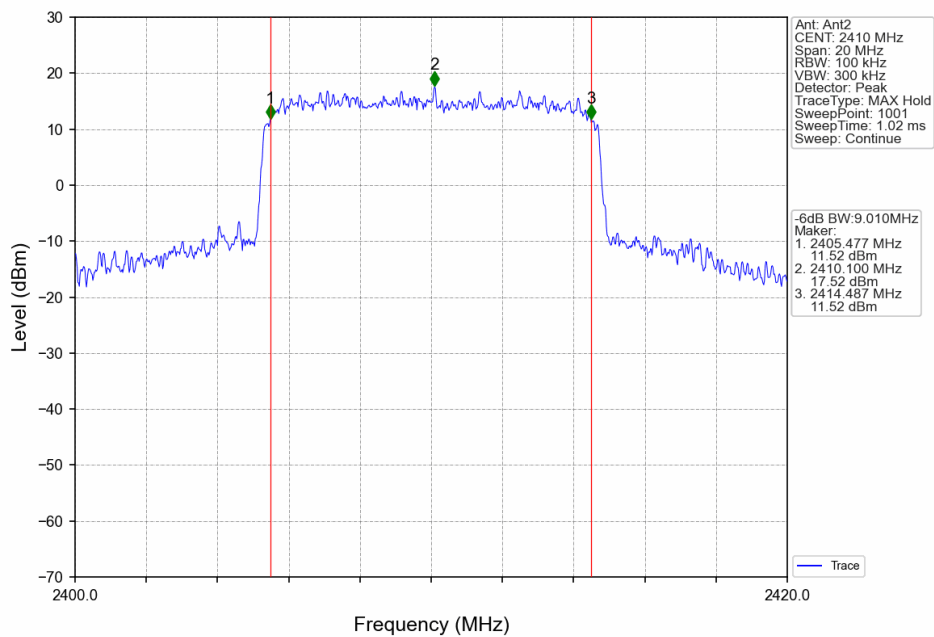

Slot10_MCH_2440MHz_Ant1_NTNV

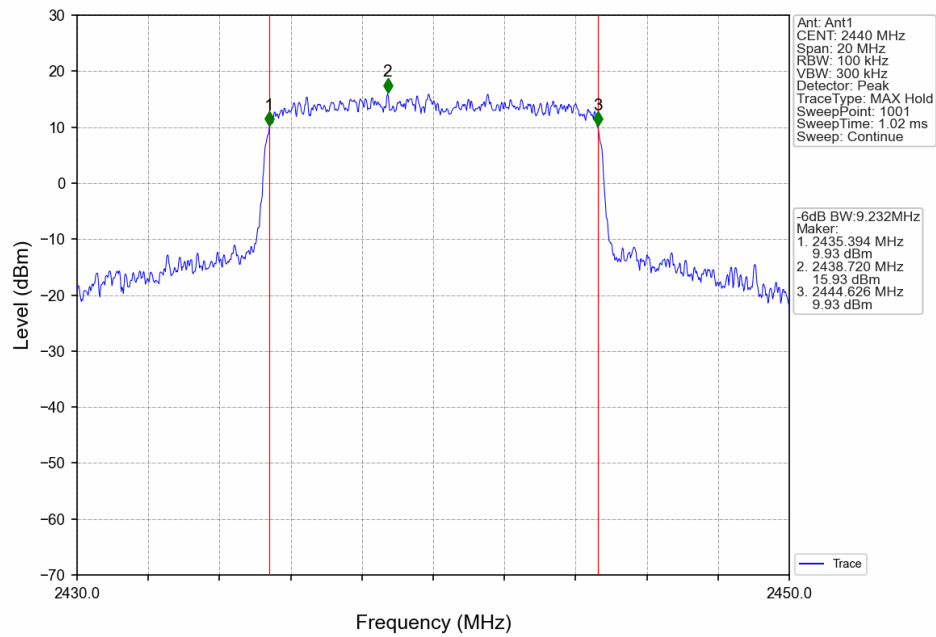


Slot10_MCH_2440MHz_Ant2_NTNV

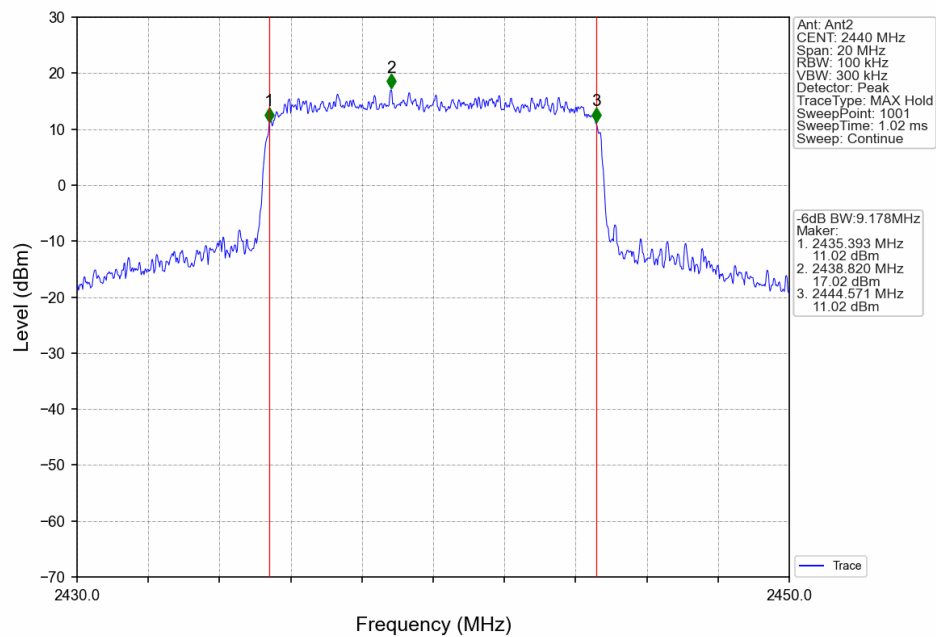





Slot10_HCH_2465MHz_Ant1_NTNV

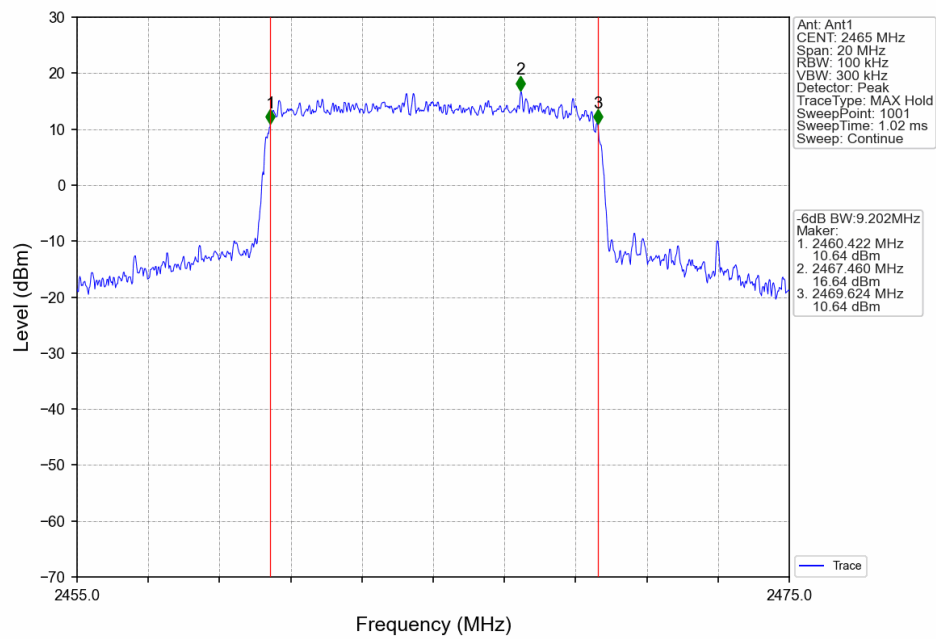


Slot10_HCH_2465MHz_Ant2_NTNV

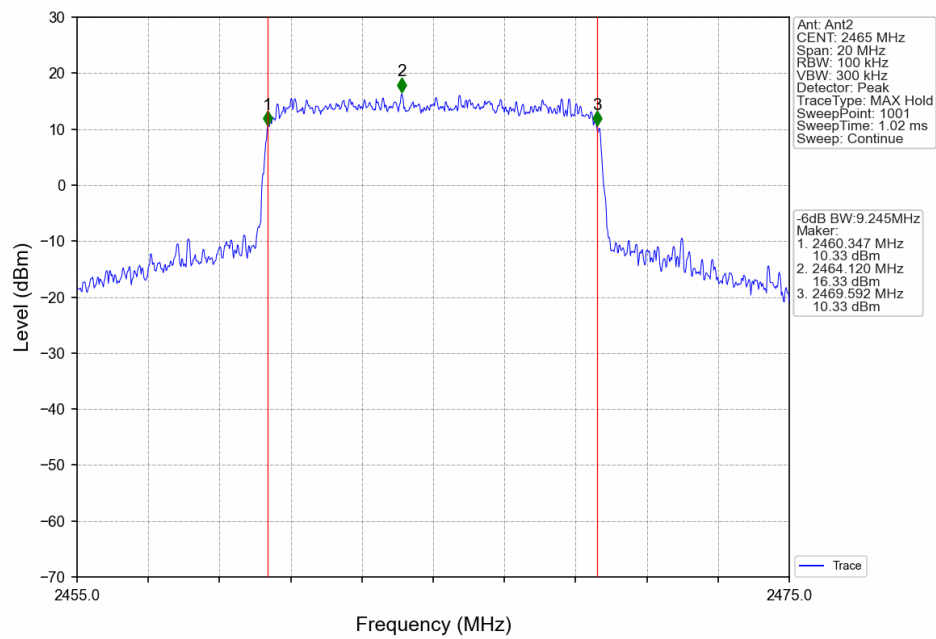

Slot20_LCH_2415MHz_Ant1_NTNV

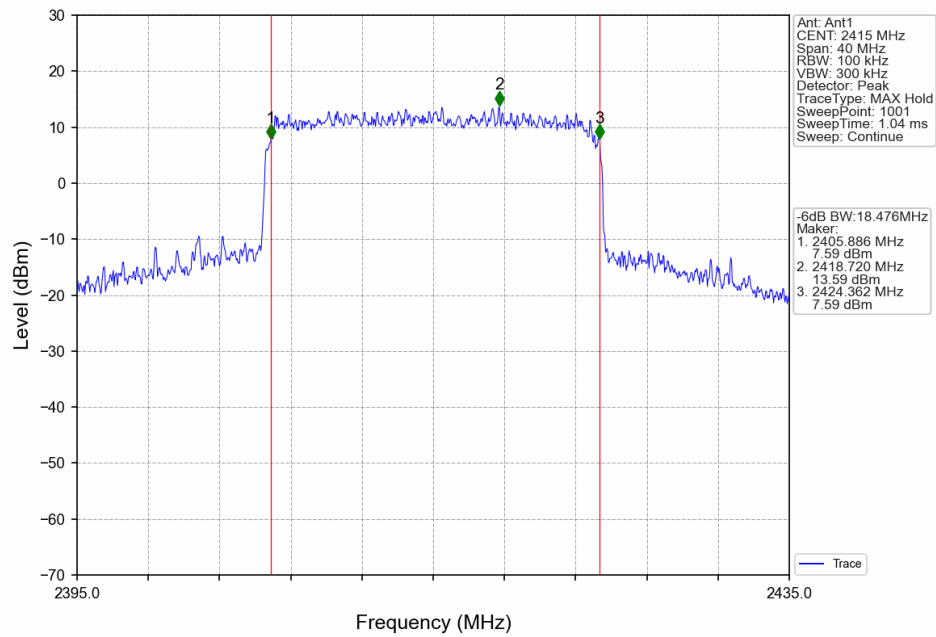


Slot20_LCH_2415MHz_Ant2_NTNV

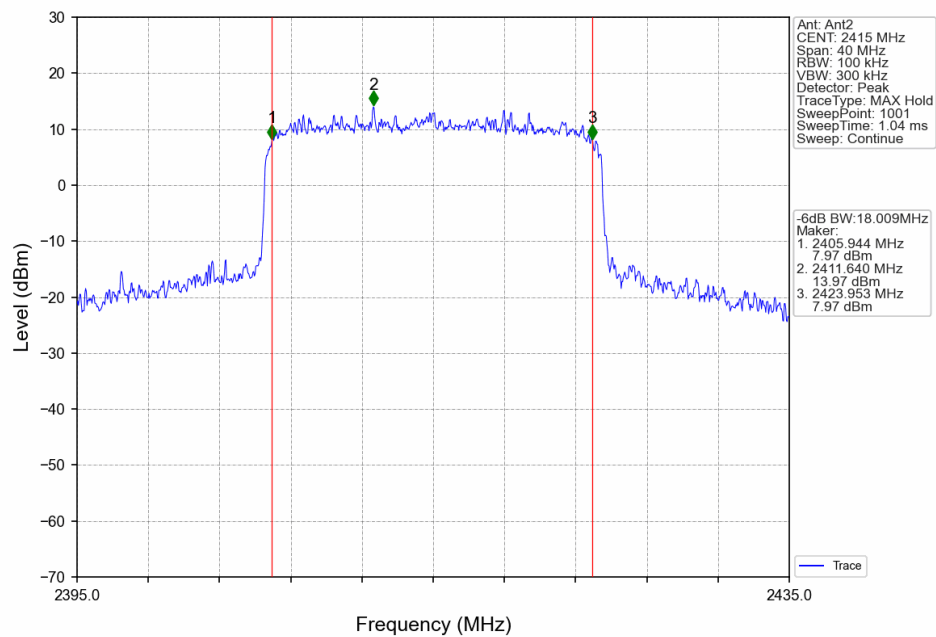





Slot20_MCH_2440MHz_Ant1_NTNV

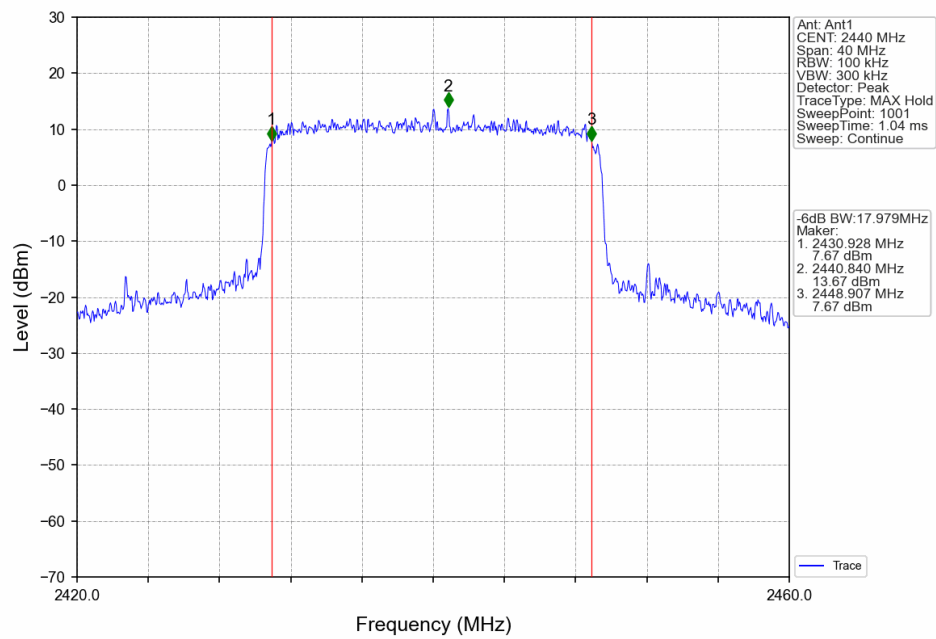


Slot20_MCH_2440MHz_Ant2_NTNV

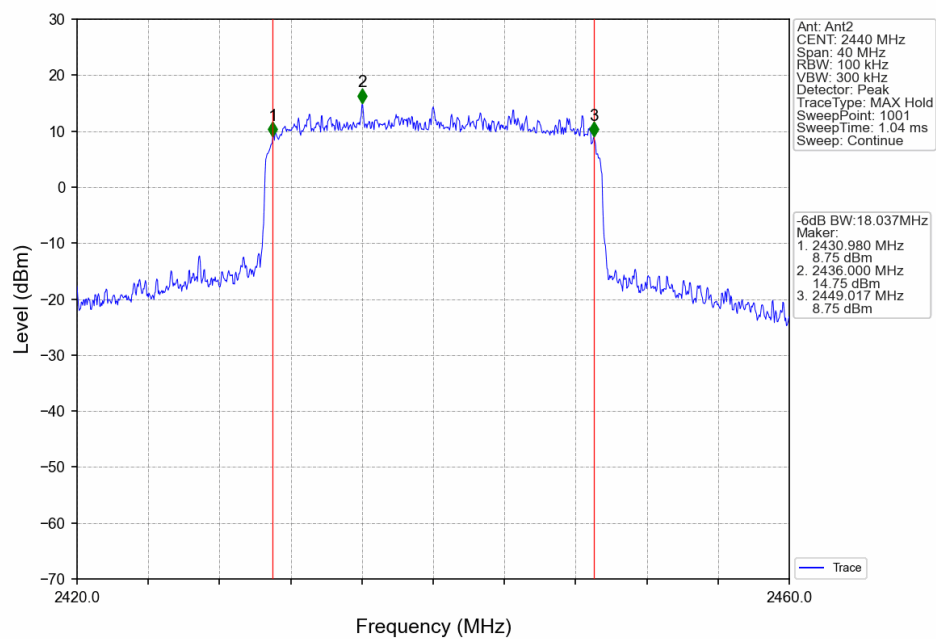

Slot20_HCH_2460MHz_Ant1_NTNV

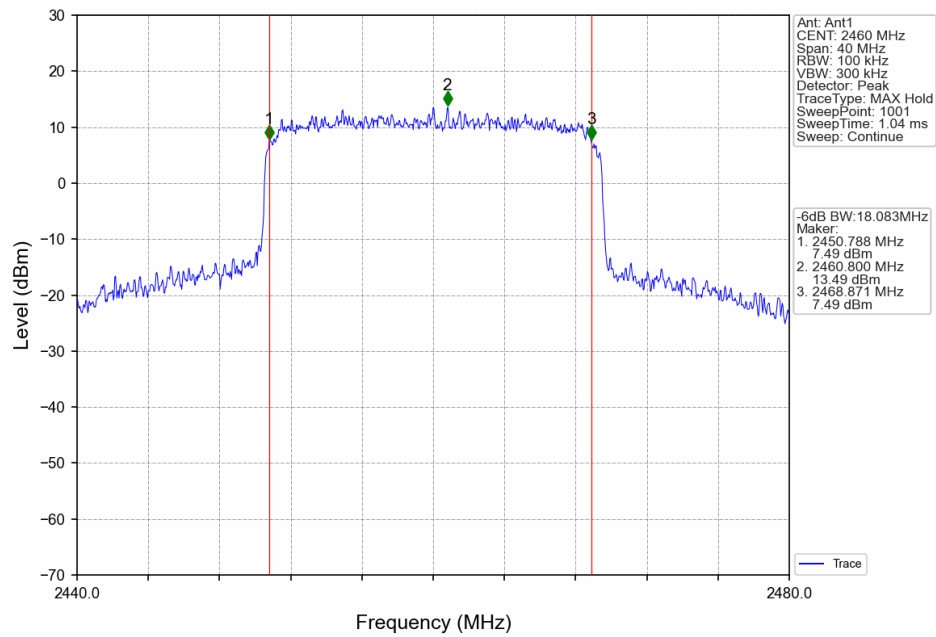


Slot20_HCH_2460MHz_Ant2_NTNV

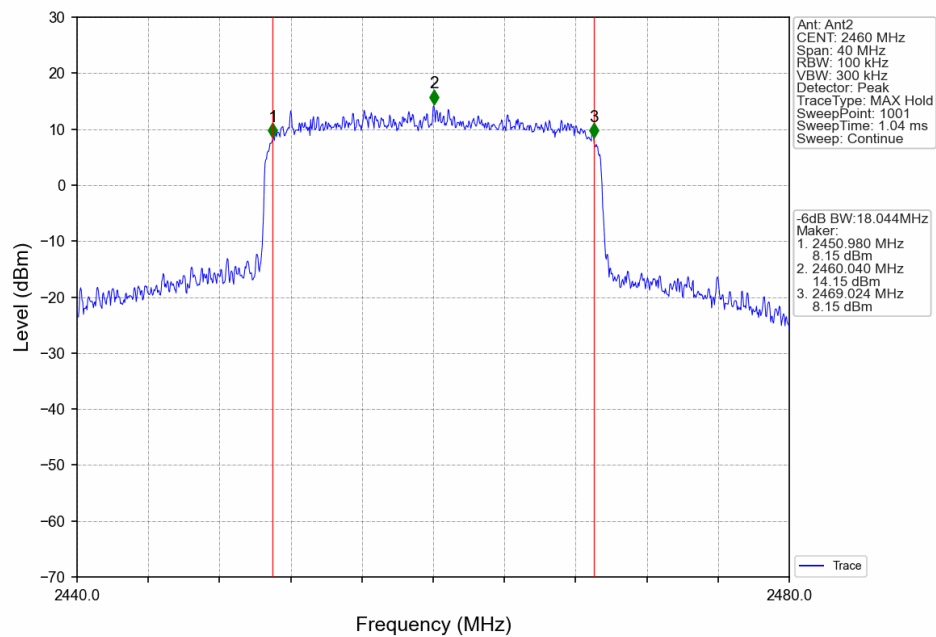




Slot40_LCH_2425MHz_Ant1_NTNV

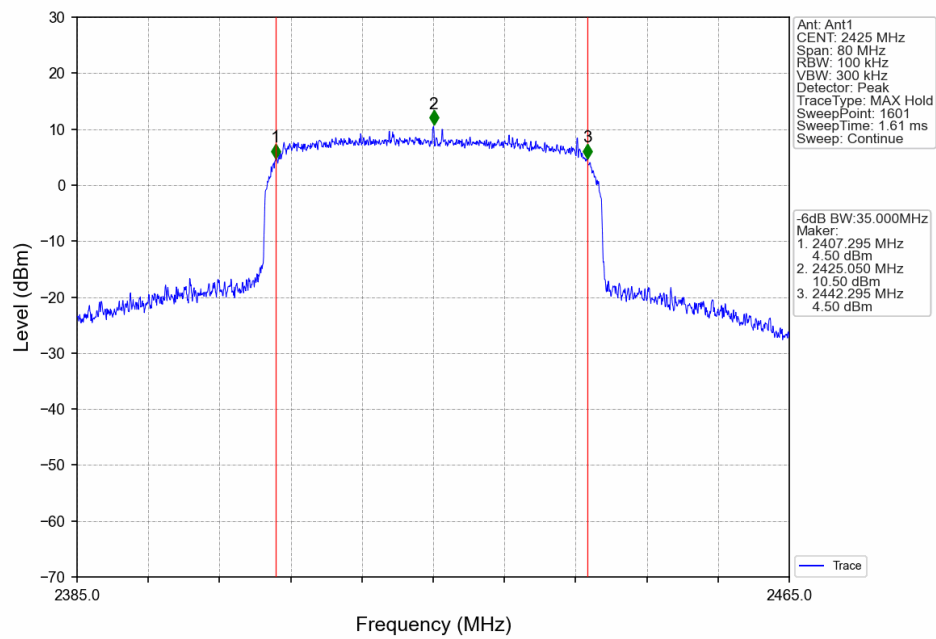


Slot40_LCH_2425MHz_Ant2_NTNV

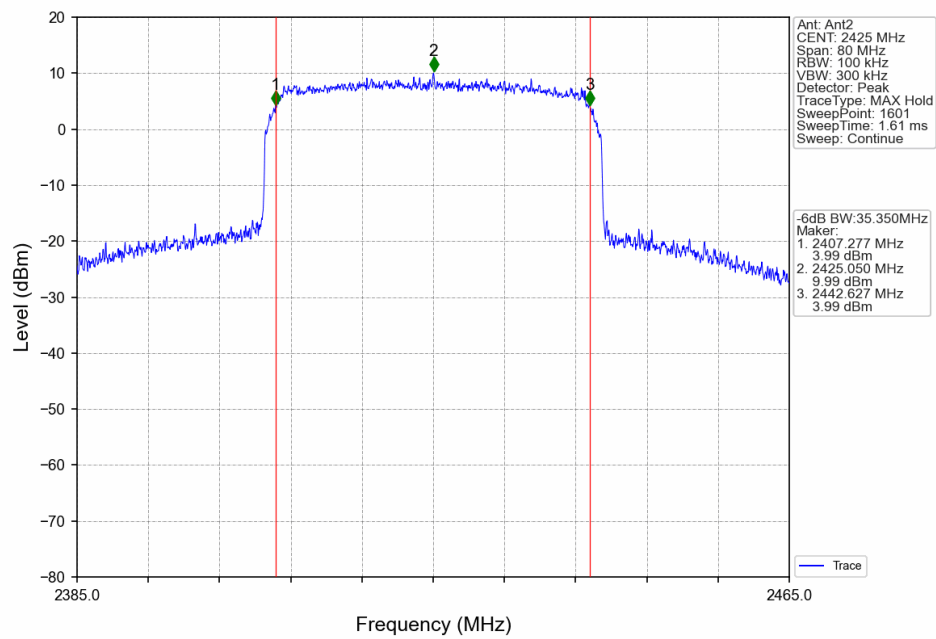




Slot40_MCH_2440MHz_Ant1_NTNV

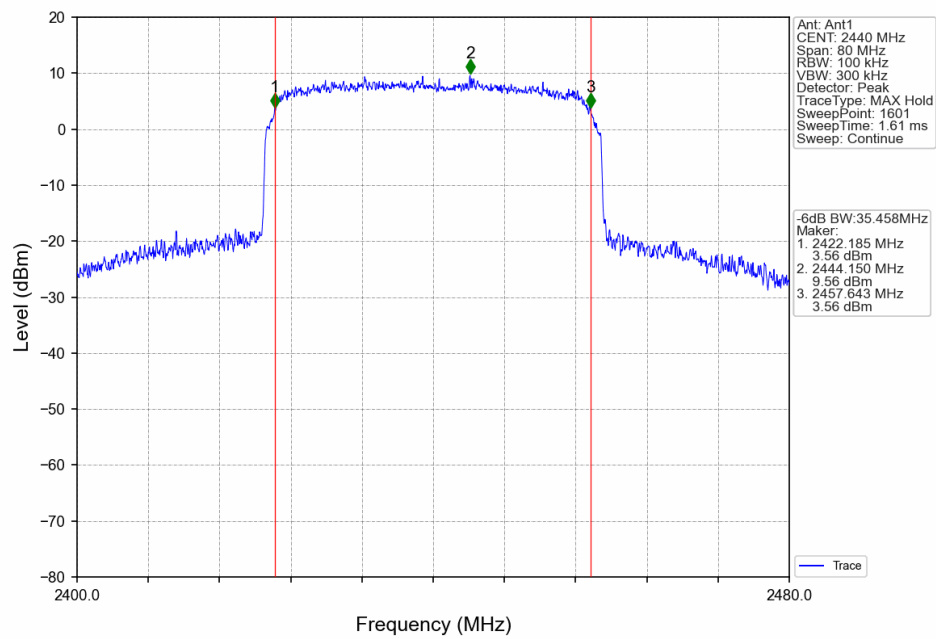


Slot40_MCH_2440MHz_Ant2_NTNV

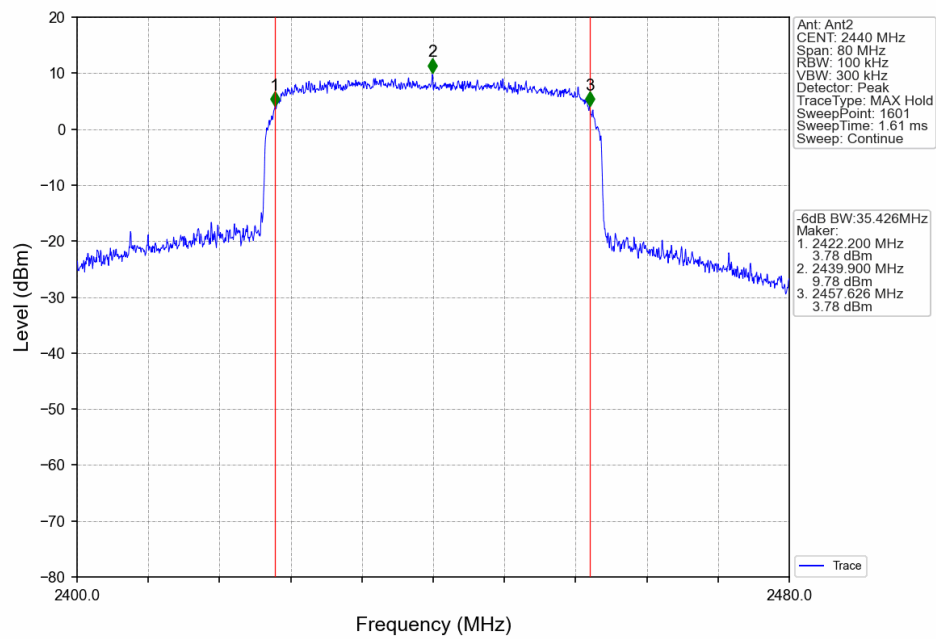




Slot40_HCH_2450MHz_Ant1_NTNV

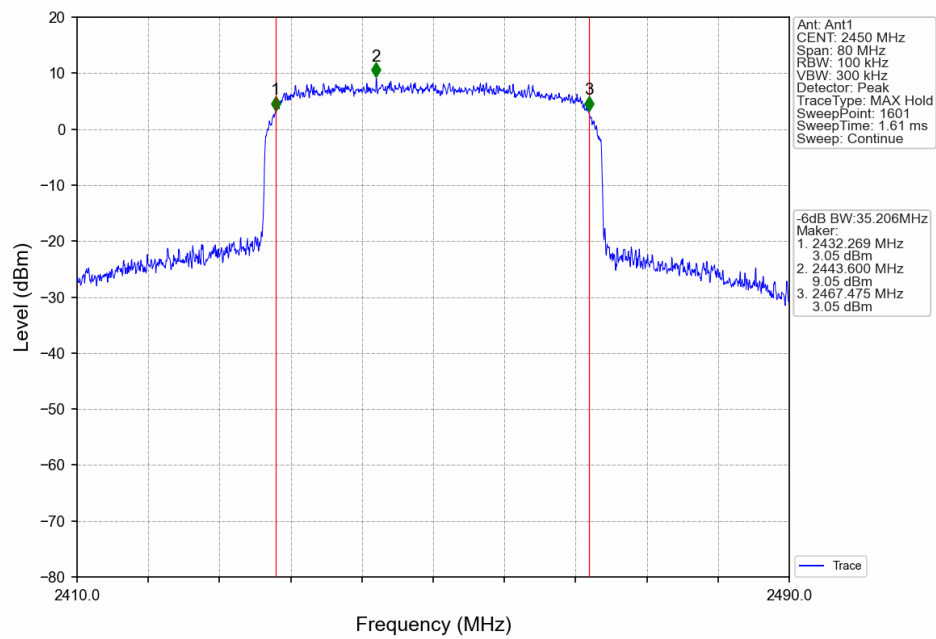

Slot40_HCH_2450MHz_Ant2_NTNV

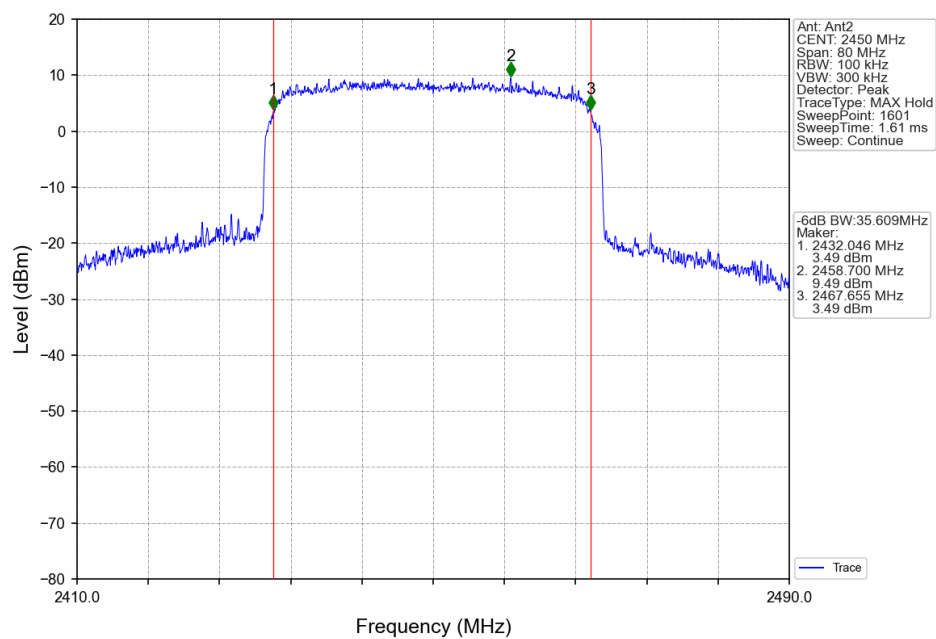

9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3kHz]


≤8


Test results

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
BR	SISO	2405	-9.40	≤8	Pass
		2440	-8.59	≤8	Pass
		2465	-10.27	≤8	Pass

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)				Verdict
			ANT1	ANT2	MIMO	Limit	
Slot5	MIMO	2405	1.41	1.90	3.94	≤8	Pass
		2440	1.05	1.31	3.97	≤8	Pass
		2465	1.63	1.17	3.94	≤8	Pass
Slot10	MIMO	2410	4.26	4.49	7.38	≤8	Pass
		2440	3.49	3.46	6.49	≤8	Pass
		2465	4.10	3.78	6.96	≤8	Pass
Slot20	MIMO	2415	-3.15	-3.87	-1.30	≤8	Pass
		2440	-4.16	-4.08	-1.88	≤8	Pass
		2460	-4.20	-4.24	-1.96	≤8	Pass
Slot40	MIMO	2425	4.24	2.75	6.57	≤8	Pass
		2440	-6.29	-6.33	-4.08	≤8	Pass
		2450	4.12	2.90	6.56	≤8	Pass


Test Graphs
BR:

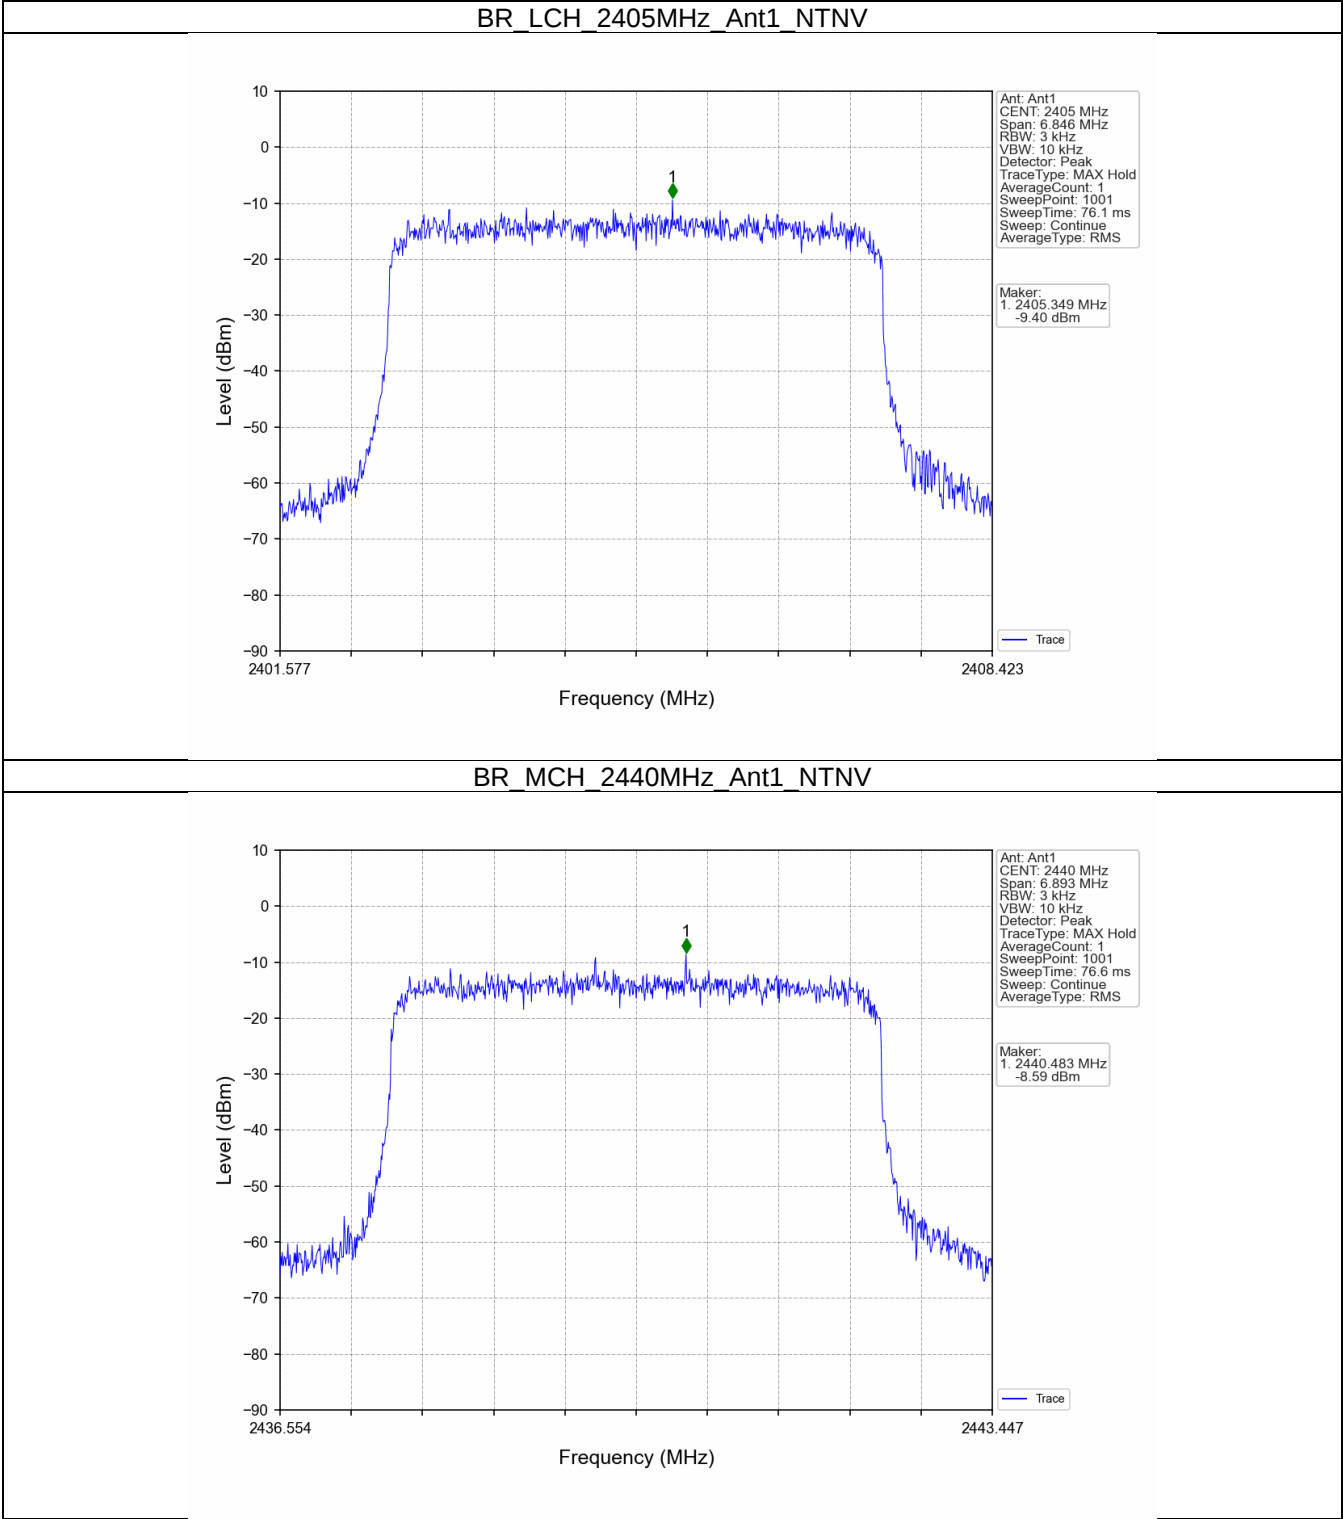

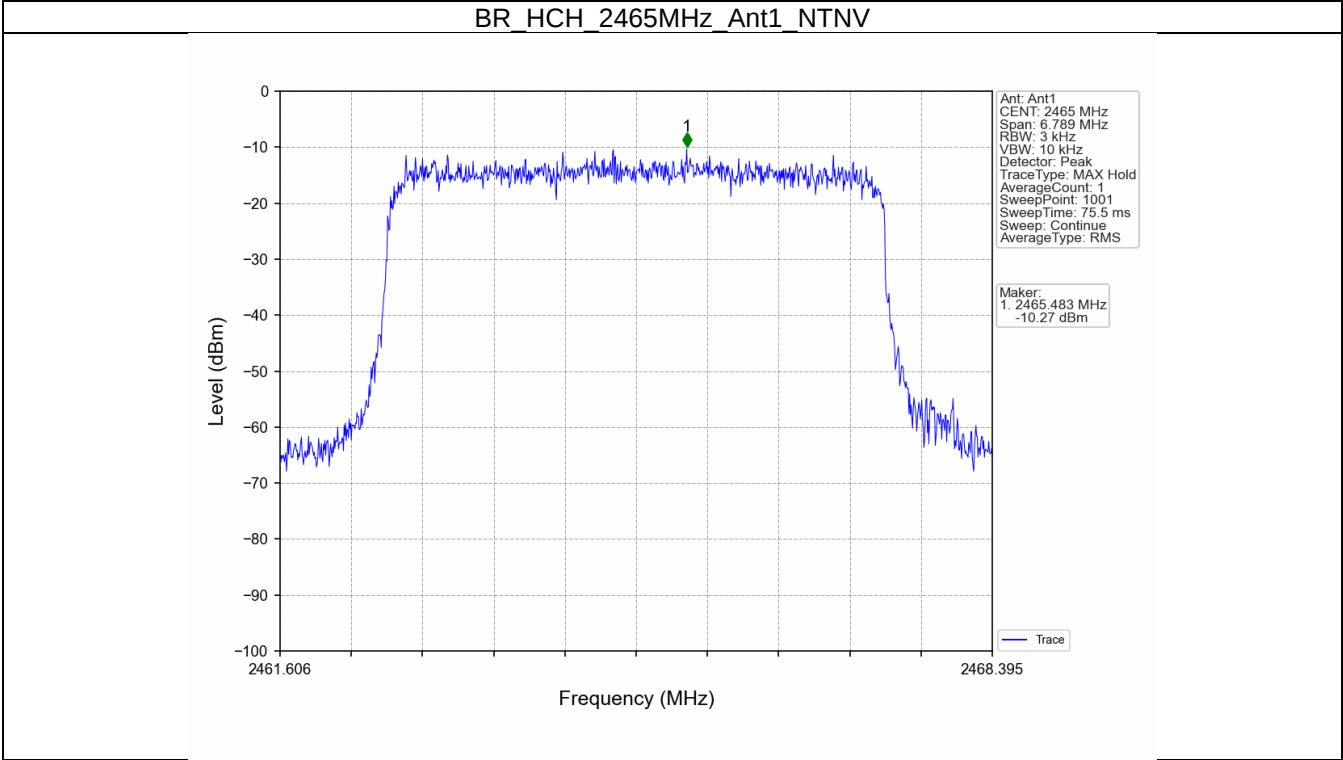


Slot:

Slot5_LCH_2405MHz_Ant1_NTNV

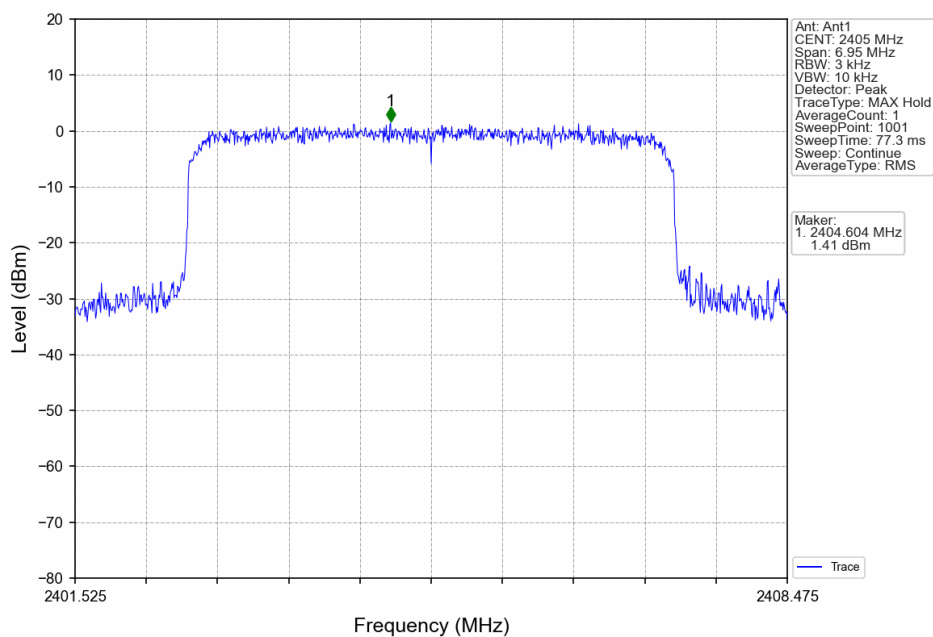


Slot5_LCH_2405MHz_Ant2_NTNV

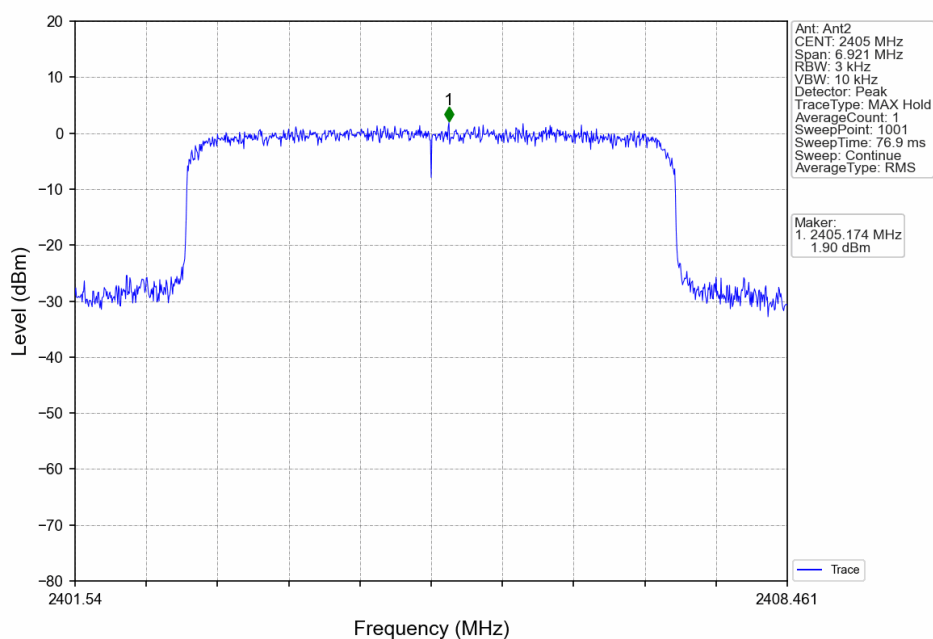





Slot5_LCH_2405MHz_MIMO_NTNV

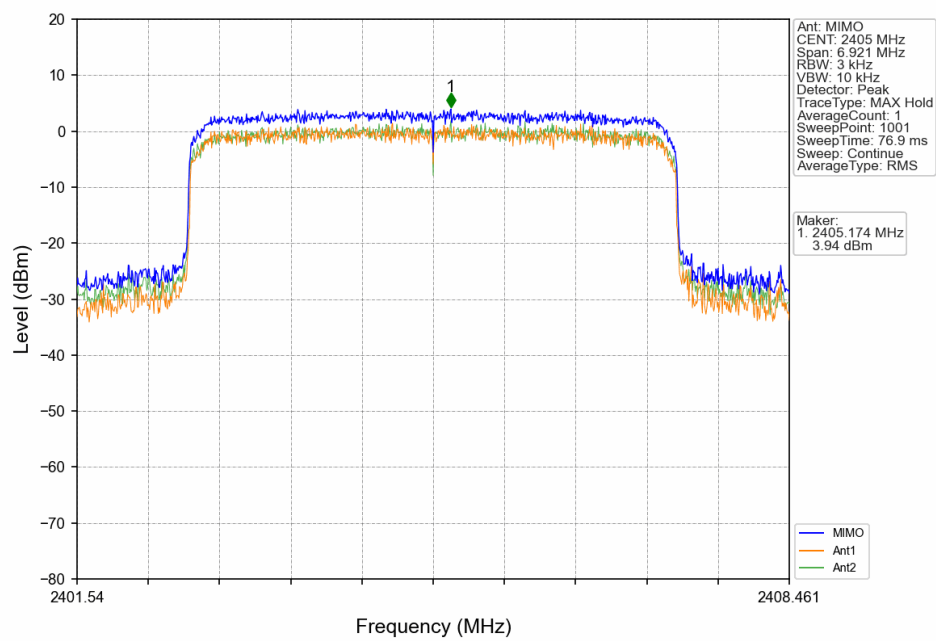


Slot5_MCH_2440MHz_Ant1_NTNV

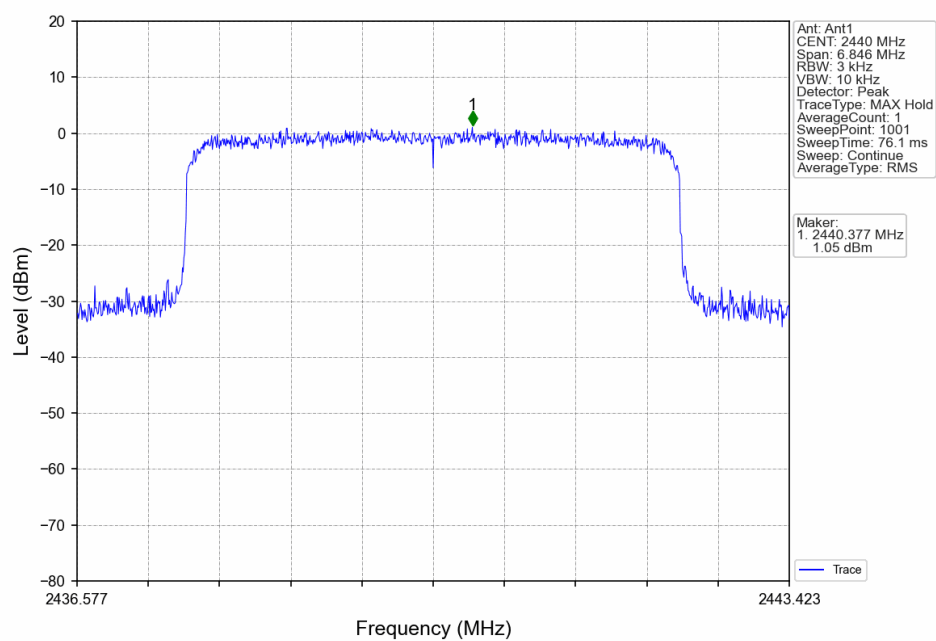

Slot5_MCH_2440MHz_Ant2_NTNV

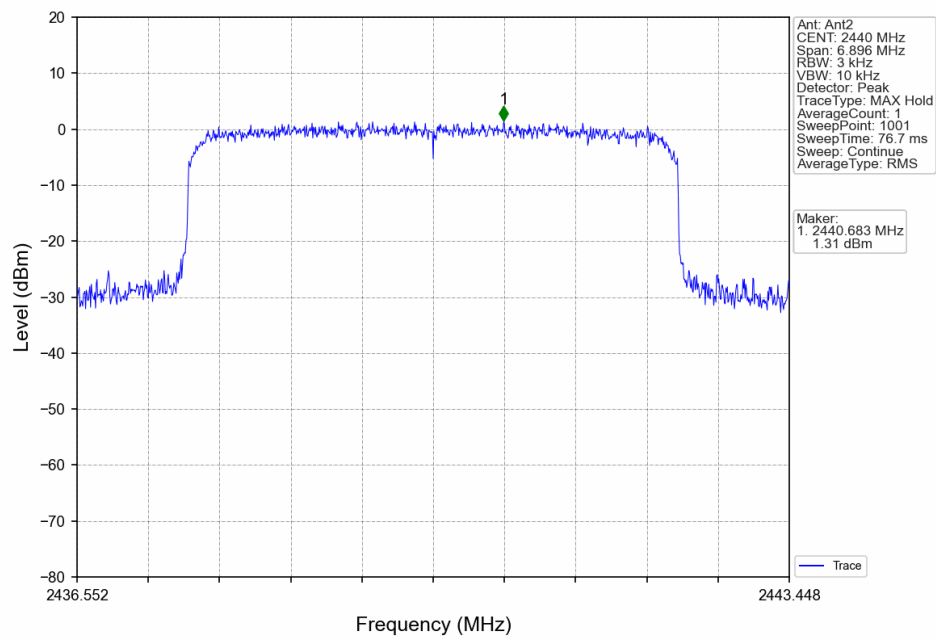


Slot5_MCH_2440MHz_MIMO_NTNV

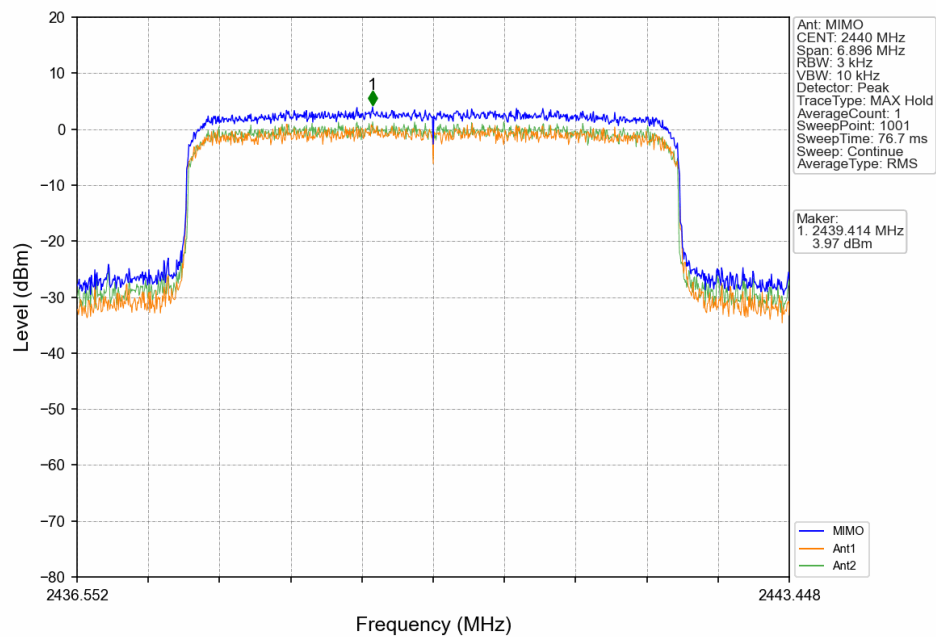




Slot5_HCH_2465MHz_Ant1_NTNV

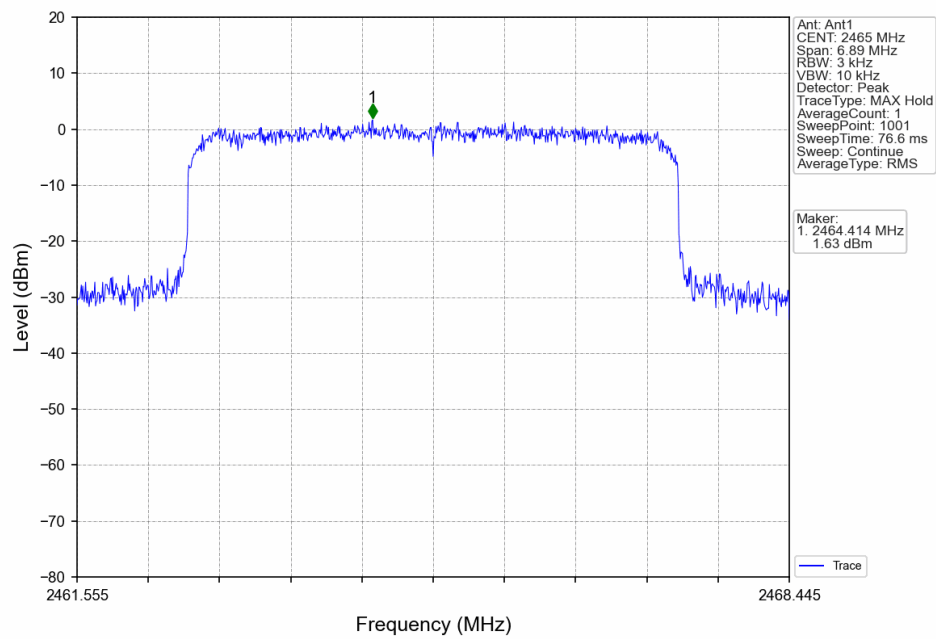


Slot5_HCH_2465MHz_Ant2_NTNV

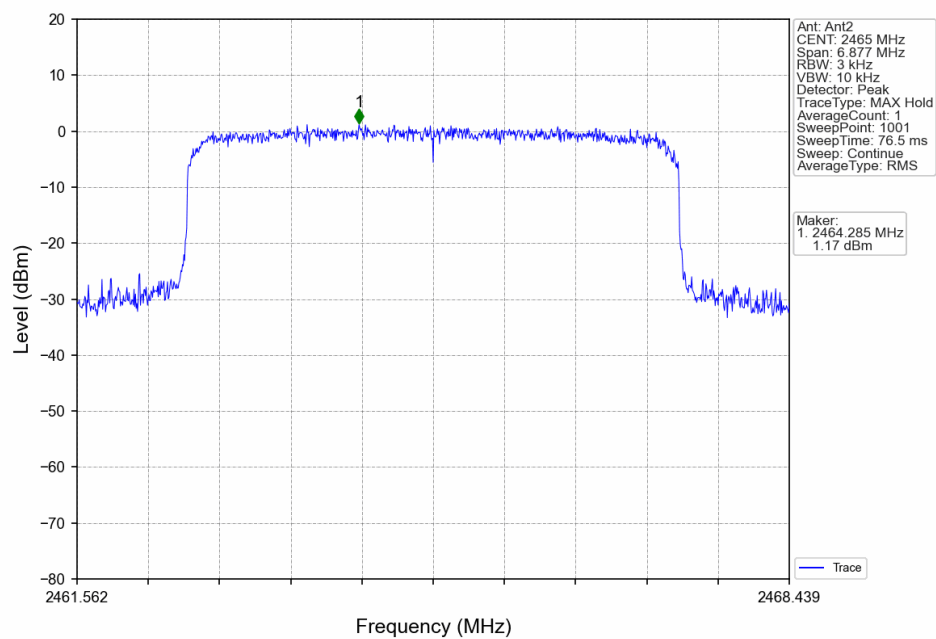





Slot5_HCH_2465MHz_MIMO_NTNV

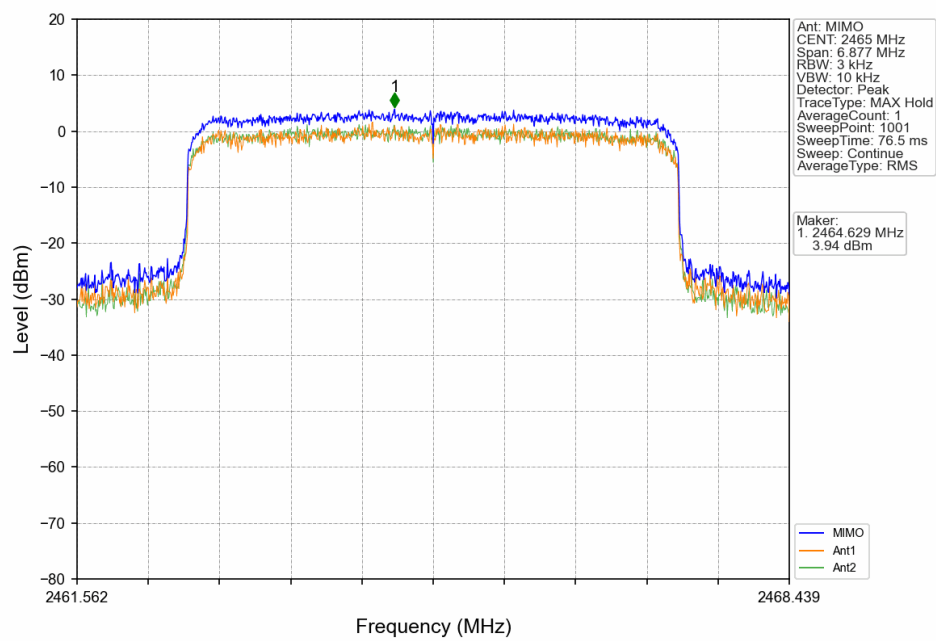


Slot10_LCH_2410MHz_Ant1_NTNV

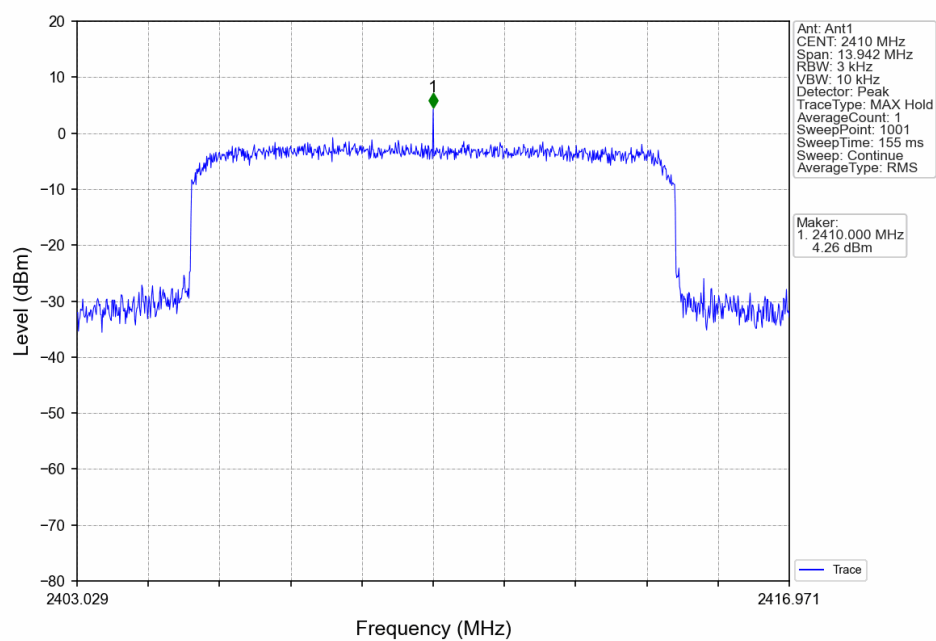

Slot10_LCH_2410MHz_Ant2_NTNV

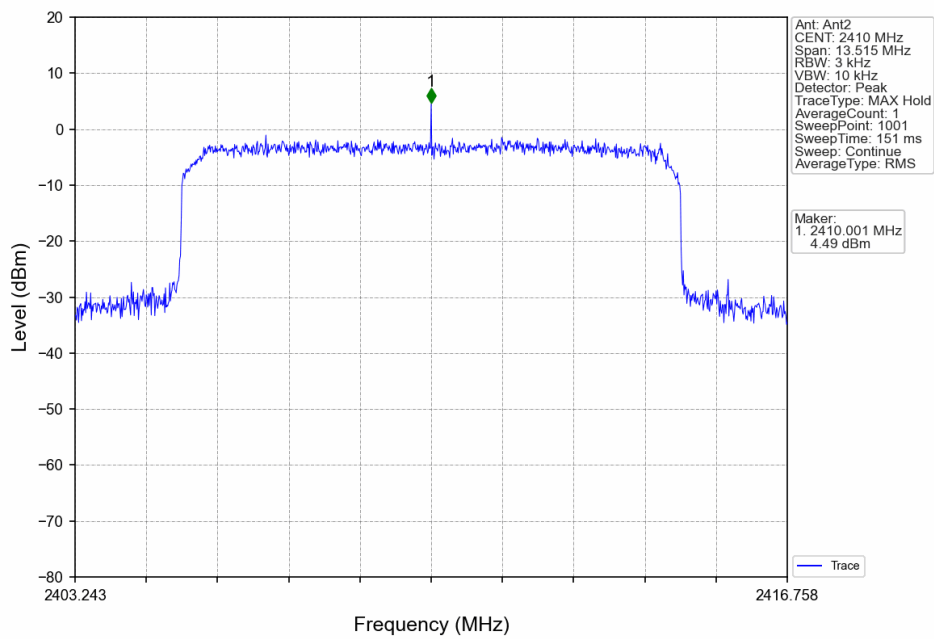


Slot10_LCH_2410MHz_MIMO_NTNV

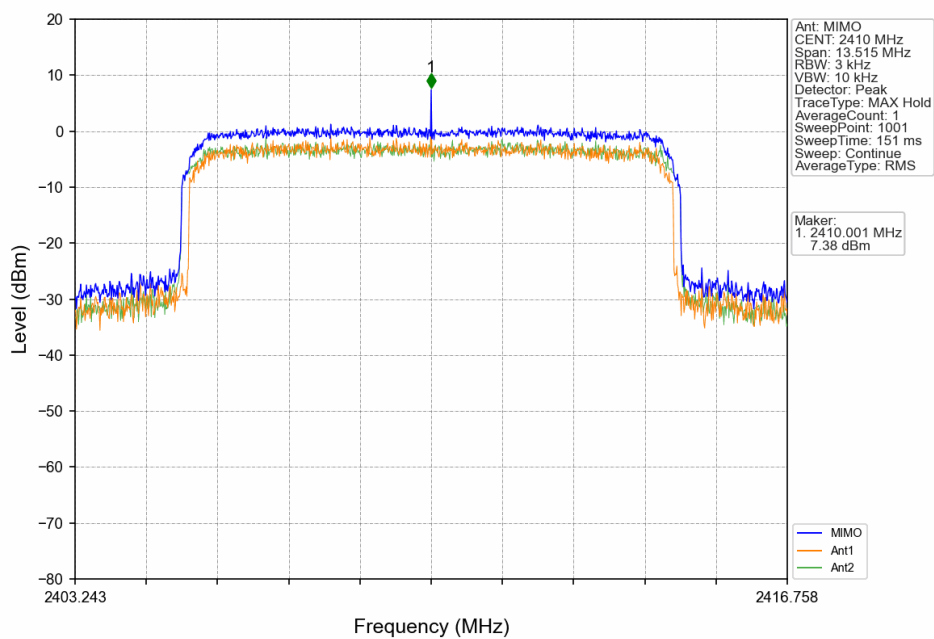




Slot10_MCH_2440MHz_Ant1_NTNV

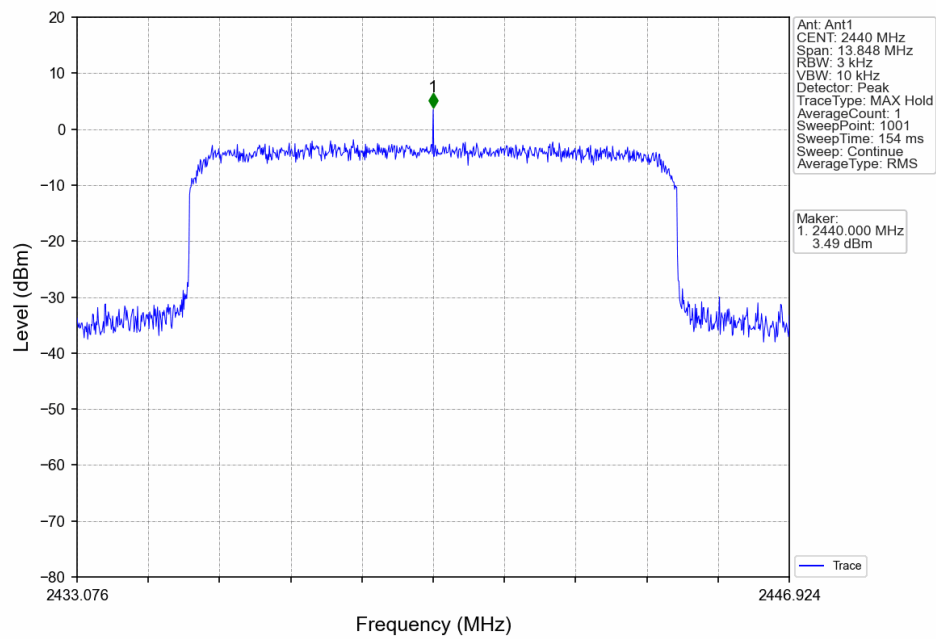


Slot10_MCH_2440MHz_Ant2_NTNV

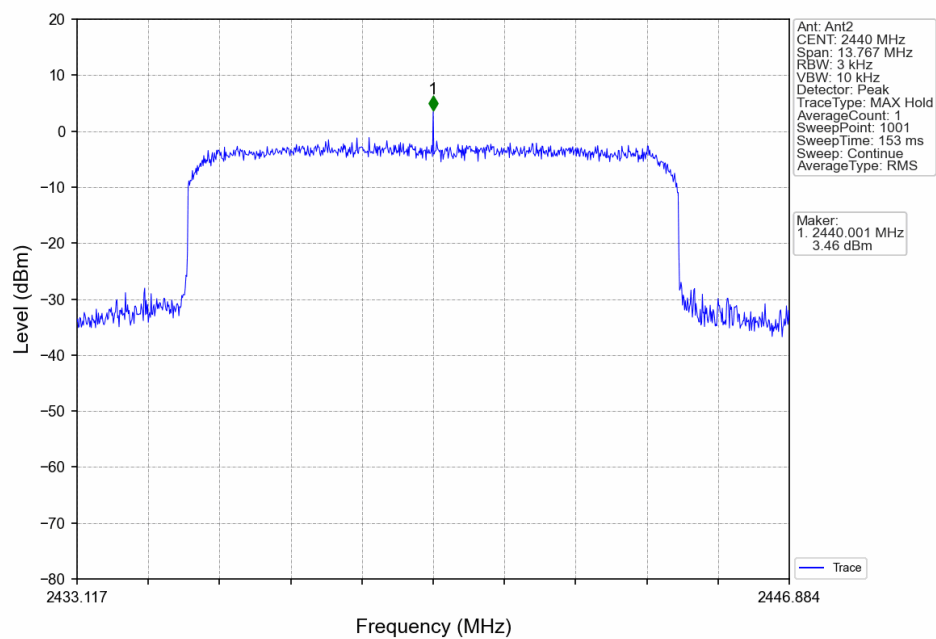





Slot10_MCH_2440MHz_MIMO_NTNV

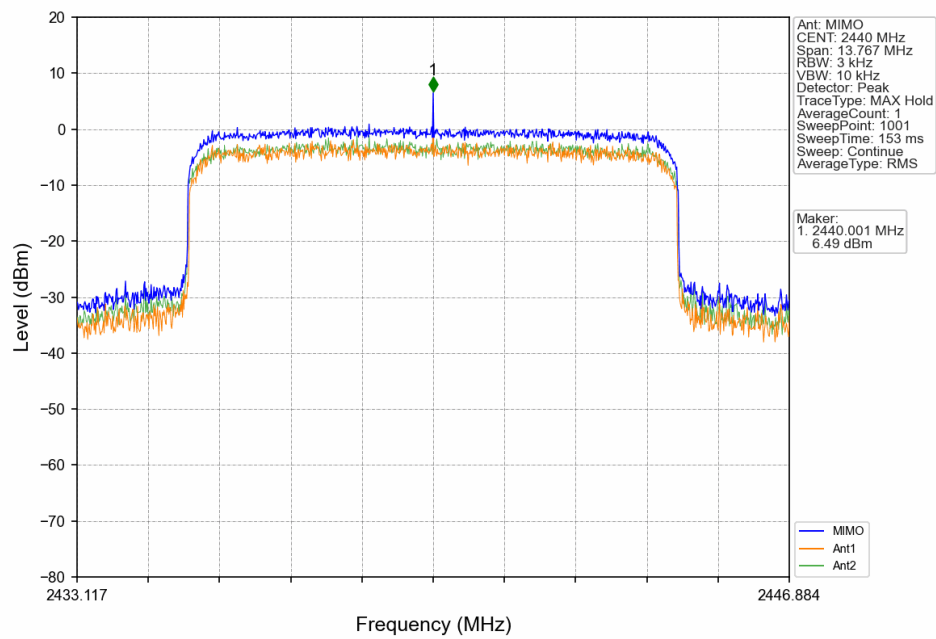


Slot10_HCH_2465MHz_Ant1_NTNV

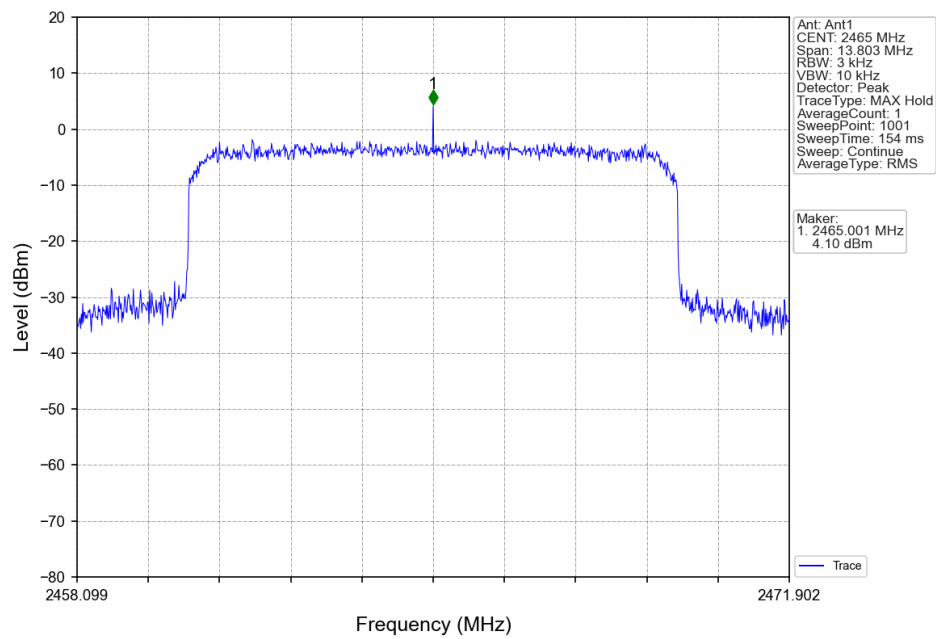


Slot10_HCH_2465MHz_Ant2_NTNV

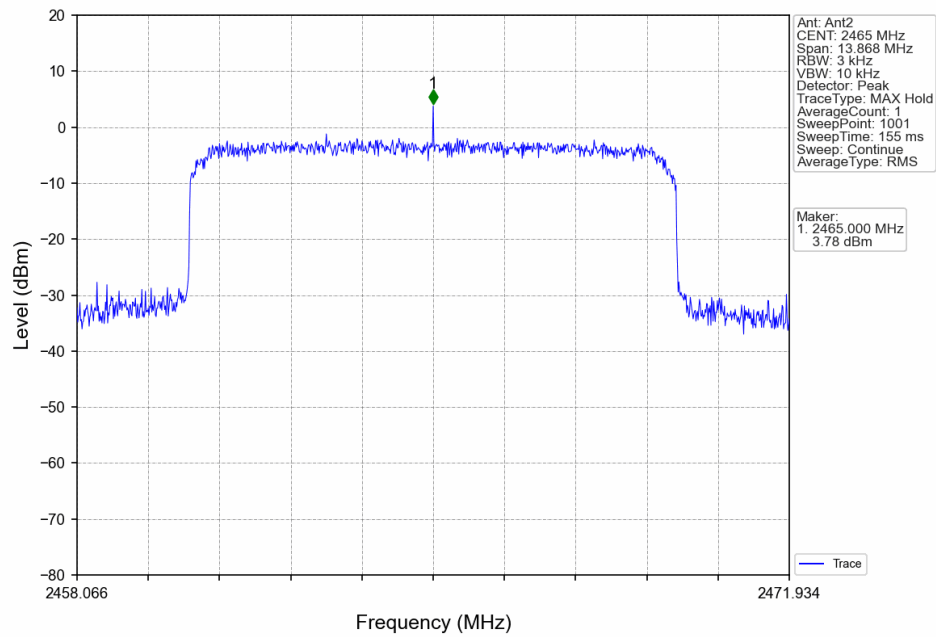


Slot10_HCH_2465MHz_MIMO_NTNV

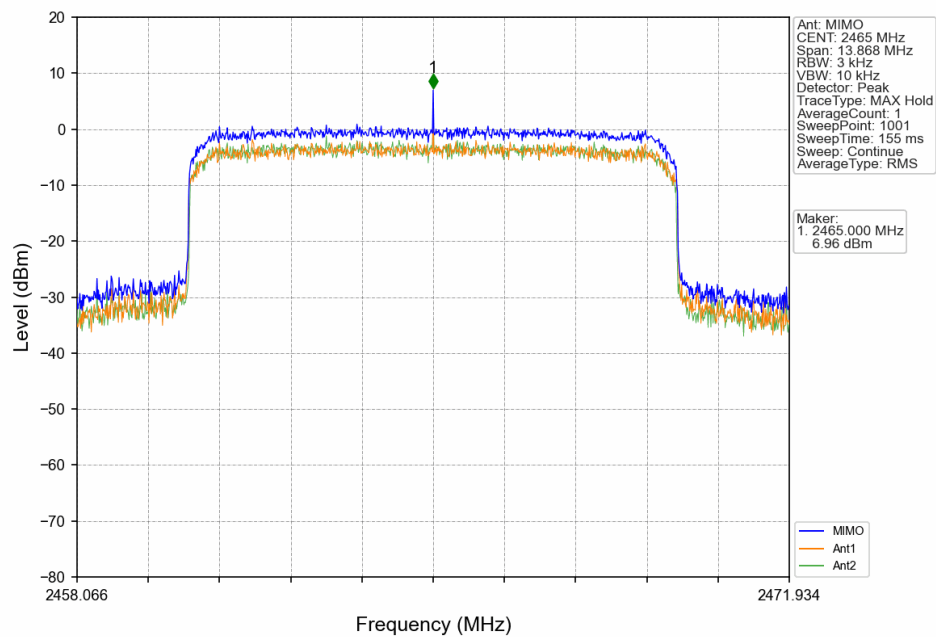


Slot20_LCH_2415MHz_Ant1_NTNV

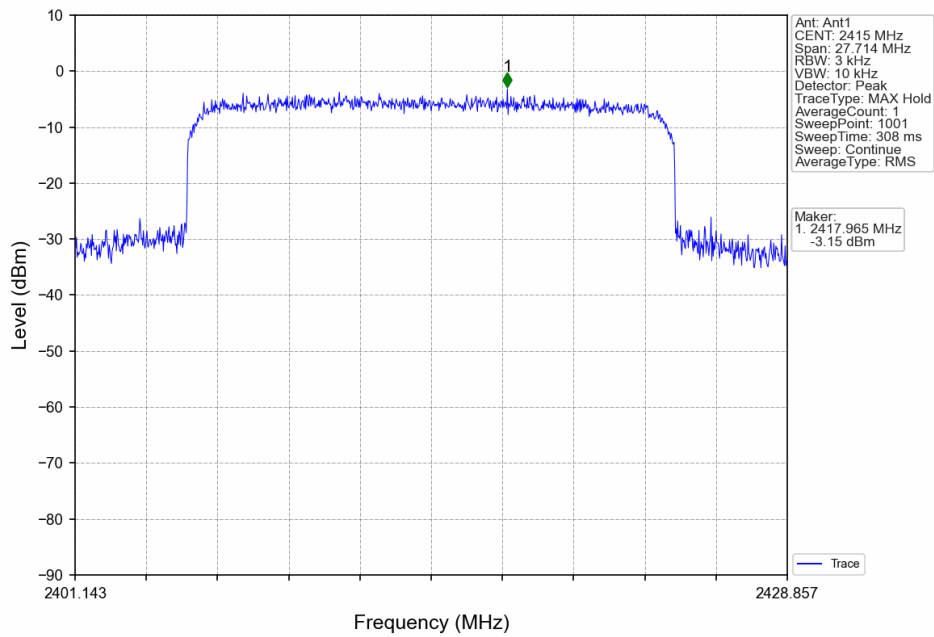


Slot20_LCH_2415MHz_Ant2_NTNV

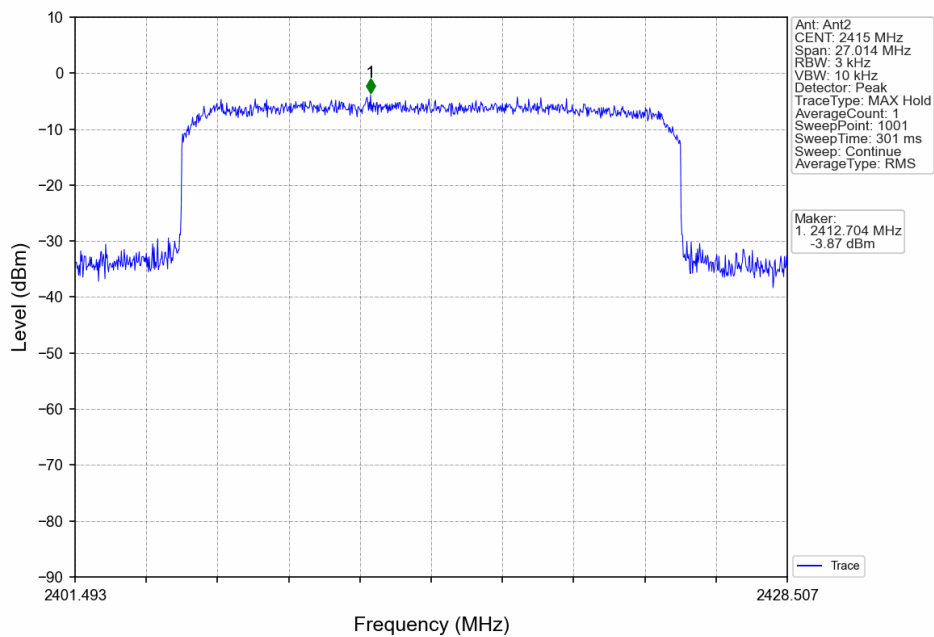


Slot20_LCH_2415MHz_MIMO_NTNV

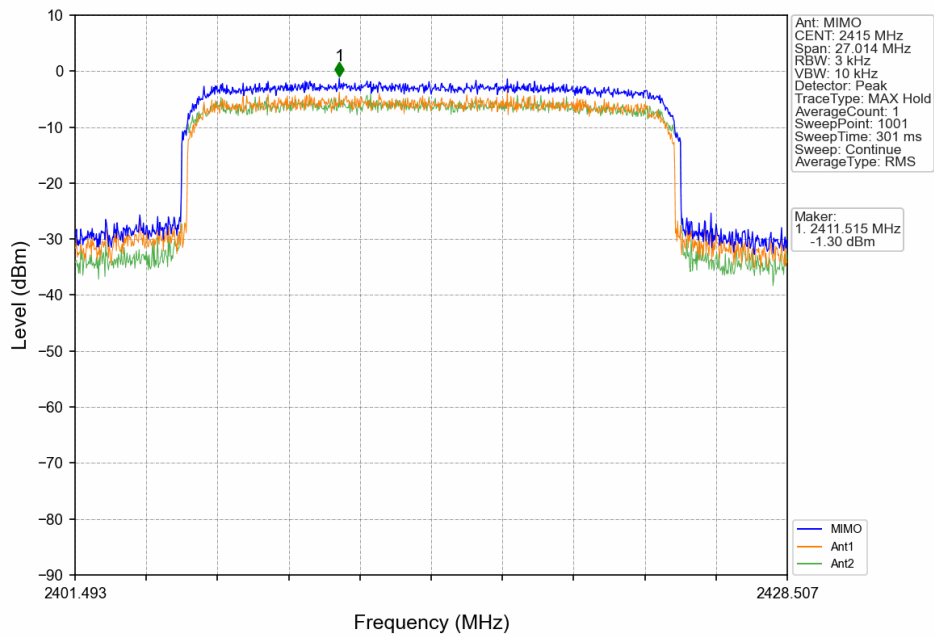


Slot20_MCH_2440MHz_Ant1_NTNV

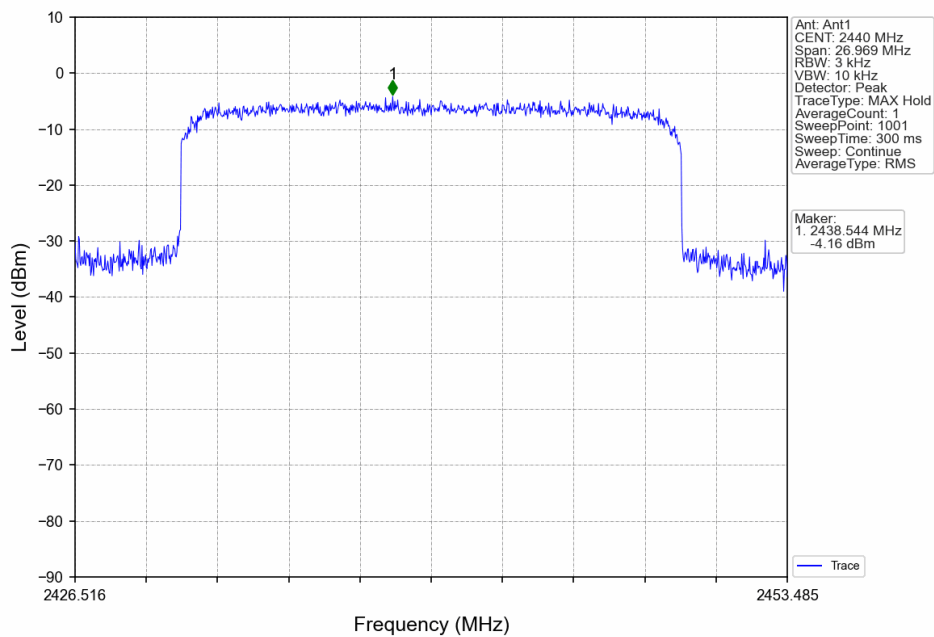


Slot20_MCH_2440MHz_Ant2_NTNV

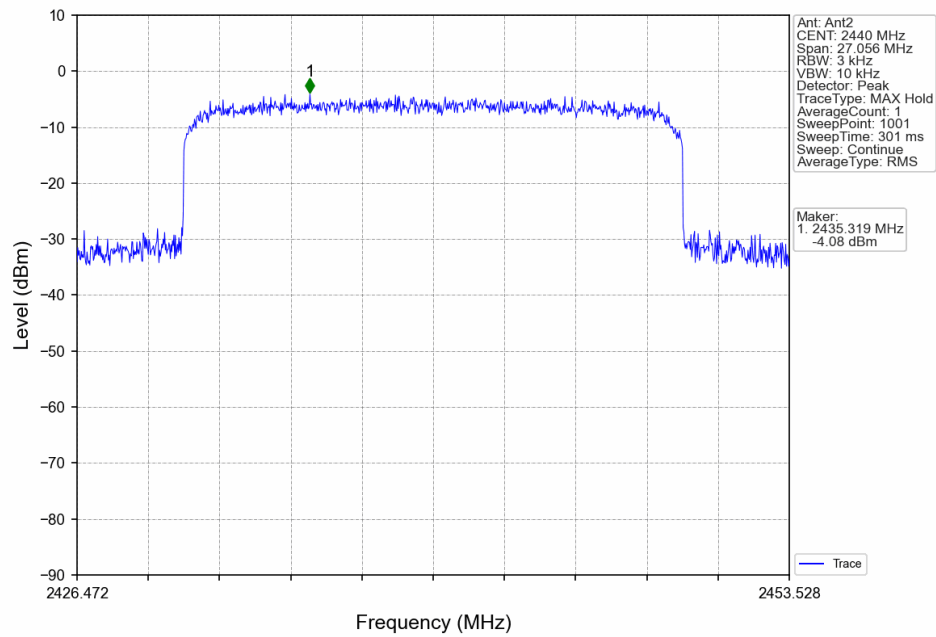


Slot20_MCH_2440MHz_MIMO_NTNV

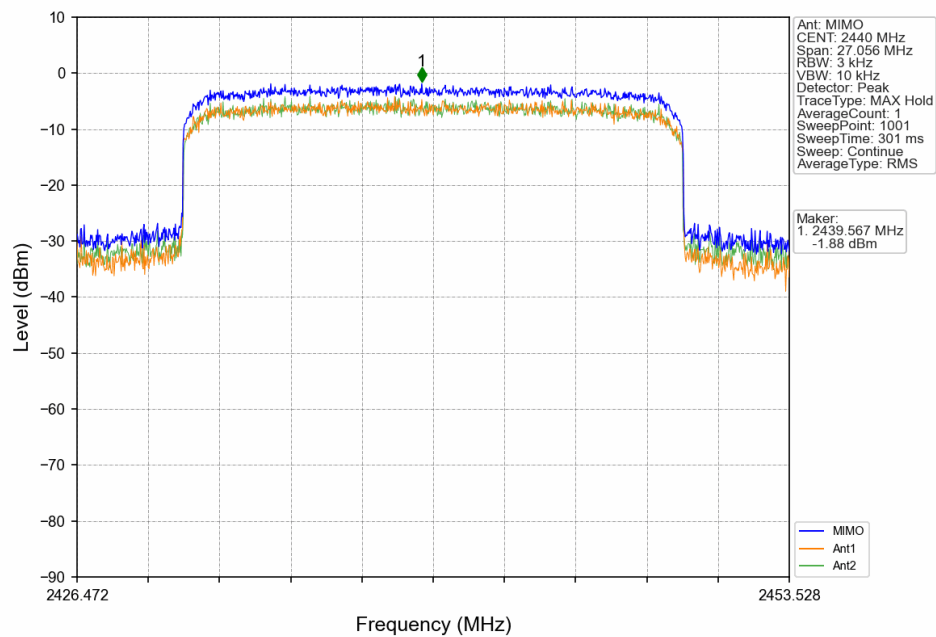

Slot20_HCH_2460MHz_Ant1_NTNV

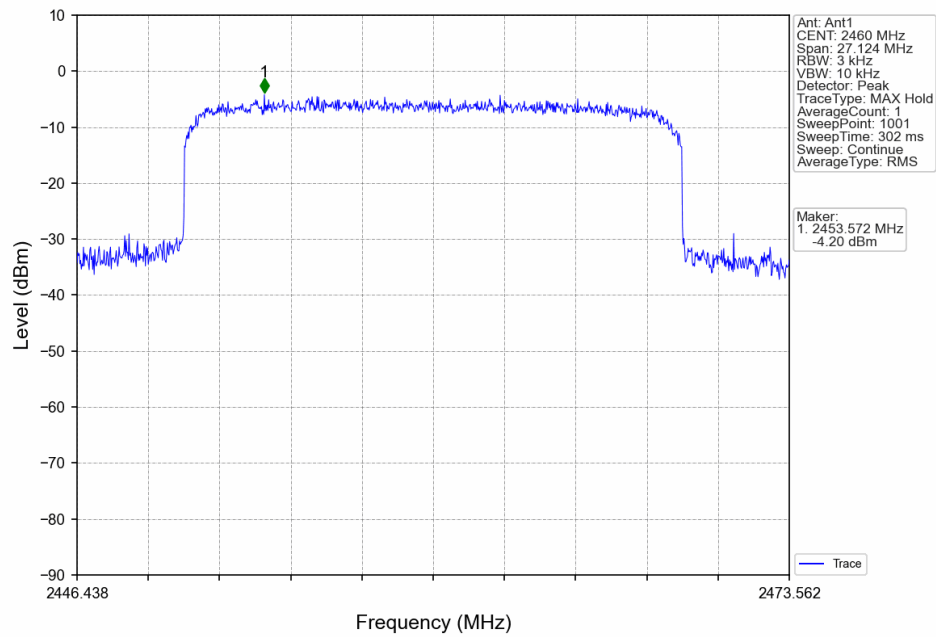


Slot20_HCH_2460MHz_Ant2_NTNV

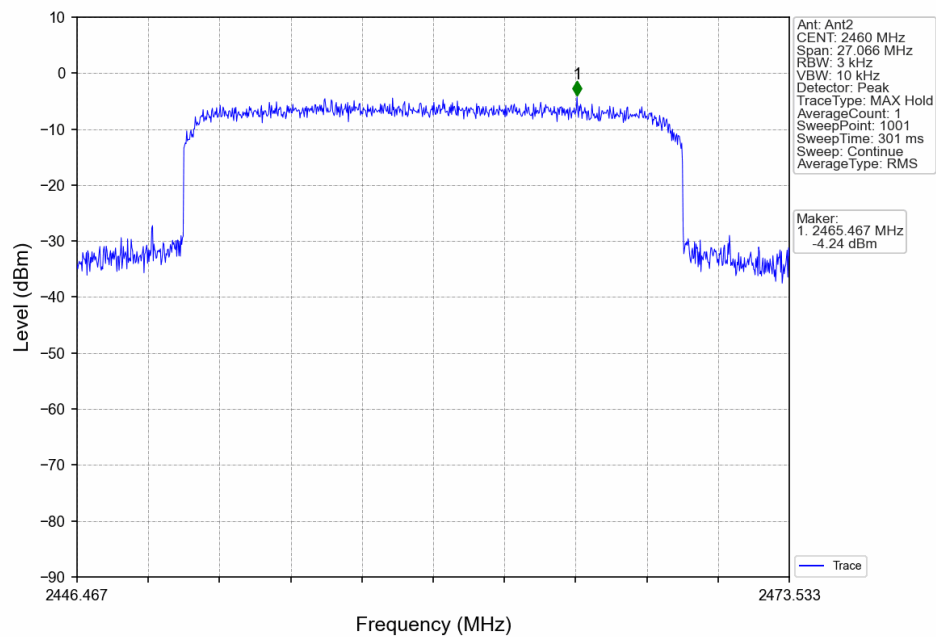





Slot20_HCH_2460MHz_MIMO_NTNV

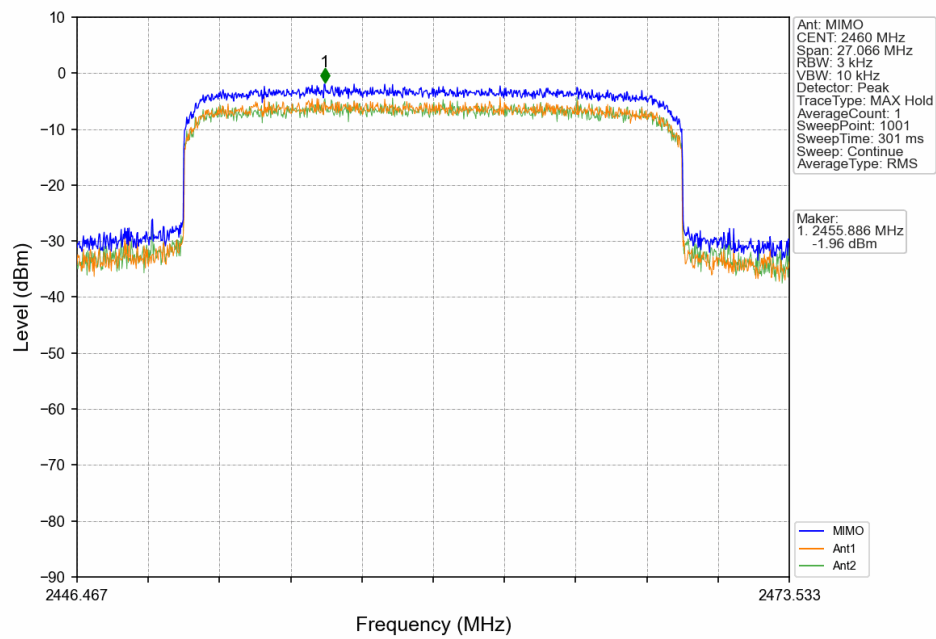


Slot40_LCH_2425MHz_Ant1_NTNV

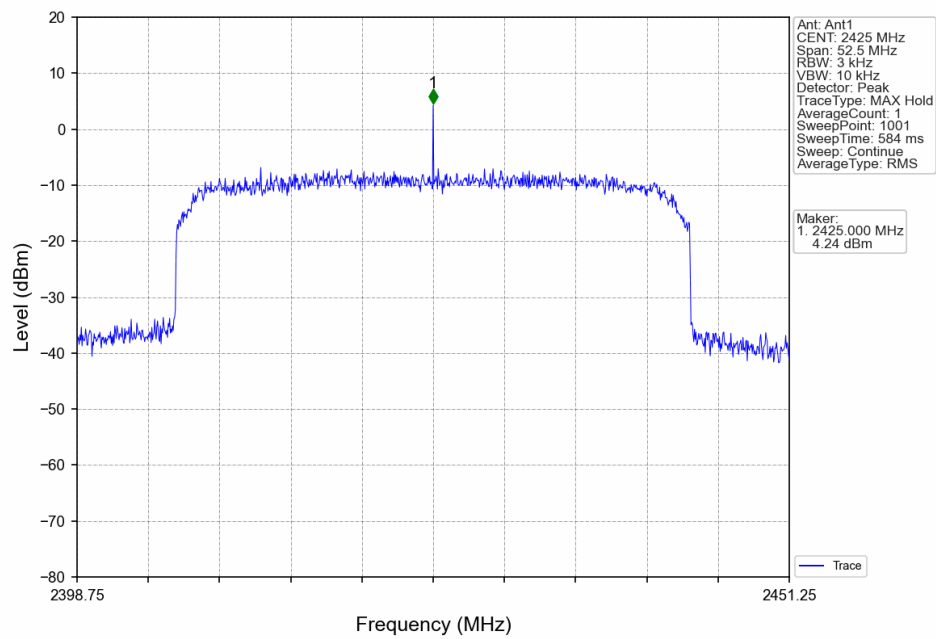

Slot40_LCH_2425MHz_Ant2_NTNV

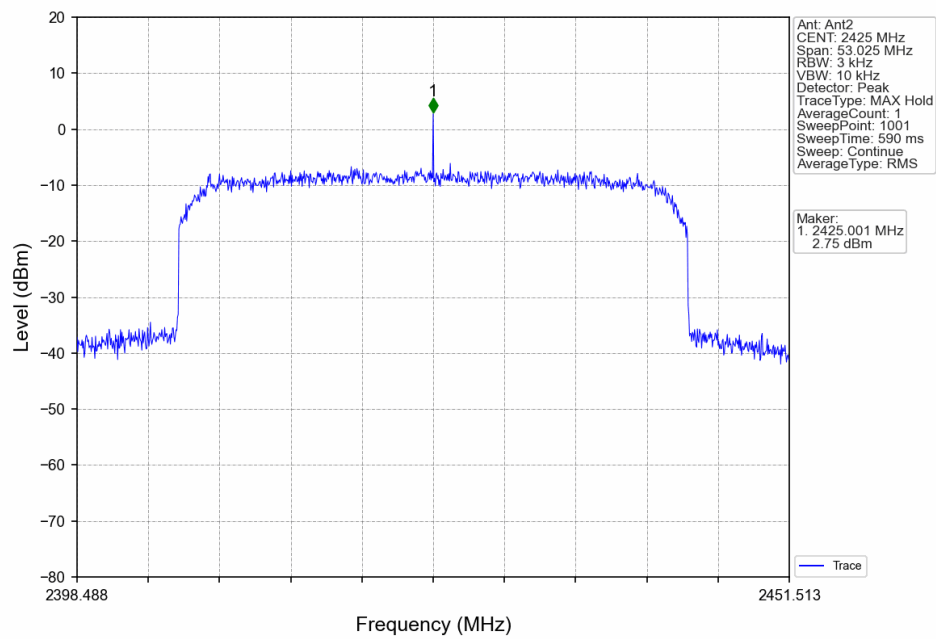


Slot40_LCH_2425MHz_MIMO_NTNV

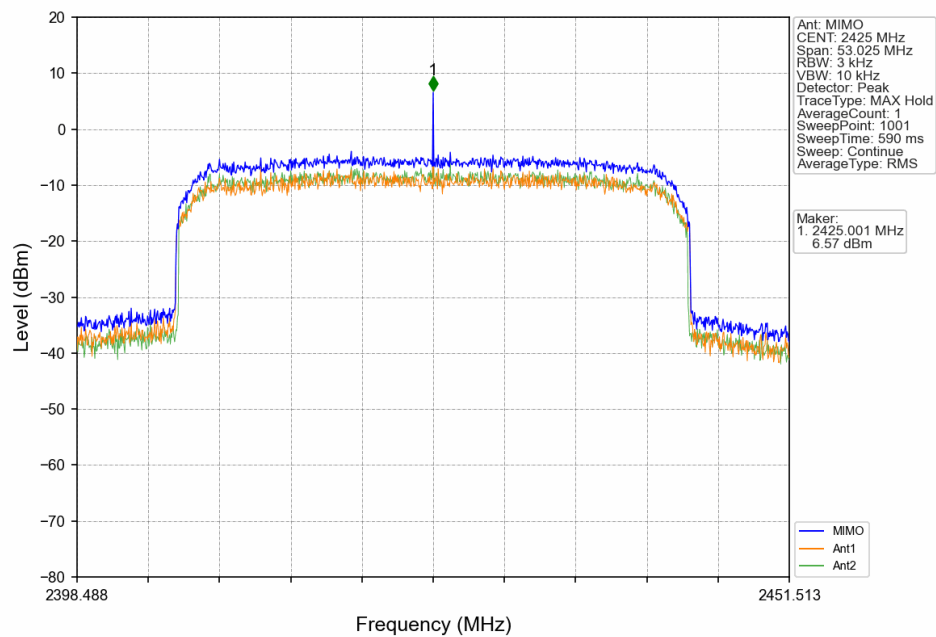




Slot40_MCH_2440MHz_Ant1_NTNV

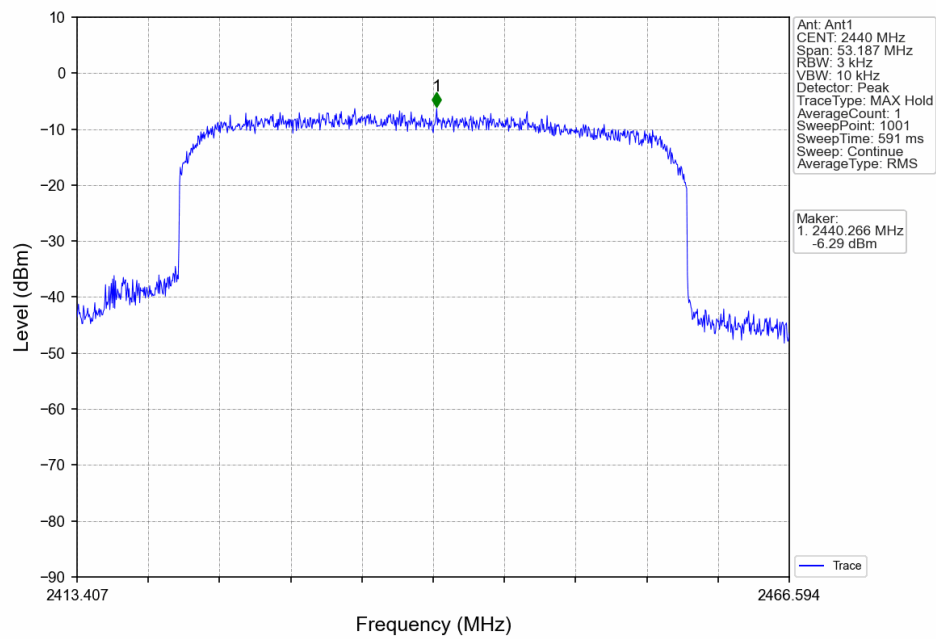


Slot40_MCH_2440MHz_Ant2_NTNV

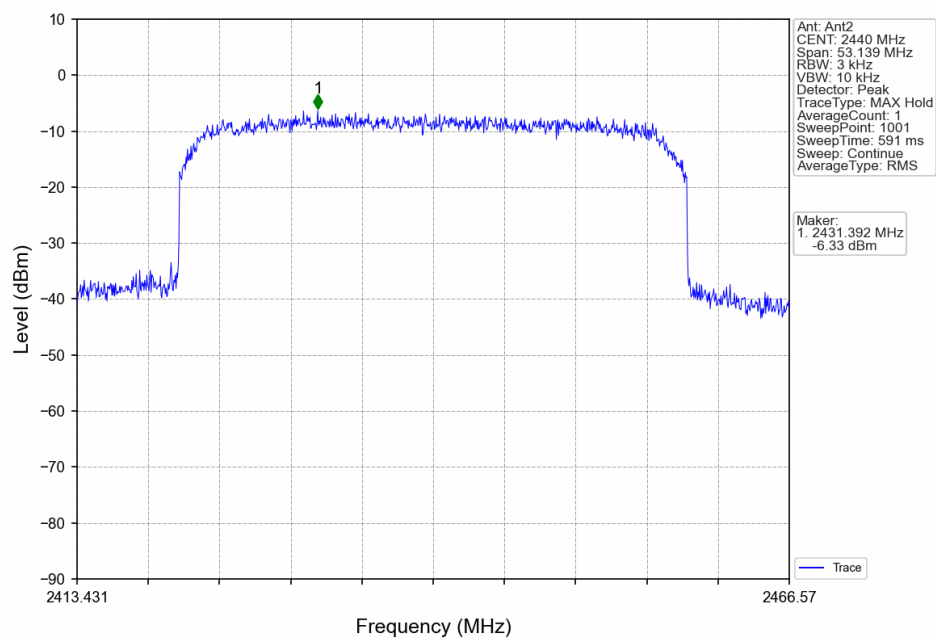




Slot40_MCH_2440MHz_MIMO_NTNV

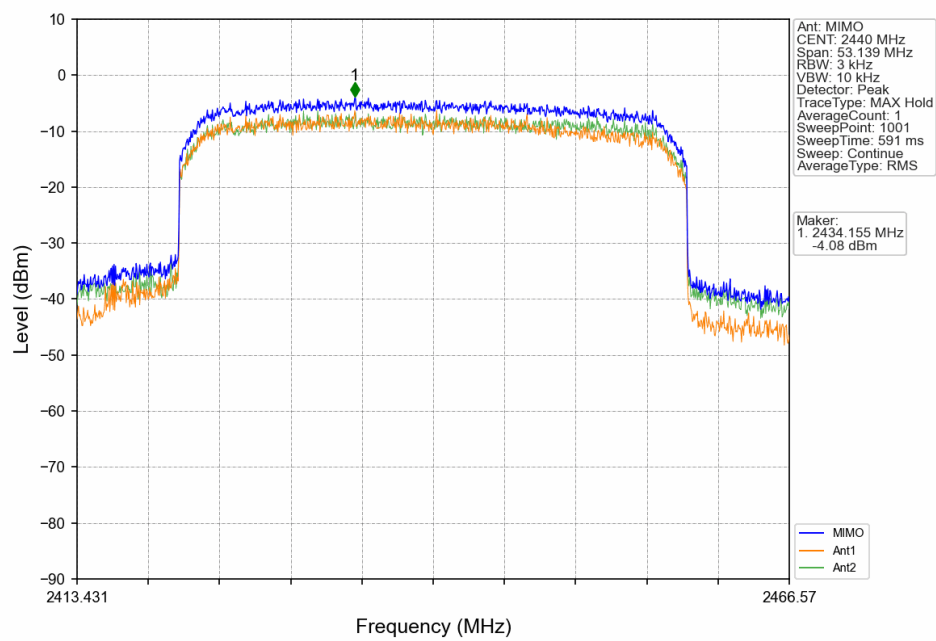


Slot40_HCH_2450MHz_Ant1_NTNV

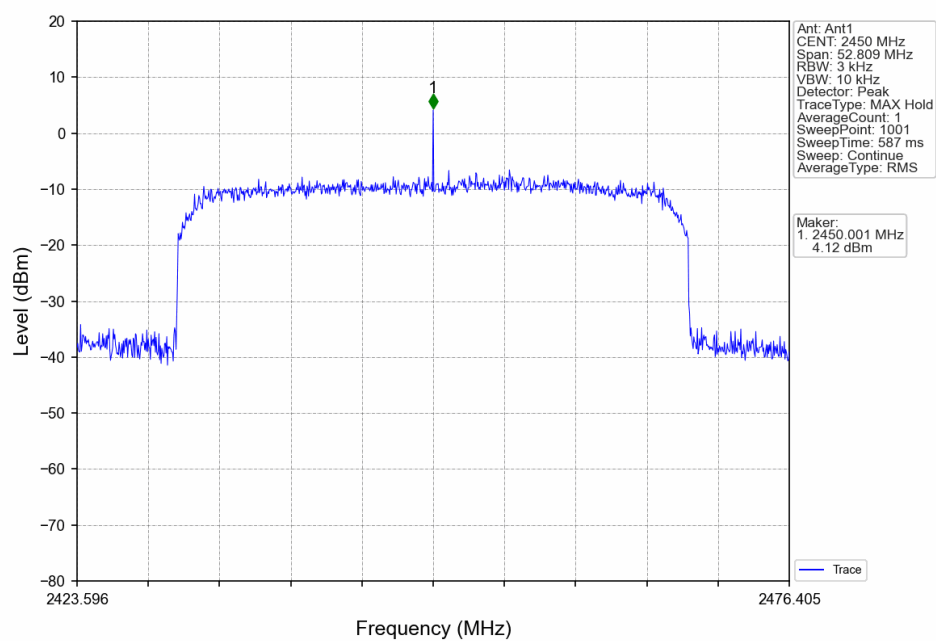




Slot40_HCH_2450MHz_Ant2_NTNV

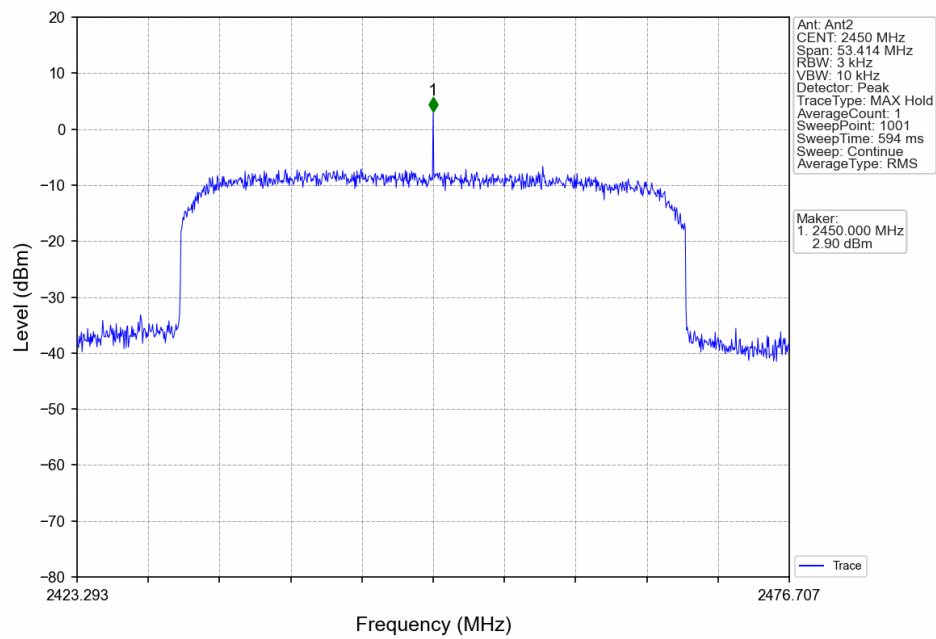

Slot40_HCH_2450MHz_MIMO_NTNV

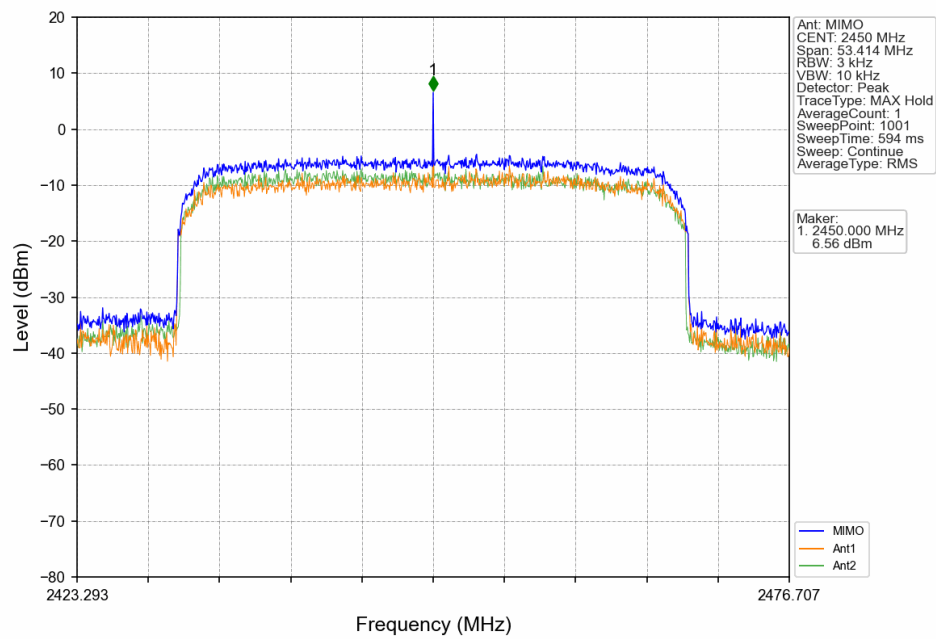

9.4 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test results

BR:

Reference:

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
BR	SISO	2405	1	4.47
		2440	1	4.85
		2465	1	4.31
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

Conducted spurious emission:

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BR	SISO	2405	1	4.47	-15.53	Pass
		2440	1	4.85	-15.15	Pass
		2465	1	4.31	-15.69	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

Slot:

Reference:


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
Slot5	MIMO	2405	1	18.91
			2	19.29
		2440	1	17.90
			2	18.84
		2465	1	19.44
			2	19.39
Slot10	MIMO	2410	1	16.27
			2	16.03
		2440	1	16.64
			2	16.35
		2465	1	16.30
			2	16.15
Slot20	MIMO	2415	1	13.59
			2	13.25
		2440	1	10.13
			2	13.05
		2460	1	7.41
			2	13.11
Slot40	MIMO	2425	1	11.03
			2	9.75
		2440	1	10.55
			2	9.72
		2450	1	10.79
			2	9.45
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				


Conducted spurious emission:

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
Slot5	MIMO	2405	1	18.91	-1.09	Pass
			2	19.29	-0.71	Pass
		2440	1	17.90	-2.10	Pass
			2	18.84	-1.16	Pass
		2465	1	19.44	-0.56	Pass
			2	19.39	-0.61	Pass
Slot10	MIMO	2410	1	16.27	-3.73	Pass
			2	16.03	-3.97	Pass
		2440	1	16.64	-3.36	Pass
			2	16.35	-3.65	Pass
		2465	1	16.30	-3.70	Pass
			2	16.15	-3.85	Pass
Slot20	MIMO	2415	1	13.59	-6.41	Pass
			2	13.25	-6.75	Pass
		2440	1	10.13	-9.87	Pass
			2	13.05	-6.95	Pass
		2460	1	7.41	-12.59	Pass
			2	13.11	-6.89	Pass
Slot40	MIMO	2425	1	11.03	-8.97	Pass
			2	9.75	-10.25	Pass
		2440	1	10.55	-9.45	Pass
			2	9.72	-10.28	Pass
		2450	1	10.79	-9.21	Pass
			2	9.45	-10.55	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						


Test Graphs

BR:
Reference

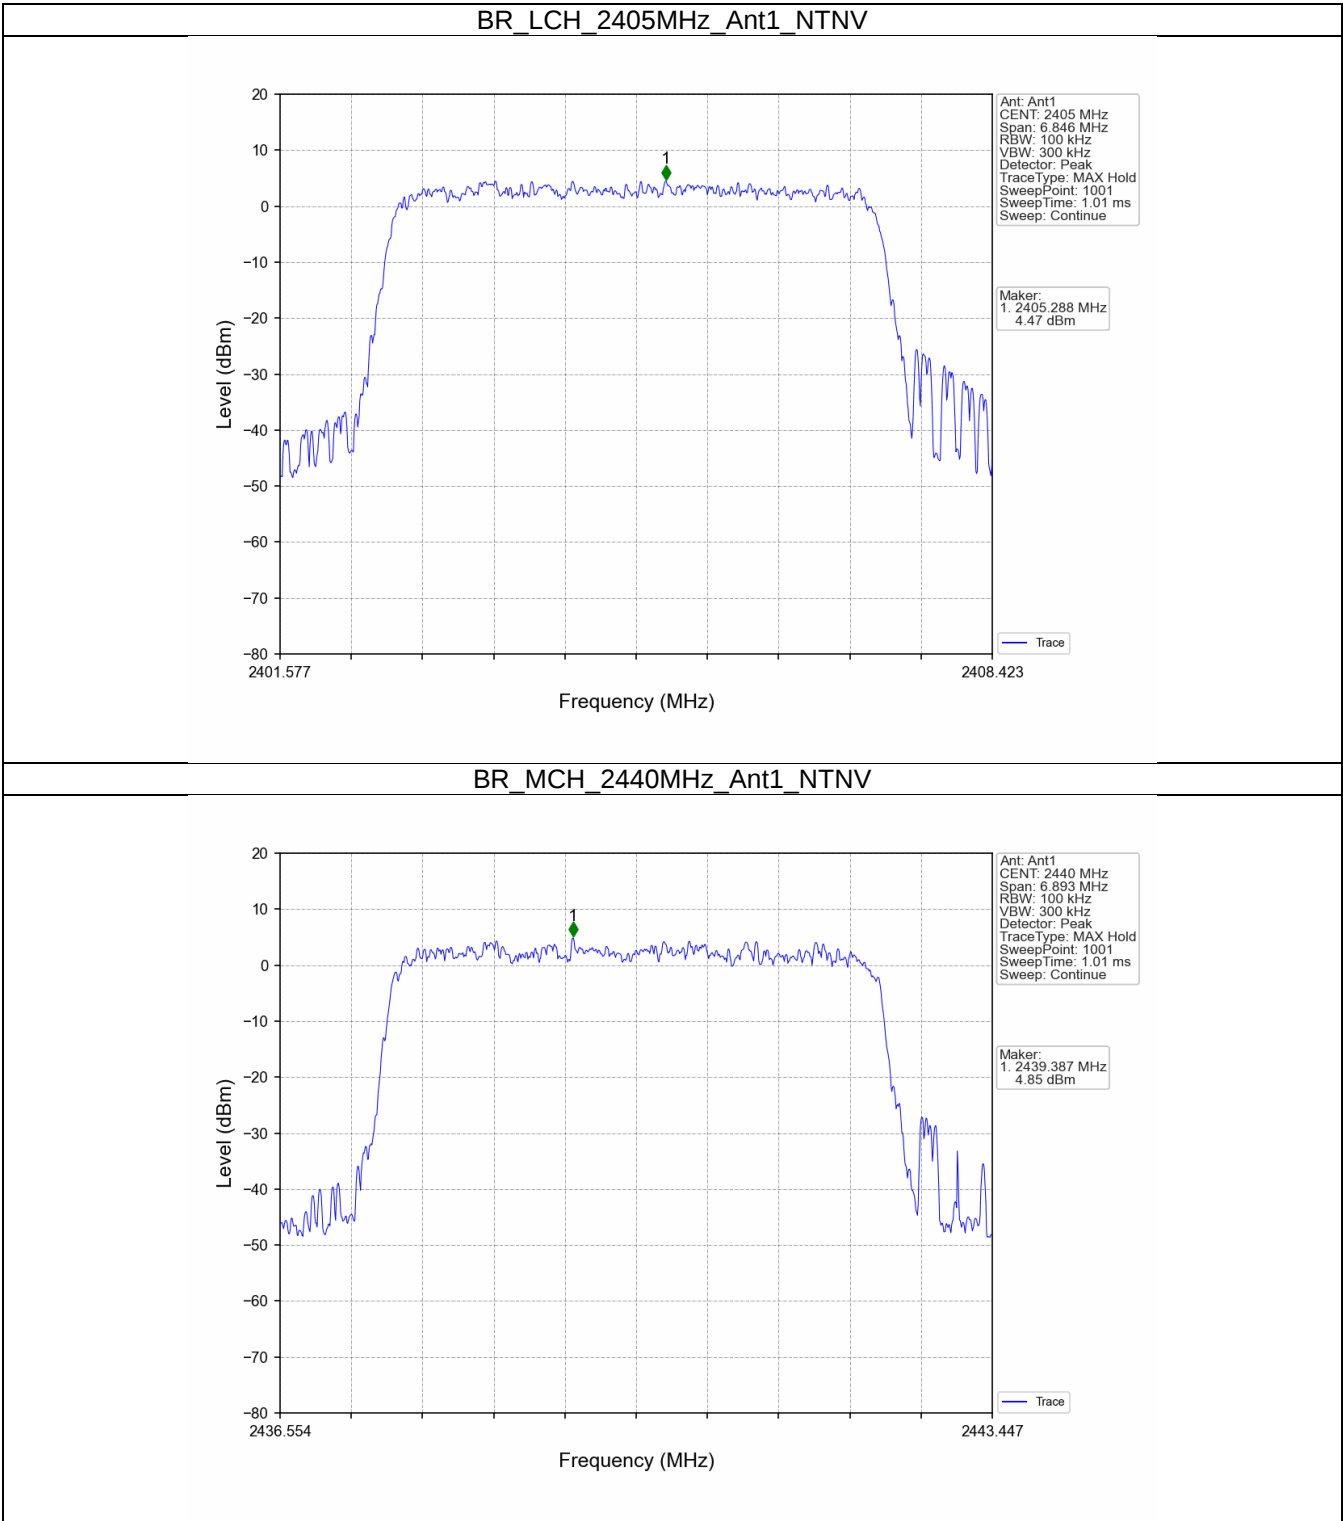

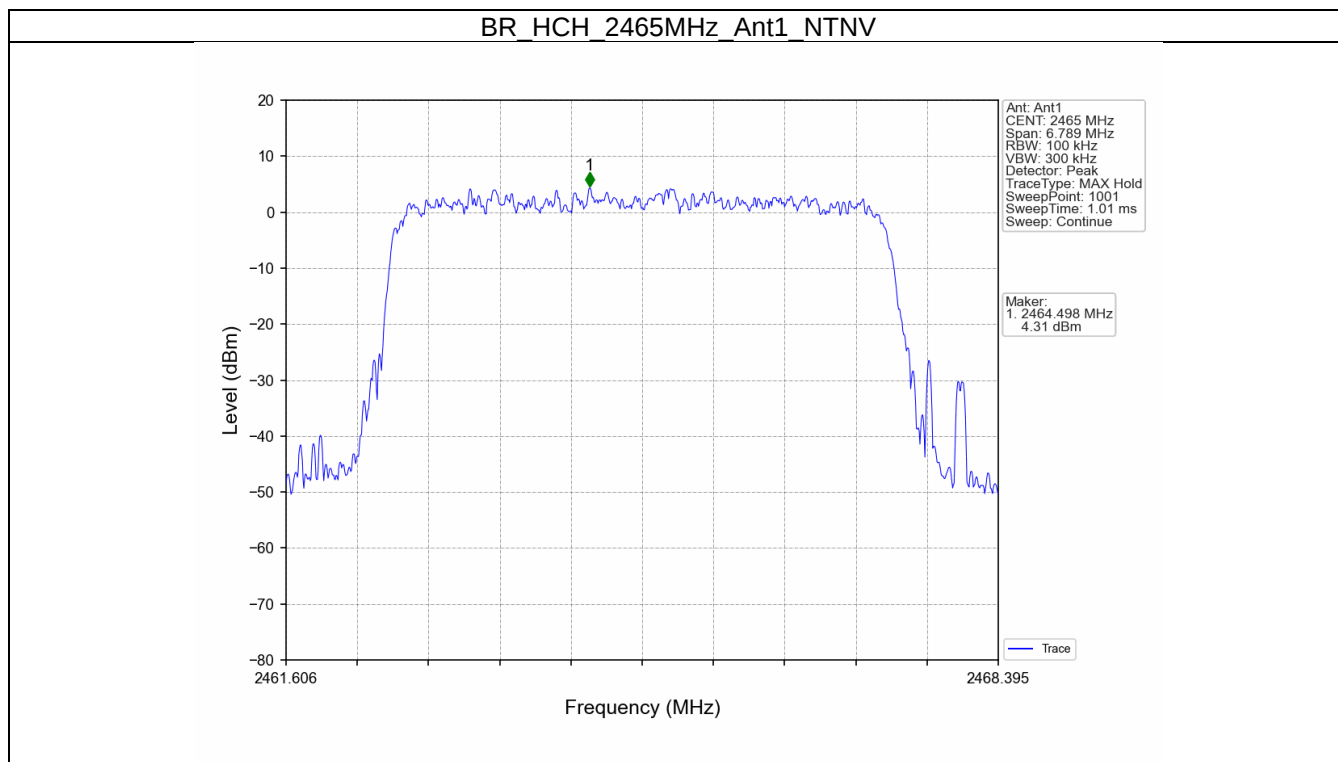


CSE:

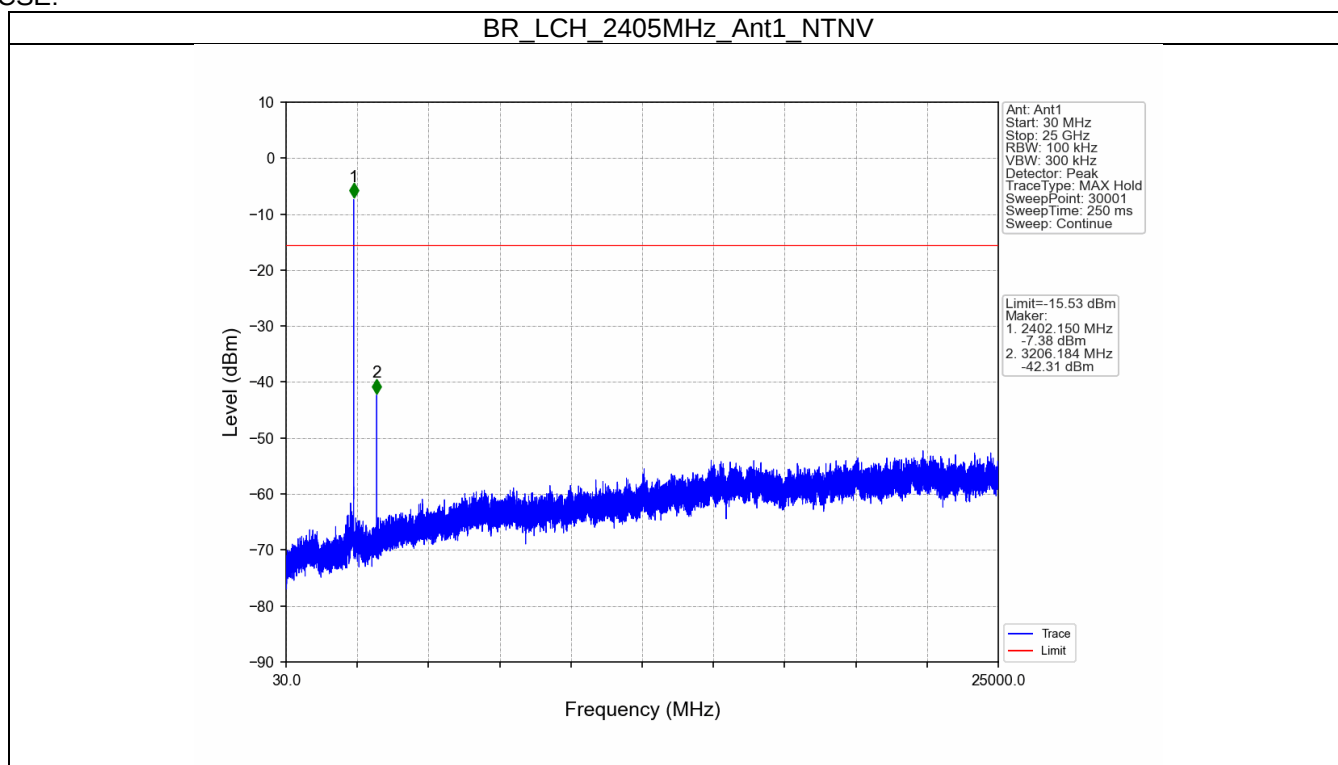




BR_MCH_2440MHz_Ant1_NTNV

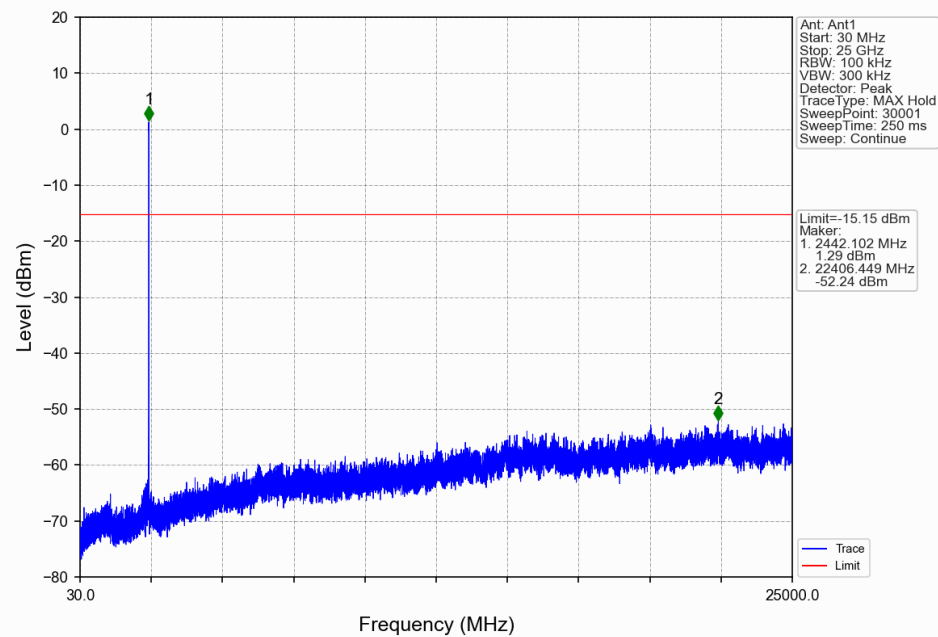


BR_HCH_2465MHz_Ant1_NTNV

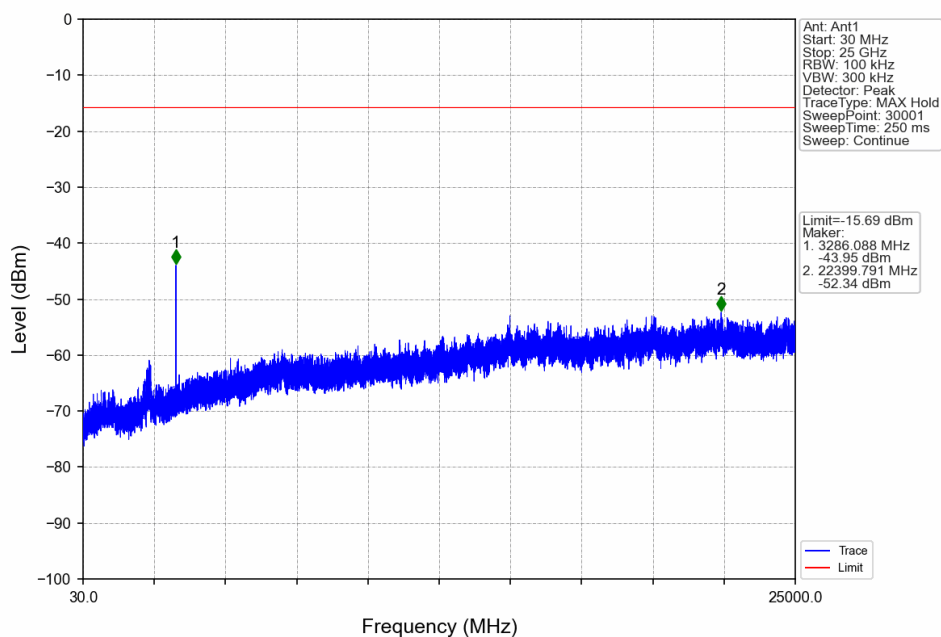


Slot:
Reference


Slot5_LCH_2405MHz_Ant1_NTNV

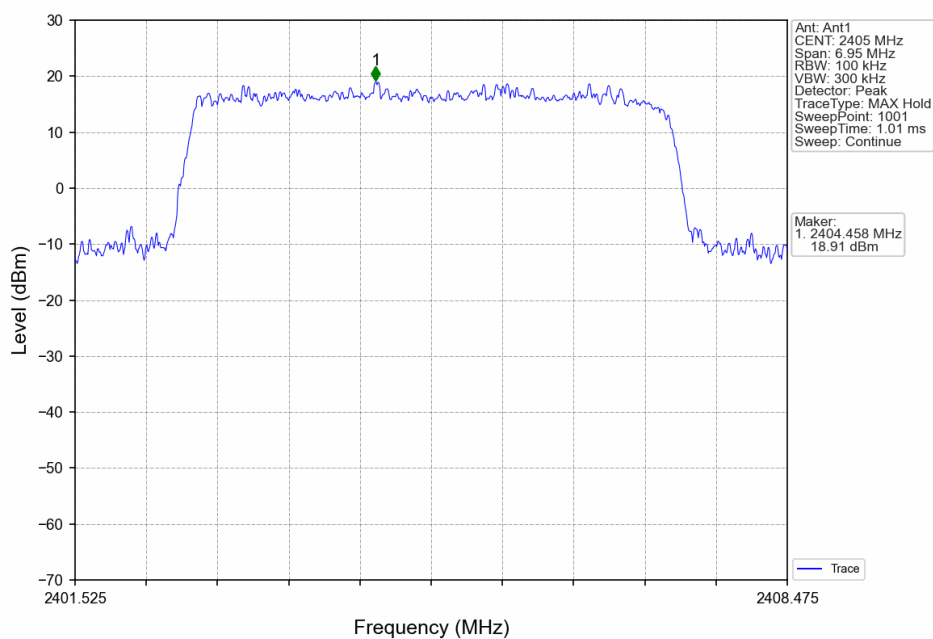


Slot5_LCH_2405MHz_Ant2_NTNV

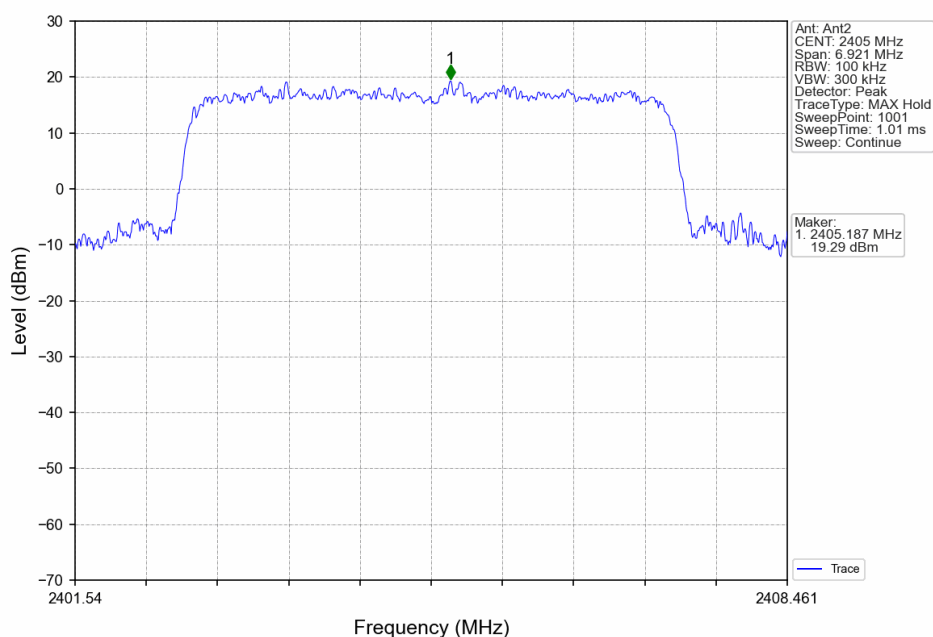


Slot5_MCH_2440MHz_Ant1_NTNV

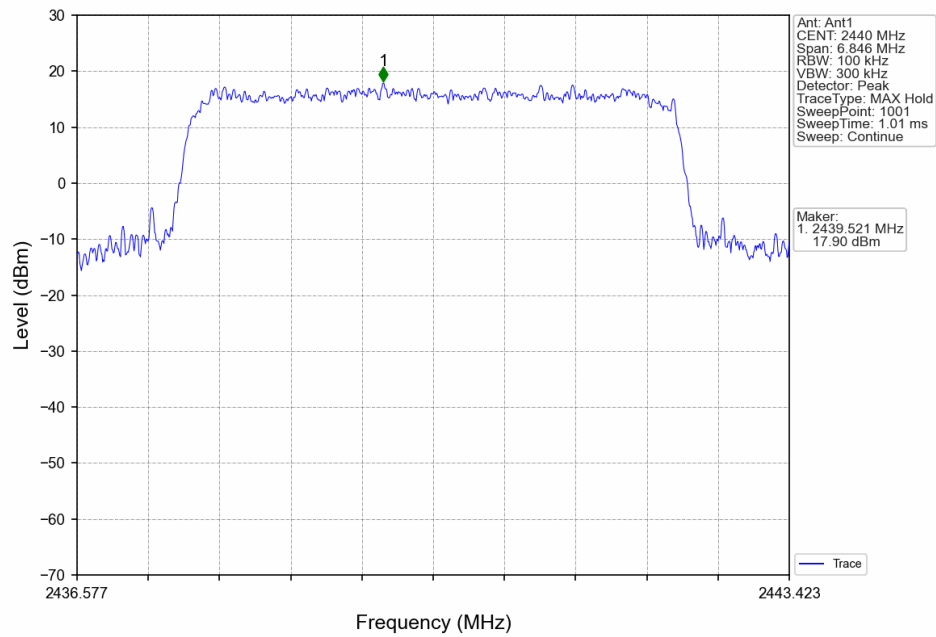


Slot5_MCH_2440MHz_Ant2_NTNV

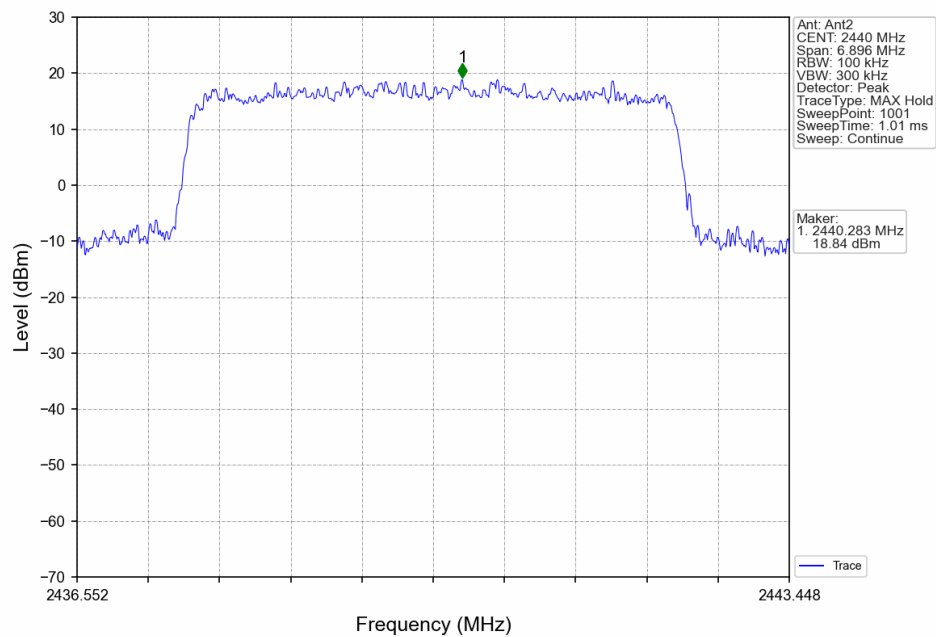


Slot5_HCH_2465MHz_Ant1_NTNV

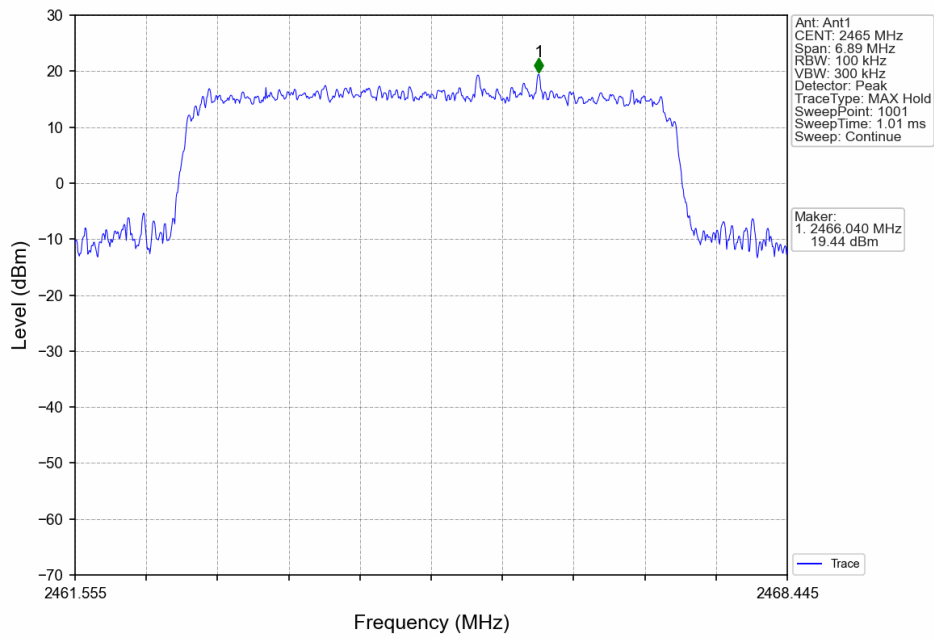


Slot5_HCH_2465MHz_Ant2_NTNV

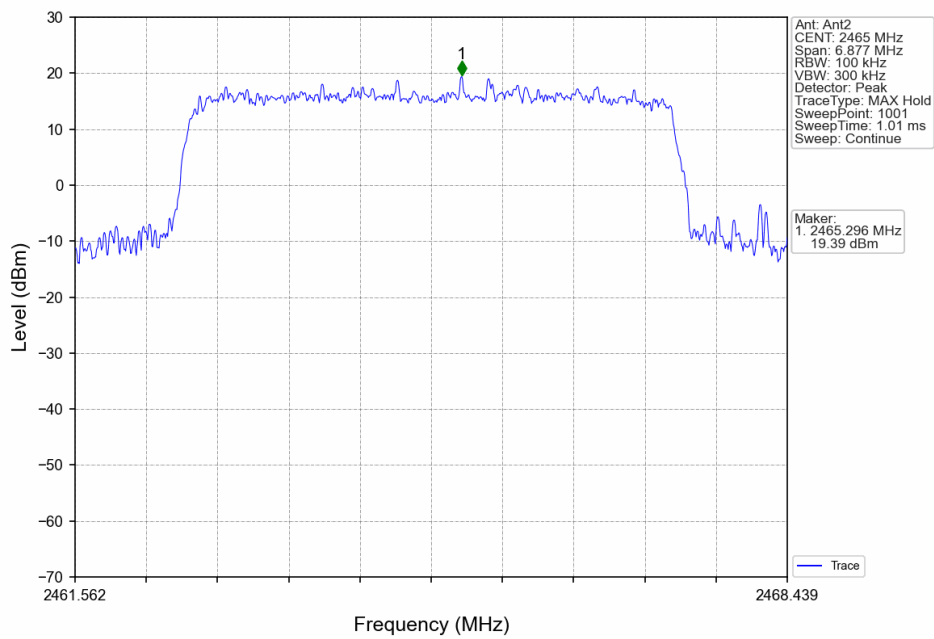


Slot10_LCH_2410MHz_Ant1_NTNV

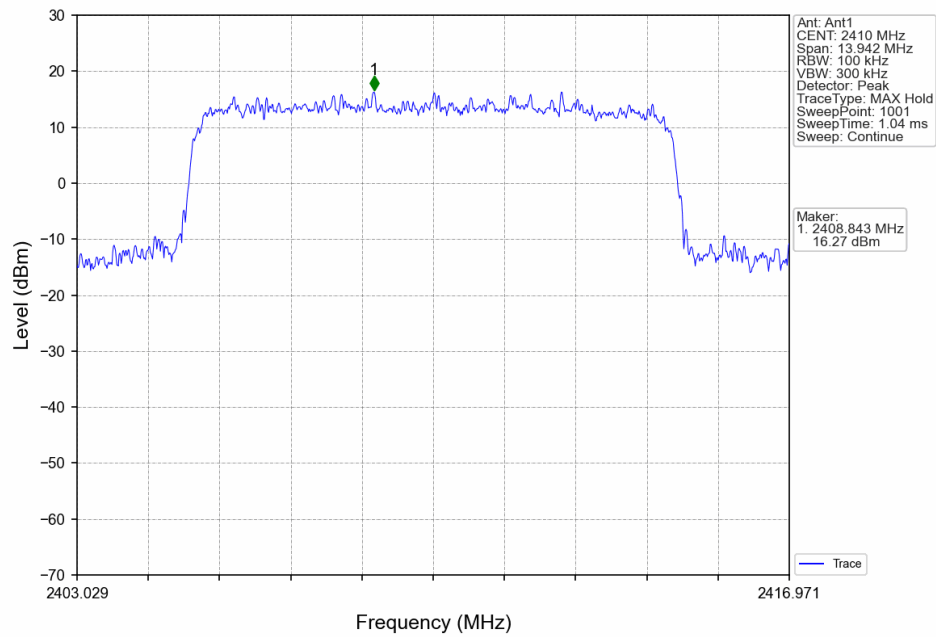


Slot10_LCH_2410MHz_Ant2_NTNV

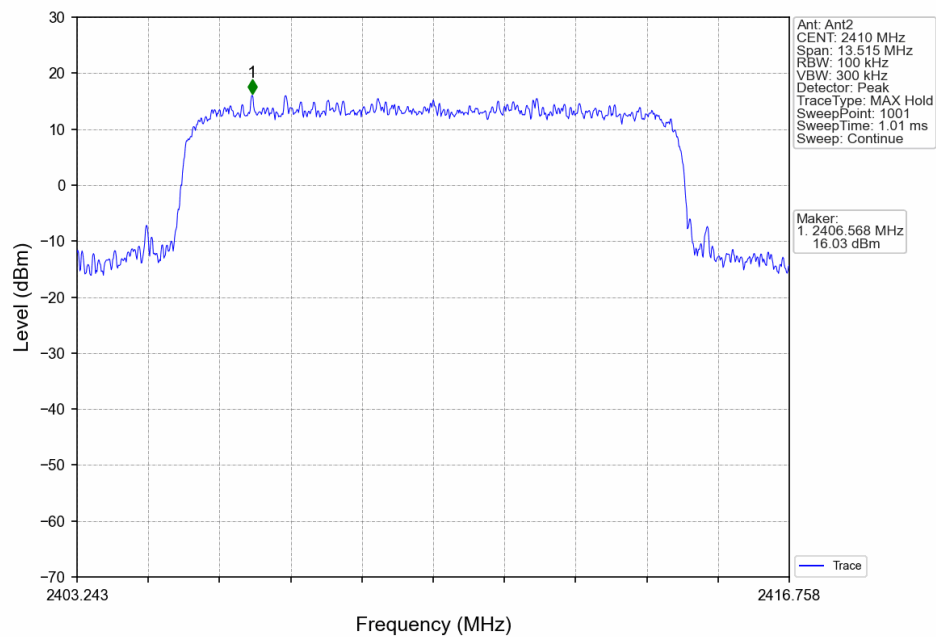


Slot10_MCH_2440MHz_Ant1_NTNV

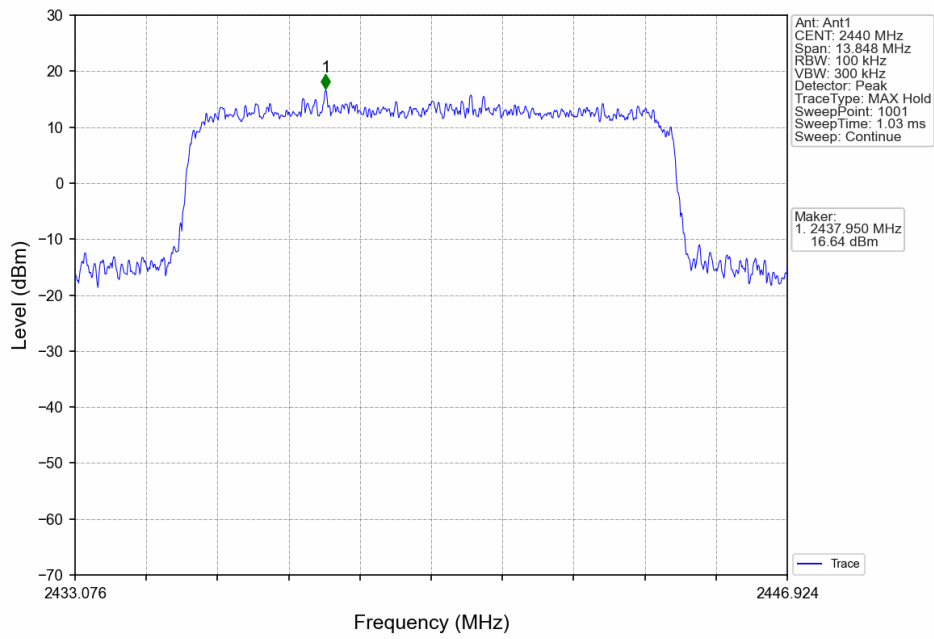


Slot10_MCH_2440MHz_Ant2_NTNV

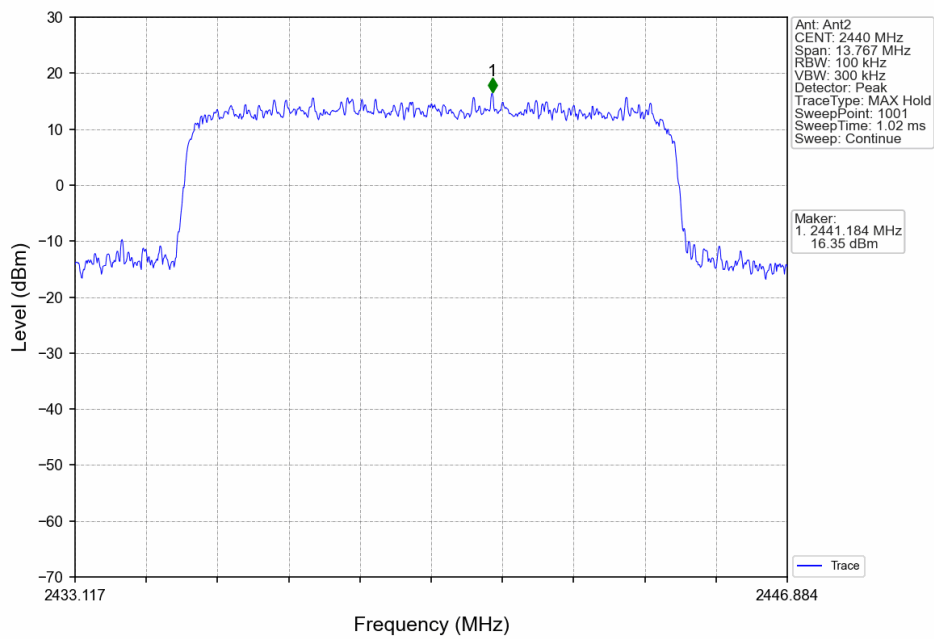


Slot10_HCH_2465MHz_Ant1_NTNV

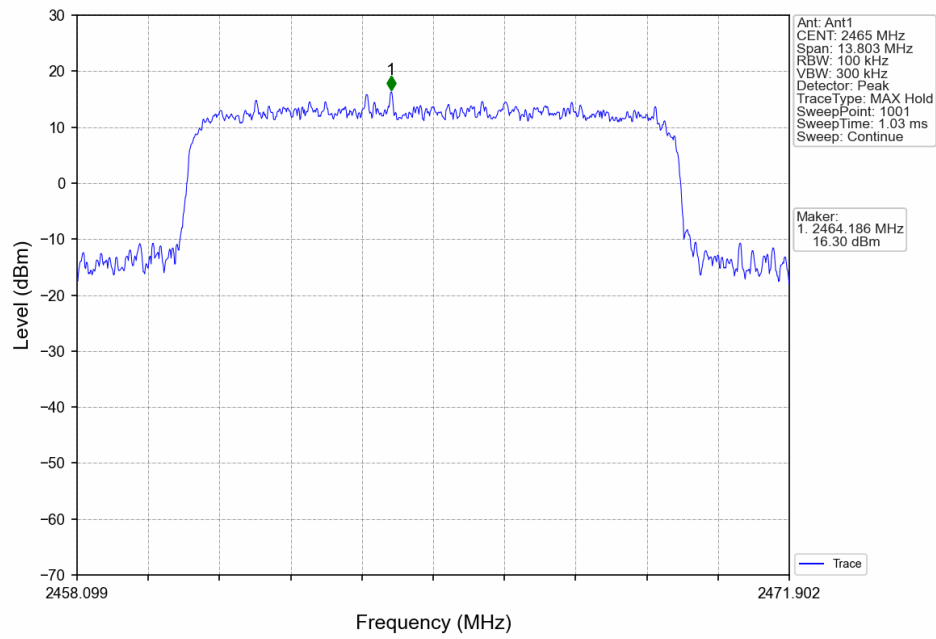


Slot10_HCH_2465MHz_Ant2_NTNV

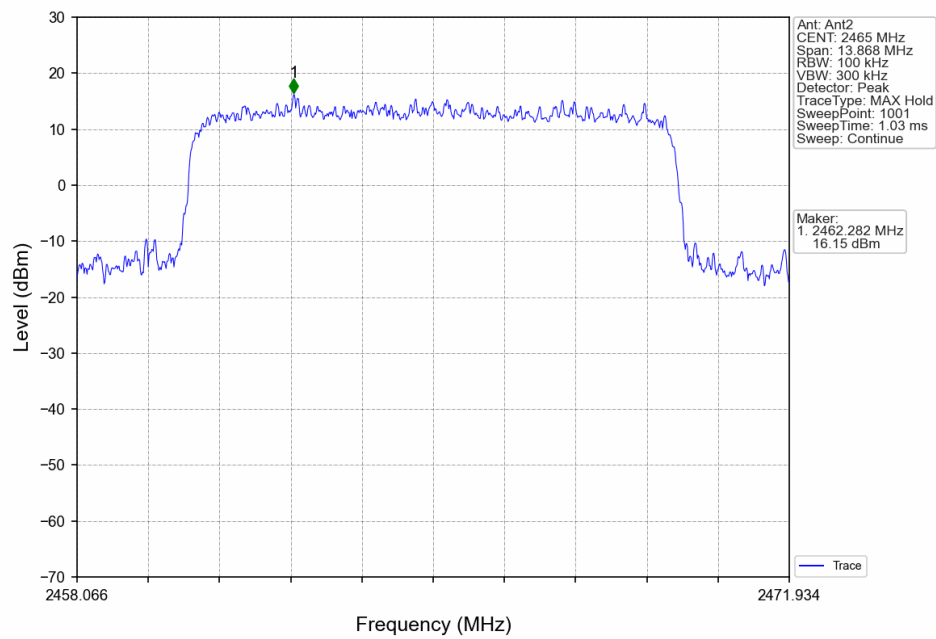


Slot20_LCH_2415MHz_Ant1_NTNV

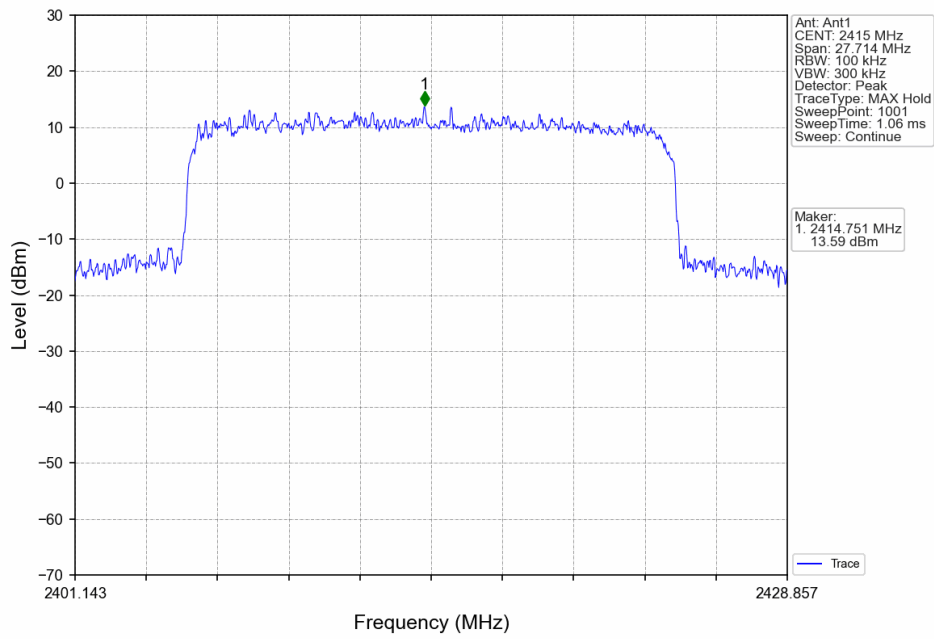


Slot20_LCH_2415MHz_Ant2_NTNV

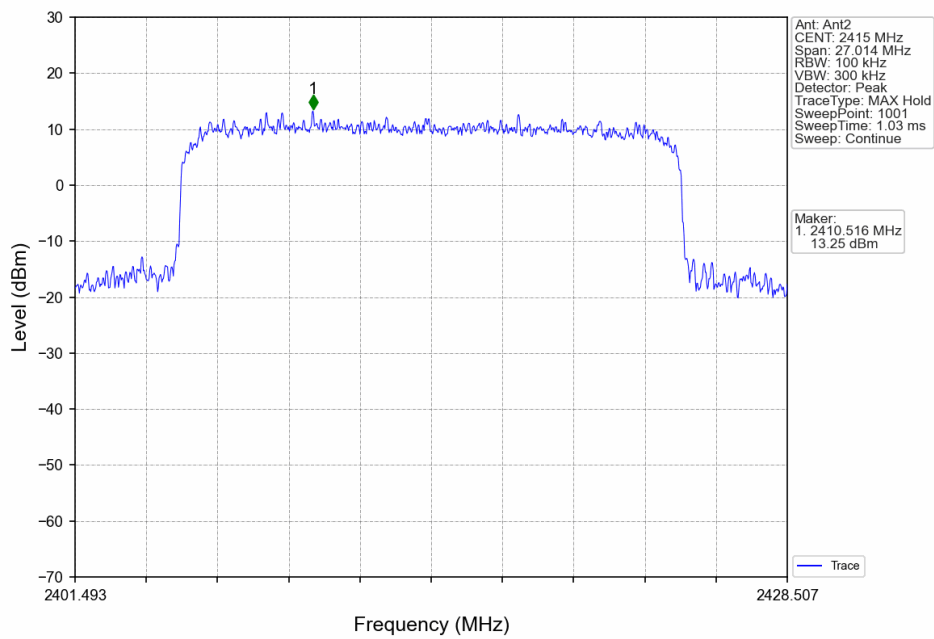


Slot20_MCH_2440MHz_Ant1_NTNV

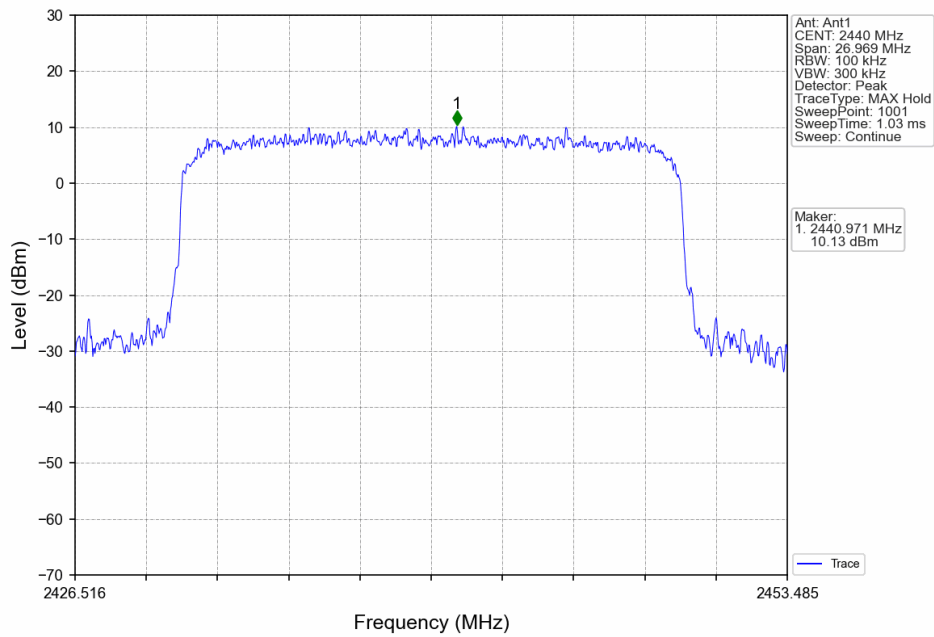


Slot20_MCH_2440MHz_Ant2_NTNV

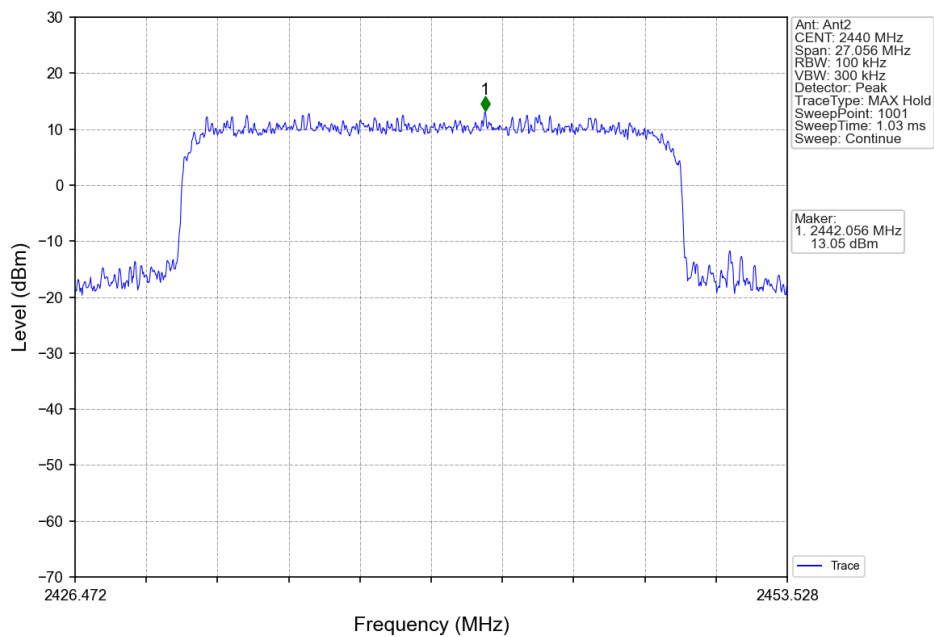


Slot20_HCH_2460MHz_Ant1_NTNV

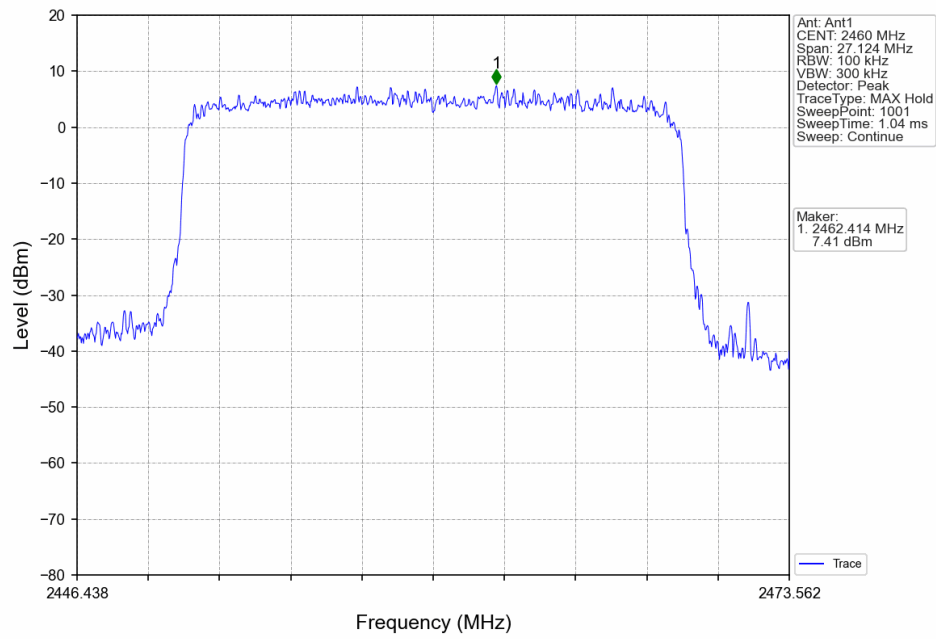


Slot20_HCH_2460MHz_Ant2_NTNV

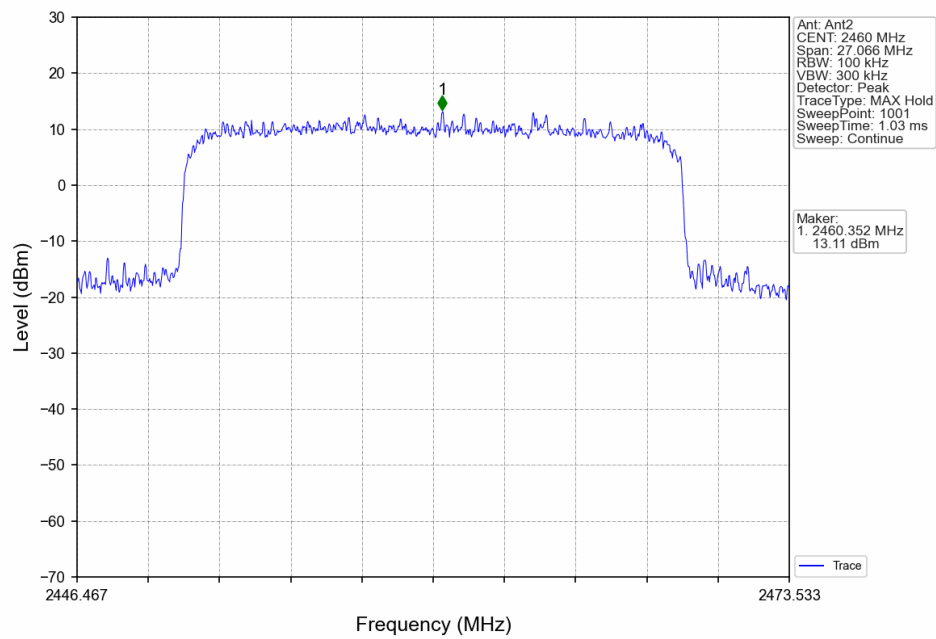


Slot40_LCH_2425MHz_Ant1_NTNV

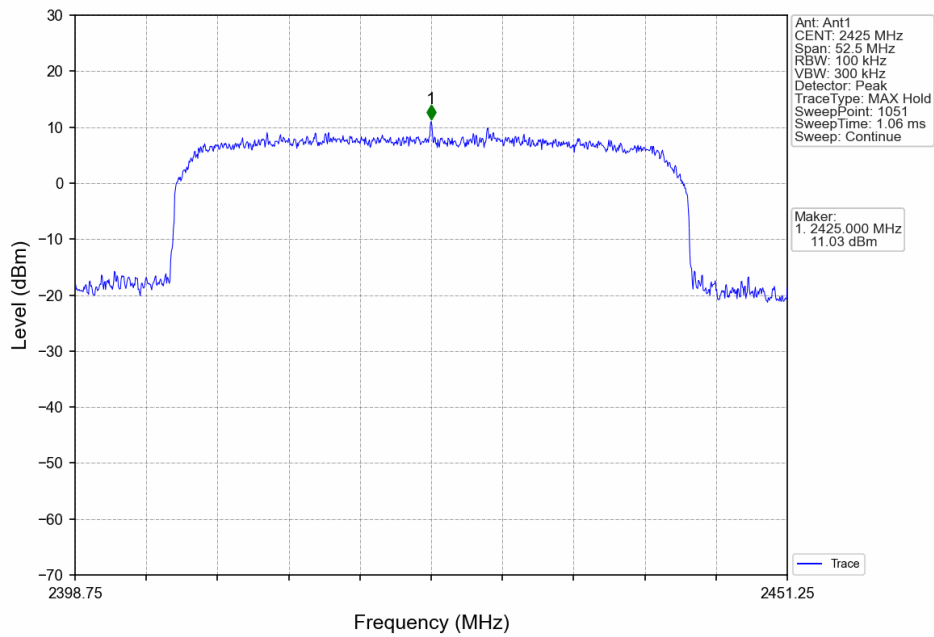


Slot40_LCH_2425MHz_Ant2_NTNV

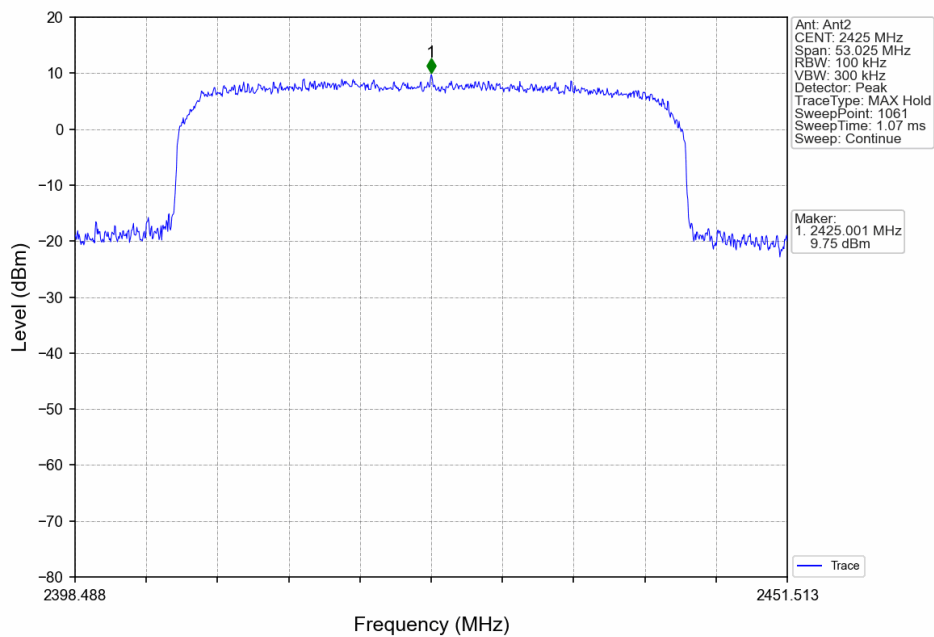


Slot40_MCH_2440MHz_Ant1_NTNV

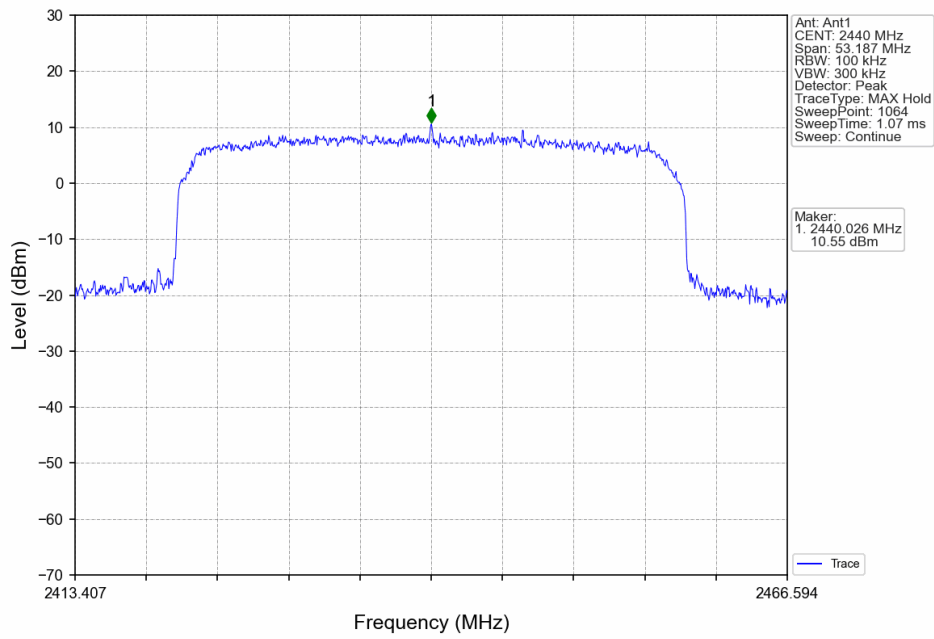

Slot40_MCH_2440MHz_Ant2_NTNV

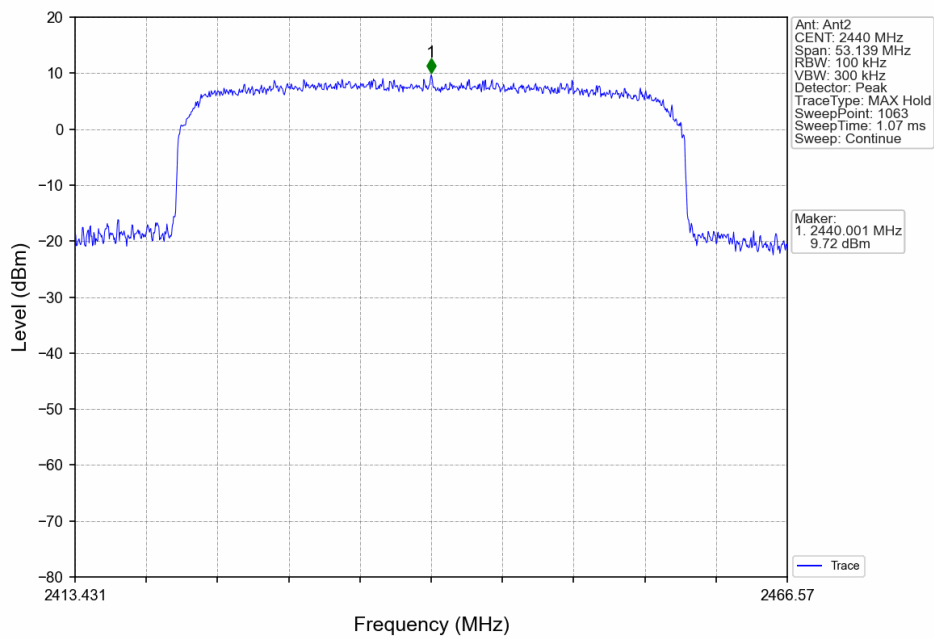

Slot40_HCH_2450MHz_Ant1_NTNV

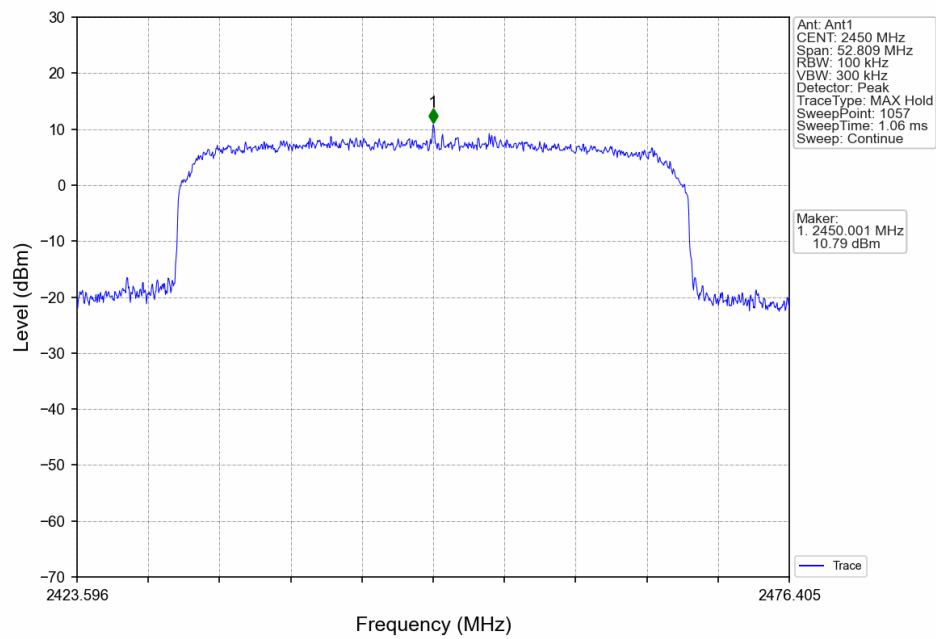

Slot40_HCH_2450MHz_Ant2_NTNV

