



WIM2480

The compact-sized BLE 5.2 module, designed for intelligent wireless controls, enables ultra-low power connectivity and provides considerable design flexibility to the engineers. WIM2480, with options for an external or a chip antenna, also has 18 General Purpose I/O pins including, 6 PWM, ADC, 2C, UART, and SPI.



Table of Contents

1. Features.....	3
2. Specifications.....	3
3. Module Dimensions.....	5
4. Land Pattern Dimensions.....	6
5. Design Recommendations.....	7
6. Antenna.....	8
7. Pinout Details.....	11
8. Firmware Pin Assignment.....	13
9. Soldering Information.....	14
10. Packaging Information.....	15
11. Ordering Information.....	16
12. Precautions.....	16

1. Features

- BLE 5.2 based non-flooding intelligent mesh
- PWM/AIO/SP/I2C/UART/IO interfaces
- External or chip antenna options
- TX output power up to +8dBm
- -92dBm RX sensitivity
- 18 programmable GPIOs
- 8 PWM channels
- Compact form factor
- Zero downtime Over-the-Air (OTA) firmware updates

2. Specifications

Electrical specifications

Parameter	Symbol	Min	Typ.	Max	Unit
Input voltage	VDD	1.7	3.0	5.5	V
IO supply voltage			VDD		V

RF specifications

Parameter	Min	Typ.	Max	Unit
Operating frequency	2402	-	2450	MHz
Maximum output power	-	8	-	dBm
Receiver sensitivity	-	-92	-	dBm

ADC specifications

Parameter	Min.	Typ.	Max.	Unit	Remarks
ADC input voltage	0.6	-	3.6	V	gnd/vinout

PWM specifications

Parameter	Symbol	Min	T _{yp}	Max	Unit	Remarks
PWM frequency		0.1	32	1000	kHz	Up to 10K Hz for low frequency PWM pins
Maximum voltage for logic low	V _L	0	-	1.03	V	
Absolute maximum current sourced	I _{MAX}	-	-	15	mA	
Absolute maximum voltage level	V _{MAX}	-	-	3.6	V	

Current specifications

Parameter	Min	T _{yp}	Max	Unit	Remarks
Deep sleep current	-	-	1.5	µA	@3V
TX peak current	-	15.5	-	mA	@10kbaud
RX peak current	-	60	-	mA	@1Mbps

Environmental specifications

Parameter	Symbol	Min	Max	Unit
Operating temperature	T _{opr}	-40	85	°C
Storage temperature	T _{str}	-40	125	°C


Mechanical specifications

Parameter	T _{yp}	Max	Unit	Remarks
Dimension	22.5 x 3.0 x 2.95		mm	For chip antenna
Dimension	16.60 x 6.0 x 2.41		mm	For external antenna

3. Module Dimensions



External antenna version (WIM2480E)

- Dimensions: 16.60 x 8.0 x 2.4 mm (with external antenna)
- Pitch: 1.65 mm
- Module pad dimensions: 0.757 x 0.898 mm

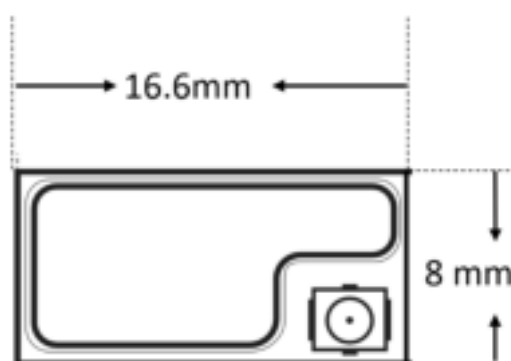


Chip antenna version (WIM2480C)

- Dimensions: 22.50 x 8.0 x 2.95 mm (with chip antenna)
- Pitch: 1.65 mm
- Module pad dimensions: 0.757 x 0.898 mm

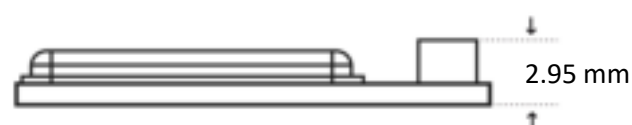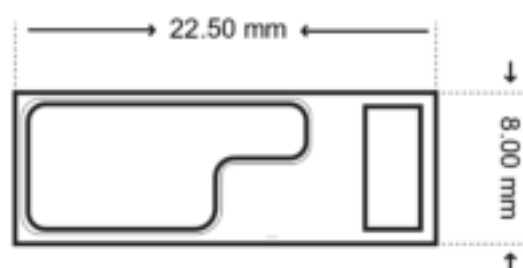


4. Land Pattern Dimensions

All dimensions are in mm

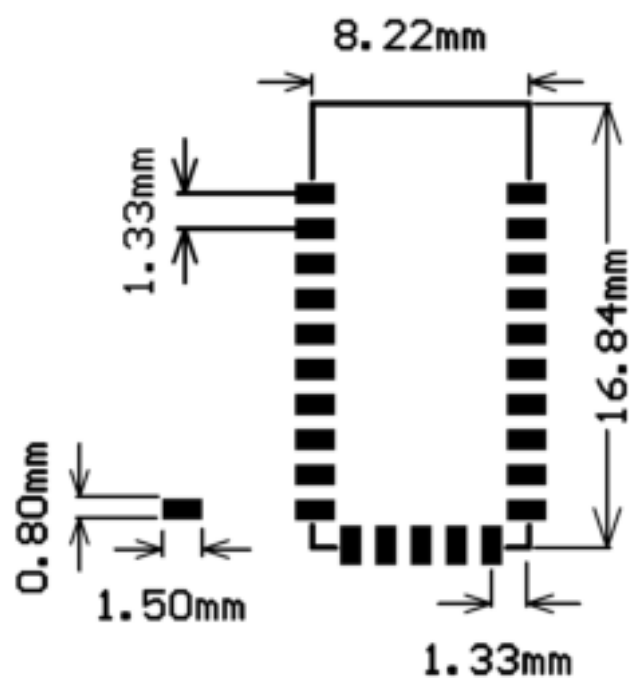


WIM2480E

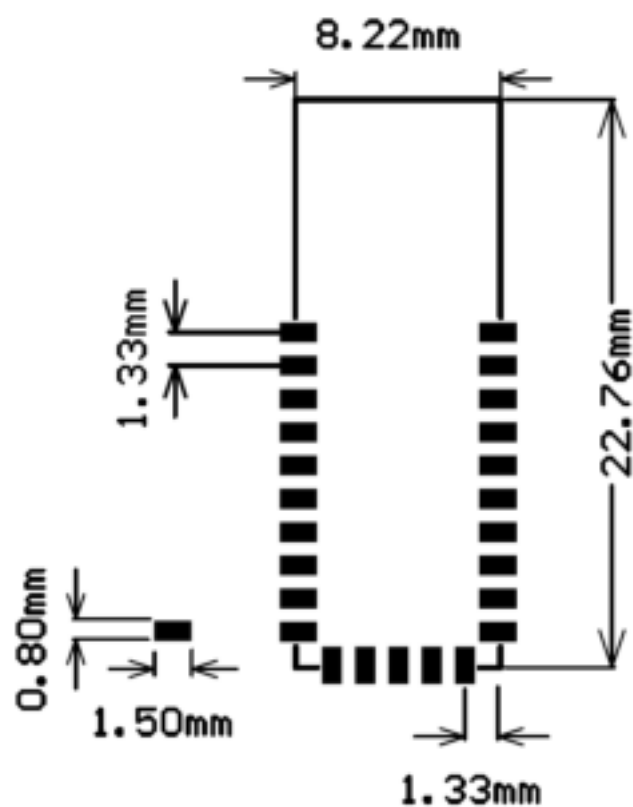

WIM2480C

5. Design Recommendations

- a) Keep out enough area for the chip antenna.
- b) Avoid any routing under antenna area as shown in the below image.
- c) Better to place the module away from High frequency circuitry like other RF and large components or metallic objects.
- d) All GND pins must be well grounded.
- e) The area around the module should be free of any ground planes, power planes, trace routings or metal for 6 mm from the module antenna position in all directions.
- f) Better not to route any traces underneath the module.
- g) The WIM2480 series modules contain highly sensitive electronic circuitry and are Electrostatic Sensitive Devices (ESD). Handling the WIM series modules without proper ESD protection may destroy or damage them permanently.

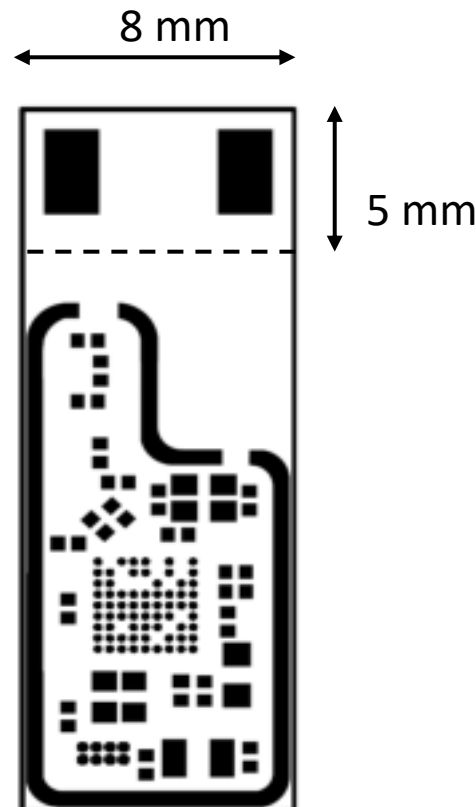

6. Antenna

External wire antenna – 37mm



37mm wire antenna

Antenna Properties	
Frequency range	2.4GHz-2.5GHz
Impedance	50Ω Nominal
VSWR	1.92:1 Max
Return loss	-10dB Max
Gain (Peak)	2dBi
Gain loss	0.3dBi Max

External wire antenna – 100mm



100mm wire antenna

Antenna Properties	
Frequency range	2.4GHz-2.5GHz
Impedance	50Ω Nominal
SWR	≤ 2.0
Gain (Peak)	3dBi

External wire antenna – 600mm



600mm wire antenna

Antenna Properties	
Frequency range	2.4GHz-2.5GHz
Impedance	50Ω Nominal
VSWR	≤ 1.3
Gain (Peak)	3dBi

Stick antenna



Stick antenna

Antenna Properties	
Frequency range	2.4GHz-2.5GHz
Impedance	50Ω Nominal
VSWR	≤ 90% Max
Return loss	≤ 0dB Max
Gain (Peak)	2dBi
Cable loss	0.3dBi Max
Polarization	Linear Vertical


Chip antenna



Chip antenna

Antenna Properties	
Frequency range	2.4 GHz-2.5 GHz
Impedance	50 Ω
Peak Gain	1.7 dBi
VSWR	<2:1
Radiation pattern	Omnidirectional
Polarization	Linear

7. Pinout Details

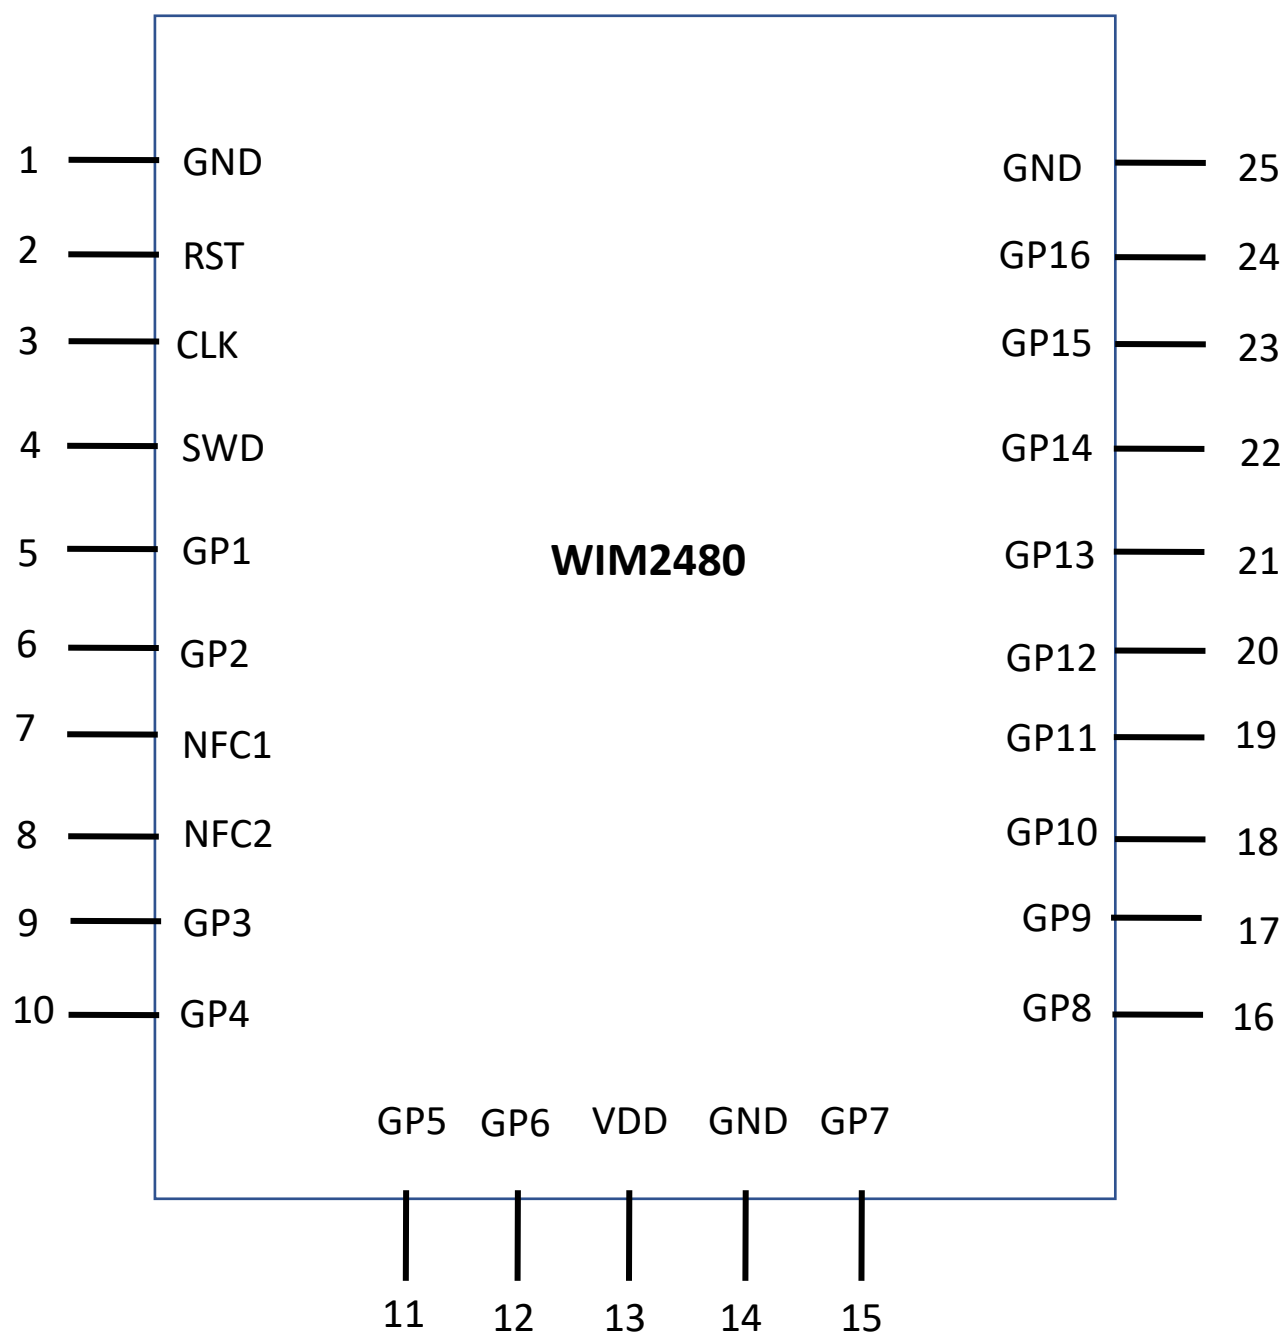

MODULE PIN	CHIP PIN	NAME	SUPPORTING FUNCTIONS	COMMENTS
		CND	CIRCUIT	Ground
2	14/PC13	RS	RESET	Reset
3	12	CLK	SWCLK	Serial wire debugging clock input for debugging and programming
4	J2	SWD	SWDIO	Serial wire debugging I/O for debug and programming
5	C0/PC17	CF	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
6	F1/PC18	CF2	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
7	F7/PC39	K-C	K-C / O	Digital I/O (Low Freq)
8	12/PC10	K-C2	K-C2 / O	Digital I/O (Low Freq)
9	17/PC38	CF3	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
10	D9/PC6	CF4	IO/PWM/DC/SP /UART/AIO	AIO or Digital I/O or PWM or Serial Interface
11	J3/PC22	CF5	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
12	J5/PC17	CF6	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
14		VDD	POWER (1.8V)	Power
14		CND	CIRCUIT	Ground
15	A4/PC36	CF7	IO/PWM/AIO	AIO or Digital I/O or PWM (up to 10KHz)
16	A3/PC35	CF8	IO/PWM	Digital I/O or PWM (up to 10KHz)
17	D4/PC3	CF9	IO/PWM	Digital I/O or PWM (up to 10KHz)
18	C6/PC27	CF10	IO/PWM/AIO	AIO or Digital I/O or PWM (up to 10KHz)
19	C4/PC25	CF11	IO/PWM	Digital I/O or PWM (up to 10KHz)
20	C5/PC19	CF12	IO/PWM	Digital I/O or PWM (up to 10KHz)
21	A7/PC29	CF13	IO/PWM/AIO	AIO or Digital I/O or PWM (up to 10KHz)
22	13/PC34	CF14	IO/PWM	PWM/ Digital I/O
23	C9/PC28	CF15	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
24	F9/PC33	CF16	IO/PWM/DC/SP /UART	PWM or Digital I/O or Serial Interface
25		CND	CIRCUIT	Ground

Note If SPI is used with 8 Mbps data rate, the recommended GPIOs for the clock signal (SCK) are CF1, and CF15.


8. Firmware Pin Assignment

PROFILE TYPE PIN DETAILS	Intensity	Intensity COI	Relay On/off, Analog dual channel i/p and o/s	Intensity COI, motor control
Pin	24 (C100)	23 (C105)	20 (C102)	10 (GP4)
Functionality	Intensity channel	Cool channel	Relay FRO	JART TX
Pin		24 (C100)	23 (GP5)	9 (GP5)
Functionality		Warm channel	Color temperature channel	JART TX
Pin			24 (GP6)	
Functionality			Intensity channel	
Pin			18 (C100)	
Functionality			Analog 7: channel 1	
Pin			21 (C105)	
Functionality			Analog 7: channel 2	

PROFILE TYPE PIN DETAILS	Analog dual channel o/p, FRO	RGB COI, Intensity	UART	DAI
Pin	23 (GP5)	5 (CP1)	10 (C100)	23 (GP5)
Functionality	Color temperature channel	Red channel	JART TX	DA
Pin	24 (GP6)	6 (CP2)	9 (C101)	24 (GP6)
Functionality	Intensity channel	Green channel	JART TX	DA +
Pin	18 (CP3)	10 (CP4)		
Functionality	Sensor trigger F.O	Blue channel		
Pin	11 (GP9)	23 (GP5)		
Functionality	Sensor data communication	Cool channel		
Pin	12 (GP9)	24 (GP6)		
Functionality	Sensor data communication	Warm channel		

9. Soldering Information

Leadfree reflow soldering

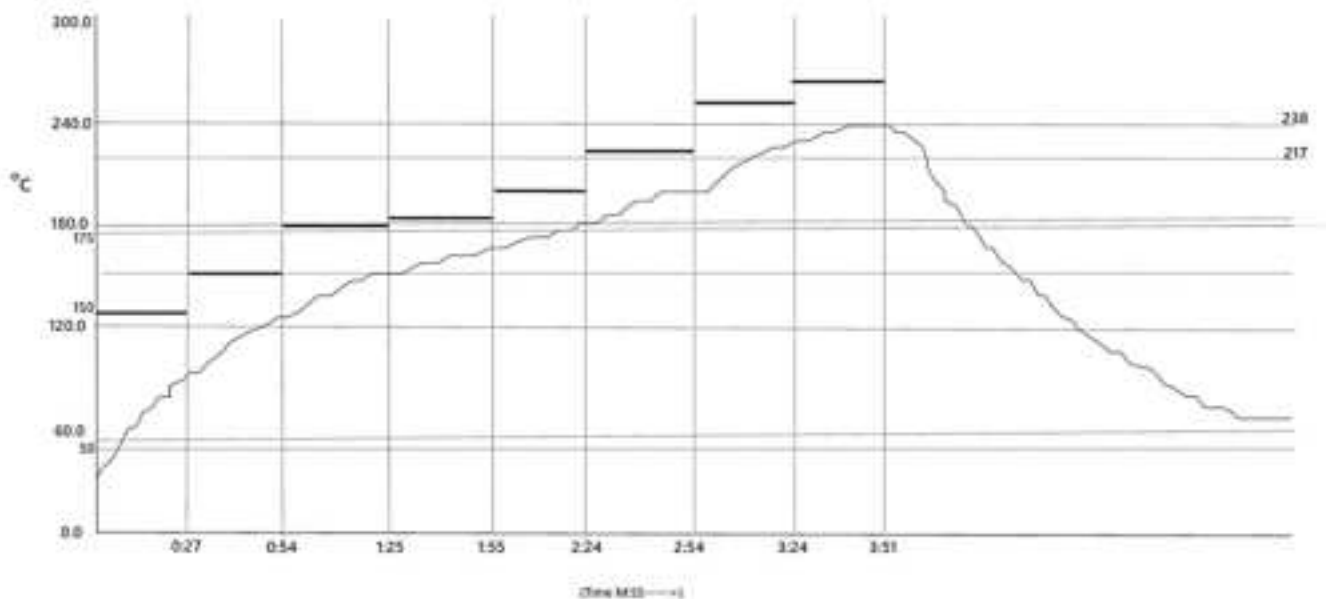

Do not exceed peak temperature (Tp) of 242°C. Time at maximum temperature is 27 seconds. After reflow soldering, optical inspection of the module is recommended to verify proper alignment. Hand soldering is also possible.

Cleaning



In general, cleaning the populated modules is strongly discouraged. Residuals under the module cannot be easily removed with any cleaning process.

1. Cleaning with water can lead to capillary effects where water is absorbed into the gap between the host board and the module. The combination of soldering flux residuals and encapsulated water could lead to short circuits between neighboring pads. Water could also damage any stickers or labels.

2. Cleaning with alcohol or a similar organic solvent will likely flood soldering flux residuals into the RI shield, which is not accessible for post-washing inspection. The solvent could also damage any stickers or labels.

10. Packaging Information

*All dimensions are in mm

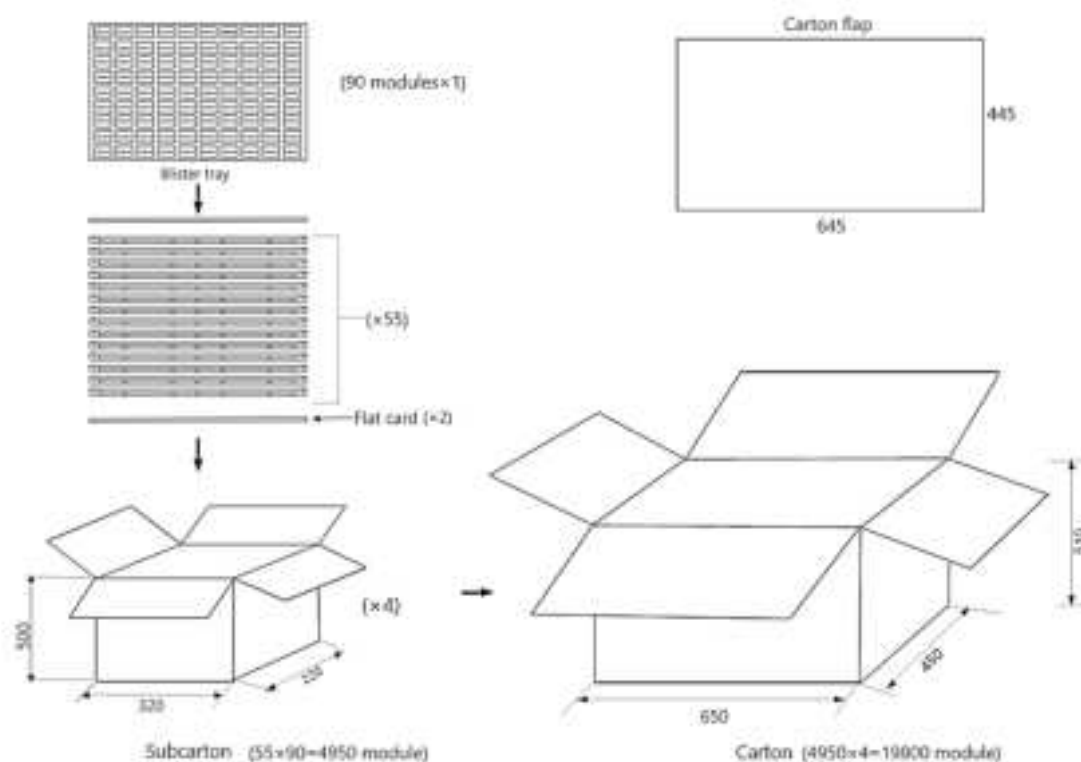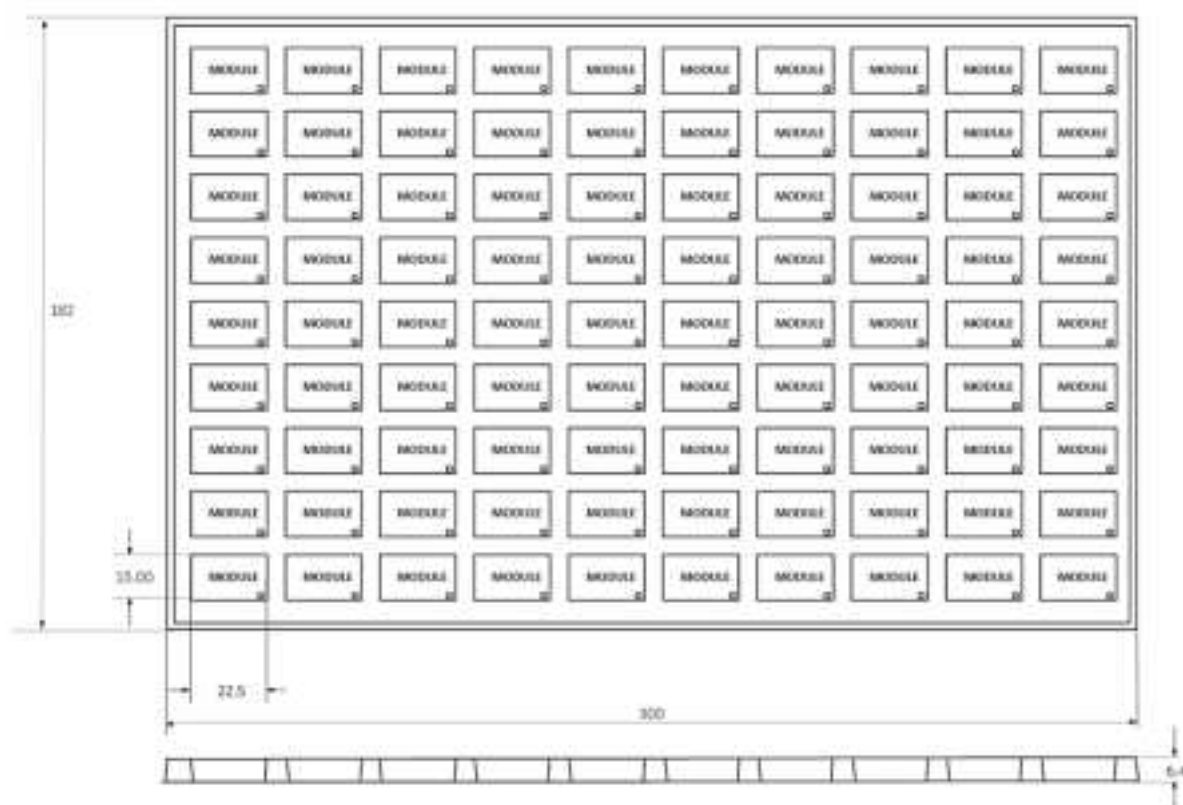

11. Ordering Information

Product Code	Communication	Voltage Rating	Analog Channel(s)	WIFI / BT	Serial Interface	Antenna	Dimensions (mm)
WIM2480S	BLE 5.2	5.0V DC	4 AI0	6 Channels	UART/SP/PC	External	16.00 × 8.0 × 2.41
WIM2480C	BLE 5.2	5.0V DC	4 AI0	6 Channels	UART/SP/PC	On-chip	12.50 × 8.0 × 2.55

12. Precautions

- While integrating module, make sure all the pads are soldered properly.
- Please use a voltage regulator if the power supply is above the max ratings.
- For best wireless signals, please avoid packing the antenna close to metal parts or cases.
- Stresses above the listed maximum ratings may cause permanent damage to the device.



23282 Mill Creek Dr #340, Laguna Hills
CA 92653, USA

Version 1.4

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformément avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

2.2 List of applicable FCC rules

CFR 47 FCC PART 15 SUBPART C has been investigated. It is applicable to the modular transmitter.

2.3 Specific operational use conditions

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system.

2.4 Limited module procedures

Not applicable

2.5 Trace antenna designs

Not applicable

2.6 RF exposure considerations

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

2.7 Antennas

This radio transmitter FCCID: 2AG4N-WIM2480 has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

2.8 Label and compliance information

The final end product must be labeled in a visible area with the following "Contains FCC ID:2AG4N-WIM2480".

2.9 Information on test modes and additional testing requirements

Host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host.

2.10 Additional testing, Part 15 Subpart B disclaimer

Host manufacturer is responsible for compliance of the host system with module installed with all other applicable requirements for the system such as Part 15 B.