

Advanced
Compliance Laboratory

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

Of

i-DIM

MODEL: IT-373ECO

FCC ID: ST2-373ECO IC: 6012A-373ECO

November 11, 2014

This report concerns (check one): Original grant ☒ Class II change ☐
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes ☐ no ☒
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes ☐ no ☒
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for: CENTRAK, INC.
Report prepared by: Advanced Compliance Lab
Report number: 0048-141117-01



Lab Code: 200101

The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page	1
Table of Contents	2
Figures	3
1. GENERAL INFORMATION	4
1.1 Verification of Compliance	4
1.2 Equipment Modifications	5
1.4 Test Methodology.....	6
1.5 Test Facility	6
1.6 Test Equipment	6
1.7 Statement for the Document Use	7
2. PRODUCT LABELING.....	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1 Justification	9
3.2 Special Accessories	9
3.3 Configuration of Tested System	9
4. SYSTEM SCHEMATICS	12
5. RADIATED EMISSION DATA	13
5.1 Field Strength Calculation.....	13
5.2 Test Methods and Conditions.....	13
5.3 Test Data	13
5.4 125KHz Transmission Radiated Test Data.....	17
6. EUT RECEIVING MODE VERIFICATION	19
7. PHOTOS OF TESTED EUT.....	20

Figures

Figure 2.1 ID Label.....	8
Figure 2.2 Location of Label on Back of the EUT.....	8
Figure 3.1 Radiated Test Setup.....	10-11
Figure 4.1 EUT Schematics.....	12
Figure 7.1-7.x EUT Details.....	21-28

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: i-DIM

Model: IT-373ECO

Applicant: CENTRAK, INC.

Test Type: FCC Part 15 Sub Part 15.249 & 15.209
IC RSS-210 (Issue 8) A2.9 & RSS-Gen (Issue 3)
CERTIFICATION

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY


Test Date: November 11, 2014

Report Number: 0048-141117-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC/IC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	± 2.36	± 2.99	± 1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date November 11, 2014

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	ID	CABLE
Product	IT-373ECO i-DIM (1)	FCC ID: ST2-373ECO IC: 6012A-373ECO	
Housing	PLASTICS		
Power Supply	1.5Vx3 DC Battery		
Operation Freq.	904MHz ~ 926MHz		
Receiver	IT-373ECO(RX)	Verification	

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Somerset, New Jersey, which is designated by IC as “site IC 3130”. This site is also accepted by FCC to perform measurements under Part 15 or 18 (Registration # 90601). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A0029 0	EMI Receiver	15/10/15
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/01/15
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/15
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	28/05/15
Electro-Metrics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	18/03/15
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	24/03/15
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/15

All Test Equipment Used are Calibrated Traceable to NIST Standards. Calibration Interval: two year.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

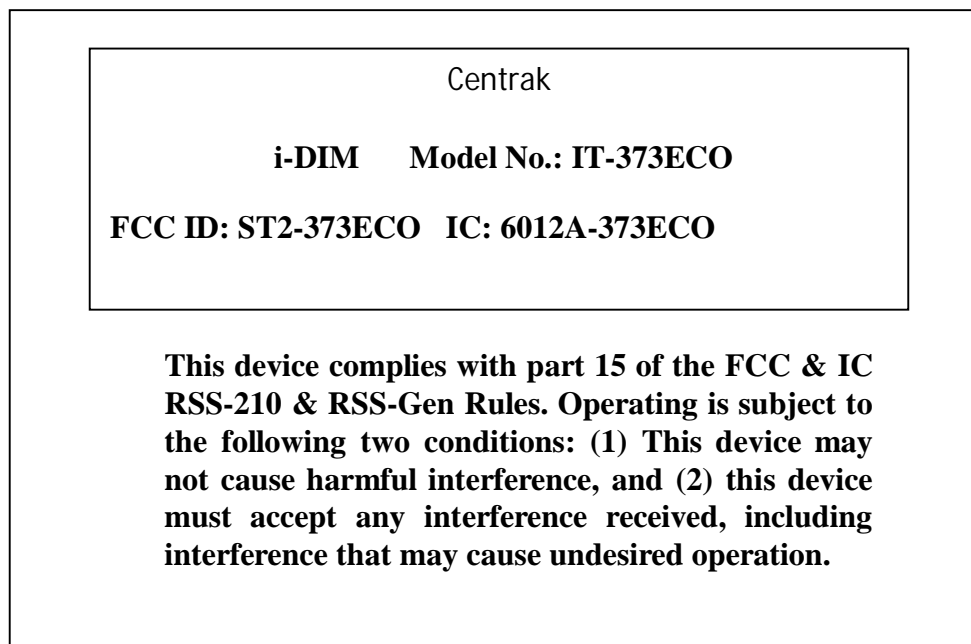


Figure 2.1 ID Label



Figure 2.2 Location of the Label

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was permanently attached to the EUT with max length, 3”.

Testing was performed as EUT was continuously operated at the following frequency channels: Low=904MHz, Middle= 915MHz, High=926MHz for 900MHz Band and 125KHz for LF band.

Fresh external battery was used for extended operating time.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.3 illustrate this system, which is tested standing along.





Figure 3.1 Radiated Test Setup

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. RADIATED EMISSION DATA

5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

THE "DUTY CYCLE CORRECTION FACTOR" FOR SPURIOUS RADIATED EMISSIONS IS;
 $20 \log * (4 \text{ ms} / 100 \text{ ms}) = -28 \text{ dB}$, WHICH WAS USED TO CORRECT THE AVERAGE RADIATED EMISSION READINGS.

5.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 100KHz IF bandwidth / 100KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. The frequency range from 9KHz up to 10th harmonics were investigated.

5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: November 11, 2014

Radiated Test Data (CH-904MHz/915MHz/926MHz)

Operation Mode: Vertical Orientation

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak /QP Reading at 3m (2) (dBuV/m)	FCC/IC 3m Peak Limit (3) (dBuV/m)	Difference To Peak Limit (dBuV/m)	Average Reading with Correction (>1GHz) (dBuV/m)	FCC/IC 3m QP/Average Limit (1) (dBuV/m)	Difference To AVG Limit (dBuV/m)
904	V/Z	1.1	45	89.0				94	-5.0
1808	V/Z	1.1	000	52.3	74	-21.7	24.3	54	-29.7
2712	V/Z	1.1	000	59.1	74	-14.9	31.1	54	-22.9
904	H/Z	1.0	90	85.6				94	-8.4
1808	H/Z	1.0	45	52.3	74	-21.7	24.3	54	-29.7
2712	H/Z	1.0	235	62.3	74	-11.7	34.3	54	-19.7
915	V/Z	1.1	45	87.7				94	-6.3
1830	V/Z	1.1	000	52.8	74	-21.2	24.8	54	-29.2
2745	V/Z	1.1	000	57.6	74	-16.4	29.6	54	-24.4
915	H/Z	1.0	90	83.8				94	-10.2
1830	H/Z	1.0	335	57.3	74	-16.7	29.3	54	-24.7
2745	H/Z	1.0	235	62.6	74	-11.4	34.6	54	-19.4
926	V/Z	1.1	90	81.3				94	-12.7
1852	V/Z	1.1	000	58.7	74	-15.3	30.7	54	-23.3
2778	V/Z	1.1	000	56.9	74	-17.1	28.9	54	-25.1
926	H/Z	1.0	000	88.3				94	-5.7
1852	H/Z	1.0	45	57.3	74	-16.7	29.3	54	-24.7
2778	H/Z	1.0	000	62.9	74	-11.1	34.9	54	-19.1

(1) The limit for emissions within the 902-928MHz band is 50mV(94dB) per FCC Sec. 15.249 & IC RSS-210 Annex 2.9. The limit for its harmonics is 500uV (54dB). Other spurious emissions shall be lower than either its fundamental by 50dB or the limit defined in Sec. 15.209, whichever is higher.

(2) If the peak reading is less than the FCC/IC quasi-peak or average limit, it'll be not necessary to show the measured/ calculated quasi-peak or average reading.

(3) For above 1GHz range, peak reading shall meet the limit: average Limit+20dB.

Other Spurious outside of the band 902-928MHz

Other Spurious outside of the band 902-928MHz

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Reading After Correction (dBuV/m)	FCC/IC 3m Limit (1) (dBuV/m)	Difference (dBuV/m)
814	H/Z	1.2	160	38.2		46.5	-8.3
830	H/Z	1.2	040	36.3		46.5	-10.2
933	H/Z	1.2	050	40.0		46.5	-6.5
946	H/Z	1.2	190	35.4		46.5	-11.1
746	V/Z	1.1	225	36.2		46.5	-10.3
814	V/Z	1.1	180	37.4		46.5	-9.1
937	V/Z	1.1	110	39.0		46.5	-7.5
944	V/Z	1.1	120	38.1		46.5	-8.4

Comparing to the limit defined in Sec. 15.209 & RSS-210, emissions below the limit by 20dB were not recorded.




MARKER Δ
113 kHz
.44 dB

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR Δ 113 kHz
.44 dB

LOG REF 92.0 dB μ V/m

10
dB/
RTN
10 dB

DL
67.3
dB μ V/m
VA SB
SC FC
ACORR

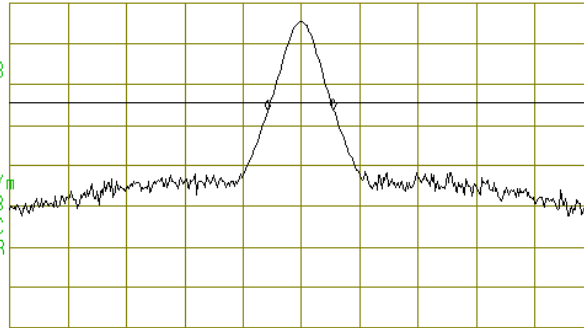

CENTER 914.983 MHz

#IF BW 30 kHz

AVG BW 30 kHz

SPAN 1.000 MHz

SWP 20.0 msec

20dB Bandwidth Plot




MARKER Δ
95 kHz
.08 dB

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR Δ 95 kHz
.08 dB

LOG REF 92.0 dB μ V/m

10
dB/
RTN
10 dB

VA SB
SC FC
ACORR

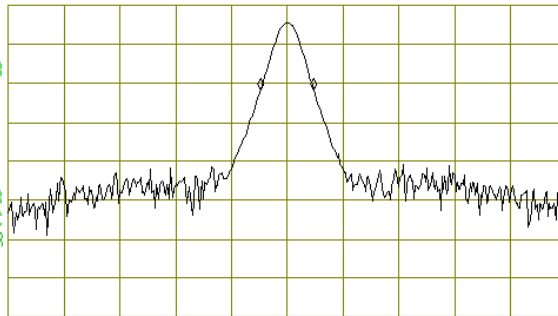

CENTER 914.983 MHz


#IF BW 30 kHz

AVG BW 30 kHz

SPAN 1.000 MHz

SWP 20.0 msec

99% Bandwidth Plot

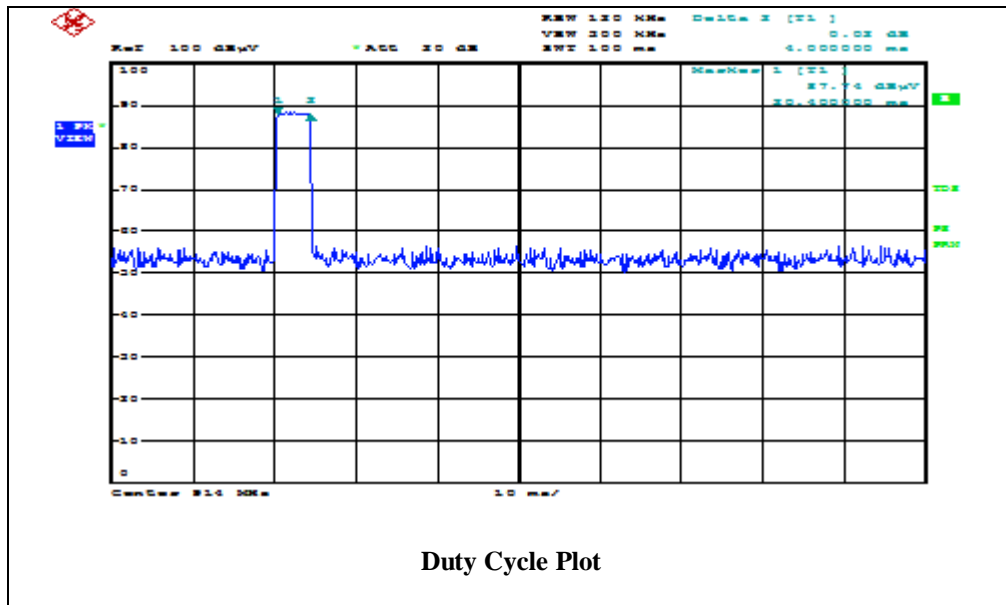

5.4 125KHz Transmission Radiated Test Data

EUT is powered by battery at Vertical Orientation

Frequency (MHz)	Polarity (V,H) Position X	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Reading After Correction (dBuV/m)	FCC Limit@ 3m (1) (dBuV/m)	Difference (dBuV/m)
0.122	Loop	1.0	000	97.5		105.6	-8.1
0.247	Loop	1.0	000	62.6		99.7	-37.1
0.369	Loop	1.0	030	58.8		96.2	-37.4
0.490	Loop	1.0	020	63.2		73.8	-10.6
0.627	Loop	1.0	050	58.6		71.2	-12.6

(1) The limit for emissions per Sec. 15.209 with distance correction factor (40dB/decade at $f < 30\text{MHz}$).

(2) If each peak reading is less than the FCC QP or average limit, it'll be not necessary to show the measured/ calculated QP or average reading (QP detector shall be used except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, in which an average detector shall be employed).

20 dB Bandwidth at 125KHz

