


SRS-XB402M & SRS-XB402G operation manual

By tonly

目录

| | |
|--|----|
| 1. Input key..... | 2 |
| 1.1 Single key..... | 2 |
| 1.1.1 Multi Function Key operation for XBH3..... | 3 |
| 1.2 Double Key..... | 3 |
| 2. Boot up..... | 4 |
| 2.1 insert adapter..... | 4 |
| 2.2 insert USB..... | 4 |
| 2.3 press the power key..... | 5 |
| 3. configure network..... | 6 |
| 4. login to amazon..... | 10 |
| 5. use USB to upgrade software..... | 15 |

1. Input key

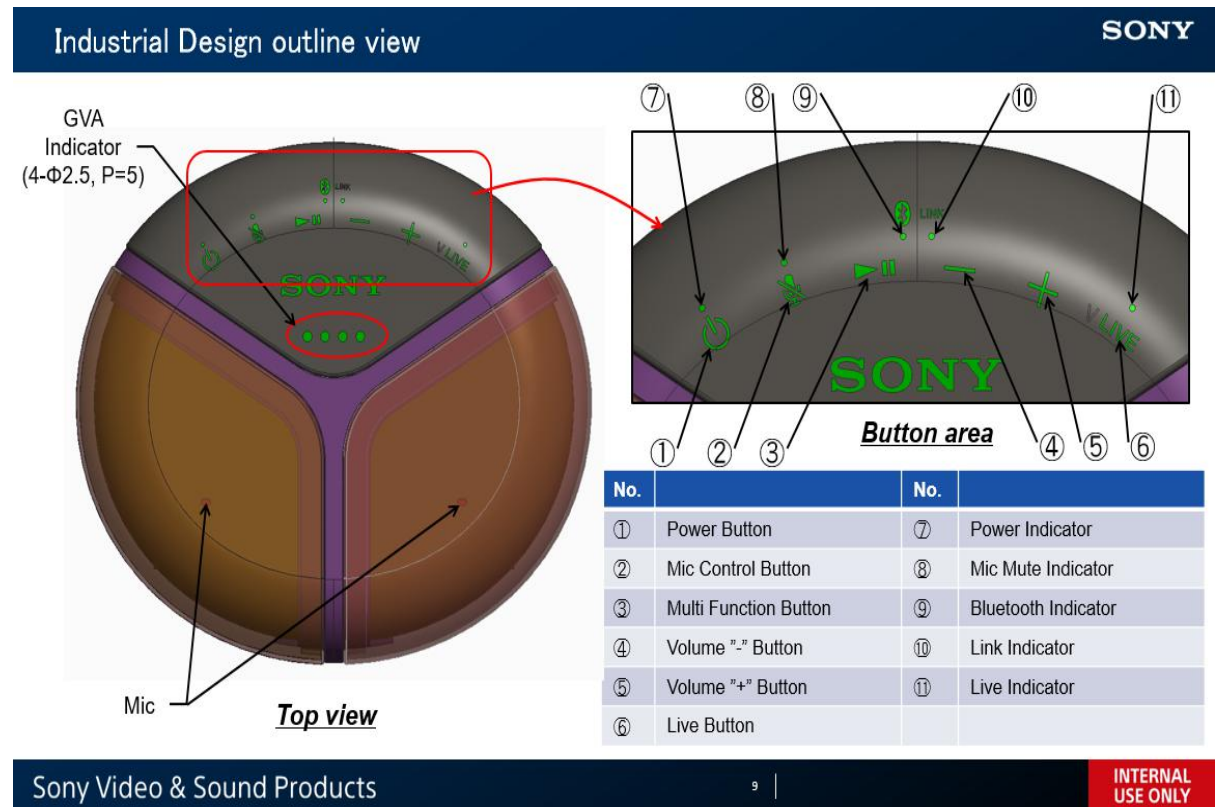

1.1 Single key

| key name | Function |
|-------------------------------------|--|
| Power/ Bluetooth Pairing | Short press : Turns the system on/off |
| | Long press : BT pairing |
| Volume− | Adjusts the volume. |
| Volume+ | Adjusts the volume. |
| MIC | Short press: MIC Muting ON/OFF |
| | Long press(7sec): Restart (Hardware Reset) |
| Multi Function | See below |
| Light/Battery | Short press: Lighting Pattern Change (include Light off) |
| | Long press: Voice guidance |
| LIVE | Short press: LIVE SOUND on/off (LIVE SOUND <=> EXTRA BASS) |
| | Long press: STANDARD on/off (STANDARD <=> EXTRA BASS) |

1.1.1 Multi Function Key operation for XBH3

| | Function | Set Operation | Status/Condition | Operation(press) |
|---|--------------|-----------------------------|----------------------------------|------------------|
| 1 | Play, Pause, | Play | Pause | Short |
| 2 | AMS | Pause | Play | Short |
| 3 | | AMS+ | Play/Pause | Short x 2 |
| 4 | | AMS- | Play/Pause | Short x 3 |
| 5 | Hot Word | Voice Control | | Long(2sec) |
| 6 | Alarm/Timer | Alarm/Timer Ringing Stop | During Alarm/Timer Ringing | Short |

1.2 Double Key

| Key Name | | | Operation |
|-----------|---|---------------------------|--------------------------|
| [Volume-] | + | [Power/Bluetooth Pairing] | Factory Data Reset(初期化) |
| [Volume+] | + | [Power/Bluetooth Pairing] | BT Codec Change(SBC⇄AAC) |
| [LIVE] | + | [Light/Battery] | WiFi 5G ON/OFF |

2. Boot up

Take out the machine from box, there are three ways to turn it on,

2.1 insert adapter



2.2 insert USB



2.3 press the power key



When the line light is on, the boot is successful.




3. configure network


a) Turn on your phone's wifi and bluetooth.



b) Open the music center app


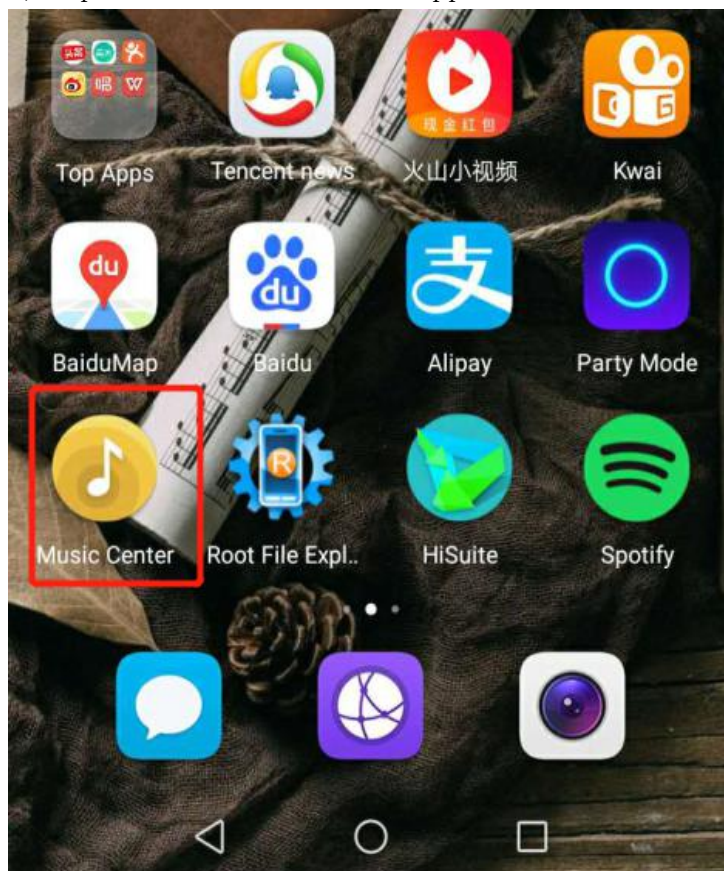


c) Select the device

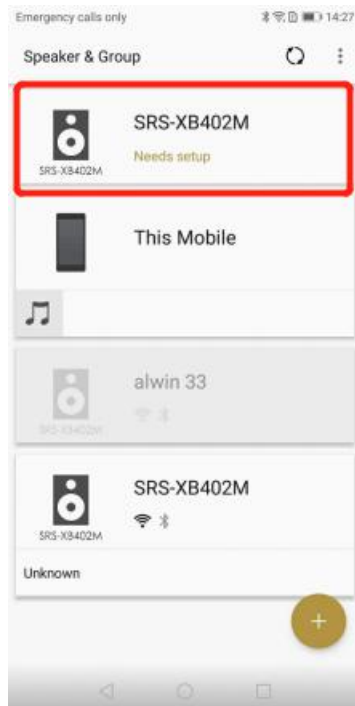


d) Confirm the WiFi connection, click ok to connect, and then wait about 2 minutes




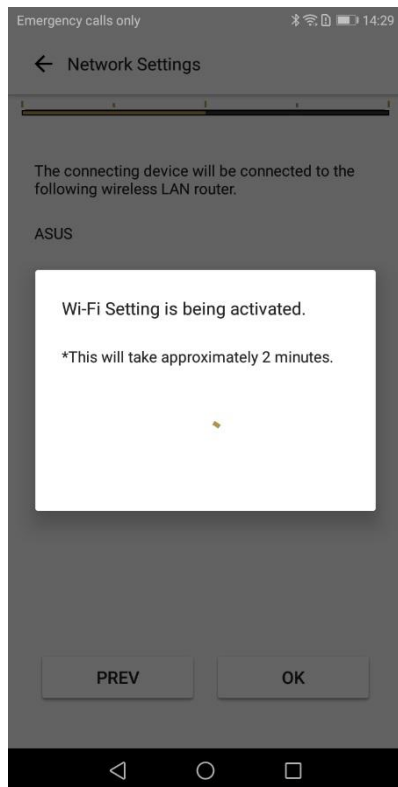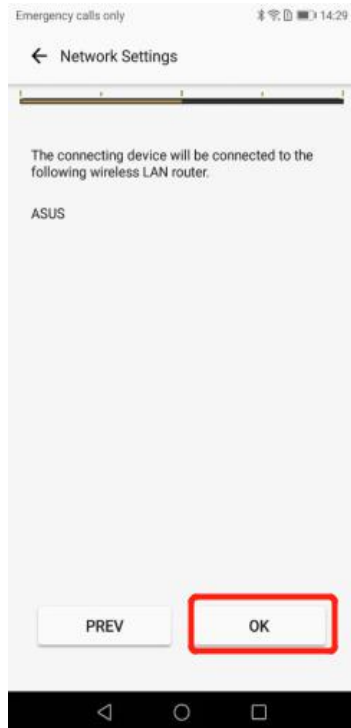

e) Rename your device name, click OK, wait a few seconds,

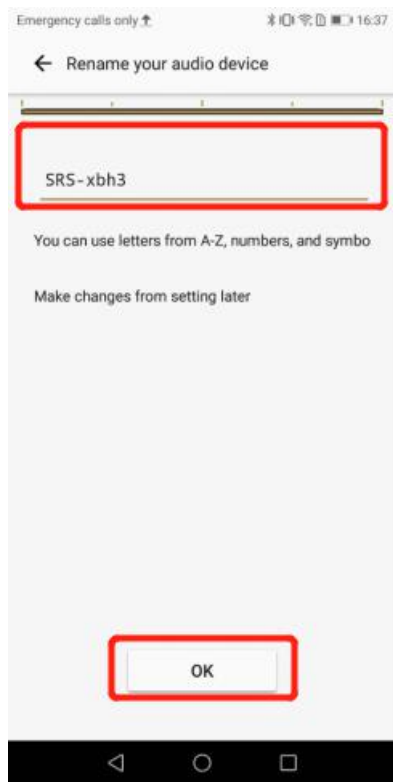

f) Set complete, click DONE

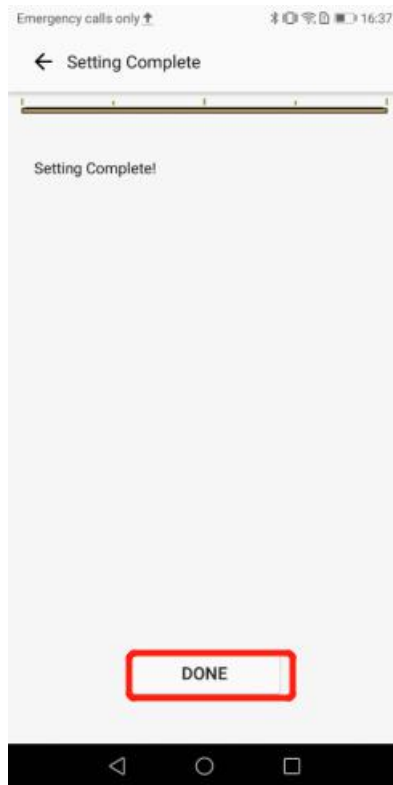


4. login to amazon


a) Select your device




b) click Settings

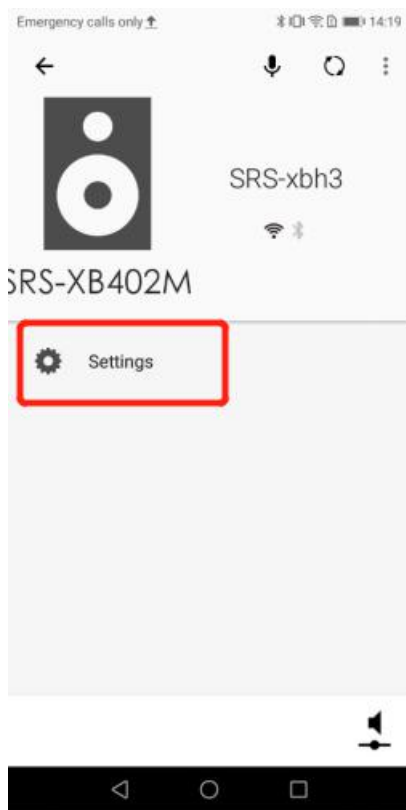


c) Click Amazon Alexa

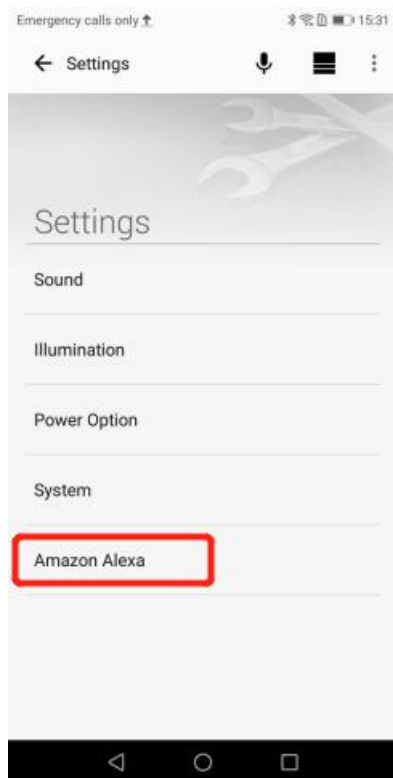


d) Click Initial Setup

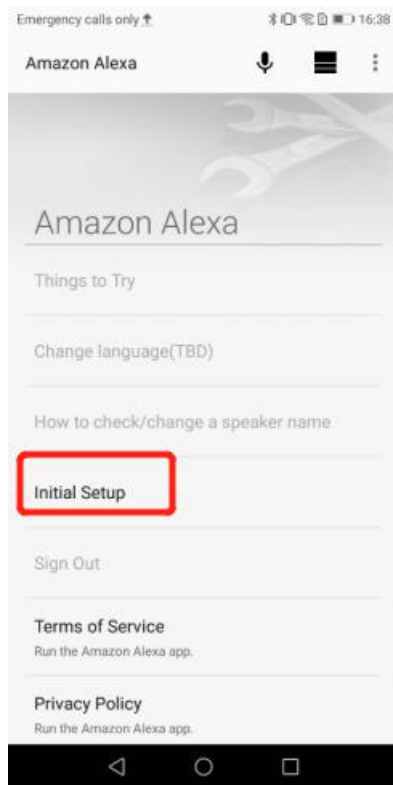


e) Click NEXTT

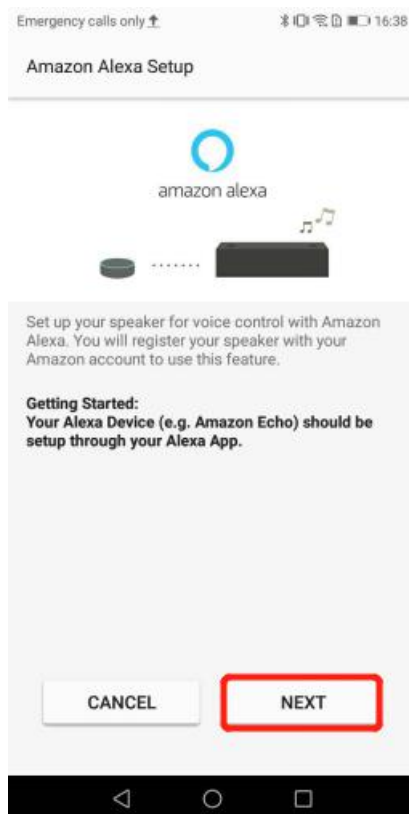

f) Choose language , and click NEXT

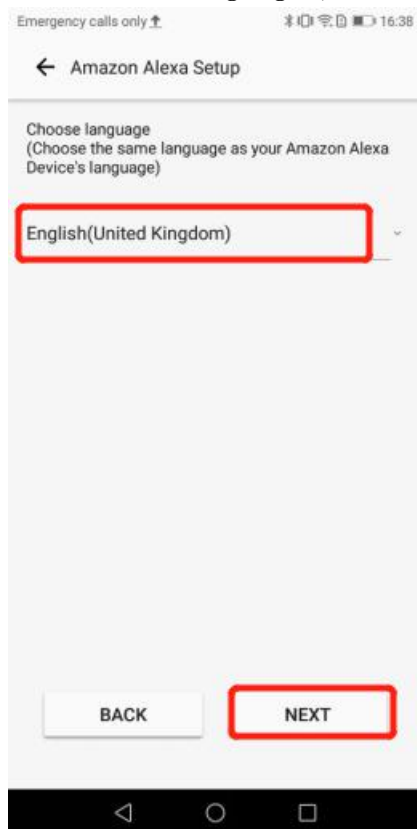

g) click NEXT to Connect your Amazon account

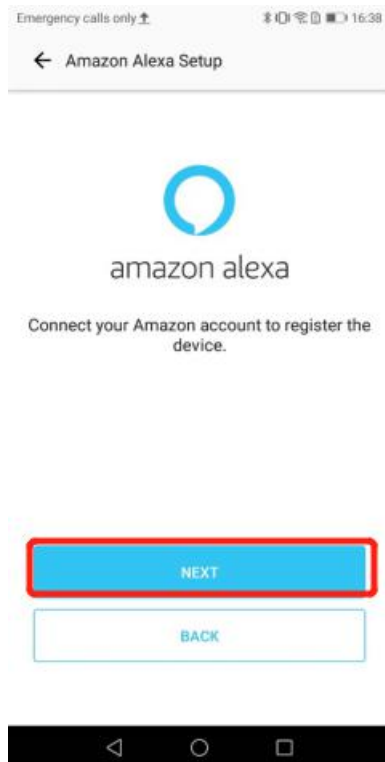

h) Enter your account number and password, click allow, and wait 10 seconds



i) Login successfully, click YES,WORK WELL, click DONE ,Network configuration successful





5. use USB to upgrade software

a) Prepare a USB flash disk and an OTG transmission line.



b) Copy XB402M_A.UPG files into the USB flash drives.

c) Use OTG transmission line to link the machine to USB flash disk.



d) Press the power key to boot up.



e) After the boot is completed, press the live key, one of the top indicatie lights will start flashing and the upgrade will start.



f) Wait a few minutes, the second lights in turn flashing blue, and then the machine automatically restart.



g) Then the third and fourth lights flashed blue. the machine restarts automatically and the upgrade is successful

