

Test Plot 1#: GPRS 850 Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.439 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

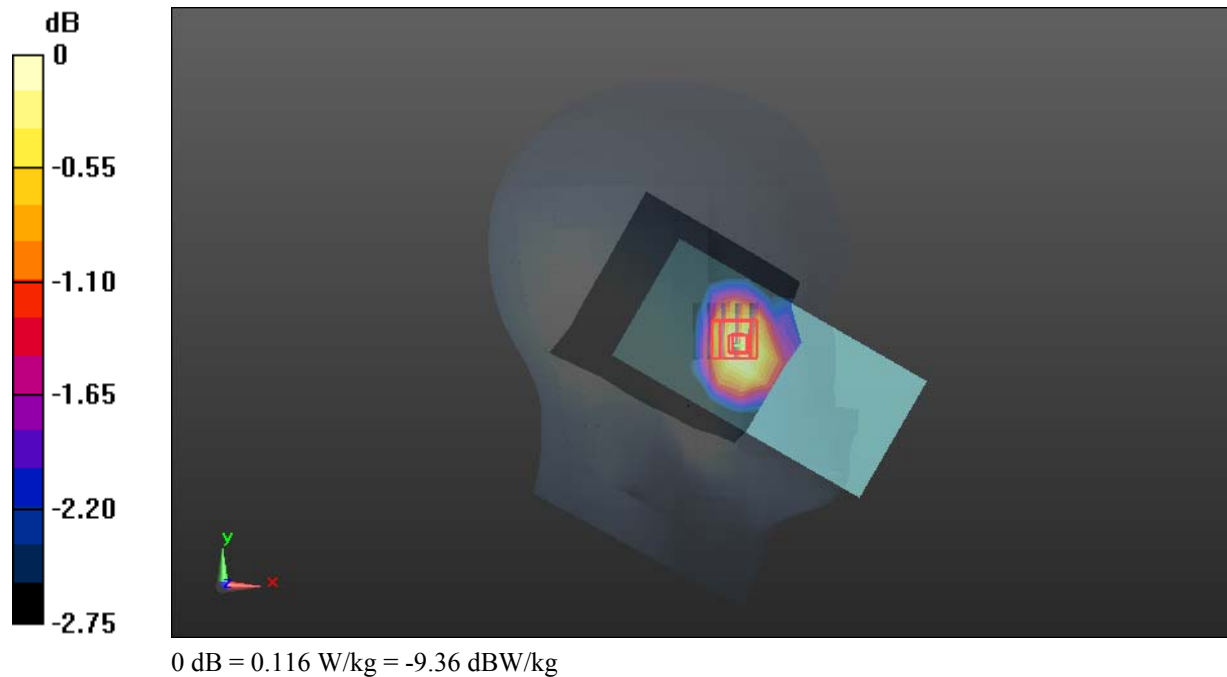

Test Plot 2#: GPRS 850 Mid ANT0 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.227 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.043 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

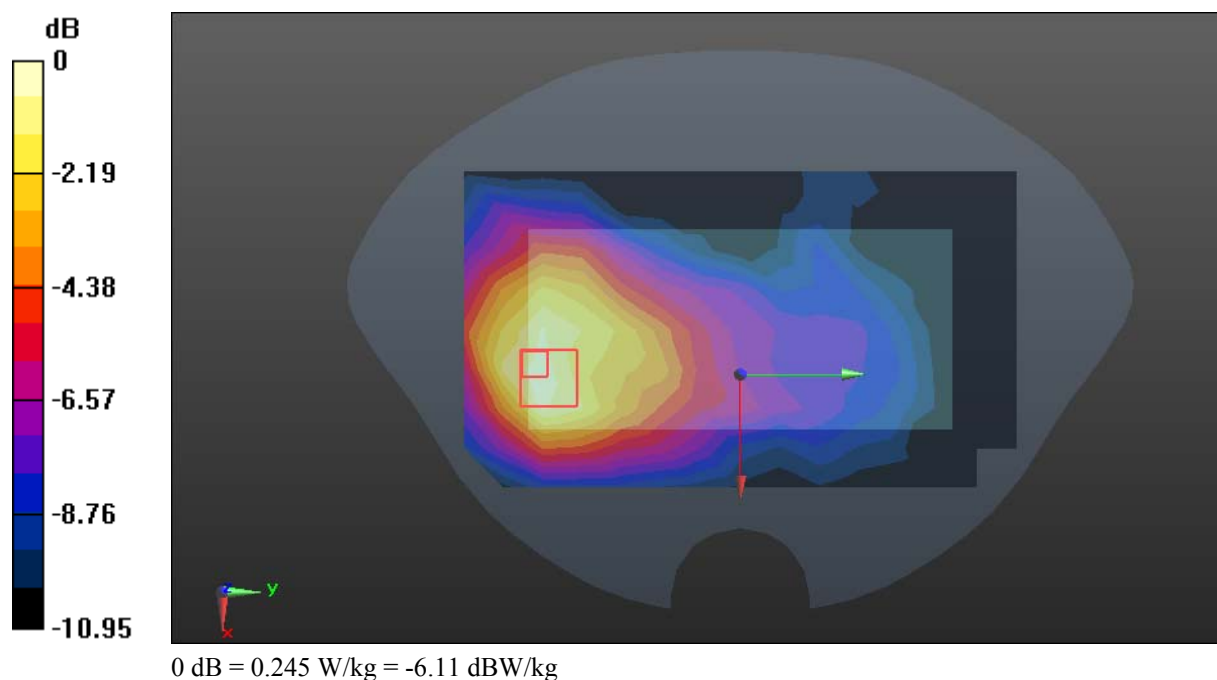

Test Plot 3#: GPRS 850 Mid ANT1 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.950 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.26 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.680 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

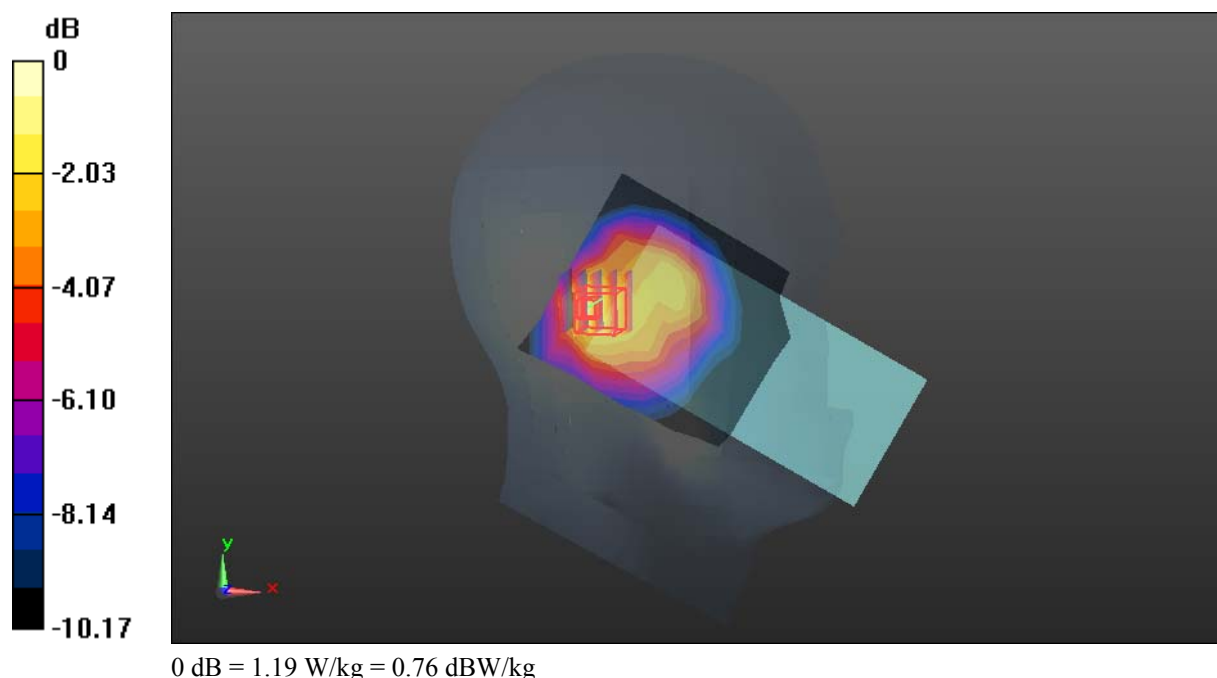

Test Plot 4#: GPRS 850 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.775 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.80 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.660 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

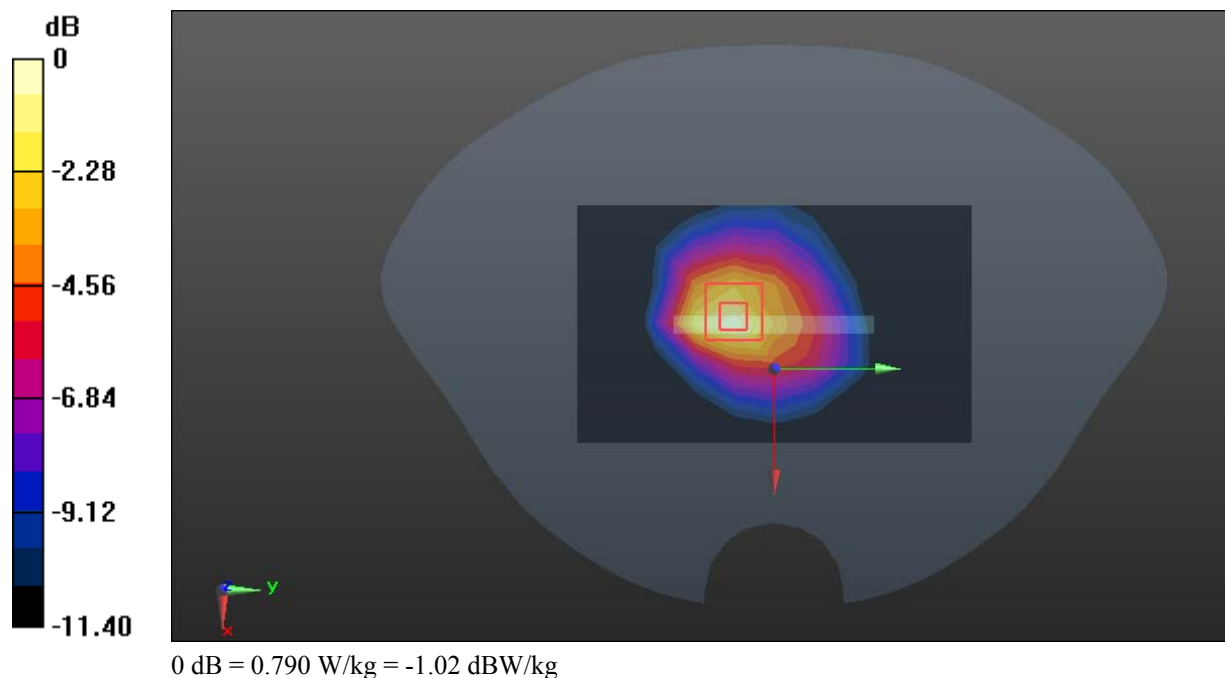

Test Plot 5#: PCS 1900 Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0992 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.290 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

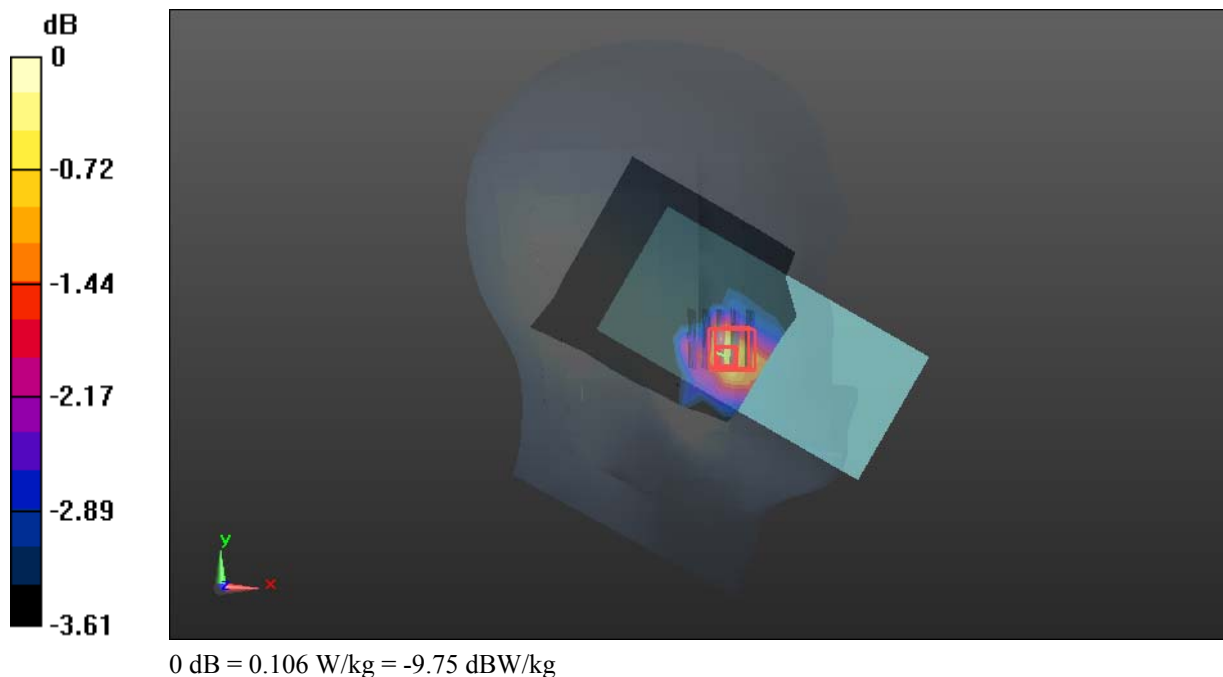

Test Plot 6#: PCS 1900 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.352 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.531 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

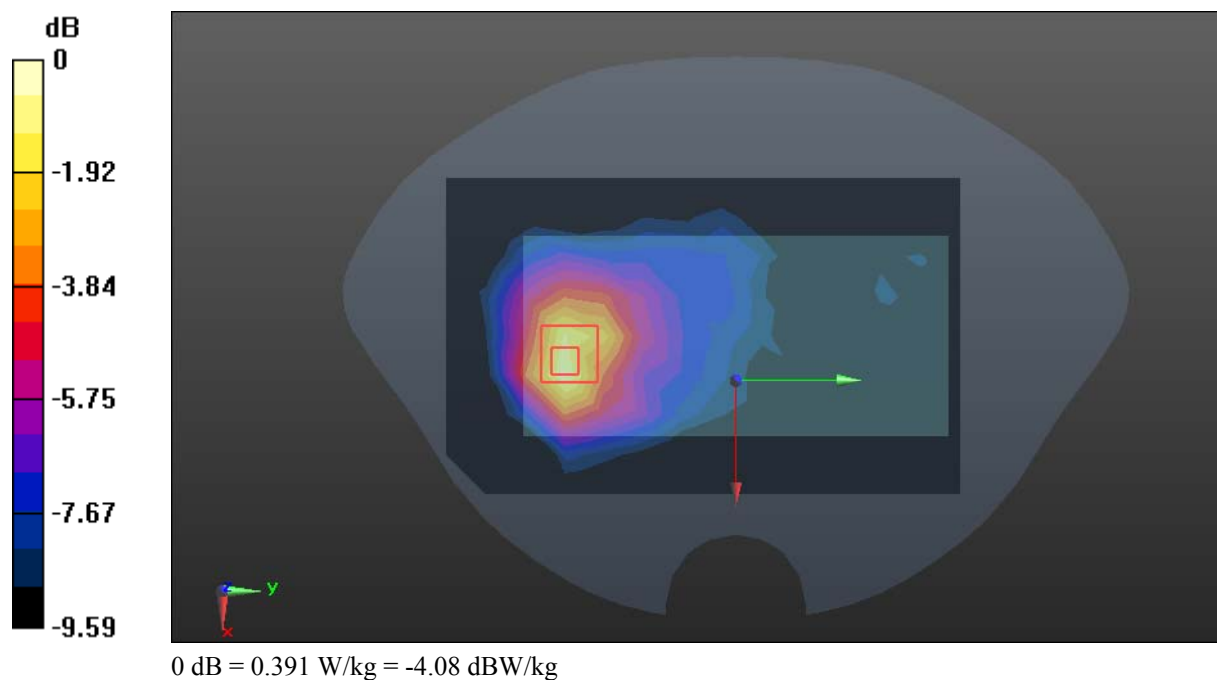

Test Plot 7#: PCS 1900 Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.735 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.89 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

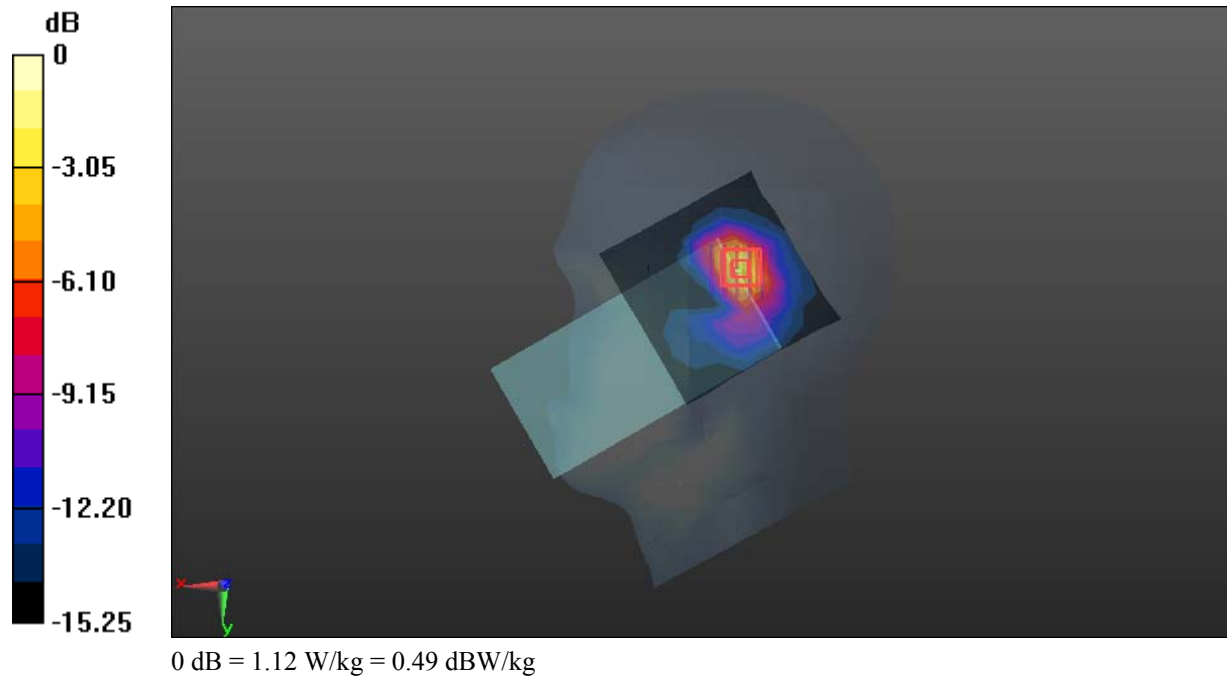

Test Plot 8#: PCS 1900 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.357 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.430 W/kg

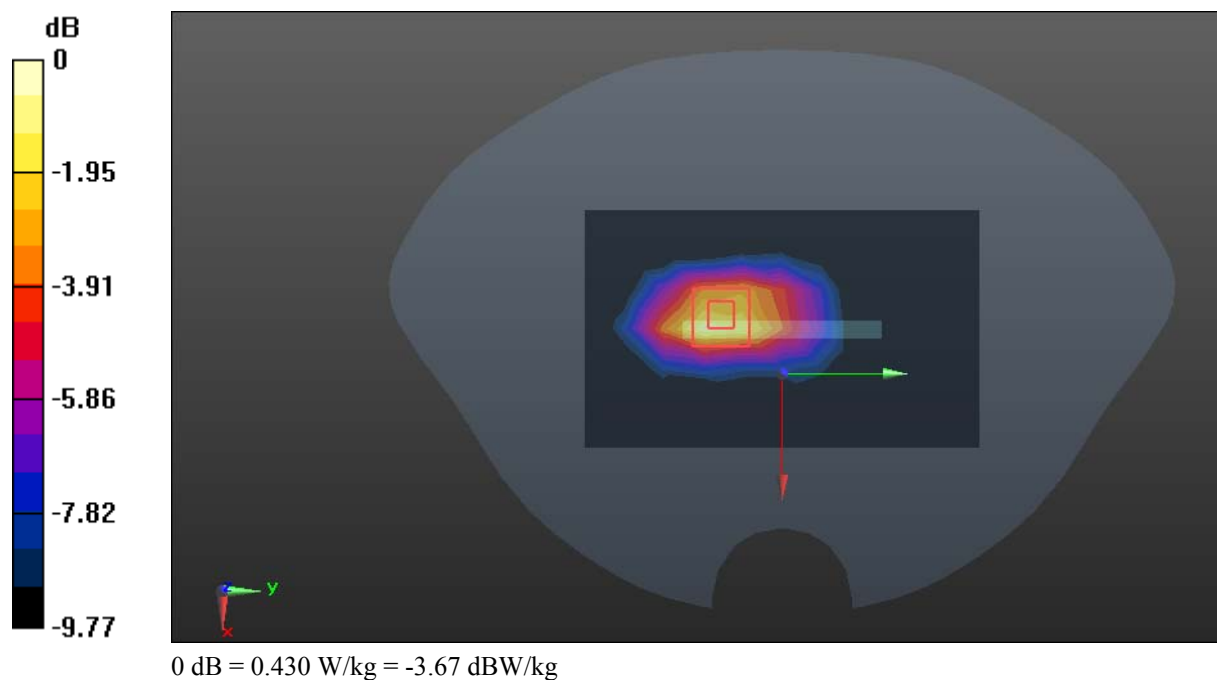

Test Plot 9#: WCDMA Band 2 Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.872 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

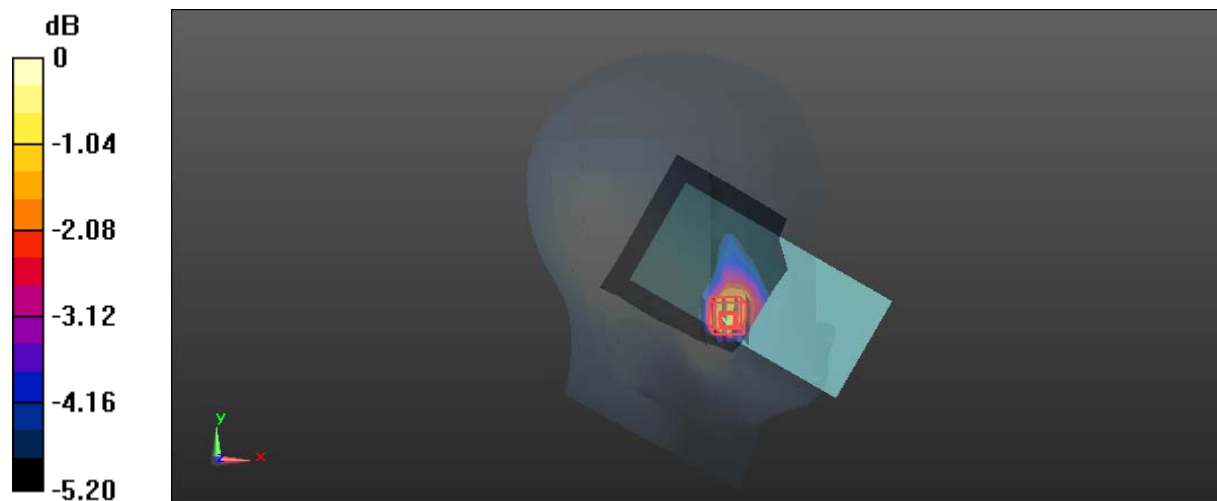

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Plot 10#: WCDMA Band 2 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.357 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.652 W/kg

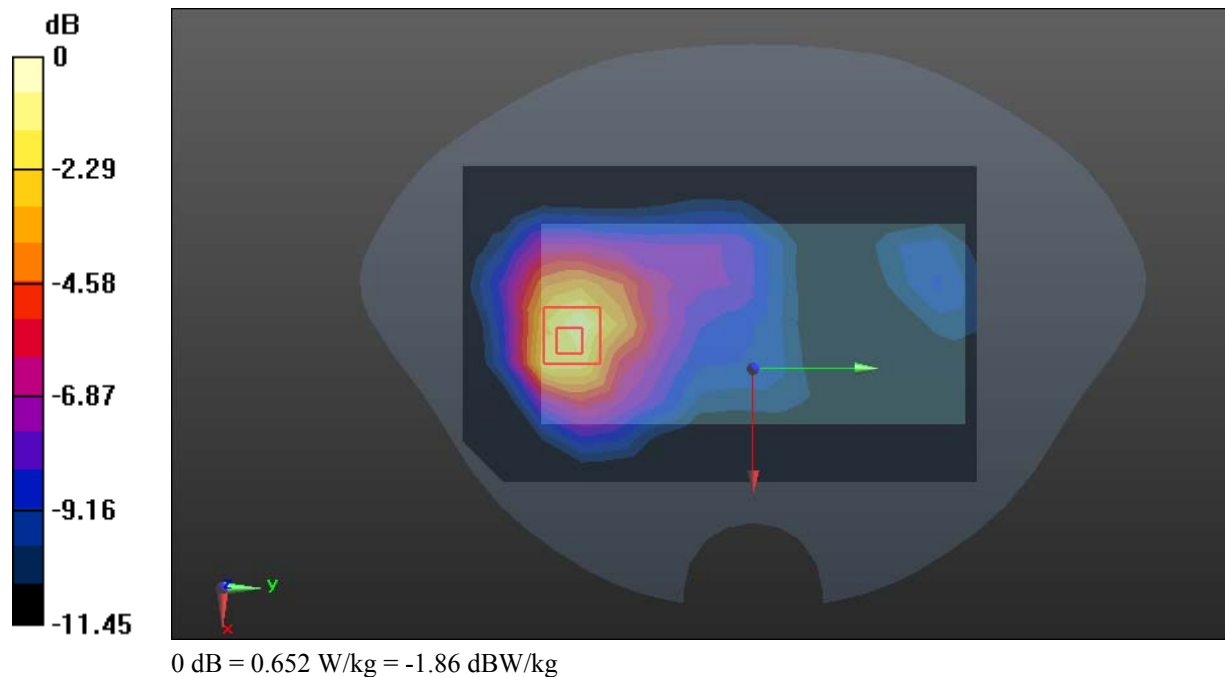

Test Plot 11#: WCDMA Band 2 Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.748 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.65 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

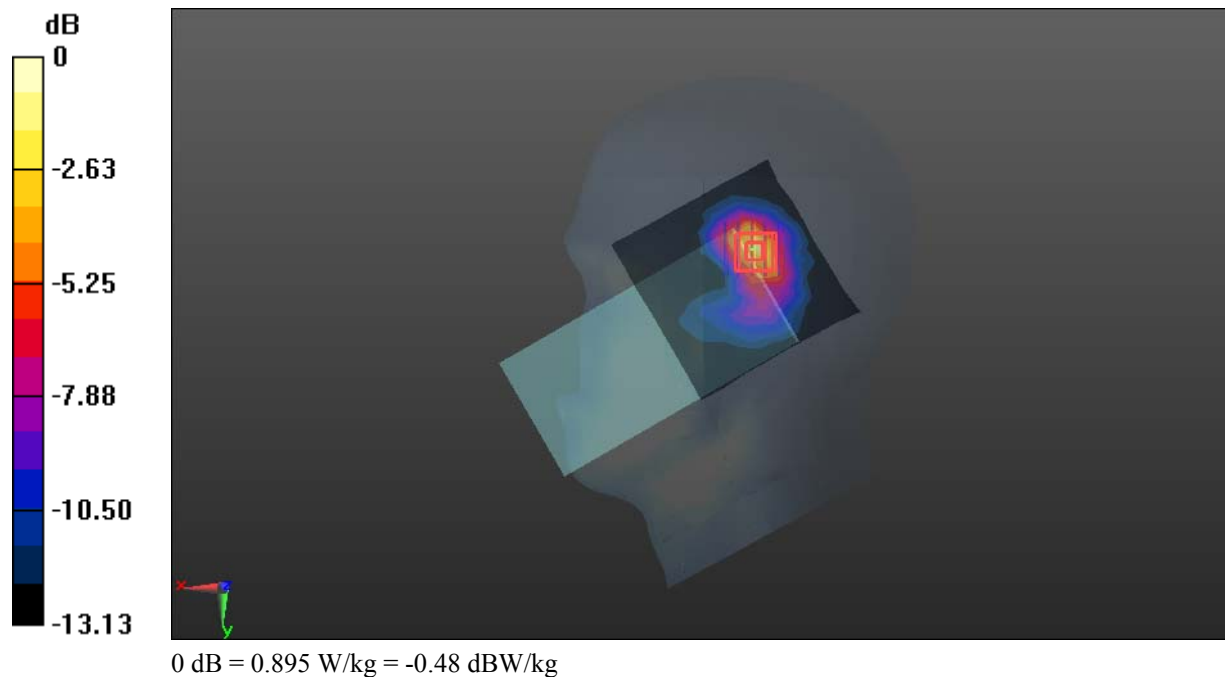

Test Plot 12#: WCDMA Band 2 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.360 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.535 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.367 W/kg

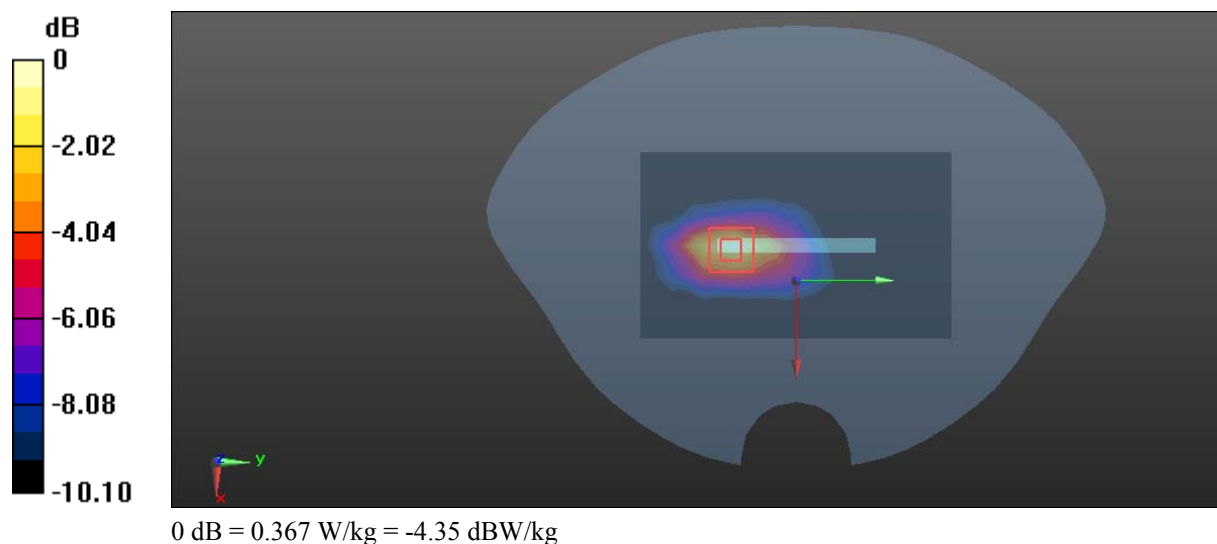

Test Plot 13#: WCDMA Band 4 Mid ANT0 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.493$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1732.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0756 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.476 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0759 W/kg

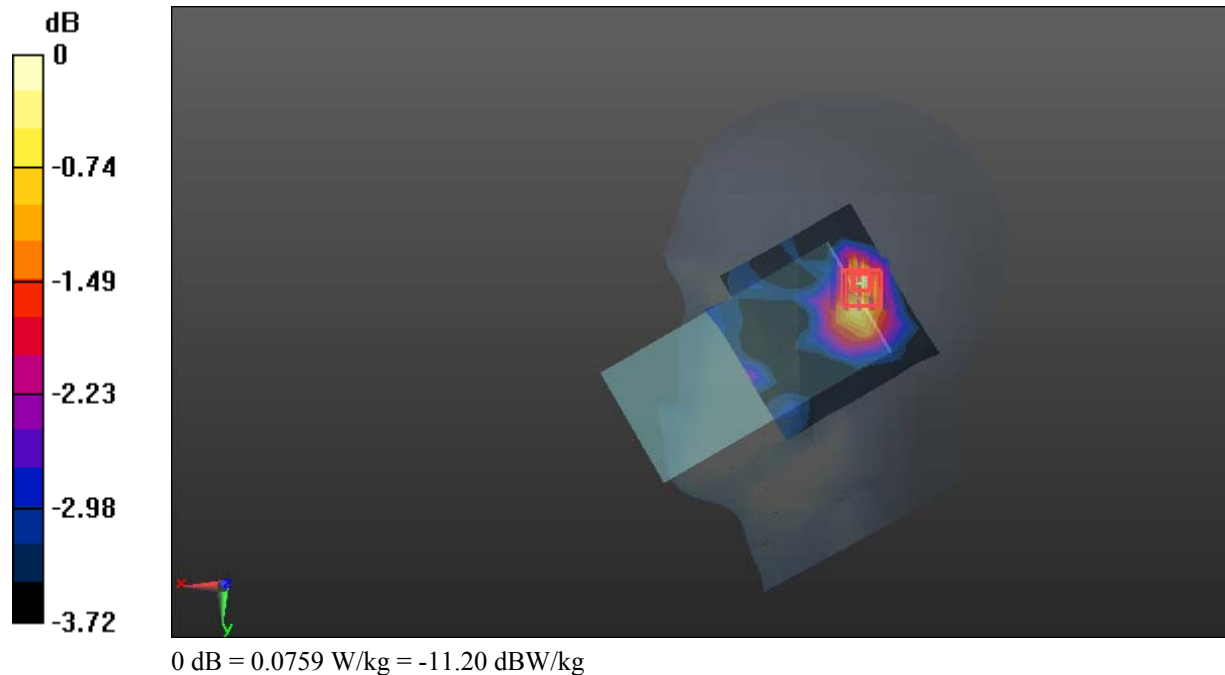

Test Plot 14#: WCDMA Band 4 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.493$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1732.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.392 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.480 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

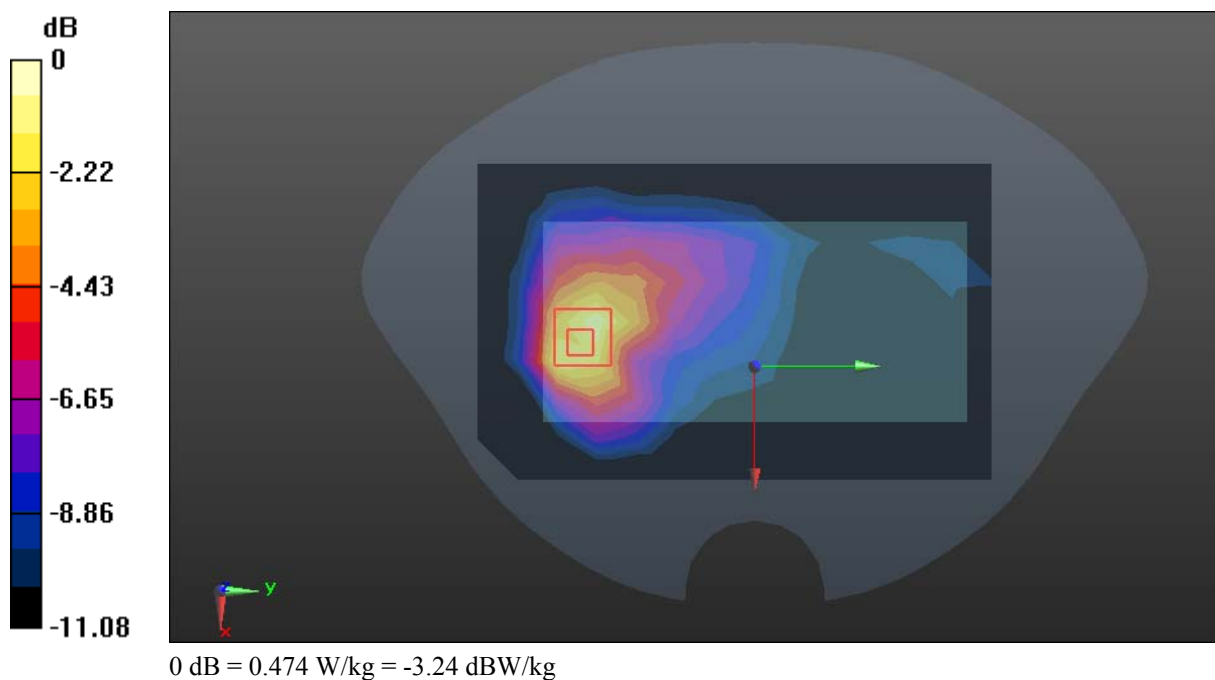

Test Plot 15#: WCDMA Band 4 High ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.408$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1752.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.917 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.572 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

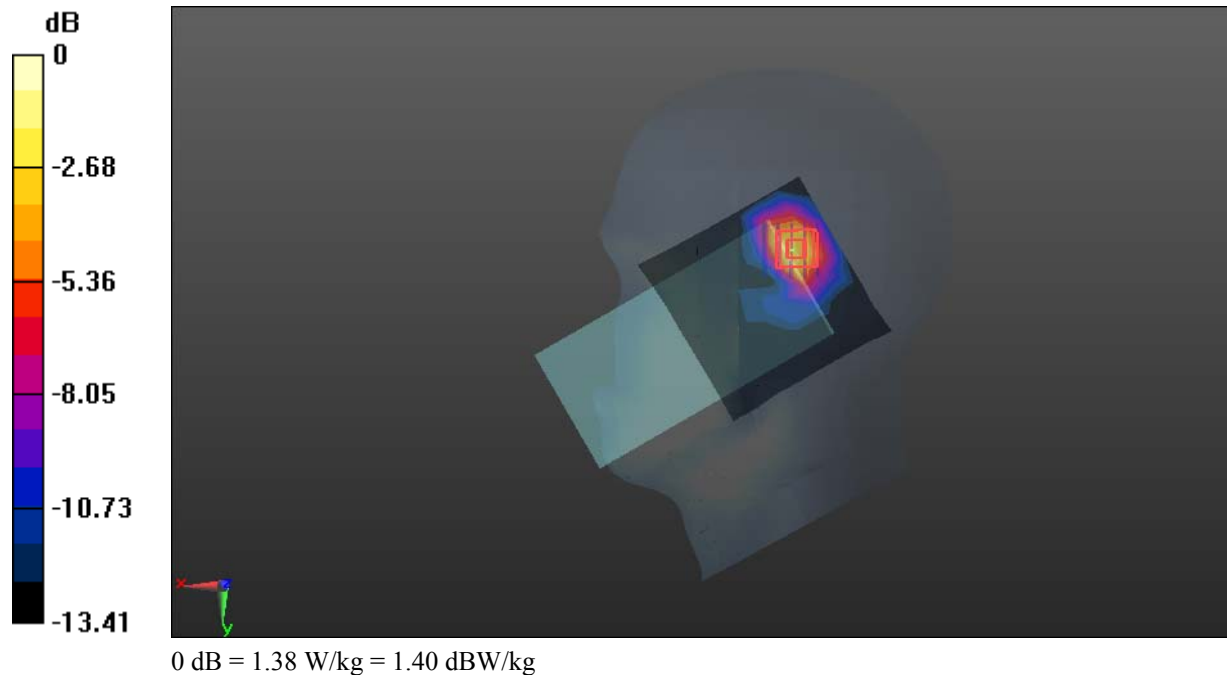

Test Plot 16#: WCDMA Band 4 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.493$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1732.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.543 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

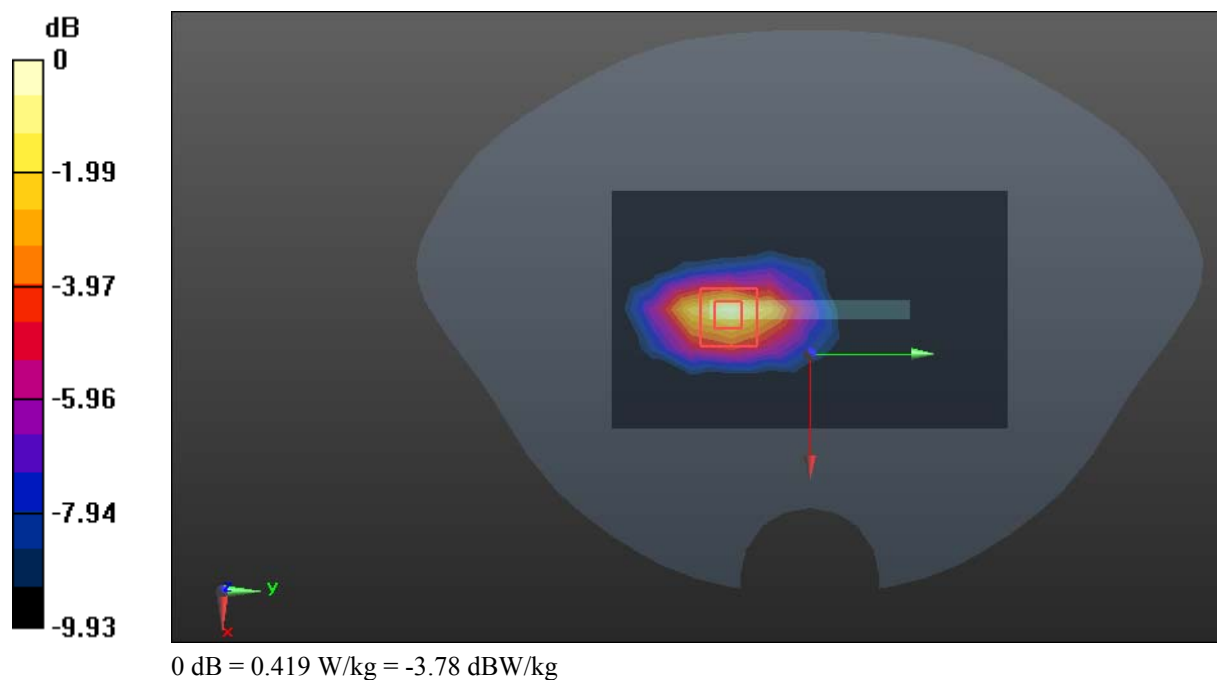

Test Plot 17#: WCDMA Band 5 Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.961$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.462 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

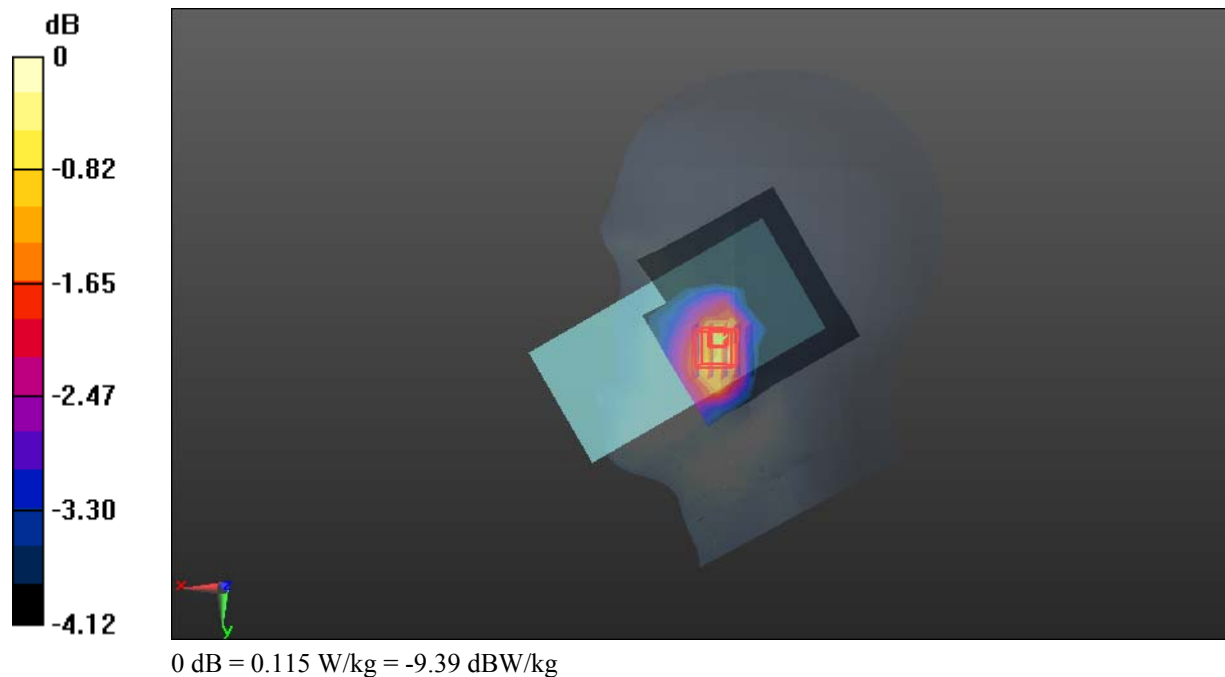

Test Plot 18#: WCDMA Band 5 Mid ANT0 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.961$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.246 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.64 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

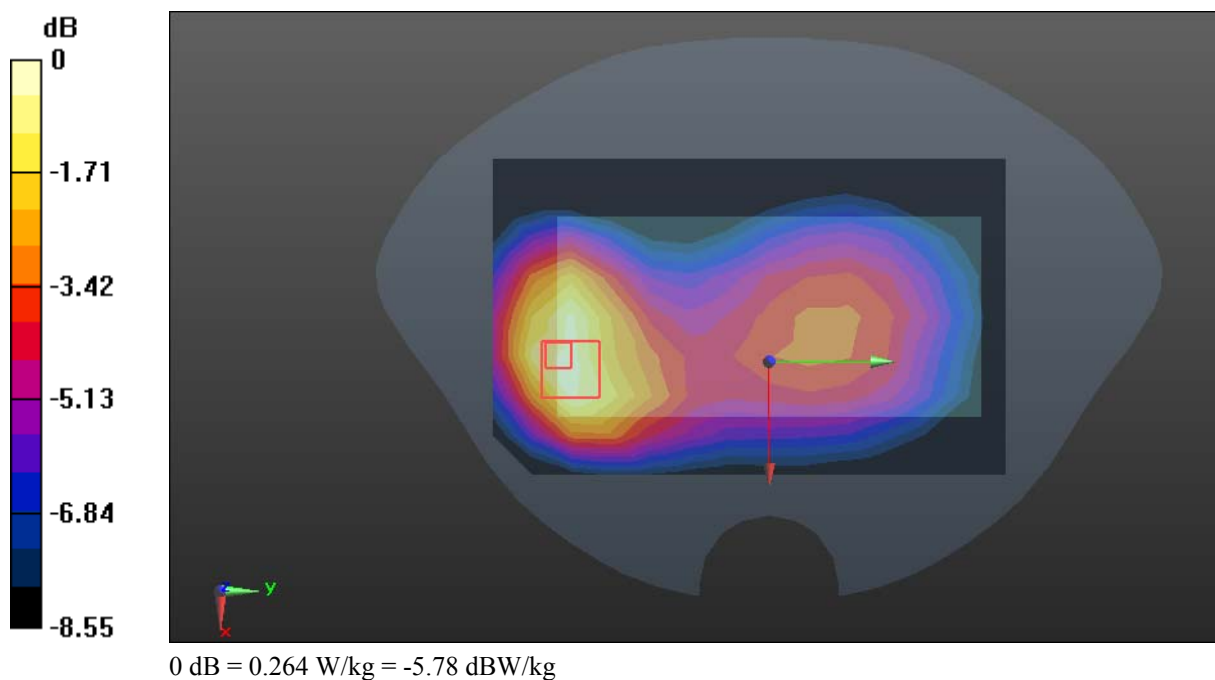

Test Plot 19#: WCDMA Band 5 Mid ANT1 Head Left Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.845 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.87 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.492 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

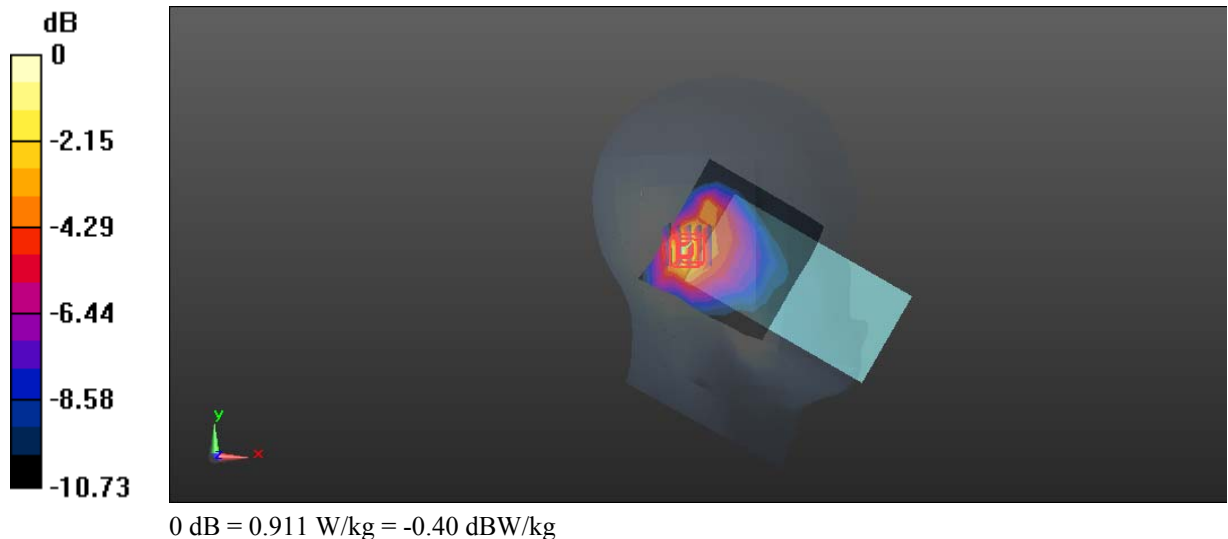

Test Plot 20#: WCDMA Band 5 Mid ANT1 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.865$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.582 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.15 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

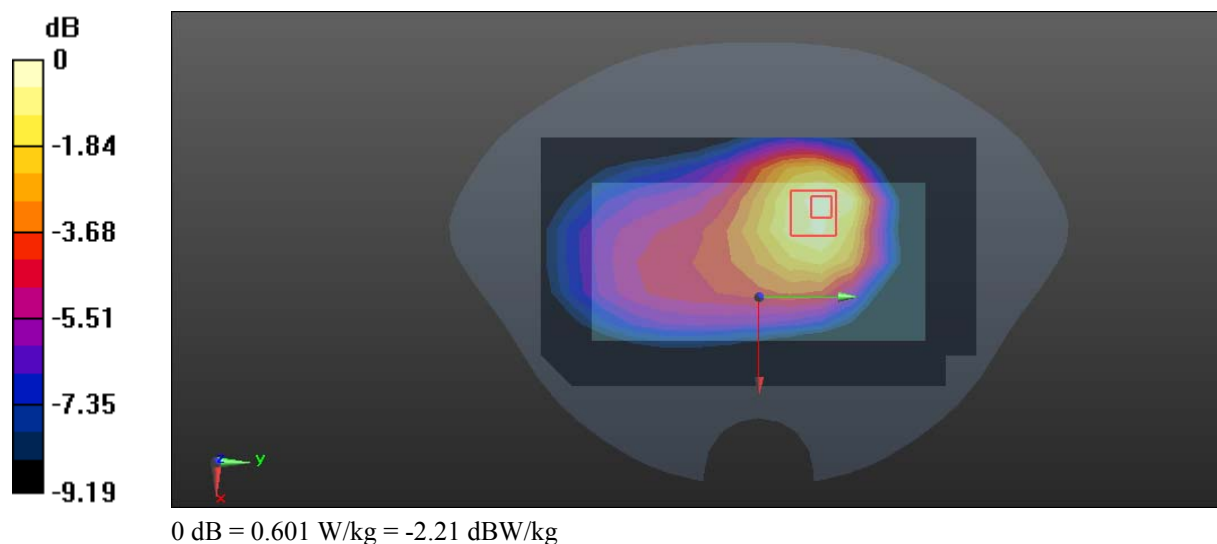

Test Plot 21#: LTE Band 2 1RB Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.609$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0654 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.626 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0697 W/kg

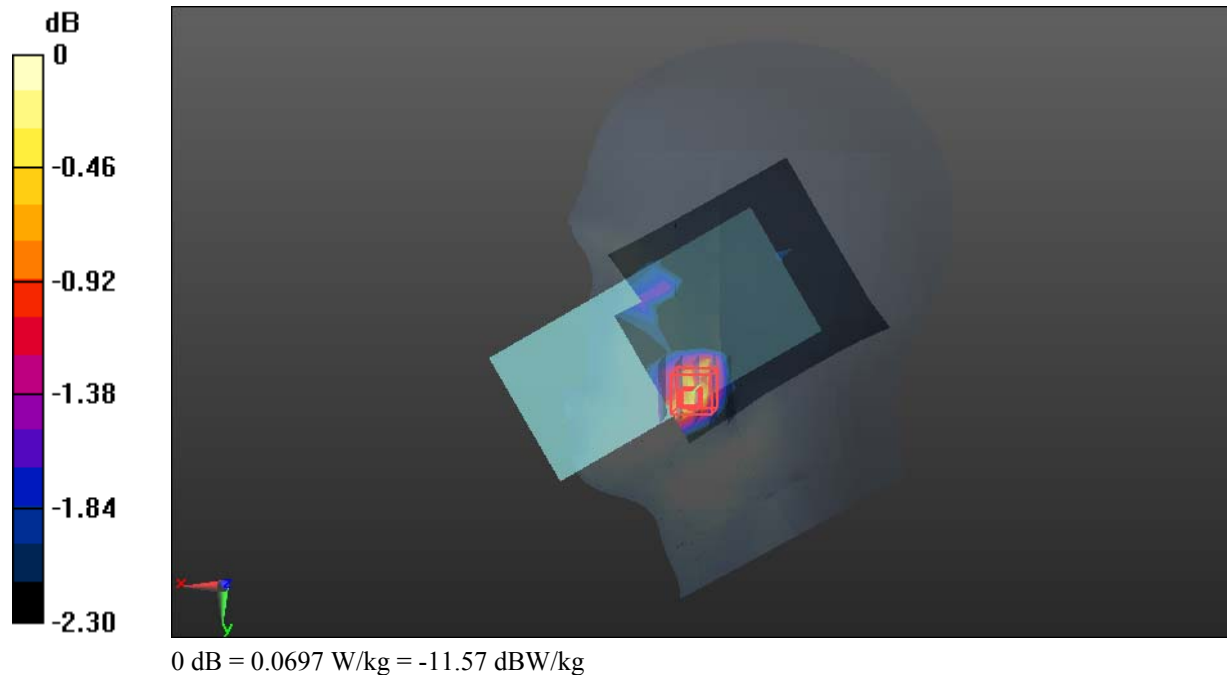

Test Plot 22#: LTE Band 2 1RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.609$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.972 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

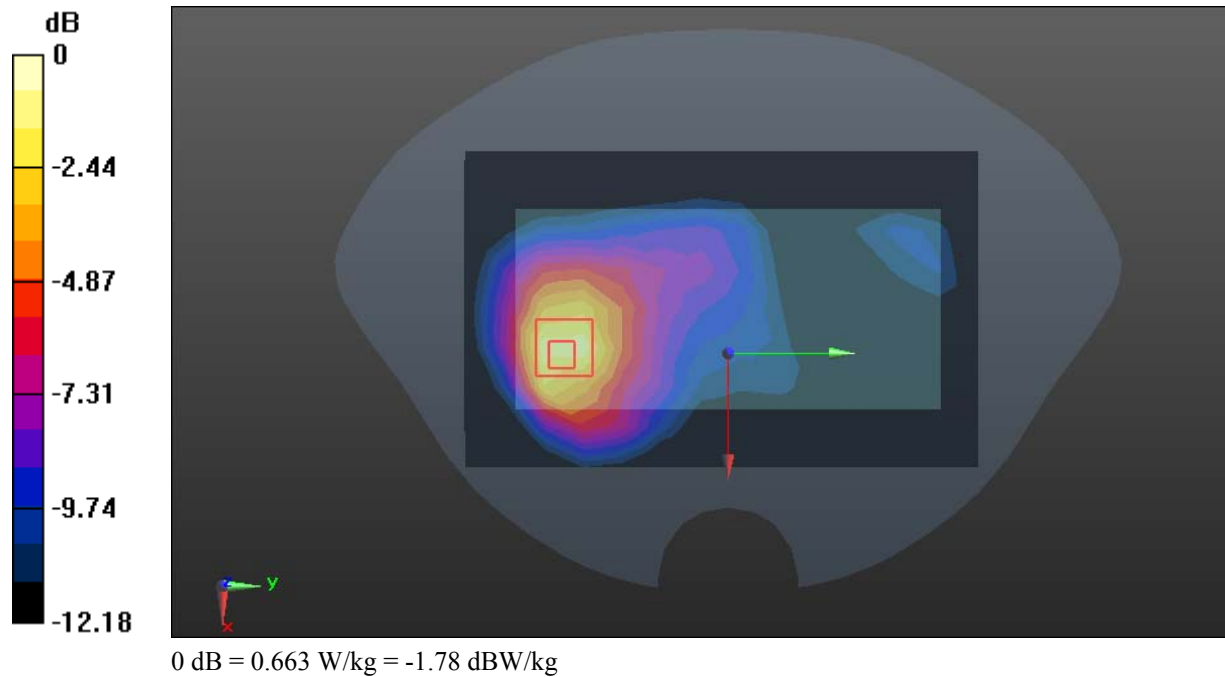

Test Plot 23#: LTE Band 2 1RB Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.609$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.568 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

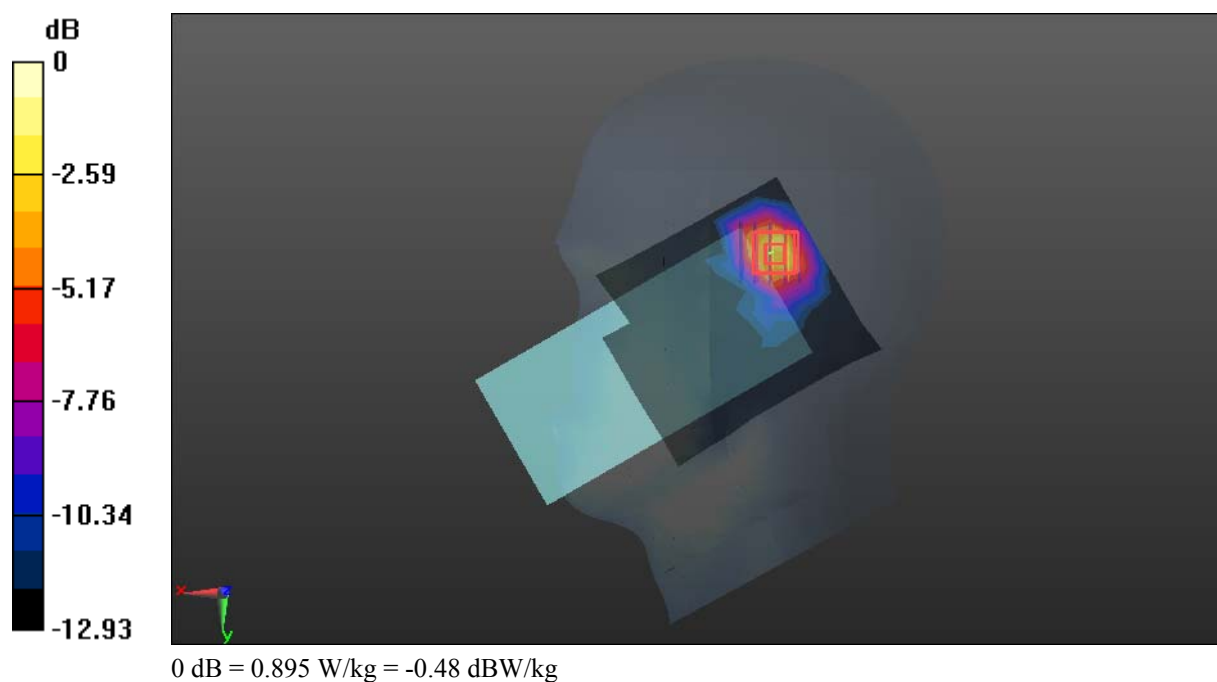

Test Plot 24#: LTE Band 2 1RB Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.609$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.470 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

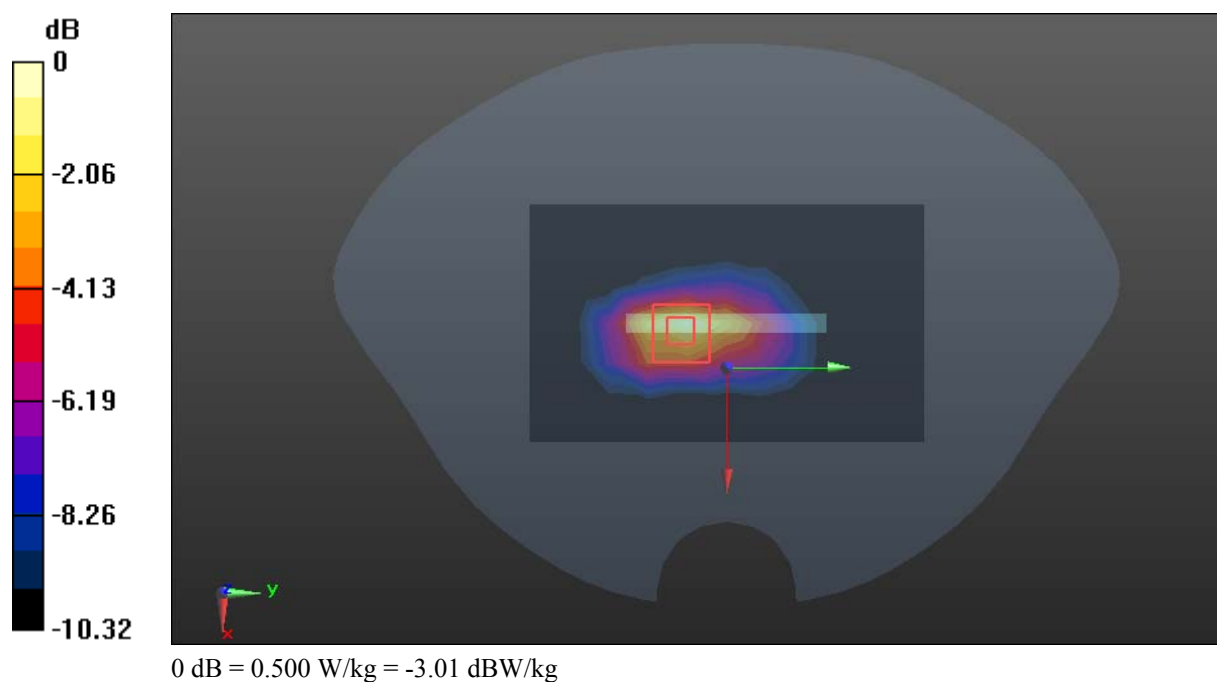

Test Plot 25#: LTE Band 5 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.984$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.117 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

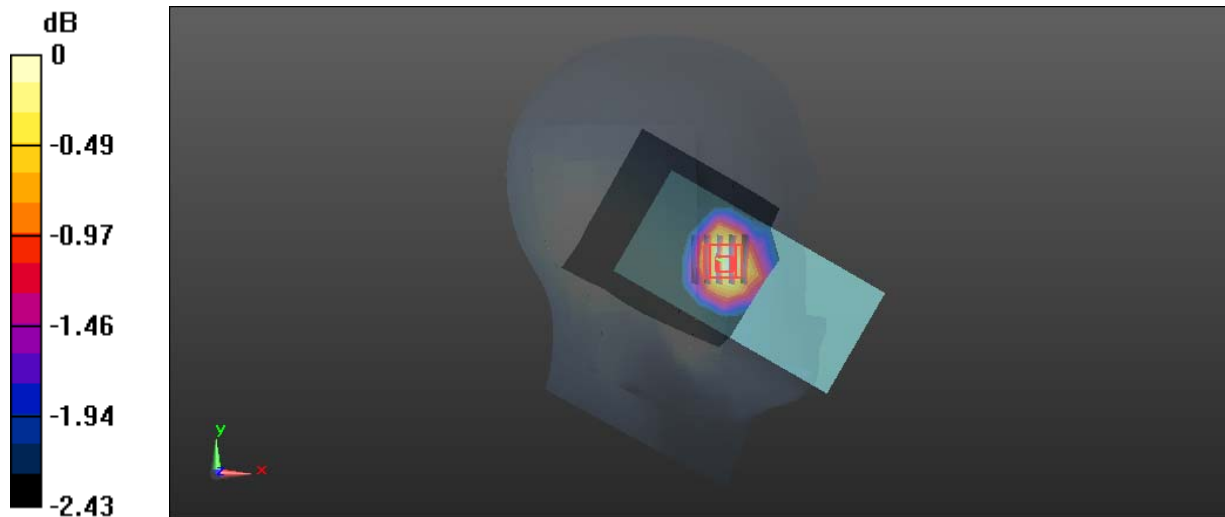

0 dB = 0.107 W/kg = -9.71 dBW/kg

Test Plot 26#: LTE Band 5 1RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.984$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.317 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

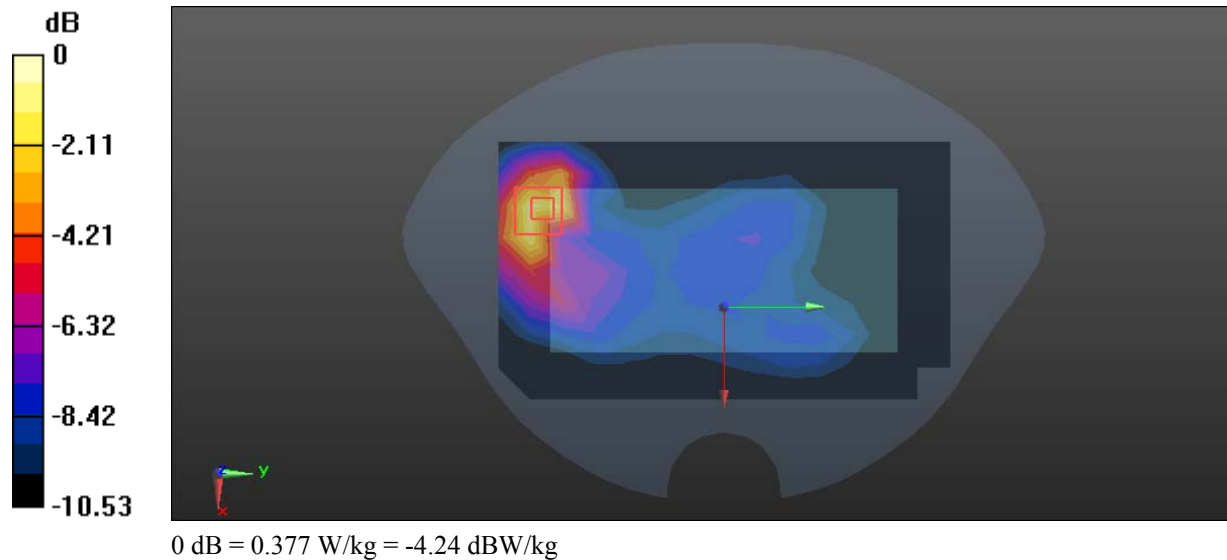

Test Plot 27#: LTE Band 5 1RB High ANT1 Head Left Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 844$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.843$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 844 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.24 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.35 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.639 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

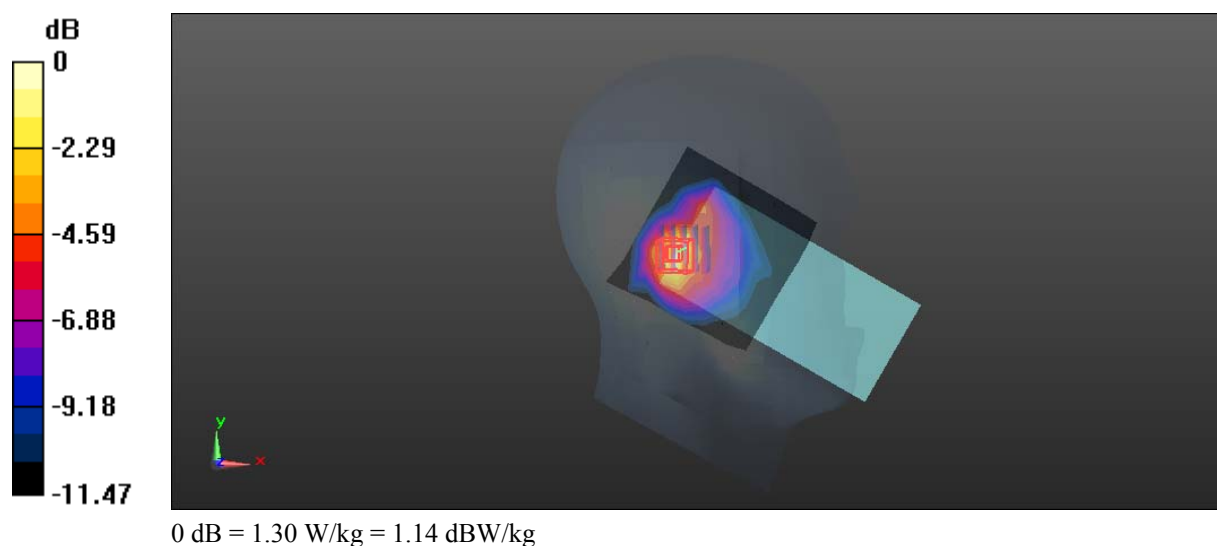

Test Plot 28#: LTE Band 5 1RB Mid ANT1 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.962$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.75 V/m; Power Drift = 0.20dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

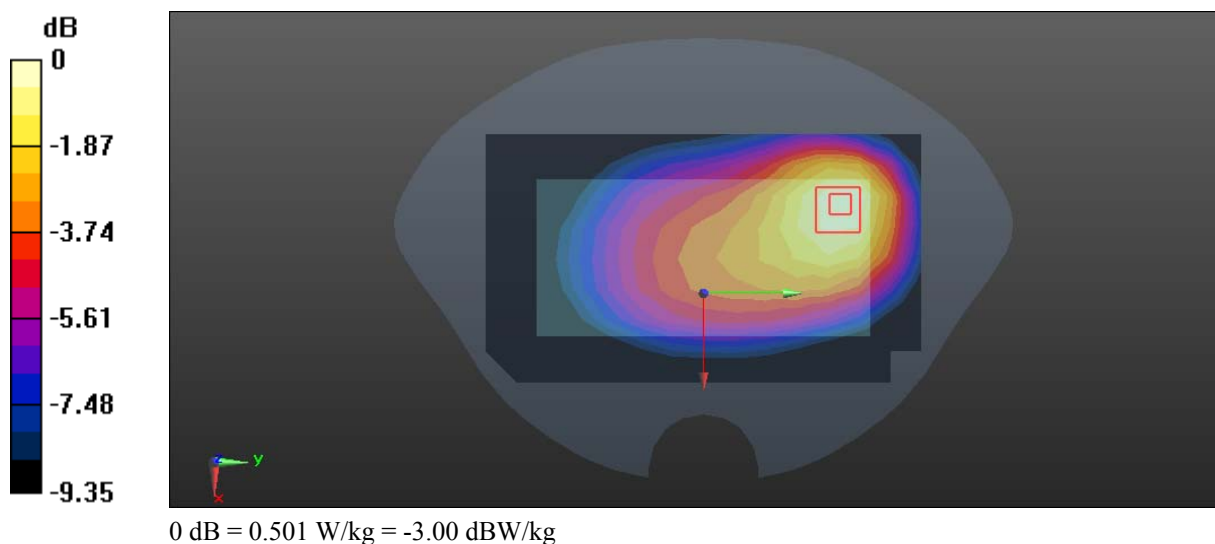

Test Plot 29#: LTE Band 7 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.227$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.553 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.049 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.608 W/kg

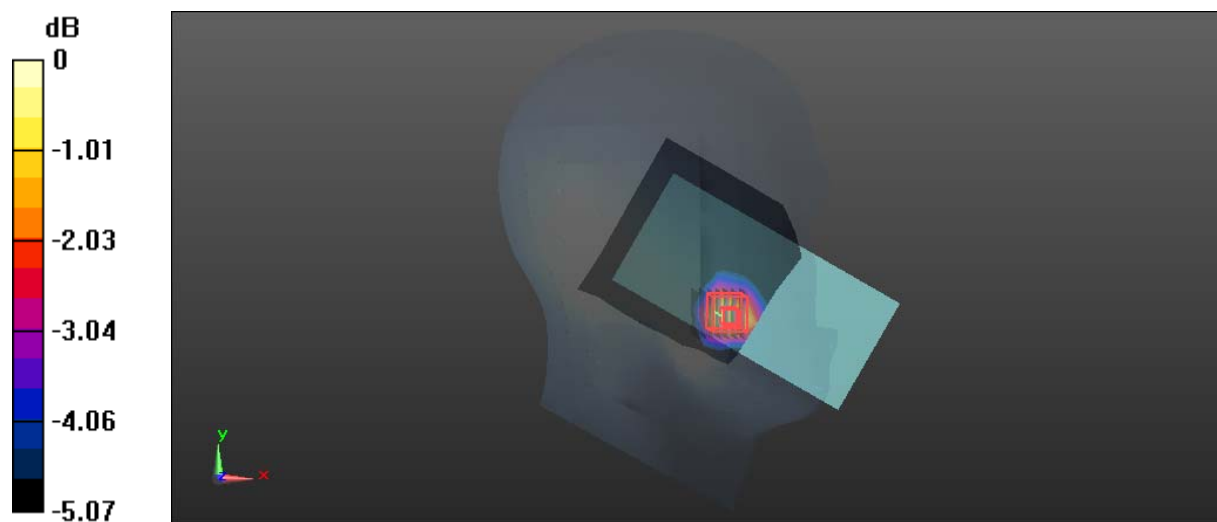

0 dB = 0.608 W/kg = -2.16 dBW/kg

Test Plot 30#: LTE Band 7 1RB Low ANT0 Body Bottom**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2510 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.20 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.629 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

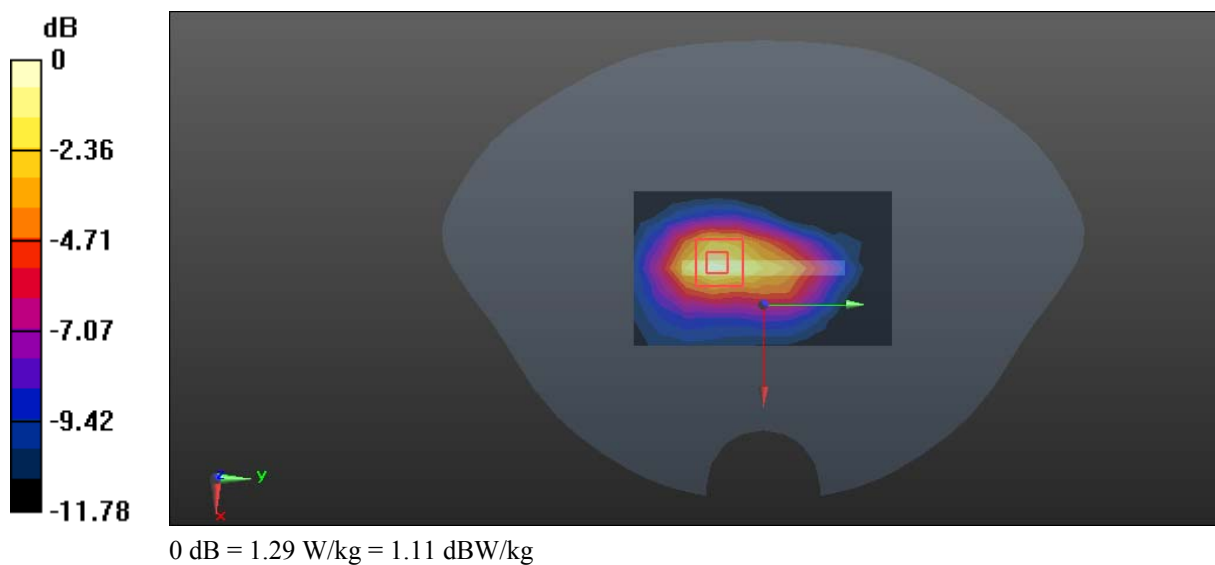

Test Plot 31#: LTE Band 7 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.227$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.762 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.646 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

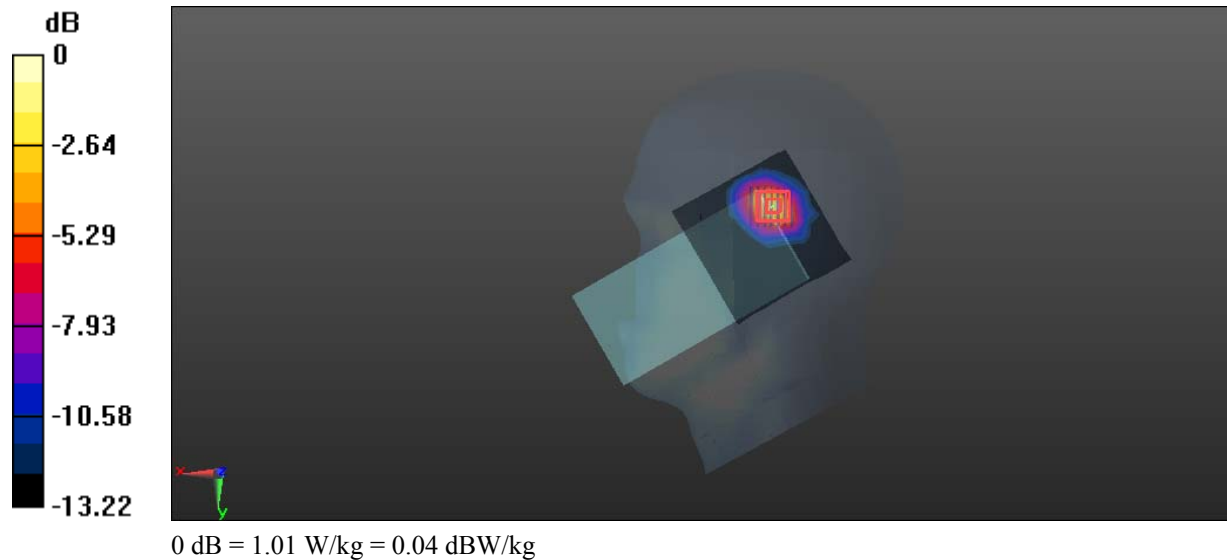

Test Plot 32#: LTE Band 7 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.227$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.361 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.556 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.463 W/kg

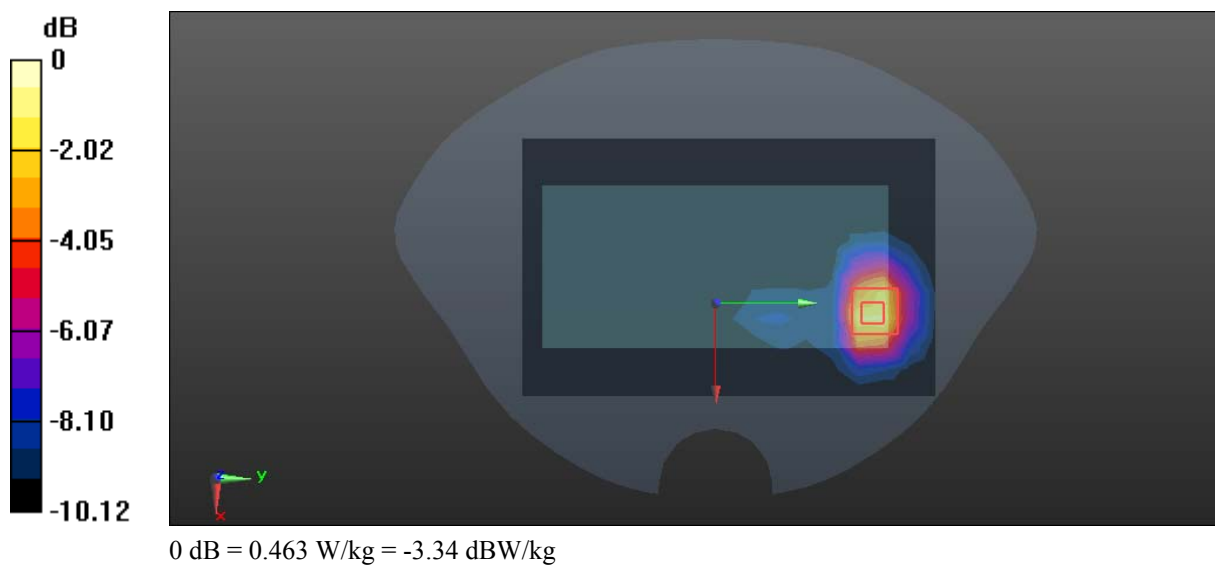

Test Plot 33#: LTE Band 12 1RB Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.617$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0864 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.821 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.0837 W/kg

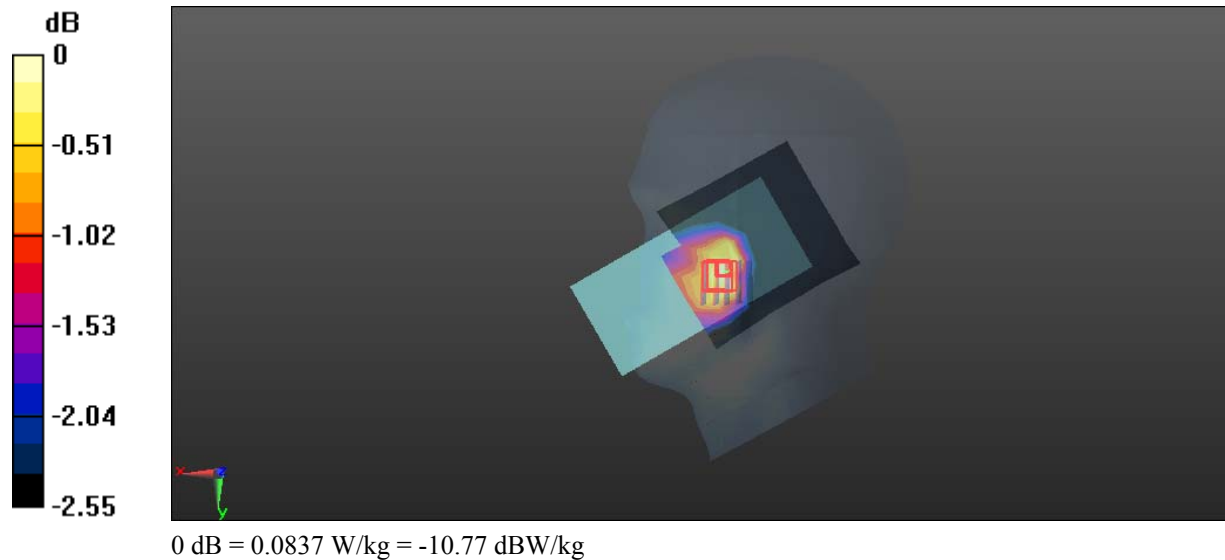

Test Plot 34#: LTE Band 12 1RB Mid ANT0 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**


Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.617$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.329 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.89 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.503 W/kg
SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.198 W/kg
 Maximum value of SAR (measured) = 0.357 W/kg

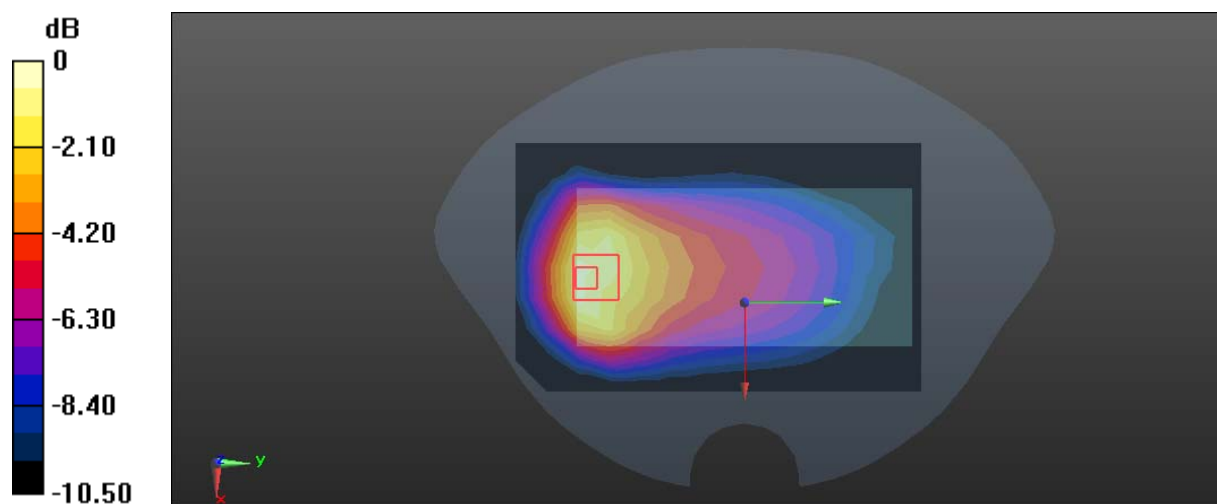

0 dB = 0.357 W/kg = -4.47 dBW/kg

Test Plot 35#: LTE Band 12 1RB Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.897 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.42 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.981 W/kg

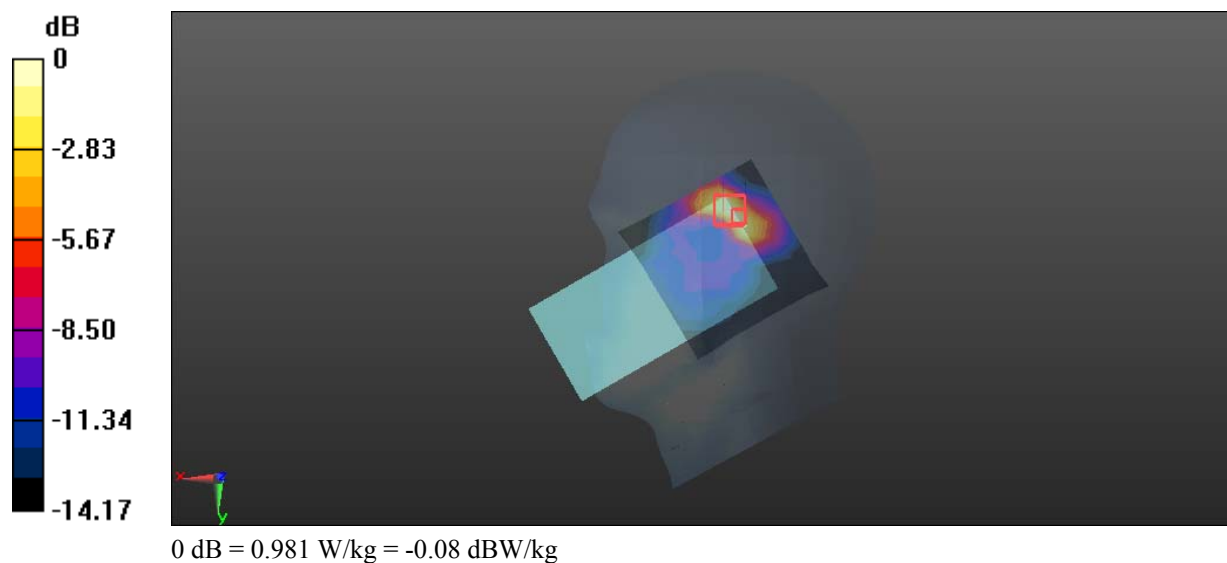

Test Plot 36#: LTE Band 12 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.617$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.27 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

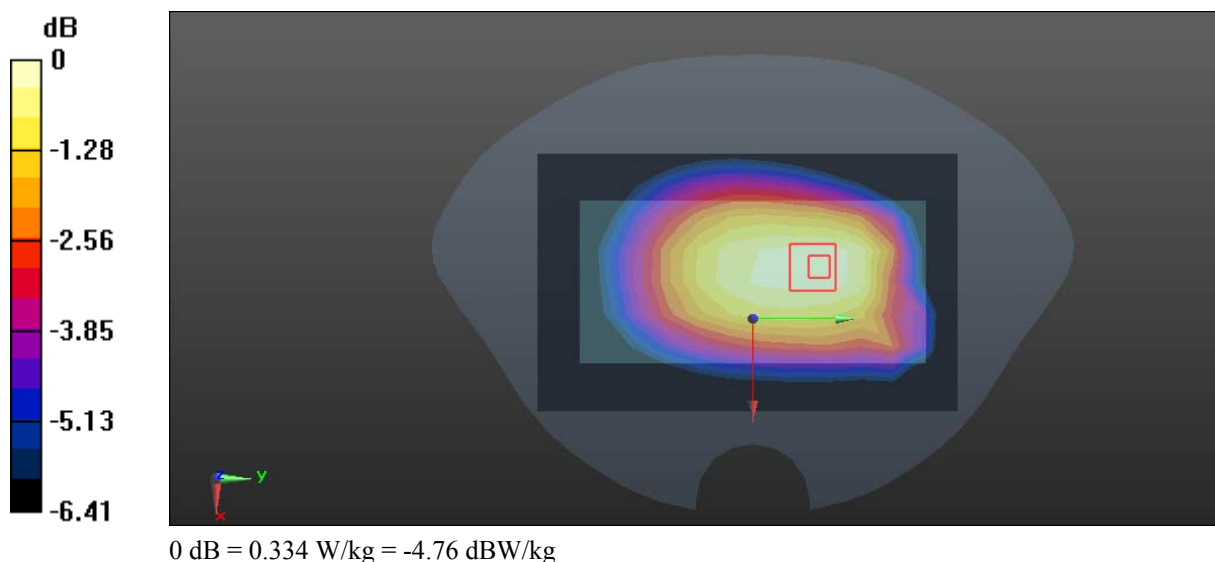


Test Plot 37#: LTE Band 13 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.677$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 782 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

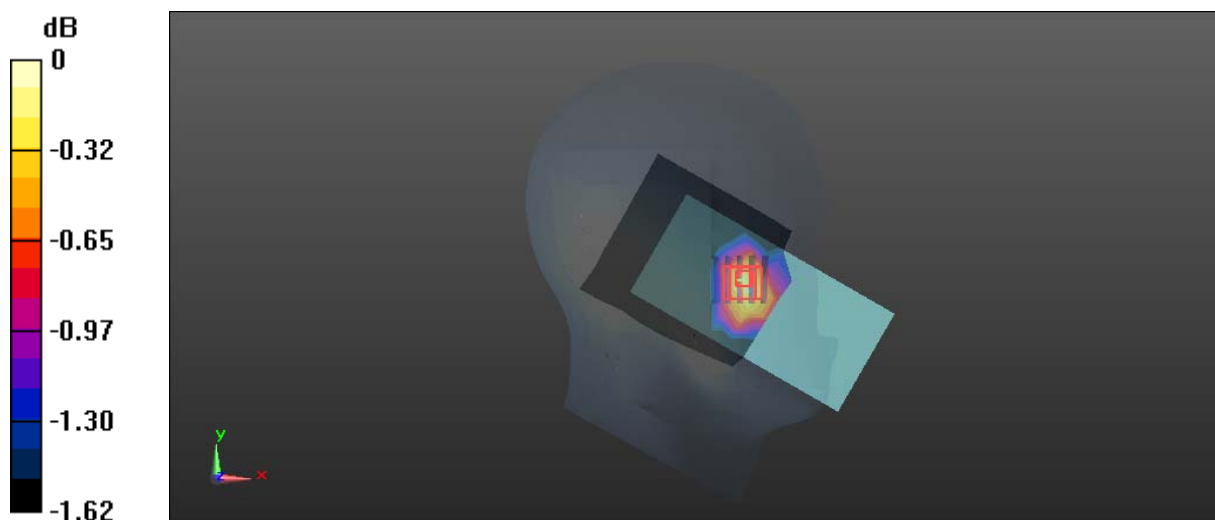Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0718 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.887 V/m ; Power Drift = 0.17dB Peak SAR (extrapolated) = 0.0770 W/kg **SAR(1 g) = 0.070 W/kg ; SAR(10 g) = 0.063 W/kg** Maximum value of SAR (measured) = 0.0733 W/kg 0 dB = 0.0733 W/kg = -11.35 dBW/kg

Test Plot 38#: LTE Band 13 1RB Mid ANT0 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**


Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.677$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 782 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.305 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 9.207 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.425 W/kg
SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.165 W/kg
 Maximum value of SAR (measured) = 0.311 W/kg

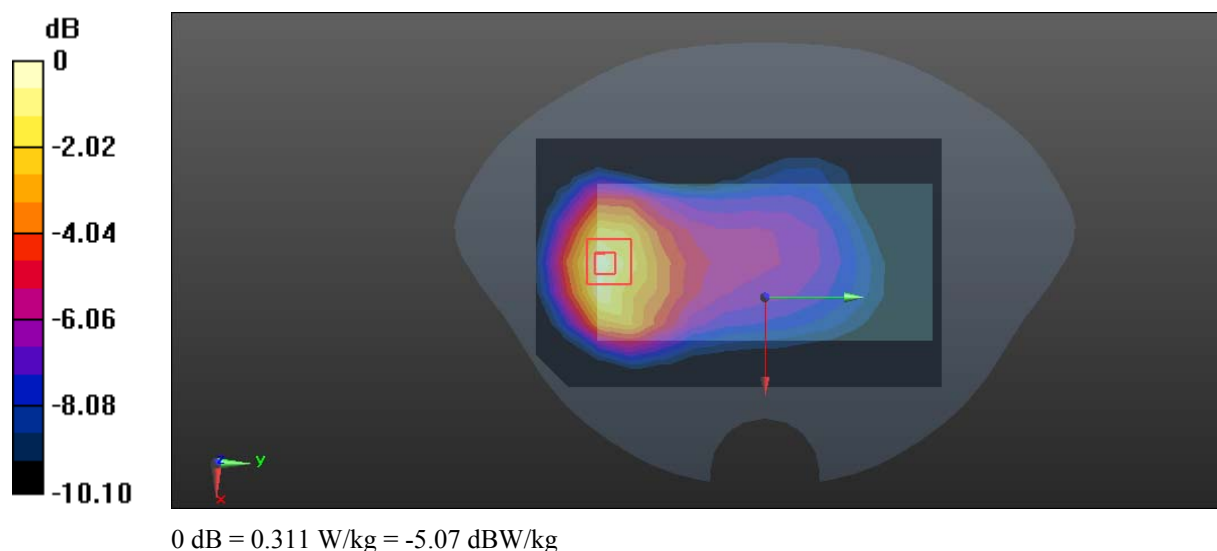

Test Plot 39#: LTE Band 13 1RB Mid ANT1 Head Left Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.677$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 782 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.566 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.53 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

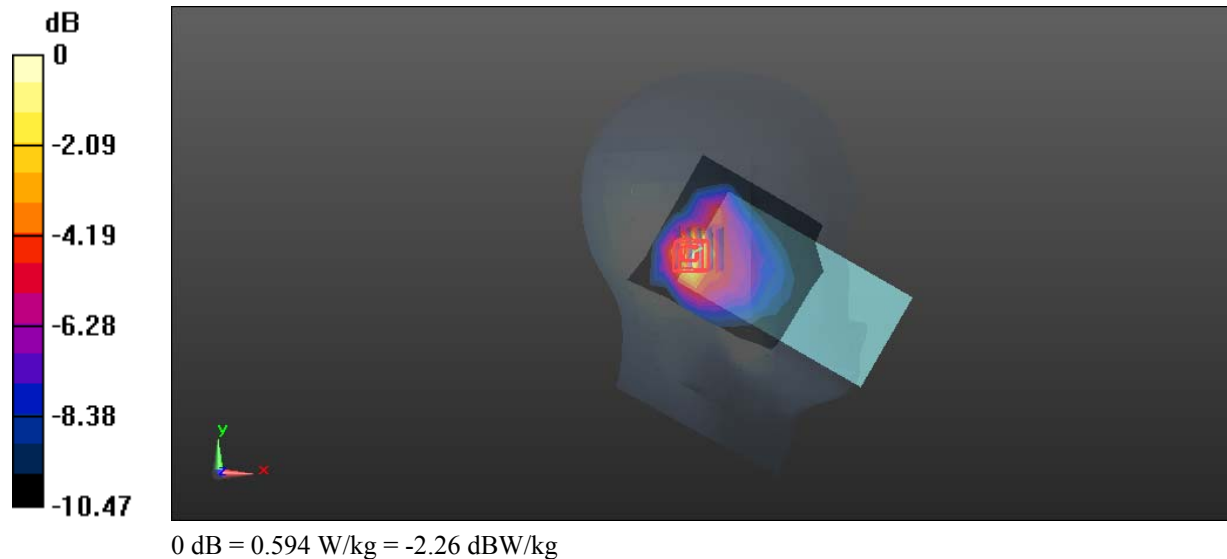

Test Plot 40#: LTE Band 13 1RB Mid ANT1 Body Front**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**


Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.677$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 782 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

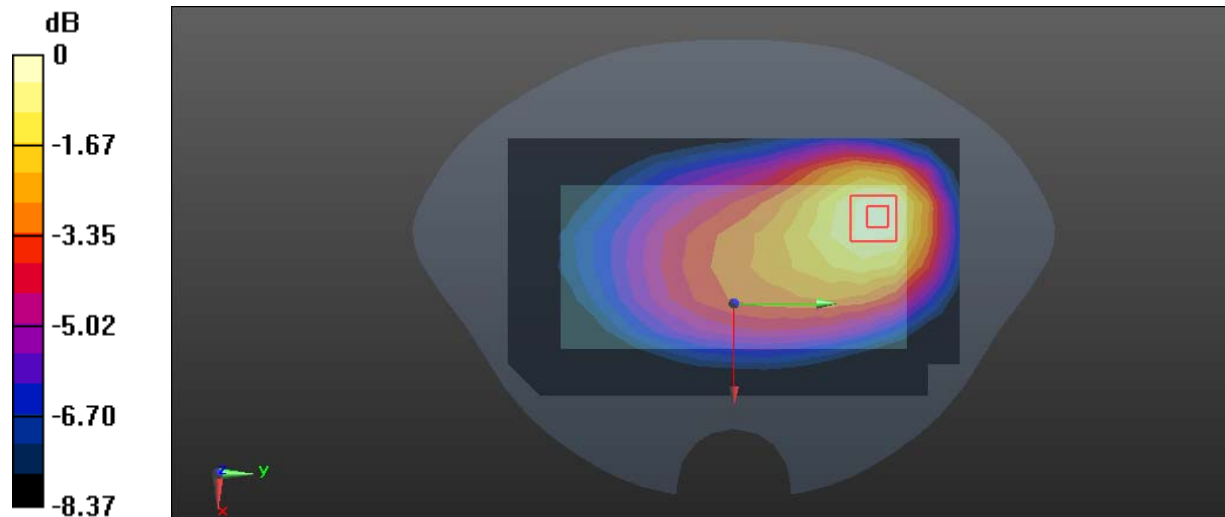Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.287 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.18 V/m ; Power Drift = 0.02dB Peak SAR (extrapolated) = 0.373 W/kg **SAR(1 g) = 0.278 W/kg ; SAR(10 g) = 0.209 W/kg** Maximum value of SAR (measured) = 0.307 W/kg 0 dB = 0.307 W/kg = -5.13 dBW/kg

Test Plot 41#: LTE Band 38 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2595$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 39.653$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2595 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.469 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.626 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

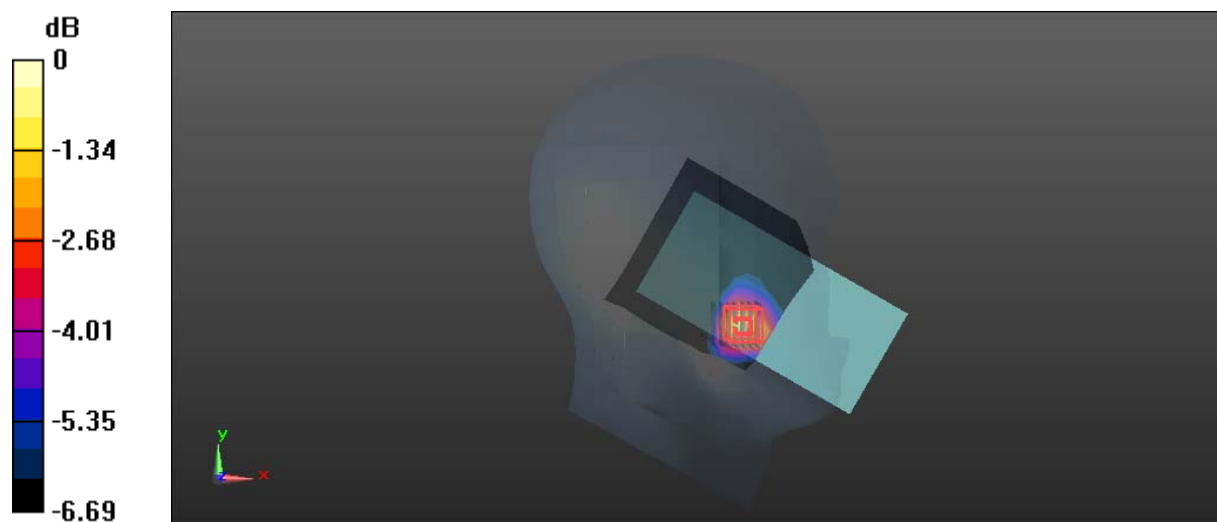

0 dB = 0.502 W/kg = -2.99 dBW/kg

Test Plot 42#: LTE Band 38 1RB Mid ANT0 Body Bottom**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 39.653$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2595 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.57 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

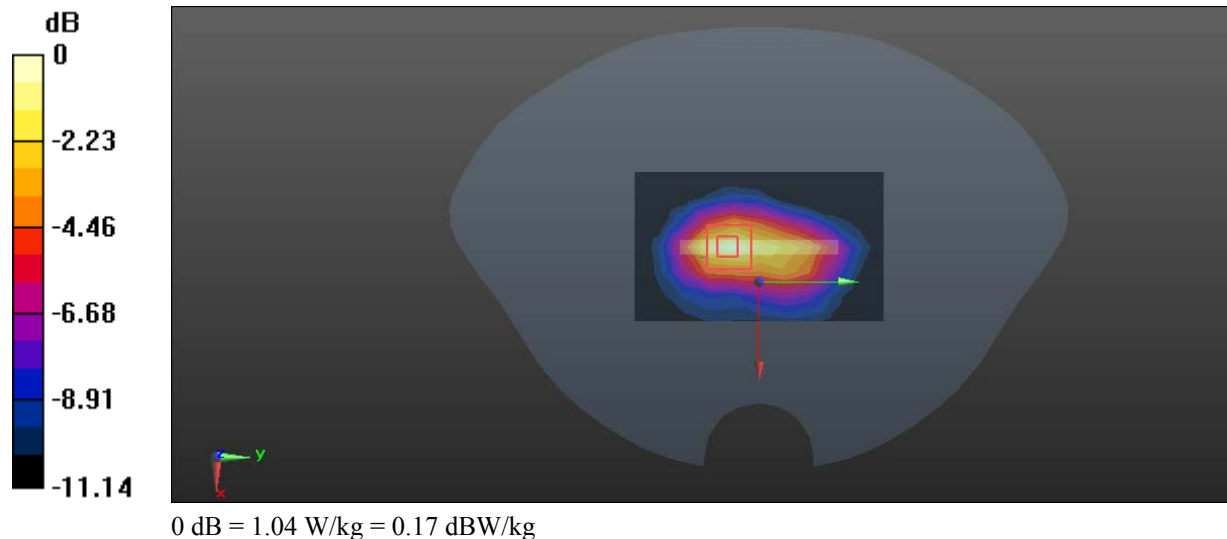

Test Plot 43#: LTE Band 38 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 39.653$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2595 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.623 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.261 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

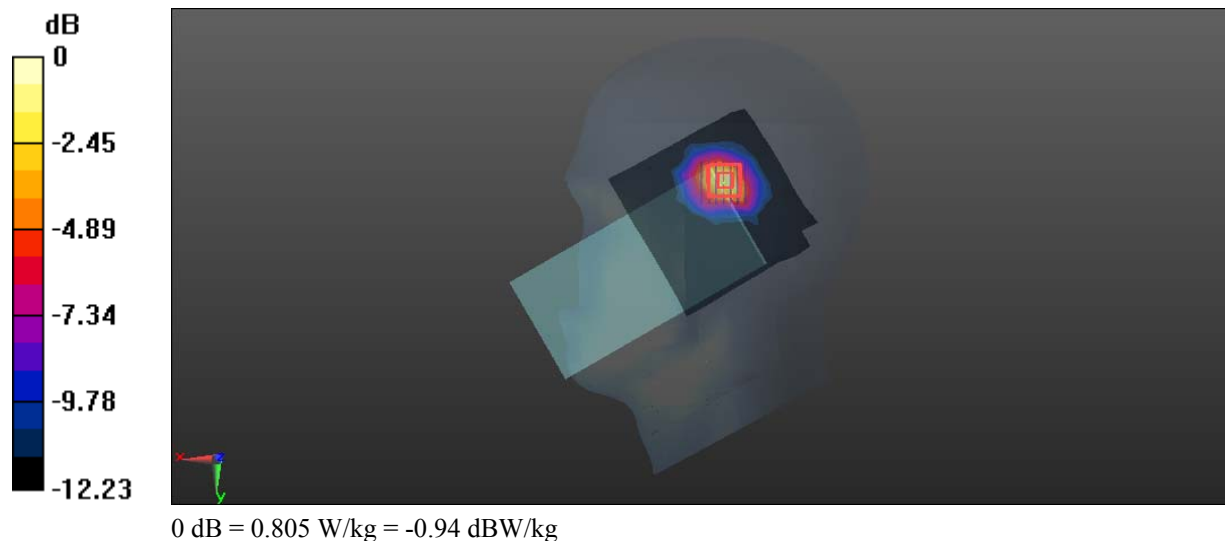

Test Plot 44#: LTE Band 38 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 39.653$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2595 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.489 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.777 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.505 W/kg

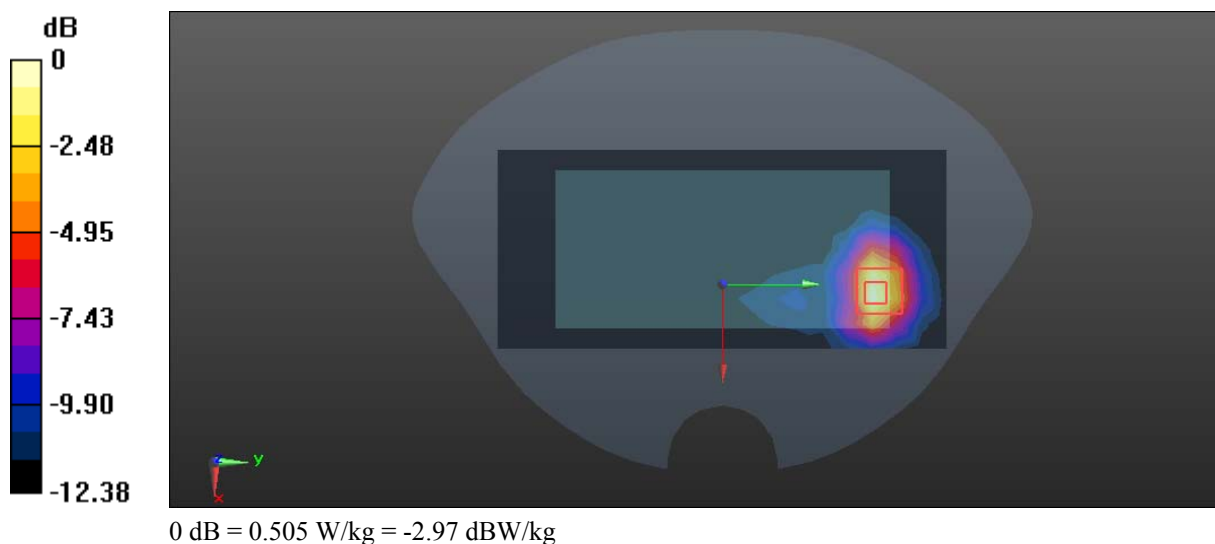

Test Plot 45#: LTE Band 41 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.535 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.237 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

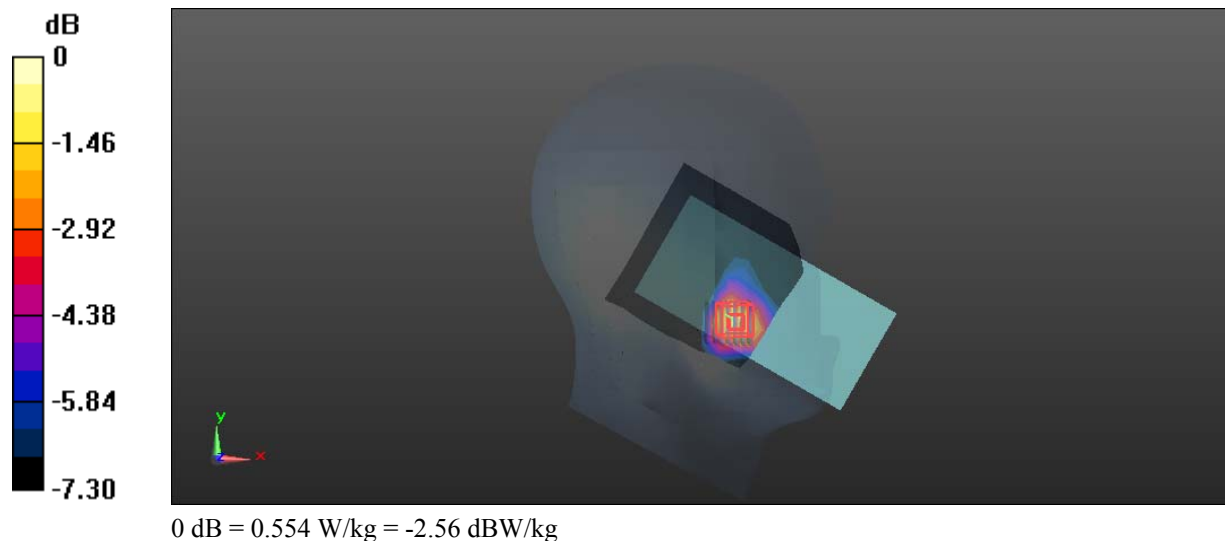

Test Plot 46#: LTE Band 41 1RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.697 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.223 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 0.945 W/kg

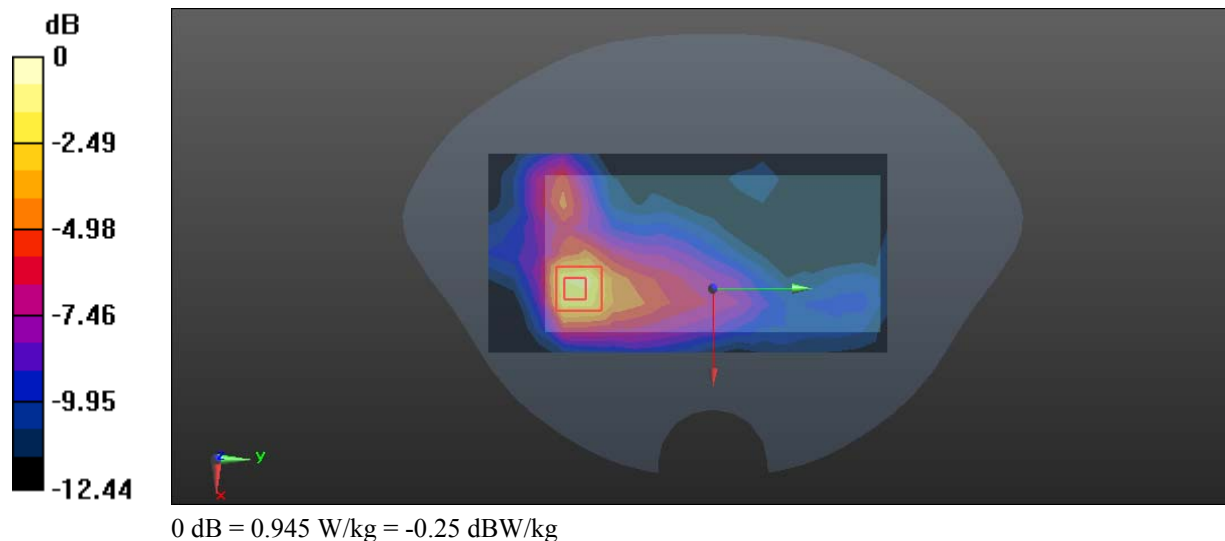

Test Plot 47#: LTE Band 41 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.560 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.678 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.940 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.678 W/kg

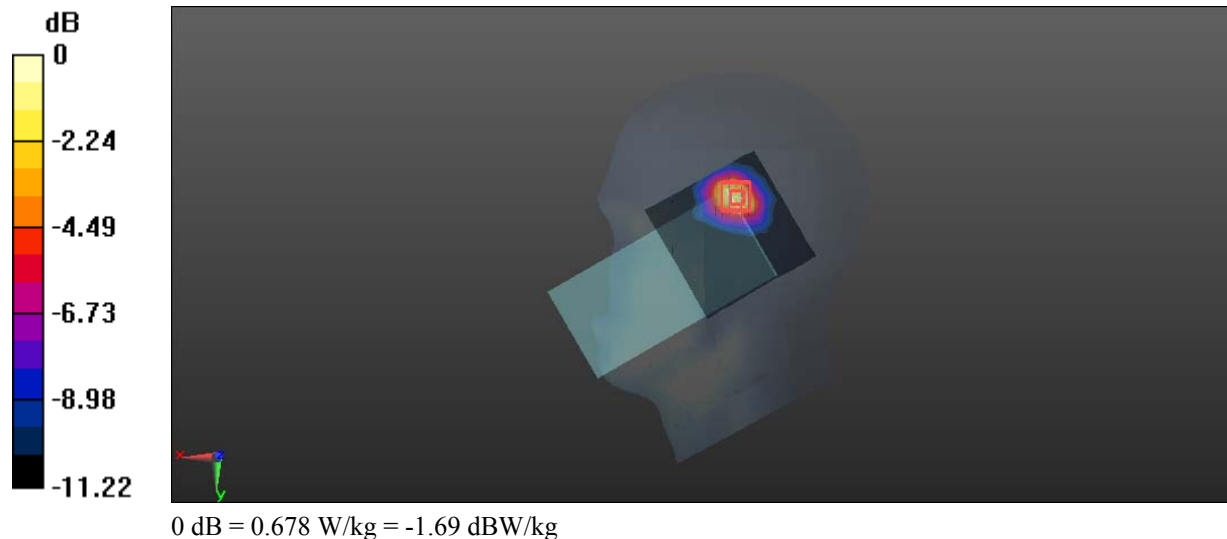

Test Plot 48#: LTE Band 41 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x19x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.549 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.597 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

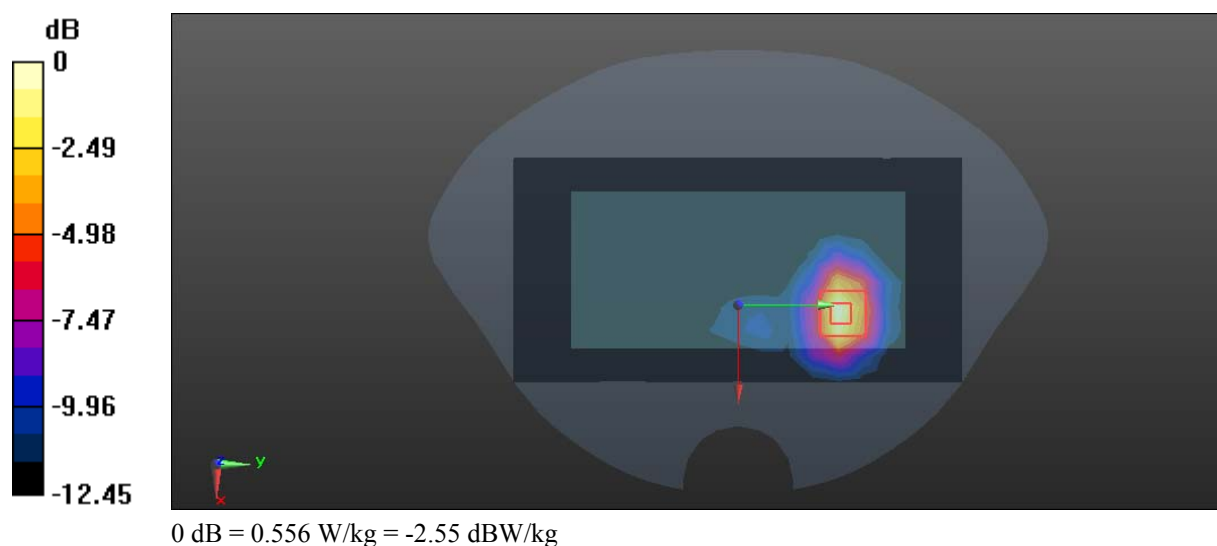

Test Plot 49#: LTE Band 66 1RB Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.429$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0864 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.821 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.0837 W/kg

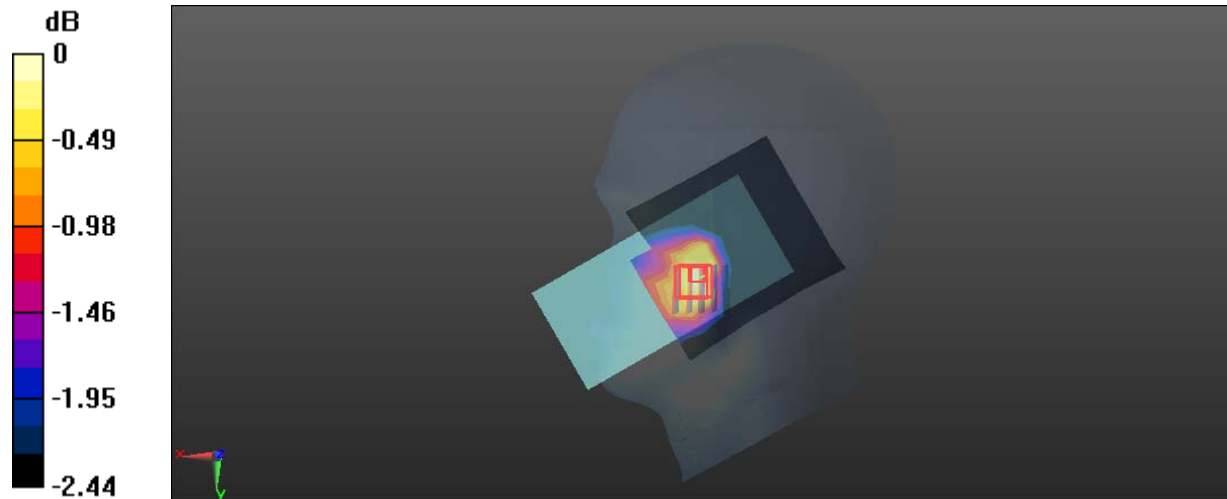

0 dB = 0.0837 W/kg = -10.77 dBW/kg

Test Plot 50#: LTE Band 66 1RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.429$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.294 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.180 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

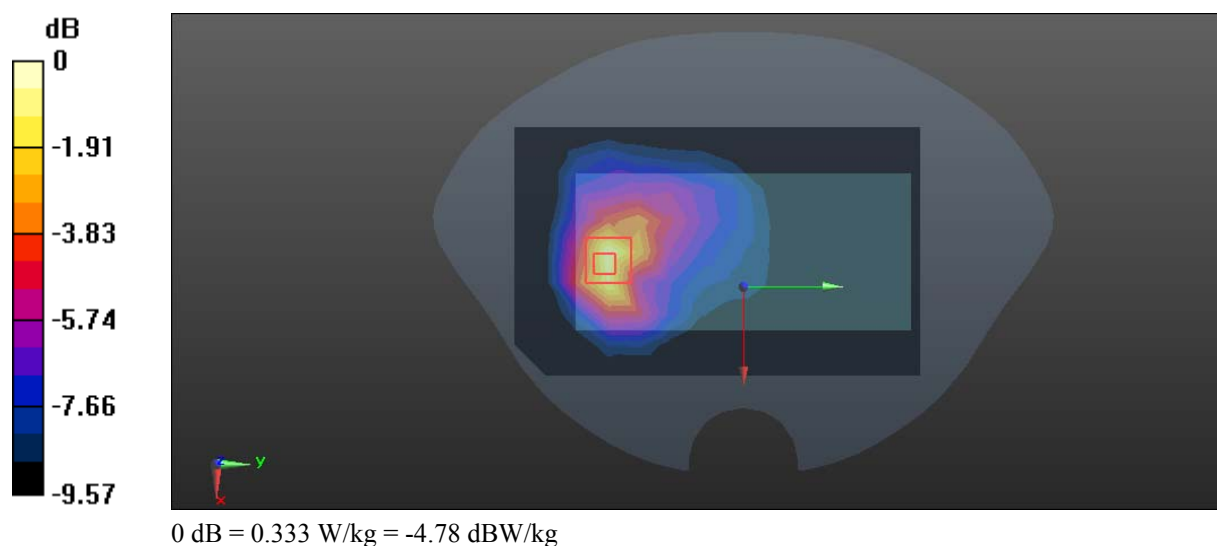

Test Plot 51#: LTE Band 66 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.429$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.25 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

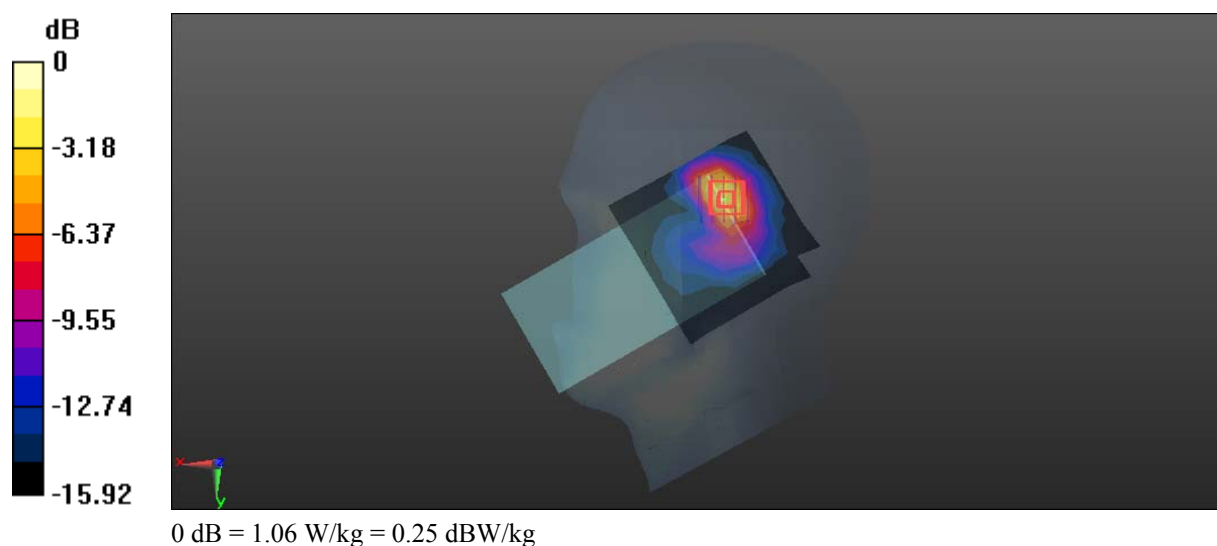

Test Plot 52#: LTE Band 66 1RB Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.429$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.369 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.86 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

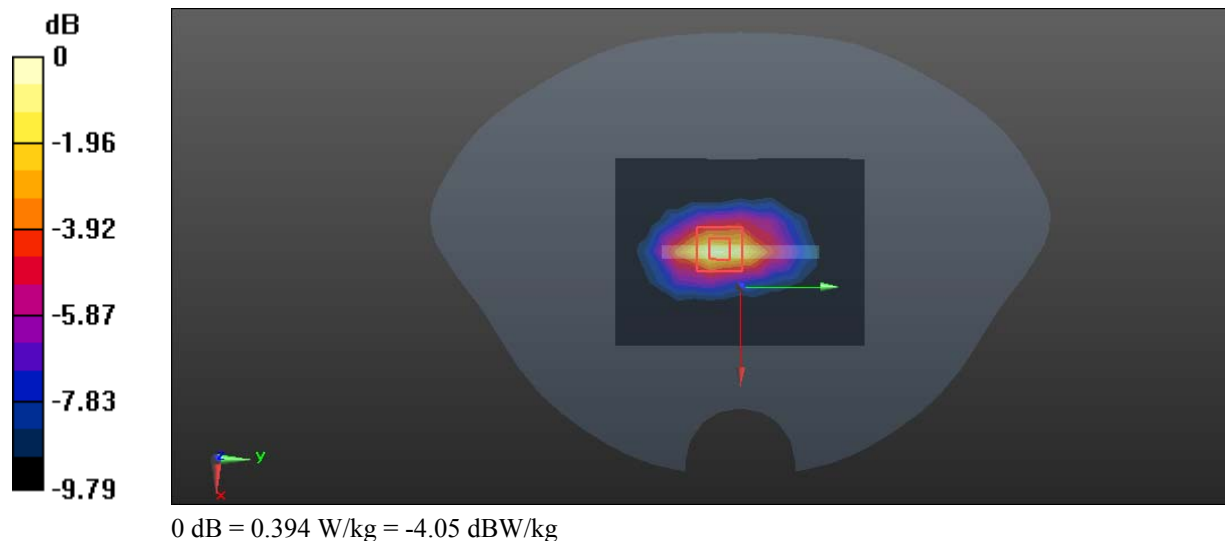

Test Plot 53#: 2.4G WIFI High Head Left Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.508$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2462 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.233 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.302 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

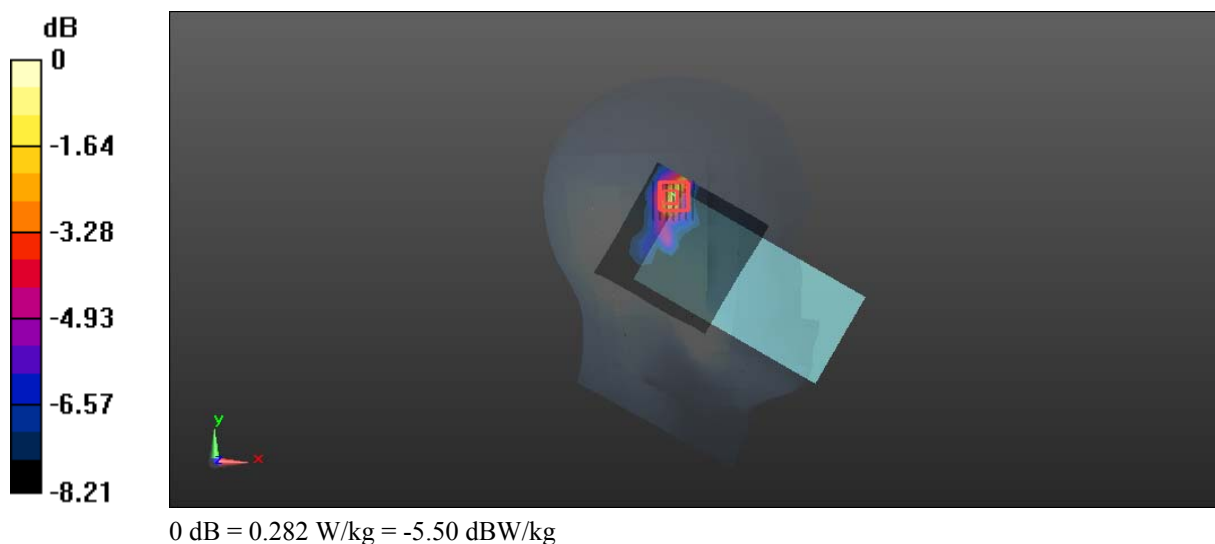

Test Plot 54#: 2.4G WIFI High Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z9H-1**

Communication System: 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.508$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2462 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.190 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.128 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.853 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

