
User Manua Safety Instru Please observe the follow 01 DO NOT attempt to repla replacement battery by Certificate 02 DO NOT operate in wet 03 Ensure proper ventilation ventilation may cause Inspector: 04 DO NOT stack anything may lead to poor conne QC:____ 05 DO NOT insert foreign ob 06 DO NOT place the powe 07 The power station gene please take carefully an P/N:17.0303.0384-00A0 物料编码 User Manual Solar Charging 67890 0 Charging Port (7909) QUICK GUIDE 01 Charging Port 07 USB-C Port x 2pcs 02 LCD Screen 08 USB-A Port x 2pcs 03 AC Power Button 09 DC 5521 Output Port x 2pcs 04 US AC output x 5 pcs 10 Cigarette Lighter Port x 1pcs (EU/UK AC output x 3pcs) 11 LED Lamp Button 05 Wireless Charging Pad x 1pcs 12 LED Lamp Power Station 06 DC Power Button

A

В


С

D

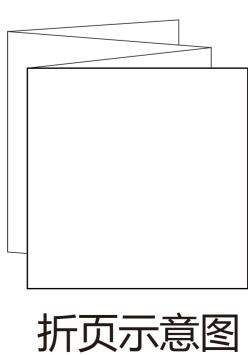

0


al						User N	lanual		
uctions ()	General	Specs							
wing instructions to ensure safety use:	(Ø			\bigcirc		
blace the internal battery with anything other than authorized yourself.	AC Rated Power 700W (1400W Surge)	Typical Capacity 716Wh	LiFe-PO4	9.7KG Around 21.38lbs (The weight may subject to slightlyn change without notice)	Dimensions 315×212×233mm (12.4×8.4×9.2 inches)	Storage Ambient Temperature 0-45°C 32-113°F	Working Environment Humidity 10-90%	Discharge Temperature -20-40°C -4-104°F	Charge Temperature 0-40°C 32-104°F
t conditions, let unit dry completely before using.	Output S	pecs	1	10000		Input Sp	ecs	1	
on while in use and do not obstruct fan openings on use. Inadequate damage to the power station.	AC	USB ×2	USB-C Cigar	ttte Lighter 5521 ×1 ×2) WirelessChargi Pad ×1	ng Car Charging	AC-DC Adapter	Solar Charging	Generator Charging
g on top of the power station in storage or in use, vibration and impact ection to hardware inside.	100-120VAC×5 5 220-240VAC×3	5/9/12	Max.100W 2/15/20VDC, 3A; 20VDC, 5A ark chip built-in)	12VD C.10A, 120W	5W/7.5W/ 10W/15W	About 4.1-4.6 Hours @2 About 7.8-8.3 Hours @1	Abo	2-28V 200W ut 4.1-4.6 hours	
bjects into outputs or ventilation holes.	Common	Loads							
ver station near heat sources like furnace or ambient heater.	Smart Phone Around 50-60 Tim		.ED Light Bulb	Televis Around 7-8		Electronic Tools	Refrigerator Around 6-7 Hr		Slow Cooker
erates the same potentially lethal AC power as household wall outlet, nd keep children away from it.	10Wh 716Wh×DOD×η÷	(the current loa	20W ad power W) = ava	75W ilable time (unit: hrs/ cates inverter efficie	times)	80W	90W		200W

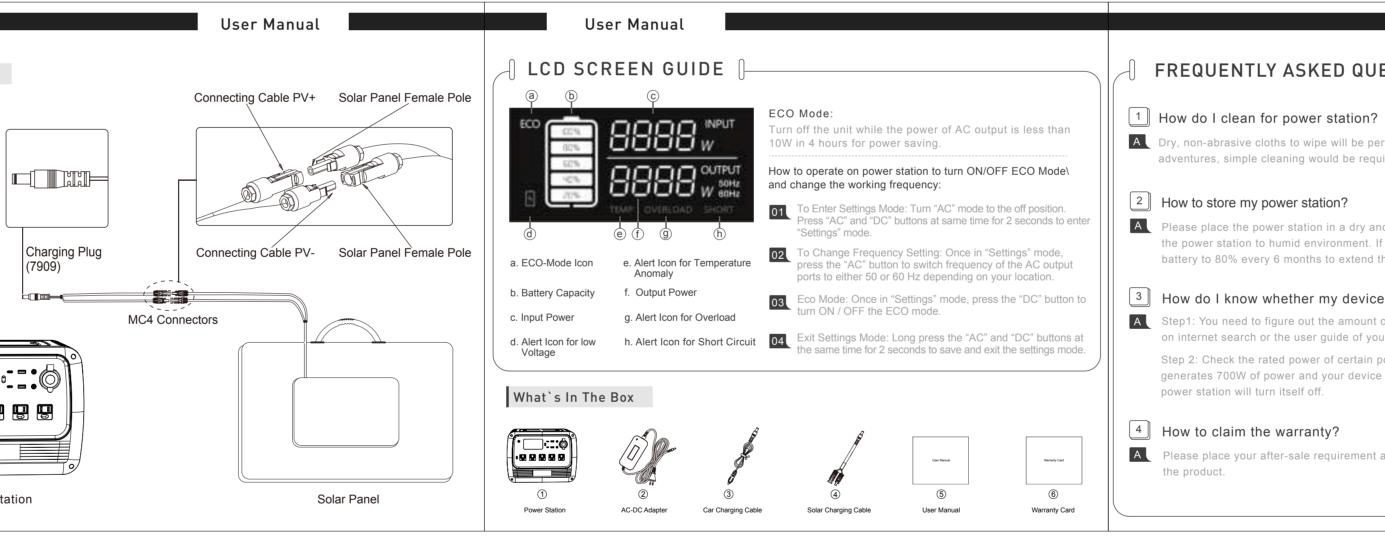

---- 压痕线(不印刷)

成品尺寸165*140mm,公差+1/-0mm; 材质157G双铜版纸; 印刷单黑,双面印刷; 要求表面洁净,无刮花,凹凸痕迹,印刷清晰,折边整齐; 所有材质必须符合RoHS要求;

版本			更改		审核	E	期
AO		首	版发布		杨振华	21.00	5. 21
A1							
A2							
	1				1		

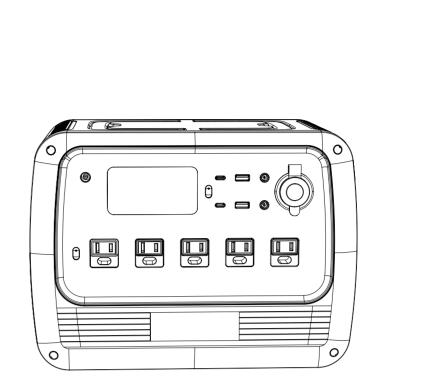

716Wh Portable Power Station

User Manual Please read this manual before use and follow its guidance. Keep this manual for future reference.

User Manual

FREQUENTLY ASKED QUESTIONS

A Dry, non-abrasive cloths to wipe will be perfect. The power station is a versatile tool for various adventures, simple cleaning would be required from time to time to keep the unit in a good condition.

A Please place the power station in a dry and cool place at the recommended temperature. Do not expose the power station to humid environment. If you want to store it for a long time, please charge the battery to 80% every 6 months to extend the battery lifetime. Remind to turn off the unit before storing.

3 How do I know whether my device will work with the power station?

A Step1: You need to figure out the amount of power your devices require. Some research may be taken on internet search or the user guide of your device shall suffice.

Step 2: Check the rated power of certain port on power station. For example, if the AC output port generates 700W of power and your device requires over 700W for a extended period of time, the power station will turn itself off.

Consult the dealer or an experienced radio/TV technician for help.

his equipment complies with FCC radiation exposure limits set forth for an uncontrolle ronment. This equipment should be installed and operated with a minimum distance of 20

articular installation.

C Radiation Exposure Statement

n between the radiator and your body

A Please place your after-sale requirement as the warranty card written to the platform where you order

FCC warning: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired peration. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio ommunications. However, there is no guarantee that interference will not occur in nis equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to to correct the interference by one or more of the following measures: -- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

	深圳市德兰明海科技有限公司 Shenzhen PowerOak Newener Co., Itd											
	Shelizhen FowerOak Newener Co., itu											
	材料				\square	表面处理		见技术说明	无特殊说明,长度单位: mm 未标注尺寸公差按:			
	型 号	型 号 PS72			 比例:		编号/版本	7	- 水林住穴了公生以: 			
	乎 ヮ F372			1:1	/A4	PPS	003–6d01	AO	见収小阮明			
	名称 说明书英文(中性)								* 一重要尺寸 () 一参照尺寸			
	设 计		审	核		批准		物	料编号			
杨振华						17.0			303. 0384–00			
	2021.0	6. 02						共	张/第 张			
								C				

D D

 Π