



5.5. Band Edge Measurements and Conducted Spurious Emissions Test

5.5.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.5.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz

The spectrum from 9 KHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results of Conducted Spurious Emissions

PASS

Please refer to Appendix A.5 for Band Edge Measurements;

Please refer to Appendix A.6 for Conducted Spurious Emissions.

Remark:

- 1). Measured RF conducted spurious emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20;
- 4). “---” means that the fundamental frequency not for 15.209 limits requirement.
- 5). Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.6. On Time and Duty Cycle

5.6.1. Standard Applicable

None: for reporting purpose only.


5.6.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the spectrum analyzer.

5.6.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8.0MHz, VBW=8.0MHz, Sweep time=Auto
3. Detector = peak;
4. Trace mode = Single hold.

5.6.4. Test Setup Layout

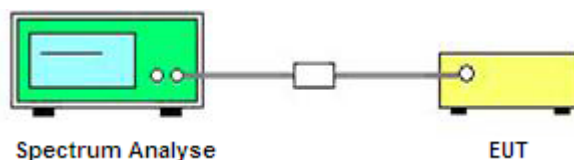

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test result

For reporting purpose only.

Please refer to Appendix A.7






5.7. Emissions in Restricted Bands

5.7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.7.2. Test Setup Layout

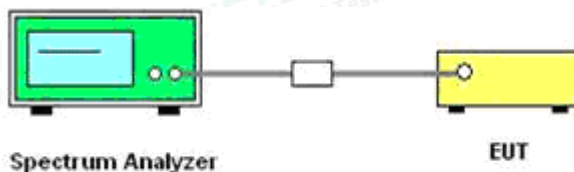

5.7.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.7.4. Test Procedures

According to KDB558074 D01 15.247 Meas Guidance v05r02 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

- 1). Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2). Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3). Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
- 4). Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5). Repeat above procedures until all measured frequencies were complete.
- 6). Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- 7). Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- 8). Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- 9). For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- 10). Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8 = \text{EIRP} + 95.26$$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- 11). Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
- 12). Compare the resultant electric field strength level to the applicable regulatory limit.
- 13). Perform radiated spurious emission test duress until all measured frequencies were complete.

5.7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dB}\mu\text{V/m)} = RA \text{ (dB}\mu\text{V)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

5.7.6. Test Results

Temperature	23.5°C	Humidity	52.1%
Test Engineer	Taylor Hu	Configurations	IEEE 802.11g/n

PASS.

The test data please refer to following page.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



IEEE 802.11g 2412 MHz 20M

Vertical

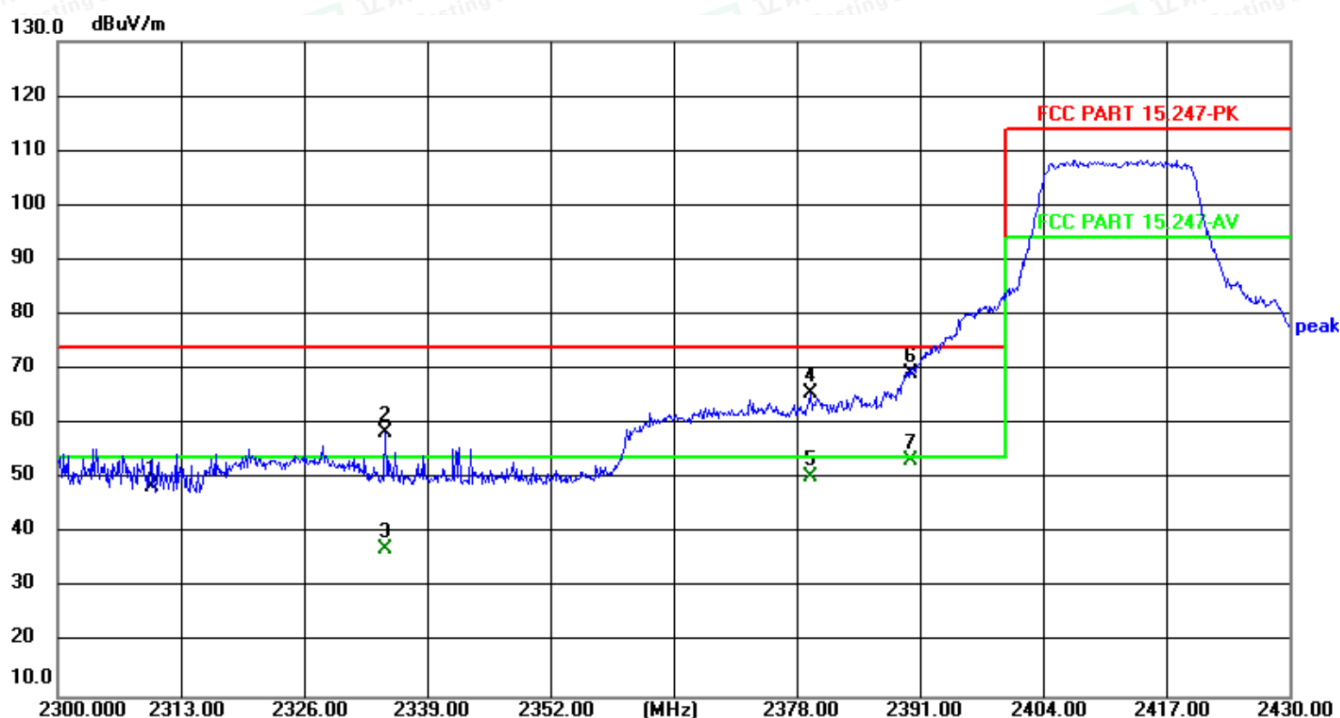

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	50.68	-2.02	48.66	74.00	-25.34	peak
2	2334.580	60.24	-1.93	58.31	74.00	-15.69	peak
3	2334.580	39.04	-1.93	37.11	54.00	-16.89	AVG
4	2379.430	67.34	-1.77	65.57	74.00	-8.43	peak
5	2379.430	52.18	-1.77	50.41	54.00	-3.59	AVG
6	2390.000	70.95	-1.73	69.22	74.00	-4.78	peak
7	2390.000	55.14	-1.73	53.41	54.00	-0.59	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

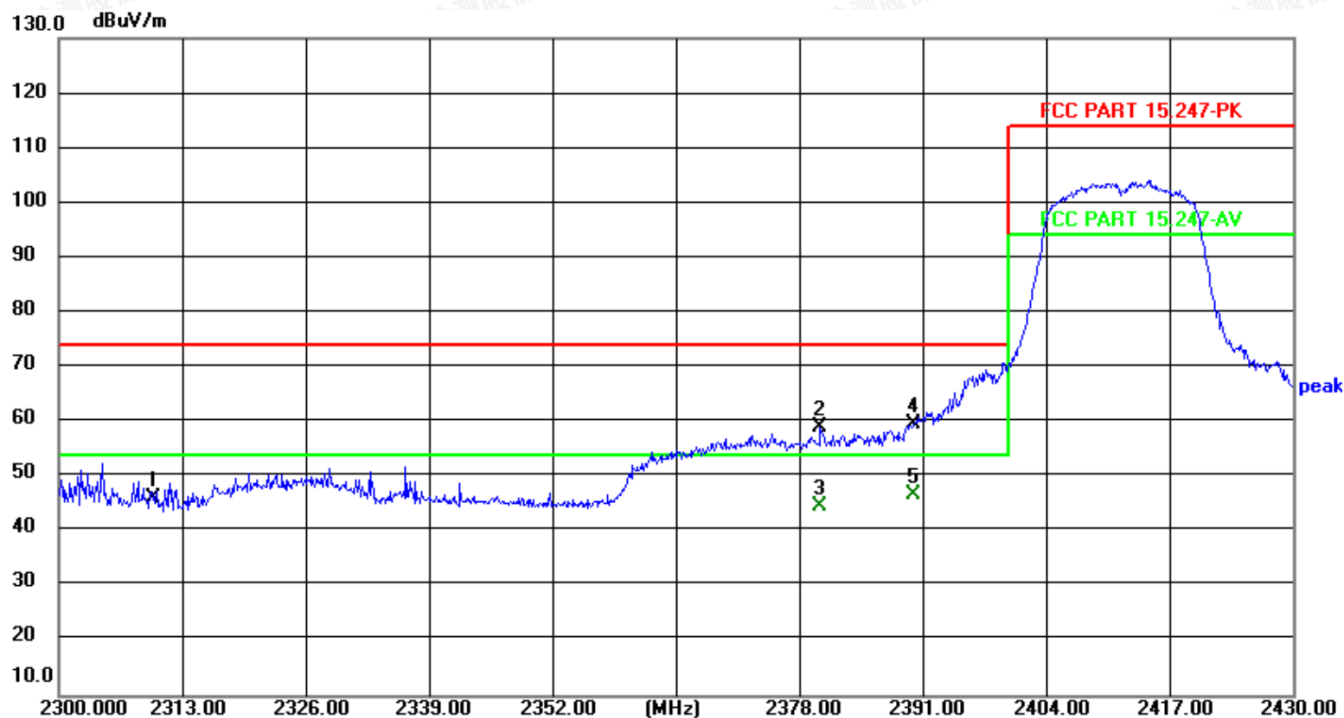

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	48.22	-2.02	46.20	74.00	-27.80	peak
2	2380.210	60.75	-1.77	58.98	74.00	-15.02	peak
3	2380.210	46.37	-1.77	44.60	54.00	-9.40	AVG
4	2390.000	61.40	-1.73	59.67	74.00	-14.33	peak
5	2390.000	48.33	-1.73	46.60	54.00	-7.40	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



IEEE 802.11g 2462 MHz 20M

Vertical

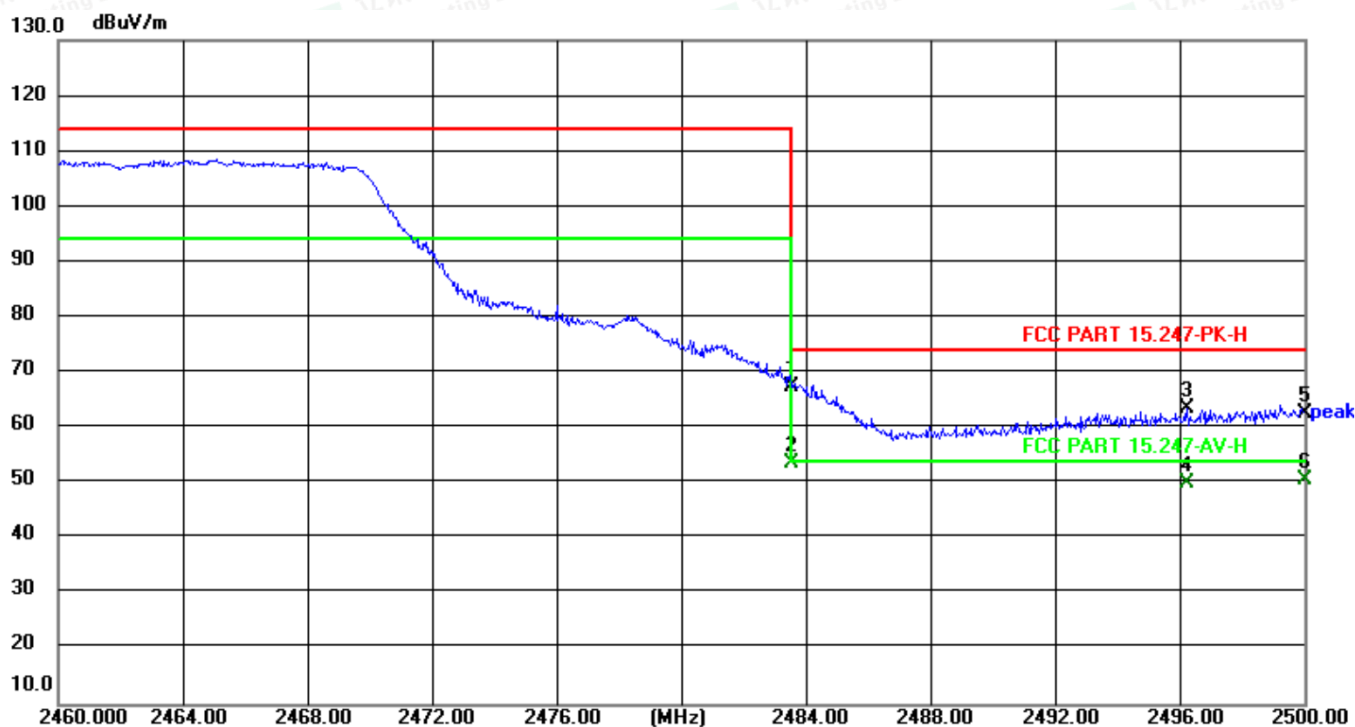

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	68.96	-1.40	67.56	74.00	-6.44	peak
2	2483.500	54.94	-1.40	53.54	54.00	-0.46	AVG
3	2496.240	65.02	-1.36	63.66	74.00	-10.34	peak
4	2496.240	51.38	-1.36	50.02	54.00	-3.98	AVG
5	2500.000	63.89	-1.34	62.55	74.00	-11.45	peak
6	2500.000	51.96	-1.34	50.62	54.00	-3.38	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

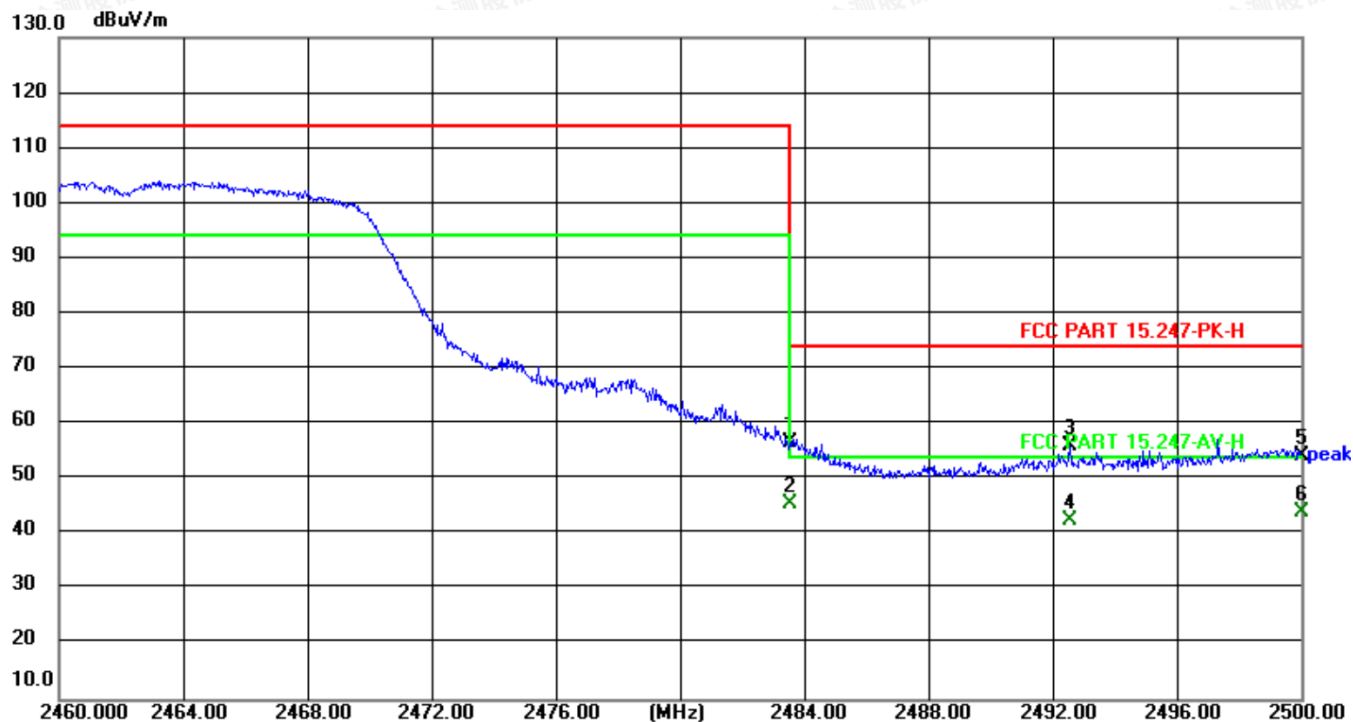

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	58.17	-1.40	56.77	74.00	-17.23	peak
2	2483.500	46.82	-1.40	45.42	54.00	-8.58	AVG
3	2492.560	57.34	-1.37	55.97	74.00	-18.03	peak
4	2492.560	43.84	-1.37	42.47	54.00	-11.53	AVG
5	2500.000	55.54	-1.34	54.20	74.00	-19.80	peak
6	2500.000	45.34	-1.34	44.00	54.00	-10.00	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



IEEE 802.11n2412 MHz 20M

Vertical

130.0 dBuV/m

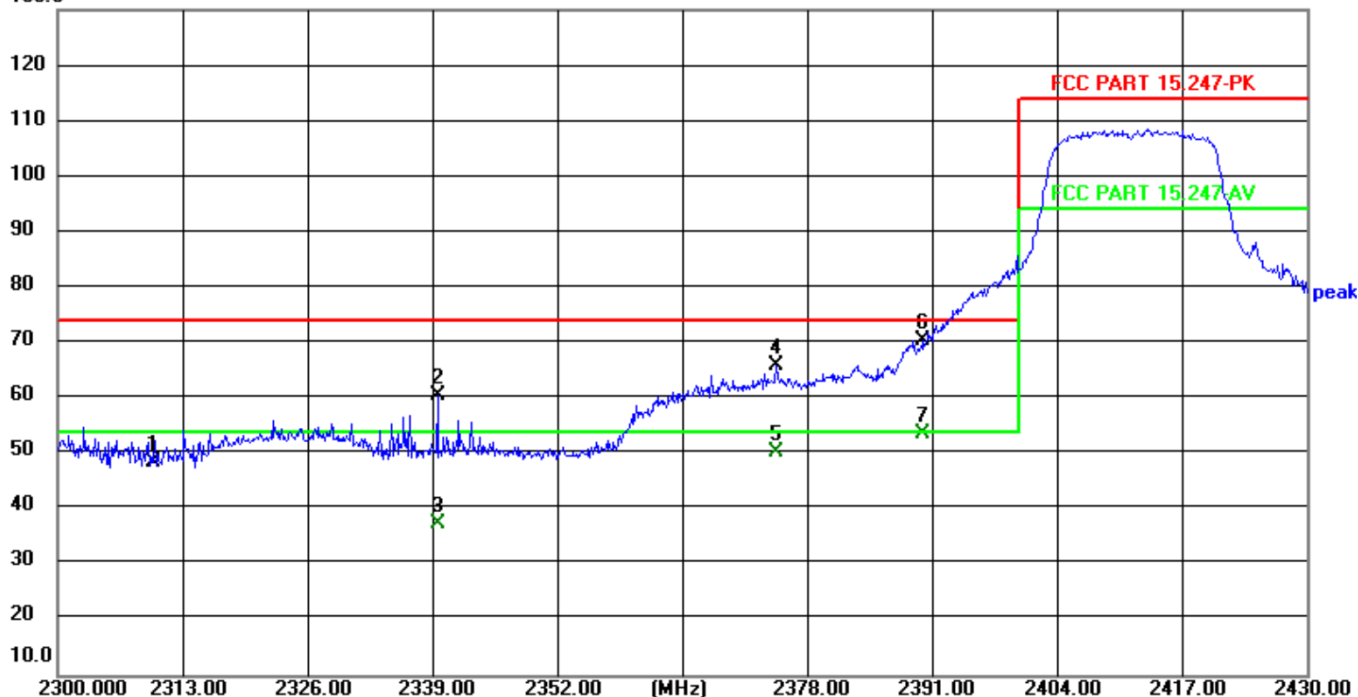

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	50.58	-2.02	48.56	74.00	-25.44	peak
2	2339.520	62.57	-1.91	60.66	74.00	-13.34	peak
3	2339.520	39.28	-1.91	37.37	54.00	-16.63	AVG
4	2374.750	67.80	-1.79	66.01	74.00	-7.99	peak
5	2374.750	52.11	-1.79	50.32	54.00	-3.68	AVG
6	2390.000	72.04	-1.73	70.31	74.00	-3.69	peak
7	2390.000	55.41	-1.73	53.68	54.00	-0.32	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

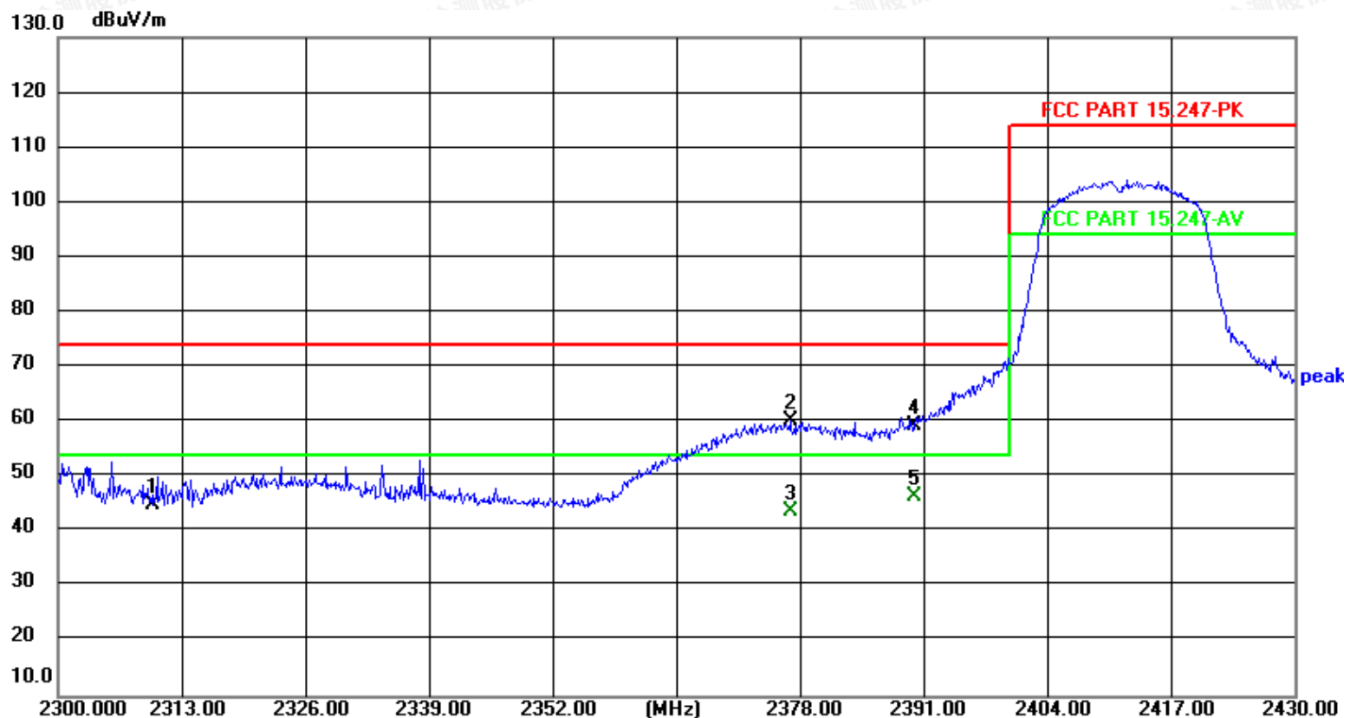

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	46.85	-2.02	44.83	74.00	-29.17	peak
2	2376.960	62.17	-1.78	60.39	74.00	-13.61	peak
3	2376.960	45.65	-1.78	43.87	54.00	-10.13	AVG
4	2390.000	61.04	-1.73	59.31	74.00	-14.69	peak
5	2390.000	48.27	-1.73	46.54	54.00	-7.46	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



IEEE 802.11n 2462 MHz 20M

Vertical

130.0 dBuV/m

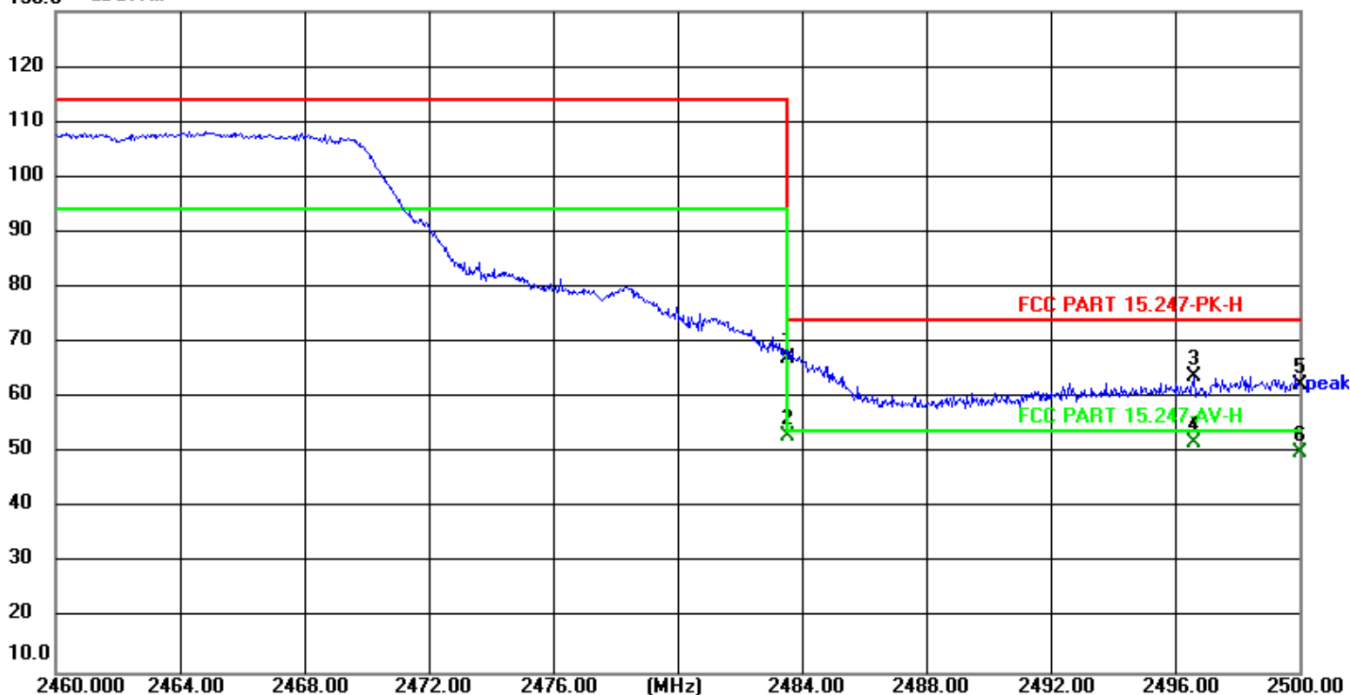

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	68.62	-1.40	67.22	74.00	-6.78	peak
2	2483.500	54.43	-1.40	53.03	54.00	-0.97	AVG
3	2496.600	65.09	-1.36	63.73	74.00	-10.27	peak
4	2496.600	53.15	-1.36	51.79	54.00	-2.21	AVG
5	2500.000	63.75	-1.34	62.41	74.00	-11.59	peak
6	2500.000	51.37	-1.34	50.03	54.00	-3.97	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

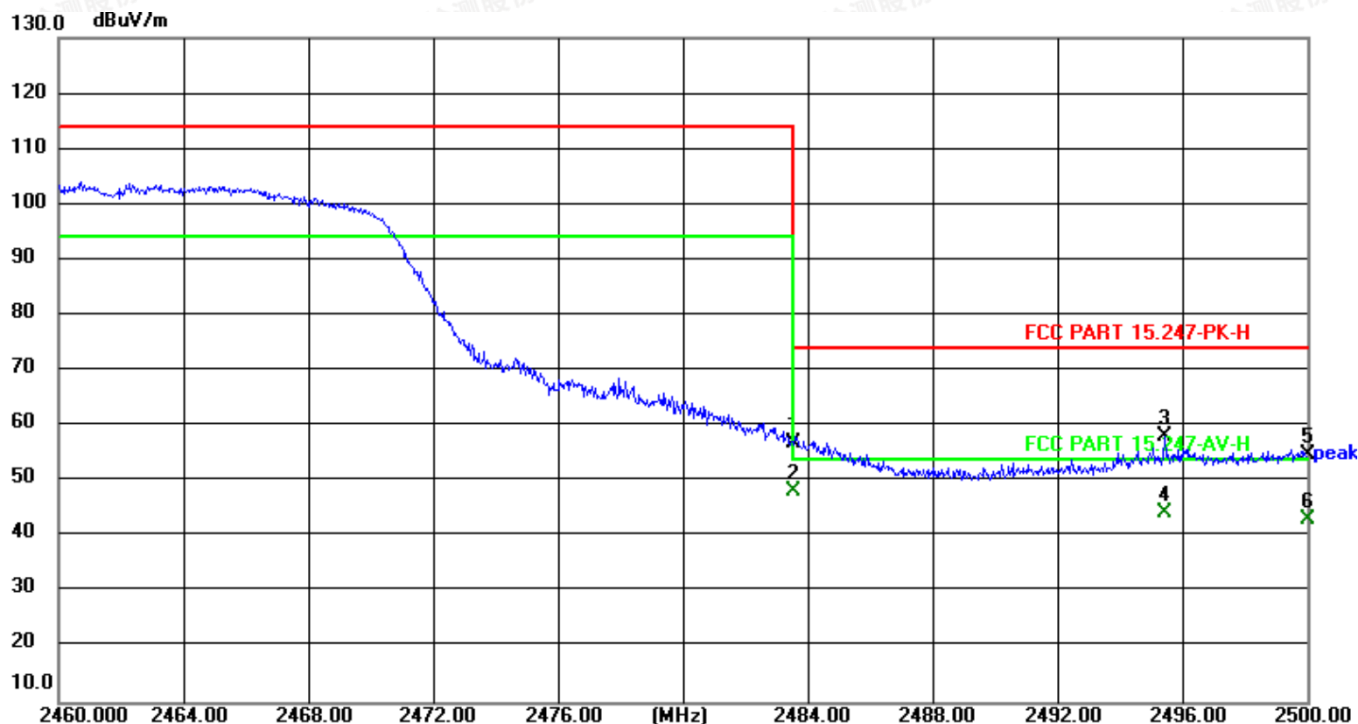

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	58.36	-1.40	56.96	74.00	-17.04	peak
2	2483.500	49.77	-1.40	48.37	54.00	-5.63	AVG
3	2495.440	59.65	-1.36	58.29	74.00	-15.71	peak
4	2495.440	45.60	-1.36	44.24	54.00	-9.76	AVG
5	2500.000	56.15	-1.34	54.81	74.00	-19.19	peak
6	2500.000	44.41	-1.34	43.07	54.00	-10.93	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



IEEE 802.11n 2412 MHz 10M

Vertical

130.0 dBuV/m

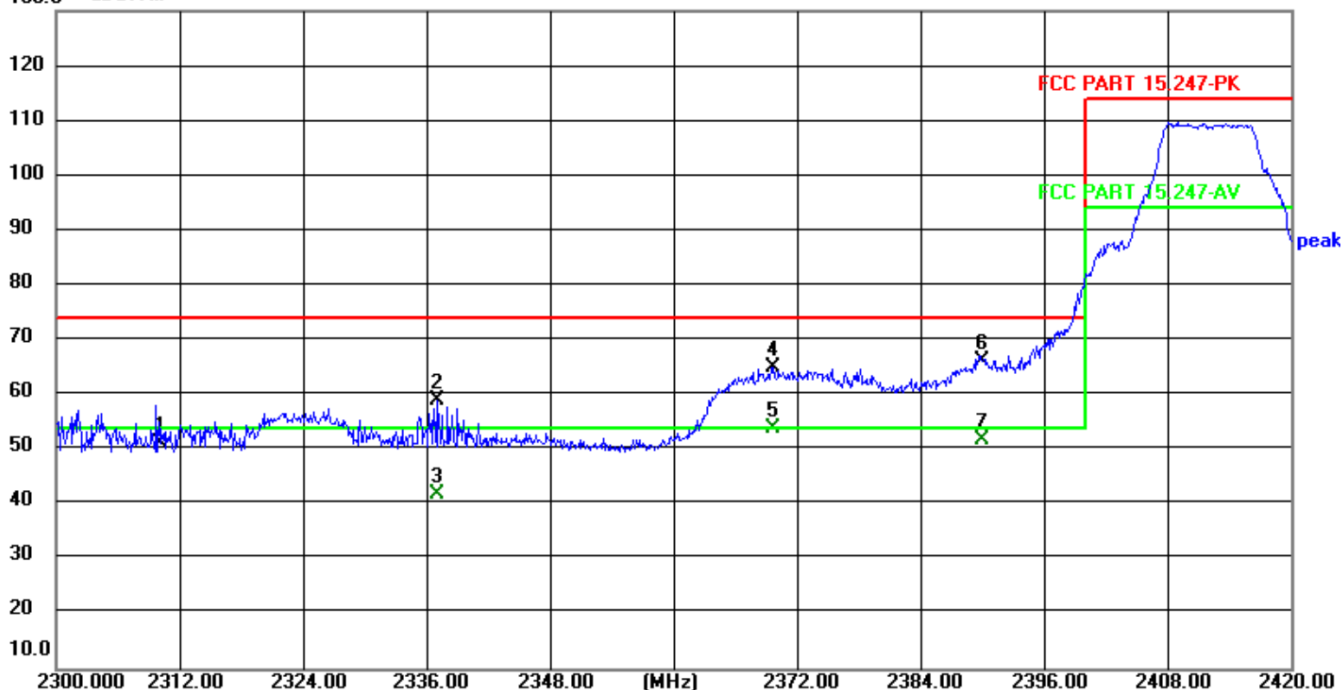

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	53.27	-2.02	51.25	74.00	-22.75	peak
2	2336.960	61.00	-1.91	59.09	74.00	-14.91	peak
3	2336.960	43.81	-1.91	41.90	54.00	-12.10	AVG
4	2369.720	66.90	-1.80	65.10	74.00	-8.90	peak
5	2369.720	55.78	-1.80	53.98	54.00	-0.02	AVG
6	2390.000	67.88	-1.73	66.15	74.00	-7.85	peak
7	2390.000	53.52	-1.73	51.79	54.00	-2.21	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

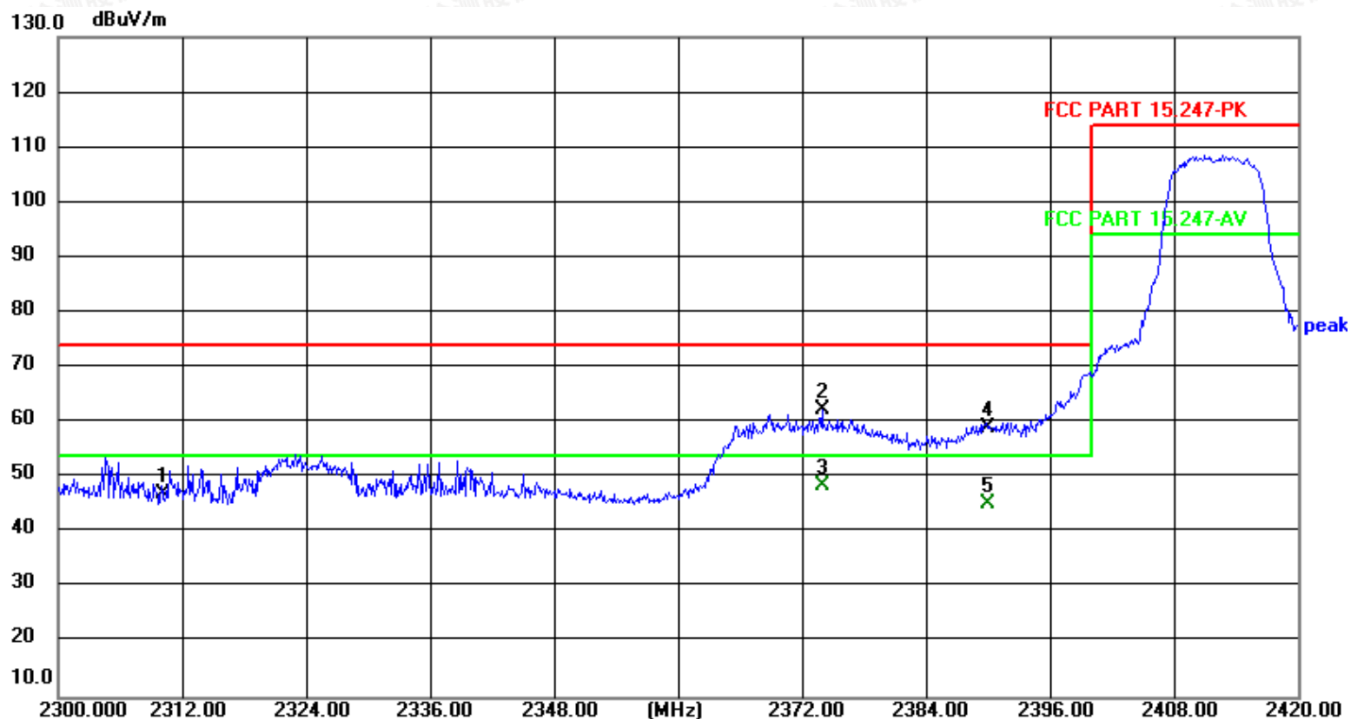

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	49.06	-2.02	47.04	74.00	-26.96	peak
2	2373.920	64.25	-1.79	62.46	74.00	-11.54	peak
3	2373.920	50.37	-1.79	48.58	54.00	-5.42	AVG
4	2390.000	60.85	-1.73	59.12	74.00	-14.88	peak
5	2390.000	47.07	-1.73	45.34	54.00	-8.66	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



IEEE 802.11n 2467 MHz 10M

Vertical

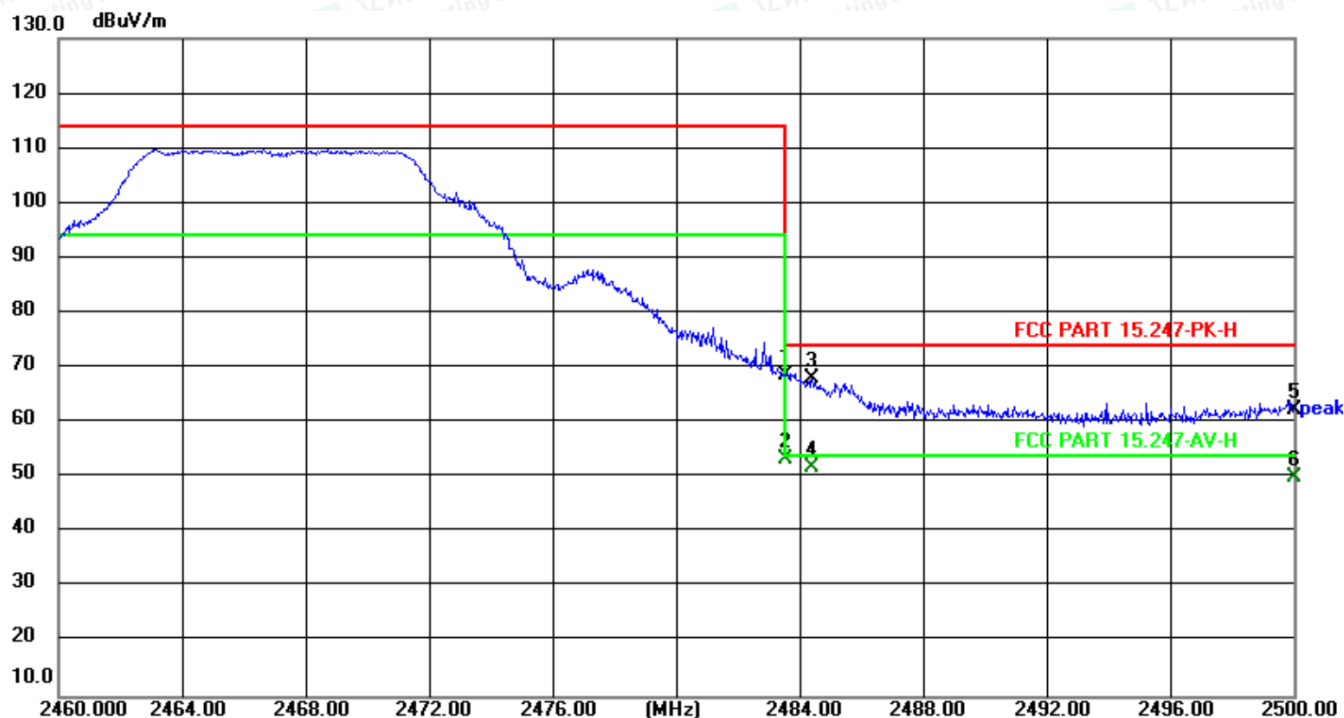

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	70.15	-1.40	68.75	74.00	-5.25	peak
2	2483.500	54.68	-1.40	53.28	54.00	-0.72	AVG
3	2484.400	69.59	-1.40	68.19	74.00	-5.81	peak
4	2484.400	53.32	-1.40	51.92	54.00	-2.08	AVG
5	2500.000	63.81	-1.34	62.47	74.00	-11.53	peak
6	2500.000	51.35	-1.34	50.01	54.00	-3.99	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

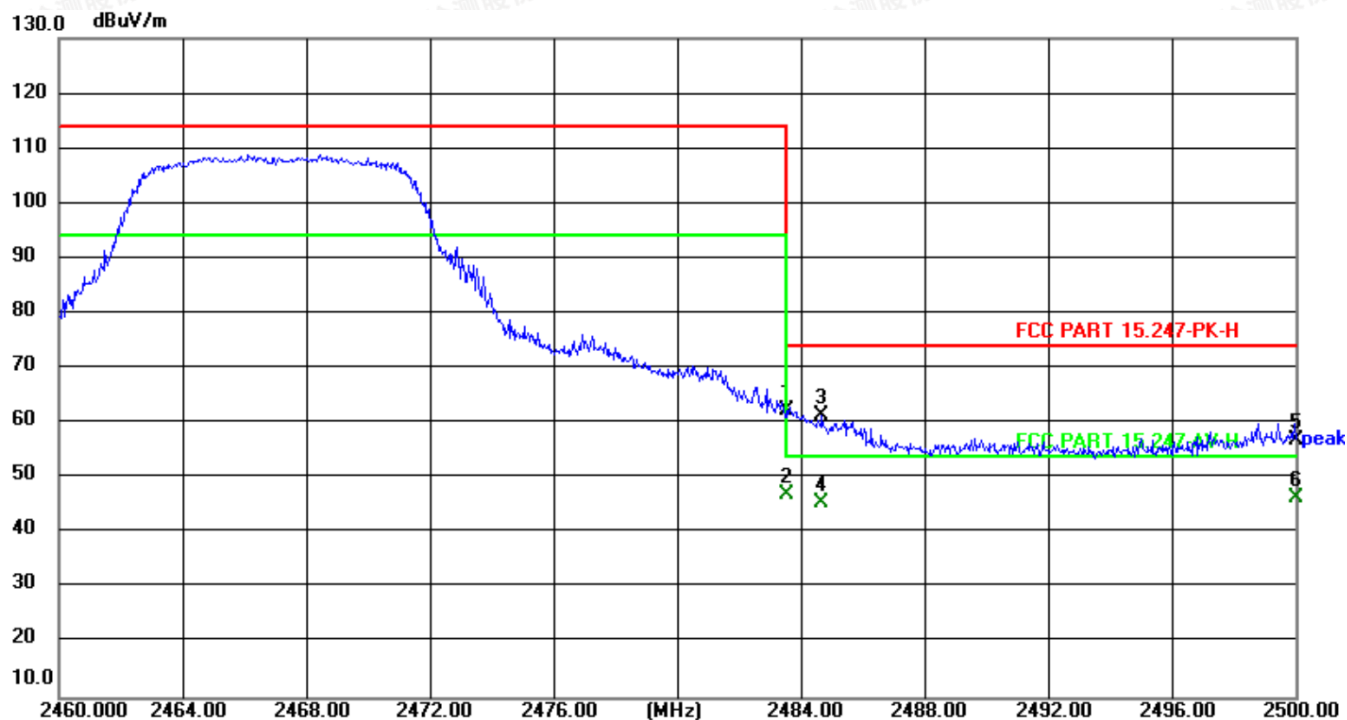

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	63.75	-1.40	62.35	74.00	-11.65	peak
2	2483.500	48.55	-1.40	47.15	54.00	-6.85	AVG
3	2484.680	62.82	-1.40	61.42	74.00	-12.58	peak
4	2484.680	47.04	-1.40	45.64	54.00	-8.36	AVG
5	2500.000	58.24	-1.34	56.90	74.00	-17.10	peak
6	2500.000	47.71	-1.34	46.37	54.00	-7.63	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



IEEE 802.11g 2412 MHz 10M

Vertical

130.0 dBuV/m

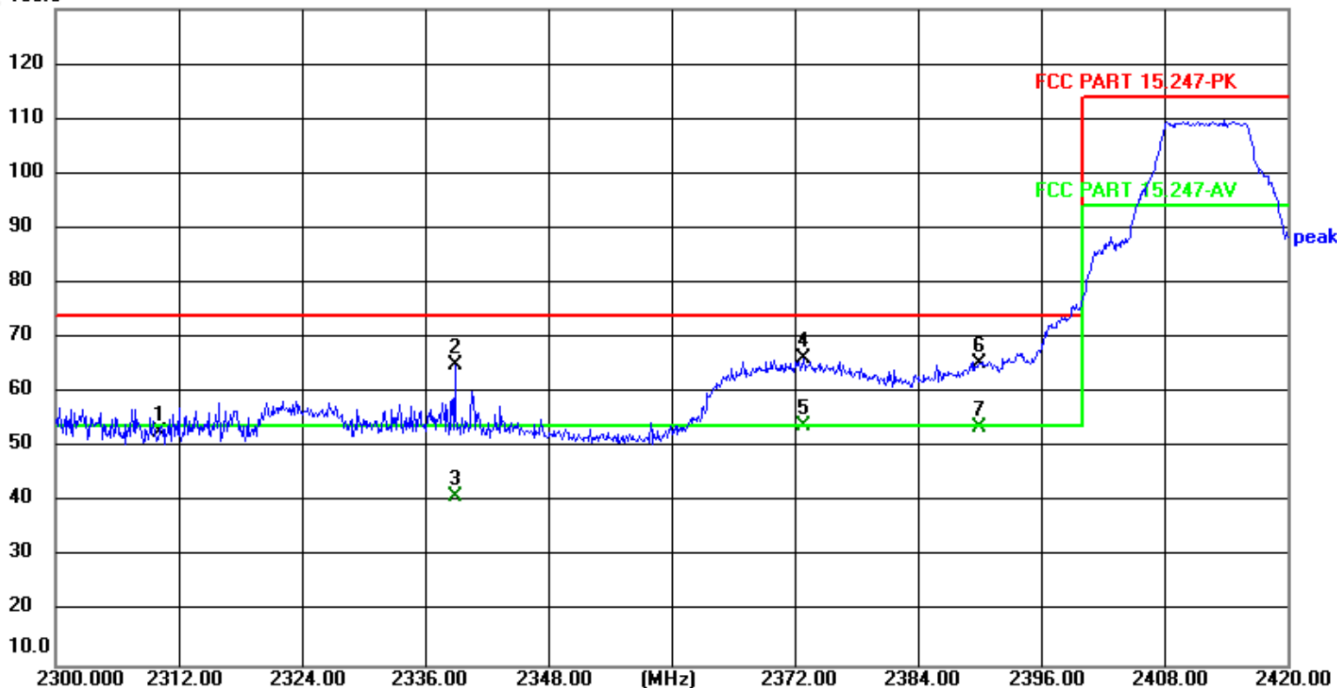

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	54.90	-2.02	52.88	74.00	-21.12	peak
2	2338.880	66.83	-1.91	64.92	74.00	-9.08	peak
3	2338.880	42.97	-1.91	41.06	54.00	-12.94	AVG
4	2372.840	68.18	-1.80	66.38	74.00	-7.62	peak
5	2372.840	55.72	-1.80	53.92	54.00	-0.08	AVG
6	2390.000	67.15	-1.73	65.42	74.00	-8.58	peak
7	2390.000	55.27	-1.73	53.54	54.00	-0.46	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

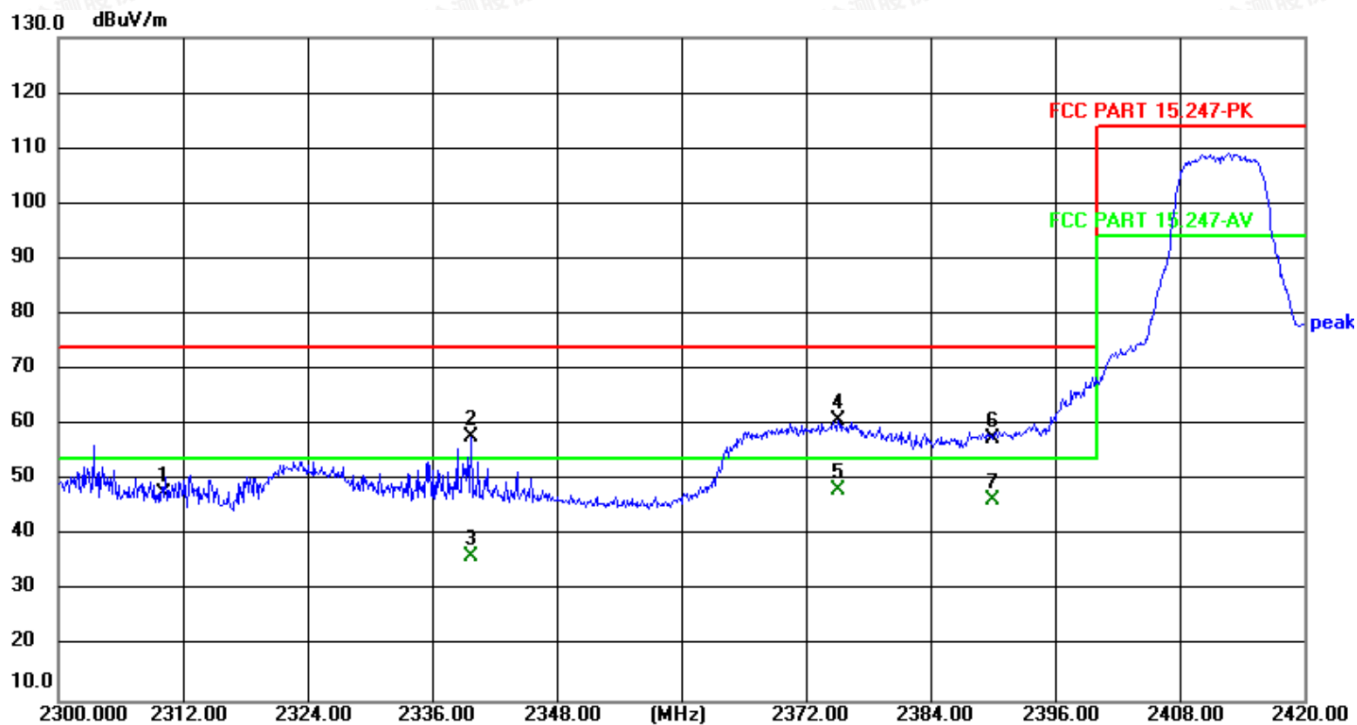

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	49.78	-2.02	47.76	74.00	-26.24	peak
2	2339.720	59.63	-1.91	57.72	74.00	-16.28	peak
3	2339.720	38.15	-1.91	36.24	54.00	-17.76	AVG
4	2375.120	62.64	-1.79	60.85	74.00	-13.15	peak
5	2375.120	50.06	-1.79	48.27	54.00	-5.73	AVG
6	2390.000	59.34	-1.73	57.61	74.00	-16.39	peak
7	2390.000	48.14	-1.73	46.41	54.00	-7.59	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



IEEE 802.11g 2467 MHz 10M

Vertical

130.0 dBuV/m

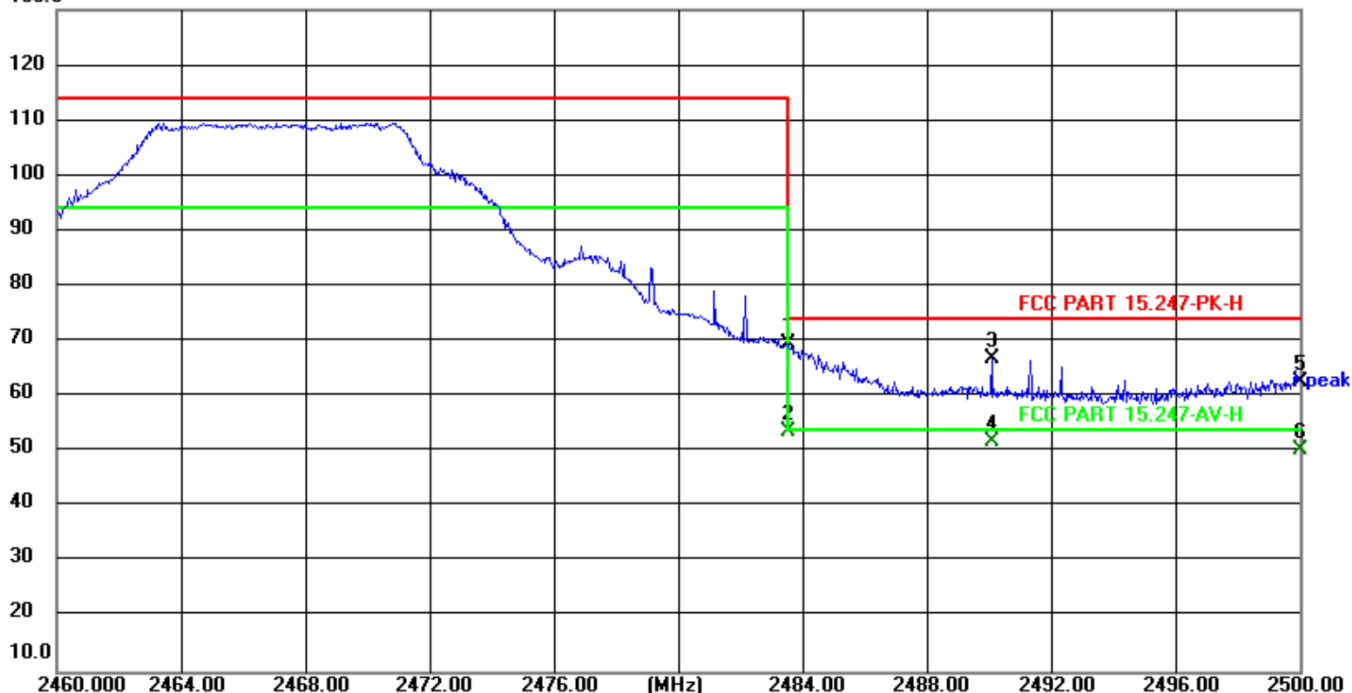

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	70.96	-1.40	69.56	74.00	-4.44	peak
2	2483.500	55.00	-1.40	53.60	54.00	-0.40	AVG
3	2490.080	68.24	-1.38	66.86	74.00	-7.14	peak
4	2490.080	53.14	-1.38	51.76	54.00	-2.24	AVG
5	2500.000	64.07	-1.34	62.73	74.00	-11.27	peak
6	2500.000	51.78	-1.34	50.44	54.00	-3.56	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

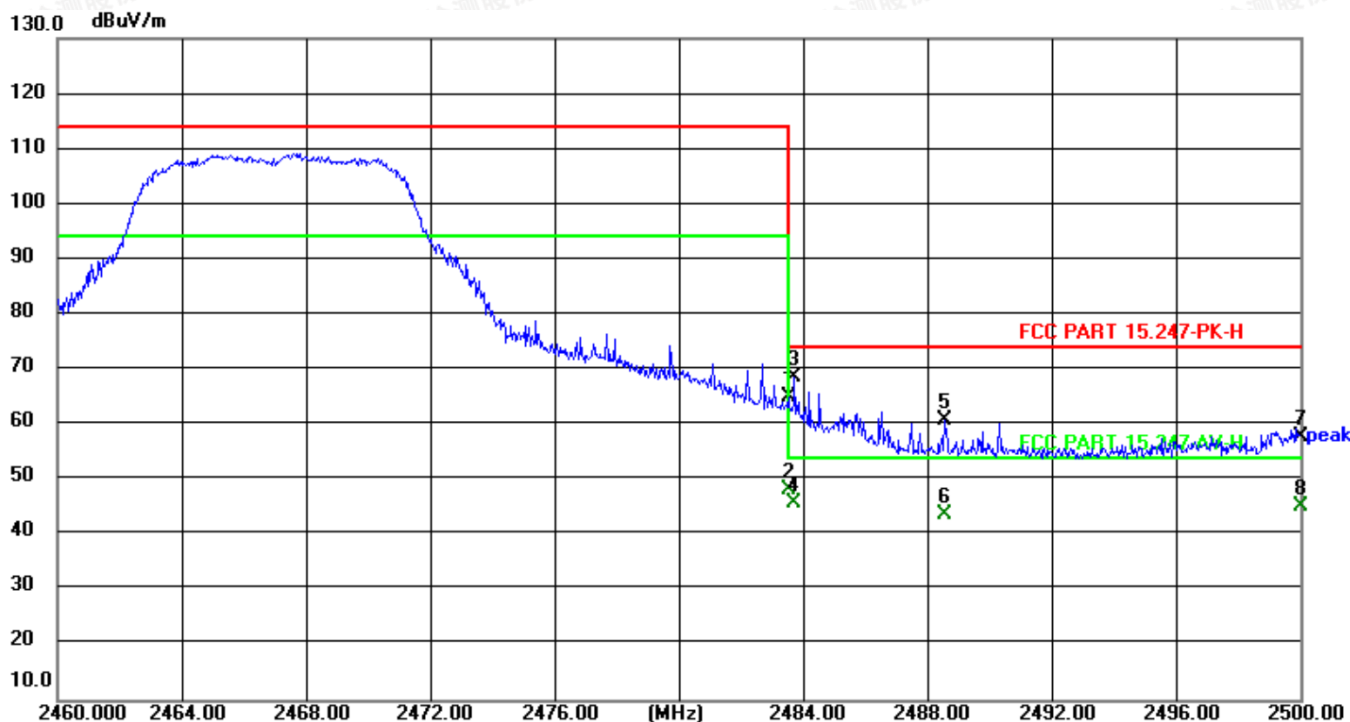

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	66.31	-1.40	64.91	74.00	-9.09	peak
2	2483.500	49.58	-1.40	48.18	54.00	-5.82	AVG
3	2483.720	69.93	-1.40	68.53	74.00	-5.47	peak
4	2483.720	47.35	-1.40	45.95	54.00	-8.05	AVG
5	2488.560	62.30	-1.39	60.91	74.00	-13.09	peak
6	2488.560	45.02	-1.39	43.63	54.00	-10.37	AVG
7	2500.000	59.25	-1.34	57.91	74.00	-16.09	peak
8	2500.000	46.48	-1.34	45.14	54.00	-8.86	AVG

Remark:

- 1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.8. AC Power line conducted emissions


5.8.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.8.2 Block Diagram of Test Setup

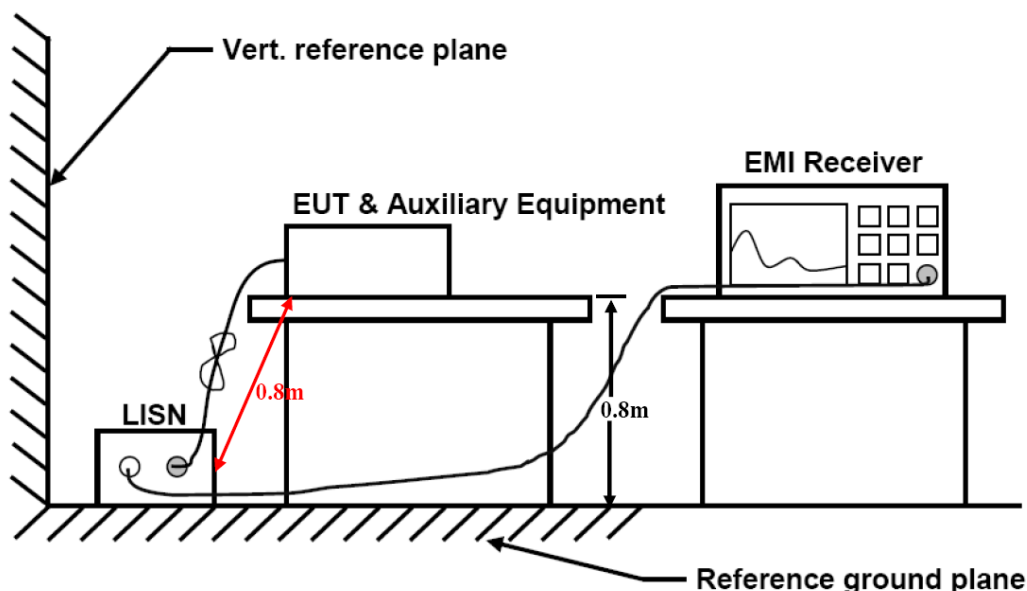

5.8.3. Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dB}\mu\text{V)} = RA \text{ (dB}\mu\text{V)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where	CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

5.8.4. Test Results


The test data please refer to following page.

Temperature	23.8°C	Humidity	52.1%
Test Engineer	Taylor Hu	Configurations	IEEE 802.11g/n



**AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))**

Line

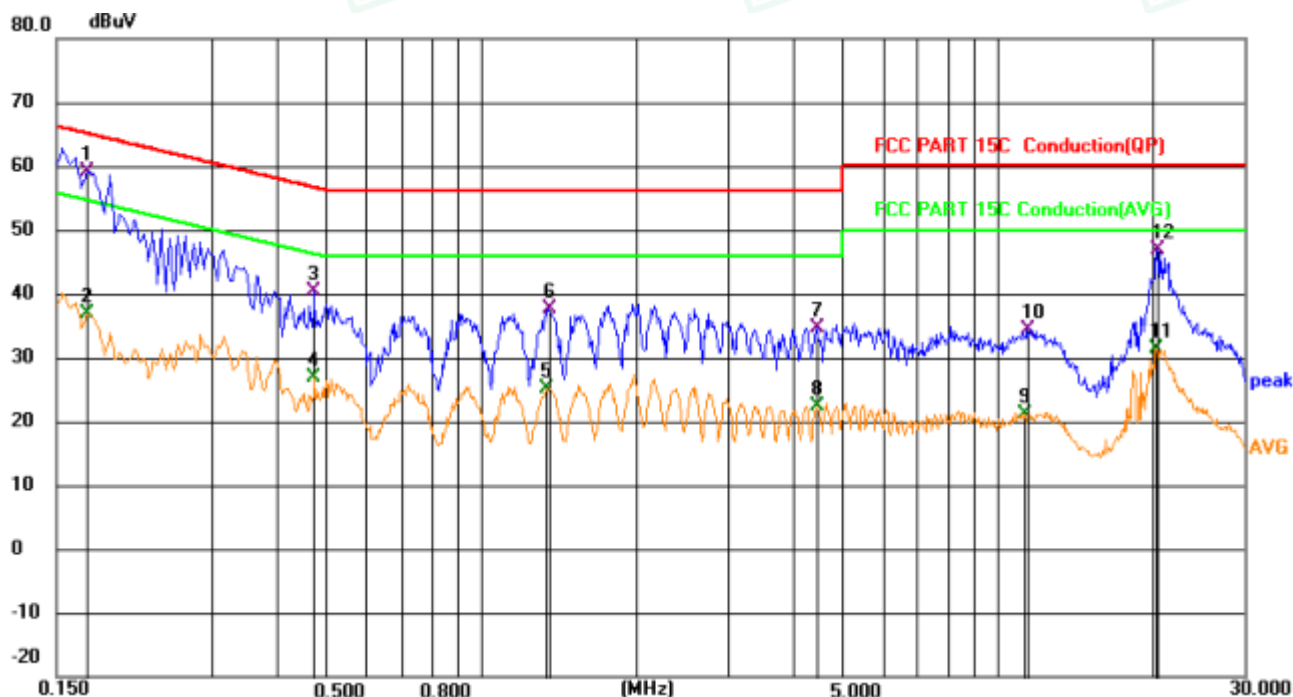

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1726	39.53	19.63	59.16	64.83	-5.67	QP
2		0.1726	17.36	19.63	36.99	54.83	-17.84	AVG
3		0.4741	20.81	19.64	40.45	56.44	-15.99	QP
4		0.4741	7.28	19.64	26.92	46.44	-19.52	AVG
5		1.3335	5.49	19.66	25.15	46.00	-20.85	AVG
6		1.3470	18.08	19.66	37.74	56.00	-18.26	QP
7		4.4701	14.98	19.70	34.68	56.00	-21.32	QP
8		4.4926	2.59	19.70	22.29	46.00	-23.71	AVG
9		11.2651	1.34	19.85	21.19	50.00	-28.81	AVG
10		11.4361	14.63	19.85	34.48	60.00	-25.52	QP
11		20.2561	11.11	20.19	31.30	50.00	-18.70	AVG
12		20.3146	26.75	20.19	46.94	60.00	-13.06	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

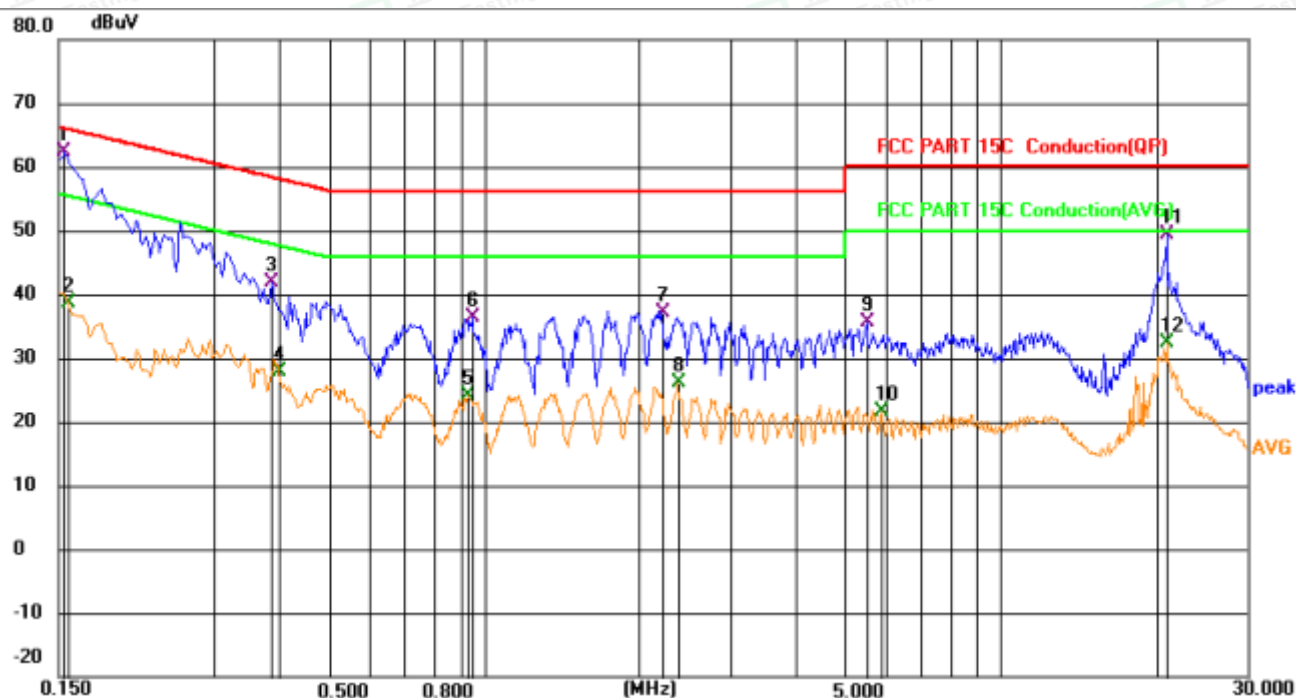

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1	*	0.1539	42.63	19.63	62.26	65.79	-3.53	QP
2		0.1565	18.99	19.63	38.62	55.65	-17.03	AVG
3		0.3871	22.15	19.63	41.78	58.13	-16.35	QP
4		0.3997	8.14	19.63	27.77	47.86	-20.09	AVG
5		0.9282	4.53	19.65	24.18	46.00	-21.82	AVG
6		0.9481	16.61	19.65	36.26	56.00	-19.74	QP
7		2.2015	17.41	19.69	37.10	56.00	-18.90	QP
8		2.3710	6.38	19.70	26.08	46.00	-19.92	AVG
9		5.5054	15.77	19.80	35.57	60.00	-24.43	QP
10		5.8668	1.94	19.80	21.74	50.00	-28.26	AVG
11		20.9243	29.24	20.15	49.39	60.00	-10.61	QP
12		20.9243	12.19	20.15	32.34	50.00	-17.66	AVG

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.9. Antenna Requirements

5.9.1 Standard Applicable

According to antenna requirement of §15.203.

According to antenna requirement of §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2 Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The gain of antenna used for transmitting is 2.2dBi (Max.), and the antenna is External Antenna and uses unique antenna connector RP-SMA (Reverse Polarity SMA). Please see EUT photo for details.

5.9.2.3. Results: Compliance.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2023-06-09	2024-06-08
2	Power Sensor	R&S	NRV-Z81	100458	2023-06-09	2024-06-08
3	Power Sensor	R&S	NRV-Z32	10057	2023-06-09	2024-06-08
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2023-10-28	2024-10-27
					2023-10-28	2024-10-27
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2023-10-28	2024-10-27
					2023-10-28	2024-10-27
7	DC Power Supply	Agilent	E3642A	N/A	2022-10-29	2024-10-27
					2023-10-28	2024-10-27
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-09	2024-06-08
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2021-08-29	2024-08-28
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2023-06-09	2024-06-08
16	EMI Test Receiver	R&S	ESR 7	101181	2023-06-09	2024-06-08
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2024-10-27
					2023-10-28	2024-10-27
18	Broadband Preamplifier	/	BP-01M18G	P190501	2023-06-09	2024-06-08
19	6dB Attenuator	/	100W/6dB	1172040	2023-06-09	2024-06-08
20	3dB Attenuator	/	2N-3dB	/	2022-10-29	2024-10-27
					2023-10-28	2024-10-27
21	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14
22	Artificial Mains	R&S	ENV216	101288	2023-06-09	2024-06-08
23	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2023-06-09	2024-06-08
24	EMI Test Software	Farad	EZ	/	N/A	N/A
25	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

