



# K15 Pro Bluetooth Mechanical Keyboard

Knob  
Version

## **IN THE BOX:**

Keychron K15 Pro Bluetooth Mechanical Keyboard x 1

Type-C Cable x 1

Manual x 1


Quick Start Guide x 1

Extra Keycaps Set x 1

# QUICK START GUIDE


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

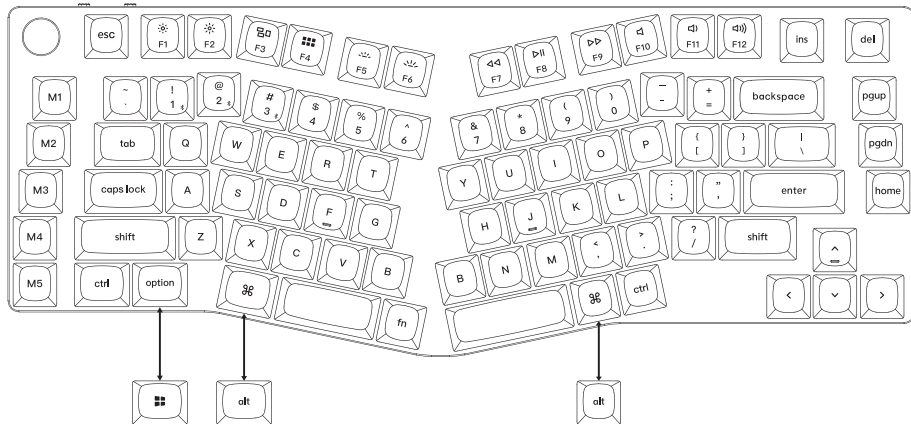


## 1 Switch To The Right System


Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.



## 2 Connect Bluetooth




Press fn + 1 (for 4 seconds) and pair with device named Keychron K15 Pro.





### 3 Connect Cable

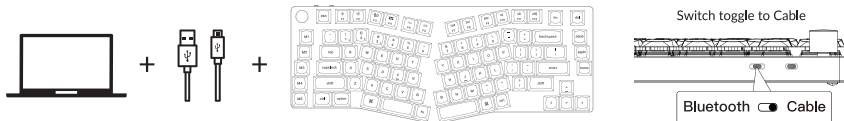

---

### 4 The VIA Key Remapping Software

Please visit [usevia.app](https://usevia.app) to use the online VIA software to remap the keys.  
If the VIA cannot recognize your keyboard, please reach our support to get the instruction.



\* The online VIA software can only run on the latest version of Chrome, Edge, and Opera browsers yet.



\* VIA only works when the keyboard is connected by wire to the computer.

## 5 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.


If your system toggle is switched to Mac, then the layer 0 will be activated.

If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.




## 6 The Backlight

Press fn + Q to change the lighting effect




Press fn + tab to turn the backlight on/off




## 7 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness




Press fn + S to decrease the backlight brightness




---

## 8 Adjust The Backlight Speed

Press fn + T to increase the light effect speed



Press fn + G to decrease the light effect speed




## 9 Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.



---

## 10 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

- ① Plug in the power cable and switch the keyboard to Cable mode.
- ② Factory reset the keyboard by pressing fn + J + Z (for 4 seconds).
- ③ Download the right firmware and QMK Toolbox from our website.
- ④ Switch the keyboard to OFF mode and remove the space bar keycap to find the reset button on the PCB.
- ⑤ Hold the reset key first, then switch the keyboard to Cable mode. Release the reset key, and the keyboard will now enter DFU mode.
- ⑥ Flash the firmware with the QMK Toolbox.
- ⑦ Factory reset the keyboard again by pressing fn + J + Z (for 4 seconds).

\* Step by step guide can be found on our website.

## K15 PRO BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 89

Switch type: Mechanical

Battery: 2000mAh

Charging time: Around 3 hours

Charging port: USB Type-C

Mode: Bluetooth / Wired



Bluetooth operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron K15 Pro

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.


# K15 PRO BLUETOOTH MECHANICAL KEYBOARD OVERVIEW

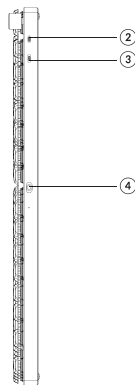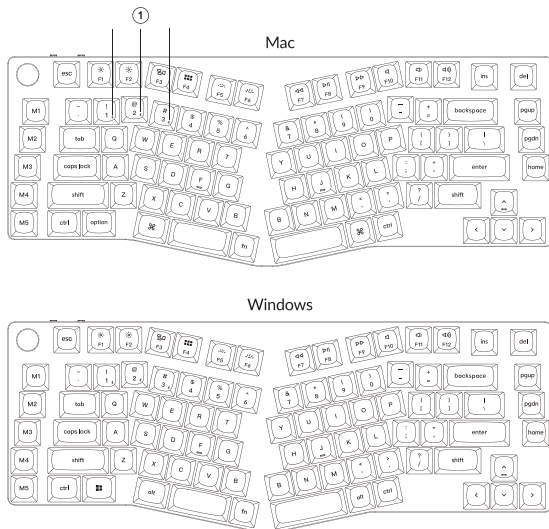


- ① Bluetooth Indicator
- ② Win/Android Mac/iOS (OS Toggle Switch)
- ③ BT OFF Cable (Mode Toggle Switch)
- ④ Charging Port

## DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

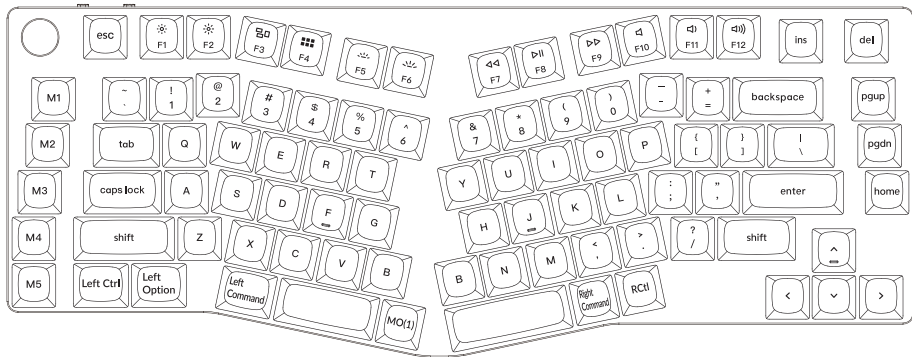


**LAYER 1:** This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn/MO(1) key.

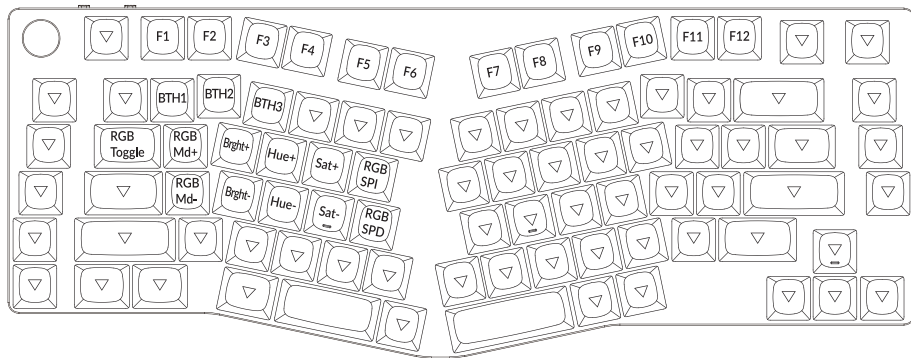



LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Windows.

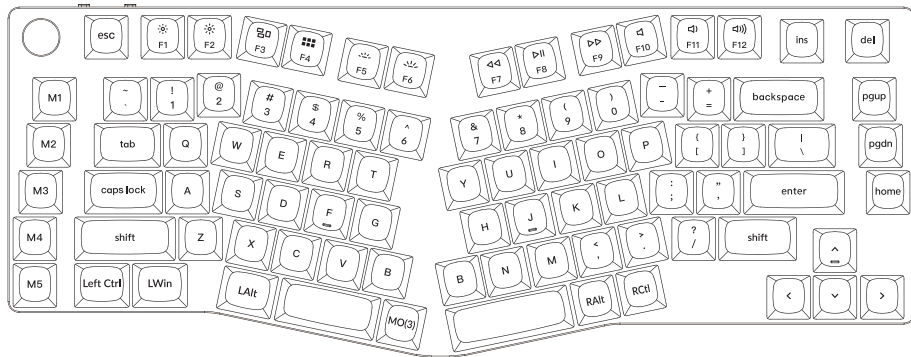

LWin = Left Windows LAIt = Left Alt RAIt = Right Alt RCtrl = Right Ctrl