

RF TEST REPORT

Applicant	Smawave Technology Co. ,Ltd
FCC ID	2AU8HSRG821
Product	Ruggedized Router
Brand	Smawave
Model	SRG821
Report No.	R2409A1327-R4
Issue Date	November 28, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. Maximum output power	8
5.2. 99% Bandwidth and 6dB Bandwidth	14
5.3. Band Edge	34
5.4. Power Spectral Density	47
5.5. Spurious RF Conducted Emissions.....	107
5.6. Unwanted Emission	127
5.7. Conducted Emission.....	174
6. Main Test Instruments.....	177
ANNEX A: The EUT Appearance.....	178
ANNEX B: Test Setup Photos.....	179

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: September 16, 2024 ~ October 31, 2024			
Date of Sample Received: September 12, 2024			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Smawave Technology Co. ,Ltd.
Applicant address	2/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Smawave Technology Co. ,Ltd.
Manufacturer address	2/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

2.2. General Information

EUT Description		
Model	SRG821	
Lab internal SN	R2409A1327/S01	
Hardware Version	V1.0	
Software Version	SQX5040_V1.1.4	
Power Supply	AC adapter	
Antenna Type	External Antenna	
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)	
Antenna Gain	Antenna 1: 2.06 dBi Antenna 2: 2.06 dBi	
Direction Gain	MIMO	Power: 2.06 dBi PSD: 5.07 dBi
	Beamforming	Power: 5.07 dBi PSD: 5.07 dBi
Operating Frequency Range(s)	802.11b/g/n(HT20)/ax(HE20): 2412 ~ 2462 MHz 802.11n(HT40)/ax(HE40): 2422 ~ 2452 MHz	
Modulation Type	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDM	
Max. Output Power	25.40 dBm	
EUT Accessory		
Adapter 1	Manufacturer: SHENZHEN TOPOW ELECTRONICS CO., LTD Model: TPA309-29240-US	
Adapter 2	Manufacturer: Dongguan Sunun Power Co., Ltd Model: SA361V-240150U	
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.		

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2023) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (vertical), lie-down position (horizontal). The worst emission was found in lie-down position (H axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11b	1 Mbps	1 Mbps	1 Mbps
802.11g	6 Mbps	6 Mbps	6 Mbps
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ax HE20	MCS0	MCS0	MCS0
802.11ax HE40	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO	Beamforming
Maximum output power	O	O	O	O
6dB Bandwidth	--	--	O	--
Band Edge	--	--	O	--
Power Spectral Density	O	O	O	O
Spurious RF Conducted Emissions	--	--	O	--
Unwanted Emissions	--	--	O	--
Conducted Emission	--	--	O	--
Note: "O": test all bands				

According to RF Output power results in chapter 5.1, MIMO was selected as the worst antenna.

5. Test Case Results

5.1. Maximum output power

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Network Standards	Carrier frequency (MHz)	Power Index			
		SISO Antenna 1	SISO Antenna 2	MIMO	Beamforming
802.11b	2412	24	24	24	24
	2437	24	24	24	24
	2462	24	24	24	24
802.11g	2412	23	23	23	23
	2437	24	24	24	24
	2462	21	21	21	21
802.11n HT20	2412	24	24	24	24
	2437	24	24	24	24
	2462	20	20	20	20
802.11n HT40	2422	23	23	23	23
	2437	24	24	24	24
	2452	17	17	17	17
802.11ax HE20	2412	24	24	24	24
	2437	24	24	24	24
	2462	20	20	20	20
802.1ax HE40	2422	23	23	23	23
	2437	24	24	24	24
	2452	18	18	18	18

Test Mode	Duty cycle	Duty cycle correction Factor (dB)
802.11b	0.708	1.50
802.11g	0.926	0.33
802.11n HT20	0.802	0.96
802.11n HT40	0.800	0.97
802.11ax HE20	0.803	0.95
802.11ax HE40	0.802	0.96

Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.

SISO Antenna 1

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	19.89	21.38	30	PASS
	2437/CH 6	20.27	21.76	30	PASS
	2462/CH11	20.54	22.04	30	PASS
802.11g	2412/CH 1	18.89	19.22	30	PASS
	2437/CH 6	21.38	21.71	30	PASS
	2462/CH11	17.79	18.12	30	PASS
802.11n HT20	2412/CH 1	19.91	20.87	30	PASS
	2437/CH 6	19.99	20.95	30	PASS
	2462/CH11	15.28	16.24	30	PASS
802.11n HT40	2422/CH3	18.91	19.88	30	PASS
	2437/CH6	21.09	22.06	30	PASS
	2452/CH9	12.93	13.89	30	PASS
802.11ax HE20	2412/CH 1	19.88	20.84	30	PASS
	2437/CH 6	20.79	21.74	30	PASS
	2462/CH11	15.16	16.11	30	PASS
802.11ax HE40	2422/CH3	18.46	19.42	30	PASS
	2437/CH6	20.19	21.14	30	PASS
	2452/CH9	13.45	14.41	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

SISO Antenna 2

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	20.46	21.96	30	PASS
	2437/CH 6	20.32	21.81	30	PASS
	2462/CH11	20.58	22.08	30	PASS
802.11g	2412/CH 1	19.85	20.18	30	PASS
	2437/CH 6	21.73	22.06	30	PASS
	2462/CH11	18.39	18.72	30	PASS
802.11n HT20	2412/CH 1	20.37	21.32	30	PASS
	2437/CH 6	20.92	21.87	30	PASS
	2462/CH11	16.04	17.00	30	PASS
802.11n HT40	2422/CH3	18.82	19.79	30	PASS
	2437/CH6	20.89	21.85	30	PASS
	2452/CH9	13.73	14.70	30	PASS
802.11ax HE20	2412/CH 1	20.72	21.67	30	PASS
	2437/CH 6	20.17	21.13	30	PASS
	2462/CH11	16.24	17.19	30	PASS
802.11ax HE40	2422/CH3	18.30	19.25	30	PASS
	2437/CH6	20.45	21.41	30	PASS
	2452/CH9	15.45	16.40	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

MIMO

Test Mode	Carrier frequency (MHz) / Channel	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11b	2412/CH 1	21.03	22.53	19.35	20.85	24.78	30.00	PASS
	2437/CH 6	20.61	22.11	20.70	22.20	25.17	30.00	PASS
	2462/CH11	20.85	22.35	20.93	22.43	25.40	30.00	PASS
802.11g	2412/CH 1	19.04	19.37	19.20	19.53	22.46	30.00	PASS
	2437/CH 6	22.09	22.42	21.62	21.95	25.20	30.00	PASS
	2462/CH11	17.63	17.96	17.99	18.32	21.16	30.00	PASS
802.11n HT20	2412/CH 1	20.98	21.93	19.39	20.34	24.22	30.00	PASS
	2437/CH 6	21.28	22.24	20.35	21.31	24.81	30.00	PASS
	2462/CH11	15.23	16.19	16.22	17.18	19.72	30.00	PASS
802.11n HT40	2422/CH3	18.66	19.63	18.35	19.32	22.48	30.00	PASS
	2437/CH6	21.11	22.08	21.23	22.20	25.15	30.00	PASS
	2452/CH9	12.66	13.63	13.65	14.62	17.16	30.00	PASS
802.11ax HE20	2412/CH 1	20.78	21.73	19.45	20.40	24.13	30.00	PASS
	2437/CH 6	21.09	22.04	20.48	21.43	24.76	30.00	PASS
	2462/CH11	15.40	16.36	15.82	16.77	19.58	30.00	PASS
802.11ax HE40	2422/CH3	18.28	19.23	17.98	18.94	22.10	30.00	PASS
	2437/CH6	21.31	22.27	21.06	22.02	25.16	30.00	PASS
	2452/CH9	13.52	14.48	14.67	15.63	18.10	30.00	PASS

Note: 1.Average Power with duty factor = Average Power Measured +Duty cycle correction factor

2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.

3. The manufacturer declared the transmitter output signals is CDD mode. And $N_{ss}=1$. According to KDB 662911 D01

Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{ss})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

So directional gain = $G_{ANT} + \text{Array Gain} = 2.06 + 0 = 2.06 \text{ dBi} < 6 \text{ dBi}$. So the power limit is 30dBm

Beamforming

Test Mode	Carrier frequency (MHz) / Channel	MIMO Antenna 1		MIMO Antenna 2		MIMO Antenna 3		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11b	2412/CH 1	21.03	22.53	19.35	20.85	24.78	21.03	22.53	30.00	PASS
	2437/CH 6	20.61	22.11	20.70	22.20	25.17	20.61	22.11	30.00	PASS
	2462/CH11	20.85	22.35	20.93	22.43	25.40	20.85	22.35	30.00	PASS
802.11g	2412/CH 1	19.04	19.37	19.20	19.53	22.46	19.04	19.37	30.00	PASS
	2437/CH 6	22.09	22.42	21.62	21.95	25.20	22.09	22.42	30.00	PASS
	2462/CH11	17.63	17.96	17.99	18.32	21.16	17.63	17.96	30.00	PASS
802.11n HT20	2412/CH 1	20.98	21.93	19.39	20.34	24.22	20.98	21.93	30.00	PASS
	2437/CH 6	21.28	22.24	20.35	21.31	24.81	21.28	22.24	30.00	PASS
	2462/CH11	15.23	16.19	16.22	17.18	19.72	15.23	16.19	30.00	PASS
802.11n HT40	2422/CH3	18.66	19.63	18.35	19.32	22.48	18.66	19.63	30.00	PASS
	2437/CH6	21.11	22.08	21.23	22.20	25.15	21.11	22.08	30.00	PASS
	2452/CH9	12.66	13.63	13.65	14.62	17.16	12.66	13.63	30.00	PASS
802.11ax HE20	2412/CH 1	20.78	21.73	19.45	20.40	24.13	20.78	21.73	30.00	PASS
	2437/CH 6	21.09	22.04	20.48	21.43	24.76	21.09	22.04	30.00	PASS
	2462/CH11	15.40	16.36	15.82	16.77	19.58	15.40	16.36	30.00	PASS
802.11ax HE40	2422/CH3	18.28	19.23	17.98	18.94	22.10	18.28	19.23	30.00	PASS
	2437/CH6	21.31	22.27	21.06	22.02	25.16	21.31	22.27	30.00	PASS
	2452/CH9	13.52	14.48	14.67	15.63	18.10	13.52	14.48	30.00	PASS

Note: 1.Average Power with duty factor = Average Power Measured +Duty cycle correction factor
2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),
The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.
3. Direction gain calculation according to KDB662911 D01 Multiple Transmitter Output v02r01 F)2)e)(i): If all antennas have the same gain, directional gain = $G_{\text{ANT}} + 10 \log(N_{\text{ANT}}/N_{\text{ss}}) = 2.06 + 10\log(2/1) = 5.07 \text{ dBi}$

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.
Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:


Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11ax(HE20)	2412	18.922	16.651	500	PASS
802.11ax(HE20)	2437	18.924	18.216	500	PASS
802.11ax(HE20)	2462	18.961	18.429	500	PASS
802.11ax(HE40)	2422	37.727	37.345	500	PASS
802.11ax(HE40)	2437	37.669	36.752	500	PASS
802.11ax(HE40)	2452	37.737	37.441	500	PASS
802.11b	2412	12.907	6.606	500	PASS
802.11b	2437	12.922	7.579	500	PASS
802.11b	2462	13.026	7.092	500	PASS
802.11g	2412	16.455	16.285	500	PASS
802.11g	2437	16.468	15.594	500	PASS
802.11g	2462	16.489	16.052	500	PASS
802.11n(HT20)	2412	17.617	17.318	500	PASS
802.11n(HT20)	2437	17.634	17.541	500	PASS
802.11n(HT20)	2462	17.691	16.686	500	PASS
802.11n(HT40)	2422	36.070	35.680	500	PASS
802.11n(HT40)	2437	36.097	36.325	500	PASS
802.11n(HT40)	2452	36.165	36.014	500	PASS

99%bandwidth


OBW 802.11ax(HE20) 2412MHz

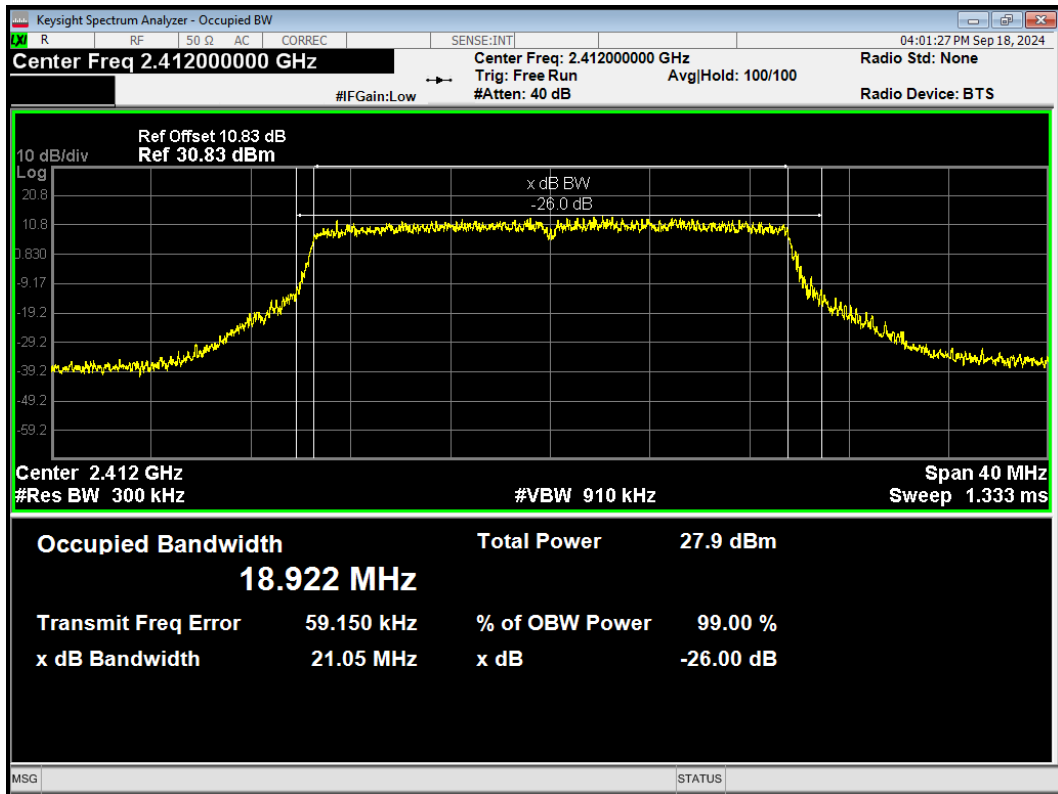


OBW 802.11ax(HE20) 2437MHz

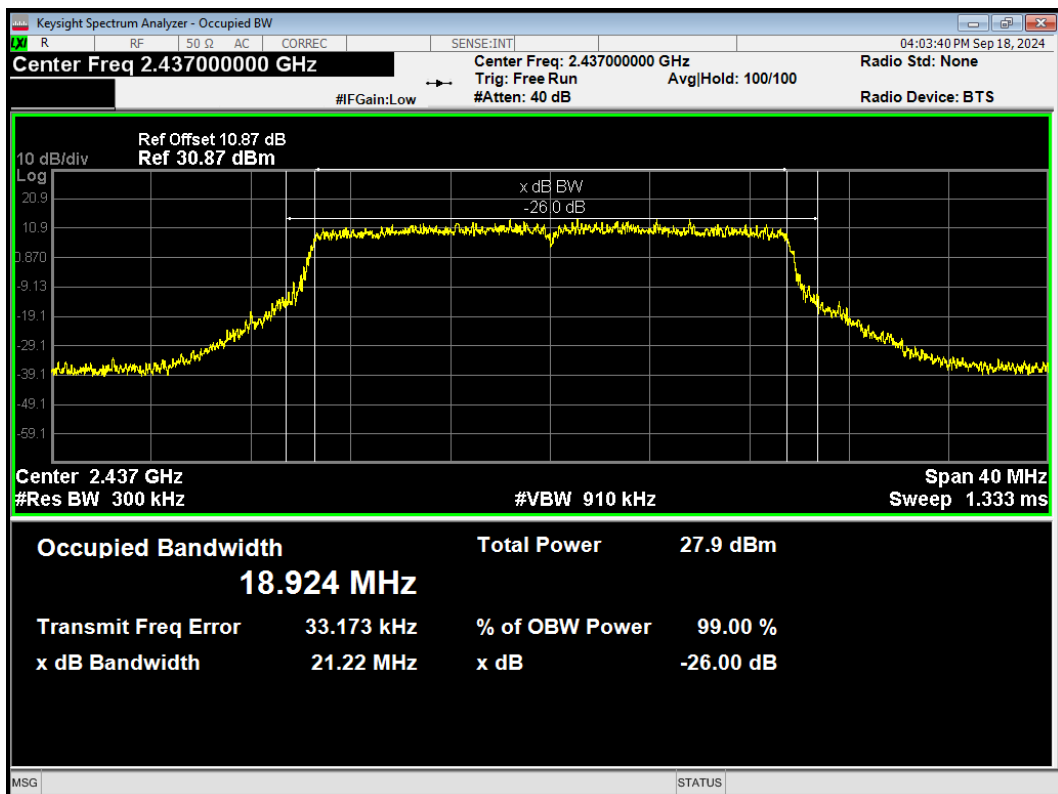


OBW 802.11ax(HE20) 2462MHz

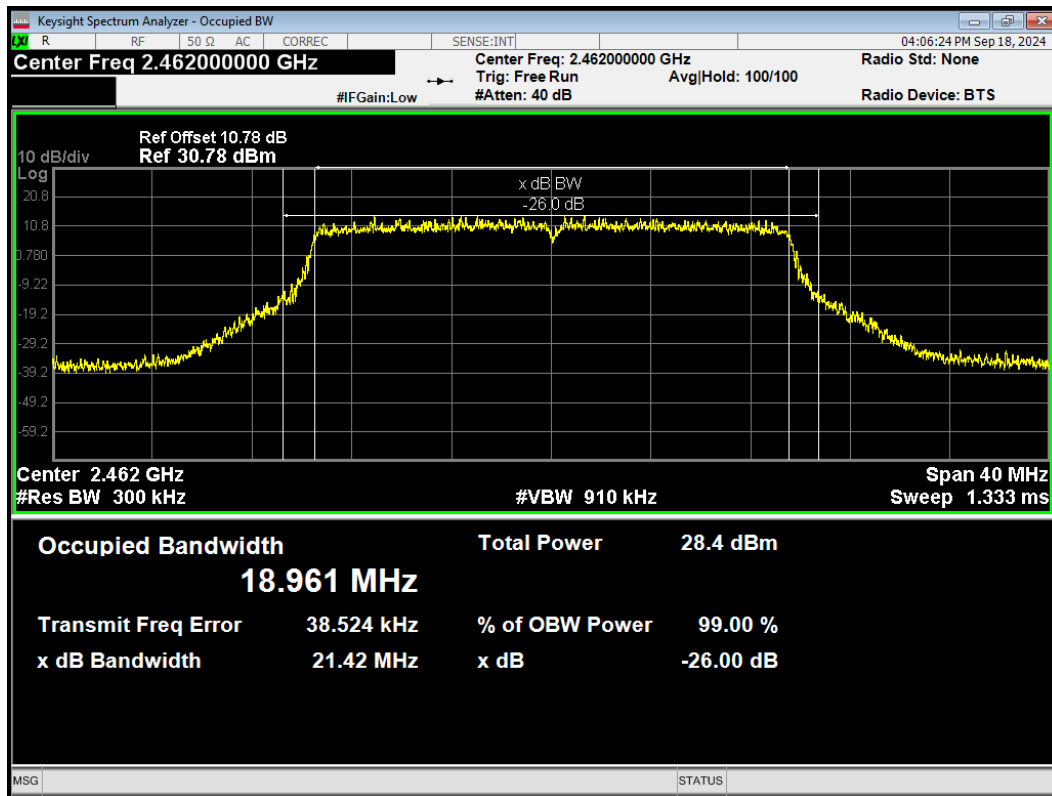


OBW 802.11ax(HE40) 2422MHz

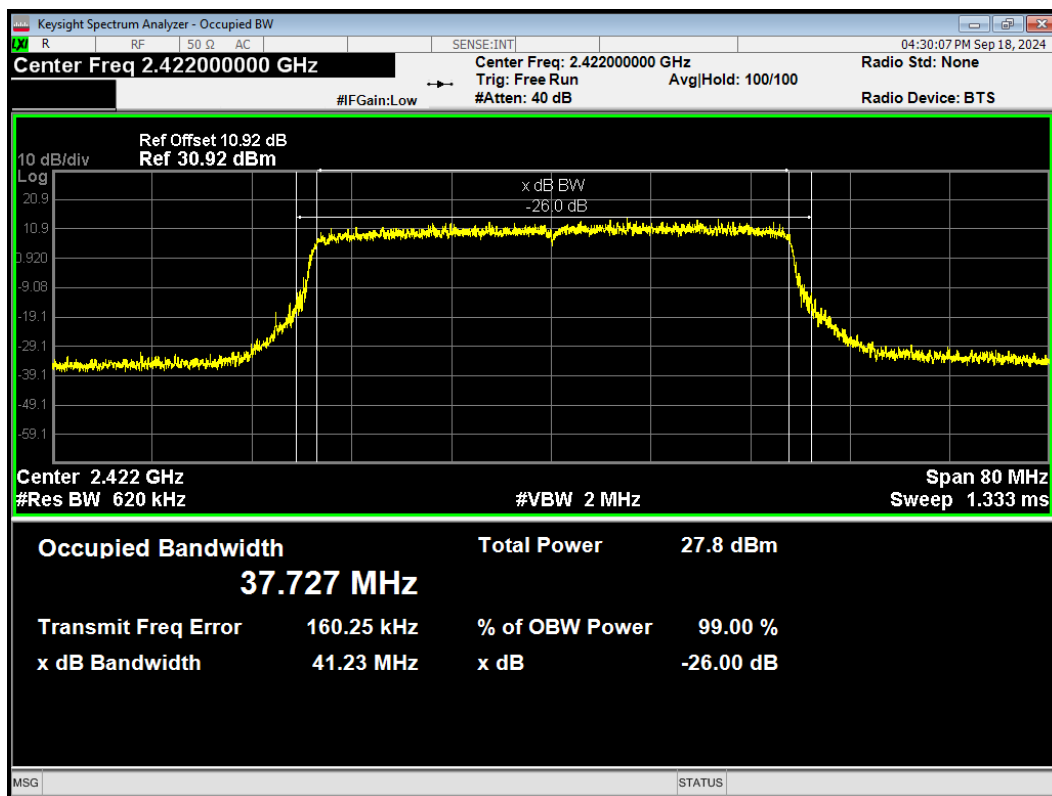


OBW 802.11ax(HE40) 2437MHz

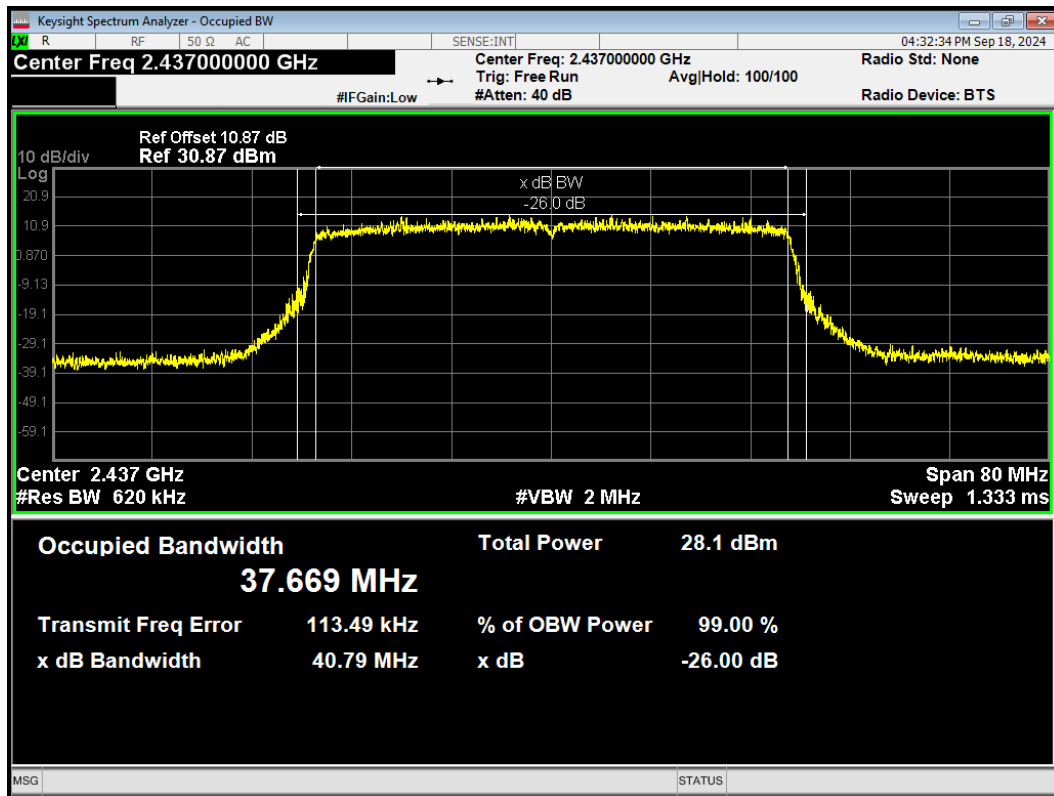


OBW 802.11ax(HE40) 2452MHz

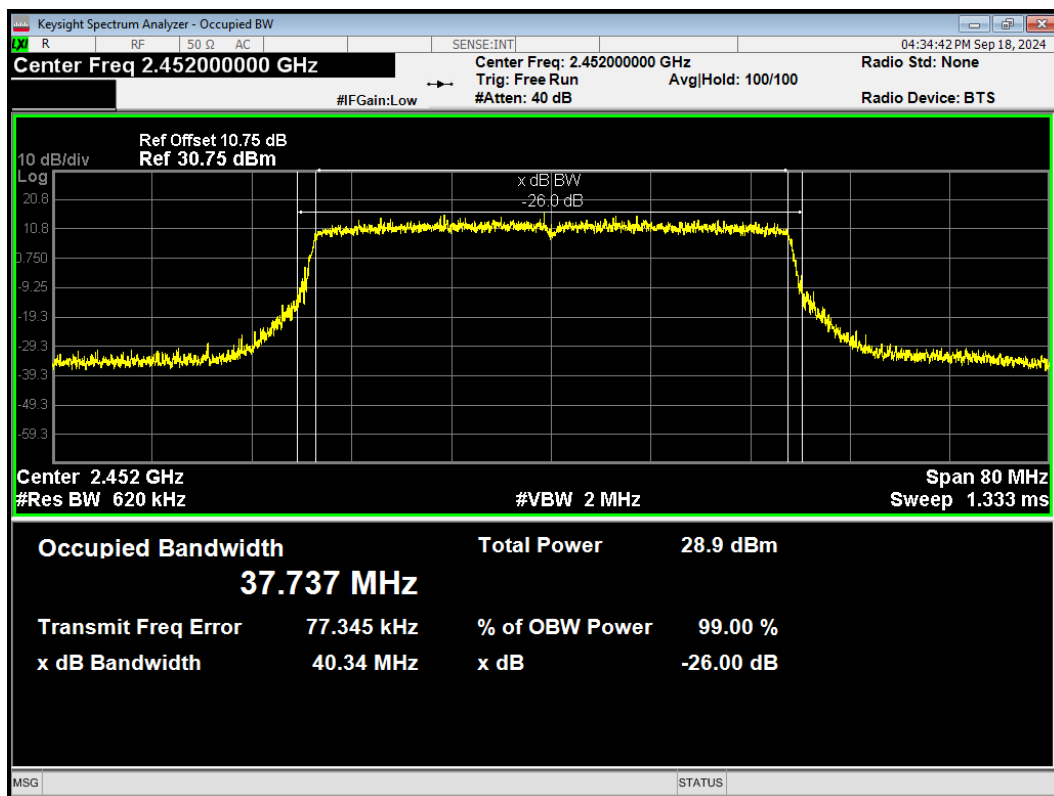


OBW 802.11b 2412MHz

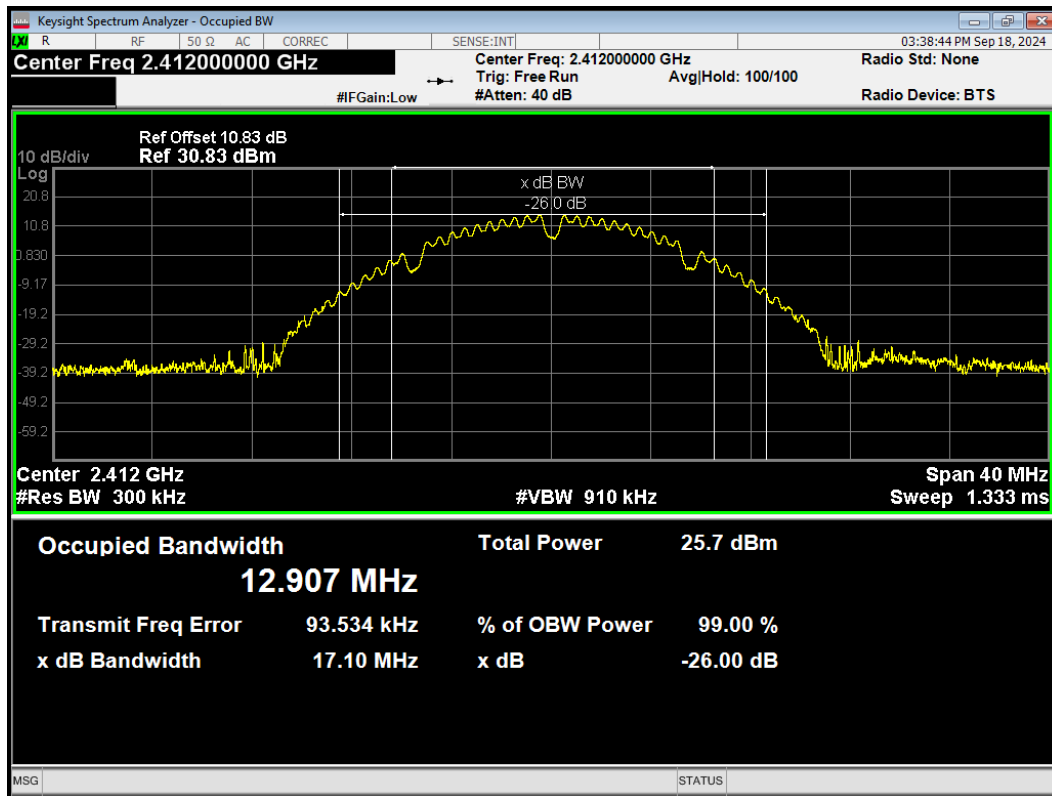


OBW 802.11b 2437MHz

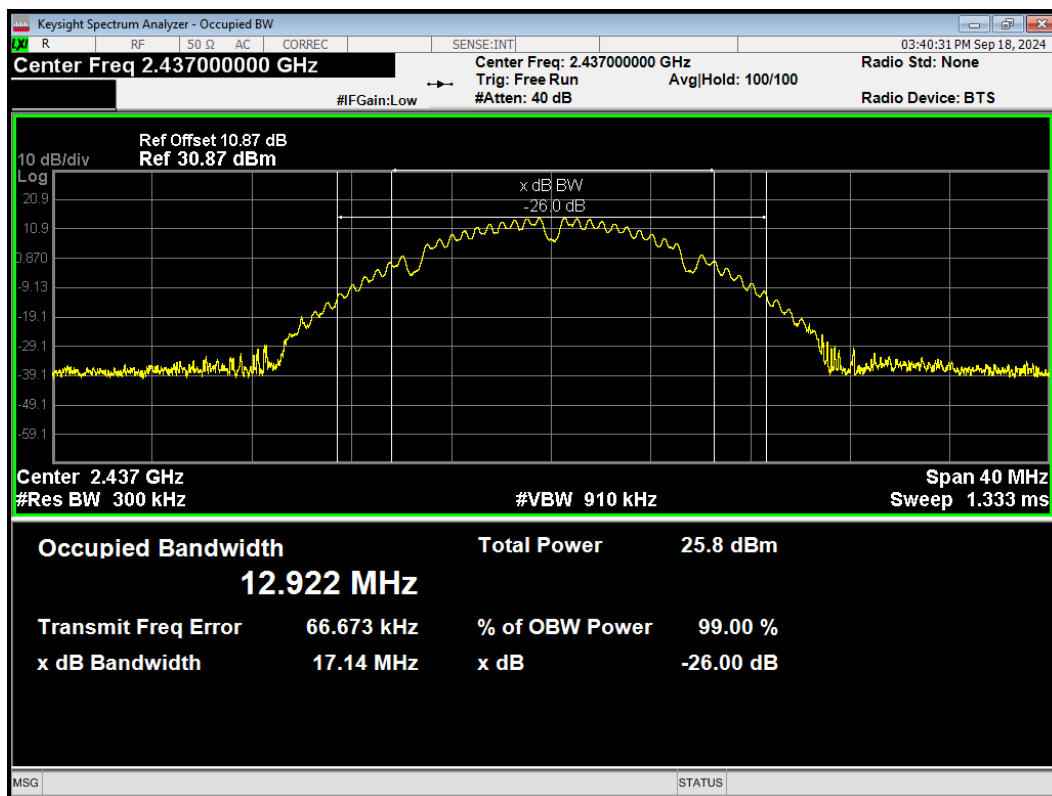


OBW 802.11b 2462MHz

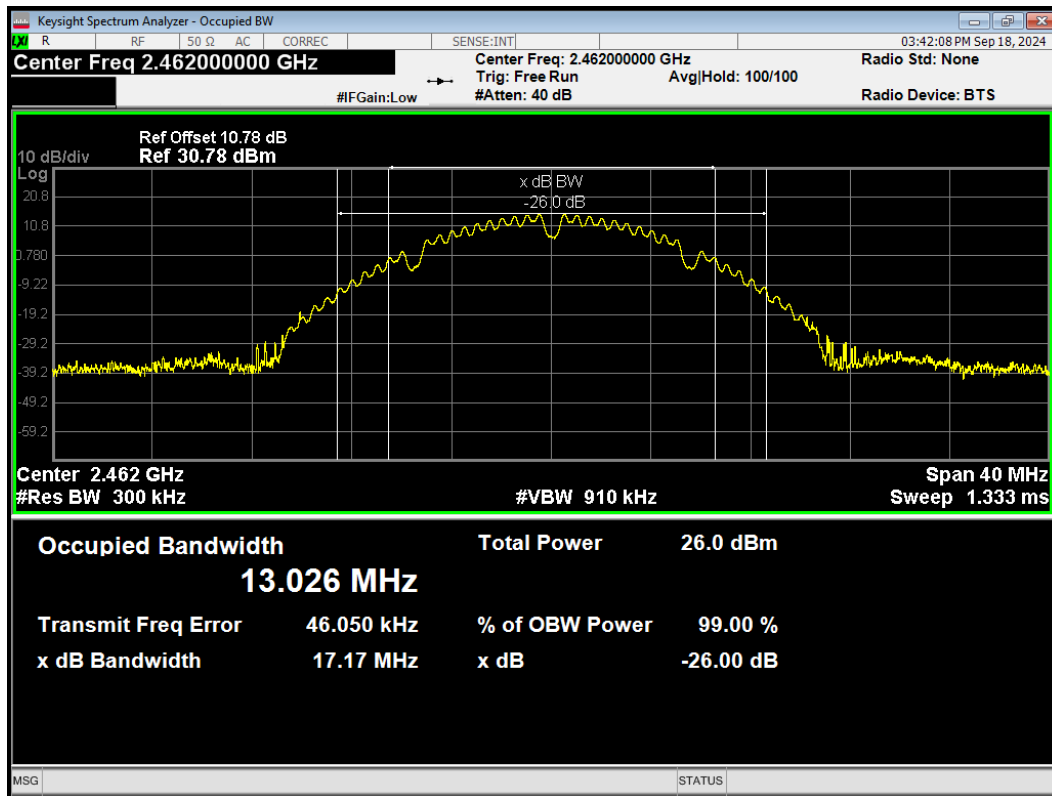


OBW 802.11g 2412MHz

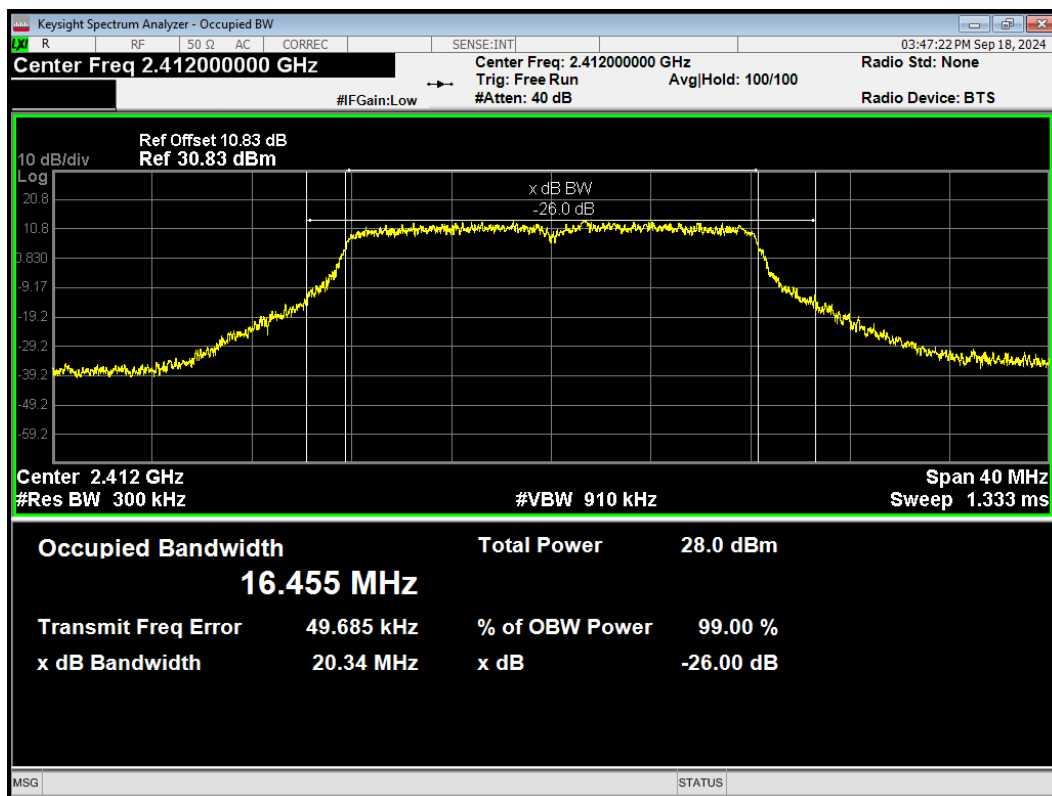


OBW 802.11g 2437MHz

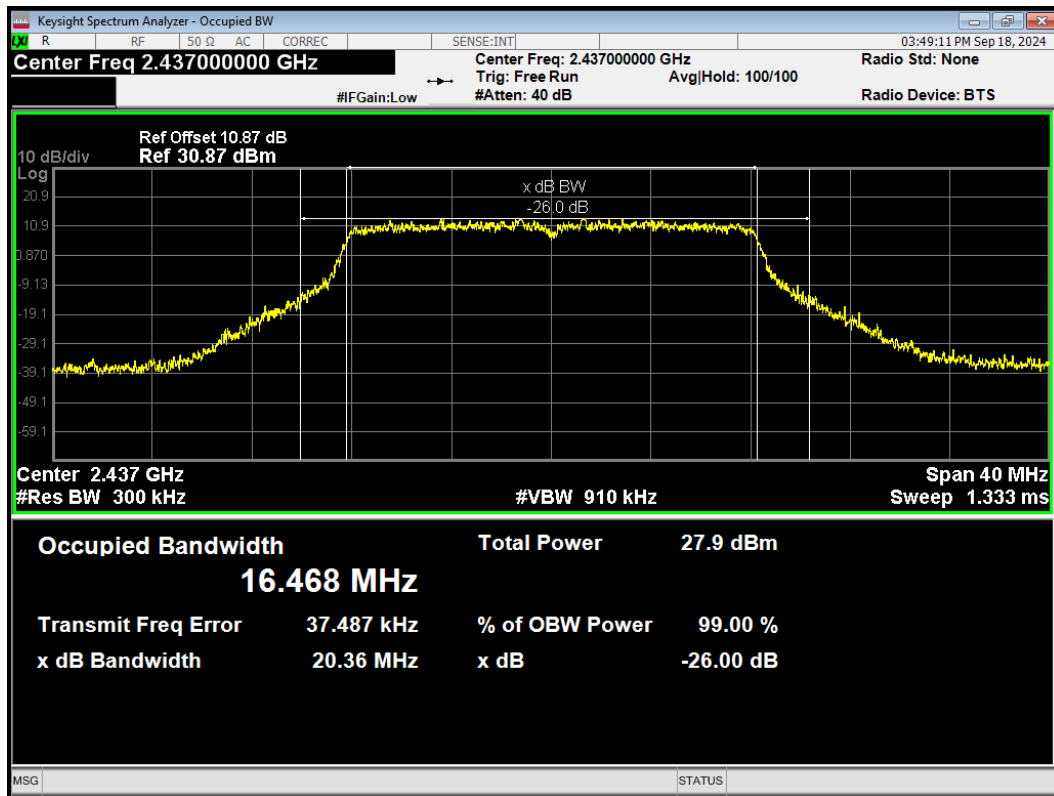


OBW 802.11g 2462MHz

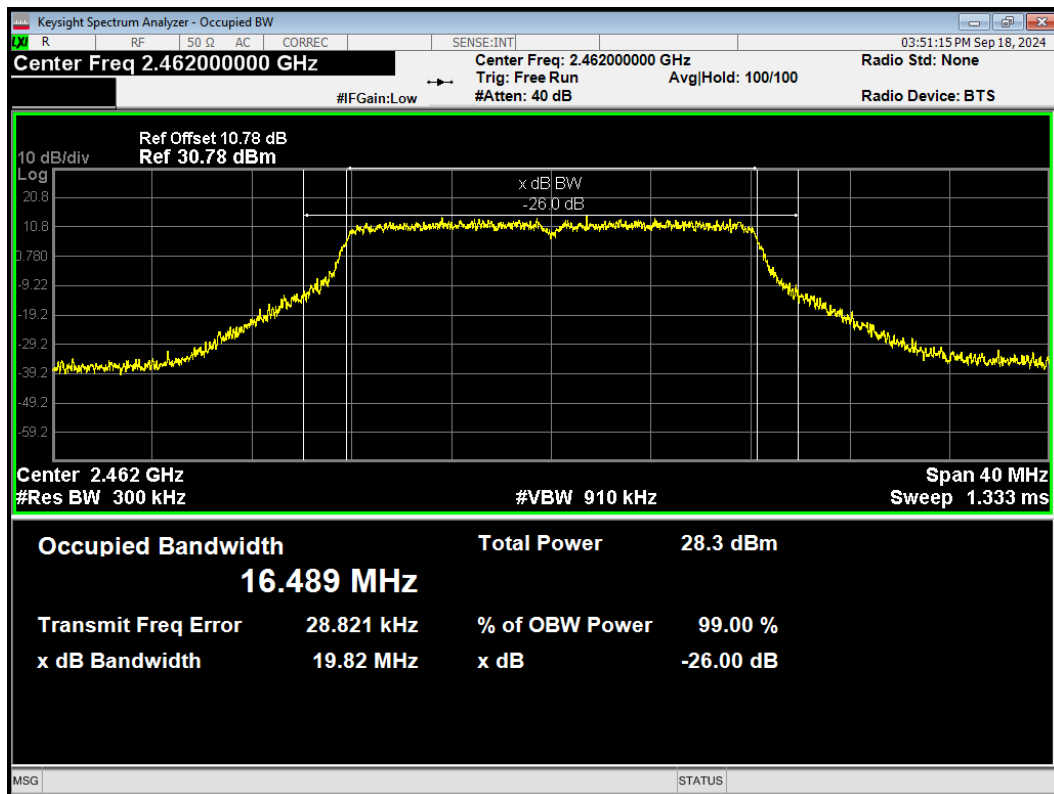


OBW 802.11n(HT20) 2412MHz

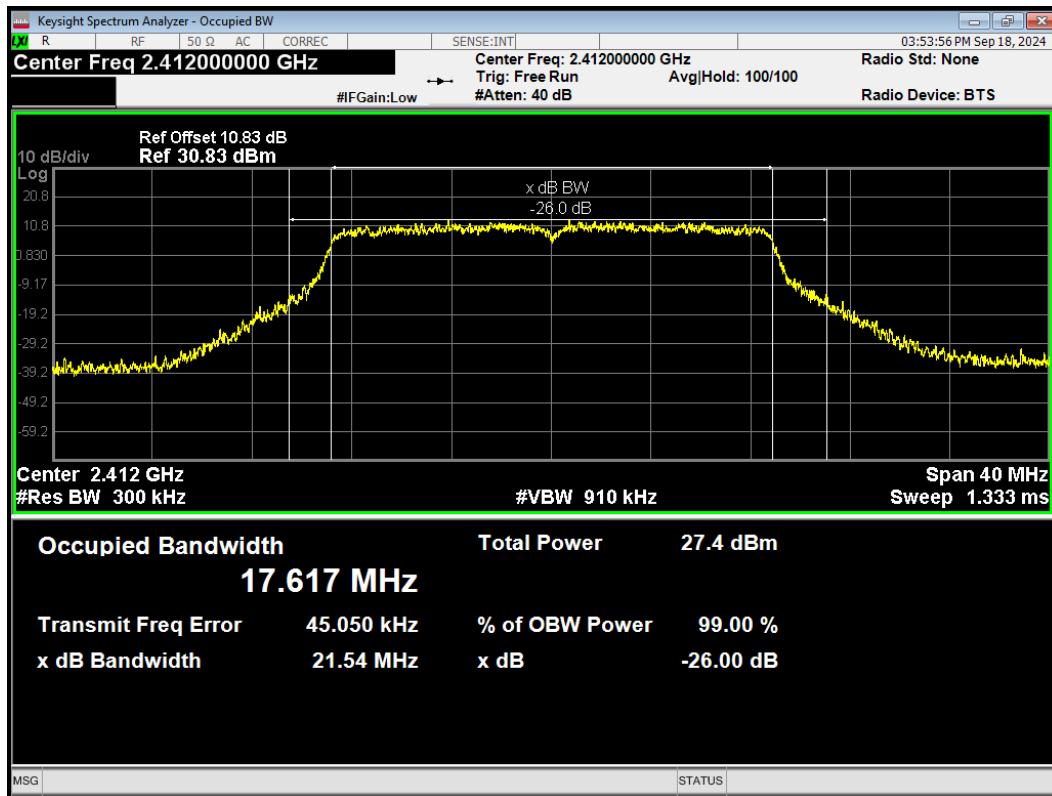


OBW 802.11n(HT20) 2437MHz

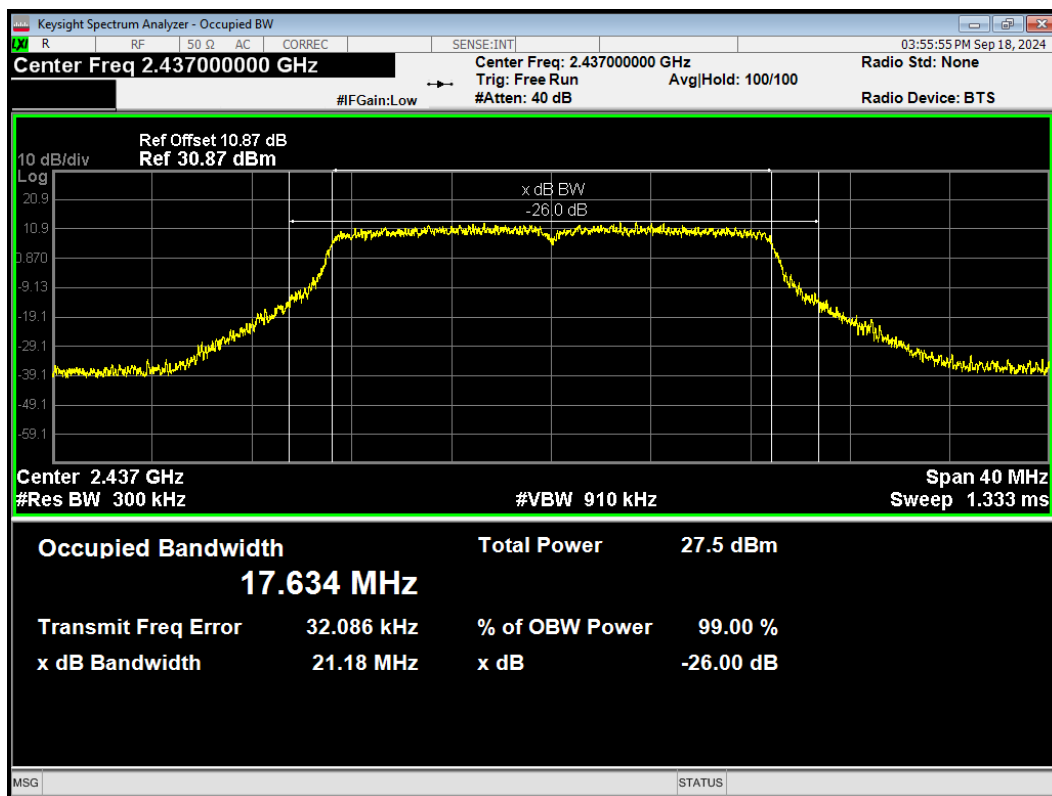


OBW 802.11n(HT20) 2462MHz

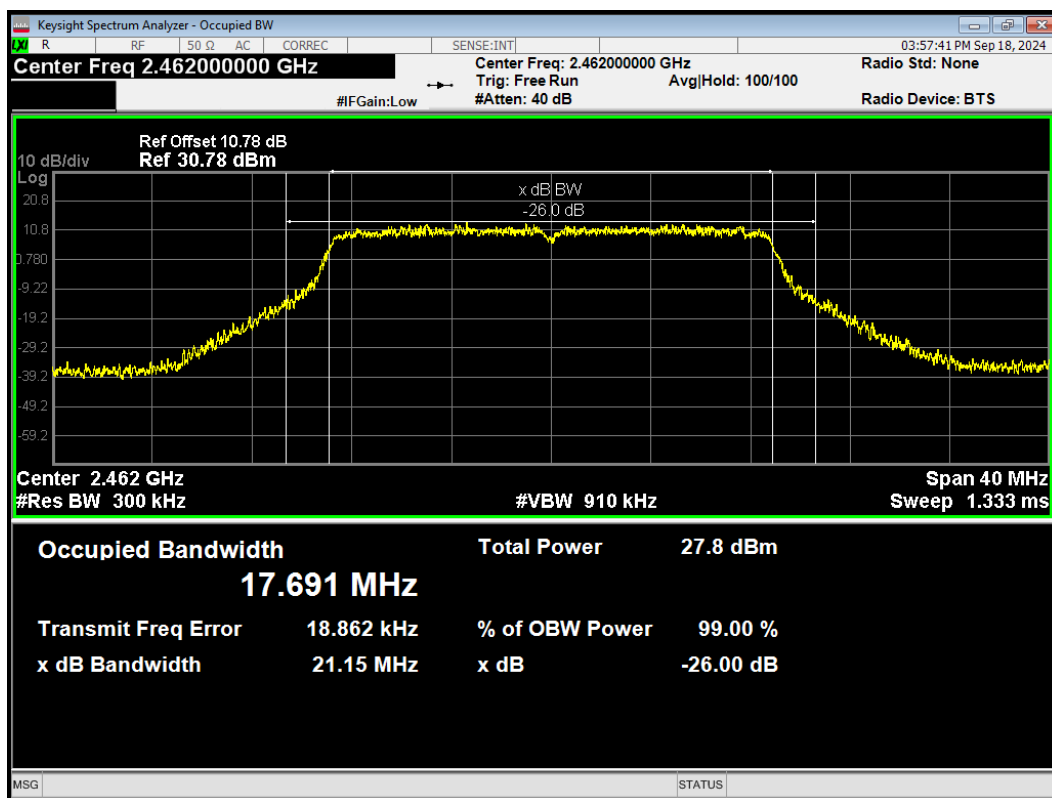


OBW 802.11n(HT40) 2422MHz

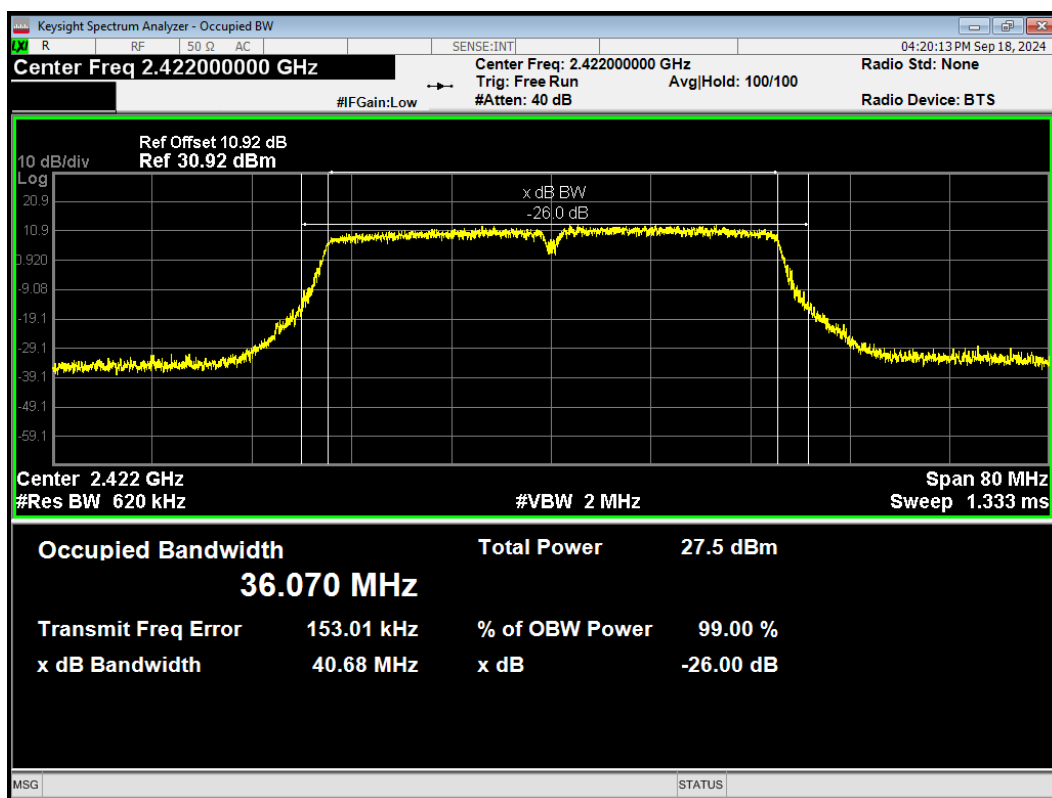

OBW 802.11n(HT40) 2437MHz

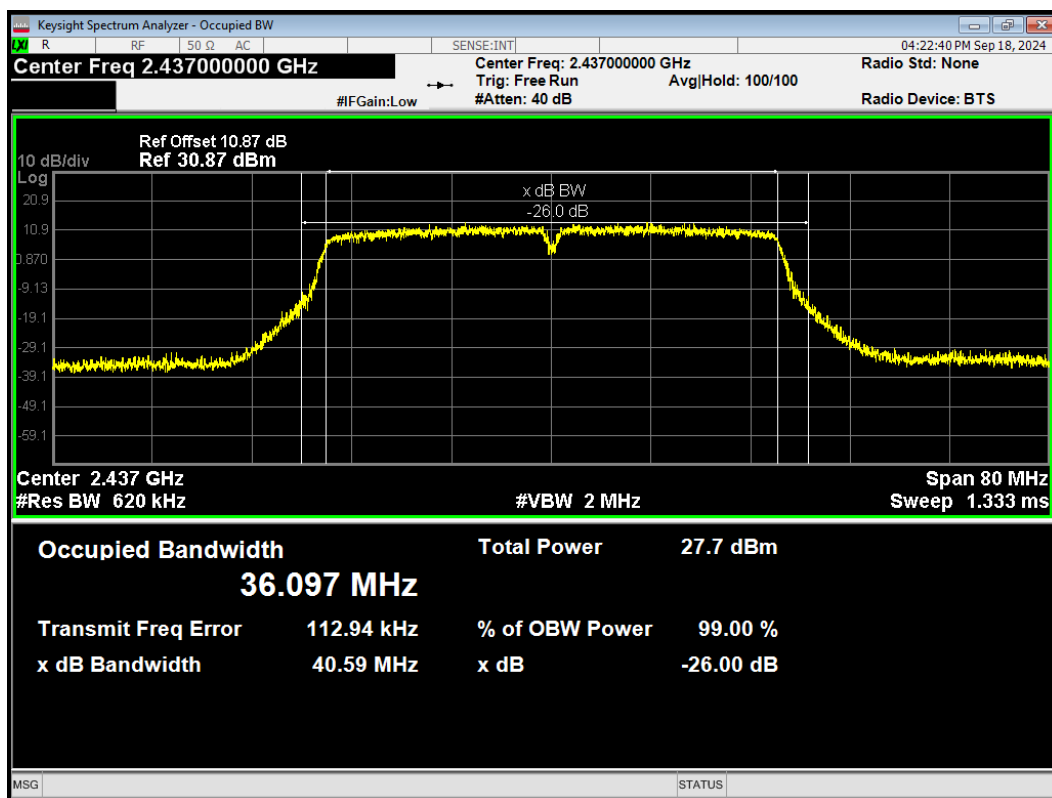


OBW 802.11n(HT40) 2452MHz

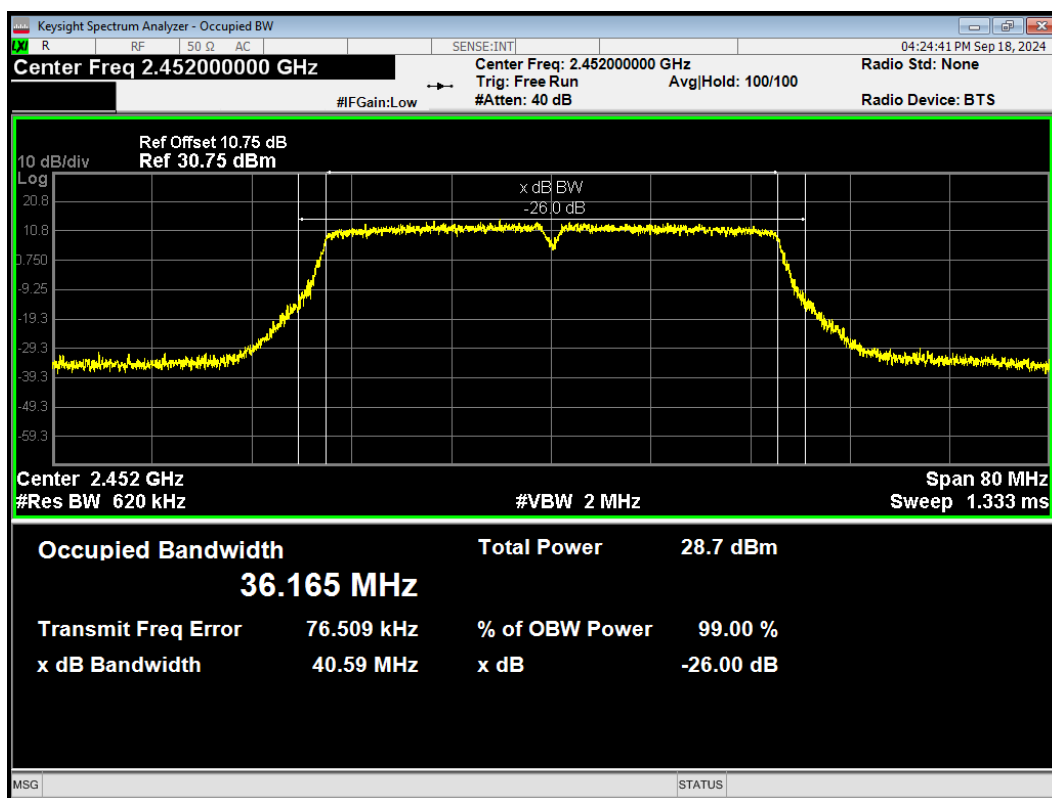


6 dB bandwidth


-6dB Bandwidth 802.11ax(HE20) 2412MHz

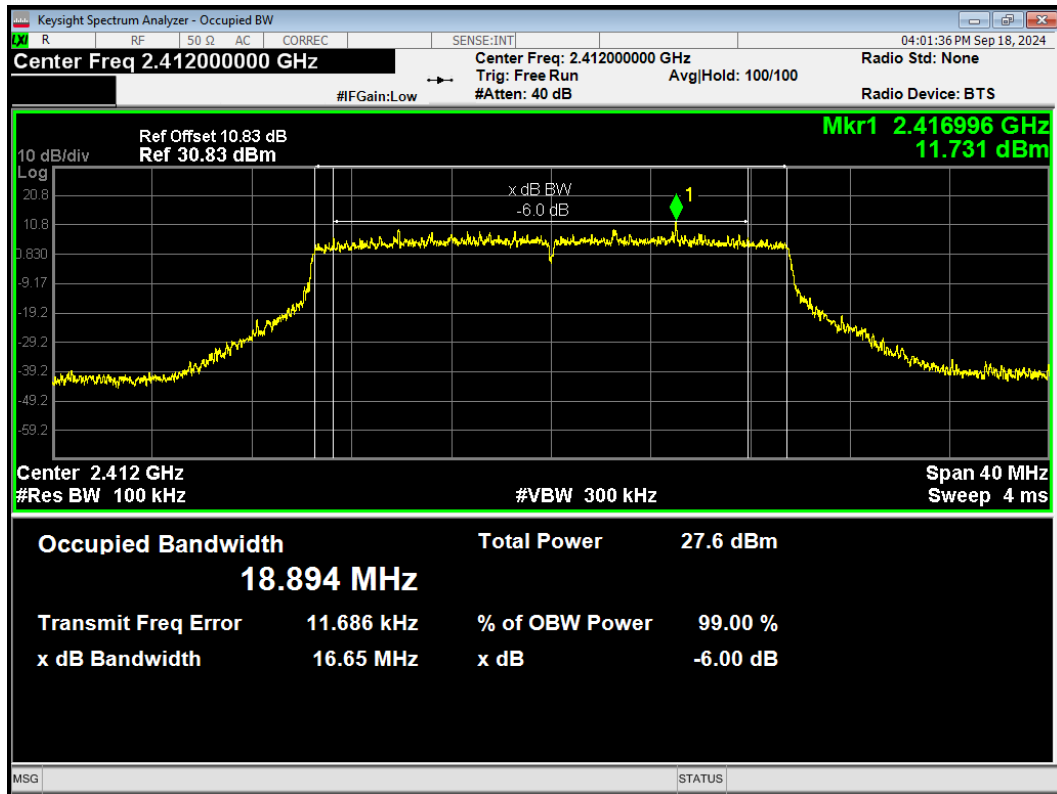


-6dB Bandwidth 802.11ax(HE20) 2437MHz

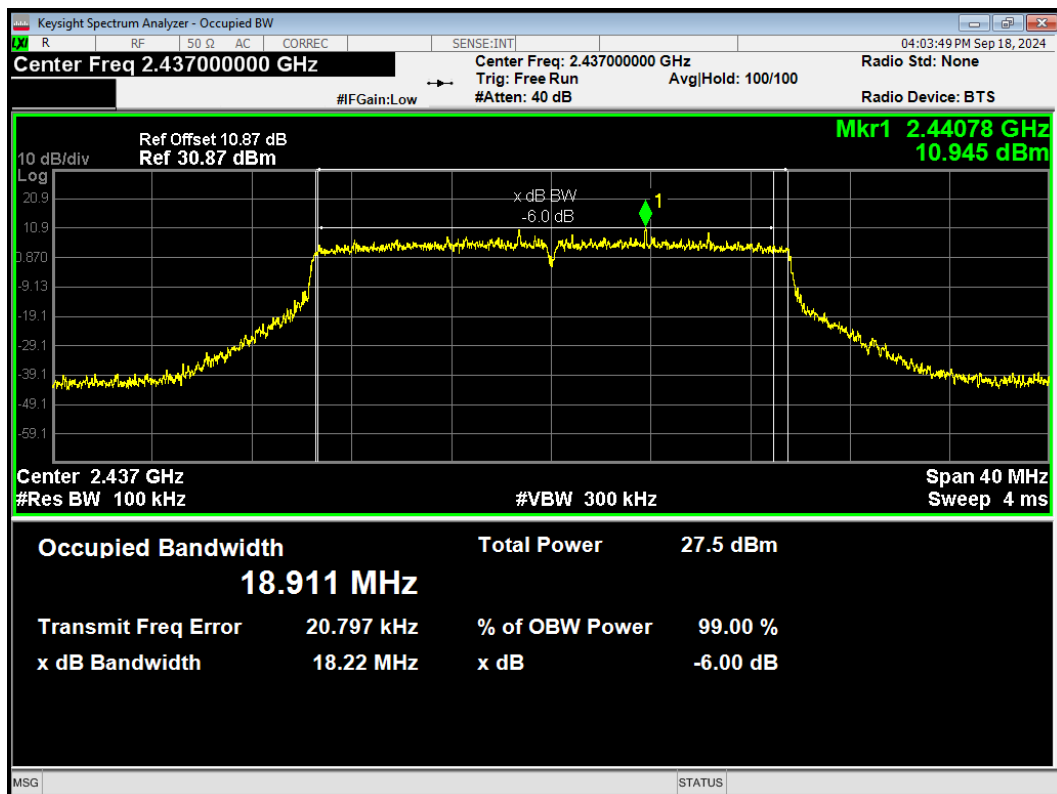


-6dB Bandwidth 802.11ax(HE20) 2462MHz

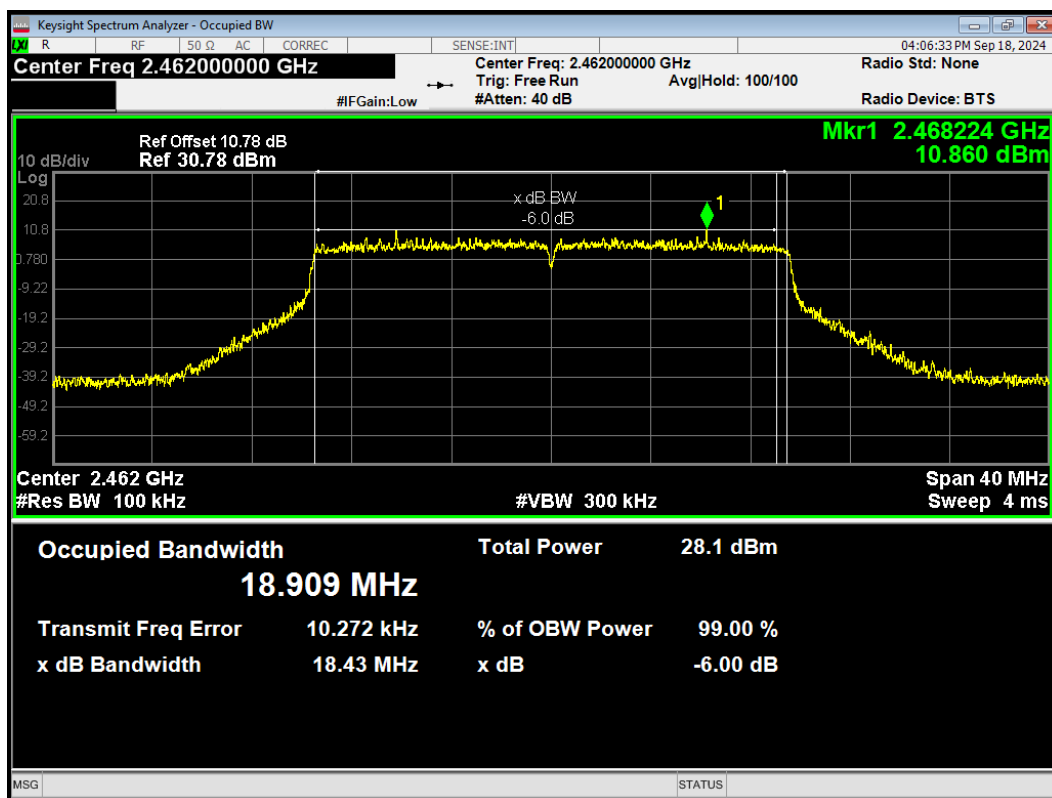


-6dB Bandwidth 802.11ax(HE40) 2422MHz

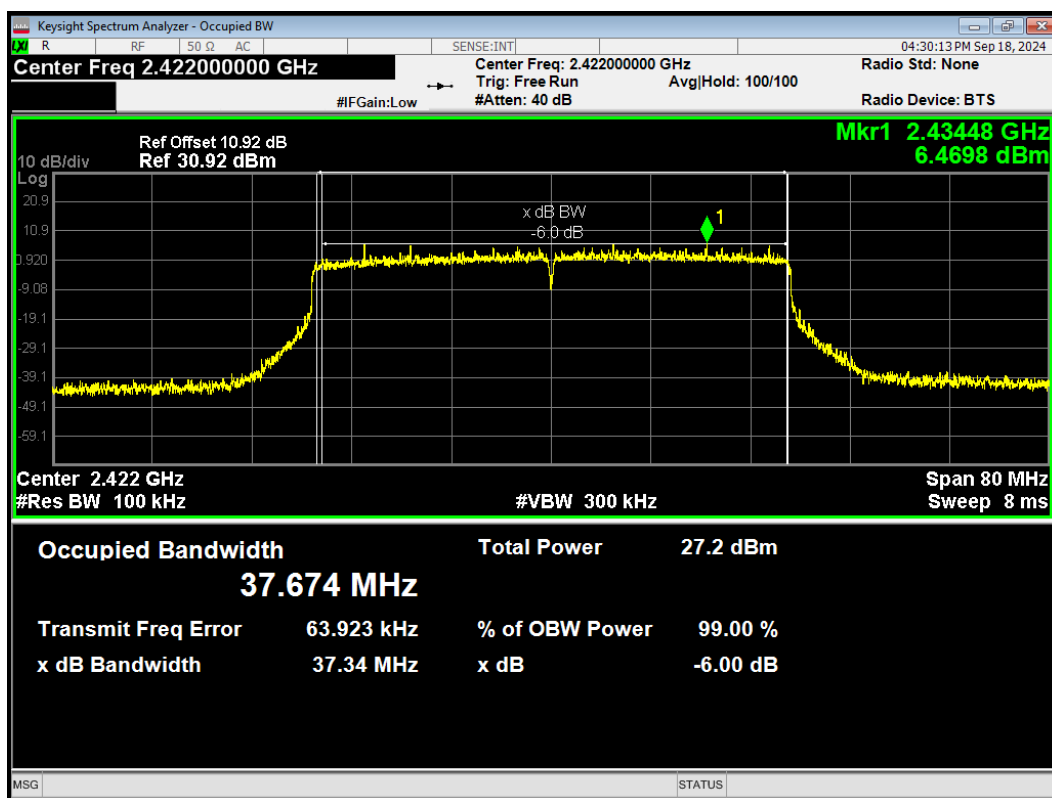


-6dB Bandwidth 802.11ax(HE40) 2437MHz

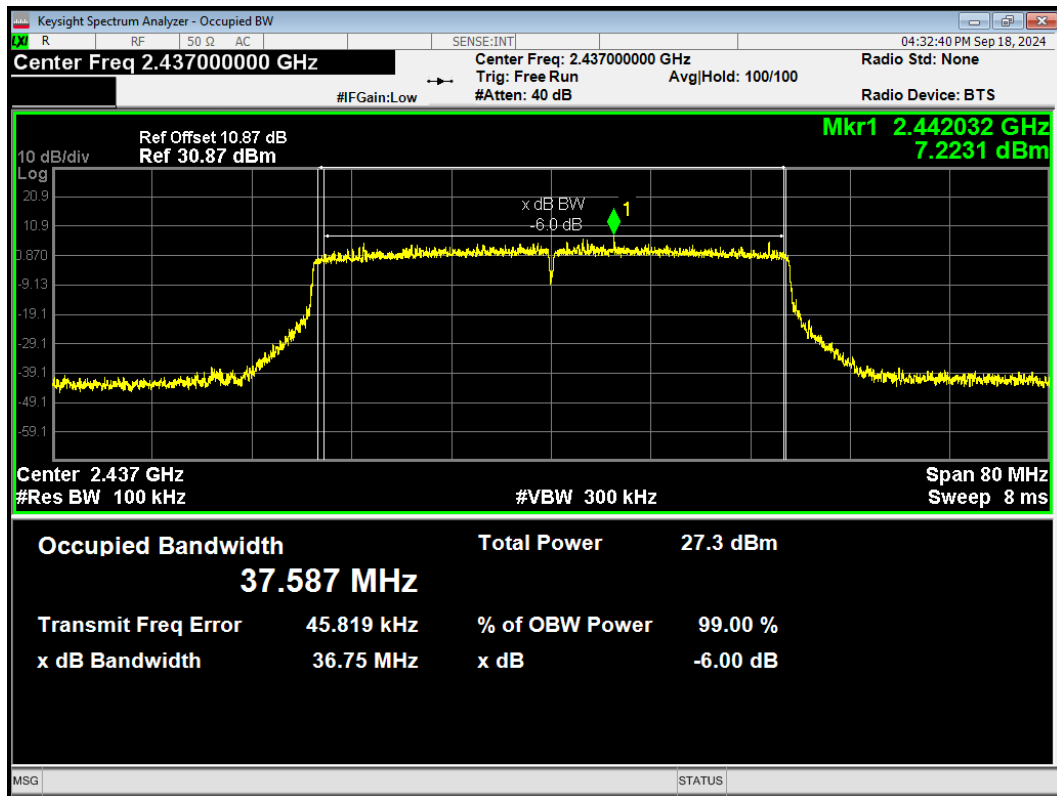


-6dB Bandwidth 802.11ax(HE40) 2452MHz

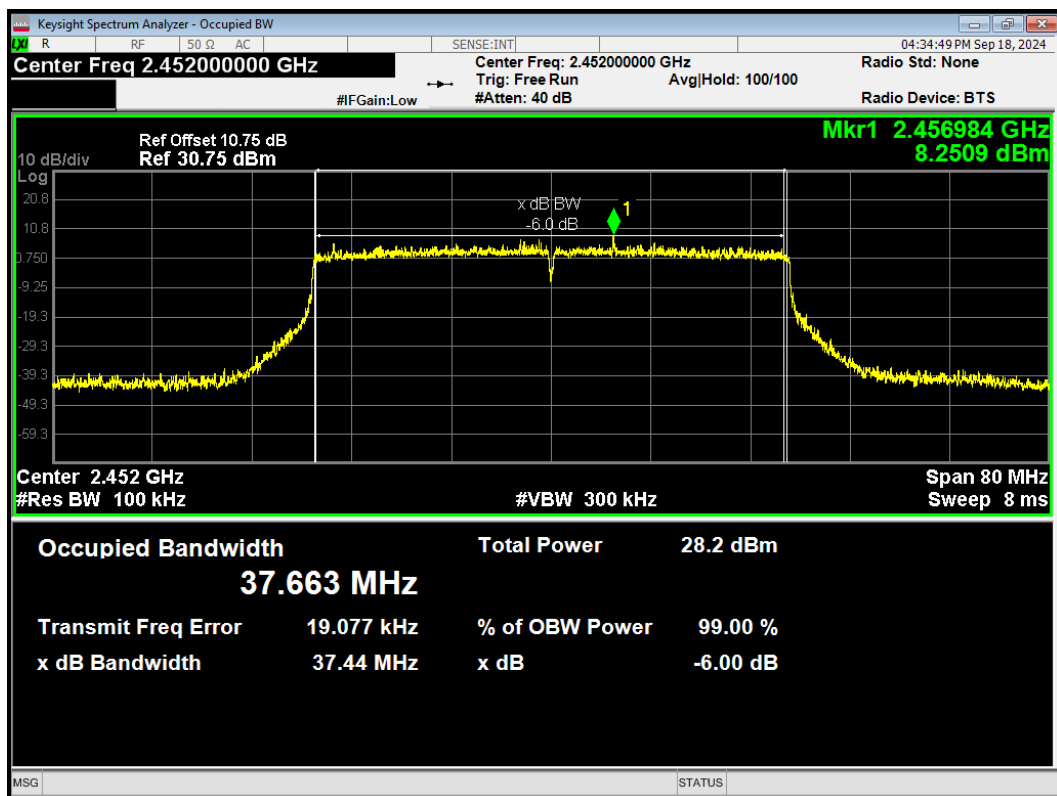


-6dB Bandwidth 802.11b 2412MHz

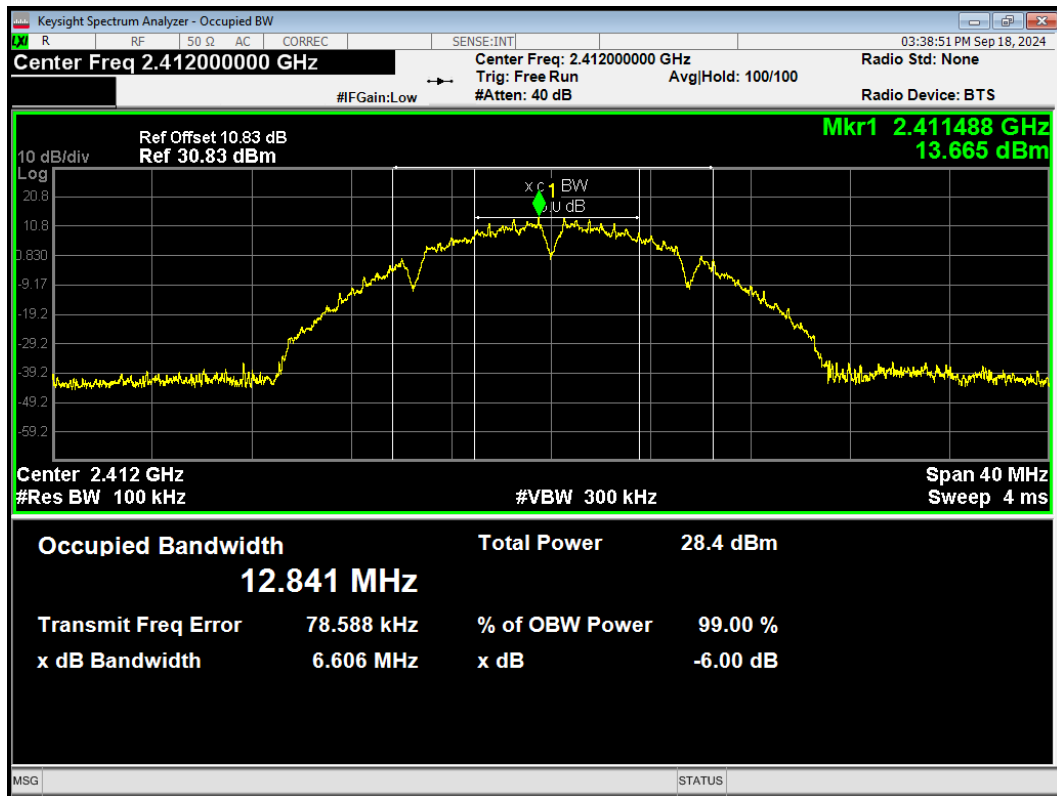


-6dB Bandwidth 802.11b 2437MHz

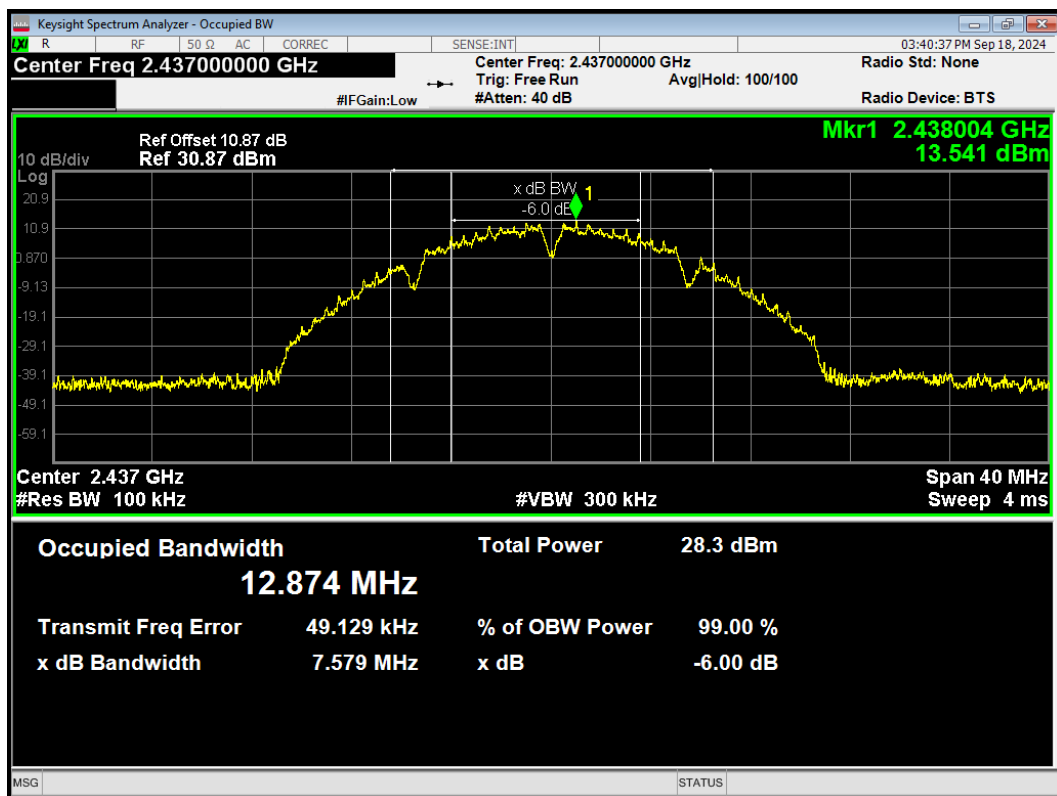


-6dB Bandwidth 802.11b 2462MHz

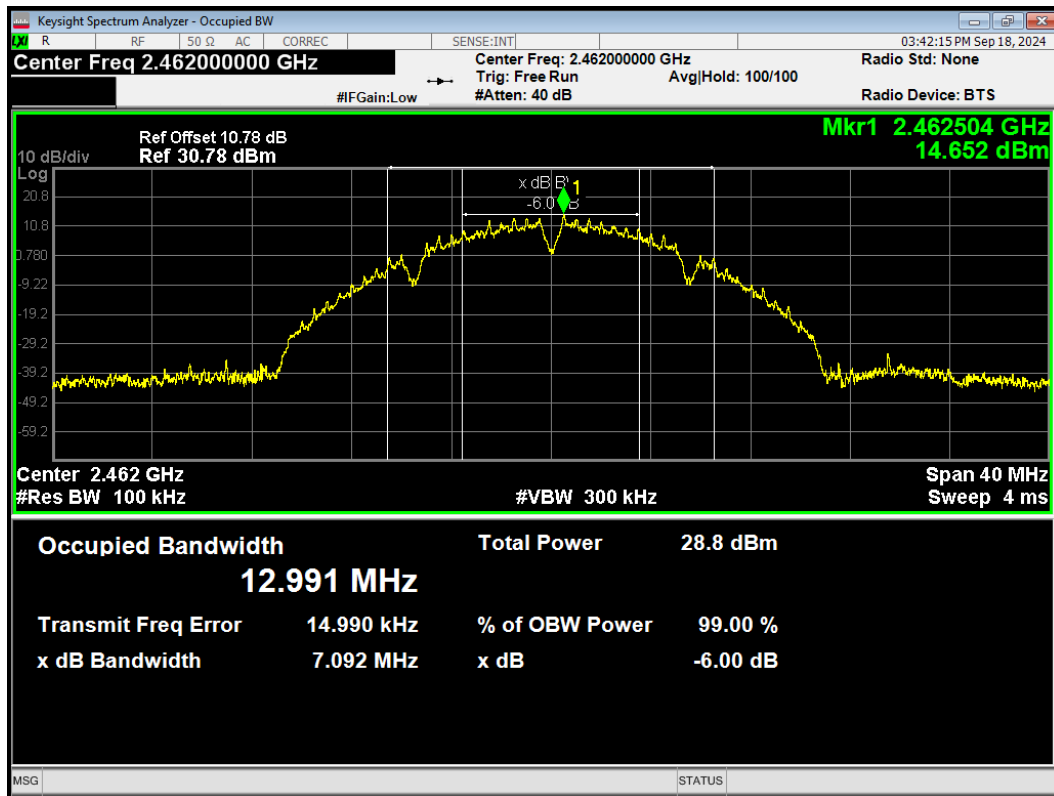


-6dB Bandwidth 802.11g 2412MHz

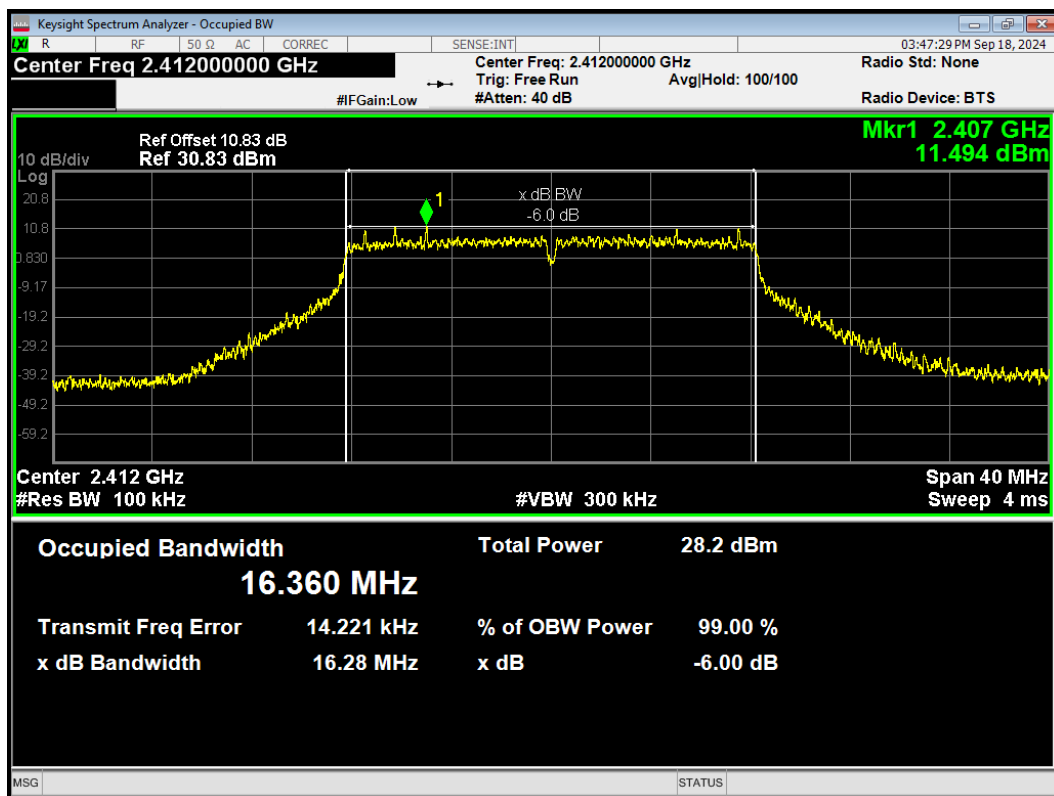


-6dB Bandwidth 802.11g 2437MHz

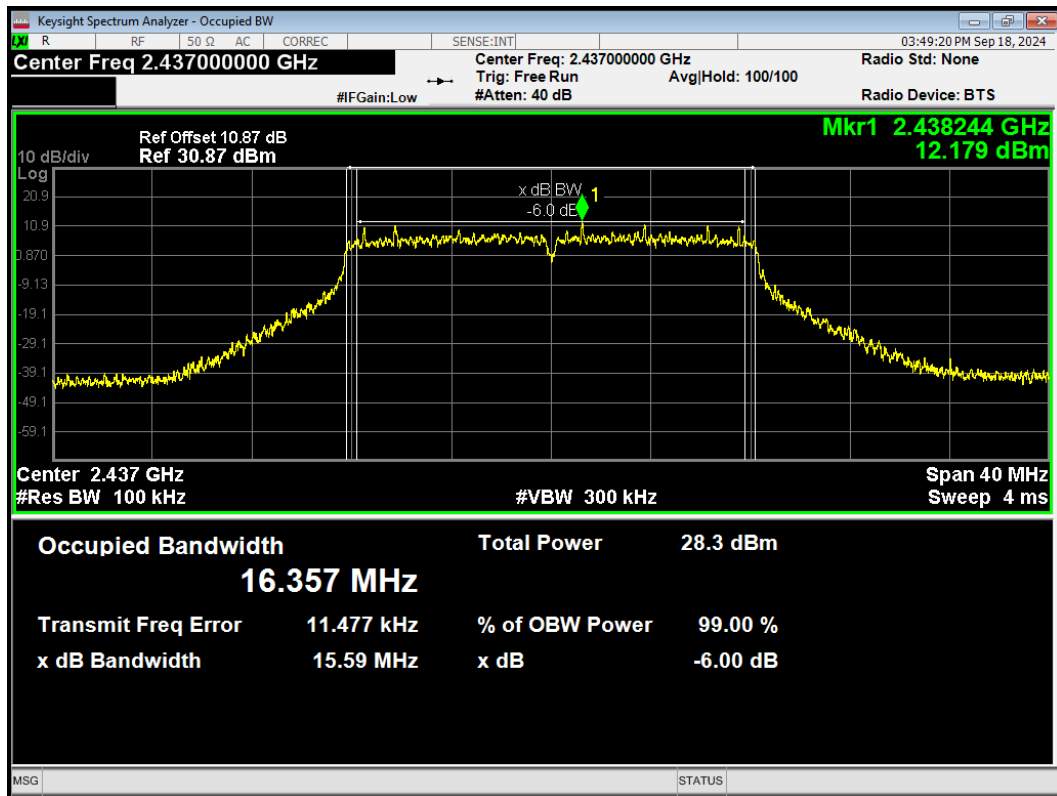


-6dB Bandwidth 802.11g 2462MHz

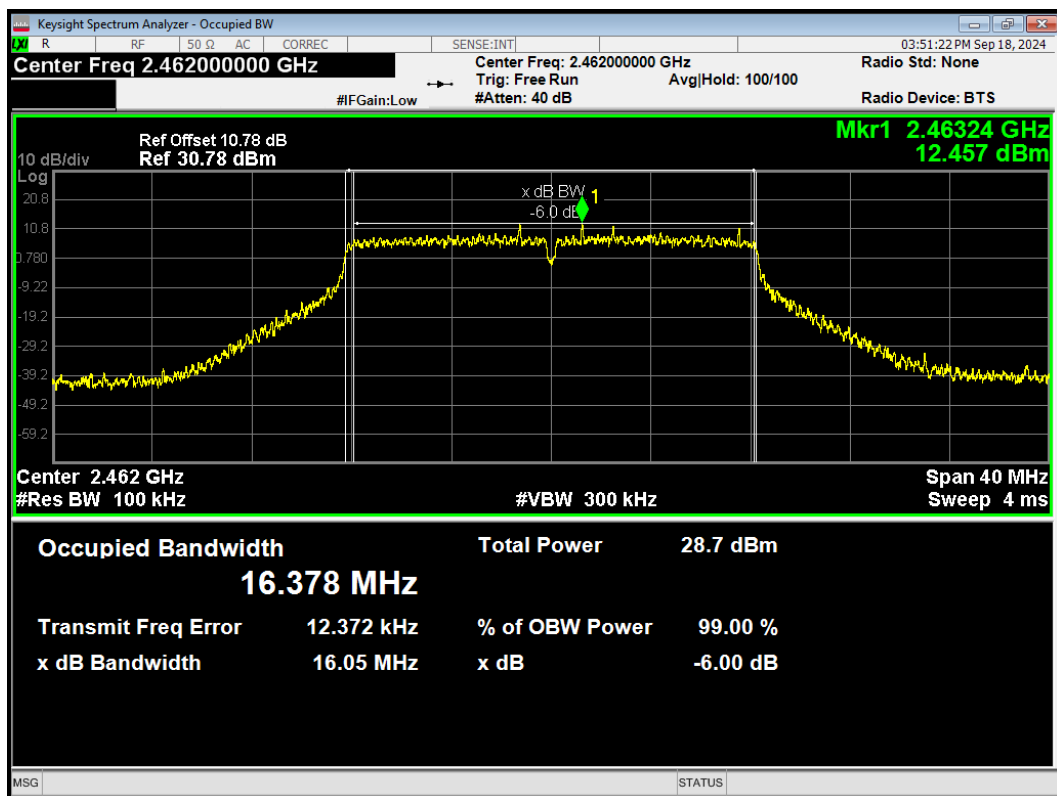


-6dB Bandwidth 802.11n(HT20) 2412MHz

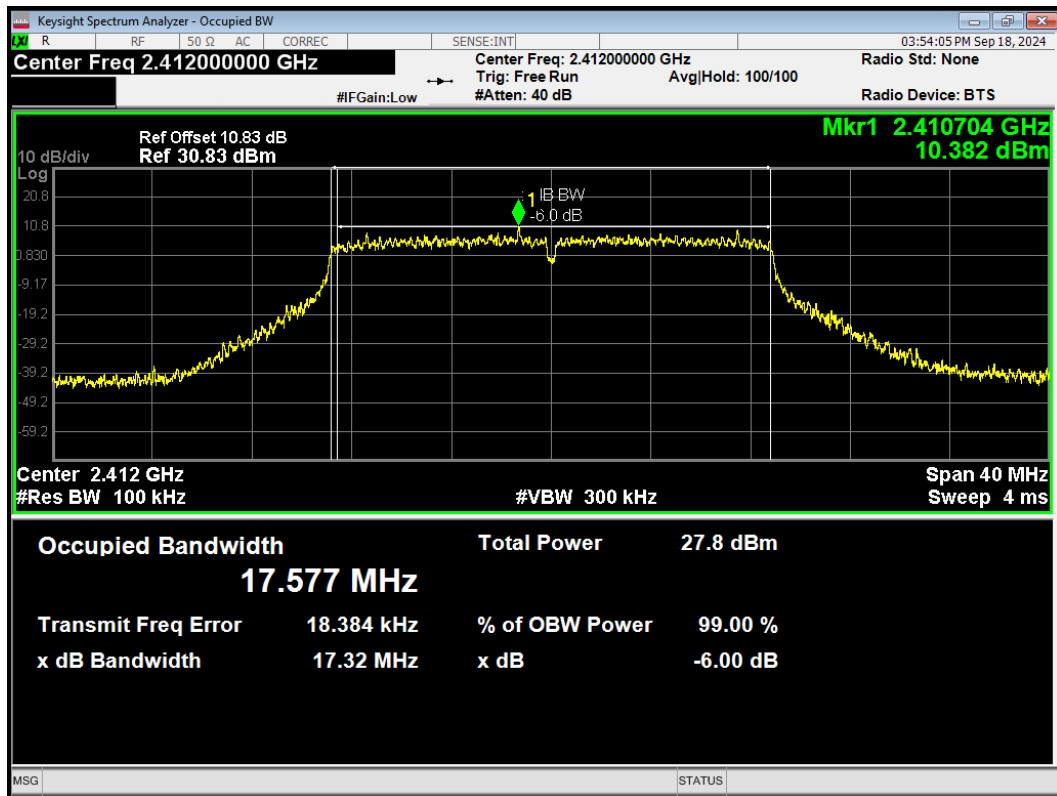


-6dB Bandwidth 802.11n(HT20) 2437MHz

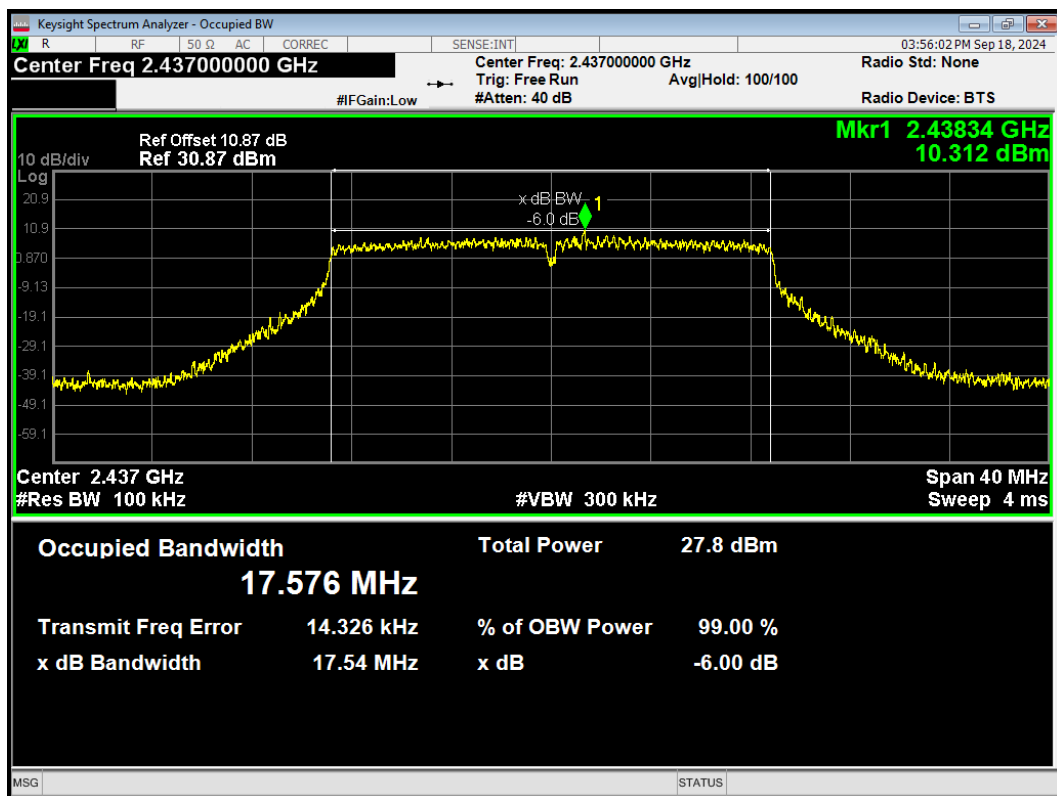


-6dB Bandwidth 802.11n(HT20) 2462MHz

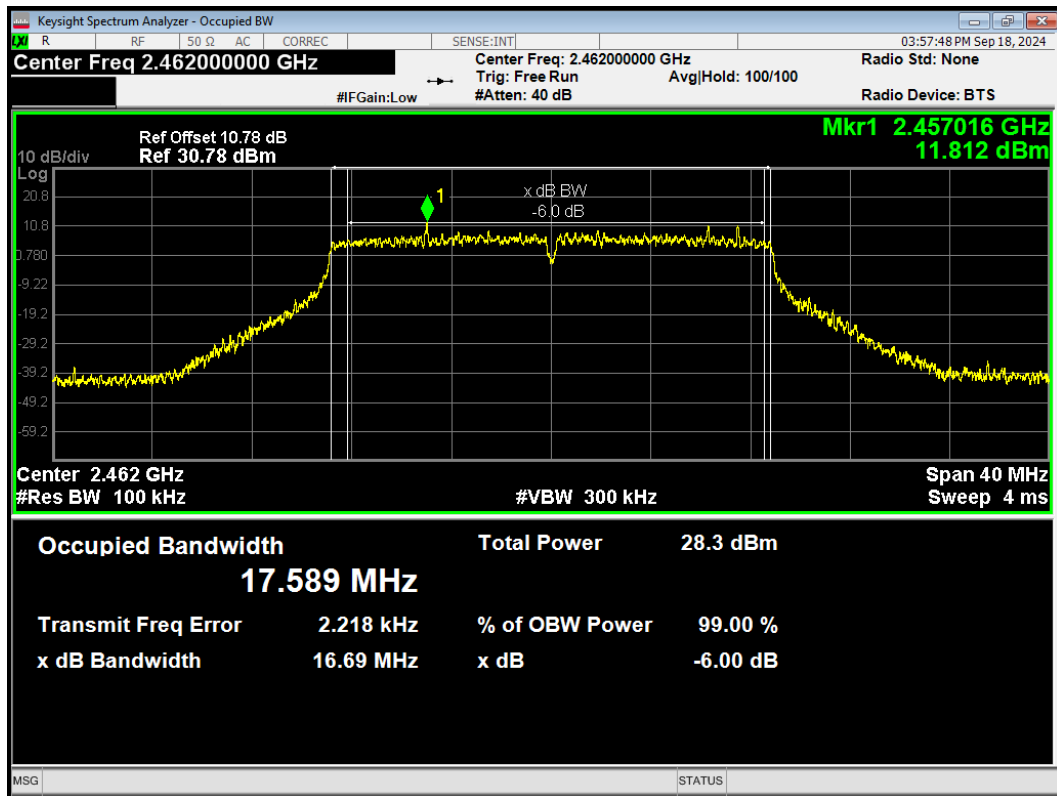


-6dB Bandwidth 802.11n(HT40) 2422MHz

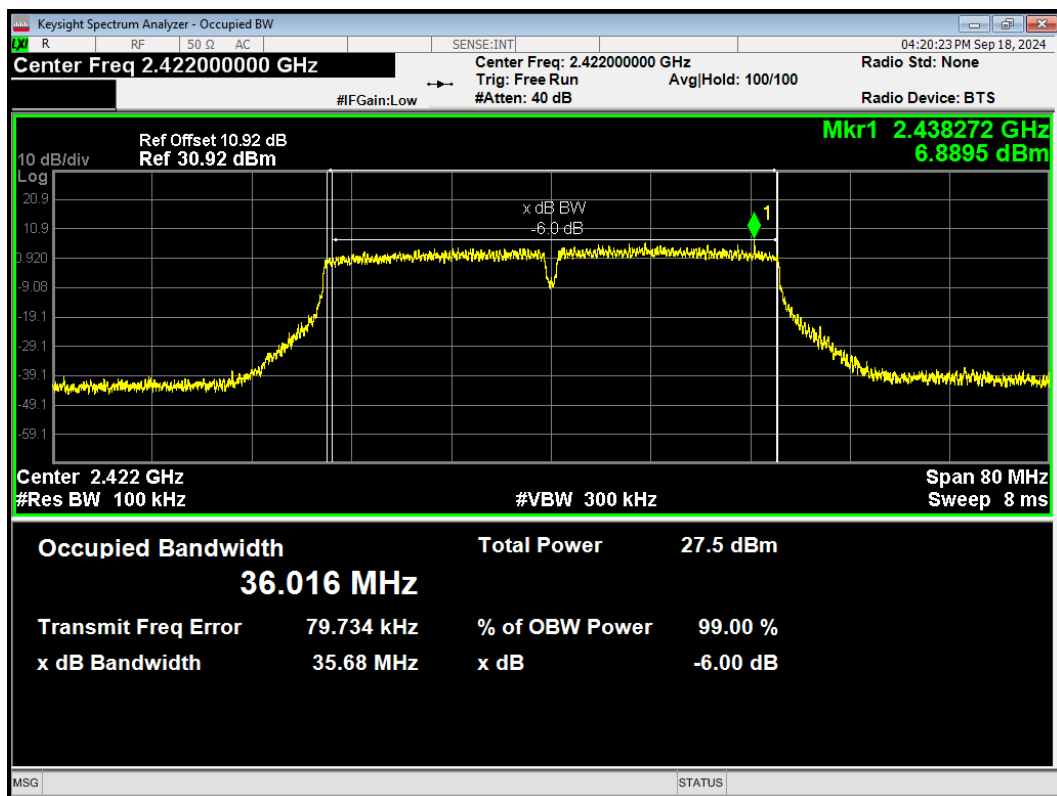

-6dB Bandwidth 802.11n(HT40) 2437MHz

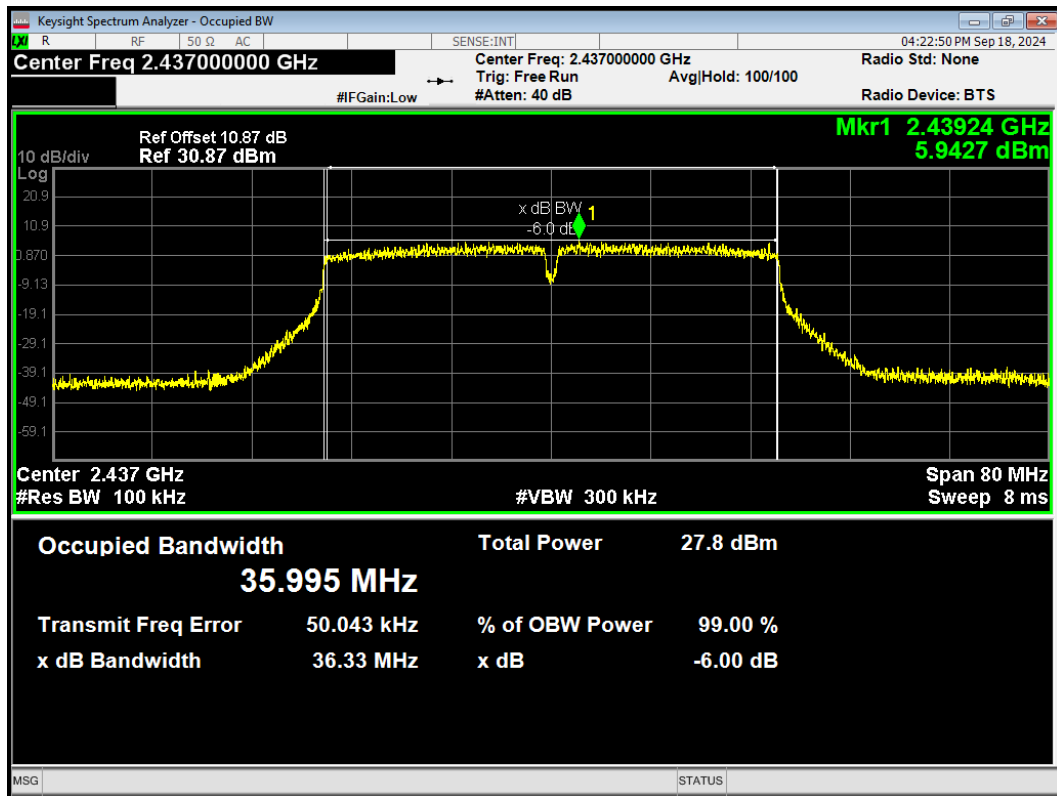

-6dB Bandwidth 802.11n(HT40) 2452MHz

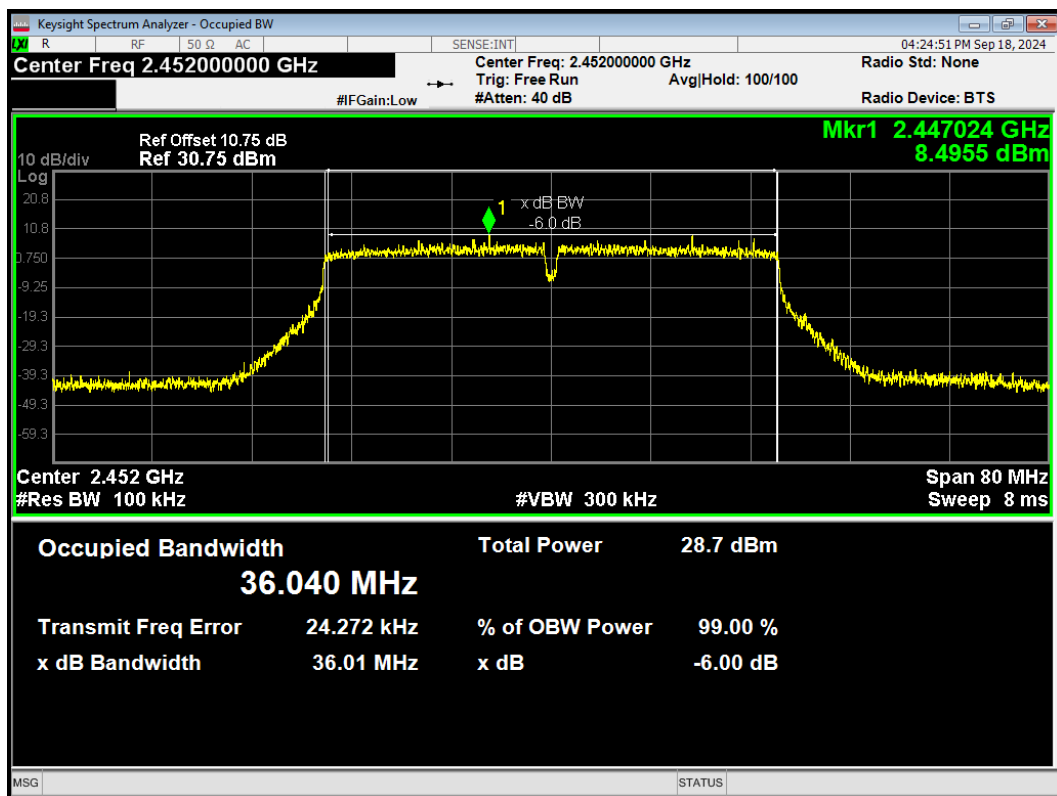

5.3. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB

Test Results: PASS


Band Edge 802.11ax(HE20) 2412MHz Ref

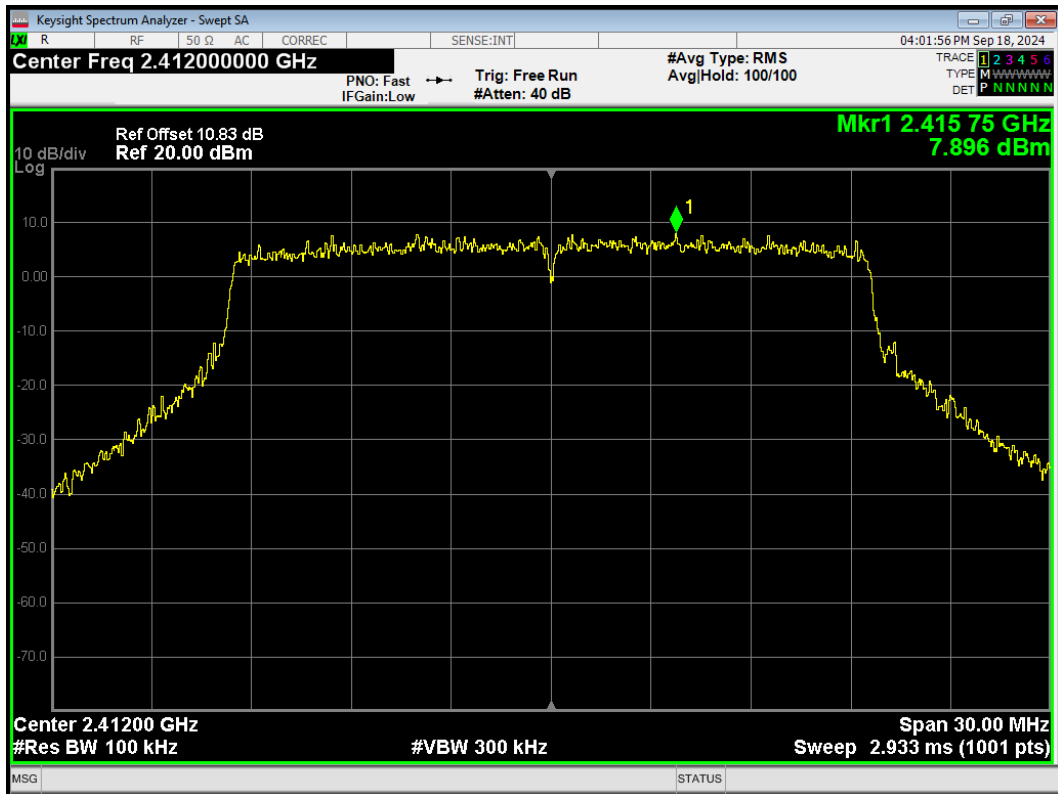


Band Edge 802.11ax(HE20) 2412MHz Emission

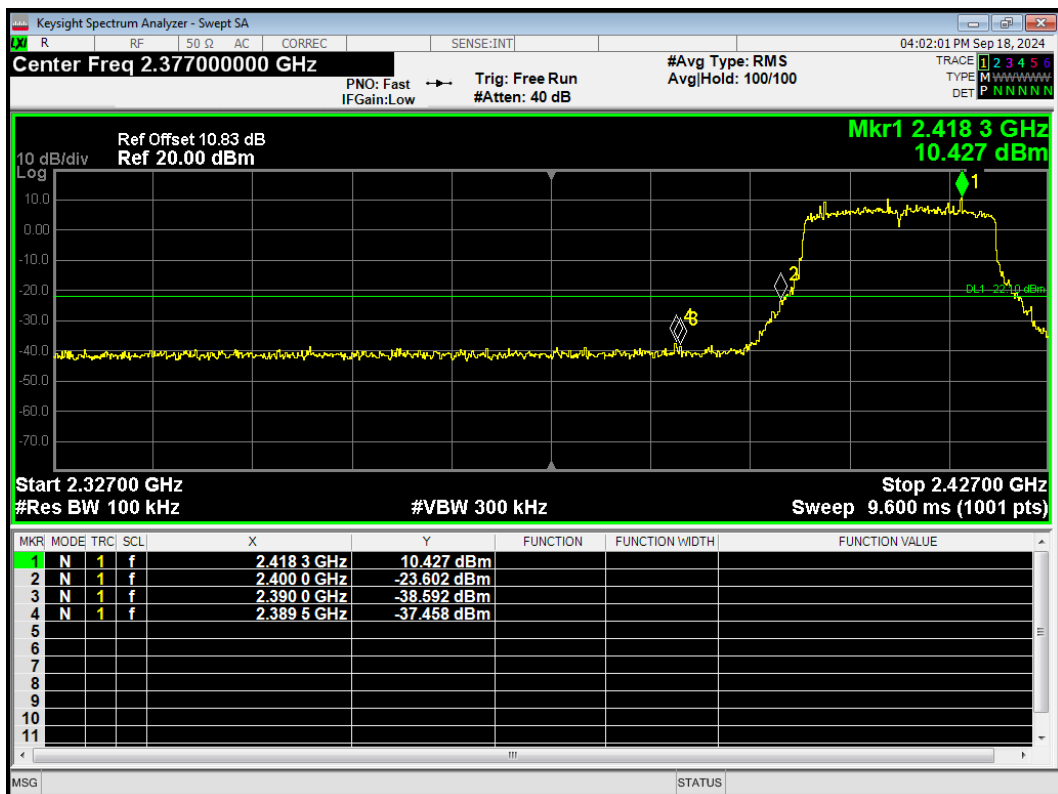


Band Edge 802.11ax(HE20) 2462MHz Ref

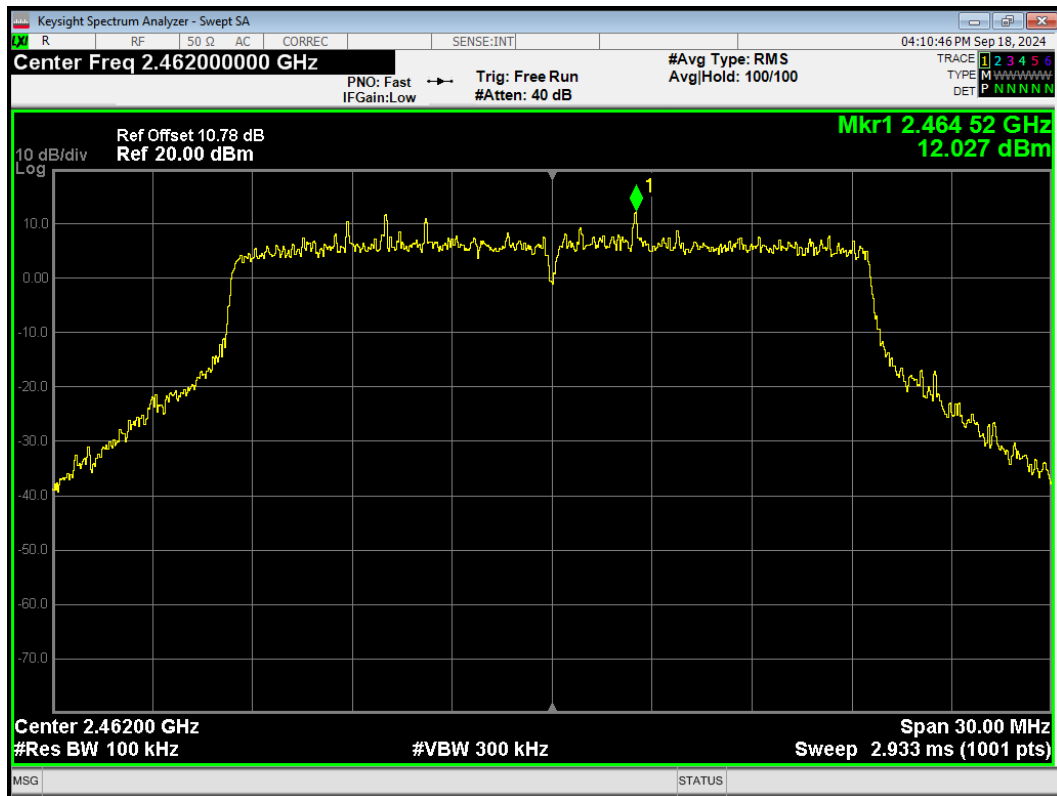


Band Edge 802.11ax(HE20) 2462MHz Emission

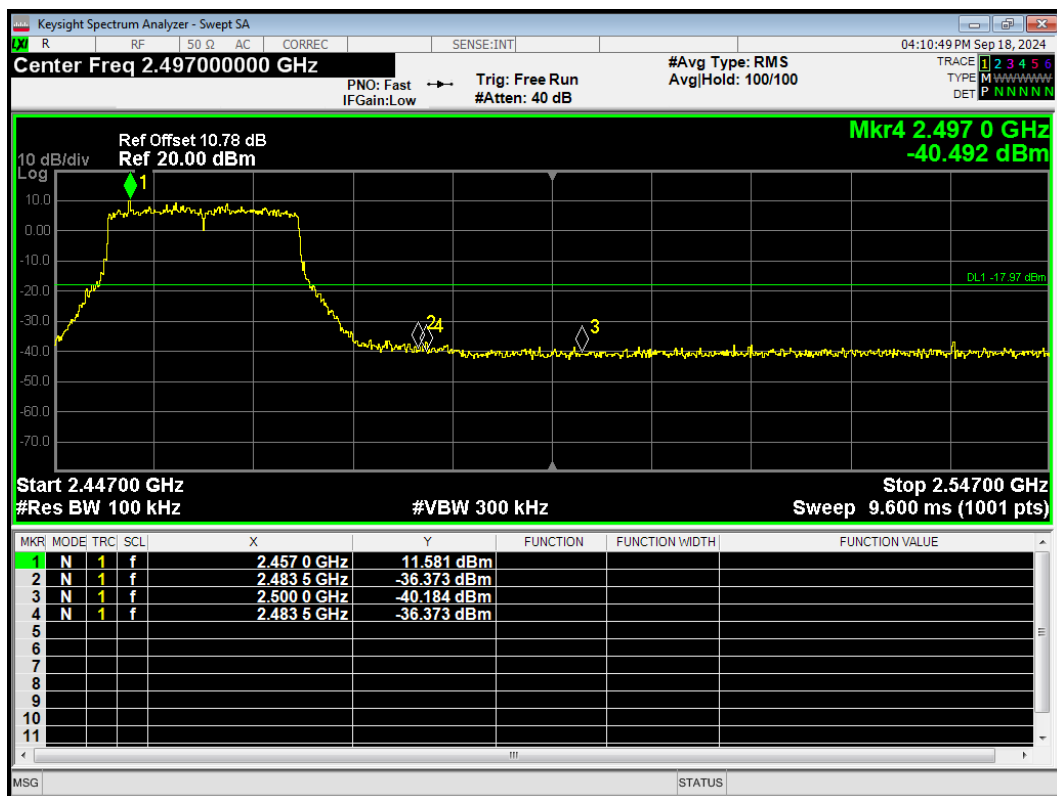


Band Edge 802.11ax(HE40) 2422MHz Ref

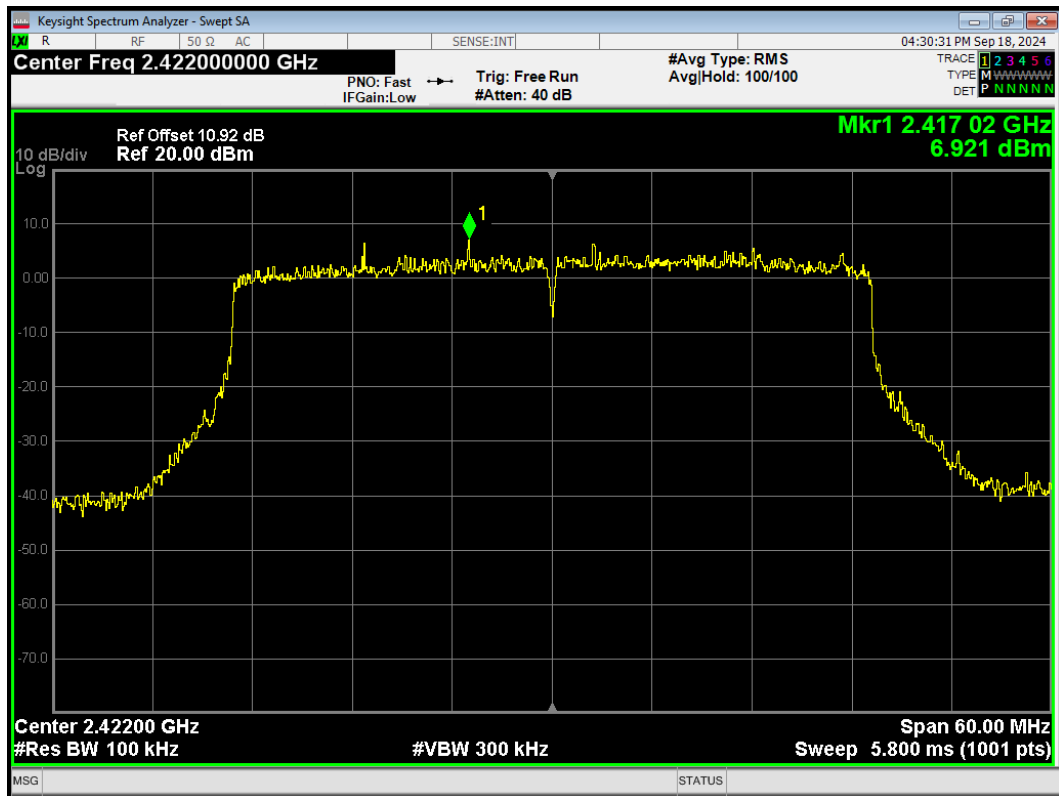


Band Edge 802.11ax(HE40) 2422MHz Emission

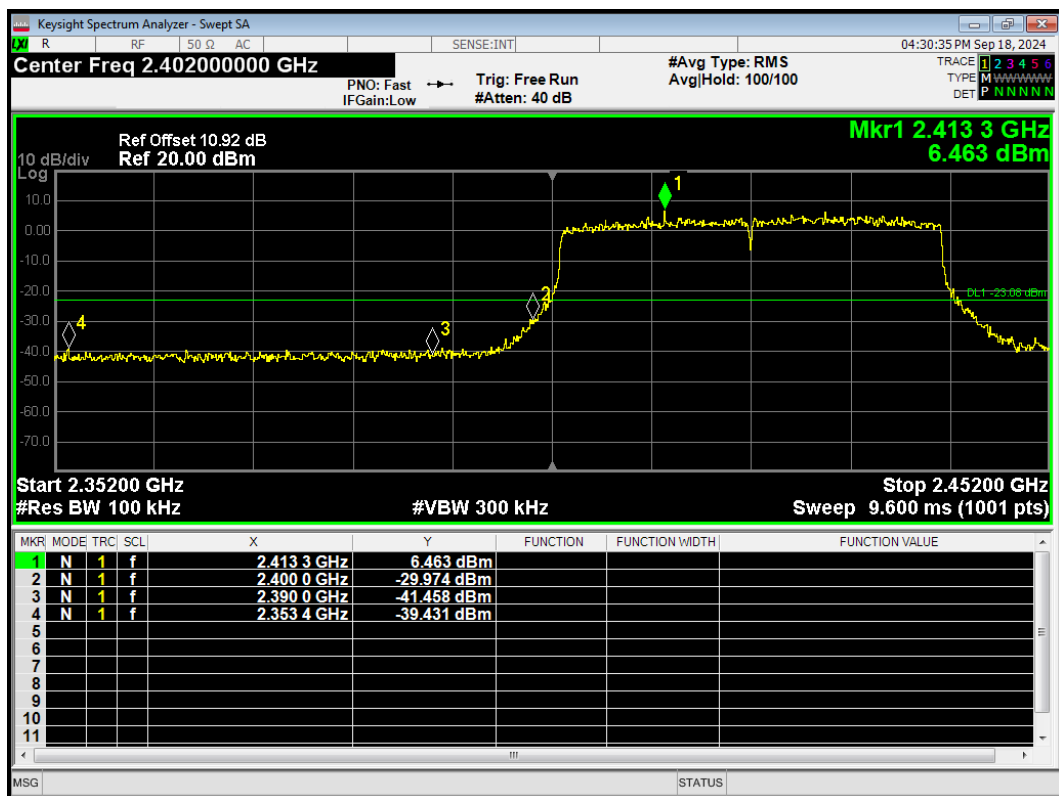


Band Edge 802.11ax(HE40) 2452MHz Ref

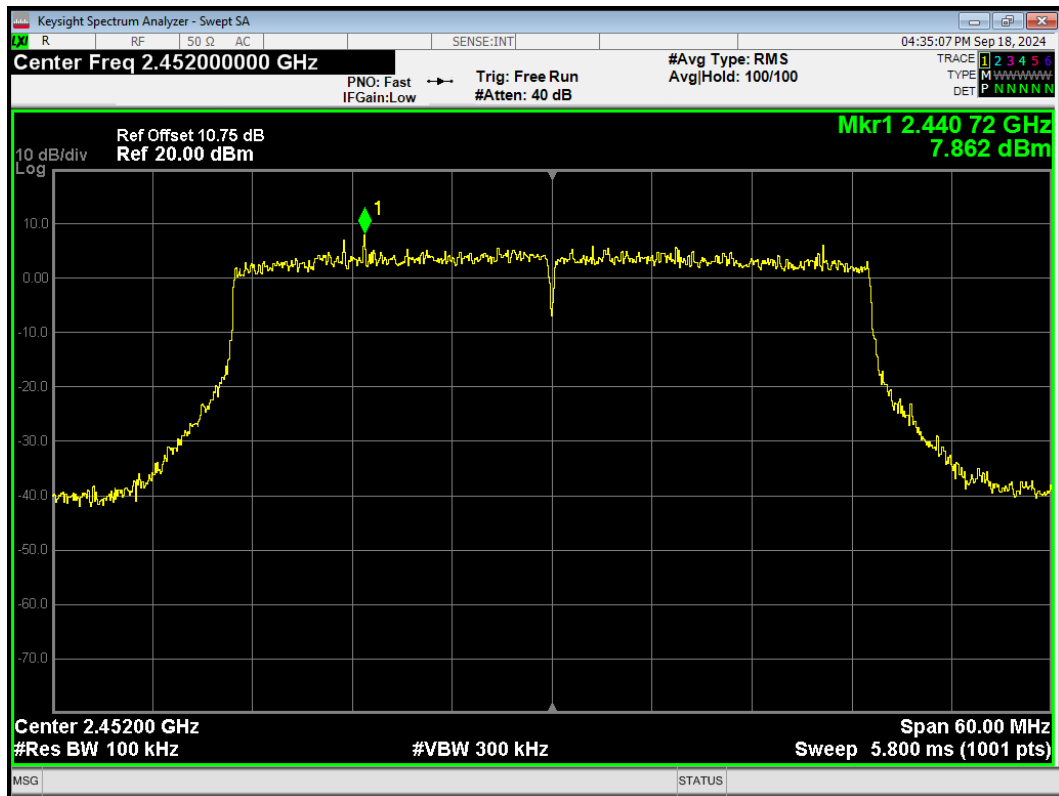


Band Edge 802.11ax(HE40) 2452MHz Emission

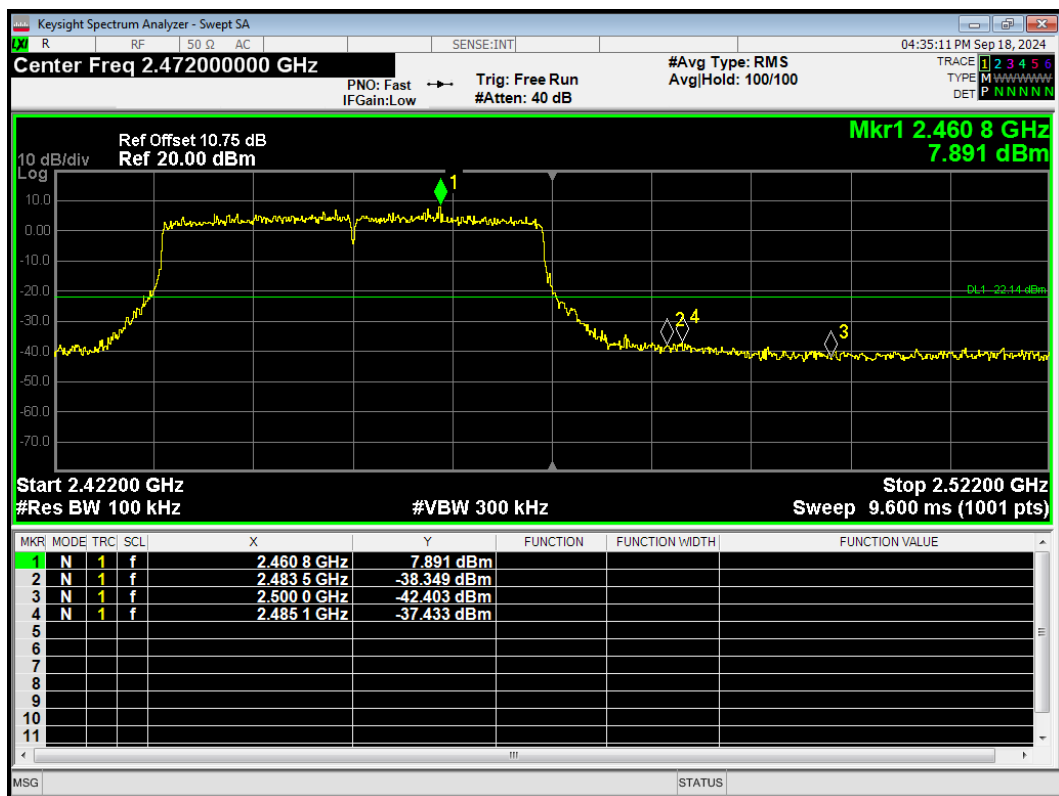


Band Edge 802.11b 2412MHz Ref

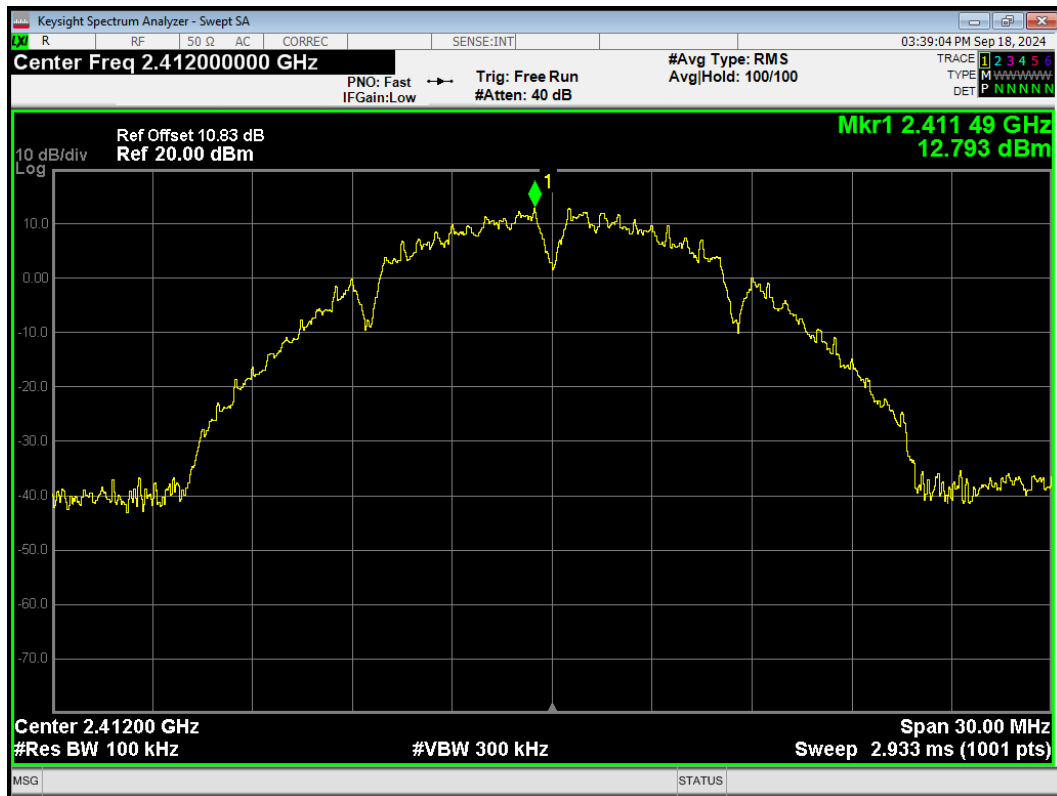


Band Edge 802.11b 2412MHz Emission

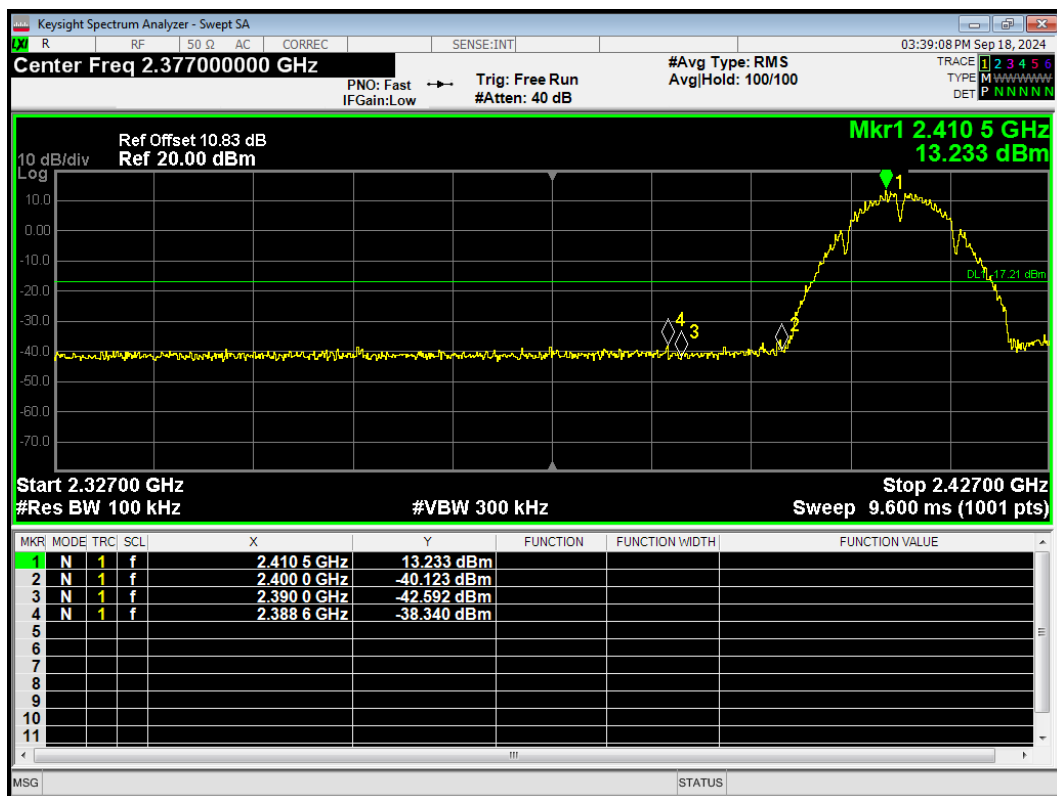


Band Edge 802.11b 2462MHz Ref

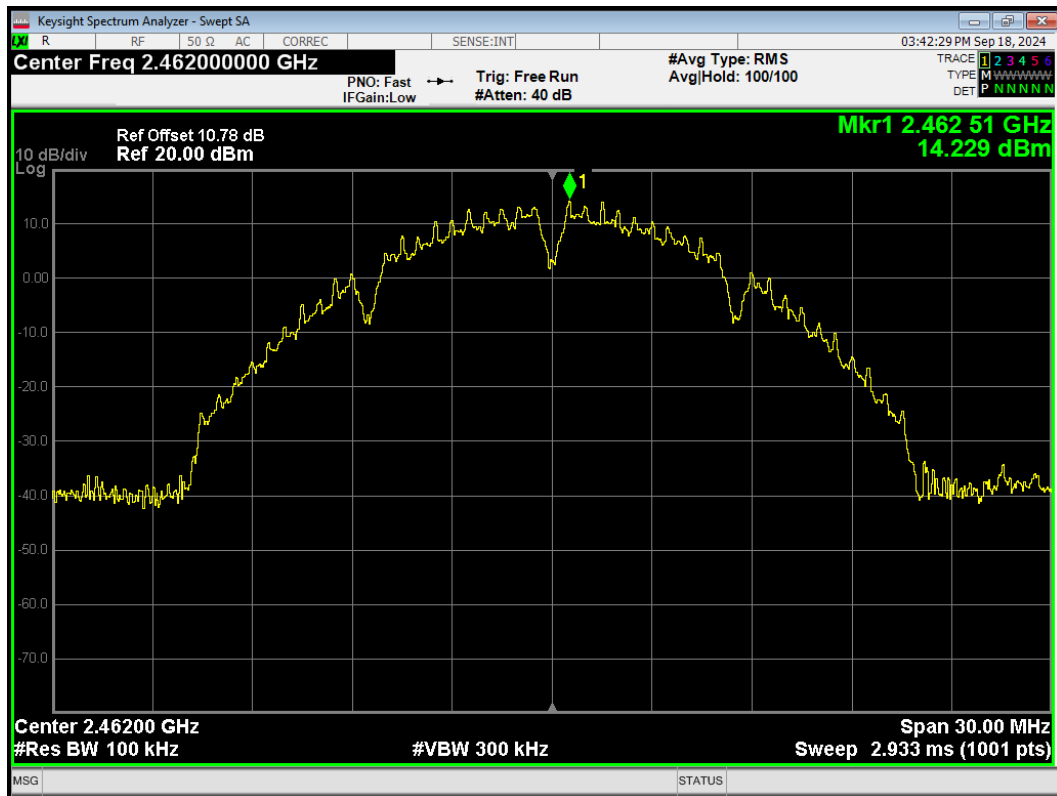


Band Edge 802.11b 2462MHz Emission

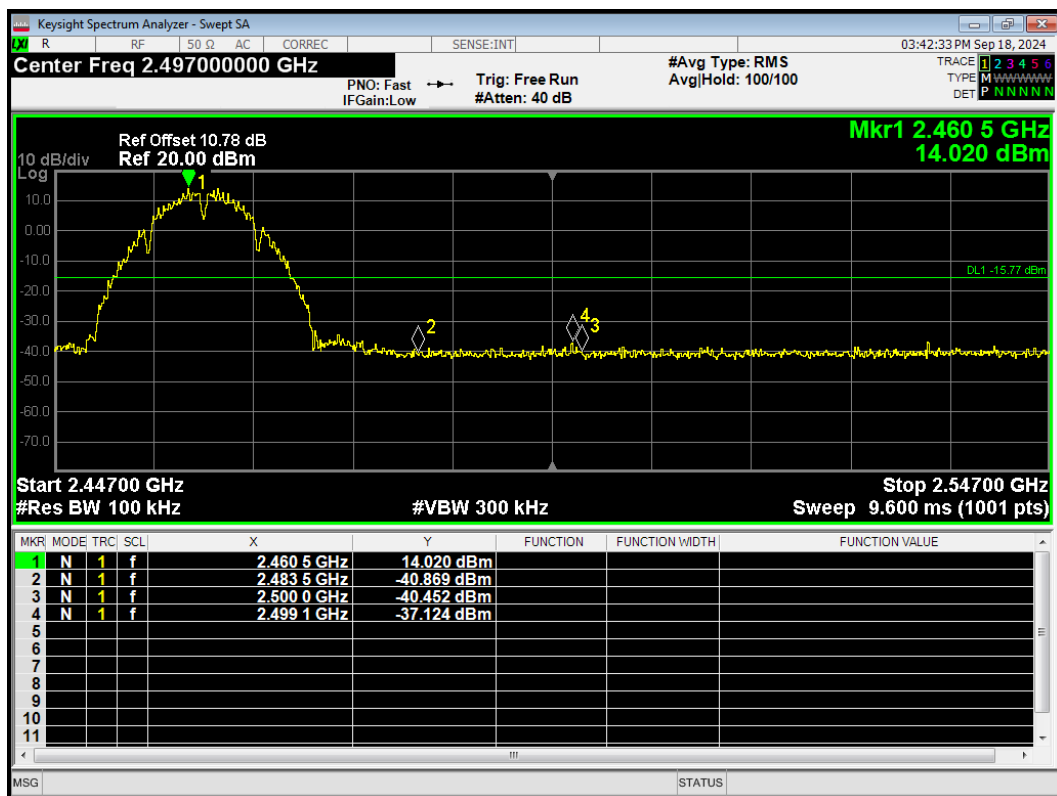


Band Edge 802.11g 2412MHz Ref

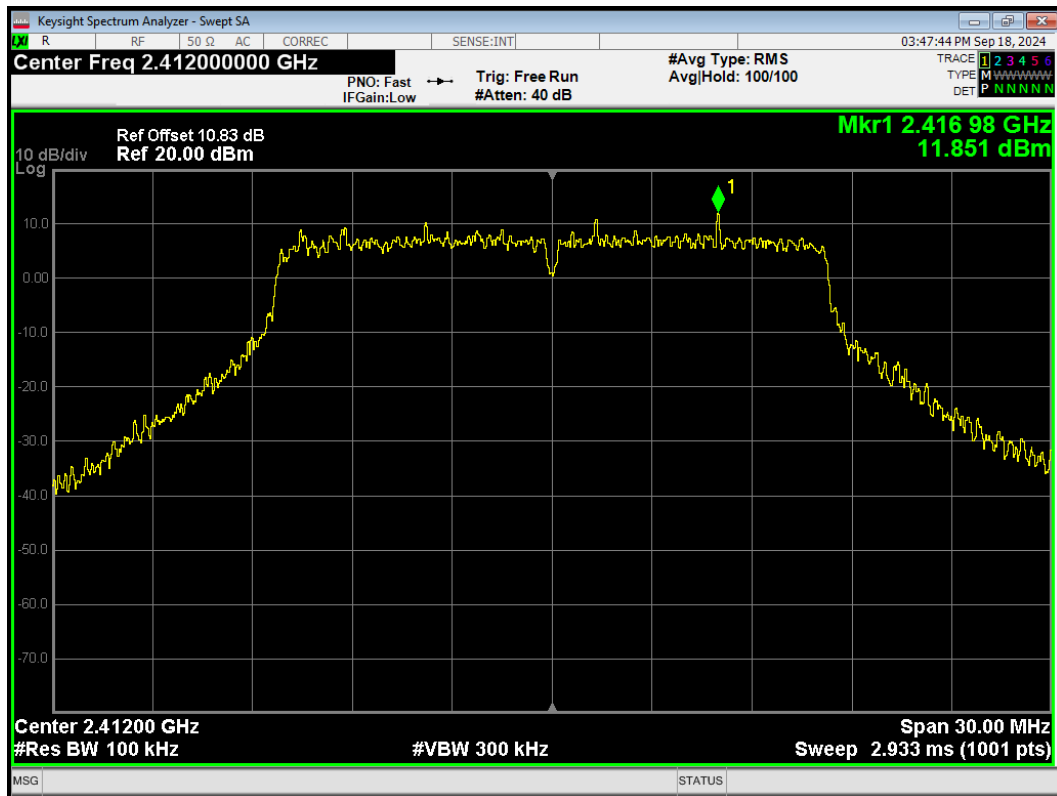


Band Edge 802.11g 2412MHz Emission

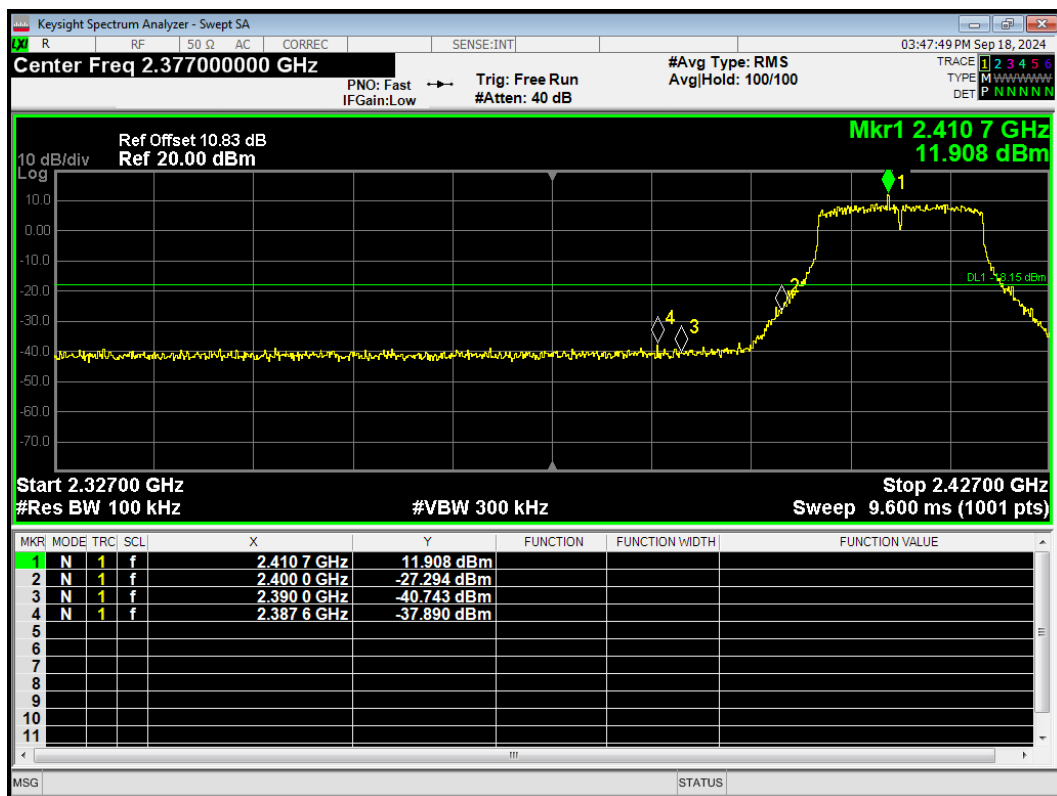


Band Edge 802.11g 2462MHz Ref

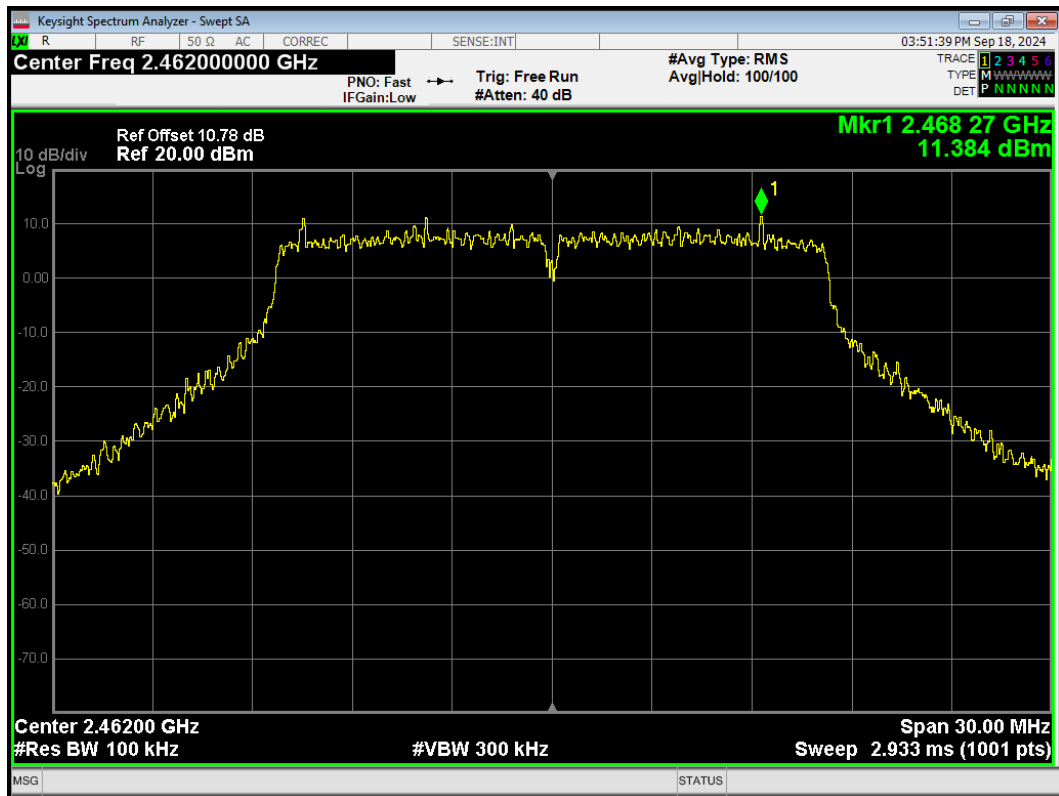


Band Edge 802.11g 2462MHz Emission

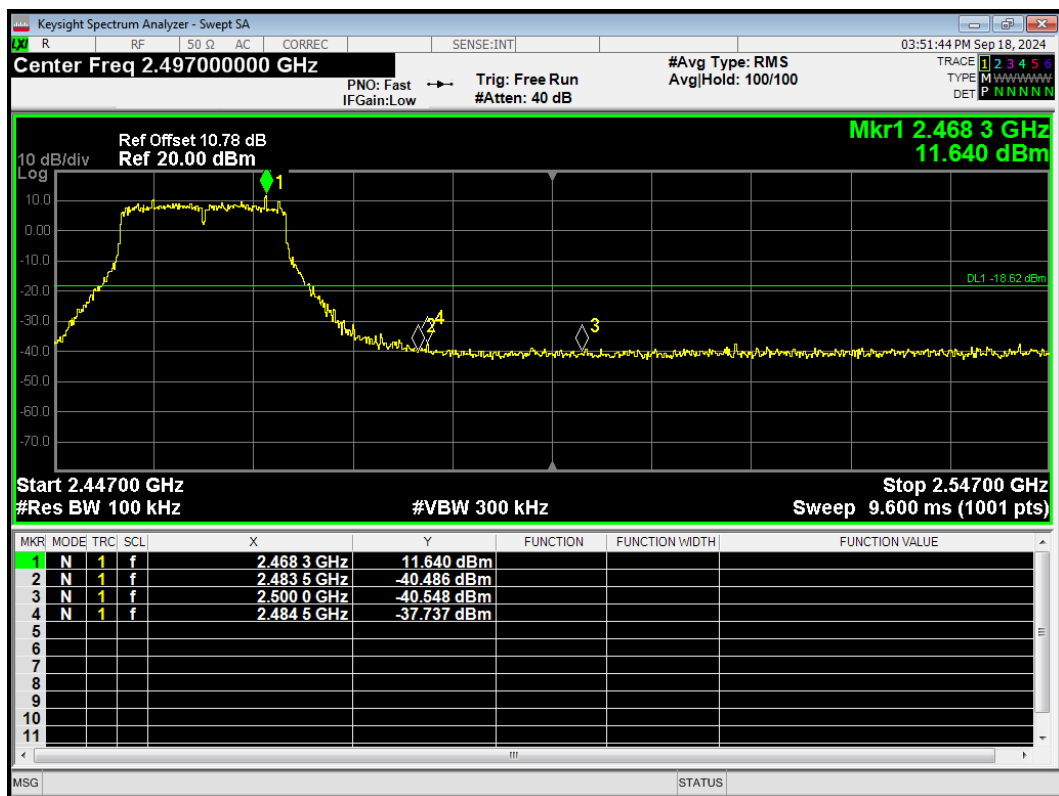


Band Edge 802.11n(HT20) 2412MHz Ref

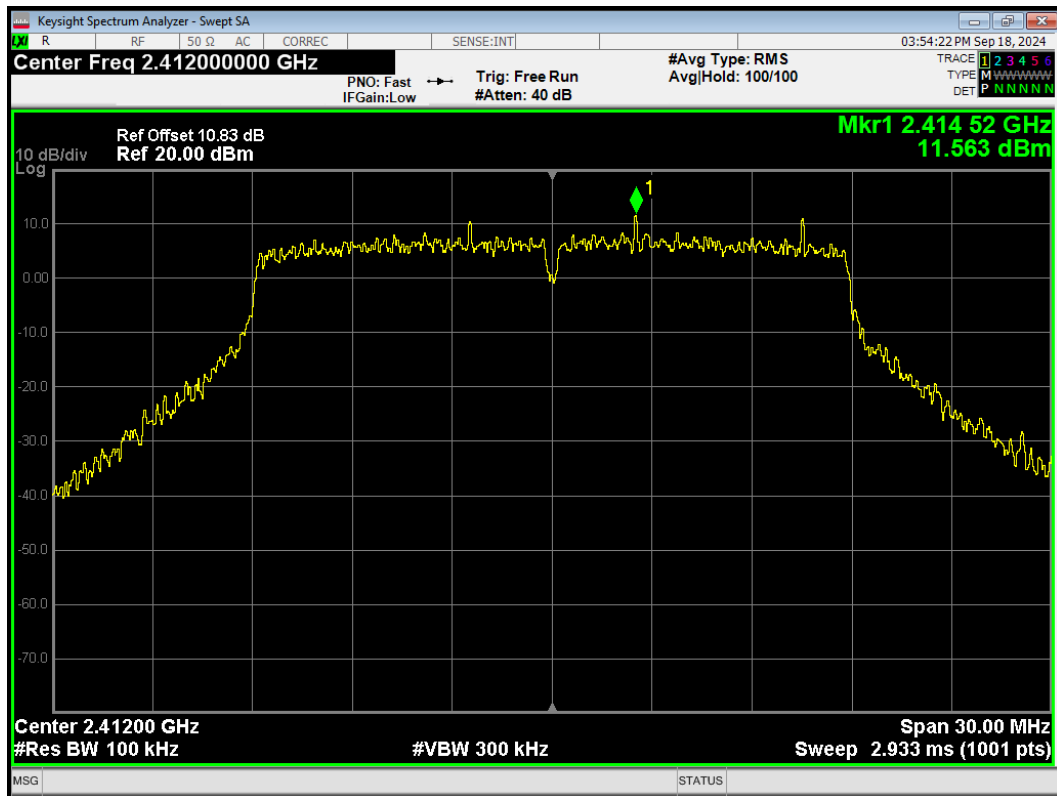


Band Edge 802.11n(HT20) 2412MHz Emission

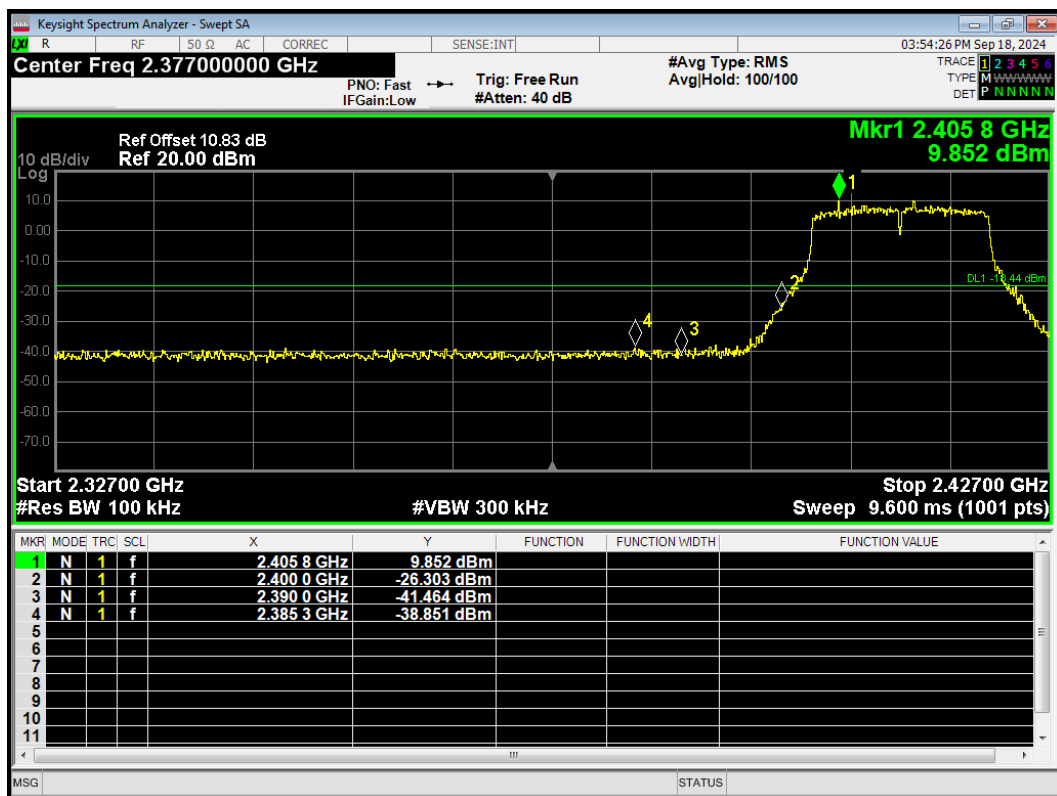


Band Edge 802.11n(HT20) 2462MHz Ref

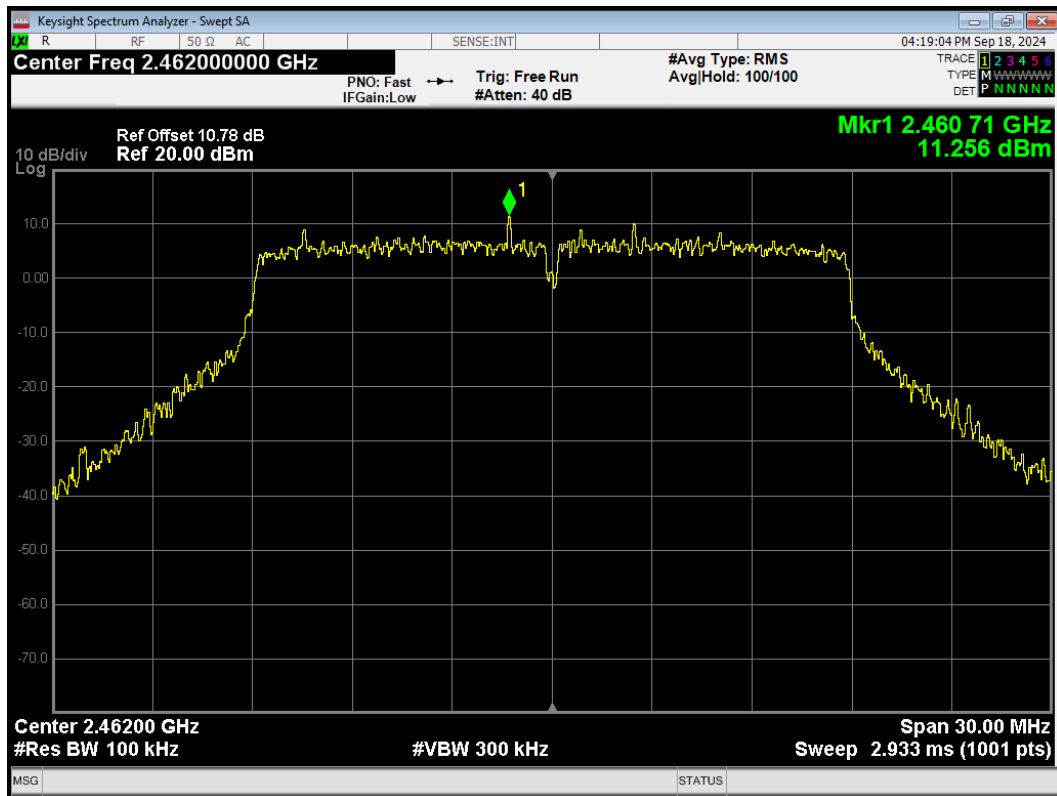


Band Edge 802.11n(HT20) 2462MHz Emission

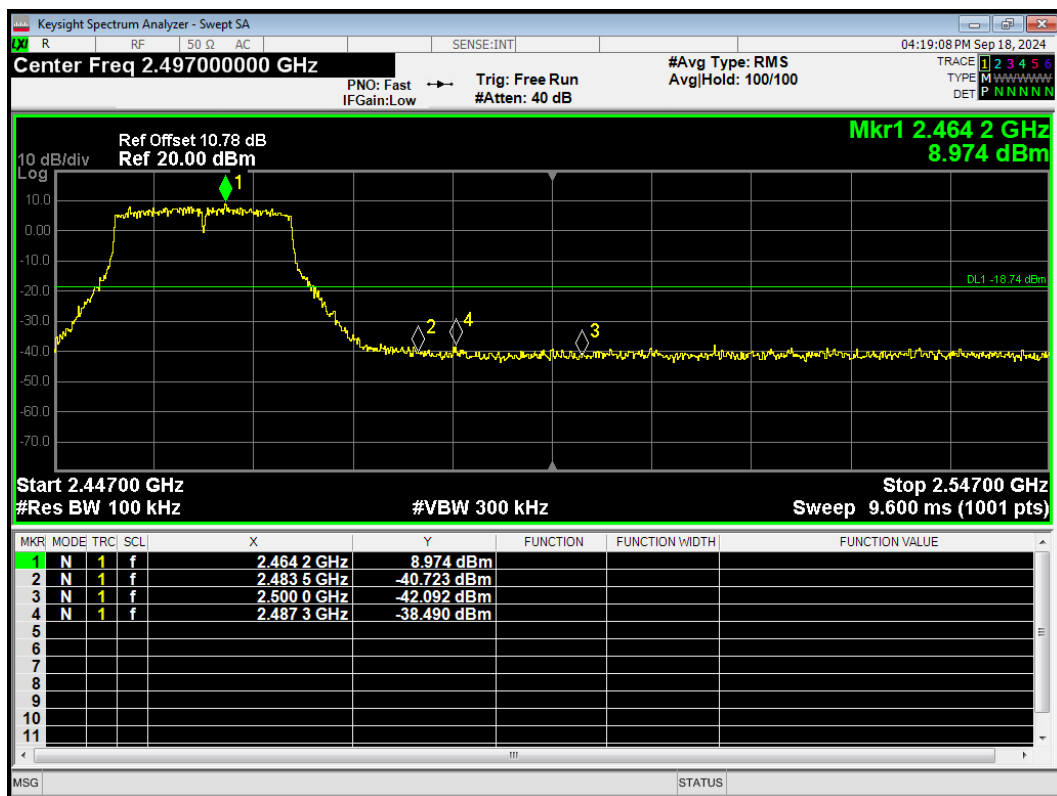


Band Edge 802.11n(HT40) 2422MHz Ref

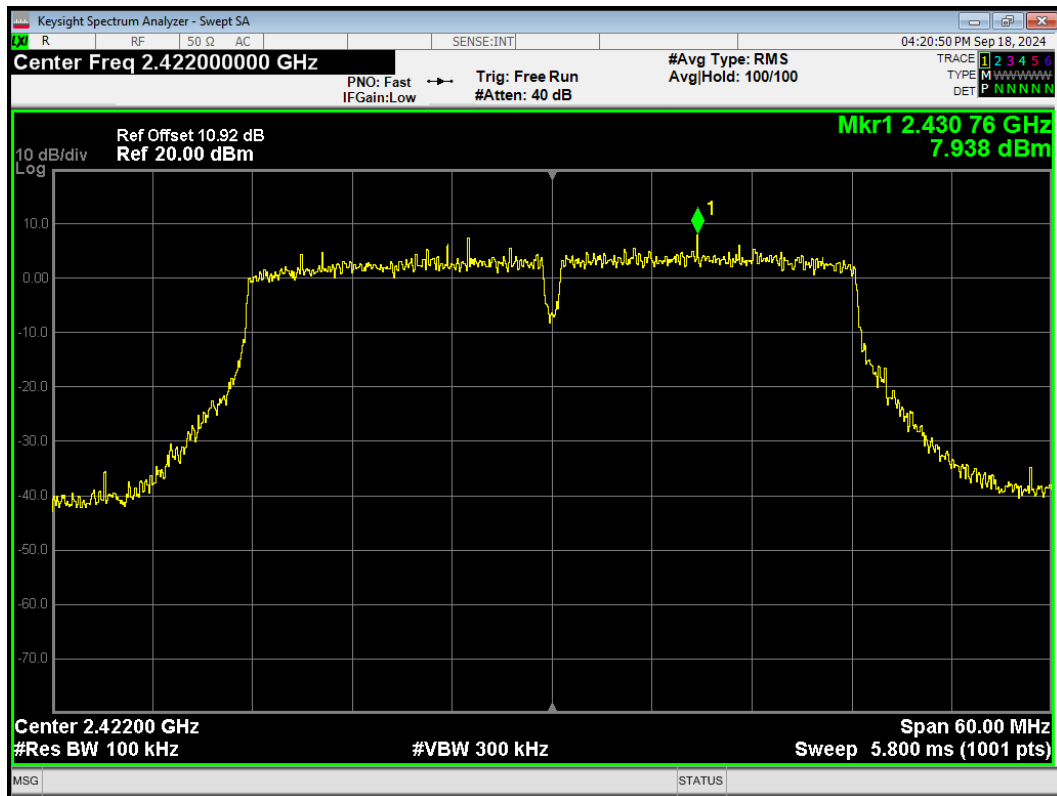


Band Edge 802.11n(HT40) 2422MHz Emission

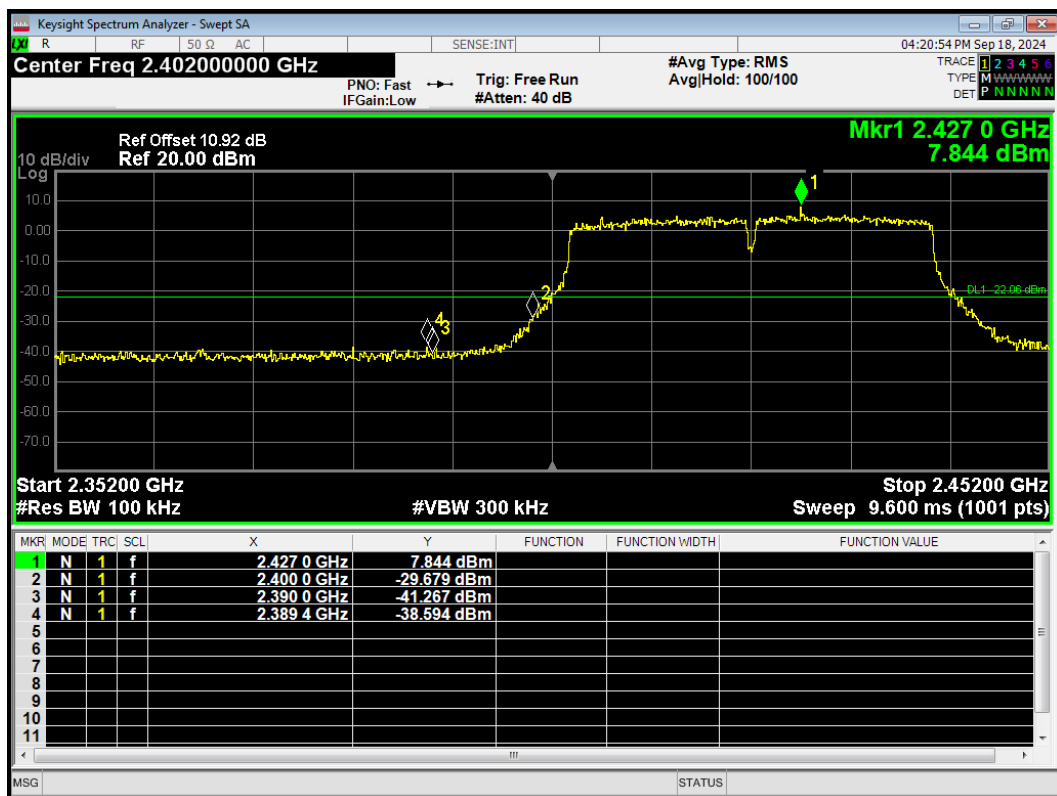

Band Edge 802.11n(HT40) 2452MHz Ref

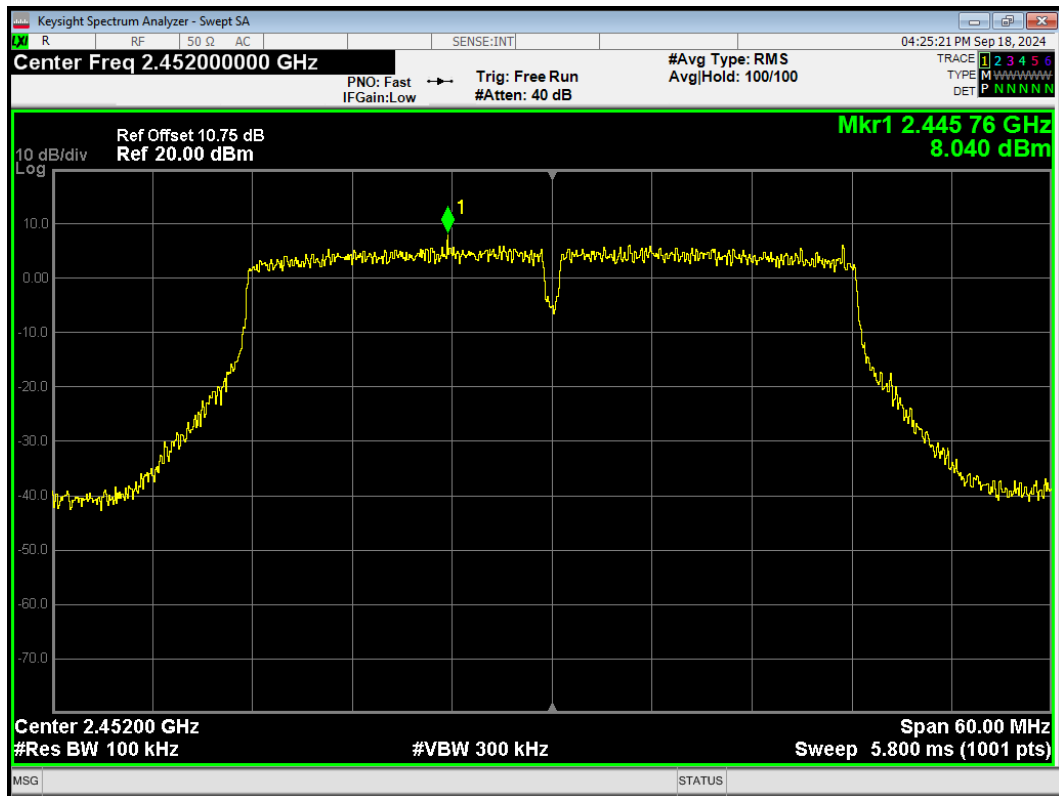

Band Edge 802.11n(HT40) 2452MHz Emission

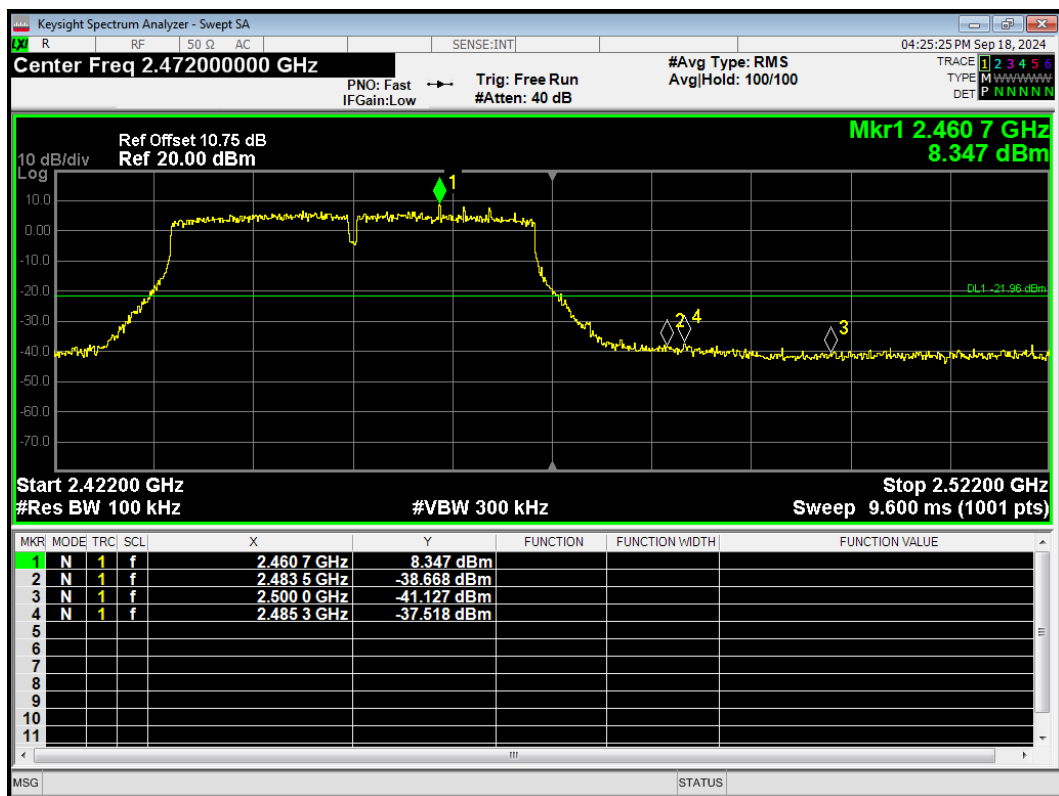

5.4. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement


During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-2 was used for this test.

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector = power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$
- Sweep time = auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density

conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:
SISO Antenna 1

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	0.03	-8.47	8	PASS
	2437/CH 6	1.79	-6.71	8	PASS
	2462/CH11	0.81	-7.69	8	PASS
802.11g	2412/CH 1	-4.98	-14.65	8	PASS
	2437/CH 6	-2.37	-12.04	8	PASS
	2462/CH11	-6.11	-15.78	8	PASS
802.11n HT20	2412/CH 1	-4.54	-13.58	8	PASS
	2437/CH 6	-3.84	-12.88	8	PASS
	2462/CH11	-8.72	-17.76	8	PASS
802.11n HT40	2422/CH3	-8.30	-17.33	8	PASS
	2437/CH6	-5.68	-14.71	8	PASS
	2452/CH9	-14.40	-23.43	8	PASS
802.11ax HE20	2412/CH 1	-5.64	-14.69	8	PASS
	2437/CH 6	-5.63	-14.68	8	PASS
	2462/CH11	-10.01	-19.06	8	PASS
802.11ax HE40	2422/CH3	-10.15	-19.19	8	PASS
	2437/CH6	-7.51	-16.55	8	PASS
	2452/CH9	-15.14	-24.18	8	PASS
Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*log10(3/30)					

SISO Antenna 2

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-2.88	-11.38	8	PASS
	2437/CH 6	-2.70	-11.20	8	PASS
	2462/CH11	-2.24	-10.74	8	PASS
802.11g	2412/CH 1	-4.41	-14.08	8	PASS
	2437/CH 6	-5.91	-15.58	8	PASS
	2462/CH11	-5.65	-15.32	8	PASS
802.11n HT20	2412/CH 1	-6.58	-15.62	8	PASS
	2437/CH 6	-6.67	-15.71	8	PASS
	2462/CH11	-6.01	-15.05	8	PASS
802.11n HT40	2422/CH3	-9.73	-18.76	8	PASS
	2437/CH6	-10.13	-19.16	8	PASS
	2452/CH9	-14.72	-23.75	8	PASS
802.11ax HE20	2412/CH 1	-5.46	-14.51	8	PASS
	2437/CH 6	-5.42	-14.47	8	PASS
	2462/CH11	-9.78	-18.83	8	PASS
802.11ax HE40	2422/CH3	-9.82	-18.86	8	PASS
	2437/CH6	-8.24	-17.28	8	PASS
	2452/CH9	-13.78	-22.82	8	PASS
Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*log10(3/30)					

MIMO

Test Mode	Carrier frequency (MHz))/ Channel	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclus ion
		Antenna 1		Antenna 2				
		Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11b	2412/CH 1	1.92	-6.58	-0.32	-8.82	-4.55	8.00	PASS
	2437/CH 6	0.66	-7.84	1.57	-6.93	-4.35	8.00	PASS
	2462/CH11	0.37	-8.13	-0.24	-8.74	-5.41	8.00	PASS
802.11g	2412/CH 1	-4.00	-13.67	-4.46	-14.13	-10.88	8.00	PASS
	2437/CH 6	-1.80	-11.47	-2.43	-12.10	-8.76	8.00	PASS
	2462/CH11	-6.29	-15.96	-5.97	-15.64	-12.78	8.00	PASS
802.11n HT20	2412/CH 1	-3.19	-12.23	-4.58	-13.62	-9.86	8.00	PASS
	2437/CH 6	-3.09	-12.13	-3.65	-12.69	-9.39	8.00	PASS
	2462/CH11	-8.27	-17.31	-8.63	-17.67	-14.48	8.00	PASS
802.11n HT40	2422/CH3	-7.85	-16.88	-8.99	-18.02	-14.40	8.00	PASS
	2437/CH6	-5.61	-14.64	-5.95	-14.98	-11.80	8.00	PASS
	2452/CH9	-13.73	-22.76	-13.11	-22.14	-19.43	8.00	PASS
802.11ax HE20	2412/CH 1	-4.82	-13.87	-6.12	-15.17	-11.46	8.00	PASS
	2437/CH 6	-4.69	-13.74	-5.43	-14.48	-11.08	8.00	PASS
	2462/CH11	-10.21	-19.26	-9.92	-18.97	-16.10	8.00	PASS
802.11ax HE40	2422/CH3	-9.97	-19.01	-10.64	-19.68	-16.32	8.00	PASS
	2437/CH6	-7.11	-16.15	-7.39	-16.43	-13.28	8.00	PASS
	2452/CH9	-14.94	-23.98	-14.20	-23.24	-20.59	8.00	PASS

Note: 1.Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + $10 \cdot \log_{10}(3 / 30)$

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),the power spectral density= $10 \log_{10}(10^{(PSD_{antenna1} \text{ in dBm}/10)} + 10^{(PSD_{antenna2} \text{ in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode. And $N_{ss}=1$. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$. For PSD measurements on all devices, Array Gain= $10 \log(N_{ant}/N_{ss})$ dB, so directional gain= $G_{ANT} + \text{Array Gain} = 2.06 + 10 \log(2/1) = 5.07 < 6 \text{dBi}$. So the PSD limit is 8 dBm.

Beamforming

Test Mode	Carrier frequency (MHz))/ Channel	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclus ion
		Antenna 1		Antenna 2				
		Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11b	2412/CH 1	1.92	-6.58	-0.32	-8.82	-4.55	8.00	PASS
	2437/CH 6	0.66	-7.84	1.57	-6.93	-4.35	8.00	PASS
	2462/CH11	0.37	-8.13	-0.24	-8.74	-5.41	8.00	PASS
802.11g	2412/CH 1	-4.00	-13.67	-4.46	-14.13	-10.88	8.00	PASS
	2437/CH 6	-1.80	-11.47	-2.43	-12.10	-8.76	8.00	PASS
	2462/CH11	-6.29	-15.96	-5.97	-15.64	-12.78	8.00	PASS
802.11n HT20	2412/CH 1	-3.19	-12.23	-4.58	-13.62	-9.86	8.00	PASS
	2437/CH 6	-3.09	-12.13	-3.65	-12.69	-9.39	8.00	PASS
	2462/CH11	-8.27	-17.31	-8.63	-17.67	-14.48	8.00	PASS
802.11n HT40	2422/CH3	-7.85	-16.88	-8.99	-18.02	-14.40	8.00	PASS
	2437/CH6	-5.61	-14.64	-5.95	-14.98	-11.80	8.00	PASS
	2452/CH9	-13.73	-22.76	-13.11	-22.14	-19.43	8.00	PASS
802.11ax HE20	2412/CH 1	-4.82	-13.87	-6.12	-15.17	-11.46	8.00	PASS
	2437/CH 6	-4.69	-13.74	-5.43	-14.48	-11.08	8.00	PASS
	2462/CH11	-10.21	-19.26	-9.92	-18.97	-16.10	8.00	PASS
802.11ax HE40	2422/CH3	-9.97	-19.01	-10.64	-19.68	-16.32	8.00	PASS
	2437/CH6	-7.11	-16.15	-7.39	-16.43	-13.28	8.00	PASS
	2452/CH9	-14.94	-23.98	-14.20	-23.24	-20.59	8.00	PASS

Note: 1.Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*LOG10(3 / 30)


2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),the power spectral density= $10\log(10^{(PSD_{antenna1} \text{ in dBm}/10)} + 10^{(PSD_{antenna2} \text{ in dBm}/10)})$

3. Direction gain calculation according to KDB662911 D01 Multiple Transmitter Output v02r01 F)2)e)(i): If all antennas have the same gain, directional gain = $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 2.06 + 10\log(2/1) = 5.07 < 6\text{dBi}$. So the PSD limit is 8 dBm.


SISO

Antenna 1


PSD 802.11ax(HE20) 2412MHz

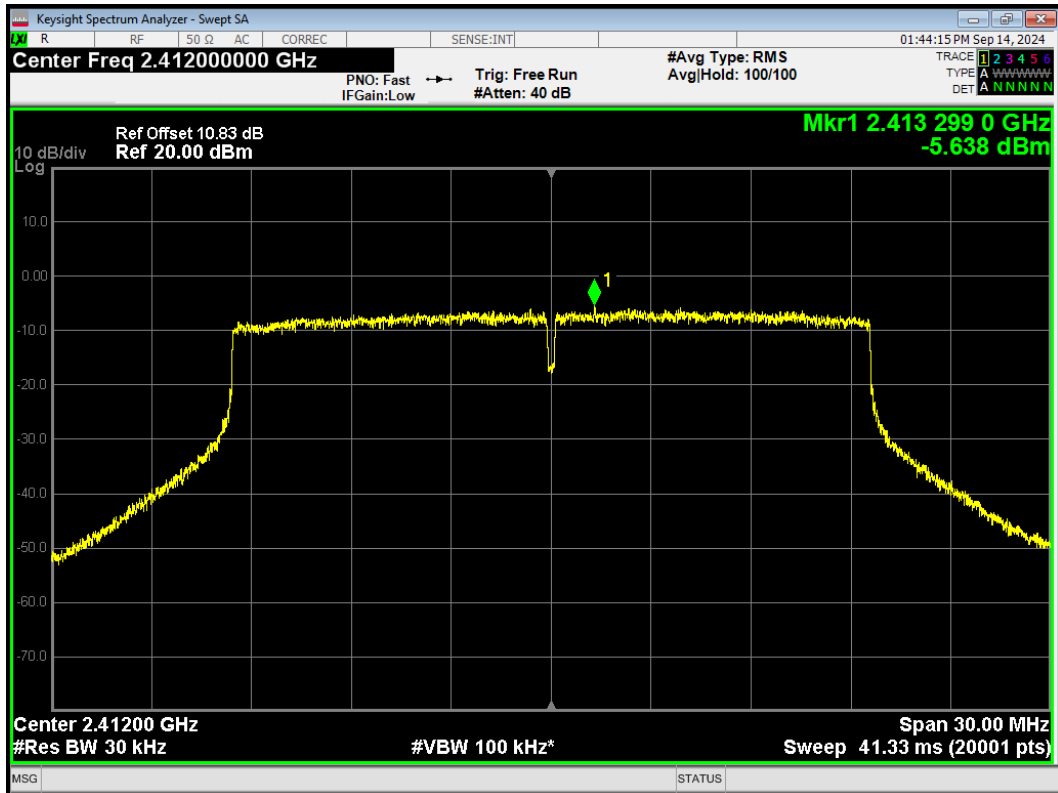


PSD 802.11ax(HE20) 2437MHz

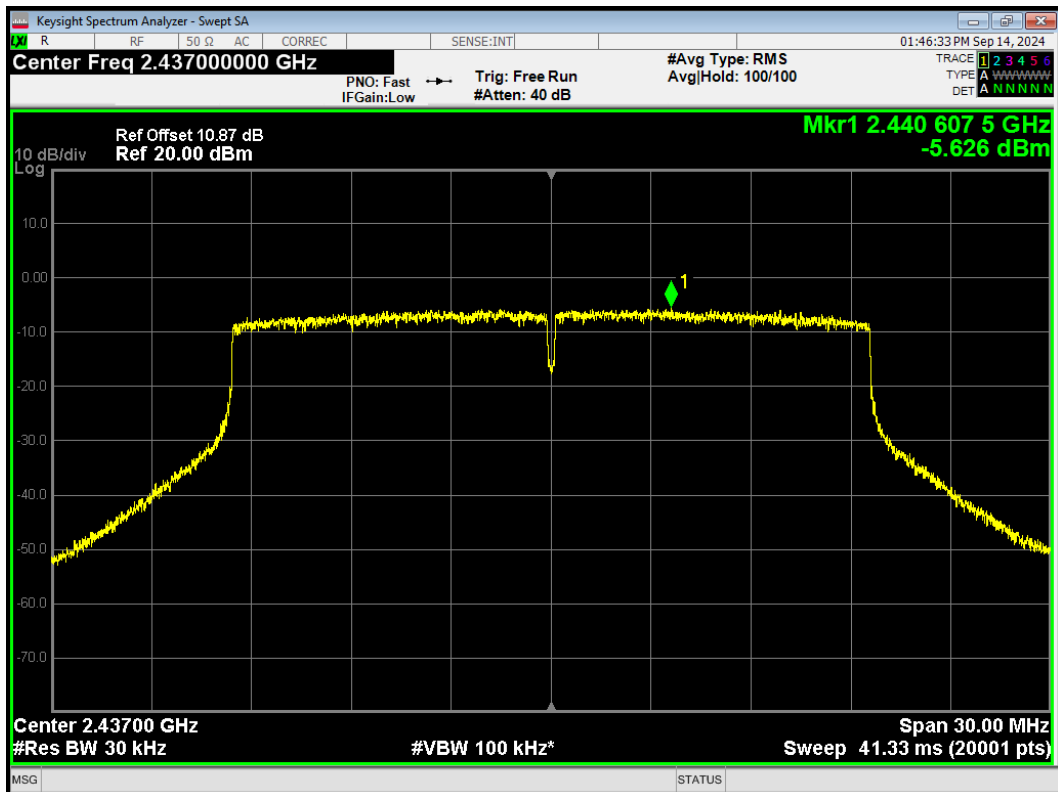


PSD 802.11ax(HE20) 2462MHz

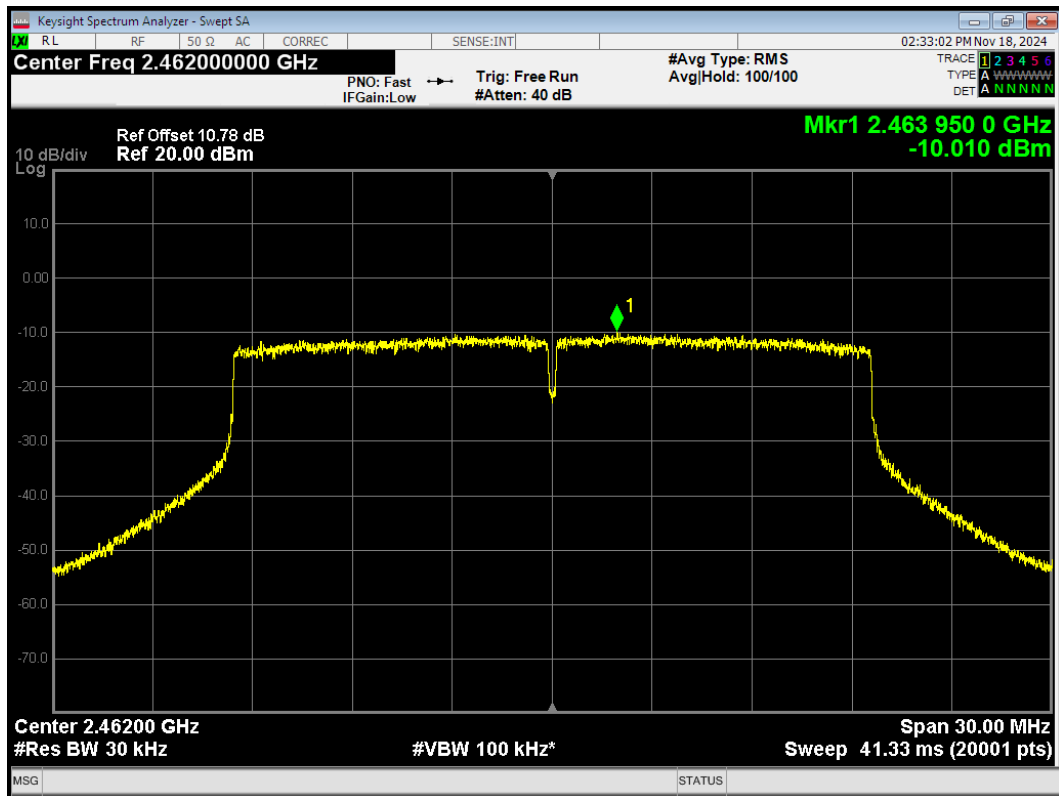


PSD 802.11ax(HE40) 2422MHz

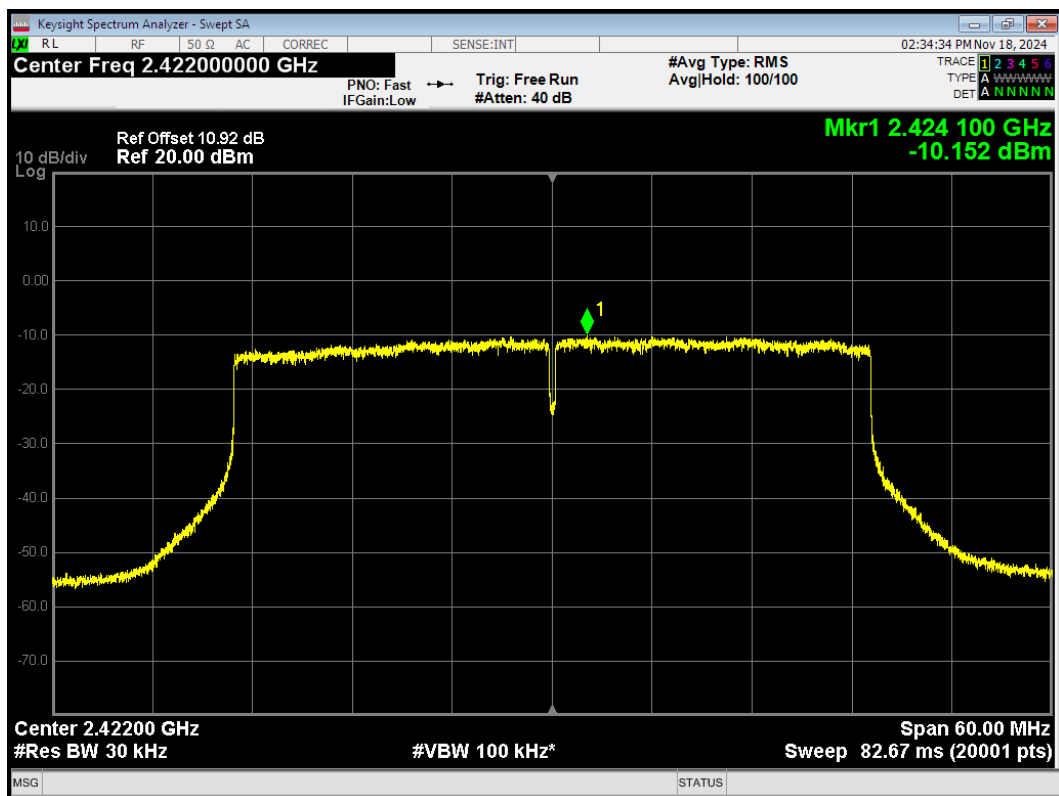


PSD 802.11ax(HE40) 2437MHz

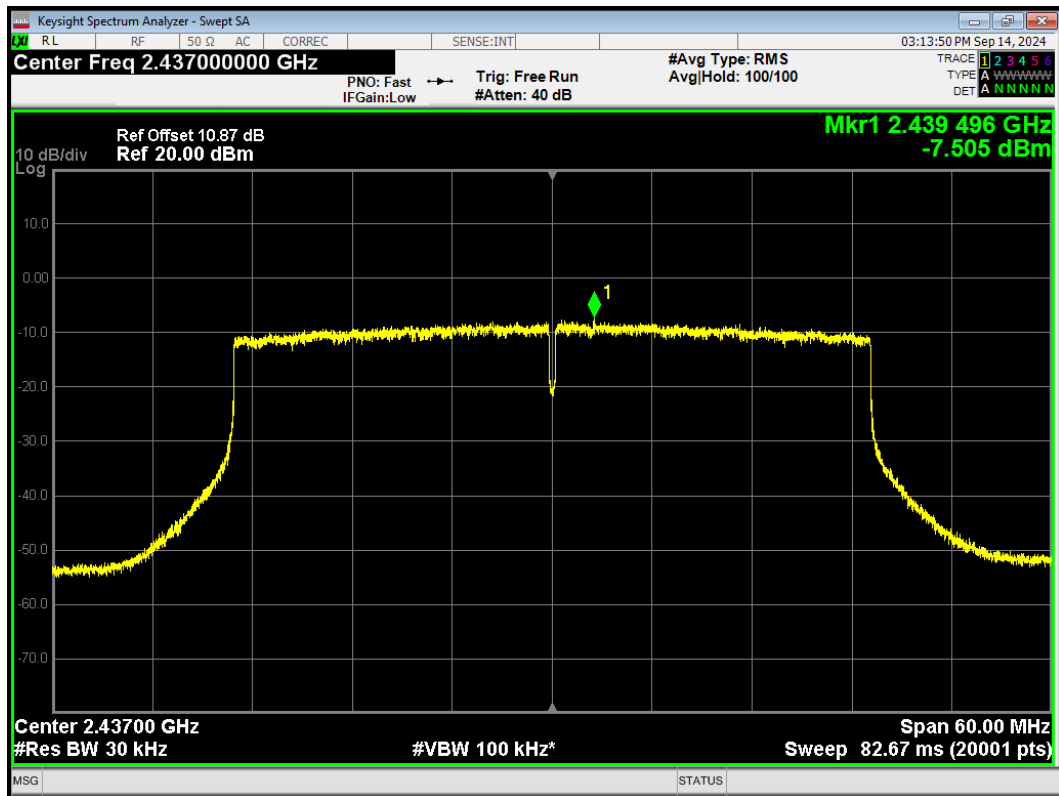


PSD 802.11ax(HE40) 2452MHz

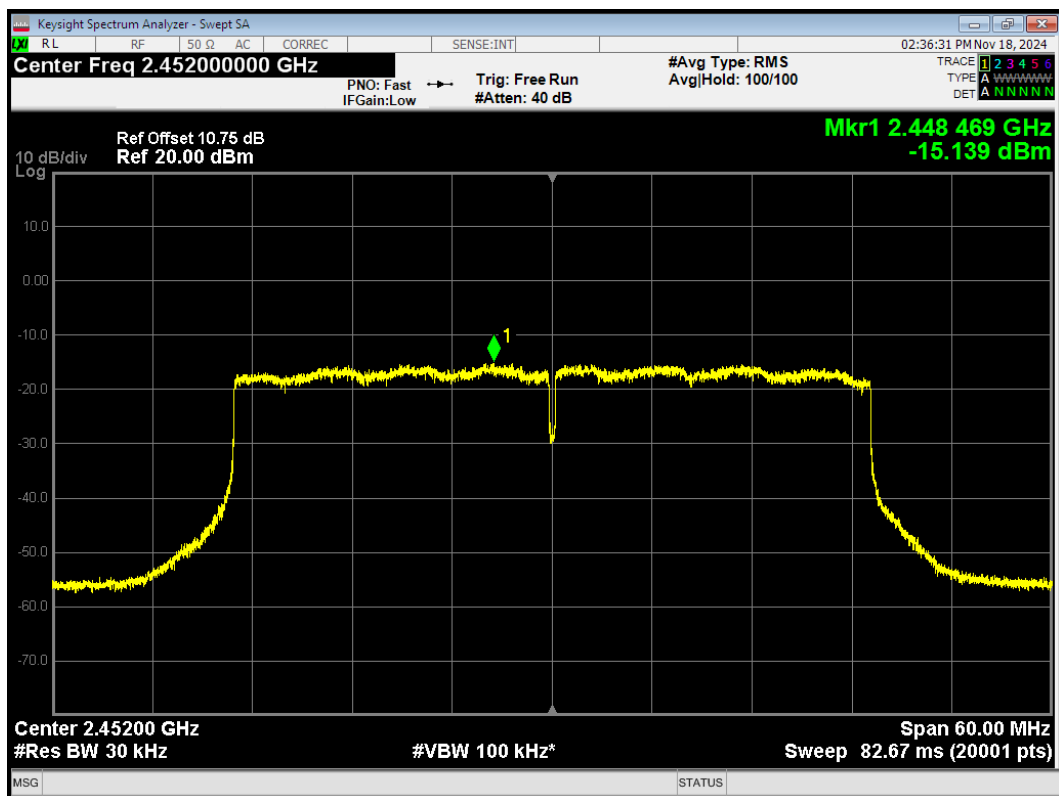


PSD 802.11b 2412MHz

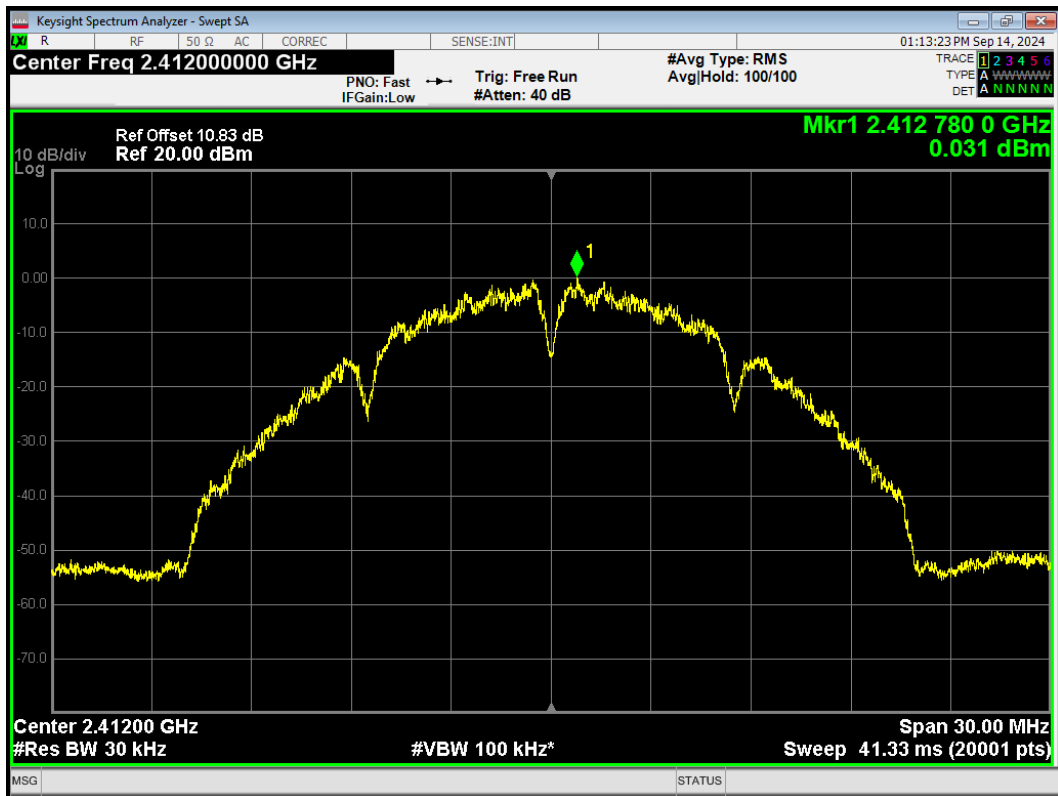


PSD 802.11b 2437MHz

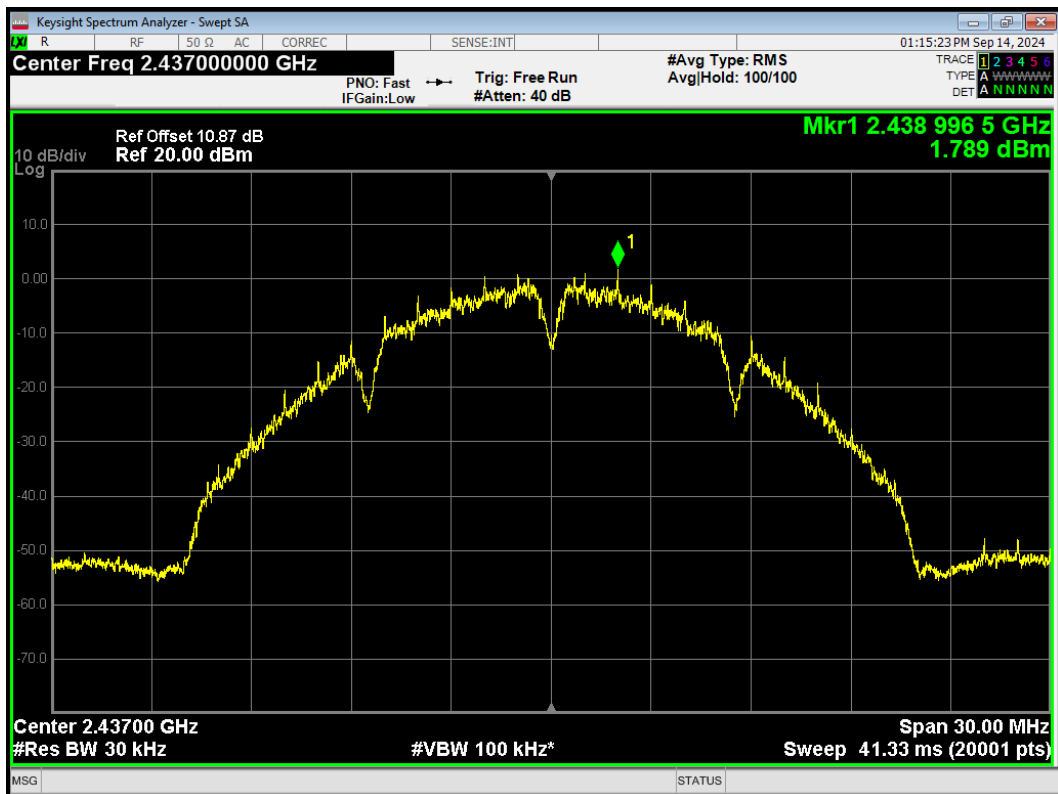


PSD 802.11b 2462MHz

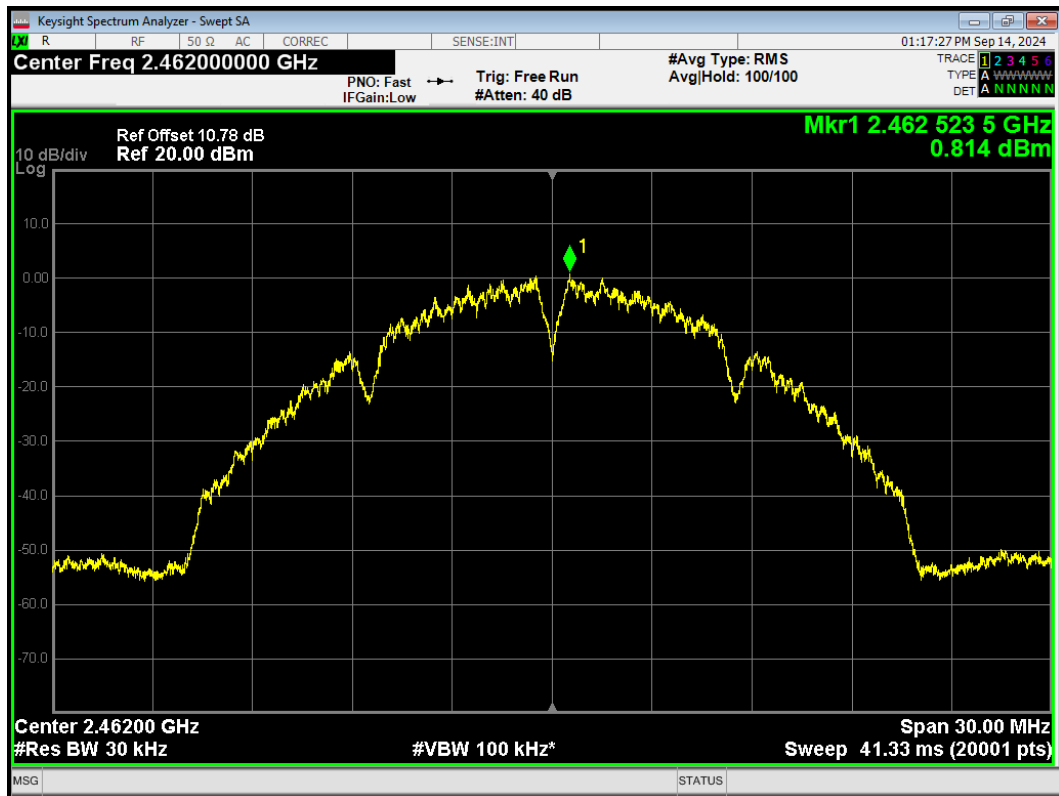


PSD 802.11g 2412MHz

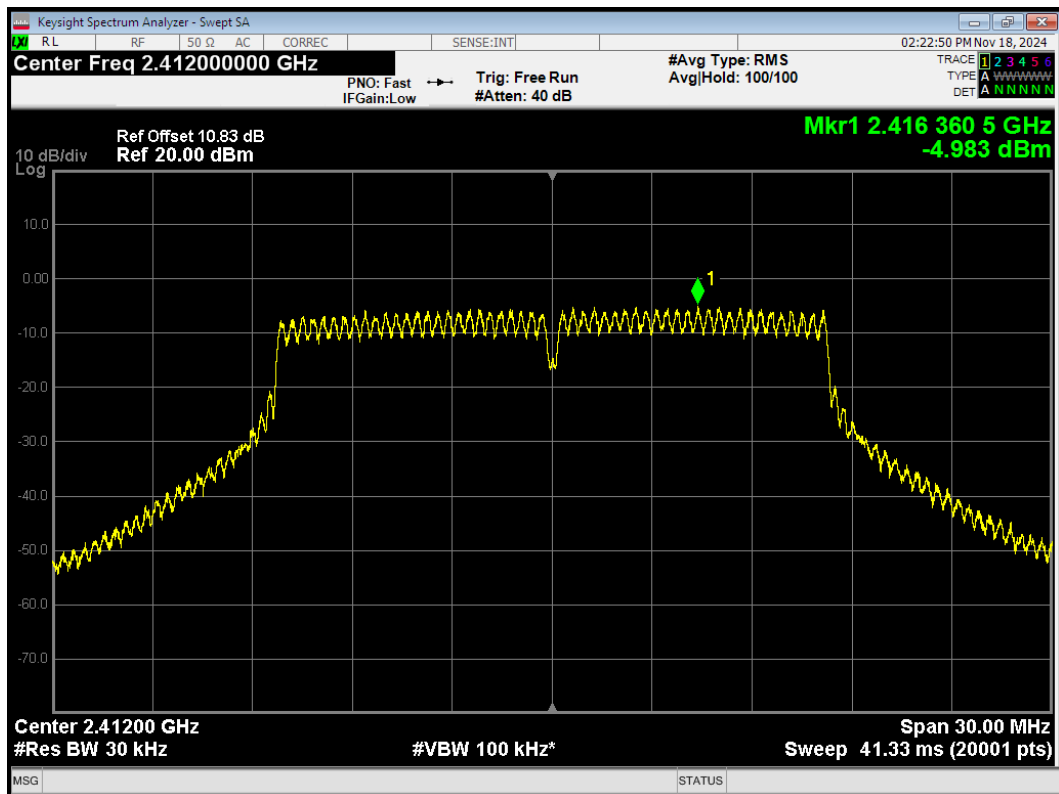


PSD 802.11g 2437MHz

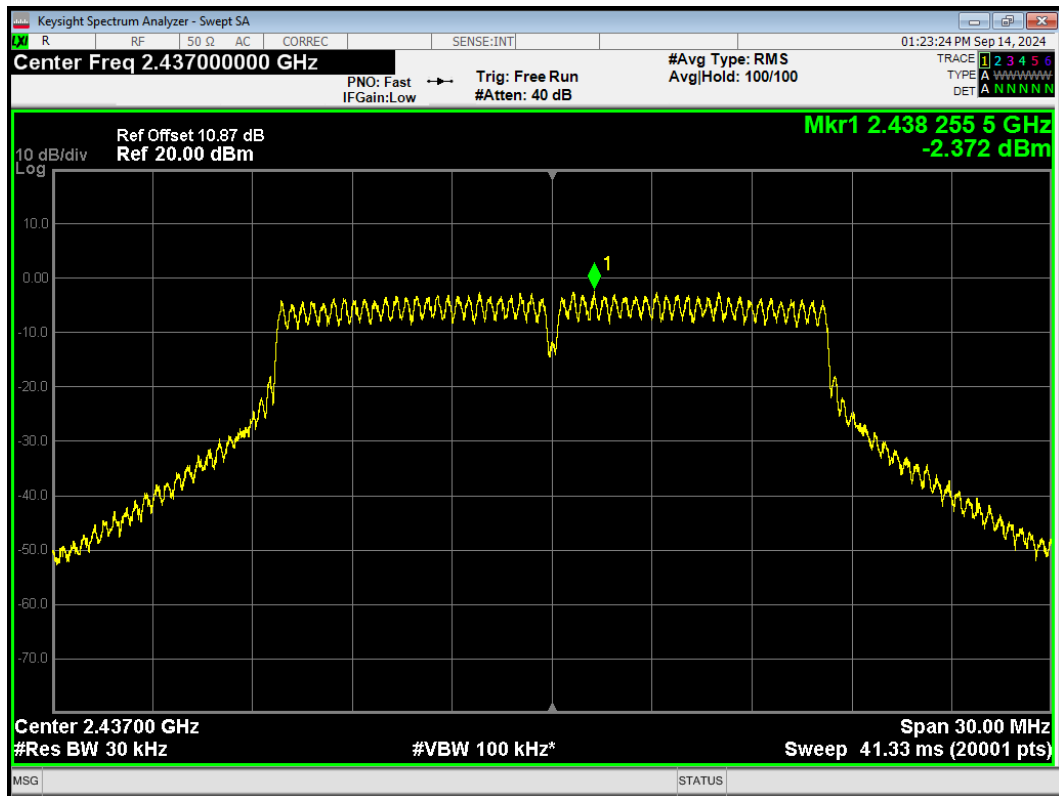


PSD 802.11g 2462MHz

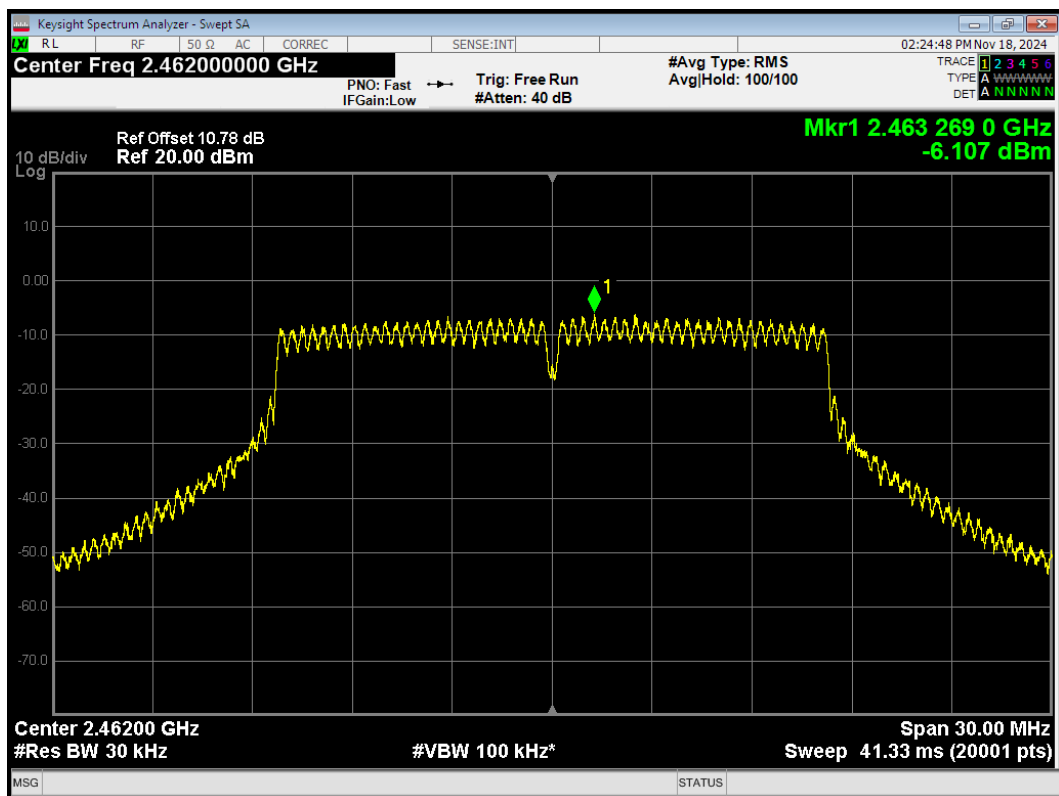


PSD 802.11n(HT20) 2412MHz

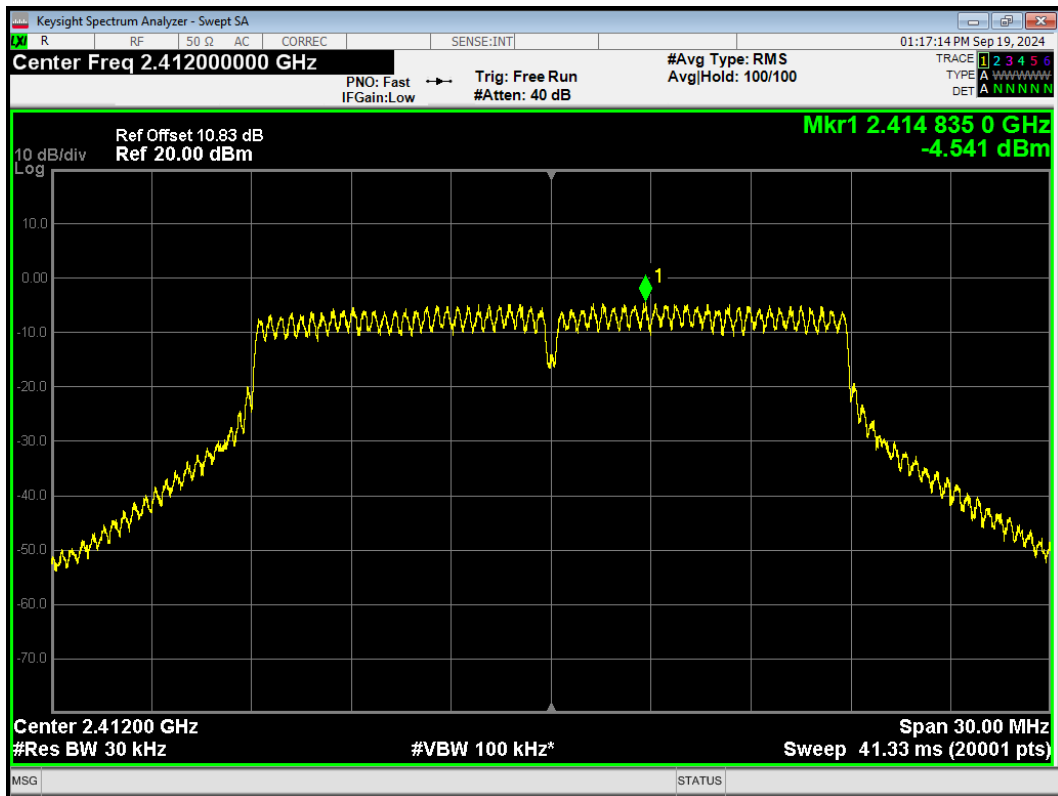


PSD 802.11n(HT20) 2437MHz

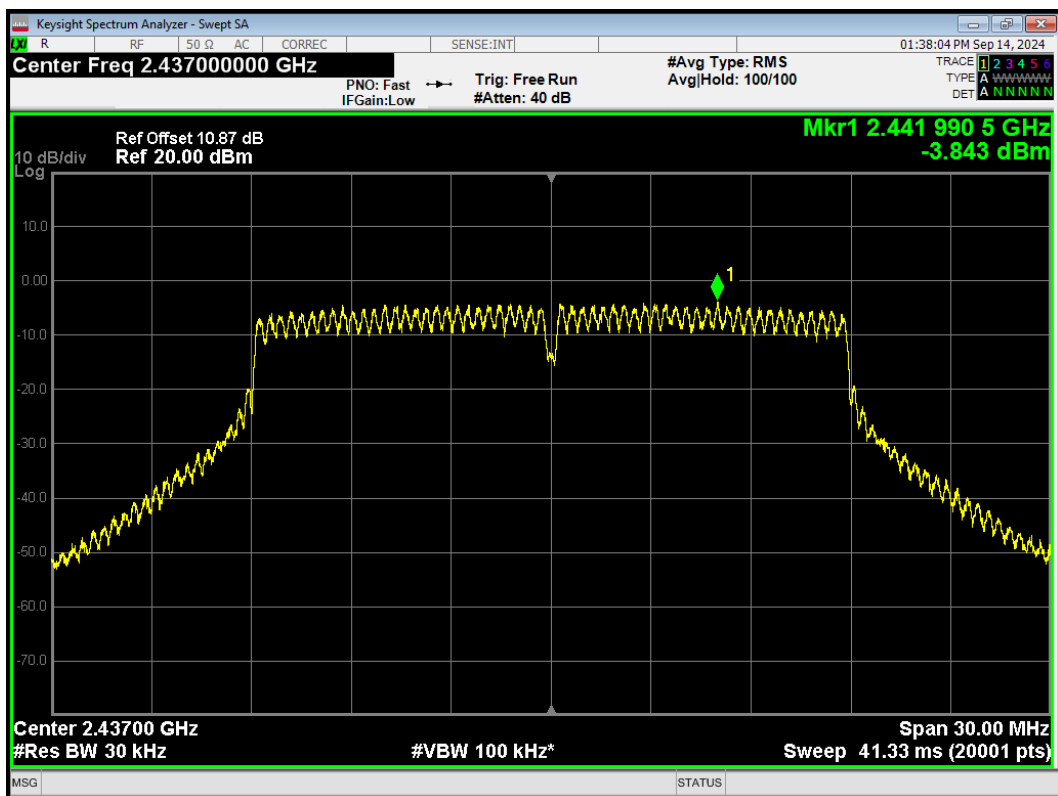


PSD 802.11n(HT20) 2462MHz

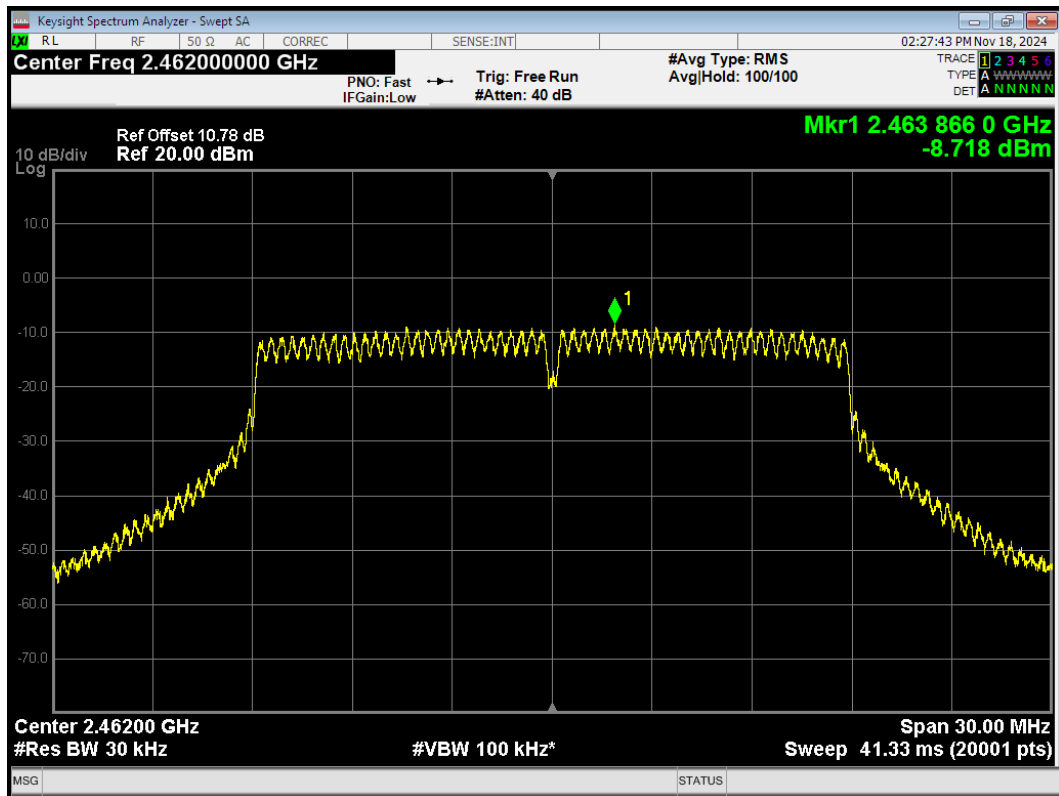


PSD 802.11n(HT40) 2422MHz

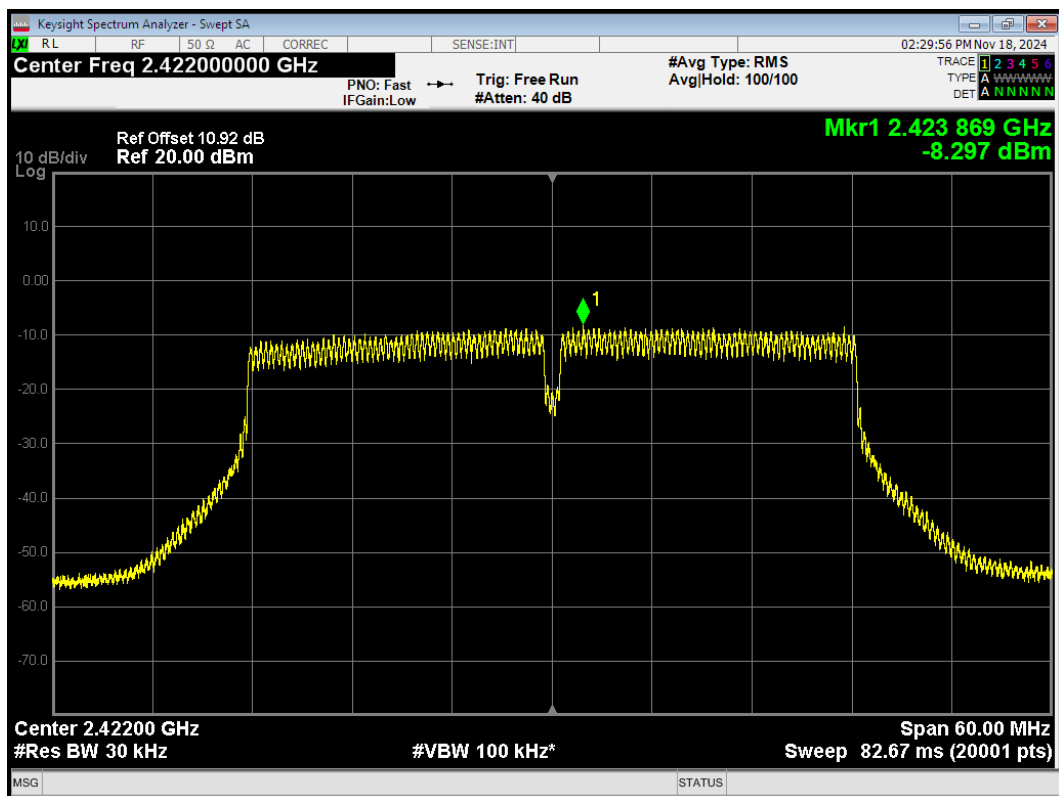

PSD 802.11n(HT40) 2437MHz

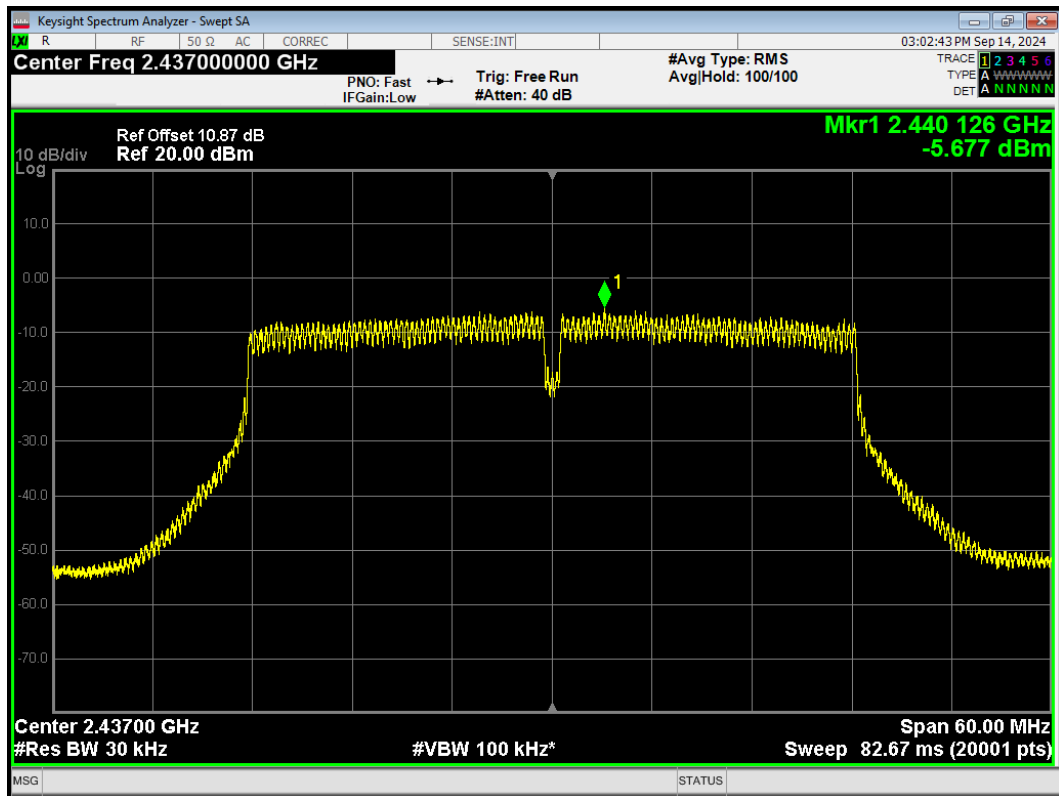


PSD 802.11n(HT40) 2452MHz

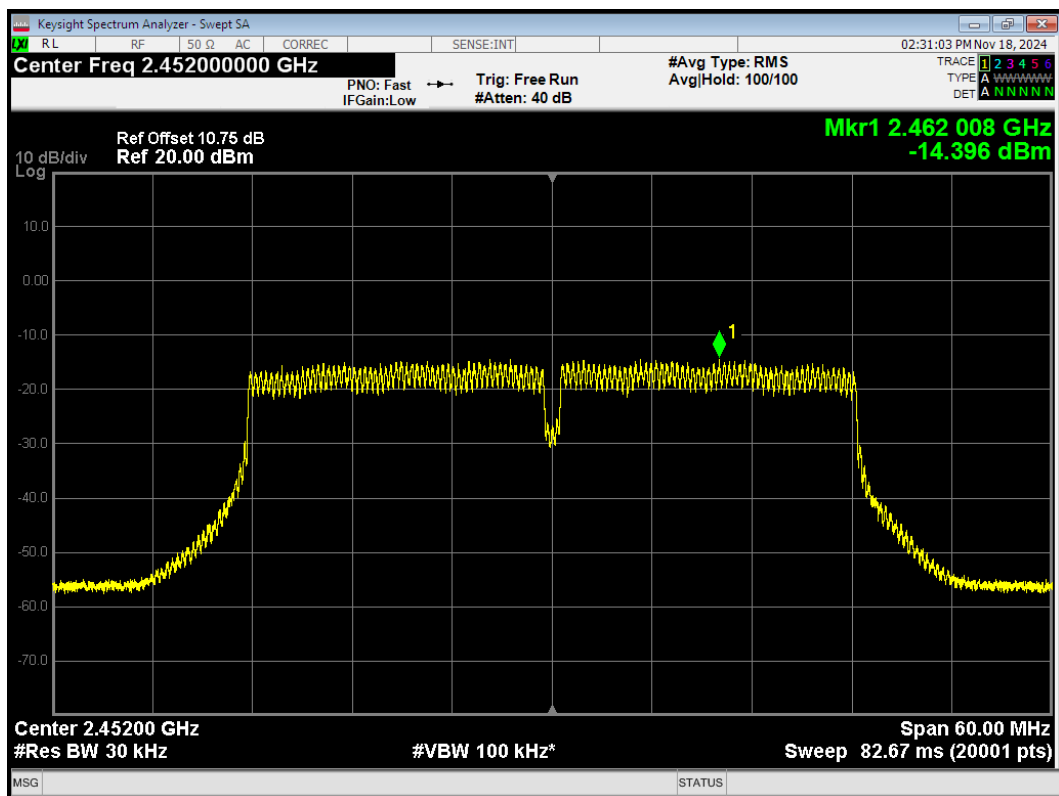


Antenna 2


PSD 802.11ax(HE20) 2412MHz

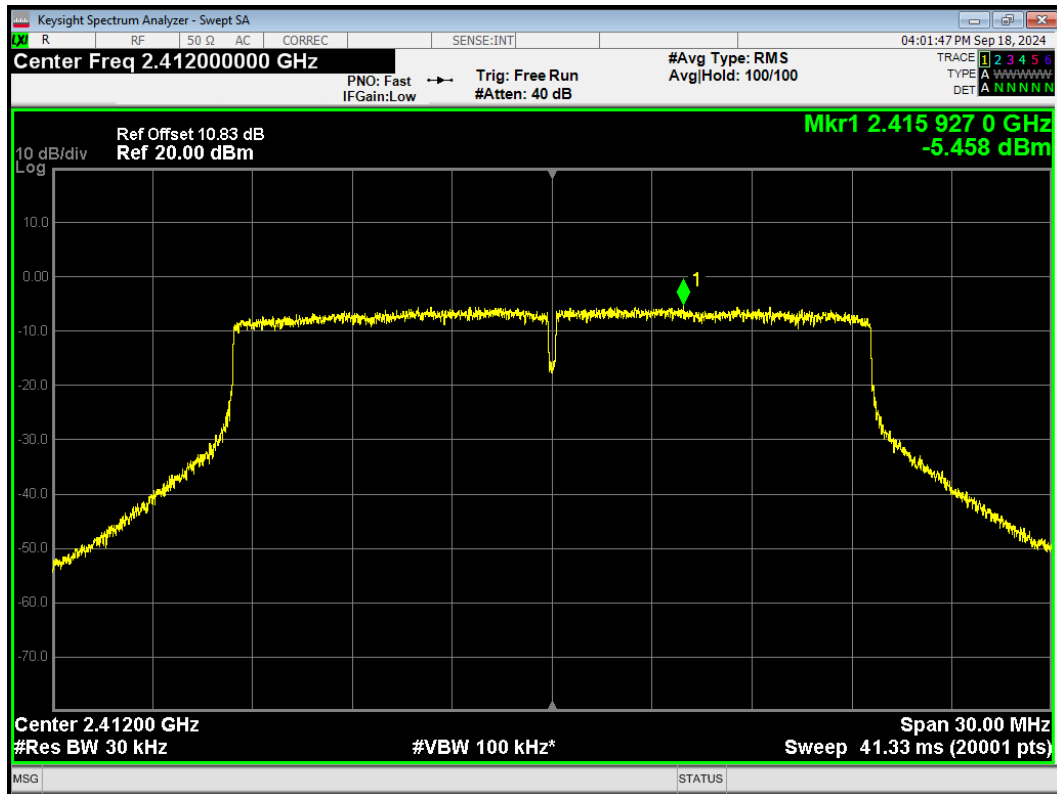


PSD 802.11ax(HE20) 2437MHz

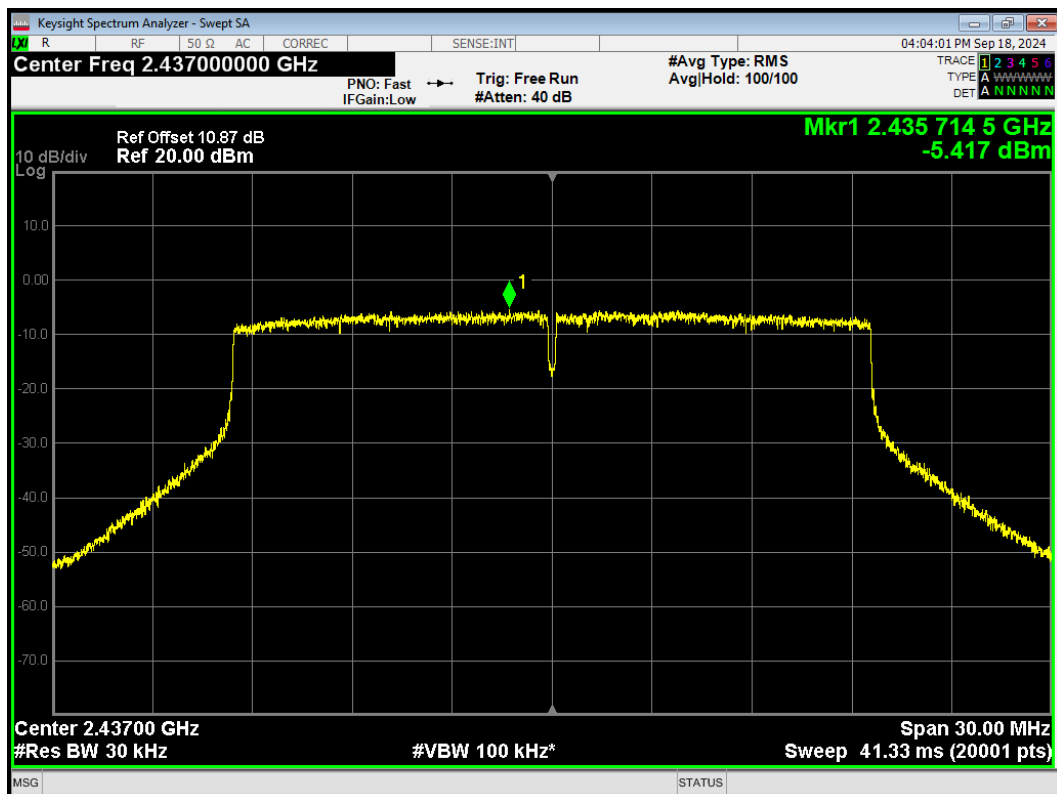


PSD 802.11ax(HE20) 2462MHz

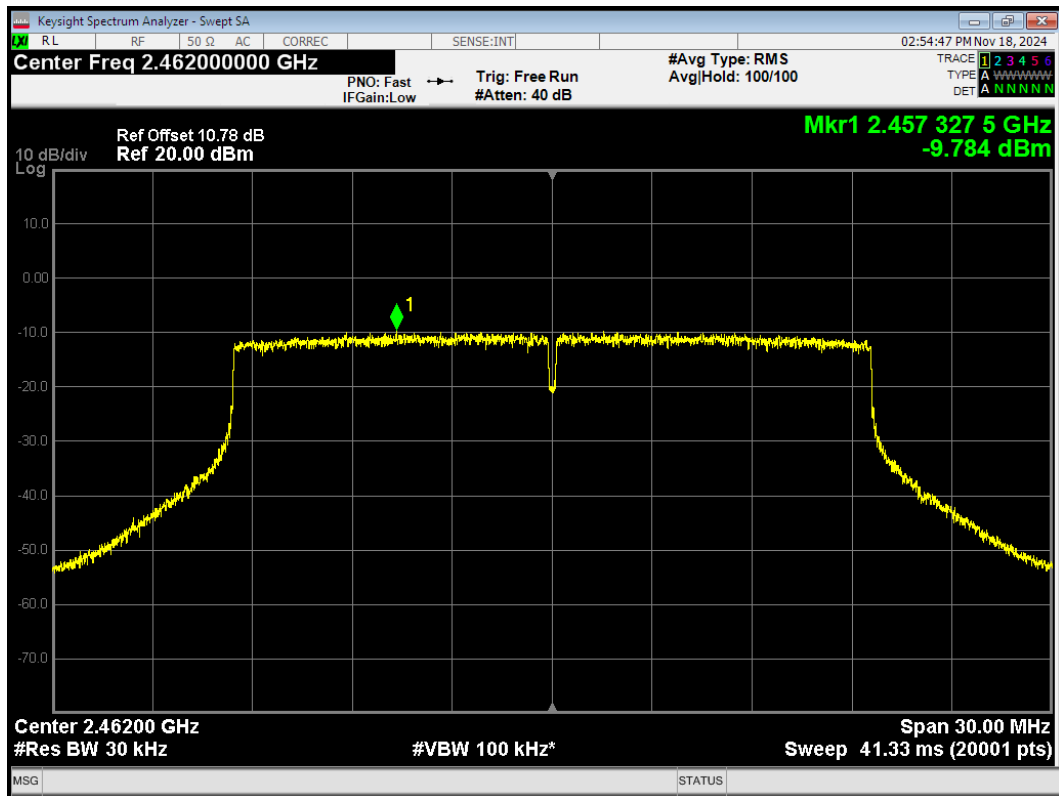


PSD 802.11ax(HE40) 2422MHz

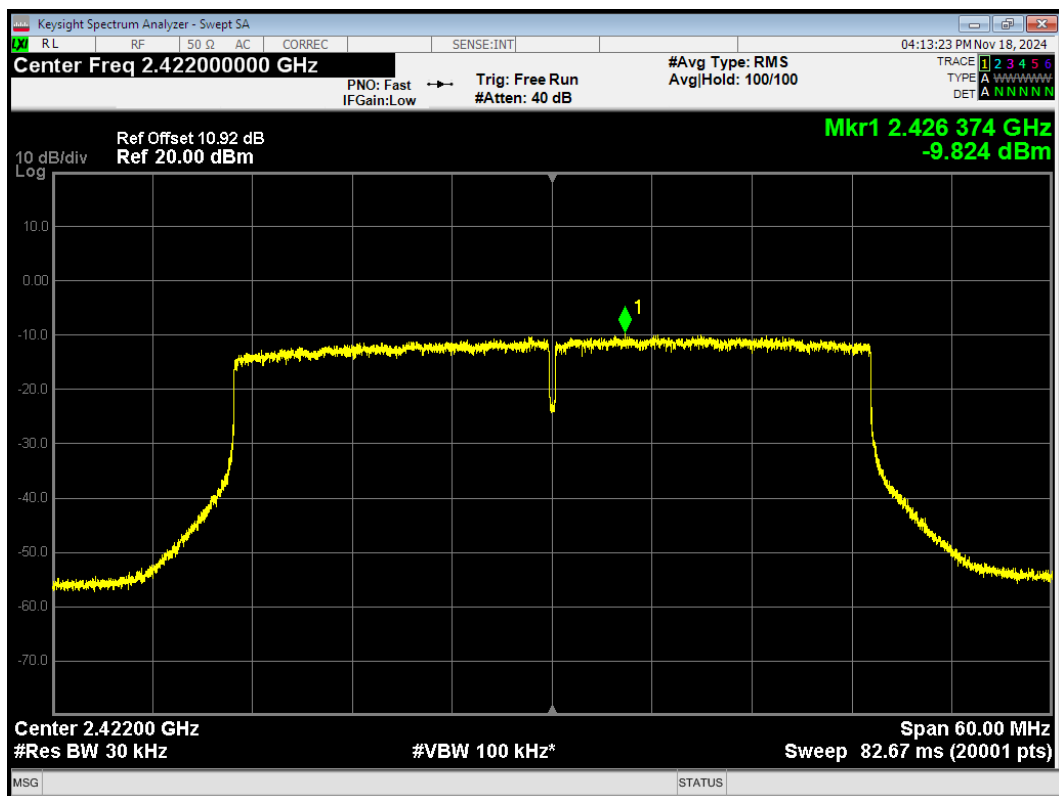


PSD 802.11ax(HE40) 2437MHz

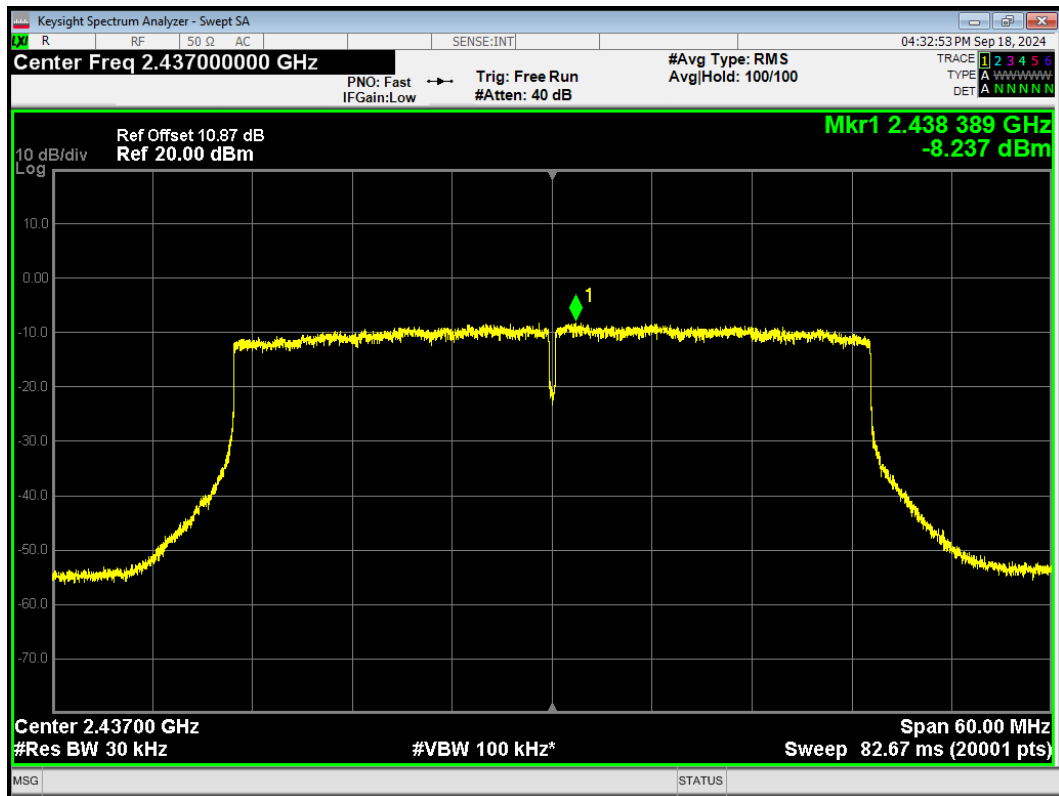


PSD 802.11ax(HE40) 2452MHz

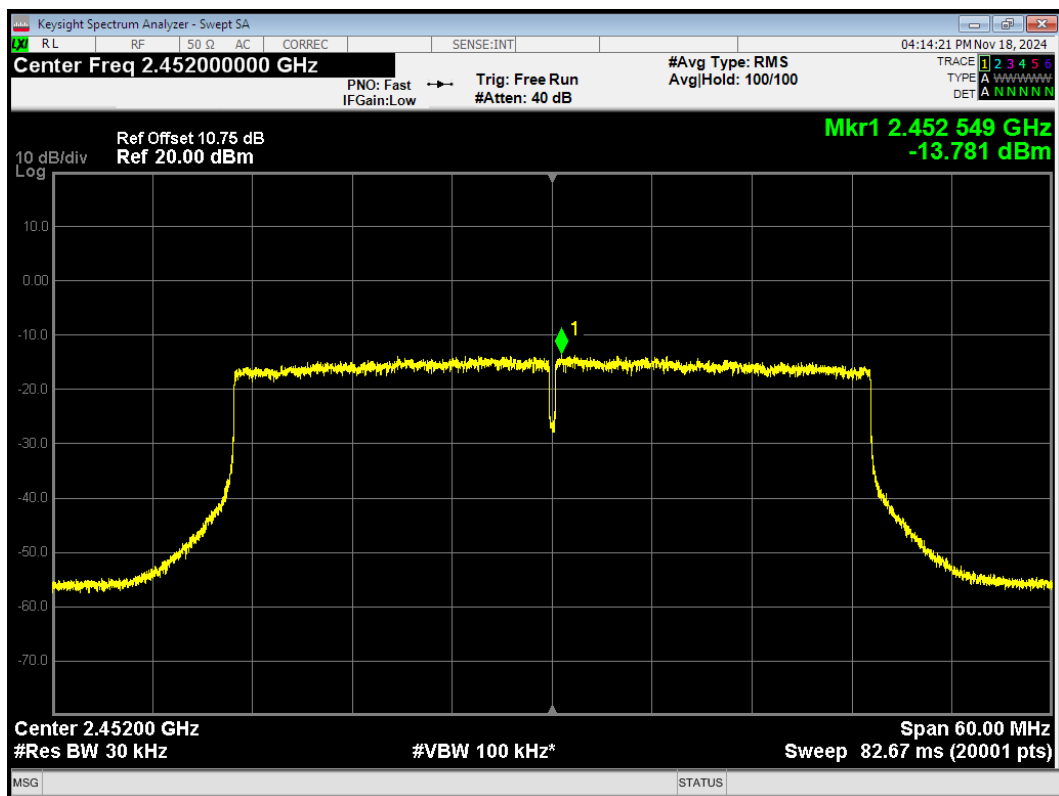


PSD 802.11b 2412MHz

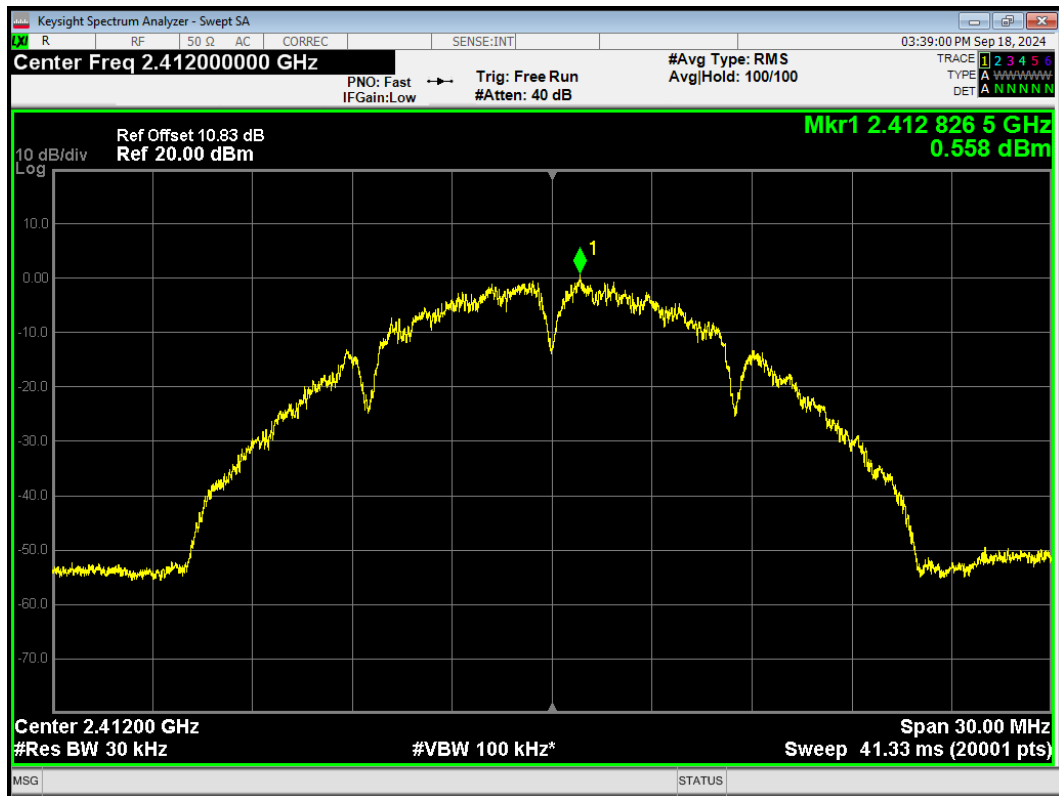


PSD 802.11b 2437MHz

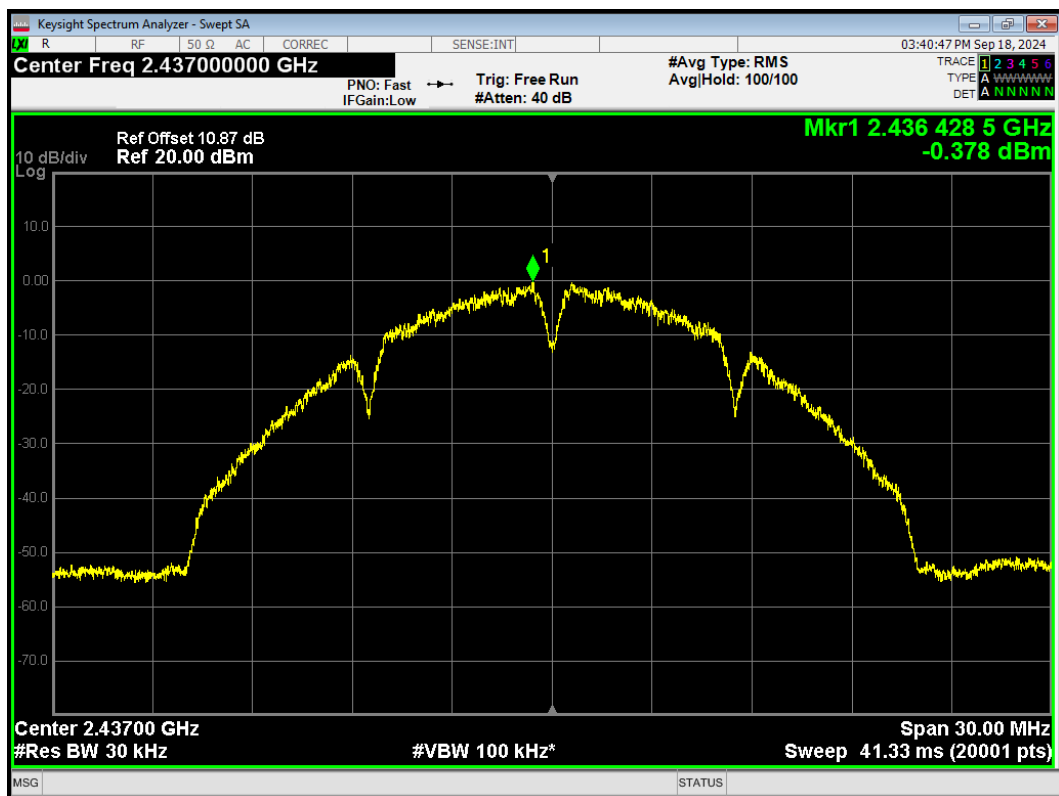


PSD 802.11b 2462MHz

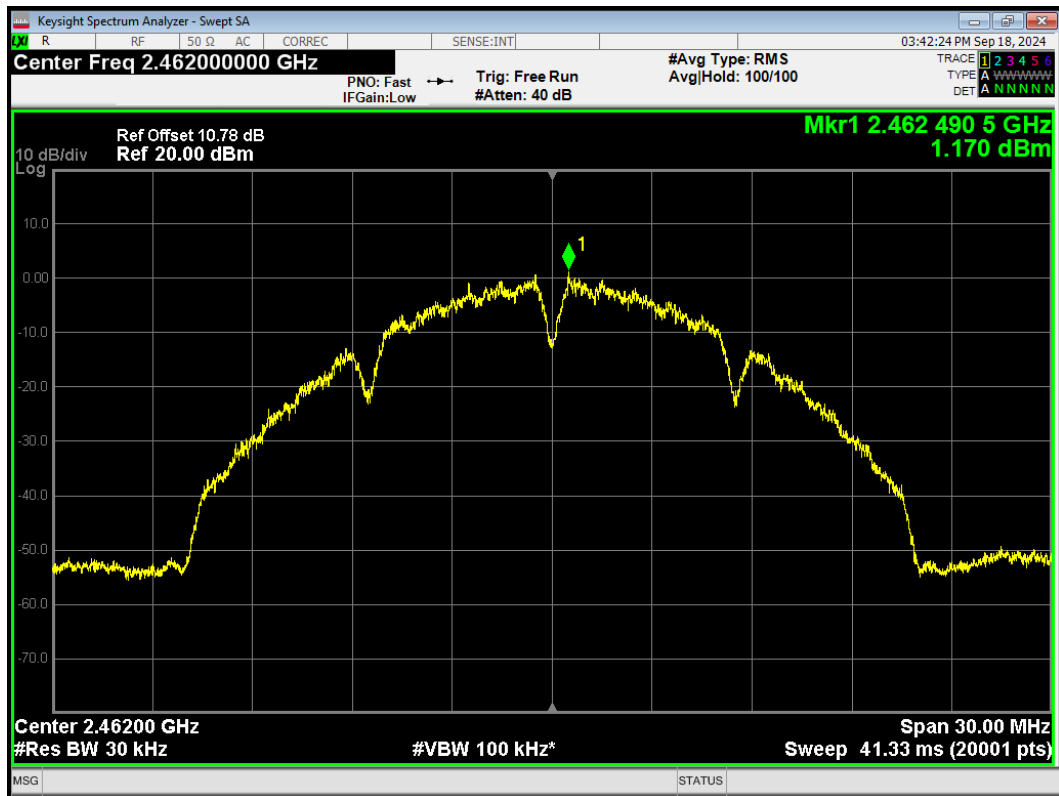


PSD 802.11g 2412MHz

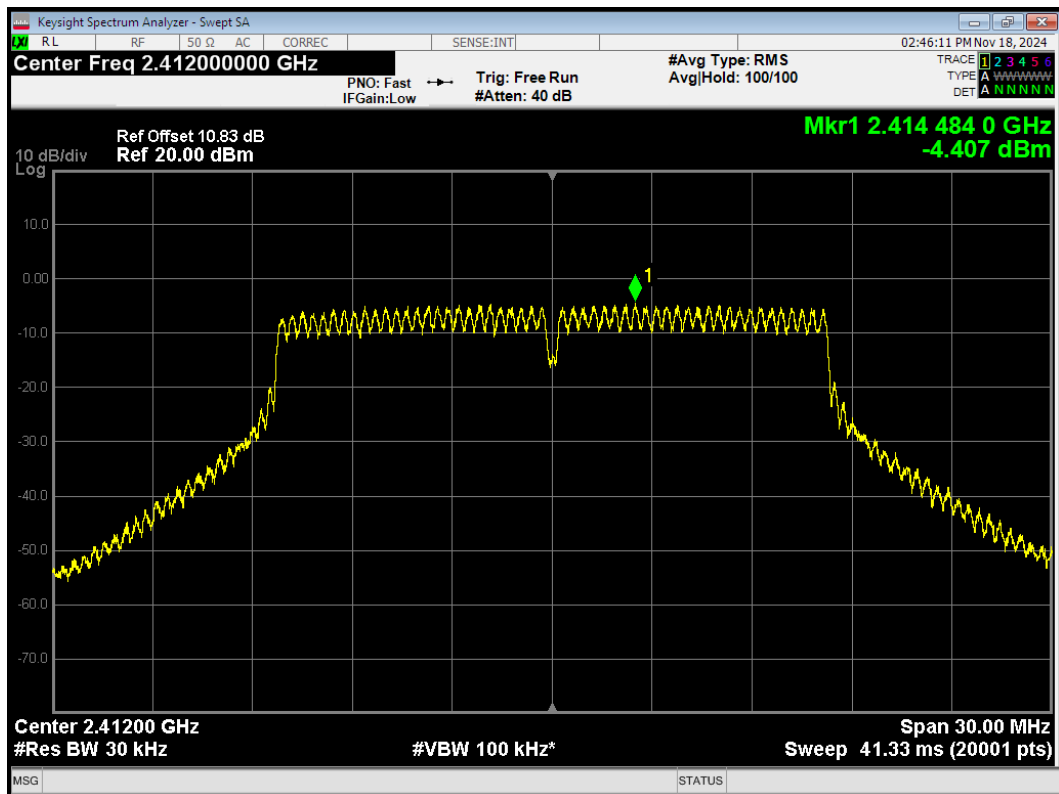


PSD 802.11g 2437MHz

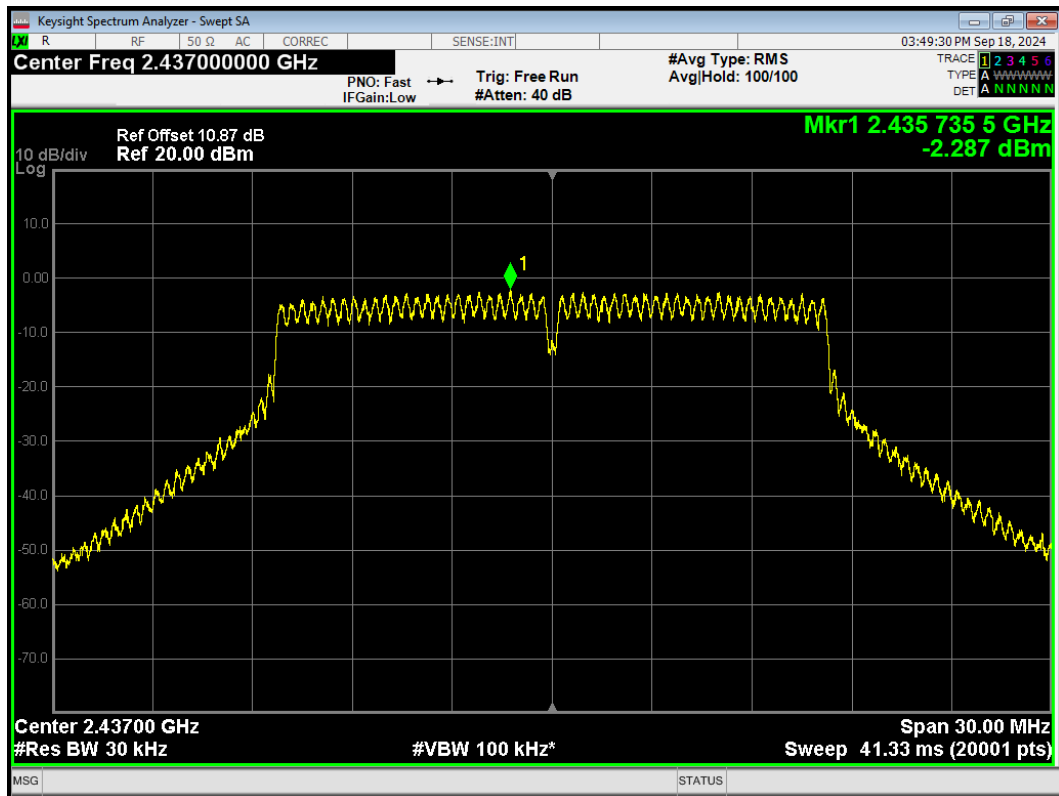


PSD 802.11g 2462MHz

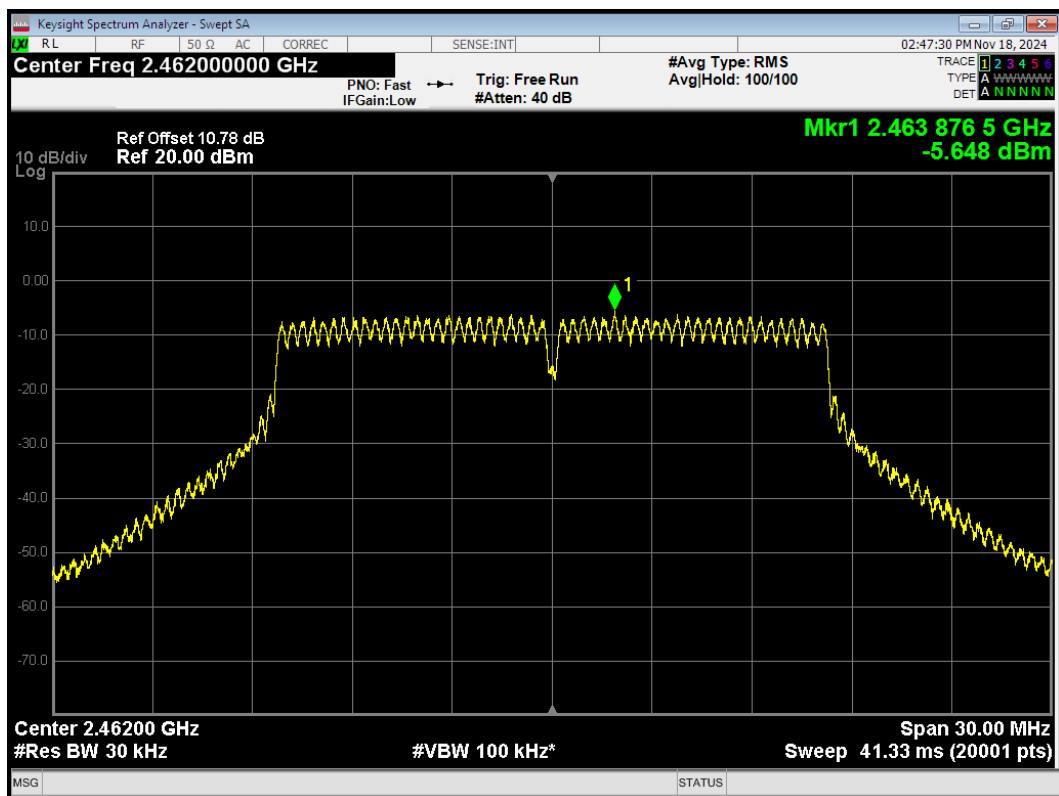


PSD 802.11n(HT20) 2412MHz

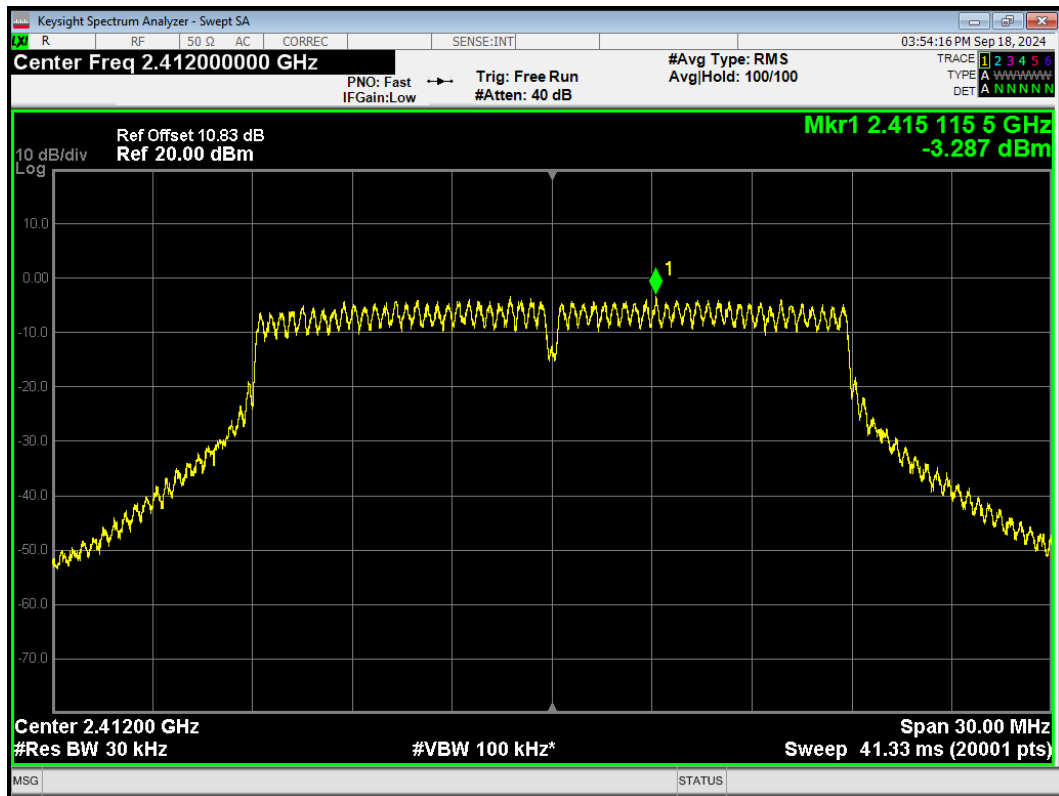


PSD 802.11n(HT20) 2437MHz

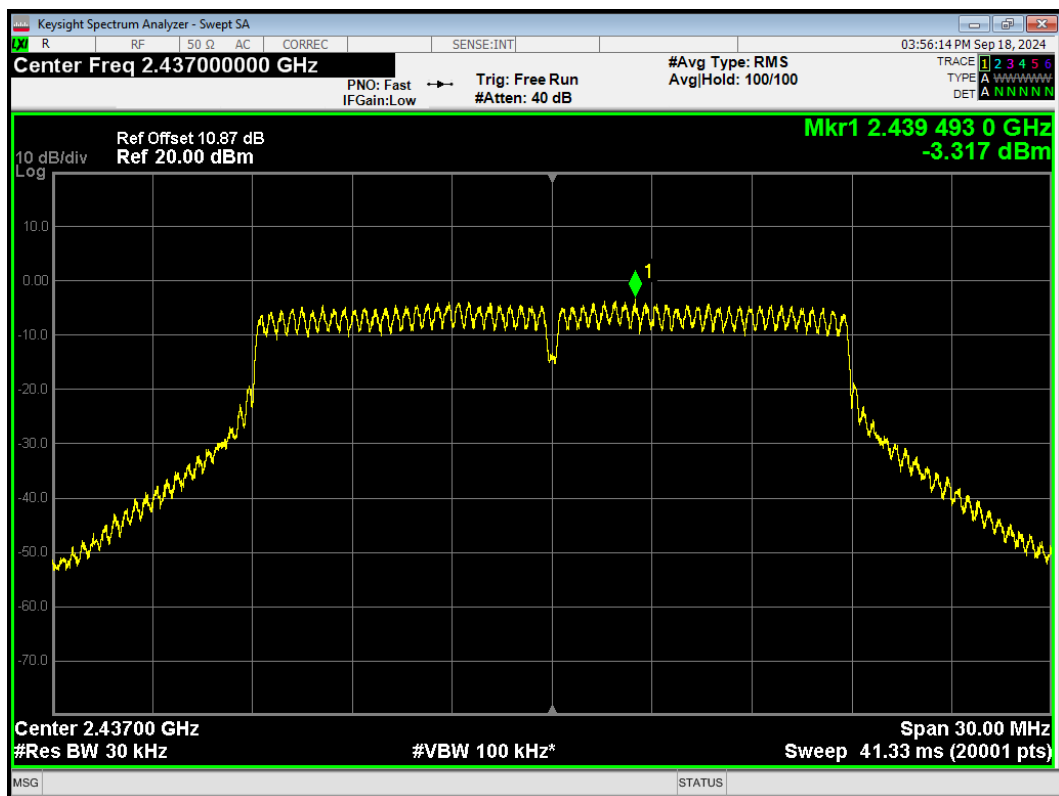


PSD 802.11n(HT20) 2462MHz

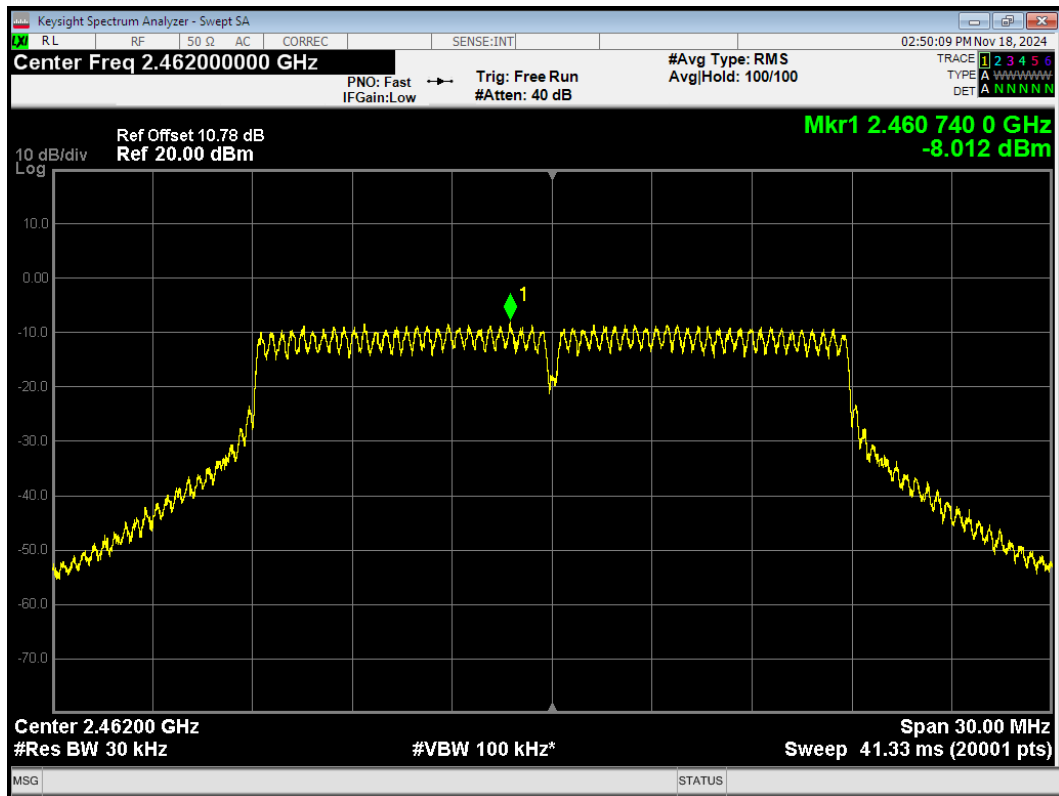


PSD 802.11n(HT40) 2422MHz

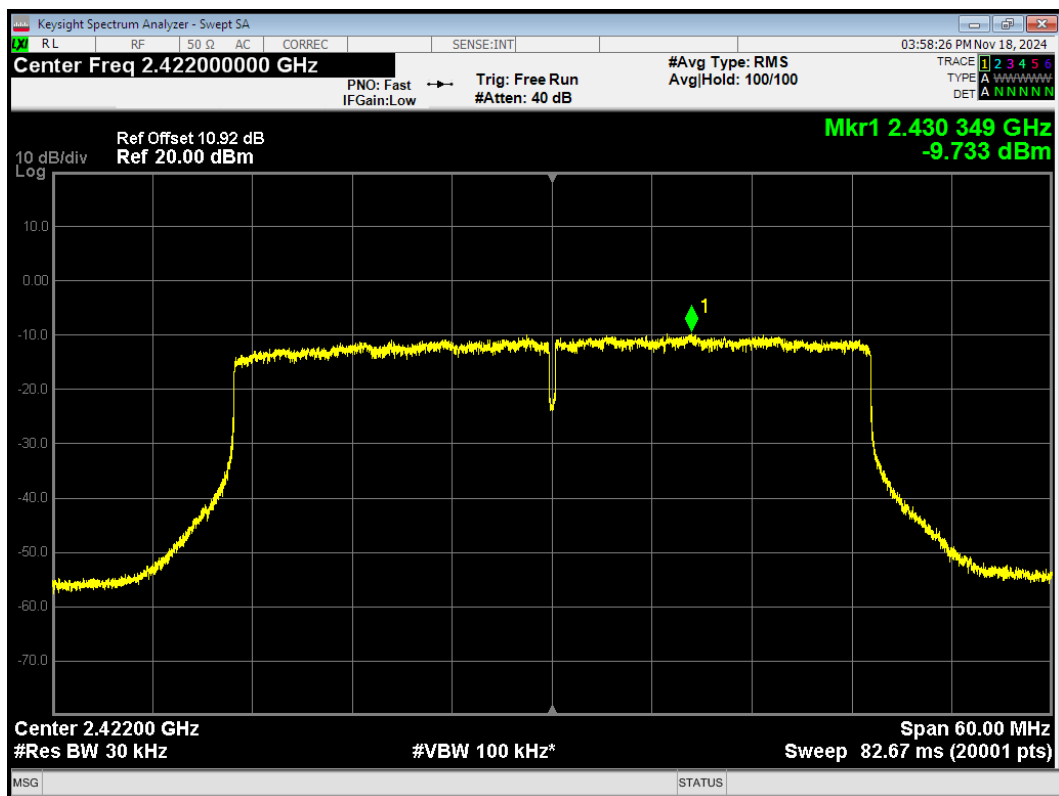

PSD 802.11n(HT40) 2437MHz

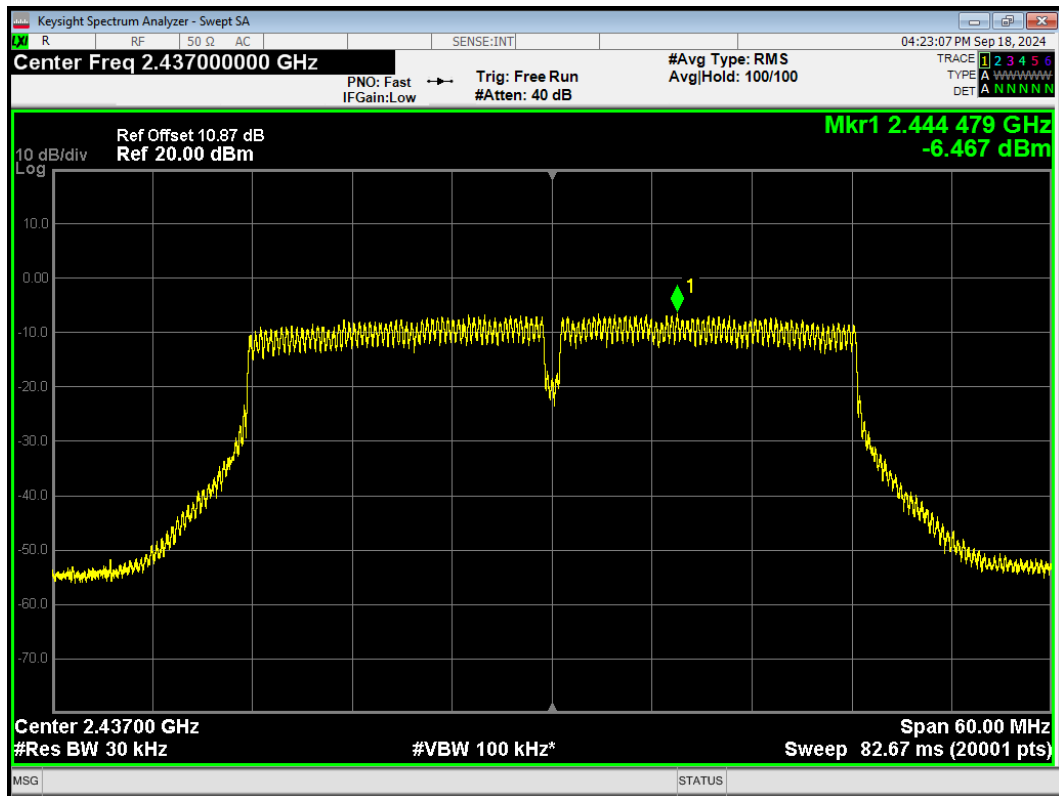


PSD 802.11n(HT40) 2452MHz

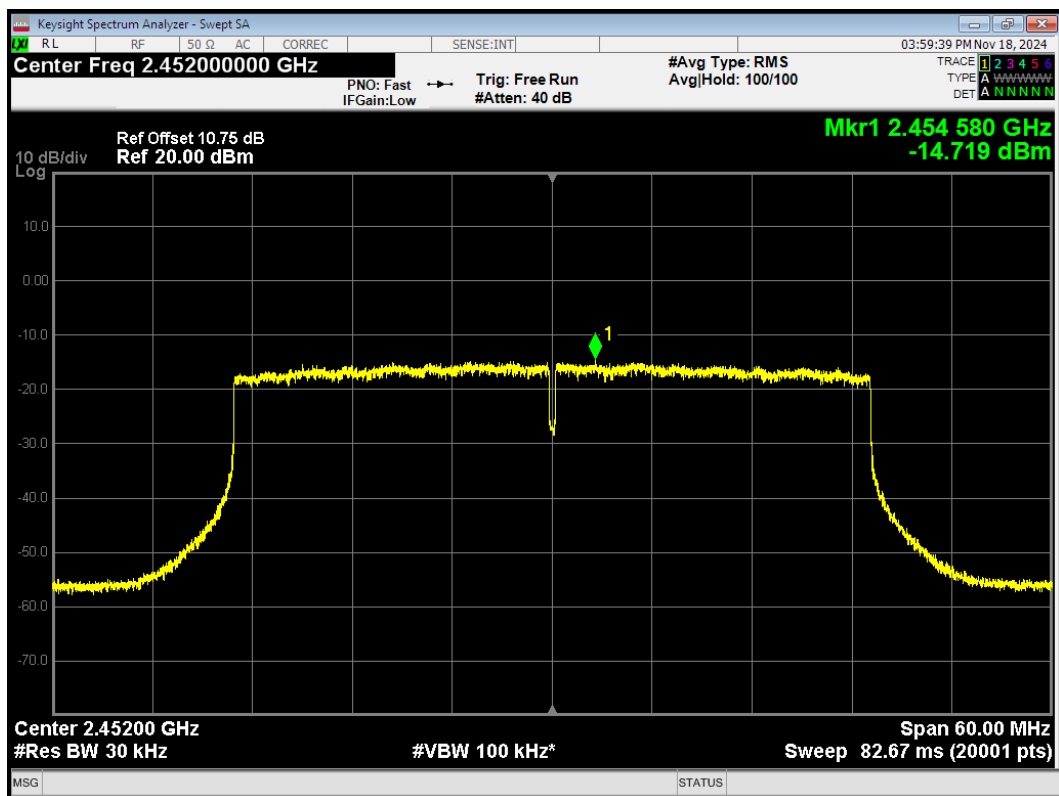


MIMO


PSD 802.11ax(HE20) 2412MHz Ant1

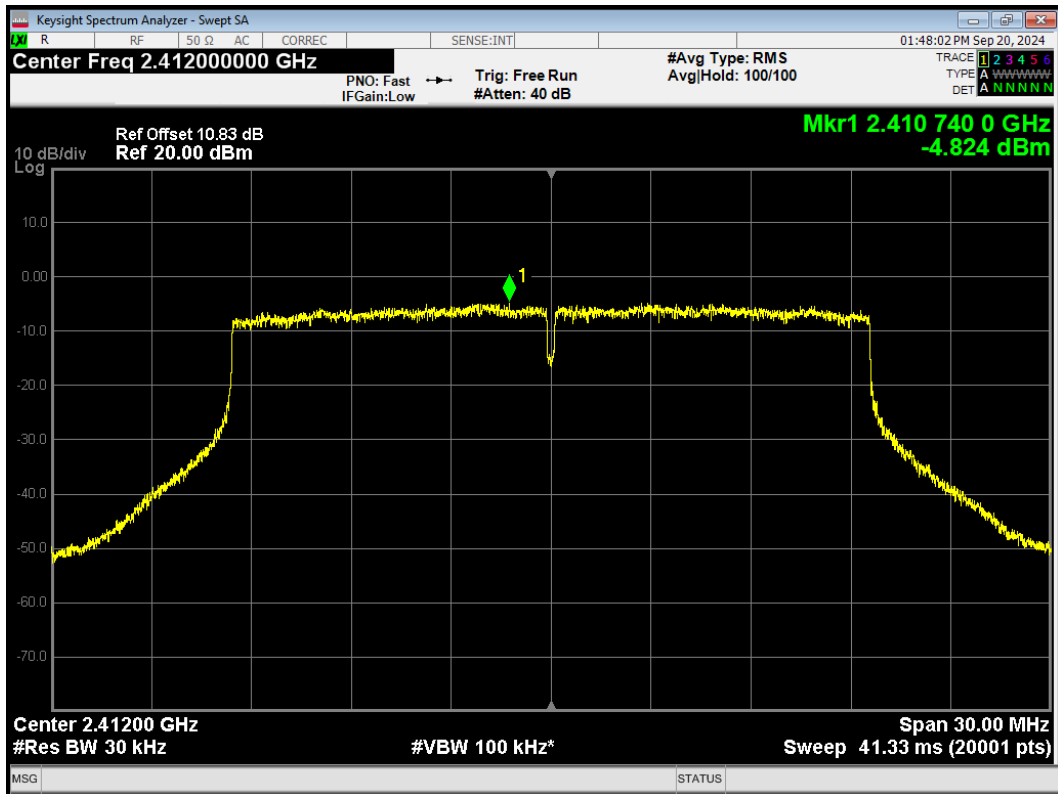


PSD 802.11ax(HE20) 2412MHz Ant2

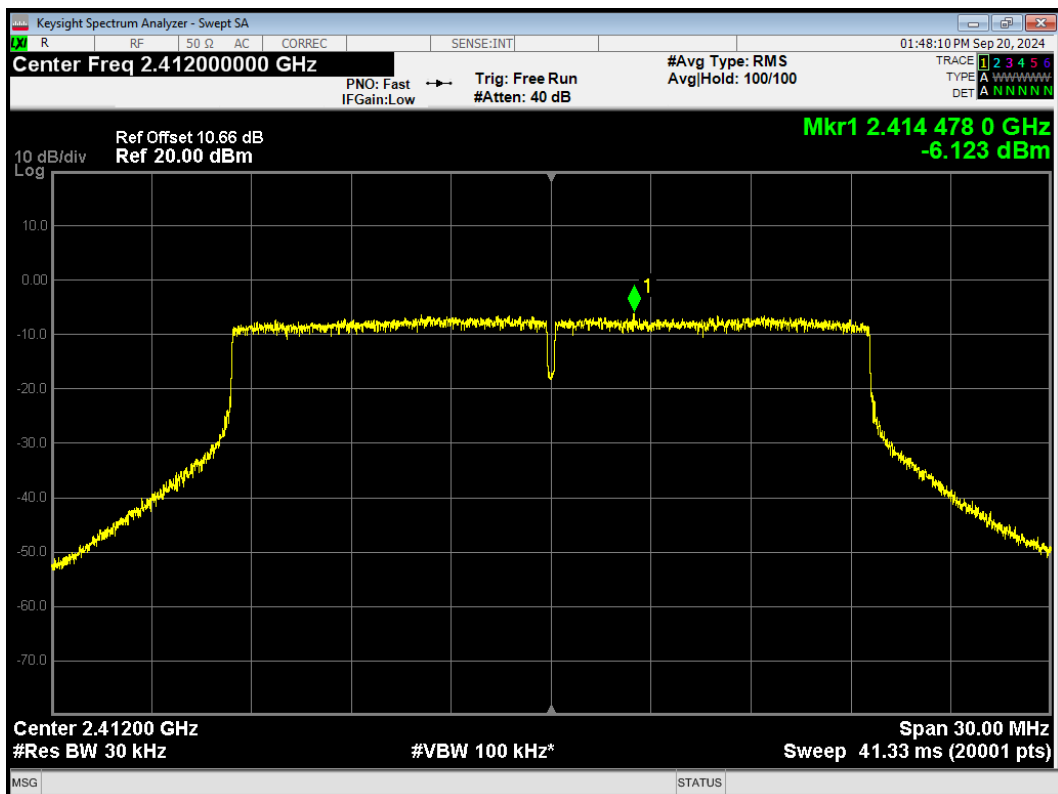


PSD 802.11ax(HE20) 2437MHz Ant1

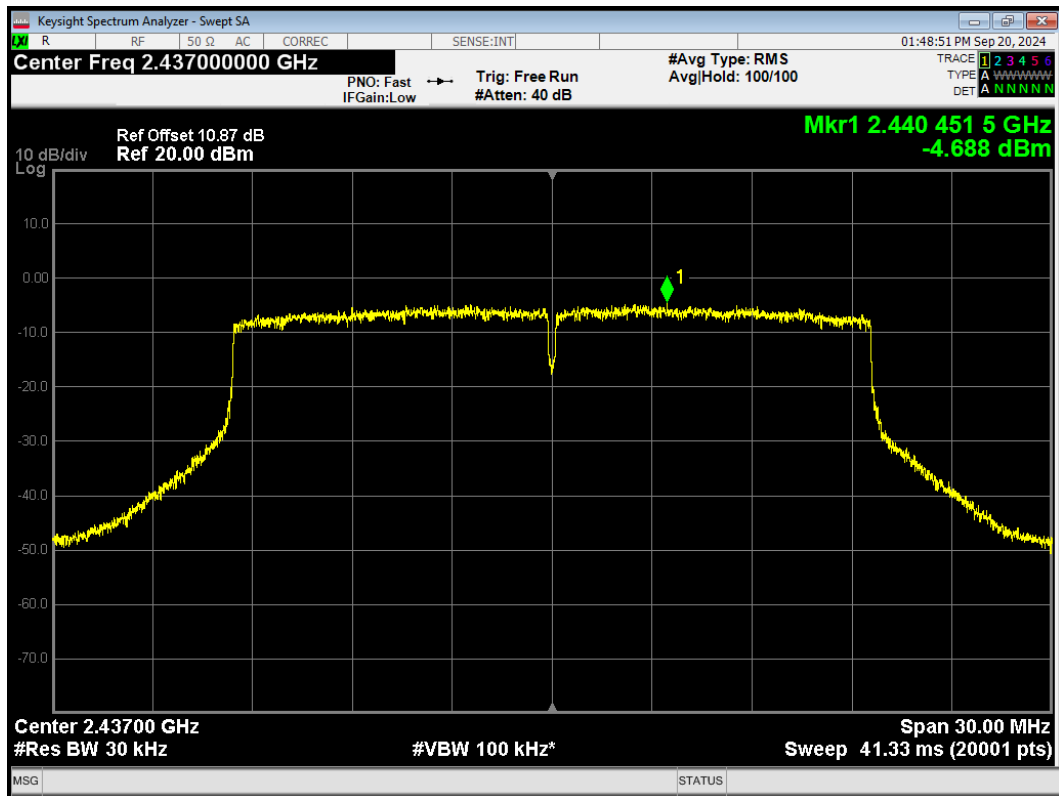


PSD 802.11ax(HE20) 2437MHz Ant2

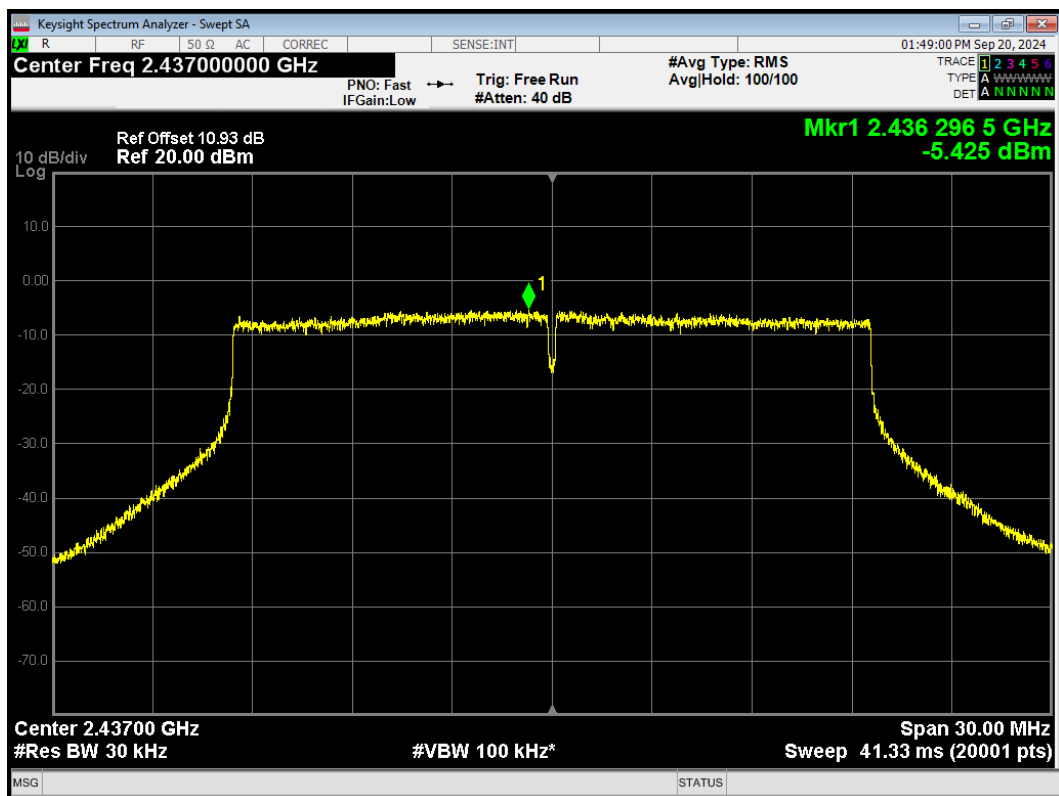


PSD 802.11ax(HE20) 2462MHz Ant1

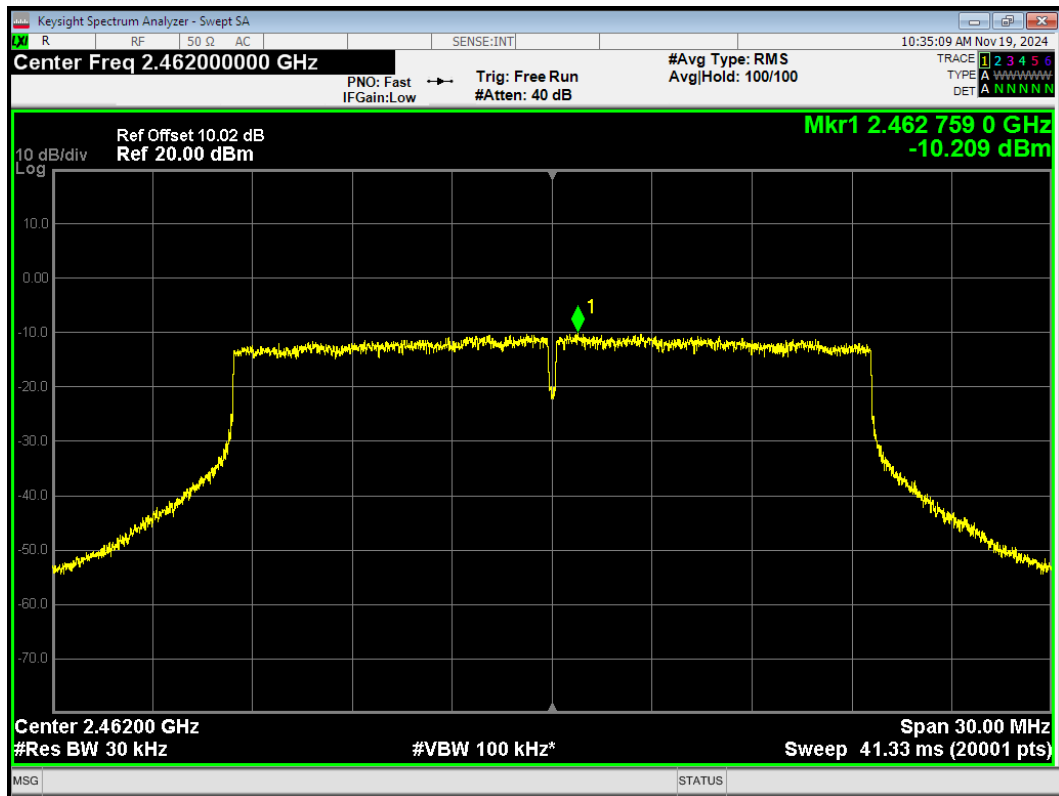


PSD 802.11ax(HE20) 2462MHz Ant2

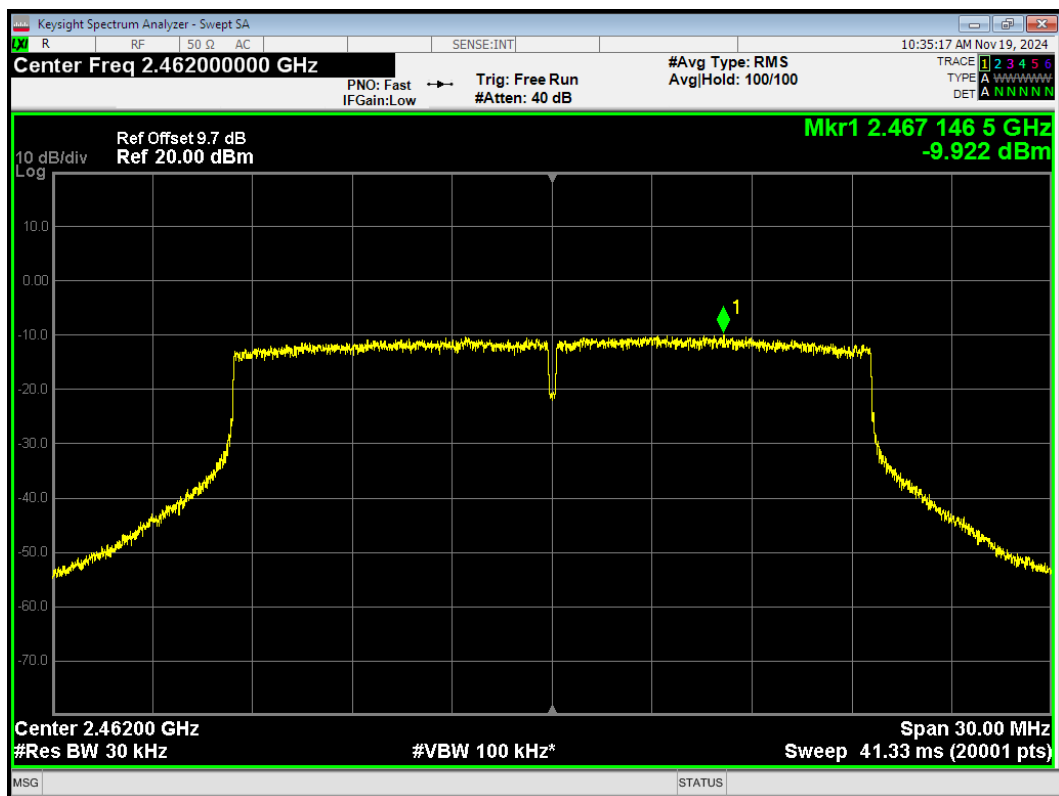


PSD 802.11ax(HE40) 2422MHz Ant1

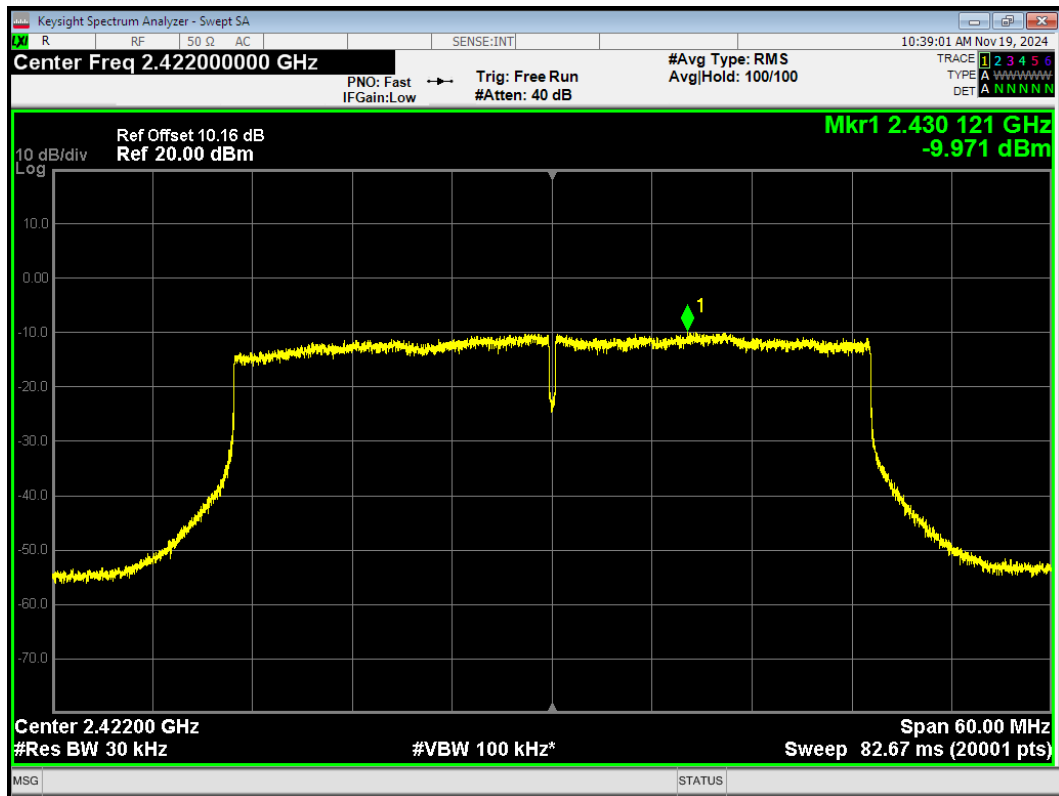


PSD 802.11ax(HE40) 2422MHz Ant2

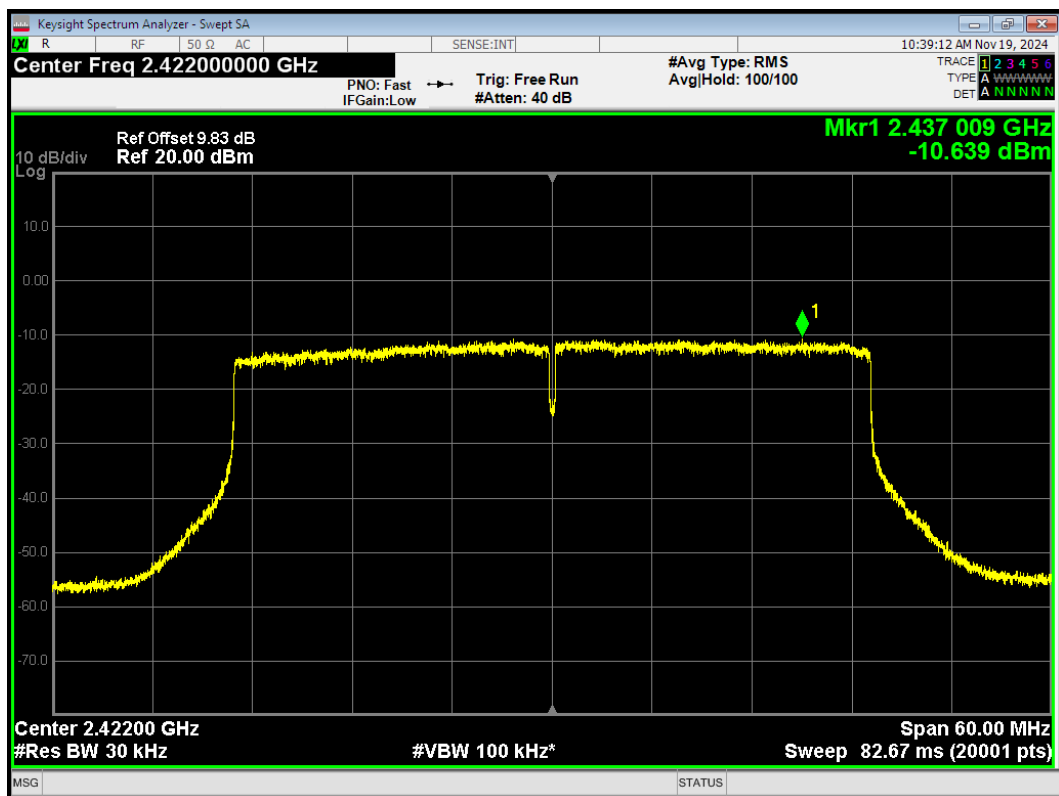


PSD 802.11ax(HE40) 2437MHz Ant1

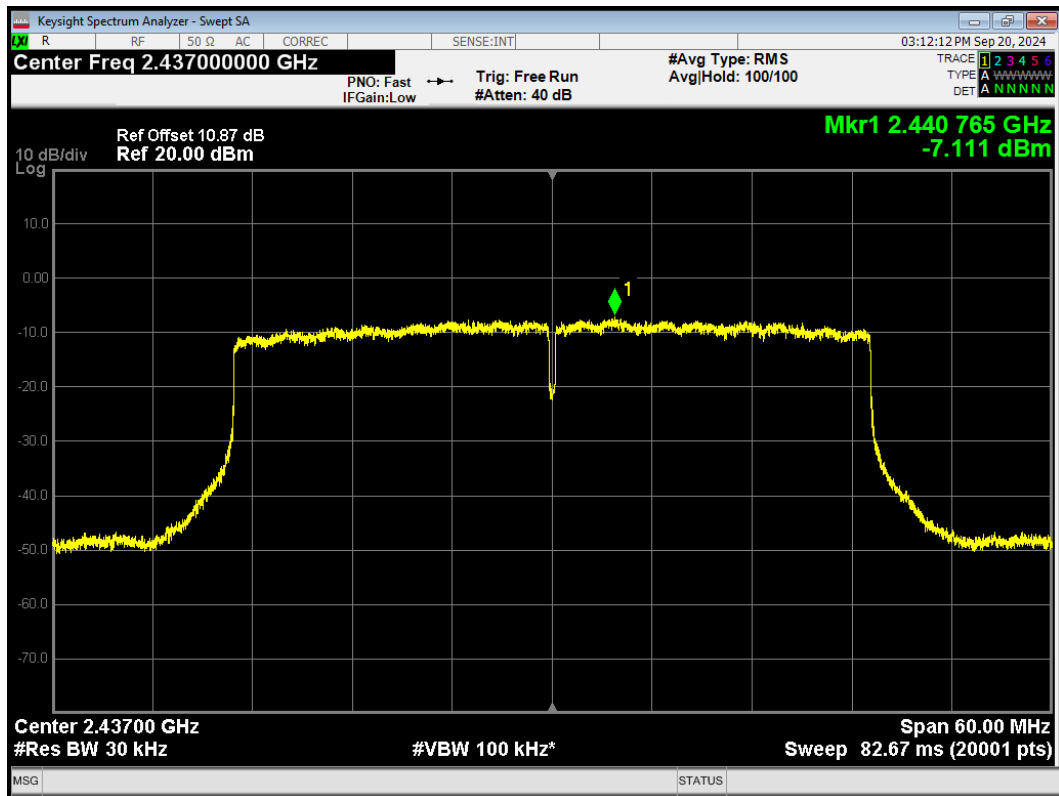


PSD 802.11ax(HE40) 2437MHz Ant2

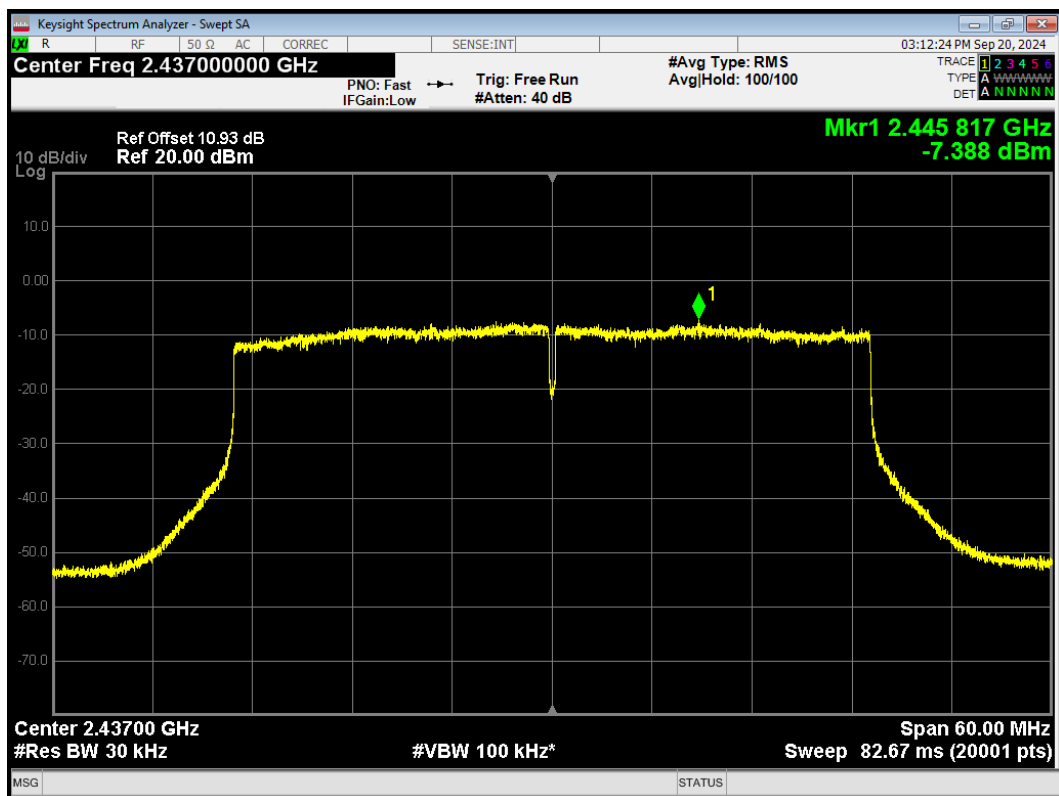


PSD 802.11ax(HE40) 2452MHz Ant1

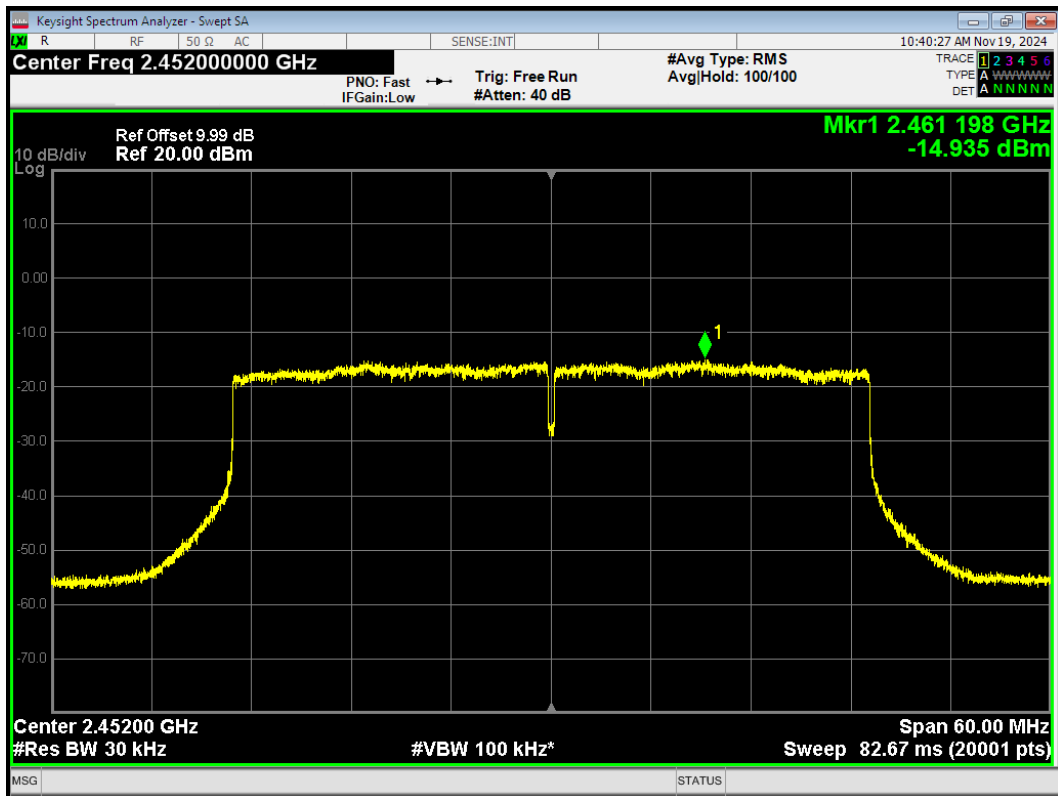


PSD 802.11ax(HE40) 2452MHz Ant2

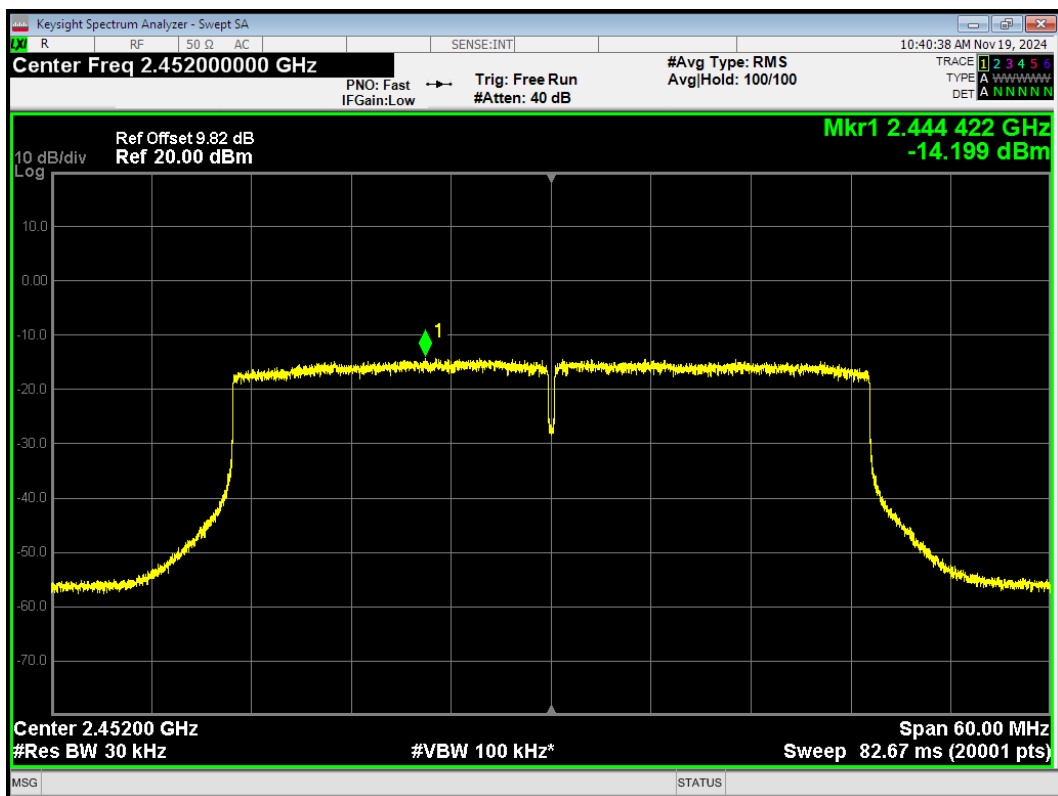


PSD 802.11b 2412MHz Ant1

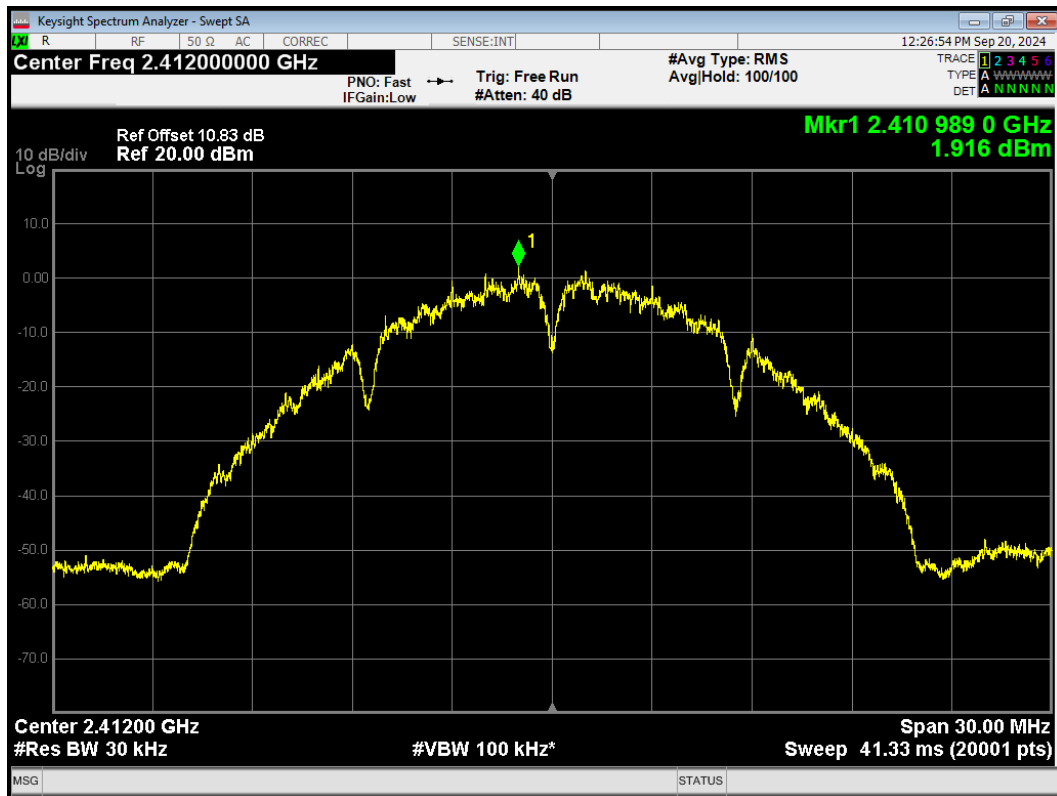


PSD 802.11b 2412MHz Ant2

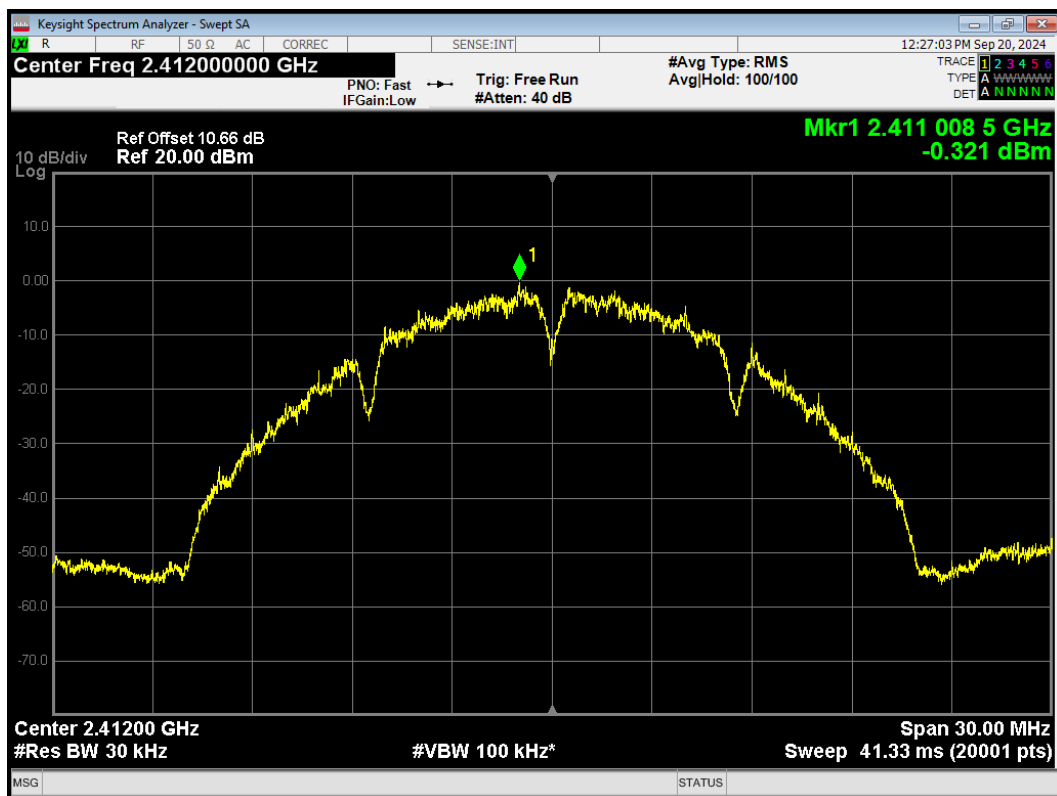


PSD 802.11b 2437MHz Ant1

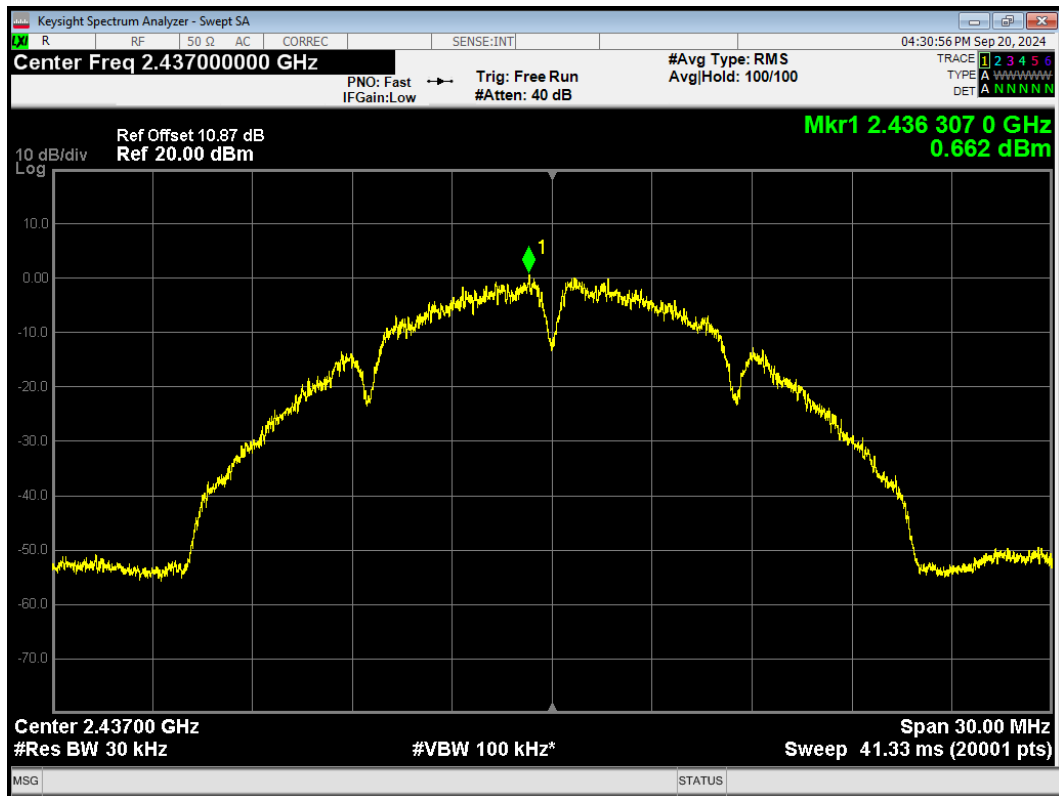


PSD 802.11b 2437MHz Ant2

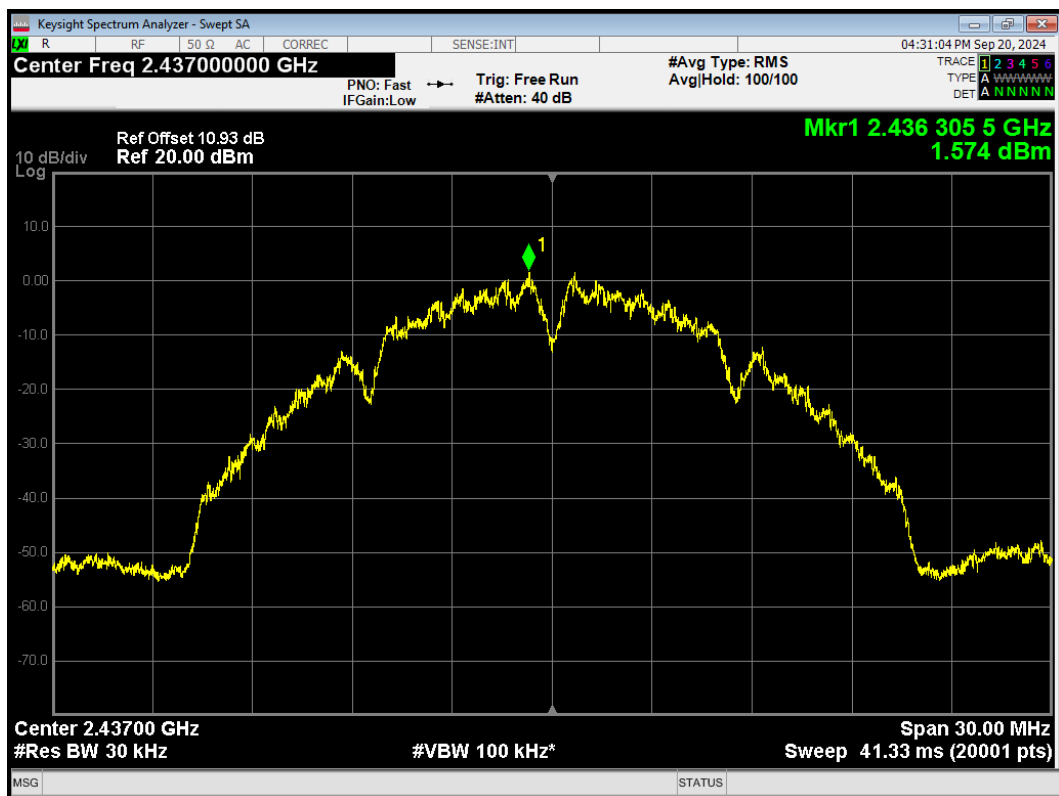


PSD 802.11b 2462MHz Ant1

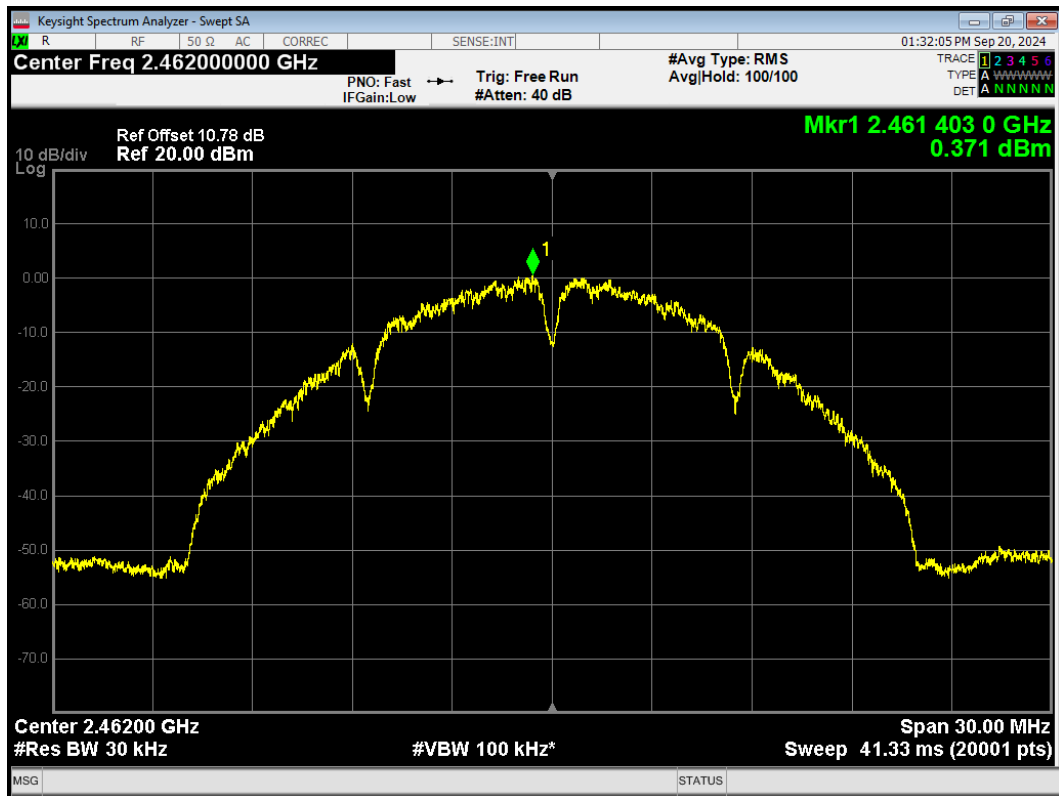


PSD 802.11b 2462MHz Ant2

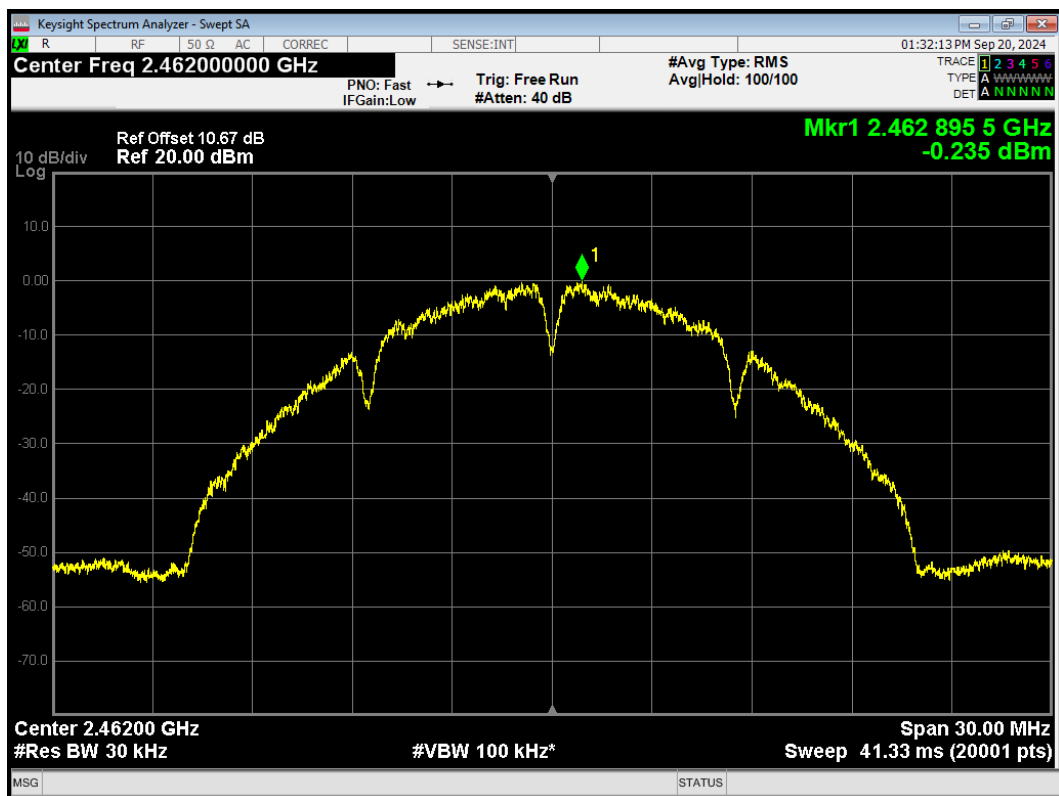


PSD 802.11g 2412MHz Ant1

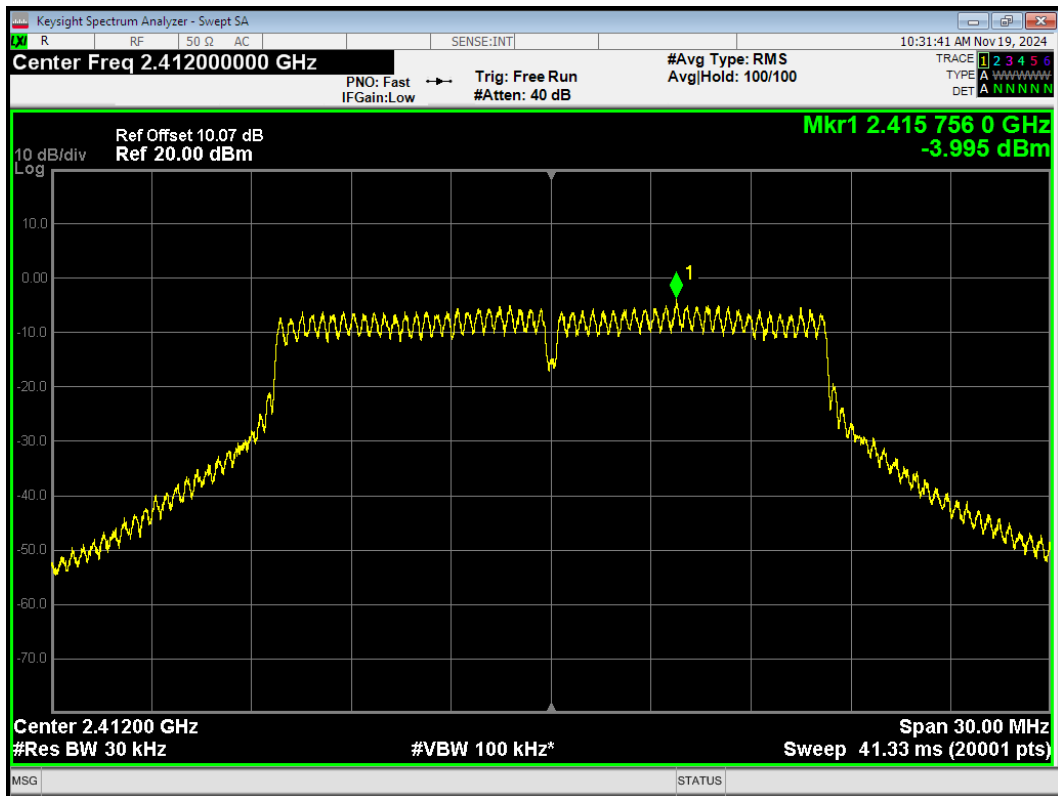


PSD 802.11g 2412MHz Ant2

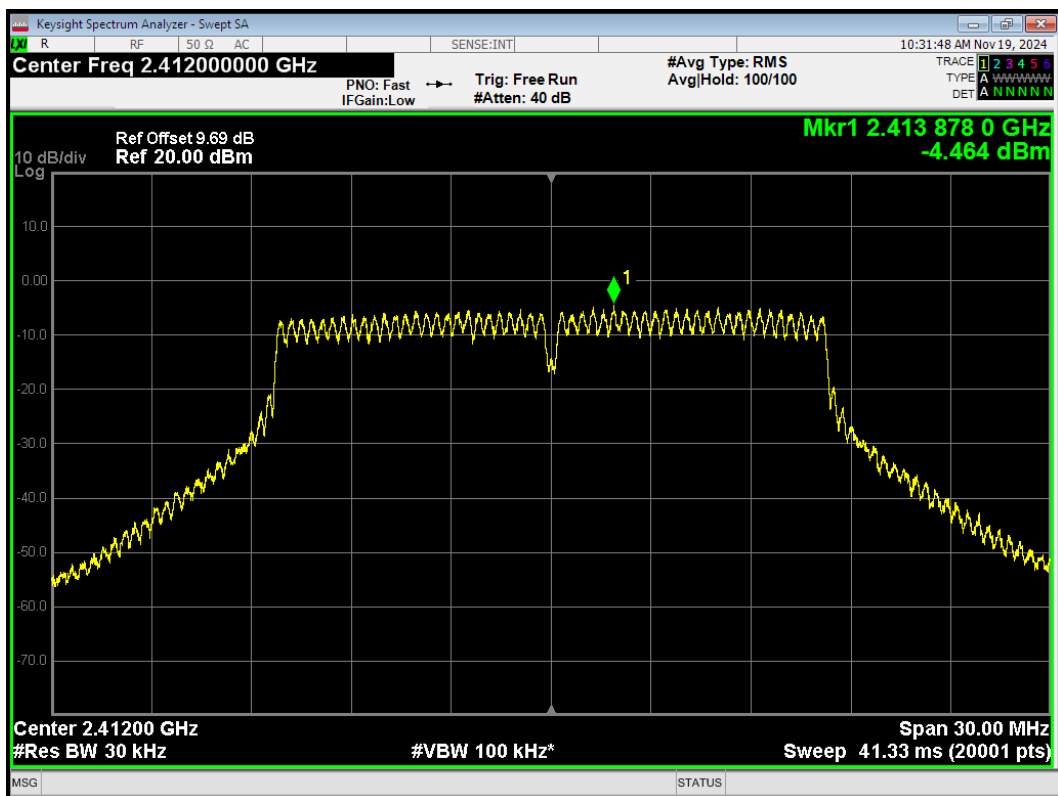


PSD 802.11g 2437MHz Ant1

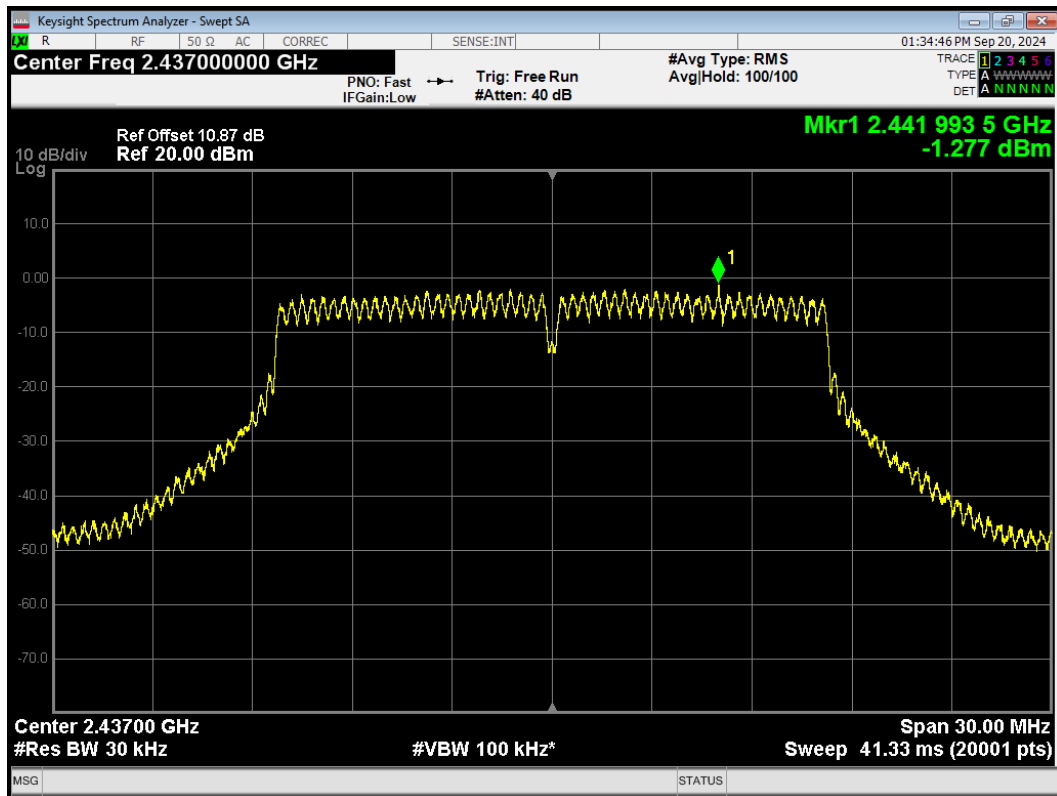


PSD 802.11g 2437MHz Ant2

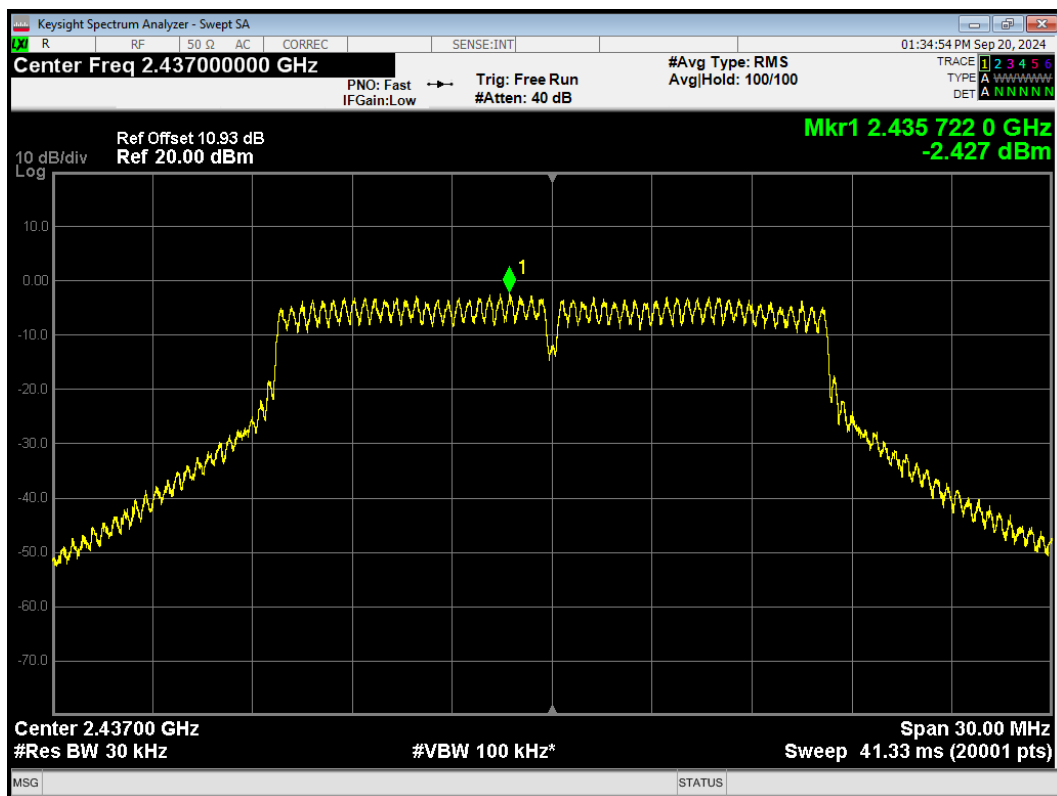


PSD 802.11g 2462MHz Ant1

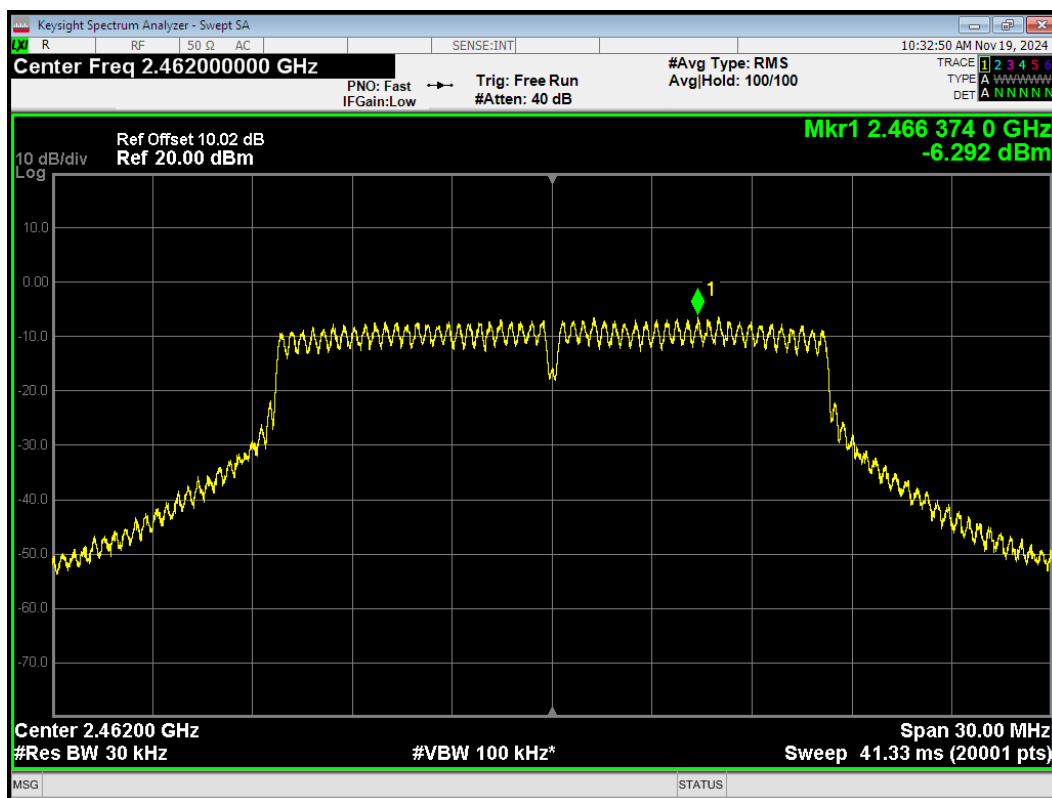


PSD 802.11g 2462MHz Ant2

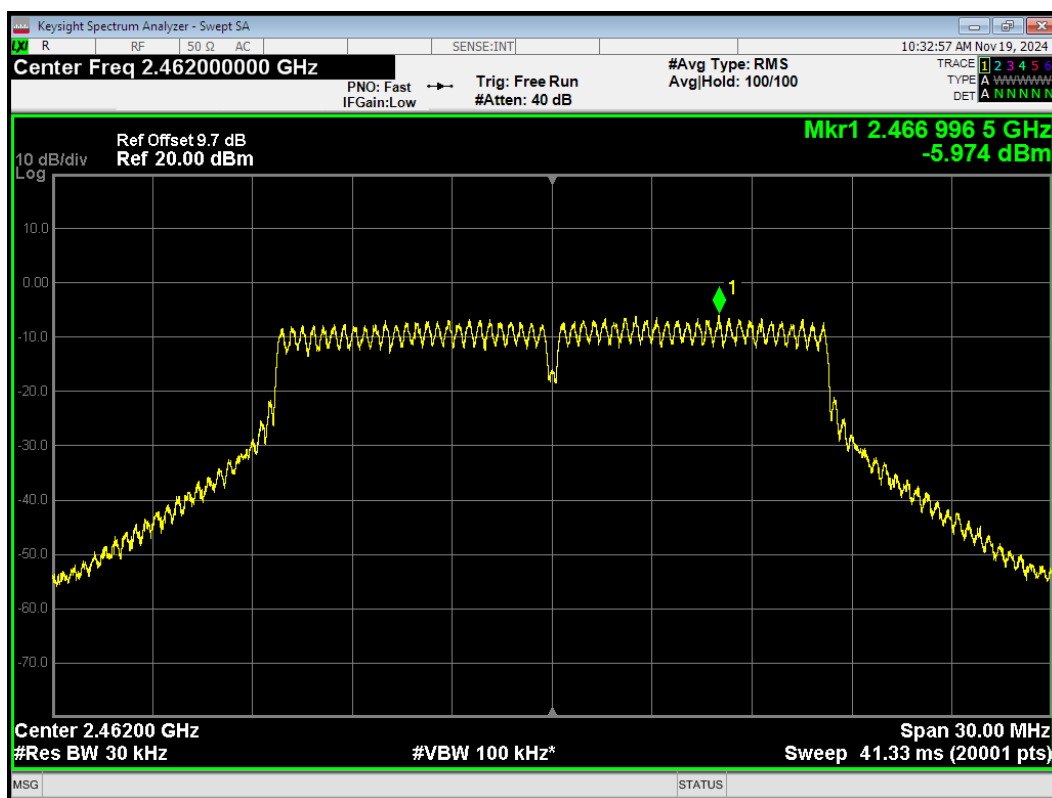


PSD 802.11n(HT20) 2412MHz Ant1

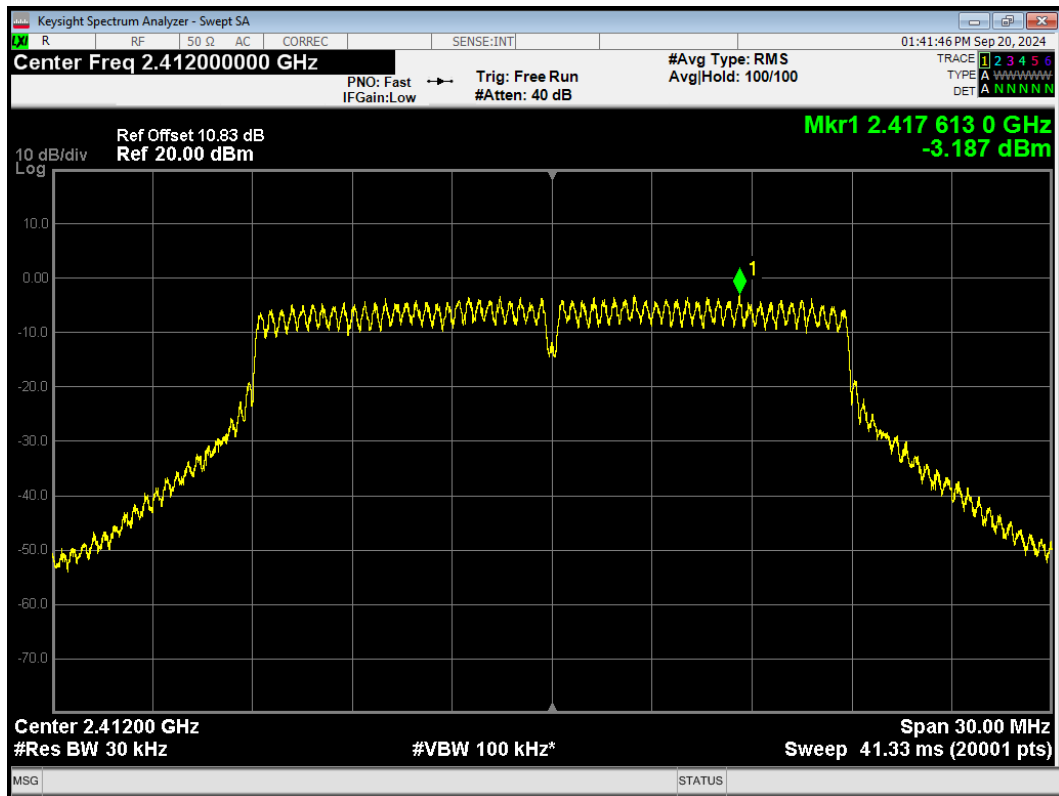


PSD 802.11n(HT20) 2412MHz Ant2

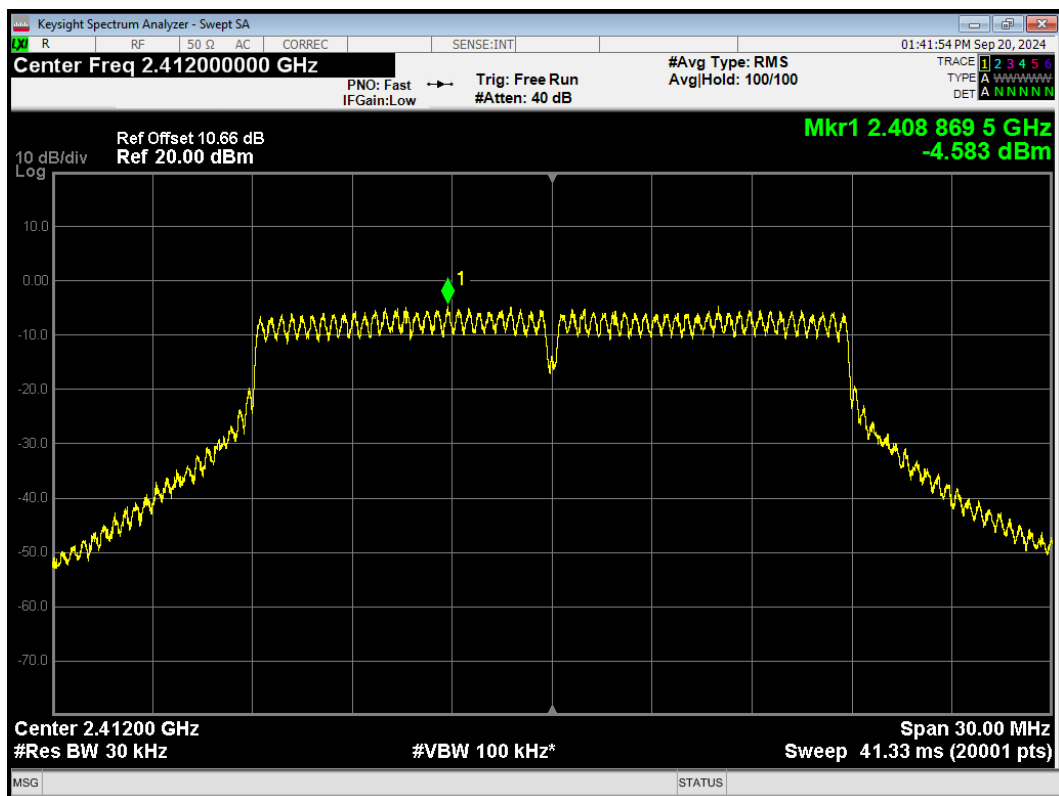


PSD 802.11n(HT20) 2437MHz Ant1

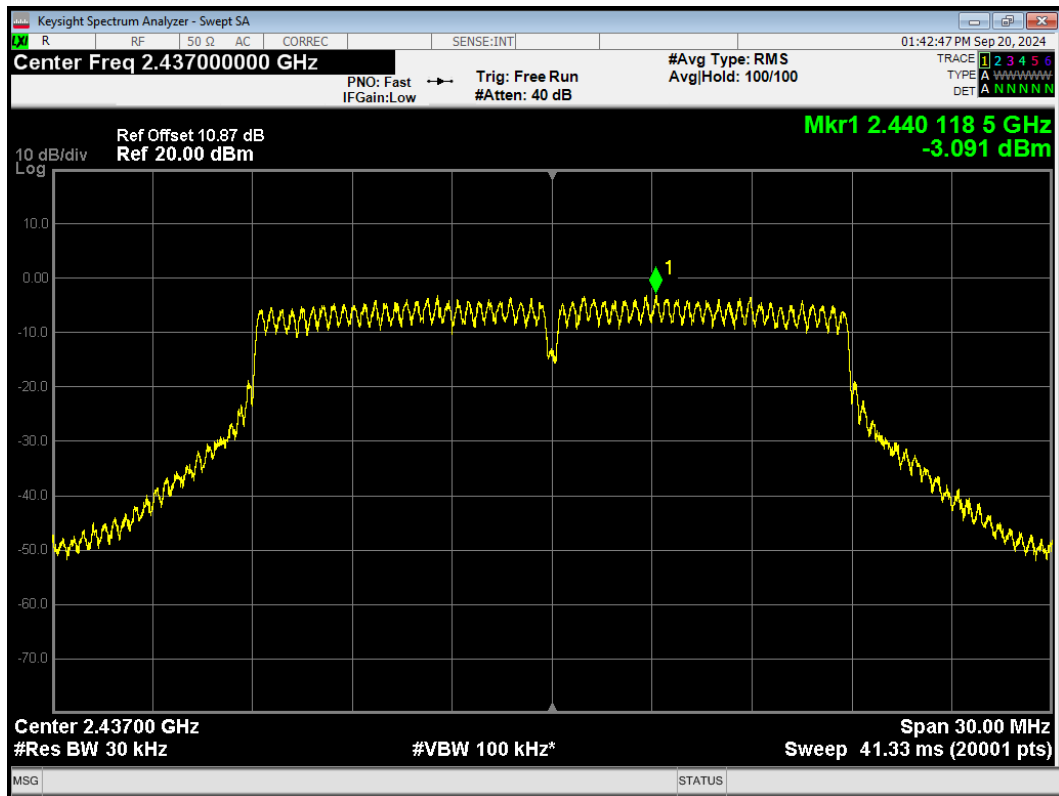


PSD 802.11n(HT20) 2437MHz Ant2

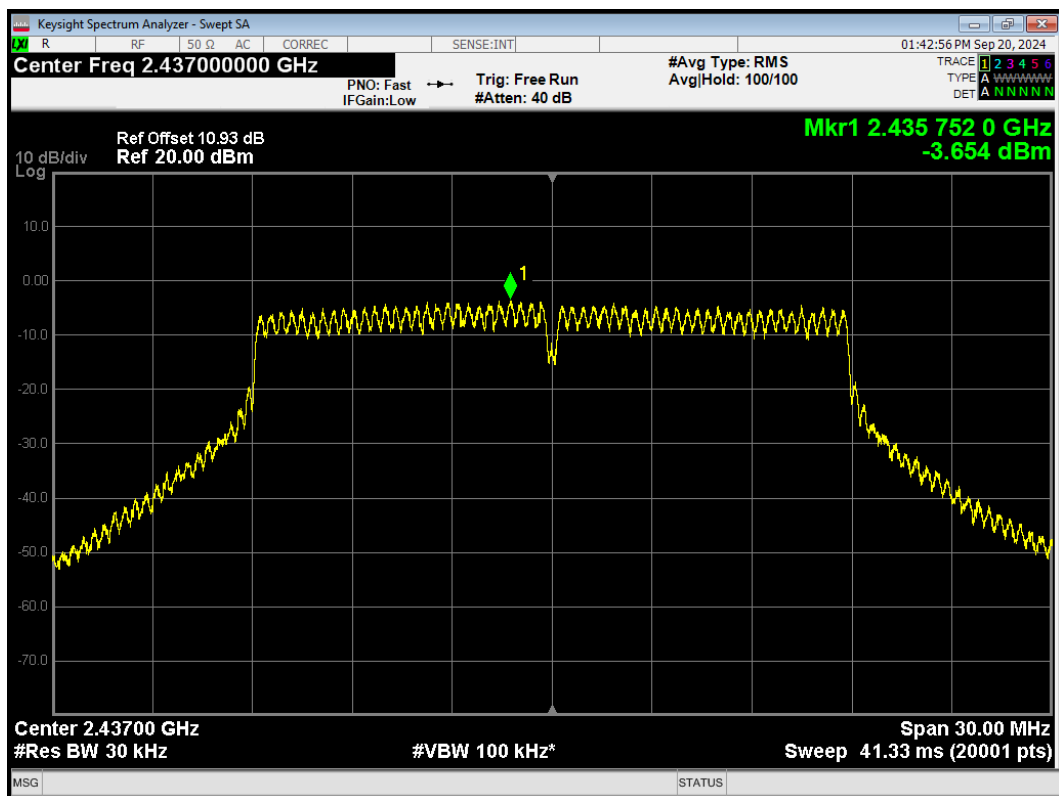


PSD 802.11n(HT20) 2462MHz Ant1

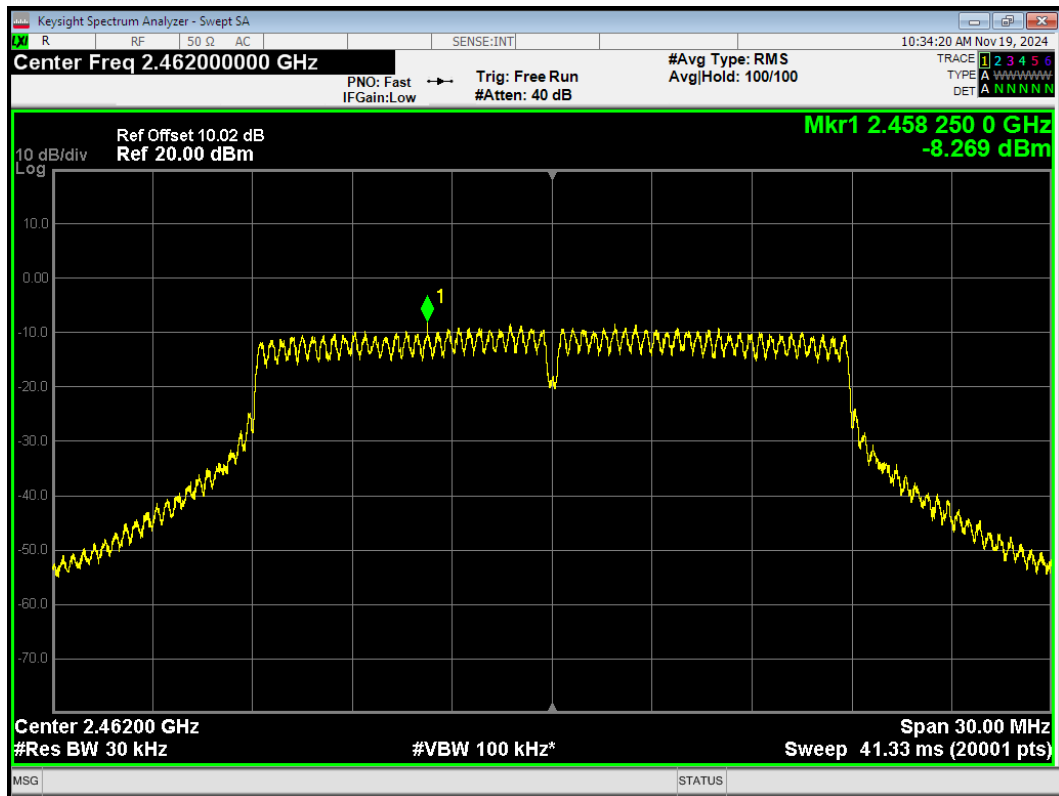


PSD 802.11n(HT20) 2462MHz Ant2

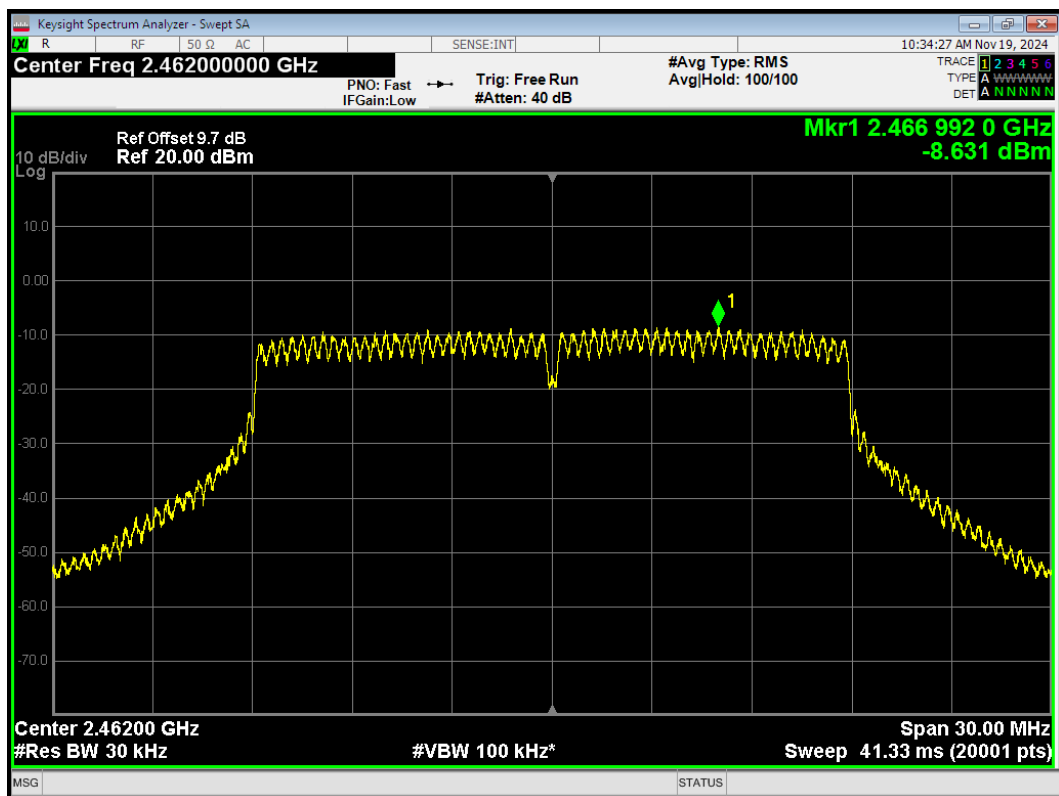


PSD 802.11n(HT40) 2422MHz Ant1

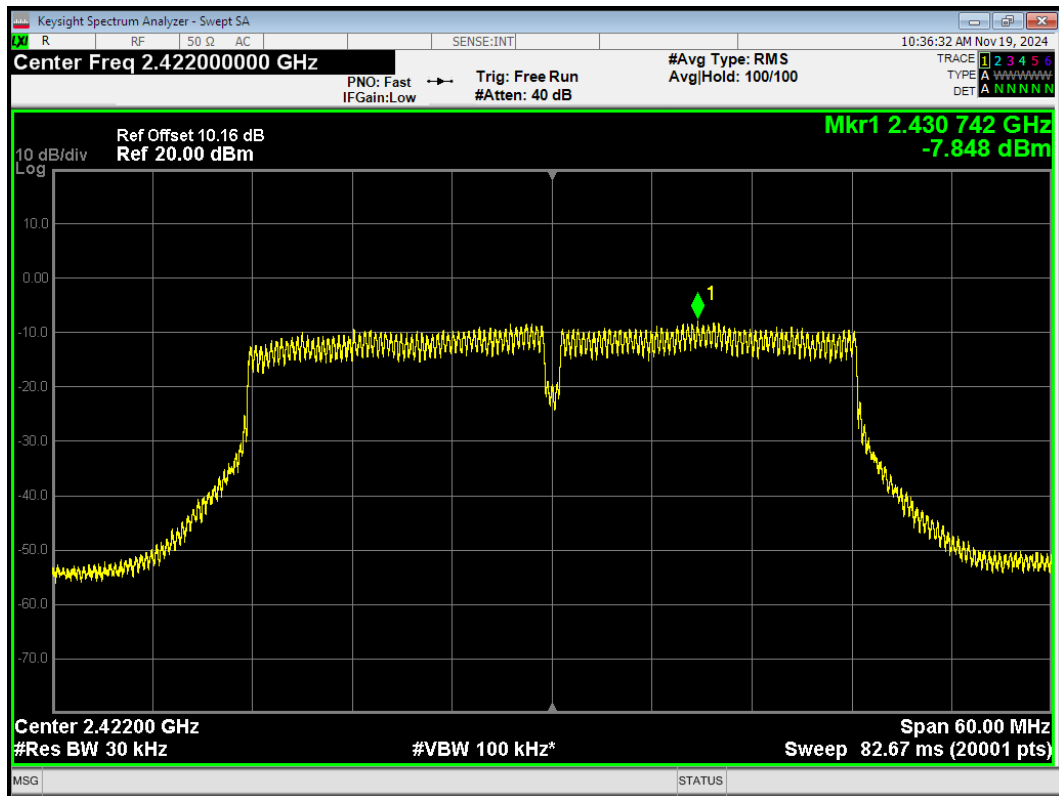


PSD 802.11n(HT40) 2422MHz Ant2

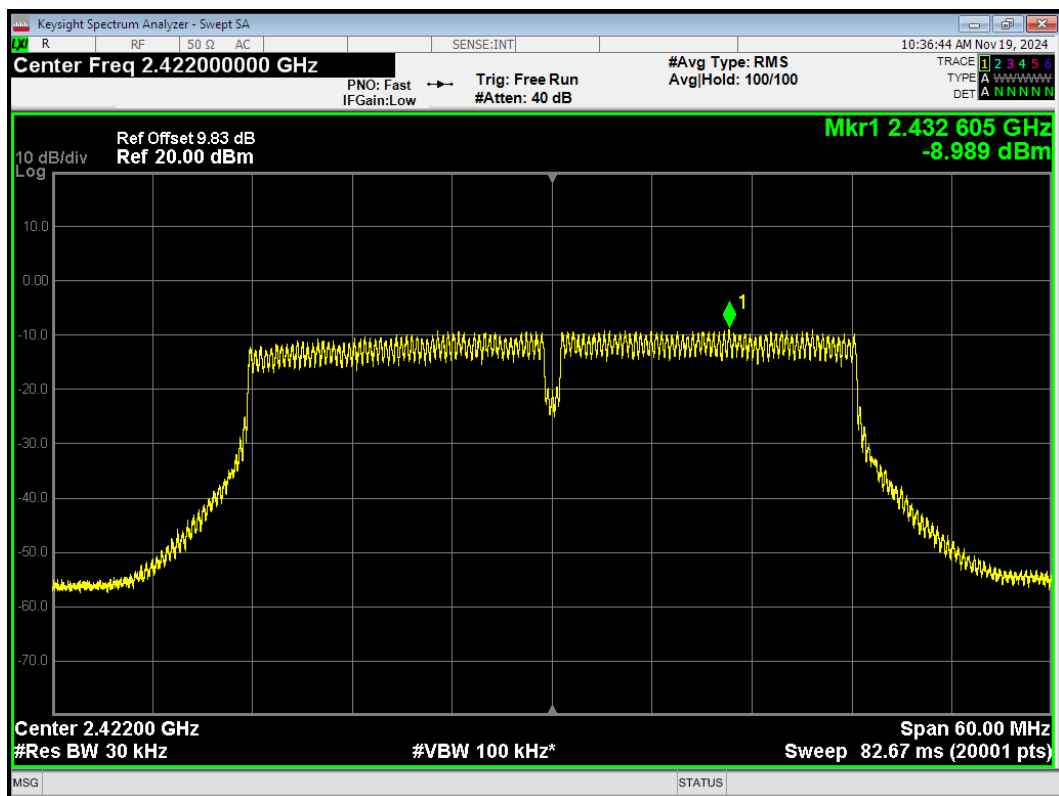


PSD 802.11n(HT40) 2437MHz Ant1

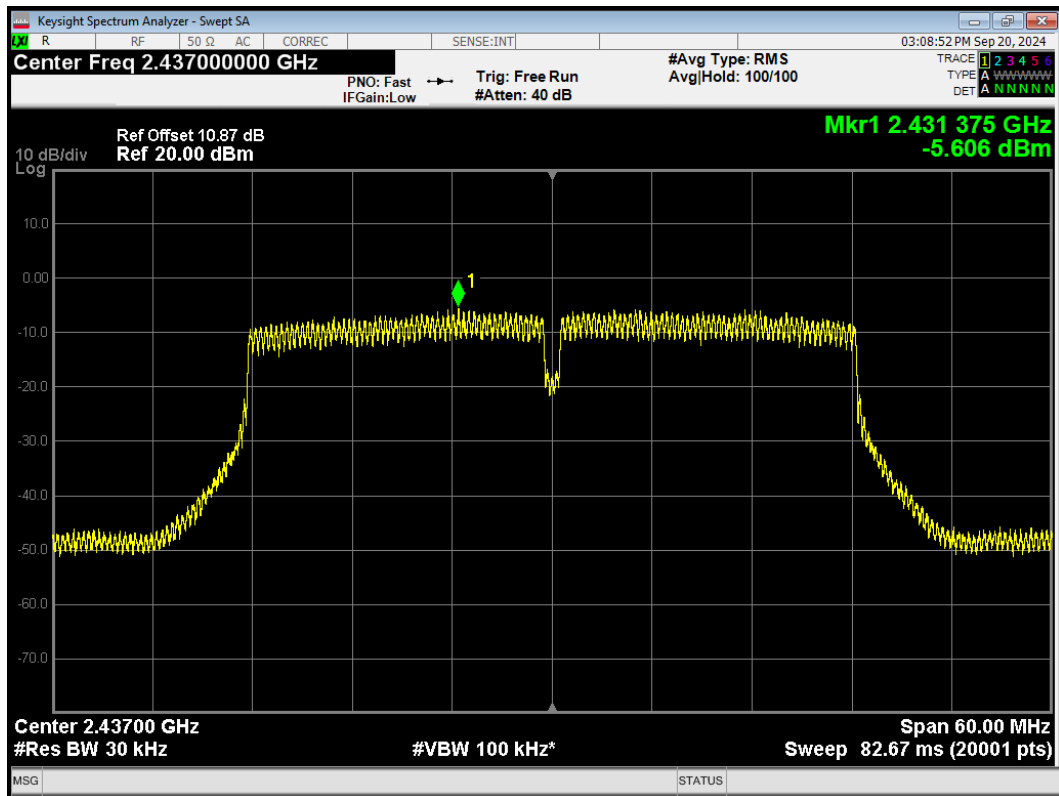


PSD 802.11n(HT40) 2437MHz Ant2

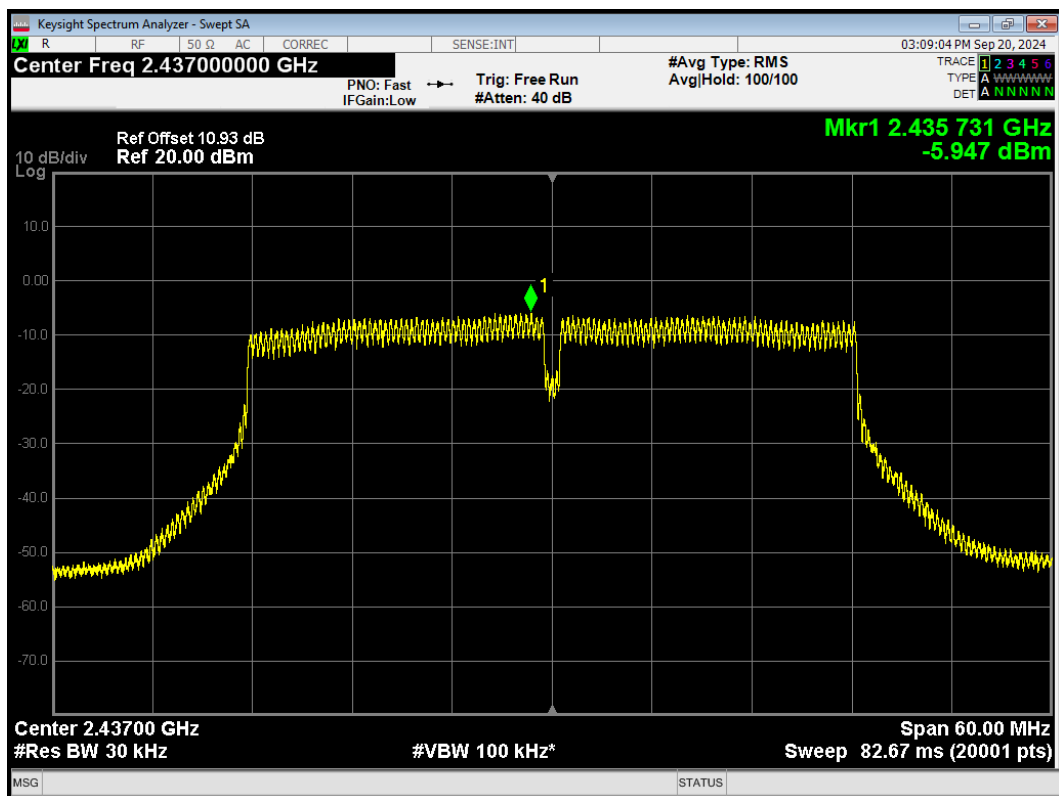

PSD 802.11n(HT40) 2452MHz Ant1

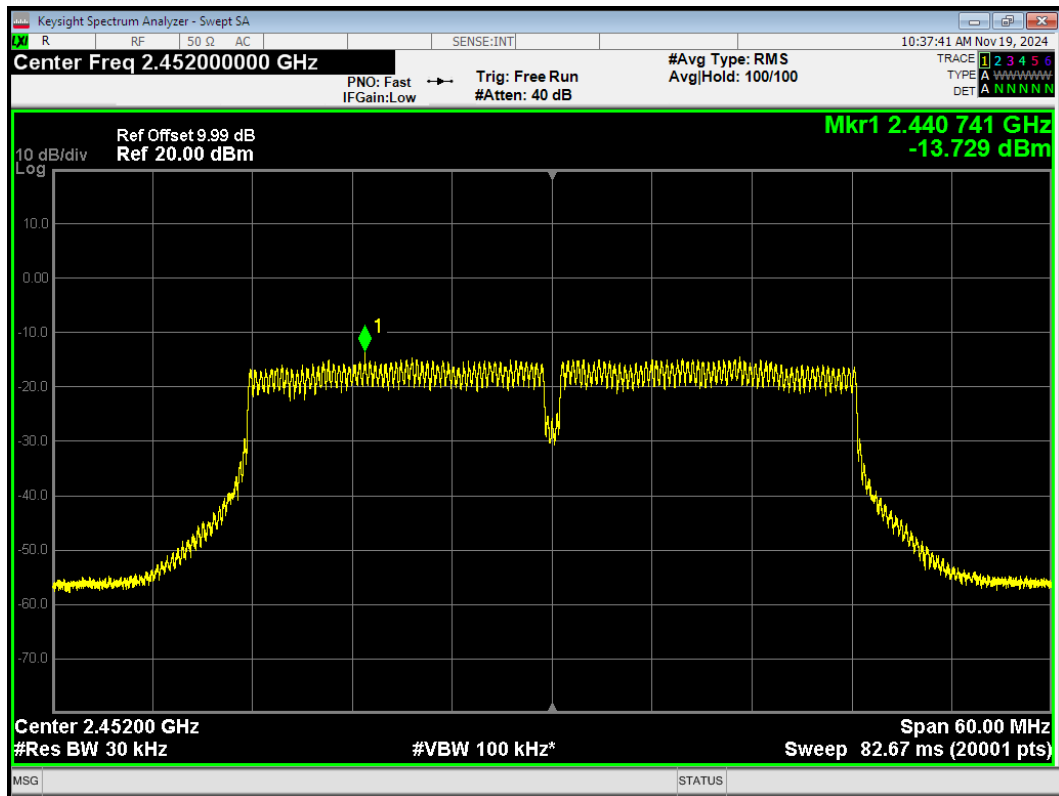


PSD 802.11n(HT40) 2452MHz Ant2

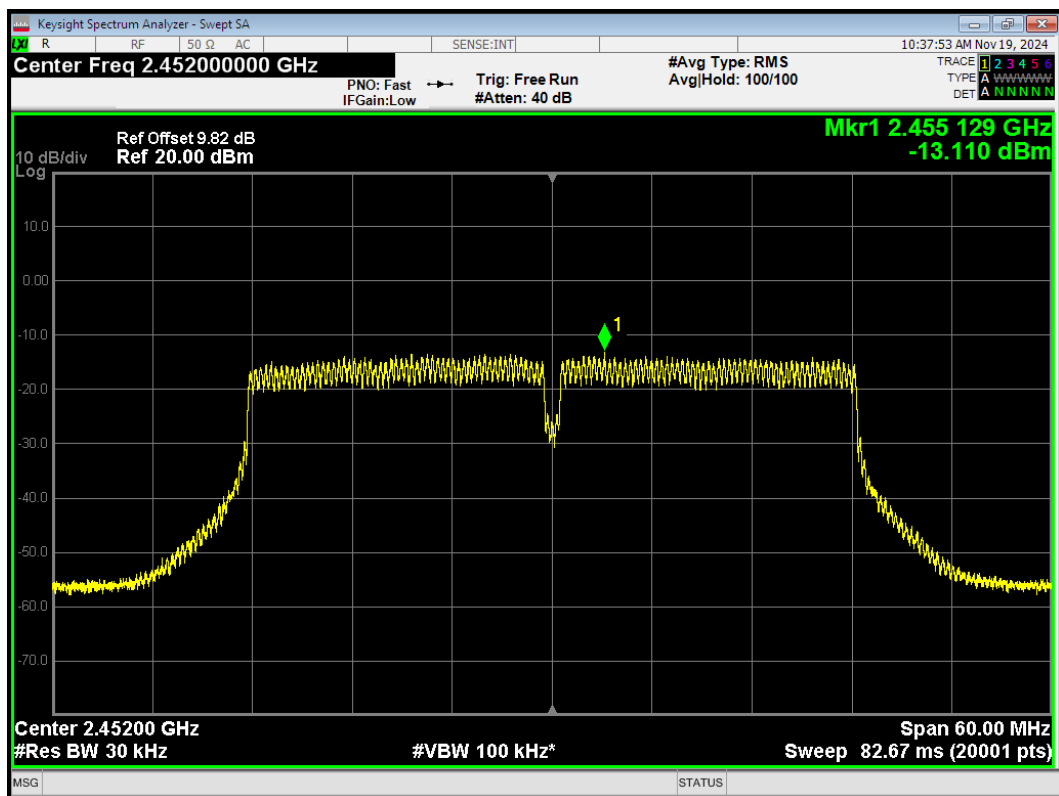


Beamforming


PSD 802.11ax(HE20) 2412MHz Ant1

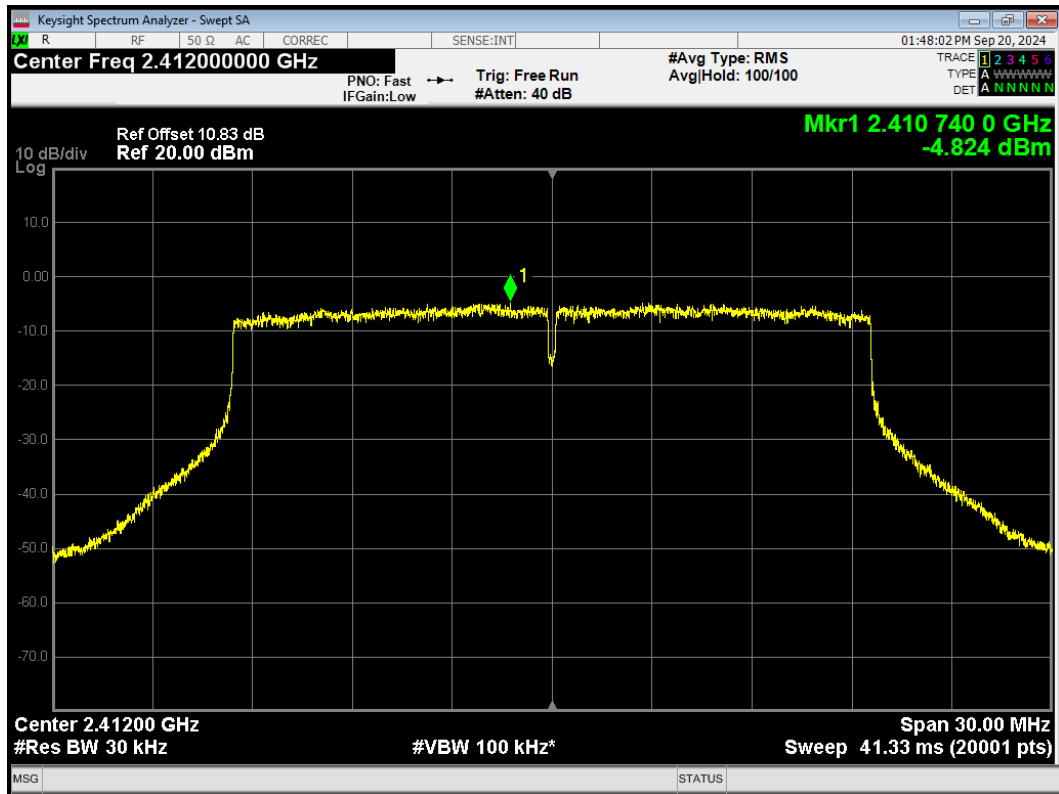


PSD 802.11ax(HE20) 2412MHz Ant2

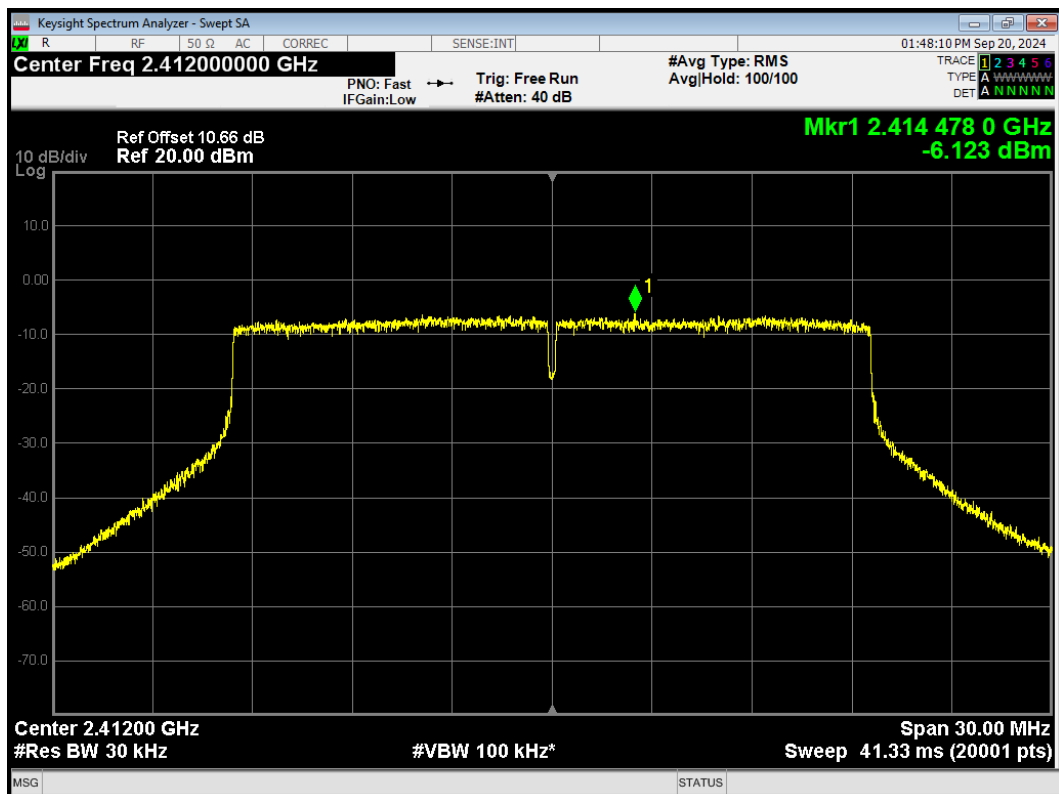


PSD 802.11ax(HE20) 2437MHz Ant1

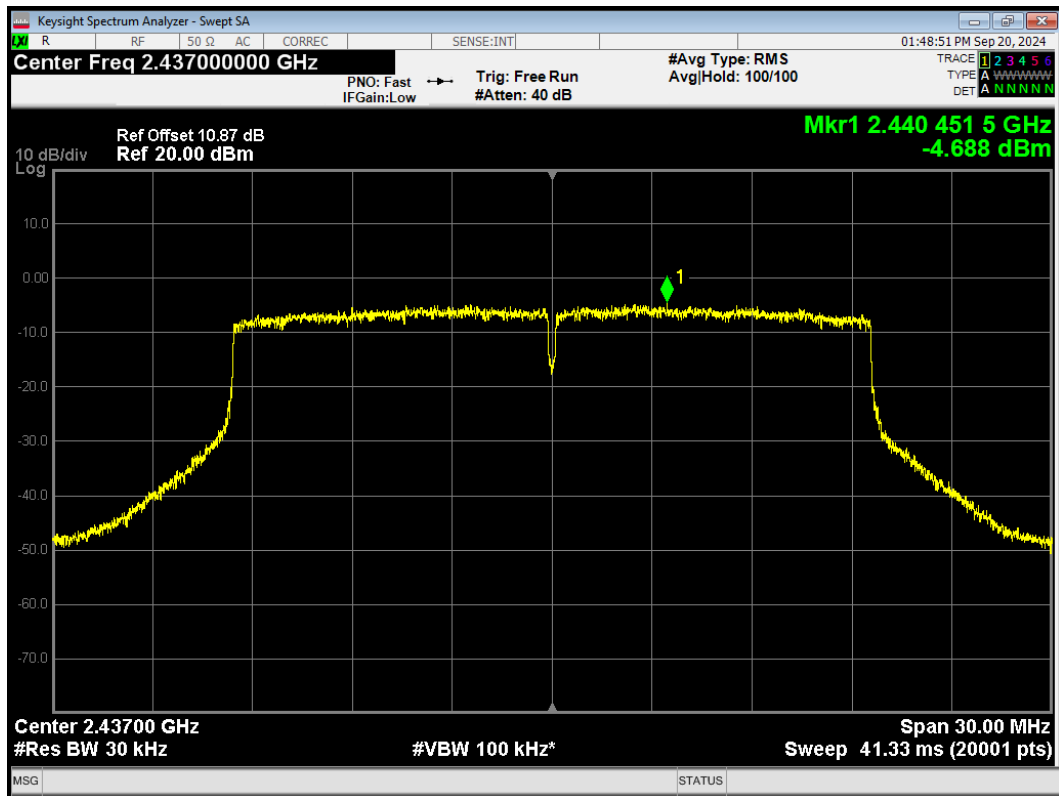


PSD 802.11ax(HE20) 2437MHz Ant2

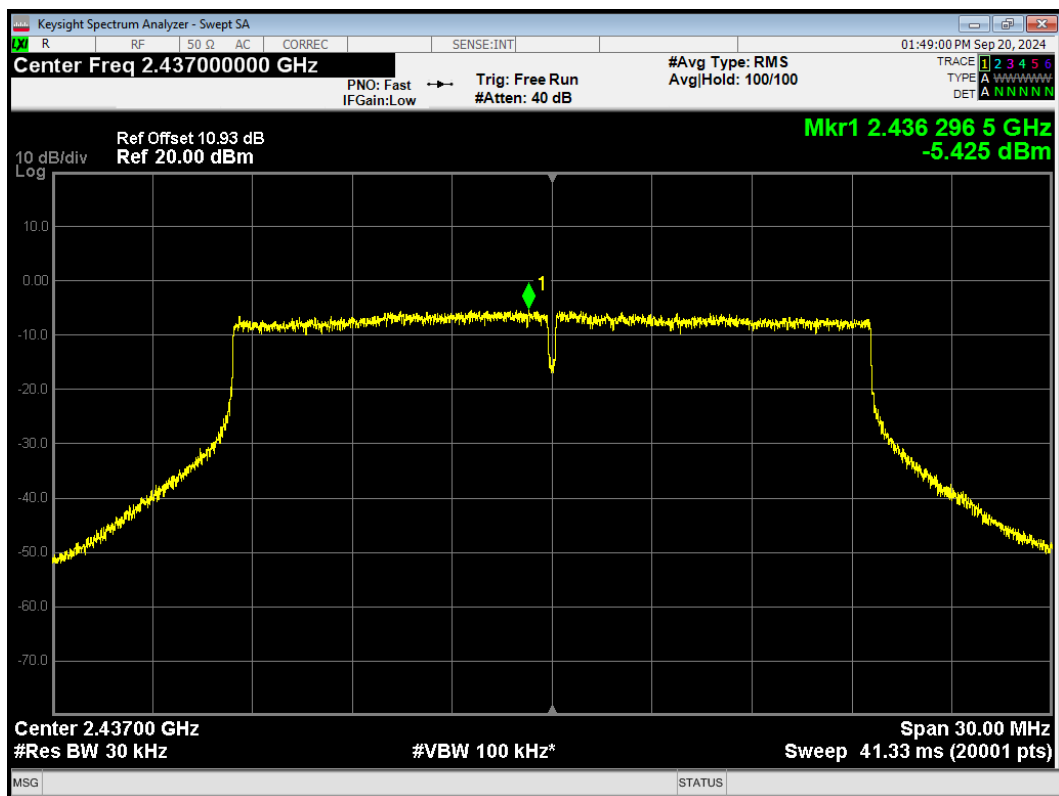


PSD 802.11ax(HE20) 2462MHz Ant1

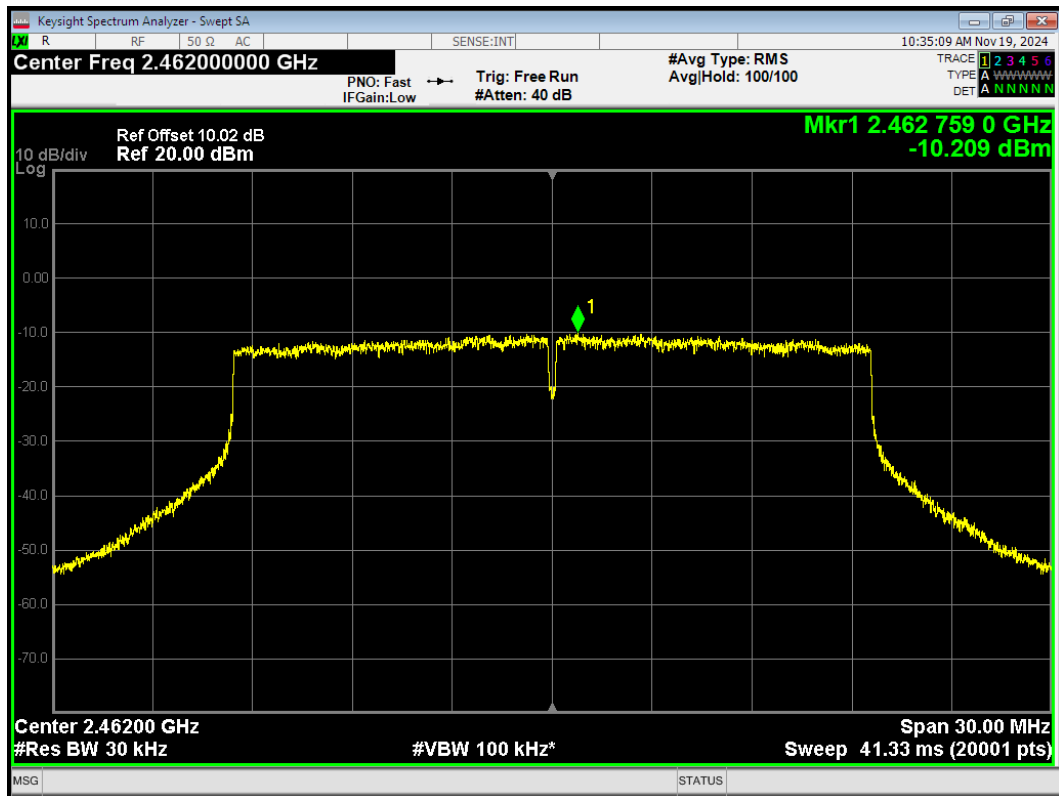


PSD 802.11ax(HE20) 2462MHz Ant2

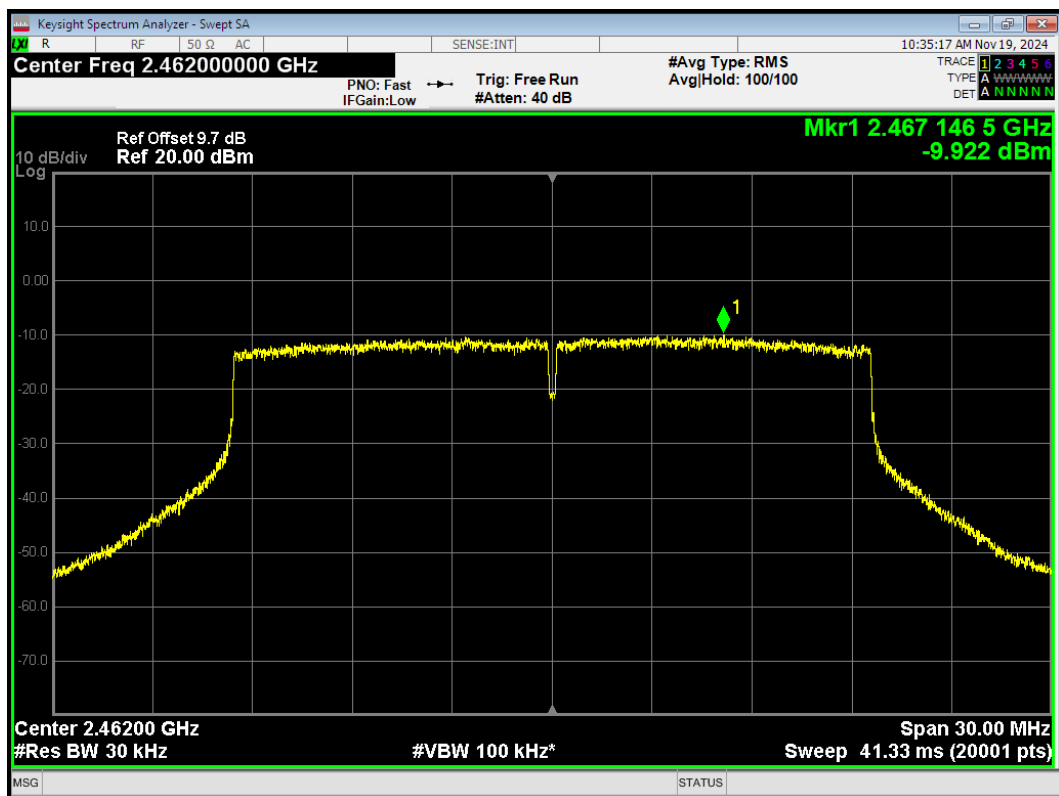


PSD 802.11ax(HE40) 2422MHz Ant1

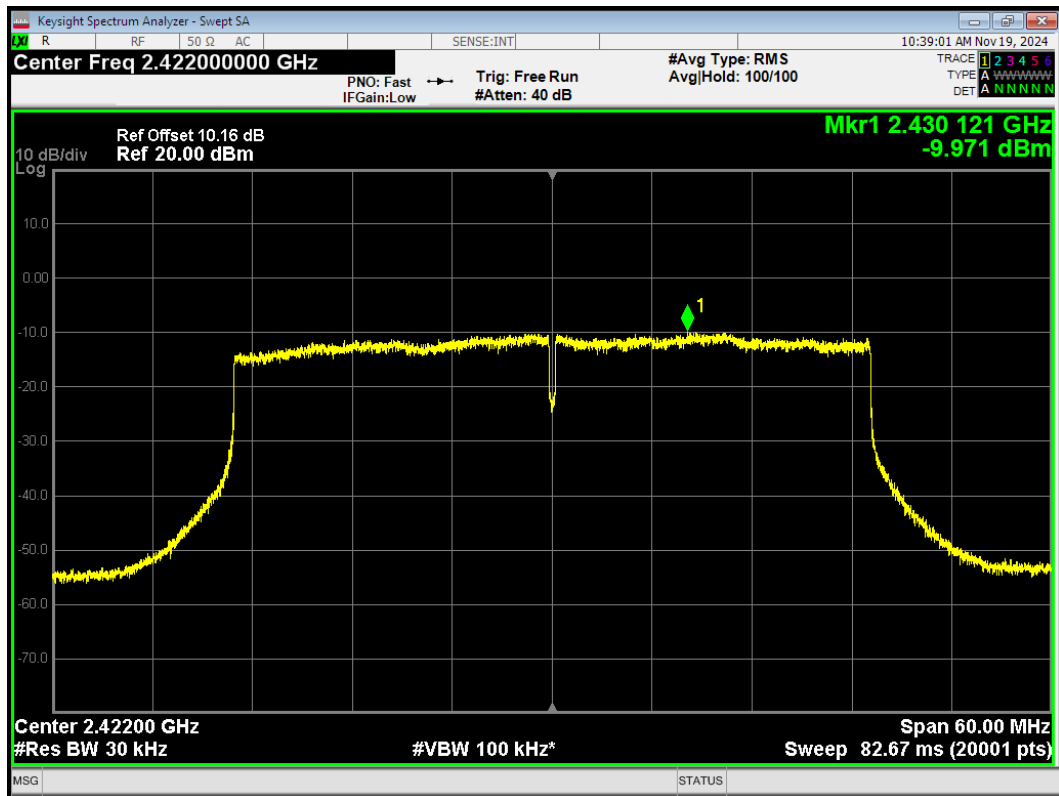


PSD 802.11ax(HE40) 2422MHz Ant2

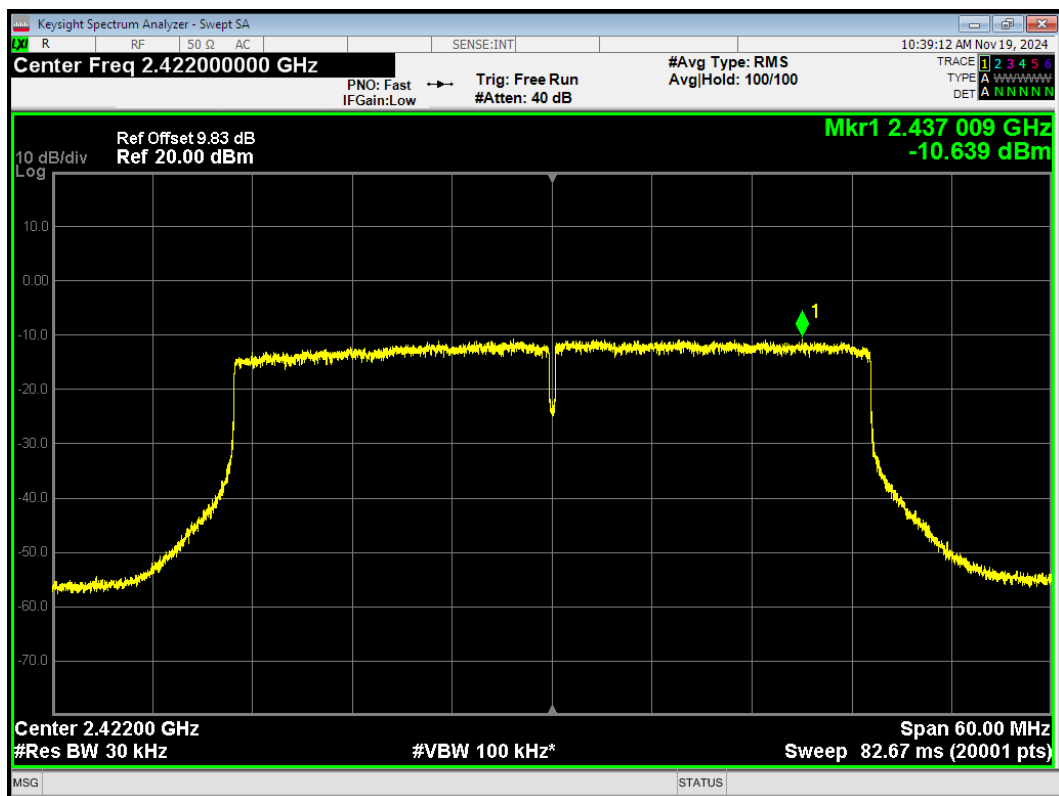


PSD 802.11ax(HE40) 2437MHz Ant1

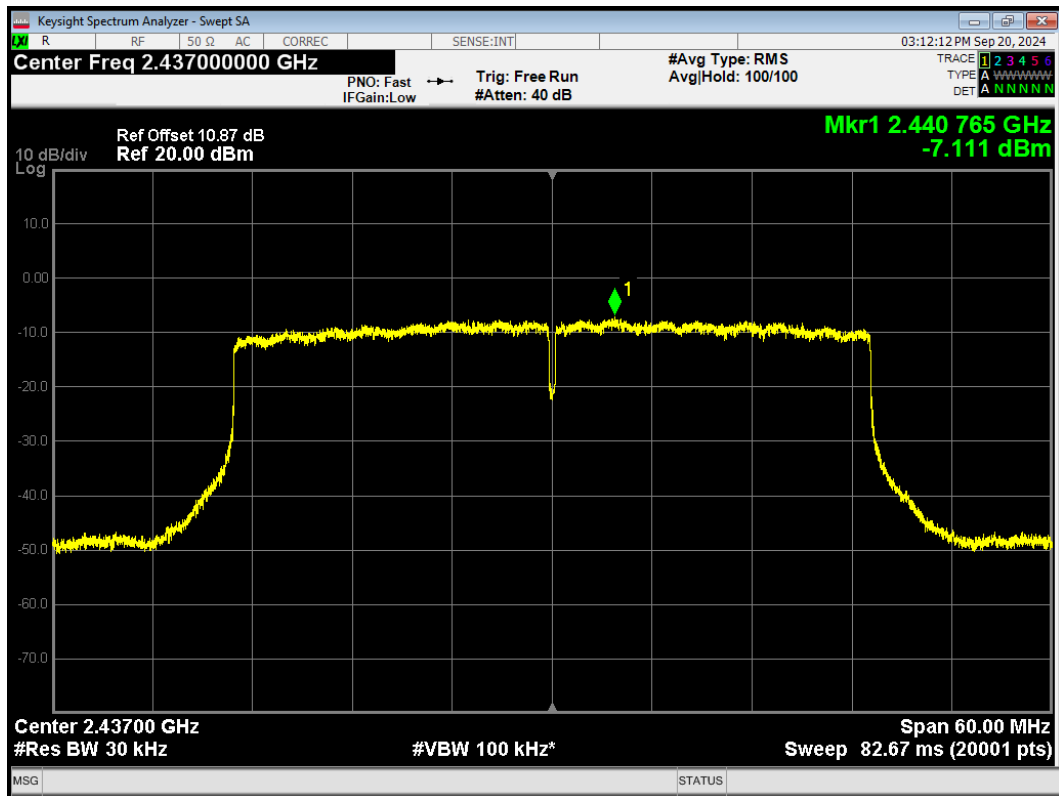


PSD 802.11ax(HE40) 2437MHz Ant2

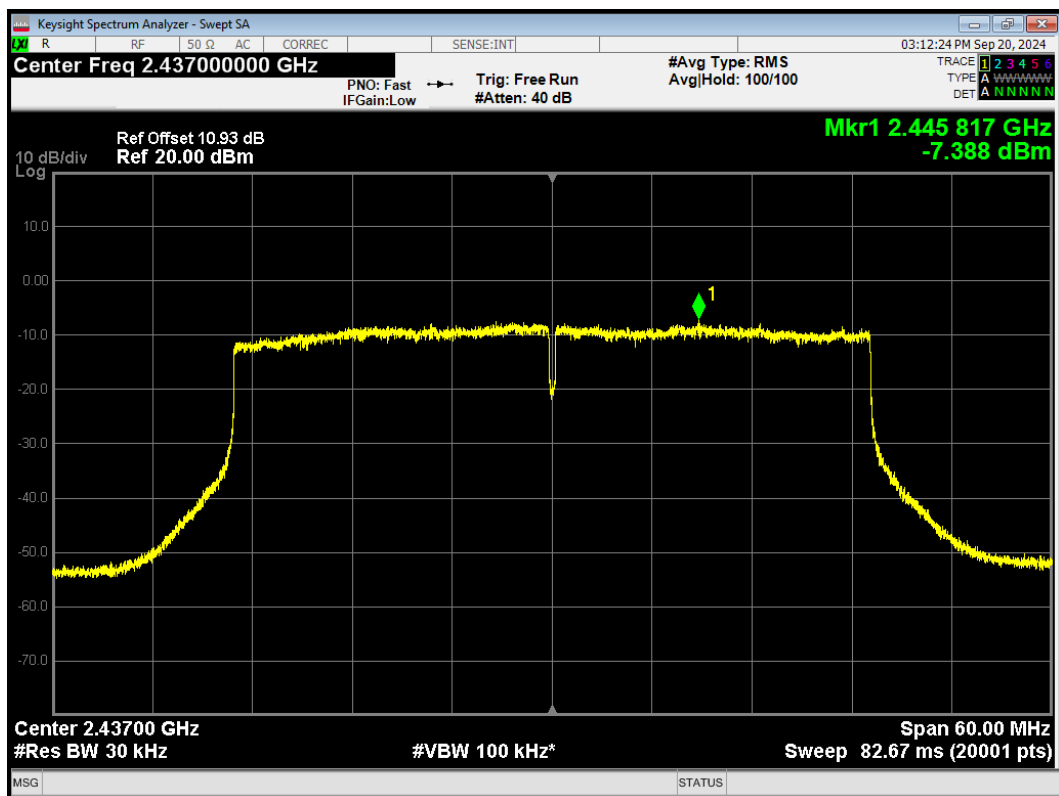


PSD 802.11ax(HE40) 2452MHz Ant1

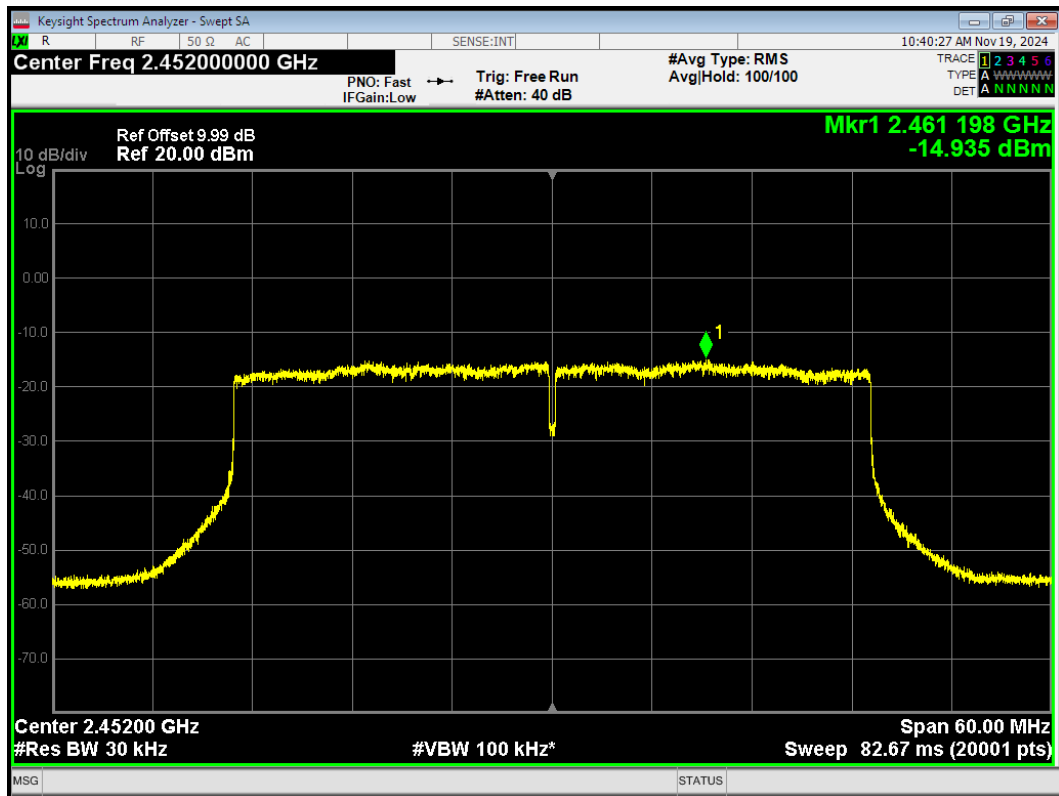


PSD 802.11ax(HE40) 2452MHz Ant2

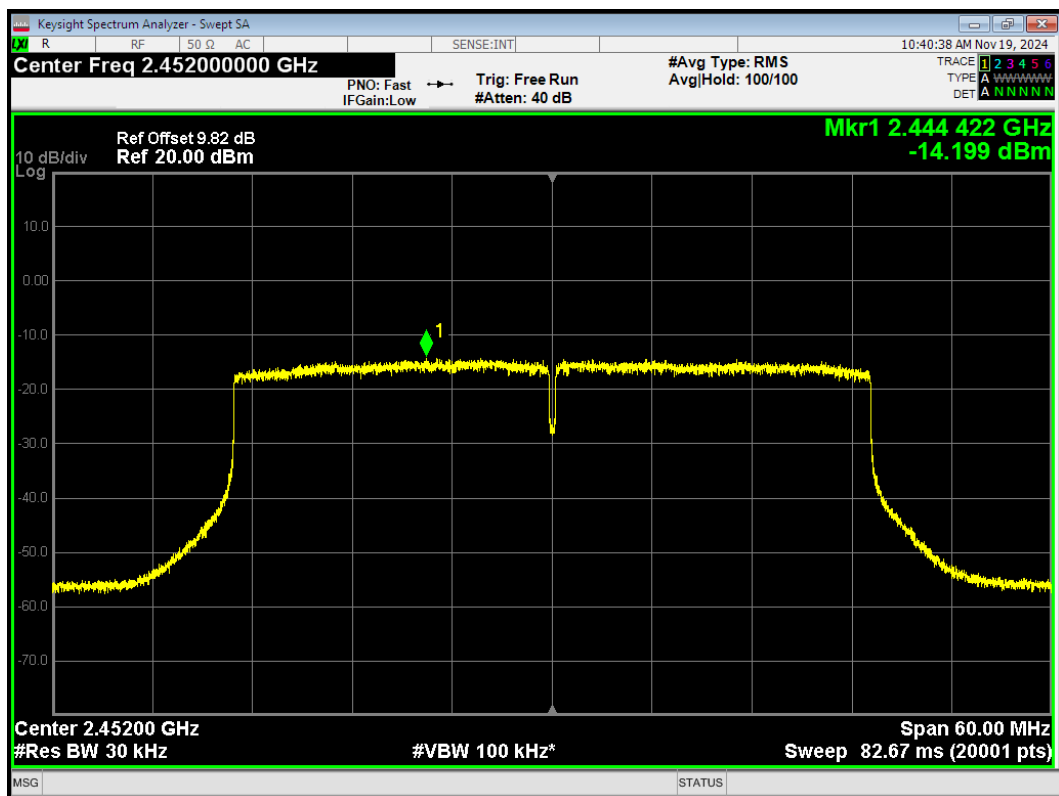


PSD 802.11b 2412MHz Ant1

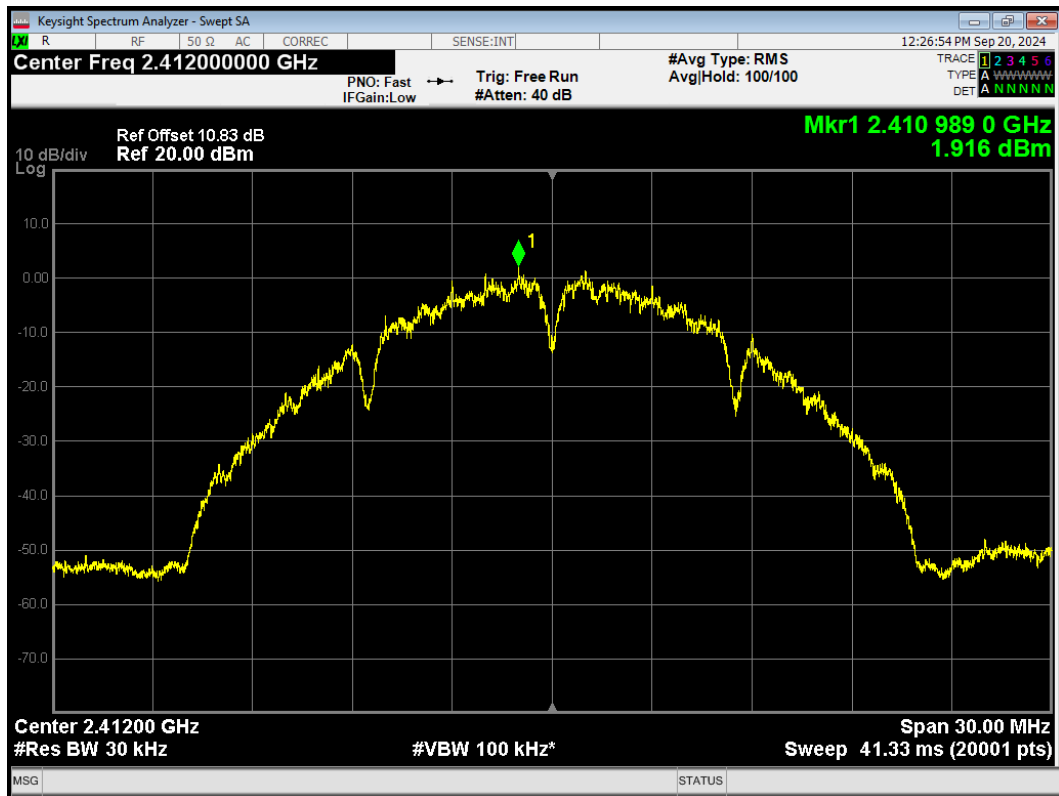


PSD 802.11b 2412MHz Ant2

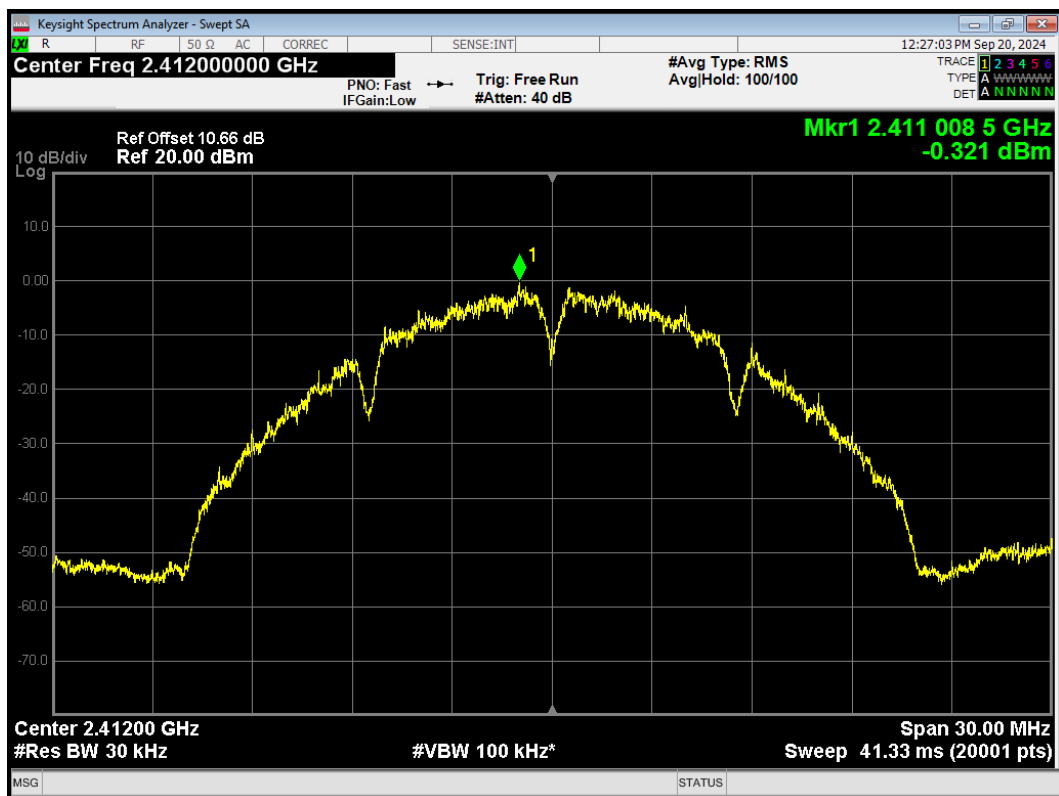


PSD 802.11b 2437MHz Ant1

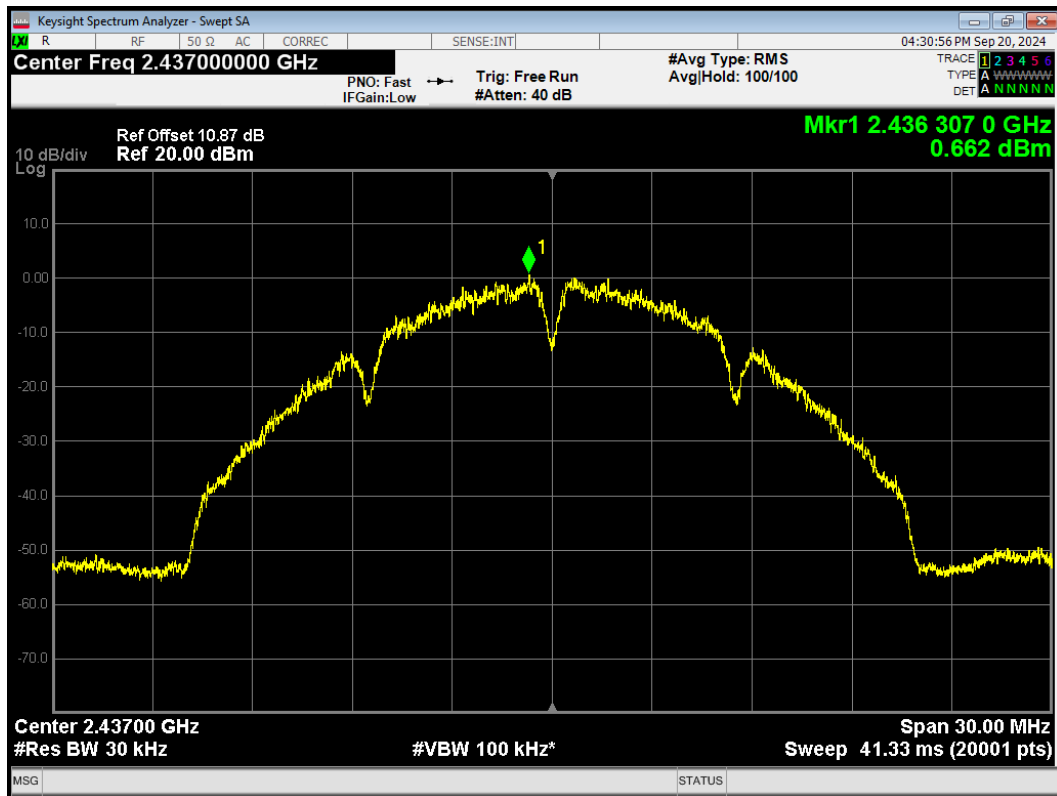


PSD 802.11b 2437MHz Ant2

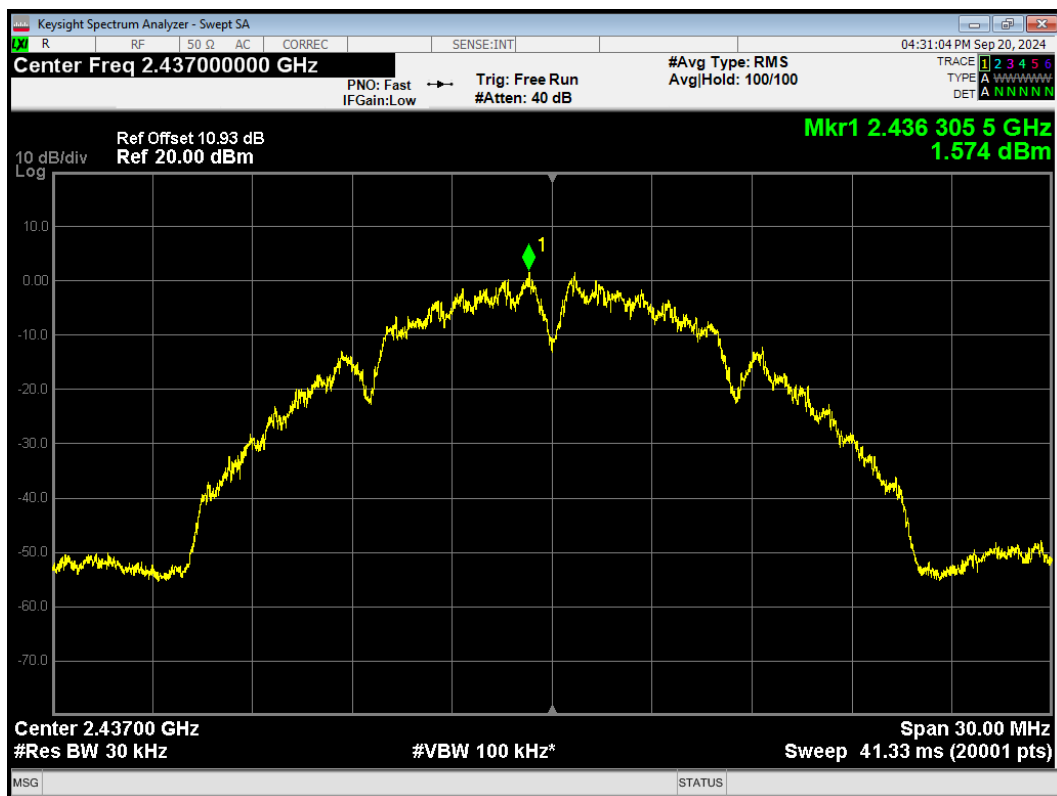


PSD 802.11b 2462MHz Ant1

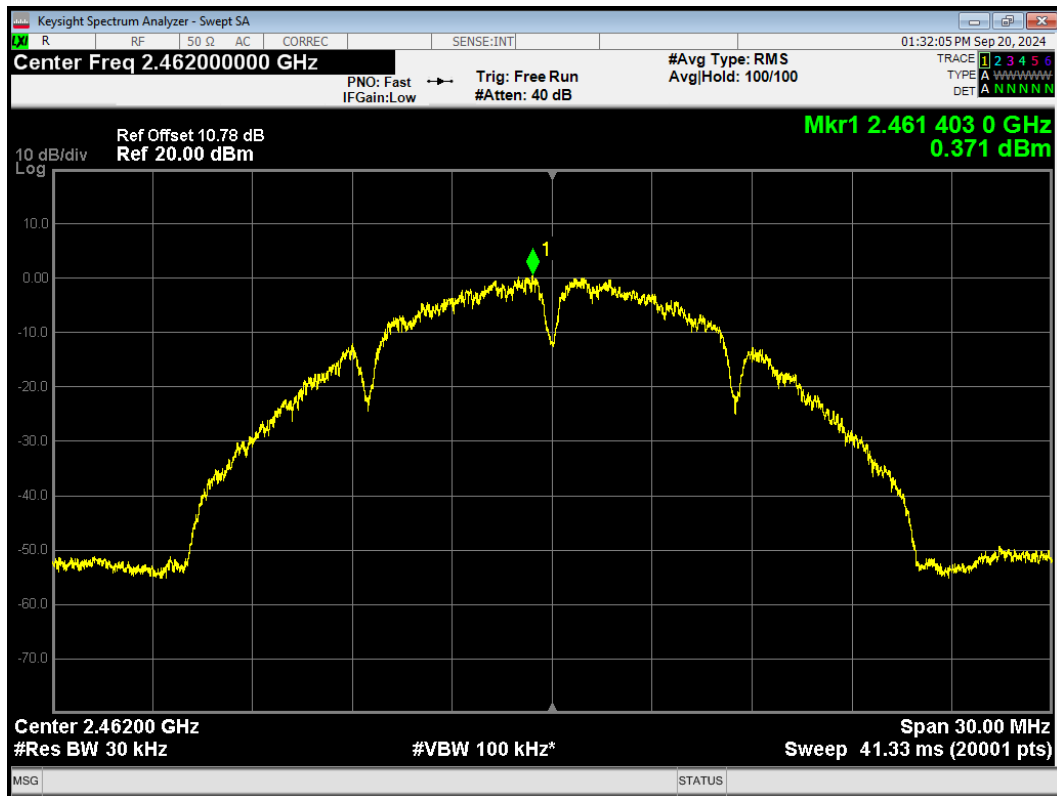


PSD 802.11b 2462MHz Ant2

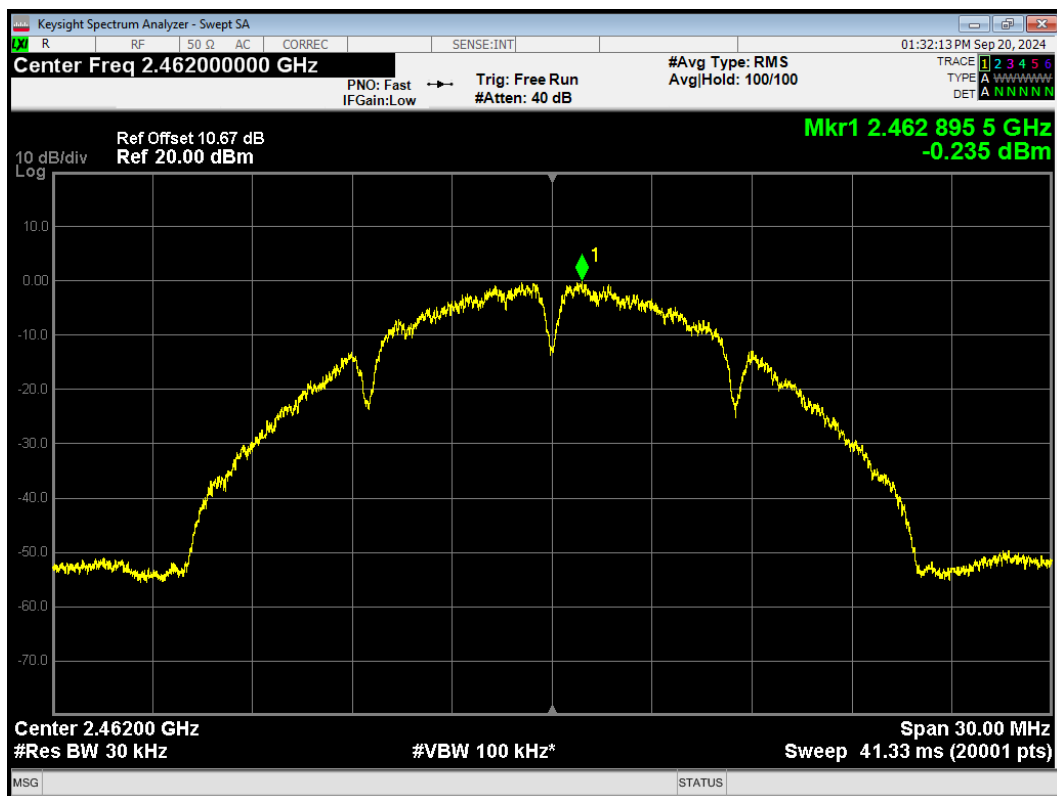


PSD 802.11g 2412MHz Ant1

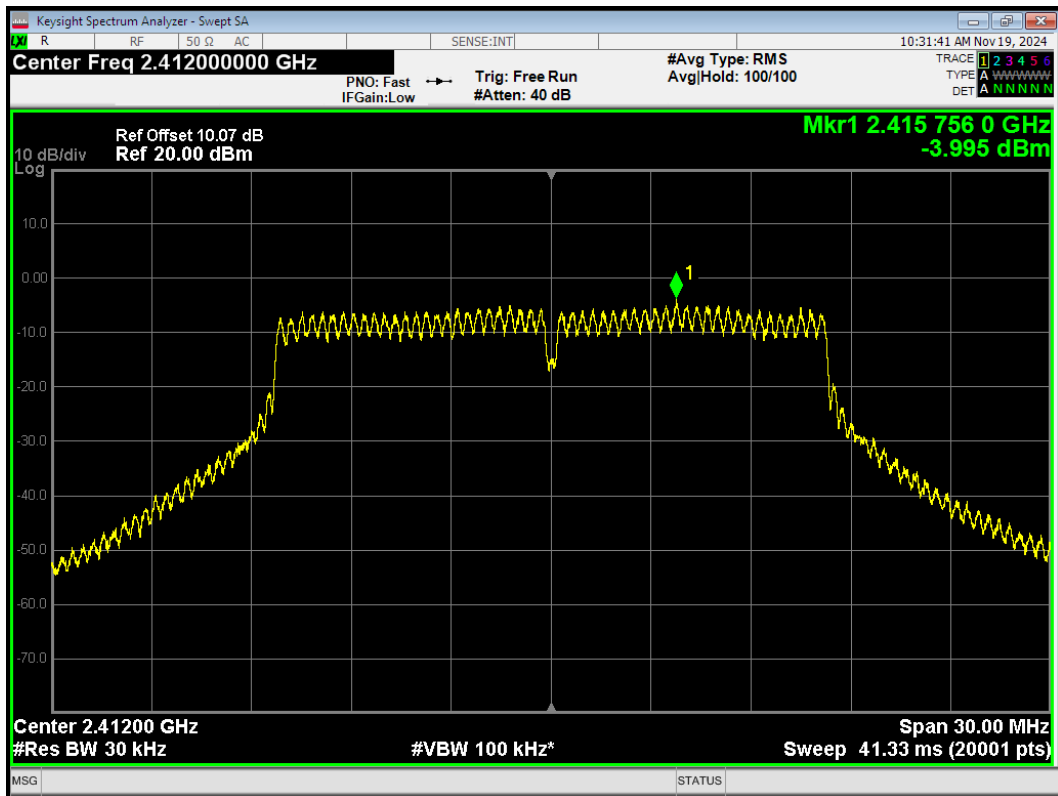


PSD 802.11g 2412MHz Ant2

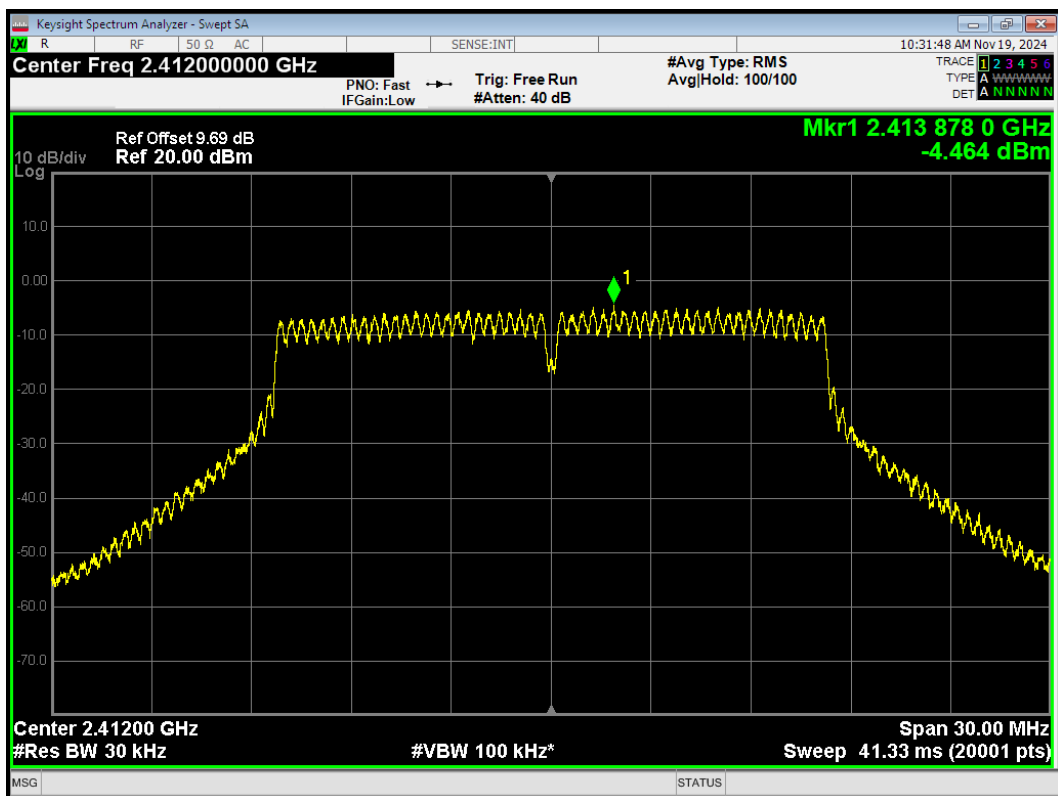


PSD 802.11g 2437MHz Ant1

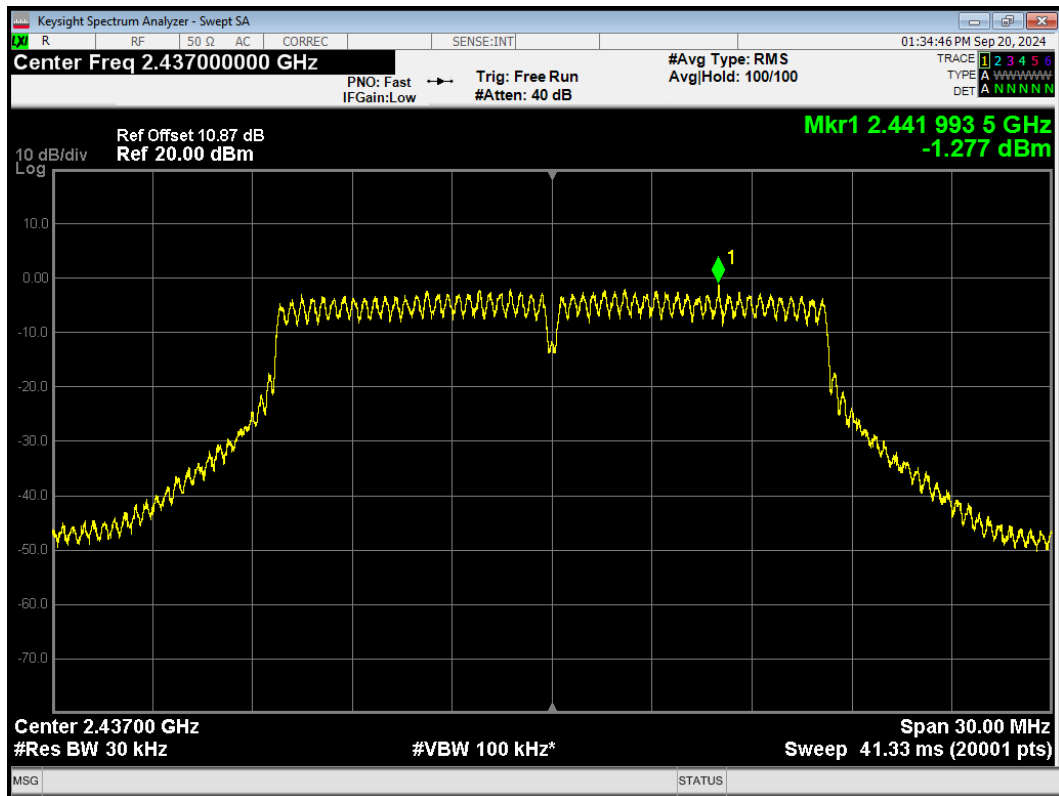


PSD 802.11g 2437MHz Ant2

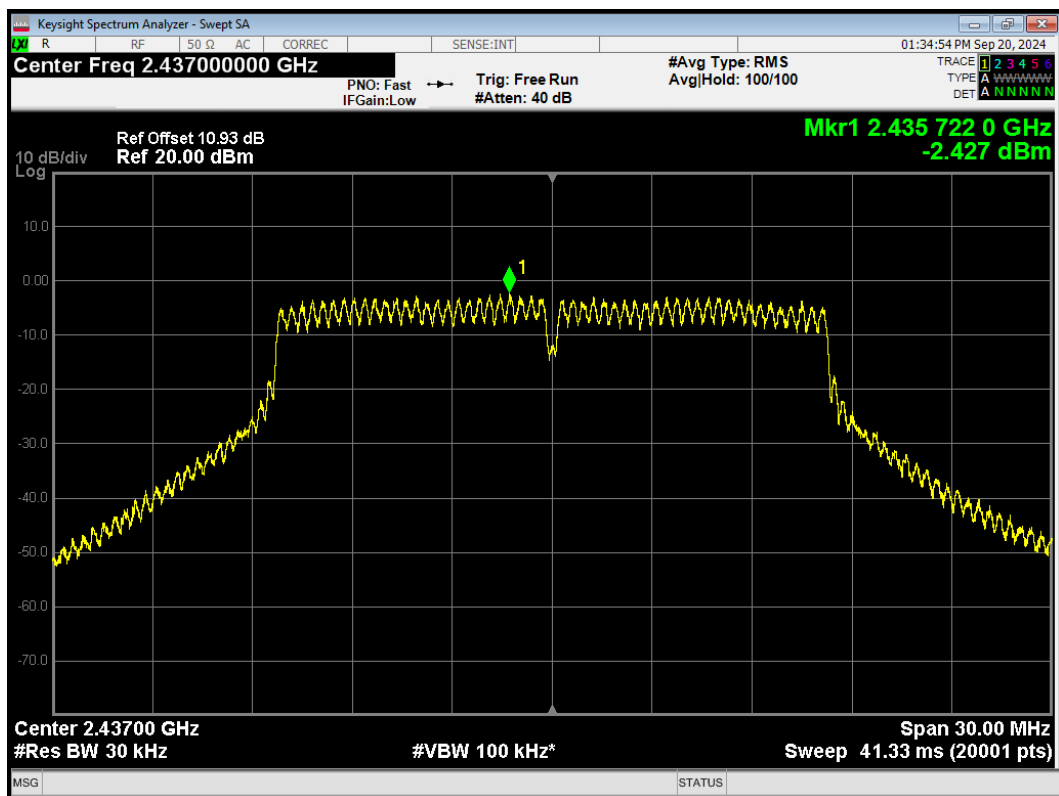


PSD 802.11g 2462MHz Ant1

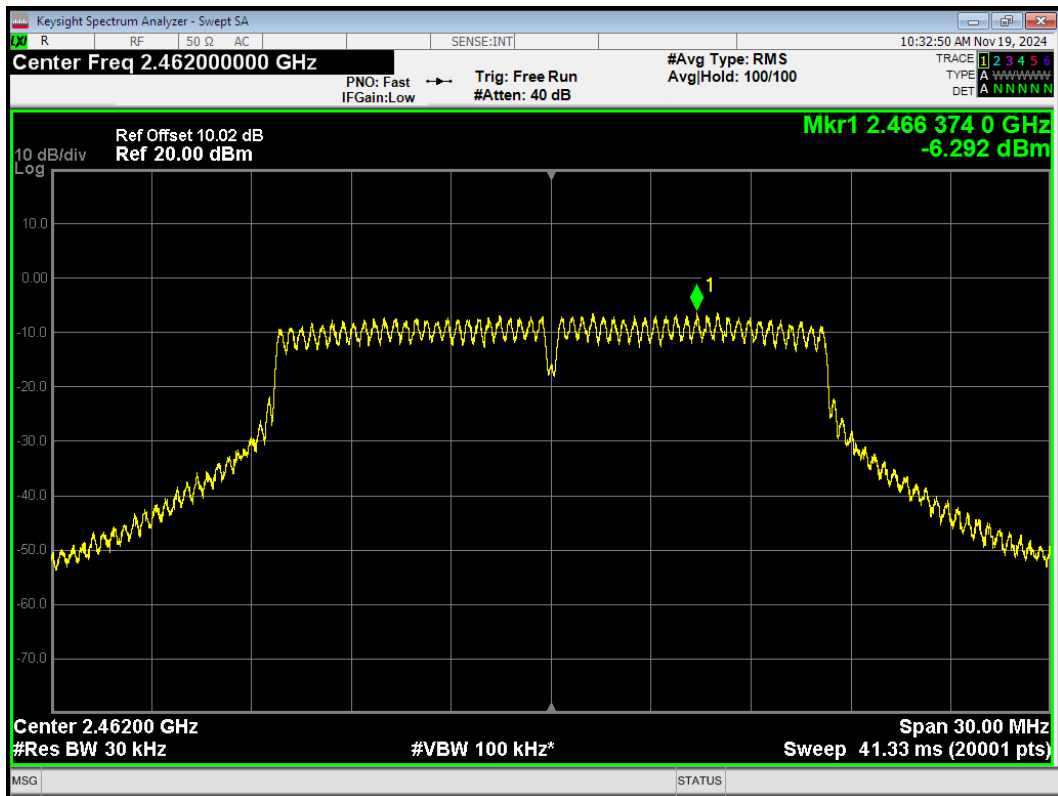


PSD 802.11g 2462MHz Ant2

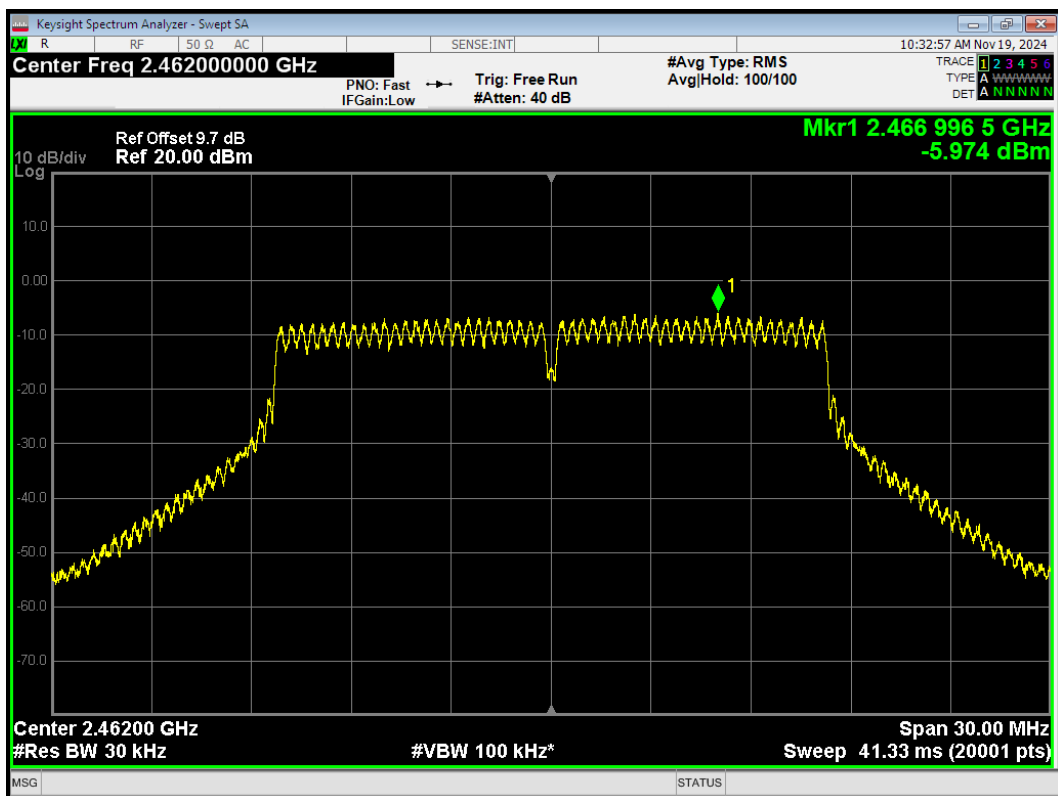


PSD 802.11n(HT20) 2412MHz Ant1

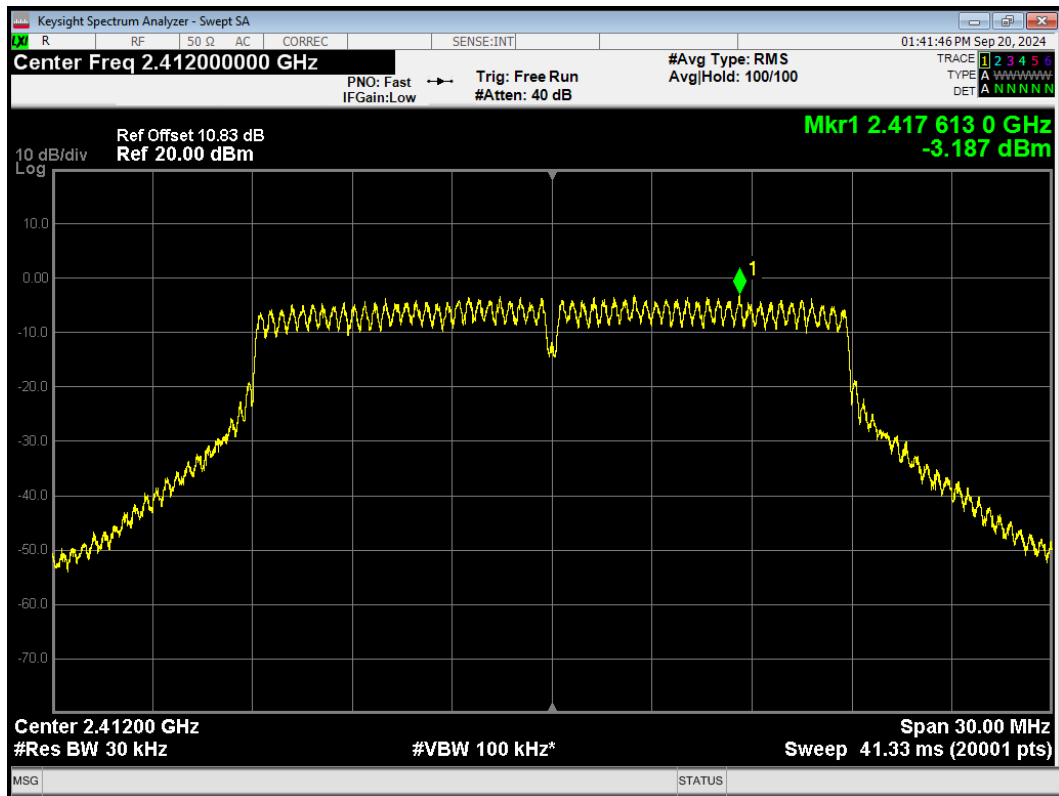


PSD 802.11n(HT20) 2412MHz Ant2

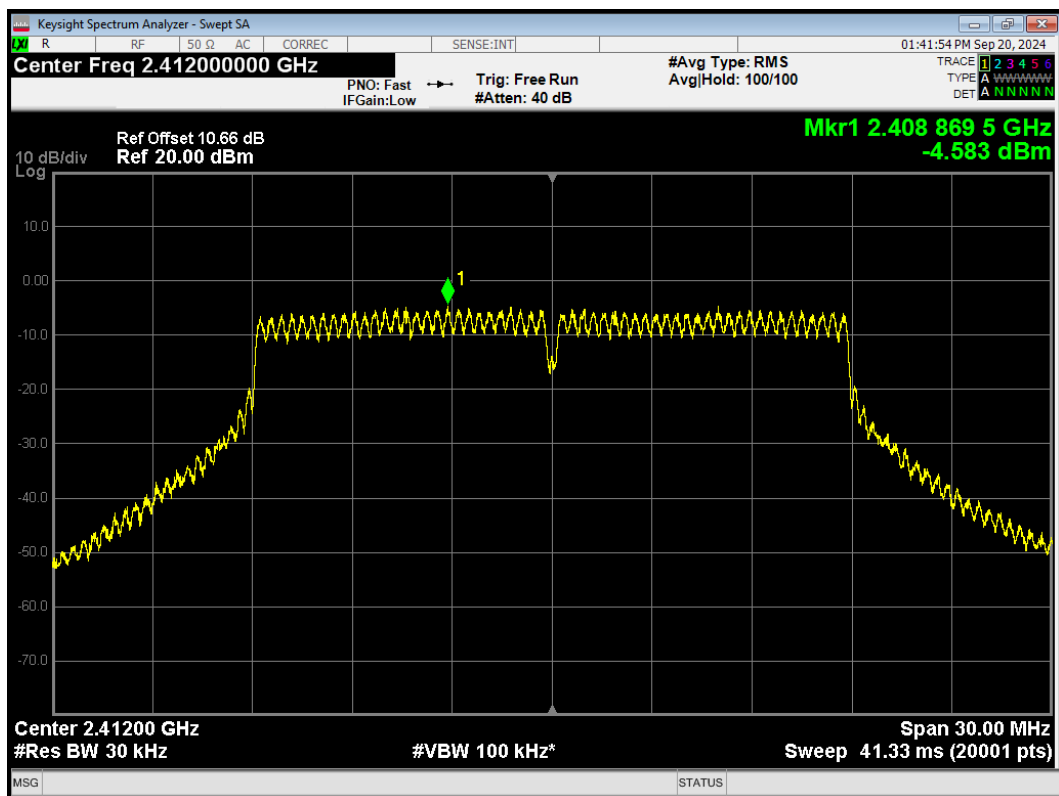


PSD 802.11n(HT20) 2437MHz Ant1

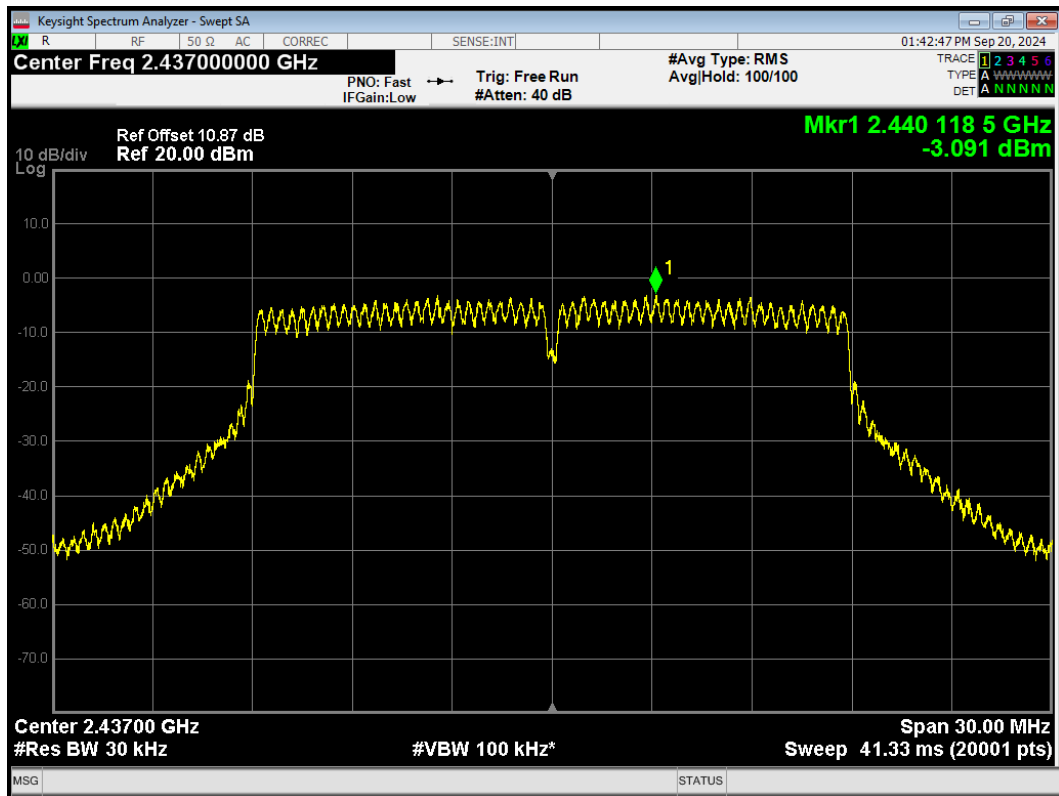


PSD 802.11n(HT20) 2437MHz Ant2

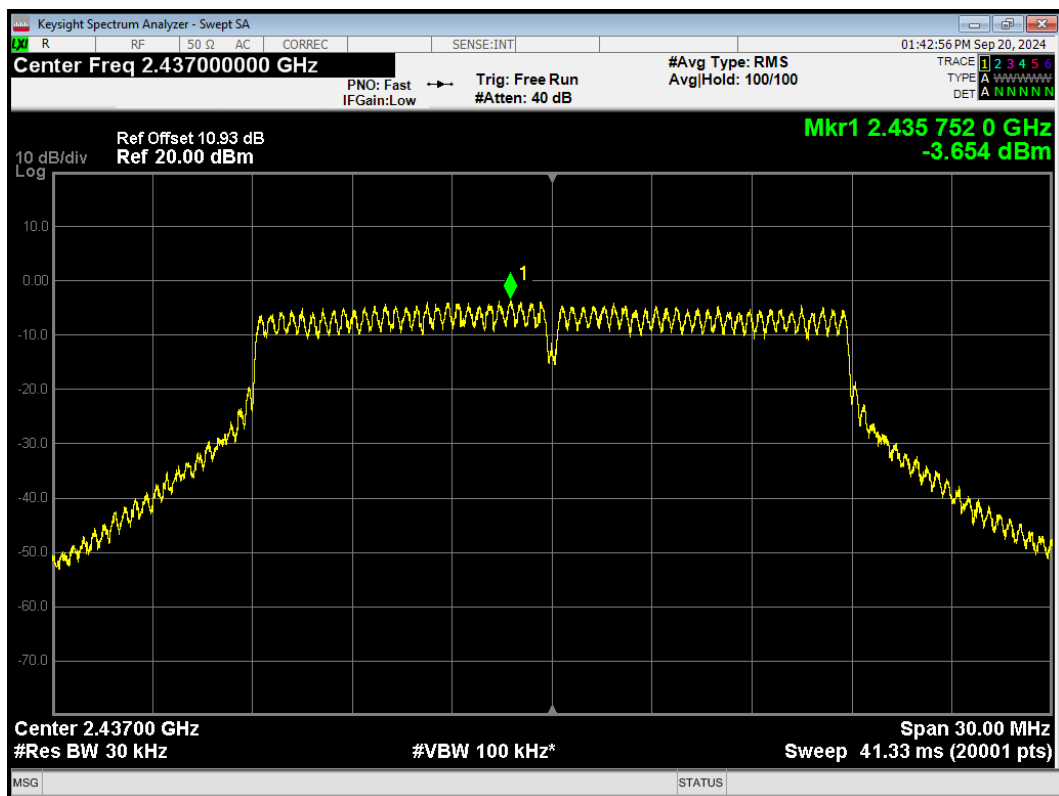


PSD 802.11n(HT20) 2462MHz Ant1

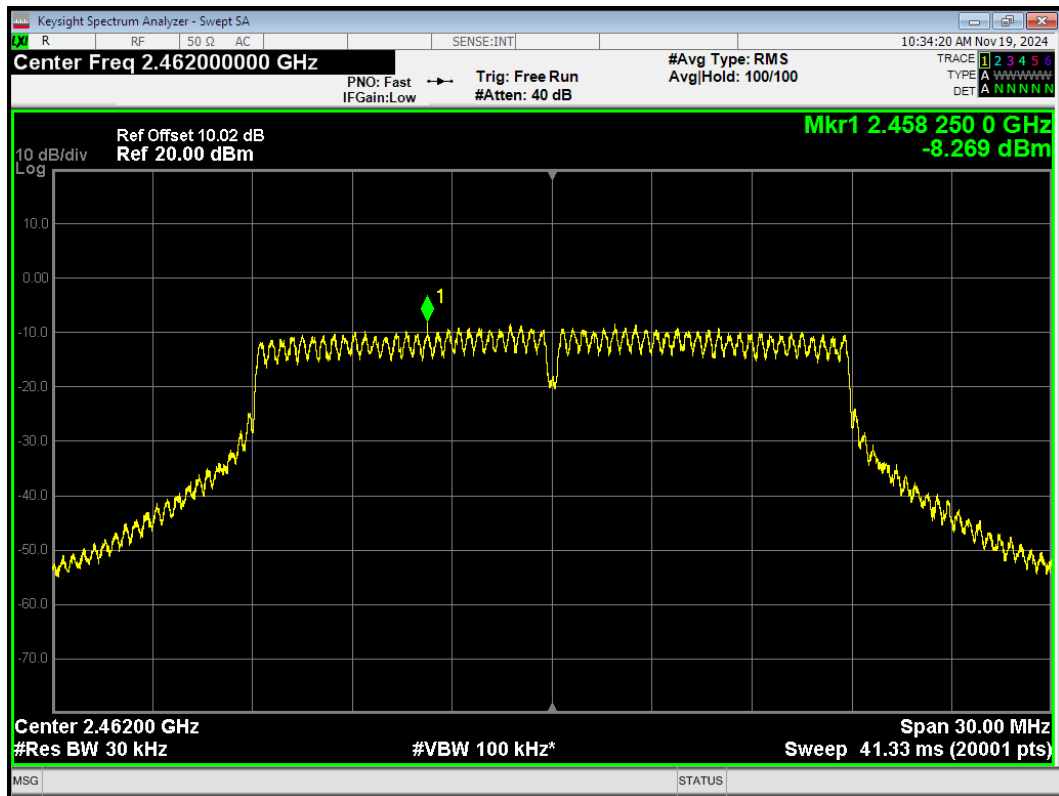


PSD 802.11n(HT20) 2462MHz Ant2

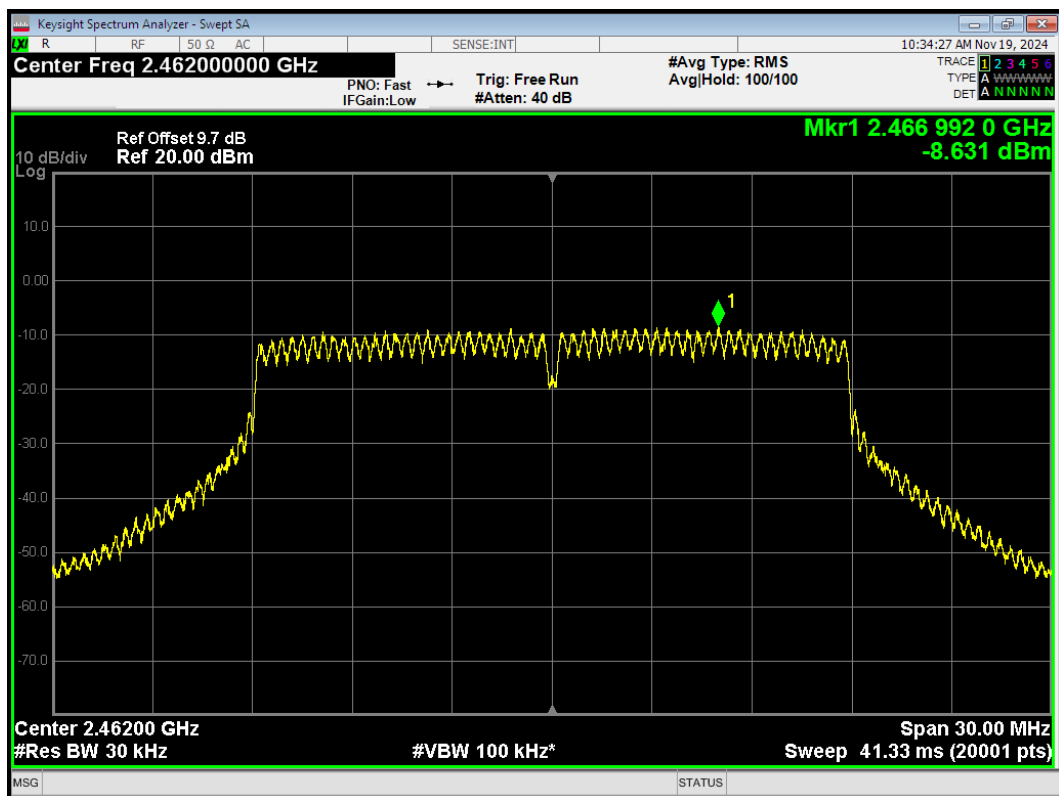


PSD 802.11n(HT40) 2422MHz Ant1

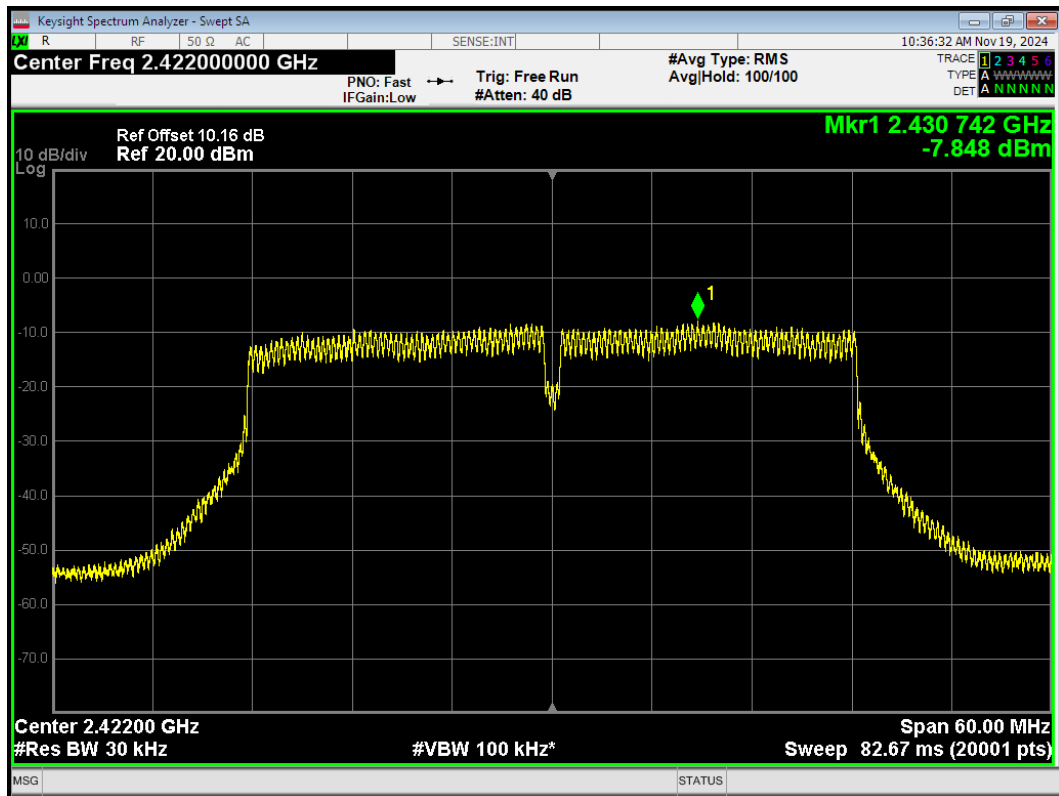


PSD 802.11n(HT40) 2422MHz Ant2

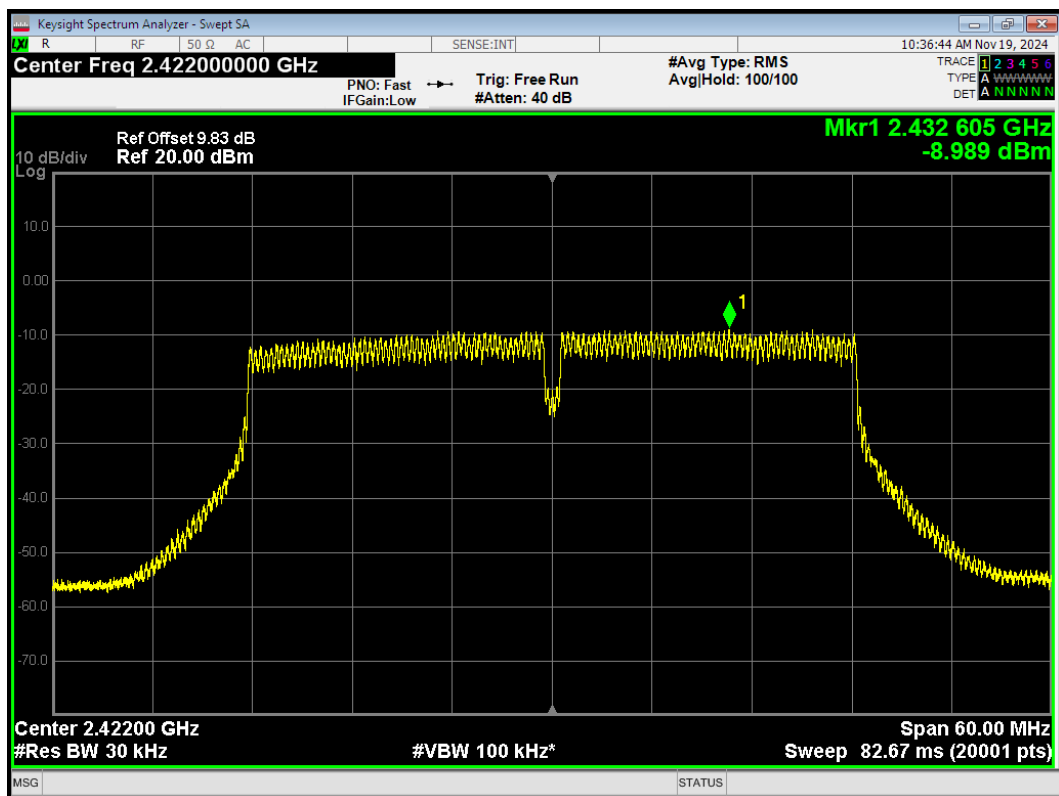


PSD 802.11n(HT40) 2437MHz Ant1

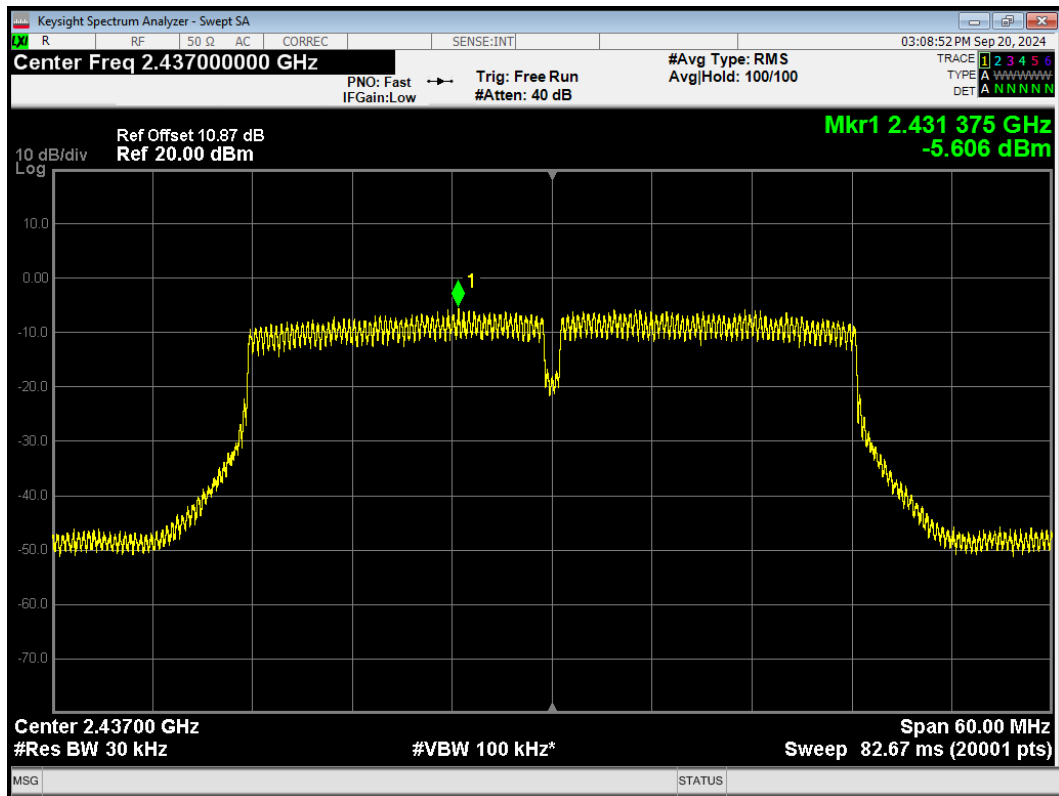

PSD 802.11n(HT40) 2437MHz Ant2

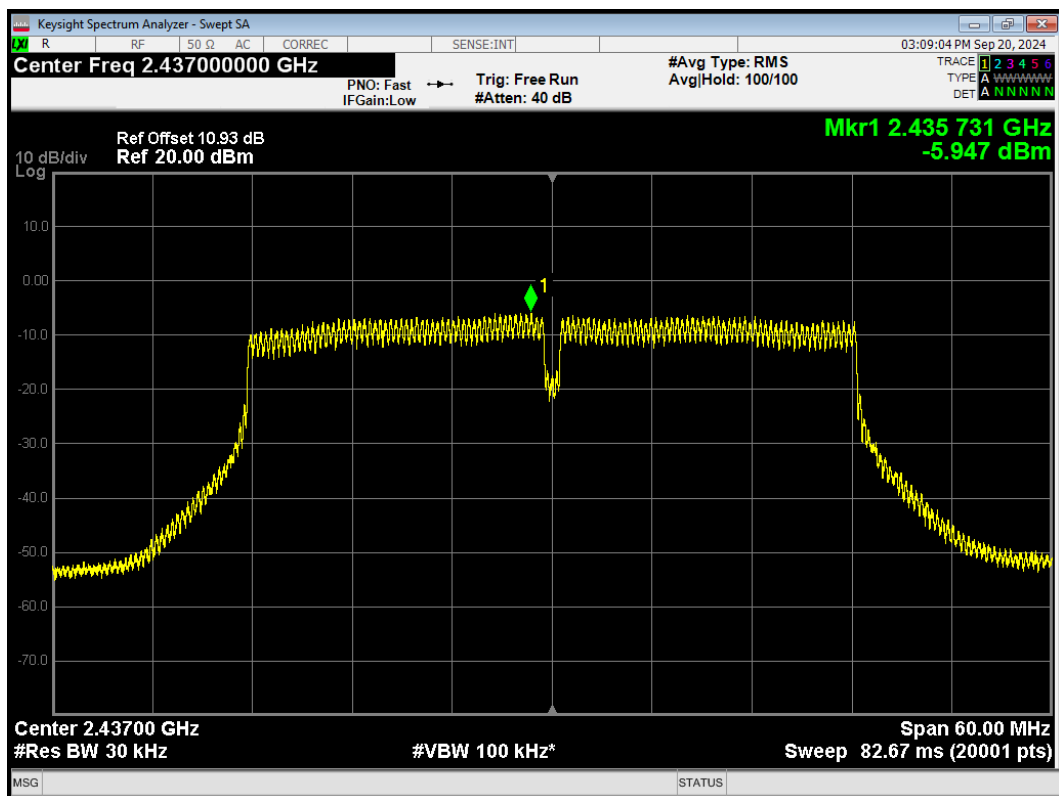

PSD 802.11n(HT40) 2452MHz Ant1

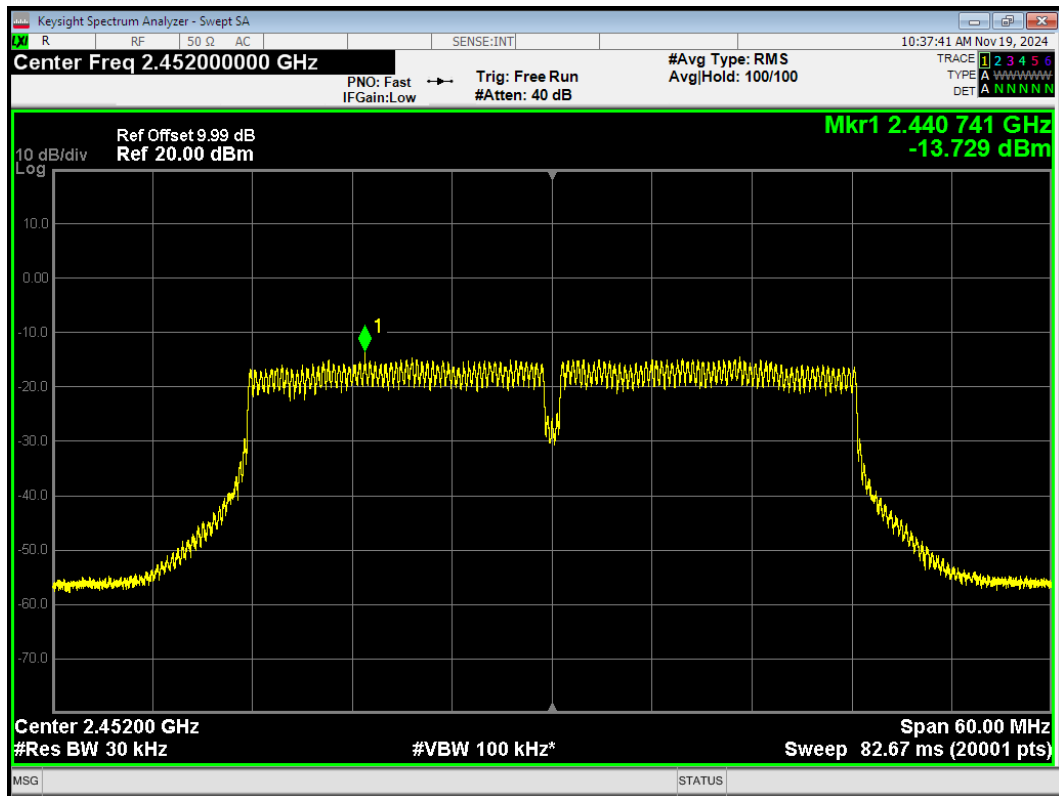

PSD 802.11n(HT40) 2452MHz Ant2

