


|                |                                           |              |            |
|----------------|-------------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW80+80)_Internal Antenna | Test Date    | 2020/2/26  |
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz          | Polarization | Horizontal |

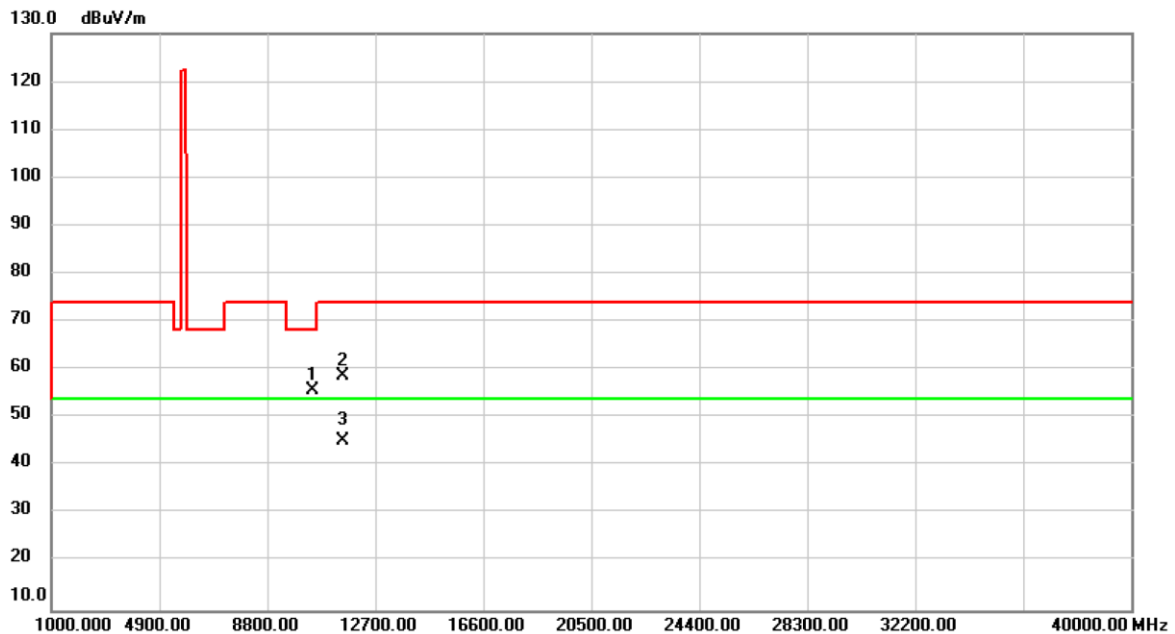


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10420.00     | 52.73                    | 2.91                    | 55.64                      | 68.20           | -12.56       | peak     |         |
| 2   |     | 11550.00     | 55.12                    | 3.67                    | 58.79                      | 74.00           | -15.21       | peak     |         |
| 3   | *   | 11550.00     | 41.51                    | 3.67                    | 45.18                      | 54.00           | -8.82        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                           |              |           |
|----------------|-------------------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11ax (HEW80+80)_Internal Antenna | Test Date    | 2020/2/26 |
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz          | Polarization | Vertical  |

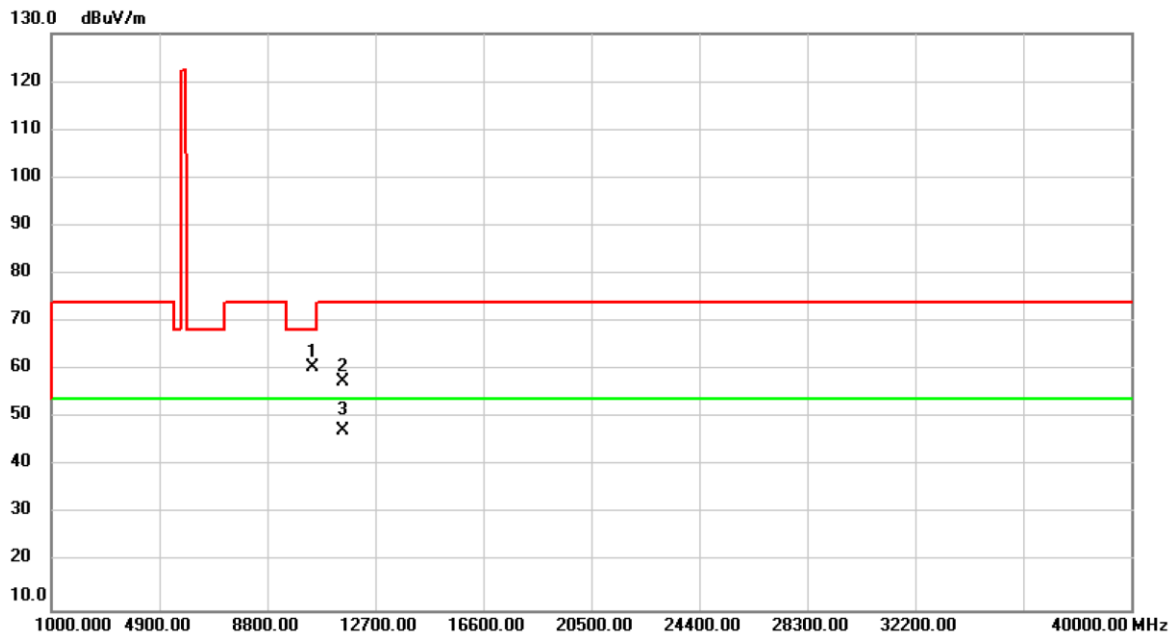


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10420.00     | 57.78                    | 2.91                    | 60.69                      | 68.20           | -7.51        | peak     |         |
| 2   |     | 11550.00     | 54.02                    | 3.67                    | 57.69                      | 74.00           | -16.31       | peak     |         |
| 3   | *   | 11550.00     | 43.66                    | 3.67                    | 47.33                      | 54.00           | -6.67        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                           |              |            |
|----------------|-------------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW80+80)_Internal Antenna | Test Date    | 2020/2/26  |
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz          | Polarization | Horizontal |

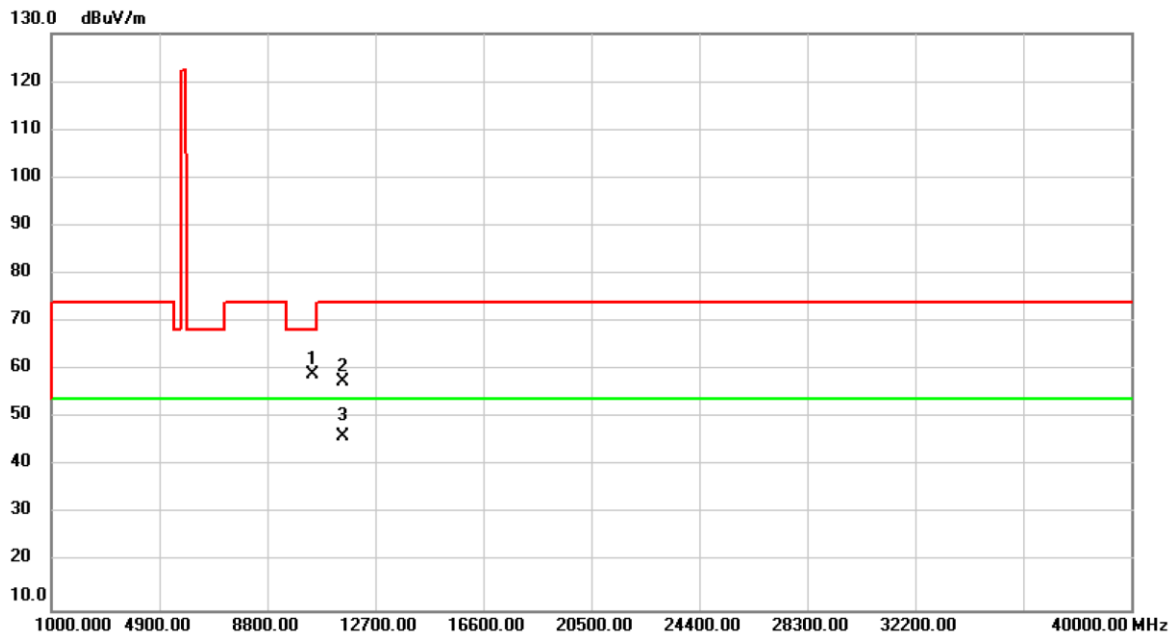


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10420.00     | 56.22                    | 2.91                    | 59.13                      | 68.20           | -9.07        | peak     |         |
| 2   |     | 11550.00     | 53.88                    | 3.67                    | 57.55                      | 74.00           | -16.45       | peak     |         |
| 3   | *   | 11550.00     | 42.51                    | 3.67                    | 46.18                      | 54.00           | -7.82        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH36: 5180 MHz                 | Polarization | Vertical   |

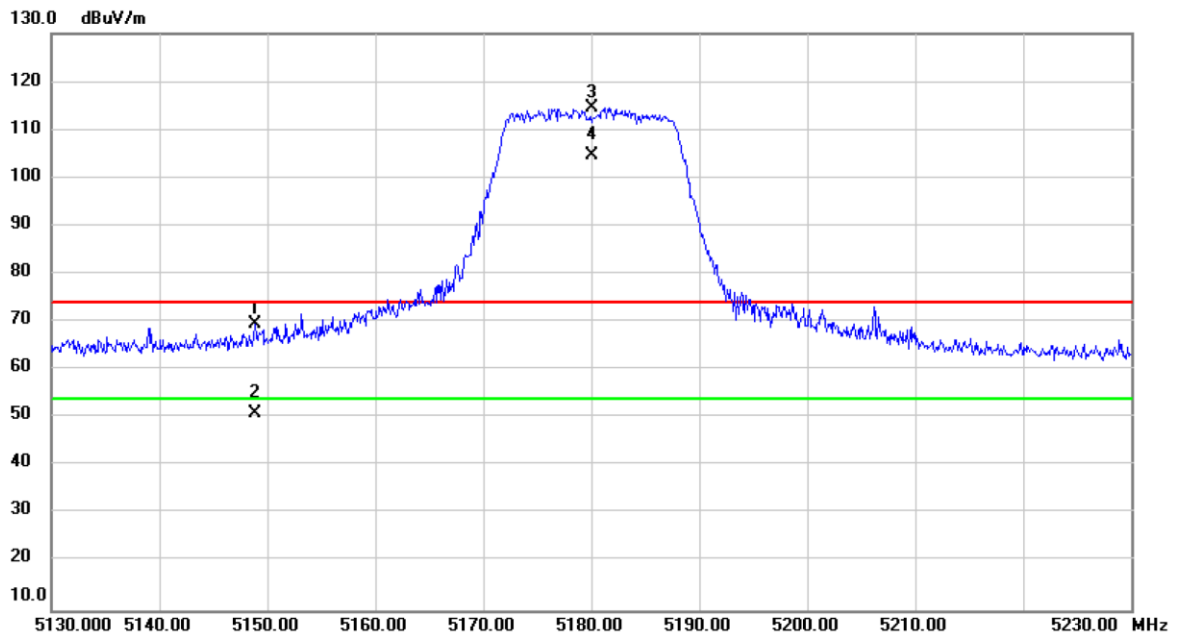


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5148.900     | 31.75                    | 37.80                   | 69.55                      | 74.00           | -4.45        | peak     |          |
| 2   |     | 5148.900     | 13.11                    | 37.80                   | 50.91                      | 54.00           | -3.09        | AVG      |          |
| 3   | X   | 5180.000     | 76.65                    | 37.83                   | 114.48                     | 74.00           | 40.48        | peak     | No Limit |
| 4   | *   | 5180.000     | 66.97                    | 37.83                   | 104.80                     | 54.00           | 50.80        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH48: 5240 MHz                 | Polarization | Vertical   |

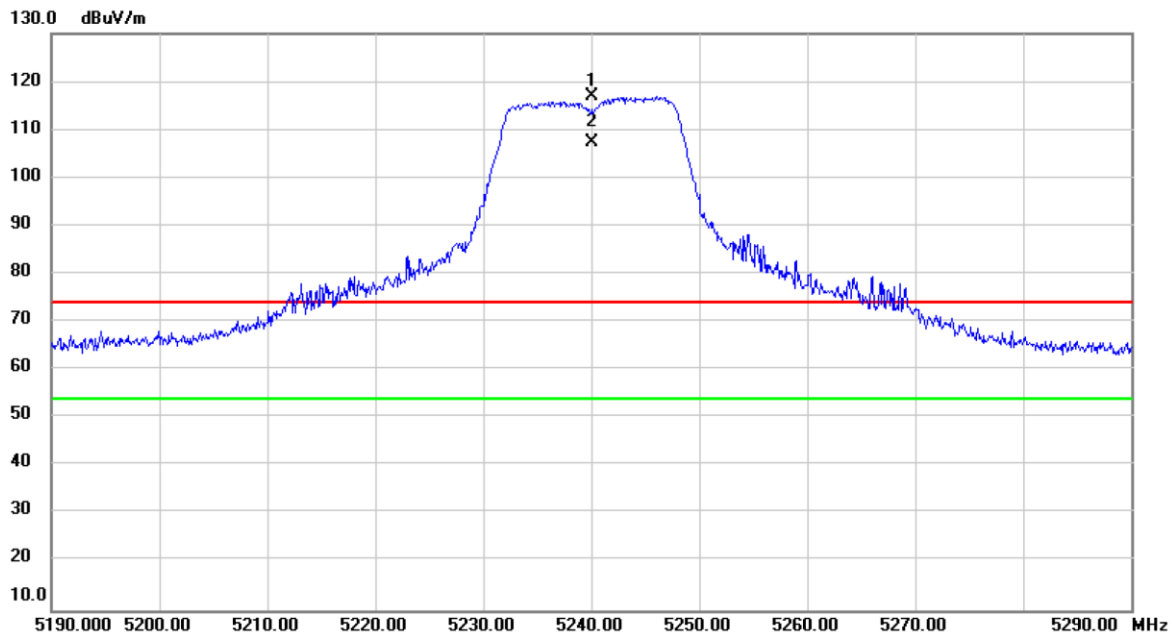


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5240.000     | 78.96                    | 37.90                   | 116.86                     | 74.00           | 42.86        | peak     | No Limit |
| 2   | *   | 5240.000     | 69.55                    | 37.90                   | 107.45                     | 54.00           | 53.45        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |            |
|----------------|-------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH149: 5745 MHz               | Polarization | Vertical   |

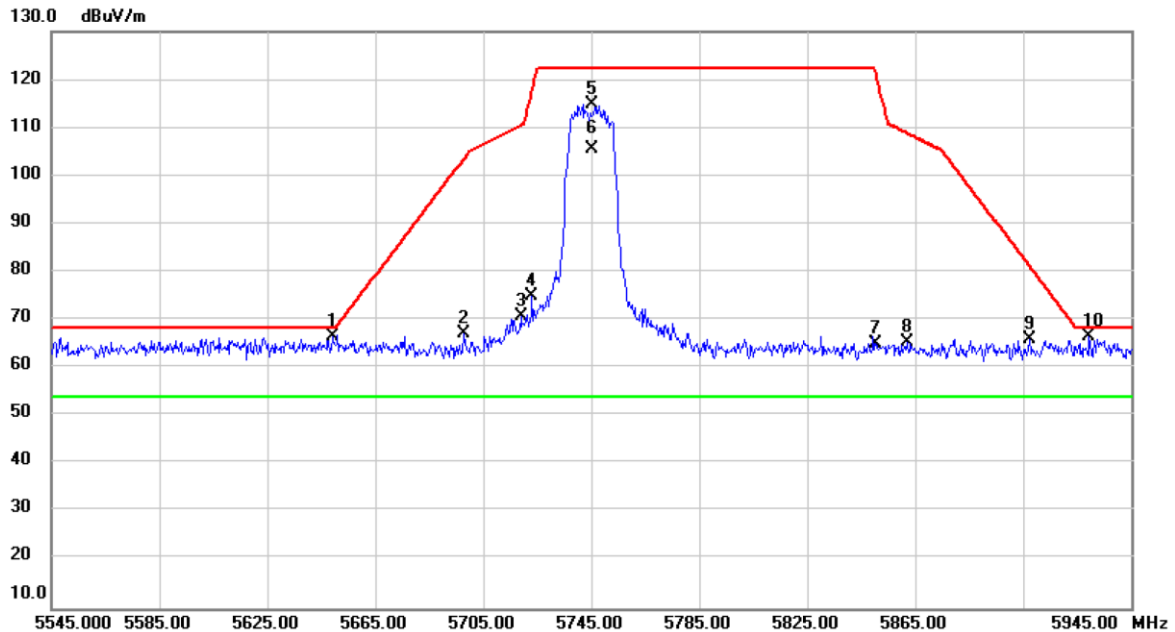


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5649.000     | 28.09                    | 38.32                   | 66.41                      | 68.20           | -1.79        | peak     |          |
| 2   |     | 5697.800     | 28.77                    | 38.36                   | 67.13                      | 103.57          | -36.44       | peak     |          |
| 3   |     | 5719.000     | 32.31                    | 38.38                   | 70.69                      | 110.52          | -39.83       | peak     |          |
| 4   |     | 5723.000     | 36.70                    | 38.37                   | 75.07                      | 117.64          | -42.57       | peak     |          |
| 5   |     | 5745.000     | 76.49                    | 38.39                   | 114.88                     | 122.20          | -7.32        | peak     | No Limit |
| 6   | *   | 5745.000     | 67.30                    | 38.39                   | 105.69                     | 54.00           | 51.69        | AVG      | No Limit |
| 7   |     | 5850.200     | 26.53                    | 38.47                   | 65.00                      | 121.74          | -56.74       | peak     |          |
| 8   |     | 5861.800     | 26.76                    | 38.48                   | 65.24                      | 108.90          | -43.66       | peak     |          |
| 9   |     | 5907.400     | 27.49                    | 38.51                   | 66.00                      | 81.22           | -15.22       | peak     |          |
| 10  |     | 5929.400     | 27.97                    | 38.53                   | 66.50                      | 68.20           | -1.70        | peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |            |
|----------------|-------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH165: 5825 MHz               | Polarization | Vertical   |

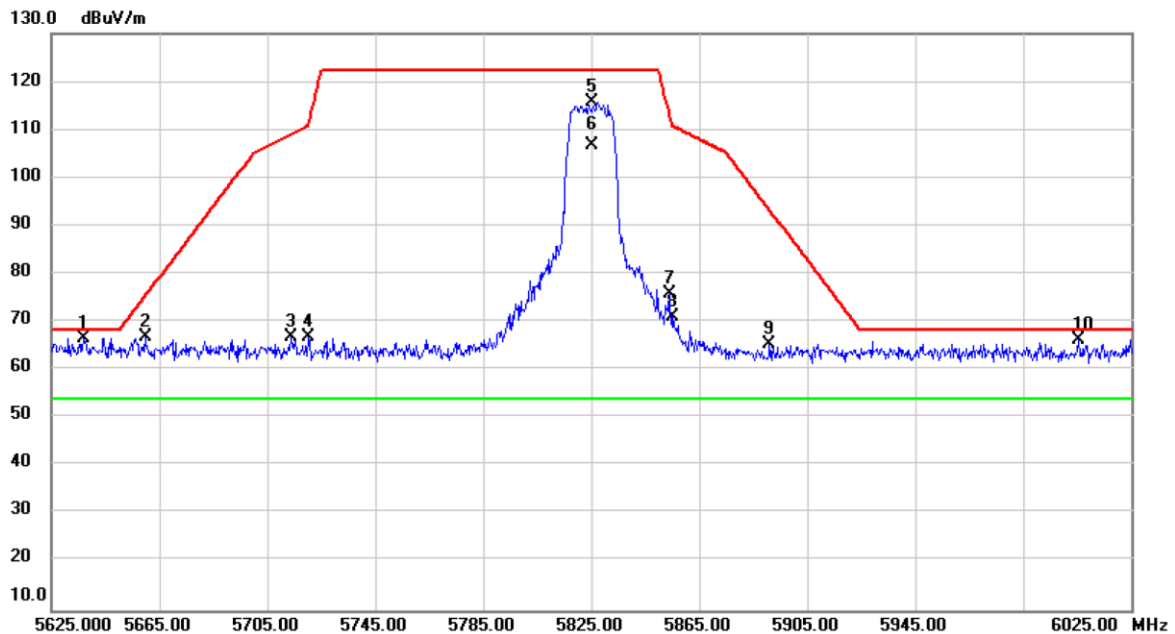


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5637.000     | 28.36                    | 38.31                   | 66.67                      | 68.20           | -1.53        | peak     |          |
| 2   |     | 5659.800     | 28.63                    | 38.32                   | 66.95                      | 75.45           | -8.50        | peak     |          |
| 3   |     | 5713.800     | 28.38                    | 38.37                   | 66.75                      | 109.06          | -42.31       | peak     |          |
| 4   |     | 5720.200     | 28.44                    | 38.37                   | 66.81                      | 111.26          | -44.45       | peak     |          |
| 5   |     | 5825.000     | 77.39                    | 38.46                   | 115.85                     | 122.20          | -6.35        | peak     | No Limit |
| 6   | *   | 5825.000     | 68.32                    | 38.46                   | 106.78                     | 54.00           | 52.78        | AVG      | No Limit |
| 7   |     | 5853.800     | 37.22                    | 38.48                   | 75.70                      | 113.54          | -37.84       | peak     |          |
| 8   |     | 5855.400     | 32.60                    | 38.48                   | 71.08                      | 110.69          | -39.61       | peak     |          |
| 9   |     | 5891.000     | 26.86                    | 38.50                   | 65.36                      | 93.36           | -28.00       | peak     |          |
| 10  |     | 6005.400     | 27.53                    | 38.61                   | 66.14                      | 68.20           | -2.06        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH36: 5180 MHz                        | Polarization | Vertical   |

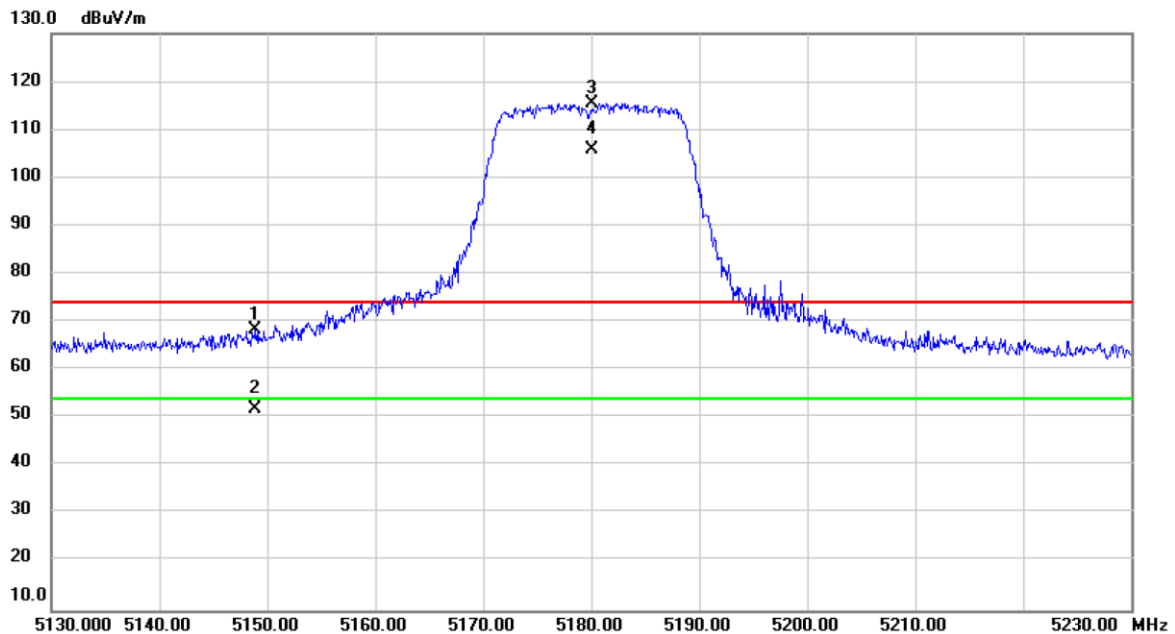


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5148.900     | 30.53                    | 37.80                   | 68.33                      | 74.00           | -5.67        | peak     |          |
| 2   |     | 5148.900     | 14.08                    | 37.80                   | 51.88                      | 54.00           | -2.12        | AVG      |          |
| 3   | X   | 5180.000     | 77.64                    | 37.83                   | 115.47                     | 74.00           | 41.47        | peak     | No Limit |
| 4   | *   | 5180.000     | 67.91                    | 37.83                   | 105.74                     | 54.00           | 51.74        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                      |              |            |
|----------------|--------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH48: 5240 MHz                       | Polarization | Vertical   |

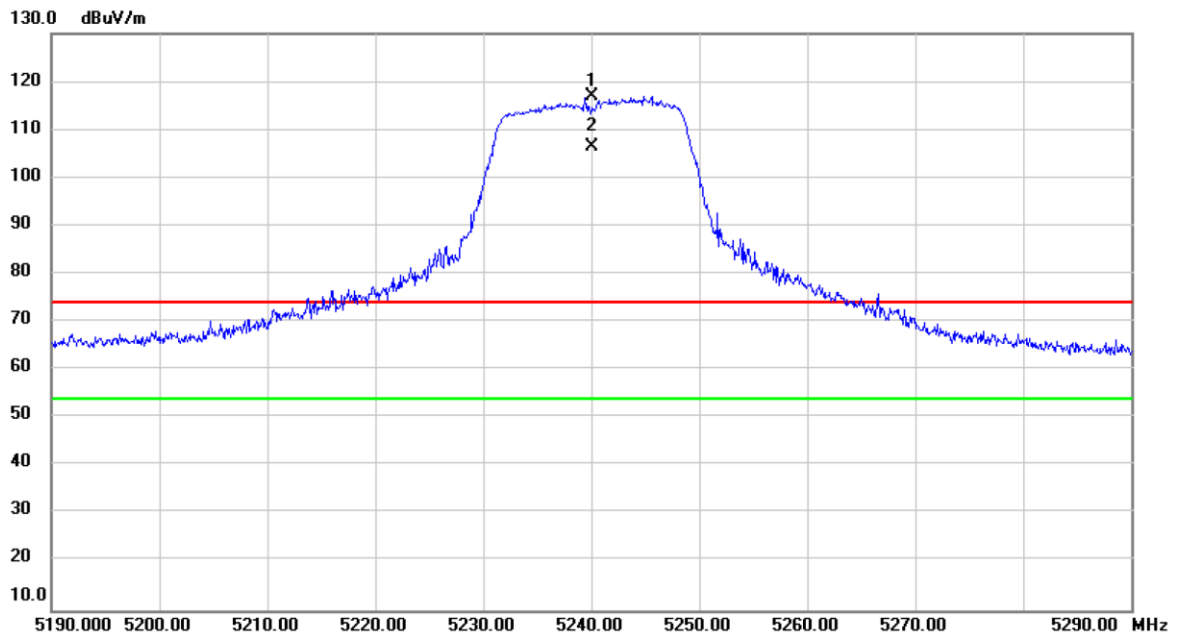


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | X   | 5240.000 | 79.07         | 37.90          | 116.97      | 74.00  | 42.97  | peak     | No Limit |
| 2   | *   | 5240.000 | 68.50         | 37.90          | 106.40      | 54.00  | 52.40  | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH149: 5745 MHz                       | Polarization | Vertical   |

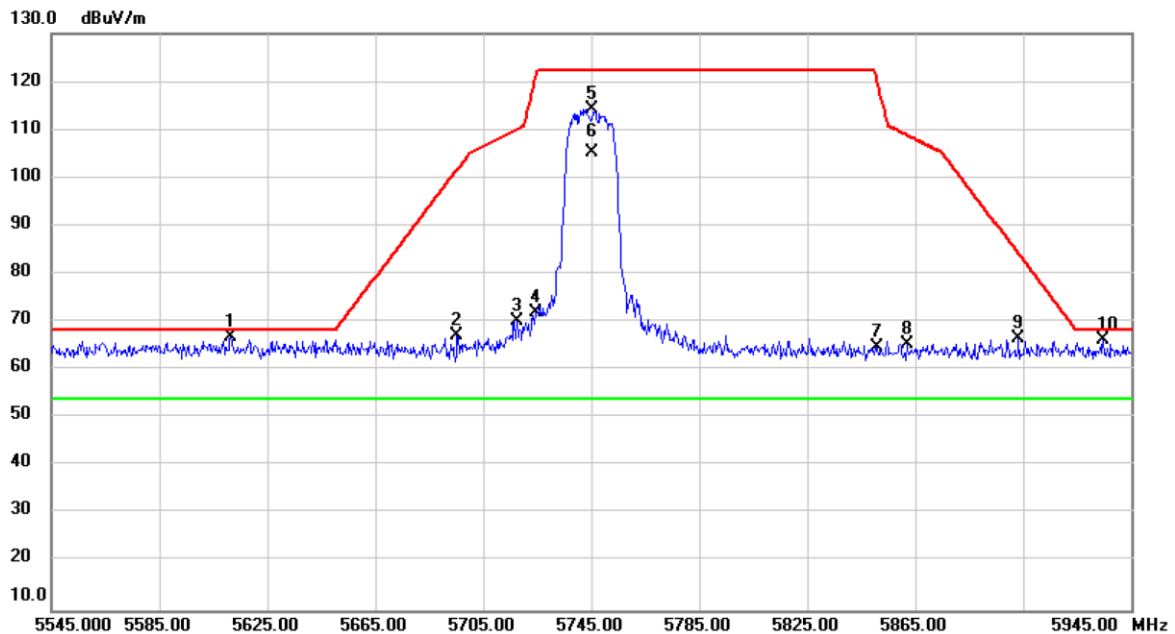


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5611.400     | 28.53                    | 38.30                   | 66.83                      | 68.20           | -1.37        | peak     |          |
| 2   |     | 5695.400     | 28.83                    | 38.35                   | 67.18                      | 101.80          | -34.62       | peak     |          |
| 3   |     | 5717.400     | 31.79                    | 38.37                   | 70.16                      | 110.07          | -39.91       | peak     |          |
| 4   |     | 5724.600     | 33.63                    | 38.37                   | 72.00                      | 121.29          | -49.29       | peak     |          |
| 5   |     | 5745.000     | 75.86                    | 38.39                   | 114.25                     | 122.20          | -7.95        | peak     | No Limit |
| 6   | *   | 5745.000     | 66.79                    | 38.39                   | 105.18                     | 54.00           | 51.18        | AVG      | No Limit |
| 7   |     | 5850.600     | 26.40                    | 38.47                   | 64.87                      | 120.83          | -55.96       | peak     |          |
| 8   |     | 5861.800     | 26.82                    | 38.48                   | 65.30                      | 108.90          | -43.60       | peak     |          |
| 9   |     | 5903.400     | 27.93                    | 38.50                   | 66.43                      | 84.18           | -17.75       | peak     |          |
| 10  |     | 5934.600     | 27.62                    | 38.53                   | 66.15                      | 68.20           | -2.05        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH165: 5825 MHz                       | Polarization | Vertical   |

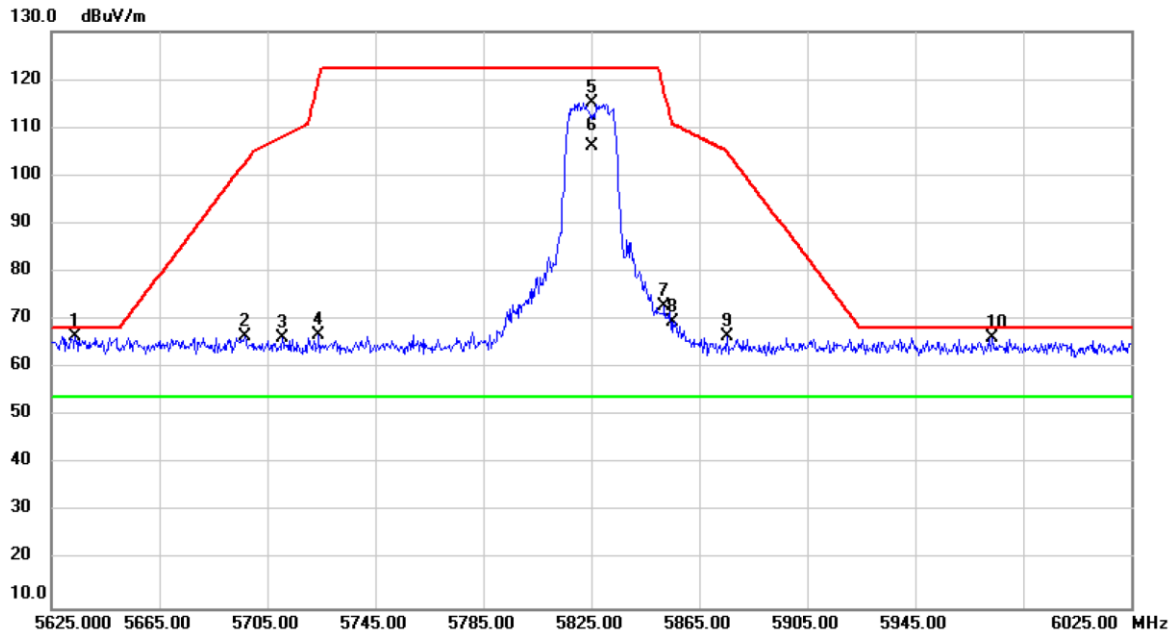


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5633.800     | 28.16                    | 38.31                   | 66.47                      | 68.20           | -1.73        | peak     |          |
| 2   |     | 5696.600     | 28.10                    | 38.36                   | 66.46                      | 102.68          | -36.22       | peak     |          |
| 3   |     | 5710.600     | 27.88                    | 38.36                   | 66.24                      | 108.17          | -41.93       | peak     |          |
| 4   |     | 5724.200     | 28.51                    | 38.37                   | 66.88                      | 120.38          | -53.50       | peak     |          |
| 5   |     | 5825.000     | 76.78                    | 38.46                   | 115.24                     | 122.20          | -6.96        | peak     | No Limit |
| 6   | *   | 5825.000     | 67.61                    | 38.46                   | 106.07                     | 54.00           | 52.07        | AVG      | No Limit |
| 7   |     | 5852.200     | 34.44                    | 38.47                   | 72.91                      | 117.18          | -44.27       | peak     |          |
| 8   |     | 5855.400     | 30.97                    | 38.48                   | 69.45                      | 110.69          | -41.24       | peak     |          |
| 9   |     | 5875.400     | 27.98                    | 38.49                   | 66.47                      | 104.90          | -38.43       | peak     |          |
| 10  |     | 5973.400     | 27.62                    | 38.56                   | 66.18                      | 68.20           | -2.02        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT40)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH38: 5190 MHz                        | Polarization | Vertical   |

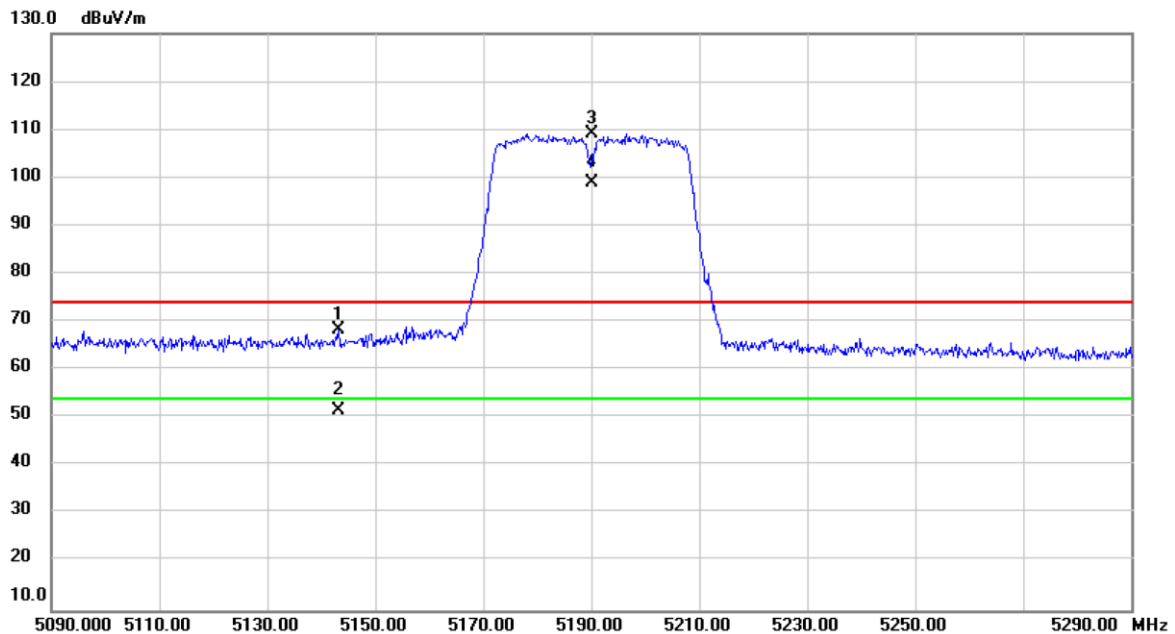


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5143.200     | 30.42                    | 37.79                   | 68.21                      | 74.00           | -5.79        | peak     |          |
| 2   |     | 5143.200     | 13.75                    | 37.79                   | 51.54                      | 54.00           | -2.46        | AVG      |          |
| 3   | X   | 5190.000     | 71.29                    | 37.84                   | 109.13                     | 74.00           | 35.13        | peak     | No Limit |
| 4   | *   | 5190.000     | 61.25                    | 37.84                   | 99.09                      | 54.00           | 45.09        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT40)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH46: 5230 MHz                        | Polarization | Vertical   |

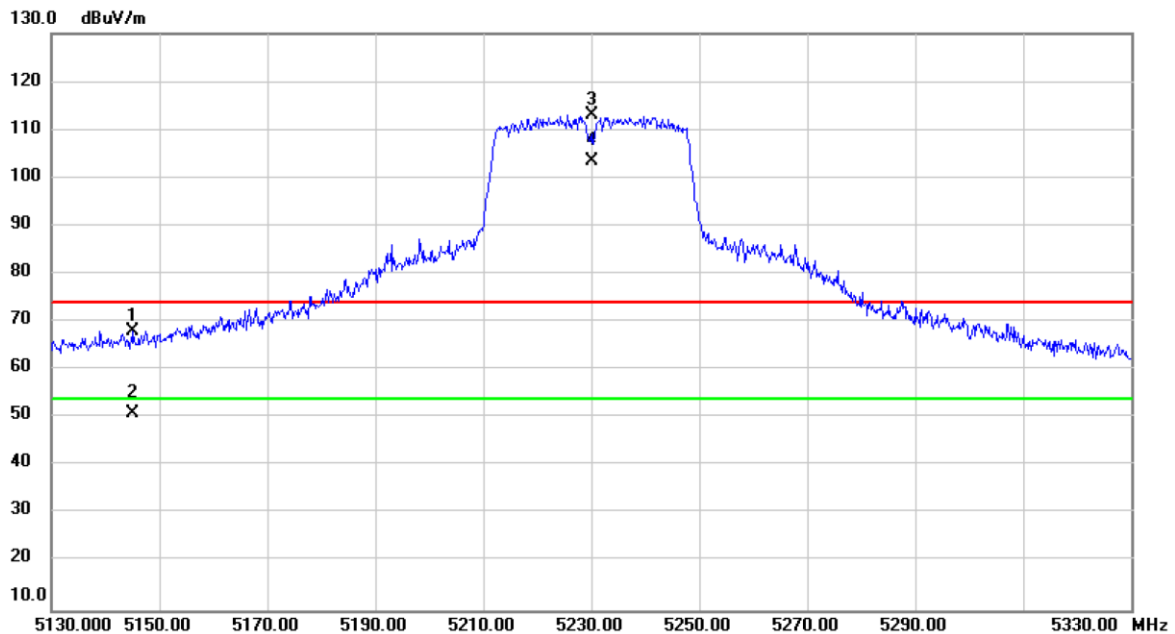


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5145.200     | 30.30                    | 37.79                   | 68.09                      | 74.00           | -5.91        | peak     |          |
| 2   |     | 5145.200     | 13.23                    | 37.79                   | 51.02                      | 54.00           | -2.98        | AVG      |          |
| 3   | X   | 5230.000     | 75.17                    | 37.89                   | 113.06                     | 74.00           | 39.06        | peak     | No Limit |
| 4   | *   | 5230.000     | 65.49                    | 37.89                   | 103.38                     | 54.00           | 49.38        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT40)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH151: 5755 MHz                       | Polarization | Vertical   |

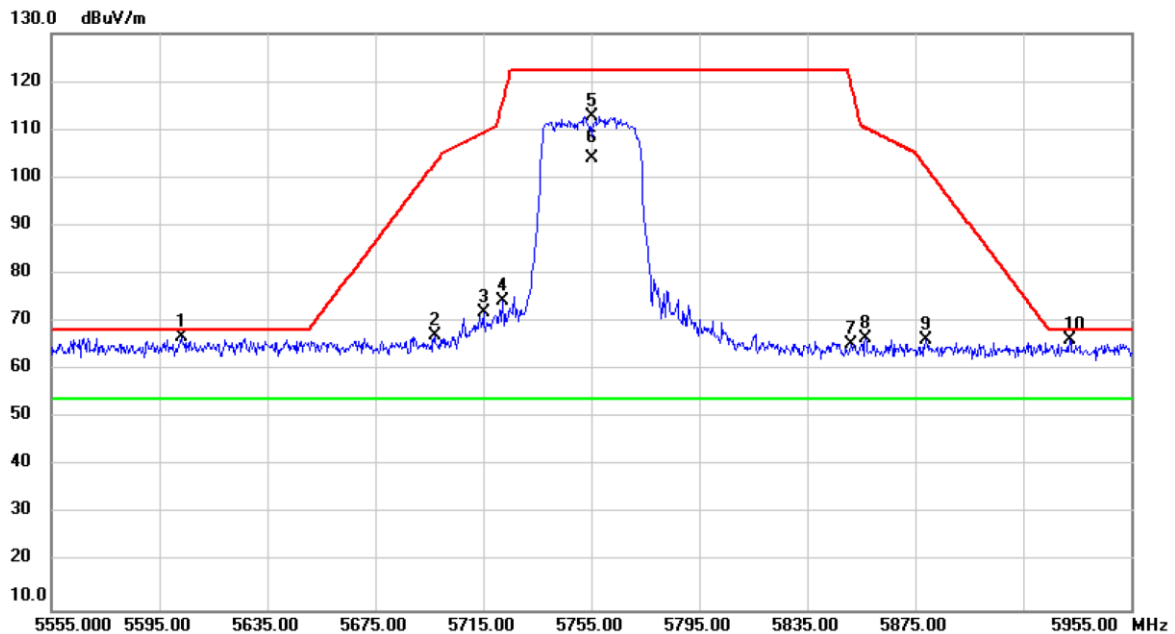


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5603.000     | 28.50                    | 38.28                   | 66.78                      | 68.20           | -1.42        | peak     |          |
| 2   |     | 5697.000     | 28.84                    | 38.36                   | 67.20                      | 102.98          | -35.78       | peak     |          |
| 3   |     | 5715.000     | 33.54                    | 38.37                   | 71.91                      | 109.40          | -37.49       | peak     |          |
| 4   |     | 5722.200     | 36.10                    | 38.37                   | 74.47                      | 115.82          | -41.35       | peak     |          |
| 5   |     | 5755.000     | 74.28                    | 38.40                   | 112.68                     | 122.20          | -9.52        | peak     | No Limit |
| 6   | *   | 5755.000     | 65.52                    | 38.40                   | 103.92                     | 54.00           | 49.92        | AVG      | No Limit |
| 7   |     | 5851.000     | 27.00                    | 38.47                   | 65.47                      | 119.92          | -54.45       | peak     |          |
| 8   |     | 5856.600     | 28.15                    | 38.47                   | 66.62                      | 110.35          | -43.73       | peak     |          |
| 9   |     | 5879.000     | 27.82                    | 38.49                   | 66.31                      | 102.24          | -35.93       | peak     |          |
| 10  |     | 5932.200     | 27.64                    | 38.53                   | 66.17                      | 68.20           | -2.03        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                       |              |            |
|----------------|---------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT40)_ External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH159: 5795 MHz                       | Polarization | Vertical   |

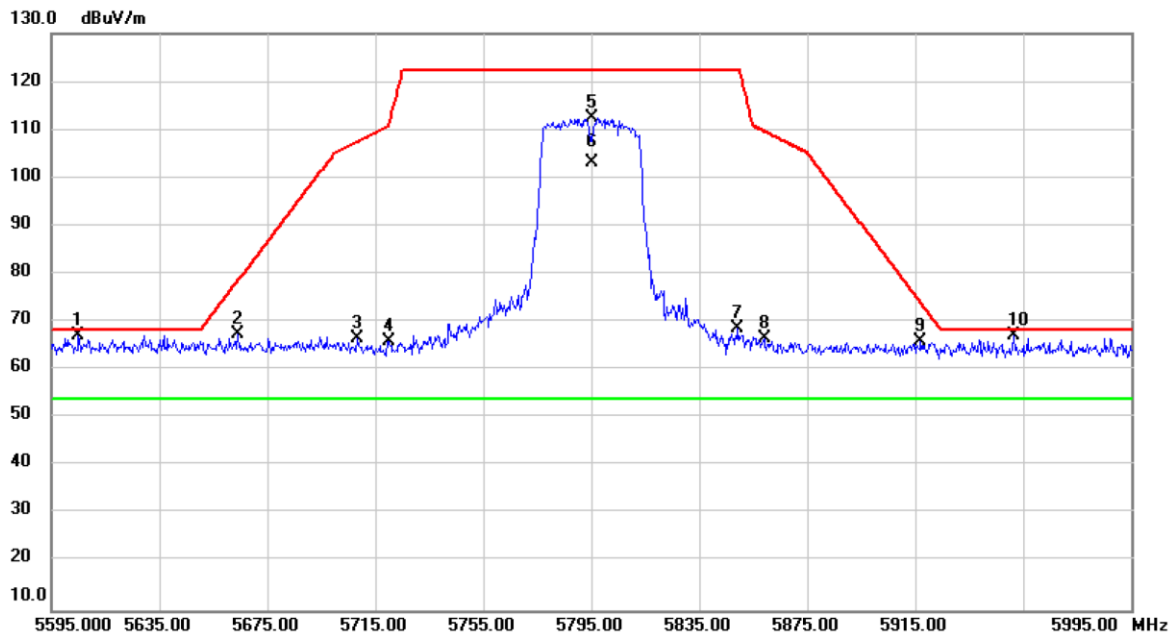


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5605.000     | 28.81                    | 38.29                   | 67.10                      | 68.20           | -1.10        | peak     |          |
| 2   |     | 5663.800     | 29.11                    | 38.33                   | 67.44                      | 78.41           | -10.97       | peak     |          |
| 3   |     | 5708.200     | 28.05                    | 38.36                   | 66.41                      | 107.50          | -41.09       | peak     |          |
| 4   |     | 5719.800     | 27.45                    | 38.37                   | 65.82                      | 110.74          | -44.92       | peak     |          |
| 5   |     | 5795.000     | 73.95                    | 38.43                   | 112.38                     | 122.20          | -9.82        | peak     | No Limit |
| 6   | *   | 5795.000     | 64.84                    | 38.43                   | 103.27                     | 54.00           | 49.27        | AVG      | No Limit |
| 7   |     | 5849.400     | 30.23                    | 38.47                   | 68.70                      | 122.20          | -53.50       | peak     |          |
| 8   |     | 5859.000     | 28.08                    | 38.47                   | 66.55                      | 109.68          | -43.13       | peak     |          |
| 9   |     | 5917.000     | 27.41                    | 38.51                   | 65.92                      | 74.12           | -8.20        | peak     |          |
| 10  |     | 5951.400     | 28.48                    | 38.54                   | 67.02                      | 68.20           | -1.18        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH42: 5210 MHz                         | Polarization | Vertical   |

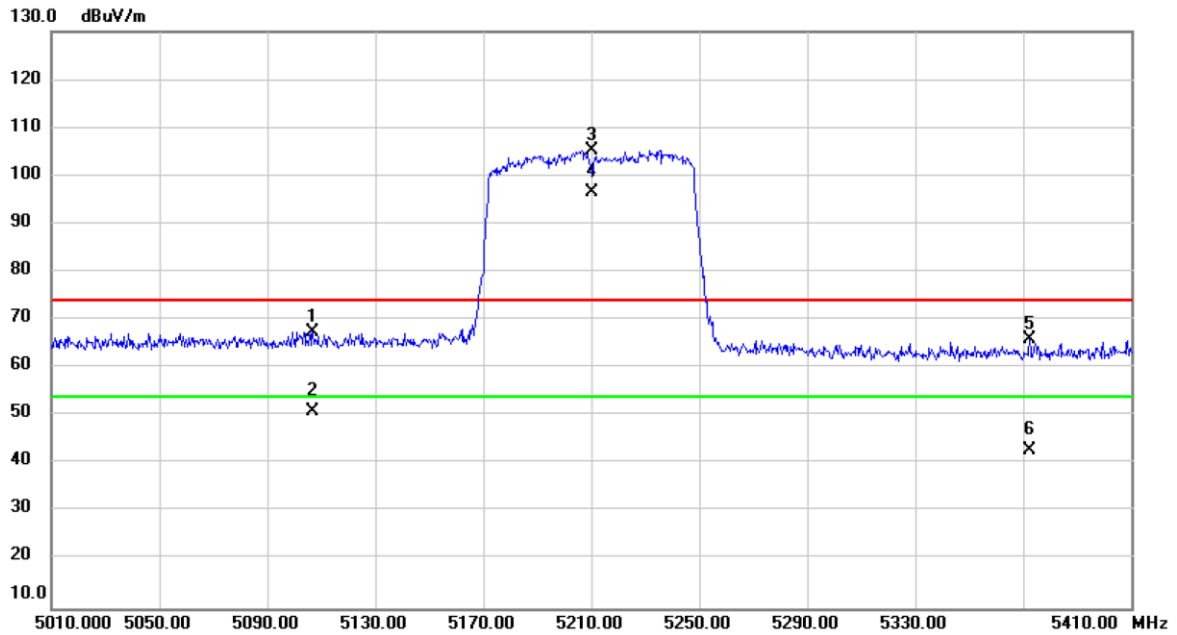


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5106.800     | 29.85                    | 37.74                   | 67.59                      | 74.00           | -6.41        | peak     |          |
| 2   |     | 5106.800     | 13.17                    | 37.74                   | 50.91                      | 54.00           | -3.09        | AVG      |          |
| 3   | X   | 5210.000     | 67.47                    | 37.87                   | 105.34                     | 74.00           | 31.34        | peak     | No Limit |
| 4   | *   | 5210.000     | 58.76                    | 37.87                   | 96.63                      | 54.00           | 42.63        | AVG      | No Limit |
| 5   |     | 5372.400     | 27.79                    | 38.06                   | 65.85                      | 74.00           | -8.15        | peak     |          |
| 6   |     | 5372.400     | 4.81                     | 38.06                   | 42.87                      | 54.00           | -11.13       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH155: 5775 MHz                        | Polarization | Vertical   |

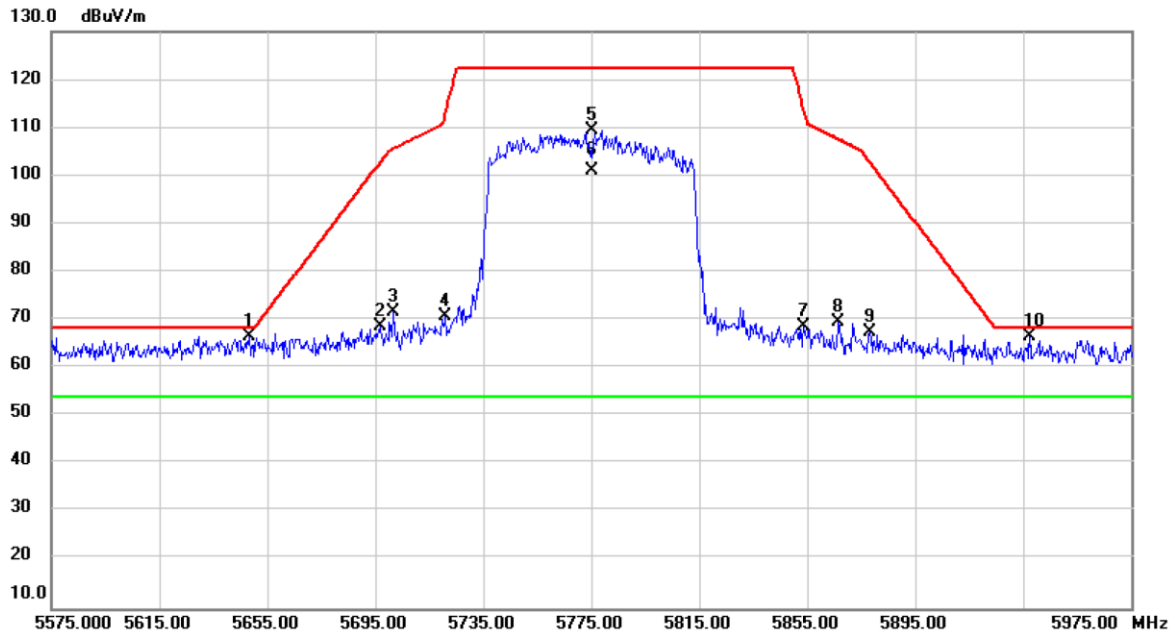


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5648.200     | 28.21                    | 38.32                   | 66.53                      | 68.20           | -1.67        | peak     |          |
| 2   |     | 5696.600     | 30.23                    | 38.36                   | 68.59                      | 102.68          | -34.09       | peak     |          |
| 3   |     | 5701.800     | 33.23                    | 38.36                   | 71.59                      | 105.70          | -34.11       | peak     |          |
| 4   |     | 5721.000     | 32.27                    | 38.37                   | 70.64                      | 113.08          | -42.44       | peak     |          |
| 5   |     | 5775.000     | 71.00                    | 38.41                   | 109.41                     | 122.20          | -12.79       | peak     | No Limit |
| 6   | *   | 5775.000     | 62.57                    | 38.41                   | 100.98                     | 54.00           | 46.98        | AVG      | No Limit |
| 7   |     | 5853.800     | 30.21                    | 38.48                   | 68.69                      | 113.54          | -44.85       | peak     |          |
| 8   |     | 5866.600     | 31.21                    | 38.48                   | 69.69                      | 107.55          | -37.86       | peak     |          |
| 9   |     | 5878.200     | 29.11                    | 38.49                   | 67.60                      | 102.83          | -35.23       | peak     |          |
| 10  |     | 5937.400     | 27.94                    | 38.53                   | 66.47                      | 68.20           | -1.73        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW20)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH36: 5180 MHz                         | Polarization | Vertical   |

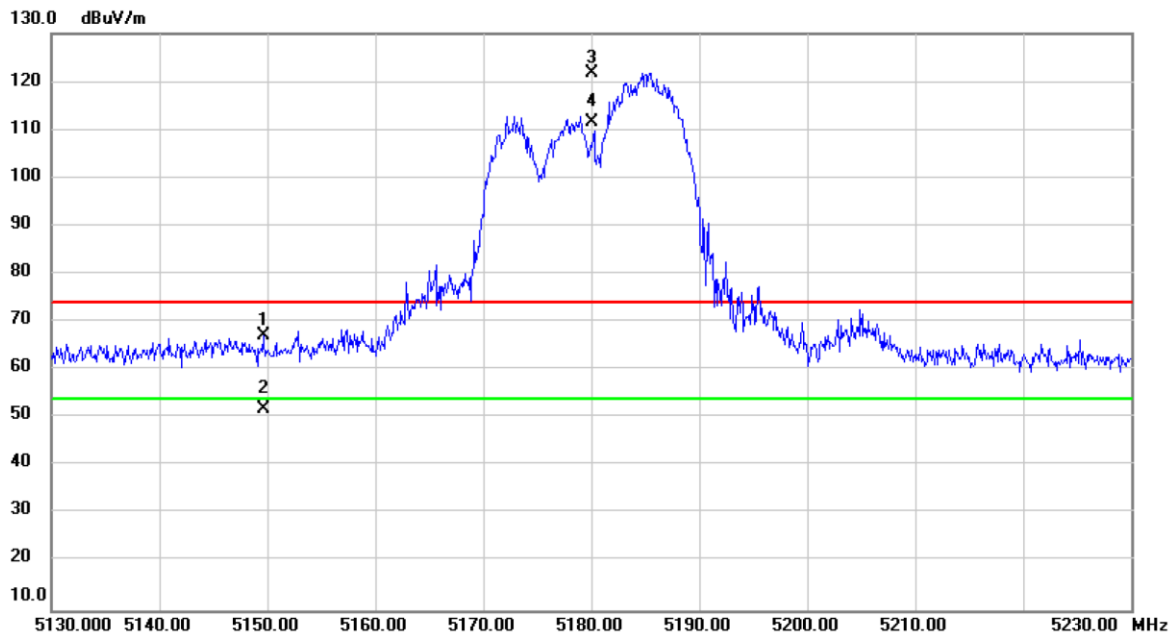


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5149.600     | 29.33                    | 37.80                   | 67.13                      | 74.00           | -6.87        | peak     |          |
| 2   |     | 5149.600     | 14.03                    | 37.80                   | 51.83                      | 54.00           | -2.17        | AVG      |          |
| 3   | X   | 5180.000     | 84.06                    | 37.83                   | 121.89                     | 74.00           | 47.89        | peak     | No Limit |
| 4   | *   | 5180.000     | 73.72                    | 37.83                   | 111.55                     | 54.00           | 57.55        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW20)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH48: 5240 MHz                         | Polarization | Vertical   |

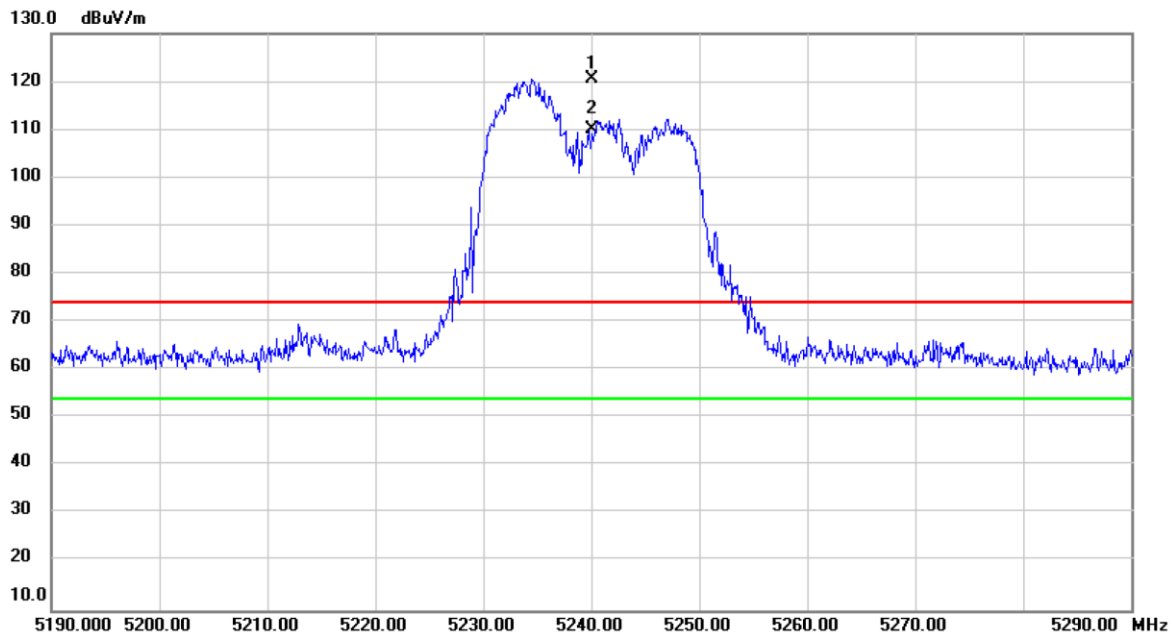


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5240.000     | 82.52                    | 37.90                   | 120.42                     | 74.00           | 46.42        | peak     | No Limit |
| 2   | *   | 5240.000     | 72.03                    | 37.90                   | 109.93                     | 54.00           | 55.93        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW20)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH149: 5745 MHz                        | Polarization | Vertical   |

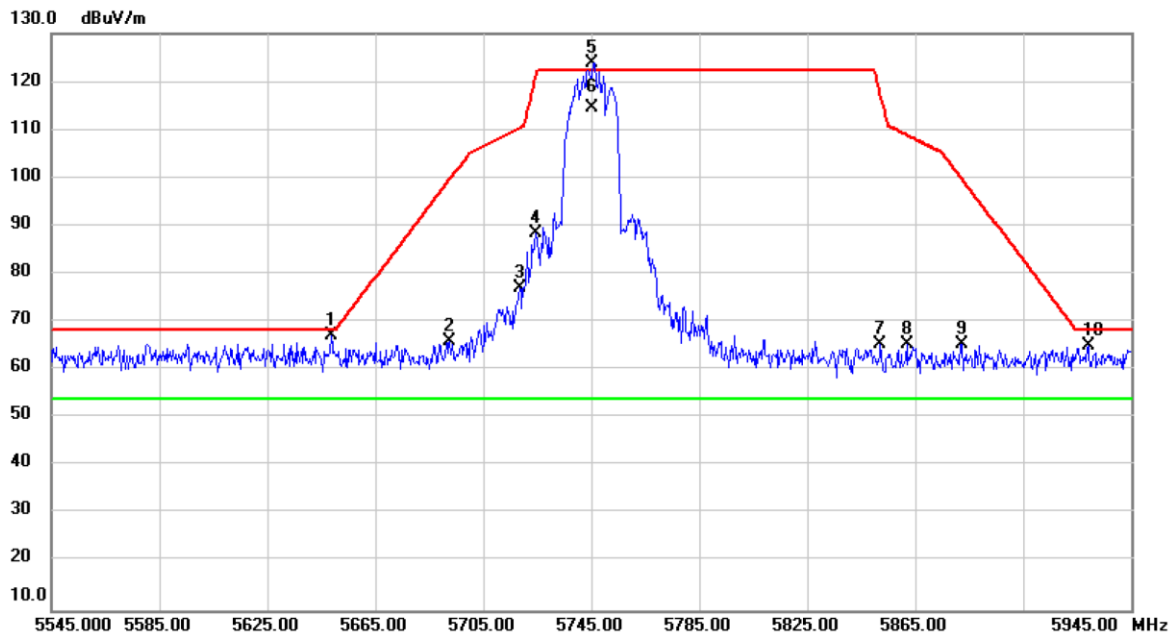


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5648.600     | 28.78                    | 38.32                   | 67.10                      | 68.20           | -1.10        | peak     |          |
| 2   |     | 5692.600     | 27.50                    | 38.35                   | 65.85                      | 99.72           | -33.87       | peak     |          |
| 3   |     | 5718.600     | 38.62                    | 38.38                   | 77.00                      | 110.41          | -33.41       | peak     |          |
| 4   |     | 5724.600     | 50.08                    | 38.37                   | 88.45                      | 121.29          | -32.84       | peak     |          |
| 5   | X   | 5745.000     | 85.40                    | 38.39                   | 123.79                     | 122.20          | 1.59         | peak     | No Limit |
| 6   | *   | 5745.000     | 76.25                    | 38.39                   | 114.64                     | 54.00           | 60.64        | AVG      | No Limit |
| 7   |     | 5852.200     | 26.99                    | 38.47                   | 65.46                      | 117.18          | -51.72       | peak     |          |
| 8   |     | 5861.800     | 26.84                    | 38.48                   | 65.32                      | 108.90          | -43.58       | peak     |          |
| 9   |     | 5882.200     | 26.93                    | 38.50                   | 65.43                      | 99.87           | -34.44       | peak     |          |
| 10  |     | 5929.000     | 26.52                    | 38.53                   | 65.05                      | 68.20           | -3.15        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW20)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH165: 5825 MHz                        | Polarization | Vertical   |

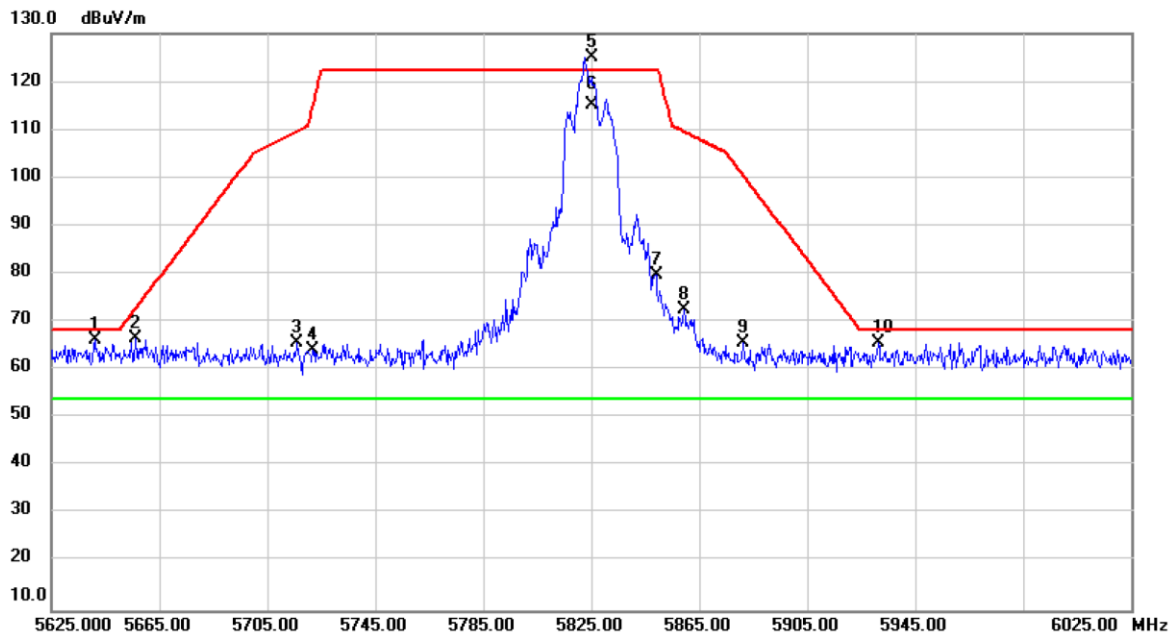


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5641.000     | 27.89                    | 38.32                   | 66.21                      | 68.20           | -1.99        | peak     |          |
| 2   |     | 5656.200     | 28.31                    | 38.33                   | 66.64                      | 72.79           | -6.15        | peak     |          |
| 3   |     | 5716.200     | 27.29                    | 38.37                   | 65.66                      | 109.74          | -44.08       | peak     |          |
| 4   |     | 5721.800     | 25.91                    | 38.37                   | 64.28                      | 114.90          | -50.62       | peak     |          |
| 5   | X   | 5825.000     | 86.56                    | 38.46                   | 125.02                     | 122.20          | 2.82         | peak     | No Limit |
| 6   | *   | 5825.000     | 76.77                    | 38.46                   | 115.23                     | 54.00           | 61.23        | AVG      | No Limit |
| 7   |     | 5849.000     | 41.32                    | 38.47                   | 79.79                      | 122.20          | -42.41       | peak     |          |
| 8   |     | 5859.400     | 34.01                    | 38.47                   | 72.48                      | 109.57          | -37.09       | peak     |          |
| 9   |     | 5881.400     | 27.18                    | 38.49                   | 65.67                      | 100.46          | -34.79       | peak     |          |
| 10  |     | 5931.400     | 27.23                    | 38.53                   | 65.76                      | 68.20           | -2.44        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW40)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH38: 5190 MHz                         | Polarization | Vertical   |

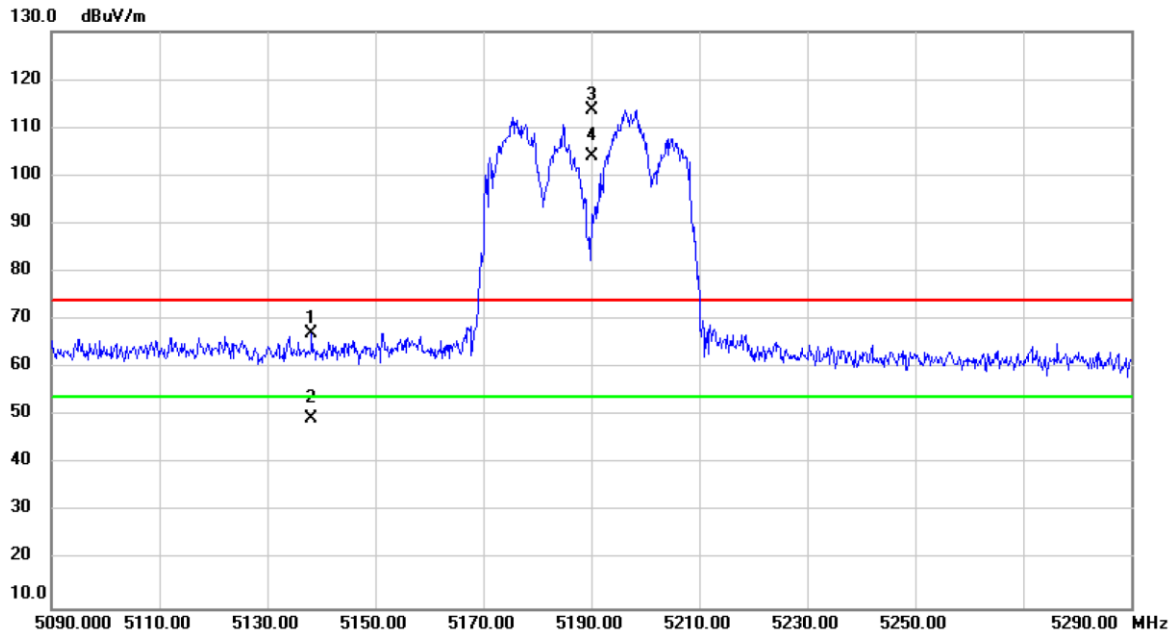


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5138.200     | 29.33                    | 37.78                   | 67.11                      | 74.00           | -6.89        | peak     |          |
| 2   |     | 5138.200     | 11.67                    | 37.78                   | 49.45                      | 54.00           | -4.55        | AVG      |          |
| 3   | X   | 5190.000     | 75.75                    | 37.84                   | 113.59                     | 74.00           | 39.59        | peak     | No Limit |
| 4   | *   | 5190.000     | 66.16                    | 37.84                   | 104.00                     | 54.00           | 50.00        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW40)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH46: 5230 MHz                         | Polarization | Vertical   |

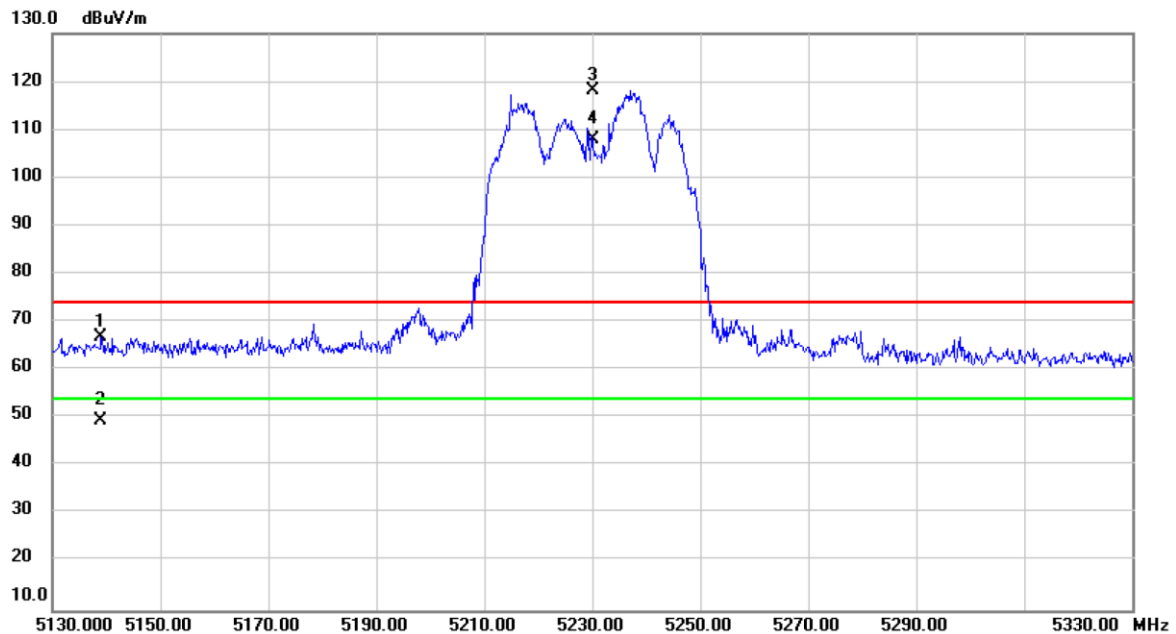

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5139.000     | 28.96                    | 37.78                   | 66.74                      | 74.00           | -7.26        | peak     |          |
| 2   |     | 5139.000     | 11.57                    | 37.78                   | 49.35                      | 54.00           | -4.65        | AVG      |          |
| 3   | X   | 5230.000     | 80.20                    | 37.89                   | 118.09                     | 74.00           | 44.09        | peak     | No Limit |
| 4   | *   | 5230.000     | 70.05                    | 37.89                   | 107.94                     | 54.00           | 53.94        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW40)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH151: 5755 MHz                        | Polarization | Vertical   |




| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5619.000     | 27.83                    | 38.30                   | 66.13                      | 68.20           | -2.07        | peak     |          |
| 2   |     | 5692.600     | 35.56                    | 38.35                   | 73.91                      | 99.72           | -25.81       | peak     |          |
| 3   |     | 5719.800     | 48.03                    | 38.37                   | 86.40                      | 110.74          | -24.34       | peak     |          |
| 4   |     | 5722.600     | 52.92                    | 38.37                   | 91.29                      | 116.73          | -25.44       | peak     |          |
| 5   |     | 5755.000     | 83.60                    | 38.40                   | 122.00                     | 122.20          | -0.20        | peak     | No Limit |
| 6   | *   | 5755.000     | 75.40                    | 38.40                   | 113.80                     | 54.00           | 59.80        | AVG      | No Limit |
| 7   |     | 5852.200     | 29.19                    | 38.47                   | 67.66                      | 117.18          | -49.52       | peak     |          |
| 8   |     | 5867.800     | 28.89                    | 38.48                   | 67.37                      | 107.22          | -39.85       | peak     |          |
| 9   |     | 5896.600     | 27.28                    | 38.51                   | 65.79                      | 89.22           | -23.43       | peak     |          |
| 10  |     | 5924.200     | 27.76                    | 38.52                   | 66.28                      | 68.79           | -2.51        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW40)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH159: 5795 MHz                        | Polarization | Vertical   |

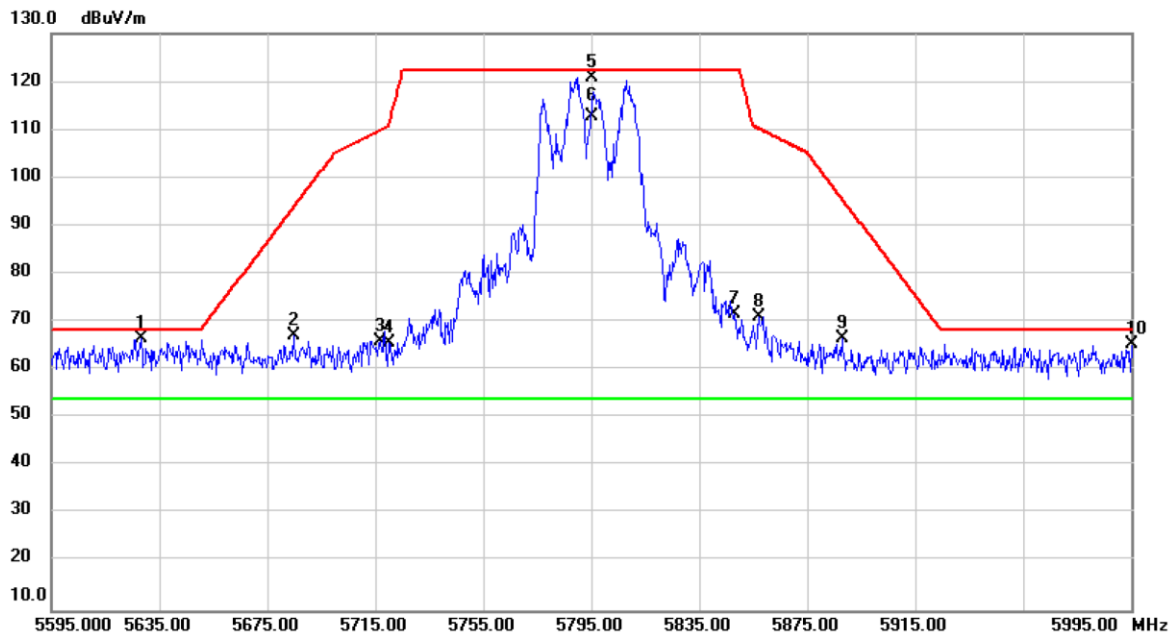


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5628.200     | 28.14                    | 38.31                   | 66.45                      | 68.20           | -1.75        | peak     |          |
| 2   |     | 5684.600     | 28.76                    | 38.35                   | 67.11                      | 93.80           | -26.69       | peak     |          |
| 3   |     | 5716.600     | 27.73                    | 38.37                   | 66.10                      | 109.85          | -43.75       | peak     |          |
| 4   |     | 5719.800     | 27.30                    | 38.37                   | 65.67                      | 110.74          | -45.07       | peak     |          |
| 5   |     | 5795.000     | 82.37                    | 38.43                   | 120.80                     | 122.20          | -1.40        | peak     | No Limit |
| 6   | *   | 5795.000     | 74.20                    | 38.43                   | 112.63                     | 54.00           | 58.63        | AVG      | No Limit |
| 7   |     | 5848.200     | 33.33                    | 38.47                   | 71.80                      | 122.20          | -50.40       | peak     |          |
| 8   |     | 5857.000     | 32.70                    | 38.47                   | 71.17                      | 110.24          | -39.07       | peak     |          |
| 9   |     | 5887.800     | 27.92                    | 38.49                   | 66.41                      | 95.73           | -29.32       | peak     |          |
| 10  |     | 5995.000     | 26.78                    | 38.57                   | 65.35                      | 68.20           | -2.85        | peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW80)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH42: 5210 MHz                         | Polarization | Vertical   |

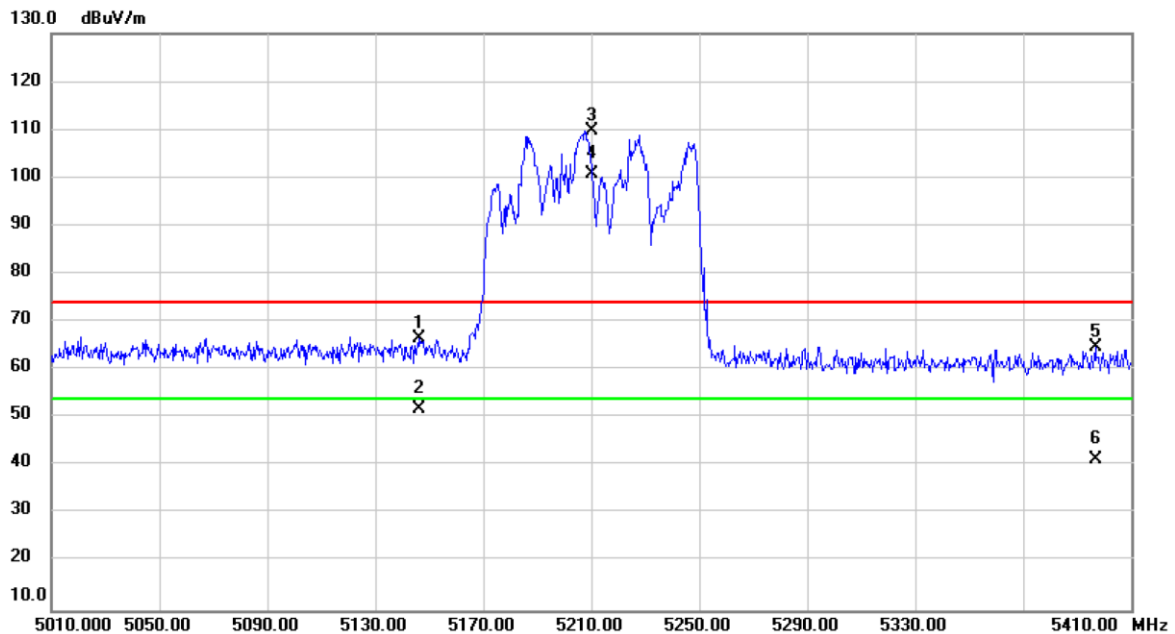


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5146.400     | 28.61                    | 37.79                   | 66.40                      | 74.00           | -7.60        | peak     |          |
| 2   |     | 5146.400     | 14.12                    | 37.79                   | 51.91                      | 54.00           | -2.09        | AVG      |          |
| 3   | X   | 5210.000     | 71.95                    | 37.87                   | 109.82                     | 74.00           | 35.82        | peak     | No Limit |
| 4   | *   | 5210.000     | 63.01                    | 37.87                   | 100.88                     | 54.00           | 46.88        | AVG      | No Limit |
| 5   |     | 5396.800     | 26.69                    | 38.09                   | 64.78                      | 74.00           | -9.22        | peak     |          |
| 6   |     | 5396.800     | 3.23                     | 38.09                   | 41.32                      | 54.00           | -12.68       | AVG      |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                        |              |            |
|----------------|----------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW80)_External Antenna | Test Date    | 2019/12/11 |
| Test Frequency | CH155: 5775 MHz                        | Polarization | Vertical   |

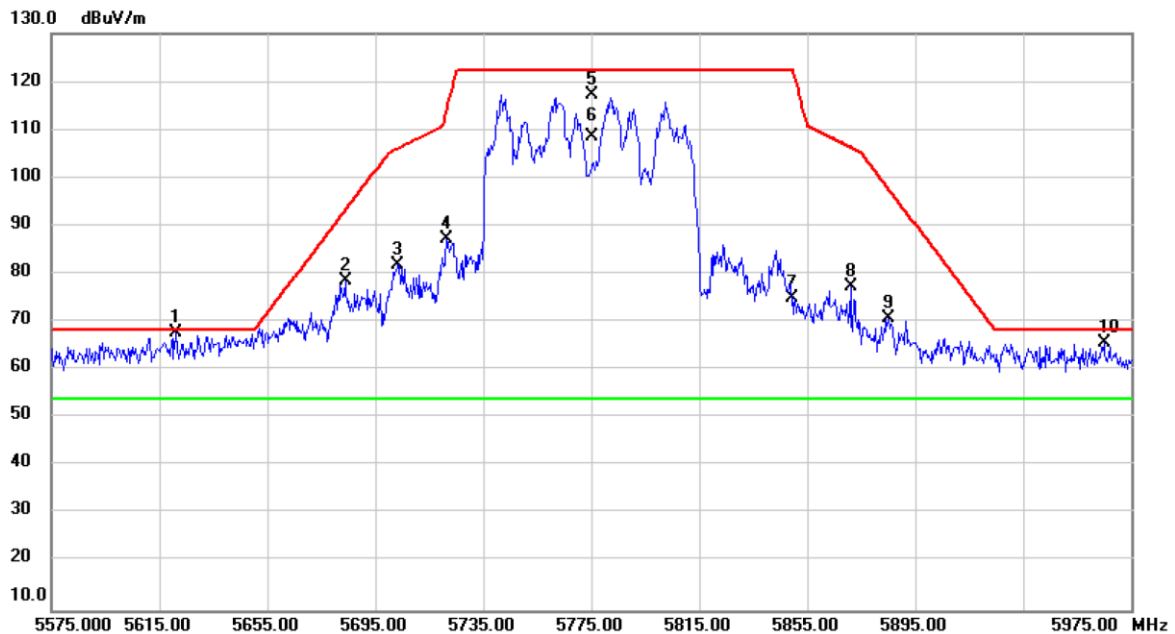


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5621.400     | 29.41                    | 38.30                   | 67.71                      | 68.20           | -0.49        | peak     |          |
| 2   |     | 5683.800     | 40.23                    | 38.35                   | 78.58                      | 93.21           | -14.63       | peak     |          |
| 3   |     | 5703.400     | 43.57                    | 38.36                   | 81.93                      | 106.15          | -24.22       | peak     |          |
| 4   |     | 5721.400     | 48.83                    | 38.37                   | 87.20                      | 113.99          | -26.79       | peak     |          |
| 5   |     | 5775.000     | 78.81                    | 38.41                   | 117.22                     | 122.20          | -4.98        | peak     | No Limit |
| 6   | *   | 5775.000     | 70.14                    | 38.41                   | 108.55                     | 54.00           | 54.55        | AVG      | No Limit |
| 7   |     | 5849.400     | 36.46                    | 38.47                   | 74.93                      | 122.20          | -47.27       | peak     |          |
| 8   |     | 5871.000     | 38.72                    | 38.49                   | 77.21                      | 106.32          | -29.11       | peak     |          |
| 9   |     | 5885.400     | 32.36                    | 38.50                   | 70.86                      | 97.50           | -26.64       | peak     |          |
| 10  |     | 5965.000     | 27.04                    | 38.55                   | 65.59                      | 68.20           | -2.61        | peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                            |              |            |
|----------------|--------------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80+80)_ External Antenna | Test Date    | 2019/12/30 |
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz           | Polarization | Vertical   |

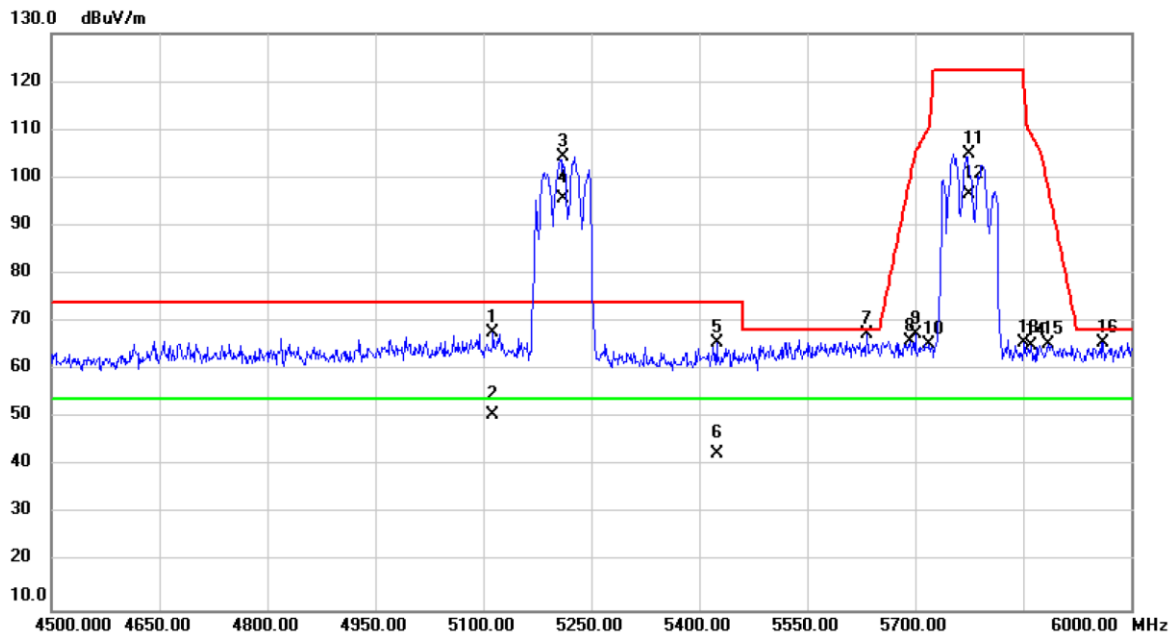


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5113.500     | 29.88                    | 37.76                   | 67.64                      | 74.00           | -6.36        | peak     |          |
| 2   |     | 5113.500     | 12.80                    | 37.76                   | 50.56                      | 54.00           | -3.44        | AVG      |          |
| 3   | X   | 5210.000     | 66.36                    | 37.87                   | 104.23                     | 74.00           | 30.23        | peak     | No Limit |
| 4   | X   | 5210.000     | 57.93                    | 37.87                   | 95.80                      | 54.00           | 41.80        | AVG      | No Limit |
| 5   |     | 5424.000     | 27.41                    | 38.12                   | 65.53                      | 74.00           | -8.47        | peak     |          |
| 6   |     | 5424.000     | 4.44                     | 38.12                   | 42.56                      | 54.00           | -11.44       | AVG      |          |
| 7   |     | 5632.500     | 29.00                    | 38.31                   | 67.31                      | 68.20           | -0.89        | peak     |          |
| 8   |     | 5692.500     | 27.68                    | 38.35                   | 66.03                      | 99.65           | -33.62       | peak     |          |
| 9   |     | 5700.000     | 29.01                    | 38.36                   | 67.37                      | 105.20          | -37.83       | peak     |          |
| 10  |     | 5719.500     | 27.04                    | 38.38                   | 65.42                      | 110.66          | -45.24       | peak     |          |
| 11  |     | 5775.000     | 66.67                    | 38.41                   | 105.08                     | 122.20          | -17.12       | peak     | No Limit |
| 12  | *   | 5775.000     | 58.26                    | 38.41                   | 96.67                      | 54.00           | 42.67        | AVG      | No Limit |
| 13  |     | 5851.500     | 27.19                    | 38.47                   | 65.66                      | 118.78          | -53.12       | peak     |          |
| 14  |     | 5860.500     | 26.55                    | 38.47                   | 65.02                      | 109.26          | -44.24       | peak     |          |
| 15  |     | 5884.500     | 26.85                    | 38.50                   | 65.35                      | 98.17           | -32.82       | peak     |          |
| 16  |     | 5961.000     | 27.21                    | 38.56                   | 65.77                      | 68.20           | -2.43        | peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                            |              |            |
|----------------|--------------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80+80)_ External Antenna | Test Date    | 2019/12/30 |
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz           | Polarization | Vertical   |

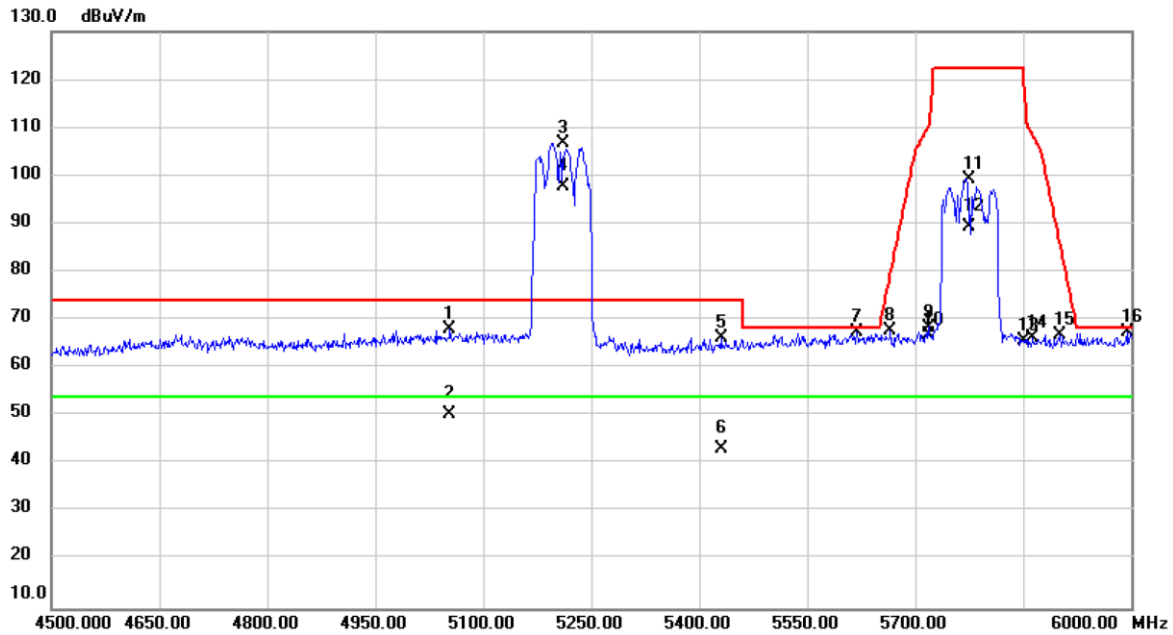


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5053.500     | 30.48                    | 37.68                   | 68.16                      | 74.00           | -5.84        | peak     |          |
| 2   |     | 5053.500     | 12.76                    | 37.68                   | 50.44                      | 54.00           | -3.56        | AVG      |          |
| 3   | X   | 5210.000     | 69.00                    | 37.87                   | 106.87                     | 74.00           | 32.87        | peak     | No Limit |
| 4   | *   | 5210.000     | 59.83                    | 37.87                   | 97.70                      | 54.00           | 43.70        | AVG      | No Limit |
| 5   |     | 5430.000     | 28.11                    | 38.13                   | 66.24                      | 74.00           | -7.76        | peak     |          |
| 6   |     | 5430.000     | 5.05                     | 38.13                   | 43.18                      | 54.00           | -10.82       | AVG      |          |
| 7   |     | 5619.000     | 29.22                    | 38.30                   | 67.52                      | 68.20           | -0.68        | peak     |          |
| 8   |     | 5665.500     | 29.42                    | 38.33                   | 67.75                      | 79.67           | -11.92       | peak     |          |
| 9   |     | 5718.000     | 30.12                    | 38.38                   | 68.50                      | 110.24          | -41.74       | peak     |          |
| 10  |     | 5719.500     | 28.62                    | 38.38                   | 67.00                      | 110.66          | -43.66       | peak     |          |
| 11  |     | 5775.000     | 60.94                    | 38.41                   | 99.35                      | 122.20          | -22.85       | peak     | No Limit |
| 12  | X   | 5775.000     | 51.08                    | 38.41                   | 89.49                      | 54.00           | 35.49        | AVG      | No Limit |
| 13  |     | 5850.000     | 27.20                    | 38.47                   | 65.67                      | 122.20          | -56.53       | peak     |          |
| 14  |     | 5863.500     | 27.79                    | 38.48                   | 66.27                      | 108.42          | -42.15       | peak     |          |
| 15  |     | 5901.000     | 28.43                    | 38.51                   | 66.94                      | 85.96           | -19.02       | peak     |          |
| 16  |     | 5994.000     | 28.78                    | 38.57                   | 67.35                      | 68.20           | -0.85        | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                           |              |           |
|----------------|-------------------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11ax (HEW80+80)_External Antenna | Test Date    | 2020/2/26 |
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz          | Polarization | Vertical  |

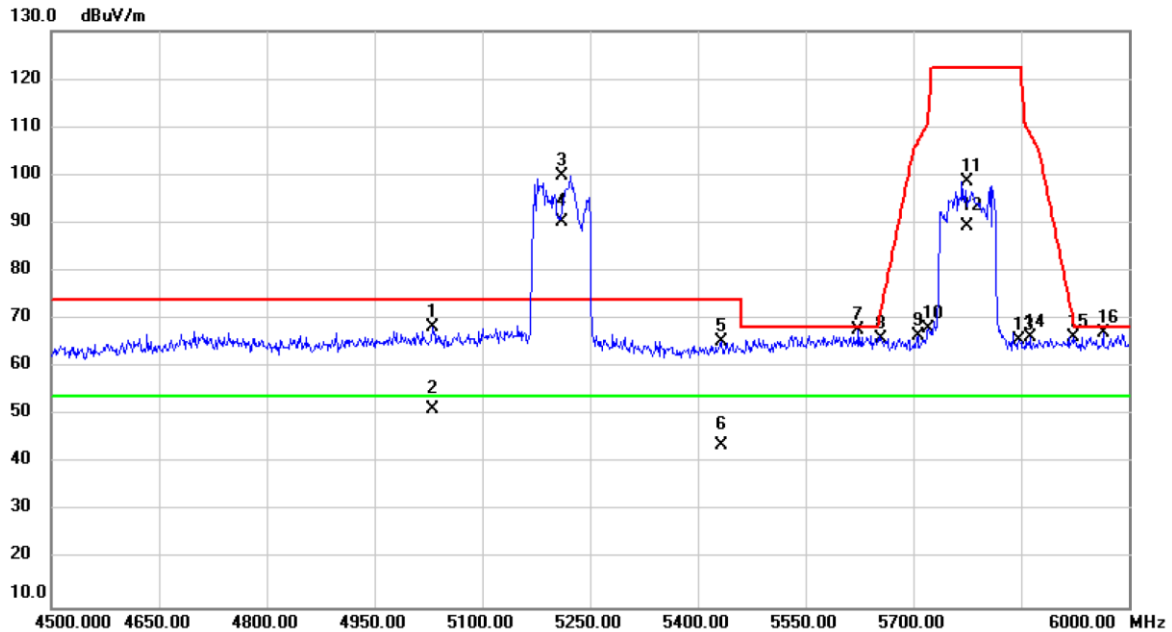


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|----------|
| 1   |     | 5031.000     | 30.65                    | 37.66                   | 68.31                      | 74.00           | -5.69      | peak     |          |
| 2   |     | 5031.000     | 13.59                    | 37.66                   | 51.25                      | 54.00           | -2.75      | AVG      |          |
| 3   | X   | 5210.000     | 62.01                    | 37.87                   | 99.88                      | 74.00           | 25.88      | peak     | No Limit |
| 4   | *   | 5210.000     | 52.29                    | 37.87                   | 90.16                      | 54.00           | 36.16      | AVG      | No Limit |
| 5   |     | 5433.000     | 27.17                    | 38.13                   | 65.30                      | 74.00           | -8.70      | peak     |          |
| 6   |     | 5433.000     | 5.76                     | 38.13                   | 43.89                      | 54.00           | -10.11     | AVG      |          |
| 7   |     | 5623.500     | 29.48                    | 38.30                   | 67.78                      | 68.20           | -0.42      | peak     |          |
| 8   |     | 5655.000     | 27.66                    | 38.33                   | 65.99                      | 71.90           | -5.91      | peak     |          |
| 9   |     | 5706.000     | 28.21                    | 38.36                   | 66.57                      | 106.88          | -40.31     | peak     |          |
| 10  |     | 5721.000     | 29.56                    | 38.37                   | 67.93                      | 113.08          | -45.15     | peak     |          |
| 11  |     | 5775.000     | 60.11                    | 38.41                   | 98.52                      | 122.20          | -23.68     | peak     | No Limit |
| 12  | X   | 5775.000     | 50.85                    | 38.41                   | 89.26                      | 54.00           | 35.26      | AVG      | No Limit |
| 13  |     | 5847.000     | 27.11                    | 38.47                   | 65.58                      | 122.20          | -56.62     | peak     |          |
| 14  |     | 5862.000     | 27.76                    | 38.48                   | 66.24                      | 108.84          | -42.60     | peak     |          |
| 15  |     | 5923.500     | 27.82                    | 38.52                   | 66.34                      | 69.31           | -2.97      | peak     |          |
| 16  |     | 5964.000     | 28.59                    | 38.55                   | 67.14                      | 68.20           | -1.06      | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                           |              |            |
|----------------|-------------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HEW80+80)_External Antenna | Test Date    | 2019/12/30 |
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz          | Polarization | Vertical   |

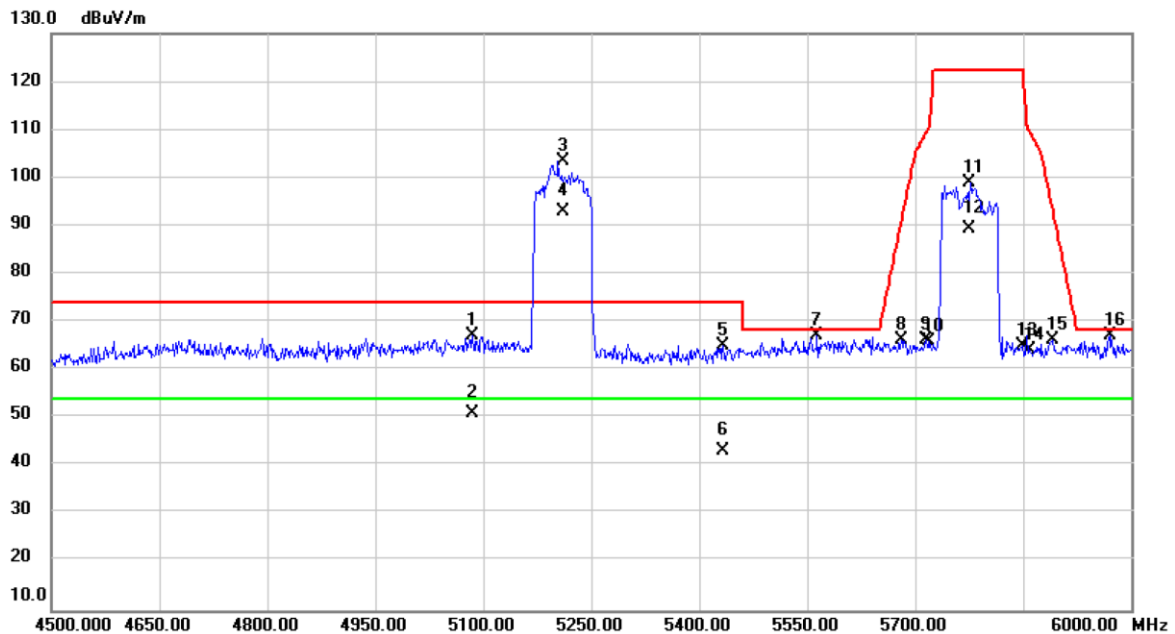


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5085.000     | 29.37                    | 37.72                   | 67.09                      | 74.00           | -6.91        | peak     |          |
| 2   |     | 5085.000     | 13.38                    | 37.72                   | 51.10                      | 54.00           | -2.90        | AVG      |          |
| 3   | X   | 5210.000     | 65.56                    | 37.87                   | 103.43                     | 74.00           | 29.43        | peak     | No Limit |
| 4   | *   | 5210.000     | 54.94                    | 37.87                   | 92.81                      | 54.00           | 38.81        | AVG      | No Limit |
| 5   |     | 5433.000     | 26.91                    | 38.13                   | 65.04                      | 74.00           | -8.96        | peak     |          |
| 6   |     | 5433.000     | 5.10                     | 38.13                   | 43.23                      | 54.00           | -10.77       | AVG      |          |
| 7   |     | 5563.500     | 28.87                    | 38.26                   | 67.13                      | 68.20           | -1.07        | peak     |          |
| 8   |     | 5680.500     | 27.81                    | 38.34                   | 66.15                      | 90.77           | -24.62       | peak     |          |
| 9   |     | 5715.000     | 27.91                    | 38.37                   | 66.28                      | 109.40          | -43.12       | peak     |          |
| 10  |     | 5719.500     | 27.56                    | 38.38                   | 65.94                      | 110.66          | -44.72       | peak     |          |
| 11  |     | 5775.000     | 60.48                    | 38.41                   | 98.89                      | 122.20          | -23.31       | peak     | No Limit |
| 12  | X   | 5775.000     | 50.84                    | 38.41                   | 89.25                      | 54.00           | 35.25        | AVG      | No Limit |
| 13  |     | 5848.500     | 26.45                    | 38.47                   | 64.92                      | 122.20          | -57.28       | peak     |          |
| 14  |     | 5859.000     | 25.74                    | 38.47                   | 64.21                      | 109.68          | -45.47       | peak     |          |
| 15  |     | 5890.500     | 27.88                    | 38.50                   | 66.38                      | 93.73           | -27.35       | peak     |          |
| 16  |     | 5970.000     | 28.48                    | 38.56                   | 67.04                      | 68.20           | -1.16        | peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |            |
|----------------|-------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/11/29 |
| Test Frequency | CH36: 5180 MHz                | Polarization | Vertical   |

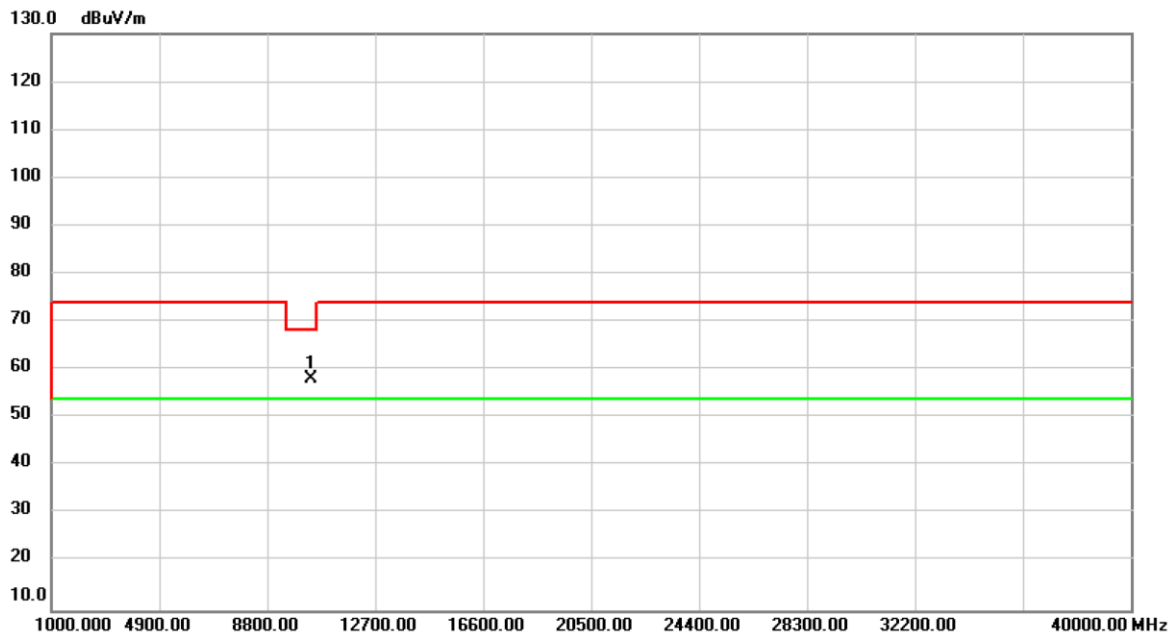


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10360.00 | 55.24         | 2.83           | 58.07       | 68.20  | -10.13 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |            |
|----------------|-------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/11/29 |
| Test Frequency | CH36: 5180 MHz                | Polarization | Horizontal |

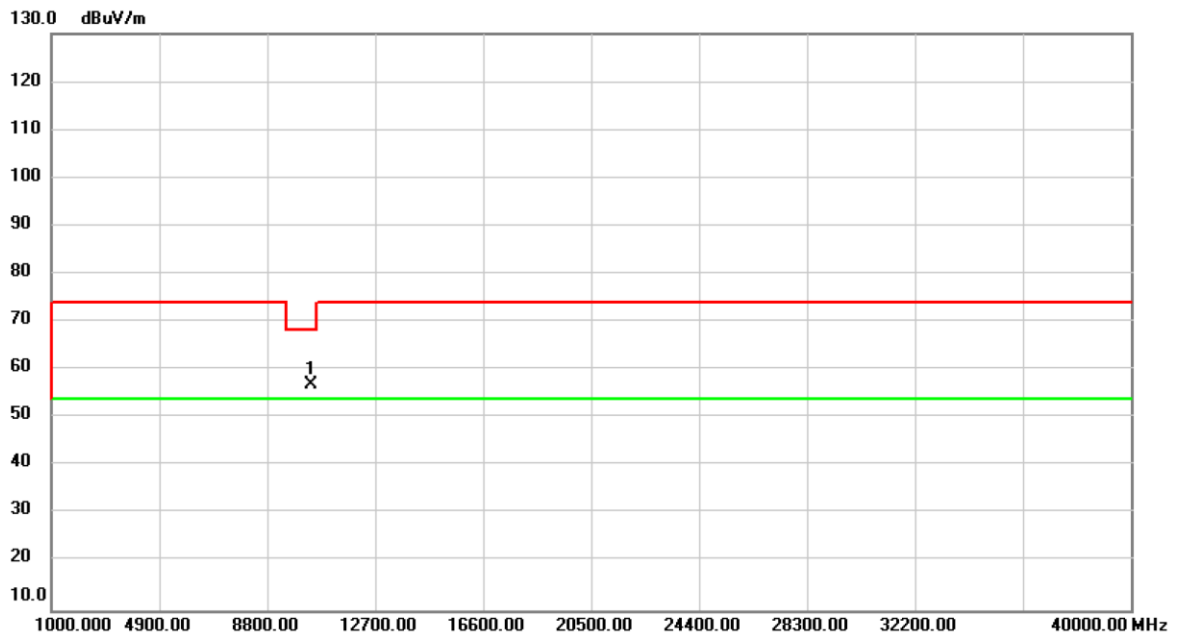


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10360.00 | 54.11         | 2.83           | 56.94        | 68.20  | -11.26 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |            |
|----------------|-------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/11/29 |
| Test Frequency | CH40: 5200 MHz                | Polarization | Vertical   |

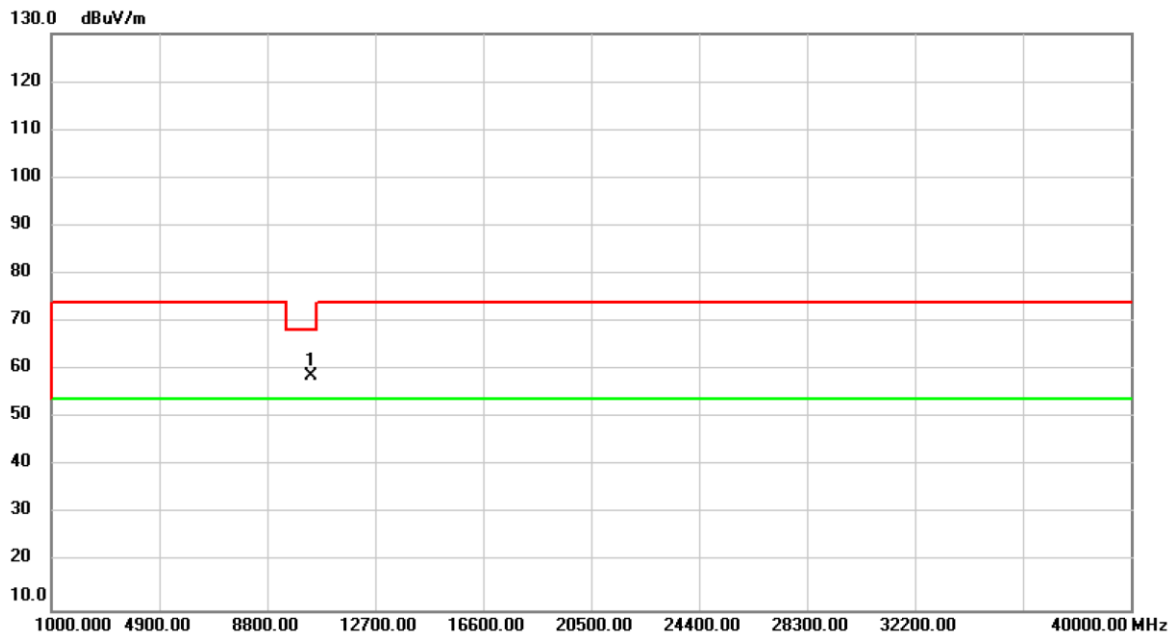


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10400.00 | 55.74         | 2.89           | 58.63       | 68.20  | -9.57  | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/11/29 |
| Test Frequency | CH40: 5200 MHz                 | Polarization | Horizontal |

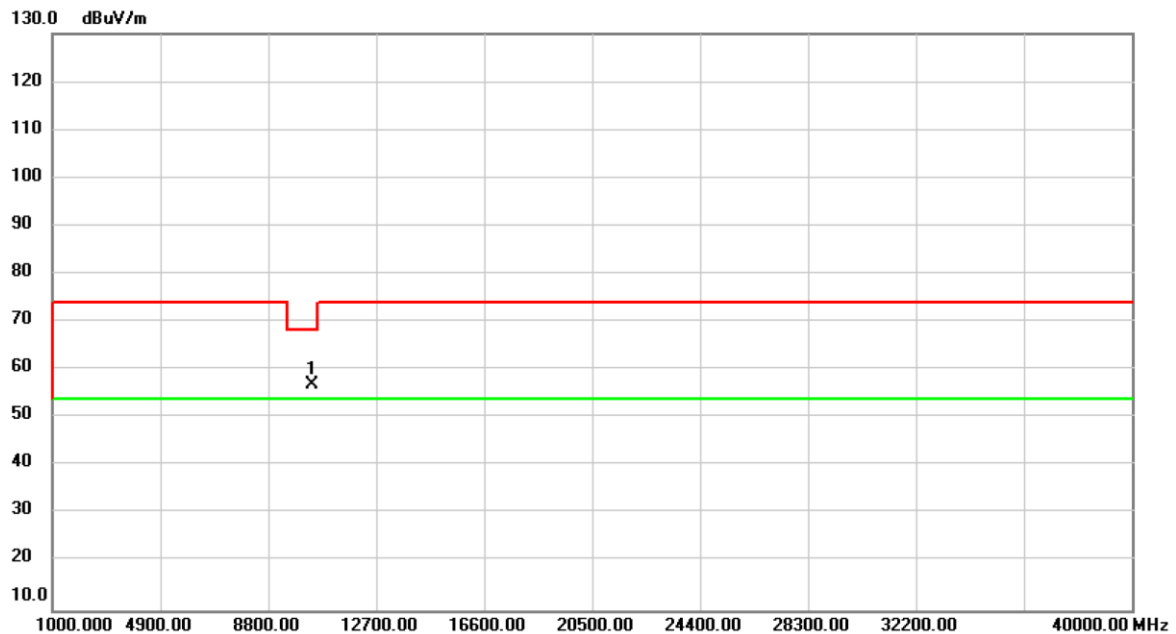


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10400.00     | 54.10                    | 2.89                    | 56.99                      | 68.20           | -11.21       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                               |              |           |
|----------------|-------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11a_External Antenna | Test Date    | 2019/12/2 |
| Test Frequency | CH48: 5240 MHz                | Polarization | Vertical  |

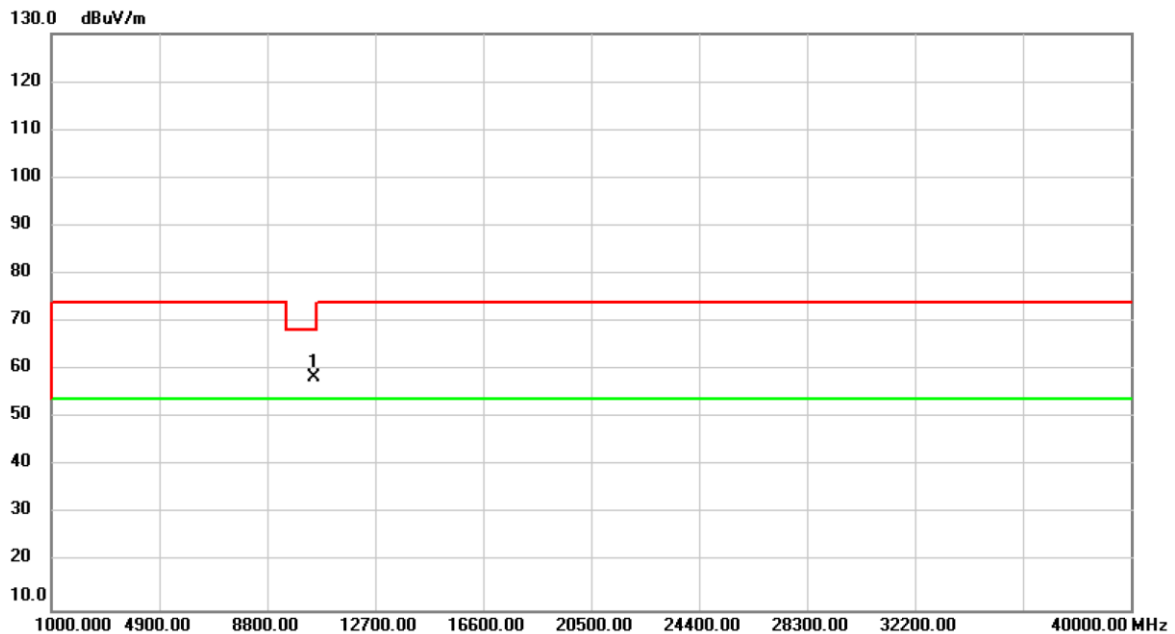


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10480.00 | 55.53         | 3.00           | 58.53       | 68.20  | -9.67  | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2  |
| Test Frequency | CH48: 5240 MHz                 | Polarization | Horizontal |

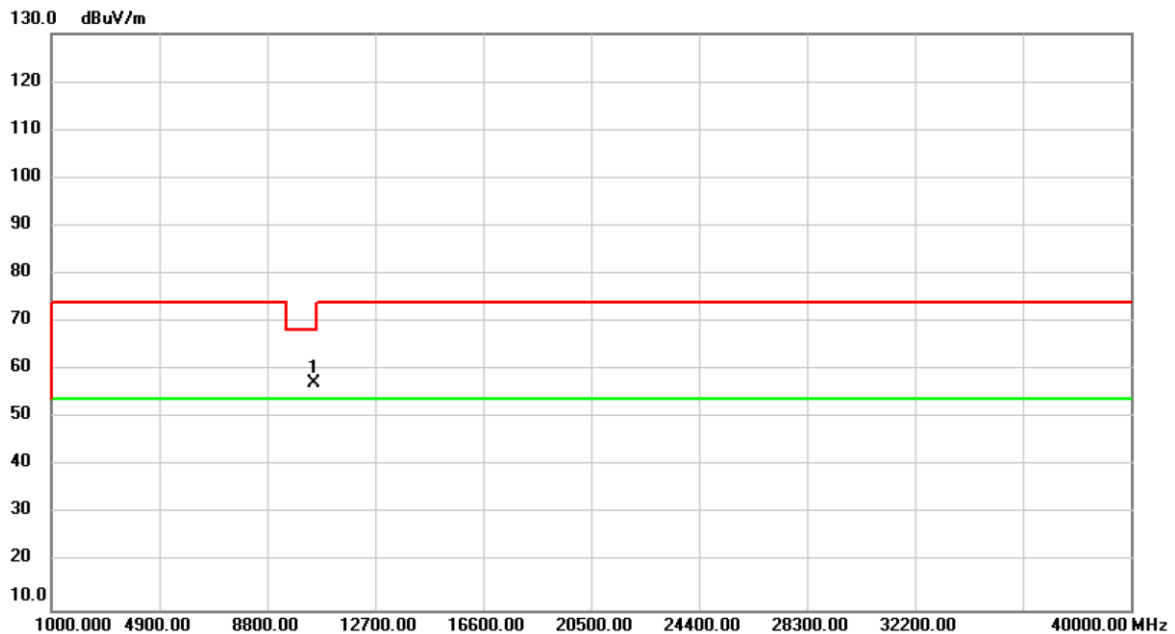


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10480.00 | 54.16         | 3.00           | 57.16       | 68.20  | -11.04 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |           |
|----------------|--------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2 |
| Test Frequency | CH149: 5745 MHz                | Polarization | Vertical  |

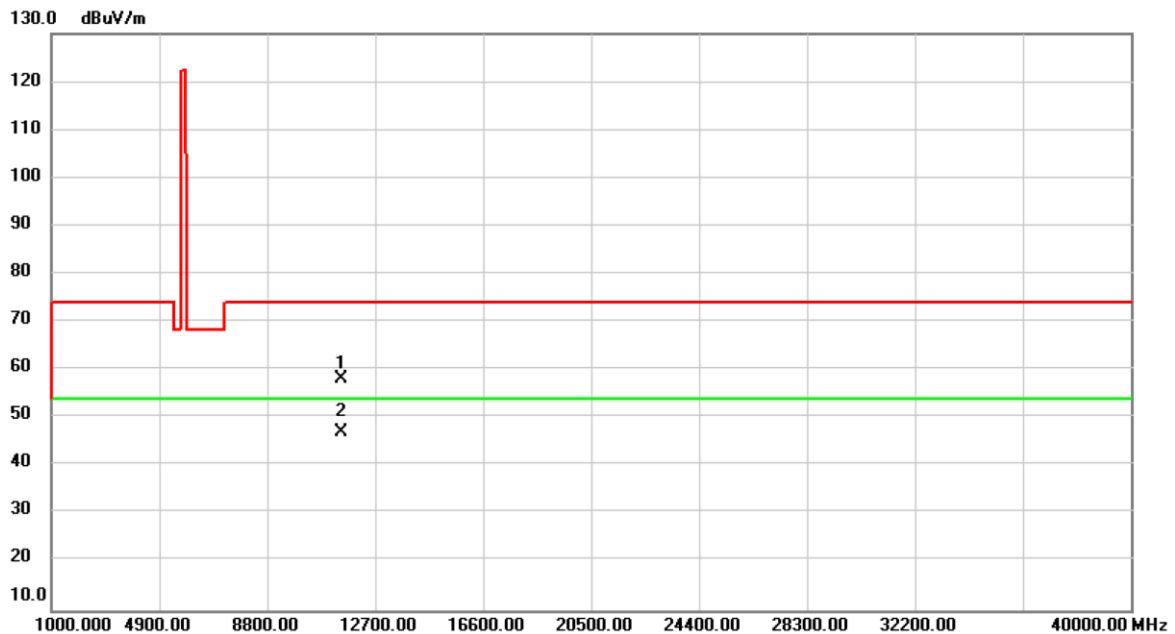


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11490.00     | 54.31                    | 3.89                    | 58.20                      | 74.00           | -15.80       | peak     |         |
| 2   | *   | 11490.00     | 43.22                    | 3.89                    | 47.11                      | 54.00           | -6.89        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2  |
| Test Frequency | CH149: 5745 MHz                | Polarization | Horizontal |

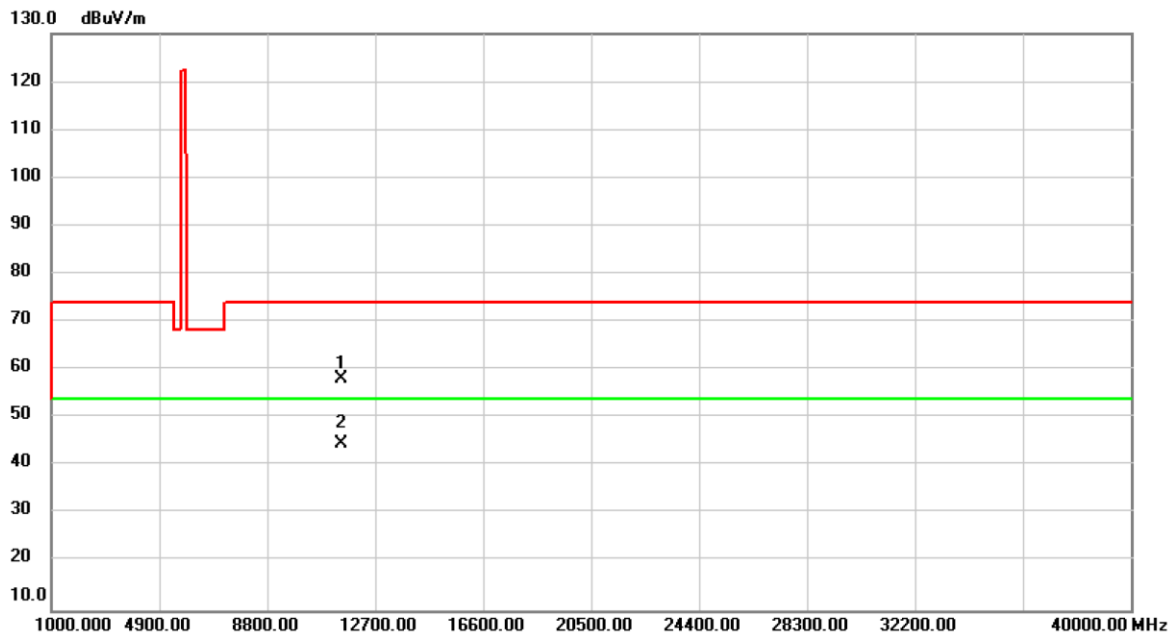


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11490.00     | 54.16                    | 3.89                    | 58.05                      | 74.00           | -15.95       | peak     |         |
| 2   | *   | 11490.00     | 40.91                    | 3.89                    | 44.80                      | 54.00           | -9.20        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |           |
|----------------|--------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2 |
| Test Frequency | CH157: 5785 MHz                | Polarization | Vertical  |

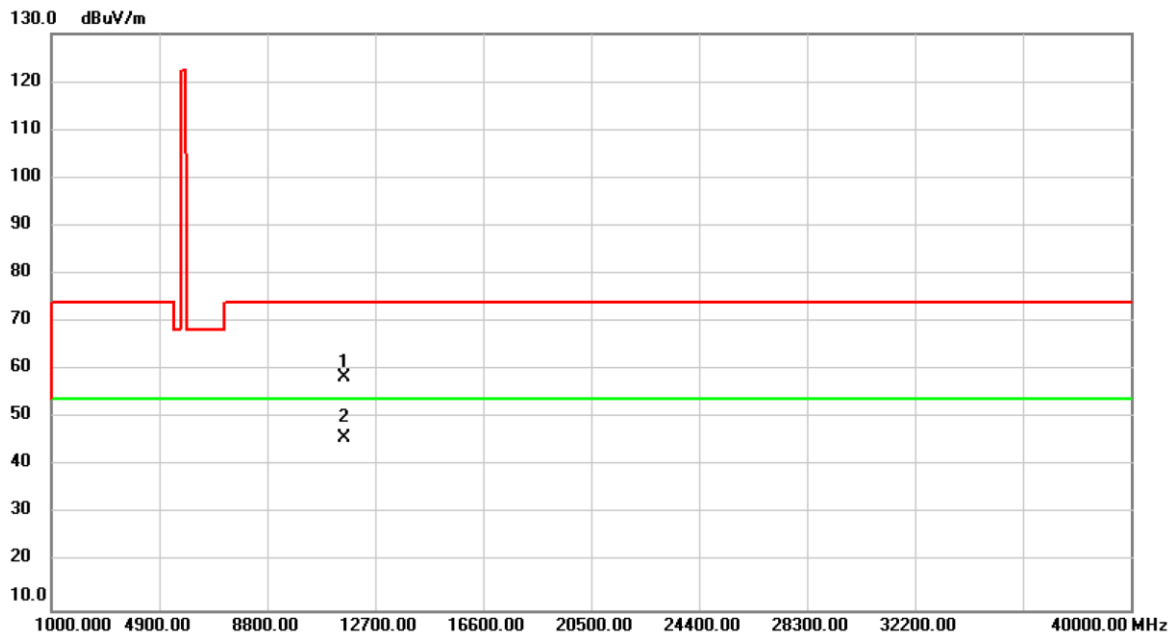


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11570.00     | 54.78                    | 3.57                    | 58.35                      | 74.00           | -15.65       | peak     |         |
| 2   | *   | 11570.00     | 42.40                    | 3.57                    | 45.97                      | 54.00           | -8.03        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2  |
| Test Frequency | CH157: 5785 MHz                | Polarization | Horizontal |

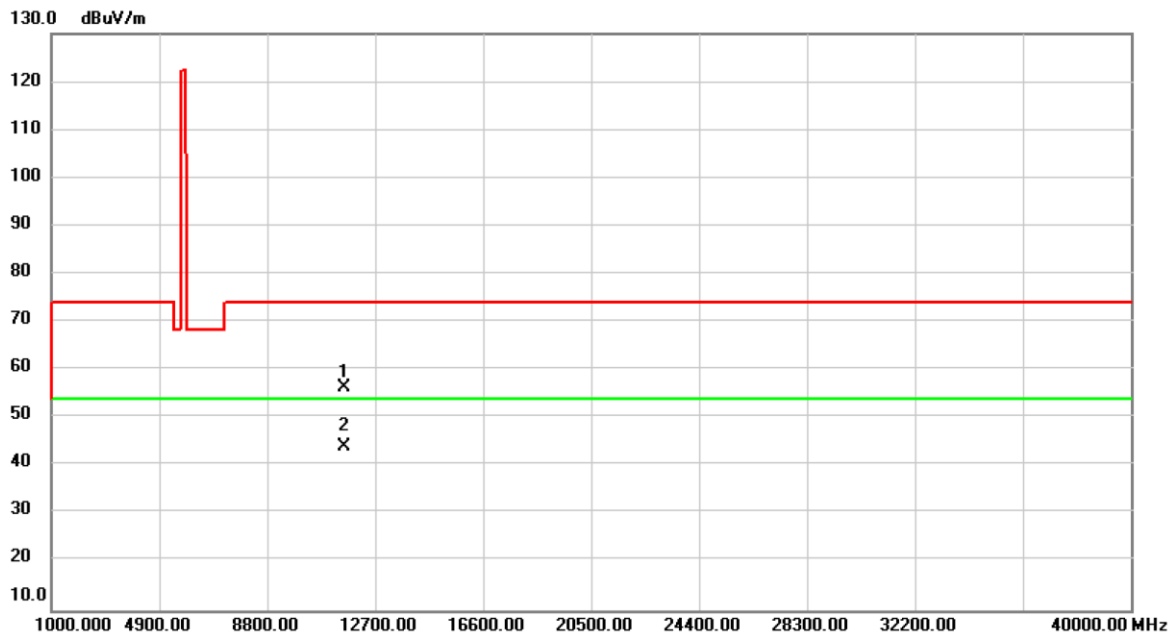


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11570.00     | 52.92                    | 3.57                    | 56.49                      | 74.00           | -17.51       | peak     |         |
| 2   | *   | 11570.00     | 40.38                    | 3.57                    | 43.95                      | 54.00           | -10.05       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |           |
|----------------|--------------------------------|--------------|-----------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2 |
| Test Frequency | CH165: 5825 MHz                | Polarization | Vertical  |

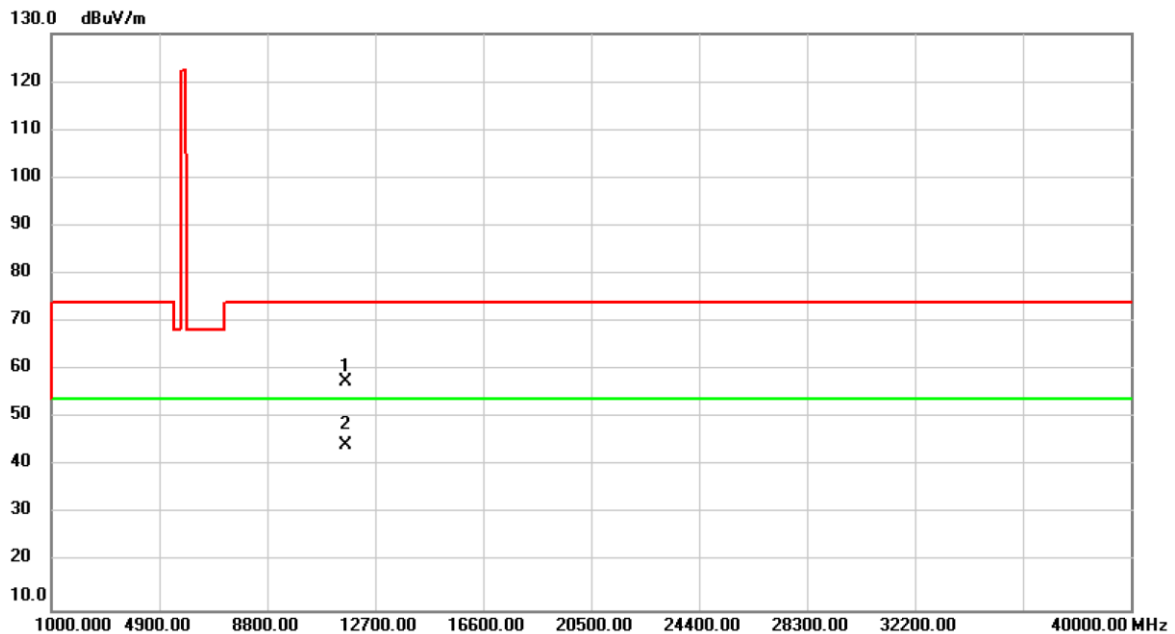


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11650.00     | 54.40                    | 3.18                    | 57.58                      | 74.00           | -16.42       | peak     |         |
| 2   | *   | 11650.00     | 41.24                    | 3.18                    | 44.42                      | 54.00           | -9.58        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                |              |            |
|----------------|--------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11a_ External Antenna | Test Date    | 2019/12/2  |
| Test Frequency | CH165: 5825 MHz                | Polarization | Horizontal |

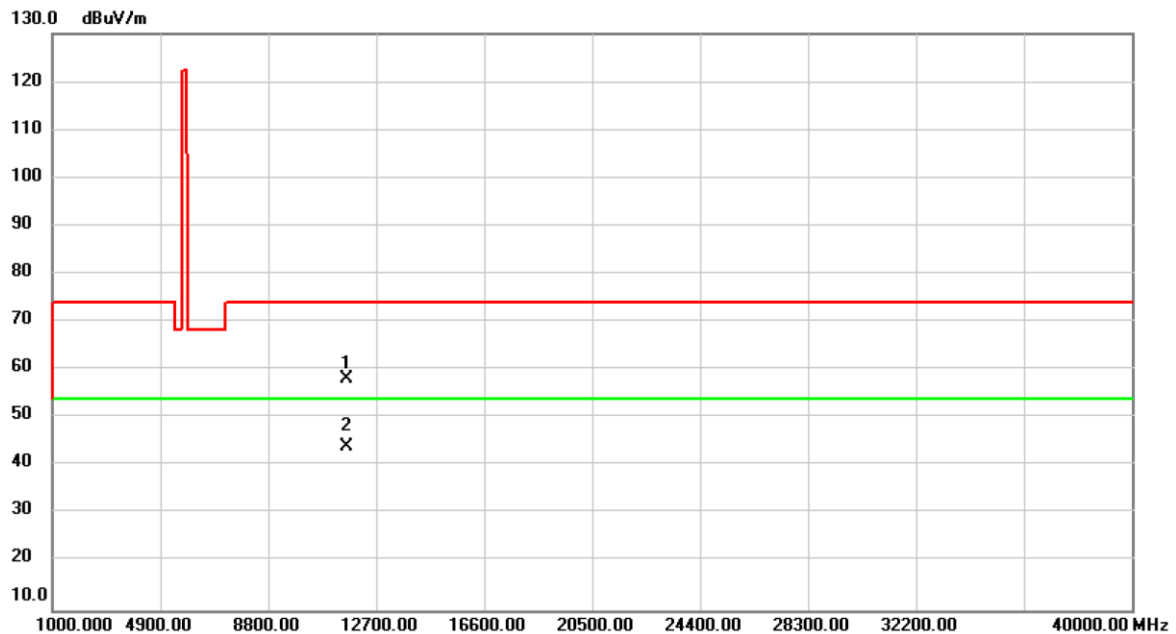


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11650.00     | 54.88                    | 3.18                    | 58.06                      | 74.00           | -15.94       | peak     |         |
| 2   | *   | 11650.00     | 40.85                    | 3.18                    | 44.03                      | 54.00           | -9.97        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                                      |              |            |
|----------------|--------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH36: 5180 MHz                       | Polarization | Vertical   |

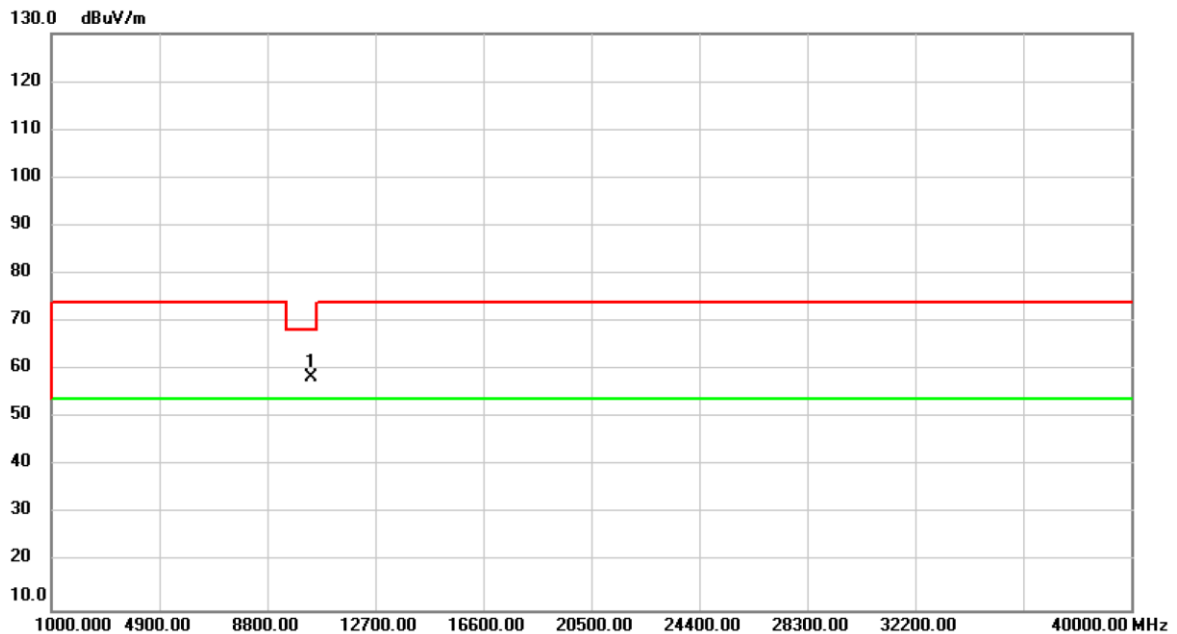


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10360.00 | 55.55         | 2.83           | 58.38       | 68.20  | -9.82  | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                      |              |            |
|----------------|--------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH36: 5180 MHz                       | Polarization | Horizontal |

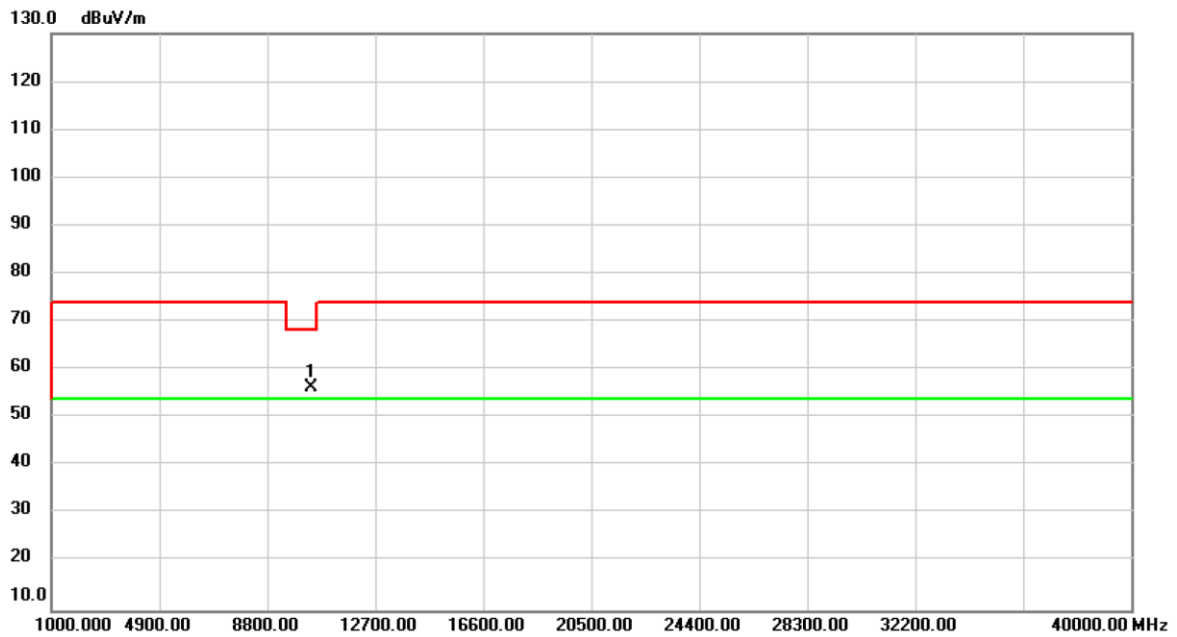


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10360.00 | 53.59         | 2.83           | 56.42       | 68.20  | -11.78 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                                      |              |            |
|----------------|--------------------------------------|--------------|------------|
| Test Mode      | IEEE 802.11n (HT20)_External Antenna | Test Date    | 2019/11/28 |
| Test Frequency | CH40: 5200 MHz                       | Polarization | Vertical   |

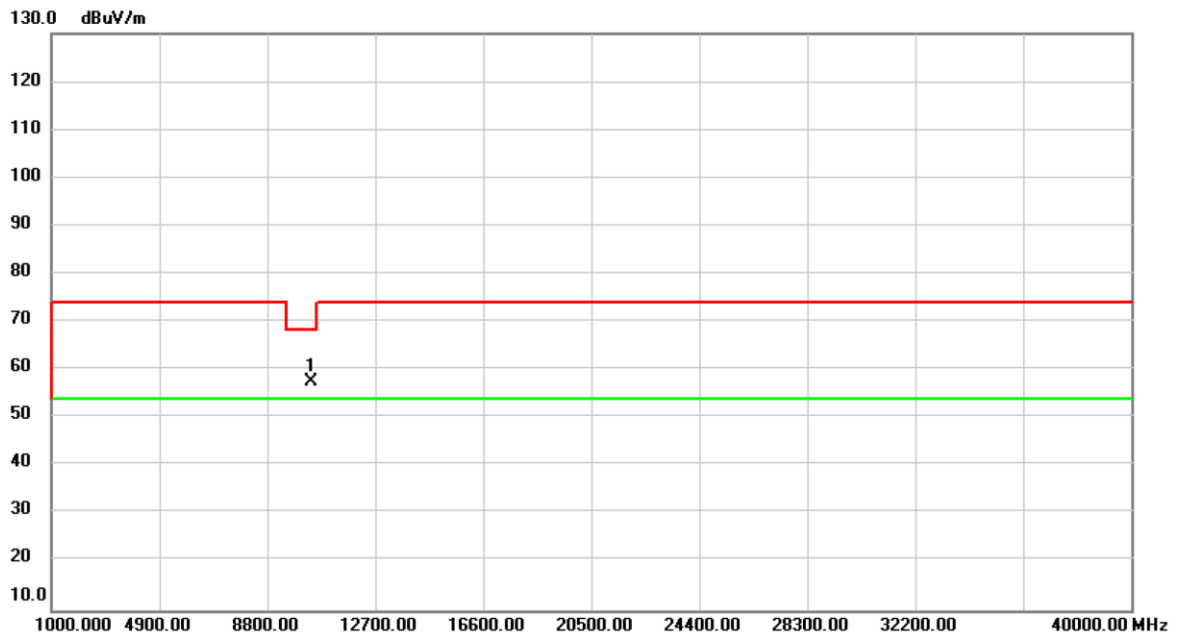

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10400.00 | 54.75         | 2.89           | 57.64       | 68.20  | -10.56 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.