



# FCC RF Test Report

APPLICANT : BlackBerry Limited  
EQUIPMENT : Smartphone  
BRAND NAME : BlackBerry  
MODEL NAME : RHF141LW  
MARKETING NAME : SQC100-3  
FCC ID : L6ARHF140LW  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 15, 2014 and testing was completed on Nov. 05, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

|                                                                                       |            |
|---------------------------------------------------------------------------------------|------------|
| <b>REVISION HISTORY.....</b>                                                          | <b>3</b>   |
| <b>SUMMARY OF TEST RESULT .....</b>                                                   | <b>4</b>   |
| <b>1 GENERAL DESCRIPTION .....</b>                                                    | <b>5</b>   |
| 1.1 Applicant.....                                                                    | 5          |
| 1.2 Manufacturer .....                                                                | 5          |
| 1.3 Product Feature of Equipment Under Test .....                                     | 5          |
| 1.4 Product Specification subjective to this standard.....                            | 6          |
| 1.5 Modification of EUT .....                                                         | 6          |
| 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....        | 7          |
| 1.7 Testing Location .....                                                            | 7          |
| 1.8 Applicable Standards .....                                                        | 8          |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>                             | <b>9</b>   |
| 2.1 Test Mode.....                                                                    | 9          |
| 2.2 Connection Diagram of Test System .....                                           | 12         |
| 2.3 Support Unit used in test configuration .....                                     | 13         |
| 2.4 Measurement Results Explanation Example .....                                     | 13         |
| <b>3 TEST RESULT .....</b>                                                            | <b>14</b>  |
| 3.1 Conducted Output Power Measurement.....                                           | 14         |
| 3.2 Peak-to-Average Ratio .....                                                       | 16         |
| 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... | 34         |
| 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....                        | 40         |
| 3.5 Band Edge Measurement.....                                                        | 67         |
| 3.6 Conducted Spurious Emission Measurement.....                                      | 76         |
| 3.7 Field Strength of Spurious Radiation Measurement .....                            | 137        |
| 3.8 Frequency Stability Measurement.....                                              | 169        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                                            | <b>175</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                                              | <b>176</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                                                  |            |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FG471526A  | Rev. 01 | Initial issue of report | Nov. 24, 2014 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                            | IC Rule                          | Description                          | Limit                               | Result | Remark                                     |
|----------------|-------------------------------------|----------------------------------|--------------------------------------|-------------------------------------|--------|--------------------------------------------|
| 3.1            | §2.1046                             | RSS-132 (5.4)<br>RSS-133 (6.4)   | Conducted Output Power               | N/A                                 | PASS   | -                                          |
| 3.2            | §24.232(d)                          | RSS-132 (5.4)<br>RSS-133(6.4)    | Peak-to-Average Ratio                | <13 dB                              | PASS   | -                                          |
| 3.3            | §22.913(a)(2)                       | RSS-132(5.4)<br>SRSP-503(5.1.3)  | Effective Radiated Power             | < 7 Watts                           | PASS   | -                                          |
|                | §24.232(c)                          | RSS-133 (6.4)<br>SRSP-510(5.1.2) | Equivalent Isotropic Radiated Power  | < 2 Watts                           | PASS   | -                                          |
| 3.4            | §2.1049<br>§22.917(b)<br>§24.238(b) | RSS-GEN(4.6.1)<br>RSS-133(2.3)   | Occupied Bandwidth                   | N/A                                 | PASS   | -                                          |
| 3.5            | §2.1051<br>§22.917(a)<br>§24.238(a) | RSS-132 (5.5)<br>RSS-133 (6.5)   | Band Edge Measurement                | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | -                                          |
| 3.6            | §2.1051<br>§22.917(a)<br>§24.238(a) | RSS-132 (5.5)<br>RSS-133 (6.5)   | Conducted Spurious Emission          | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | -                                          |
| 3.7            | §2.1053<br>§22.917(a)<br>§24.238(a) | RSS-132 (5.5)<br>RSS-133 (6.5)   | Field Strength of Spurious Radiation | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | Under limit<br>15.71 dB at<br>7639.200 MHz |
| 3.8            | §2.1055<br>§22.355                  | RSS-132(5.3)                     | Frequency Stability for              | < 2.5 ppm for Part 22               | PASS   | -                                          |
|                | §2.1055<br>§24.235                  | RSS-133(6.3)                     | Temperature & Voltage                | Within Authorized Band              |        |                                            |



# 1 General Description

## 1.1 Applicant

**BlackBerry Limited**

2300 University Street East, Waterloo, ON., CAN, N2K1A0

## 1.2 Manufacturer

**FIH Mobile Limited**

No. 4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| Equipment                       | Smartphone                                                                                                    |
| Brand Name                      | BlackBerry                                                                                                    |
| Model Name                      | RHF141LW                                                                                                      |
| Marketing Name                  | SQC100-3                                                                                                      |
| FCC ID                          | L6ARHF140LW                                                                                                   |
| EUT supports Radios application | CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC<br>WLAN 11b/g/n HT20<br>WLAN 11a/n HT20/HT40<br>Bluetooth v4.0 EDR/LE |
| HW Version                      | PVT 2                                                                                                         |
| SW Version                      | BlackBerry 10.3.1.565/566                                                                                     |
| EUT Stage                       | Identical Prototype                                                                                           |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |                                                                                                                                                                                                                                        |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                               | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz<br>CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz  |
| <b>Rx Frequency</b>                               | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz<br>CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz<br>CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz |
| <b>Maximum Output Power to Antenna</b>            | GSM850 : 32.72 dBm<br>GSM1900 : 29.74 dBm<br>WCDMA Band V : 23.22 dBm<br>WCDMA Band II : 23.71 dBm<br>CDMA2000 BC0 : 23.60 dBm<br>CDMA2000 BC1 : 24.25 dBm                                                                             |
| <b>Antenna Type</b>                               | Coupling type (LDS) Antenna                                                                                                                                                                                                            |
| <b>Type of Modulation</b>                         | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: 64QAM (Downlink)<br>HSUPA: QPSK (Uplink)<br>CDMA2000 : QPSK<br>CDMA2000 1xEV-DO : QPSK/8PSK                                                             |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 22  | GSM850 GPRS class 8        | GMSK               | 0.7194               | 0.0143 ppm                | 246KGXW             |
| Part 22  | GSM850 EDGE class 8        | 8PSK               | 0.1486               | 0.0084 ppm                | 246KG7W             |
| Part 22  | WCDMA Band V RMC 12.2Kbps  | QPSK               | 0.0918               | 0.0143 ppm                | 4M20F9W             |
| Part 22  | CDMA2000 BC0 1xRTT         | QPSK               | 0.0780               | 0.0311 ppm                | 1M28F9W             |
| Part 24  | GSM1900 GPRS class 8       | GMSK               | 0.9226               | 0.0207 ppm                | 248KGXW             |
| Part 24  | GSM1900 EDGE class 8       | 8PSK               | 0.3097               | 0.0213 ppm                | 248KG7W             |
| Part 24  | WCDMA Band II RMC 12.2Kbps | QPSK               | 0.2112               | 0.0032 ppm                | 4M20F9W             |
| Part 24  | CDMA2000 BC1 1xRTT         | QPSK               | 0.1950               | 0.0021 ppm                | 1M28F9W             |

## 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                           |                                                                                                                                                                 |           |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                                                                      |           |
| <b>Test Site Location</b> | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |           |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                         |           |
|                           | TH02-HY                                                                                                                                                         | 03CH07-HY |



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V, and CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II, and CDMA2000 BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes           |                                                                                                                                                                                                                                                                                                                              |                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Band                 | Radiated TCs                                                                                                                                                                                                                                                                                                                 | Conducted TCs                                                                                      |
| <b>GSM 850</b>       | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> <li>■ EDGE class 8 Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul>                                                                                                                 | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> |
| <b>GSM 1900</b>      | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> <li>■ GPRS class 8 Link + PMA Charger + Earphone 1</li> <li>■ GPRS class 8 Link + WPC Charger + Earphone 1</li> <li>■ EDGE class 8 Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul> | <ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul> |
| <b>WCDMA Band V</b>  | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul>                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              |
| <b>WCDMA Band II</b> | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul>                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>                              |
| <b>CDMA2000 BC0</b>  | <ul style="list-style-type: none"> <li>■ 1xRTT Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul>                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>■ 1xRTT Link Mode</li> </ul>                                |
| <b>CDMA2000 BC1</b>  | <ul style="list-style-type: none"> <li>■ 1xRTT Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1</li> </ul>                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>■ 1xRTT Link Mode</li> </ul>                                |

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS multi-slot class 8 mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V and WCDMA band II,



1xRTT RC3 SO32 (+F-SCH) mode for CDMA2000 BC0 and CDMA2000 BC1,  
only these modes were used for all tests.



## Conducted Power Measurement Results:


| Conducted Power (*Unit: dBm) |        |       |       |         |        |        |
|------------------------------|--------|-------|-------|---------|--------|--------|
| Band                         | GSM850 |       |       | GSM1900 |        |        |
| Channel                      | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency                    | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM                          | 32.70  | 32.66 | 32.48 | 29.65   | 29.48  | 29.72  |
| GPRS class 8                 | 32.72  | 32.67 | 32.50 | 29.68   | 29.51  | 29.74  |
| GPRS class 10                | 29.35  | 29.30 | 29.22 | 28.59   | 28.47  | 28.62  |
| GPRS class 11                | 28.57  | 28.47 | 28.39 | 25.94   | 25.88  | 26.00  |
| GPRS class 12                | 26.44  | 26.39 | 26.33 | 25.45   | 25.39  | 25.49  |
| EGPRS class 8                | 25.75  | 25.72 | 25.66 | 25.38   | 25.33  | 25.41  |
| EGPRS class 10               | 25.70  | 25.69 | 25.64 | 24.89   | 24.83  | 24.92  |
| EGPRS class 11               | 24.09  | 24.07 | 24.05 | 23.92   | 23.85  | 23.98  |
| EGPRS class 12               | 23.19  | 23.16 | 23.14 | 22.94   | 22.90  | 23.05  |

| Conducted Power (*Unit: dBm) |              |       |       |               |        |        |
|------------------------------|--------------|-------|-------|---------------|--------|--------|
| Band                         | WCDMA Band V |       |       | WCDMA Band II |        |        |
| Channel                      | 4132         | 4182  | 4233  | 9262          | 9400   | 9538   |
| Frequency                    | 826.4        | 836.4 | 846.6 | 1852.4        | 1880.0 | 1907.6 |
| RMC 12.2K                    | 23.21        | 23.22 | 23.15 | 23.71         | 23.65  | 23.43  |
| HSDPA Subtest-1              | 22.24        | 22.13 | 22.12 | 22.66         | 22.49  | 22.40  |
| HSDPA Subtest-2              | 22.23        | 22.10 | 22.03 | 22.60         | 22.47  | 22.39  |
| HSDPA Subtest-3              | 21.74        | 21.61 | 21.55 | 22.14         | 21.99  | 21.89  |
| HSDPA Subtest-4              | 21.60        | 21.61 | 21.54 | 22.13         | 22.02  | 21.89  |
| HSUPA Subtest-1              | 22.10        | 22.05 | 22.01 | 22.03         | 22.14  | 22.08  |
| HSUPA Subtest-2              | 21.15        | 21.04 | 21.06 | 21.46         | 21.52  | 21.31  |
| HSUPA Subtest-3              | 21.11        | 21.01 | 21.03 | 21.29         | 21.11  | 21.05  |
| HSUPA Subtest-4              | 21.62        | 21.00 | 21.01 | 21.86         | 21.52  | 21.31  |
| HSUPA Subtest-5              | 22.30        | 22.20 | 22.02 | 22.70         | 22.80  | 22.40  |


| Conducted Power (*Unit: dBm) |              |        |        |              |       |         |
|------------------------------|--------------|--------|--------|--------------|-------|---------|
| Band                         | CDMA2000 BC0 |        |        | CDMA2000 BC1 |       |         |
| Channel                      | 1013         | 384    | 777    | 25           | 600   | 1175    |
| Frequency                    | 824.7        | 836.52 | 848.31 | 1851.25      | 1880  | 1908.75 |
| 1xRTT RC1 SO55               | 23.20        | 23.43  | 23.49  | 24.14        | 23.95 | 23.76   |
| 1xRTT RC3 SO55               | 23.33        | 23.58  | 23.59  | 24.22        | 24.05 | 23.84   |
| 1xRTT RC3 SO32(+ F-SCH)      | 23.28        | 23.56  | 23.60  | 24.25        | 24.04 | 23.80   |
| 1xRTT RC3 SO32(+SCH)         | 23.22        | 23.42  | 23.46  | 24.13        | 23.93 | 23.69   |
| 1xEV-DO RTAP 153.6kbps       | 23.26        | 23.53  | 23.58  | 24.20        | 24.04 | 23.81   |
| 1xEV-DO RETAP 4096Bits       | 23.25        | 23.52  | 23.56  | 24.18        | 24.03 | 23.79   |

## 2.2 Connection Diagram of Test System


### <EUT with Adapter Mode>

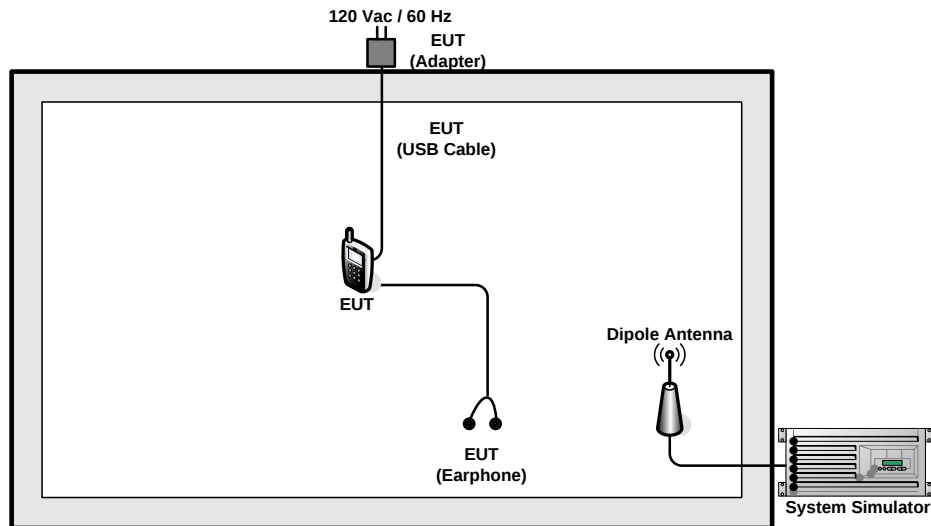

### <EUT with WPC Charger>

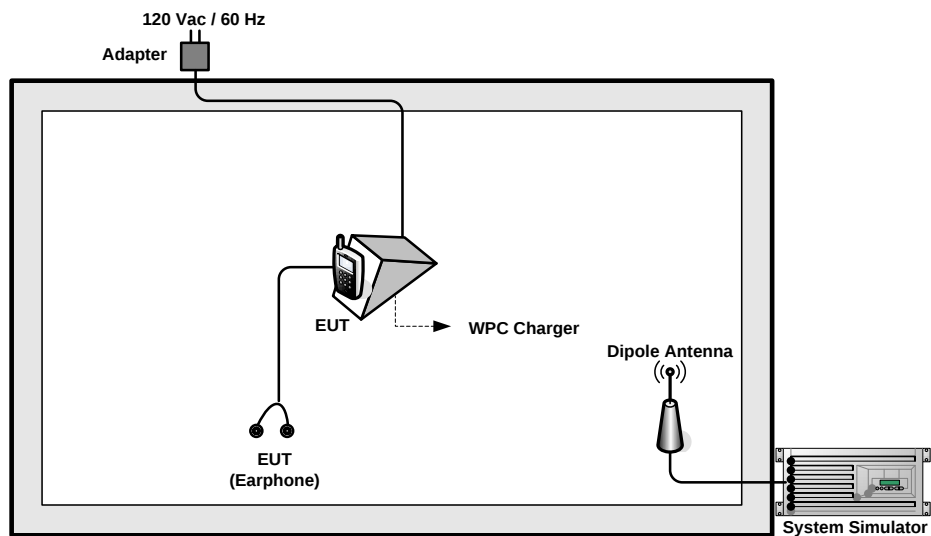

### <EUT with PMA Charger>

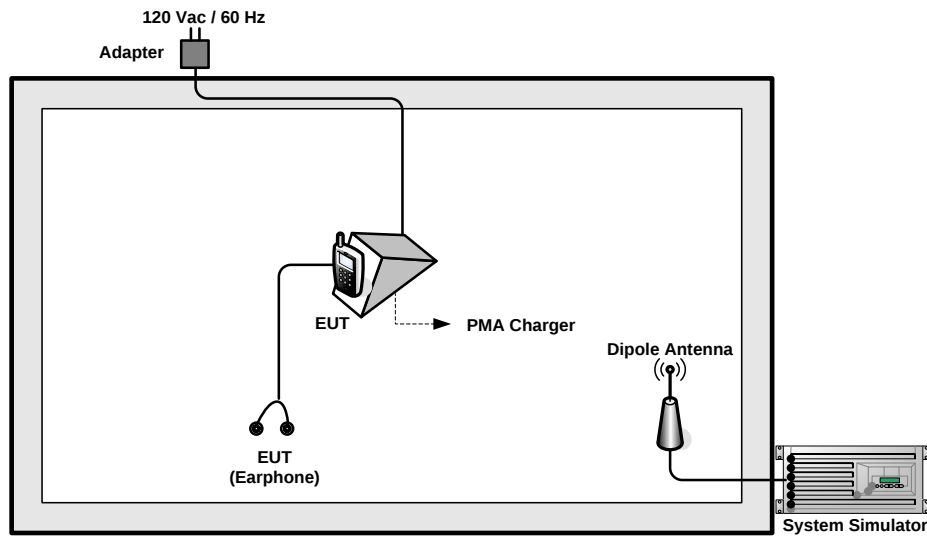

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID    | Data Cable | Power Cord        |
|------|------------------|------------|-----------|-----------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A       | N/A        | Unshielded, 1.8 m |
| 2.   | WPC Charger      | LG         | WPC-700   | BEJWCP700 | N/A        | Unshielded, 1.5 m |
| 3.   | PMA Charger      | DURACELL   | POWERMAT  | FCC DOC   | N/A        | Unshielded, 1.5 m |

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

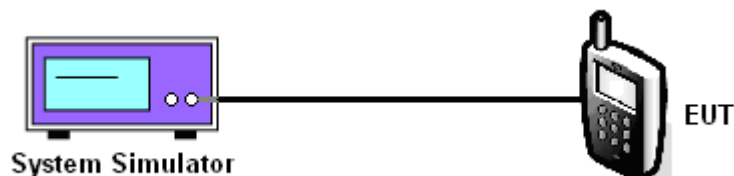

### 3.1.5 Test Result of Conducted Output Power

| Cellular Band         |                       |           |            |                       |           |            |                             |            |             |
|-----------------------|-----------------------|-----------|------------|-----------------------|-----------|------------|-----------------------------|------------|-------------|
| Modes                 | GSM850 (GPRS class 8) |           |            | GSM850 (EDGE class 8) |           |            | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel               | 128 (Low)             | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz)       | 824.2                 | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      | 826.4                       | 836.4      | 846.6       |
| Conducted Power (dBm) | 32.72                 | 32.67     | 32.50      | 25.75                 | 25.72     | 25.66      | 23.21                       | 23.22      | 23.15       |

| PCS Band              |                        |           |            |                        |           |            |                              |            |             |
|-----------------------|------------------------|-----------|------------|------------------------|-----------|------------|------------------------------|------------|-------------|
| Modes                 | GSM1900 (GPRS class 8) |           |            | GSM1900 (EDGE class 8) |           |            | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel               | 512 (Low)              | 661 (Mid) | 810 (High) | 512 (Low)              | 661 (Mid) | 810 (High) | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz)       | 1850.2                 | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     | 1852.4                       | 1880       | 1907.6      |
| Conducted Power (dBm) | 29.68                  | 29.51     | 29.74      | 25.38                  | 25.33     | 25.41      | 23.71                        | 23.65      | 23.43       |

| CDMA2000 BC0          |                 |           |            |
|-----------------------|-----------------|-----------|------------|
| Test Mode             | CDMA 2000 1xRTT |           |            |
| Test Status           | RC3+SO32        |           |            |
| Channel               | 1013 (Low)      | 384 (Mid) | 777 (High) |
| Frequency (MHz)       | 824.70          | 836.52    | 848.31     |
| Conducted Power (dBm) | 23.28           | 23.56     | 23.60      |

| CDMA2000 BC1          |                 |           |             |
|-----------------------|-----------------|-----------|-------------|
| Test Mode             | CDMA 2000 1xRTT |           |             |
| Test Status           | RC3+SO32        |           |             |
| Channel               | 25 (Low)        | 600 (Mid) | 1175 (High) |
| Frequency (MHz)       | 1851.25         | 1880.00   | 1908.75     |
| Conducted Power (dBm) | 24.25           | 24.04     | 23.80       |

**Note:** maximum burst average power for GSM, and maximum average power for WCDMA and CDMA2000.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.  
Record the maximum PAPR level associated with a probability of 0.1%.

### 3.2.4 Test Setup

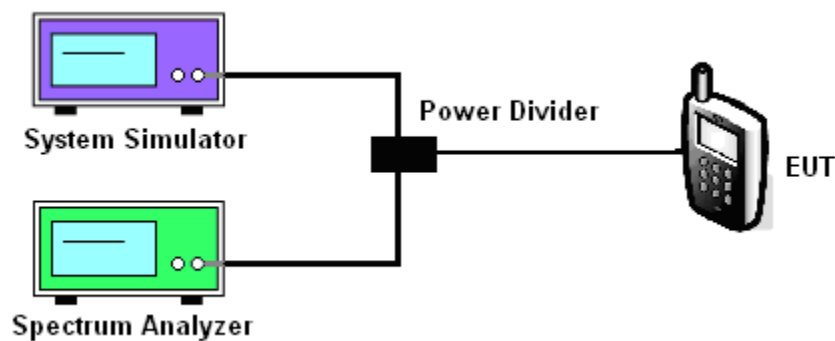

### 3.2.5 Test Result of Peak-to-Average Ratio

| Cellular Band              |                       |           |            |                       |           |            |                             |            |             |
|----------------------------|-----------------------|-----------|------------|-----------------------|-----------|------------|-----------------------------|------------|-------------|
| Modes                      | GSM850 (GPRS class 8) |           |            | GSM850 (EDGE class 8) |           |            | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel                    | 128 (Low)             | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz)            | 824.2                 | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      | 826.4                       | 836.4      | 846.6       |
| Peak-to-Average Ratio (dB) | 0.32                  | 0.28      | 0.28       | 3.52                  | 3.28      | 3.12       | 2.68                        | 2.88       | 2.84        |

| PCS Band                   |                        |           |            |                        |           |            |                              |            |             |
|----------------------------|------------------------|-----------|------------|------------------------|-----------|------------|------------------------------|------------|-------------|
| Modes                      | GSM1900 (GPRS class 8) |           |            | GSM1900 (EDGE class 8) |           |            | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel                    | 512 (Low)              | 661 (Mid) | 810 (High) | 512 (Low)              | 661 (Mid) | 810 (High) | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz)            | 1850.2                 | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     | 1852.4                       | 1880       | 1907.6      |
| Peak-to-Average Ratio (dB) | 0.20                   | 0.28      | 0.24       | 3.44                   | 3.44      | 3.44       | 2.68                         | 2.72       | 2.80        |


| CDMA2000 BC0               |                 |           |            |
|----------------------------|-----------------|-----------|------------|
| Modes                      | CDMA 2000 1xRTT |           |            |
| Test Status                | RC3+SO32        |           |            |
| Channel                    | 1013 (Low)      | 384 (Mid) | 777 (High) |
| Frequency (MHz)            | 824.70          | 836.52    | 848.31     |
| Peak-to-Average Ratio (dB) | 4.00            | 4.32      | 3.56       |

| CDMA2000 BC1               |                 |           |             |
|----------------------------|-----------------|-----------|-------------|
| Modes                      | CDMA 2000 1xRTT |           |             |
| Test Status                | RC3+SO32        |           |             |
| Channel                    | 25 (Low)        | 600 (Mid) | 1175 (High) |
| Frequency (MHz)            | 1851.25         | 1880      | 1908.75     |
| Peak-to-Average Ratio (dB) | 4.28            | 4.48      | 4.08        |

### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


|               |         |                    |                          |
|---------------|---------|--------------------|--------------------------|
| <b>Band :</b> | GSM 850 | <b>Test Mode :</b> | GPRS class 8 Link (GMSK) |
|---------------|---------|--------------------|--------------------------|

#### Peak-to-Average Ratio on Channel 128 (824.2 MHz)

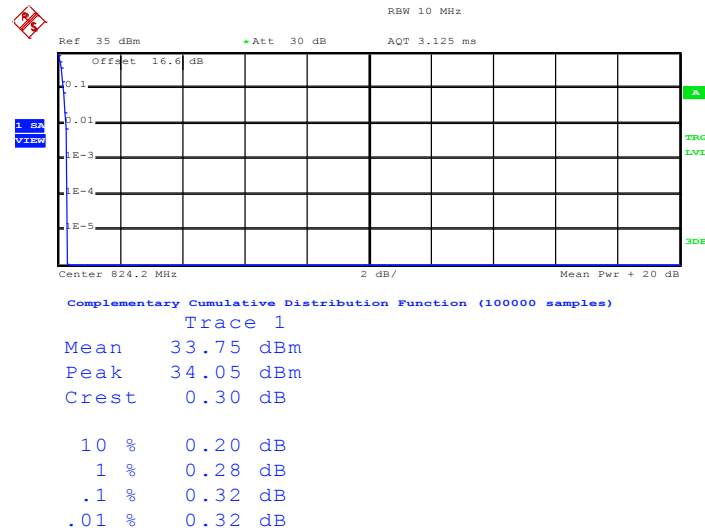

Date: 4.AUG.2014 17:28:51


#### Peak-to-Average Ratio on Channel 189 (836.4 MHz)

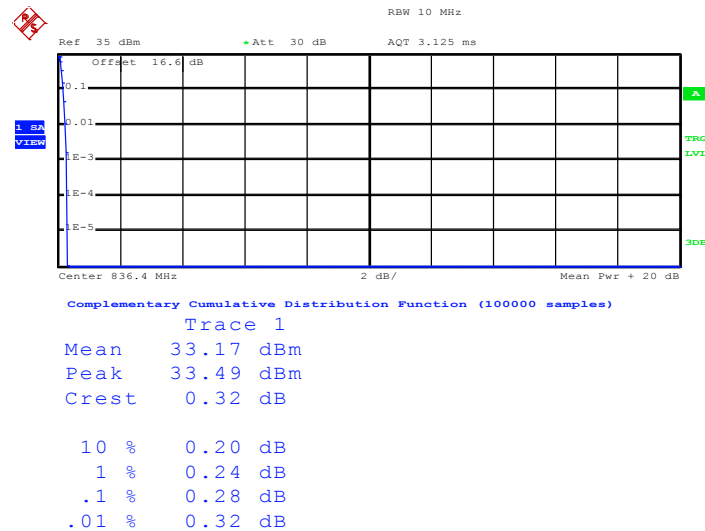

Date: 4.AUG.2014 17:29:44



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

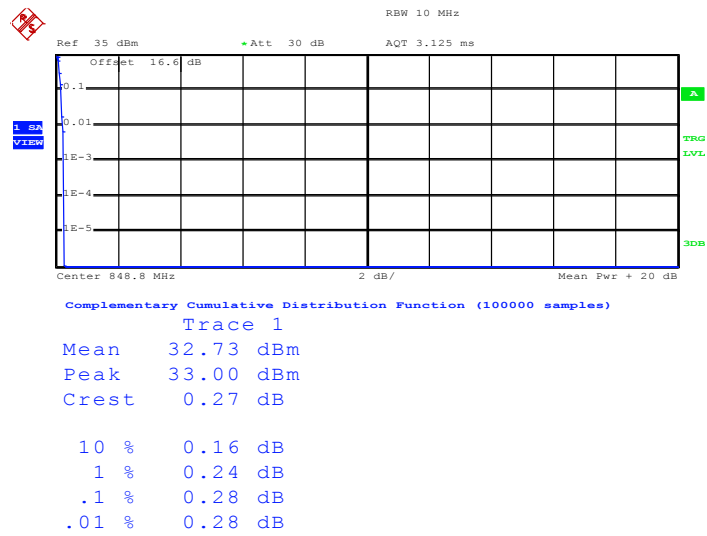


Date: 4.AUG.2014 17:30:16




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 128 (824.2 MHz)

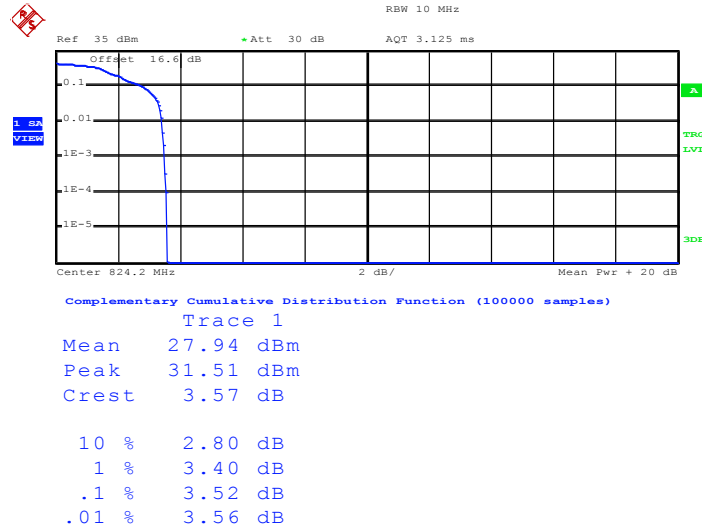

Date: 5.AUG.2014 09:14:21


## Peak-to-Average Ratio on Channel 189 (836.4 MHz)

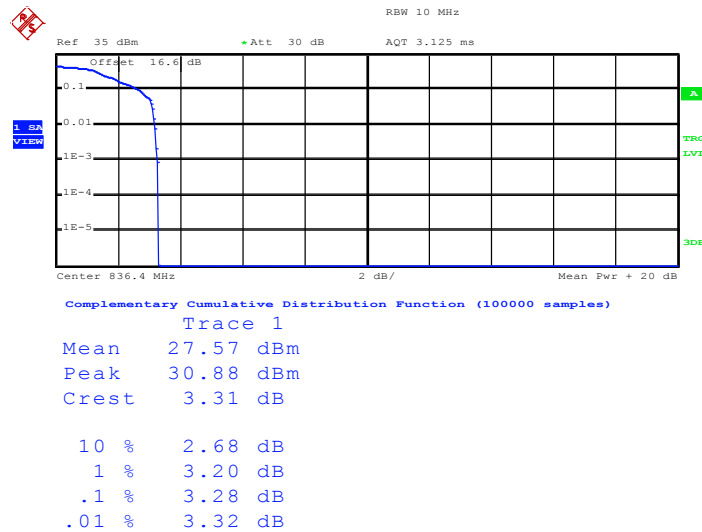

Date: 5.AUG.2014 09:15:26



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

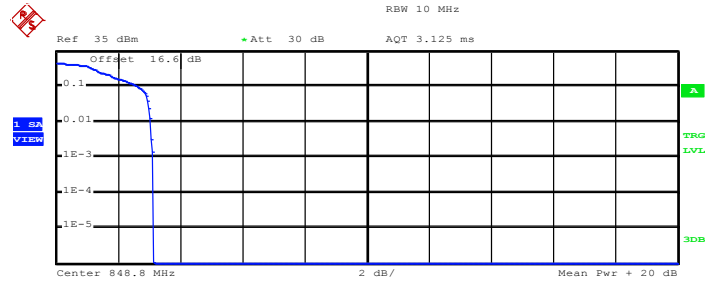

Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
Mean 27.03 dBm  
Peak 30.17 dBm  
Crest 3.14 dB


|       |         |
|-------|---------|
| 10 %  | 2.64 dB |
| 1 %   | 3.04 dB |
| .1 %  | 3.12 dB |
| .01 % | 3.16 dB |

Date: 5.AUG.2014 09:15:54




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|----------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

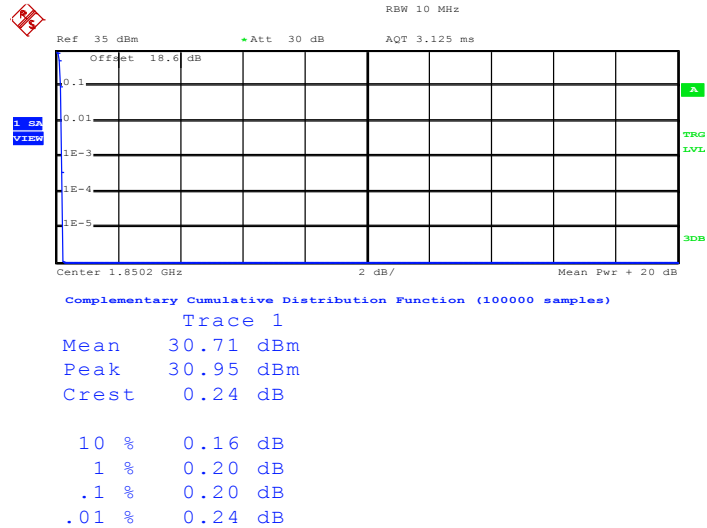


Date: 5.AUG.2014 10:10:11

## Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

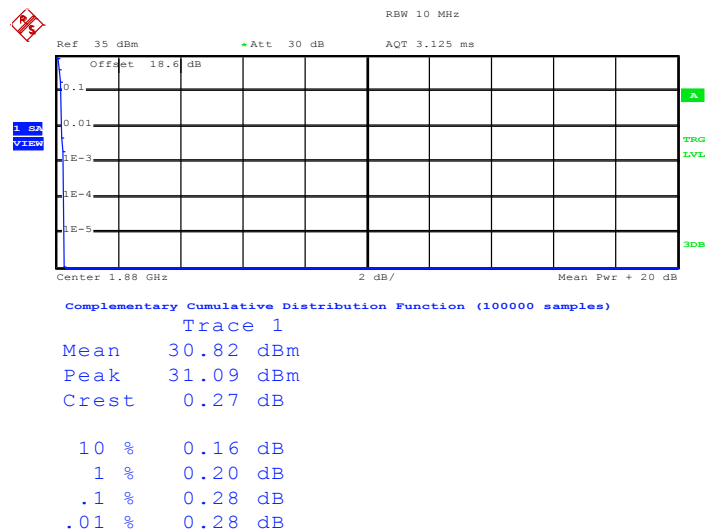

Date: 5.AUG.2014 10:10:36

### Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

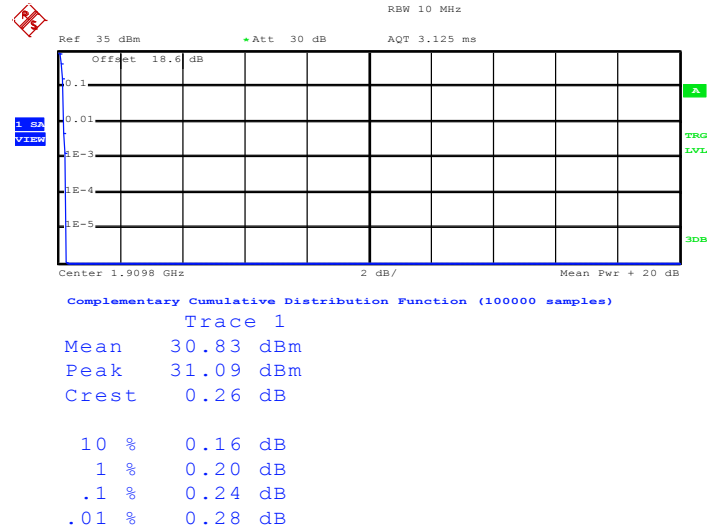


Date: 5.AUG.2014 10:11:01




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

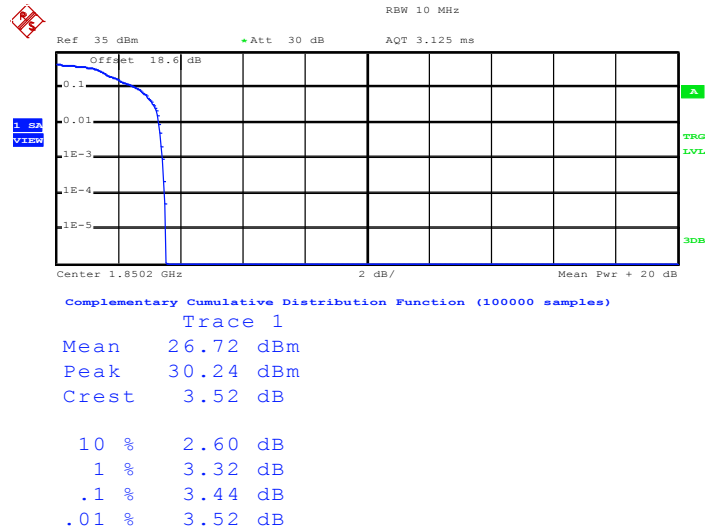

Date: 5.AUG.2014 11:00:32


## Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

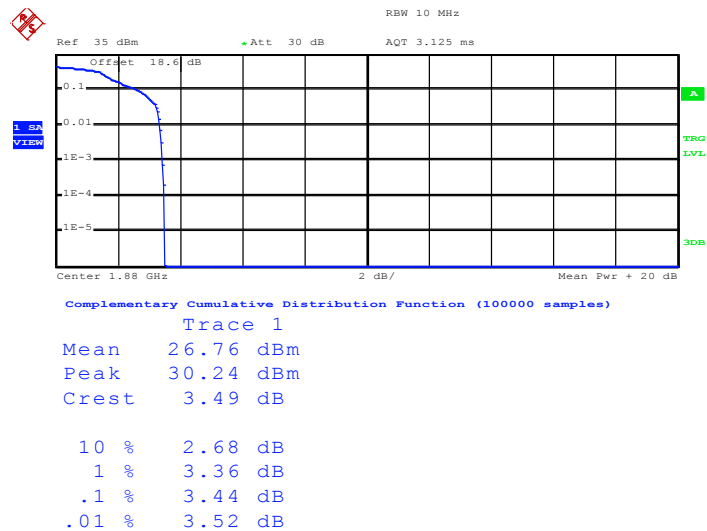

Date: 5.AUG.2014 11:01:00



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

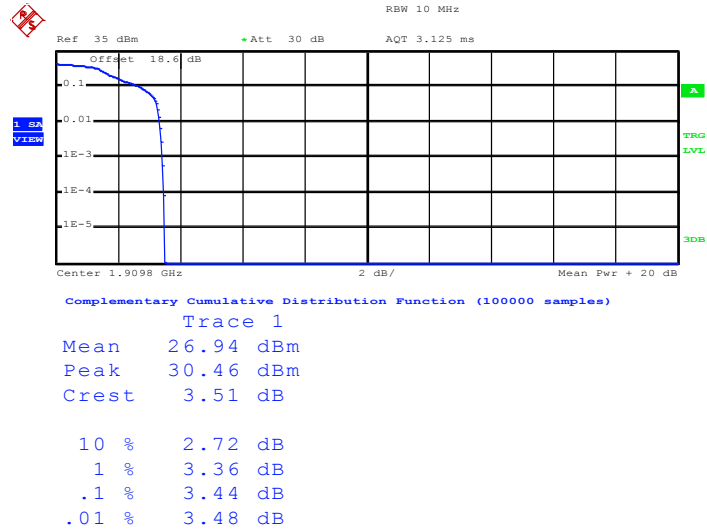


Date: 5.AUG.2014 11:01:51




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

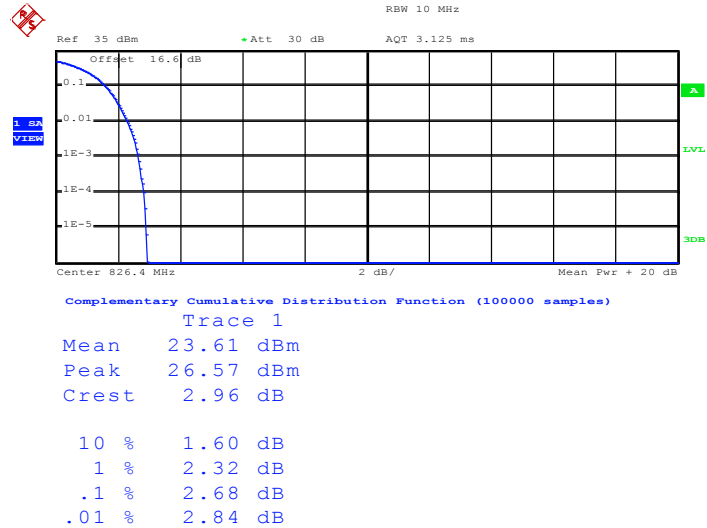

Date: 5.AUG.2014 12:57:15


## Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

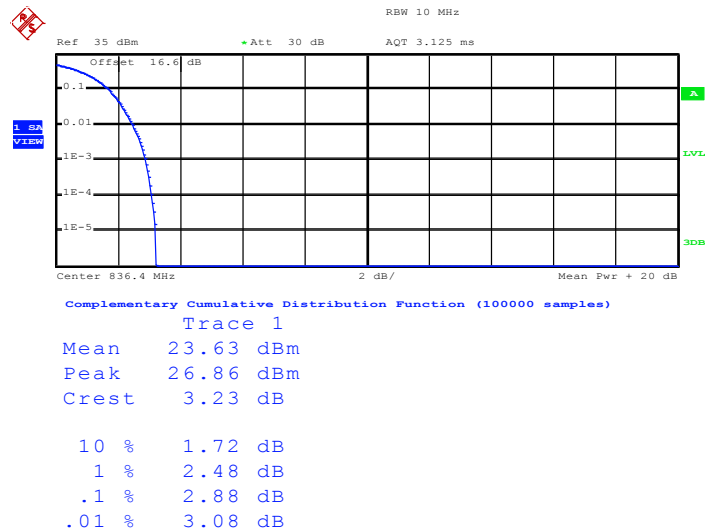

Date: 5.AUG.2014 12:57:45



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

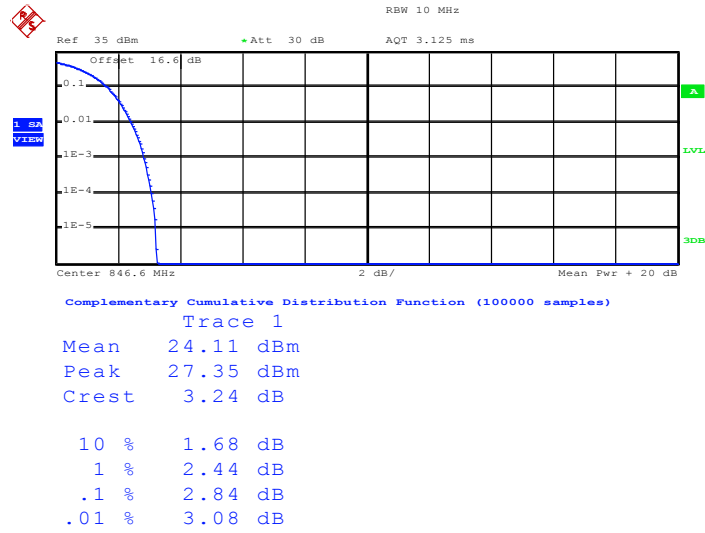


Date: 5.AUG.2014 12:58:24




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

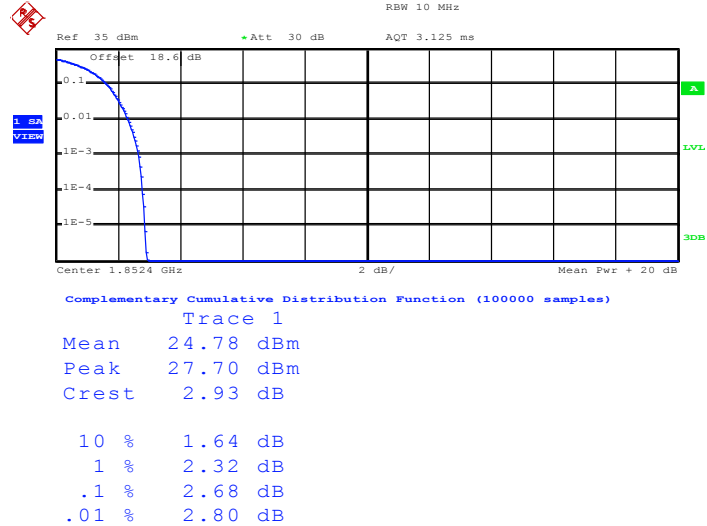

Date: 5.AUG.2014 11:43:21


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

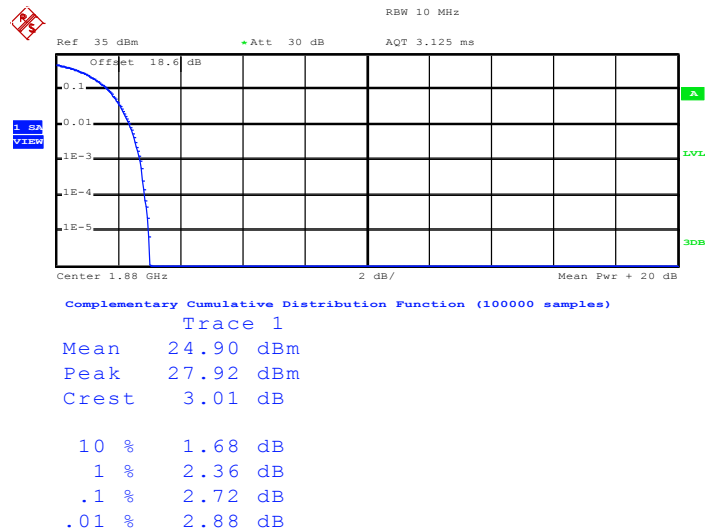

Date: 5.AUG.2014 11:54:06



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

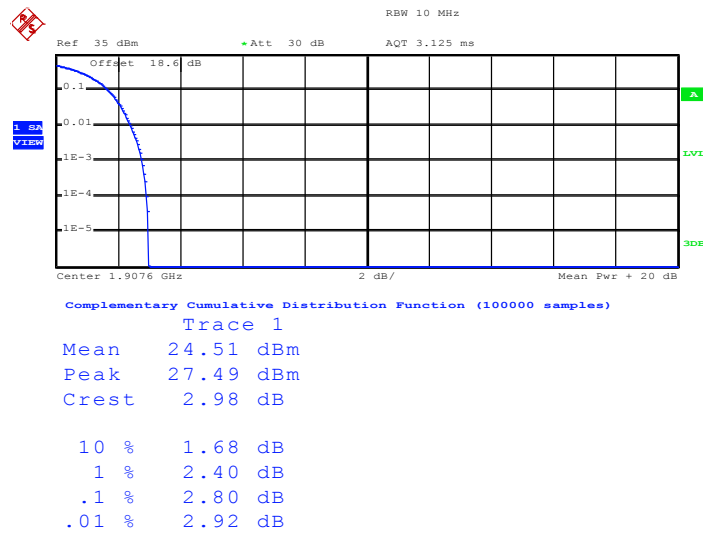


Date: 5.AUG.2014 11:55:05




|        |              |             |                   |
|--------|--------------|-------------|-------------------|
| Band : | CDMA2000 BC0 | Test Mode : | 1xRTT Link (QPSK) |
|--------|--------------|-------------|-------------------|

## Peak-to-Average Ratio on Channel 1013 (824.70 MHz)

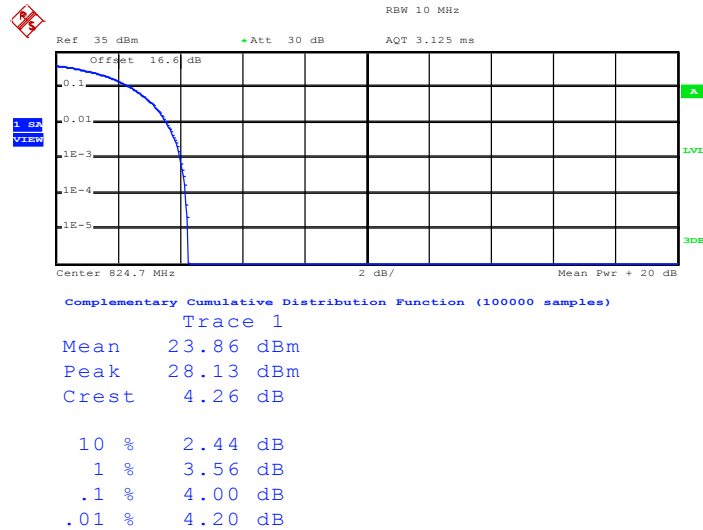

Date: 10.AUG.2014 15:45:54


## Peak-to-Average Ratio on Channel 384 (836.52 MHz)

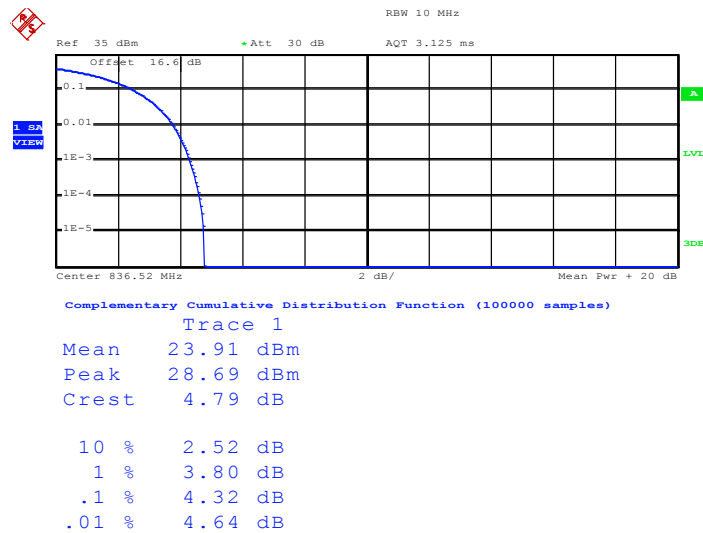

Date: 10.AUG.2014 15:46:23



Peak-to-Average Ratio on Channel 777 (848.31 MHz)

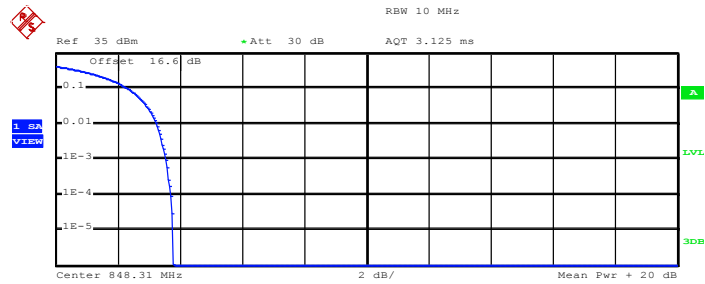

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 24.00 dBm  
Peak 27.77 dBm  
Crest 3.77 dB


|       |         |
|-------|---------|
| 10 %  | 2.36 dB |
| 1 %   | 3.28 dB |
| .1 %  | 3.56 dB |
| .01 % | 3.72 dB |

Date: 10.AUG.2014 15:46:59




|        |              |             |                   |
|--------|--------------|-------------|-------------------|
| Band : | CDMA2000 BC1 | Test Mode : | 1xRTT Link (QPSK) |
|--------|--------------|-------------|-------------------|

## Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

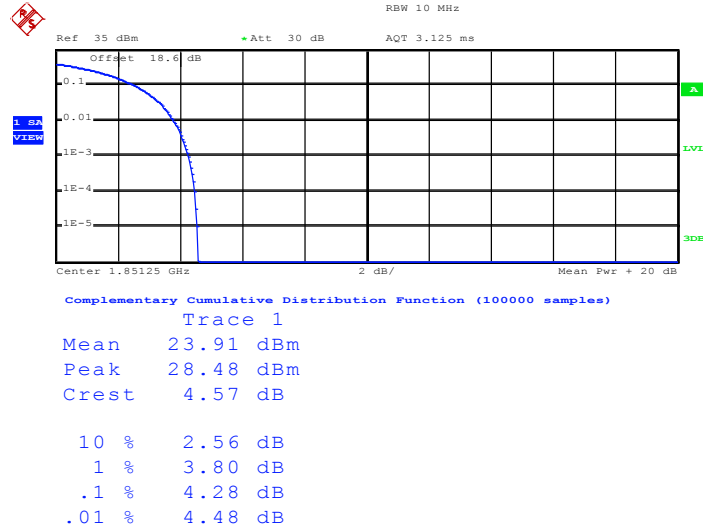

Date: 10.AUG.2014 14:57:56


## Peak-to-Average Ratio on Channel 600 (1880 MHz)

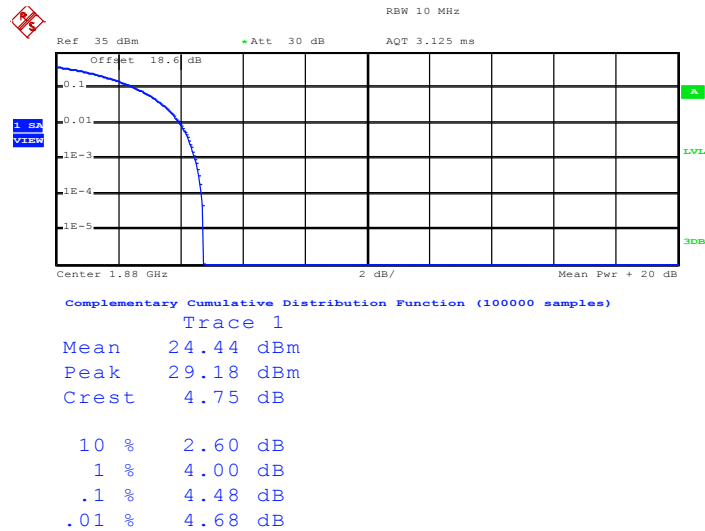

Date: 10.AUG.2014 14:58:43



Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

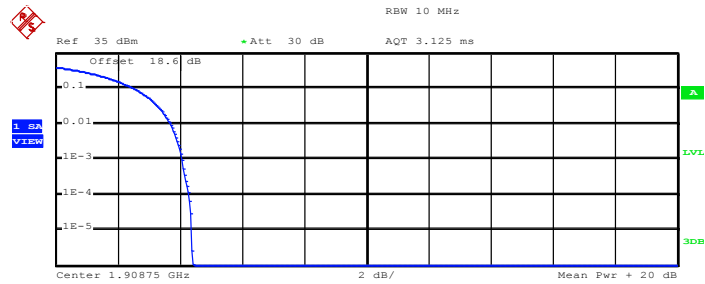

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 24.15 dBm  
Peak 28.55 dBm  
Crest 4.40 dB

10 % 2.56 dB  
1 % 3.72 dB  
.1 % 4.08 dB  
.01 % 4.28 dB

Date: 10.AUG.2014 14:59:13

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
3. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;  
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
5. The table was rotated 360 degrees to determine the position of the highest radiated power.
6. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
7. Taking the record of maximum ERP/EIRP.
8. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
9. The conducted power at the terminal of the dipole antenna is measured.
10. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
11.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$


$AF$  (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

|                     | GSM/GPRS/EDGE | CDMA2000/EV-DO | WCDMA/HSPA |
|---------------------|---------------|----------------|------------|
| <b>SPAN</b>         | 500kHz        | 3MHz           | 10MHz      |
| <b>RBW</b>          | 10kHz         | 30kHz          | 100kHz     |
| <b>VBW</b>          | 30kHz         | 100kHz         | 300kHz     |
| <b>Detector</b>     | RMS           | RMS            | RMS        |
| <b>Trace</b>        | Average       | Average        | Average    |
| <b>Average Type</b> | Power         | Power          | Power      |
| <b>Sweep Count</b>  | 100           | 100            | 100        |

### 3.3.4 Test Setup

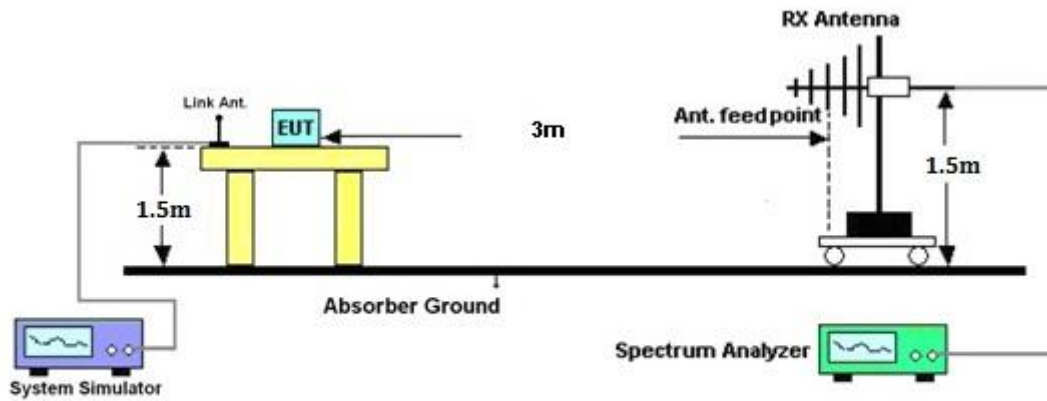



## 3.3.5 Test Result of ERP

| GSM850 (GPRS class 8) Radiated Power ERP |             |             |             |             |              |            |
|------------------------------------------|-------------|-------------|-------------|-------------|--------------|------------|
| Horizontal Polarization                  |             |             |             |             |              |            |
| Frequency<br>(MHz)                       | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                   | -18.62      | -48.12      | 0.00        | -1.08       | 28.42        | 0.6950     |
| 836.40                                   | -18.99      | -48.28      | 0.00        | -0.93       | 28.36        | 0.6855     |
| 848.80                                   | -19.02      | -48.35      | 0.00        | -0.76       | 28.57        | 0.7194     |
| Vertical Polarization                    |             |             |             |             |              |            |
| Frequency<br>(MHz)                       | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                   | -27.37      | -47.97      | 0.00        | -1.08       | 19.52        | 0.0895     |
| 836.40                                   | -28.28      | -48.01      | 0.00        | -0.93       | 18.80        | 0.0759     |
| 848.80                                   | -28.96      | -48.05      | 0.00        | -0.76       | 18.33        | 0.0681     |

| GSM850 (EDGE class 8) Radiated Power ERP |             |             |             |             |              |            |
|------------------------------------------|-------------|-------------|-------------|-------------|--------------|------------|
| Horizontal Polarization                  |             |             |             |             |              |            |
| Frequency<br>(MHz)                       | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                   | -25.49      | -48.12      | 0.00        | -1.08       | 21.55        | 0.1429     |
| 836.40                                   | -25.97      | -48.28      | 0.00        | -0.93       | 21.38        | 0.1374     |
| 848.80                                   | -25.87      | -48.35      | 0.00        | -0.76       | 21.72        | 0.1486     |
| Vertical Polarization                    |             |             |             |             |              |            |
| Frequency<br>(MHz)                       | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.20                                   | -33.45      | -47.97      | 0.00        | -1.08       | 13.44        | 0.0221     |
| 836.40                                   | -33.99      | -48.01      | 0.00        | -0.93       | 13.09        | 0.0204     |
| 848.80                                   | -34.65      | -48.05      | 0.00        | -0.76       | 12.64        | 0.0184     |



| WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP |             |             |             |             |              |            |
|------------------------------------------------|-------------|-------------|-------------|-------------|--------------|------------|
| Horizontal Polarization                        |             |             |             |             |              |            |
| Frequency<br>(MHz)                             | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 826.40                                         | -28.92      | -48.12      | 0.00        | -1.08       | 18.12        | 0.0649     |
| 836.40                                         | -28.21      | -48.28      | 0.00        | -0.93       | 19.14        | 0.0820     |
| 846.60                                         | -27.96      | -48.35      | 0.00        | -0.76       | 19.63        | 0.0918     |
| Vertical Polarization                          |             |             |             |             |              |            |
| Frequency<br>(MHz)                             | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 826.40                                         | -35.85      | -47.97      | 0.00        | -1.08       | 11.04        | 0.0127     |
| 836.40                                         | -36.20      | -48.01      | 0.00        | -0.93       | 10.88        | 0.0122     |
| 846.60                                         | -36.73      | -48.05      | 0.00        | -0.76       | 10.56        | 0.0114     |

| CDMA2000 BC0 1xRTT_RC3+SO32 Radiated Power ERP |             |             |             |             |              |            |
|------------------------------------------------|-------------|-------------|-------------|-------------|--------------|------------|
| Horizontal Polarization                        |             |             |             |             |              |            |
| Frequency<br>(MHz)                             | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.70                                         | -28.29      | -48.12      | 0.00        | -1.08       | 18.75        | 0.0750     |
| 836.52                                         | -29.57      | -48.28      | 0.00        | -0.93       | 17.78        | 0.0600     |
| 848.31                                         | -28.67      | -48.35      | 0.00        | -0.76       | 18.92        | 0.0780     |
| Vertical Polarization                          |             |             |             |             |              |            |
| Frequency<br>(MHz)                             | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBd) | ERP<br>(dBm) | ERP<br>(W) |
| 824.70                                         | -35.18      | -47.97      | 0.00        | -1.08       | 11.71        | 0.0148     |
| 836.52                                         | -34.73      | -48.01      | 0.00        | -0.93       | 12.35        | 0.0172     |
| 848.31                                         | -35.33      | -48.05      | 0.00        | -0.76       | 11.96        | 0.0157     |



## 3.3.6 Test Result of EIRP

| GSM1900 (GPRS class 8) Radiated Power EIRP |             |             |             |             |               |             |
|--------------------------------------------|-------------|-------------|-------------|-------------|---------------|-------------|
| Horizontal Polarization                    |             |             |             |             |               |             |
| Frequency<br>(MHz)                         | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1850.20                                    | -25.81      | -51.88      | 0.00        | 1.96        | 28.03         | 0.6353      |
| 1880.00                                    | -26.26      | -52.99      | 0.00        | 2.00        | 28.73         | 0.7464      |
| 1909.80                                    | -26.61      | -54.28      | 0.00        | 1.98        | 29.65         | 0.9226      |
| Vertical Polarization                      |             |             |             |             |               |             |
| Frequency<br>(MHz)                         | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1850.20                                    | -26.17      | -52.13      | 0.00        | 1.96        | 27.92         | 0.6194      |
| 1880.00                                    | -27.10      | -53.17      | 0.00        | 2.00        | 28.07         | 0.6412      |
| 1909.80                                    | -26.99      | -54.13      | 0.00        | 1.98        | 29.12         | 0.8166      |

| GSM1900 (EDGE class 8) Radiated Power EIRP |             |             |             |             |               |             |
|--------------------------------------------|-------------|-------------|-------------|-------------|---------------|-------------|
| Horizontal Polarization                    |             |             |             |             |               |             |
| Frequency<br>(MHz)                         | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1850.20                                    | -30.13      | -51.88      | 0.00        | 1.96        | 23.71         | 0.2350      |
| 1880.00                                    | -30.51      | -52.99      | 0.00        | 2.00        | 24.48         | 0.2805      |
| 1909.80                                    | -31.35      | -54.28      | 0.00        | 1.98        | 24.91         | 0.3097      |
| Vertical Polarization                      |             |             |             |             |               |             |
| Frequency<br>(MHz)                         | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1850.20                                    | -30.67      | -52.13      | 0.00        | 1.96        | 23.42         | 0.2198      |
| 1880.00                                    | -31.66      | -53.17      | 0.00        | 2.00        | 23.51         | 0.2244      |
| 1909.80                                    | -31.69      | -54.13      | 0.00        | 1.98        | 24.42         | 0.2767      |



| WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP |             |             |             |             |               |             |
|--------------------------------------------------|-------------|-------------|-------------|-------------|---------------|-------------|
| Horizontal Polarization                          |             |             |             |             |               |             |
| Frequency<br>(MHz)                               | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1852.40                                          | -31.39      | -51.88      | 0.00        | 1.96        | 22.45         | 0.1758      |
| 1880.00                                          | -31.86      | -52.99      | 0.00        | 2.00        | 23.13         | 0.2056      |
| 1907.60                                          | -33.01      | -54.28      | 0.00        | 1.98        | 23.25         | 0.2113      |
| Vertical Polarization                            |             |             |             |             |               |             |
| Frequency<br>(MHz)                               | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1852.40                                          | -31.66      | -52.13      | 0.00        | 1.96        | 22.43         | 0.1748      |
| 1880.00                                          | -32.50      | -53.17      | 0.00        | 2.00        | 22.67         | 0.1848      |
| 1907.60                                          | -33.50      | -54.13      | 0.00        | 1.98        | 22.61         | 0.1826      |

| CDMA2000 BC1 1xRTT_RC3+S032 Radiated Power EIRP |             |             |             |             |               |             |
|-------------------------------------------------|-------------|-------------|-------------|-------------|---------------|-------------|
| Horizontal Polarization                         |             |             |             |             |               |             |
| Frequency<br>(MHz)                              | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1851.25                                         | -31.46      | -51.88      | 0.00        | 1.96        | 22.38         | 0.1730      |
| 1880.00                                         | -32.09      | -52.99      | 0.00        | 2.00        | 22.90         | 0.1950      |
| 1908.75                                         | -33.61      | -54.28      | 0.00        | 1.98        | 22.65         | 0.1841      |
| Vertical Polarization                           |             |             |             |             |               |             |
| Frequency<br>(MHz)                              | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1851.25                                         | -32.51      | -52.13      | 0.00        | 1.96        | 21.58         | 0.1439      |
| 1880.00                                         | -34.41      | -53.17      | 0.00        | 2.00        | 20.76         | 0.1191      |
| 1908.75                                         | -35.78      | -54.13      | 0.00        | 1.98        | 20.33         | 0.1079      |

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

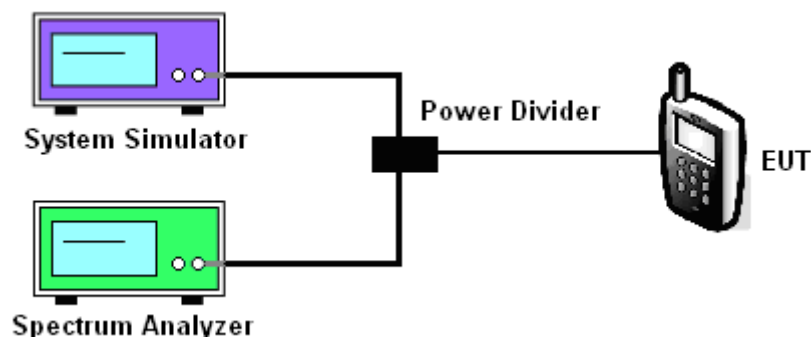

### 3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

| Cellular Band   |                       |           |            |                       |           |            |
|-----------------|-----------------------|-----------|------------|-----------------------|-----------|------------|
| Modes           | GSM850 (GPRS class 8) |           |            | GSM850 (EDGE class 8) |           |            |
| Channel         | 128 (Low)             | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) |
| Frequency (MHz) | 824.2                 | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      |
| 99% OBW (kHz)   | 246.00                | 242.00    | 244.00     | 244.00                | 246.00    | 246.00     |
| 26dB BW (kHz)   | 306.00                | 314.00    | 318.00     | 304.00                | 308.00    | 312.00     |

| PCS Band        |                        |           |            |                        |           |            |
|-----------------|------------------------|-----------|------------|------------------------|-----------|------------|
| Modes           | GSM1900 (GPRS class 8) |           |            | GSM1900 (EDGE class 8) |           |            |
| Channel         | 512 (Low)              | 661 (Mid) | 810 (High) | 512 (Low)              | 661 (Mid) | 810 (High) |
| Frequency (MHz) | 1850.2                 | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     |
| 99% OBW (kHz)   | 248.00                 | 248.00    | 246.00     | 246.00                 | 246.00    | 248.00     |
| 26dB BW (kHz)   | 310.00                 | 310.00    | 312.00     | 310.00                 | 296.00    | 302.00     |

| Cellular Band   |                             |            |             |
|-----------------|-----------------------------|------------|-------------|
| Modes           | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel         | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz) | 826.4                       | 836.4      | 846.6       |
| 99% OBW (MHz)   | 4.18                        | 4.20       | 4.16        |
| 26dB BW (MHz)   | 4.68                        | 4.68       | 4.68        |

| PCS Band        |                              |            |             |
|-----------------|------------------------------|------------|-------------|
| Modes           | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel         | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz) | 1852.4                       | 1880       | 1907.6      |
| 99% OBW (MHz)   | 4.16                         | 4.20       | 4.16        |
| 26dB BW (MHz)   | 4.68                         | 4.68       | 4.66        |



| CDMA2000 BC0    |                 |           |            |
|-----------------|-----------------|-----------|------------|
| Test Mode       | CDMA 2000 1xRTT |           |            |
| Test Status     | RC3+SO32        |           |            |
| Channel         | 1013 (Low)      | 384 (Mid) | 777 (High) |
| Frequency (MHz) | 824.70          | 836.52    | 848.31     |
| 99% OBW (MHz)   | 1.28            | 1.27      | 1.28       |
| 26dB BW (MHz)   | 1.42            | 1.42      | 1.42       |


| CDMA2000 BC1    |                 |           |             |
|-----------------|-----------------|-----------|-------------|
| Test Mode       | CDMA 2000 1xRTT |           |             |
| Test Status     | RC3+SO32        |           |             |
| Channel         | 25 (Low)        | 600 (Mid) | 1175 (High) |
| Frequency (MHz) | 1851.25         | 1880.00   | 1908.75     |
| 99% OBW (MHz)   | 1.28            | 1.28      | 1.28        |
| 26dB BW (MHz)   | 1.41            | 1.42      | 1.42        |



## 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|---------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

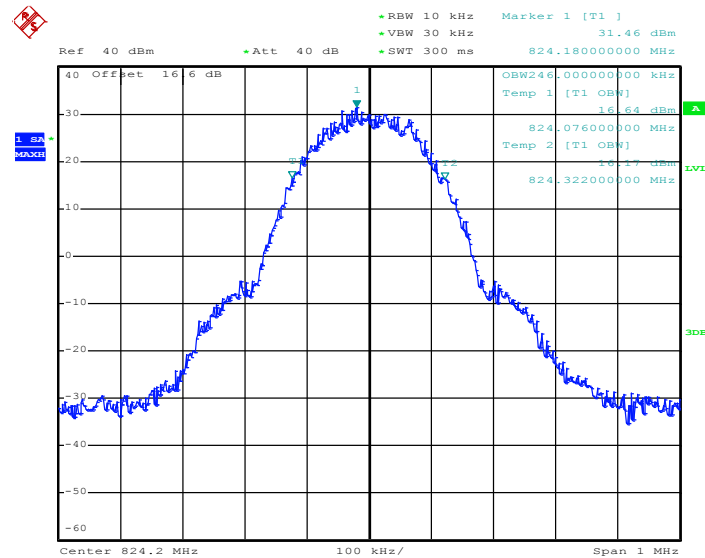

Date: 4.AUG.2014 18:08:31


## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

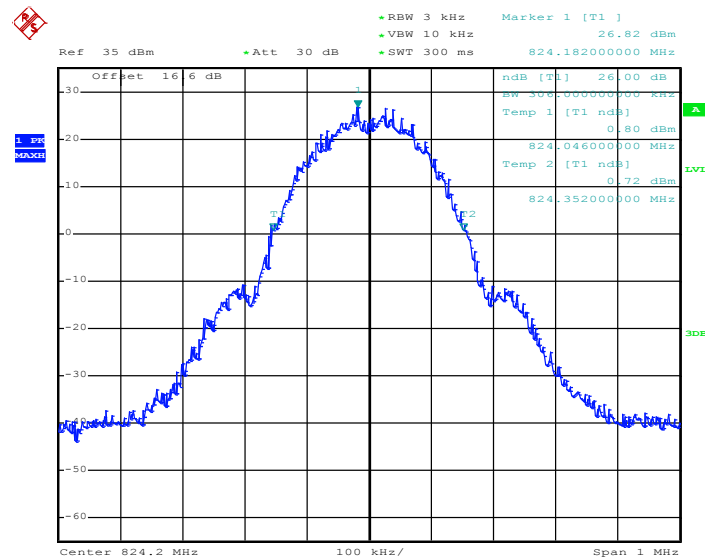

Date: 4.AUG.2014 17:54:50




### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

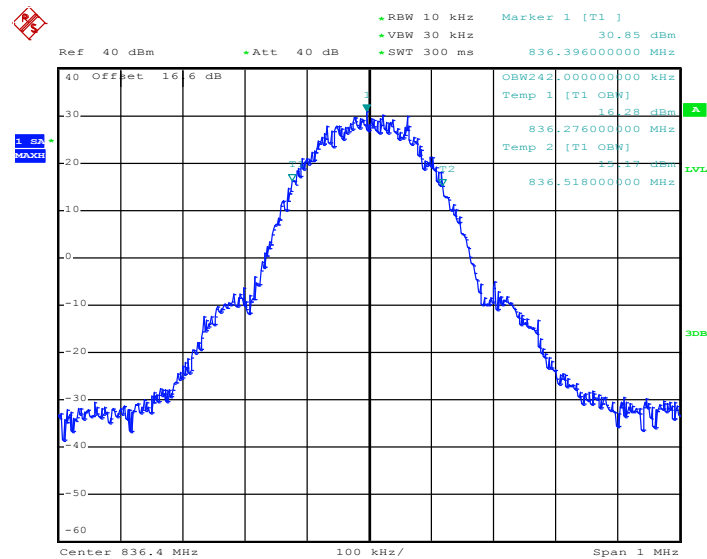

Date: 4.AUG.2014 18:05:43


### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

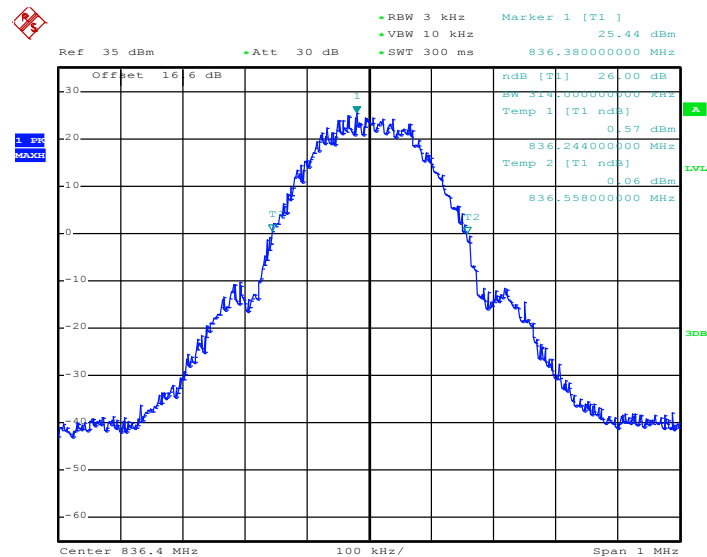

Date: 4.AUG.2014 17:55:28




### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

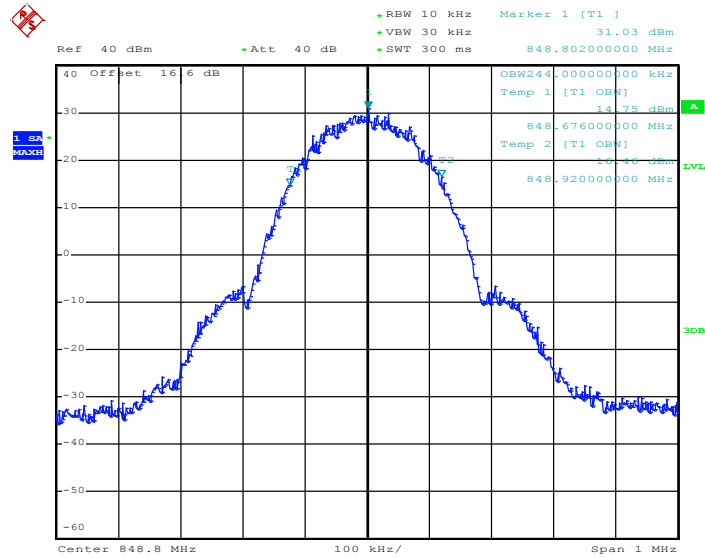

Date: 4.AUG.2014 18:03:37

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

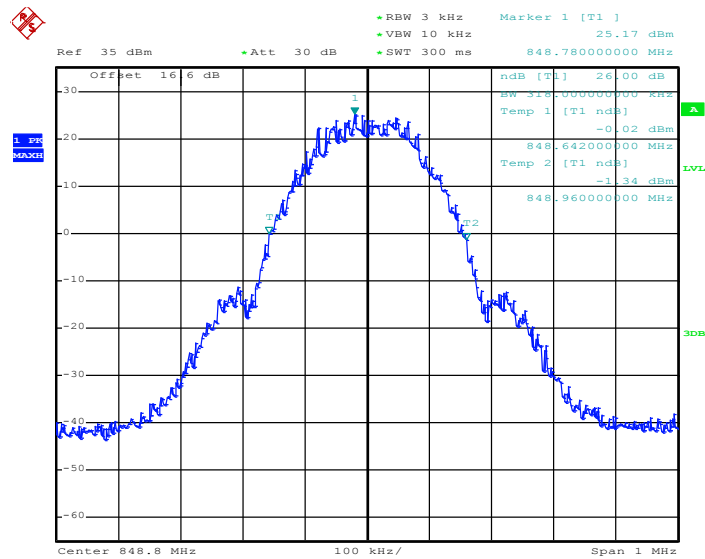


Date: 4.AUG.2014 17:56:06




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

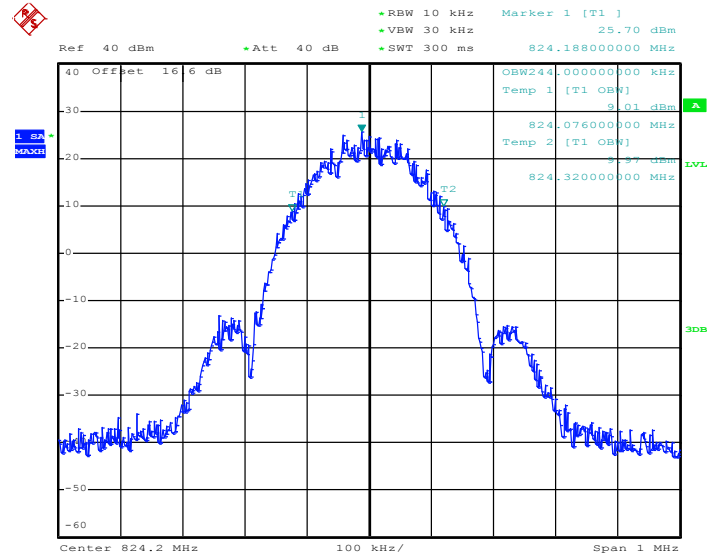

Date: 5.AUG.2014 09:34:07


## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

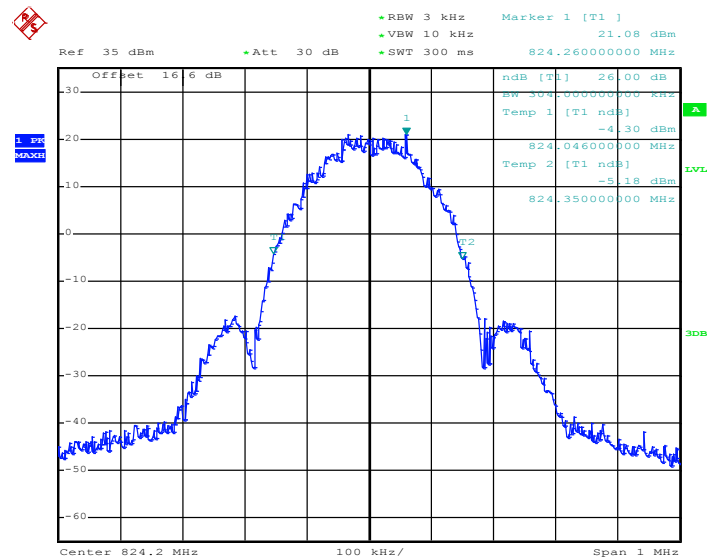

Date: 5.AUG.2014 09:20:32




### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

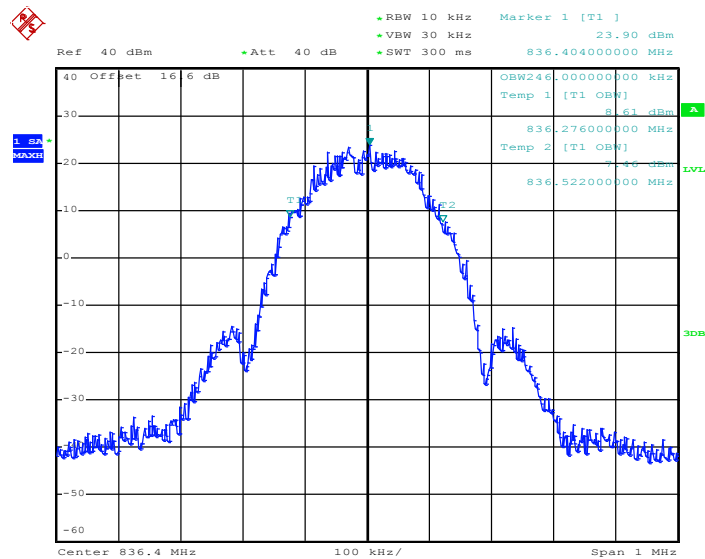

Date: 5.AUG.2014 09:34:43


### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

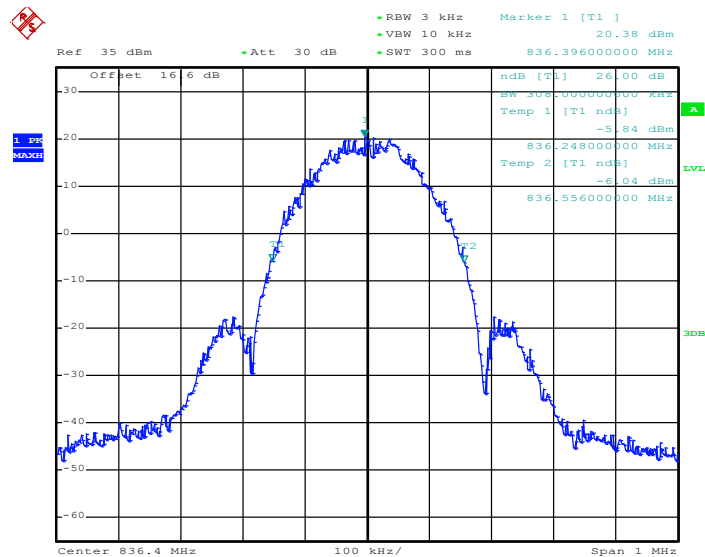

Date: 5.AUG.2014 09:21:06




### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

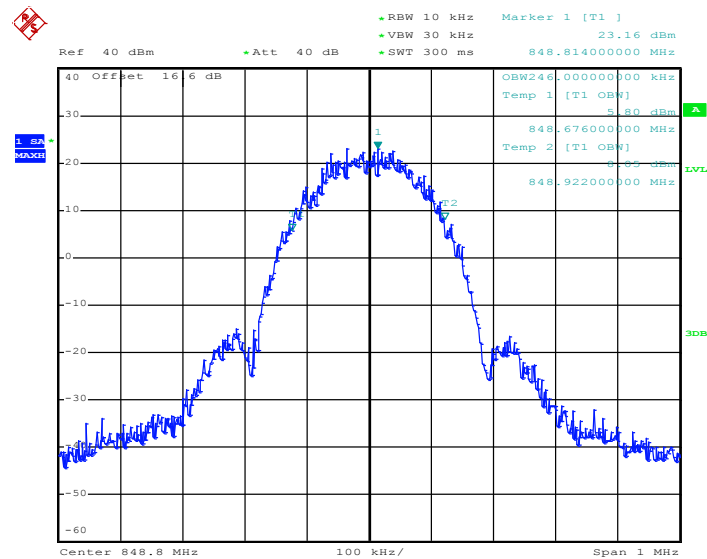

Date: 5.AUG.2014 09:35:17

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

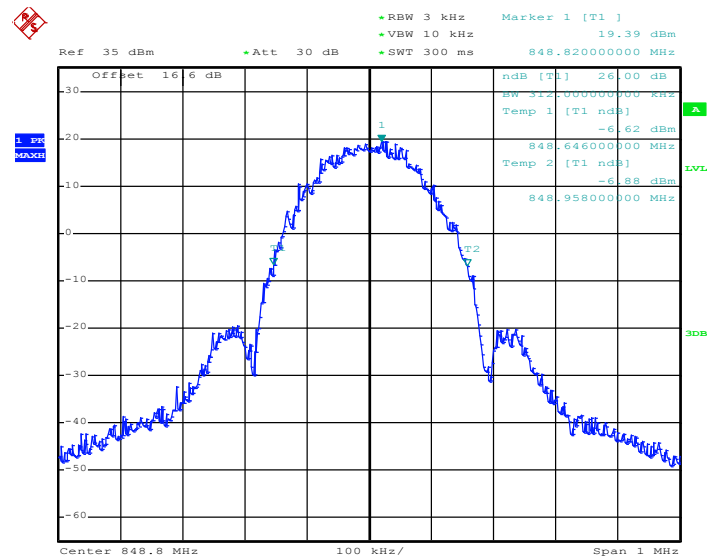


Date: 5.AUG.2014 09:21:39




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|----------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

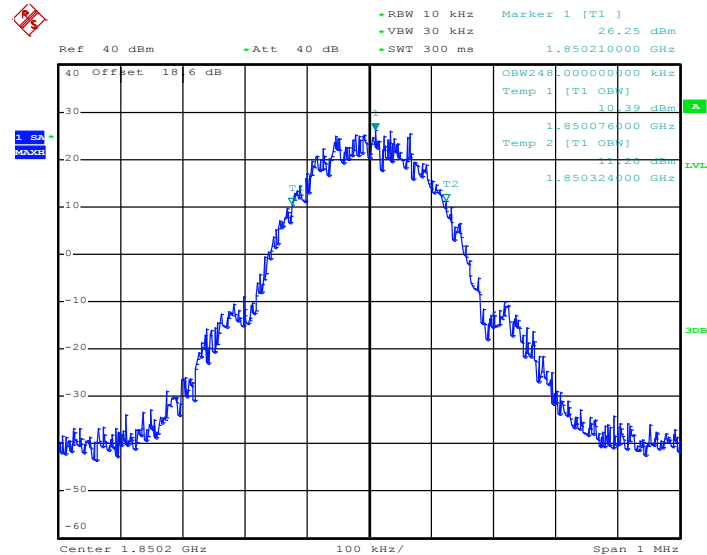

Date: 5.AUG.2014 10:31:40


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

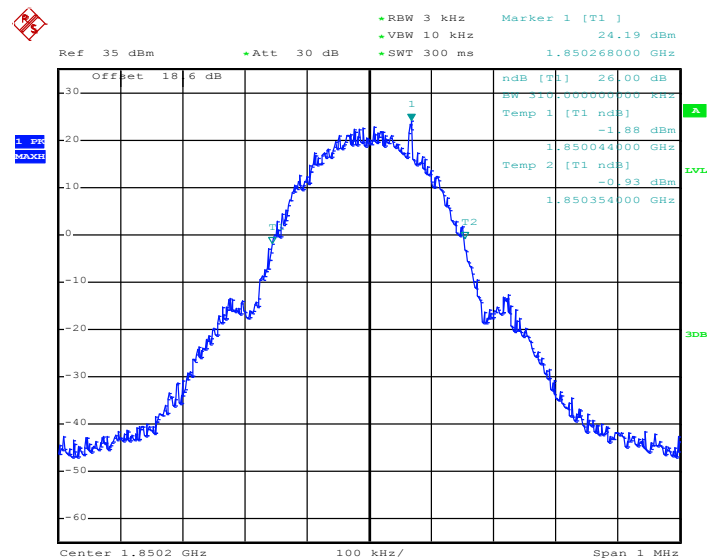

Date: 5.AUG.2014 10:15:34




### 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

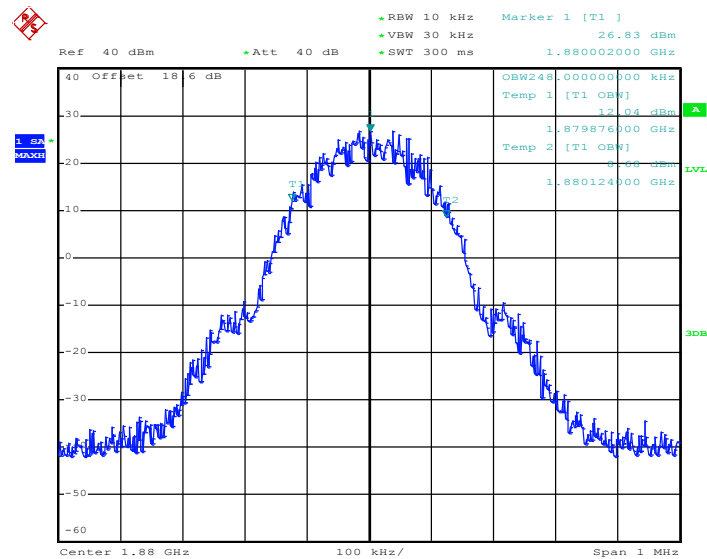


Date: 5.AUG.2014 10:32:08


### 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

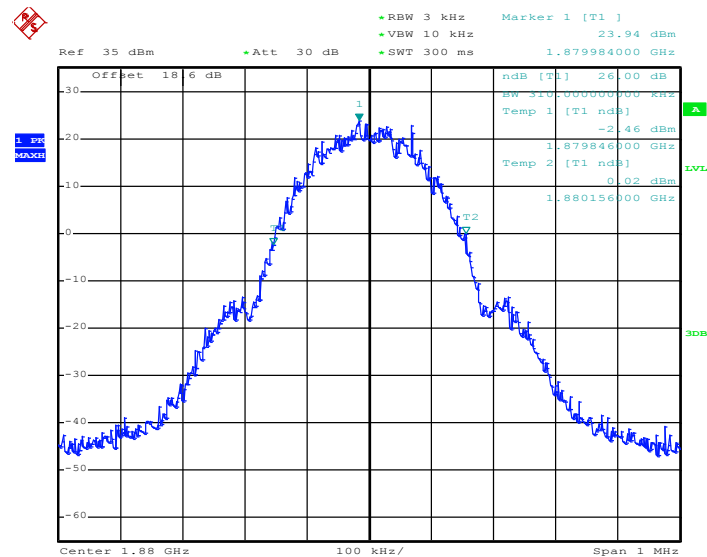

Date: 5.AUG.2014 10:16:03

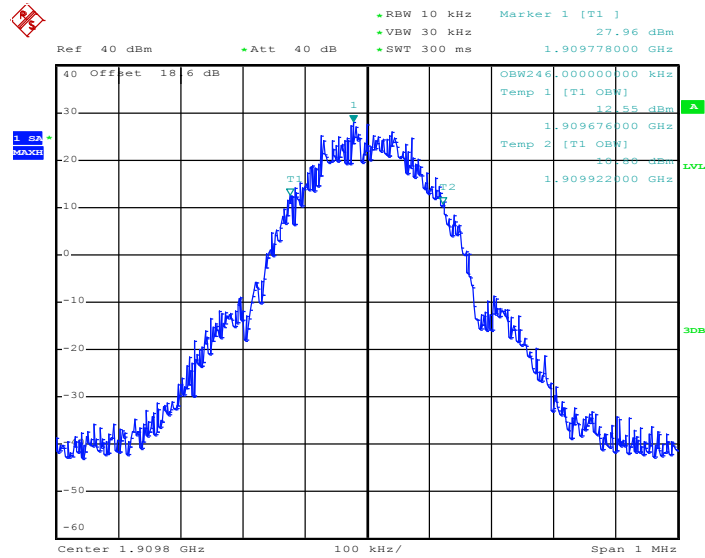**99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)**


Date: 5.AUG.2014 10:32:37

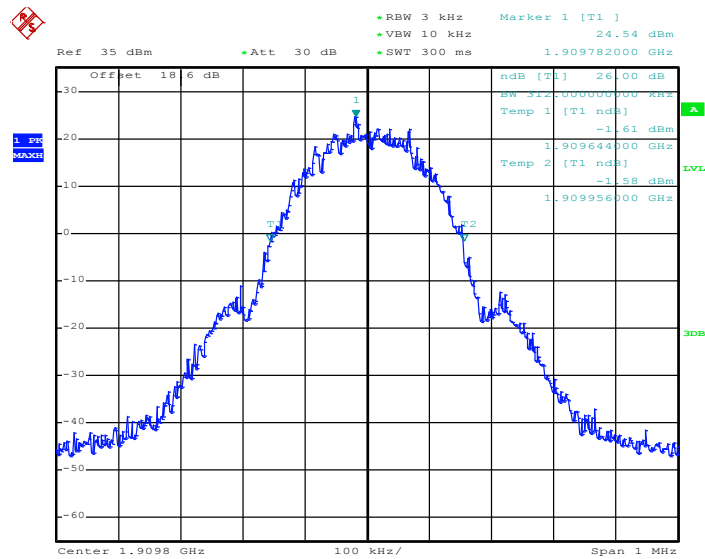
**26dB Bandwidth Plot on Channel 810 (1909.8 MHz)**


Date: 5.AUG.2014 10:16:32




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

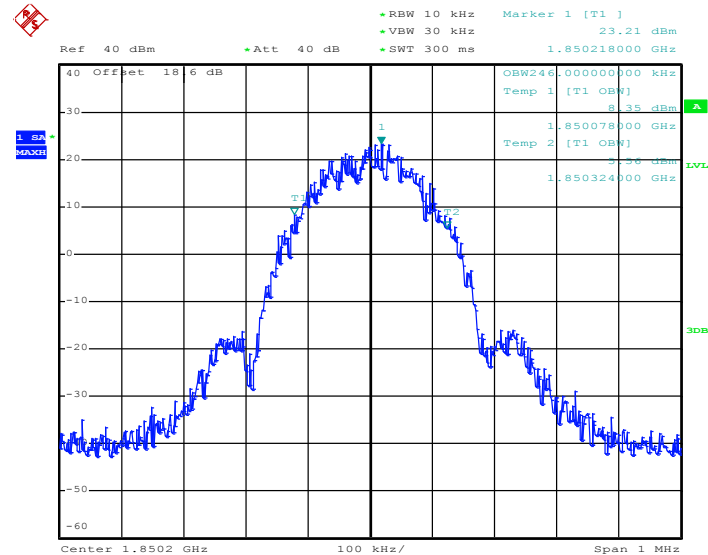

Date: 5.AUG.2014 11:15:38


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

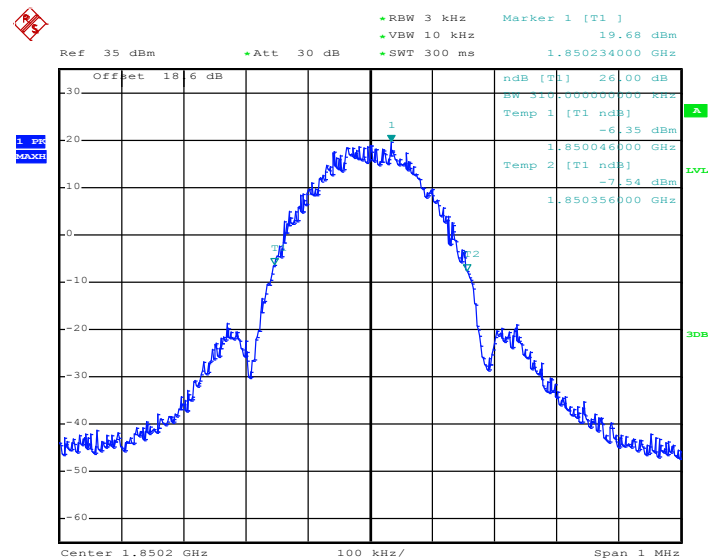

Date: 5.AUG.2014 11:13:15




### 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

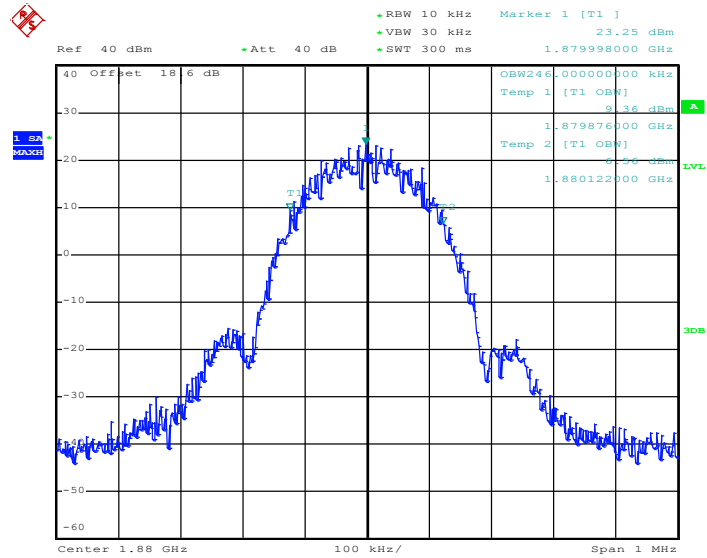

Date: 5.AUG.2014 11:16:15


### 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

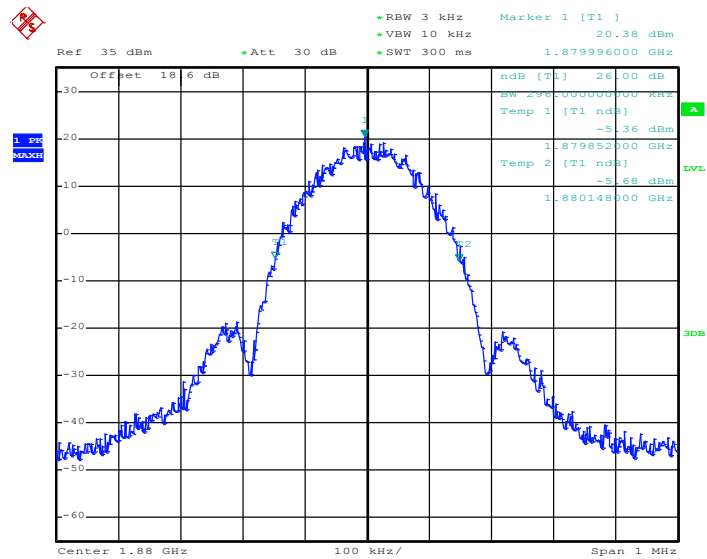

Date: 5.AUG.2014 11:13:56




### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

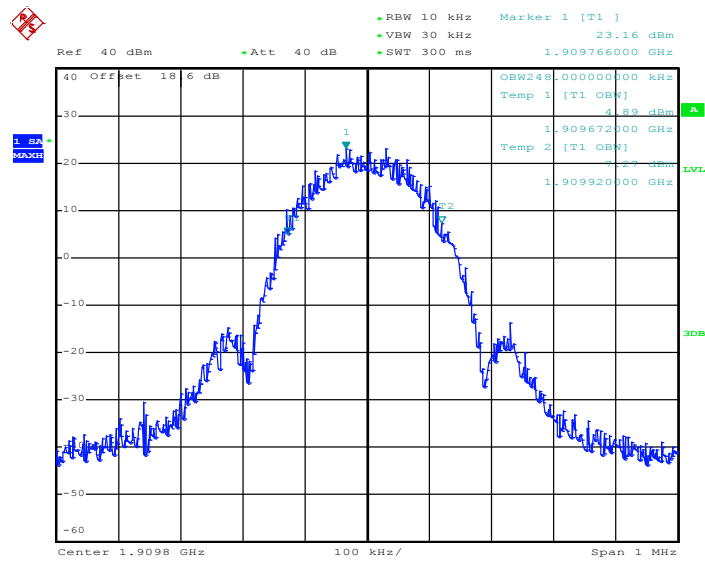

Date: 5.AUG.2014 11:18:58

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

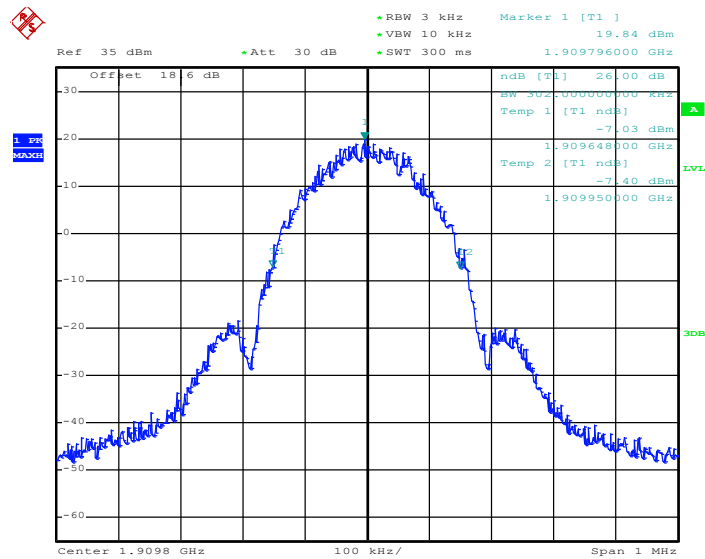


Date: 5.AUG.2014 11:14:31




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

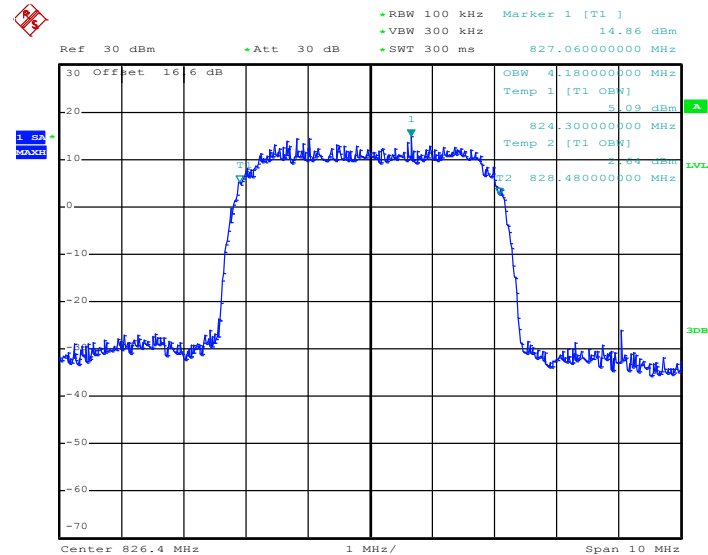

Date: 5.AUG.2014 13:17:18


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

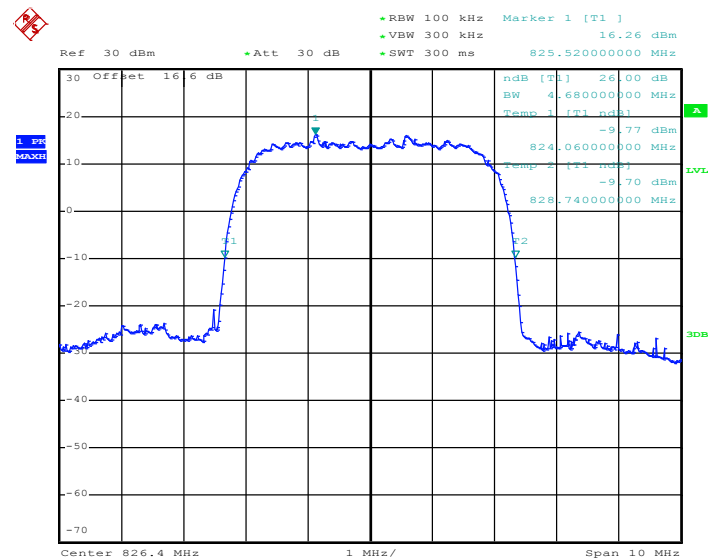

Date: 5.AUG.2014 13:08:13




### 99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

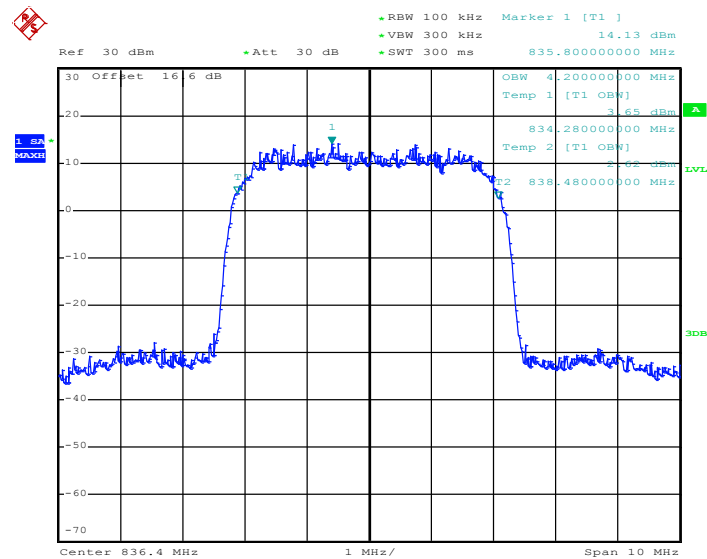

Date: 5.AUG.2014 13:17:46


### 26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

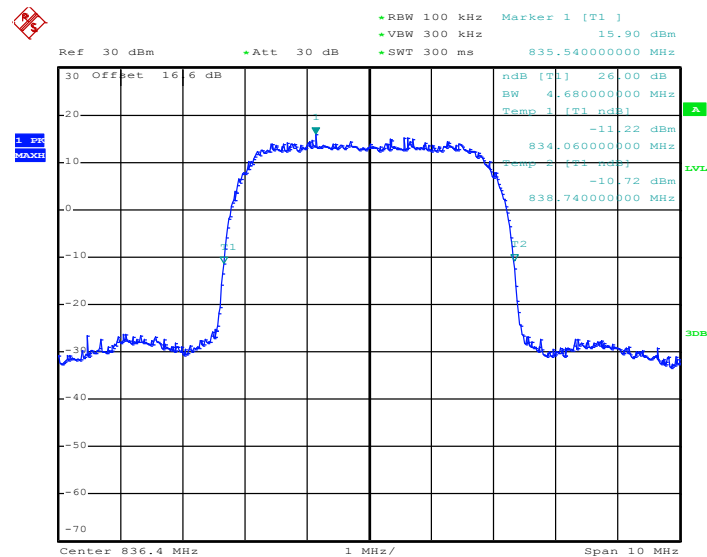

Date: 5.AUG.2014 13:12:53




## 99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

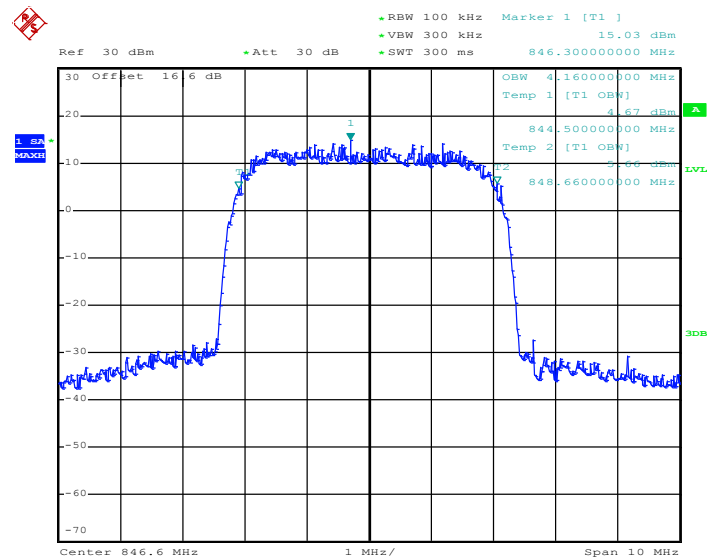

Date: 5.AUG.2014 13:18:15

## 26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

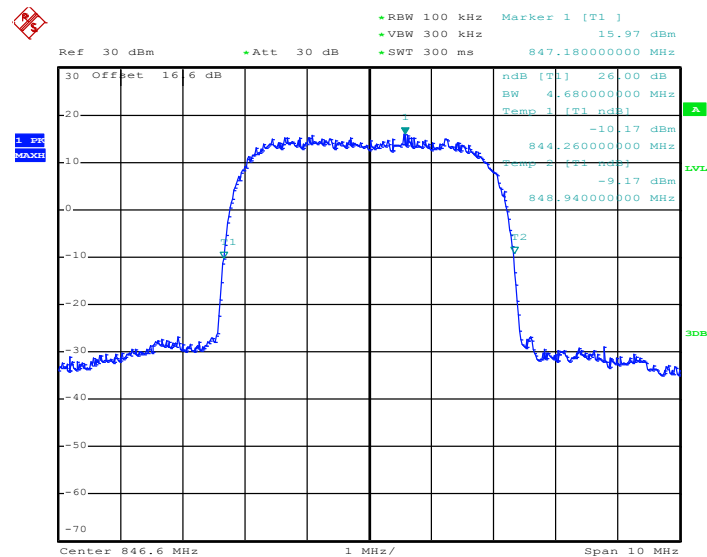


Date: 5.AUG.2014 13:12:22




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

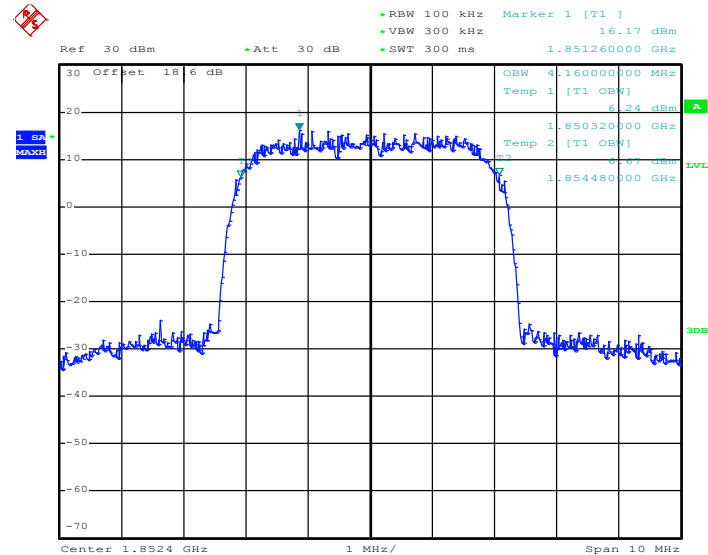

Date: 5.AUG.2014 12:40:34


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

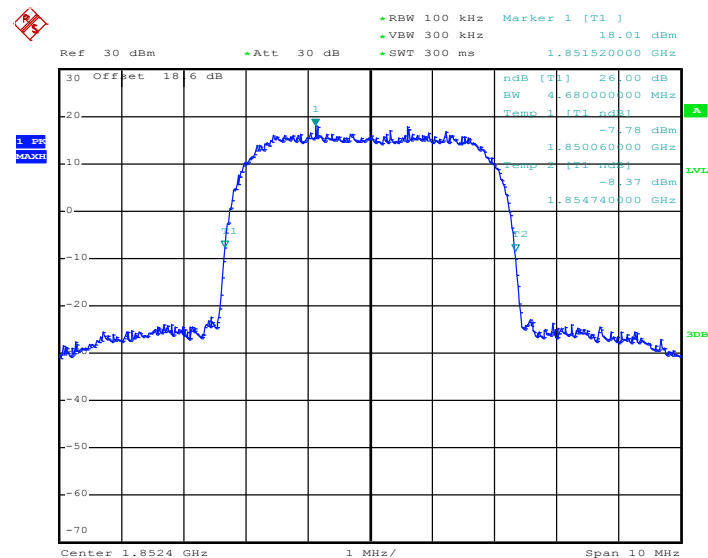

Date: 5.AUG.2014 12:34:06




### 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

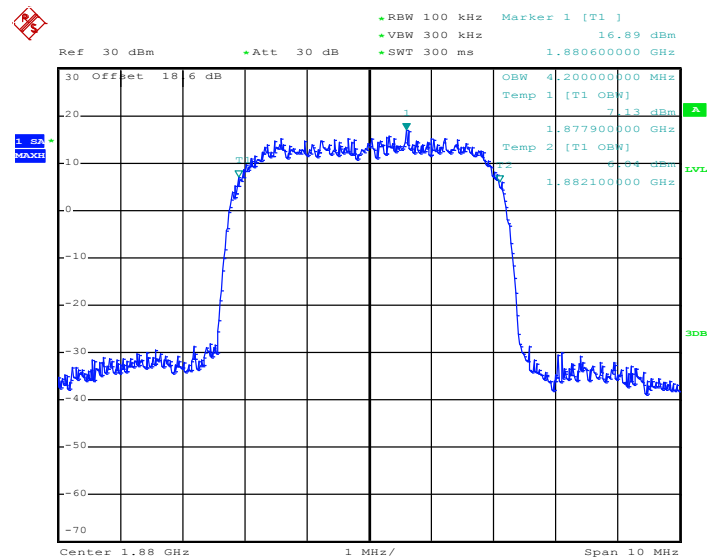

Date: 5.AUG.2014 12:41:02


### 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

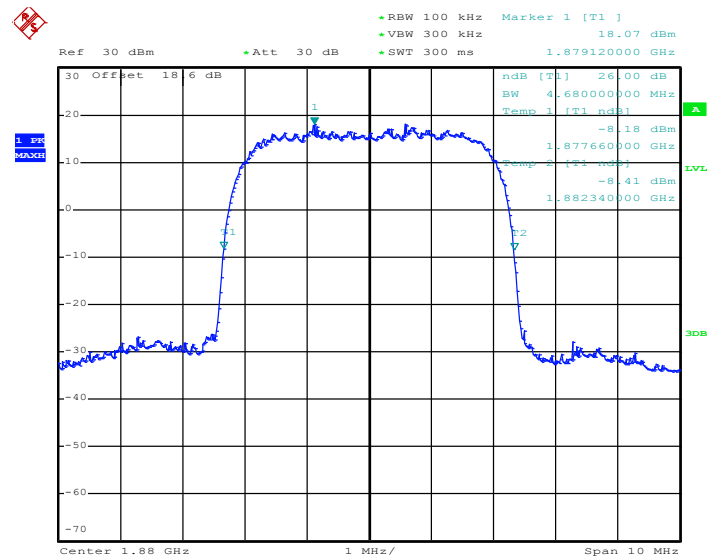

Date: 5.AUG.2014 12:33:45




### 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

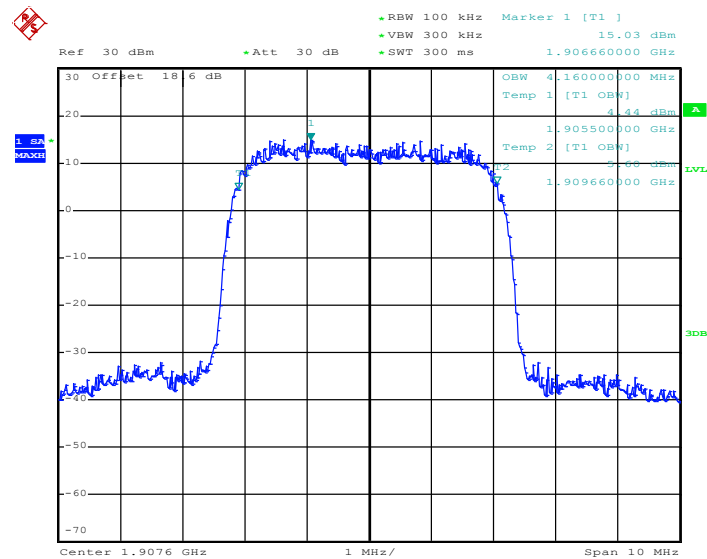

Date: 5.AUG.2014 12:41:31

### 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

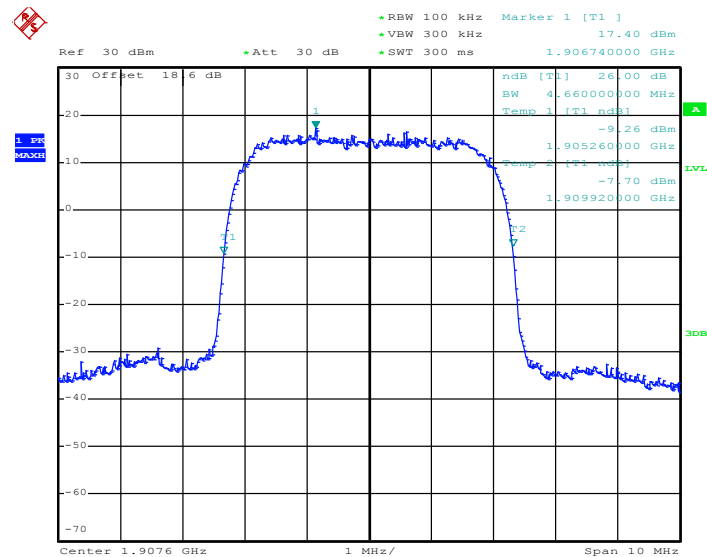


Date: 5.AUG.2014 12:32:56




|        |              |             |                       |
|--------|--------------|-------------|-----------------------|
| Band : | CDMA2000 BC0 | Test Mode : | 1xRTT_RC3+SO32 (QPSK) |
|--------|--------------|-------------|-----------------------|

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

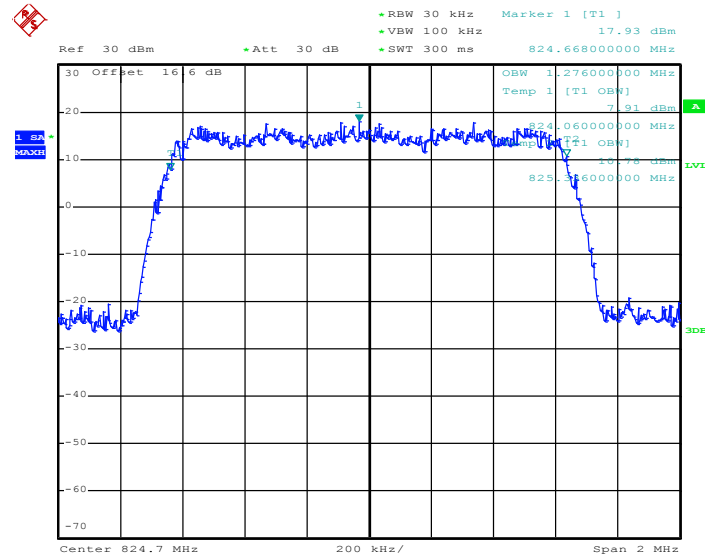

Date: 10.AUG.2014 16:11:54


26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

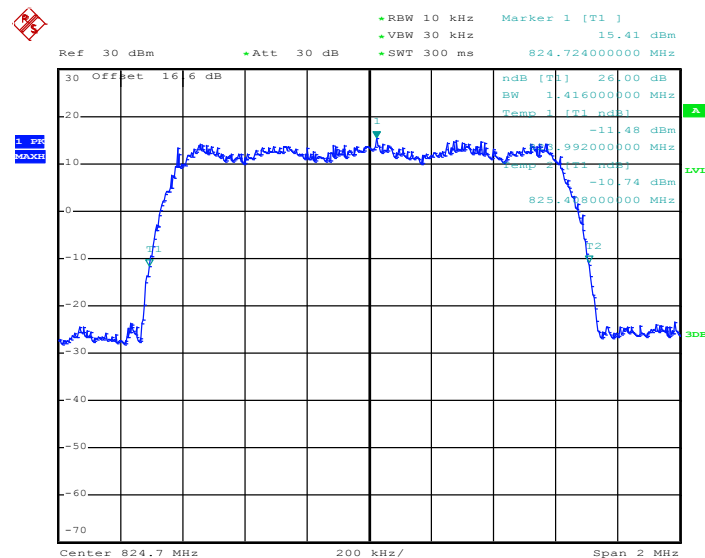

Date: 10.AUG.2014 16:09:52




### 99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

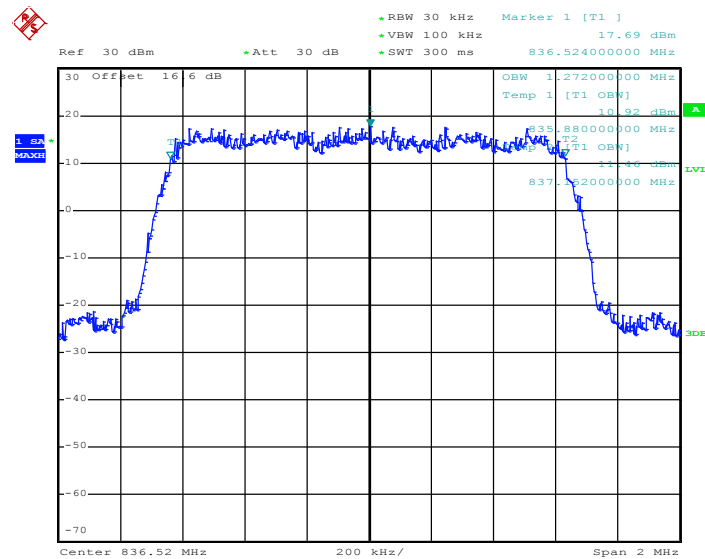

Date: 10.AUG.2014 16:12:26


### 26dB Bandwidth Plot on Channel 384 (836.52 MHz)

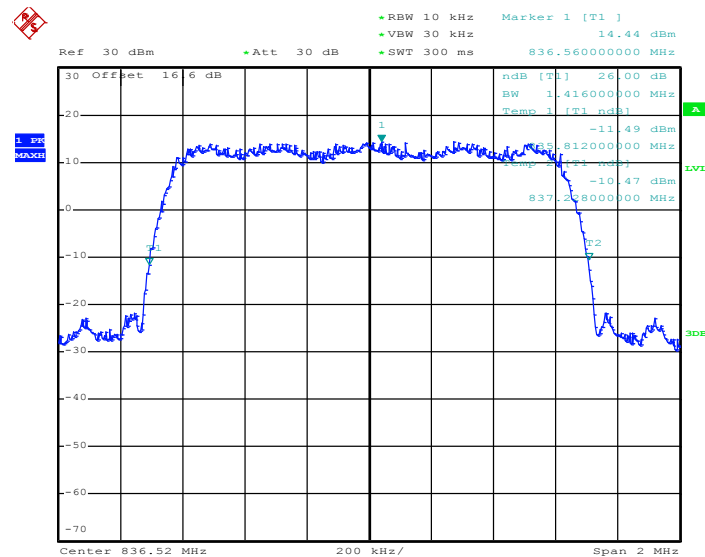

Date: 10.AUG.2014 16:10:25




### 99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

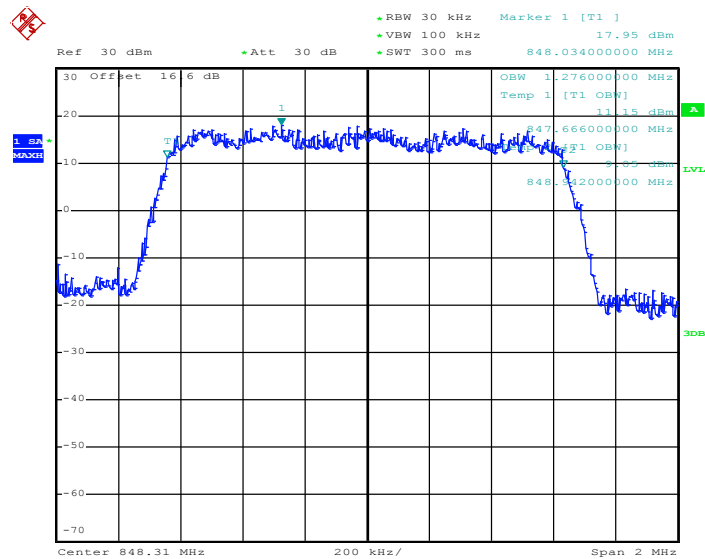

Date: 10.AUG.2014 16:13:00

### 26dB Bandwidth Plot on Channel 777 (848.31 MHz)

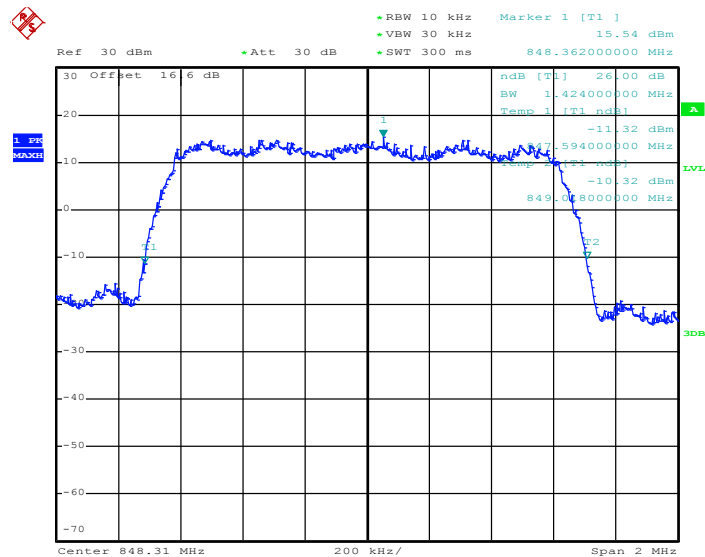


Date: 10.AUG.2014 16:11:02




|        |              |             |                       |
|--------|--------------|-------------|-----------------------|
| Band : | CDMA2000 BC1 | Test Mode : | 1xRTT_RC3+SO32 (QPSK) |
|--------|--------------|-------------|-----------------------|

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

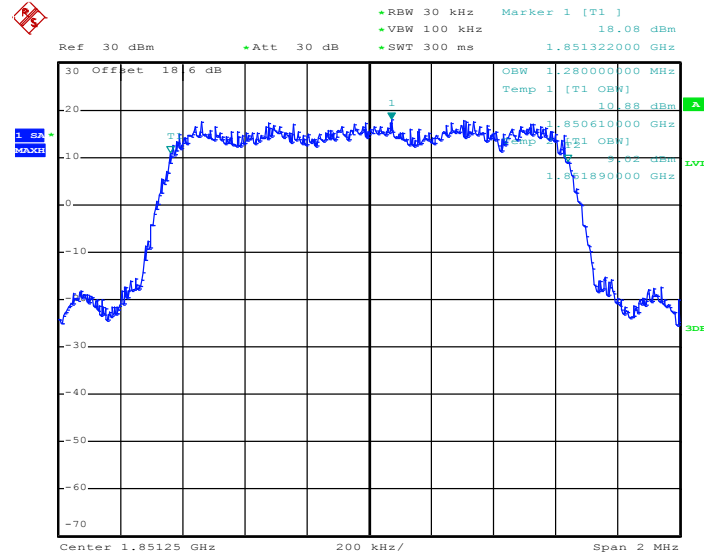

Date: 10.AUG.2014 15:34:56


26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

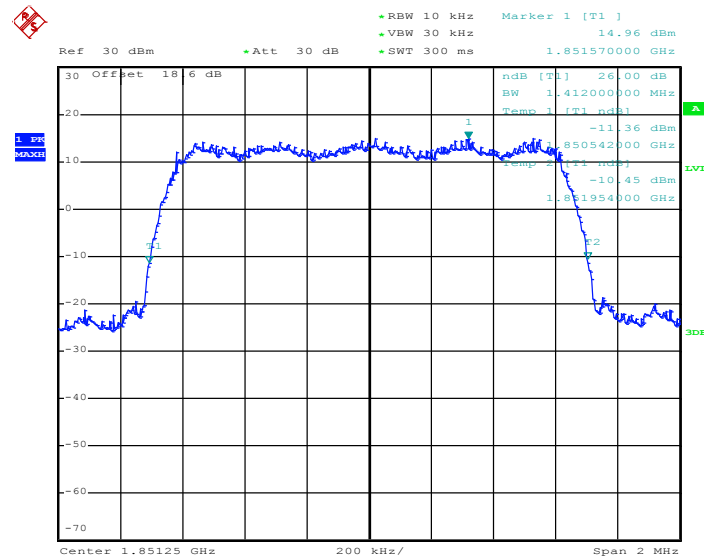

Date: 10.AUG.2014 15:32:59




### 99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

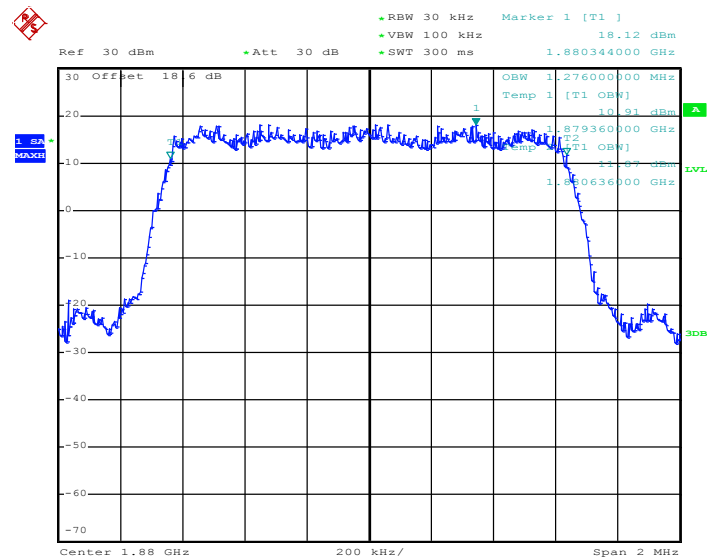

Date: 10.AUG.2014 15:35:28


### 26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

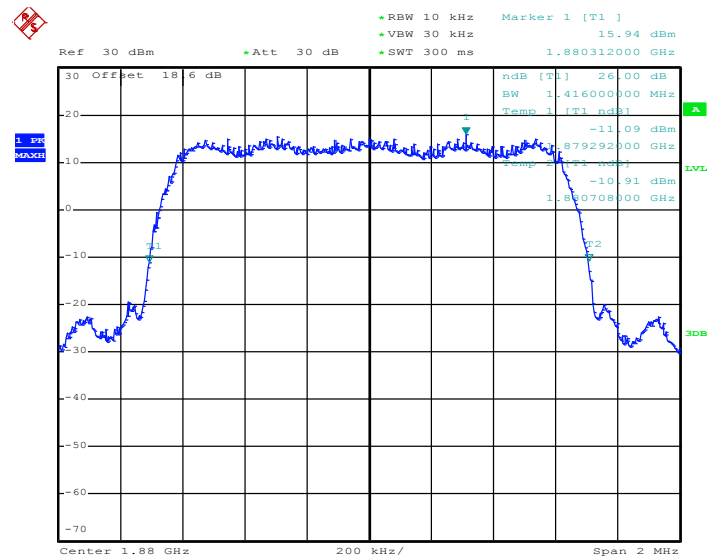

Date: 10.AUG.2014 15:33:33




99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

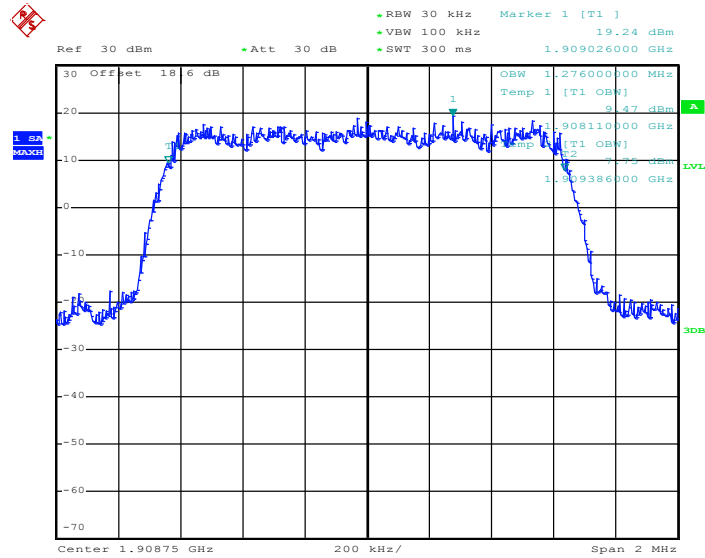

Date: 10.AUG.2014 15:36:02

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

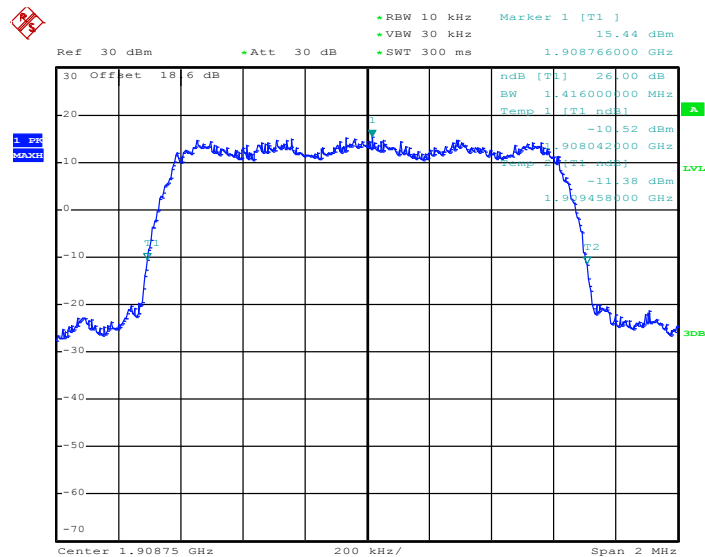

Date: 10.AUG.2014 15:34:06

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$


#### 3.5.4 Test Setup

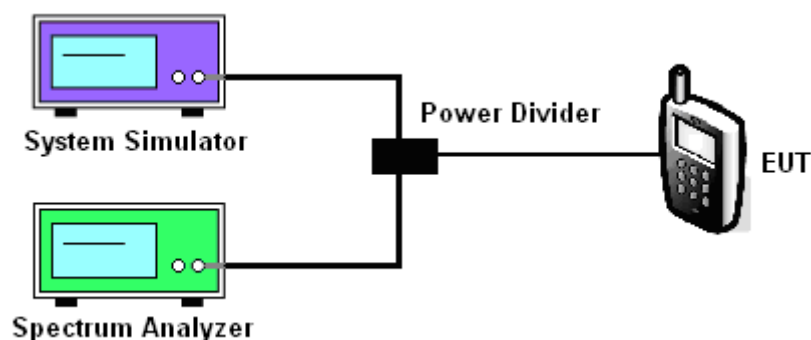

### 3.5.5 Test Result (Plots) of Conducted Band Edge


|               |        |                    |                          |
|---------------|--------|--------------------|--------------------------|
| <b>Band :</b> | GSM850 | <b>Test Mode :</b> | GPRS class 8 Link (GMSK) |
|---------------|--------|--------------------|--------------------------|

### Lower Band Edge Plot on Channel 128 (824.2 MHz)

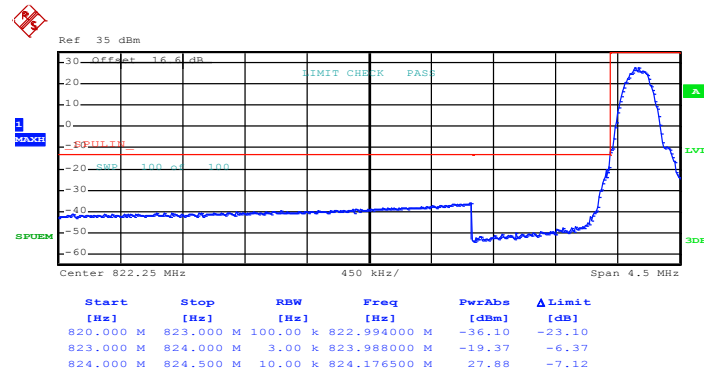

Date: 4.AUG.2014 17:21:14

### Higher Band Edge Plot on Channel 251 (848.8 MHz)

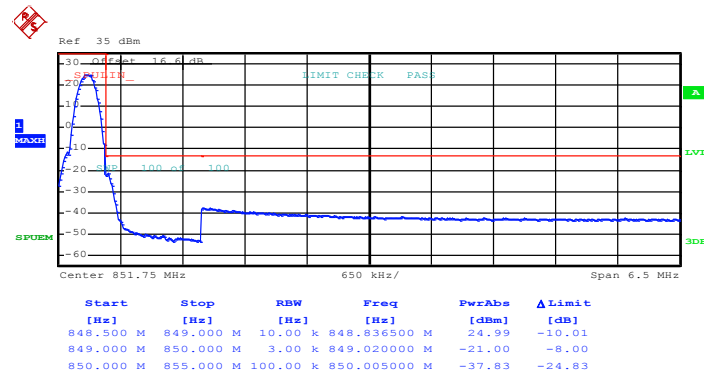


Date: 4.AUG.2014 17:24:47




|        |        |             |                          |
|--------|--------|-------------|--------------------------|
| Band : | GSM850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|--------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 128 (824.2 MHz)

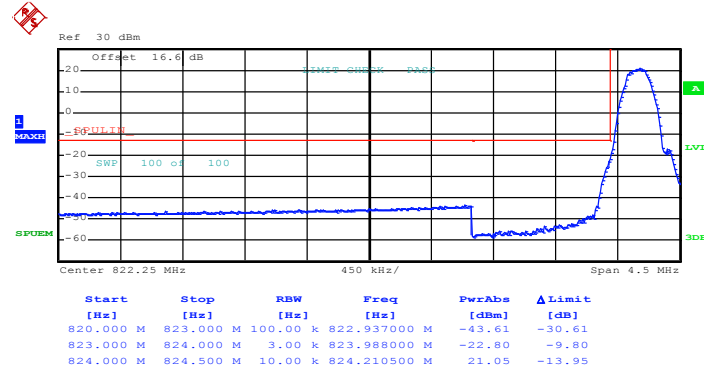

Date: 4.AUG.2014 20:26:48

## Higher Band Edge Plot on Channel 251 (848.8 MHz)

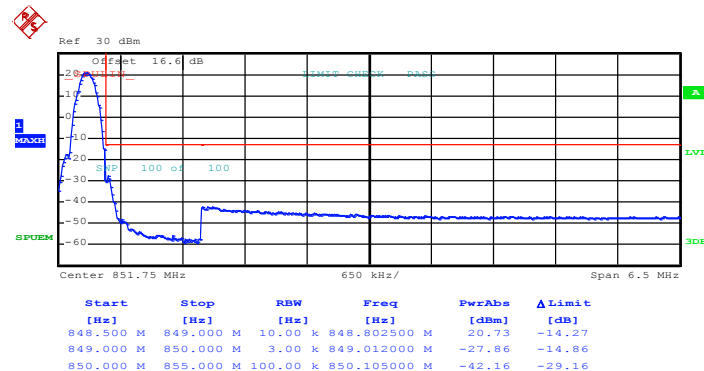


Date: 5.AUG.2014 09:10:36




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM1900 | Test Mode : | GPRS class 8 Link (GMSK) |
|--------|---------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

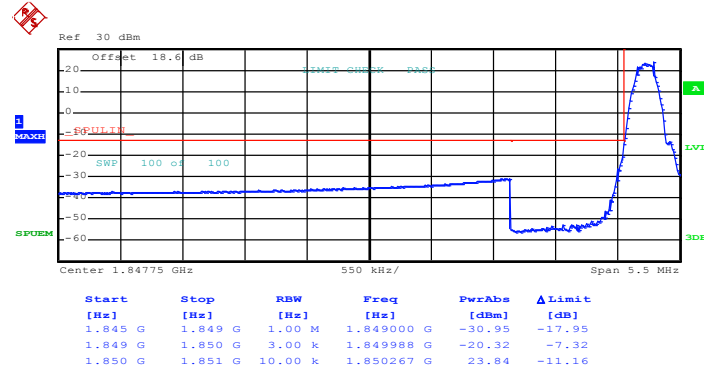

Date: 5.AUG.2014 10:07:50

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

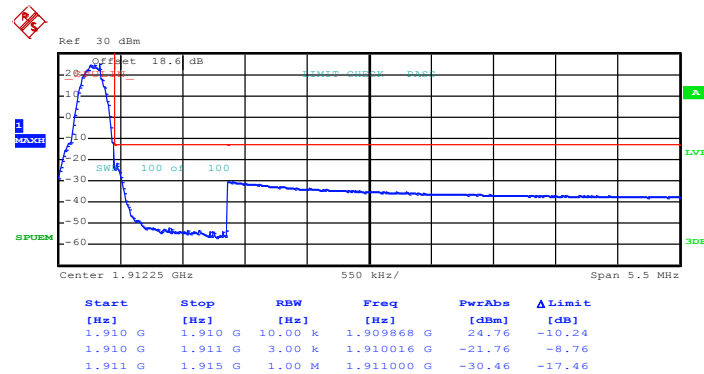


Date: 5.AUG.2014 10:03:24




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

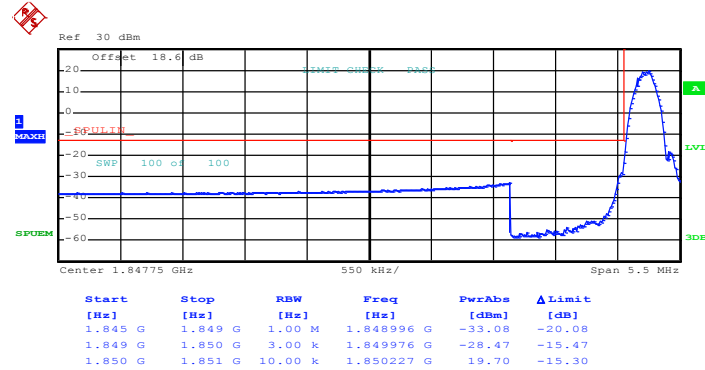

Date: 5.AUG.2014 11:10:32

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

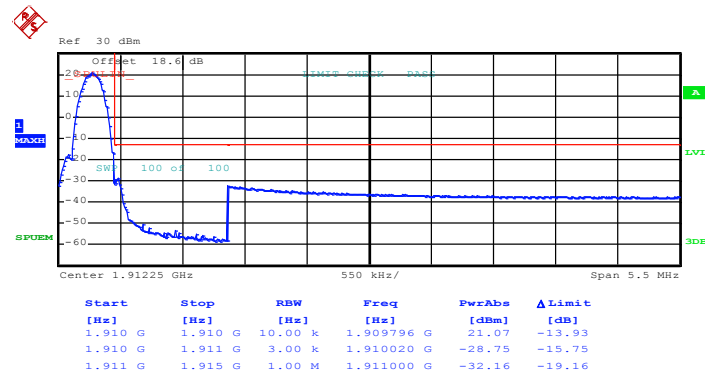


Date: 5.AUG.2014 11:05:23




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 4132 (826.4 MHz)

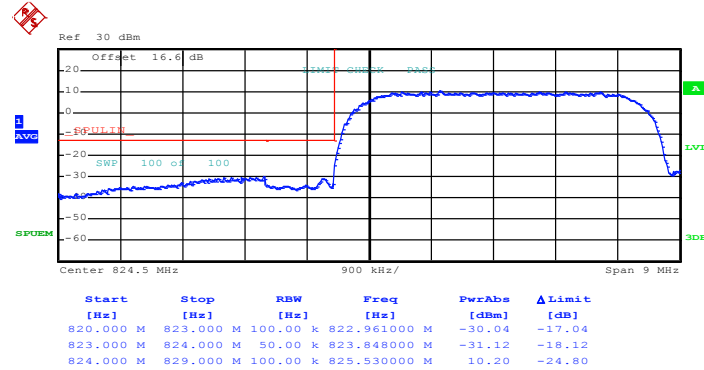

Date: 5.AUG.2014 13:05:19

## Higher Band Edge Plot on Channel 4233 (846.6 MHz)

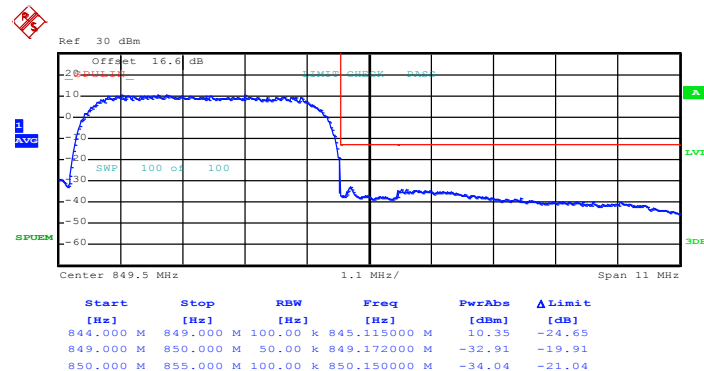


Date: 5.AUG.2014 13:02:28




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

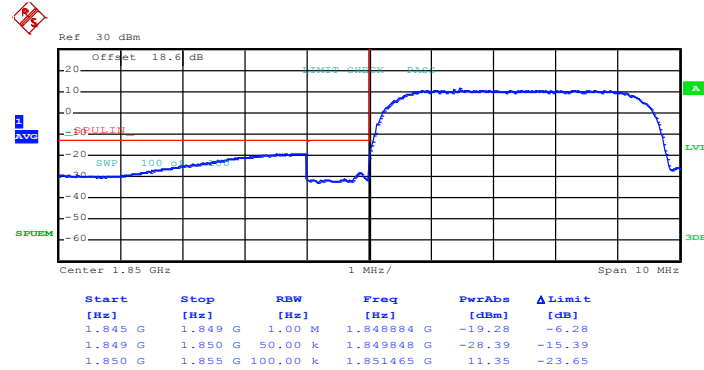

Date: 5.AUG.2014 12:25:34

## Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

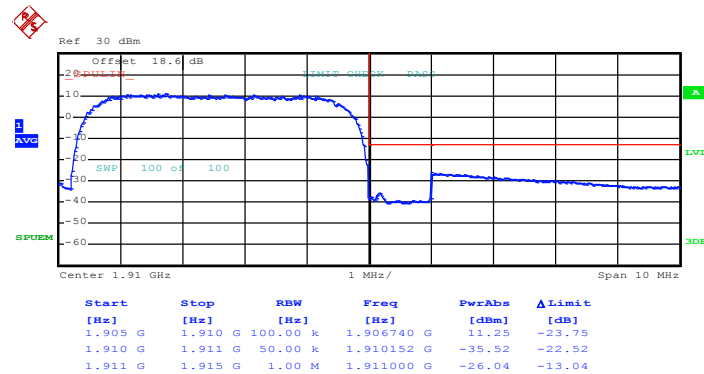


Date: 5.AUG.2014 12:00:45




|        |              |             |                       |
|--------|--------------|-------------|-----------------------|
| Band : | CDMA2000 BC0 | Test Mode : | 1xRTT_RC3+SO32 (QPSK) |
|--------|--------------|-------------|-----------------------|

## Lower Band Edge Plot on Channel 1013 (824.7 MHz)

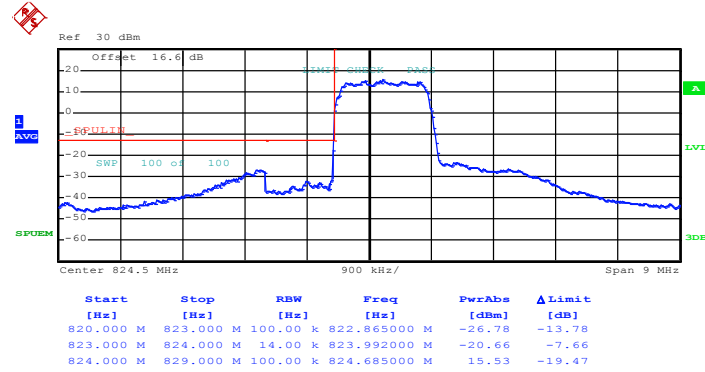

Date: 10.AUG.2014 16:01:38

## Higher Band Edge Plot on Channel 777 (848.31 MHz)

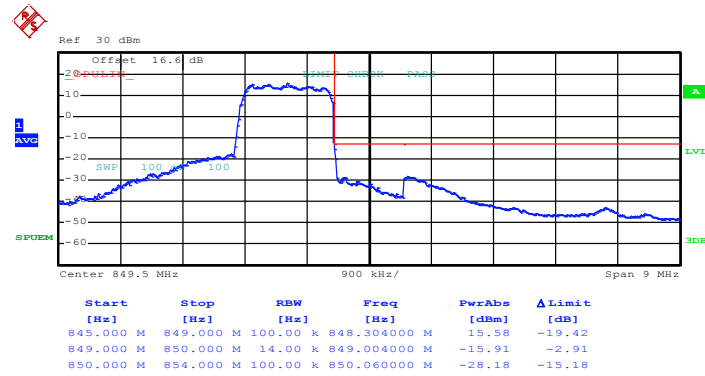


Date: 10.AUG.2014 15:50:17




|        |              |             |                       |
|--------|--------------|-------------|-----------------------|
| Band : | CDMA2000 BC1 | Test Mode : | 1xRTT_RC3+SO32 (QPSK) |
|--------|--------------|-------------|-----------------------|

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

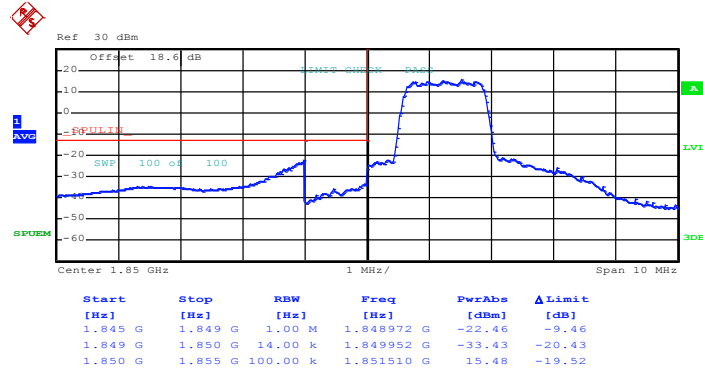

Date: 10.AUG.2014 15:12:41

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

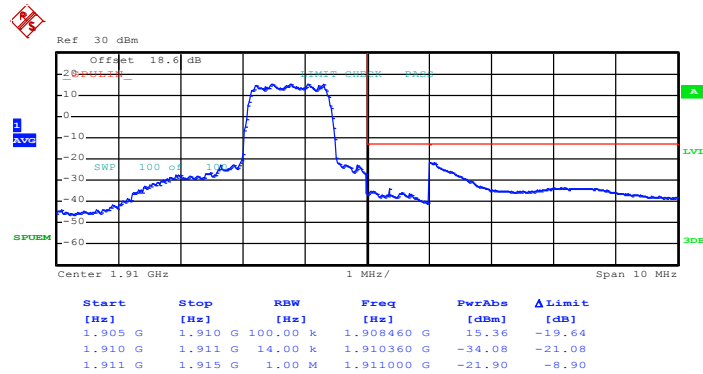

Date: 10.AUG.2014 15:01:59

## 3.6 Conducted Spurious Emission Measurement

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

### 3.6.4 Test Setup

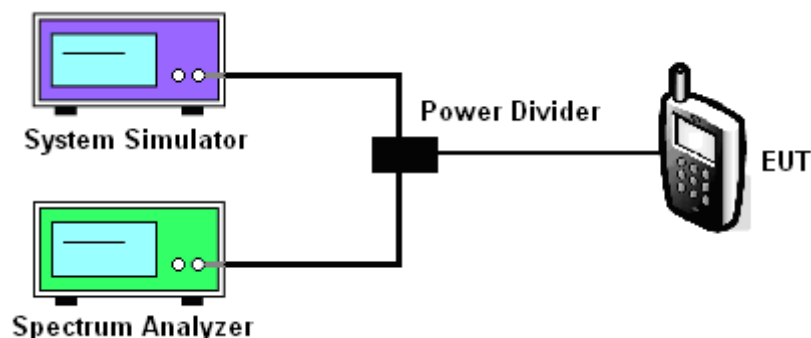


### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH128     |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 824.2 MHz |

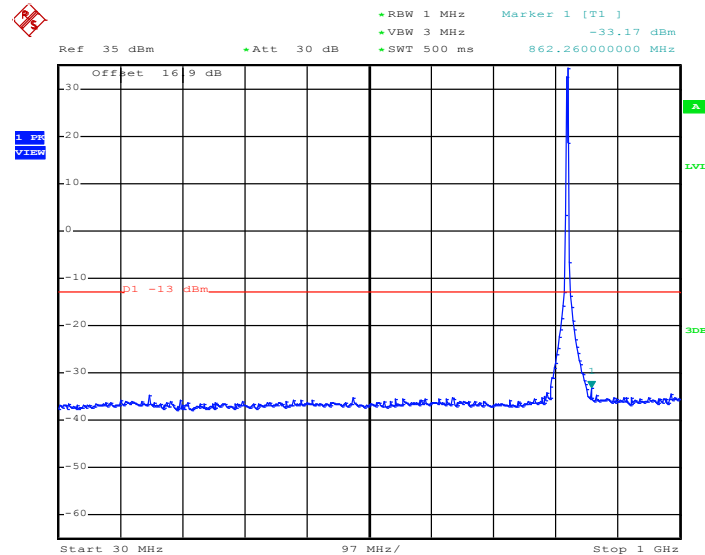**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


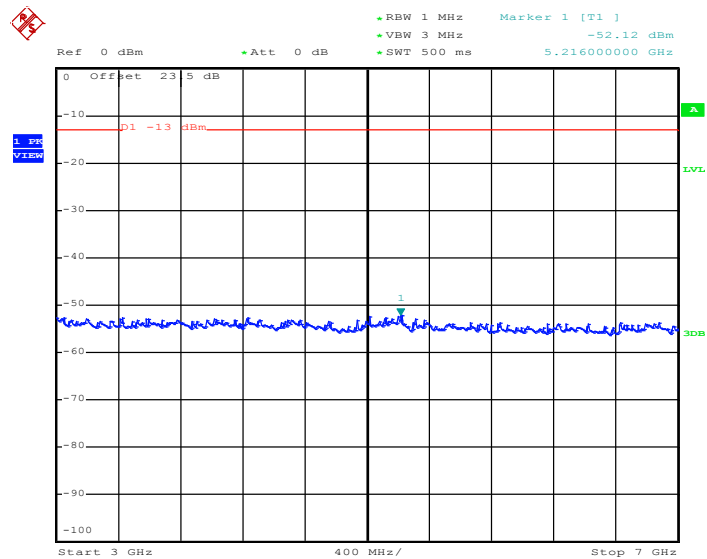
Date: 4.AUG.2014 19:52:15

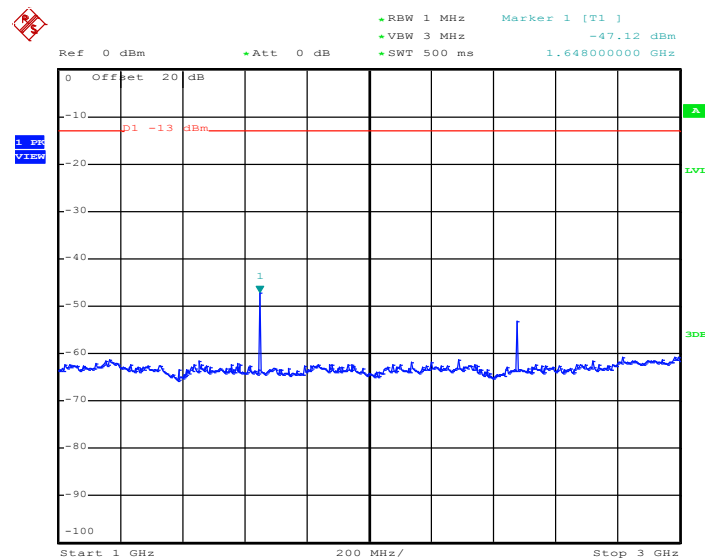**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 4.AUG.2014 19:53:02




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz



Date: 4.AUG.2014 19:53:11


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

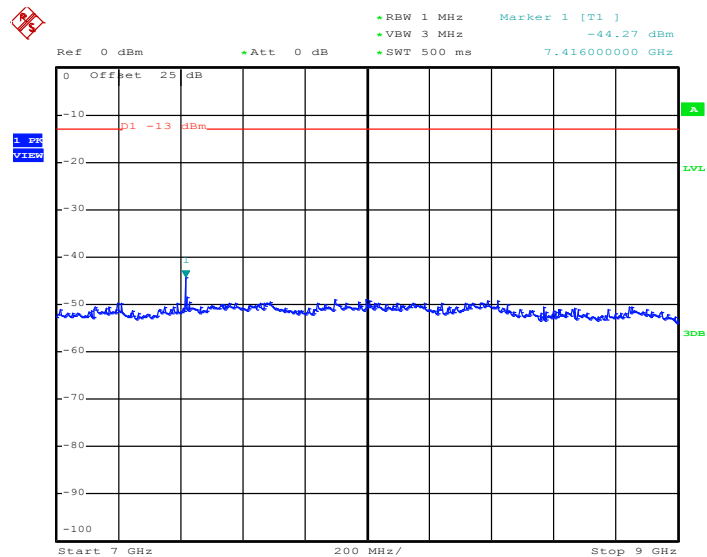


Date: 4.AUG.2014 19:53:19



|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH189     |
| Test Mode : | GPRS class 8 Link (GMSK) | Frequency : | 836.4 MHz |

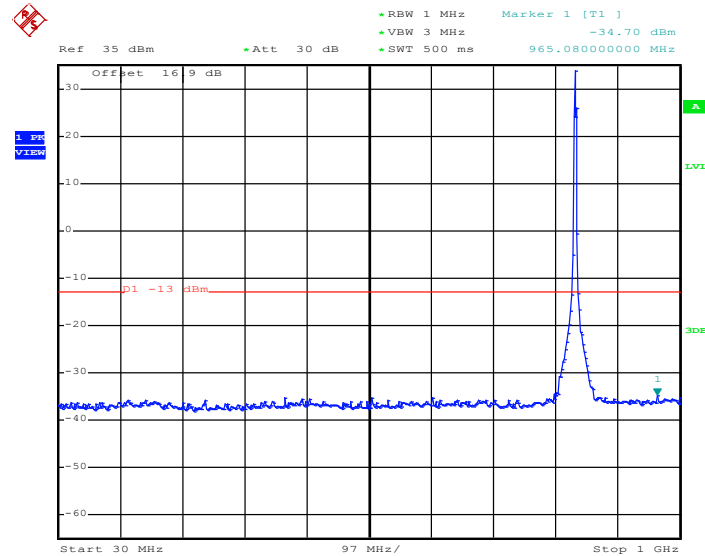**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 4.AUG.2014 19:56:01

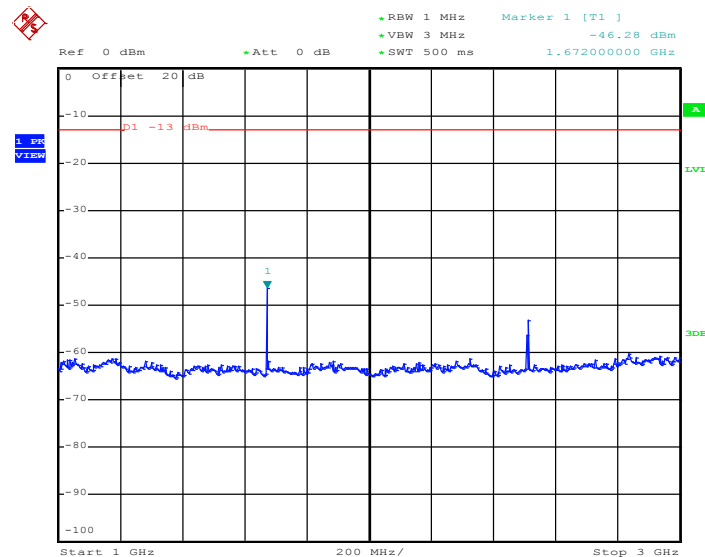**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 4.AUG.2014 19:55:50




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

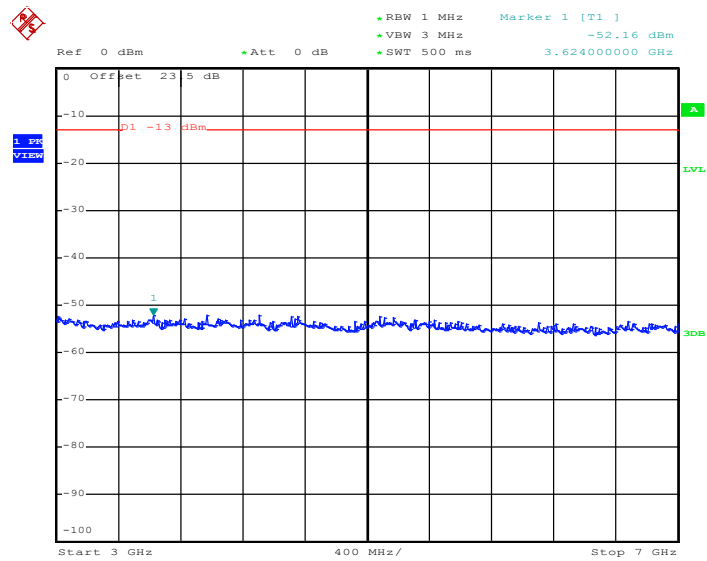

Date: 4.AUG.2014 19:55:59


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

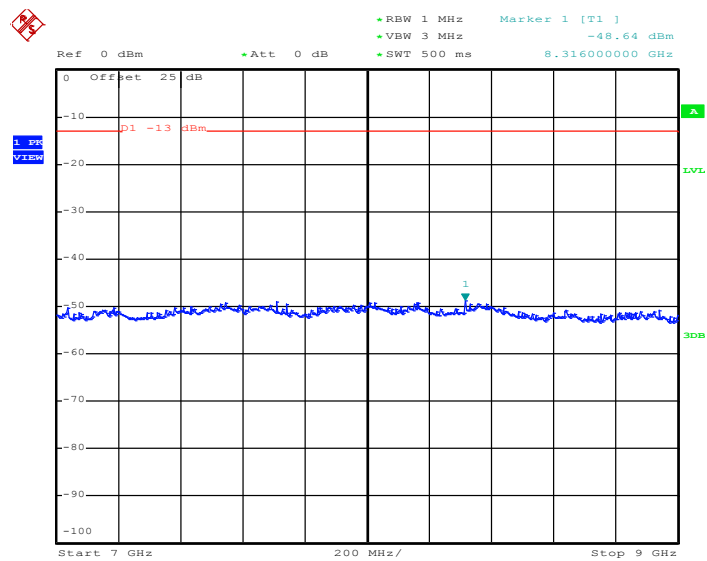

Date: 4.AUG.2014 19:56:07


|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH251     |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 848.8 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

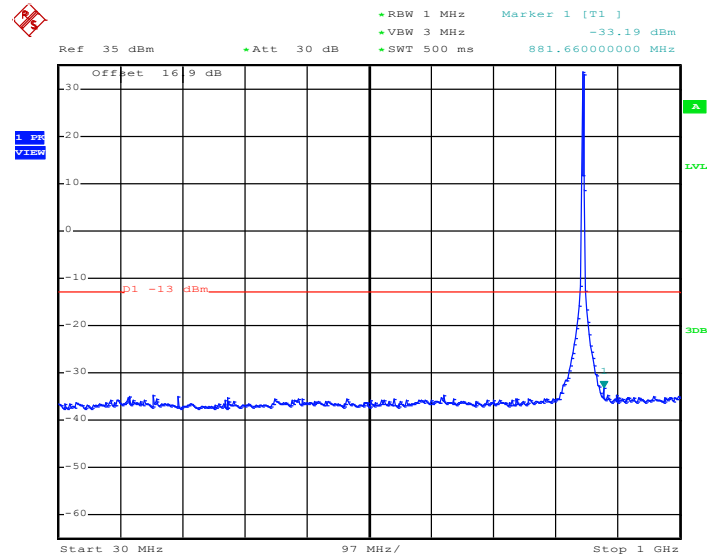


Date: 4.AUG.2014 19:59:21


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

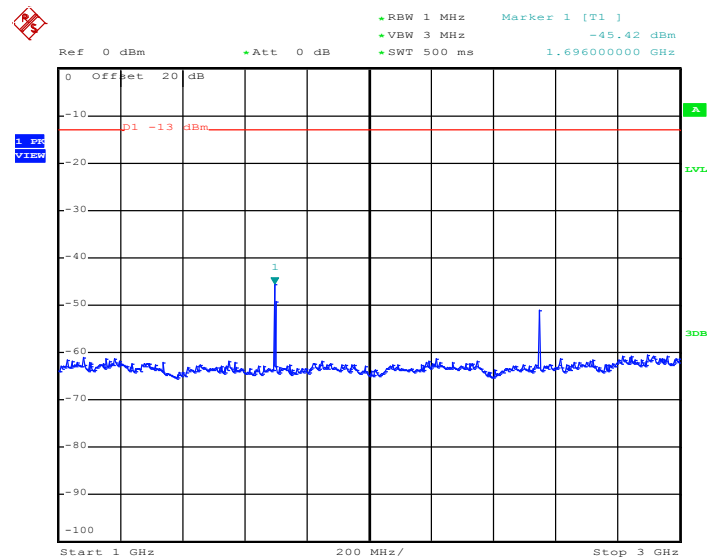

Date: 4.AUG.2014 19:59:57

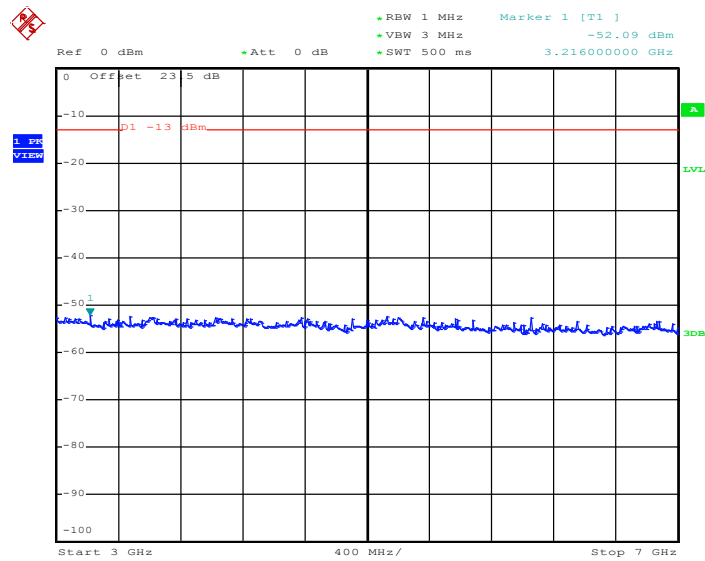
**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


Date: 4.AUG.2014 20:00:06

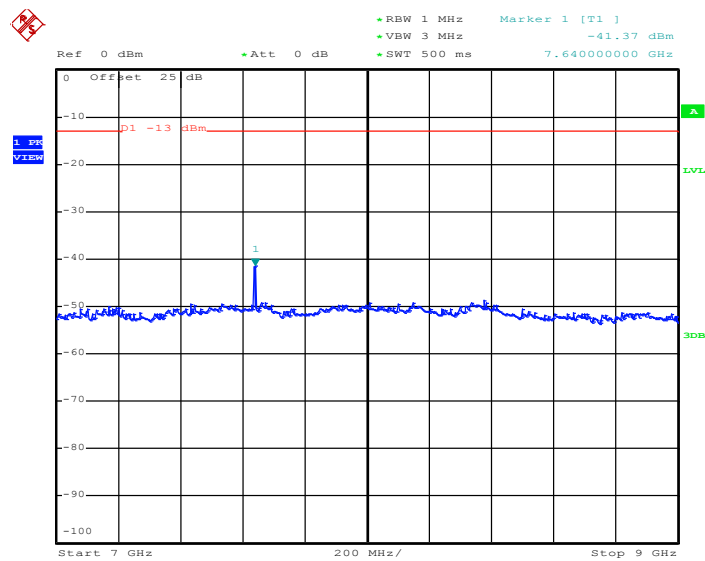
**Conducted Spurious Emission Plot between 7GHz ~ 9GHz**


Date: 4.AUG.2014 20:00:14


|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH128     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 824.2 MHz |

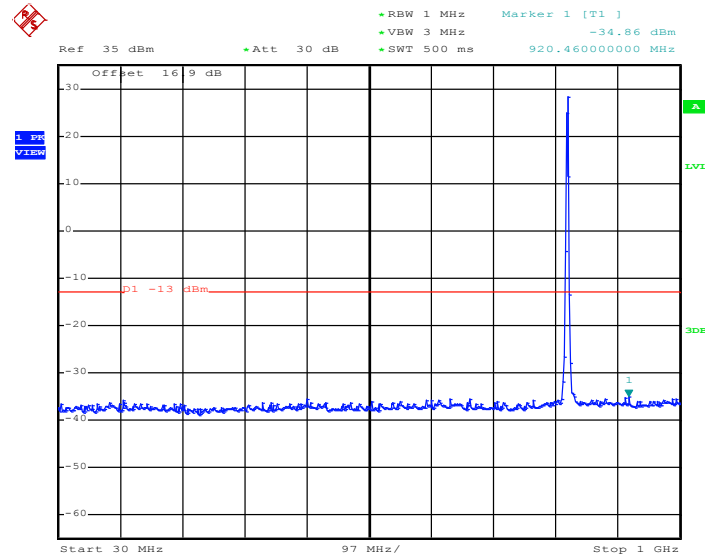**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


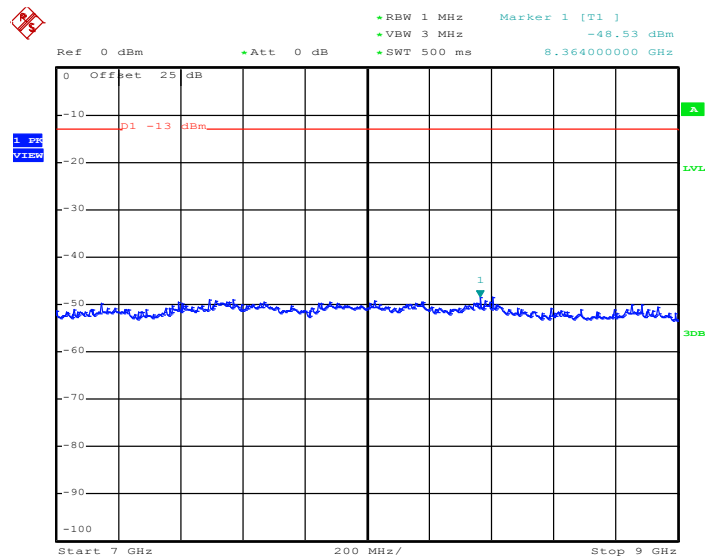
Date: 5.AUG.2014 09:39:38

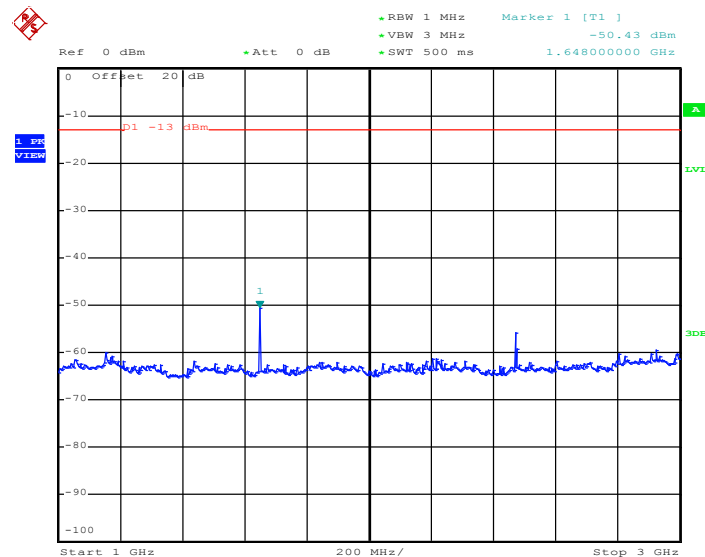**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 5.AUG.2014 09:39:50

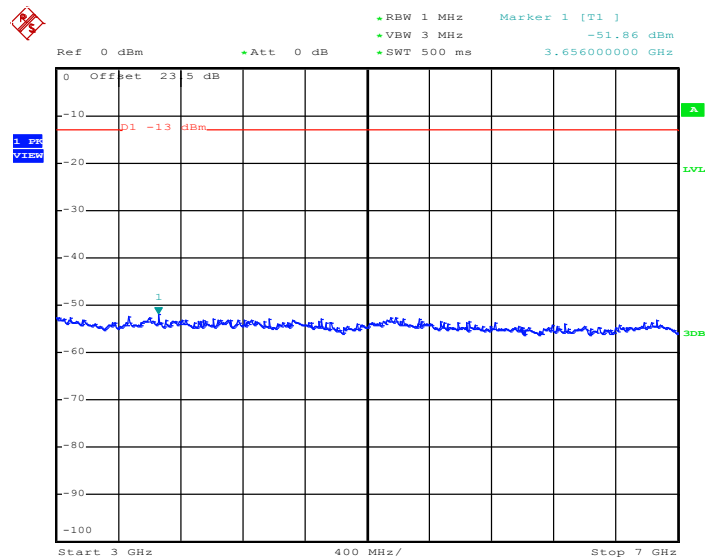**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


Date: 5.AUG.2014 09:39:58


**Conducted Spurious Emission Plot between 7GHz ~ 9GHz**


Date: 5.AUG.2014 09:40:07




|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH189     |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 836.4 MHz |


## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

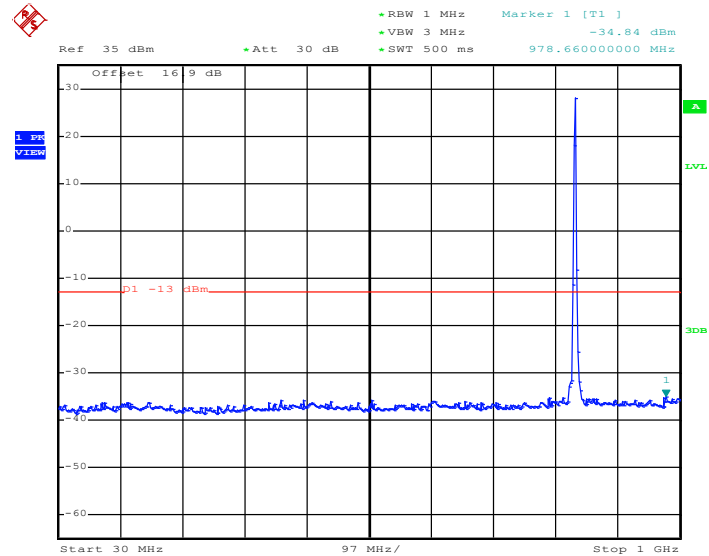


Date: 5.AUG.2014 09:40:58

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

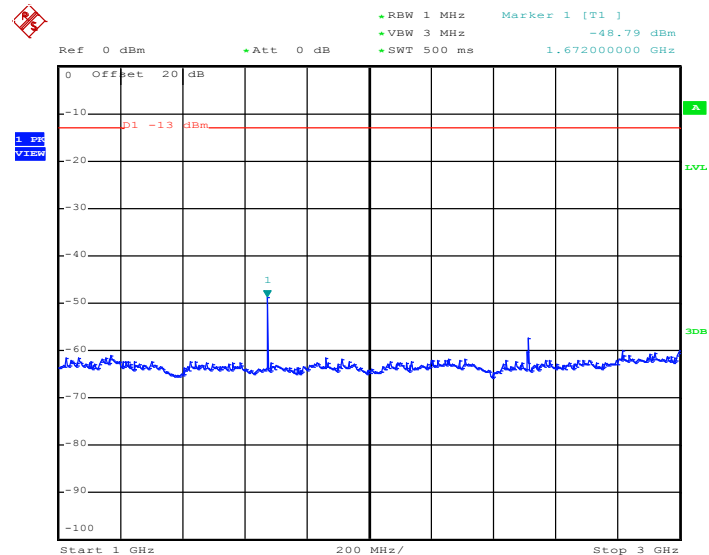

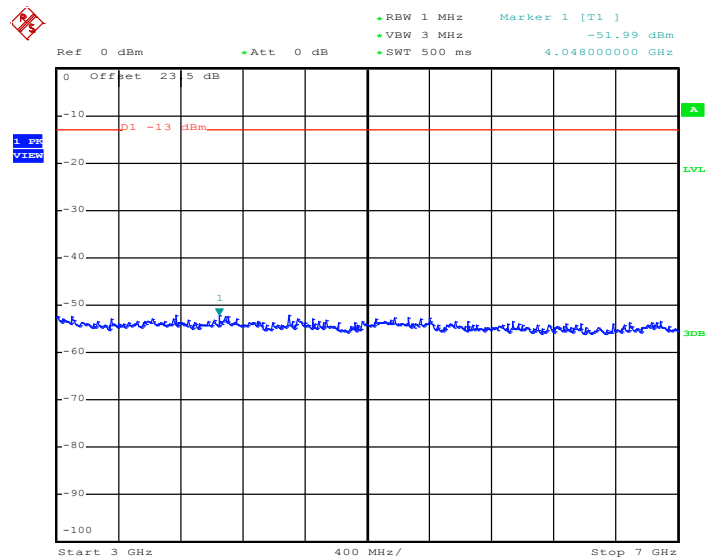**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


Date: 5.AUG.2014 09:41:18

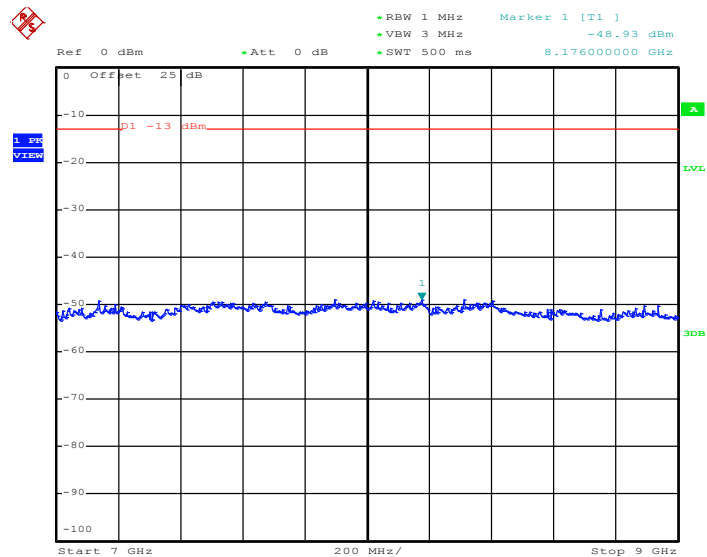
**Conducted Spurious Emission Plot between 7GHz ~ 9GHz**


Date: 5.AUG.2014 09:41:26




|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH251     |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 848.8 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

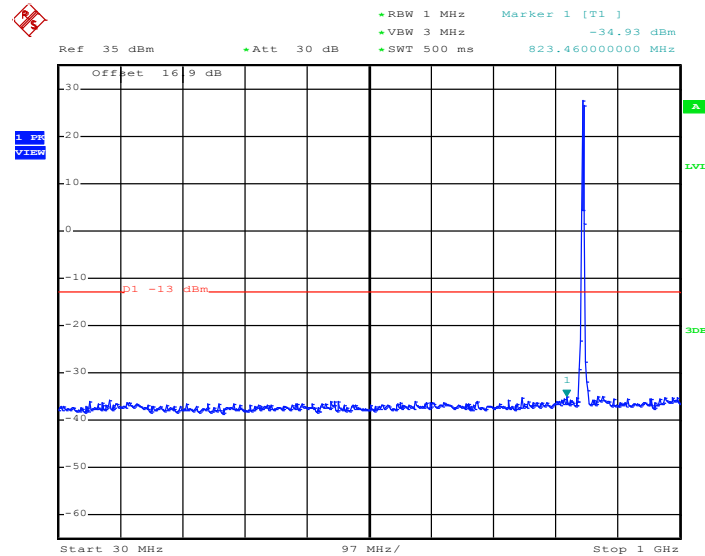


Date: 5.AUG.2014 09:46:43


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

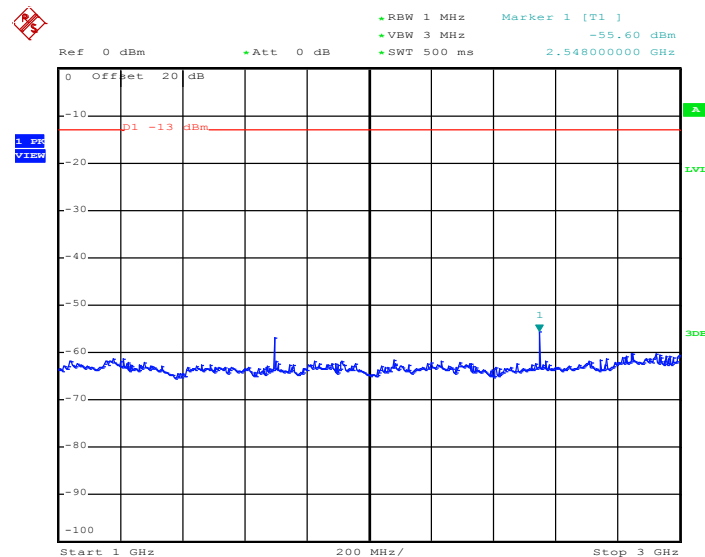

Date: 5.AUG.2014 09:46:54

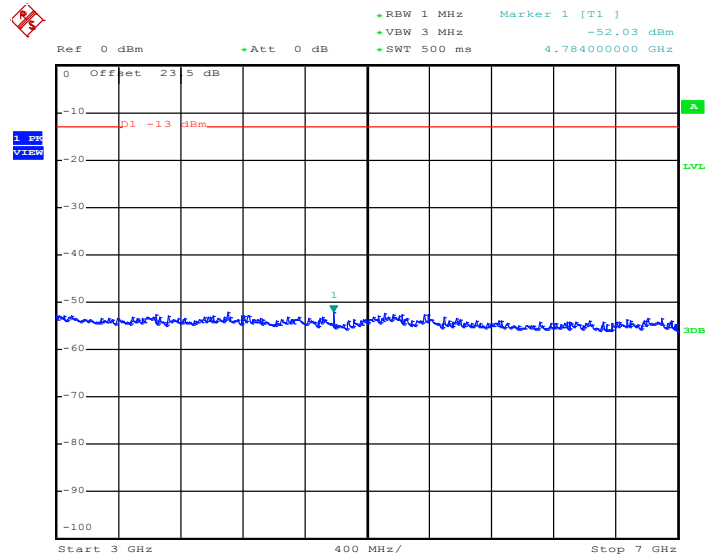**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


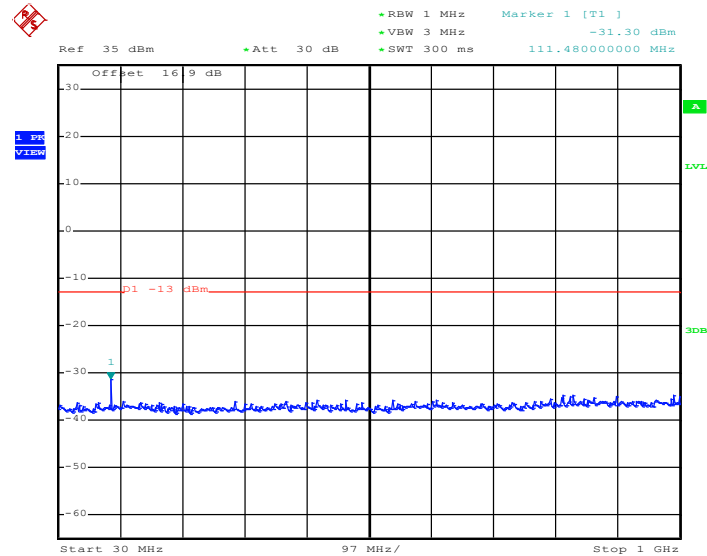
Date: 5.AUG.2014 09:47:02

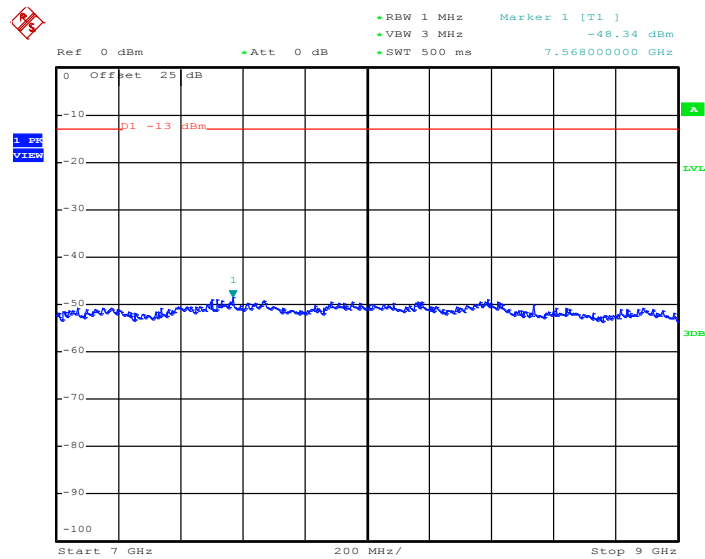**Conducted Spurious Emission Plot between 7GHz ~ 9GHz**


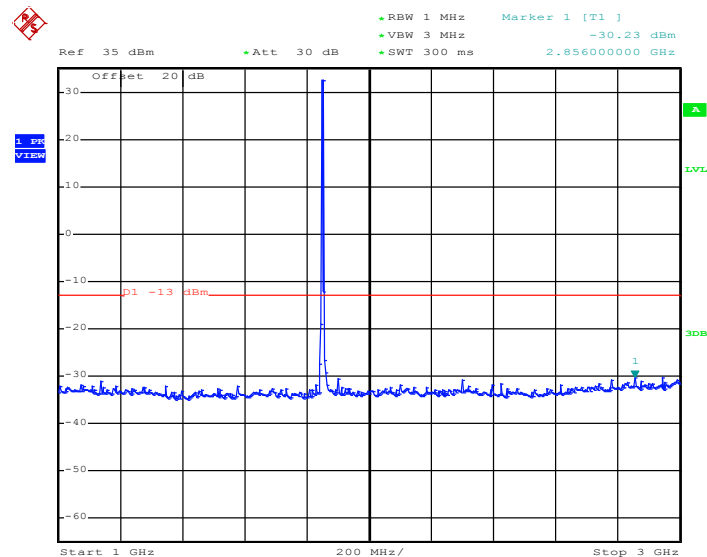
Date: 5.AUG.2014 09:47:10



|             |                          |             |             |
|-------------|--------------------------|-------------|-------------|
| Band :      | GSM1900                  | Channel :   | CH512       |
| Test Mode : | GPRS class 8 Link (GMSK) | Frequency : | 11850.2 MHz |

**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 5.AUG.2014 10:40:36

**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 5.AUG.2014 10:40:44




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

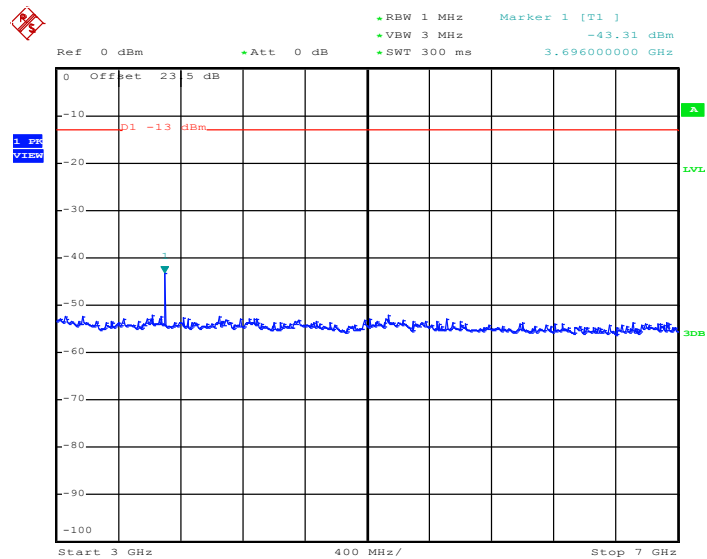

Date: 5.AUG.2014 10:40:54


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

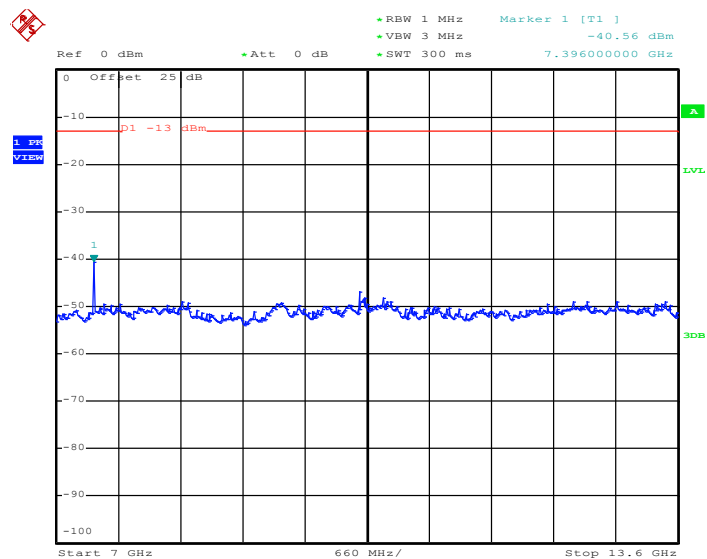

Date: 5.AUG.2014 10:41:03




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

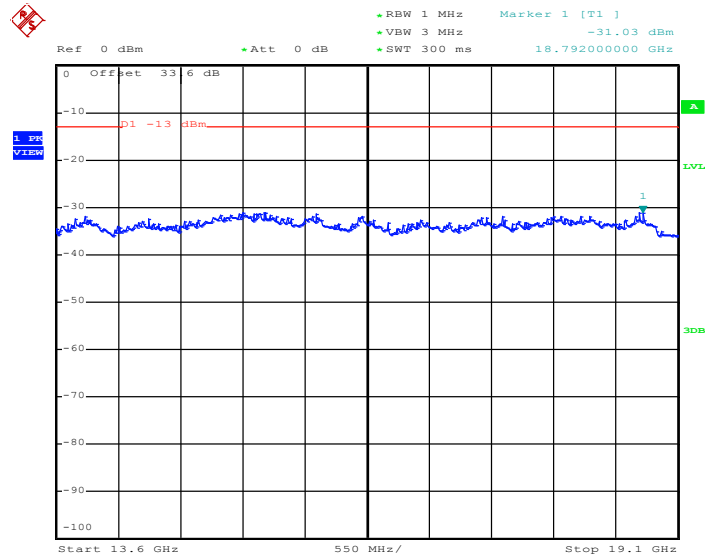

Date: 5.AUG.2014 10:41:11


|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 1880.0 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

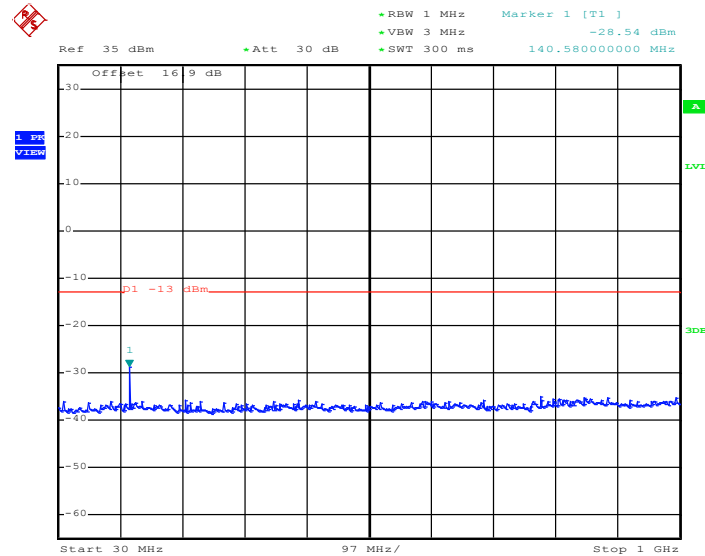


Date: 5.AUG.2014 10:35:54


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

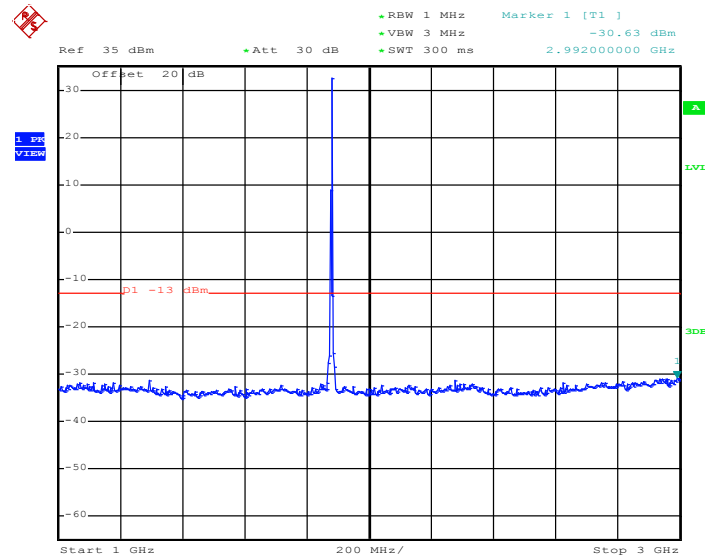

Date: 5.AUG.2014 10:36:02

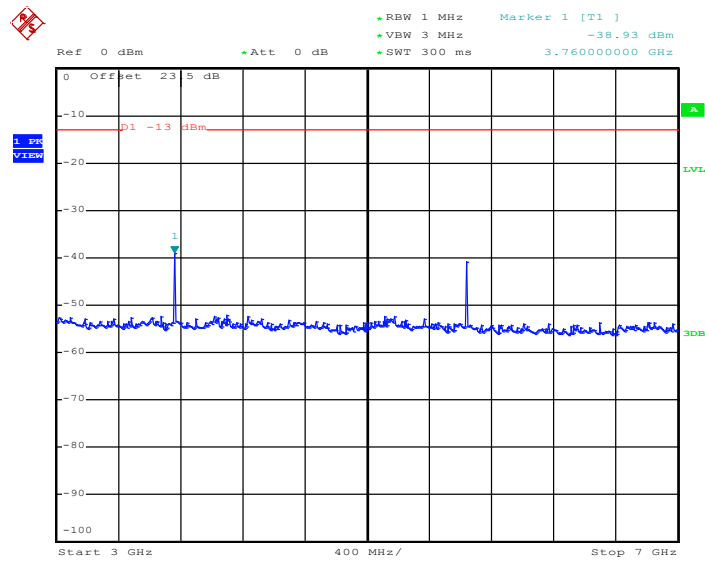**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


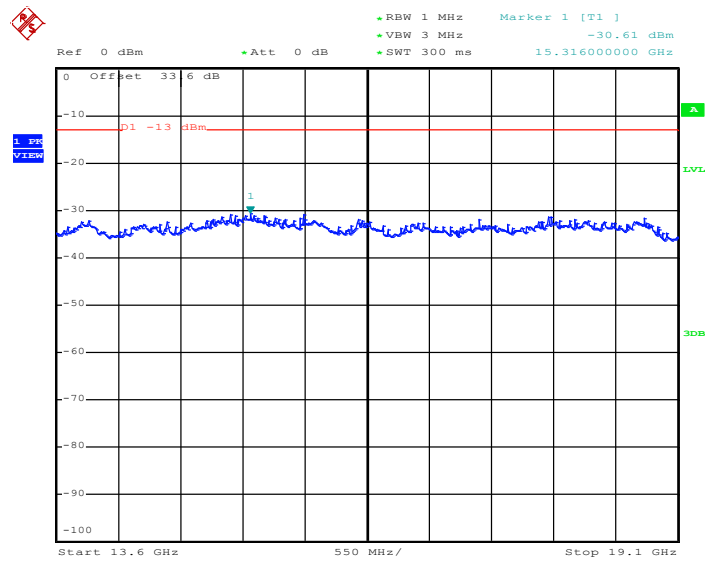
Date: 5.AUG.2014 10:36:13

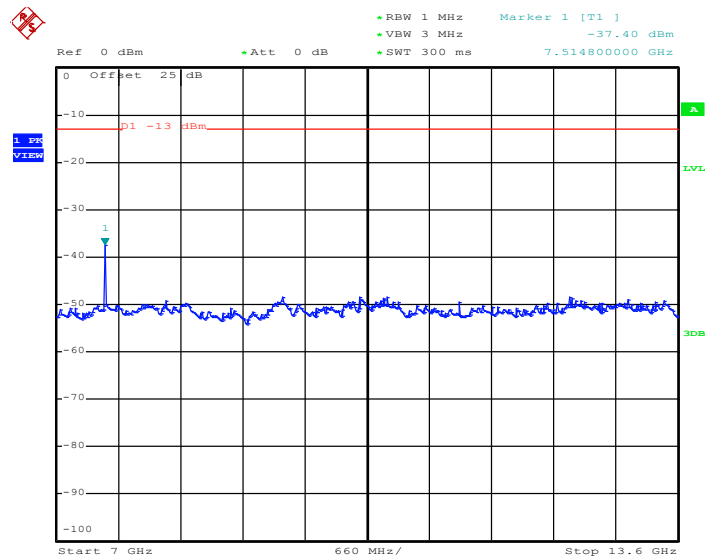**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 5.AUG.2014 10:36:21




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 5.AUG.2014 10:36:30


|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH810      |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 1909.8 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

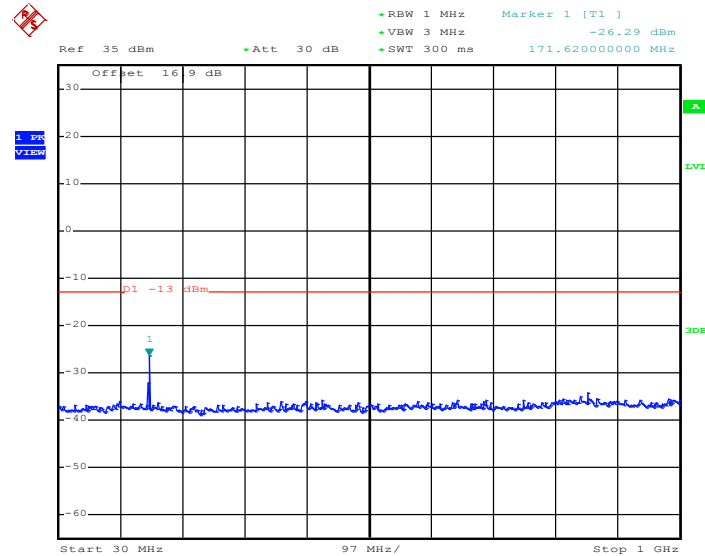

Date: 5.AUG.2014 10:44:38


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

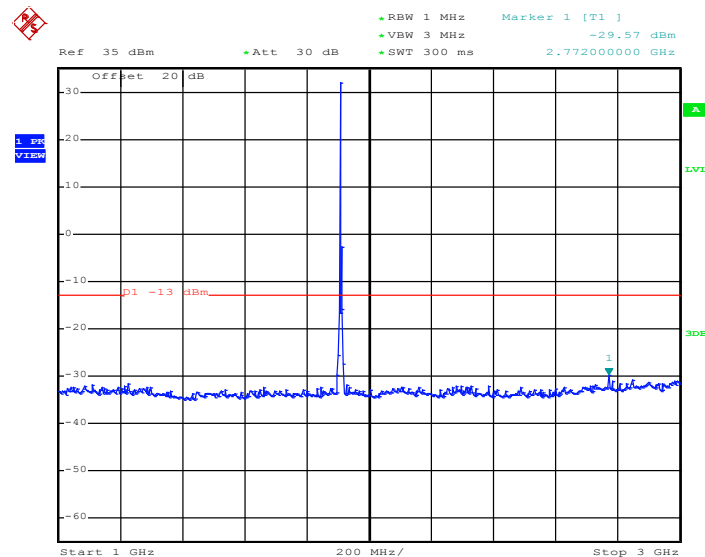

Date: 5.AUG.2014 10:44:47




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

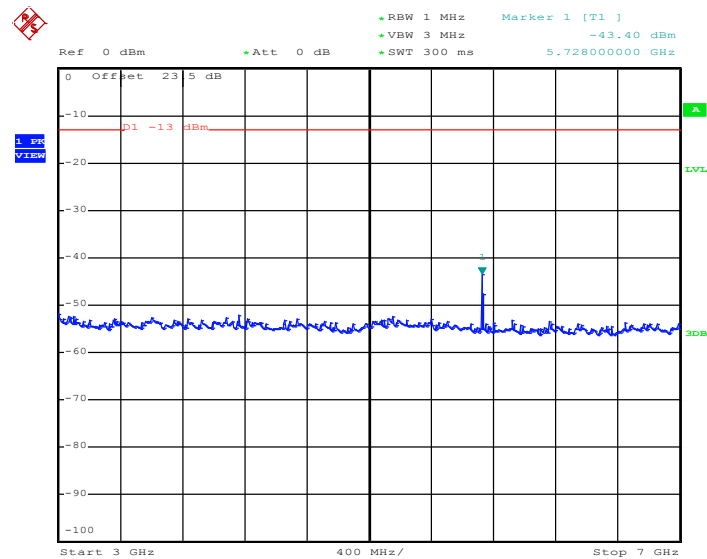

Date: 5.AUG.2014 10:44:57


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

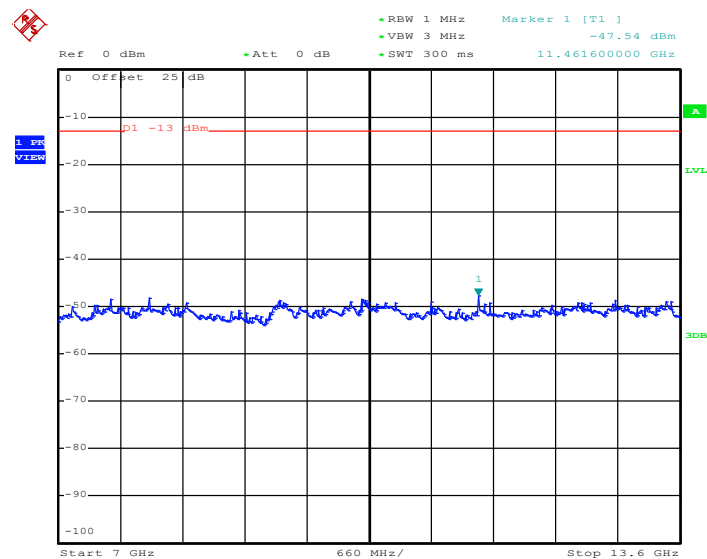

Date: 5.AUG.2014 10:45:05



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

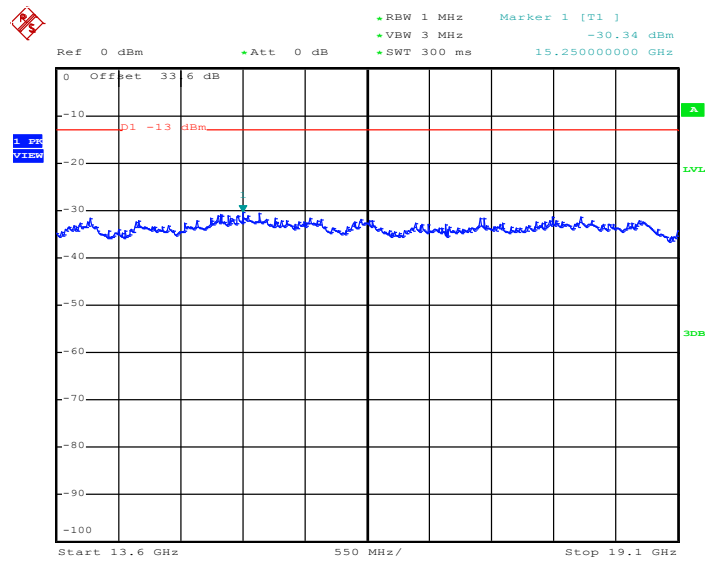


Date: 5.AUG.2014 10:45:14




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH512      |
| Test Mode : | EDGE class 8 Link (GMSK) | Frequency : | 1850.2 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

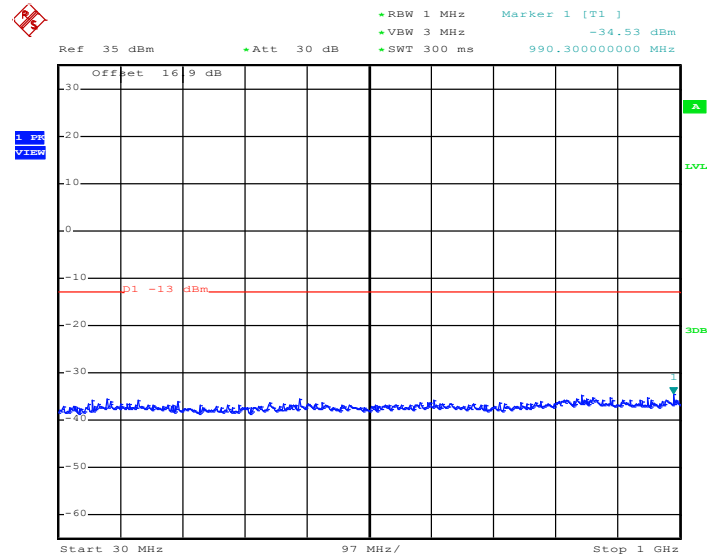


Date: 5.AUG.2014 11:21:09


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

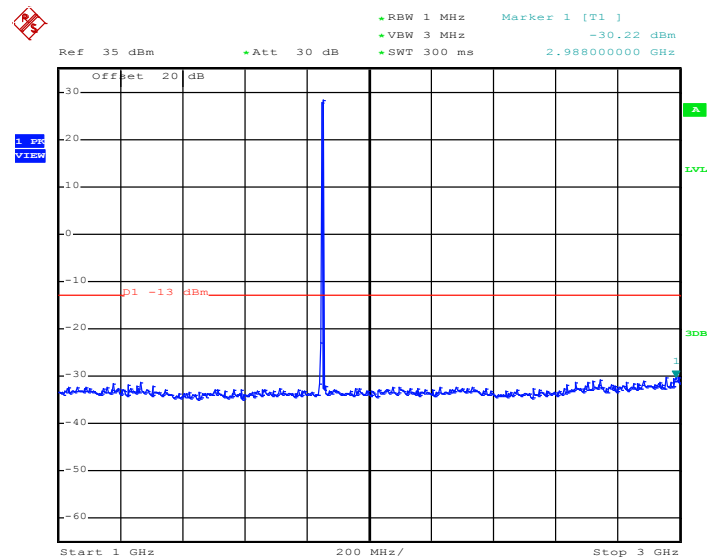

Date: 5.AUG.2014 11:21:17

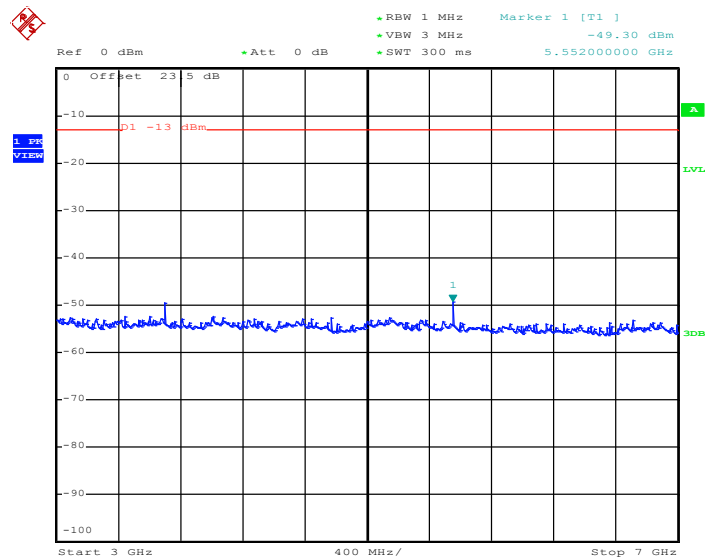**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


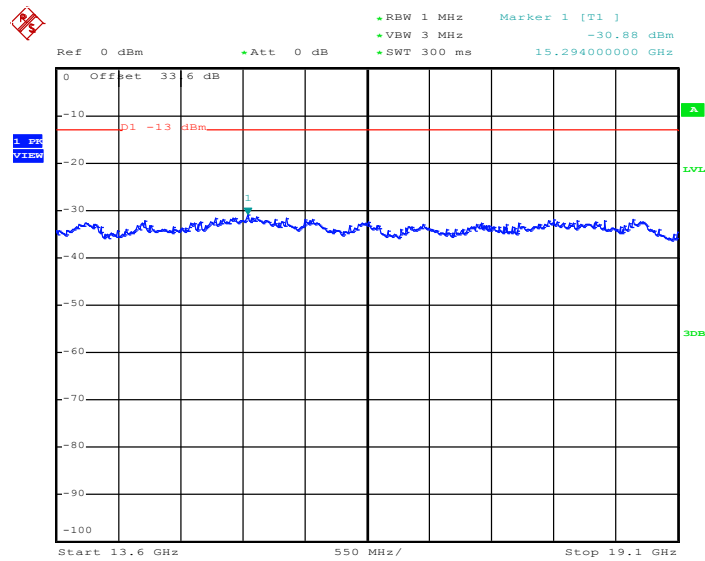
Date: 5.AUG.2014 11:21:28

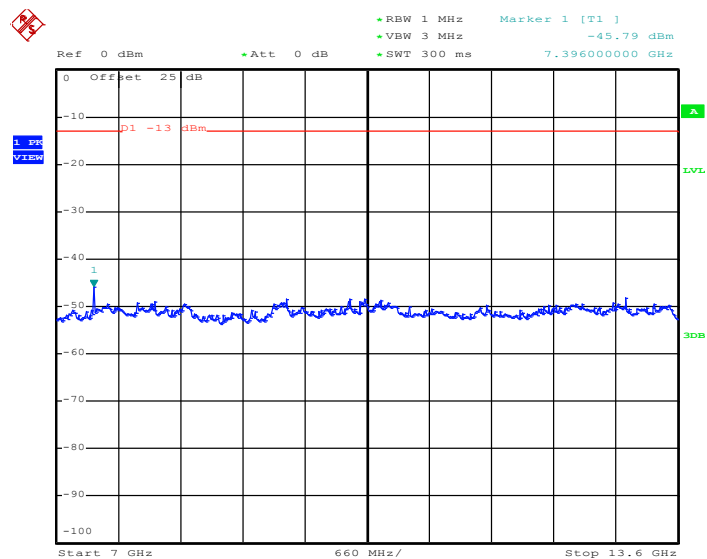**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 5.AUG.2014 11:21:36




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 5.AUG.2014 11:21:44


|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | GPRS class 8 Link (GMSK) | <b>Frequency :</b> | 1880.0 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

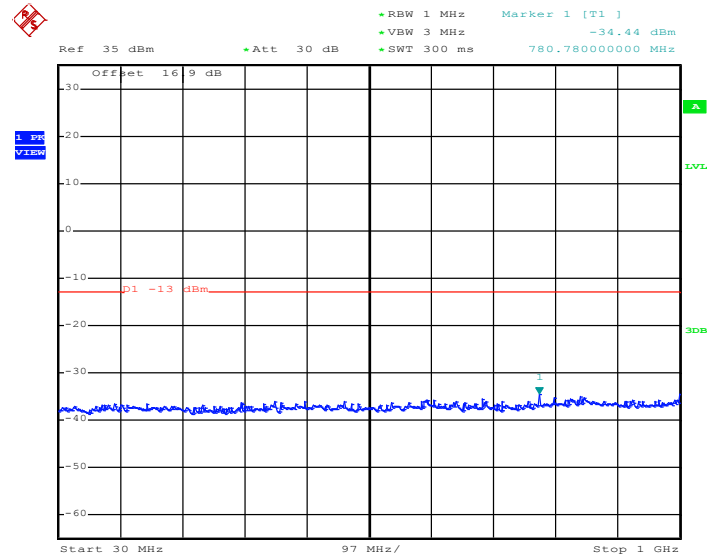

Date: 5.AUG.2014 11:23:23


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

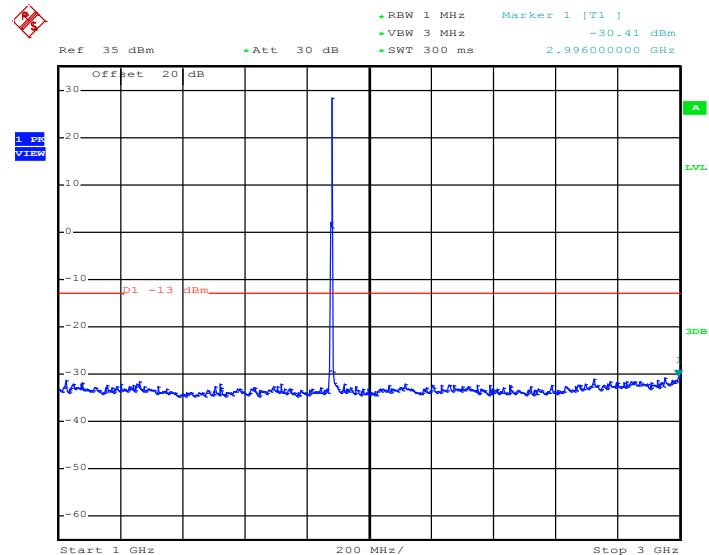

Date: 5.AUG.2014 11:23:32




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

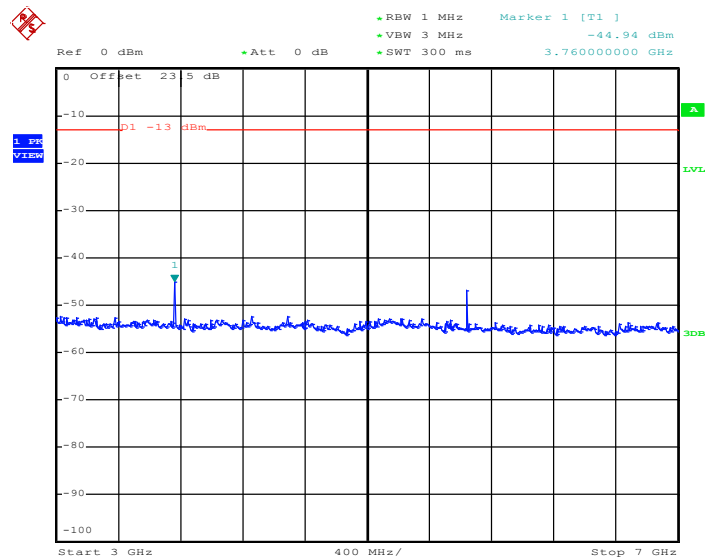

Date: 5.AUG.2014 11:23:44


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

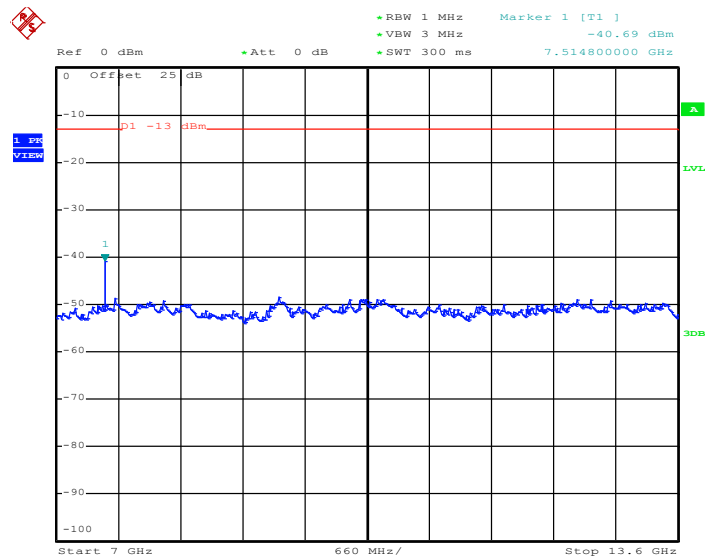

Date: 5.AUG.2014 11:23:52




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

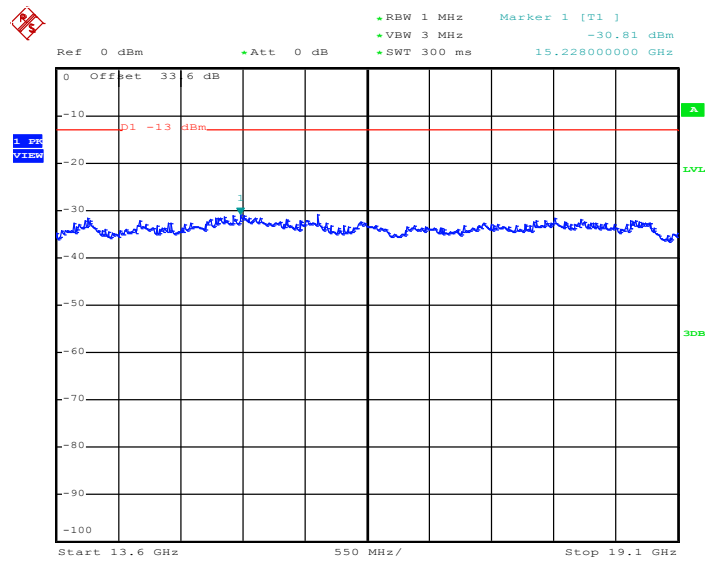


Date: 5.AUG.2014 11:24:00



|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH810      |
| Test Mode : | GPRS class 8 Link (GMSK) | Frequency : | 1909.8 MHz |

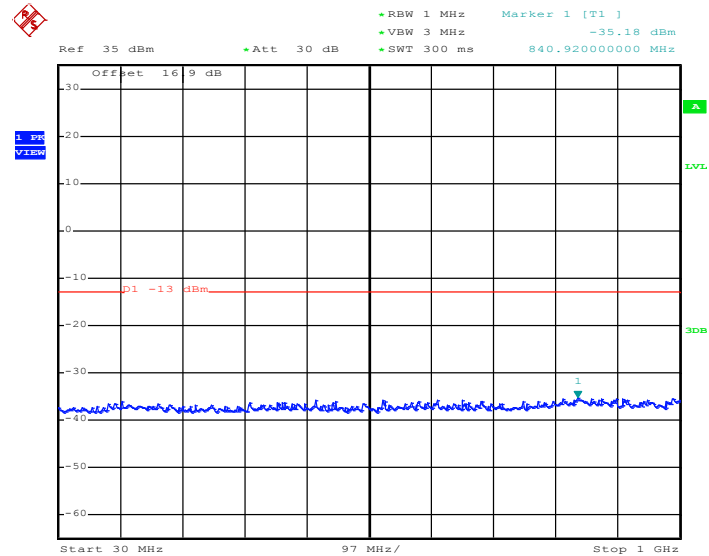**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 5.AUG.2014 11:25:49

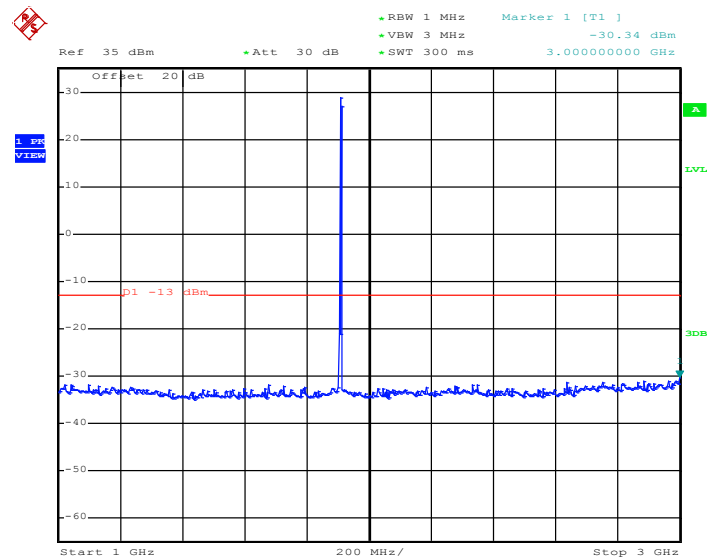**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 5.AUG.2014 11:25:58




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

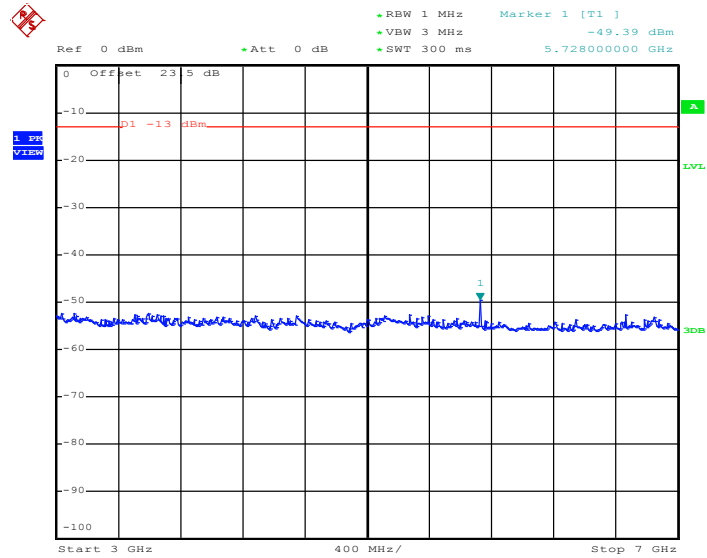

Date: 5.AUG.2014 11:26:08


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

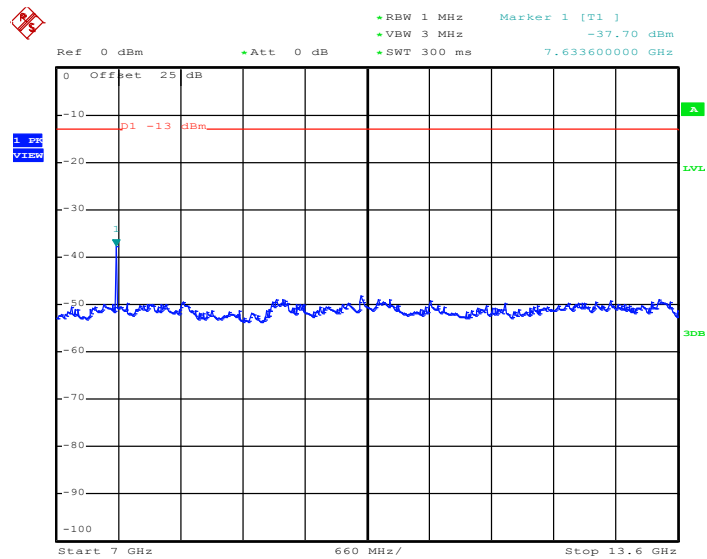

Date: 5.AUG.2014 11:26:17




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

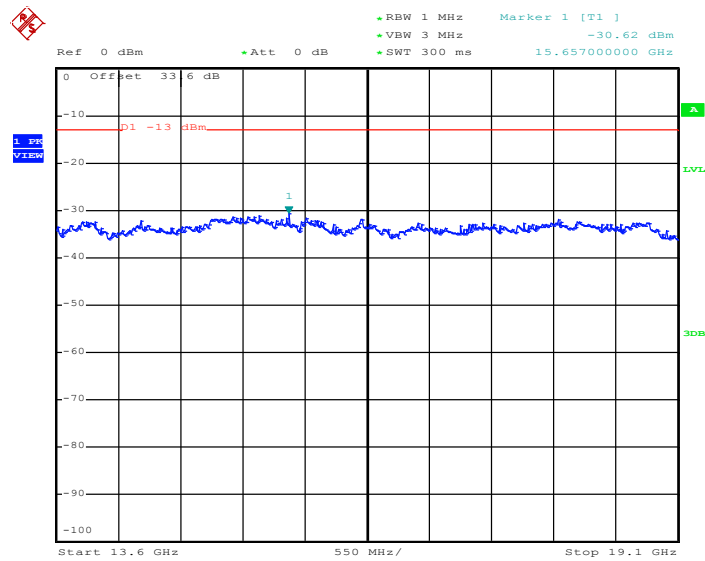

Date: 5.AUG.2014 11:26:25


|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | WCDMA Band V             | <b>Channel :</b>   | CH4132    |
| <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) | <b>Frequency :</b> | 826.4 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

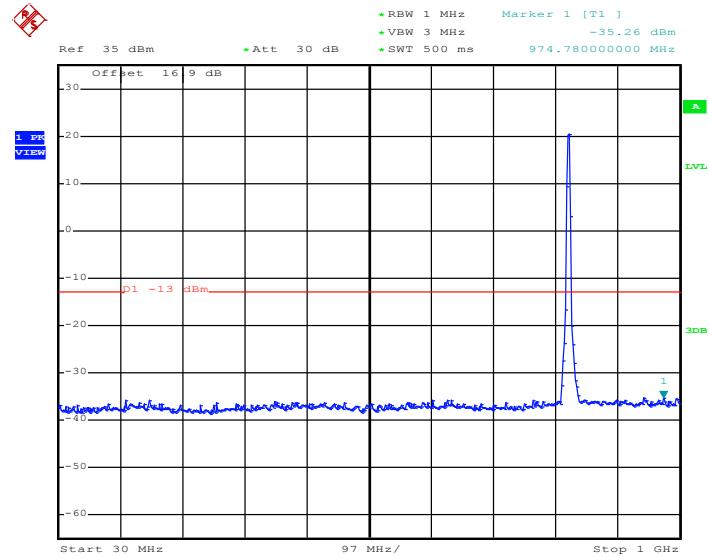


Date: 5.AUG.2014 13:33:48

### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

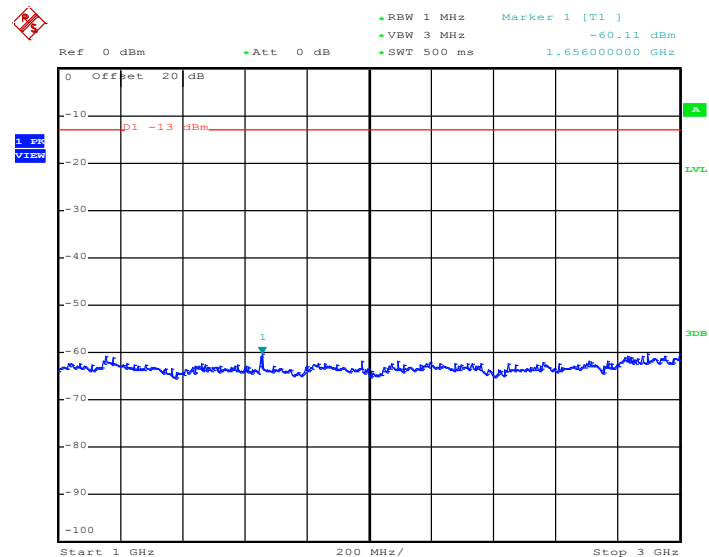


Date: 5.AUG.2014 13:33:59

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

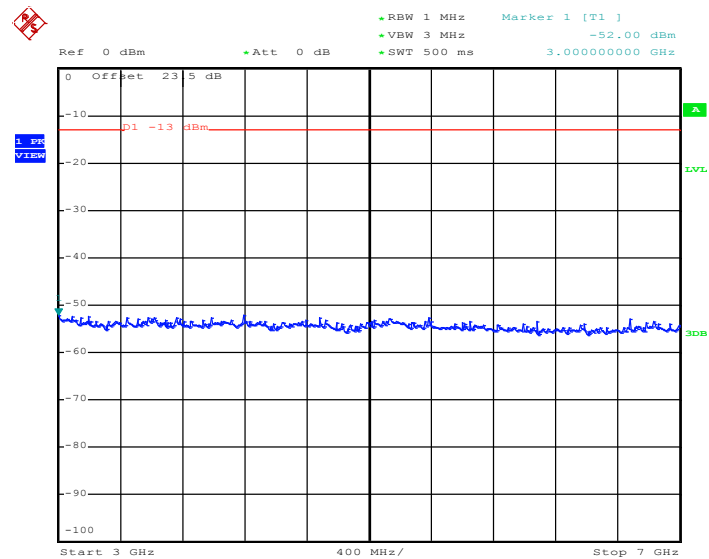

Date: 5.AUG.2014 13:34:07


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

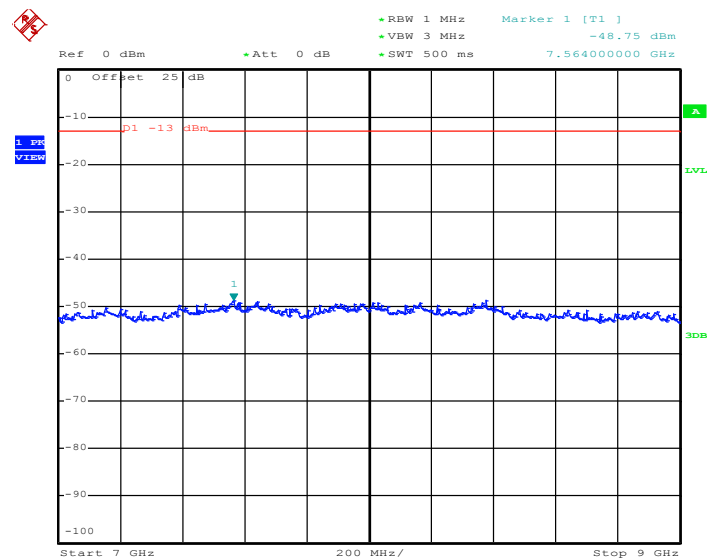


Date: 5.AUG.2014 13:34:16



|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | WCDMA Band V             | Channel :   | CH4182    |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 836.4 MHz |

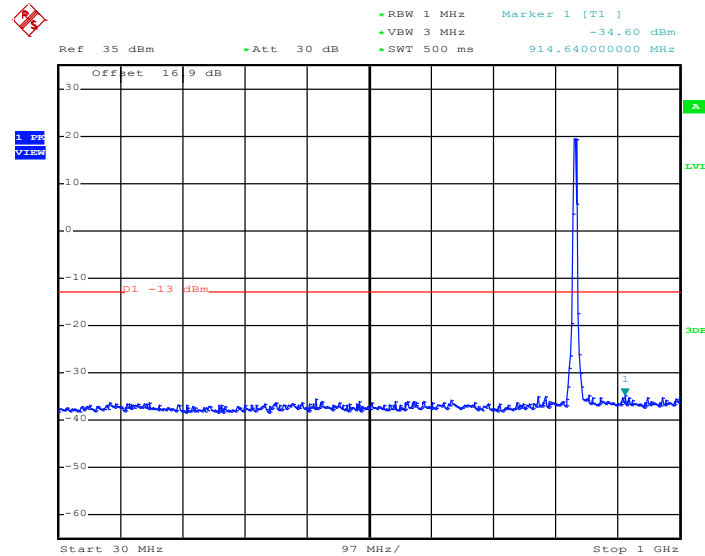**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 5.AUG.2014 13:32:46

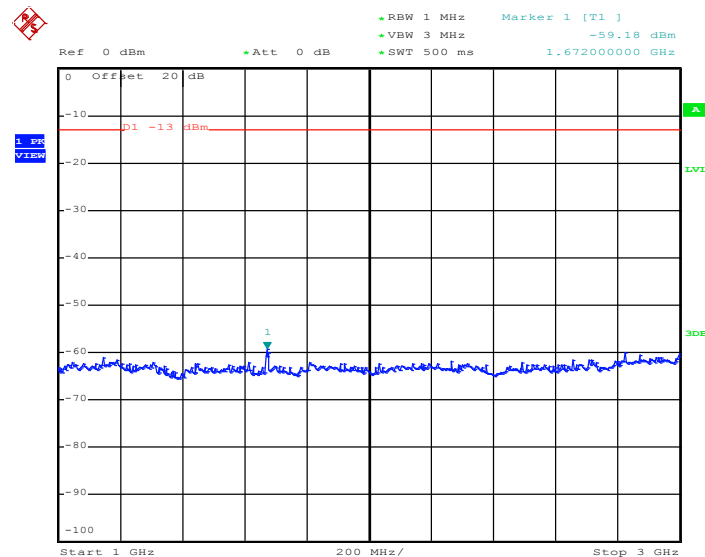**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 5.AUG.2014 13:32:57




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

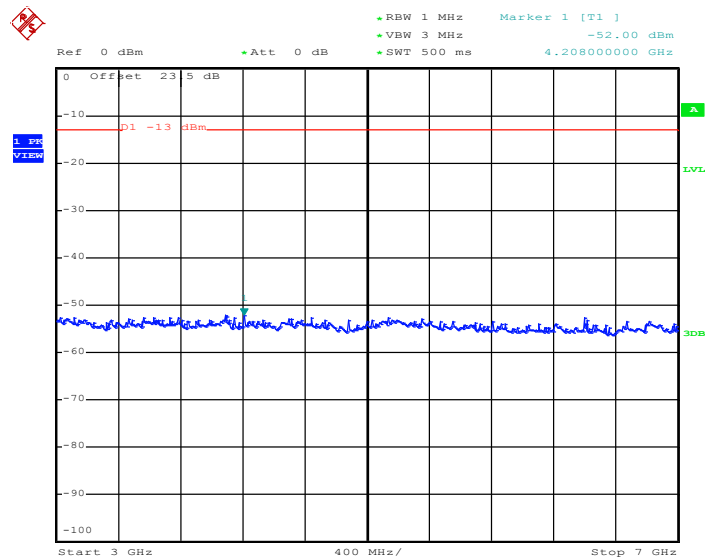

Date: 5.AUG.2014 13:33:05


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

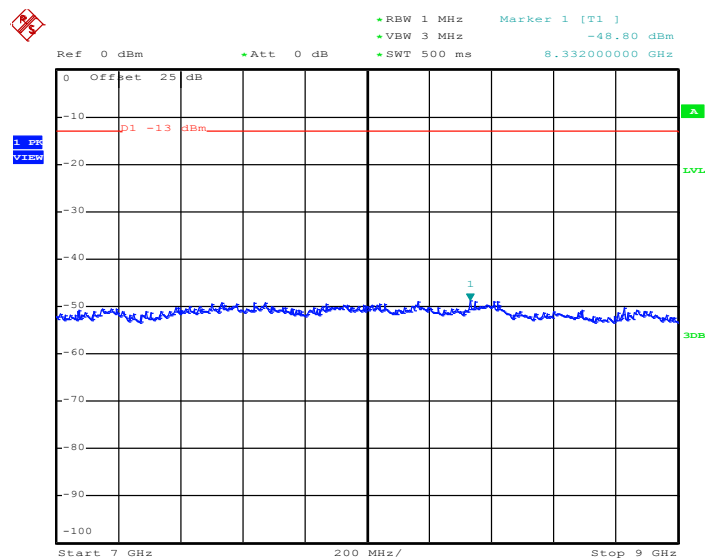


Date: 5.AUG.2014 13:33:13



|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | WCDMA Band V             | Channel :   | CH4233    |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 846.6 MHz |

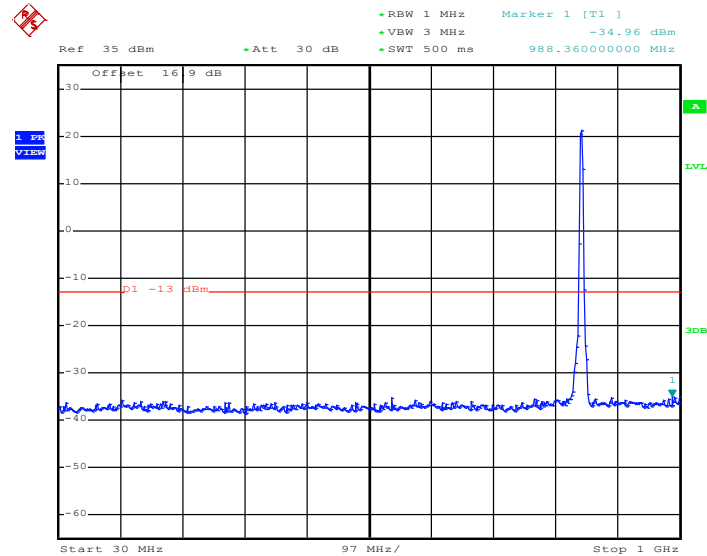**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 5.AUG.2014 13:35:03

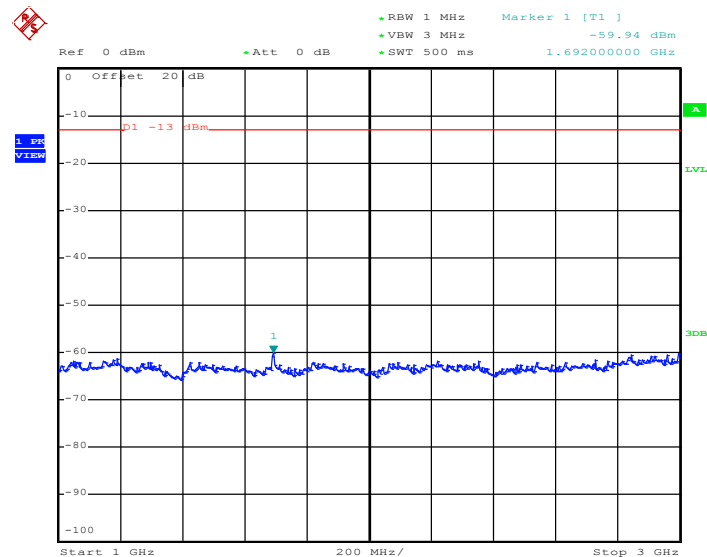**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 5.AUG.2014 13:35:13




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

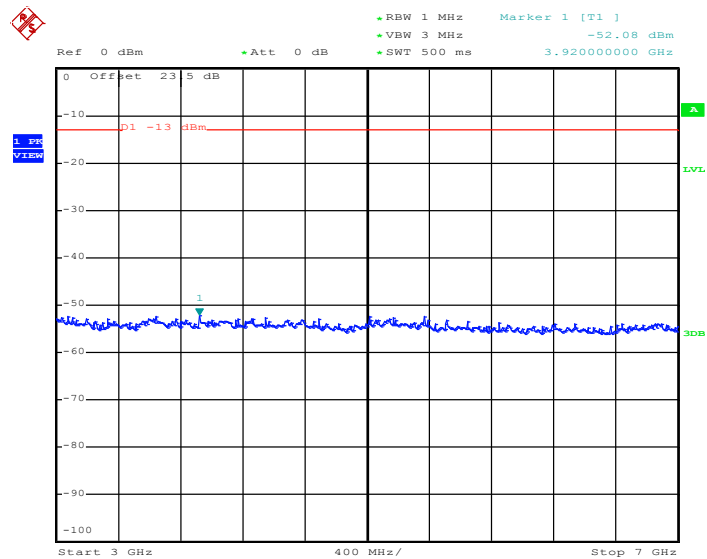

Date: 5.AUG.2014 13:35:22

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

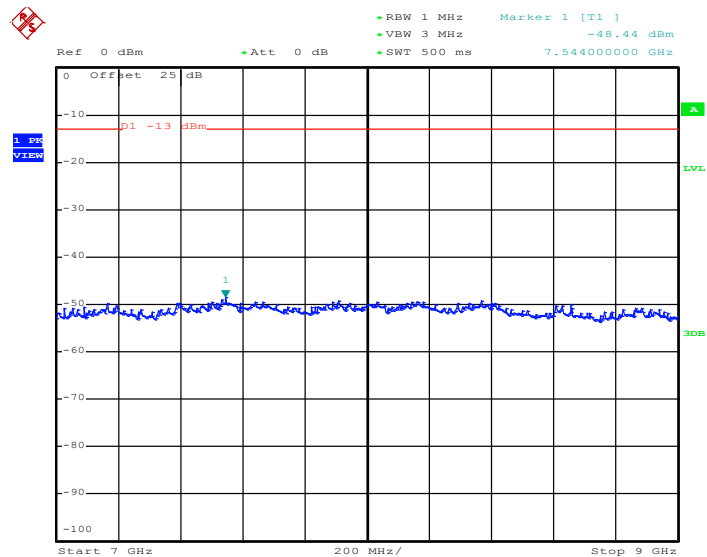

Date: 5.AUG.2014 13:35:30

[illegible]

Ref 35 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 300 ms Marker 1 [T1] -30.47 dBm 2.928000000 GHz

Offset 20 dB

1. dB VIEW


D1 -13 dBm

1

Start 1 GHz 200 MHz/ Stop 3 GHz


Page Number : 113 of 176  
Report Issued Date : Nov. 24, 2014  
Report Version : Rev. 01  
Report Template No.: BU5-FG22/24 Version 1.1

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

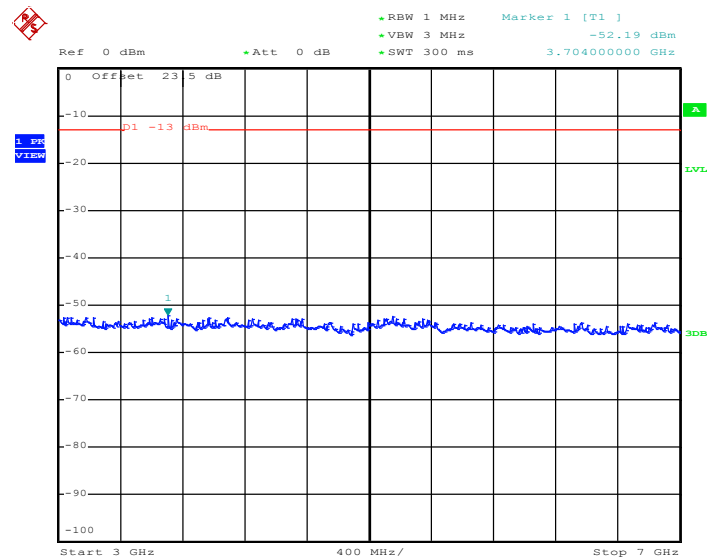

Date: 5.AUG.2014 12:43:52


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

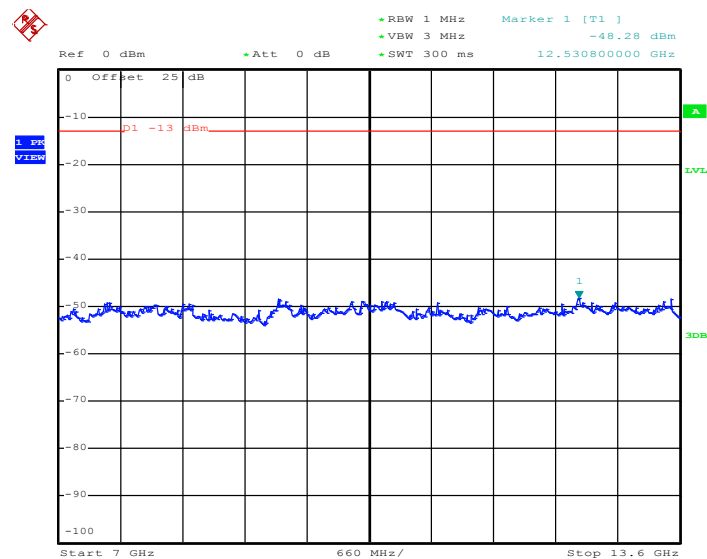

Date: 5.AUG.2014 12:44:01



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

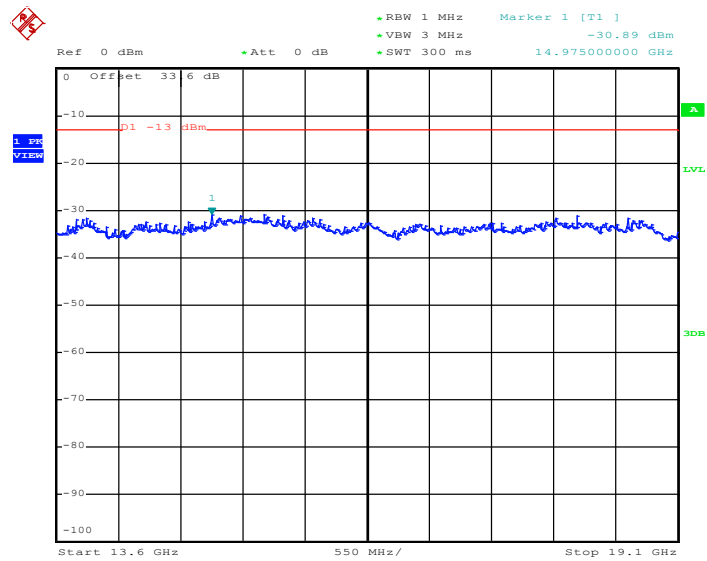


Date: 5.AUG.2014 12:44:09




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band II            | Channel :   | CH9400     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1880.0 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

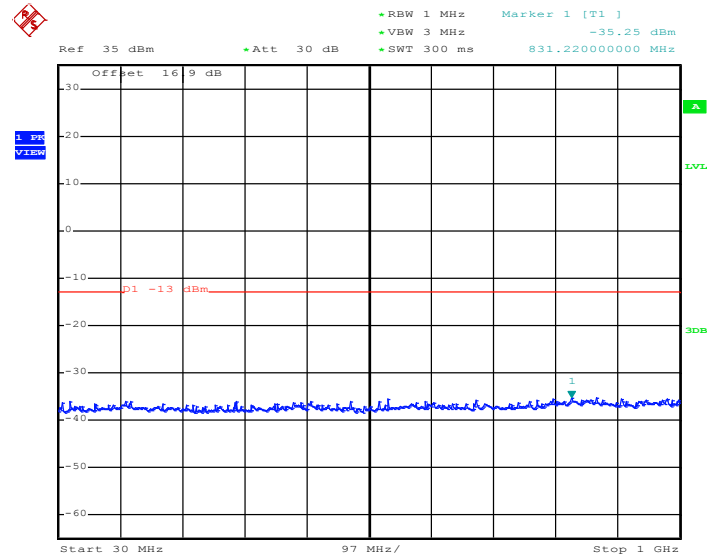


Date: 5.AUG.2014 12:42:19


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

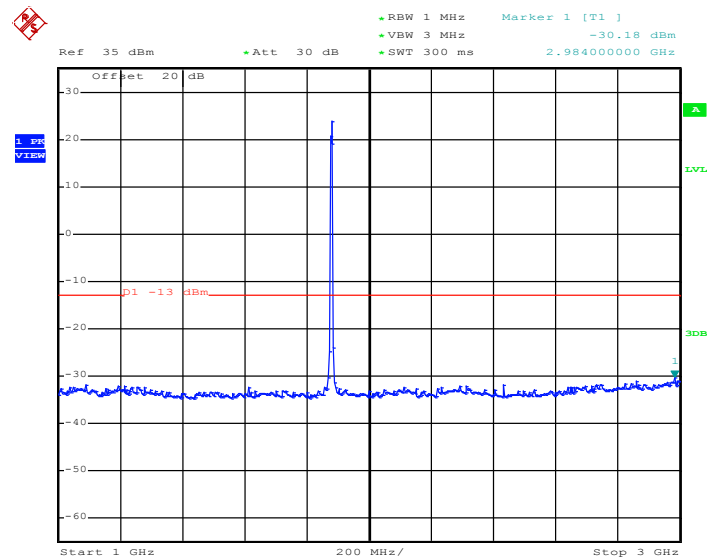

Date: 5.AUG.2014 12:42:27

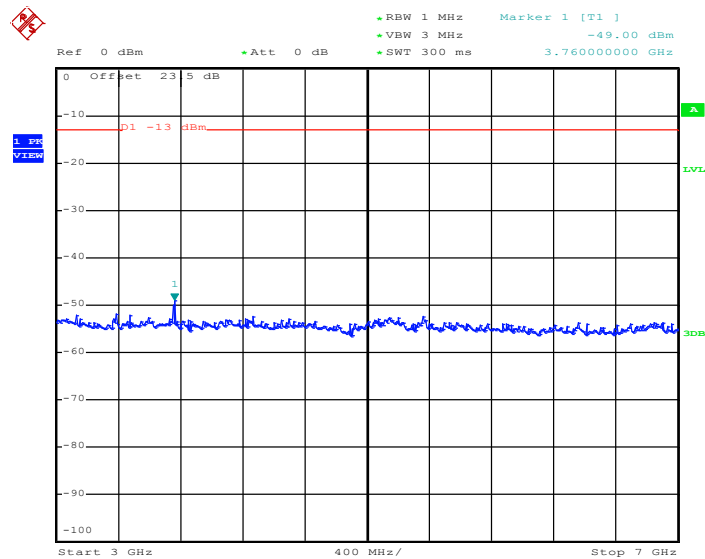**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


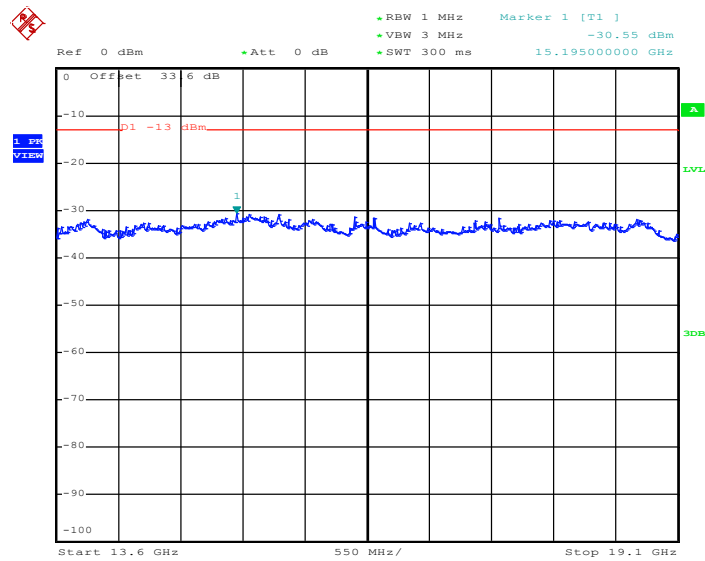
Date: 5.AUG.2014 12:42:39

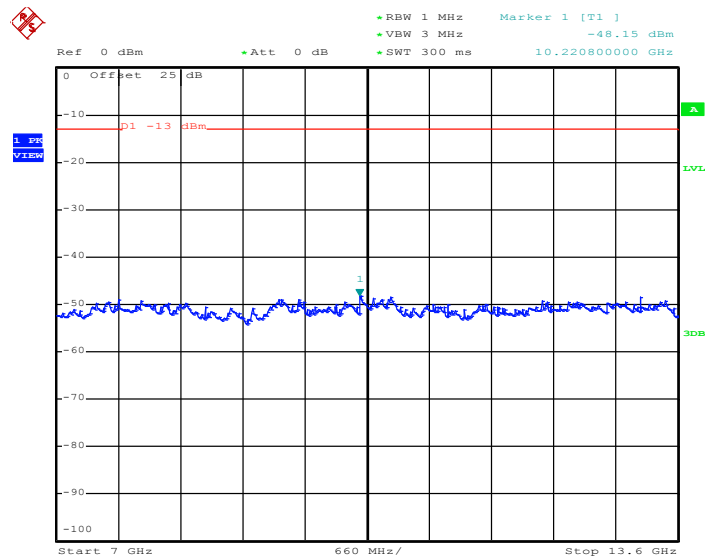**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 5.AUG.2014 12:42:47




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz




Date: 5.AUG.2014 12:42:55




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band II            | Channel :   | CH9538     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1907.6 MHz |

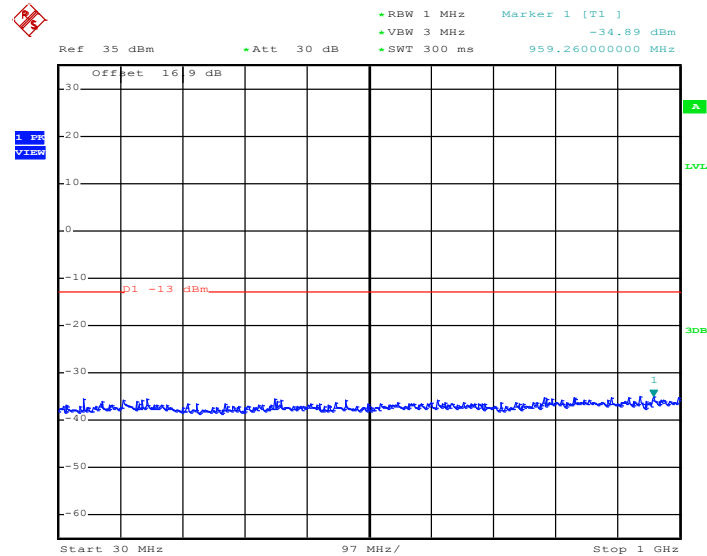**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 5.AUG.2014 12:45:23

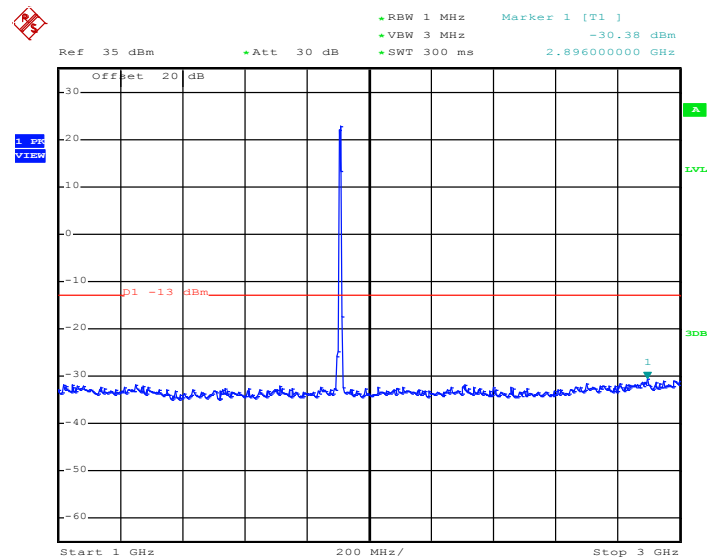**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 5.AUG.2014 12:45:31

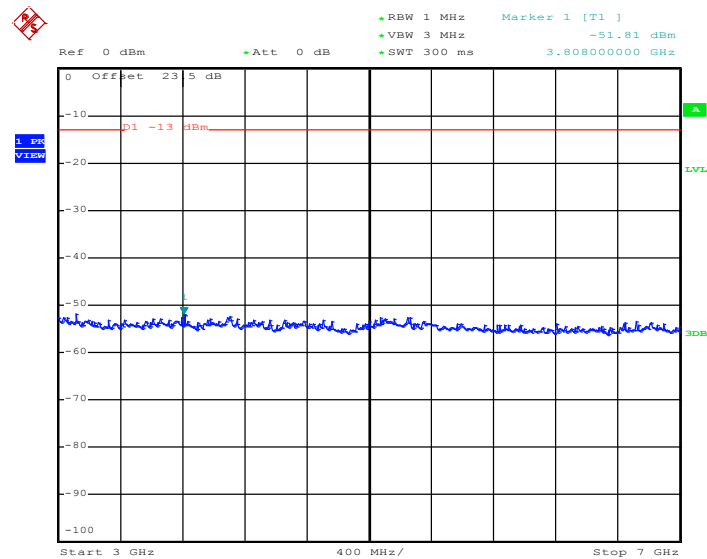**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


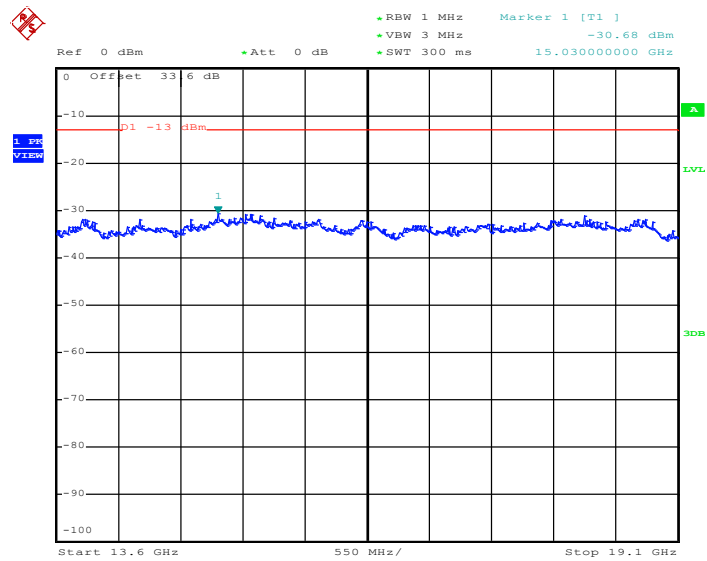
Date: 5.AUG.2014 12:45:44

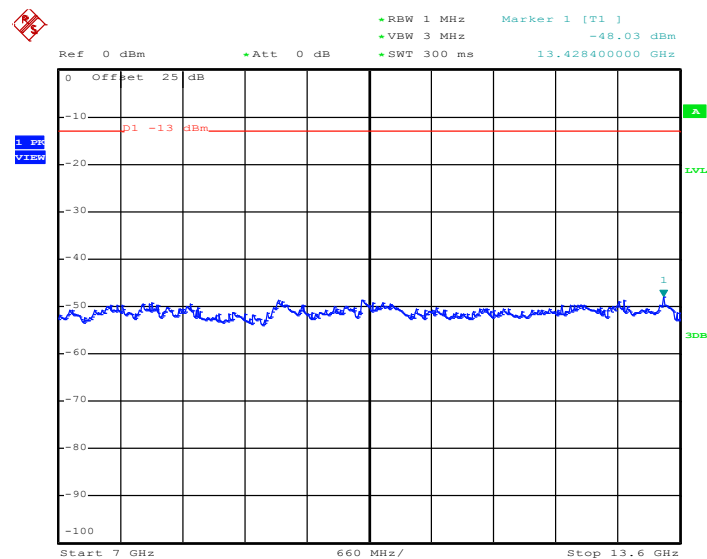**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 5.AUG.2014 12:45:52




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 5.AUG.2014 12:46:01


|                    |                       |                    |           |
|--------------------|-----------------------|--------------------|-----------|
| <b>Band :</b>      | CDMA2000 BC0          | <b>Channel :</b>   | CH1013    |
| <b>Test Mode :</b> | 1xRTT_RC3+SO32 (QPSK) | <b>Frequency :</b> | 824.7 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

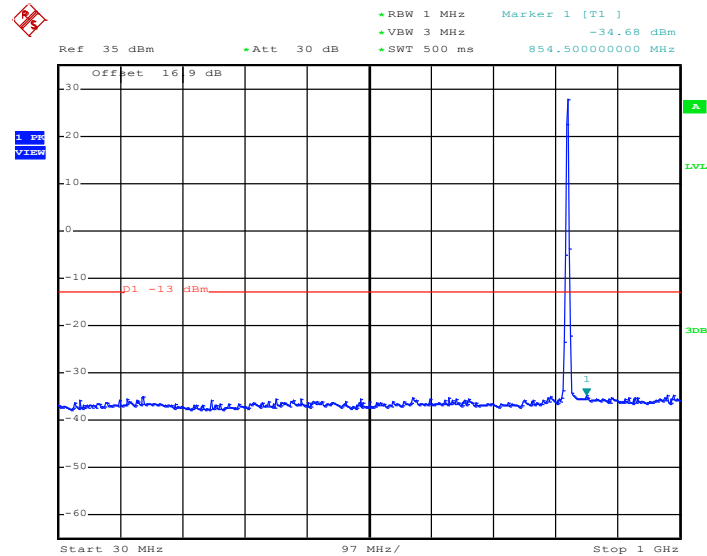

Date: 10.AUG.2014 16:13:14


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

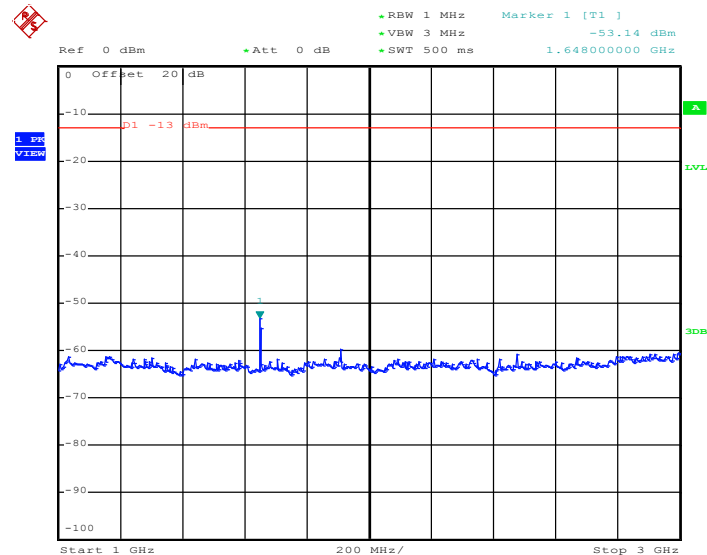

Date: 10.AUG.2014 16:14:04




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

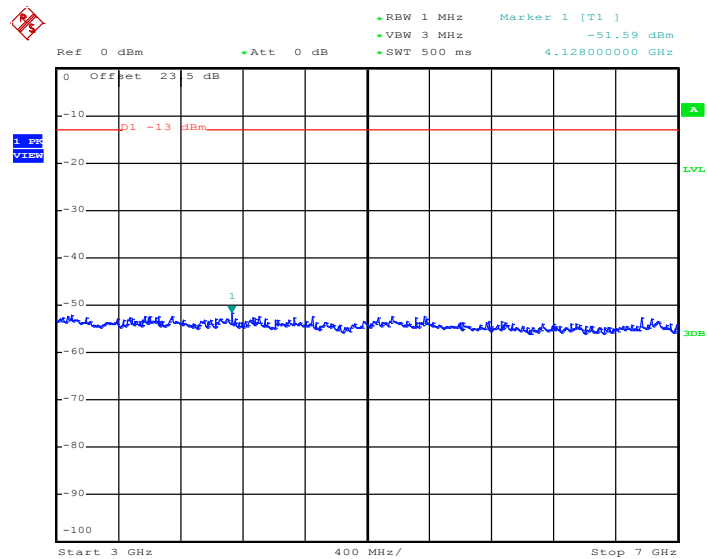

Date: 10.AUG.2014 16:14:12


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

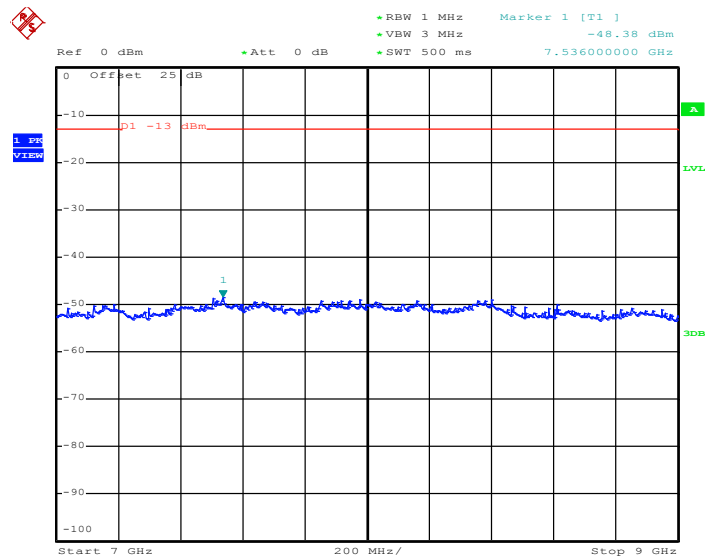

Date: 10.AUG.2014 16:14:20


|                    |                       |                    |            |
|--------------------|-----------------------|--------------------|------------|
| <b>Band :</b>      | CDMA2000 BC0          | <b>Channel :</b>   | CH384      |
| <b>Test Mode :</b> | 1xRTT_RC3+SO32 (QPSK) | <b>Frequency :</b> | 836.52 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

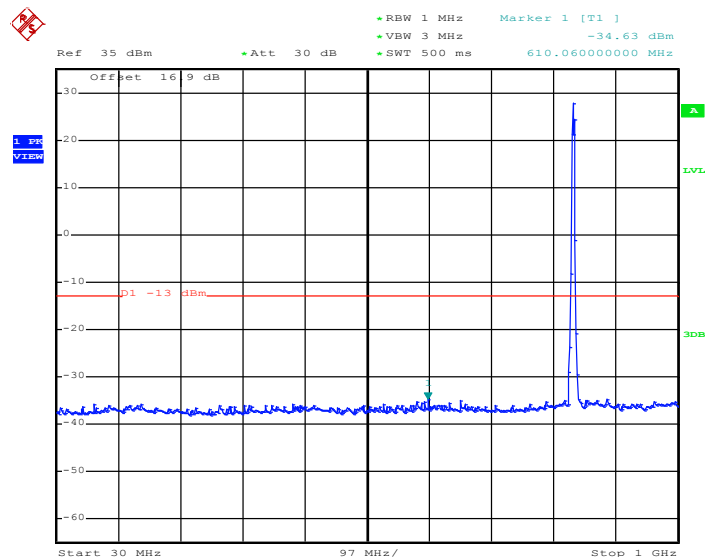

Date: 10.AUG.2014 16:16:41


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

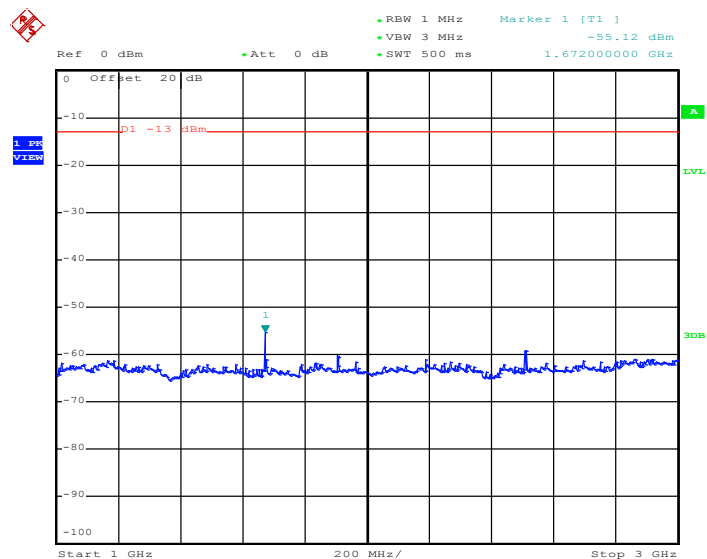

Date: 10.AUG.2014 16:16:36




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

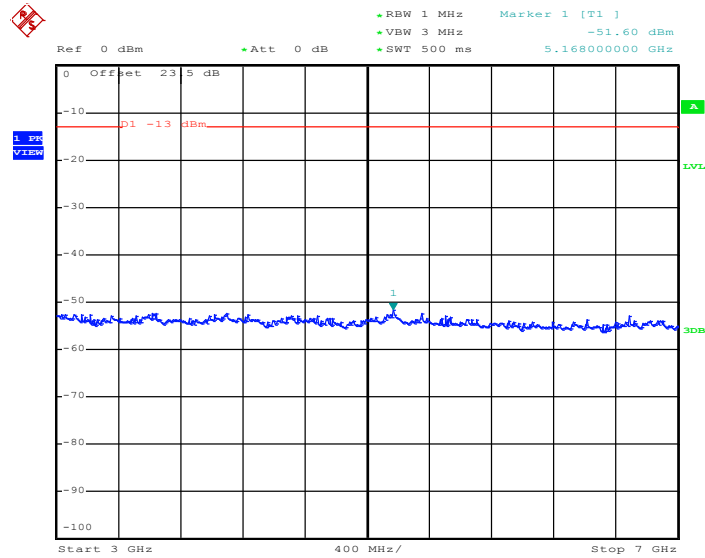

Date: 10.AUG.2014 16:16:44


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

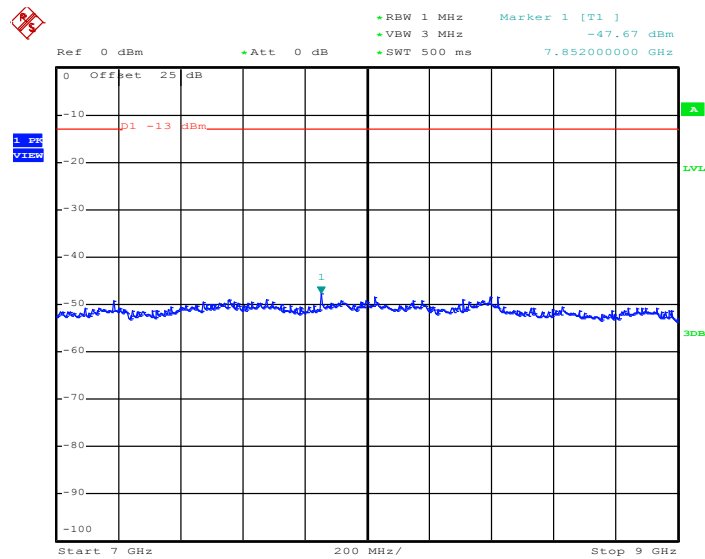

Date: 10.AUG.2014 16:16:52


|                    |                       |                    |            |
|--------------------|-----------------------|--------------------|------------|
| <b>Band :</b>      | CDMA2000 BC0          | <b>Channel :</b>   | CH777      |
| <b>Test Mode :</b> | 1xRTT_RC3+SO32 (QPSK) | <b>Frequency :</b> | 848.31 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

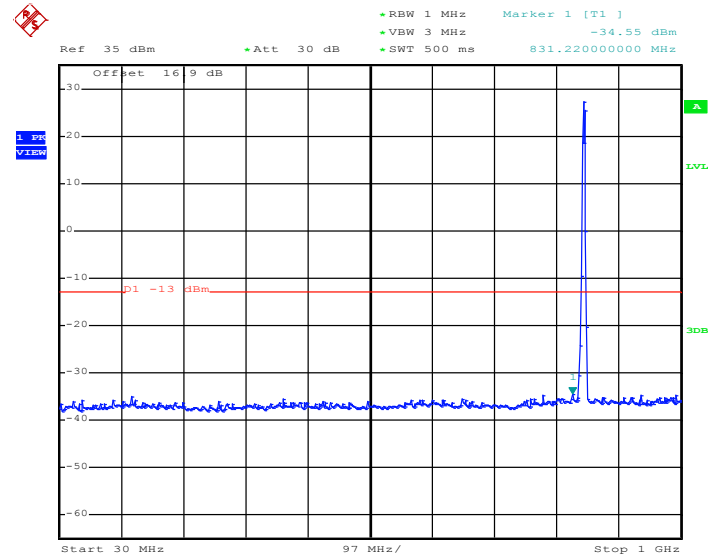

Date: 10.AUG.2014 16:17:52


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

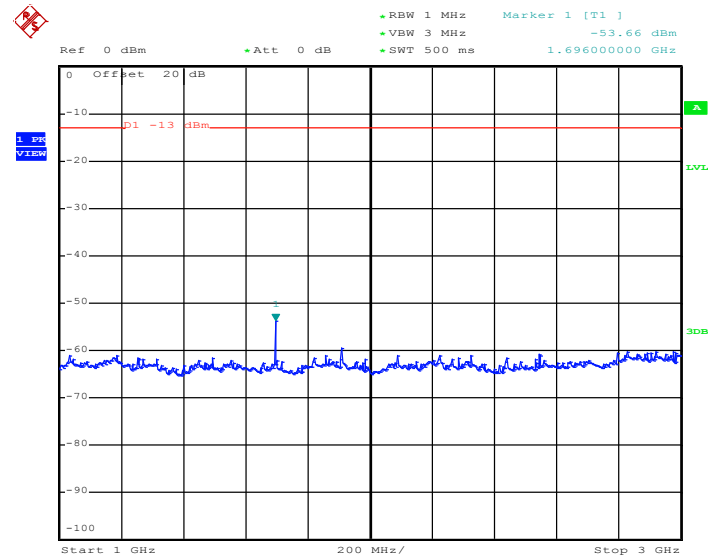

Date: 10.AUG.2014 16:17:50




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

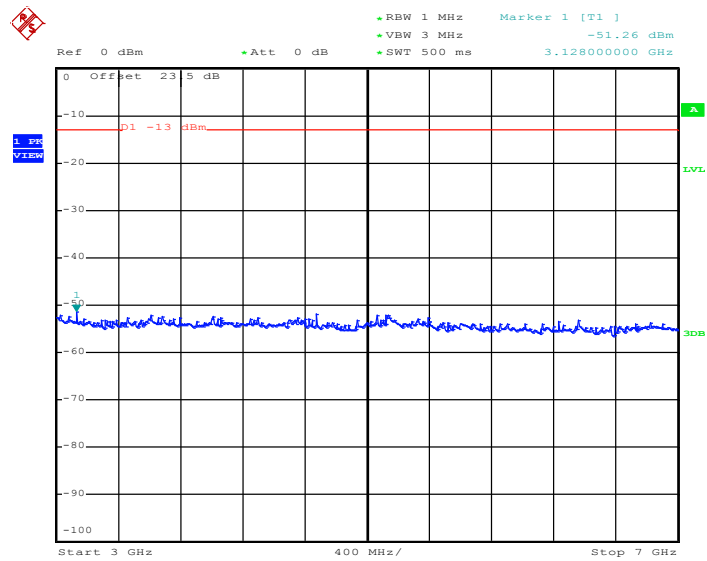

Date: 10.AUG.2014 16:17:59

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

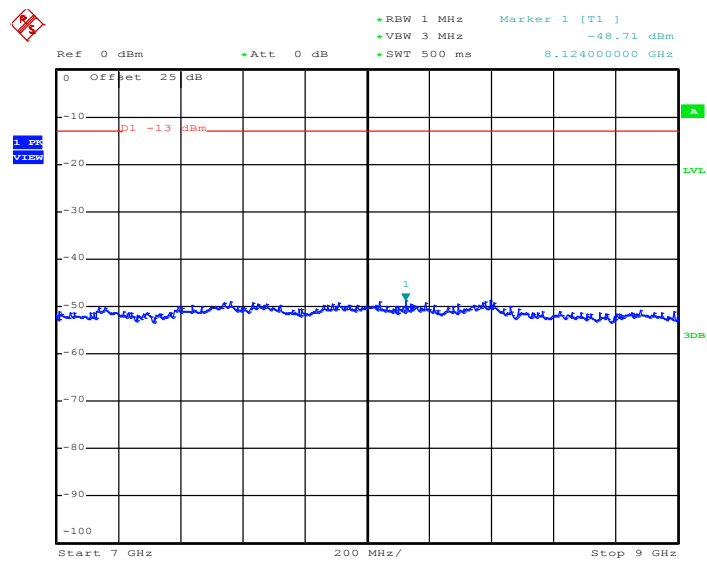


Date: 10.AUG.2014 16:18:07




|             |                       |             |             |
|-------------|-----------------------|-------------|-------------|
| Band :      | CDMA2000 BC1          | Channel :   | CH25        |
| Test Mode : | 1xRTT_RC3+SO32 (QPSK) | Frequency : | 1851.25 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

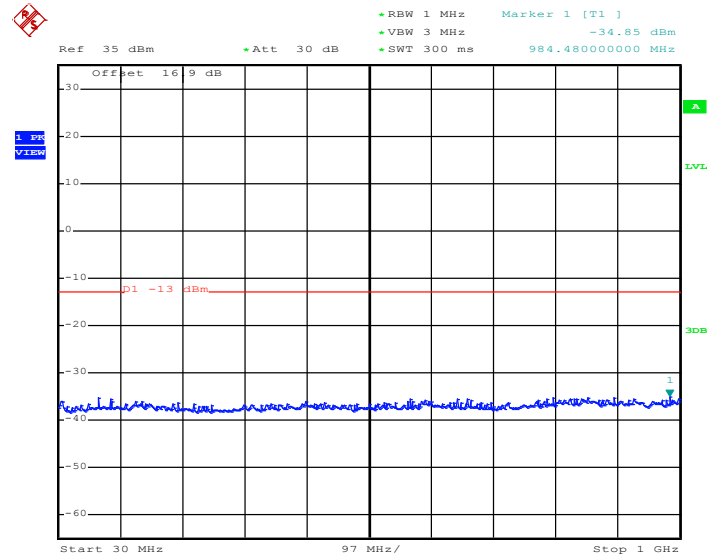

Date: 10.AUG.2014 15:36:26


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

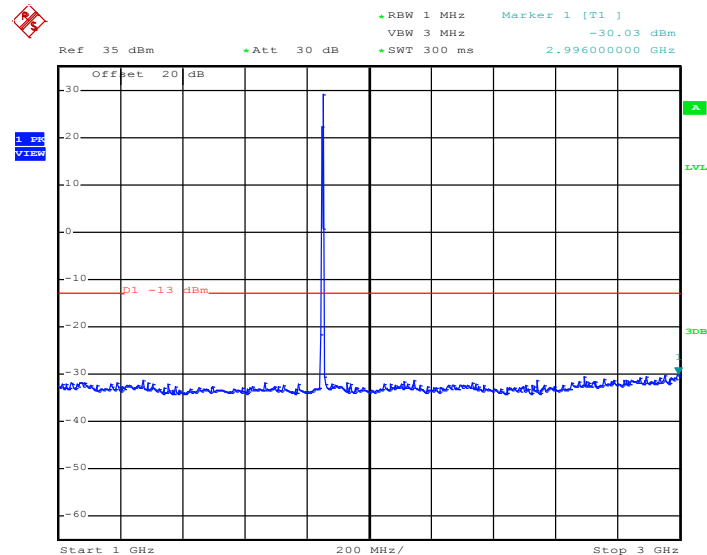

Date: 10.AUG.2014 15:36:41




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

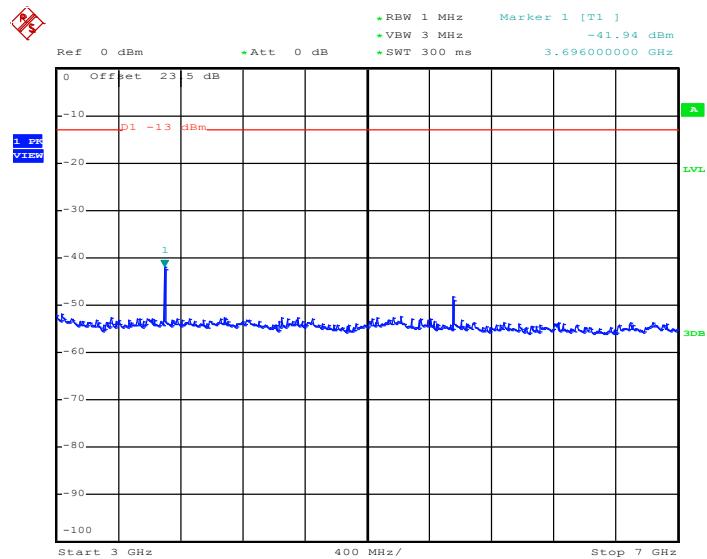

Date: 10.AUG.2014 15:36:45


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

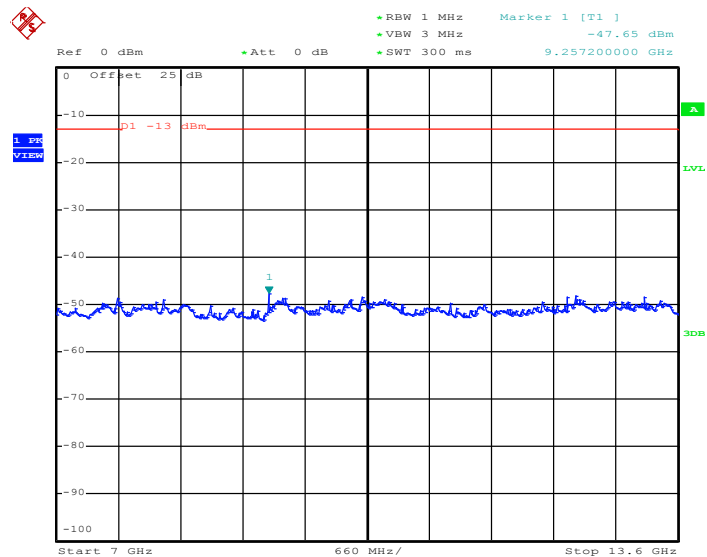

Date: 10.AUG.2014 15:36:53




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

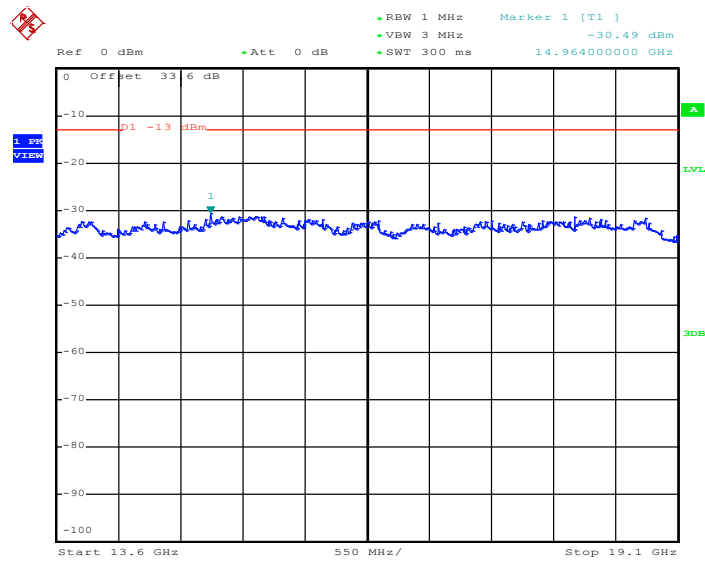

Date: 10.AUG.2014 15:37:01


|                    |                       |                    |            |
|--------------------|-----------------------|--------------------|------------|
| <b>Band :</b>      | CDMA2000 BC1          | <b>Channel :</b>   | CH600      |
| <b>Test Mode :</b> | 1xRTT_RC3+SO32 (QPSK) | <b>Frequency :</b> | 1880.0 MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

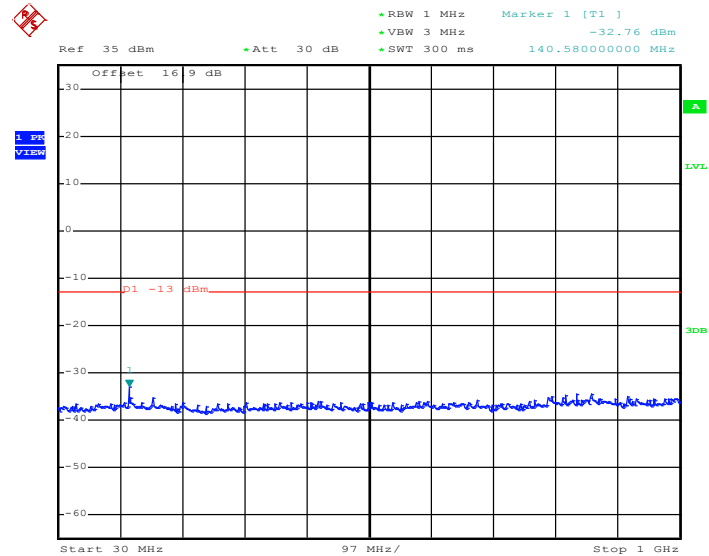


Date: 10.AUG.2014 15:38:19


### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

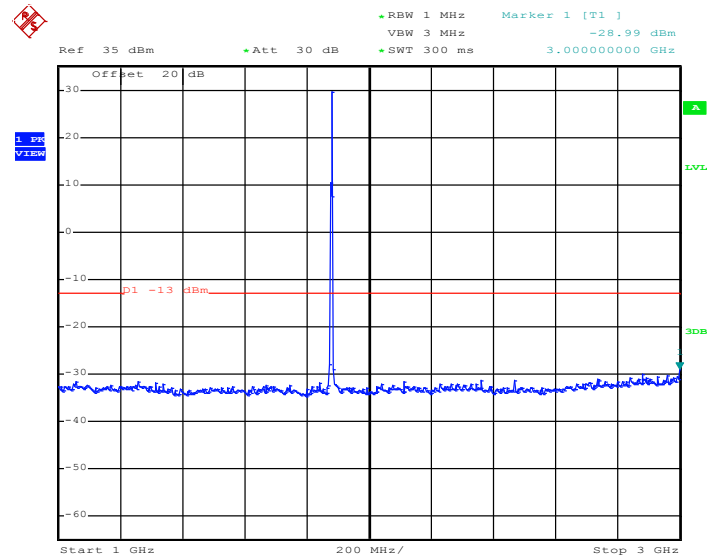

Date: 10.AUG.2014 15:38:36

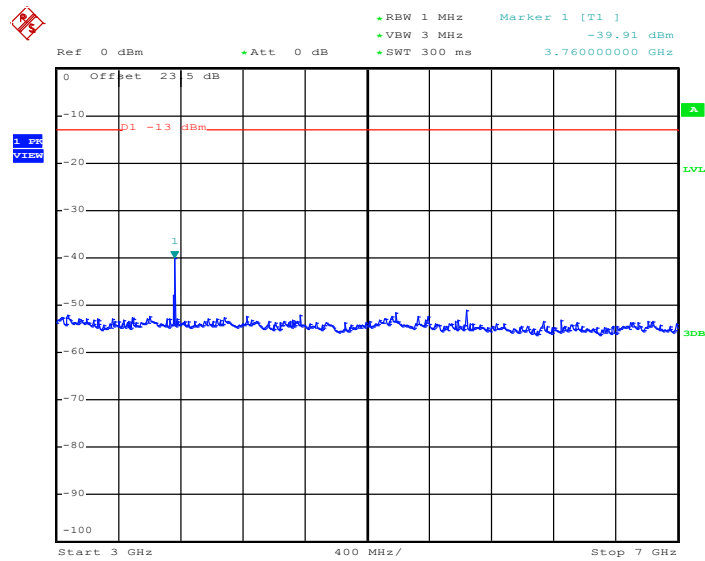
**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


Date: 10.AUG.2014 15:38:38

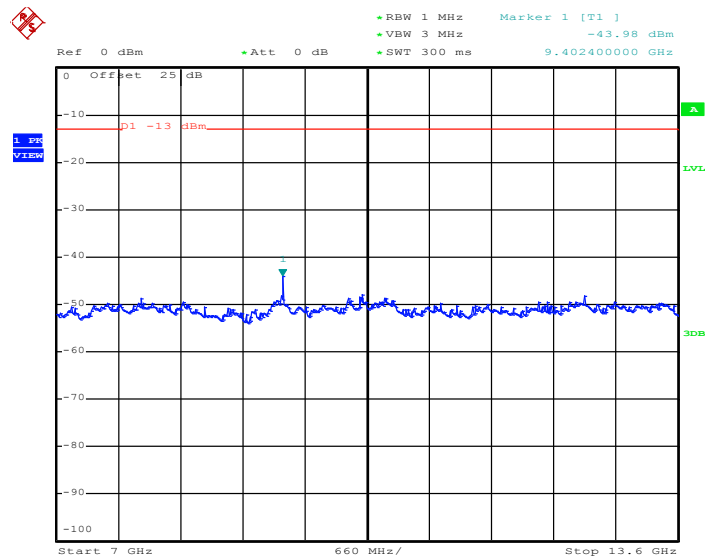**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 10.AUG.2014 15:38:46


### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

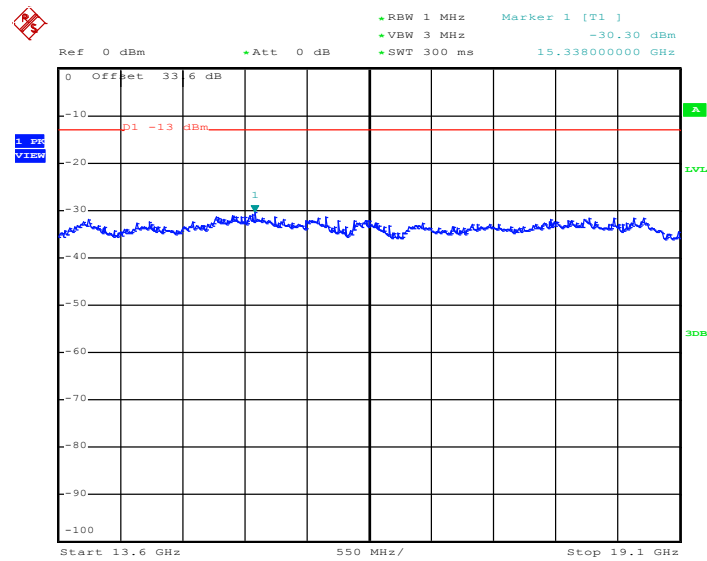

Date: 10.AUG.2014 15:38:55


|                    |                       |                    |            |
|--------------------|-----------------------|--------------------|------------|
| <b>Band :</b>      | CDMA2000 BC1          | <b>Channel :</b>   | CH1175     |
| <b>Test Mode :</b> | 1xRTT_RC3+SO32 (QPSK) | <b>Frequency :</b> | 1908.75MHz |

### Conducted Spurious Emission Plot between 30MHz ~ 1GHz

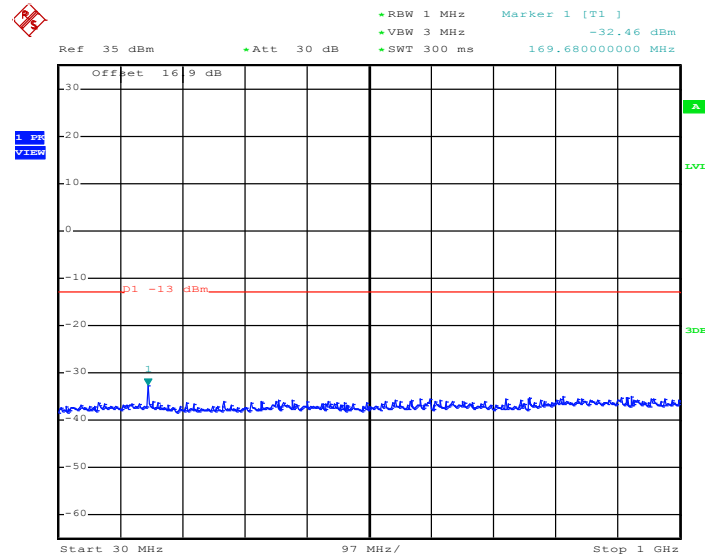


Date: 10.AUG.2014 15:40:35

### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

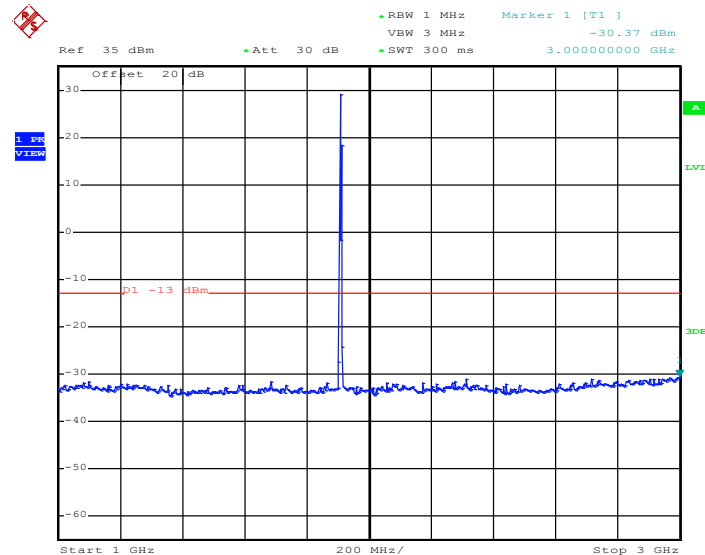


Date: 10.AUG.2014 15:39:33

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

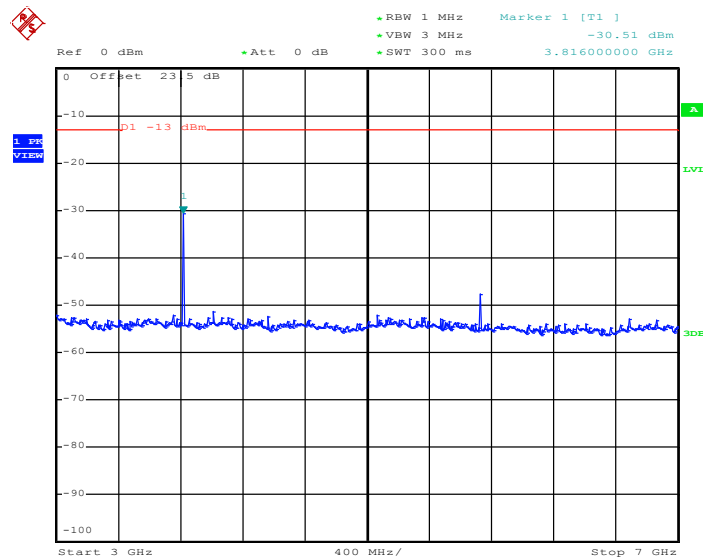

Date: 10.AUG.2014 15:40:55


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

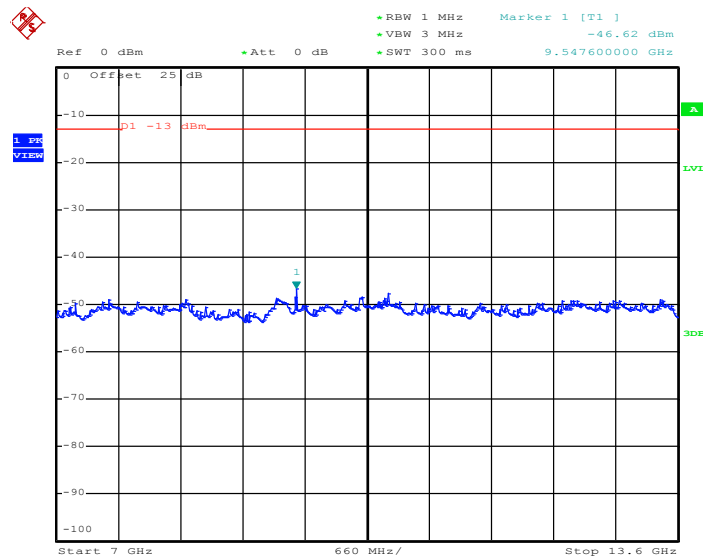

Date: 10.AUG.2014 15:41:03



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

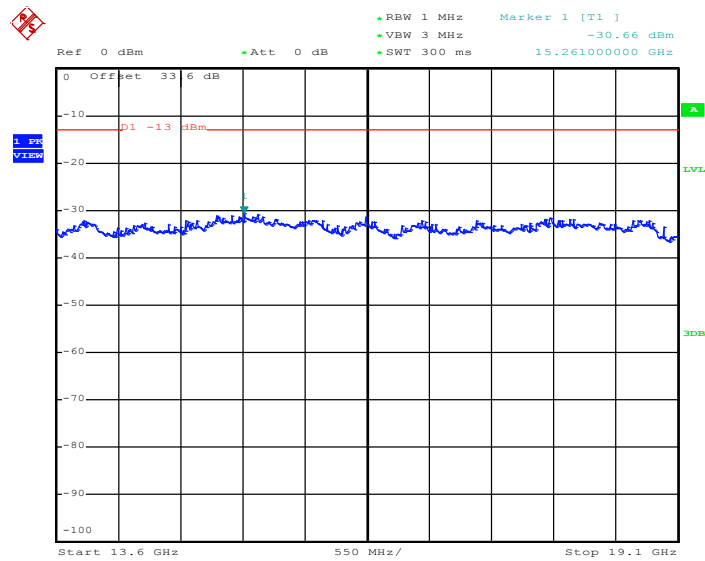

Date: 10.AUG.2014 15:41:12

## 3.7 Field Strength of Spurious Radiation Measurement

### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

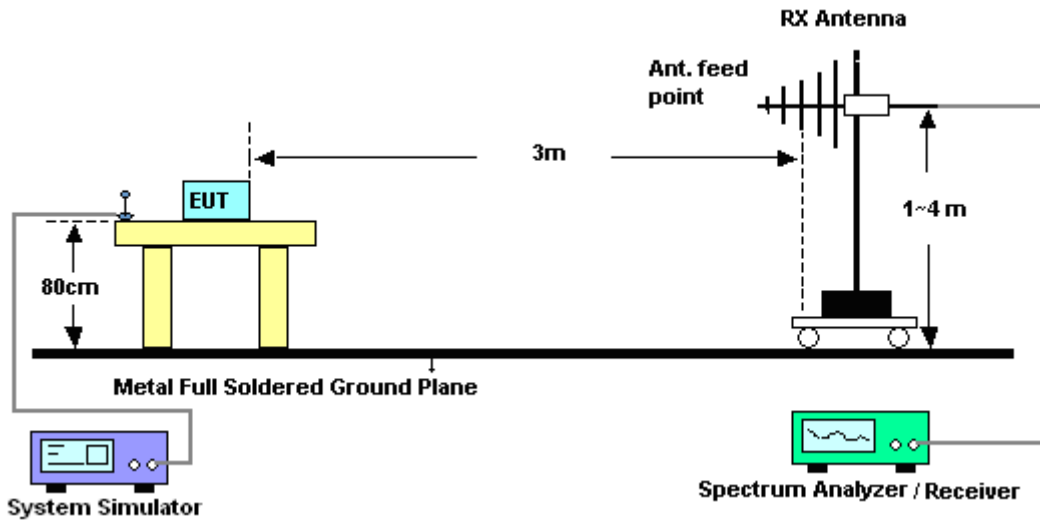

For radiated emissions above 1GHz

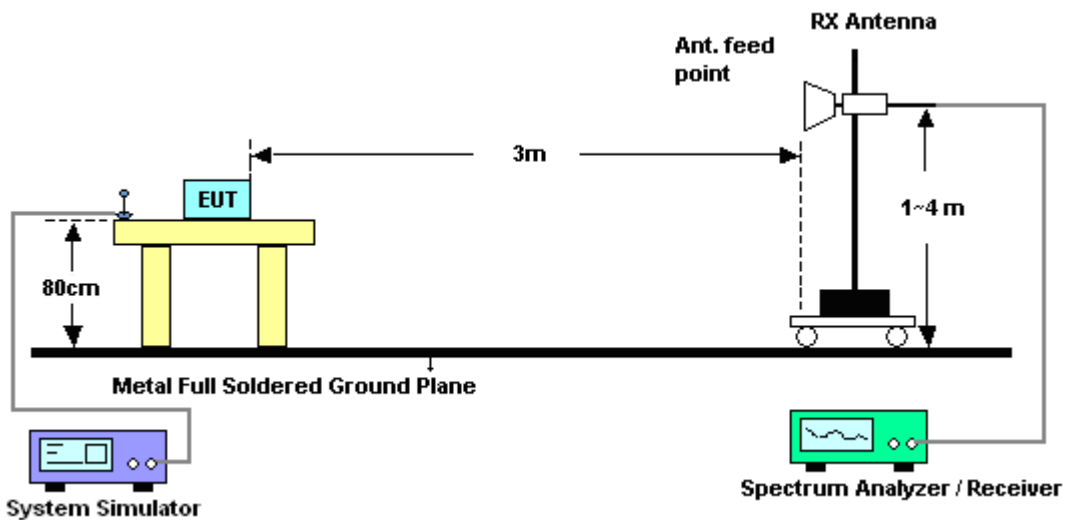

### 3.7.5 Test Result of Field Strength of Spurious Radiated

#### <Low Channel>

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -43.94                                                                           | -13                 | -30.94          | -55.29           | -45.7            | 0.98           | 4.89          | H            | Pass   |
| 2472            | -41.42                                                                           | -13                 | -28.42          | -57.29           | -43.3            | 1.28           | 5.32          | H            | Pass   |
| 3298            | -48.98                                                                           | -13                 | -35.98          | -66.1            | -52.4            | 1.54           | 7.11          | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25℃   |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%   |         |         |          |            |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          |                                                                                  |                     | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      |              |        |
| 1648            | -41.84                                                                           | -13                 | -28.84   | -55.32  | -43.6   | 0.98     | 4.89       | V            | Pass   |
| 2472            | -41.72                                                                           | -13                 | -28.72   | -57.66  | -43.6   | 1.28     | 5.32       | V            | Pass   |
| 3298            | -47.28                                                                           | -13                 | -34.28   | -65.57  | -50.7   | 1.54     | 7.11       | V            | Pass   |

**<Middle Channel>**

|                 |                                                                                  |                     |            |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C    |         |         |          |            |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%     |         |         |          |            |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 1672            | -43.12                                                                           | -13                 | -30.12     | -54.59  | -44.8   | 0.99     | 4.82       | H            | Pass   |
| 2512            | -43.63                                                                           | -13                 | -30.63     | -59.73  | -45.6   | 1.29     | 5.41       | H            | Pass   |
| 3345            | -49.59                                                                           | -13                 | -36.59     | -66.42  | -53.2   | 1.56     | 7.32       | H            | Pass   |

|                 |                                                                                  |         |                 |                  |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM850                                                                           |         |                 |                  |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 |         |                 |                  |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                  |                  |                | Polarization :      | Vertical     |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                |                     |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi)       | (H/V)        |        |
| 1672            | -42.22                                                                           | -13     | -29.22          | -56.07           | -43.9            | 0.99           | 4.82                | V            | Pass   |
| 2512            | -41.83                                                                           | -13     | -28.83          | -58.55           | -43.8            | 1.29           | 5.41                | V            | Pass   |
| 3345            | -47.79                                                                           | -13     | -34.79          | -65.79           | -51.4            | 1.56           | 7.32                | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -44.50                                                                           | -13                 | -31.50          | -56.04           | -46.1            | 1.00           | 4.75          | H            | Pass   |
| 2544            | -47.62                                                                           | -13                 | -34.62          | -63.41           | -49.6            | 1.30           | 5.44          | H            | Pass   |
| 3393            | -49.79                                                                           | -13                 | -36.79          | -66.46           | -53.6            | 1.57           | 7.53          | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -43.70                                                                           | -13                 | -30.70          | -57.59           | -45.3            | 1.00           | 4.75          | V            | Pass   |
| 2544            | -46.12                                                                           | -13                 | -33.12          | -62.5            | -48.1            | 1.30           | 5.44          | V            | Pass   |
| 3393            | -46.19                                                                           | -13                 | -33.19          | -66.01           | -50              | 1.57           | 7.53          | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -53.04                                                                           | -13                 | -40.04          | -64.32           | -54.8            | 0.98           | 4.89          | H            | Pass   |
| 2472            | -50.12                                                                           | -13                 | -37.12          | -65.8            | -52              | 1.28           | 5.32          | H            | Pass   |
| 3298            | -49.58                                                                           | -13                 | -36.58          | -66.08           | -53              | 1.54           | 7.11          | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -50.34                                                                           | -13                 | -37.34          | -63.72           | -52.1            | 0.98           | 4.89          | V            | Pass   |
| 2472            | -50.02                                                                           | -13                 | -37.02          | -66.03           | -51.9            | 1.28           | 5.32          | V            | Pass   |
| 3298            | -48.18                                                                           | -13                 | -35.18          | -65.91           | -51.6            | 1.54           | 7.11          | V            | Pass   |



## &lt;Middle Channel&gt;

| Band :          | GSM850                                                                           |         |                 |                  |                  | Temperature :       | 23~25℃        |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 |         |                 |                  |                  | Relative Humidity : | 46~48%        |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 1672            | -53.42                                                                           | -13     | -40.42          | -64.88           | -55.1            | 0.99                | 4.82          | H            | Pass   |
| 2512            | -49.43                                                                           | -13     | -36.43          | -65.28           | -51.4            | 1.29                | 5.41          | H            | Pass   |
| 3345            | -49.99                                                                           | -13     | -36.99          | -66.42           | -53.6            | 1.56                | 7.32          | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1672            | -50.62                                                                           | -13                 | -37.62          | -64.24           | -52.3            | 0.99           | 4.82          | V            | Pass   |
| 2512            | -48.93                                                                           | -13                 | -35.93          | -65.34           | -50.9            | 1.29           | 5.41          | V            | Pass   |
| 3345            | -48.09                                                                           | -13                 | -35.09          | -66.13           | -51.7            | 1.56           | 7.32          | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |         |                 |                    |                  |                     |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850                                                                           |         |                 |                    |                  | Temperature :       | 23~25℃          |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 |         |                 |                    |                  | Relative Humidity : | 46~48%          |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1696            | -53.50                                                                           | -13     | -40.50          | -64.97             | -55.1            | 1.00                | 4.75            | H            | Pass   |
| 2544            | -52.32                                                                           | -13     | -39.32          | -65.38             | -54.3            | 1.30                | 5.44            | H            | Pass   |
| 3393            | -49.79                                                                           | -13     | -36.79          | -66.51             | -53.6            | 1.57                | 7.53            | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM850                                                                           | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -50.00                                                                           | -13                 | -37.00          | -63.58           | -51.6            | 1.00           | 4.75          | V            | Pass   |
| 2544            | -48.97                                                                           | -13                 | -35.97          | -65.4            | -53.1            | 1.30           | 5.44          | V            | Pass   |
| 3393            | -47.64                                                                           | -13                 | -34.64          | -65.53           | -53.6            | 1.57           | 7.53          | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -48.64                                                                           | -13                 | -35.64          | -65.92           | -55.21           | 1.67           | 8.24          | H            | Pass   |
| 5550.6          | -43.95                                                                           | -13                 | -30.95          | -66.88           | -51.02           | 2.65           | 9.72          | H            | Pass   |
| 7400.8          | -32.01                                                                           | -13                 | -19.01          | -61.31           | -41.15           | 2.46           | 11.60         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -47.69                                                                           | -13                 | -34.69          | -66.29           | -54.26           | 1.67           | 8.24          | V            | Pass   |
| 5550.6          | -45.94                                                                           | -13                 | -32.94          | -67.96           | -53.01           | 2.65           | 9.72          | V            | Pass   |
| 7400.8          | -29.27                                                                           | -13                 | -16.27          | -58.18           | -38.41           | 2.46           | 11.60         | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3756            | -49.59                                                                           | -13                 | -36.59          | -67.03           | -56.21           | 1.68           | 8.31          | H            | Pass   |
| 5640            | -44.27                                                                           | -13                 | -31.27          | -66.66           | -51.32           | 2.71           | 9.76          | H            | Pass   |
| 7522            | -30.80                                                                           | -13                 | -17.80          | -59.79           | -40.19           | 2.42           | 11.81         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3756            | -44.59                                                                           | -13                 | -31.59          | -62.86           | -51.21           | 1.68           | 8.31          | V            | Pass   |
| 5640            | -42.27                                                                           | -13                 | -29.27          | -64.41           | -49.32           | 2.71           | 9.76          | V            | Pass   |
| 7520            | -30.12                                                                           | -13                 | -17.12          | -59.37           | -39.51           | 2.42           | 11.81         | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819            | -46.53                                                                           | -13                 | -33.53          | -64.57           | -53.21           | 1.70           | 8.38          | H            | Pass   |
| 5729.4          | -42.28                                                                           | -13                 | -29.28          | -65.08           | -49.31           | 2.76           | 9.79          | H            | Pass   |
| 7639.2          | -31.78                                                                           | -13                 | -18.78          | -59.92           | -41.28           | 2.38           | 11.88         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819.6          | -46.61                                                                           | -13                 | -33.61          | -64.94           | -53.29           | 1.70           | 8.38          | V            | Pass   |
| 5729.4          | -43.36                                                                           | -13                 | -30.36          | -65.82           | -50.39           | 2.76           | 9.79          | V            | Pass   |
| 7639.2          | -28.71                                                                           | -13                 | -15.71          | -57.55           | -38.21           | 2.38           | 11.88         | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | ( H/V )      |        |
| 3700            | -48.90                                                                           | -13                 | -35.90          | -66.42             | -55.47           | 1.67           | 8.24            | H            | Pass   |
| 5550.6          | -44.22                                                                           | -13                 | -31.22          | -66.55             | -51.29           | 2.65           | 9.72            | H            | Pass   |
| 7400.8          | -33.31                                                                           | -13                 | -20.31          | -62.65             | -42.45           | 2.46           | 11.60           | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -47.71                                                                           | -13                 | -34.71          | -66.31           | -54.28           | 1.67           | 8.24          | V            | Pass   |
| 5550.6          | -44.02                                                                           | -13                 | -31.02          | -66.19           | -51.09           | 2.65           | 9.72          | V            | Pass   |
| 7400.8          | -29.99                                                                           | -13                 | -16.99          | -58.65           | -39.13           | 2.46           | 11.60         | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | ( H/V )      |        |
| 3763            | -48.99                                                                           | -13                 | -35.99          | -66.76             | -55.62           | 1.69           | 8.32            | H            | Pass   |
| 5640            | -44.18                                                                           | -13                 | -31.18          | -66.81             | -51.23           | 2.71           | 9.76            | H            | Pass   |
| 7520            | -33.70                                                                           | -13                 | -20.70          | -63.23             | -43.09           | 2.42           | 11.81           | H            | Pass   |

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3763            | -47.76                                                                           | -13                 | -34.76          | -66.38             | -54.39           | 1.69           | 8.32            | V            | Pass   |
| 5640            | -41.96                                                                           | -13                 | -28.96          | -64.16             | -49.01           | 2.71           | 9.76            | V            | Pass   |
| 7520            | -30.90                                                                           | -13                 | -17.90          | -60.15             | -40.29           | 2.42           | 11.81           | V            | Pass   |

**<High Channel>**

|                 |                                                                                  |         |                 |                  |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                  |                  |                | Temperature :       | 23~25℃       |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              |         |                 |                  |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                  |                  |                | Polarization :      | Horizontal   |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                |                     |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA              | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi)       | (H/V)        |        |
| 3819            | -48.33                                                                           | -13     | -35.33          | -66.35           | -55.01           | 1.70           | 8.38                | H            | Pass   |
| 5729.4          | -43.55                                                                           | -13     | -30.55          | -66.59           | -50.58           | 2.76           | 9.79                | H            | Pass   |
| 7639.2          | -33.11                                                                           | -13     | -20.11          | -61.34           | -42.61           | 2.38           | 11.88               | H            | Pass   |

|                 |                                                                                  |         |                 |                  |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                  |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + PMA Charger + Earphone 1                              |         |                 |                  |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                  |                  |                | Polarization :      | Vertical     |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                |                     |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA              | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi)       | (H/V)        |        |
| 3819            | -47.71                                                                           | -13     | -34.71          | -66.88           | -54.39           | 1.70           | 8.38                | V            | Pass   |
| 5729.4          | -41.28                                                                           | -13     | -28.28          | -64.05           | -48.31           | 2.76           | 9.79                | V            | Pass   |
| 7639.2          | -31.11                                                                           | -13     | -18.11          | -59.52           | -40.61           | 2.38           | 11.88               | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | ( H/V )      |        |
| 3700            | -49.09                                                                           | -13                 | -36.09          | -66.76             | -55.66           | 1.67           | 8.24            | H            | Pass   |
| 5548            | -44.21                                                                           | -13                 | -31.21          | -67.17             | -51.28           | 2.65           | 9.72            | H            | Pass   |
| 7403            | -33.24                                                                           | -13                 | -20.24          | -62.98             | -42.39           | 2.46           | 11.61           | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                    |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              |         |                 |                    |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                    |                  |                | Polarization :      | Vertical     |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                |                     |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA                | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi )     | (H/V)        |        |
| 3700            | -48.57                                                                           | -13     | -35.57          | -67.25             | -55.14           | 1.67           | 8.24                | V            | Pass   |
| 5548            | -43.86                                                                           | -13     | -30.86          | -66.54             | -50.93           | 2.65           | 9.72                | V            | Pass   |
| 7403            | -30.85                                                                           | -13     | -17.85          | -60.37             | -40              | 2.46           | 11.61               | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3763            | -48.83                                                                           | -13                 | -35.83          | -66.75             | -55.46           | 1.69           | 8.32            | H            | Pass   |
| 5639            | -41.53                                                                           | -13                 | -28.53          | -64.81             | -48.58           | 2.71           | 9.76            | H            | Pass   |
| 7522            | -32.71                                                                           | -13                 | -19.71          | -62.5              | -42.1            | 2.42           | 11.81           | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                    |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              |         |                 |                    |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                    |                  |                | Polarization :      | Vertical     |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                |                     |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA                | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi )     | (H/V)        |        |
| 3763            | -48.13                                                                           | -13     | -35.13          | -66.96             | -54.76           | 1.69           | 8.32                | V            | Pass   |
| 5639            | -42.17                                                                           | -13     | -29.17          | -65.26             | -49.22           | 2.71           | 9.76                | V            | Pass   |
| 7522            | -29.84                                                                           | -13     | -16.84          | -59.42             | -39.23           | 2.42           | 11.81               | V            | Pass   |

**<High Channel>**

|                 |                                                                                  |         |                 |                    |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | GSM1900                                                                          |         |                 |                    |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              |         |                 |                    |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                    |                  |                | Polarization :      | Horizontal   |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                |                     |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA                | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi )     | (H/V)        |        |
| 3819            | -46.70                                                                           | -13     | -33.70          | -64.86             | -53.38           | 1.70           | 8.38                | H            | Pass   |
| 5730            | -40.66                                                                           | -13     | -27.66          | -64.22             | -47.69           | 2.76           | 9.79                | H            | Pass   |
| 7641            | -29.27                                                                           | -13     | -16.27          | -58.05             | -38.77           | 2.38           | 11.88               | H            | Pass   |

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | GPRS class 8 Link (GMSK) + WPC Charger + Earphone 1                              | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3819            | -47.64                                                                           | -13                 | -34.64          | -66.64             | -54.32           | 1.70           | 8.38            | V            | Pass   |
| 5730            | -43.81                                                                           | -13                 | -30.81          | -67.18             | -50.84           | 2.76           | 9.79            | V            | Pass   |
| 7641            | -30.00                                                                           | -13                 | -17.00          | -58.75             | -39.5            | 2.38           | 11.88           | V            | Pass   |



## &lt;Low Channel&gt;

| Band :          | GSM1900                                                                          |         |                 |                  |                  | Temperature :       | 23~25℃        |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|------------------|------------------|---------------------|---------------|--------------|--------|
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 |         |                 |                  |                  | Relative Humidity : | 46~48%        |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                  |                  | Polarization :      | Horizontal    |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                  |                  |                     |               |              |        |
| Frequency       | EIRP                                                                             | Limit   | Over            | SPA              | S.G.             | TX Cable            | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -48.70                                                                           | -13     | -35.70          | -66.36           | -55.27           | 1.67                | 8.24          | H            | Pass   |
| 5550.6          | -45.24                                                                           | -13     | -32.24          | -67.76           | -52.31           | 2.65                | 9.72          | H            | Pass   |
| 7400.8          | -34.91                                                                           | -13     | -21.91          | -64.2            | -44.05           | 2.46                | 11.60         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -47.44                                                                           | -13                 | -34.44          | -65.93           | -54.01           | 1.67           | 8.24          | V            | Pass   |
| 5550.6          | -45.32                                                                           | -13                 | -32.32          | -67.36           | -52.39           | 2.65           | 9.72          | V            | Pass   |
| 7400.8          | -33.72                                                                           | -13                 | -20.72          | -62.59           | -42.86           | 2.46           | 11.60         | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3763            | -49.09                                                                           | -13                 | -36.09          | -66.9            | -55.72           | 1.69           | 8.32          | H            | Pass   |
| 5640            | -44.24                                                                           | -13                 | -31.24          | -66.71           | -51.29           | 2.71           | 9.76          | H            | Pass   |
| 7520            | -35.32                                                                           | -13                 | -22.32          | -64.43           | -44.71           | 2.42           | 11.81         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3763            | -47.08                                                                           | -13                 | -34.08          | -65.84           | -53.71           | 1.69           | 8.32          | V            | Pass   |
| 5640            | -44.59                                                                           | -13                 | -31.59          | -66.78           | -51.64           | 2.71           | 9.76          | V            | Pass   |
| 7520            | -34.24                                                                           | -13                 | -21.24          | -63.59           | -43.63           | 2.42           | 11.81         | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819.6          | -48.54                                                                           | -13                 | -35.54          | -66.44           | -55.22           | 1.70           | 8.38          | H            | Pass   |
| 5729.4          | -44.24                                                                           | -13                 | -31.24          | -67.32           | -51.27           | 2.76           | 9.79          | H            | Pass   |
| 7641            | -33.34                                                                           | -13                 | -20.34          | -61.83           | -42.84           | 2.38           | 11.88         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900                                                                          | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819            | -48.59                                                                           | -13                 | -35.59          | -66.93           | -55.27           | 1.70           | 8.38          | V            | Pass   |
| 5729.4          | -44.90                                                                           | -13                 | -31.90          | -67.9            | -51.93           | 2.76           | 9.79          | V            | Pass   |
| 7639.2          | -32.91                                                                           | -13                 | -19.91          | -61.34           | -42.41           | 2.38           | 11.88         | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 1653            | -53.26                                                                           | -13                 | -40.26          | -64.5              | -55              | 0.98           | 4.87            | H            | Pass   |
| 2479            | -49.30                                                                           | -13                 | -36.30          | -64.87             | -51.2            | 1.28           | 5.34            | H            | Pass   |
| 3305            | -50.25                                                                           | -13                 | -37.25          | -66.72             | -53.7            | 1.54           | 7.14            | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1653            | -50.76                                                                           | -13                 | -37.76          | -64.28           | -52.5            | 0.98           | 4.87          | V            | Pass   |
| 2479            | -49.30                                                                           | -13                 | -36.30          | -65.29           | -51.2            | 1.28           | 5.34          | V            | Pass   |
| 3305            | -48.55                                                                           | -13                 | -35.55          | -66.56           | -52              | 1.54           | 7.14          | V            | Pass   |

**<Middle Channel>**

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -53.72                                                                           | -13                 | -40.72          | -65.32             | -55.4            | 0.99           | 4.82            | H            | Pass   |
| 2510            | -48.94                                                                           | -13                 | -35.94          | -64.78             | -50.9            | 1.29           | 5.41            | H            | Pass   |
| 3345            | -49.99                                                                           | -13                 | -36.99          | -66.3              | -53.6            | 1.56           | 7.32            | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1672            | -51.22                                                                           | -13                 | -38.22          | -64.99           | -52.9            | 0.99           | 4.82          | V            | Pass   |
| 2510            | -48.64                                                                           | -13                 | -35.64          | -64.54           | -50.6            | 1.29           | 5.41          | V            | Pass   |
| 3345            | -48.19                                                                           | -13                 | -35.19          | -66.36           | -51.8            | 1.56           | 7.32          | V            | Pass   |

**<High Channel>**

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1693            | -53.09                                                                           | -13                 | -40.09          | -64.65           | -54.7            | 1.00           | 4.76          | H            | Pass   |
| 2540            | -49.62                                                                           | -13                 | -36.62          | -65.46           | -51.6            | 1.30           | 5.43          | H            | Pass   |
| 3386            | -49.72                                                                           | -13                 | -36.72          | -66.28           | -53.5            | 1.57           | 7.50          | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band V                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1693            | -50.79                                                                           | -13                 | -37.79          | -64.29           | -52.4            | 1.00           | 4.76          | V            | Pass   |
| 2540            | -49.32                                                                           | -13                 | -36.32          | -65.58           | -51.3            | 1.30           | 5.43          | V            | Pass   |
| 3386            | -48.92                                                                           | -13                 | -35.92          | -66.72           | -52.7            | 1.57           | 7.50          | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3707            | -48.63                                                                           | -13                 | -35.63          | -65.94             | -55.21           | 1.67           | 8.25            | H            | Pass   |
| 5557.2          | -44.23                                                                           | -13                 | -31.23          | -66.7              | -51.29           | 2.66           | 9.72            | H            | Pass   |
| 7409.6          | -37.63                                                                           | -13                 | -24.63          | -67.43             | -46.79           | 2.46           | 11.62           | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3707            | -48.43                                                                           | -13                 | -35.43          | -66.8            | -55.01           | 1.67           | 8.25          | V            | Pass   |
| 5557.2          | -45.30                                                                           | -13                 | -32.30          | -67.31           | -52.36           | 2.66           | 9.72          | V            | Pass   |
| 7409.6          | -35.87                                                                           | -13                 | -22.87          | -67.94           | -45.03           | 2.46           | 11.62         | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3763            | -49.58                                                                           | -13                 | -36.58          | -67.03             | -56.21           | 1.69           | 8.32            | H            | Pass   |
| 5640            | -44.38                                                                           | -13                 | -31.38          | -66.72             | -51.43           | 2.71           | 9.76            | H            | Pass   |
| 7520            | -38.42                                                                           | -13                 | -25.42          | -67.75             | -47.81           | 2.42           | 11.81           | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%   |         |         |          |            |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3763            | -48.66                                                                           | -13                 | -35.66   | -66.9   | -55.29  | 1.69     | 8.32       | V            | Pass   |
| 5640            | -44.26                                                                           | -13                 | -31.26   | -66.96  | -51.31  | 2.71     | 9.76       | V            | Pass   |
| 7520            | -39.22                                                                           | -13                 | -26.22   | -68.24  | -48.61  | 2.42     | 11.81      | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 38123           | -49.06                                                                           | -13                 | -36.06          | -67.04             | -59.22           | 3.74           | 13.90           | H            | Pass   |
| 5722            | -45.32                                                                           | -13                 | -32.32          | -68.05             | -52.36           | 2.75           | 9.79            | H            | Pass   |
| 7630            | -39.12                                                                           | -13                 | -26.12          | -67.24             | -48.61           | 2.39           | 11.88           | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II                                                                    | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1 | Relative Humidity : | 46~48%   |         |         |          |            |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                                  |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3812            | -47.57                                                                           | -13                 | -34.57   | -66.61  | -54.24  | 1.70     | 8.37       | V            | Pass   |
| 5722.8          | -43.45                                                                           | -13                 | -30.45   | -66.44  | -50.49  | 2.75     | 9.79       | V            | Pass   |
| 7630.4          | -38.58                                                                           | -13                 | -25.58   | -67.14  | -48.07  | 2.39     | 11.88      | V            | Pass   |



## &lt;Low Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -50.14                                                                           | -13                 | -37.14          | -61.39           | -51.9            | 0.98           | 4.89          | H            | Pass   |
| 2474            | -49.81                                                                           | -13                 | -36.81          | -65.56           | -51.7            | 1.28           | 5.32          | H            | Pass   |
| 3298            | -49.68                                                                           | -13                 | -36.68          | -65.94           | -53.1            | 1.54           | 7.11          | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1648            | -49.54                                                                           | -13                 | -36.54          | -62.54           | -51.3            | 0.98           | 4.89          | V            | Pass   |
| 2474            | -49.41                                                                           | -13                 | -36.41          | -65.4            | -51.3            | 1.28           | 5.32          | V            | Pass   |
| 3298            | -48.18                                                                           | -13                 | -35.18          | -66.09           | -51.6            | 1.54           | 7.11          | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     | Temperature :       | 23~25°C         |                    |                  |                |                 |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -52.22                                                                           | -13                 | -39.22          | -63.67             | -53.9            | 0.99           | 4.82            | H            | Pass   |
| 2510            | -48.94                                                                           | -13                 | -35.94          | -64.59             | -50.9            | 1.29           | 5.41            | H            | Pass   |
| 3346            | -50.18                                                                           | -13                 | -37.18          | -66.61             | -53.8            | 1.56           | 7.32            | H            | Pass   |

|                 |                                                                                  |         |                 |                    |                  |                |                     |              |        |
|-----------------|----------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|----------------|---------------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     |         |                 |                    |                  |                | Temperature :       | 23~25°C      |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    |         |                 |                    |                  |                | Relative Humidity : | 46~48%       |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   |         |                 |                    |                  |                | Polarization :      | Vertical     |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                |                     |              |        |
| Frequency       | ERP                                                                              | Limit   | Over            | SPA                | S.G.             | TX Cable       | TX Antenna          | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi )     | (H/V)        |        |
| 1672            | -48.42                                                                           | -13     | -35.42          | -62.05             | -50.1            | 0.99           | 4.82                | V            | Pass   |
| 2510            | -49.64                                                                           | -13     | -36.64          | -65.68             | -51.6            | 1.29           | 5.41                | V            | Pass   |
| 3346            | -48.48                                                                           | -13     | -35.48          | -66.16             | -52.1            | 1.56           | 7.32                | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | ERP                                                                              | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 1696            | -50.80                                                                           | -13                 | -37.80          | -62.34           | -52.4            | 1.00           | 4.75          | H            | Pass   |
| 2544            | -48.92                                                                           | -13                 | -35.92          | -64.56           | -50.9            | 1.30           | 5.44          | H            | Pass   |
| 3393            | -49.79                                                                           | -13                 | -36.79          | -66.13           | -53.6            | 1.57           | 7.53          | H            | Pass   |

|                 |                                                                                  |                     |          |         |         |          |            |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | CDMA2000 BC0                                                                     | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%   |         |         |          |            |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | ERP                                                                              | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dB )                                                                           | ( dB )              | ( dB )   | ( dBm ) | ( dBm ) | ( dB )   | ( dBi )    |              |        |
| 1696            | -48.50                                                                           | -13                 | -35.50   | -62.2   | -50.1   | 1.00     | 4.75       | V            | Pass   |
| 2544            | -49.22                                                                           | -13                 | -36.22   | -65.34  | -51.2   | 1.30     | 5.44       | V            | Pass   |
| 3393            | -48.39                                                                           | -13                 | -35.39   | -66.23  | -52.2   | 1.57     | 7.53       | V            | Pass   |

**<Low Channel>**

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -49.33                                                                           | -13                 | -36.33          | -66.66           | -55.9            | 1.67           | 8.24          | H            | Pass   |
| 5554            | -43.73                                                                           | -13                 | -30.73          | -66.68           | -50.8            | 2.66           | 9.72          | H            | Pass   |
| 7405            | -38.95                                                                           | -13                 | -25.95          | -68.47           | -48.1            | 2.46           | 11.61         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700            | -47.93                                                                           | -13                 | -34.93          | -66.54           | -54.5            | 1.67           | 8.24          | V            | Pass   |
| 5554            | -44.73                                                                           | -13                 | -31.73          | -67.39           | -51.8            | 2.66           | 9.72          | V            | Pass   |
| 7405            | -37.75                                                                           | -13                 | -24.75          | -66.9            | -46.9            | 2.46           | 11.61         | V            | Pass   |



## &lt;Middle Channel&gt;

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3763            | -47.58                                                                           | -13                 | -34.58          | -65.1            | -54.21           | 1.69           | 8.32          | H            | Pass   |
| 5640            | -44.96                                                                           | -13                 | -31.96          | -67.35           | -52.01           | 2.71           | 9.76          | H            | Pass   |
| 7520            | -38.24                                                                           | -13                 | -25.24          | -67.59           | -47.63           | 2.42           | 11.81         | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3763            | -47.66                                                                           | -13                 | -34.66          | -66.69           | -54.29           | 1.69           | 8.32          | V            | Pass   |
| 5640            | -44.16                                                                           | -13                 | -31.16          | -66.82           | -51.21           | 2.71           | 9.76          | V            | Pass   |
| 7520            | -39.24                                                                           | -13                 | -26.24          | -68.23           | -48.63           | 2.42           | 11.81         | V            | Pass   |



## &lt;High Channel&gt;

|                 |                                                                                  |                     |                 |                    |                  |                |                 |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|--------------------|------------------|----------------|-----------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25℃          |                    |                  |                |                 |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                    |                  |                |                 |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Horizontal      |                    |                  |                |                 |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                    |                  |                |                 |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA                | S.G.             | TX Cable       | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>( dBi ) | (H/V)        |        |
| 3819            | -49.52                                                                           | -13                 | -36.52          | -67.51             | -56.2            | 1.70           | 8.38            | H            | Pass   |
| 5726            | -44.86                                                                           | -13                 | -31.86          | -67.93             | -51.9            | 2.76           | 9.79            | H            | Pass   |
| 7635            | -38.80                                                                           | -13                 | -25.80          | -67.64             | -48.3            | 2.39           | 11.88           | H            | Pass   |

|                 |                                                                                  |                     |                 |                  |                  |                |               |              |        |
|-----------------|----------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | CDMA2000 BC1                                                                     | Temperature :       | 23~25℃          |                  |                  |                |               |              |        |
| Test Mode :     | 1xRTT_RC3+SO32 (QPSK) + USB Cable 1<br>(Charging from Adapter 1) + Earphone 1    | Relative Humidity : | 46~48%          |                  |                  |                |               |              |        |
| Test Engineer : | Eric Shih, Stan Hsieh, Ken Wu and Derreck Chen                                   | Polarization :      | Vertical        |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                             | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                          | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819            | -48.42                                                                           | -13                 | -35.42          | -67.37           | -55.1            | 1.70           | 8.38          | V            | Pass   |
| 5726            | -44.46                                                                           | -13                 | -31.46          | -67.64           | -51.5            | 2.76           | 9.79          | V            | Pass   |
| 7635            | -38.90                                                                           | -13                 | -25.90          | -67.37           | -48.4            | 2.39           | 11.88         | V            | Pass   |

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

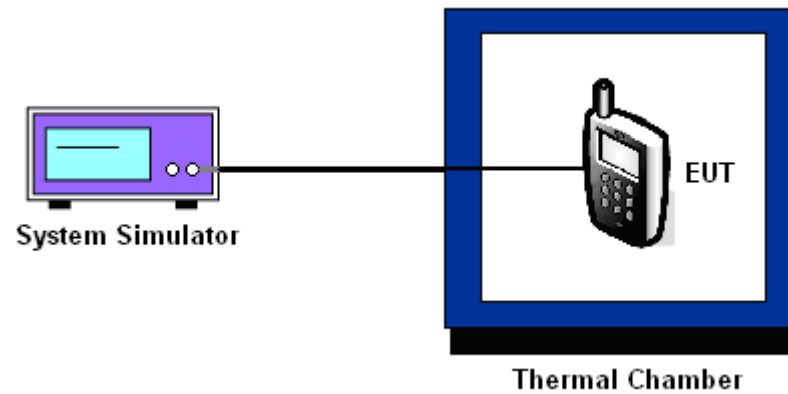

### 3.8.6 Test Result of Temperature Variation

|                      |         |                    |           |
|----------------------|---------|--------------------|-----------|
| <b>Band :</b>        | GSM 850 | <b>Channel :</b>   | 189       |
| <b>Limit (ppm) :</b> | 2.5     | <b>Frequency :</b> | 836.4 MHz |

| Temperature<br>(°C) | GPRS class 8    | EDGE class 8    | Result |
|---------------------|-----------------|-----------------|--------|
|                     | Deviation (ppm) | Deviation (ppm) |        |
| 50                  | 0.0143          | 0.0084          | PASS   |
| 40                  | 0.0120          | 0.0048          |        |
| 30                  | 0.0024          | 0.0024          |        |
| 20(Ref.)            | 0.0000          | 0.0000          |        |
| 10                  | 0.0024          | 0.0012          |        |
| 0                   | 0.0060          | 0.0024          |        |
| -10                 | 0.0084          | 0.0012          |        |
| -20                 | 0.0108          | 0.0036          |        |
| -30                 | 0.0096          | 0.0060          |        |

|                      |                        |                    |            |
|----------------------|------------------------|--------------------|------------|
| <b>Band :</b>        | GSM 1900               | <b>Channel :</b>   | 661        |
| <b>Limit (ppm) :</b> | within authorized band | <b>Frequency :</b> | 1880.0 MHz |

| Temperature<br>(°C) | GPRS class 8    | EDGE class 8    | Result |
|---------------------|-----------------|-----------------|--------|
|                     | Deviation (ppm) | Deviation (ppm) |        |
| 50                  | 0.0207          | 0.0021          | PASS   |
| 40                  | 0.0005          | 0.0011          |        |
| 30                  | 0.0021          | 0.0027          |        |
| 20(Ref.)            | 0.0000          | 0.0000          |        |
| 10                  | 0.0016          | 0.0016          |        |
| 0                   | 0.0186          | 0.0005          |        |
| -10                 | 0.0027          | 0.0005          |        |
| -20                 | 0.0011          | 0.0011          |        |
| -30                 | 0.0037          | 0.0037          |        |

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

|                      |              |                    |           |
|----------------------|--------------|--------------------|-----------|
| <b>Band :</b>        | WCDMA Band V | <b>Channel :</b>   | 4182      |
| <b>Limit (ppm) :</b> | 2.5          | <b>Frequency :</b> | 836.4 MHz |

| Temperature<br>(°C) | RMC 12.2Kbps    | Result |
|---------------------|-----------------|--------|
|                     | Deviation (ppm) |        |
| 50                  | 0.0143          | PASS   |
| 40                  | 0.0120          |        |
| 30                  | 0.0108          |        |
| 20(Ref.)            | 0.0000          |        |
| 10                  | 0.0096          |        |
| 0                   | 0.0108          |        |
| -10                 | 0.0024          |        |
| -20                 | 0.0012          |        |
| -30                 | 0.0132          |        |

|                      |                        |                    |            |
|----------------------|------------------------|--------------------|------------|
| <b>Band :</b>        | WCDMA Band II          | <b>Channel :</b>   | 9400       |
| <b>Limit (ppm) :</b> | within authorized band | <b>Frequency :</b> | 1880.0 MHz |

| Temperature<br>(°C) | RMC 12.2Kbps    | Result |
|---------------------|-----------------|--------|
|                     | Deviation (ppm) |        |
| 50                  | 0.0027          | PASS   |
| 40                  | 0.0011          |        |
| 30                  | 0.0005          |        |
| 20(Ref.)            | 0.0000          |        |
| 10                  | 0.0005          |        |
| 0                   | 0.0005          |        |
| -10                 | 0.0027          |        |
| -20                 | 0.0016          |        |
| -30                 | 0.0032          |        |

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

|                      |                             |                    |            |
|----------------------|-----------------------------|--------------------|------------|
| <b>Band :</b>        | CDMA2000 BC0 1xRTT_RC3+SO32 | <b>Channel :</b>   | 384        |
| <b>Limit (ppm) :</b> | 2.5                         | <b>Frequency :</b> | 836.52 MHz |

| Temperature (°C) | Deviation (ppm) | Result |
|------------------|-----------------|--------|
| 50               | 0.0311          | PASS   |
| 40               | 0.0275          |        |
| 30               | 0.0299          |        |
| 20(Ref.)         | 0.0000          |        |
| 10               | 0.0012          |        |
| 0                | 0.0036          |        |
| -10              | 0.0287          |        |
| -20              | 0.0048          |        |
| -30              | 0.0060          |        |

|                      |                             |                    |            |
|----------------------|-----------------------------|--------------------|------------|
| <b>Band :</b>        | CDMA2000 BC1 1xRTT_RC3+SO32 | <b>Channel :</b>   | 600        |
| <b>Limit (ppm) :</b> | within authorized band      | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | Deviation (ppm) | Result |
|------------------|-----------------|--------|
| 50               | 0.0011          | PASS   |
| 40               | 0.0021          |        |
| 30               | 0.0005          |        |
| 20(Ref.)         | 0.0000          |        |
| 10               | 0.0016          |        |
| 0                | 0.0021          |        |
| -10              | 0.0005          |        |
| -20              | 0.0011          |        |
| -30              | 0.0000          |        |

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

### 3.8.7 Test Result of Voltage Variation

| Band & Channel          | Mode              | Voltage(Volt) | Deviation (ppm) | Limit (ppm) | Result |
|-------------------------|-------------------|---------------|-----------------|-------------|--------|
| GSM 850<br>CH189        | GPRS<br>class 8   | 4.2           | 0.0036          | 2.5         | PASS   |
|                         |                   | 3.8           | 0.0000          |             |        |
|                         |                   | BEP           | 0.0072          |             |        |
|                         | EDGE<br>class 8   | 4.2           | 0.0012          |             |        |
|                         |                   | 3.8           | 0.0024          |             |        |
|                         |                   | BEP           | 0.0048          |             |        |
| GSM 1900<br>CH661       | GPRS<br>class 8   | 4.2           | 0.0011          | (Note 3.)   |        |
|                         |                   | 3.8           | 0.0043          |             |        |
|                         |                   | BEP           | 0.0059          |             |        |
|                         | EDGE<br>class 8   | 4.2           | 0.0213          |             |        |
|                         |                   | 3.8           | 0.0027          |             |        |
|                         |                   | BEP           | 0.0005          |             |        |
| WCDMA Band V<br>CH4182  | RMC<br>12.2Kbps   | 4.2           | 0.0000          | 2.5         |        |
|                         |                   | 3.8           | 0.0108          |             |        |
|                         |                   | BEP           | 0.0096          |             |        |
| WCDMA Band II<br>CH9400 | RMC<br>12.2Kbps   | 4.2           | 0.0005          | (Note 3.)   |        |
|                         |                   | 3.8           | 0.0016          |             |        |
|                         |                   | BEP           | 0.0011          |             |        |
| CDMA2000 BC0<br>CH384   | 1xRTT<br>RC3+SO32 | 4.2           | 0.0000          | 2.5         |        |
|                         |                   | 3.8           | 0.0275          |             |        |
|                         |                   | BEP           | 0.0012          |             |        |
| CDMA2000 BC1<br>CH600   | 1xRTT<br>RC3+SO32 | 4.2           | 0.0011          | (Note 3.)   |        |
|                         |                   | 3.8           | 0.0005          |             |        |
|                         |                   | BEP           | 0.0016          |             |        |

**Note:**

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.6 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4 List of Measuring Equipment

| Instrument                | Manufacturer    | Model No.        | Serial No.        | Characteristics     | Calibration Date | Test Date                       | Due Date      | Remark                   |
|---------------------------|-----------------|------------------|-------------------|---------------------|------------------|---------------------------------|---------------|--------------------------|
| System Simulator          | Rohde & Schwarz | CMU200           | 117995            | N/A                 | Jul. 29, 2014    | Aug. 04, 2014~<br>Nov. 05, 2014 | Jul. 28, 2015 | Conducted<br>(TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz | FSP40            | 100055            | 9kHz~40GHz          | Jun. 09, 2014    | Aug. 04, 2014~<br>Nov. 05, 2014 | Jun. 08, 2015 | Conducted<br>(TH02-HY)   |
| Thermal Chamber           | Ten Billion     | TTH-D3SP         | TBN-9307<br>01    | N/A                 | Jul. 17, 2014    | Aug. 04, 2014~<br>Nov. 05, 2014 | Jul. 16, 2015 | Conducted<br>(TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz | FSV30            | 101749            | 10Hz ~ 30GHz        | Feb. 10, 2014    | Oct. 28, 2014                   | Feb. 09, 2015 | Radiation<br>(03CH07-HY) |
| Bilog Antenna             | Schaffner       | CBL6111C         | 2726              | 30MHz ~ 1GHz        | Sep. 27, 2014    | Oct. 28, 2014                   | Sep. 26, 2015 | Radiation<br>(03CH07-HY) |
| Double Ridge Horn Antenna | ESCO            | 3117             | 75962             | 1GHz~18GHz          | Aug. 19, 2014    | Oct. 28, 2014                   | Aug. 18, 2015 | Radiation<br>(03CH07-HY) |
| Preamplifier              | COM-POWER       | PA-103A          | 161241            | 10 MHz ~<br>1000MHz | Mar. 17, 2014    | Oct. 28, 2014                   | Mar. 16, 2015 | Radiation<br>(03CH07-HY) |
| Preamplifier              | Agilent         | 8449B            | 3008A023<br>62    | 1 GHz~26.5<br>GHz   | Nov. 29, 2013    | Oct. 28, 2014                   | Nov. 28, 2014 | Radiation<br>(03CH07-HY) |
| Turn Table                | ChainTek        | ChainTek<br>3000 | N/A               | 0 ~ 360 degree      | N/A              | Oct. 28, 2014                   | N/A           | Radiation<br>(03CH07-HY) |
| Antenna Mast              | ChainTek        | M-400-0          | 114/80006<br>04/L | N/A                 | N/A              | Oct. 28, 2014                   | N/A           | Radiation<br>(03CH07-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBE<br>CK | BBHA 9170        | BBHA9170<br>251   | 18GHz~40GHz         | Oct. 02, 2014    | Oct. 28, 2014                   | Oct. 01, 2015 | Radiation<br>(03CH07-HY) |



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.50 |
|-------------------------------------------------------------------------|------|