



FCC RF Test Report

APPLICANT : PAX Technology Limited
EQUIPMENT : UNATTENDED PAYMENT TERMINAL
BRAND NAME : PAX
MODEL NAME : IM30
FCC ID : V5PIM304GBWL
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 22, 2023 ~ Aug. 28, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT	22
5 MEASUREMENT UNCERTAINTY	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR380711C	Rev. 01	Initial issue of report	Oct. 12, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Average Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 30\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.42 dB at 2389.95 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.80 dB at 0.15 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

PAX Technology Limited

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

1.2 Manufacturer

PAX Computer Technology (Shenzhen) Co., Ltd.

401 and 402, Building 3, Shenzhen Software Park, Nanshan District, Shenzhen City, Guangdong Province, P.R.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	UNATTENDED PAYMENT TERMINAL
Brand Name	PAX
Model Name	IM30
FCC ID	V5PIM304GBWL
SN	Conducted: 1640169811 Conduction: 1640169774 Radiation: 1640169807
HW Version	NA
SW Version	NA
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Avg) Output Power to antenna	802.11b : 15.93 dBm (0.0392 W) 802.11g : 14.76 dBm (0.0299 W) 802.11n HT20 : 14.82 dBm (0.0303 W)
99% Occupied Bandwidth	802.11b : 12.148 MHz 802.11g : 17.383 MHz 802.11n HT20 : 18.142 MHz
Antenna Type / Gain	metal antenna type with gain 1.7 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :WCDMA Band5 Idle (ANT 2) + WLAN Link(2.4G) + Adapter (MDB Port)
Remark: Radiated Test Cases, The tests were performance with Adapter and AC Cable	


RSE Co-location
802.11n HT20 CH11 2462 + LTE Band13 Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

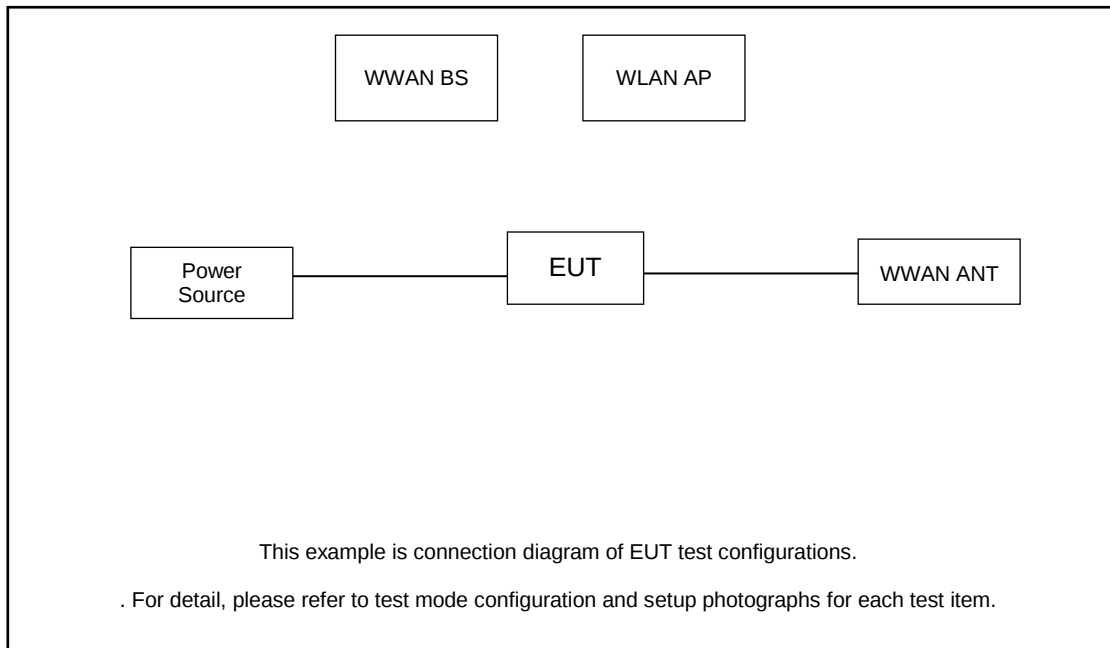

Radiated Emission:

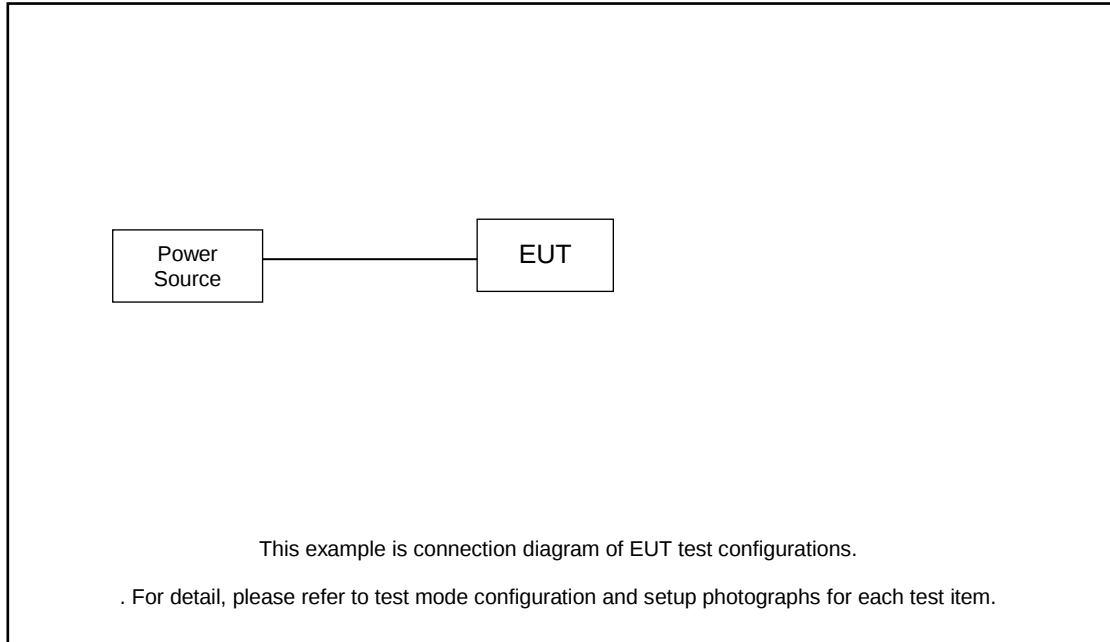

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Adapter	N/A	N/A	N/A	N/A	N/A
4.	AC Cable	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.32 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

=2.32 + 10 = 12.32 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

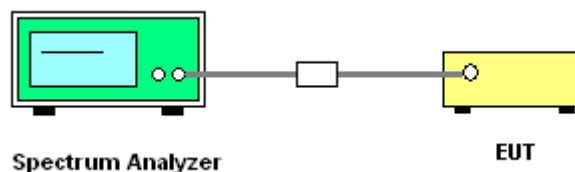

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

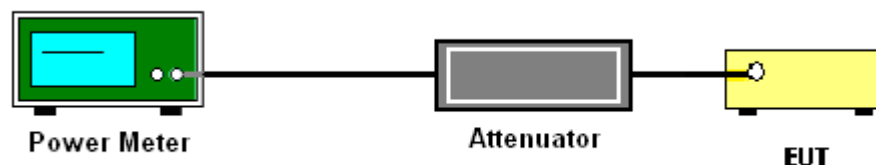



3.2.5 Test Result of Average Output Power

2.4GHz Band											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1		Ant 1
11b	1Mbps	1	1	2412	15.93	30.00	1.70	17.63	36.00	Pass	15.00
11b	1Mbps	1	6	2437	15.11	30.00	1.70	16.81	36.00	Pass	14.00
11b	1Mbps	1	11	2462	14.90	30.00	1.70	16.60	36.00	Pass	14.00
11g	6Mbps	1	1	2412	12.71	30.00	1.70	14.41	36.00	Pass	12.00
11g	6Mbps	1	6	2437	14.76	30.00	1.70	16.46	36.00	Pass	14.00
11g	6Mbps	1	11	2462	14.71	30.00	1.70	16.41	36.00	Pass	14.00
HT20	MCS0	1	1	2412	12.51	30.00	1.70	14.21	36.00	Pass	12.00
HT20	MCS0	1	6	2437	14.82	30.00	1.70	16.52	36.00	Pass	14.00
HT20	MCS0	1	11	2462	14.77	30.00	1.70	16.47	36.00	Pass	14.00

Note: the duty cycle factor has been added to the final results.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

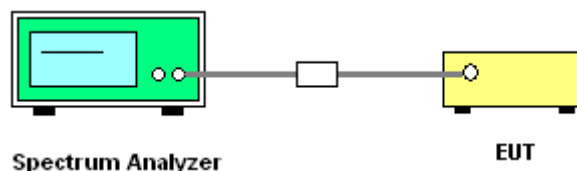

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

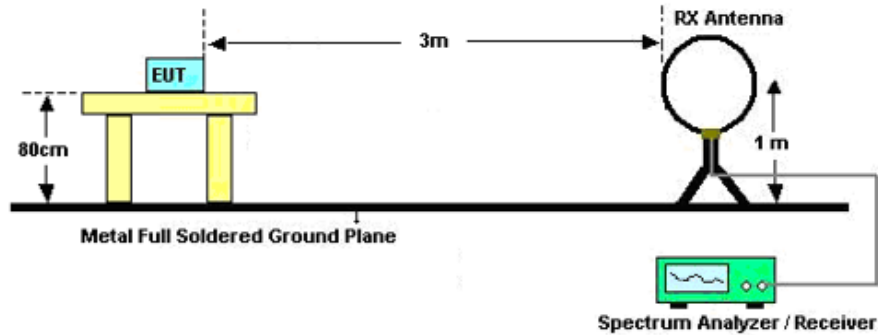

For radiated emissions from 30MHz to 1GHz

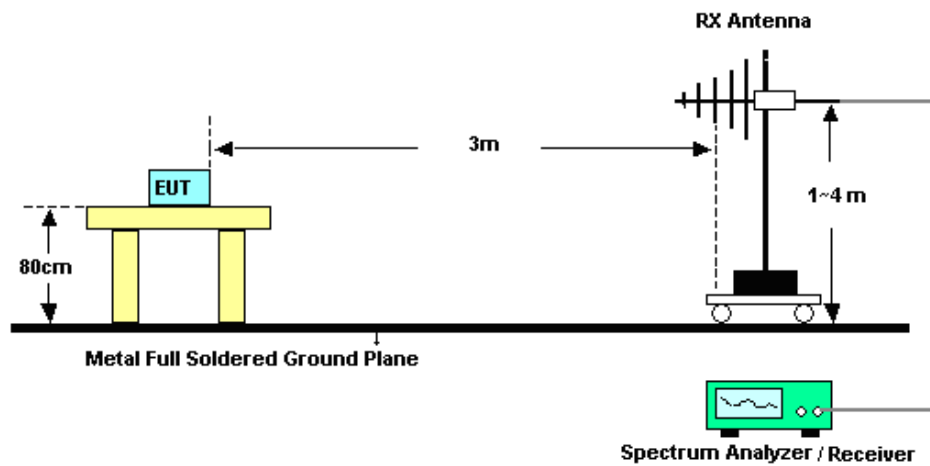

For radiated emissions above 1GHz

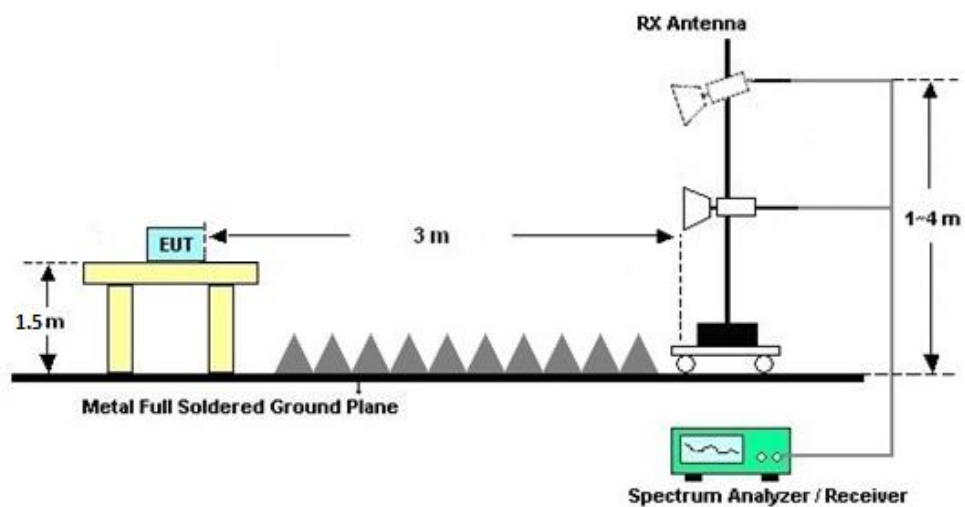

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

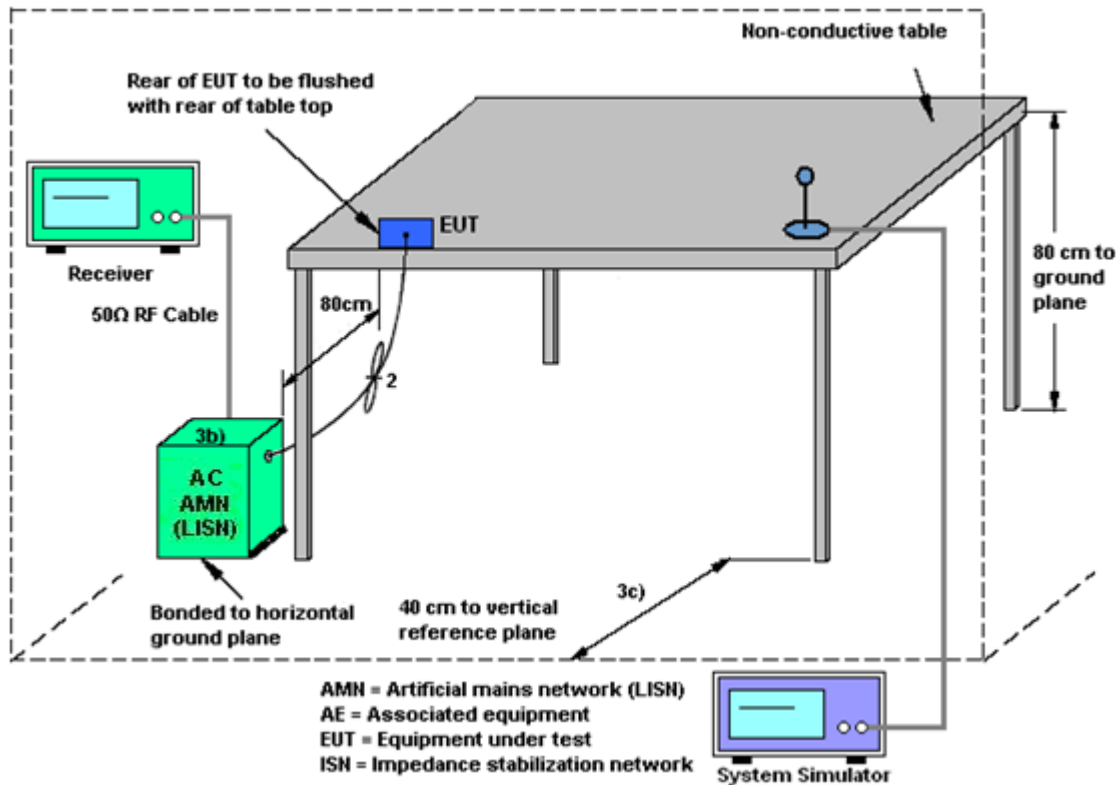

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	Aug. 22, 2023~Aug. 28, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	Aug. 22, 2023~Aug. 28, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Aug. 22, 2023~Aug. 28, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Aug. 22, 2023~Aug. 28, 2023	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	Aug. 22, 2023~Aug. 28, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Aug. 22, 2023~Aug. 28, 2023	Jul.06, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Aug. 22, 2023~Aug. 28, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Aug. 22, 2023~Aug. 28, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Aug. 22, 2023~Aug. 28, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	Aug. 22, 2023~Aug. 28, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	1 N/A	Nov. 10, 2022	Aug. 22, 2023~Aug. 28, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 22, 2023~Aug. 28, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 22, 2023~Aug. 28, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Aug. 23, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Aug. 23, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Aug. 23, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Aug. 24, 2023~Aug. 25, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Aug. 24, 2023~Aug. 25, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Aug. 24, 2023~Aug. 25, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 08, 2023	Aug. 24, 2023~Aug. 25, 2023	Apr. 07, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB
Conducted Emissions	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 %
Conducted Power Spectral Density	± 1.32 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Ambient Condition: 24~26 °C, 45~55 %RH

According Standard: ■Part15C

Test Date: 2023/8/24~2023/8/25Test Engineer: Zhang Xue Yi


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.08	2408.48	2415.56	0.5	PASS
		2437	8.00	2433.00	2441.00	0.5	PASS
		2462	8.04	2458.00	2466.04	0.5	PASS
11G	Ant1	2412	15.48	2404.44	2419.92	0.5	PASS
		2437	15.48	2429.44	2444.92	0.5	PASS
		2462	15.16	2454.44	2469.60	0.5	PASS
11N20SISO	Ant1	2412	15.48	2404.12	2419.60	0.5	PASS
		2437	15.16	2429.44	2444.60	0.5	PASS
		2462	15.16	2454.44	2469.60	0.5	PASS





Test Graphs

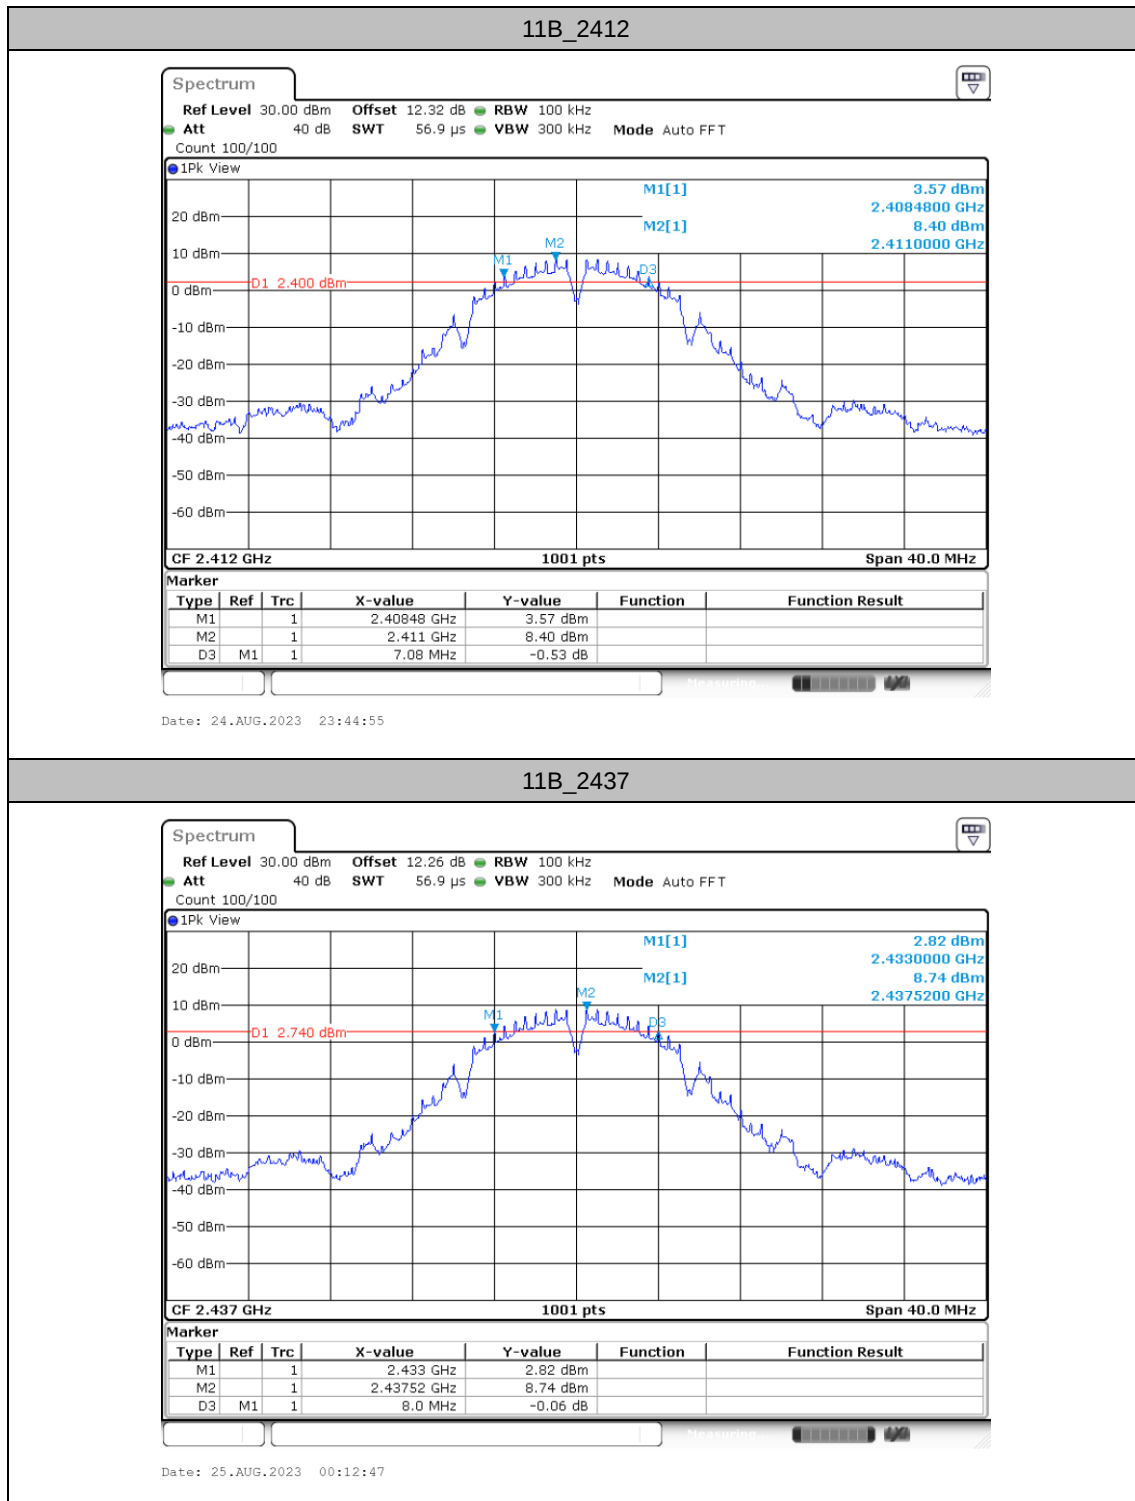

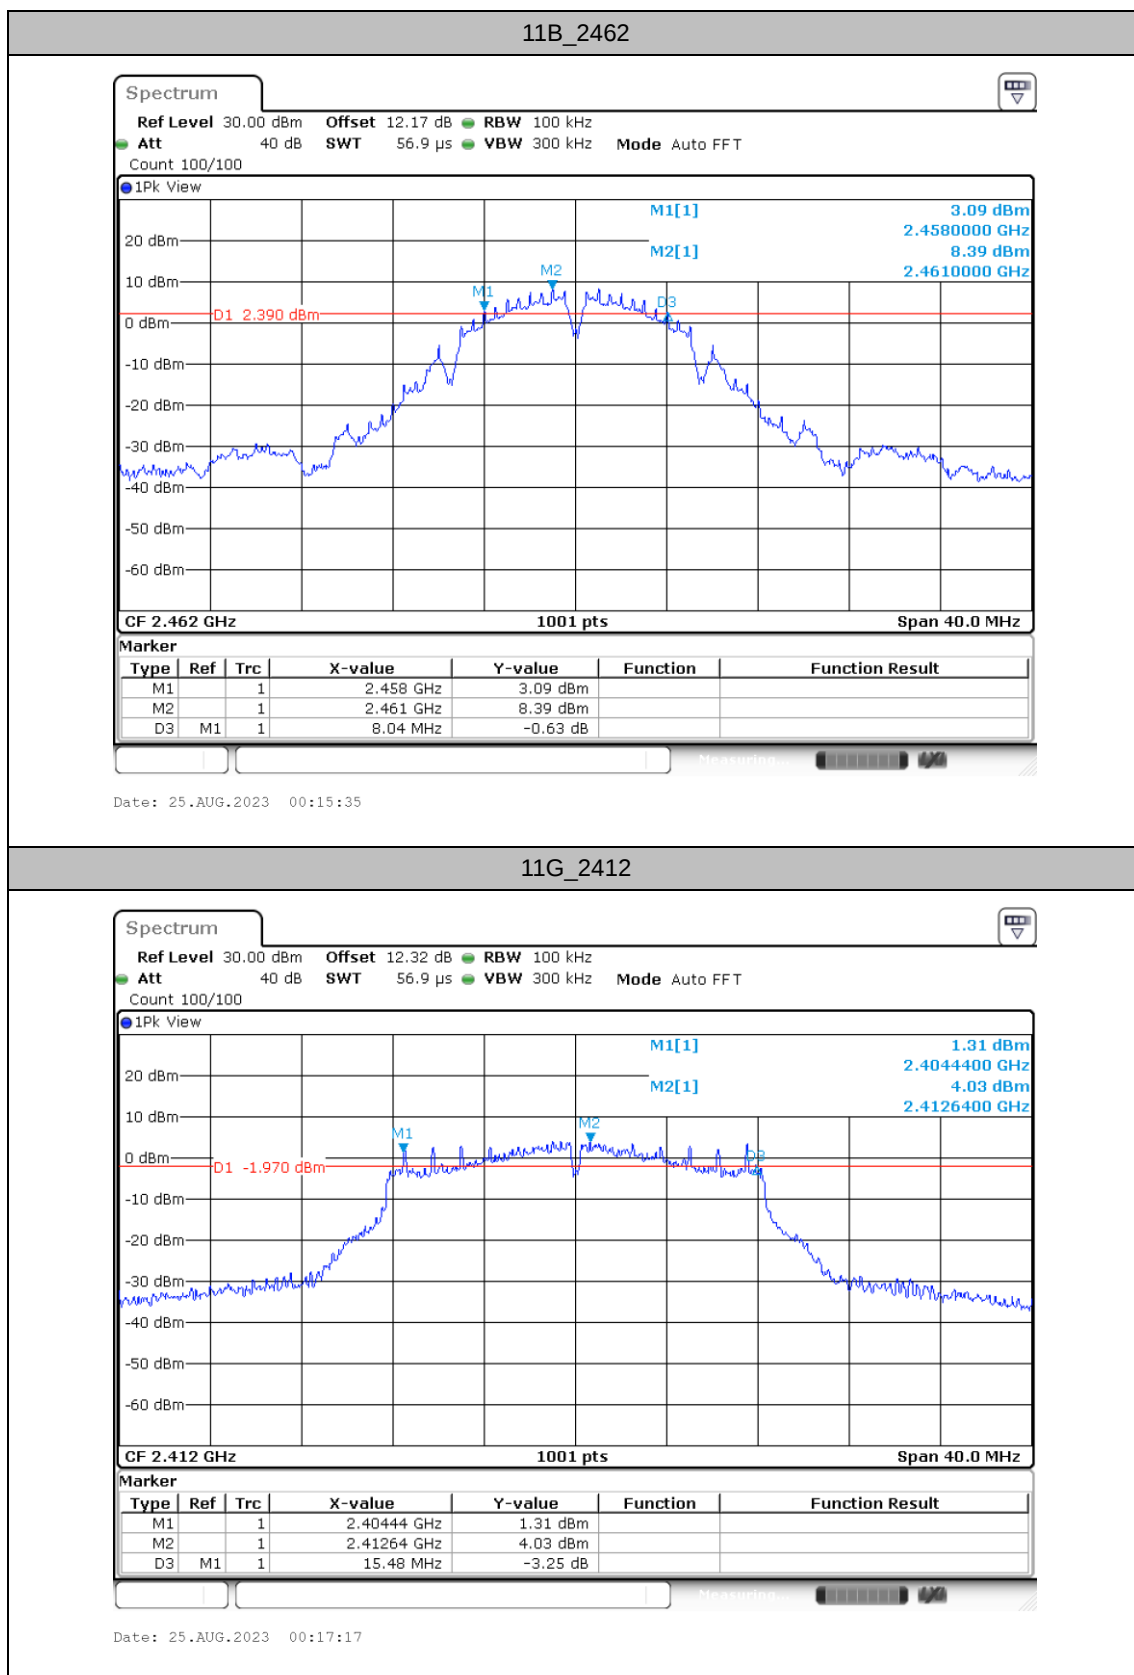

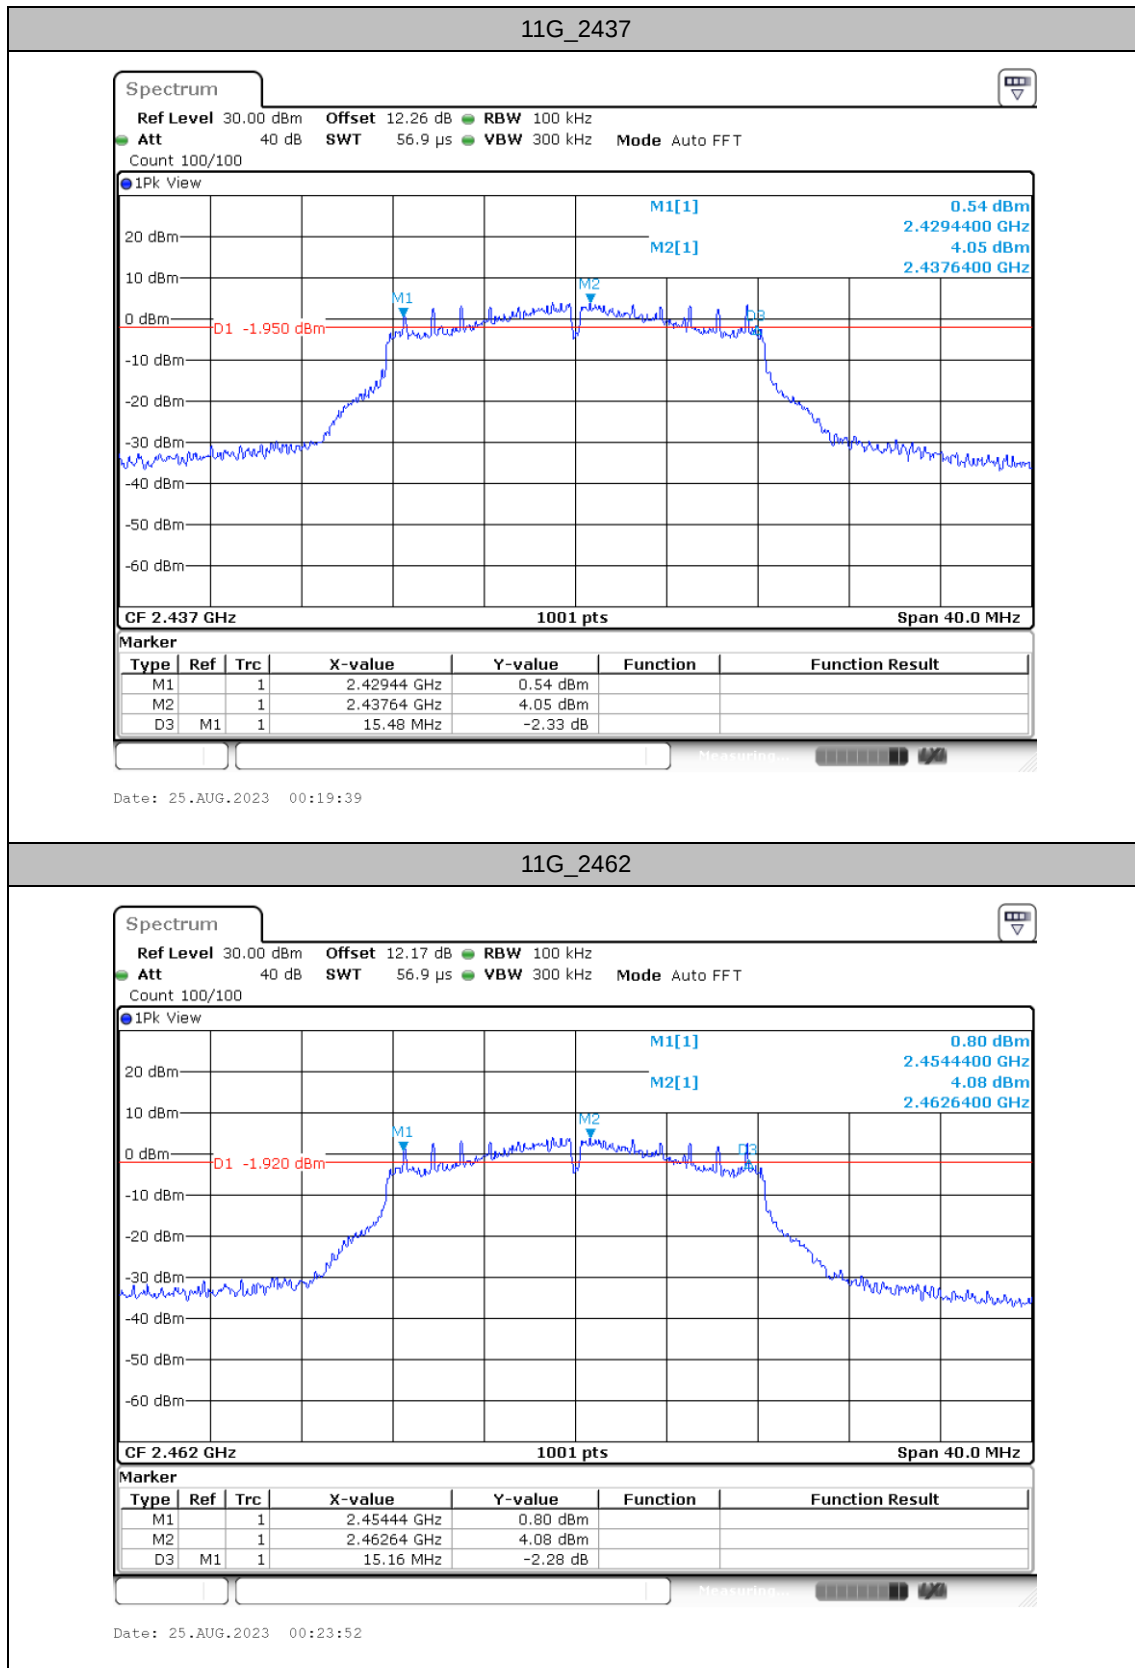

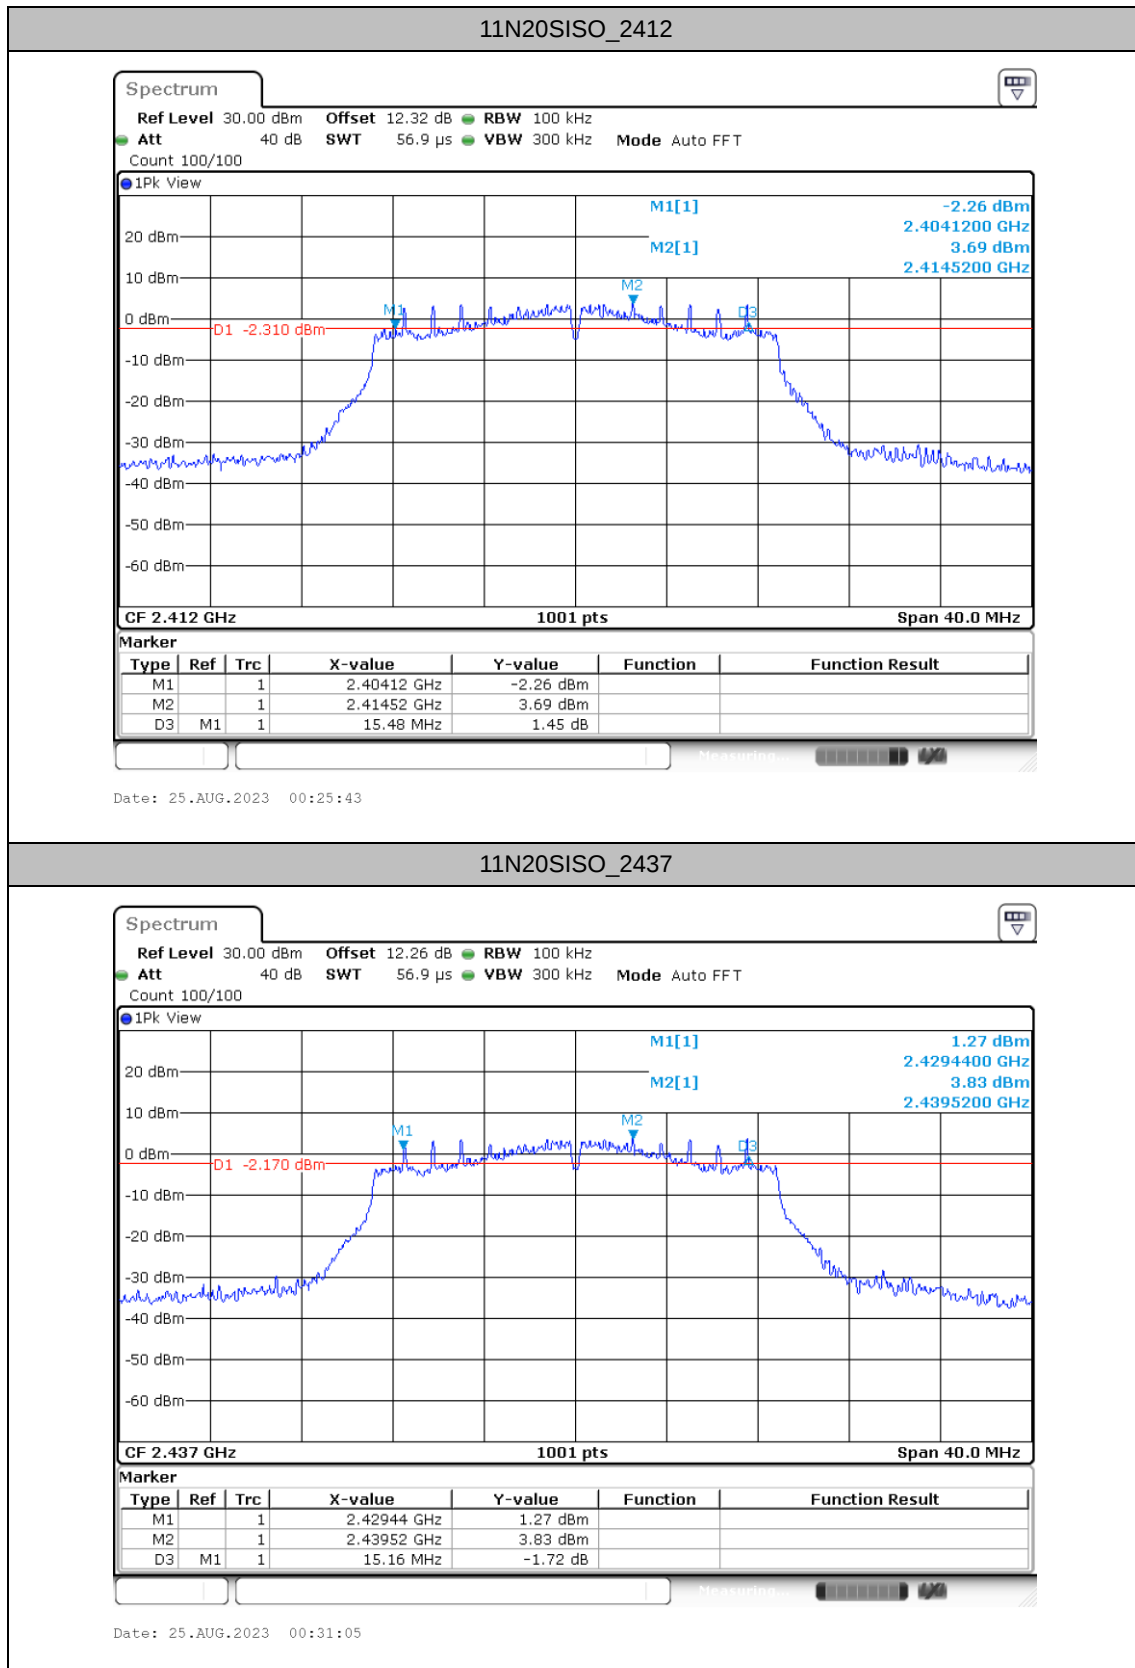

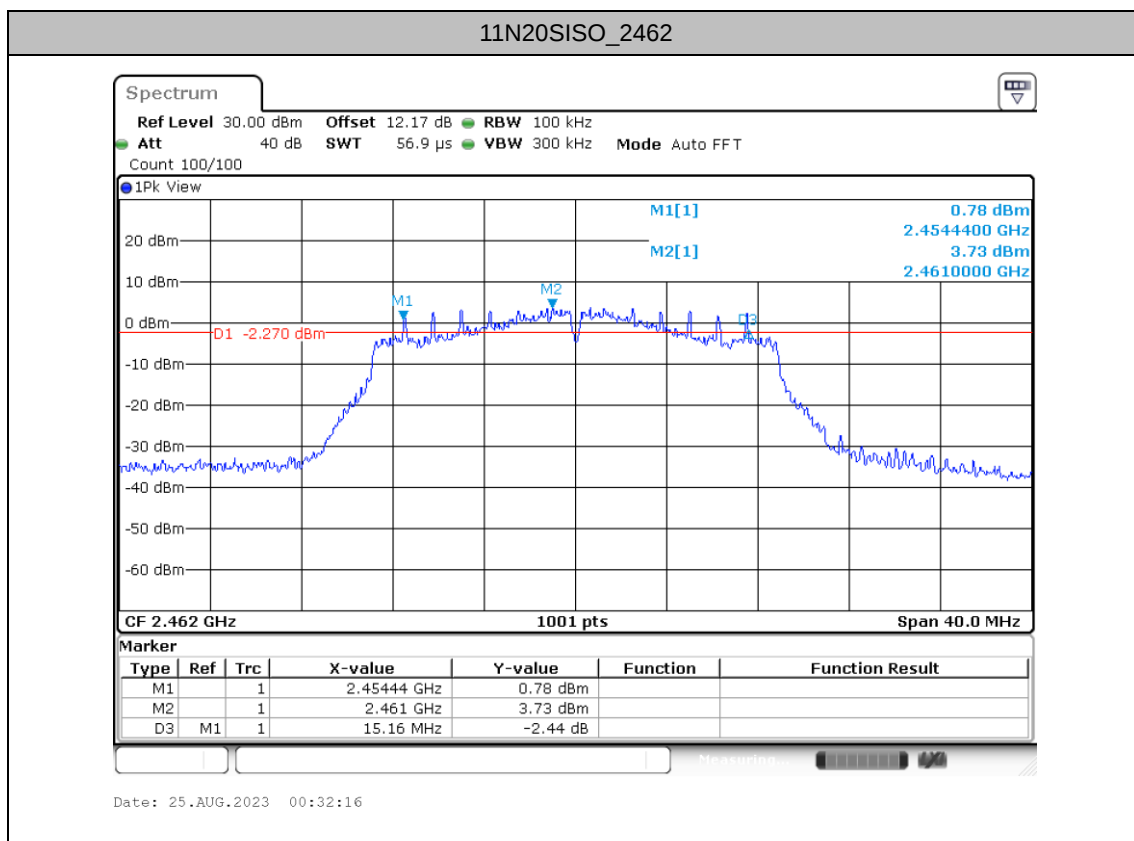




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B	Ant1	2412	11.948	2406.0859	2418.0340
		2437	11.988	2431.0859	2443.0739
		2462	12.148	2455.9660	2468.1139
11G	Ant1	2412	17.383	2403.1289	2420.5115
		2437	17.143	2428.4486	2445.5914
		2462	16.903	2453.4885	2470.3916
11N20SISO	Ant1	2412	18.142	2403.0889	2421.2308
		2437	17.942	2428.0490	2445.9910
		2462	17.942	2453.1688	2471.1109





Test Graphs

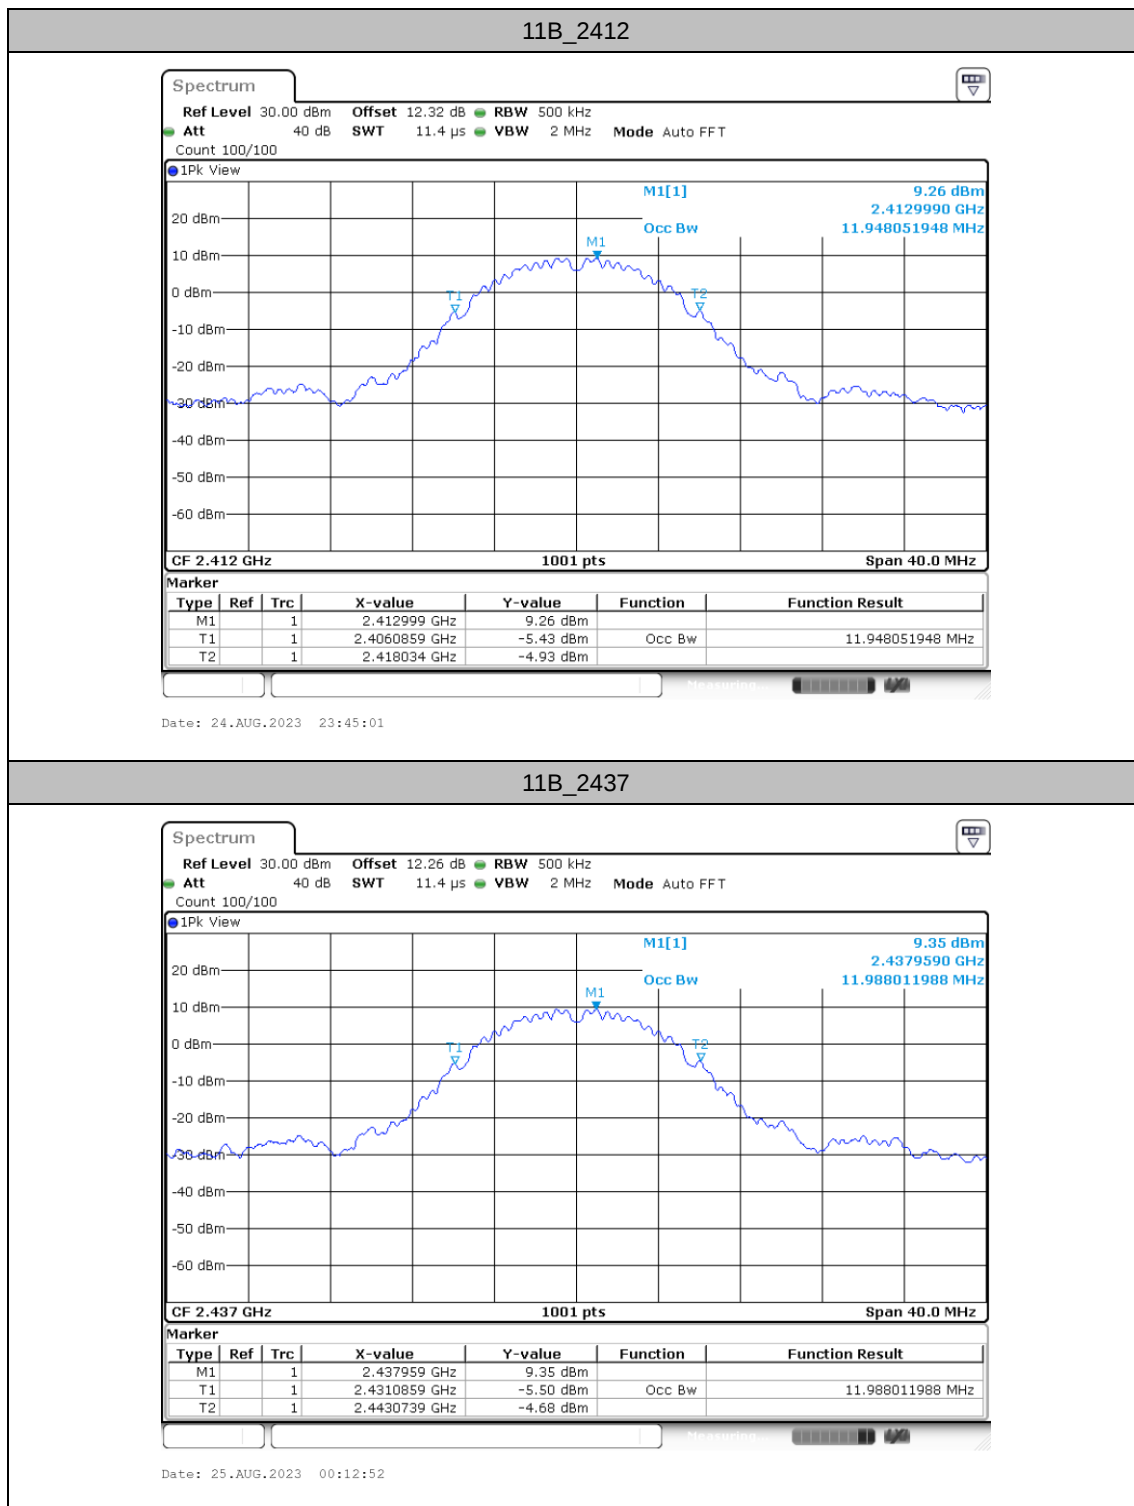

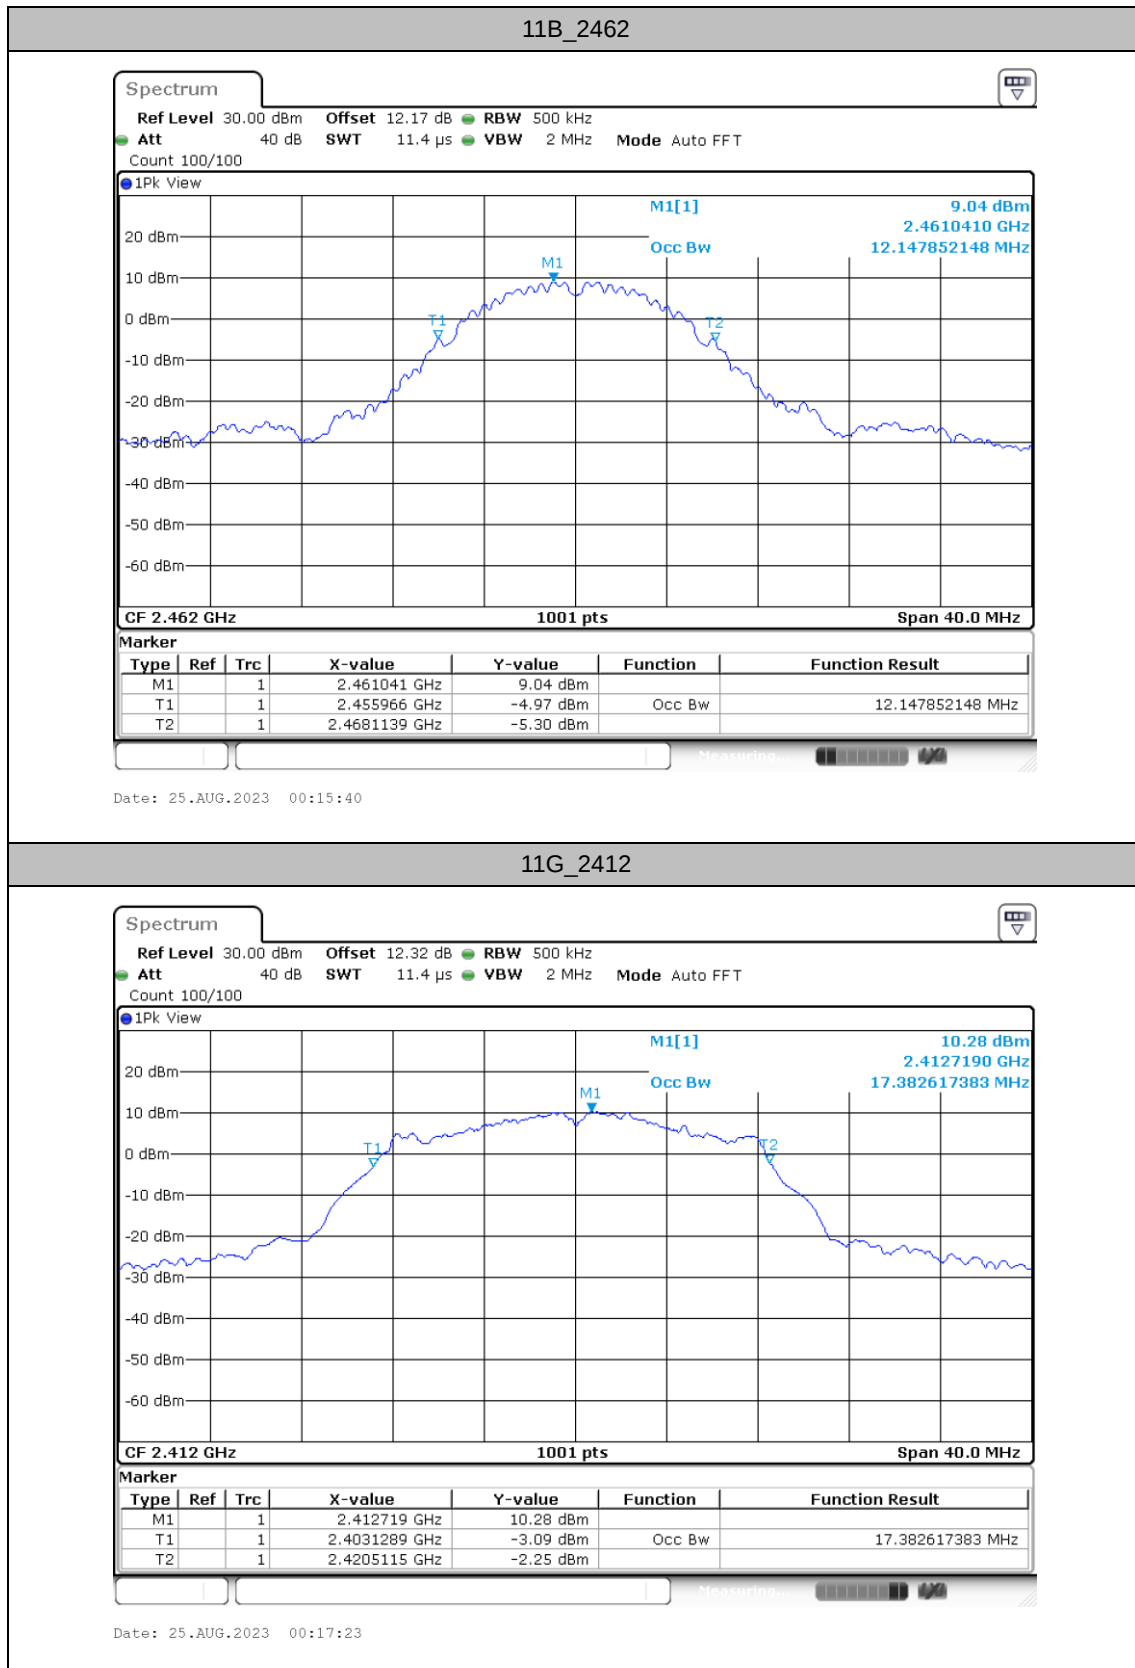

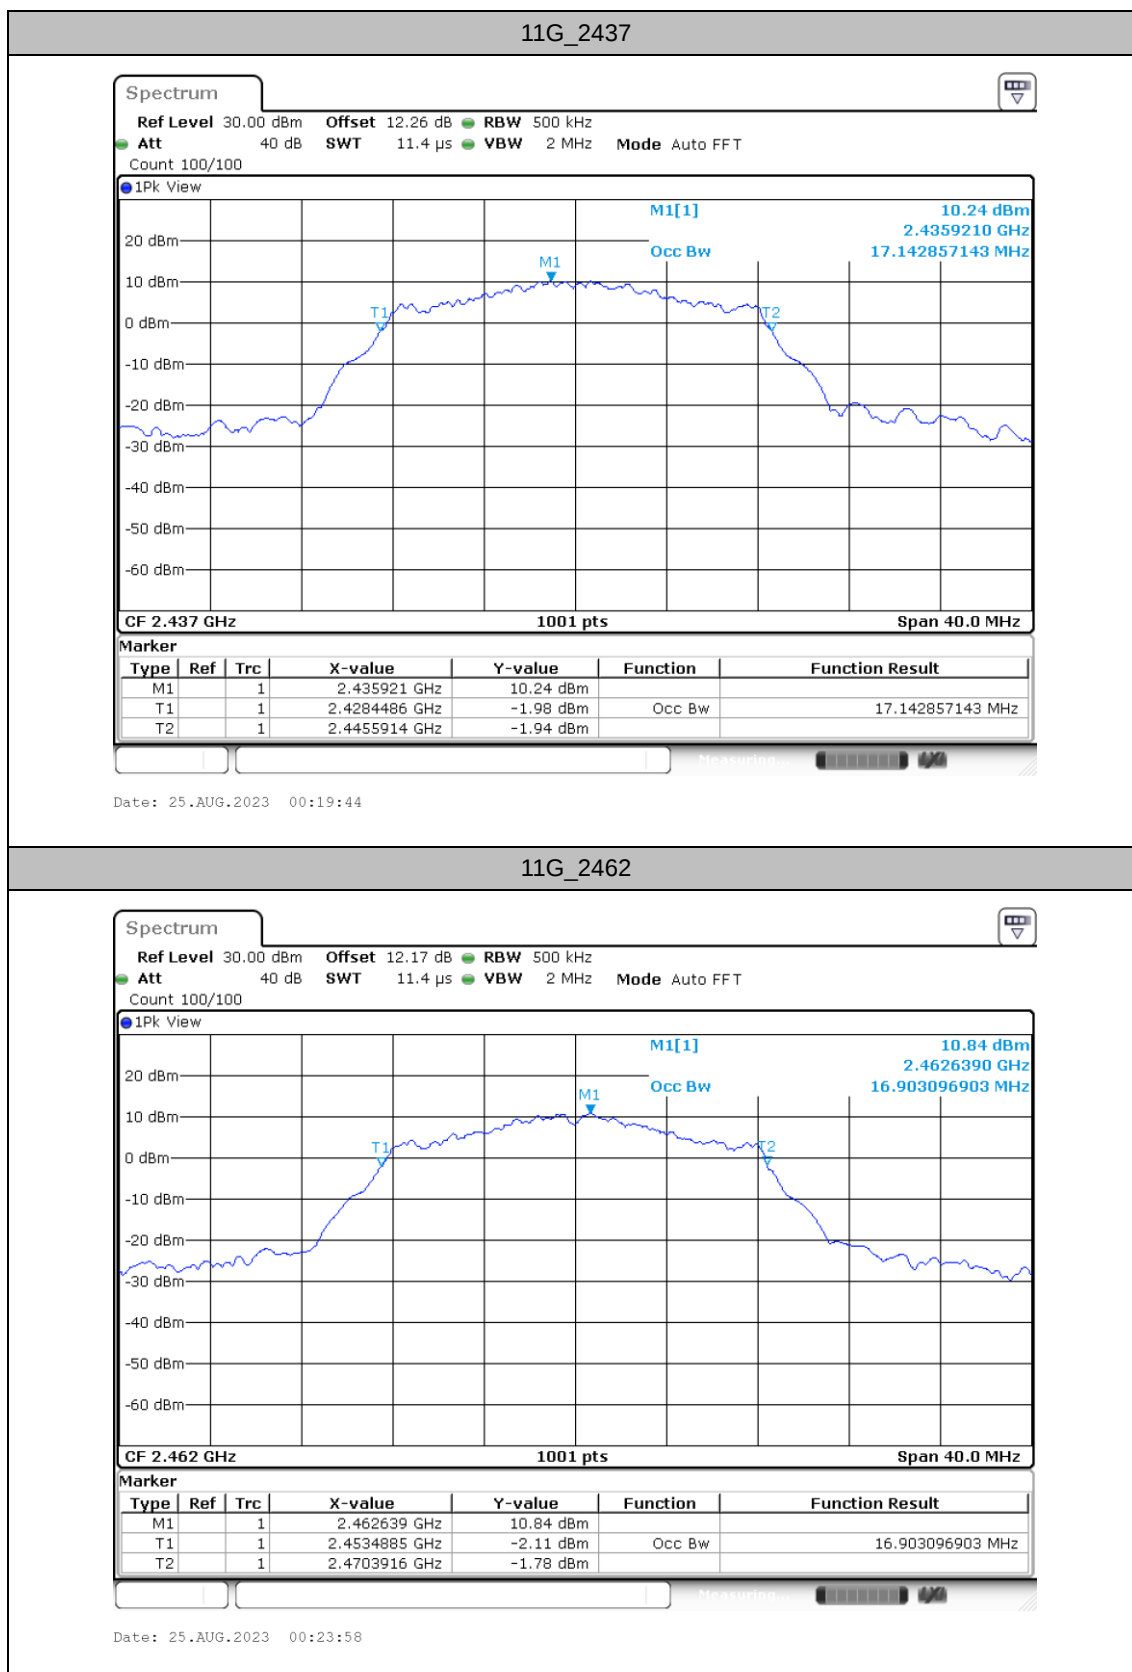

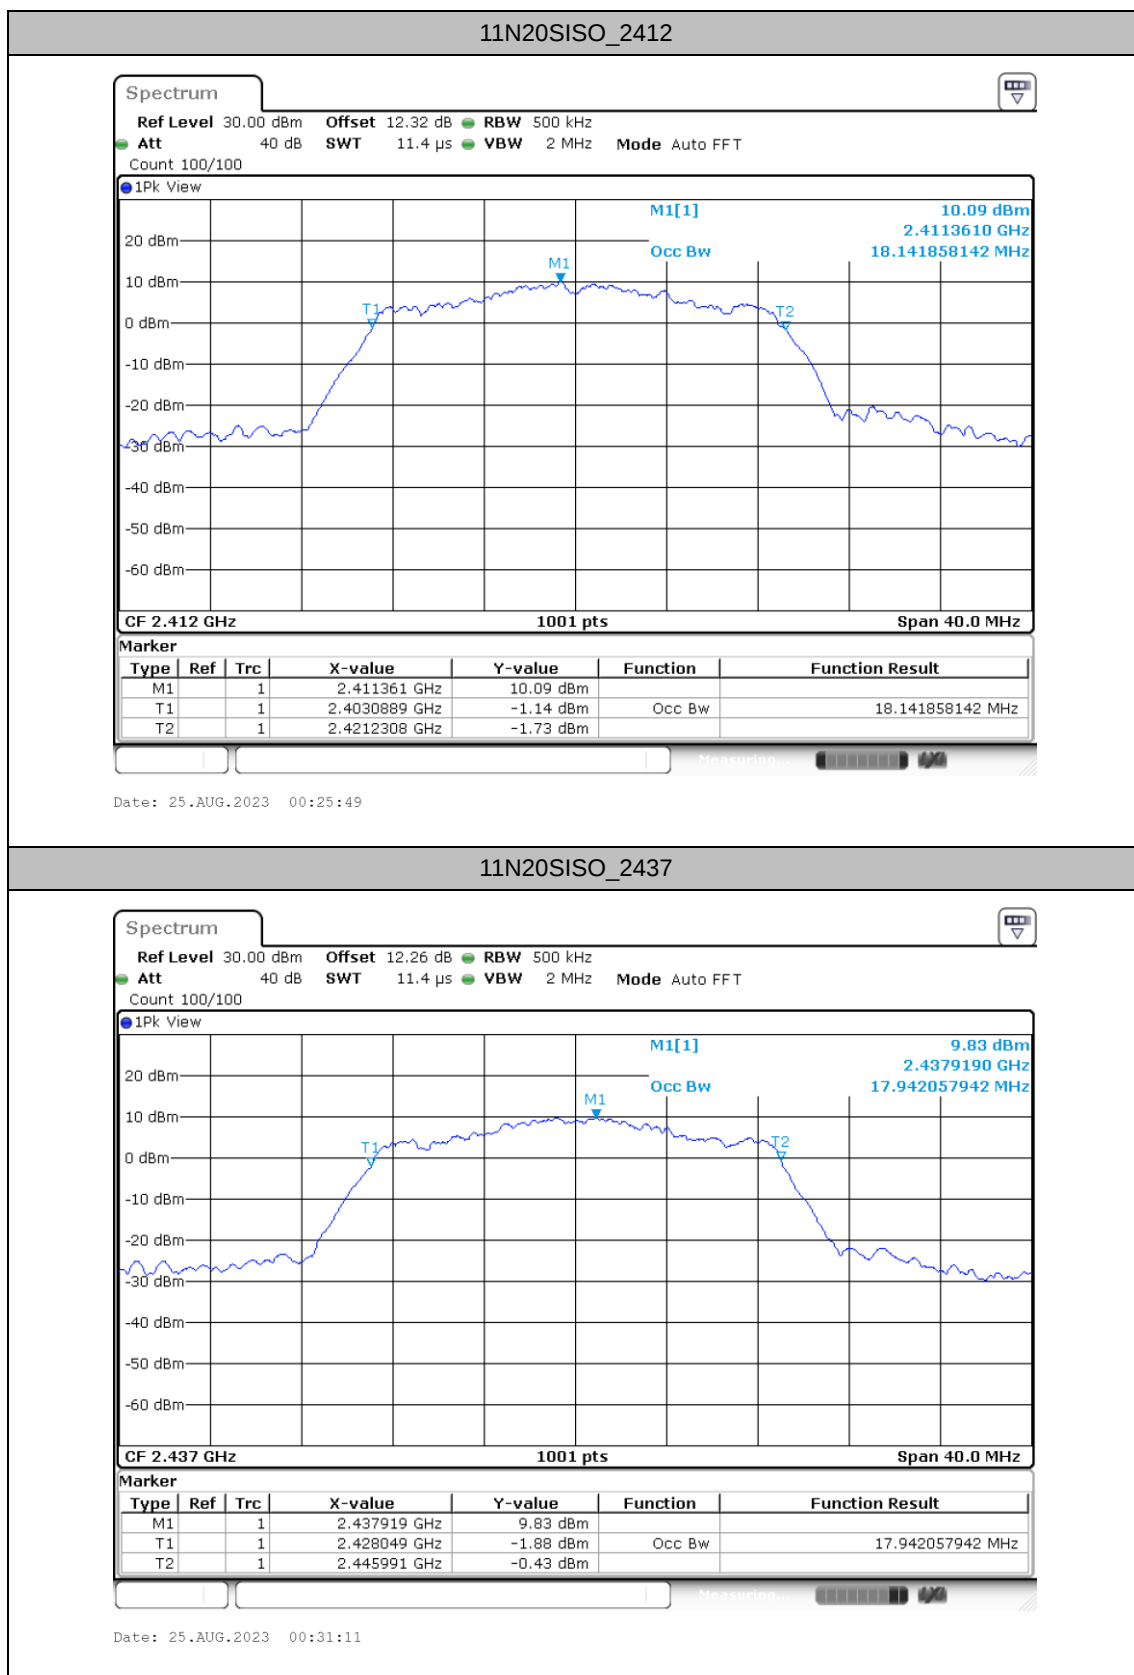

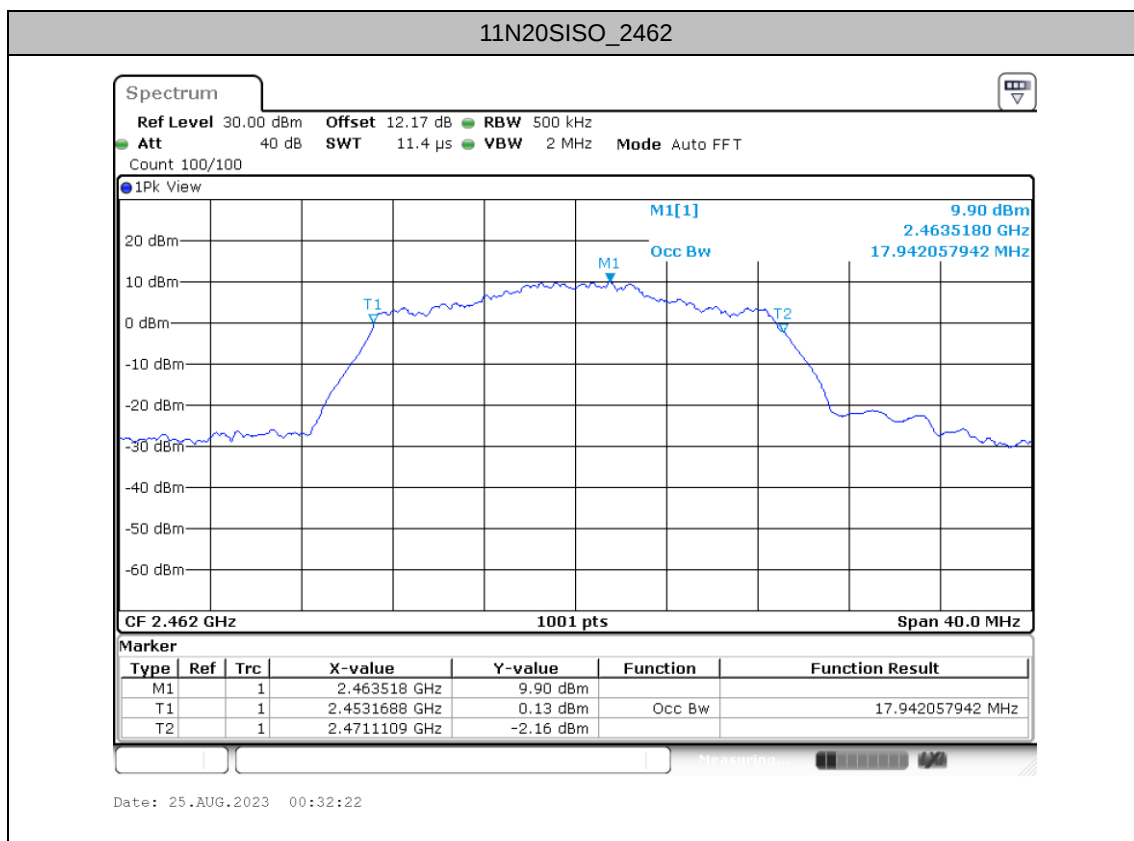




Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-4.49	≤8.00	PASS
		2437	-5.03	≤8.00	PASS
		2462	-4.83	≤8.00	PASS
11G	Ant1	2412	-7.01	≤8.00	PASS
		2437	-7.09	≤8.00	PASS
		2462	-7.01	≤8.00	PASS
11N20SISO	Ant1	2412	-7	≤8.00	PASS
		2437	-6.87	≤8.00	PASS
		2462	-7.09	≤8.00	PASS





Test Graphs

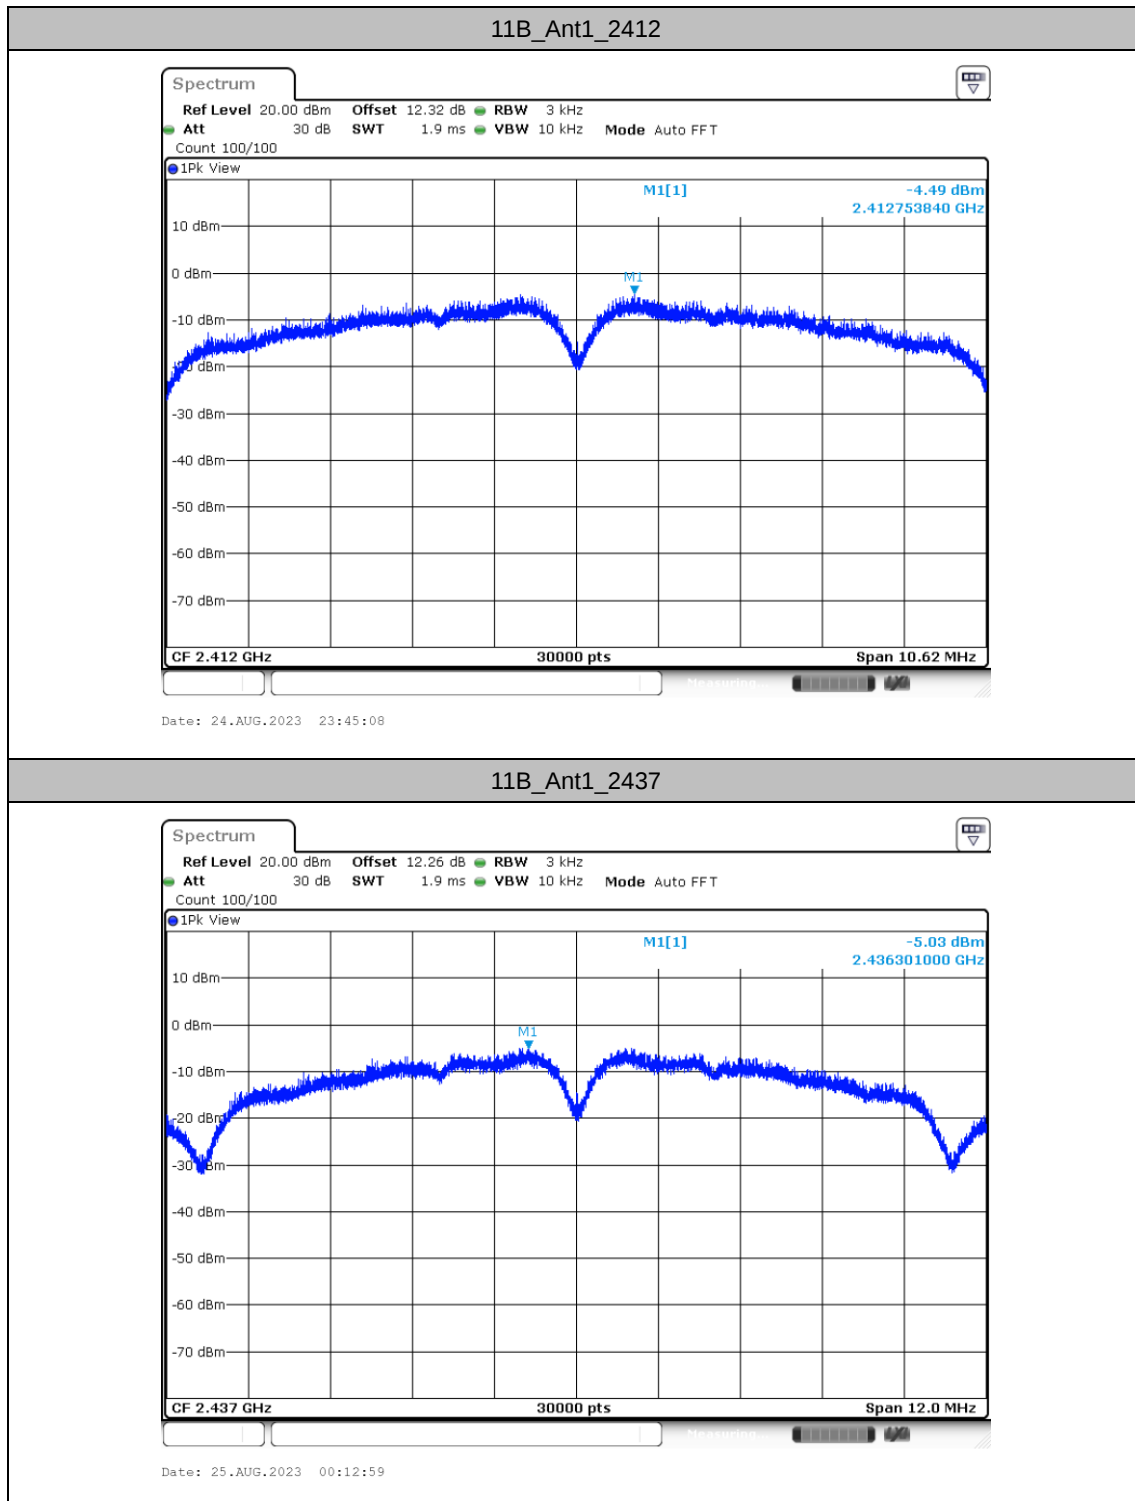

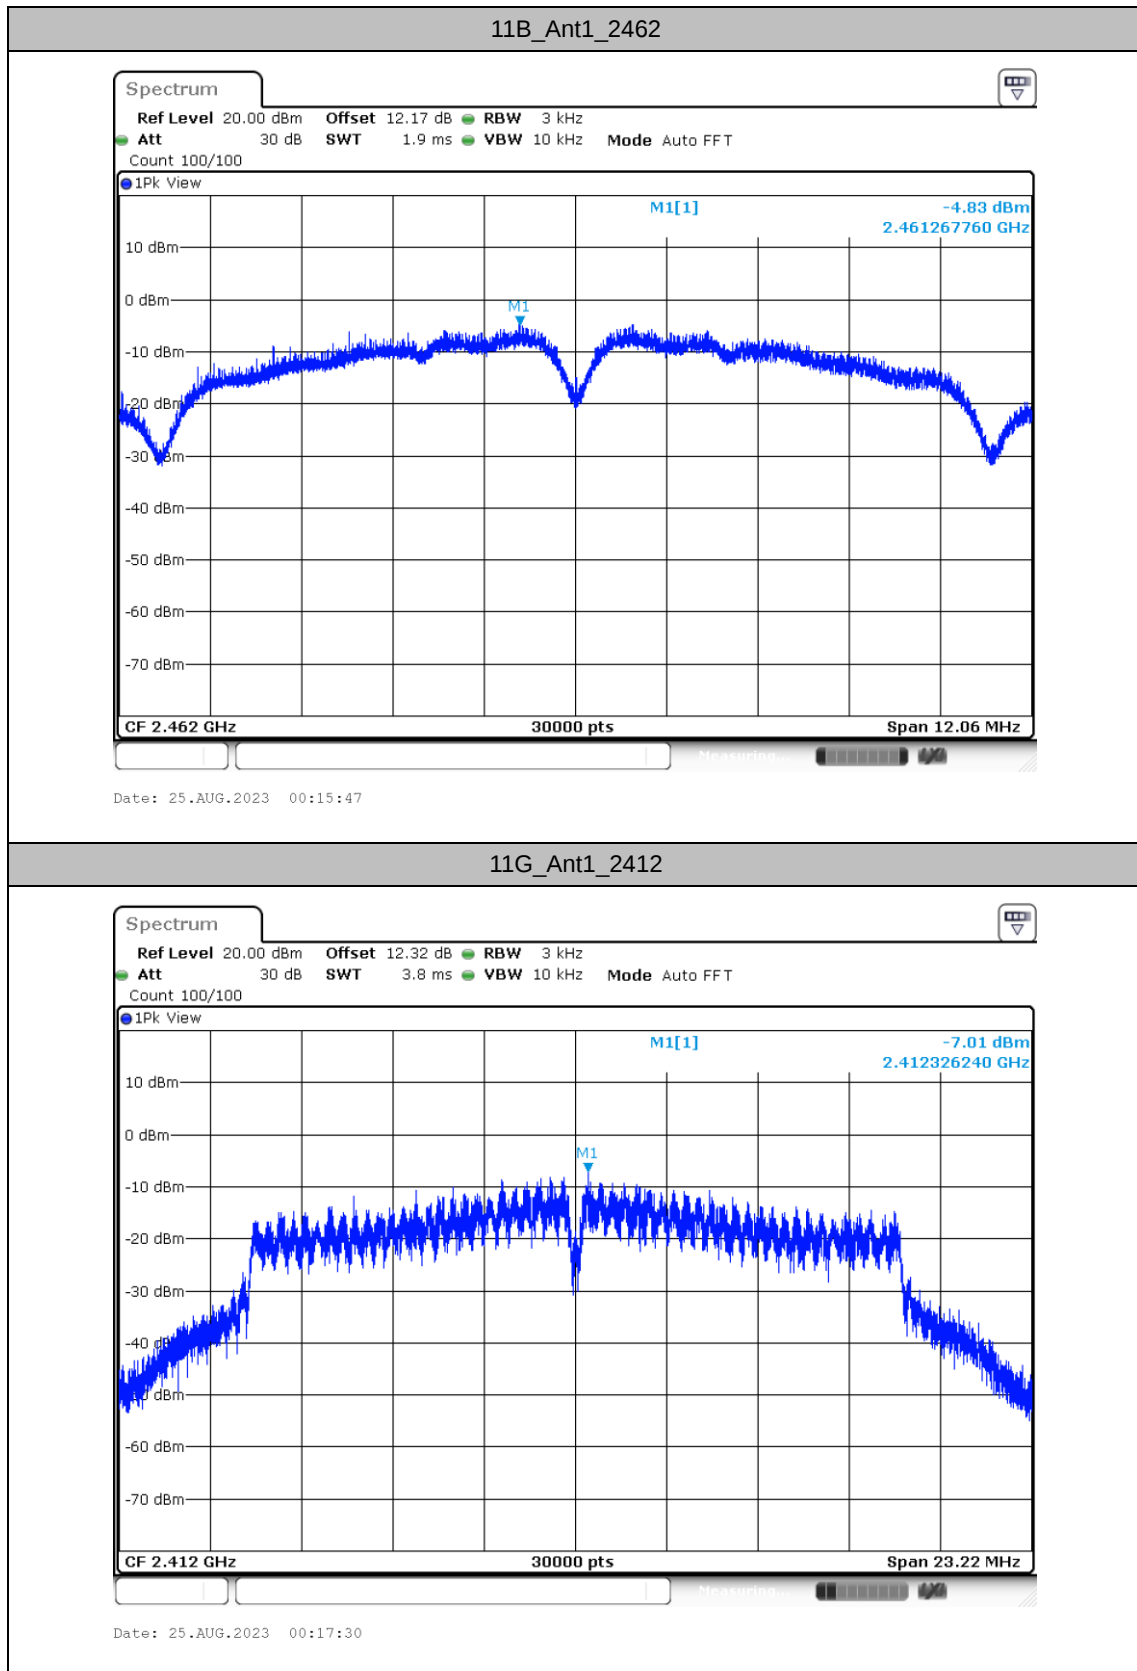

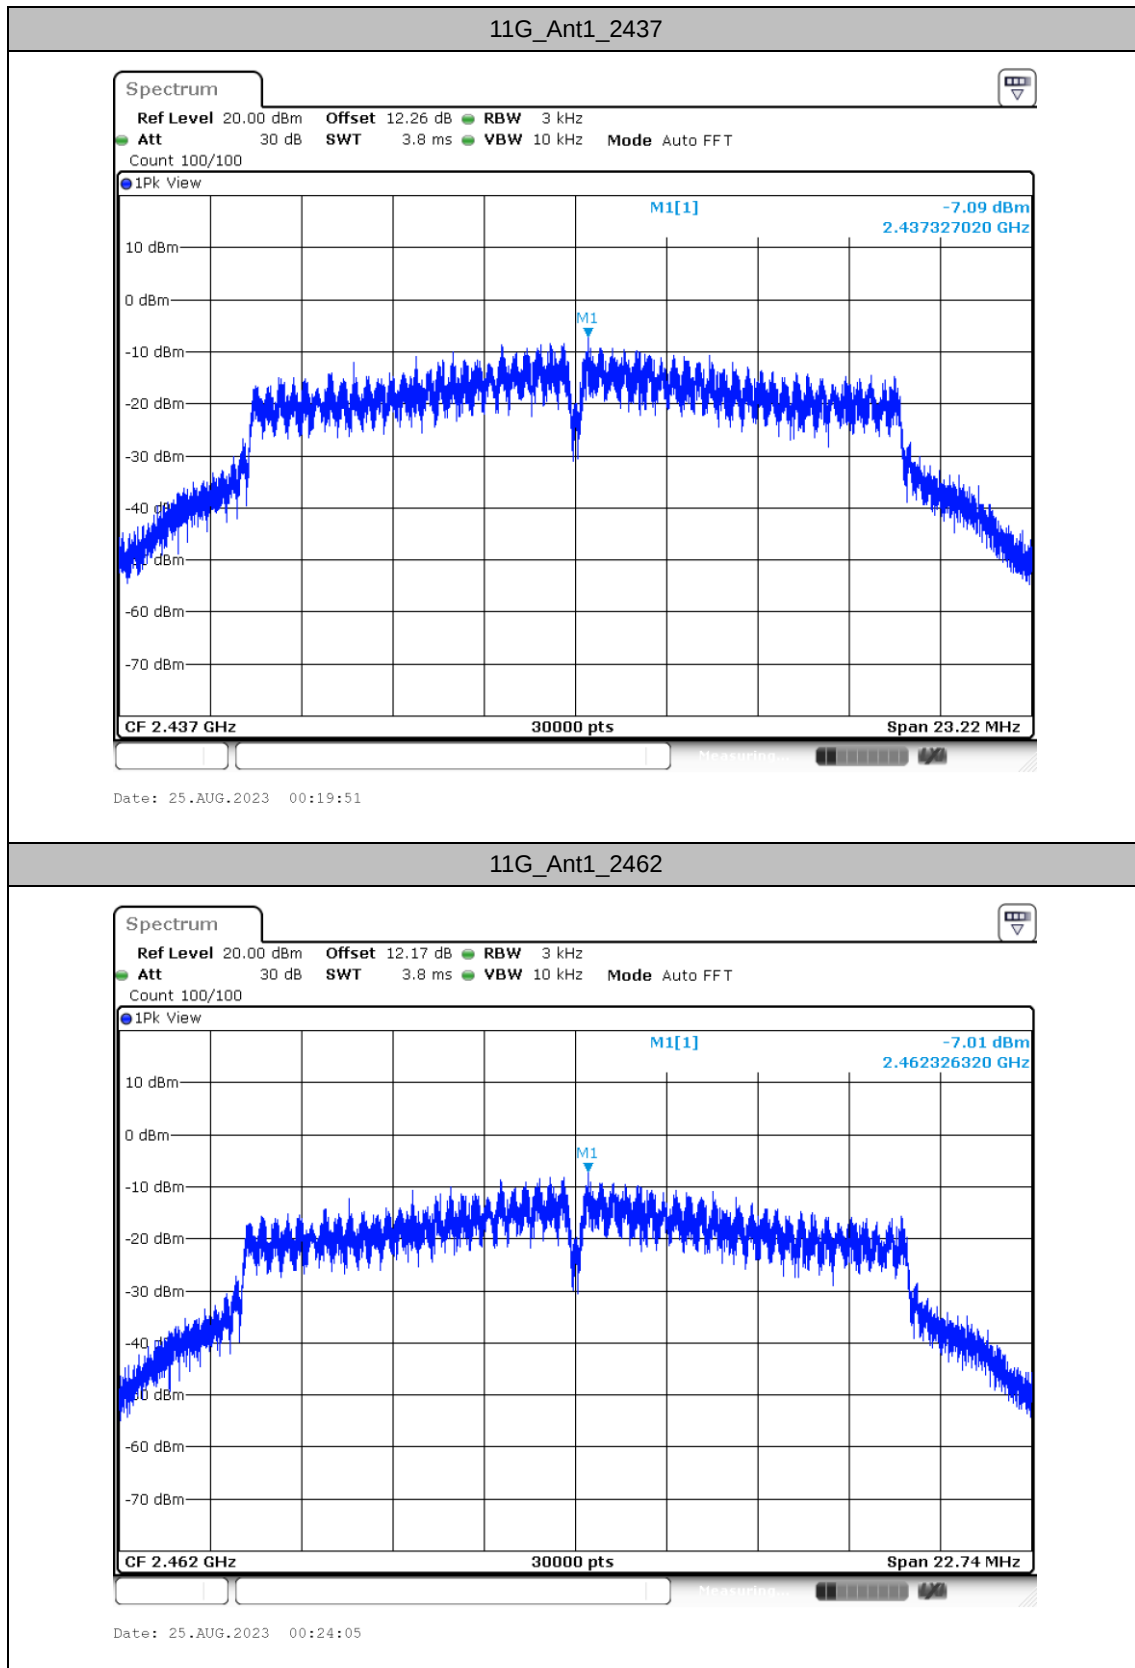

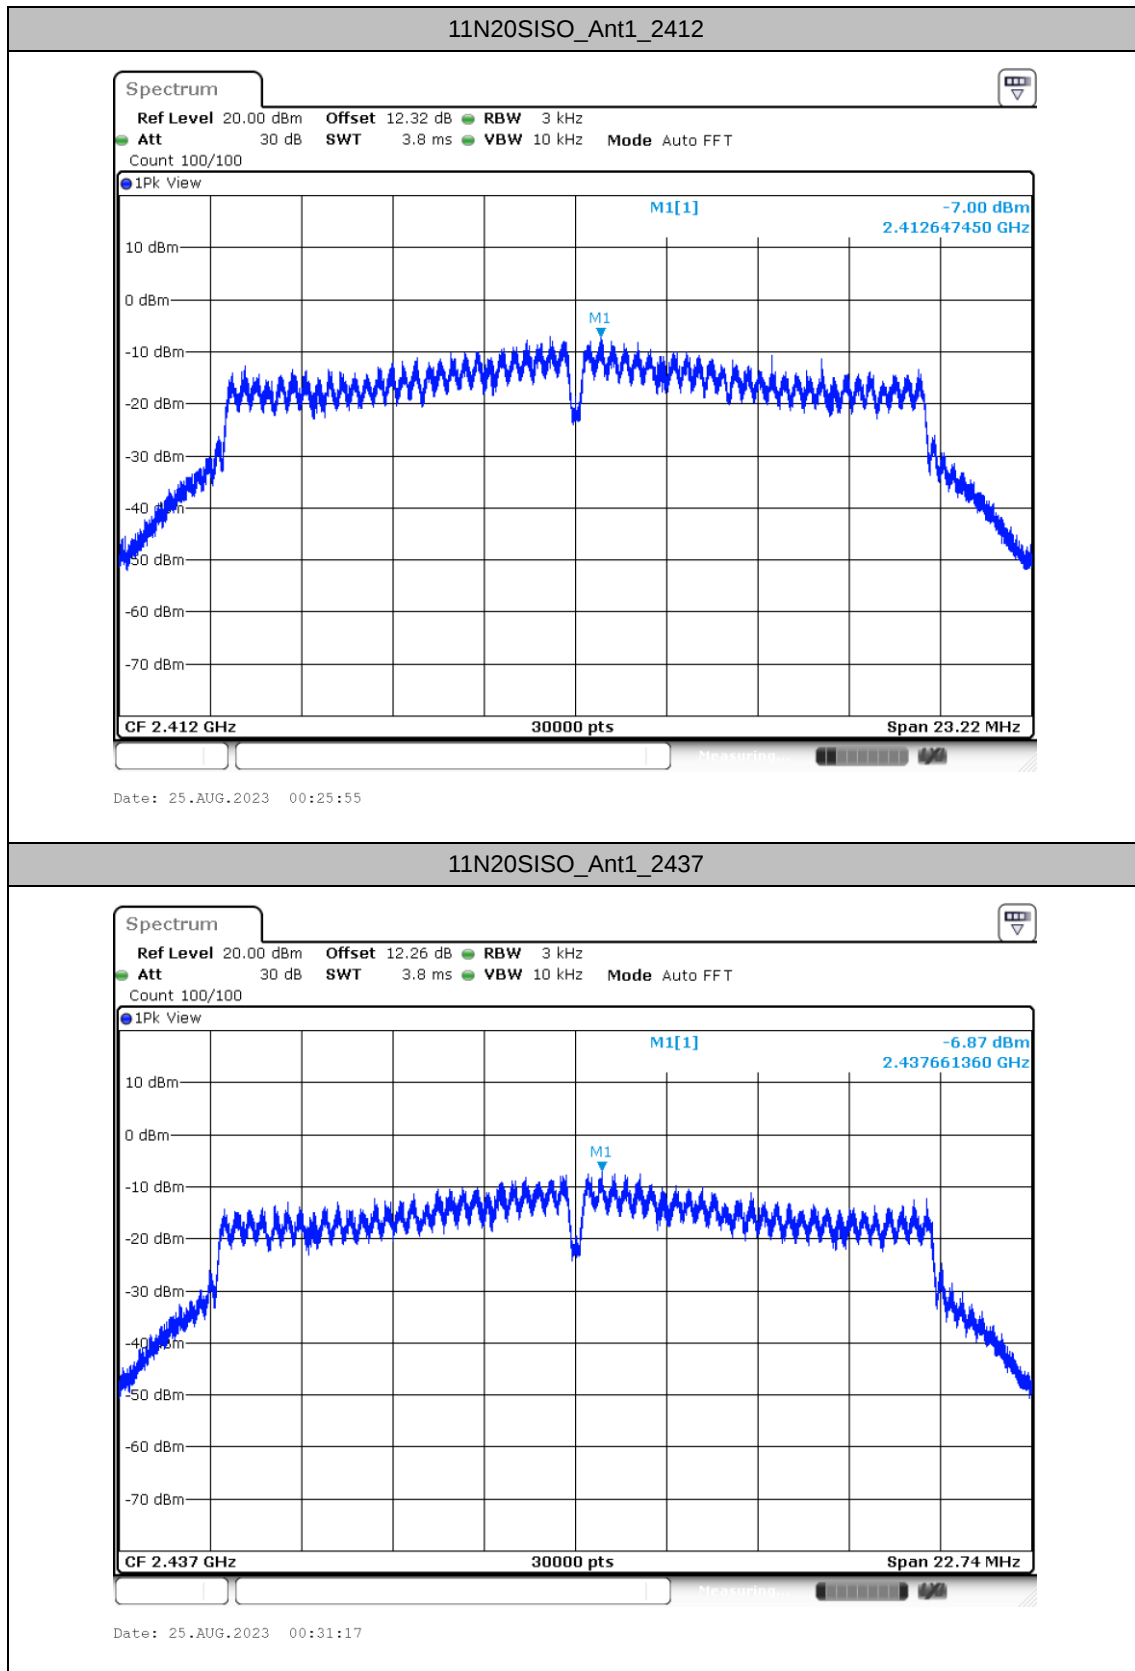

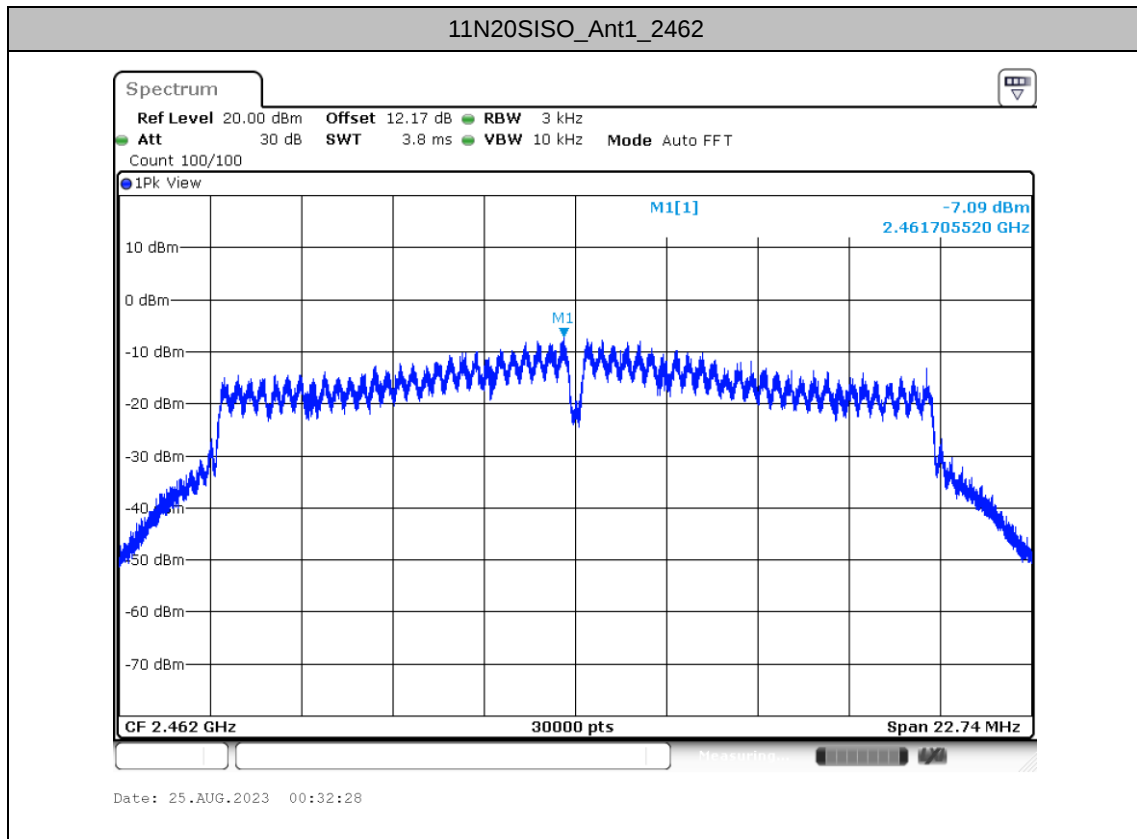




Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant1	2412	2411.51	8.96
		2437	2437.50	9.09
		2462	2461.51	8.82
11G	Ant1	2412	2412.64	4.08
		2437	2437.64	4.00
		2462	2462.63	3.96
11N20SISO	Ant1	2412	2414.49	3.78
		2437	2439.50	3.96
		2462	2464.50	3.61



Test Graphs

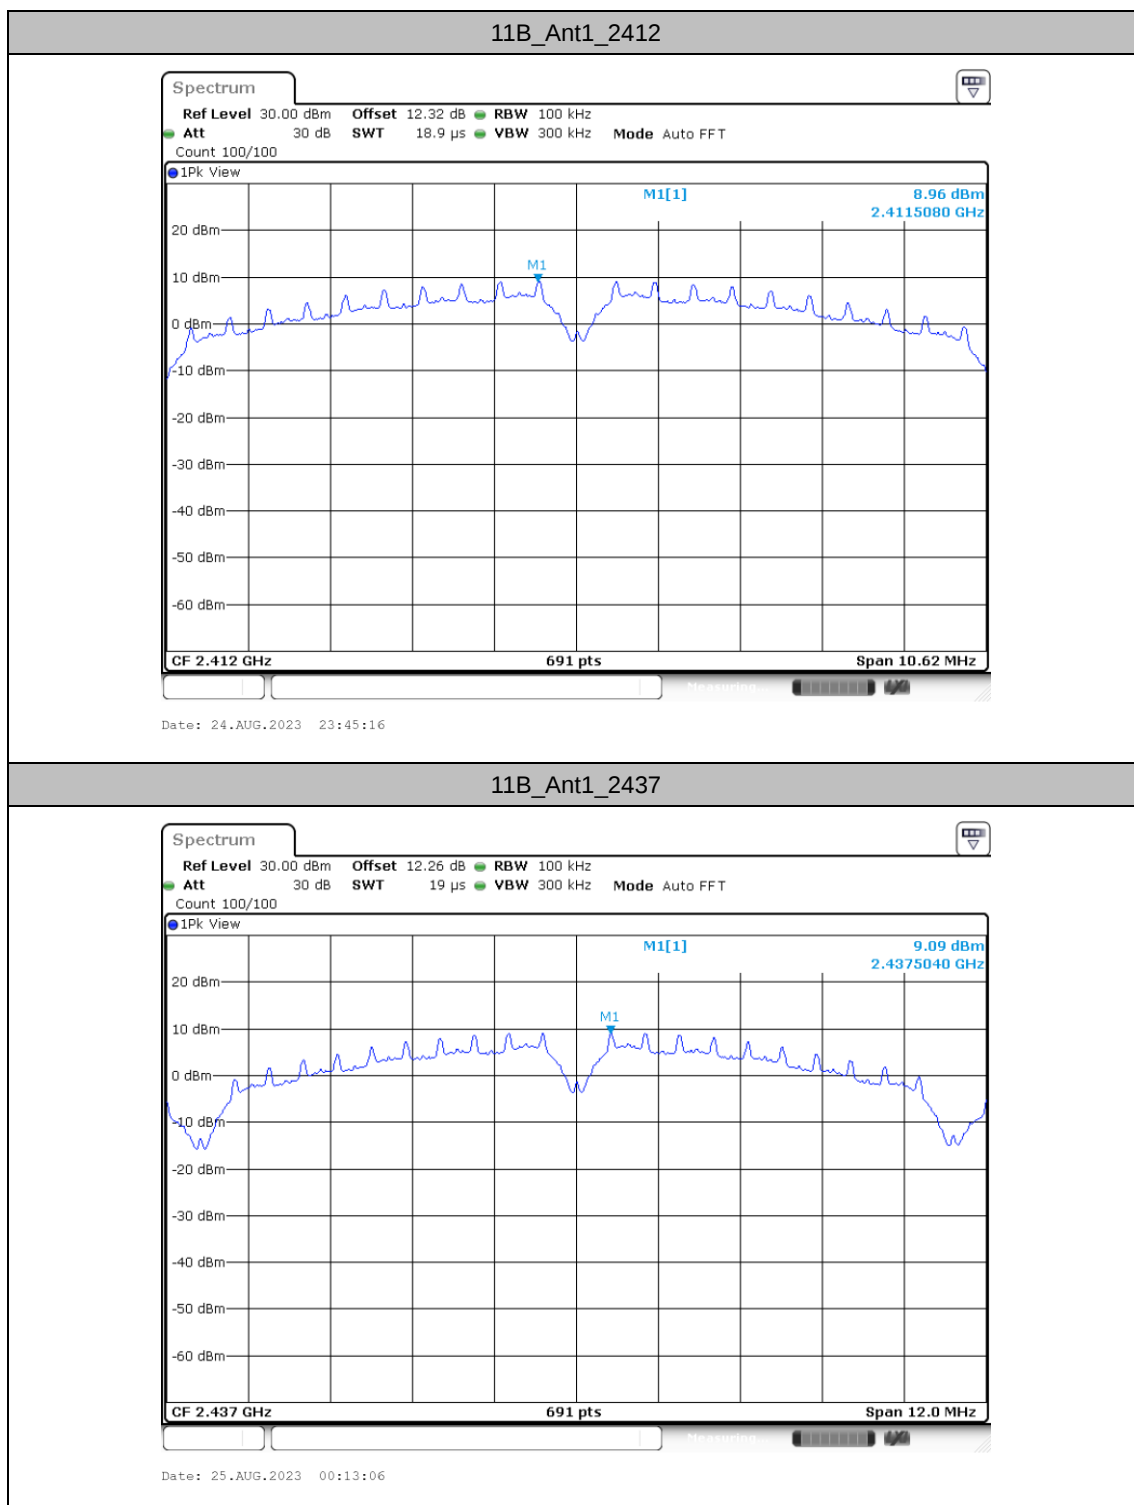


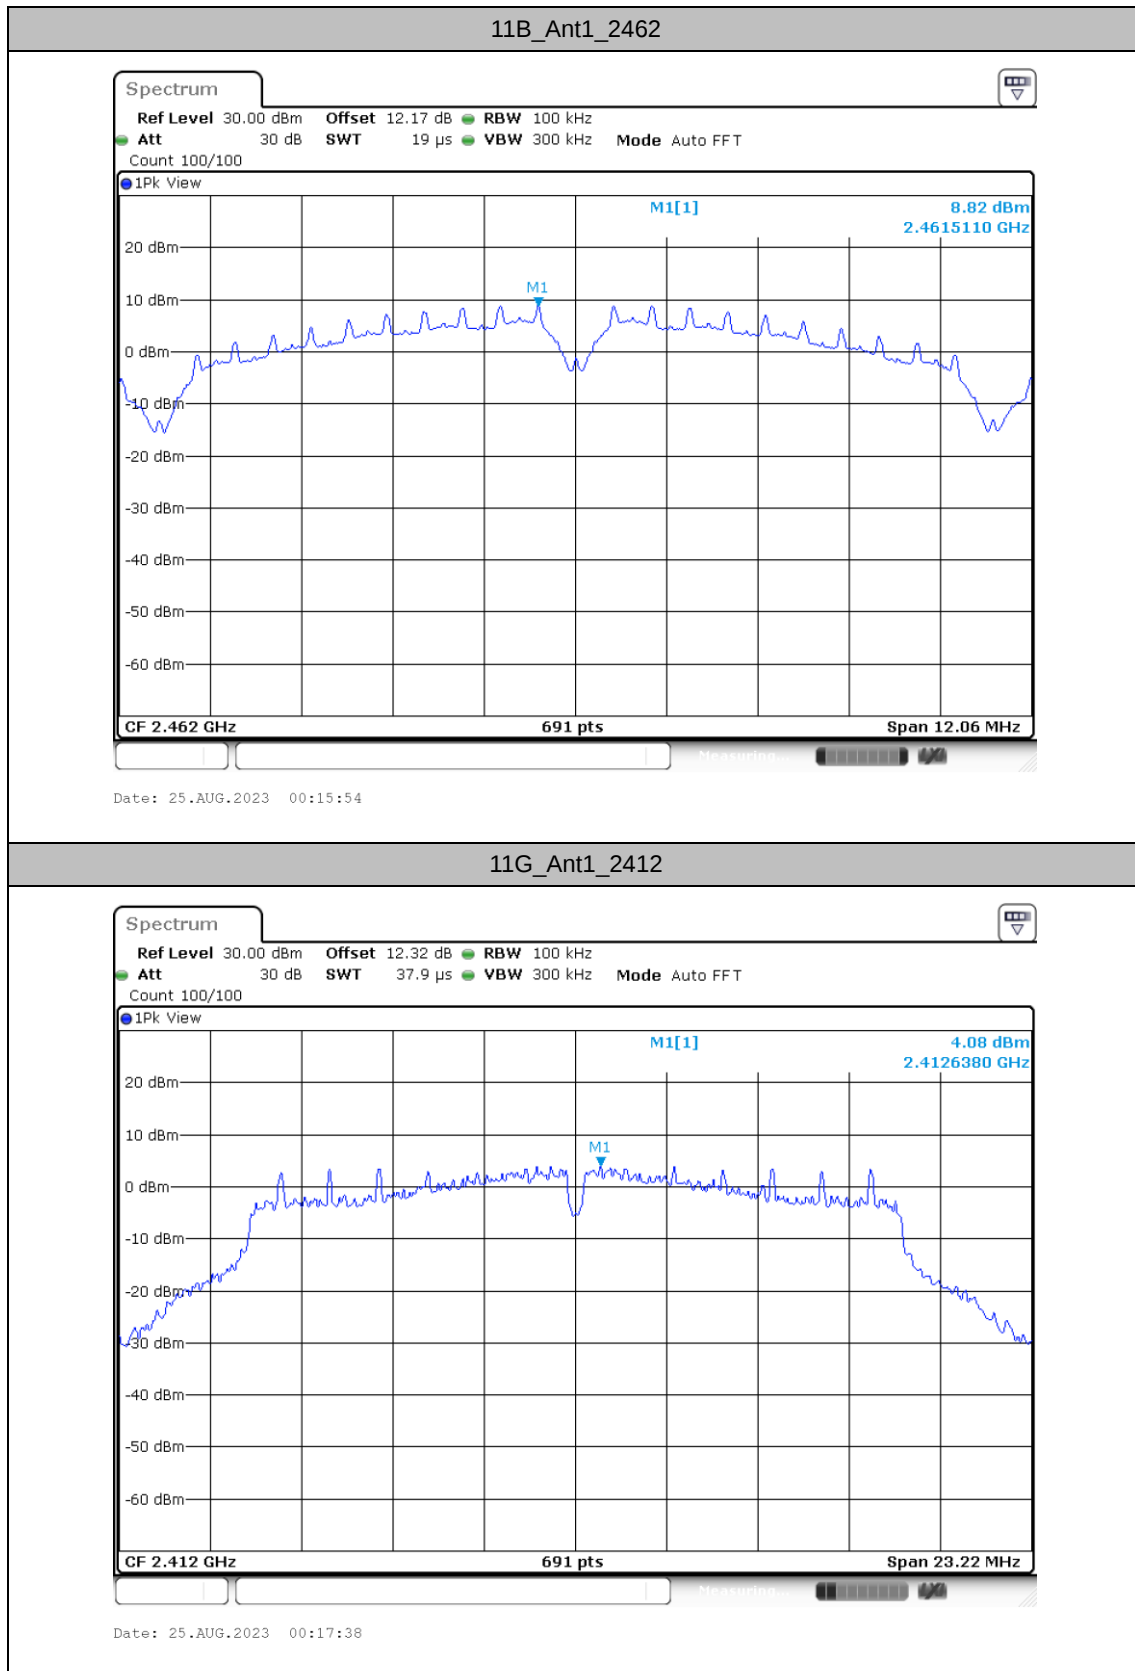

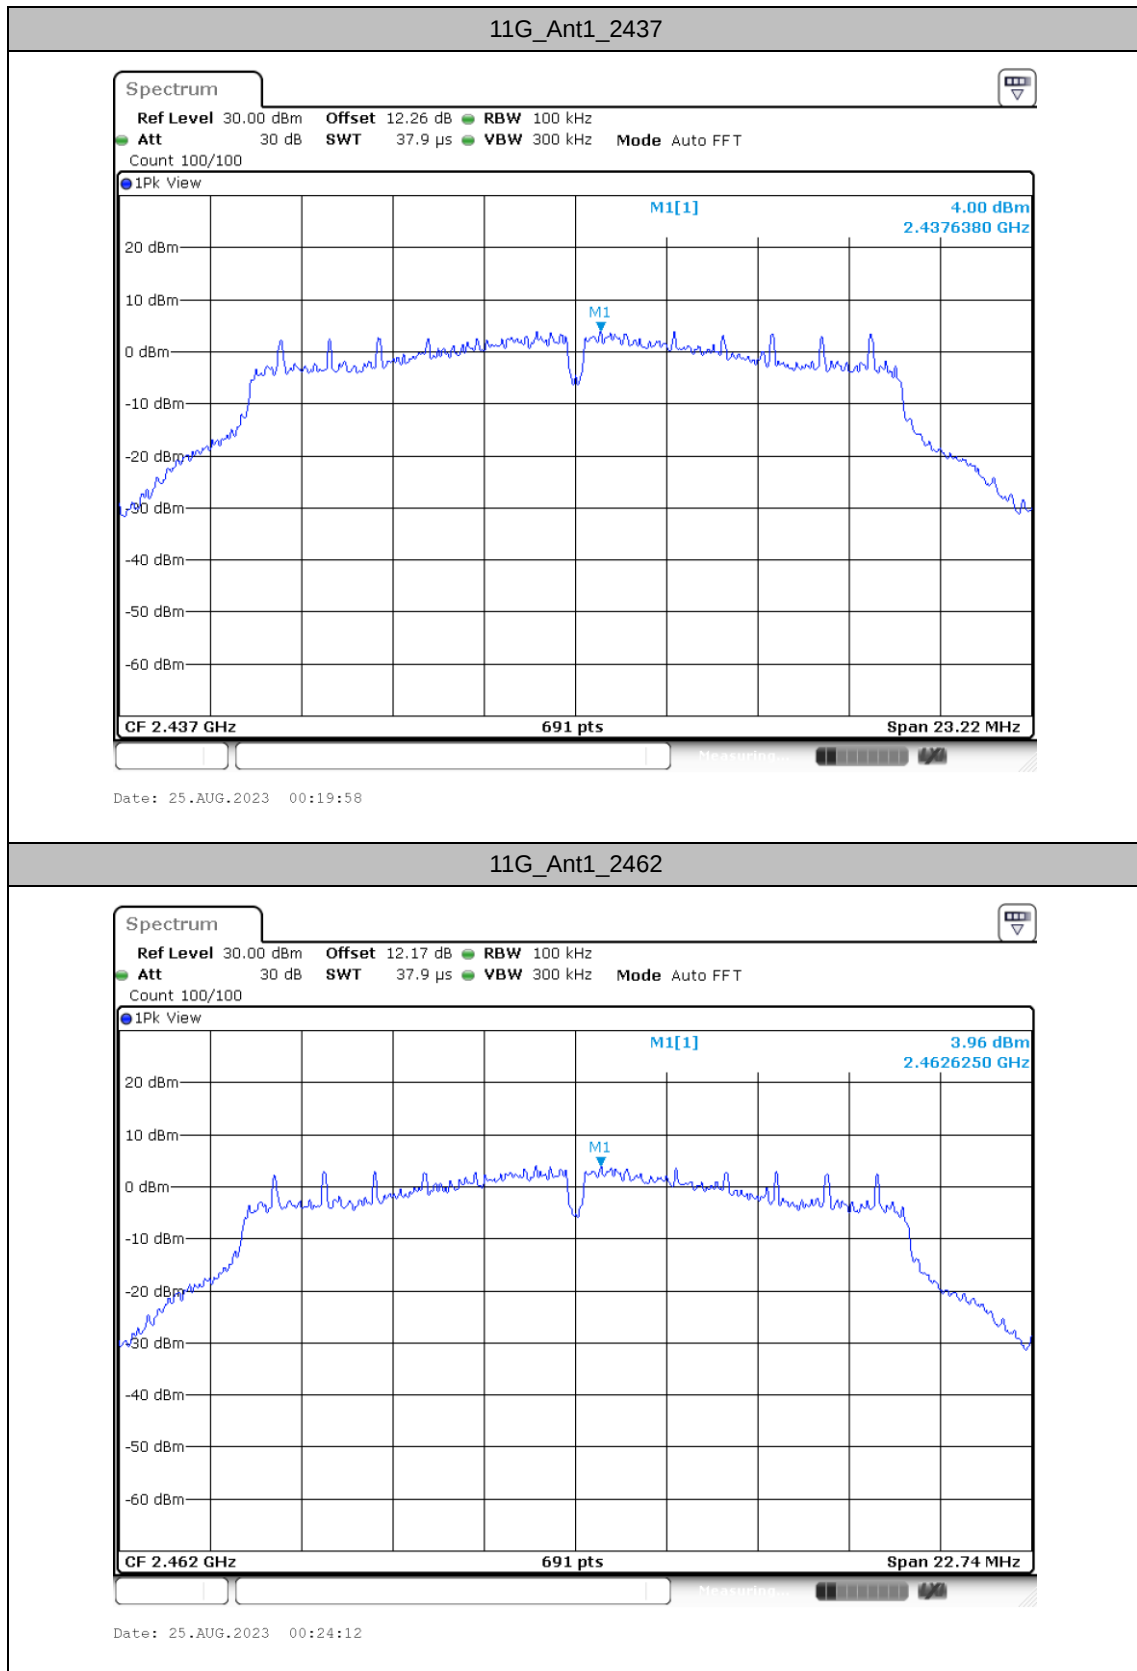




11N20SISO_Ant1_2412

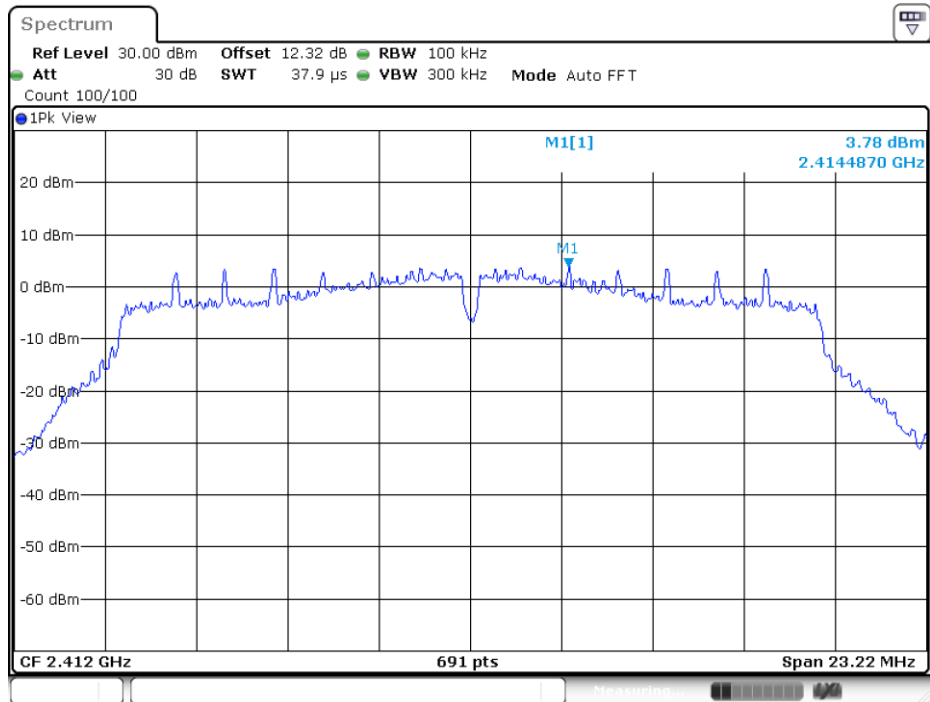


Date: 25.AUG.2023 00:26:03

11N20SISO_Ant1_2437

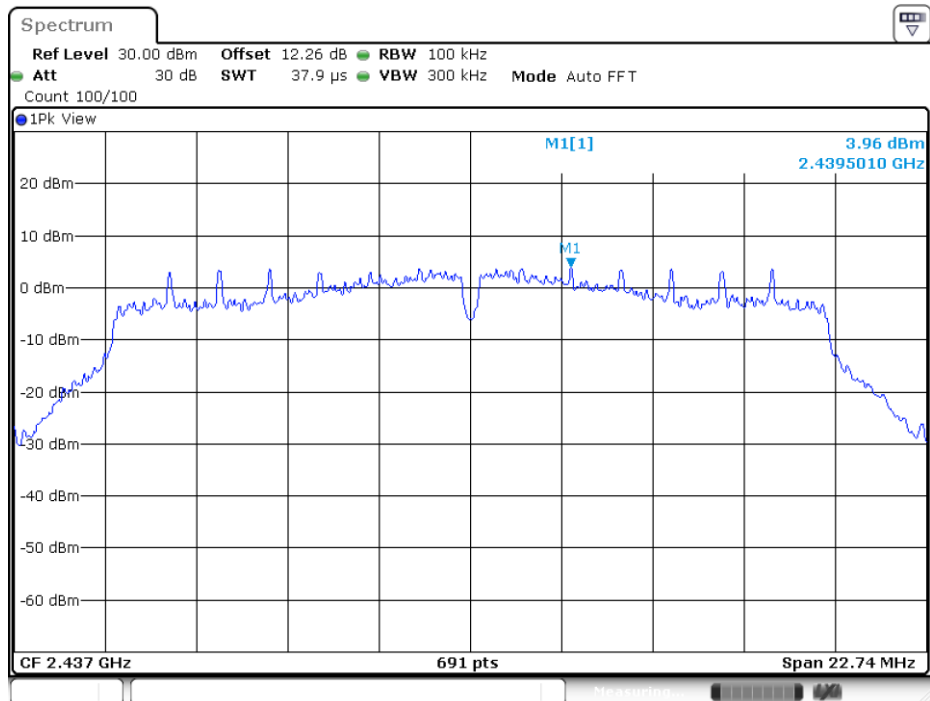

Date: 25.AUG.2023 00:31:25

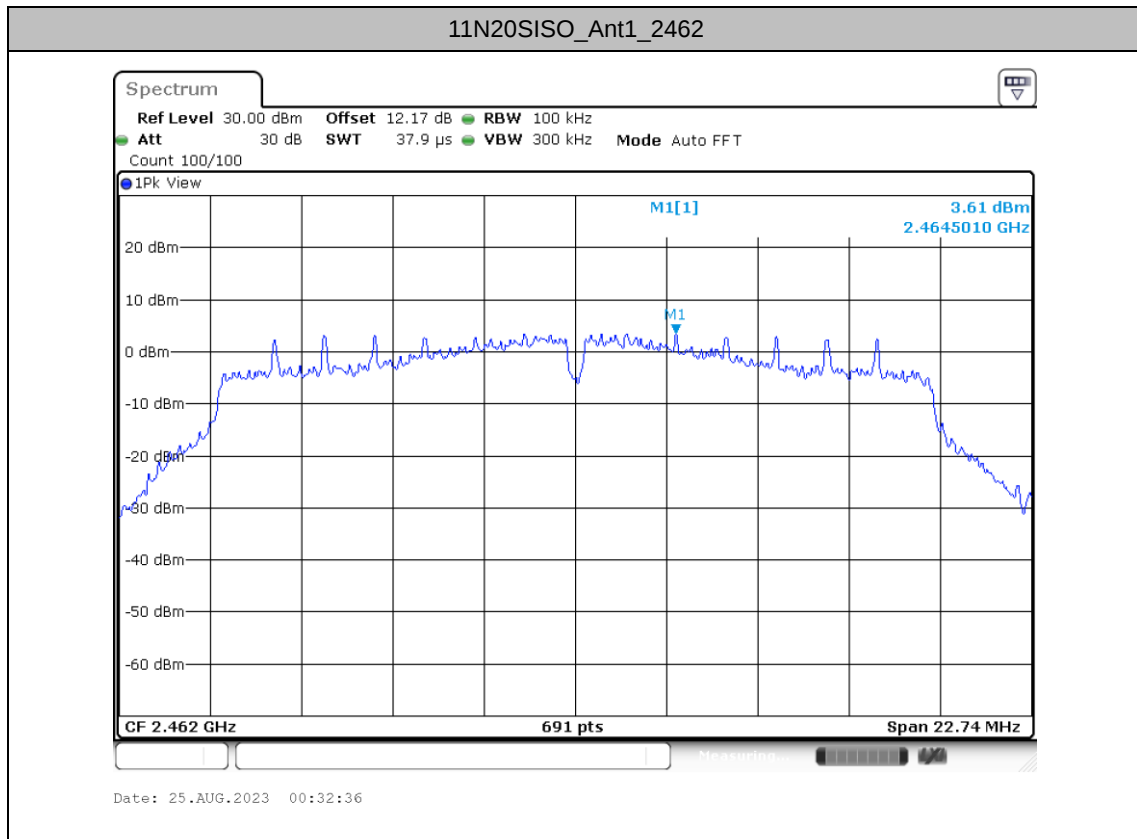




Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	Low	2412	8.96	-30.78	≤ -21.04	PASS
		High	2462	8.82	-43.62	≤ -21.18	PASS
11G	Ant1	Low	2412	4.08	-29.92	≤ -25.92	PASS
		High	2462	3.96	-39.84	≤ -26.04	PASS
11N20SISO	Ant1	Low	2412	3.78	-31.41	≤ -26.22	PASS
		High	2462	3.61	-41.58	≤ -26.39	PASS



Test Graphs

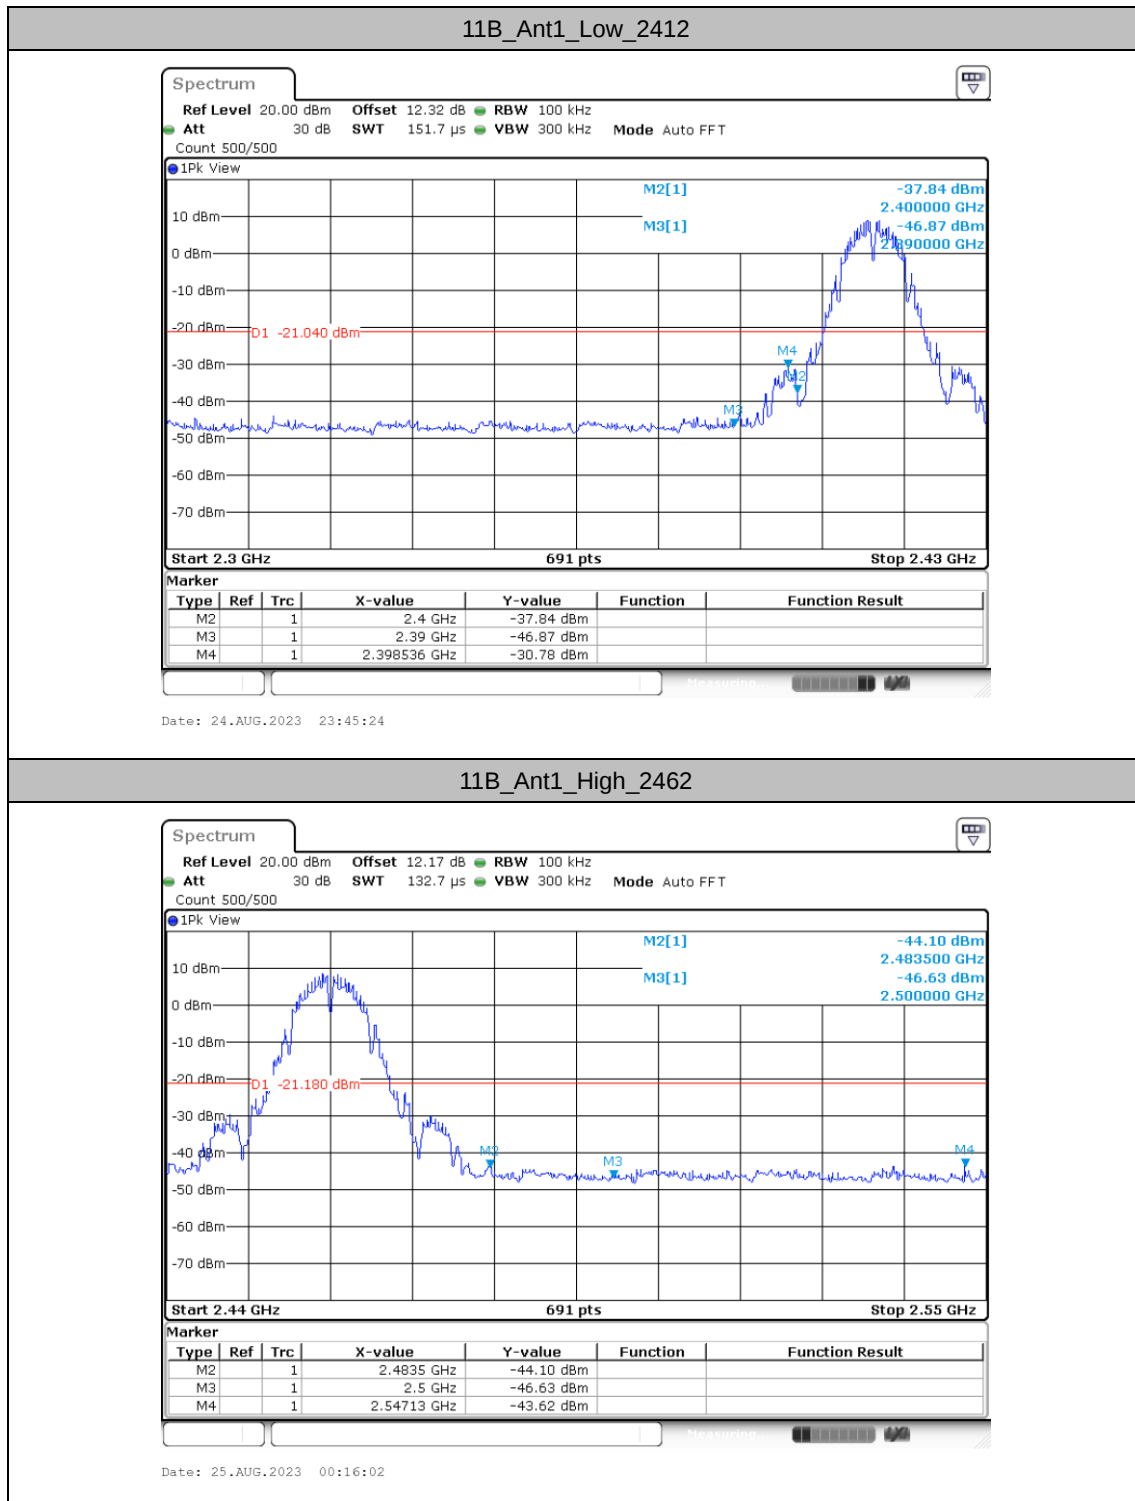

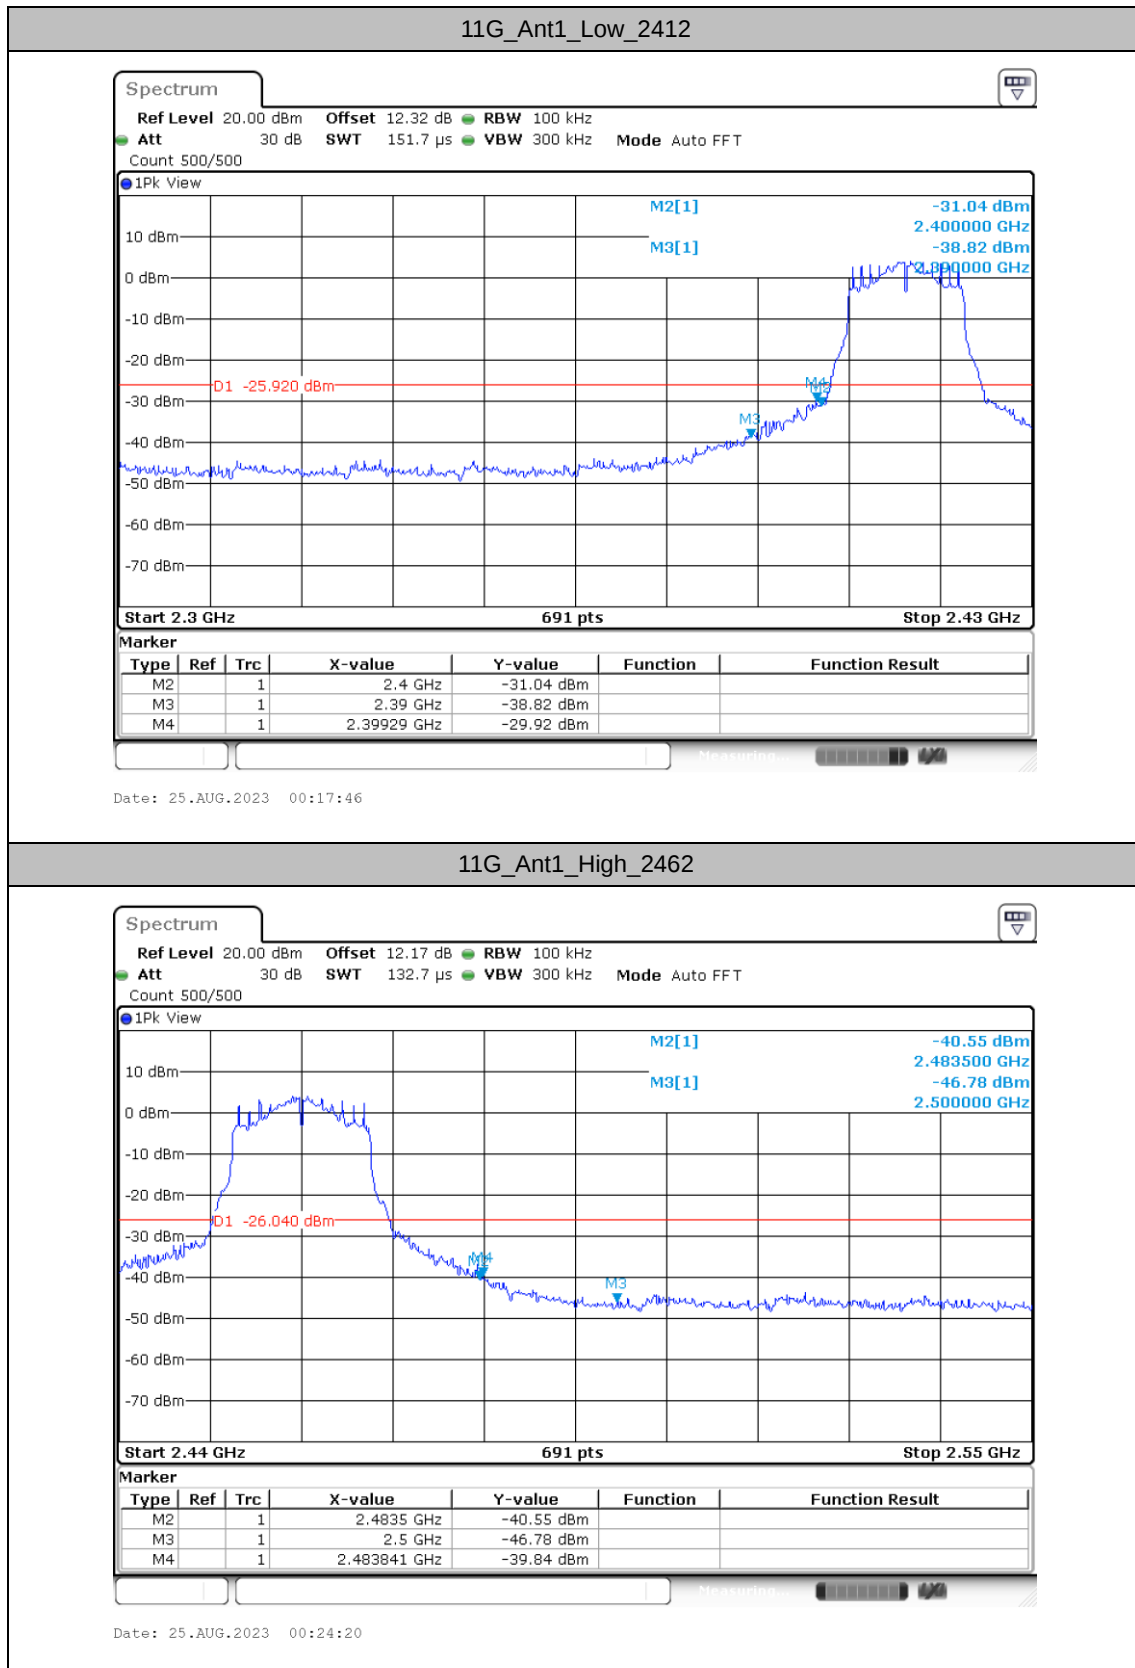

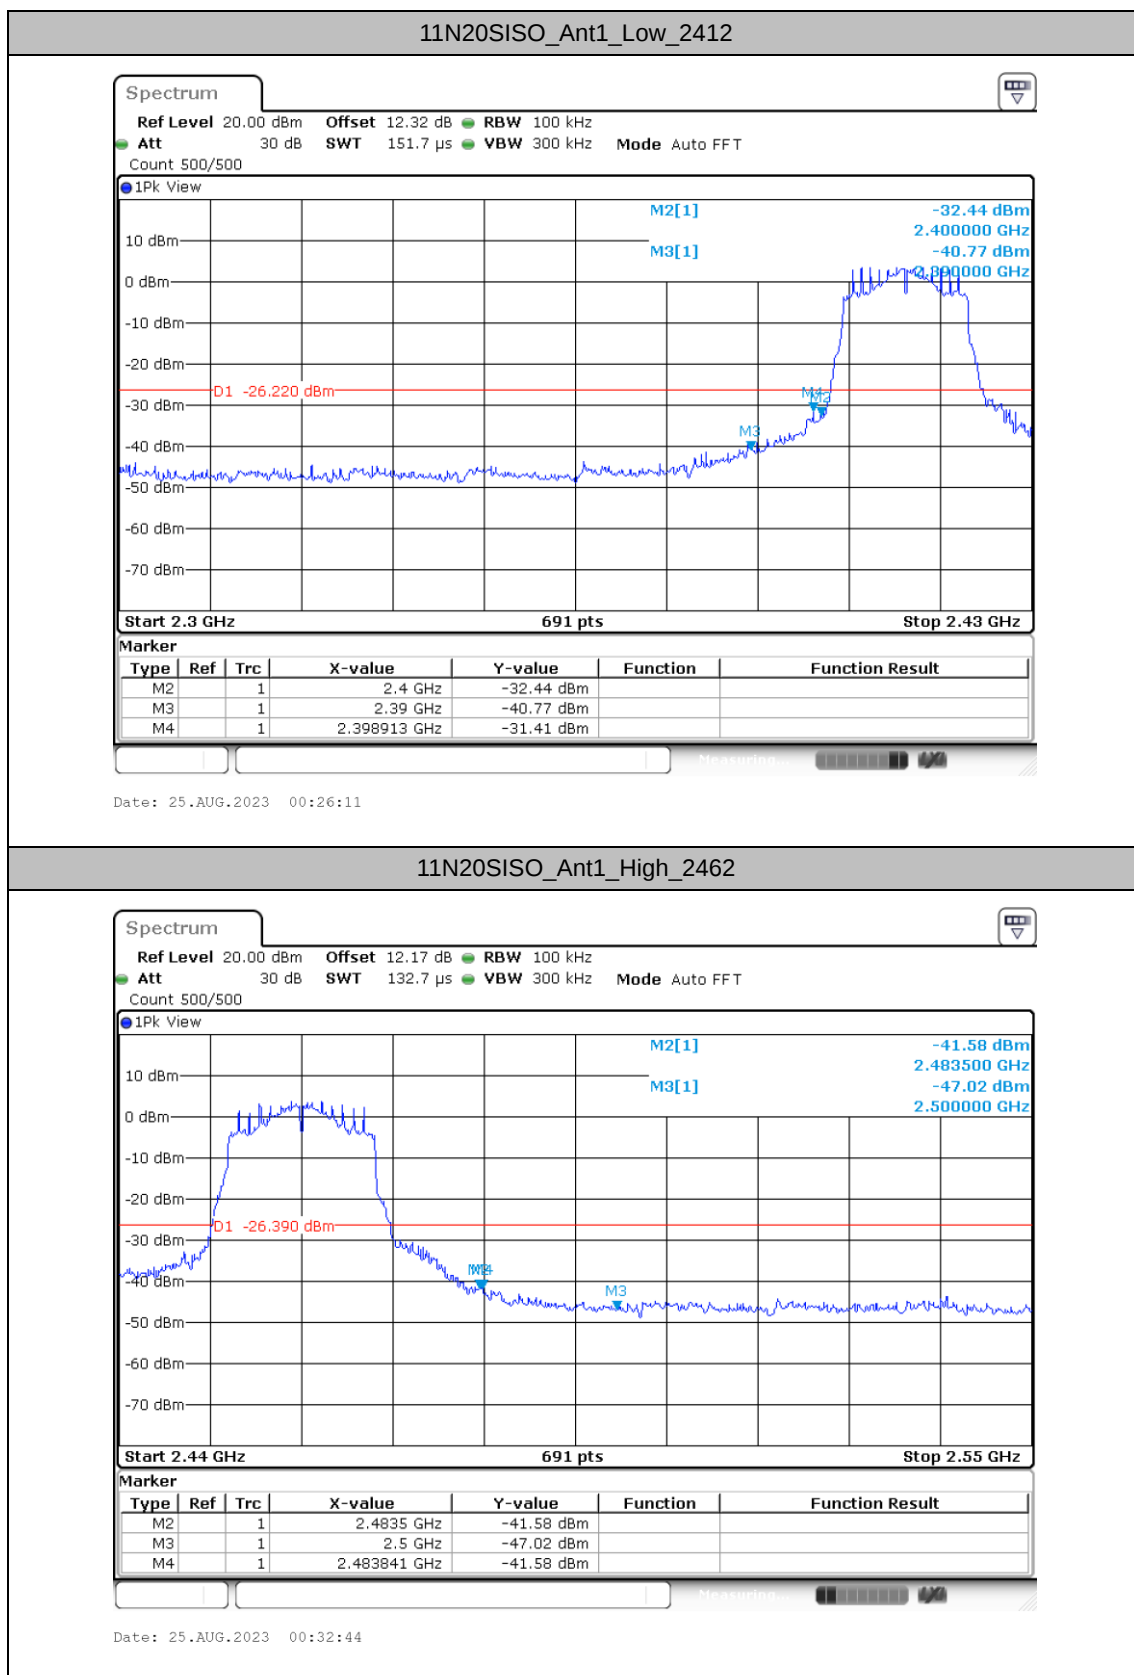




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	2412	30~1000	8.96	-55.24	≤-21.04	PASS
			1000~26500	8.96	-45.59	≤-21.04	PASS
		2437	30~1000	9.09	-55.21	≤-20.91	PASS
			1000~26500	9.09	-45.9	≤-20.91	PASS
		2462	30~1000	8.82	-55.61	≤-21.18	PASS
			1000~26500	8.82	-46.39	≤-21.18	PASS
11G	Ant1	2412	30~1000	4.08	-55.46	≤-25.92	PASS
			1000~26500	4.08	-45.39	≤-25.92	PASS
		2437	30~1000	4.00	-55.15	≤-26	PASS
			1000~26500	4.00	-45.21	≤-26	PASS
		2462	30~1000	3.96	-55.32	≤-26.04	PASS
			1000~26500	3.96	-45.72	≤-26.04	PASS
11N20SISO	Ant1	2412	30~1000	3.78	-55.32	≤-26.22	PASS
			1000~26500	3.78	-45.08	≤-26.22	PASS
		2437	30~1000	3.96	-55.09	≤-26.04	PASS
			1000~26500	3.96	-45.72	≤-26.04	PASS
		2462	30~1000	3.61	-55.33	≤-26.39	PASS
			1000~26500	3.61	-46.08	≤-26.39	PASS





Test Graphs

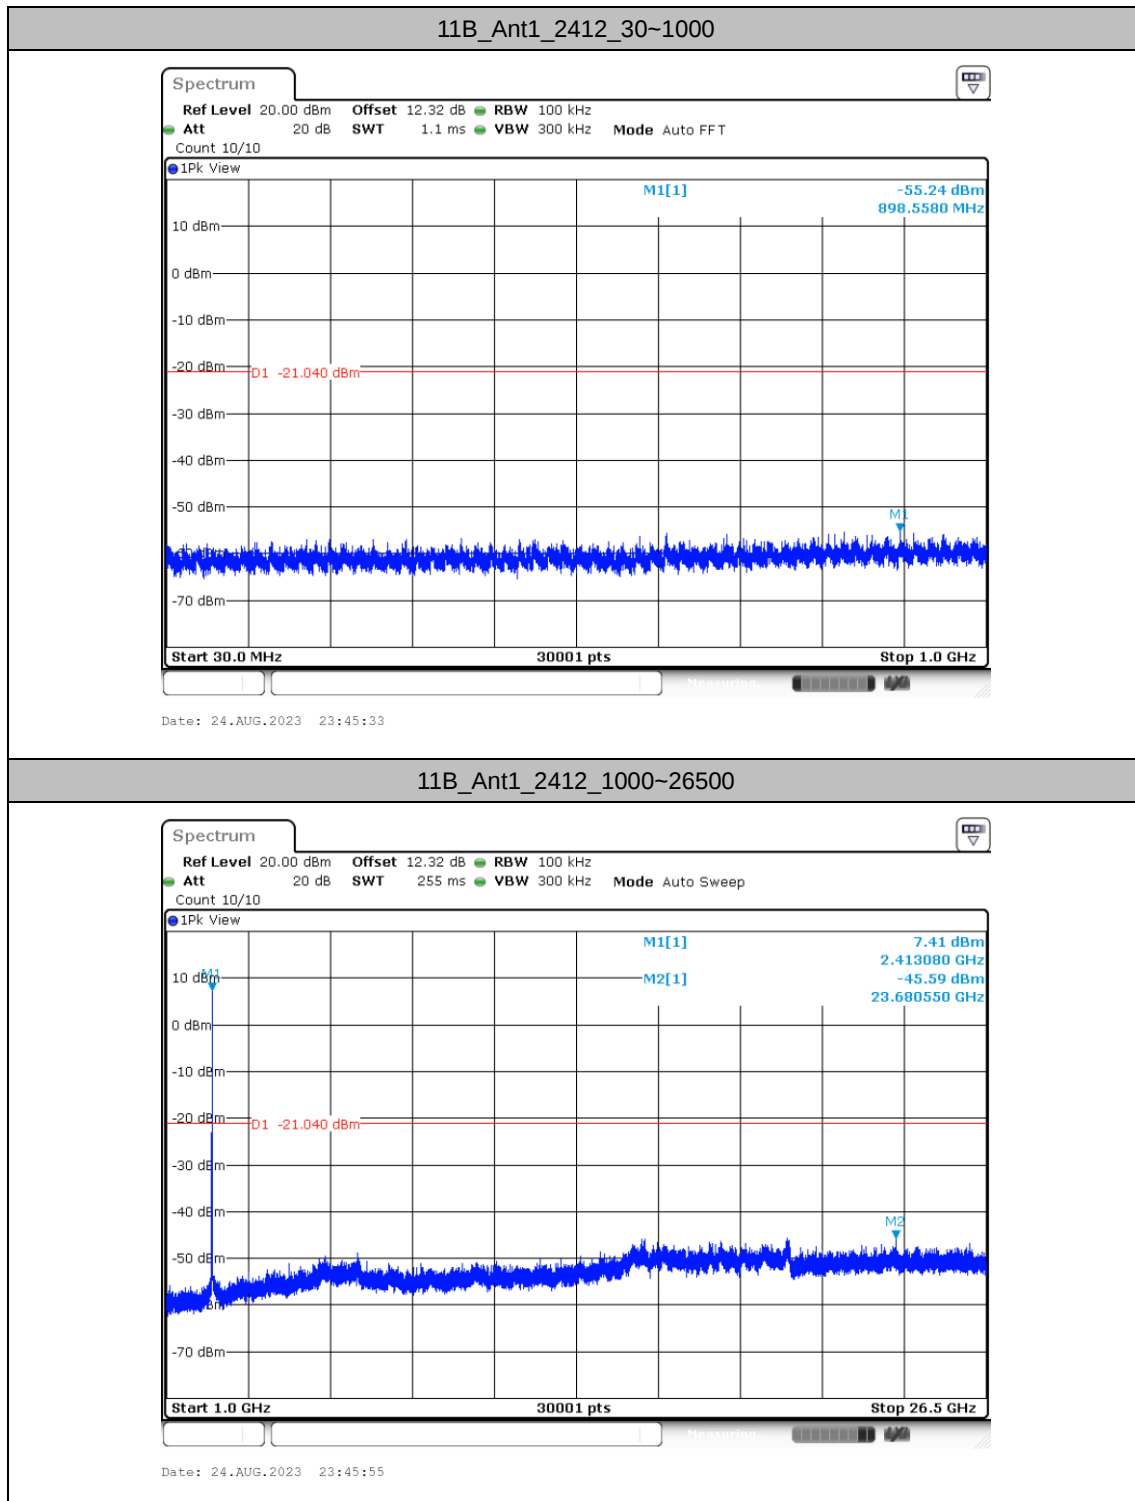


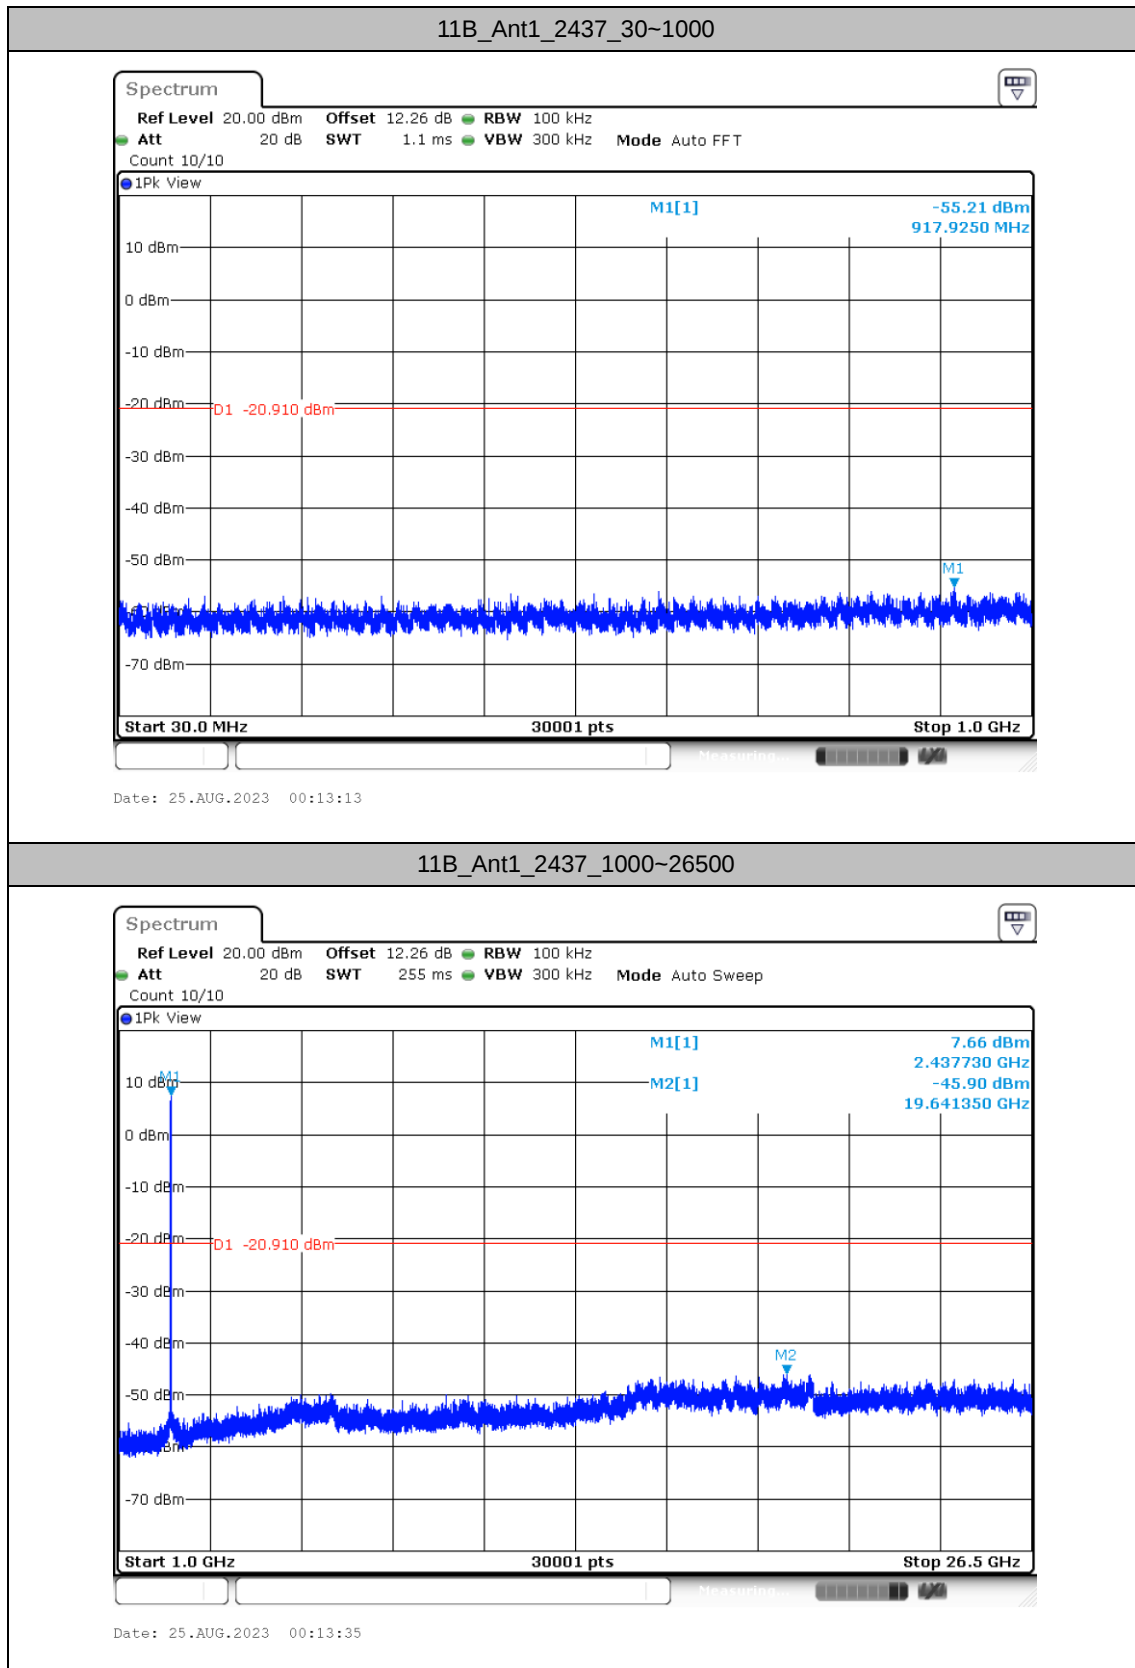


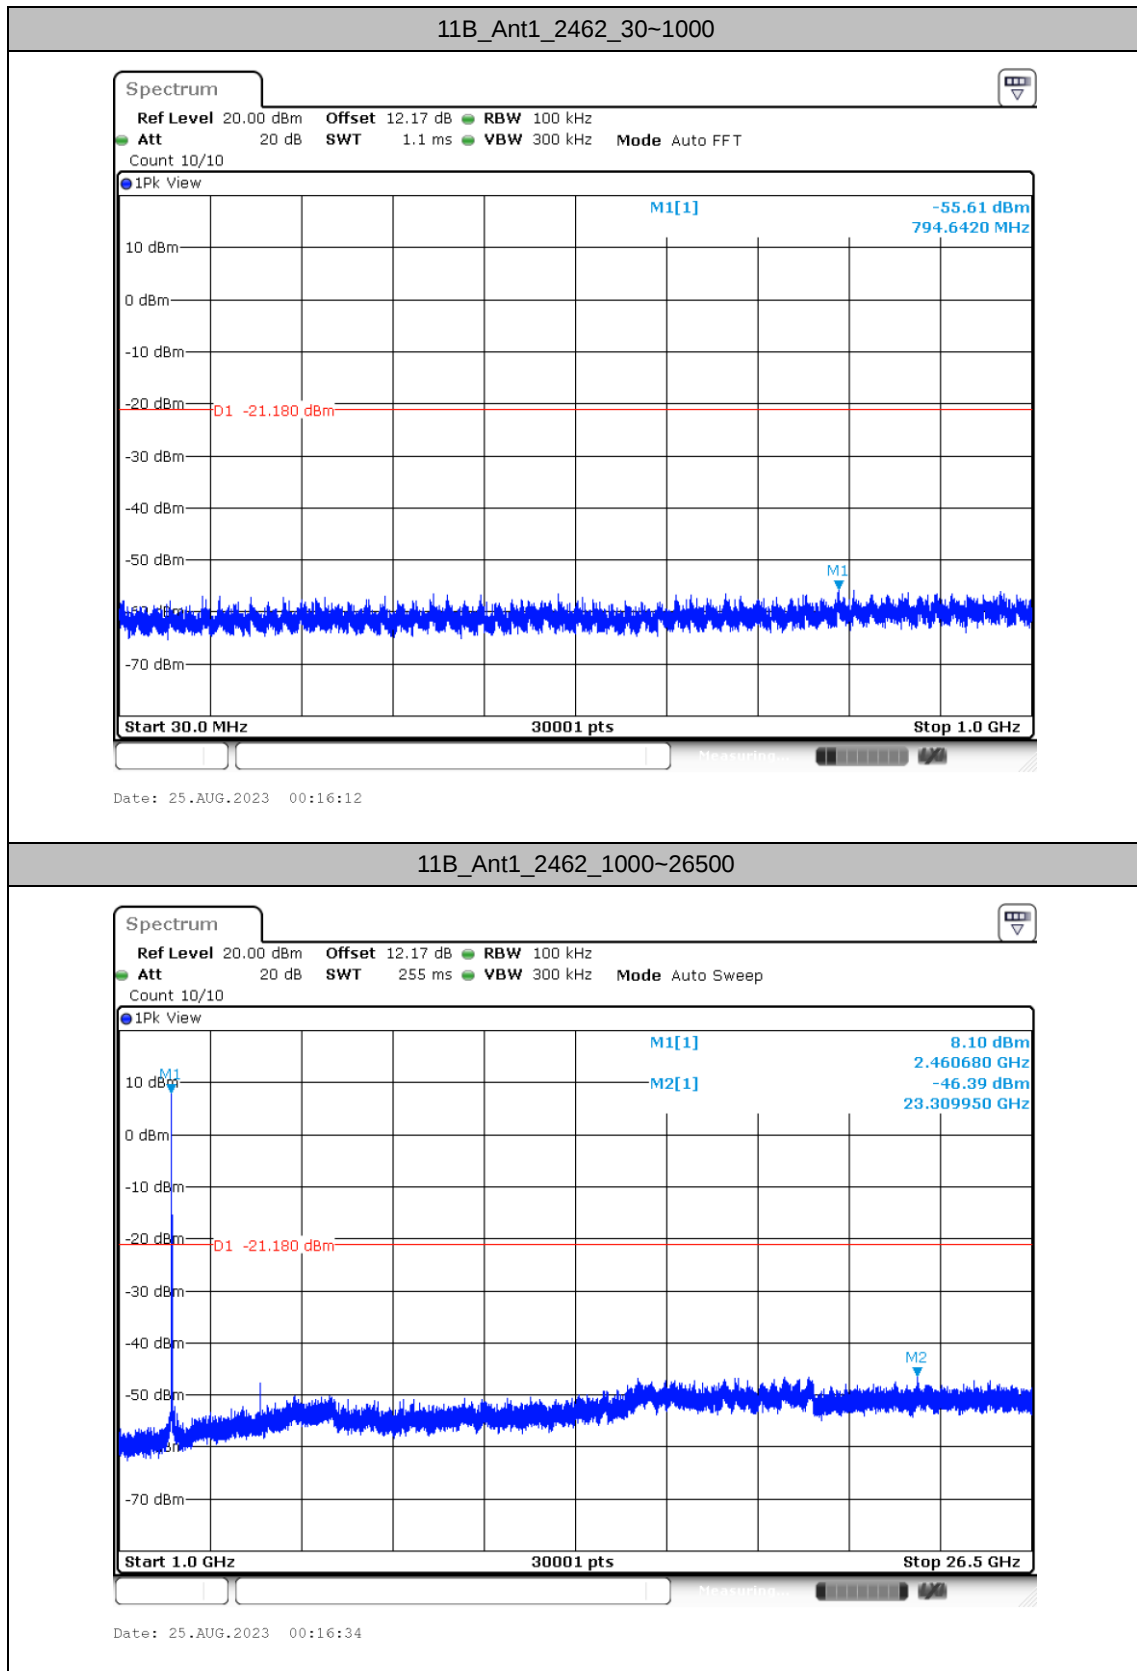


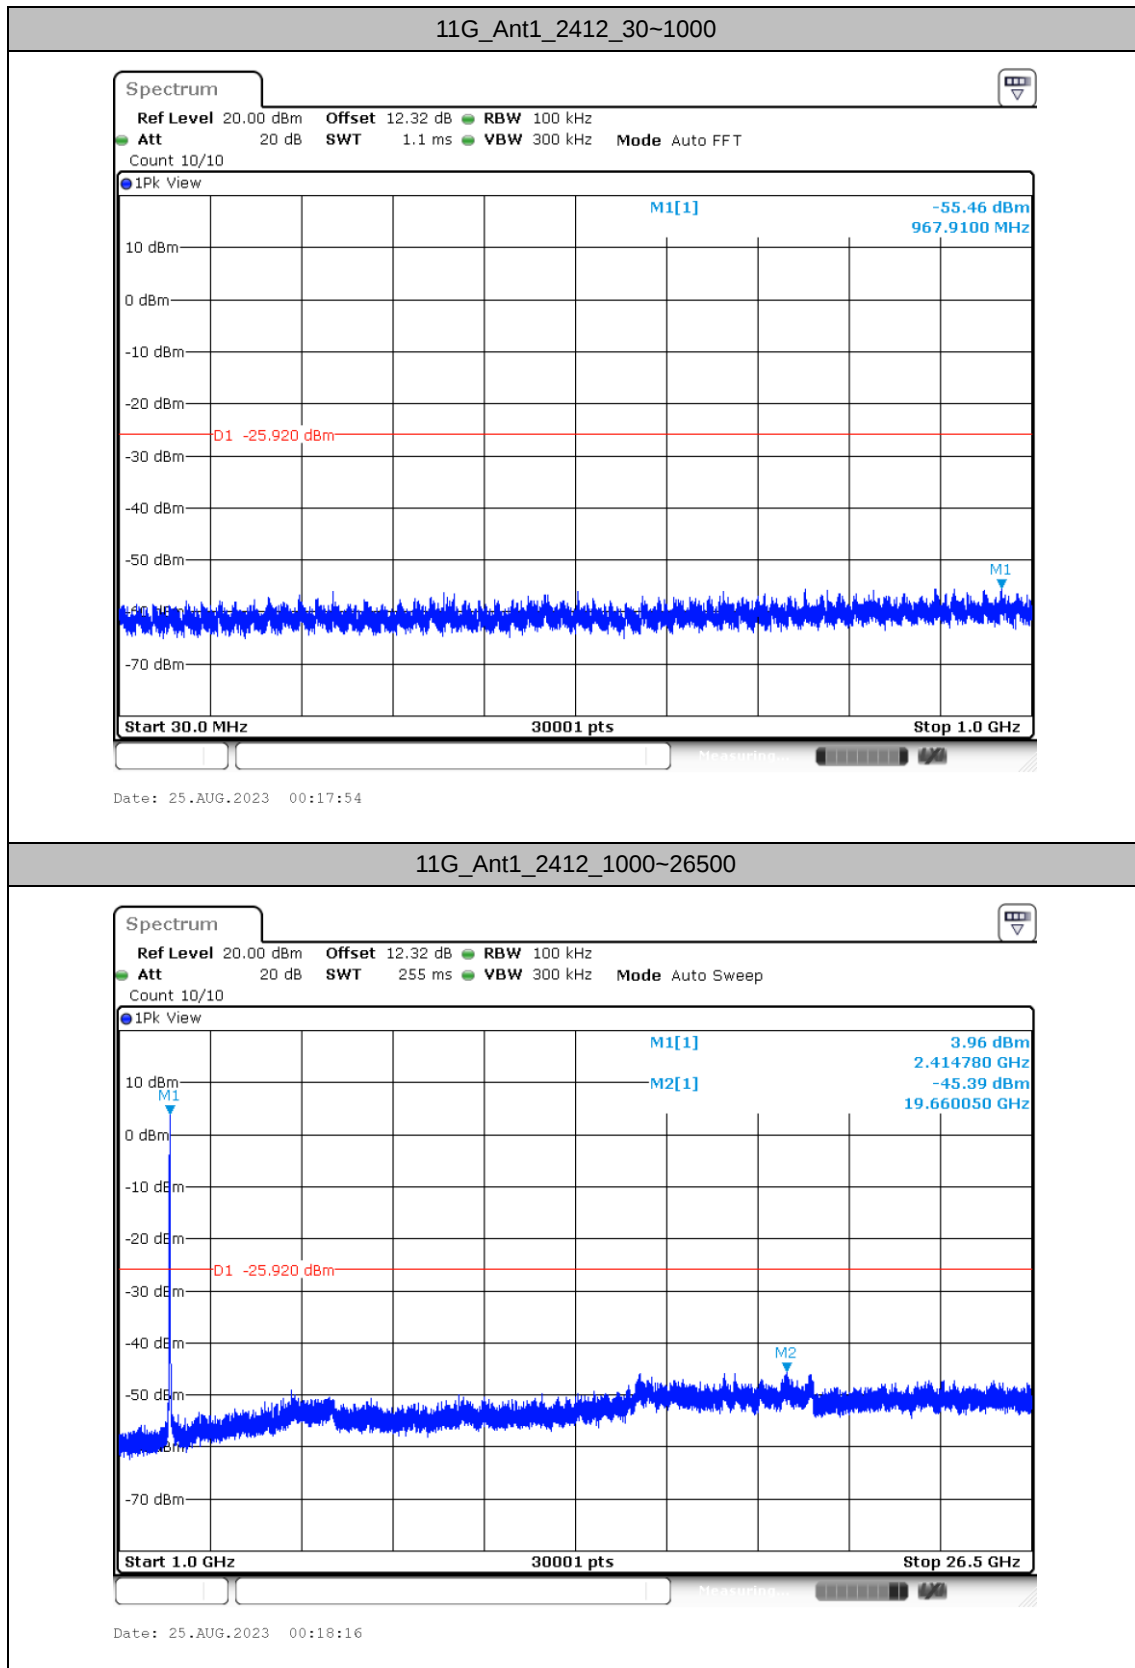


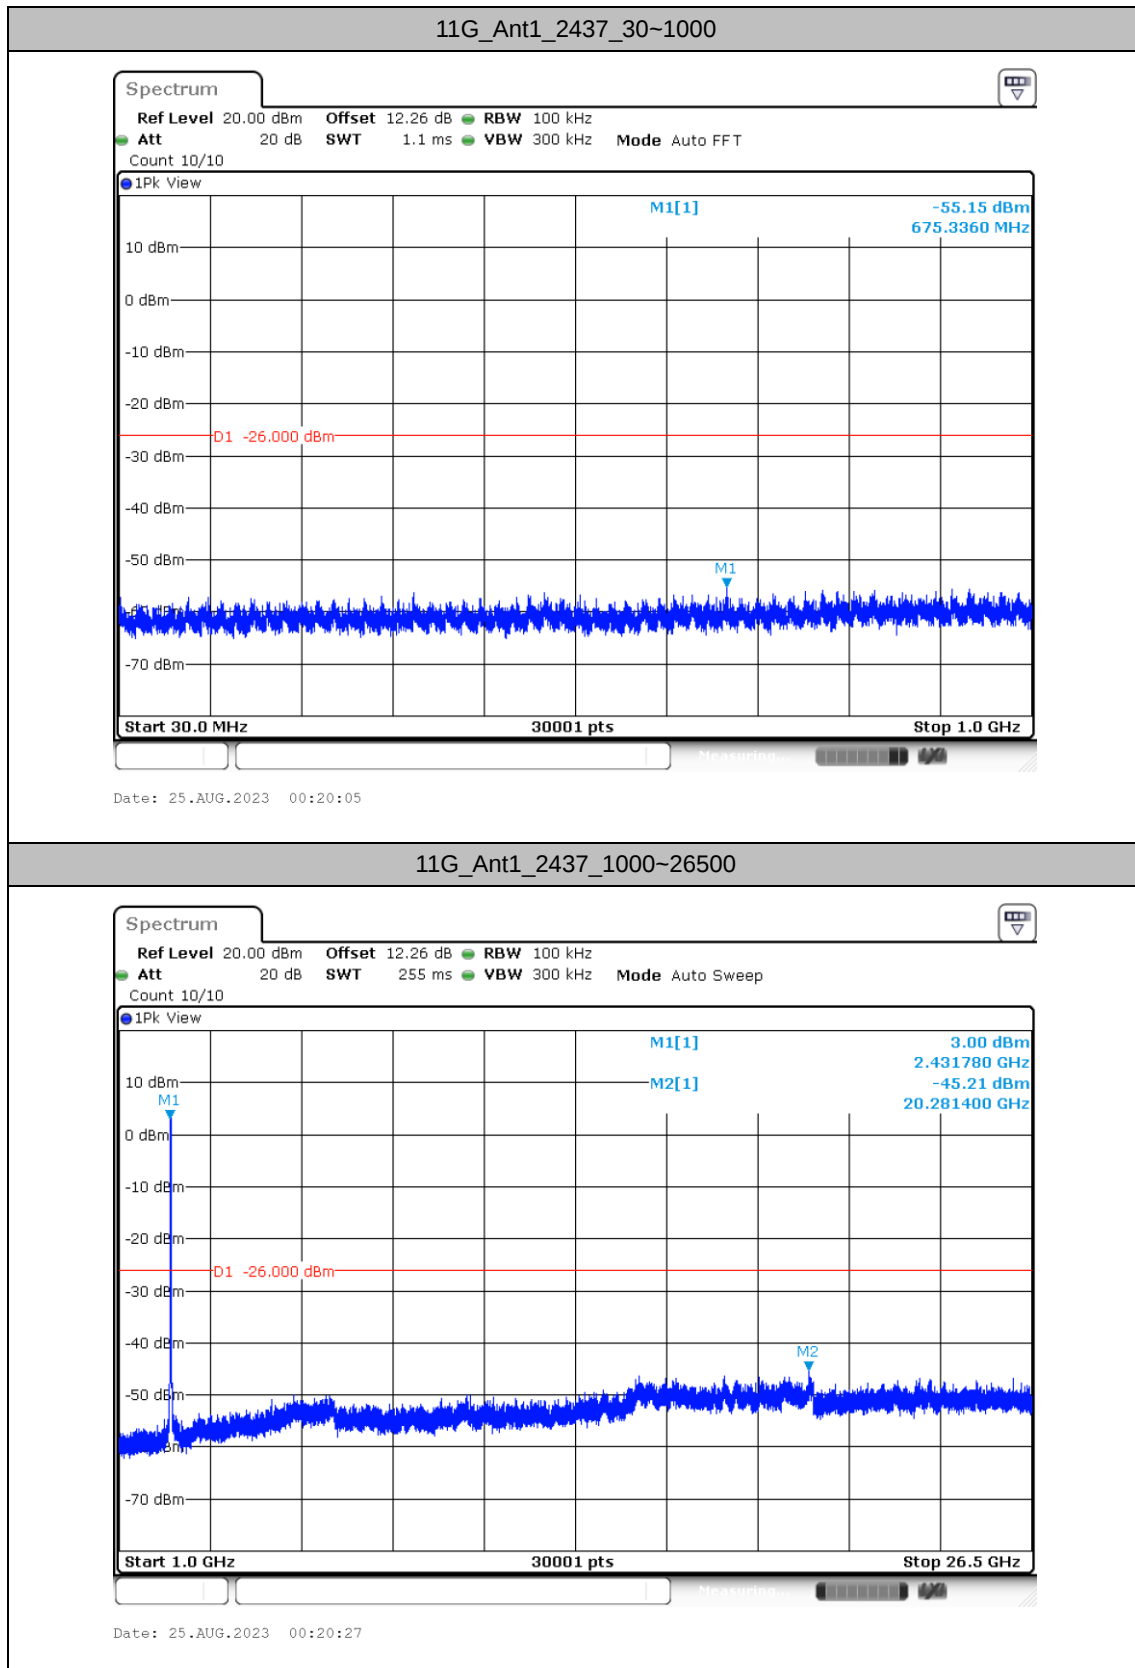

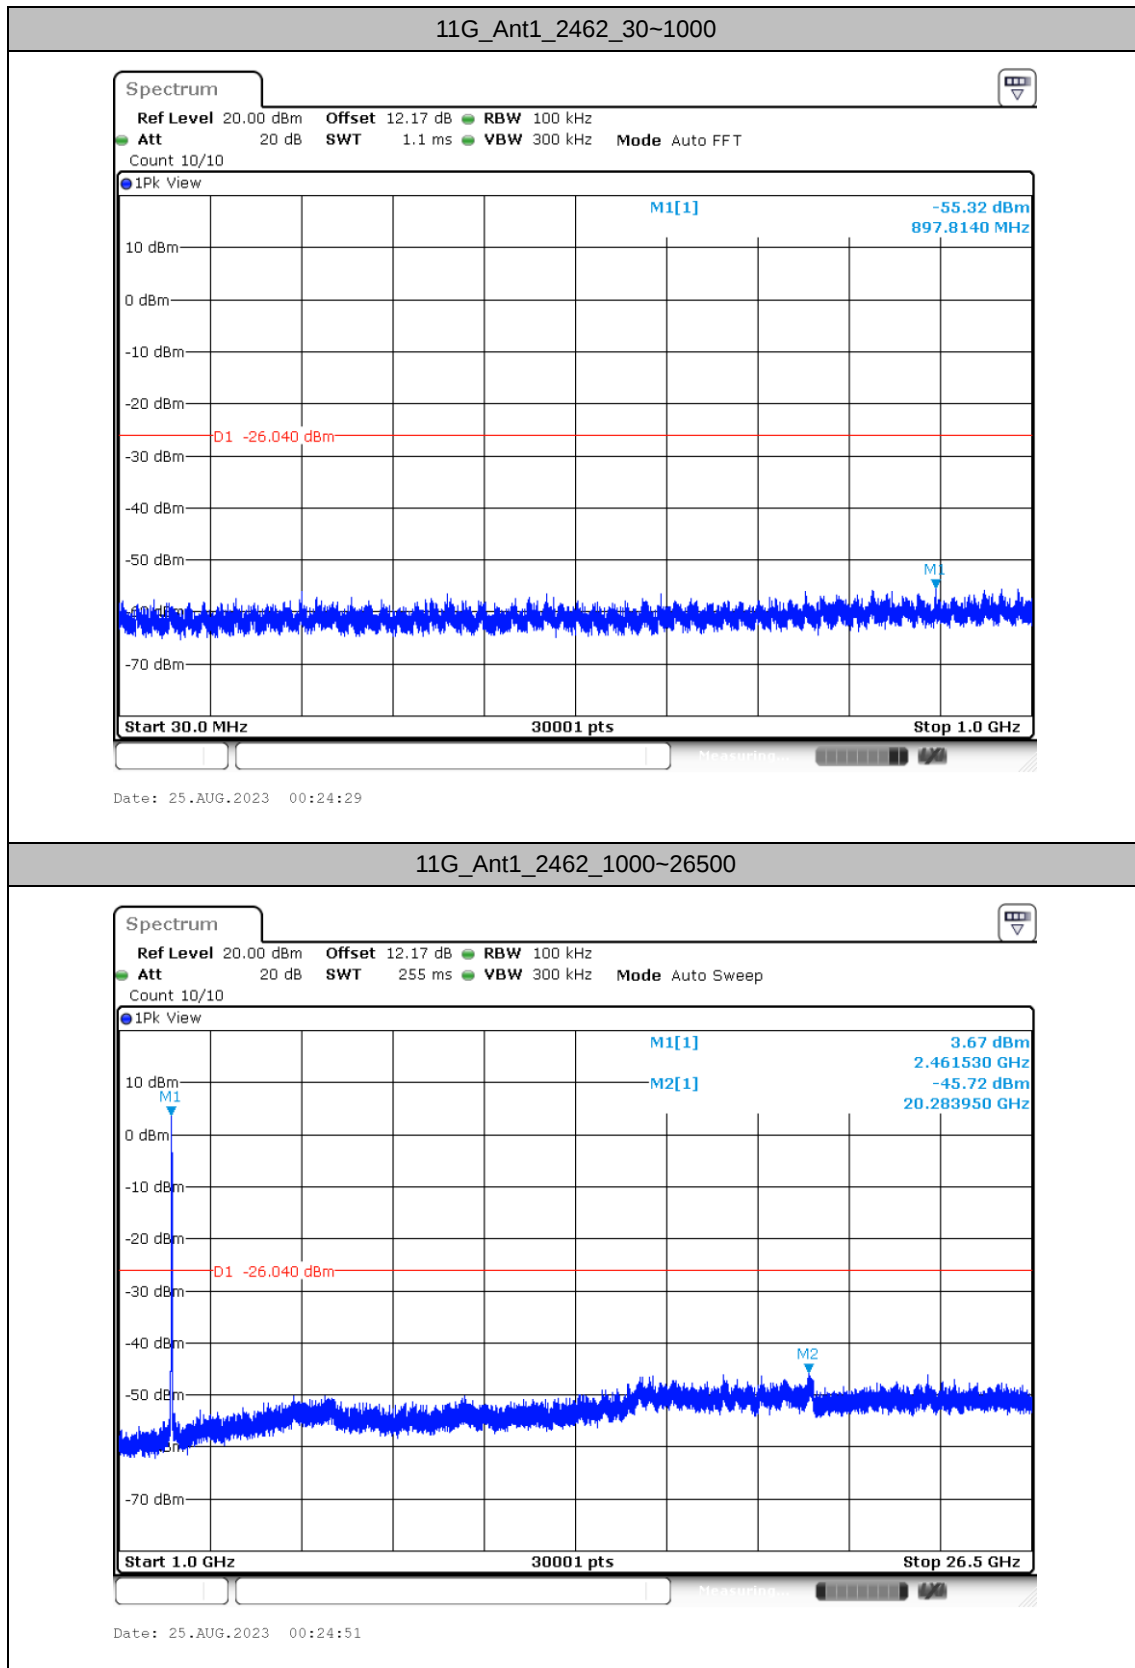

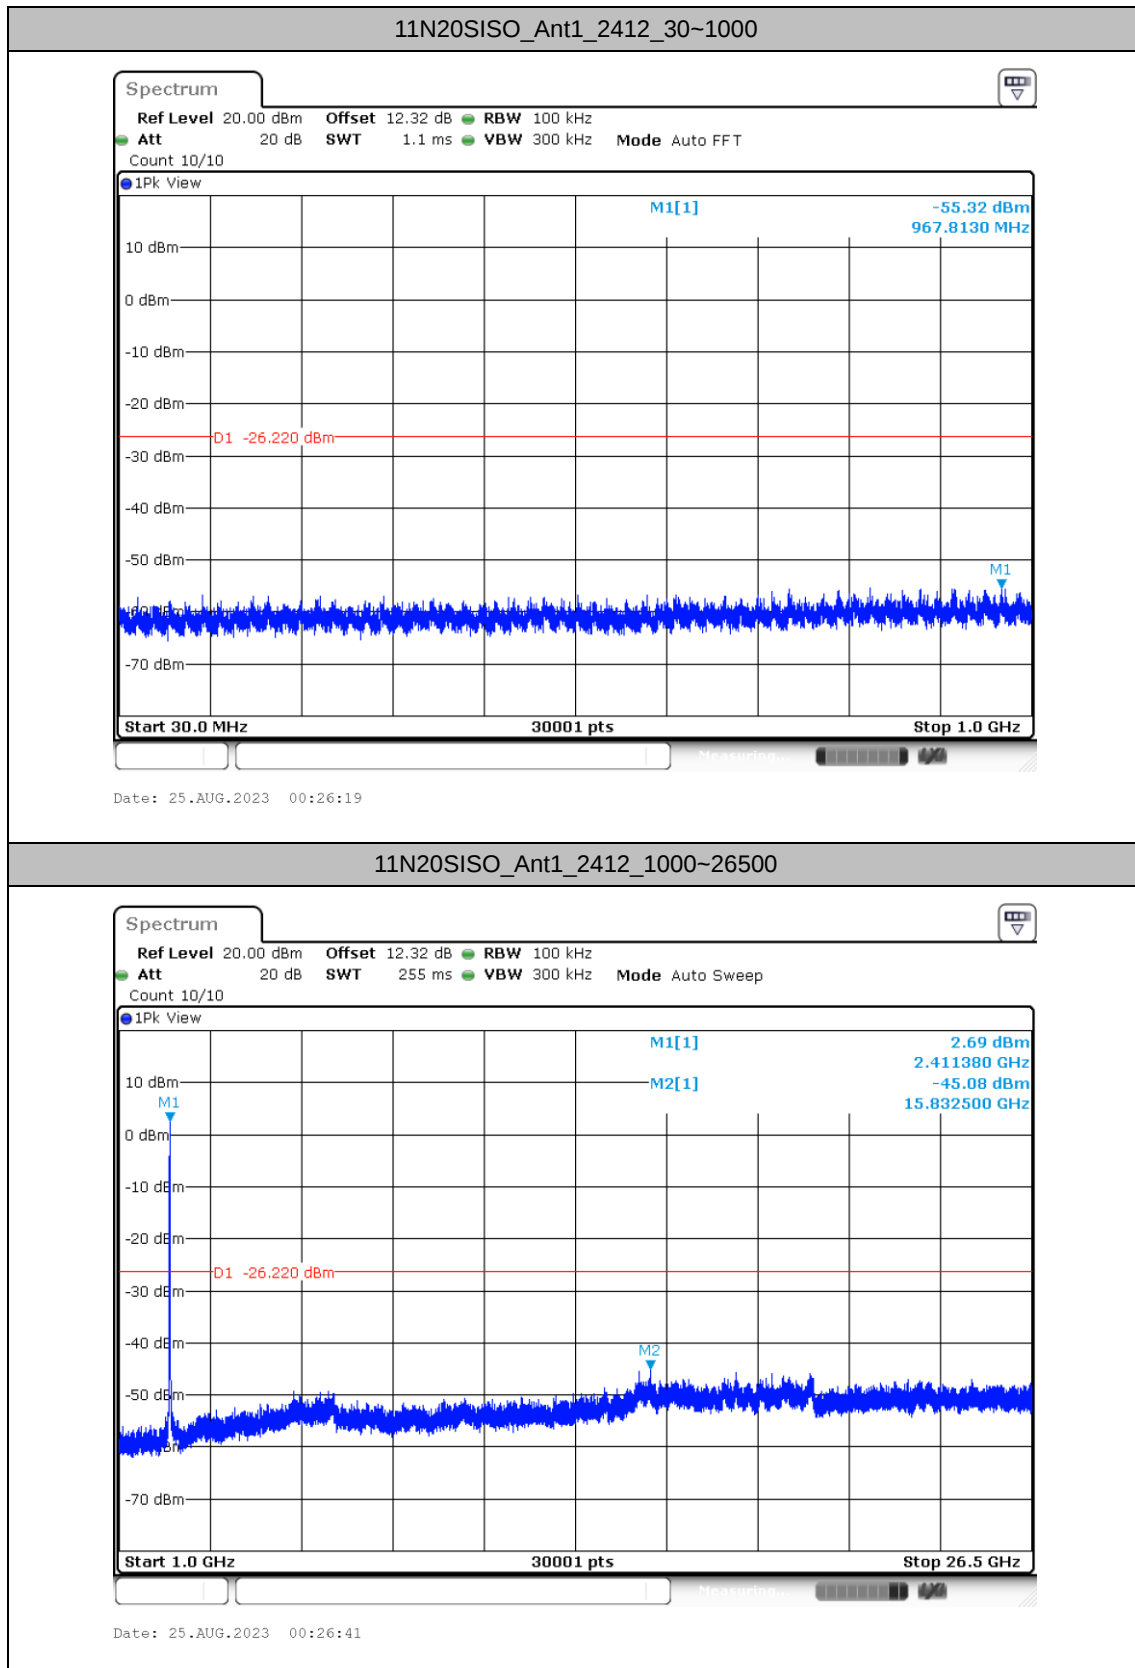


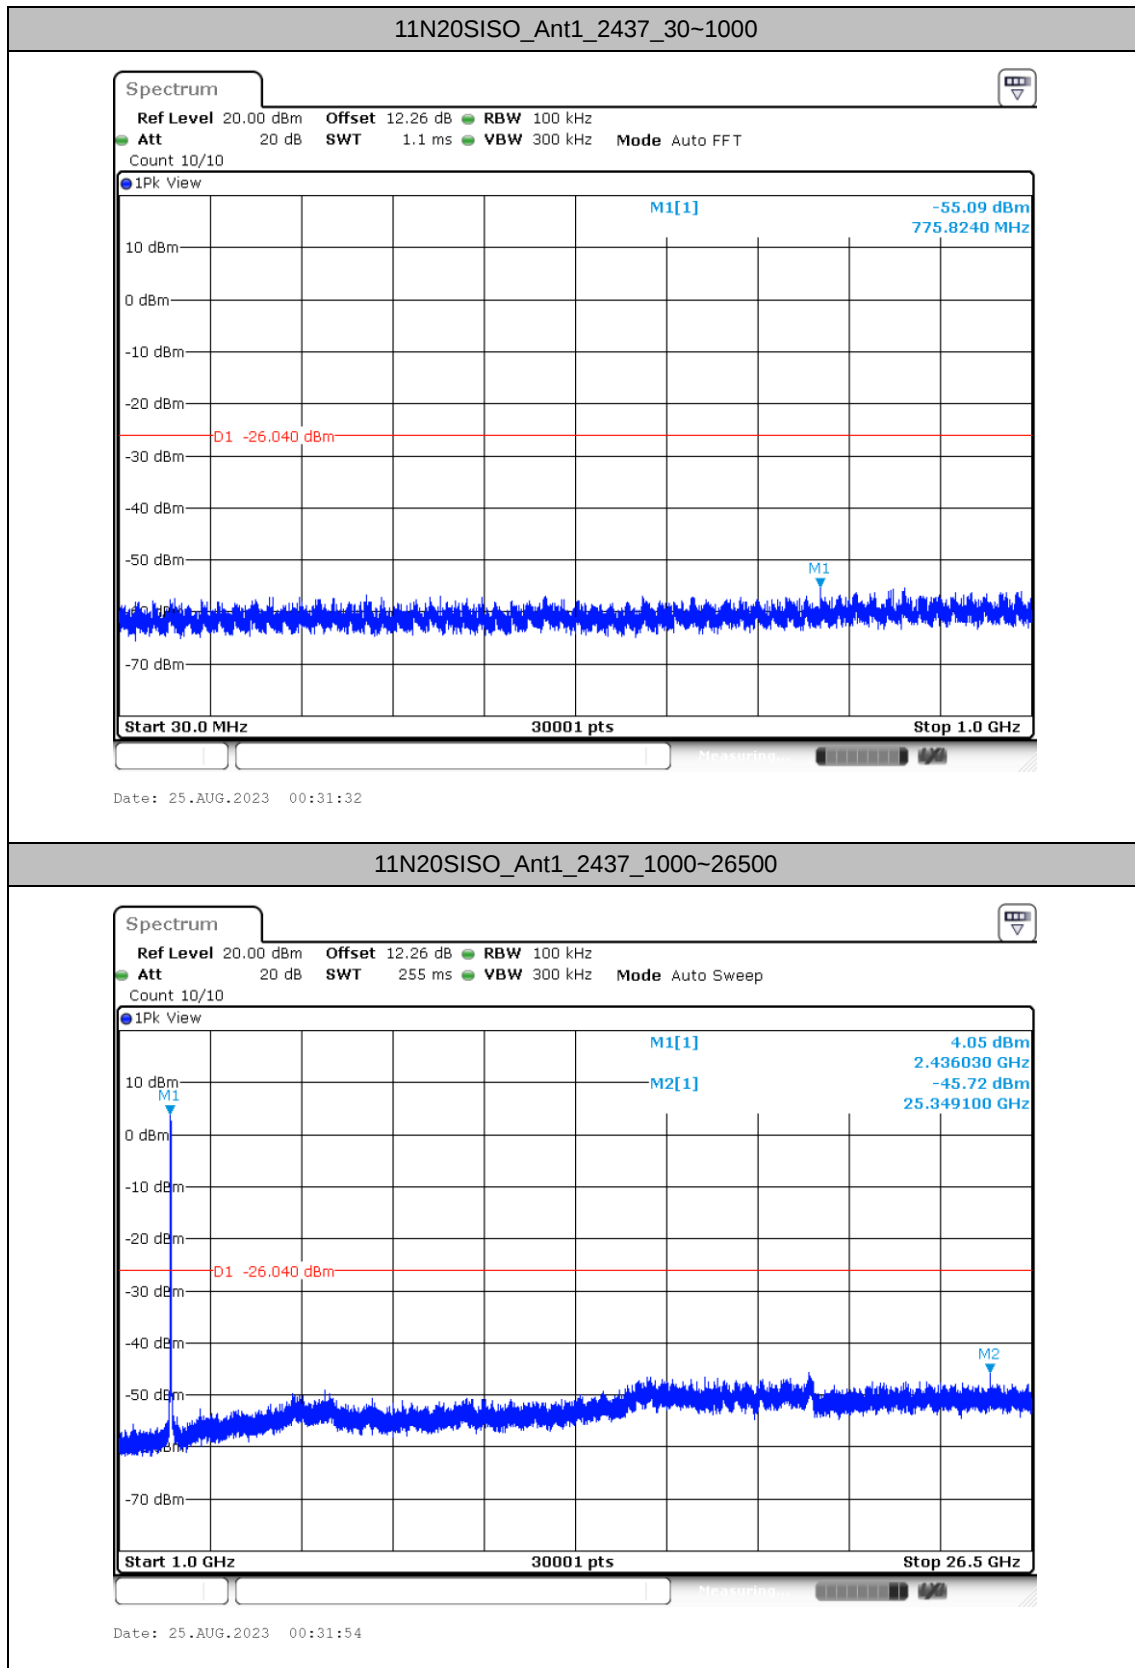

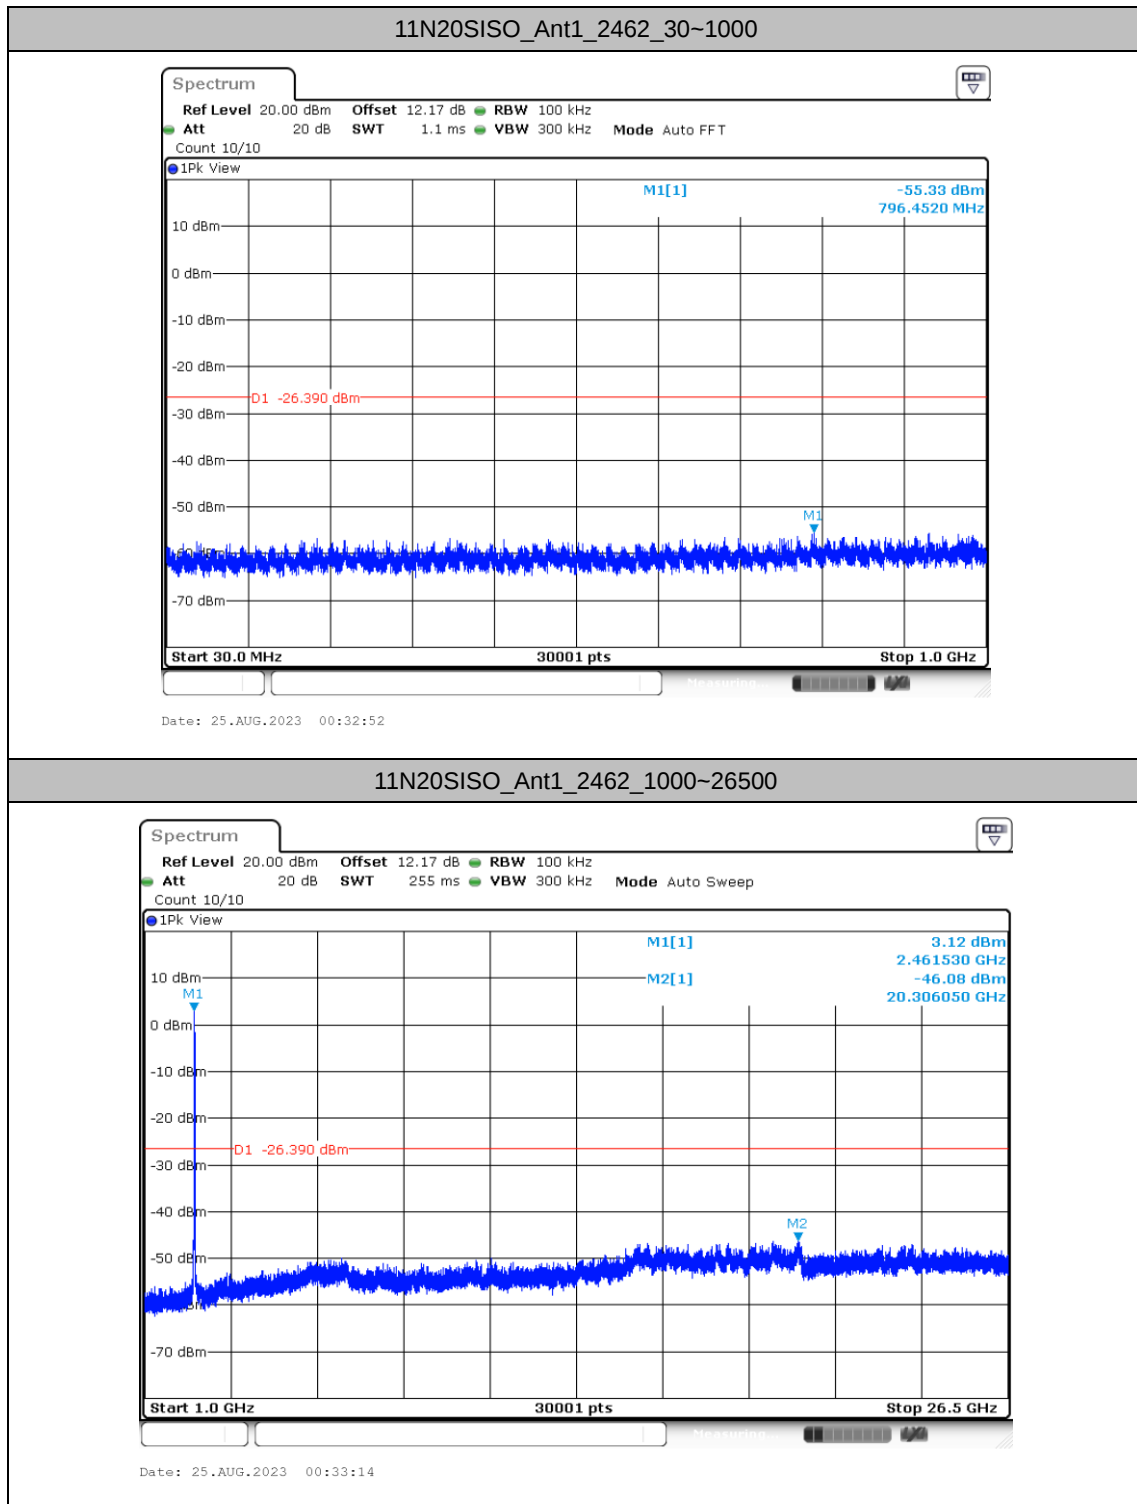




Appendix B. AC Conducted Emission Test Results

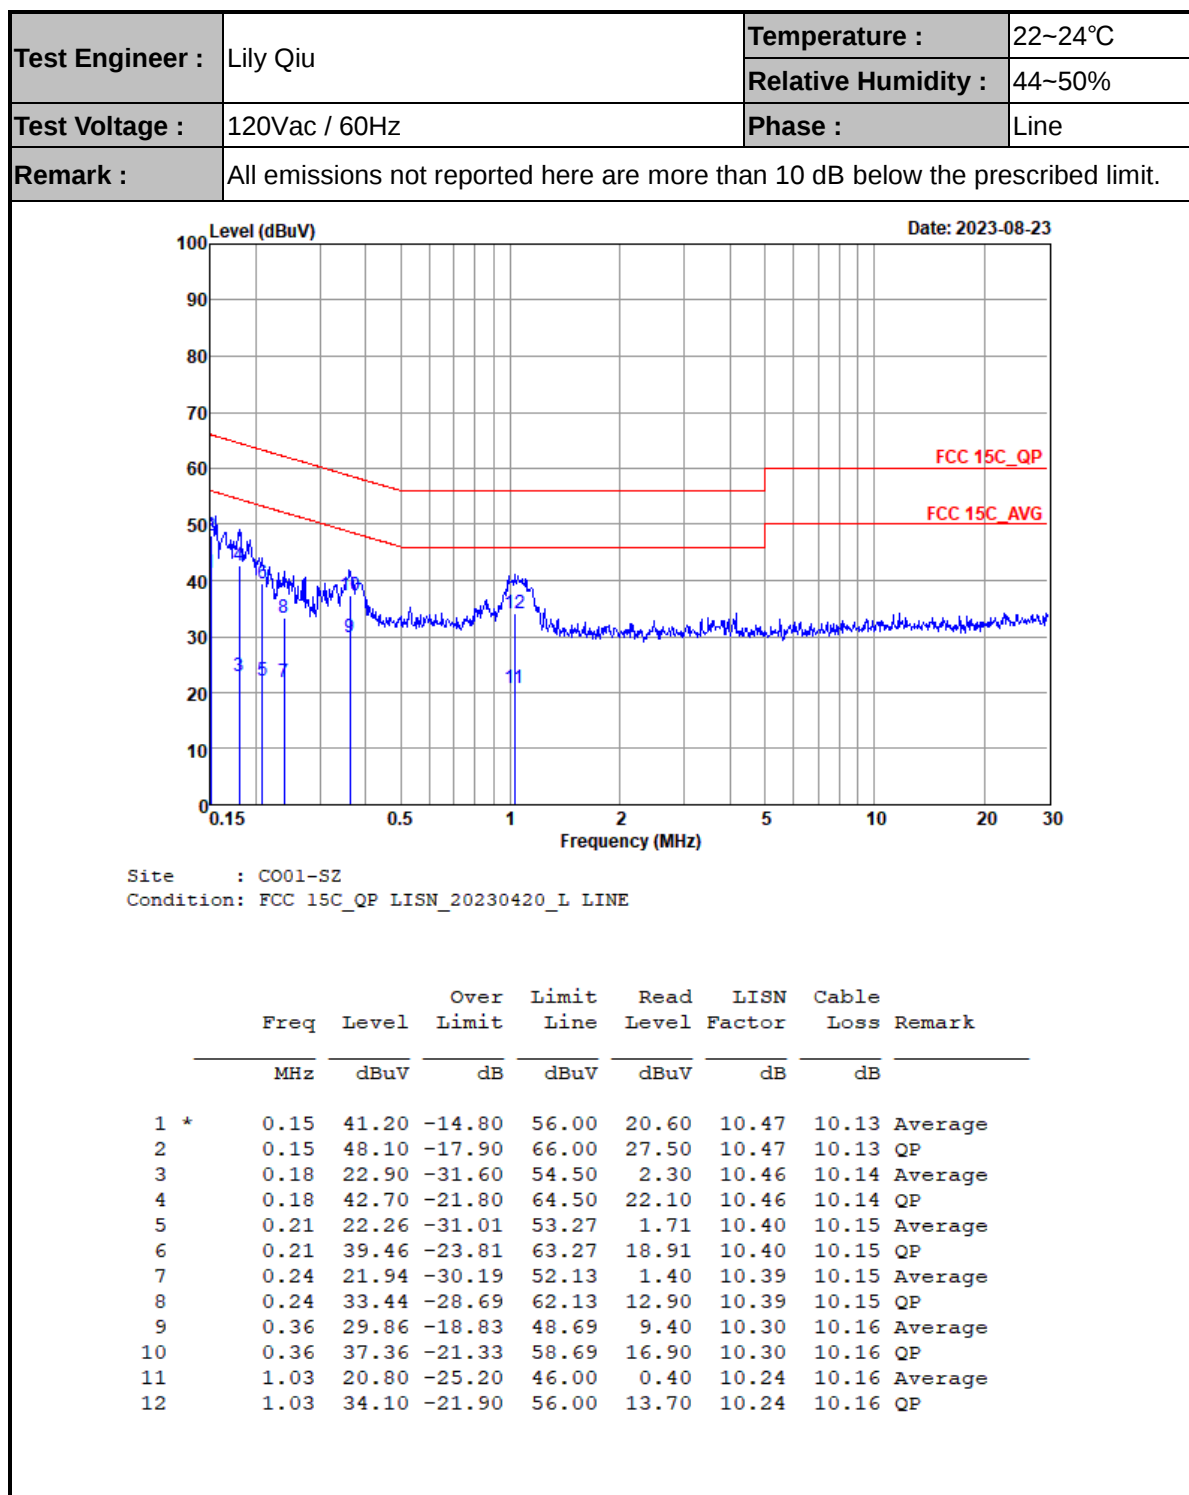



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

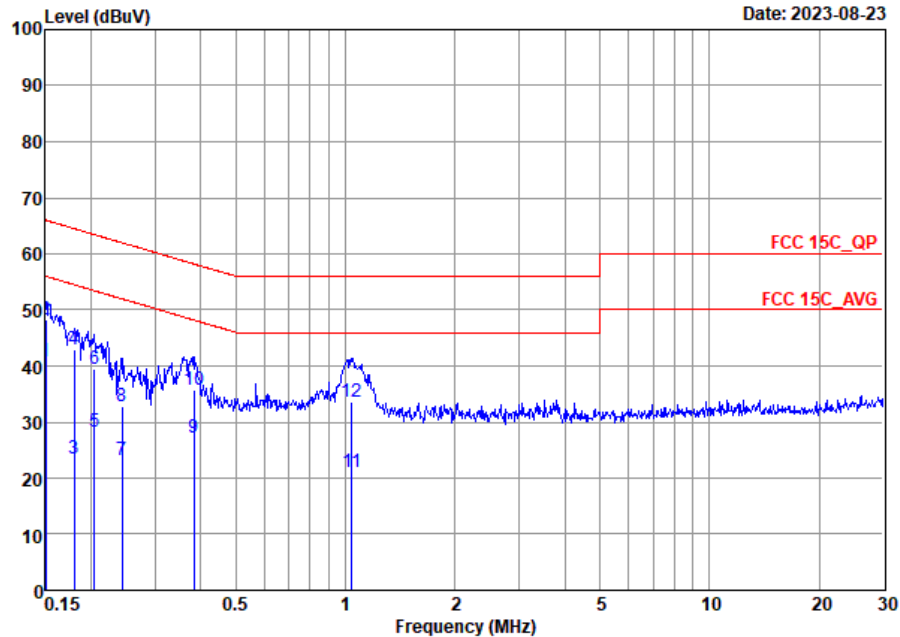

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20230420_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.15	40.79	-15.21	56.00	20.20	10.46	10.13	Average
2	0.15	48.19	-17.81	66.00	27.60	10.46	10.13	QP
3	0.18	23.45	-31.05	54.50	2.91	10.40	10.14	Average
4	0.18	42.95	-21.55	64.50	22.41	10.40	10.14	QP
5	0.20	28.20	-25.25	53.45	7.70	10.35	10.15	Average
6	0.20	39.40	-24.05	63.45	18.90	10.35	10.15	QP
7	0.24	23.28	-28.72	52.00	2.81	10.32	10.15	Average
8	0.24	32.88	-29.12	62.00	12.41	10.32	10.15	QP
9	0.38	27.11	-21.10	48.21	6.70	10.25	10.16	Average
10	0.38	35.81	-22.40	58.21	15.40	10.25	10.16	QP
11	1.04	21.01	-24.99	46.00	0.60	10.25	10.16	Average
12	1.04	33.71	-22.29	56.00	13.30	10.25	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20~22°C

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-
Mode 10	2400-2483.5	SISO	802.11b	06	2437	1Mbps	LF
Mode 11	Co-location	SISO	802.11b	11	2462	MCS0	-
		ANT 1	LTE B13 Link	-	-	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.95	43.34	54.00	-10.66	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	42.95	74.00	-31.05	H	Peak	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	7311.00	49.89	54.00	-4.11	H	Average	Pass	Harmonic
3	802.11b	11	2483.74	42.97	54.00	-11.03	H	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	49.60	54.00	-4.40	H	Average	Pass	Harmonic
4	802.11g	01	2389.95	50.58	54.00	-3.42	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	42.67	74.00	-31.33	V	Peak	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	47.36	54.00	-6.64	H	Average	Pass	Harmonic
6	802.11g	11	-	-	-	-	-	-	-	Band Edge
6	802.11g	11	7386.00	47.35	54.00	-6.65	H	Average	Pass	Harmonic
7	802.11n HT20	01	2389.95	48.76	54.00	-5.24	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	42.77	74.00	-31.23	V	Peak	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	49.00	54.00	-5.00	H	Average	Pass	Harmonic
9	802.11n HT20	11	2483.70	50.71	54.00	-3.29	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	42.48	54.00	-11.52	H	Average	Pass	Harmonic
10	802.11n HT20	11	32.91	32.11	40	-7.89	V	Peak	Pass	LF
11	802.11n HT20	11	2483.77	49.98	54.00	-4.02	H	AVERAGE	Pass	Band Edge
	802.11n HT20	11	7386.00	46.01	54.00	-7.99	H	Average	Pass	Harmonic

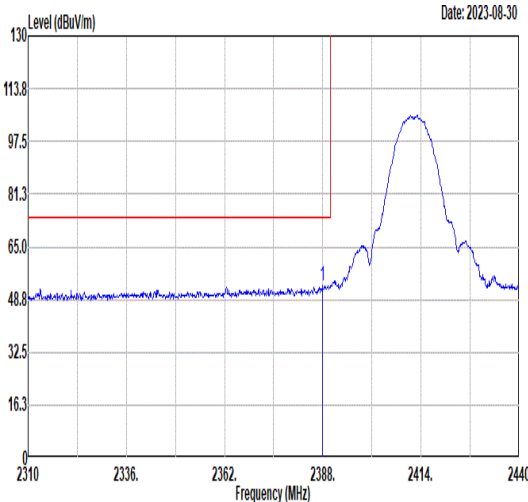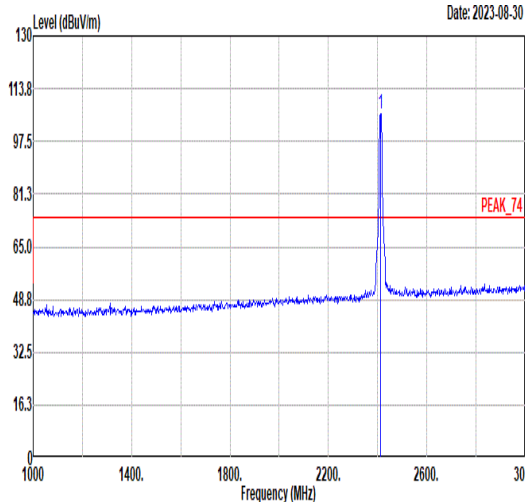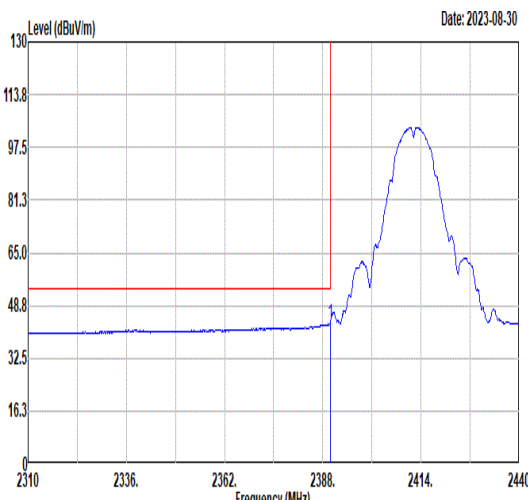
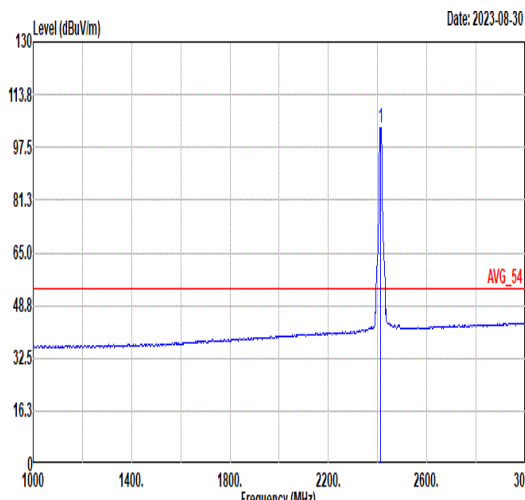


Mode	1																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>49.81</td><td>32.21</td><td>4.79</td><td>33.67</td><td>337</td><td>333</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.00	53.14	74.00	-20.86	49.81	32.21	4.79	33.67	337	333	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.07</td><td>-----</td><td>-----</td><td>102.63</td><td>32.27</td><td>4.82</td><td>33.65</td><td>337</td><td>333</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	106.07	-----	-----	102.63	32.27	4.82	33.65	337	333
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2388.00	53.14	74.00	-20.86	49.81	32.21	4.79	33.67	337	333	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	106.07	-----	-----	102.63	32.27	4.82	33.65	337	333	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.34</td><td>54.00</td><td>-10.66</td><td>40.00</td><td>32.21</td><td>4.80</td><td>33.67</td><td>337</td><td>333</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	43.34	54.00	-10.66	40.00	32.21	4.80	33.67	337	333	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.73</td><td>-----</td><td>-----</td><td>100.28</td><td>32.28</td><td>4.82</td><td>33.65</td><td>337</td><td>333</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	103.73	-----	-----	100.28	32.28	4.82	33.65	337	333
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.95	43.34	54.00	-10.66	40.00	32.21	4.80	33.67	337	333	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	103.73	-----	-----	100.28	32.28	4.82	33.65	337	333	AVERAGE																																																																																

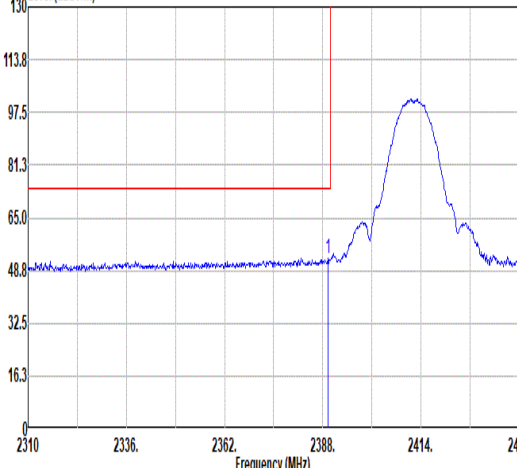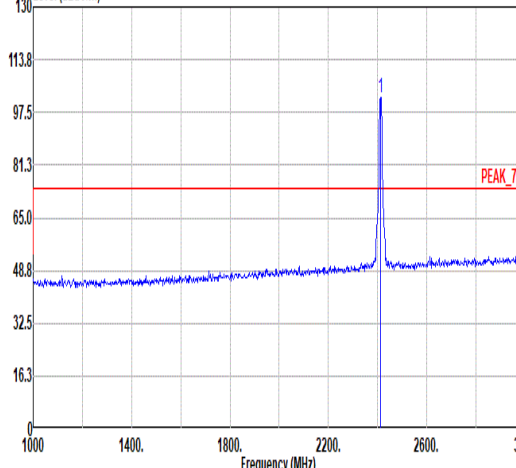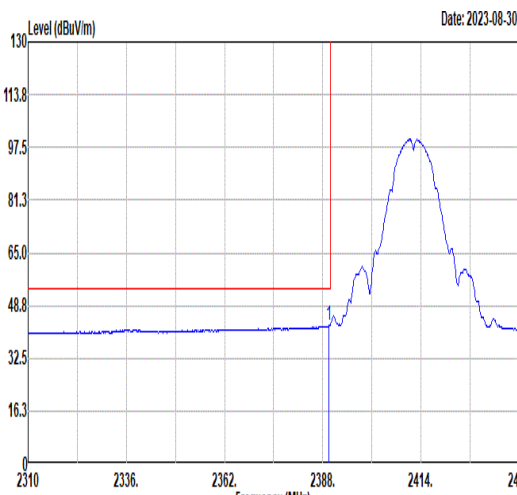
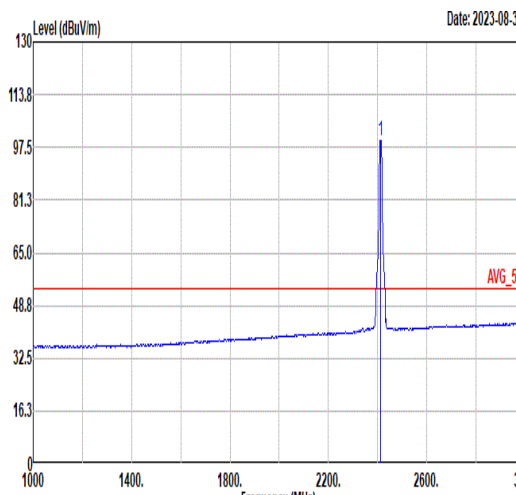


Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																															
ANT	SISO																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2023-08-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>52.56</td><td>74.00</td><td>-21.44</td><td>49.22</td><td>32.21</td><td>4.80</td><td>33.67</td><td>344</td><td>17 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.43	52.56	74.00	-21.44	49.22	32.21	4.80	33.67	344	17 PEAK	Level (dBuV/m) Date: 2023-08-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.23</td><td>-----</td><td>-----</td><td>98.79</td><td>32.27</td><td>4.82</td><td>33.65</td><td>344</td><td>17 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	102.23	-----	-----	98.79	32.27	4.82	33.65	344	17 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.43	52.56	74.00	-21.44	49.22	32.21	4.80	33.67	344	17 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	102.23	-----	-----	98.79	32.27	4.82	33.65	344	17 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2023-08-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>39.32</td><td>32.21</td><td>4.80</td><td>33.67</td><td>344</td><td>17 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.69	42.66	54.00	-11.34	39.32	32.21	4.80	33.67	344	17 AVERAGE	Level (dBuV/m) Date: 2023-08-30  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.77</td><td>-----</td><td>-----</td><td>96.32</td><td>32.28</td><td>4.82</td><td>33.65</td><td>344</td><td>17 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	99.77	-----	-----	96.32	32.28	4.82	33.65	344	17 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.69	42.66	54.00	-11.34	39.32	32.21	4.80	33.67	344	17 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	99.77	-----	-----	96.32	32.28	4.82	33.65	344	17 AVERAGE																																																																						



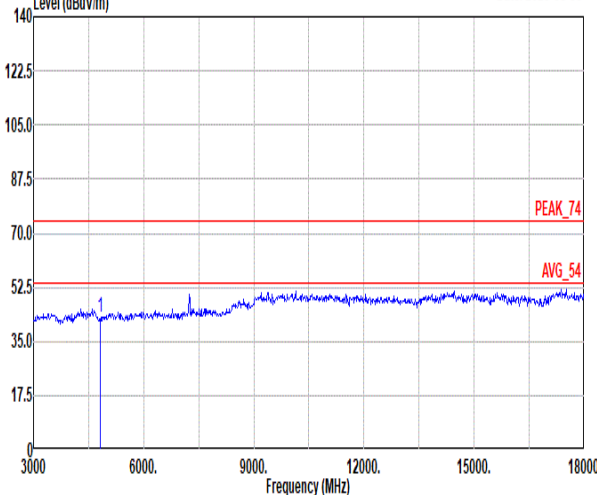
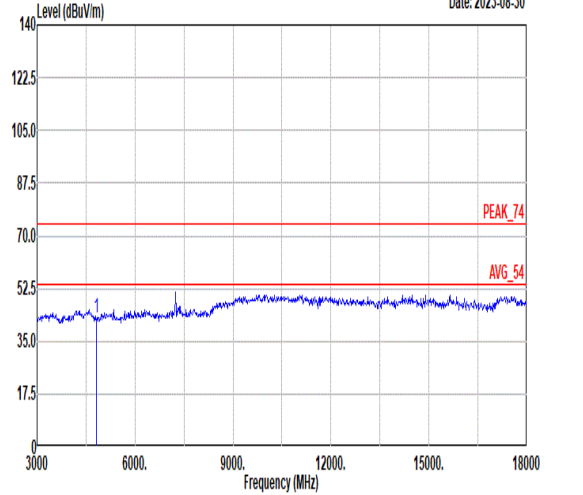


Mode	1																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																																															
ANT	SISO																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg	Level (dBuV/m) Date: 2023-08-30  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>42.95</td><td>74.00</td><td>-31.05</td><td>55.24</td><td>34.67</td><td>7.75</td><td>54.71</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	42.95	74.00	-31.05	55.24	34.67	7.75	54.71	--	--	Peak	Level (dBuV/m) Date: 2023-08-30  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>42.86</td><td>74.00</td><td>-31.14</td><td>55.15</td><td>34.67</td><td>7.75</td><td>54.71</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	42.86	74.00	-31.14	55.15	34.67	7.75	54.71	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	42.95	74.00	-31.05	55.24	34.67	7.75	54.71	--	--	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	42.86	74.00	-31.14	55.15	34.67	7.75	54.71	--	--	Peak																																																																																					



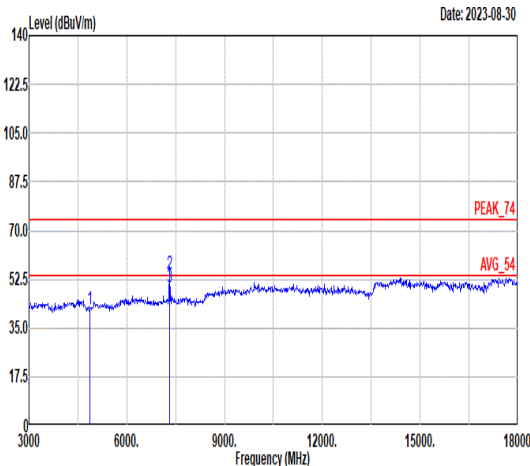
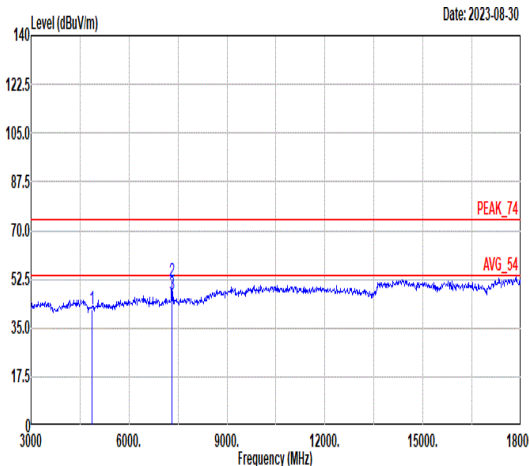


Mode	2																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																					
ANT	SISO																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.55</td><td>74.00</td><td>-32.45</td><td>56.65</td><td>34.65</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>68.08</td><td>36.41</td><td>8.93</td><td>58.92</td><td>346</td><td>294</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>49.89</td><td>54.00</td><td>-4.11</td><td>63.47</td><td>36.41</td><td>8.93</td><td>58.92</td><td>346</td><td>294</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4874.00	41.55	74.00	-32.45	56.65	34.65	7.77	57.52	--	--	Peak	2	7311.00	54.50	74.00	-19.50	68.08	36.41	8.93	58.92	346	294	Peak	3	7311.00	49.89	54.00	-4.11	63.47	36.41	8.93	58.92	346	294	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.49</td><td>74.00</td><td>-32.51</td><td>56.59</td><td>34.65</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>65.52</td><td>36.41</td><td>8.93</td><td>58.92</td><td>376</td><td>339</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>46.87</td><td>54.00</td><td>-7.13</td><td>60.45</td><td>36.41</td><td>8.93</td><td>58.92</td><td>376</td><td>339</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4874.00	41.49	74.00	-32.51	56.59	34.65	7.77	57.52	--	--	Peak	2	7311.00	51.94	74.00	-22.06	65.52	36.41	8.93	58.92	376	339	Peak	3	7311.00	46.87	54.00	-7.13	60.45	36.41	8.93	58.92	376	339	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
1	4874.00	41.55	74.00	-32.45	56.65	34.65	7.77	57.52	--	--	Peak																																																																																																											
2	7311.00	54.50	74.00	-19.50	68.08	36.41	8.93	58.92	346	294	Peak																																																																																																											
3	7311.00	49.89	54.00	-4.11	63.47	36.41	8.93	58.92	346	294	Average																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
1	4874.00	41.49	74.00	-32.51	56.59	34.65	7.77	57.52	--	--	Peak																																																																																																											
2	7311.00	51.94	74.00	-22.06	65.52	36.41	8.93	58.92	376	339	Peak																																																																																																											
3	7311.00	46.87	54.00	-7.13	60.45	36.41	8.93	58.92	376	339	Average																																																																																																											

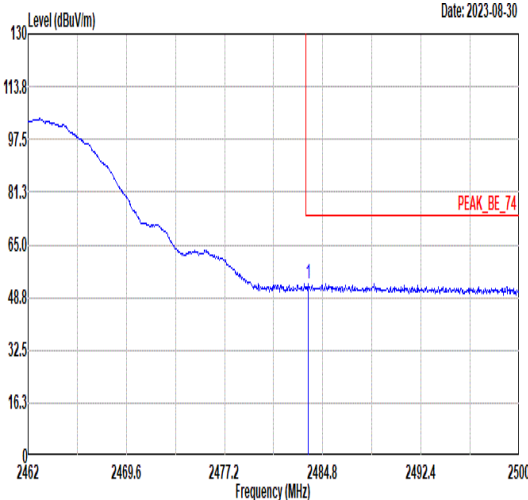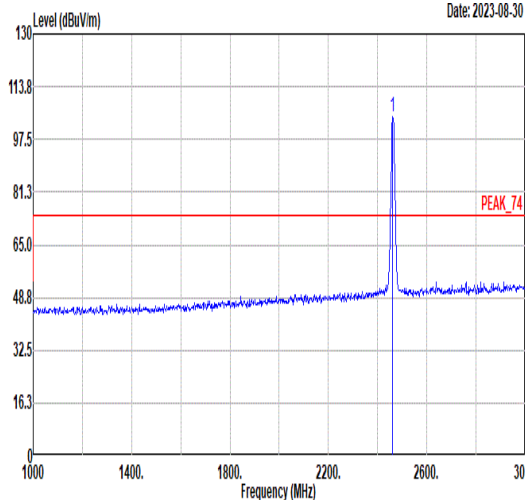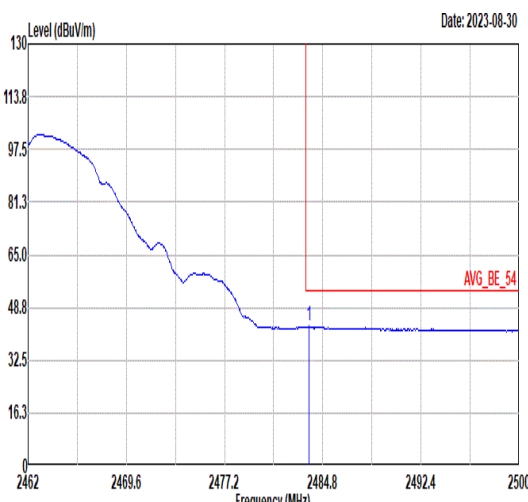
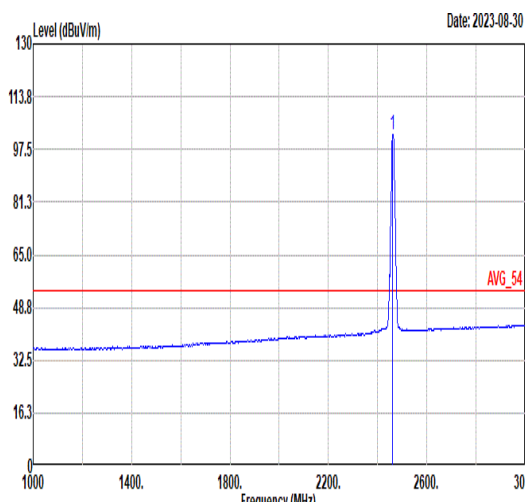


Mode	3																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>49.34</td><td>32.46</td><td>4.92</td><td>33.61</td><td>281</td><td>334</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.66	53.11	74.00	-20.89	49.34	32.46	4.92	33.61	281	334	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.65</td><td>-----</td><td>-----</td><td>100.98</td><td>32.40</td><td>4.89</td><td>33.62</td><td>281</td><td>334</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	104.65	-----	-----	100.98	32.40	4.89	33.62	281	334
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.66	53.11	74.00	-20.89	49.34	32.46	4.92	33.61	281	334	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	104.65	-----	-----	100.98	32.40	4.89	33.62	281	334	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>39.20</td><td>32.46</td><td>4.92</td><td>33.61</td><td>281</td><td>334</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.74	42.97	54.00	-11.03	39.20	32.46	4.92	33.61	281	334	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.24</td><td>-----</td><td>-----</td><td>98.57</td><td>32.40</td><td>4.89</td><td>33.62</td><td>281</td><td>334</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	102.24	-----	-----	98.57	32.40	4.89	33.62	281	334
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.74	42.97	54.00	-11.03	39.20	32.46	4.92	33.61	281	334	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	102.24	-----	-----	98.57	32.40	4.89	33.62	281	334	AVERAGE																																																																																

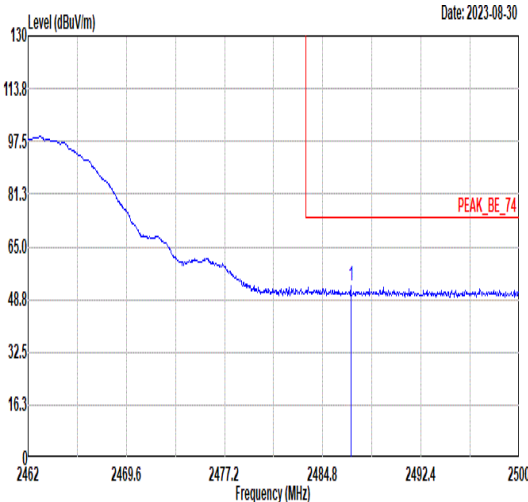
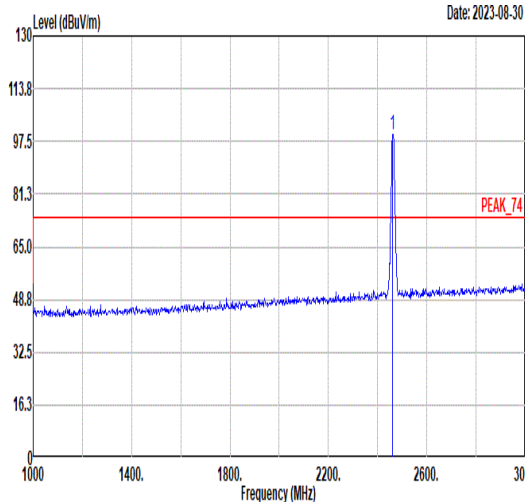
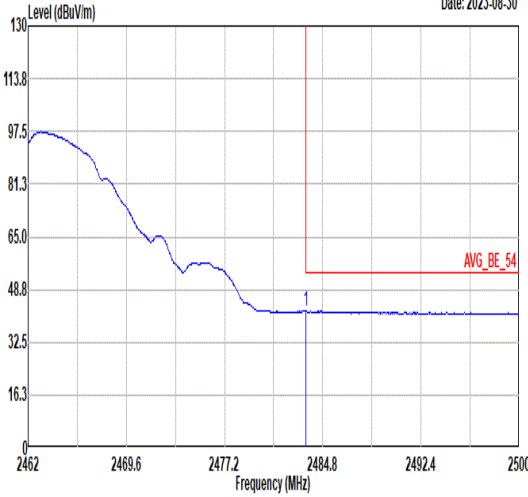
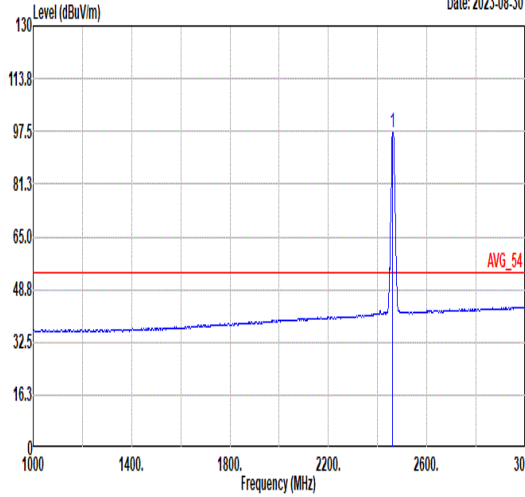


Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2486.97</td><td>52.85</td><td>74.00</td><td>-21.15</td><td>49.07</td><td>32.47</td><td>4.92</td><td>33.61</td><td>400</td><td>8</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2486.97	52.85	74.00	-21.15	49.07	32.47	4.92	33.61	400	8	PEAK	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2462.00</td><td>99.67</td><td>-----</td><td>-----</td><td>96.00</td><td>32.40</td><td>4.89</td><td>33.62</td><td>400</td><td>8</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2462.00	99.67	-----	-----	96.00	32.40	4.89	33.62	400	8
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2486.97	52.85	74.00	-21.15	49.07	32.47	4.92	33.61	400	8	PEAK																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	99.67	-----	-----	96.00	32.40	4.89	33.62	400	8	PEAK																																																																																								
Avg																																																																																																			
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.51</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>38.32</td><td>32.46</td><td>4.92</td><td>33.61</td><td>400</td><td>8</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2483.51	42.09	54.00	-11.91	38.32	32.46	4.92	33.61	400	8	AVERAGE	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2462.00</td><td>97.28</td><td>-----</td><td>-----</td><td>93.61</td><td>32.40</td><td>4.89</td><td>33.62</td><td>400</td><td>8</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2462.00	97.28	-----	-----	93.61	32.40	4.89	33.62	400	8
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	42.09	54.00	-11.91	38.32	32.46	4.92	33.61	400	8	AVERAGE																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	97.28	-----	-----	93.61	32.40	4.89	33.62	400	8	AVERAGE																																																																																								

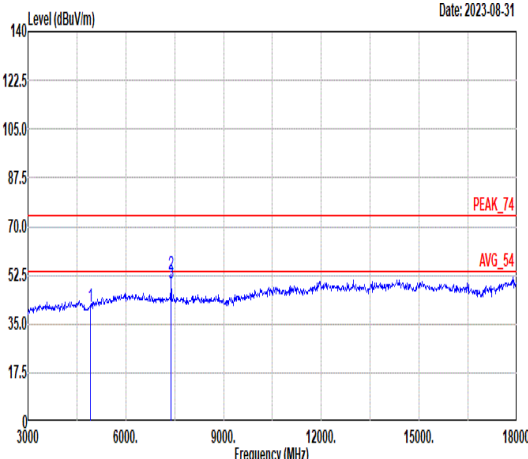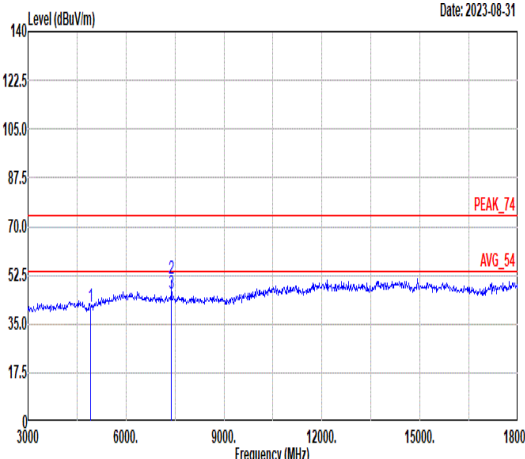

Mode	3																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																														
ANT	SISO																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.40</td><td>74.00</td><td>-32.60</td><td>56.82</td><td>34.34</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>52.82</td><td>74.00</td><td>-21.18</td><td>66.61</td><td>35.99</td><td>9.17</td><td>58.95</td><td>220</td><td>142</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>49.60</td><td>54.00</td><td>-4.40</td><td>63.39</td><td>35.99</td><td>9.17</td><td>58.95</td><td>220</td><td>142</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	41.40	74.00	-32.60	56.82	34.34	7.79	57.55	--	--	Peak	2	7386.00	52.82	74.00	-21.18	66.61	35.99	9.17	58.95	220	142	Peak	3	7386.00	49.60	54.00	-4.40	63.39	35.99	9.17	58.95	220	142	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.08</td><td>74.00</td><td>-32.92</td><td>56.50</td><td>34.34</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>51.09</td><td>74.00</td><td>-22.91</td><td>64.88</td><td>35.99</td><td>9.17</td><td>58.95</td><td>152</td><td>178</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>45.91</td><td>54.00</td><td>-8.09</td><td>59.70</td><td>35.99</td><td>9.17</td><td>58.95</td><td>152</td><td>178</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	41.08	74.00	-32.92	56.50	34.34	7.79	57.55	--	--	Peak	2	7386.00	51.09	74.00	-22.91	64.88	35.99	9.17	58.95	152	178	Peak	3	7386.00	45.91	54.00	-8.09	59.70	35.99	9.17	58.95	152	178
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	41.40	74.00	-32.60	56.82	34.34	7.79	57.55	--	--	Peak																																																																																																																																				
2	7386.00	52.82	74.00	-21.18	66.61	35.99	9.17	58.95	220	142	Peak																																																																																																																																				
3	7386.00	49.60	54.00	-4.40	63.39	35.99	9.17	58.95	220	142	Average																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	41.08	74.00	-32.92	56.50	34.34	7.79	57.55	--	--	Peak																																																																																																																																				
2	7386.00	51.09	74.00	-22.91	64.88	35.99	9.17	58.95	152	178	Peak																																																																																																																																				
3	7386.00	45.91	54.00	-8.09	59.70	35.99	9.17	58.95	152	178	Average																																																																																																																																				

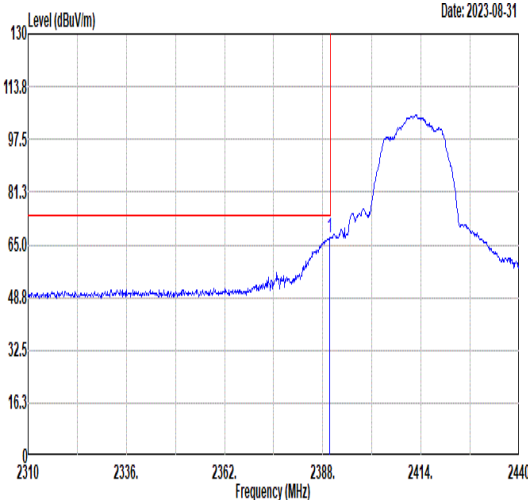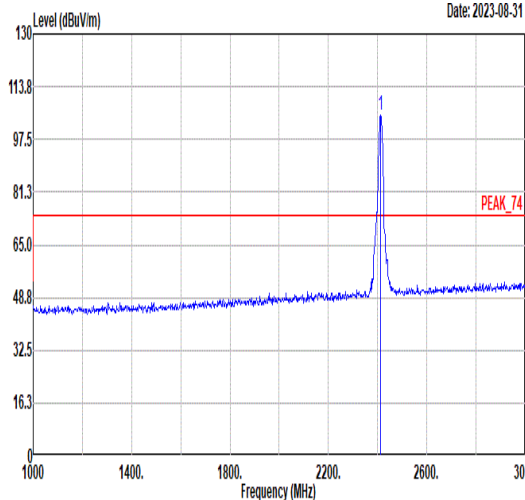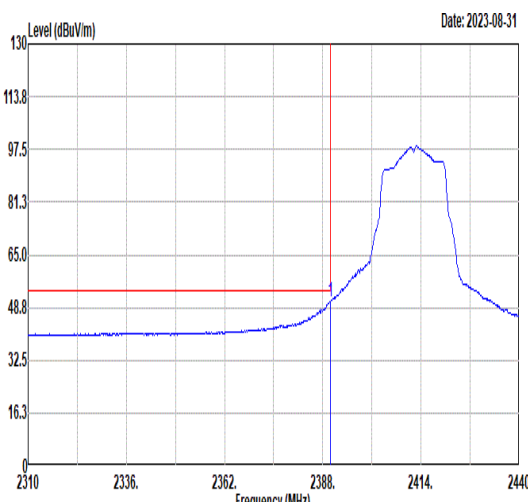
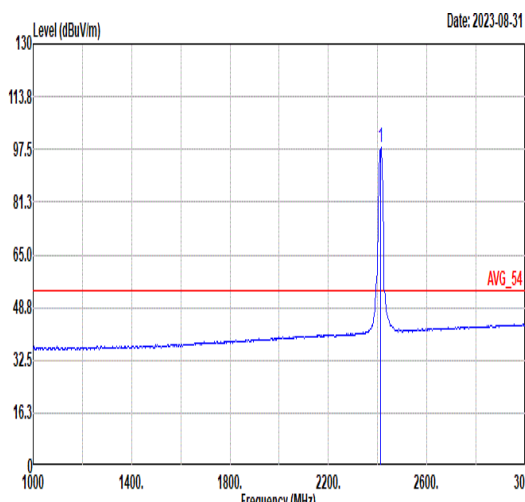


Mode	4																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>67.38</td><td>74.00</td><td>-6.62</td><td>64.04</td><td>32.21</td><td>4.80</td><td>33.67</td><td>326</td><td>334</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	67.38	74.00	-6.62	64.04	32.21	4.80	33.67	326	334	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.03</td><td>-----</td><td>-----</td><td>101.59</td><td>32.27</td><td>4.82</td><td>33.65</td><td>326</td><td>334</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	105.03	-----	-----	101.59	32.27	4.82	33.65	326	334
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.82	67.38	74.00	-6.62	64.04	32.21	4.80	33.67	326	334	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	105.03	-----	-----	101.59	32.27	4.82	33.65	326	334	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.58</td><td>54.00</td><td>-3.42</td><td>47.24</td><td>32.21</td><td>4.80</td><td>33.67</td><td>326</td><td>334</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	50.58	54.00	-3.42	47.24	32.21	4.80	33.67	326	334	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.03</td><td>-----</td><td>-----</td><td>94.58</td><td>32.28</td><td>4.82</td><td>33.65</td><td>326</td><td>334</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	98.03	-----	-----	94.58	32.28	4.82	33.65	326	334
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.95	50.58	54.00	-3.42	47.24	32.21	4.80	33.67	326	334	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	98.03	-----	-----	94.58	32.28	4.82	33.65	326	334	AVERAGE																																																																																





Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2023-08-31 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>66.15</td><td>74.00</td><td>-7.85</td><td>62.81</td><td>32.21</td><td>4.80</td><td>33.67</td><td>336</td><td>0 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	2389.95	66.15	74.00	-7.85	62.81	32.21	4.80	33.67	336	0 PEAK	Level (dBuV/m) Date: 2023-08-31 Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.99</td><td>-----</td><td>-----</td><td>98.55</td><td>32.27</td><td>4.82</td><td>33.65</td><td>336</td><td>0 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	2412.00	101.99	-----	-----	98.55	32.27	4.82	33.65	336	0 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2389.95	66.15	74.00	-7.85	62.81	32.21	4.80	33.67	336	0 PEAK																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2412.00	101.99	-----	-----	98.55	32.27	4.82	33.65	336	0 PEAK																																																																								
Avg	Level (dBuV/m) Date: 2023-08-31 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.64</td><td>54.00</td><td>-5.36</td><td>45.30</td><td>32.21</td><td>4.80</td><td>33.67</td><td>336</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	2389.95	48.64	54.00	-5.36	45.30	32.21	4.80	33.67	336	0 AVERAGE	Level (dBuV/m) Date: 2023-08-31 Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.45</td><td>-----</td><td>-----</td><td>92.01</td><td>32.27</td><td>4.82</td><td>33.65</td><td>336</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	2412.00	95.45	-----	-----	92.01	32.27	4.82	33.65	336	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2389.95	48.64	54.00	-5.36	45.30	32.21	4.80	33.67	336	0 AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2412.00	95.45	-----	-----	92.01	32.27	4.82	33.65	336	0 AVERAGE																																																																								

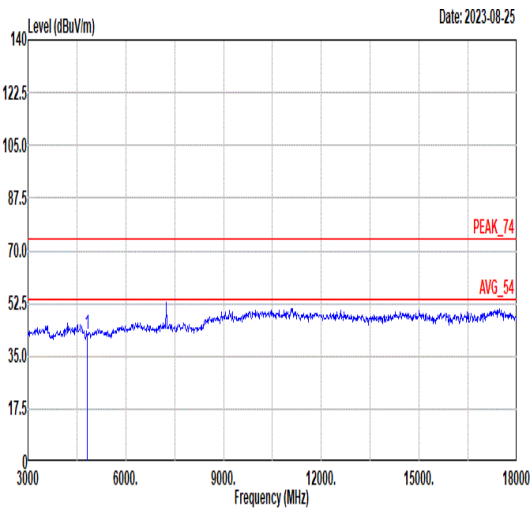
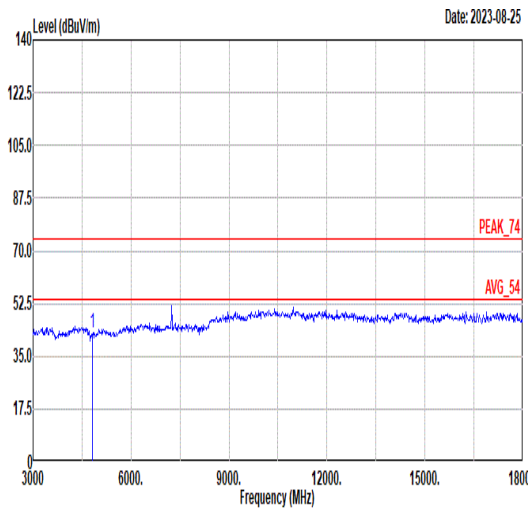


Mode	4																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																									
ANT	SISO																																																																																																																																									
Pol.	Horizontal					Vertical																																																																																																																																				
Peak Avg																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>54.29</td><td>34.67</td><td>7.75</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>54.71</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>Peak</td><td></td><td></td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4824.00	42.00	74.00	-32.00	54.29	34.67	7.75						54.71								--								--								Peak			<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>54.96</td><td>34.67</td><td>7.75</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>54.71</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>Peak</td><td></td><td></td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4824.00	42.67	74.00	-31.33	54.96	34.67	7.75						54.71								--								--								Peak		
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																																																			
1	4824.00	42.00	74.00	-32.00	54.29	34.67	7.75																																																																																																																																			
					54.71																																																																																																																																					
					--																																																																																																																																					
					--																																																																																																																																					
					Peak																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																																																			
1	4824.00	42.67	74.00	-31.33	54.96	34.67	7.75																																																																																																																																			
					54.71																																																																																																																																					
					--																																																																																																																																					
					--																																																																																																																																					
					Peak																																																																																																																																					



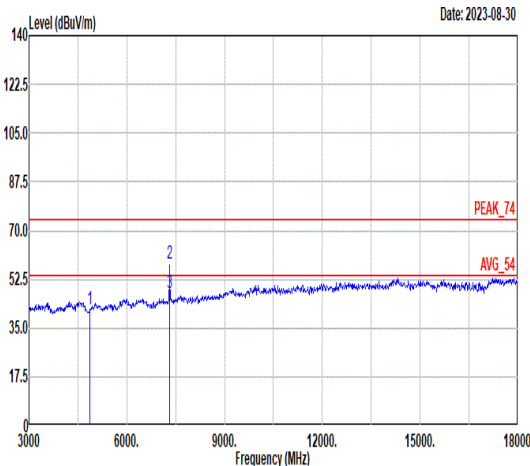
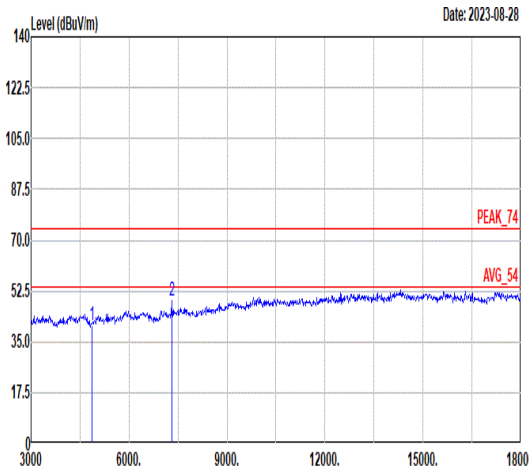


Mode	5																																																																																																																														
	Harmonic																																																																																																																														
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																														
ANT	SISO																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>56.83</td><td>34.65</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>58.23</td><td>74.00</td><td>-15.77</td><td>71.81</td><td>36.41</td><td>8.93</td><td>58.92</td><td>203</td><td>142</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>47.36</td><td>54.00</td><td>-6.64</td><td>60.94</td><td>36.41</td><td>8.93</td><td>58.92</td><td>203</td><td>142</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	41.73	74.00	-32.27	56.83	34.65	7.77	57.52	--	--	--	Peak	2	7311.00	58.23	74.00	-15.77	71.81	36.41	8.93	58.92	203	142	Peak	3	7311.00	47.36	54.00	-6.64	60.94	36.41	8.93	58.92	203	142	Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>40.85</td><td>74.00</td><td>-33.15</td><td>55.95</td><td>34.65</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>62.95</td><td>36.41</td><td>8.93</td><td>58.92</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	40.85	74.00	-33.15	55.95	34.65	7.77	57.52	--	--	--	Peak	2	7311.00	49.37	74.00	-24.63	62.95	36.41	8.93	58.92	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	4874.00	41.73	74.00	-32.27	56.83	34.65	7.77	57.52	--	--	--	Peak																																																																																																																			
2	7311.00	58.23	74.00	-15.77	71.81	36.41	8.93	58.92	203	142	Peak																																																																																																																				
3	7311.00	47.36	54.00	-6.64	60.94	36.41	8.93	58.92	203	142	Average																																																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	4874.00	40.85	74.00	-33.15	55.95	34.65	7.77	57.52	--	--	--	Peak																																																																																																																			
2	7311.00	49.37	74.00	-24.63	62.95	36.41	8.93	58.92	--	--	--	Peak																																																																																																																			



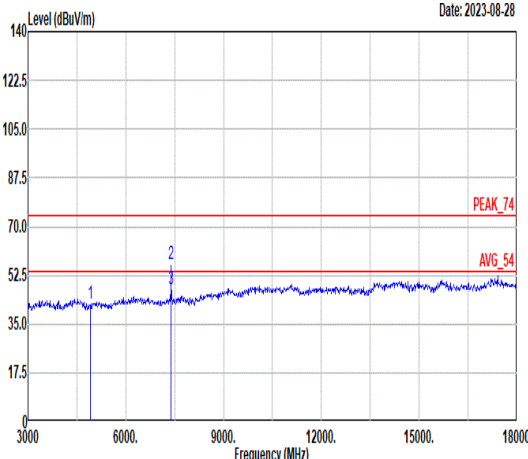
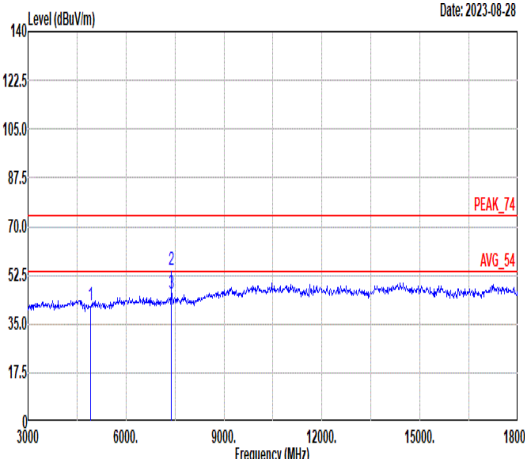


Mode	6																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																														
ANT	SISO																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.36</td><td>74.00</td><td>-31.64</td><td>57.49</td><td>34.63</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>56.49</td><td>74.00</td><td>-17.51</td><td>69.78</td><td>36.49</td><td>9.17</td><td>58.95</td><td>219</td><td>143</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>47.35</td><td>54.00</td><td>-6.65</td><td>60.64</td><td>36.49</td><td>9.17</td><td>58.95</td><td>219</td><td>143</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	42.36	74.00	-31.64	57.49	34.63	7.79	57.55	--	--	Peak	2	7386.00	56.49	74.00	-17.51	69.78	36.49	9.17	58.95	219	143	Peak	3	7386.00	47.35	54.00	-6.65	60.64	36.49	9.17	58.95	219	143	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>56.98</td><td>34.63</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>67.73</td><td>36.49</td><td>9.17</td><td>58.95</td><td>357</td><td>172</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>45.91</td><td>54.00</td><td>-8.09</td><td>59.20</td><td>36.49</td><td>9.17</td><td>58.95</td><td>357</td><td>172</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	41.85	74.00	-32.15	56.98	34.63	7.79	57.55	--	--	Peak	2	7386.00	54.44	74.00	-19.56	67.73	36.49	9.17	58.95	357	172	Peak	3	7386.00	45.91	54.00	-8.09	59.20	36.49	9.17	58.95	357	172
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	42.36	74.00	-31.64	57.49	34.63	7.79	57.55	--	--	Peak																																																																																																																																				
2	7386.00	56.49	74.00	-17.51	69.78	36.49	9.17	58.95	219	143	Peak																																																																																																																																				
3	7386.00	47.35	54.00	-6.65	60.64	36.49	9.17	58.95	219	143	Average																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	41.85	74.00	-32.15	56.98	34.63	7.79	57.55	--	--	Peak																																																																																																																																				
2	7386.00	54.44	74.00	-19.56	67.73	36.49	9.17	58.95	357	172	Peak																																																																																																																																				
3	7386.00	45.91	54.00	-8.09	59.20	36.49	9.17	58.95	357	172	Average																																																																																																																																				

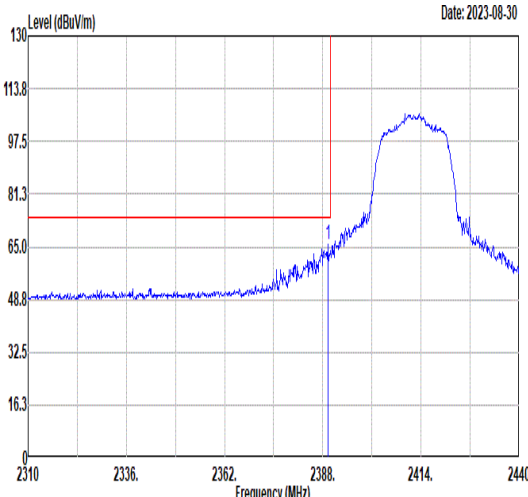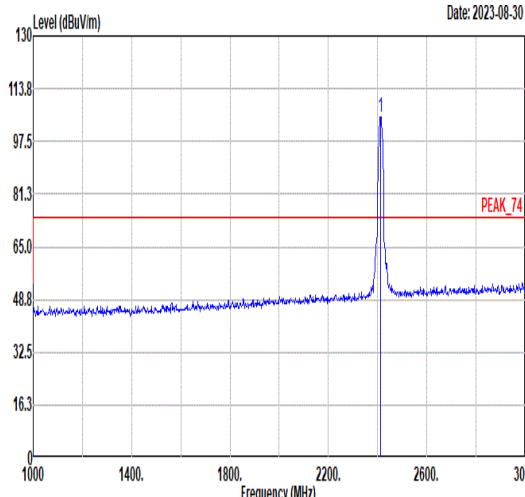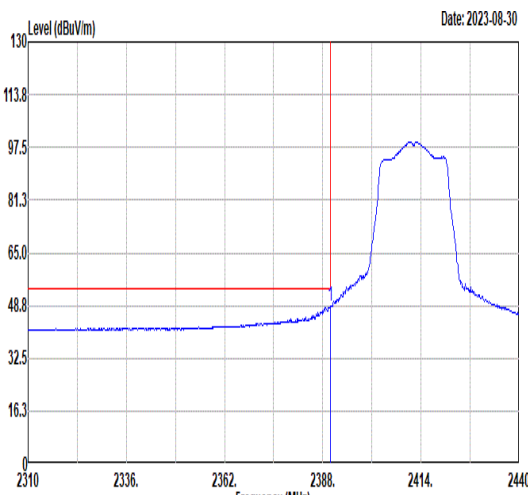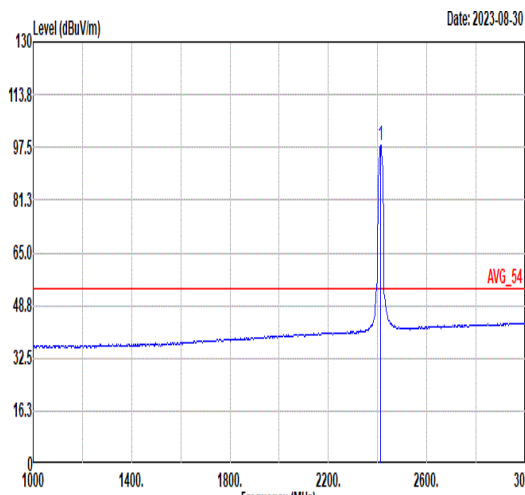

Mode	7																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>65.58</td><td>74.00</td><td>-8.42</td><td>62.25</td><td>32.21</td><td>4.79</td><td>33.67</td><td>334</td><td>326</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.30	65.58	74.00	-8.42	62.25	32.21	4.79	33.67	334	326	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.07</td><td>-----</td><td>-----</td><td>101.62</td><td>32.28</td><td>4.82</td><td>33.65</td><td>334</td><td>326</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	105.07	-----	-----	101.62	32.28	4.82	33.65	334	326
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.30	65.58	74.00	-8.42	62.25	32.21	4.79	33.67	334	326	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	105.07	-----	-----	101.62	32.28	4.82	33.65	334	326	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.76</td><td>54.00</td><td>-5.24</td><td>45.42</td><td>32.21</td><td>4.80</td><td>33.67</td><td>334</td><td>326</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	48.76	54.00	-5.24	45.42	32.21	4.80	33.67	334	326	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.24</td><td>-----</td><td>-----</td><td>94.79</td><td>32.28</td><td>4.82</td><td>33.65</td><td>334</td><td>326</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	98.24	-----	-----	94.79	32.28	4.82	33.65	334	326
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.95	48.76	54.00	-5.24	45.42	32.21	4.80	33.67	334	326	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	98.24	-----	-----	94.79	32.28	4.82	33.65	334	326	AVERAGE																																																																																

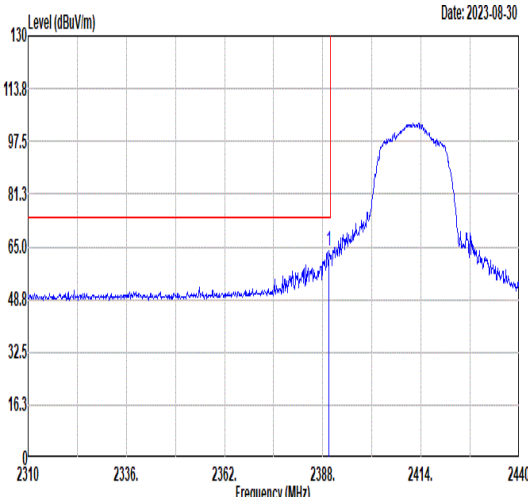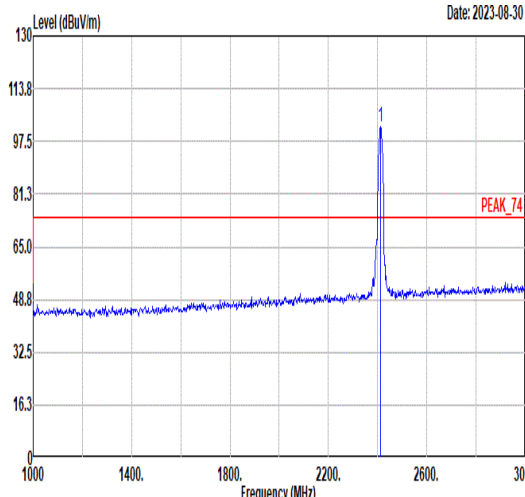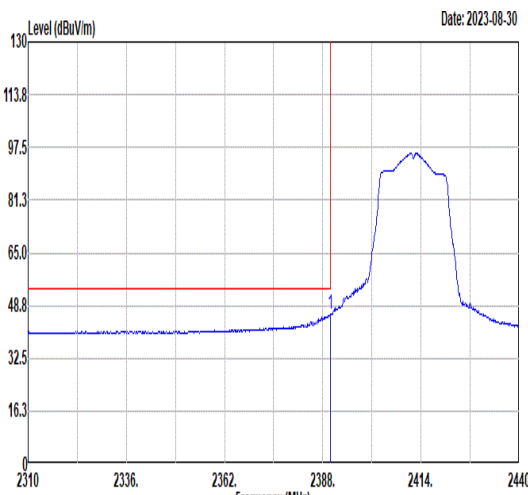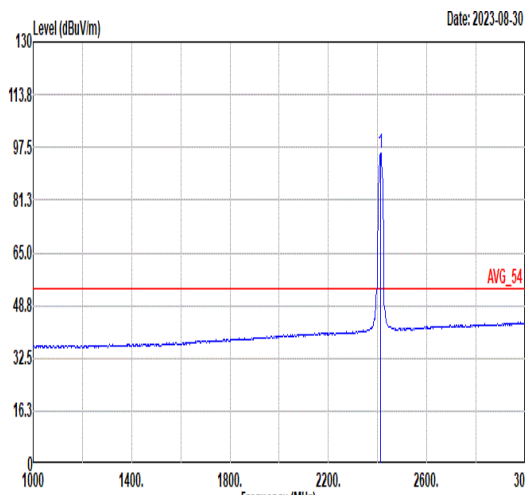

Mode	7																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>63.90</td><td>74.00</td><td>-10.10</td><td>60.56</td><td>32.21</td><td>4.80</td><td>33.67</td><td>303</td><td>15</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.69	63.90	74.00	-10.10	60.56	32.21	4.80	33.67	303	15	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.98</td><td>-----</td><td>-----</td><td>98.54</td><td>32.27</td><td>4.82</td><td>33.65</td><td>303</td><td>15</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.98	-----	-----	98.54	32.27	4.82	33.65	303	15
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2389.69	63.90	74.00	-10.10	60.56	32.21	4.80	33.67	303	15	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2412.00	101.98	-----	-----	98.54	32.27	4.82	33.65	303	15	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>45.96</td><td>54.00</td><td>-8.04</td><td>42.62</td><td>32.21</td><td>4.80</td><td>33.67</td><td>303</td><td>15</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	45.96	54.00	-8.04	42.62	32.21	4.80	33.67	303	15	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.60</td><td>-----</td><td>-----</td><td>92.16</td><td>32.27</td><td>4.82</td><td>33.65</td><td>303</td><td>15</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	95.60	-----	-----	92.16	32.27	4.82	33.65	303	15
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2389.95	45.96	54.00	-8.04	42.62	32.21	4.80	33.67	303	15	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2412.00	95.60	-----	-----	92.16	32.27	4.82	33.65	303	15	AVERAGE																																																																															