

# TEST REPORT

Report number : Z101C-15078

Issue date : August 24, 2015

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## **FCC Part 24 Subpart E** **IC RSS-133**

The test results are traceable to the international or national standards.

|                            |                       |
|----------------------------|-----------------------|
| Applicant                  | : KYOCERA Corporation |
| Equipment under test (EUT) | : Module              |
| Model number               | : J79                 |
| FCC ID                     | : JOYJ79              |
| IC Certification Number    | : 574B-J79            |

Date of test : June 17, 19, 20, 22, 23, 24, 25, July 1, 2, 3, 2015

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome  
Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by

: Taiki Watanabe

Taiki Watanabe

: Hikaru Shibata

Hikaru Shibata

Authorized by

: Hiroaki Suzuki

Hiroaki Suzuki

Manager of EMC Technical Department

## ***Table of contents***

---

|                                                                      | <b>Page</b> |
|----------------------------------------------------------------------|-------------|
| <b>1. Summary of Test .....</b>                                      | <b>4</b>    |
| 1.1 Purpose of test .....                                            | 4           |
| 1.2 Standards .....                                                  | 4           |
| 1.3 List of applied test to the EUT .....                            | 4           |
| 1.4 Modification to the EUT by laboratory .....                      | 4           |
| <b>2. Equipment Under Test .....</b>                                 | <b>5</b>    |
| 2.1 General Description of equipment .....                           | 5           |
| 2.2 EUT information .....                                            | 5           |
| 2.3 Variation of the family model(s) .....                           | 6           |
| 2.4 Description of Test mode .....                                   | 6           |
| <b>3. Configuration of equipment .....</b>                           | <b>8</b>    |
| 3.1 Equipment(s) used .....                                          | 8           |
| 3.2 Cable(s) used .....                                              | 8           |
| 3.3 System configuration .....                                       | 8           |
| <b>4. Conducted Output Power .....</b>                               | <b>9</b>    |
| 4.1 Measurement procedure .....                                      | 9           |
| 4.2 Measurement result .....                                         | 9           |
| <b>5. Equivalent Isotropic Radiated Power .....</b>                  | <b>13</b>   |
| 5.1 Measurement procedure .....                                      | 13          |
| 5.2 Calculation method .....                                         | 13          |
| 5.3 Limit .....                                                      | 13          |
| 5.4 Test data .....                                                  | 14          |
| <b>6. Peak to Average Ratio .....</b>                                | <b>17</b>   |
| 6.1 Measurement procedure .....                                      | 17          |
| 6.2 Limit .....                                                      | 17          |
| 6.3 Measurement result .....                                         | 17          |
| 6.4 Trace data .....                                                 | 19          |
| <b>7. Occupied Bandwidth .....</b>                                   | <b>26</b>   |
| 7.1 Measurement procedure .....                                      | 26          |
| 7.2 Limit .....                                                      | 26          |
| 7.3 Measurement result .....                                         | 26          |
| 7.4 Trace data .....                                                 | 29          |
| <b>8. Band Edge Spurious and Harmonic at Antenna Terminals .....</b> | <b>42</b>   |
| 8.1 Measurement procedure .....                                      | 42          |
| 8.2 Limit .....                                                      | 42          |
| 8.3 Measurement result .....                                         | 42          |
| 8.4 Trace data .....                                                 | 44          |
| <b>9. Radiated Emissions and Harmonic Emissions .....</b>            | <b>85</b>   |
| 9.1 Measurement procedure .....                                      | 85          |
| 9.2 Calculation method .....                                         | 85          |
| 9.3 Limit .....                                                      | 85          |
| 9.4 Test data .....                                                  | 86          |
| <b>10. Frequency Stability .....</b>                                 | <b>99</b>   |



Zacta

**10.1 Measurement procedure..... 99**

**10.2 Limit..... 99**

**10.3 Measurement result..... 100**

**11. Uncertainty of measurement .....102**

**12. Laboratory description .....103**

**Appendix A. Test equipment .....104**

## 1. Summary of Test

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 24 Subpart E, IC RSS-133.

### 1.2 Standards

CFR47 FCC Part 24 Subpart E  
IC RSS-133

#### 1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v02r02  
ANSI/TIA/EIA-603-D-2010

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

| FCC Section         | IC Section    | Test items                                          | Condition | Result |
|---------------------|---------------|-----------------------------------------------------|-----------|--------|
| 2.1046              | N/A           | Conducted Output Power                              | Conducted | PASS   |
| 24.232(c)           | RSS-133 6.4   | Equivalent Isotropic Radiated Power                 | Radiated  | PASS   |
| 24.232(d)           | N/A           | Peak to Average Ratio                               | Conducted | PASS   |
| 24.238(a)<br>2.1049 | N/A           | Occupied Bandwidth                                  | Conducted | PASS   |
| 24.238(a)<br>2.1051 | RSS-133 6.5.1 | Band Edge Spurious and Harmonic at Antenna Terminal | Conducted | PASS   |
| 24.238(a)<br>2.1053 | RSS-133 6.5.1 | Radiated emissions and Harmonic Emissions           | Radiated  | PASS   |
| 24.235<br>2.1055    | RSS-133 6.3   | Frequency Stability                                 | Conducted | PASS   |

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None

## 2. Equipment Under Test

---

### 2.1 General Description of equipment

EUT is the Module.

### 2.2 EUT information

|                                               |   |                                                                                                                                                   |
|-----------------------------------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant                                     | : | KYOCERA Corporation<br>Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa,<br>Japan<br>Phone: +81-45-943-6253 Fax: +81-45-943-6314 |
| Equipment under test                          | : | Module                                                                                                                                            |
| Trade name                                    | : | Kyocera                                                                                                                                           |
| Model number                                  | : | J79                                                                                                                                               |
| Serial number                                 | : | N/A                                                                                                                                               |
| EUT condition                                 | : | Pre-Production                                                                                                                                    |
| Power ratings                                 | : | DC 3.9V                                                                                                                                           |
| Size                                          | : | (W) 40.0 × (D) 40.0 × (H) 4.3 mm                                                                                                                  |
| Environment                                   | : | Indoor and Outdoor use                                                                                                                            |
| Terminal limitation                           | : | -20°C to 60°C                                                                                                                                     |
| RF Specification<br>Frequency of<br>Operation | : | Up Link<br>WCDMA Band II: 1852.4-1907.6MHz<br>LTE Band II: 1850-1910MHz                                                                           |
|                                               |   | Down Link<br>WCDMA Band II: 1932.4-1987.6MHz<br>LTE Band II: 1930-1990MHz                                                                         |
| Modulation type                               | : | WCDMA Band II: QPSK, 16QAM<br>LTE Band II: QPSK, 16QAM                                                                                            |
| Emission designator                           | : | WCDMA Band II: 4M16F9W<br>LTE Band II: QPSK: 17M95G7D, 16QAM: 17M97W7D                                                                            |
| Conducted<br>Output power                     | : | WCDMA Band II: 0.258W (24.12dBm)<br>LTE Band II: QPSK: 0.205W (23.11dBm), 16QAM: 0.163W (22.13dBm)                                                |
| Antenna type                                  | : | External antenna                                                                                                                                  |
| Antenna gain                                  | : | WCDMA Band II: 4.9dBi<br>LTE Band II: 4.9dBi                                                                                                      |

### 2.3 Variation of the family model(s)

Not applicable

### 2.4 Description of Test mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

| Band          | Channel | Frequency |
|---------------|---------|-----------|
| WCDMA Band II | 9262    | 1852.4MHz |
|               | 9400    | 1880.0MHz |
|               | 9538    | 1907.6MHz |

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.  
The worst emission was found in Y axis and the worst case recorded.

| Band        | Modulation | Bandwidth | Channel                 | Frequency [MHz]            |
|-------------|------------|-----------|-------------------------|----------------------------|
| LTE Band II | QPSK       | 1.4MHz    | 18607<br>18900<br>19193 | 1850.7<br>1880.0<br>1909.3 |
|             |            | 3MHz      | 18615<br>18900<br>19185 | 1851.5<br>1880.0<br>1908.5 |
|             |            | 5MHz      | 18625<br>18900<br>19175 | 1852.5<br>1880.0<br>1907.5 |
|             |            | 10MHz     | 18650<br>18900<br>19150 | 1855.0<br>1880.0<br>1905.0 |
|             |            | 15MHz     | 18675<br>18900<br>19125 | 1857.5<br>1880.0<br>1902.5 |
|             |            | 20MHz     | 18700<br>18900<br>19100 | 1860.0<br>1880.0<br>1900.0 |
|             | 16QAM      | 1.4MHz    | 18607<br>18900<br>19193 | 1850.7<br>1880.0<br>1909.3 |
|             |            | 3MHz      | 18615<br>18900<br>19185 | 1851.5<br>1880.0<br>1908.5 |
|             |            | 5MHz      | 18625<br>18900<br>19175 | 1852.5<br>1880.0<br>1907.5 |
|             |            | 10MHz     | 18650<br>18900<br>19150 | 1855.0<br>1880.0<br>1905.0 |
|             |            | 15MHz     | 18675<br>18900<br>19125 | 1857.5<br>1880.0<br>1902.5 |
|             |            | 20MHz     | 18700<br>18900<br>19100 | 1860.0<br>1880.0<br>1900.0 |

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y axis and the worst case recorded.

### 3. Configuration of equipment


#### 3.1 Equipment(s) used

| No. | Equipment     | Company   | Model No. | Serial No. | FCC ID / DoC | Comment |
|-----|---------------|-----------|-----------|------------|--------------|---------|
| 1   | Module        | KYOCERA   | J79       | N/A        | JOYJ79       | EUT     |
| 2   | JOINT BOARD   | KYOCERA   | N/A       | N/A        | N/A          | -       |
| 3   | SHARK Antenna | YOKOWO    | N/A       | N/A        | N/A          | -       |
| 4   | Whip Antenna  | EAD       | PTR7210   | N/A        | N/A          | -       |
| 5   | GPS Antenna   | PASTERNAK | PE51066   | N/A        | N/A          | -       |

#### 3.2 Cable(s) used

| No. | Cable             | Length[m] | Shield | Connector | Comment |
|-----|-------------------|-----------|--------|-----------|---------|
| a   | RF cable (MAIN)   | 0.3       | YES    | Metal     | -       |
| b   | RF cable (SUB)    | 0.3       | YES    | Metal     | -       |
| c   | GPS Antenna cable | 5.0       | YES    | Metal     | -       |
| d   | DC cable          | 1.3       | NO     | Plastic   | -       |
| e   | RF cable          | 0.9       | YES    | Metal     | -       |

#### 3.3 System configuration

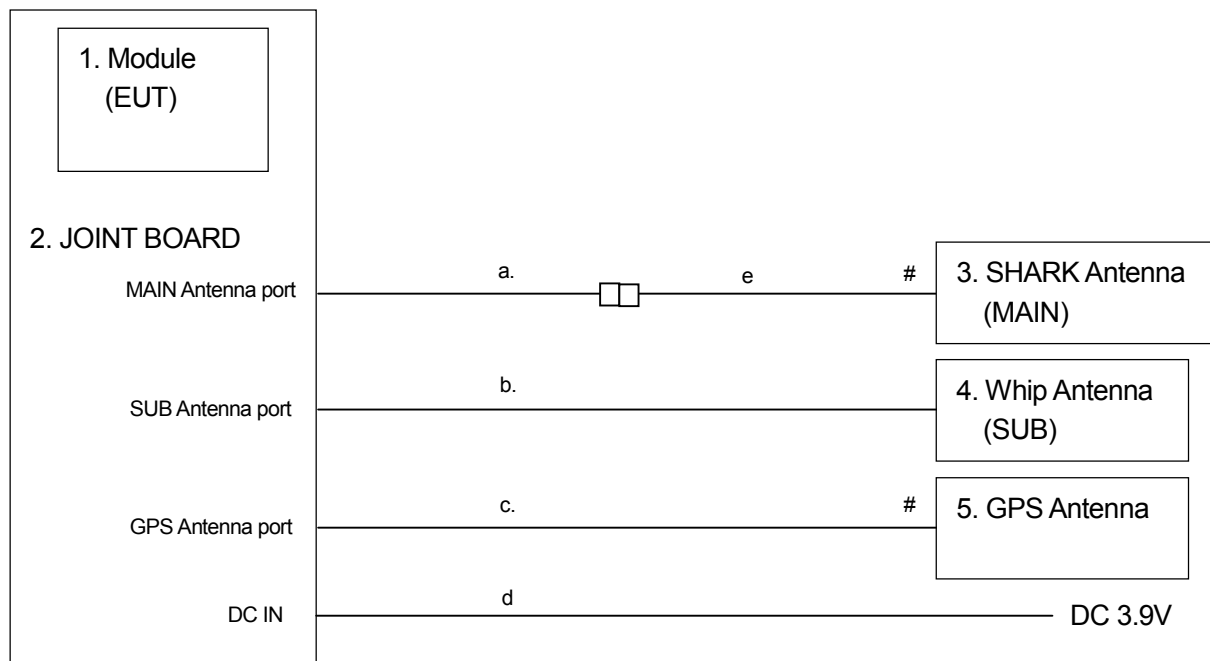

# : Un-detachable cable

□ : Connector

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".




## 4. Conducted Output Power

### 4.1 Measurement procedure [FCC 2.1046]

The conducted output power was measured with a wireless communication tester connected to the antenna terminal. The wireless communication tester parameters were set to produce the maximum power from the EUT.

- Test configuration

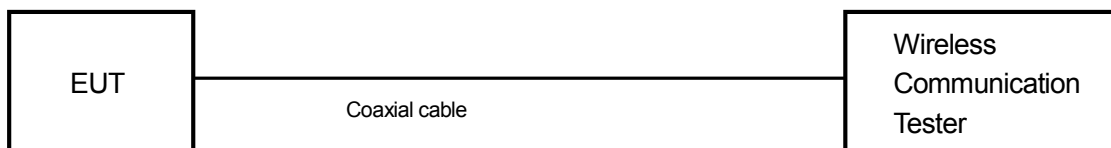

### 4.2 Measurement result

Date : June 17, 2015

Temperature : 22.5 [°C]

Humidity : 51.2 [%]

Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

| 3GPP<br>Release<br>Version | Mode            |     | Sub-<br>Test | Cellular Band [dBm] |        |        | MPR | Bc    | ßd    | Bc/ßd |
|----------------------------|-----------------|-----|--------------|---------------------|--------|--------|-----|-------|-------|-------|
|                            | Channel         |     |              | 9262                | 9400   | 9538   |     |       |       |       |
|                            | Frequency [MHz] |     |              | 1852.4              | 1880.0 | 1907.6 |     |       |       |       |
| 99                         | W-CDMA          | RMC | -            | <u>24.12</u>        | 23.84  | 23.68  | -   | -     | -     | -     |
|                            |                 | AMR | -            | -                   | -      |        |     |       |       |       |
| 5                          | HSDPA           |     | 1            | 22.76               | 22.40  | 22.33  | 0   | 2/15  | 15/15 | 2/15  |
| 5                          |                 |     | 2            | 22.74               | 22.38  | 22.16  | 0   | 12/15 | 15/15 | 12/15 |
| 5                          |                 |     | 3            | 22.69               | 22.31  | 22.38  | 0.5 | 15/15 | 8/15  | 15/8  |
| 5                          |                 |     | 4            | 22.72               | 22.40  | 22.31  | 0.5 | 15/15 | 4/15  | 15/4  |
| 6                          | HSUPA           |     | 1            | 23.02               | 22.77  | 22.74  | 0   | 11/15 | 15/15 | 11/15 |
| 6                          |                 |     | 2            | 21.87               | 21.49  | 21.50  | 2   | 6/15  | 15/15 | 6/15  |
| 6                          |                 |     | 3            | 21.65               | 21.34  | 21.47  | 1   | 15/15 | 9/15  | 15/9  |
| 6                          |                 |     | 4            | 22.18               | 22.37  | 22.38  | 2   | 2/15  | 15/15 | 2/15  |
| 6                          |                 |     | 5            | 22.77               | 22.81  | 22.85  | 0   | 15/15 | 15/15 | 15/15 |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18607          | 18900      | 19193      |
|                |             |       |                  |              |               | 1850.7 MHz     | 1880.0 MHz | 1909.3 MHz |
| LTE<br>Band II | 1.4         | QPSK  | 1                | 0            | 0             | 22.91          | 22.59      | 22.50      |
|                |             |       | 1                | 3            | 0             | 22.93          | 22.63      | 22.42      |
|                |             |       | 1                | 5            | 0             | 22.99          | 22.59      | 22.41      |
|                |             |       | 3                | 0            | 0             | 22.96          | 22.62      | 22.45      |
|                |             |       | 3                | 1            | 0             | 22.92          | 22.64      | 22.44      |
|                |             |       | 3                | 3            | 0             | 22.96          | 22.64      | 22.39      |
|                |             |       | 6                | 0            | 1             | 22.08          | 21.68      | 21.51      |
|                |             | 16QAM | 1                | 0            | 1             | 21.93          | 21.49      | 21.25      |
|                |             |       | 1                | 3            | 1             | 22.01          | 21.51      | 21.23      |
|                |             |       | 1                | 5            | 1             | 22.08          | 21.54      | 21.13      |
|                |             |       | 3                | 0            | 1             | 21.92          | 21.67      | 21.60      |
|                |             |       | 3                | 1            | 1             | 21.97          | 21.69      | 21.51      |
|                |             |       | 3                | 3            | 1             | 22.01          | 21.58      | 21.56      |
|                |             |       | 6                | 0            | 2             | 21.07          | 20.75      | 20.59      |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18615          | 18900      | 19185      |
|                |             |       |                  |              |               | 1851.5 MHz     | 1880.0 MHz | 1908.5 MHz |
| LTE<br>Band II | 3           | QPSK  | 1                | 0            | 0             | 22.88          | 22.58      | 22.53      |
|                |             |       | 1                | 8            | 0             | 23.08          | 22.57      | 22.47      |
|                |             |       | 1                | 14           | 0             | 23.09          | 22.54      | 22.38      |
|                |             |       | 8                | 0            | 1             | 22.04          | 21.64      | 21.59      |
|                |             |       | 8                | 4            | 1             | 22.14          | 21.67      | 21.53      |
|                |             |       | 8                | 7            | 1             | 22.16          | 21.67      | 21.54      |
|                |             |       | 15               | 0            | 1             | 22.15          | 21.66      | 21.56      |
|                |             | 16QAM | 1                | 0            | 1             | 21.87          | 21.48      | 21.33      |
|                |             |       | 1                | 8            | 1             | 22.07          | 21.52      | 21.23      |
|                |             |       | 1                | 14           | 1             | 22.10          | 21.50      | 21.16      |
|                |             |       | 8                | 0            | 2             | 20.98          | 20.79      | 20.70      |
|                |             |       | 8                | 4            | 2             | 21.09          | 20.73      | 20.63      |
|                |             |       | 8                | 7            | 2             | 21.19          | 20.75      | 20.59      |
|                |             |       | 15               | 0            | 2             | 21.15          | 20.77      | 20.68      |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18625          | 18900      | 19175      |
|                |             |       |                  |              |               | 1852.5 MHz     | 1880.0 MHz | 1907.5 MHz |
| LTE<br>Band II | 5           | QPSK  | 1                | 0            | 0             | 22.93          | 22.40      | 22.63      |
|                |             |       | 1                | 12           | 0             | 23.04          | 22.58      | 22.56      |
|                |             |       | 1                | 24           | 0             | 23.06          | 22.43      | 22.43      |
|                |             |       | 12               | 0            | 1             | 22.07          | 21.69      | 21.60      |
|                |             |       | 12               | 7            | 1             | 22.11          | 21.69      | 21.56      |
|                |             |       | 12               | 13           | 1             | 22.22          | 21.61      | 21.58      |
|                |             |       | 25               | 0            | 1             | 22.16          | 21.60      | 21.60      |
|                |             | 16QAM | 1                | 0            | 1             | 21.90          | 21.15      | 21.52      |
|                |             |       | 1                | 12           | 1             | 22.10          | 21.36      | 21.51      |
|                |             |       | 1                | 24           | 1             | 22.10          | 21.25      | 21.36      |
|                |             |       | 12               | 0            | 2             | 21.08          | 20.70      | 20.71      |
|                |             |       | 12               | 7            | 2             | 21.22          | 20.70      | 20.68      |
|                |             |       | 12               | 13           | 2             | 21.33          | 20.75      | 20.64      |
|                |             |       | 25               | 0            | 2             | 21.26          | 20.72      | 20.62      |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18650          | 18900      | 19150      |
|                |             |       |                  |              |               | 1855.0 MHz     | 1880.0 MHz | 1905.0 MHz |
| LTE<br>Band II | 10          | QPSK  | 1                | 0            | 0             | 22.93          | 22.68      | 22.38      |
|                |             |       | 1                | 25           | 0             | 23.11          | 22.63      | 22.51      |
|                |             |       | 1                | 49           | 0             | 23.00          | 22.52      | 22.36      |
|                |             |       | 25               | 0            | 1             | 22.14          | 21.63      | 21.44      |
|                |             |       | 25               | 12           | 1             | 22.11          | 21.57      | 21.53      |
|                |             |       | 25               | 25           | 1             | 22.00          | 21.46      | 21.57      |
|                |             |       | 50               | 0            | 1             | 21.94          | 21.50      | 21.45      |
|                |             | 16QAM | 1                | 0            | 1             | 22.02          | 21.56      | 21.11      |
|                |             |       | 1                | 25           | 1             | 22.13          | 21.50      | 21.33      |
|                |             |       | 1                | 49           | 1             | 21.96          | 21.43      | 21.18      |
|                |             |       | 25               | 0            | 2             | 21.13          | 20.75      | 20.55      |
|                |             |       | 25               | 12           | 2             | 21.12          | 20.69      | 20.65      |
|                |             |       | 25               | 25           | 2             | 21.10          | 20.59      | 20.58      |
|                |             |       | 50               | 0            | 2             | 20.97          | 20.60      | 20.55      |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18675          | 18900      | 19125      |
|                |             |       |                  |              |               | 1857.5 MHz     | 1880.0 MHz | 1902.5 MHz |
| LTE<br>Band II | 15          | QPSK  | 1                | 0            | 0             | 22.97          | 22.65      | 22.46      |
|                |             |       | 1                | 37           | 0             | 22.99          | 22.59      | 22.38      |
|                |             |       | 1                | 74           | 0             | 22.97          | 22.48      | 22.40      |
|                |             |       | 36               | 0            | 1             | 22.05          | 21.56      | 21.39      |
|                |             |       | 36               | 20           | 1             | 21.93          | 21.56      | 21.38      |
|                |             |       | 36               | 39           | 1             | 21.87          | 21.48      | 21.43      |
|                |             |       | 75               | 0            | 1             | 21.84          | 21.46      | 21.37      |
|                |             | 16QAM | 1                | 0            | 1             | 22.02          | 21.59      | 21.27      |
|                |             |       | 1                | 37           | 1             | 22.00          | 21.43      | 21.27      |
|                |             |       | 1                | 74           | 1             | 21.97          | 21.40      | 21.26      |
|                |             |       | 36               | 0            | 2             | 21.09          | 20.76      | 20.48      |
|                |             |       | 36               | 20           | 2             | 21.03          | 20.65      | 20.48      |
|                |             |       | 36               | 39           | 2             | 21.01          | 20.56      | 20.52      |
|                |             |       | 75               | 0            | 2             | 20.92          | 20.55      | 20.46      |

| Band           | BW<br>[MHz] | Mode  | RB<br>Allocation | RB<br>offset | Target<br>MPR | Avg Power[dBm] |            |            |
|----------------|-------------|-------|------------------|--------------|---------------|----------------|------------|------------|
|                |             |       |                  |              |               | 18700          | 18900      | 1910       |
|                |             |       |                  |              |               | 1860.0 MHz     | 1880.0 MHz | 1900.0 MHz |
| LTE<br>Band II | 20          | QPSK  | 1                | 0            | 0             | 23.02          | 22.84      | 22.45      |
|                |             |       | 1                | 49           | 0             | 22.96          | 22.61      | 22.39      |
|                |             |       | 1                | 99           | 0             | 22.87          | 22.52      | 22.48      |
|                |             |       | 50               | 0            | 1             | 21.88          | 21.46      | 21.32      |
|                |             |       | 50               | 24           | 1             | 21.82          | 21.44      | 21.25      |
|                |             |       | 50               | 50           | 1             | 21.82          | 21.45      | 21.36      |
|                |             |       | 100              | 0            | 1             | 21.91          | 21.49      | 21.40      |
|                |             | 16QAM | 1                | 0            | 1             | 21.91          | 21.76      | 21.38      |
|                |             |       | 1                | 49           | 1             | 21.84          | 21.58      | 21.42      |
|                |             |       | 1                | 99           | 1             | 21.72          | 21.48      | 21.43      |
|                |             |       | 50               | 0            | 2             | 20.96          | 20.64      | 20.49      |
|                |             |       | 50               | 24           | 2             | 20.91          | 20.62      | 20.39      |
|                |             |       | 50               | 50           | 2             | 20.91          | 20.56      | 20.44      |
|                |             |       | 100              | 0            | 2             | 20.89          | 20.62      | 20.47      |

## 5. Equivalent Isotropic Radiated Power

### 5.1 Measurement procedure

[FCC 24.232(c), IC RSS-133 6.4]

#### <Step 1>


The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

#### Spectrum analyzer setting

- Detector: Peak (RBW: 5MHz, VBW: 8MHz)
- Test configuration

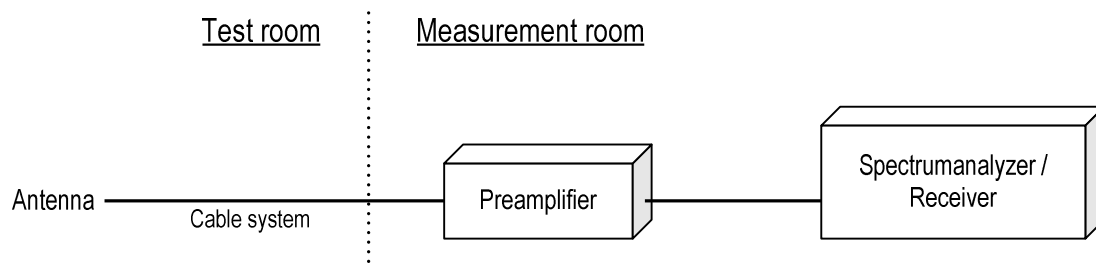

### 5.2 Calculation method

Result (EIRP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1880MHz : 33.0dBm

S.G Reading = 18.9dBm Cable loss = 1.1dB Ant. Gain = 8.3dBi

Result = 18.9 – 1.1 + 8.3 = 26.1dBm

Margin = 33.0 - 26.1 = 6.9dB

### 5.3 Limit

2 W (33dBm)

## 5.4 Test data

|             |                            |               |   |                       |
|-------------|----------------------------|---------------|---|-----------------------|
| Date        | : June 22, 2015            | Test engineer | : | <u>Taiki Watanabe</u> |
| Temperature | : 24.8 [°C]                |               |   |                       |
| Humidity    | : 53.2 [%]                 |               |   |                       |
| Test place  | : 3m Semi-anechoic chamber |               |   |                       |
| Date        | : June 23, 2015            | Test engineer | : | <u>Taiki Watanabe</u> |
| Temperature | : 24.4 [°C]                |               |   |                       |
| Humidity    | : 62.1 [%]                 |               |   |                       |
| Test place  | : 3m Semi-anechoic chamber |               |   |                       |
| Date        | : June 30, 2015            | Test engineer | : | <u>Hikaru Shibata</u> |
| Temperature | : 24.2 [°C]                |               |   |                       |
| Humidity    | : 59.4 [%]                 |               |   |                       |
| Test place  | : 3m Semi-anechoic chamber |               |   |                       |
| Date        | : July 2, 2015             | Test engineer | : | <u>Hikaru Shibata</u> |
| Temperature | : 24.1 [°C]                |               |   |                       |
| Humidity    | : 59.5 [%]                 |               |   |                       |
| Test place  | : 3m Semi-anechoic chamber |               |   |                       |
| Date        | : July 3, 2015             | Test engineer | : | <u>Hikaru Shibata</u> |
| Temperature | : 24.8 [°C]                |               |   |                       |
| Humidity    | : 63.6 [%]                 |               |   |                       |
| Test place  | : 3m Semi-anechoic chamber |               |   |                       |

### [WCDMA Band II]

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1852.4          | -14.7             | 19.0              | 1.1             | 8.2            | 26.0         | 33.0        | 7.0         |
| H   | 1880.0          | -14.8             | 18.9              | 1.1             | 8.3            | 26.1         | 33.0        | 6.9         |
| H   | 1907.6          | -16.1             | 18.4              | 1.1             | 8.4            | 25.7         | 33.0        | 7.3         |

### [LTE Band II] QPSK, BW 1.4MHz

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1850.7          | -9.7              | 23.7              | 1.1             | 8.2            | 30.7         | 33.0        | 2.3         |
| H   | 1880.0          | -8.7              | 25.0              | 1.1             | 8.3            | 32.1         | 33.0        | 0.9         |
| H   | 1909.3          | -9.6              | 25.3              | 1.1             | 8.4            | 32.6         | 33.0        | 0.4         |

### 16QAM, BW 1.4MHz

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1850.7          | -9.1              | 24.3              | 1.1             | 8.2            | 31.3         | 33.0        | 1.7         |
| H   | 1880.0          | -9.4              | 24.3              | 1.1             | 8.3            | 31.4         | 33.0        | 1.6         |
| H   | 1909.3          | -9.8              | 25.1              | 1.1             | 8.4            | 32.4         | 33.0        | 0.6         |

**QPSK, BW 3MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1851.5          | -9.7              | 23.7              | 1.1             | 8.2            | 30.7         | 33.0        | 2.3         |
| H   | 1880.0          | -9.5              | 24.2              | 1.1             | 8.3            | 31.3         | 33.0        | 1.7         |
| H   | 1908.5          | -9.9              | 25.0              | 1.1             | 8.4            | 32.3         | 33.0        | 0.7         |

**16QAM, BW 3MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1851.5          | -10.1             | 23.3              | 1.1             | 8.2            | 30.3         | 33.0        | 2.7         |
| H   | 1880.0          | -9.0              | 24.7              | 1.1             | 8.3            | 31.8         | 33.0        | 1.2         |
| H   | 1908.5          | -9.8              | 25.1              | 1.1             | 8.4            | 32.4         | 33.0        | 0.6         |

**QPSK, BW 5MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1852.5          | -10.3             | 23.4              | 1.1             | 8.2            | 30.4         | 33.0        | 2.6         |
| H   | 1880.0          | -9.7              | 24.0              | 1.1             | 8.3            | 31.1         | 33.0        | 1.9         |
| H   | 1907.5          | -11.8             | 22.7              | 1.1             | 8.4            | 30.0         | 33.0        | 3.0         |

**16QAM, BW 5MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1852.5          | -10.4             | 23.0              | 1.1             | 8.2            | 30.1         | 33.0        | 2.9         |
| H   | 1880.0          | -9.9              | 23.8              | 1.1             | 8.3            | 30.9         | 33.0        | 2.1         |
| H   | 1907.5          | -11.0             | 23.9              | 1.1             | 8.4            | 31.2         | 33.0        | 1.8         |

**QPSK, BW 10MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1855.0          | -10.5             | 23.2              | 1.1             | 8.2            | 30.2         | 33.0        | 2.8         |
| H   | 1880.0          | -9.4              | 24.3              | 1.1             | 8.3            | 31.4         | 33.0        | 1.6         |
| H   | 1905.0          | -10.3             | 24.2              | 1.1             | 8.4            | 31.4         | 33.0        | 1.6         |

**16QAM, BW 10MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1855.0          | -10.5             | 23.2              | 1.1             | 8.2            | 30.2         | 33.0        | 2.8         |
| H   | 1880.0          | -10.5             | 23.2              | 1.1             | 8.3            | 30.3         | 33.0        | 2.7         |
| H   | 1905.0          | -10.4             | 24.1              | 1.1             | 8.4            | 31.3         | 33.0        | 1.7         |

**QPSK, BW 15MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1857.5          | -10.1             | 23.6              | 1.1             | 8.2            | 30.6         | 33.0        | 2.4         |
| H   | 1880.0          | -9.6              | 24.1              | 1.1             | 8.3            | 31.2         | 33.0        | 1.8         |
| H   | 1902.5          | -10.7             | 23.8              | 1.1             | 8.4            | 31.0         | 33.0        | 2.0         |

**16QAM, BW 15MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1857.5          | -10.6             | 22.8              | 1.1             | 8.2            | 29.9         | 33.0        | 3.1         |
| H   | 1880.0          | -9.2              | 24.5              | 1.1             | 8.3            | 31.6         | 33.0        | 1.4         |
| H   | 1902.5          | -10.4             | 24.5              | 1.1             | 8.4            | 31.7         | 33.0        | 1.3         |

**QPSK, BW 20MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1860.0          | -10.7             | 24.1              | 1.1             | 8.2            | 31.2         | 33.0        | 1.8         |
| H   | 1880.0          | -9.4              | 24.4              | 1.1             | 8.3            | 31.5         | 33.0        | 1.5         |
| H   | 1900.0          | -10.1             | 23.4              | 1.1             | 8.3            | 30.6         | 33.0        | 2.4         |

**16QAM, BW 20MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 1860.0          | -10.5             | 24.1              | 1.1             | 8.2            | 31.2         | 33.0        | 1.8         |
| H   | 1880.0          | -9.3              | 24.4              | 1.1             | 8.3            | 31.5         | 33.0        | 1.5         |
| H   | 1900.0          | -10.3             | 23.4              | 1.1             | 8.3            | 30.6         | 33.0        | 2.4         |



## 6. Peak to Average Ratio


### 6.1 Measurement procedure [FCC 24.232(d)]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=3MHz, Span=5MHz, Sweep=auto, Detector=Peak/average, Trace mode=Max hold
- Power Start CCDF

- Test configuration

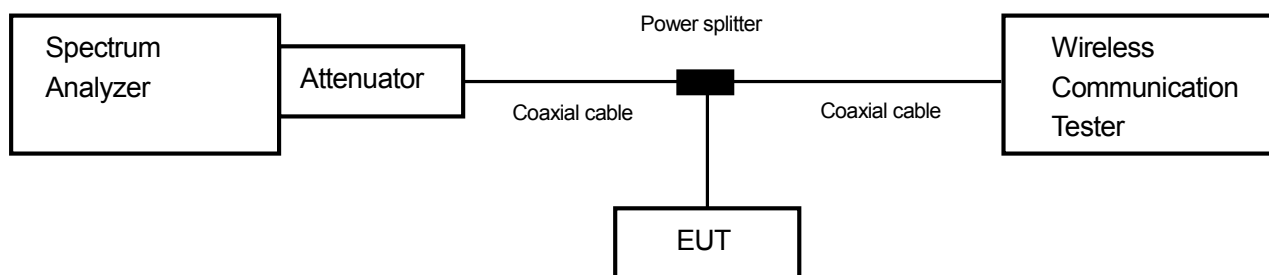

### 6.2 Limit

13dB or less

### 6.3 Measurement result

Date : June 19, 2015  
 Temperature : 24.9 [°C]  
 Humidity : 49.1 [%]  
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata


| Mode          | Channel | Frequency [MHz] | Peak to Average Power Ratio [dB] | Limit [dB] |
|---------------|---------|-----------------|----------------------------------|------------|
| WCDMA Band II | 9262    | 1852.4          | 2.89                             | 13.0       |
|               | 9400    | 1880.0          | 3.09                             |            |
|               | 9538    | 1907.6          | 3.08                             |            |

| Band        | Channel | Frequency [MHz] | Modulation | BW [MHz] | RB    | Peak to Average Power Ratio [dB] | Limit [dB] |
|-------------|---------|-----------------|------------|----------|-------|----------------------------------|------------|
| LTE Band II | 18900   | 1880.0          | QPSK       | 1.4      | 6-0   | 5.35                             | 13         |
|             |         |                 |            | 3        | 15-0  | 5.33                             | 13         |
|             |         |                 |            | 5        | 25-0  | 5.33                             | 13         |
|             |         |                 |            | 10       | 50-0  | 4.53                             | 13         |
|             |         |                 |            | 15       | 75-0  | 5.78                             | 13         |
|             |         |                 |            | 20       | 100-0 | 6.57                             | 13         |
|             |         |                 | 16QAM      | 1.4      | 6-0   | 6.33                             | 13         |
|             |         |                 |            | 3        | 15-0  | 6.3                              | 13         |
|             |         |                 |            | 5        | 25-0  | 6.11                             | 13         |
|             |         |                 |            | 10       | 50-0  | 6.06                             | 13         |
|             |         |                 |            | 15       | 75-0  | 6.82                             | 13         |
|             |         |                 |            | 20       | 100-0 | 7.17                             | 13         |


## 6.4 Trace data

### [WCDMA Band II]


#### Channel: 9262

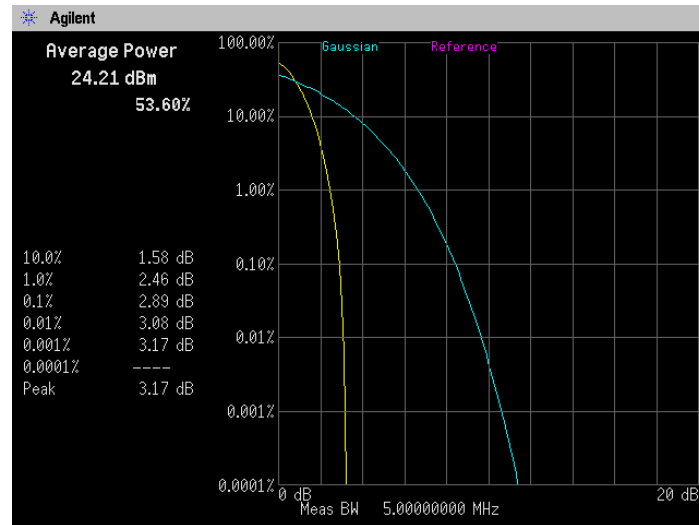


#### Channel: 9400

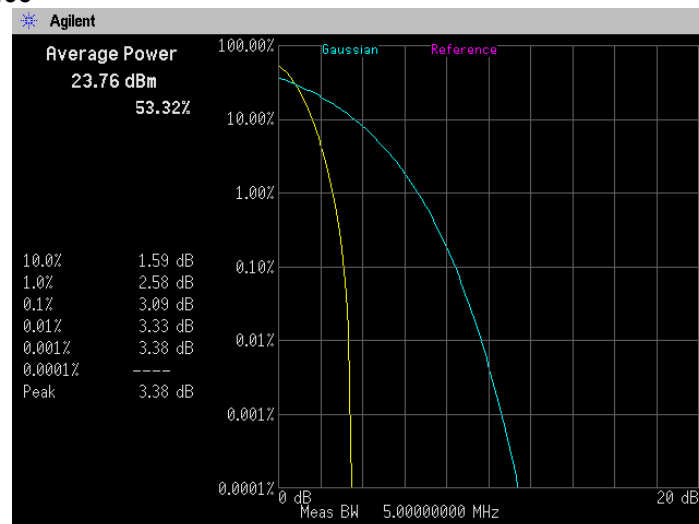


#### Channel: 9538

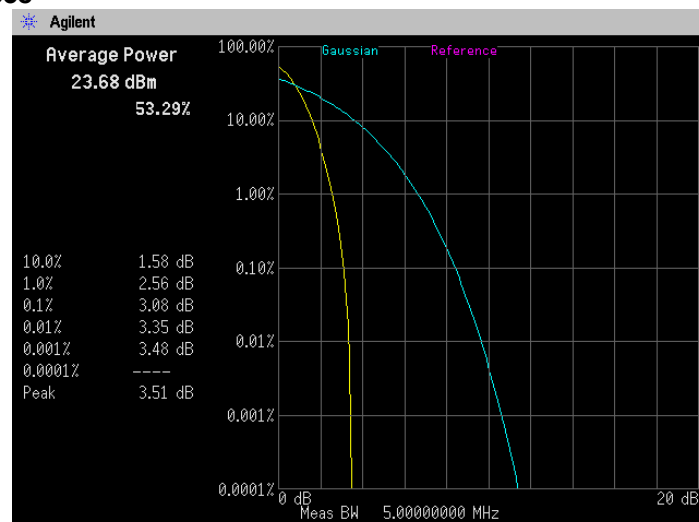


[LTE Band II]  
Channel: 18900  
QPSK, BW 1.4MHz, RB6-0

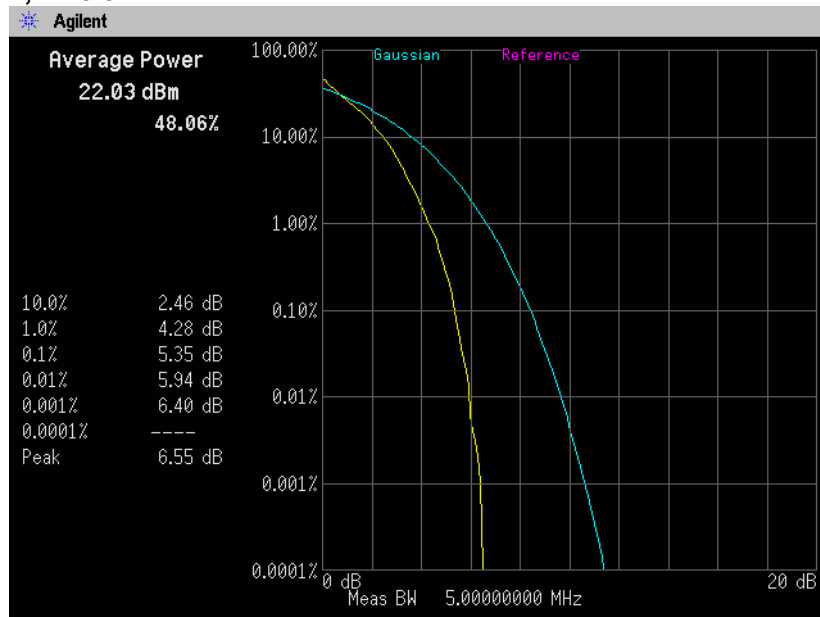

QPSK, BW 3MHz, RB15-0

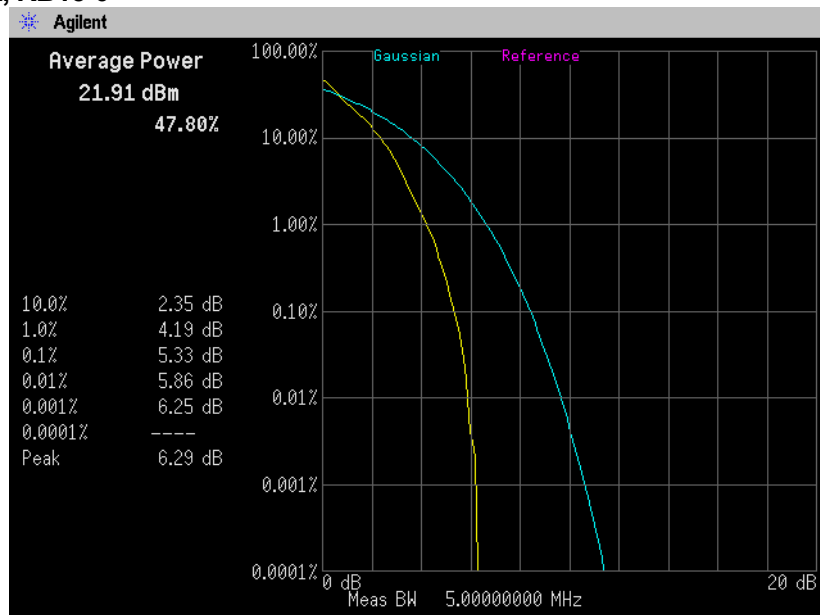


### QPSK, BW 5MHz, RB25-0

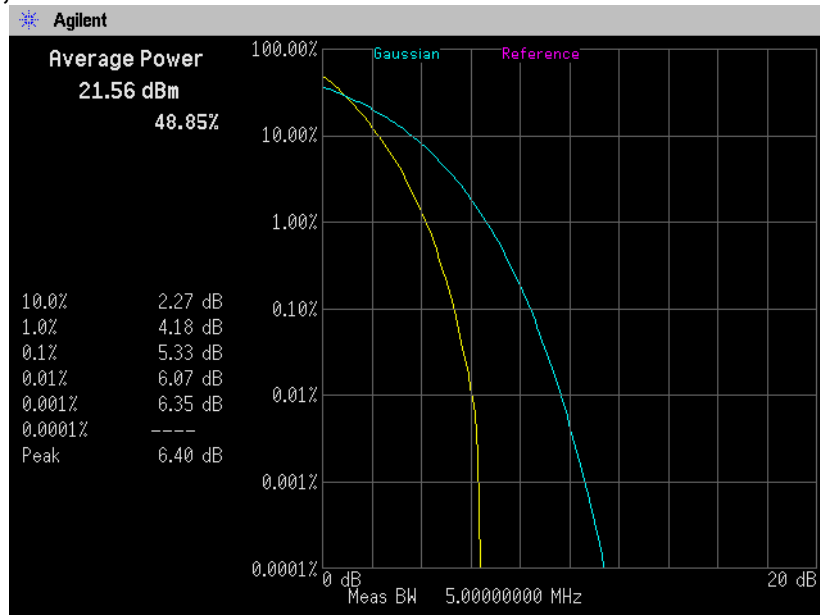


### QPSK, BW 10MHz, RB50-0





### QPSK, BW 15MHz, RB75-0

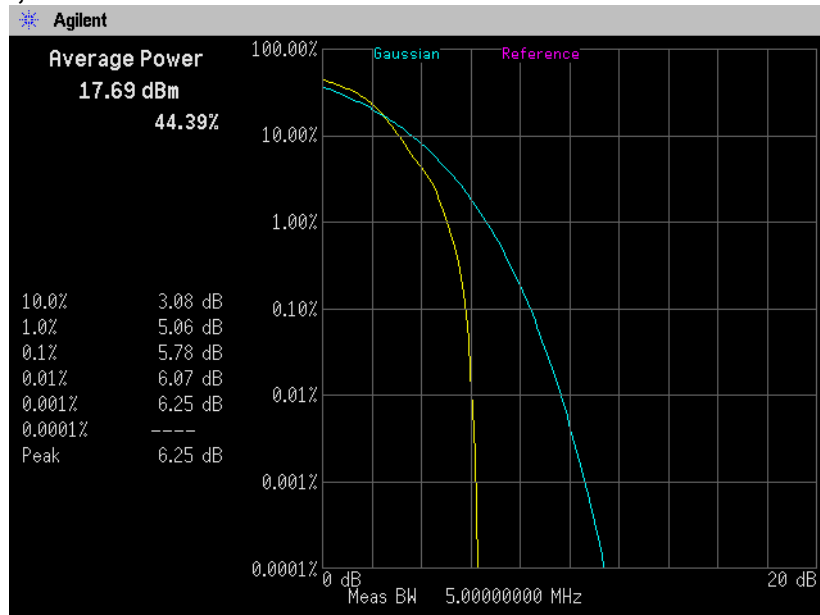


### QPSK, BW 20MHz, RB100-0

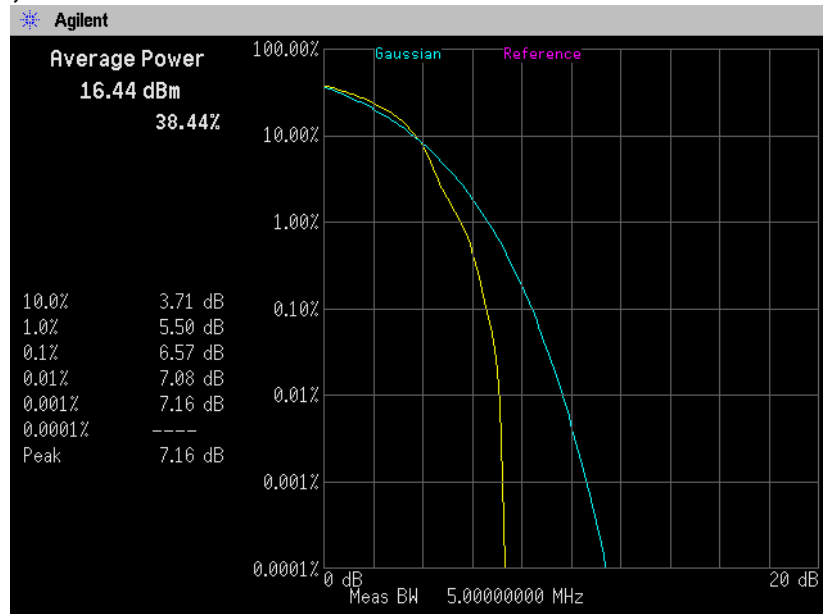


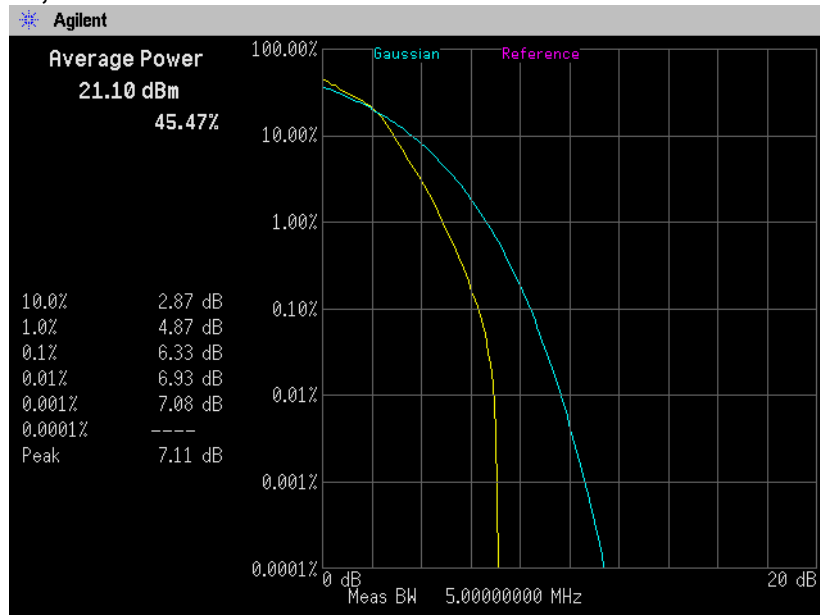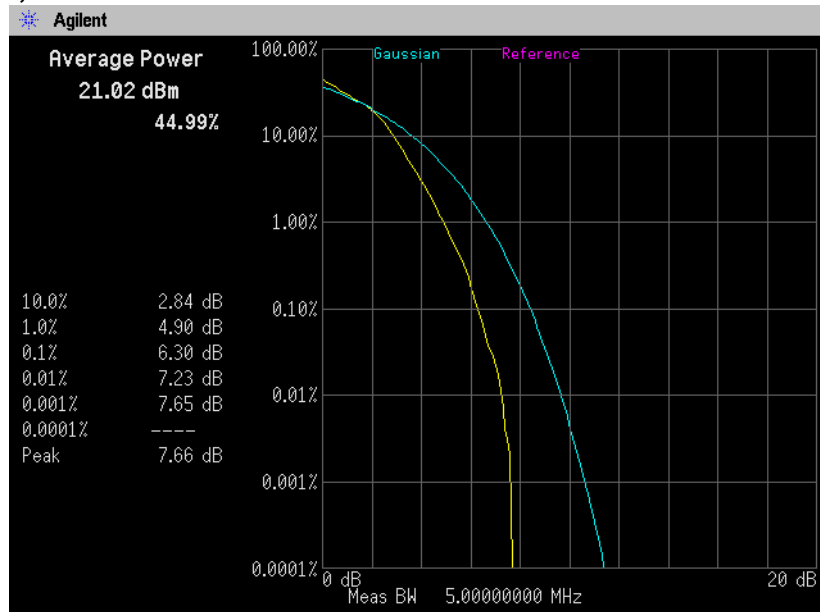**16QAM, BW 1.4MHz, RB6-0****16QAM, BW 3MHz, RB15-0**



### 16QAM, BW 5MHz, RB25-0

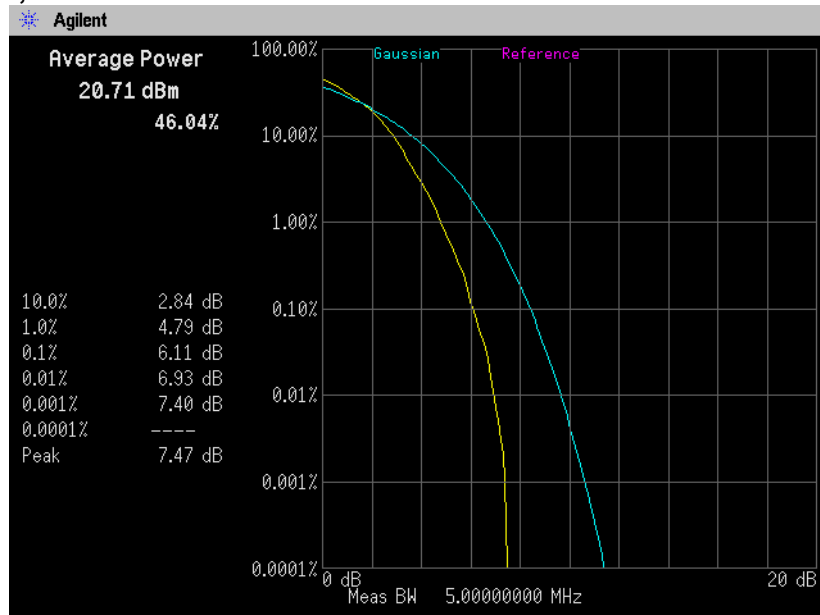

### 16QAM, BW 10MHz, RB50-0

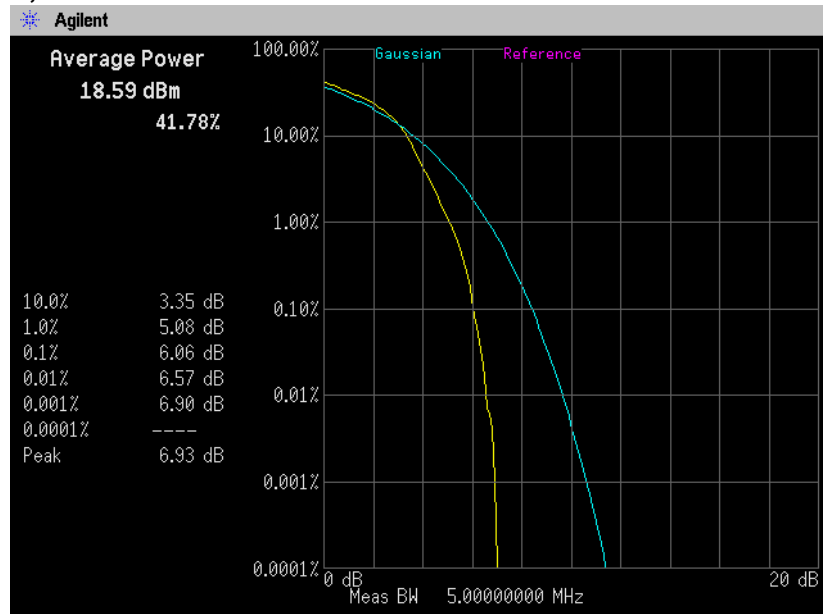

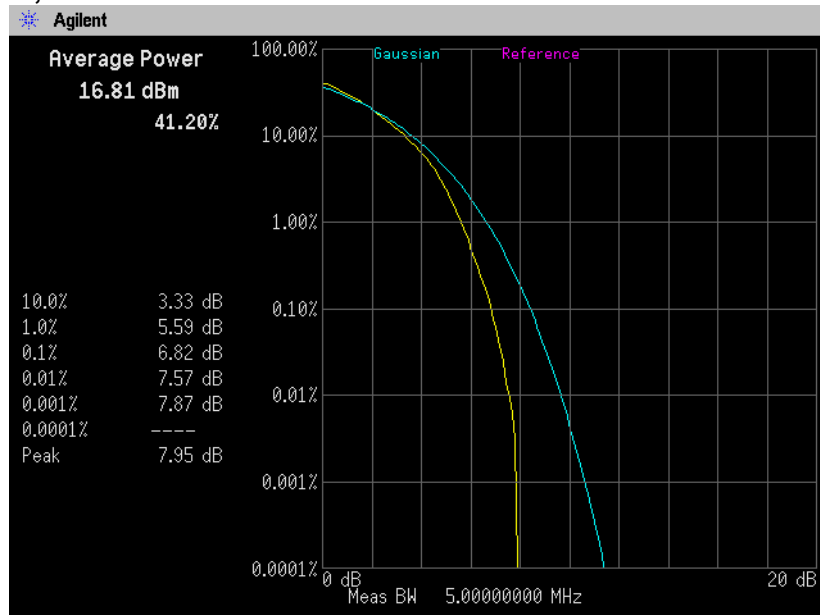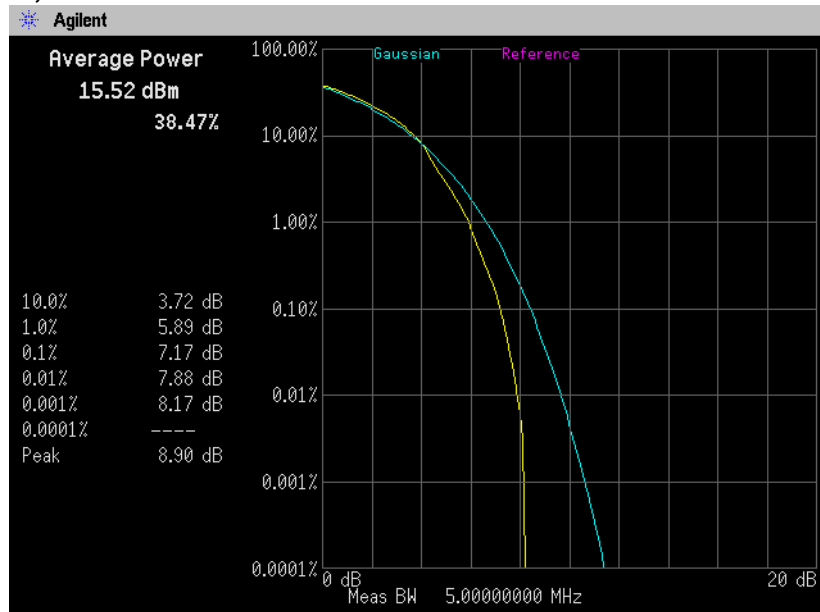

**16QAM, BW 15MHz, RB75-0****16QAM, BW 20MHz, RB100-0**

## 7. Occupied Bandwidth

### 7.1 Measurement procedure [FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.


The spectrum analyzer is set to;  
[WCDMA Band II]

- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

[LTE Band II]

- RBW=30kHz, VBW=91kHz, Span=3MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (1.4MHz)
- RBW=62kHz, VBW=180kHz, Span=6MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (3MHz)
- RBW=100kHz, VBW=300kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (5MHz)
- RBW=200kHz, VBW=620kHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (10MHz)
- RBW=300kHz, VBW=910kHz, Span=30MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (15MHz)
- RBW=390kHz, VBW=1.2MHz, Span=40MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (20MHz)

- Test configuration

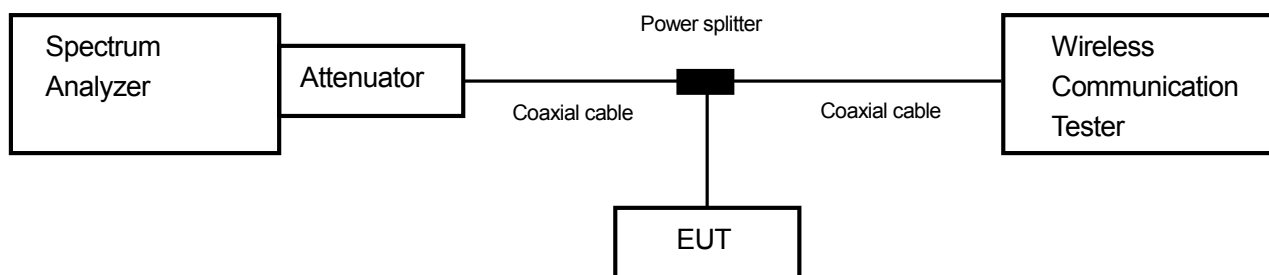

### 7.2 Limit

None

### 7.3 Measurement result

Date : June 19, 2015  
 Temperature : 24.9 [°C]  
 Humidity : 49.1 [%]  
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

| Band          | Channel | Frequency (MHz) | Test Result (MHz) |
|---------------|---------|-----------------|-------------------|
| WCDMA Band II | 9262    | 1852.4          | 4.1628            |
|               | 9400    | 1880.0          | 4.1609            |
|               | 9538    | 1907.6          | 4.1601            |

**[LTE Band II]**


| Mode  | UL RB Allocation | UL RB Start | Frequency [MHz] | 26dB Bandwidth [MHz] | 99% OBW [MHz] |
|-------|------------------|-------------|-----------------|----------------------|---------------|
| QPSK  | 1                | 0           | 1880.0          | 0.419                | 0.2779        |
|       | 1                | 5           |                 | 0.446                | 0.2856        |
|       | 3                | 1           |                 | 0.908                | 0.6108        |
|       | 6                | 0           |                 | 1.330                | 1.1051        |
| 16QAM | 1                | 0           | 1880.0          | 0.427                | 0.2776        |
|       | 1                | 5           |                 | 0.427                | 0.2828        |
|       | 3                | 1           |                 | 0.923                | 0.6255        |
|       | 6                | 0           |                 | 1.339                | 1.1098        |
| QPSK  | 1                | 0           | 1880.0          | 0.524                | 0.3717        |
|       | 1                | 14          |                 | 0.510                | 0.3520        |
|       | 8                | 4           |                 | 2.156                | 1.5533        |
|       | 15               | 0           |                 | 3.102                | 2.7115        |
| 16QAM | 1                | 0           | 1880.0          | 0.530                | 0.3686        |
|       | 1                | 14          |                 | 0.511                | 0.3589        |
|       | 8                | 4           |                 | 2.151                | 1.5605        |
|       | 15               | 0           |                 | 3.105                | 2.7214        |
| QPSK  | 1                | 0           | 1880.0          | 0.737                | 0.5127        |
|       | 1                | 24          |                 | 0.740                | 0.5129        |
|       | 12               | 7           |                 | 3.352                | 2.3164        |
|       | 25               | 0           |                 | 5.083                | 4.5163        |
| 16QAM | 1                | 0           | 1880.0          | 0.706                | 0.4888        |
|       | 1                | 24          |                 | 0.713                | 0.4976        |
|       | 12               | 7           |                 | 3.337                | 2.3434        |
|       | 25               | 0           |                 | 5.122                | 4.5252        |
| QPSK  | 1                | 0           | 1880.0          | 1.014                | 0.7385        |
|       | 1                | 49          |                 | 1.040                | 0.7489        |
|       | 25               | 12          |                 | 6.609                | 4.7157        |
|       | 50               | 0           |                 | 10.034               | 8.9884        |
| 16QAM | 1                | 0           | 1880.0          | 0.984                | 0.7177        |
|       | 1                | 49          |                 | 0.998                | 0.7199        |
|       | 25               | 12          |                 | 6.689                | 4.7063        |
|       | 50               | 0           |                 | 10.011               | 8.9815        |

**[LTE Band II]**


| Mode  | UL RB Allocation | UL RB Start | Frequency [MHz] | 26dB Bandwidth [MHz] | 99% OBW [MHz] |
|-------|------------------|-------------|-----------------|----------------------|---------------|
| QPSK  | 1                | 0           | 1880.0          | 1.544                | 1.1177        |
|       | 1                | 74          |                 | 1.616                | 1.1558        |
|       | 36               | 20          |                 | 9.093                | 6.8423        |
|       | 75               | 0           |                 | 14.968               | 13.4781       |
| 16QAM | 1                | 0           | 1880.0          | 1.620                | 1.1294        |
|       | 1                | 74          |                 | 1.568                | 1.1182        |
|       | 36               | 20          |                 | 9.460                | 6.8112        |
|       | 75               | 0           |                 | 14.982               | 13.4688       |
| QPSK  | 1                | 0           | 1880.0          | 2.009                | 1.4147        |
|       | 1                | 99          |                 | 2.006                | 1.4392        |
|       | 50               | 24          |                 | 11.876               | 9.2877        |
|       | 100              | 0           |                 | 19.884               | 17.9533       |
| 16QAM | 1                | 0           | 1880.0          | 2.020                | 1.4612        |
|       | 1                | 99          |                 | 1.974                | 1.4364        |
|       | 50               | 24          |                 | 11.963               | 9.2628        |
|       | 100              | 0           |                 | 19.857               | 17.9716       |

## 7.4 Trace data [WCDMA]


Channel: 9262

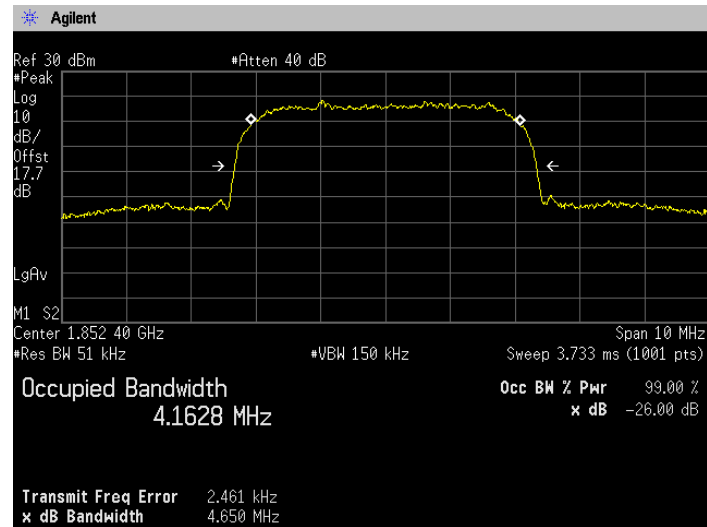


Channel: 9400

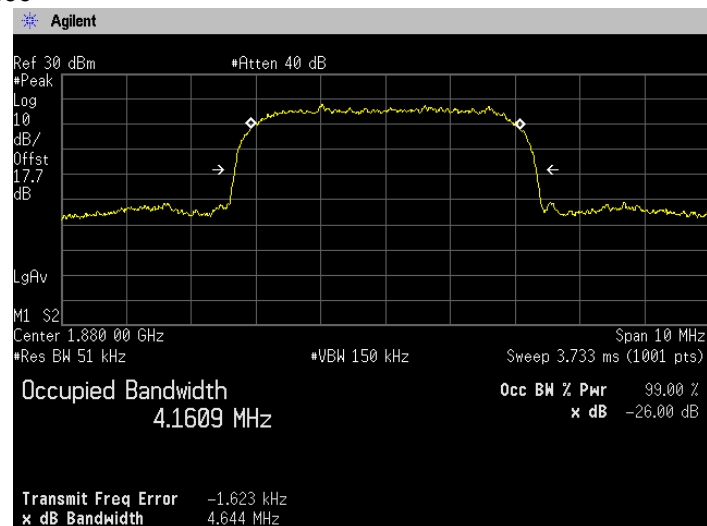


Channel: 9538

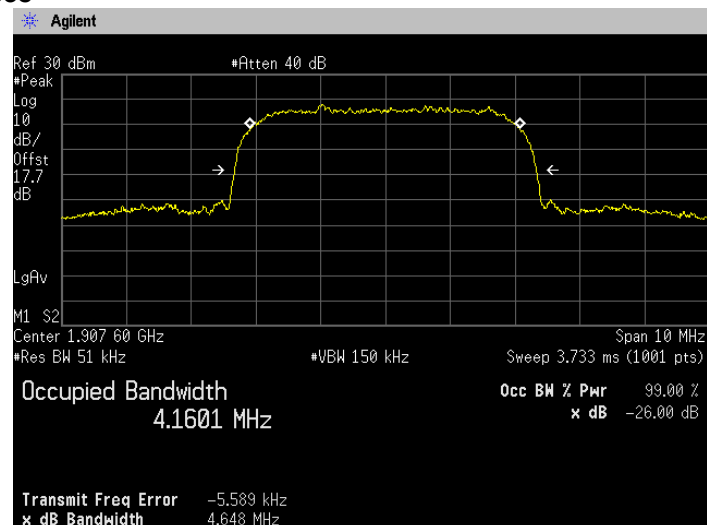


**[LTE Band II]  
Channel: 18900  
QPSK, BW 1.4MHz, RB1-0**

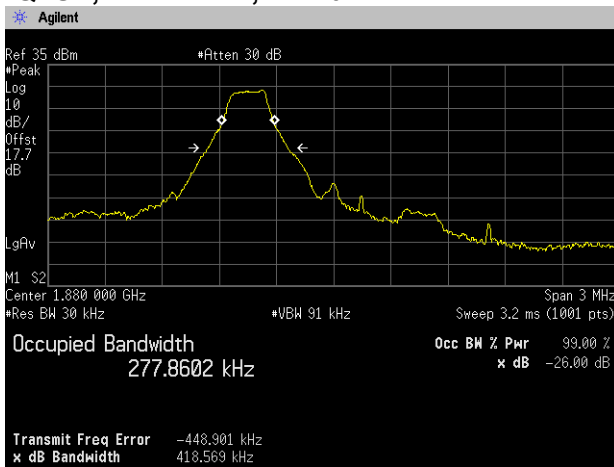


**RB1-5**




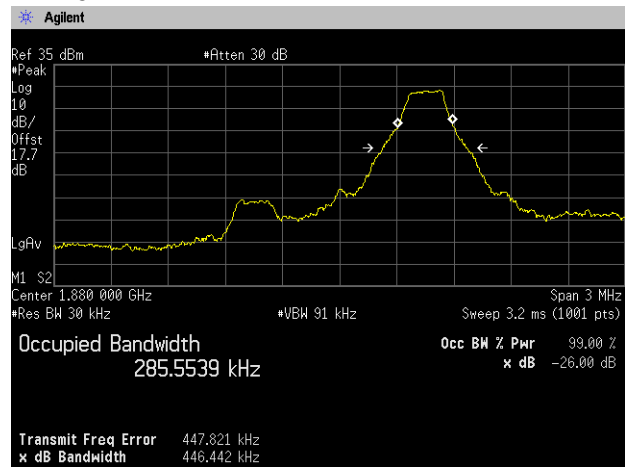






**RB3-1**

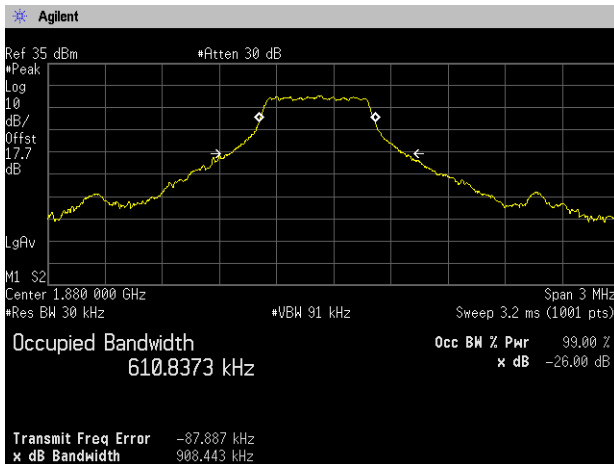





**RB6-0**




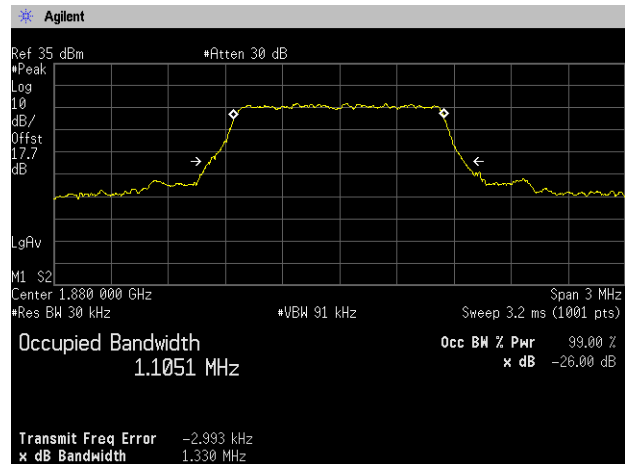


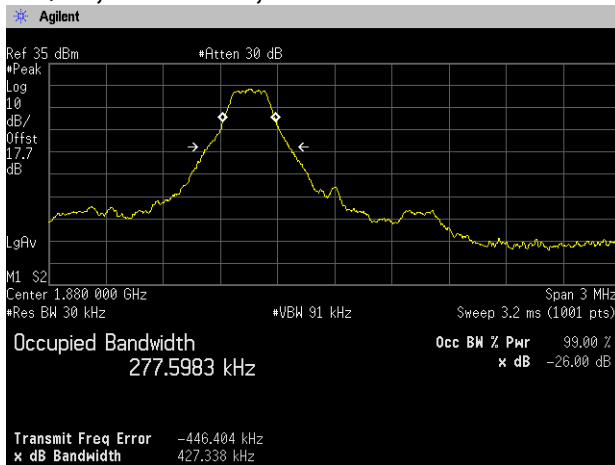
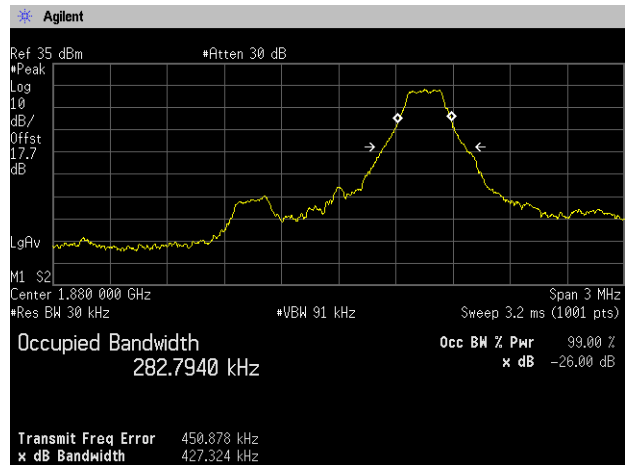
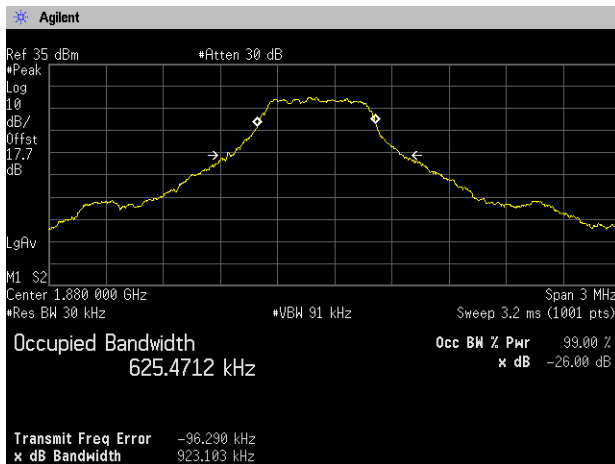
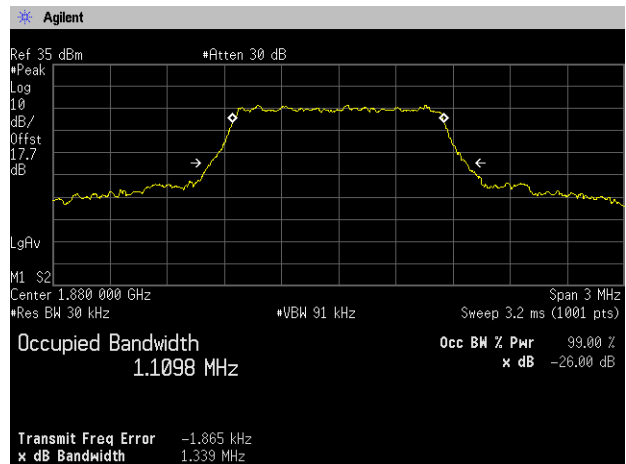
**16QAM, BW 1.4MHz, RB1-0****RB1-5****RB3-1****RB6-0**

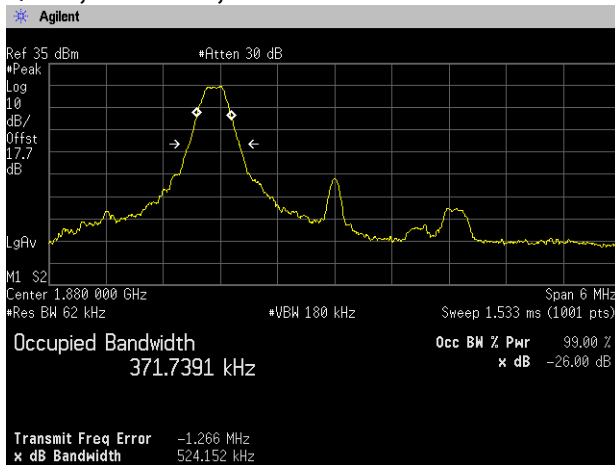
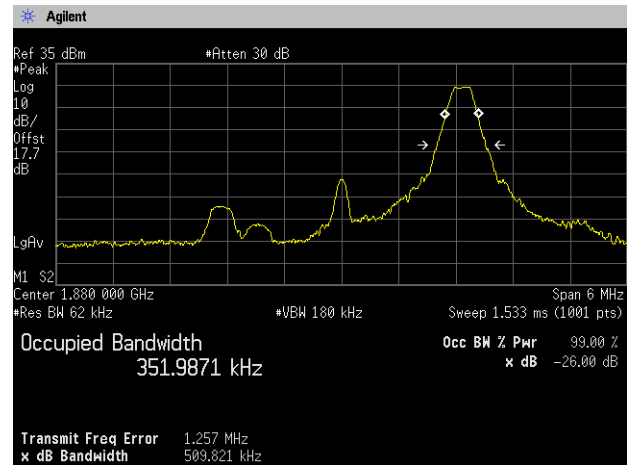
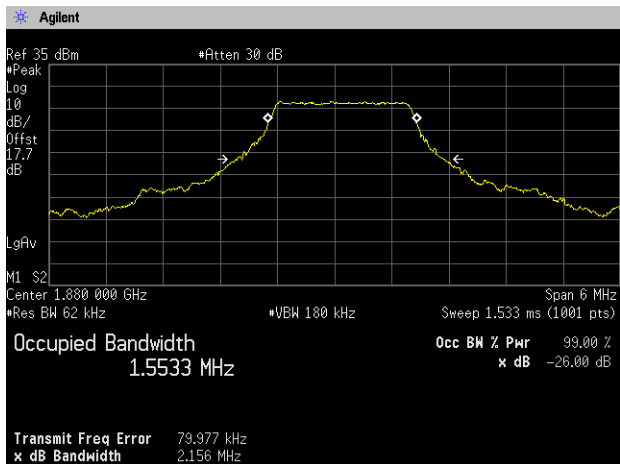
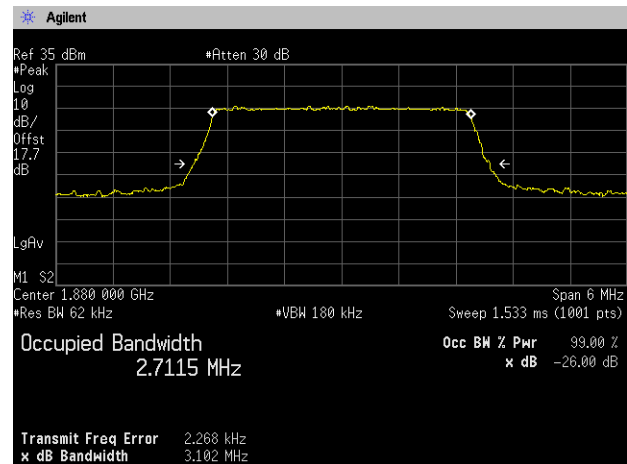
**QPSK, BW 3MHz, RB1-0****RB1-14****RB8-4****RB15-0**

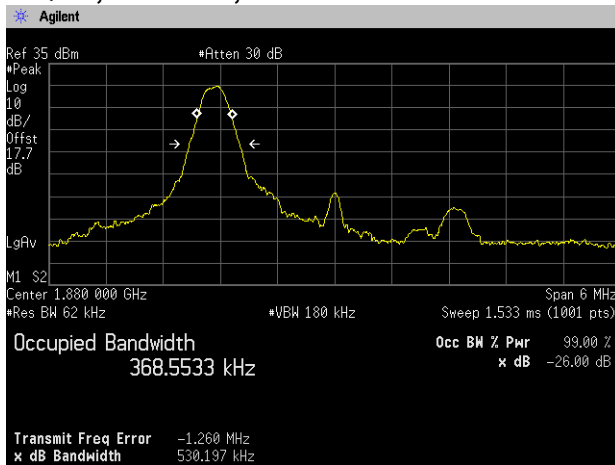
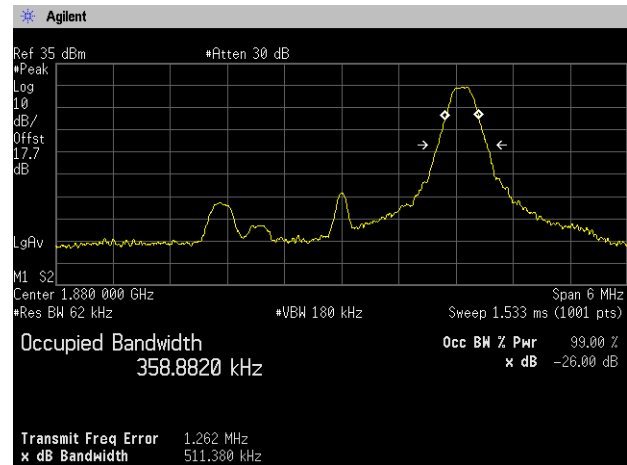
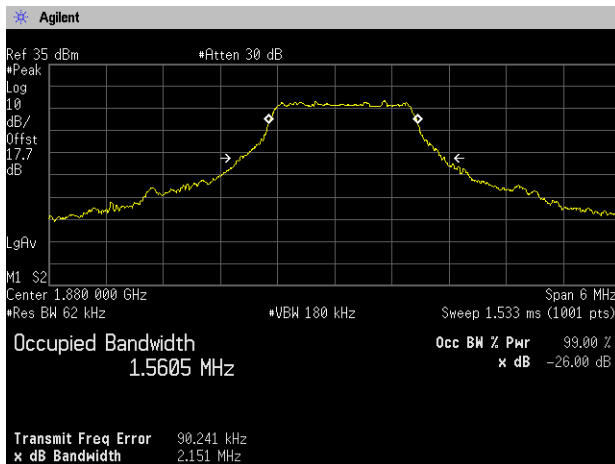
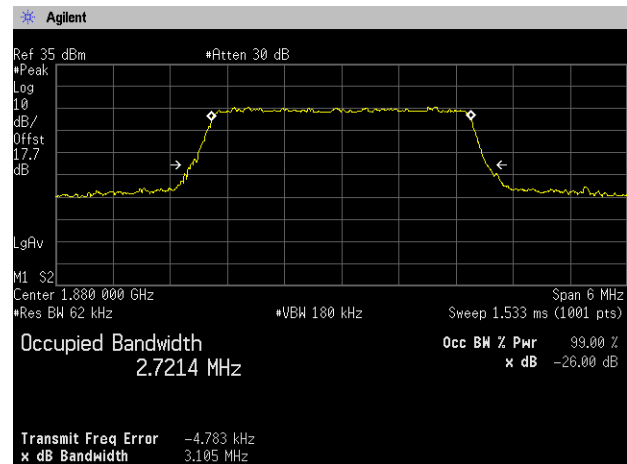






**16QAM, BW 3MHz, RB1-0****RB1-14****RB8-4****RB15-0**

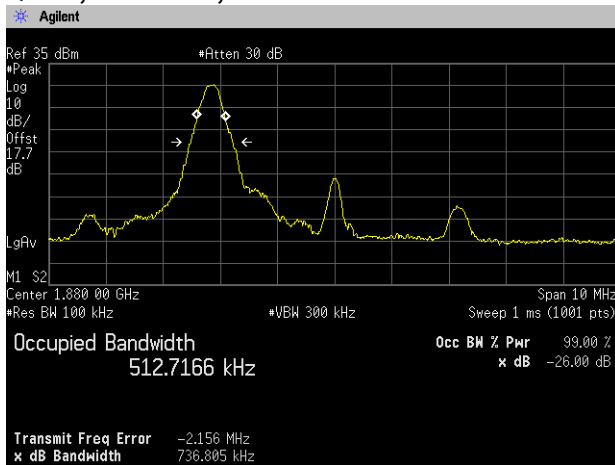
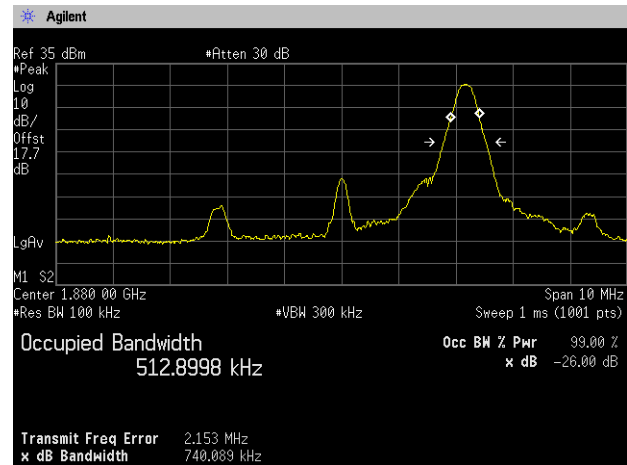
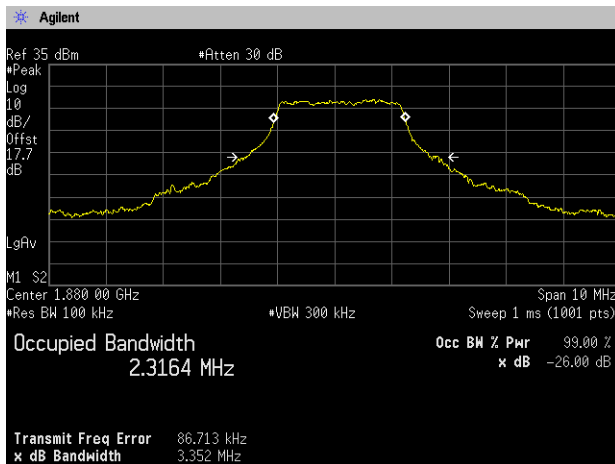
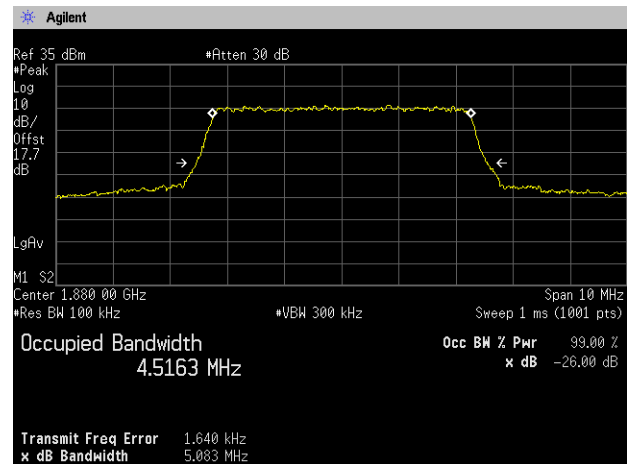
**QPSK, BW 5MHz, RB1-0****RB1-24****RB12-7****RB25-0**

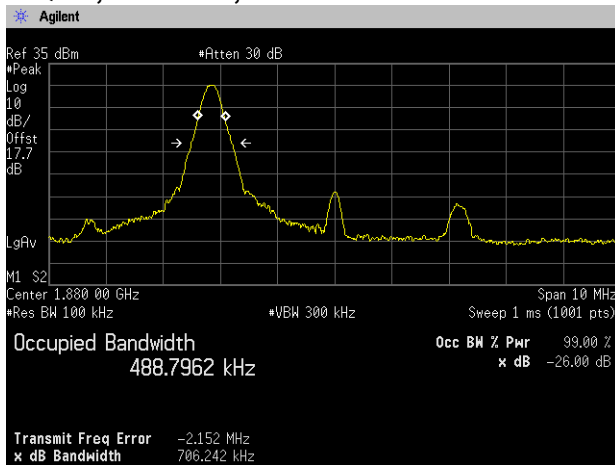
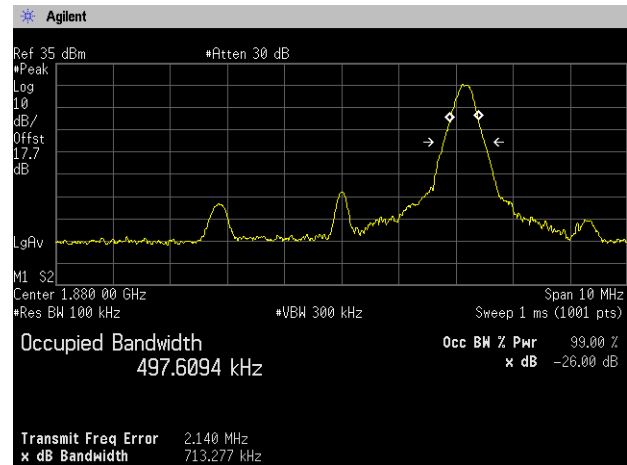
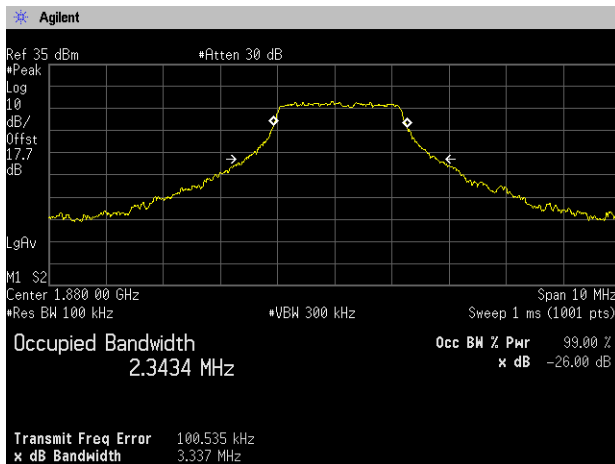
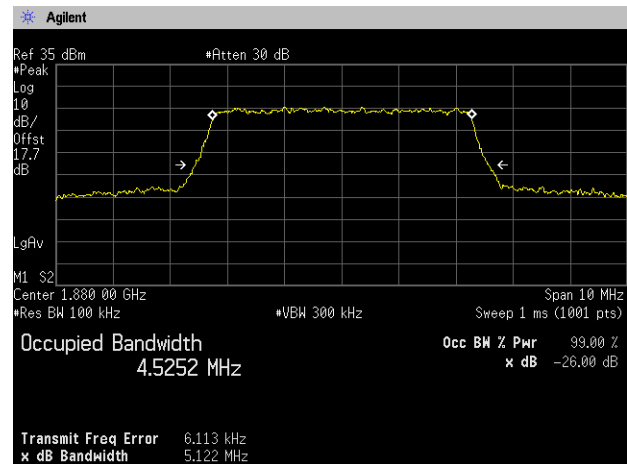
**16QAM, BW 5MHz, RB1-0****RB1-24****RB12-7****RB25-0**

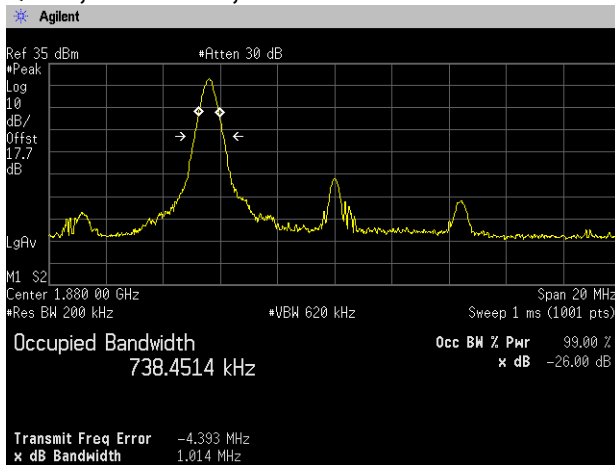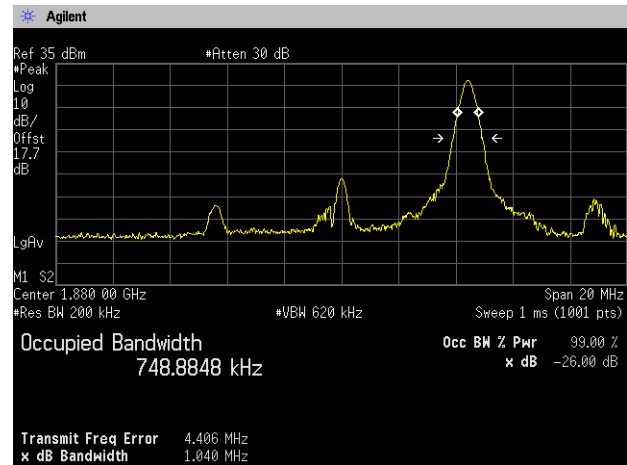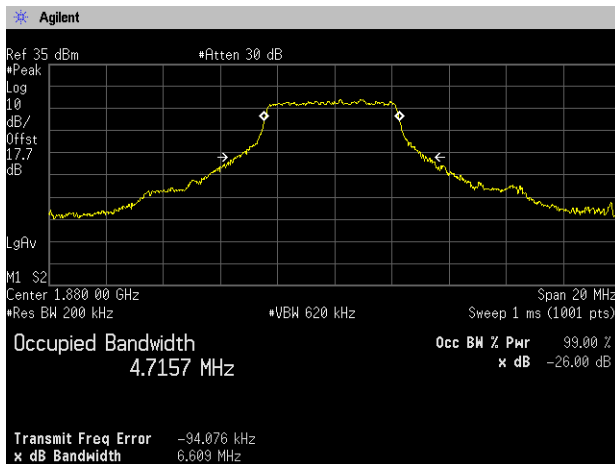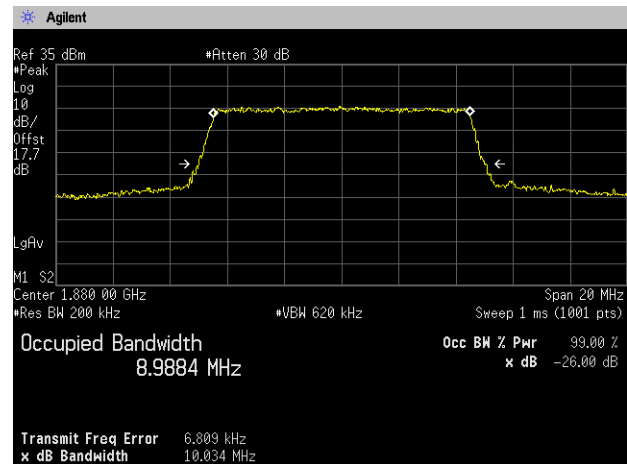**QPSK, BW 10MHz, RB1-0****RB1-49****RB25-12****RB50-0**

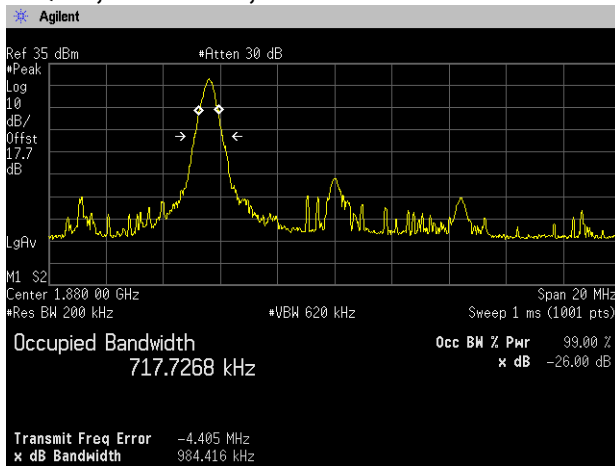
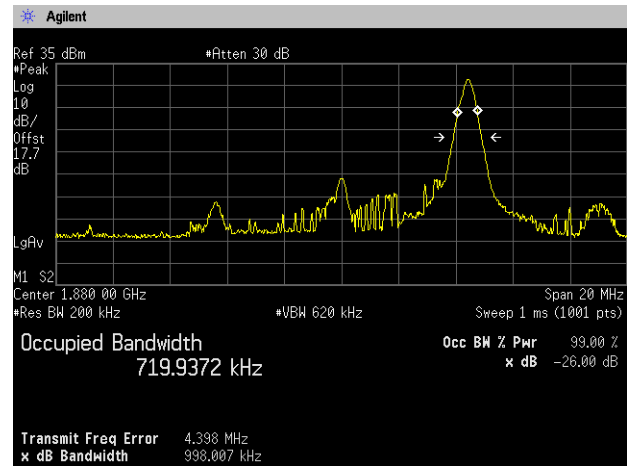
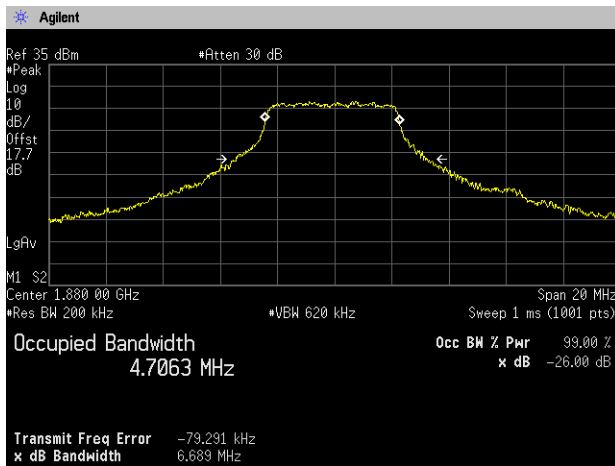
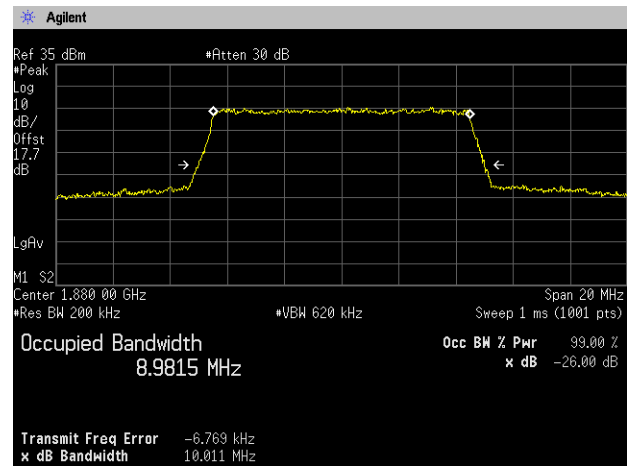
**16QAM, BW 10MHz, RB1-0****RB1-49****RB25-12****RB50-0**

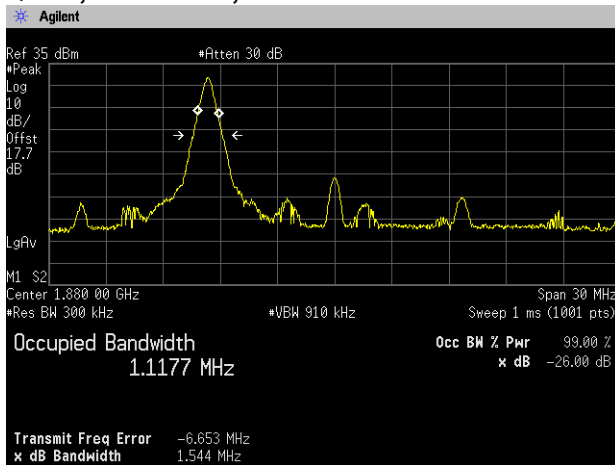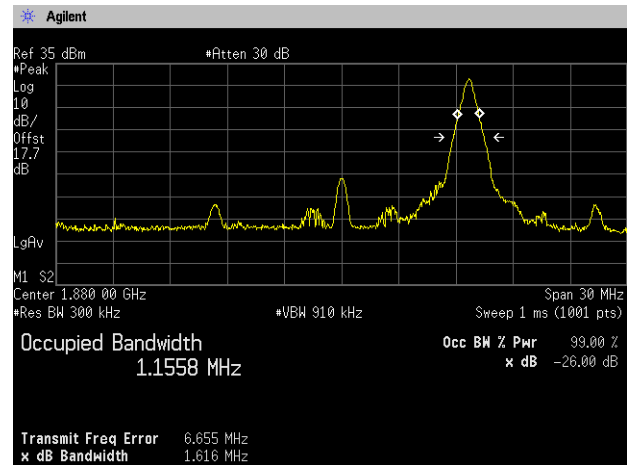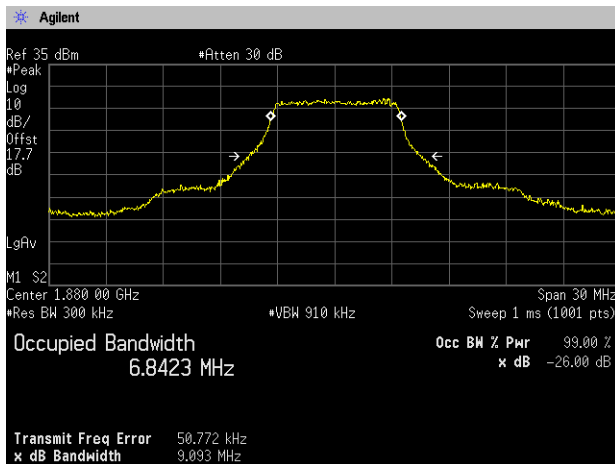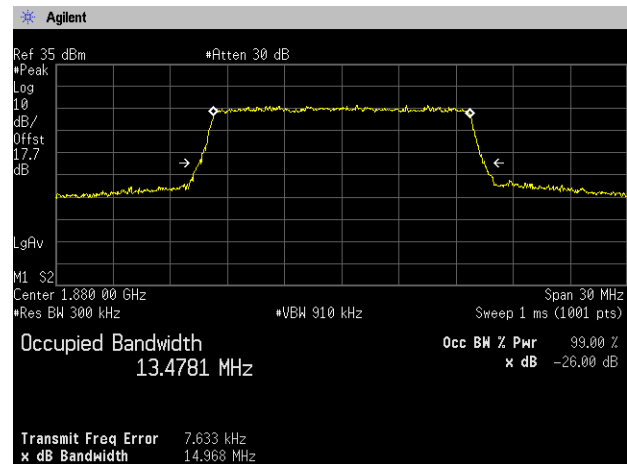**QPSK, BW 15MHz, RB1-0****RB1-74****RB36-20****RB75-0**

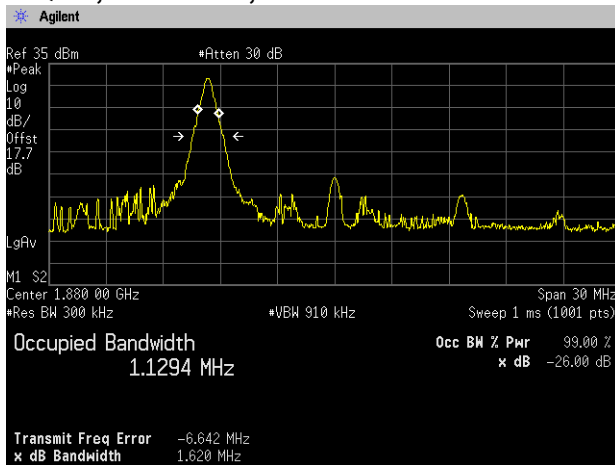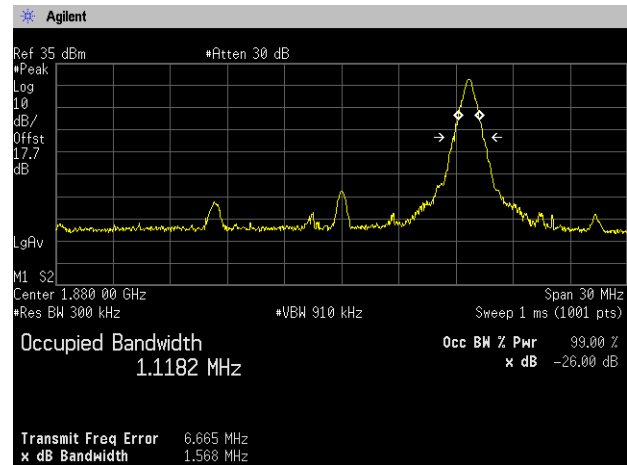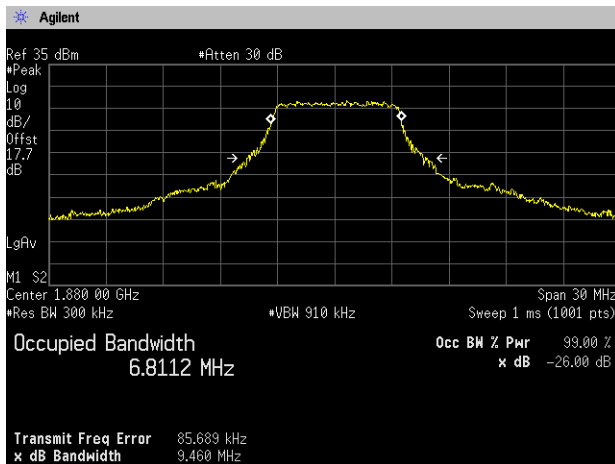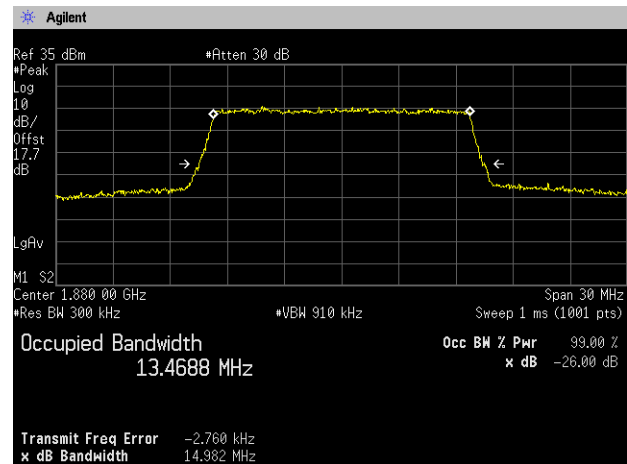**16QAM, BW 15MHz, RB1-0****RB1-74****RB36-20****RB75-0**

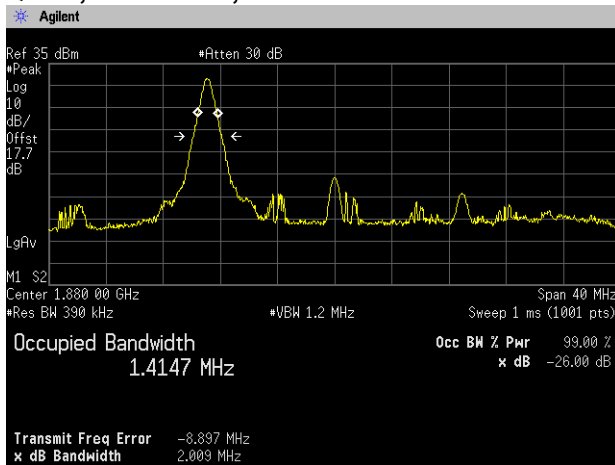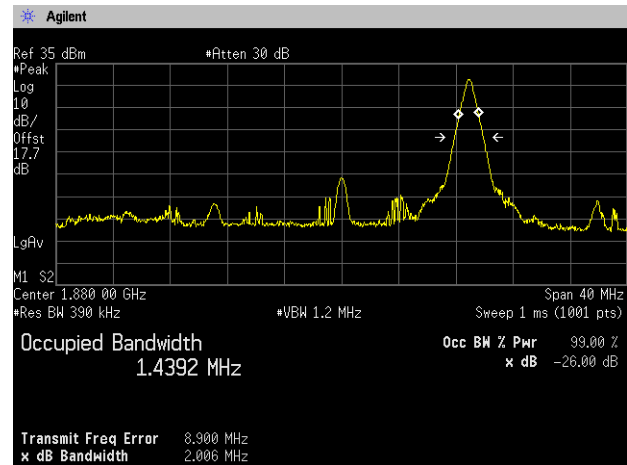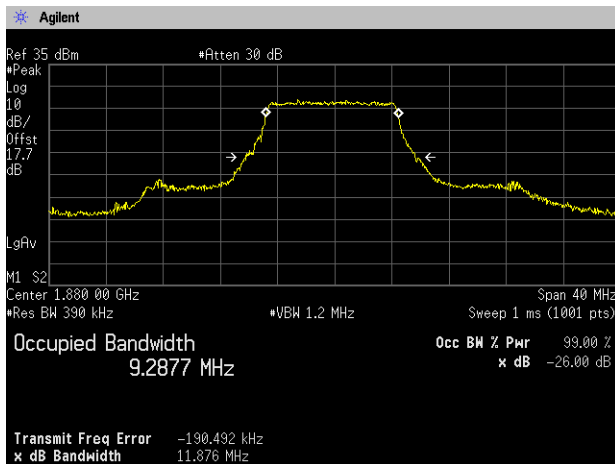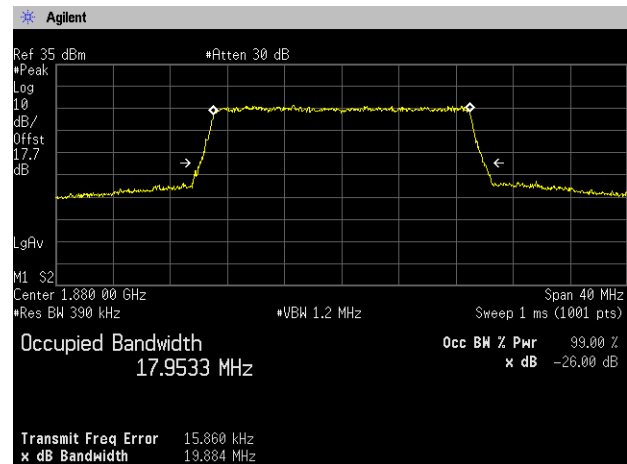**QPSK, BW 20MHz, RB1-0****RB1-99****RB50-24****RB100-0**

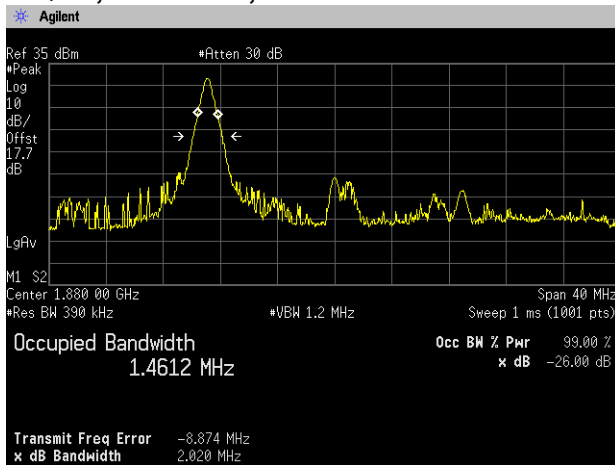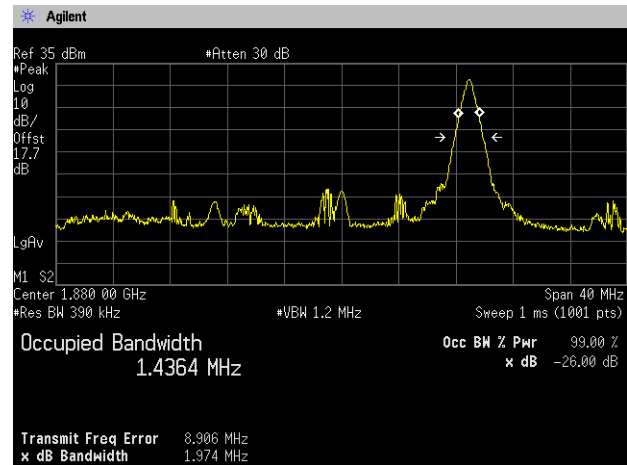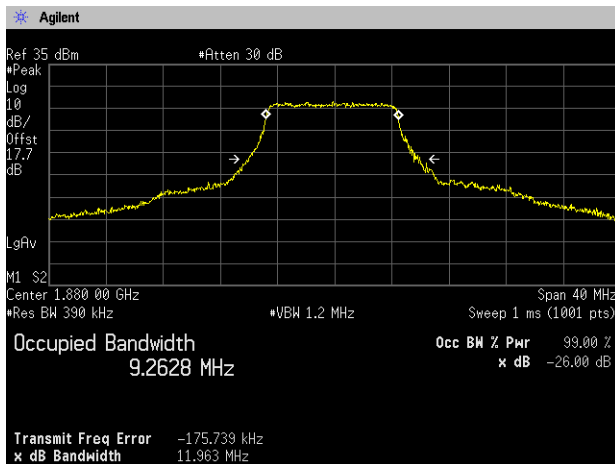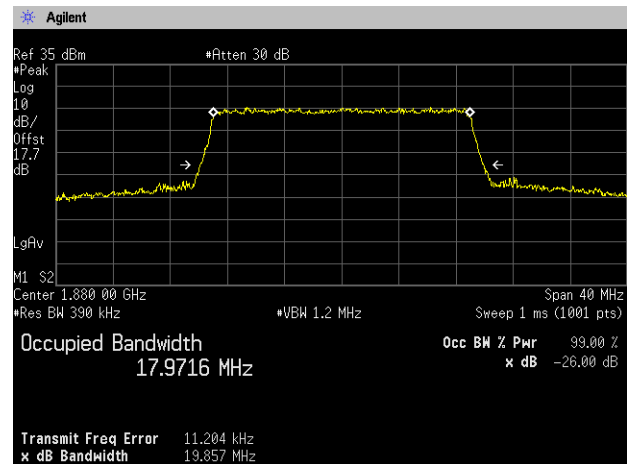

**16QAM, BW 20MHz, RB1-0****RB1-99****RB50-24****RB100-0**

## 8. Band Edge Spurious and Harmonic at Antenna Terminals

### 8.1 Measurement procedure

[FCC 24.238(a), 2.1051, IC RSS-133 6.5.1]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

<Band Edge>

[WCDMA Band II]

- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

[LTE Band II]

- RBW=20kHz, VBW=62kHz, Span=2.8MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (1.4MHz)

- RBW=43kHz, VBW=130kHz, Span=6MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (3MHz)

- RBW=75kHz, VBW=220kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (5MHz)

- RBW=150kHz, VBW=430kHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (10MHz)


- RBW=220kHz, VBW=680kHz, Span=30MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (15MHz)

- RBW=300kHz, VBW=910kHz, Span=40MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold (20MHz)

<Spurious Emissions>

- RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

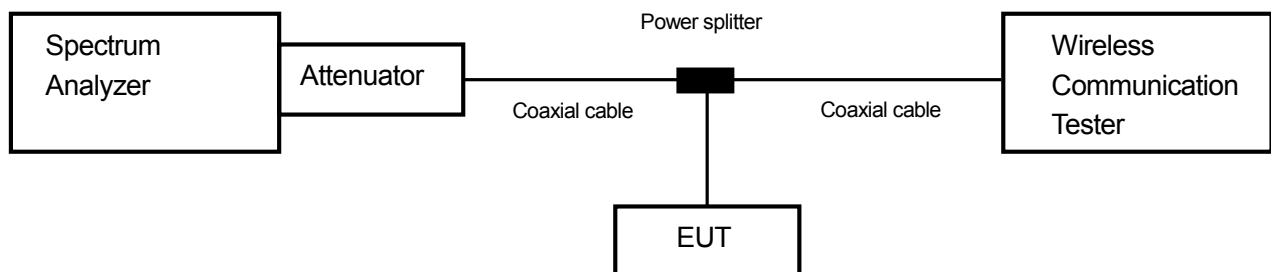

### 8.2 Limit

-13dBm or less

### 8.3 Measurement result

Date : June 20, 2015

Temperature : 24.2 [°C]

Humidity : 53.7 [%]

Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

| Band          | Channel | Frequency [MHz] | Limit [dB] | Results            | Results |
|---------------|---------|-----------------|------------|--------------------|---------|
| WCDMA Band II | 9262    | 1852.4          | -13.0      | See the trace data | PASS    |
|               | 9538    | 1907.6          | -13.0      | See the trace data | PASS    |







Zacta

| Band           | Modulation | Bandwidth | Results            |      |
|----------------|------------|-----------|--------------------|------|
| LTE<br>Band II | QPSK       | 1.4MHz    | See the trace data | PASS |
|                |            | 3MHz      | See the trace data | PASS |
|                |            | 5MHz      | See the trace data | PASS |
|                |            | 10MHz     | See the trace data | PASS |
|                |            | 15MHz     | See the trace data | PASS |
|                |            | 20MHz     | See the trace data | PASS |
|                | 16QAM      | 1.4MHz    | See the trace data | PASS |
|                |            | 3MHz      | See the trace data | PASS |
|                |            | 5MHz      | See the trace data | PASS |
|                |            | 10MHz     | See the trace data | PASS |
|                |            | 15MHz     | See the trace data | PASS |
|                |            | 20MHz     | See the trace data | PASS |

## 8.4 Trace data [WCDMA Band II] (Band Edge)

Channel: 9262

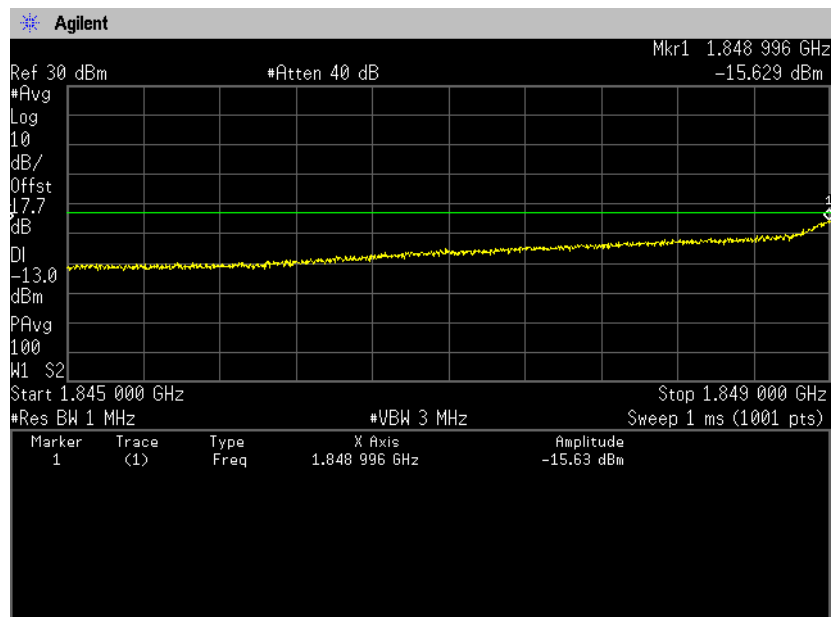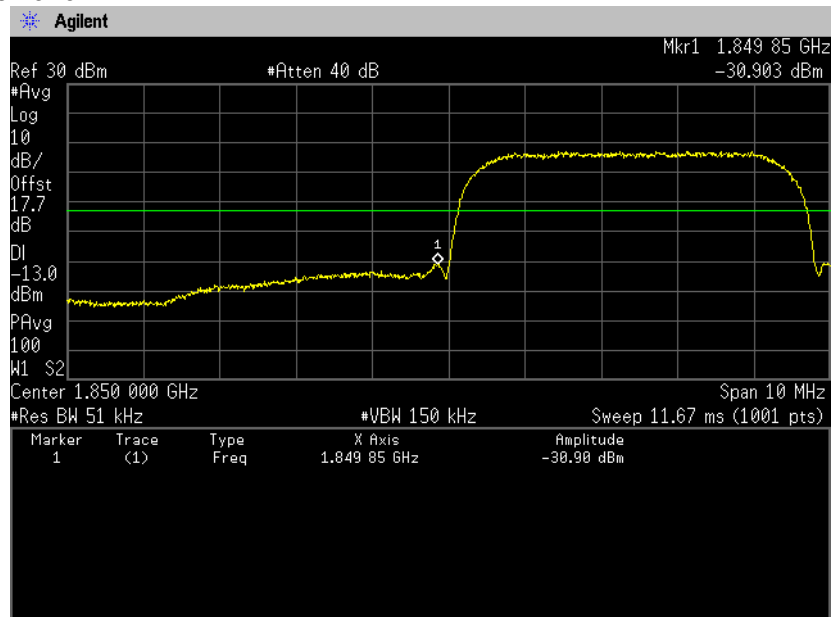


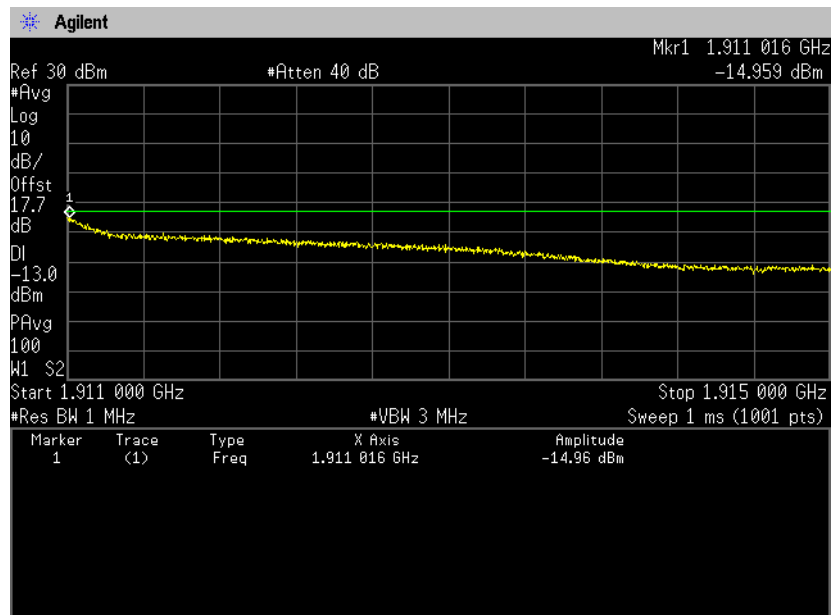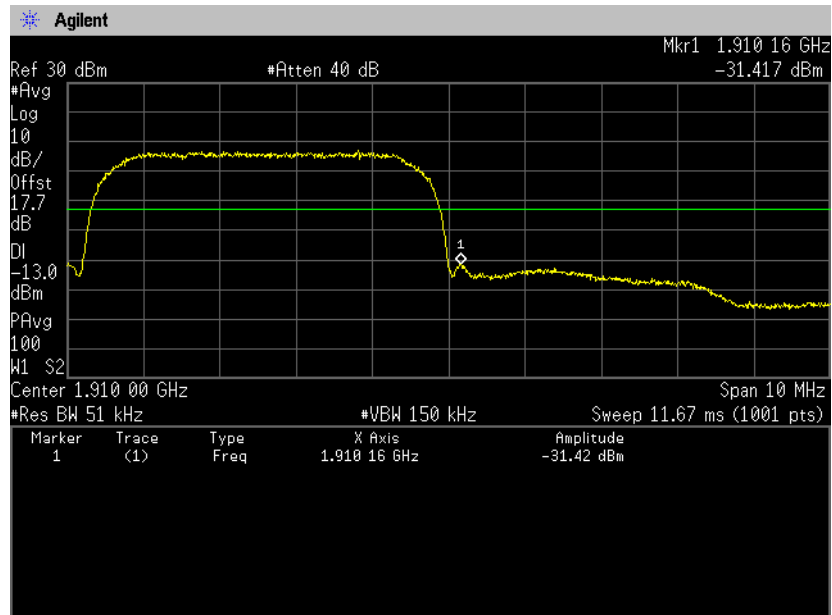**Channel: 9538**


**(Spurious Emissions)**

Note: Conducted spurious test was measured in the worst case of conducted output power.


Channel: 9262  
30MHz-5GHz

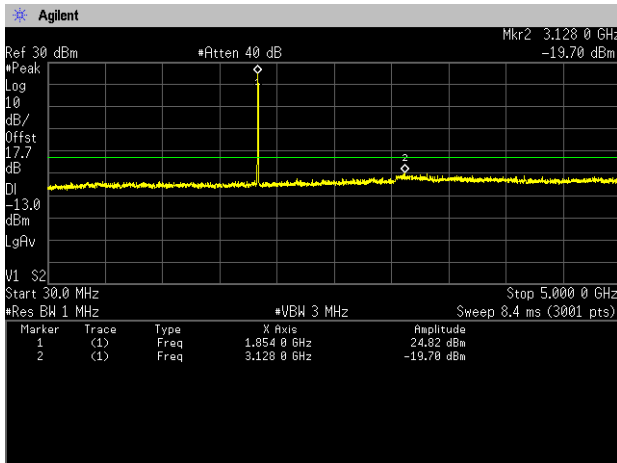


5GHz-10GHz

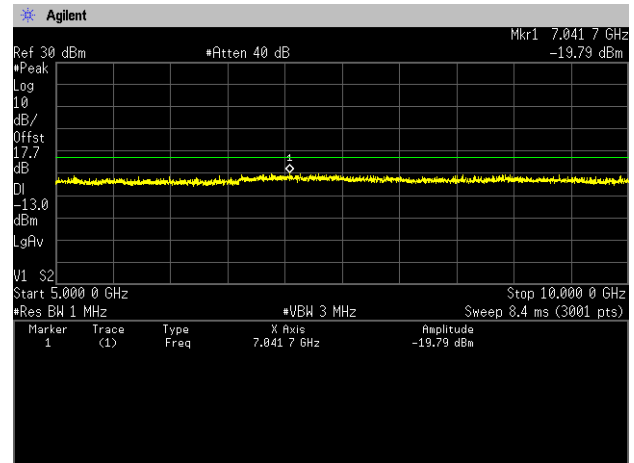


10GHz-15GHz

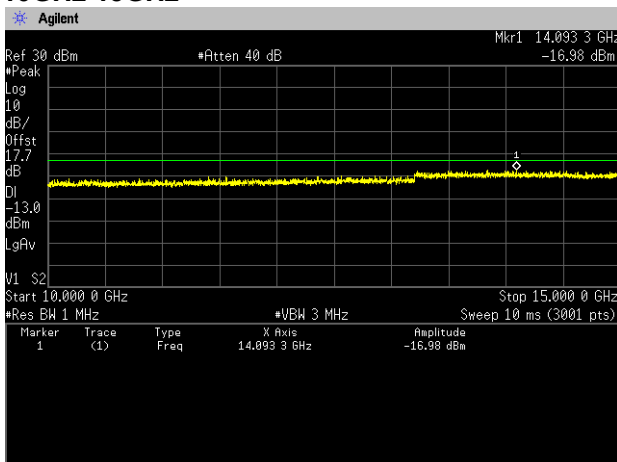


15GHz-20GHz

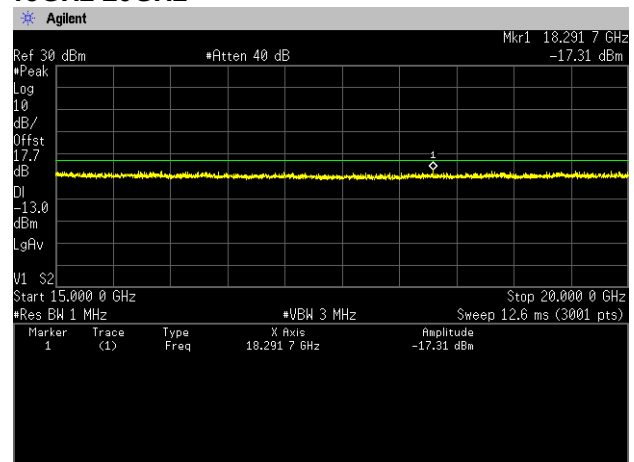


### Channel: 9400 30MHz-5GHz

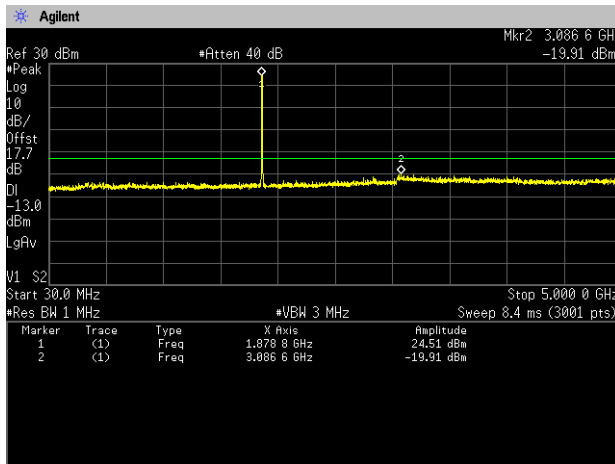


### 5GHz-10GHz

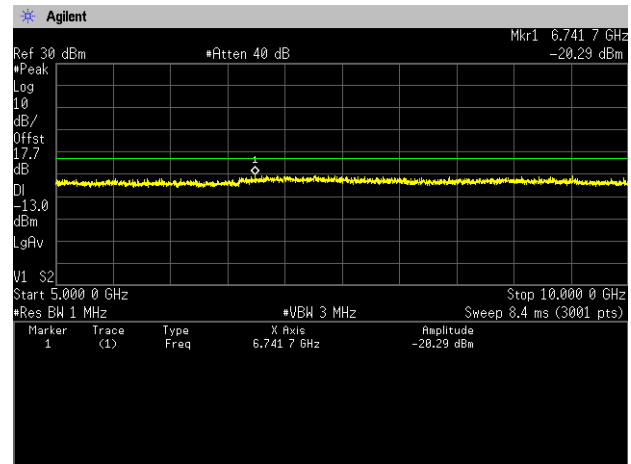


### 10GHz-15GHz

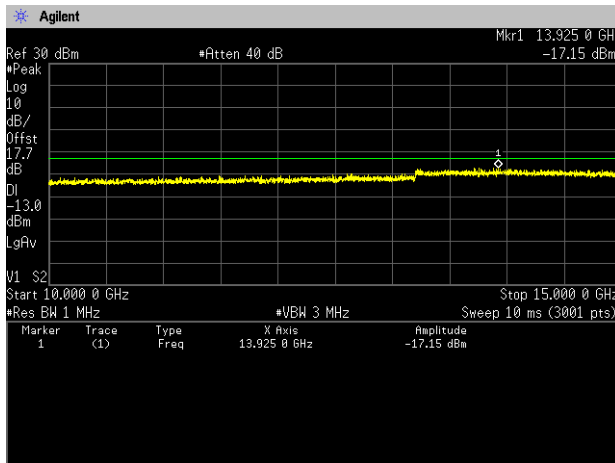


### 15GHz-20GHz

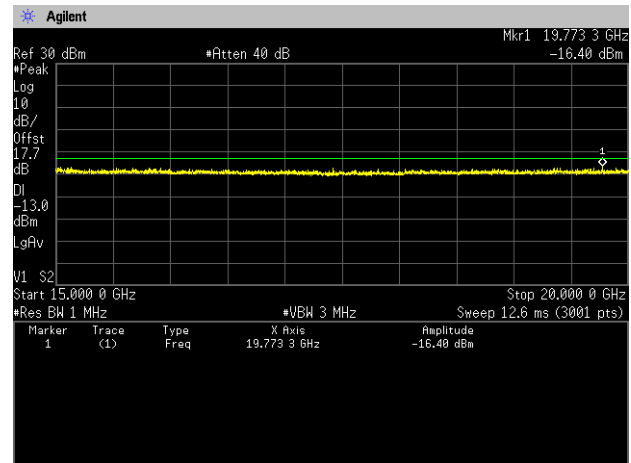


### Channel: 9538 30MHz-5GHz

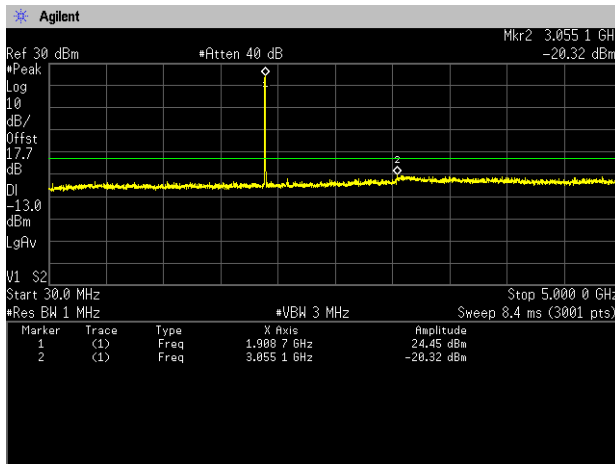


### 5GHz-10GHz

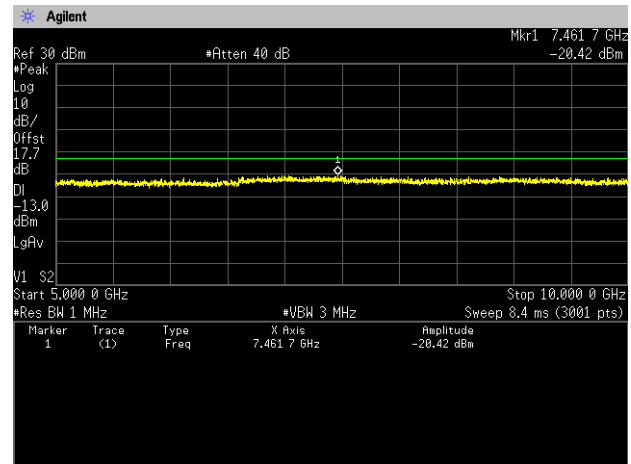

### 10GHz-15GHz

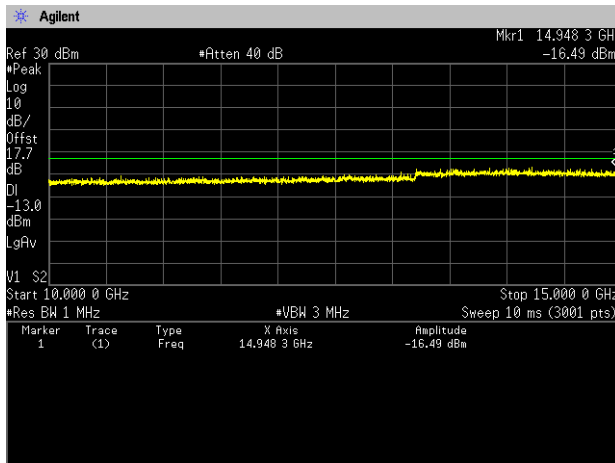


### 15GHz-20GHz

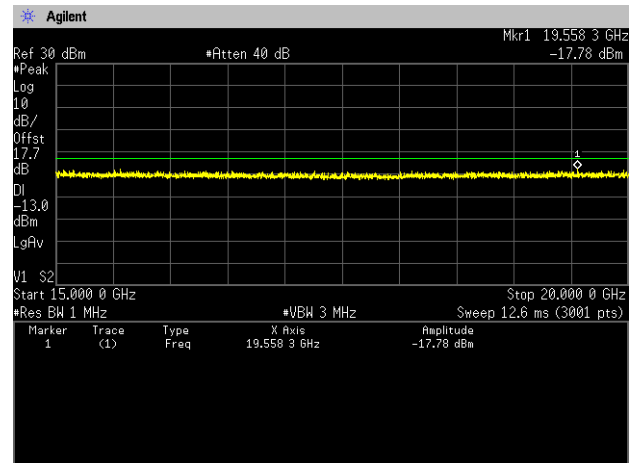





[LTE Band II]  
(Band Edge)  
QPSK, BW 1.4MHz, RB1-0  
Channel: Low

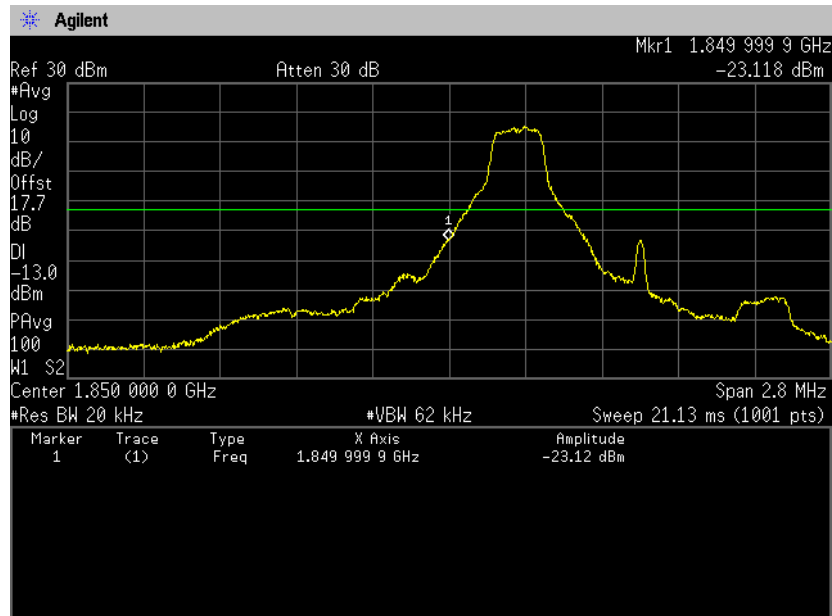


QPSK, BW 1.4MHz, RB1-5  
Channel: High

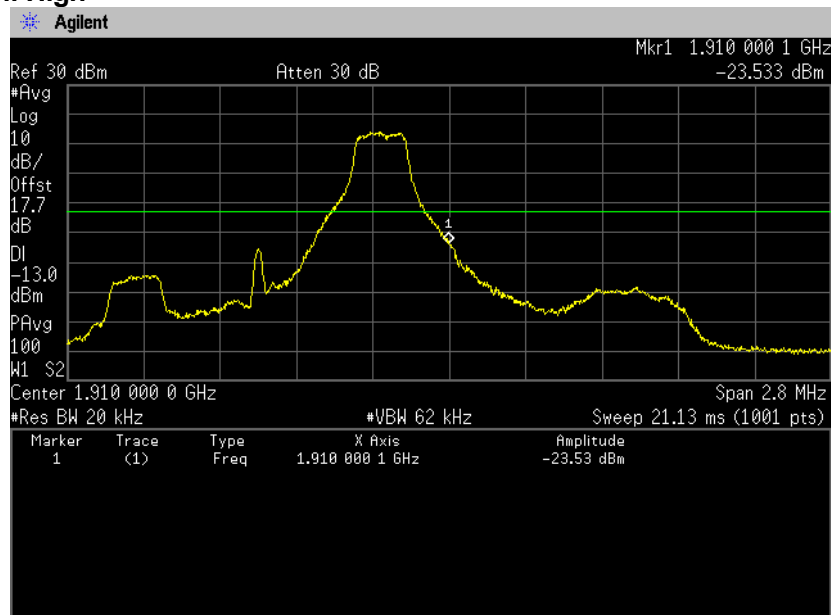


**QPSK, BW 1.4MHz, RB6-0**  
**Channel: Low**

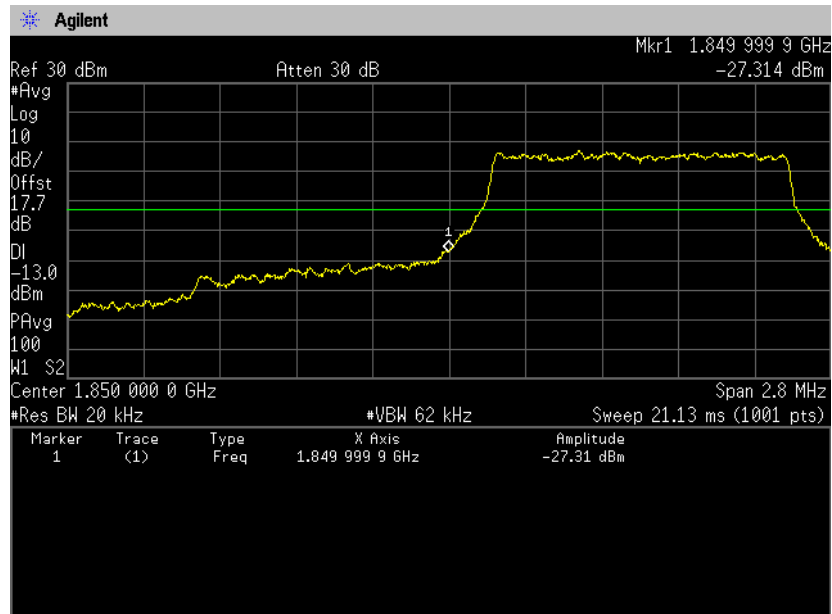


**QPSK, BW 1.4MHz, RB6-0**  
**Channel: High**

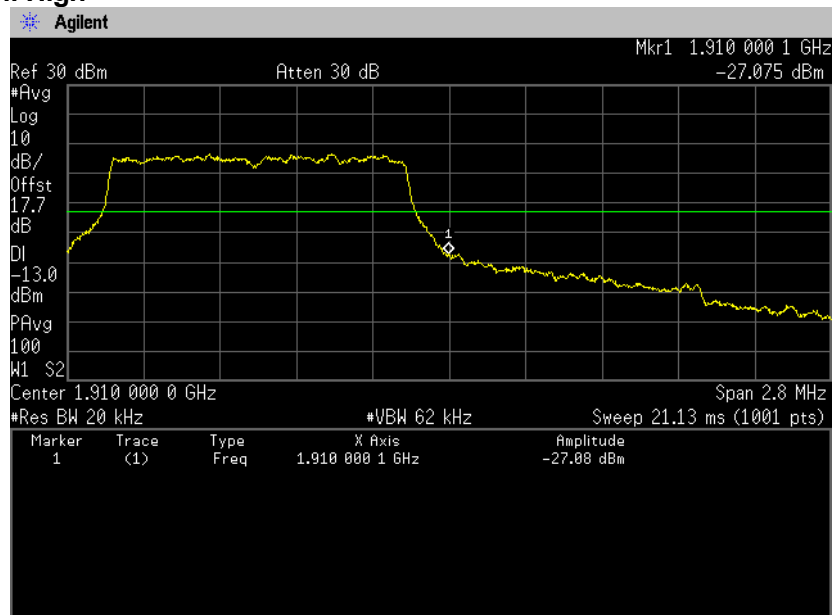


**16QAM, BW 1.4MHz, RB1-0**  
**Channel: Low**

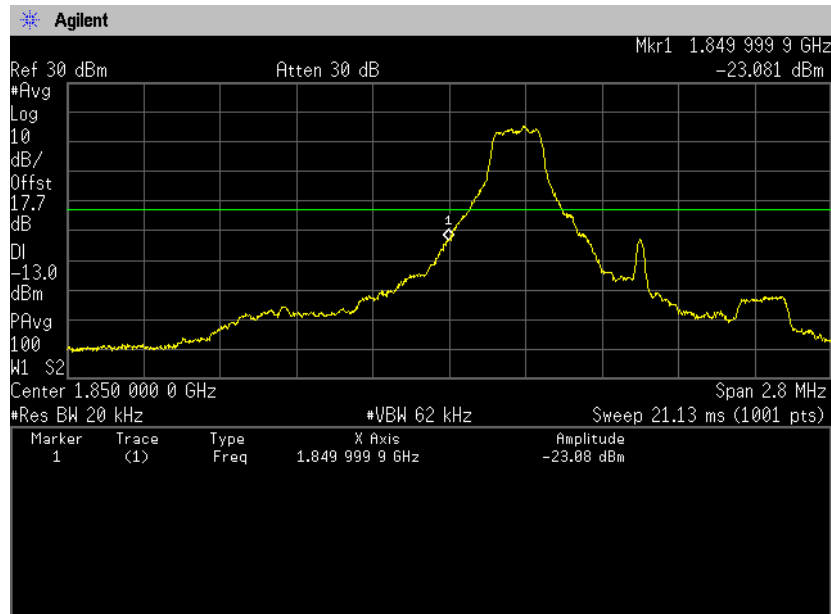


**16QAM, BW 1.4MHz, RB1-5**  
**Channel: High**

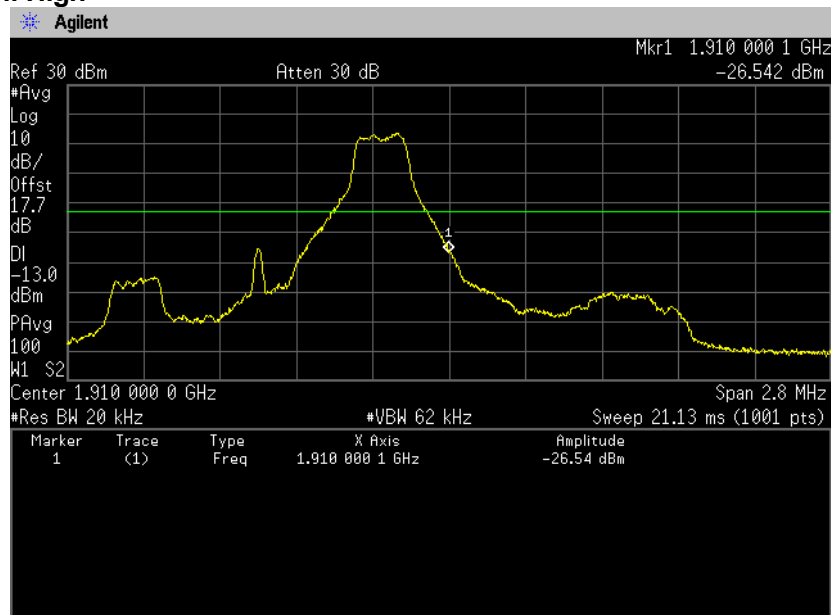


**16QAM, BW 1.4MHz, RB6-0**  
**Channel: Low**

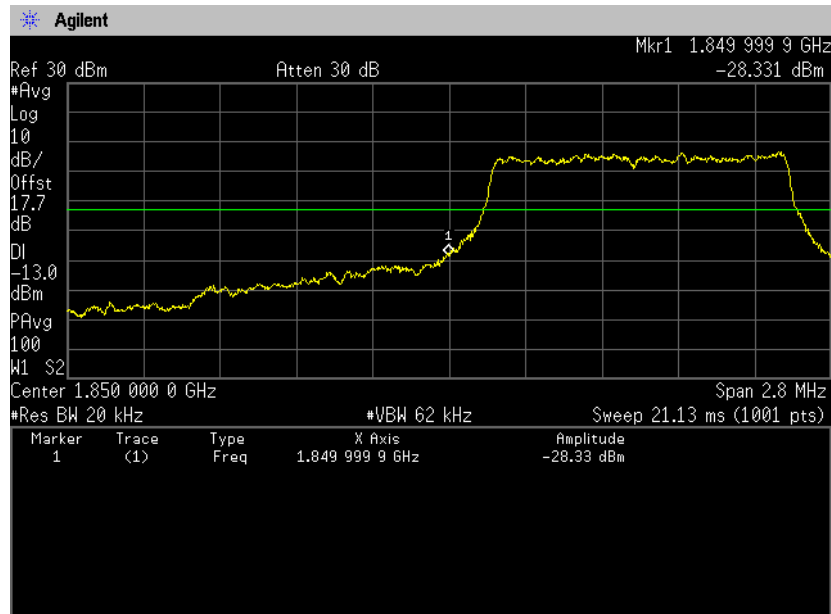


**16QAM, BW 1.4MHz, RB6-0**  
**Channel: High**

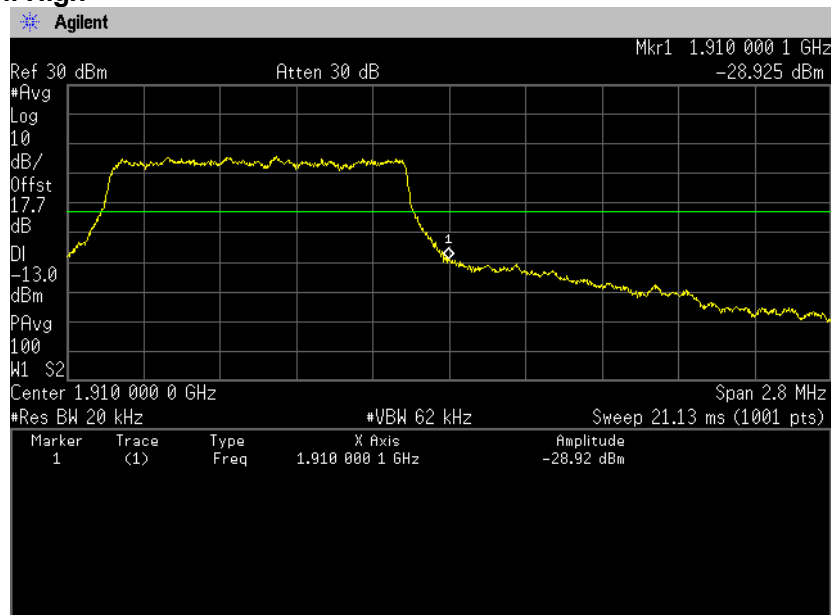


**QPSK, BW 3MHz, RB1-0**  
**Channel: Low**

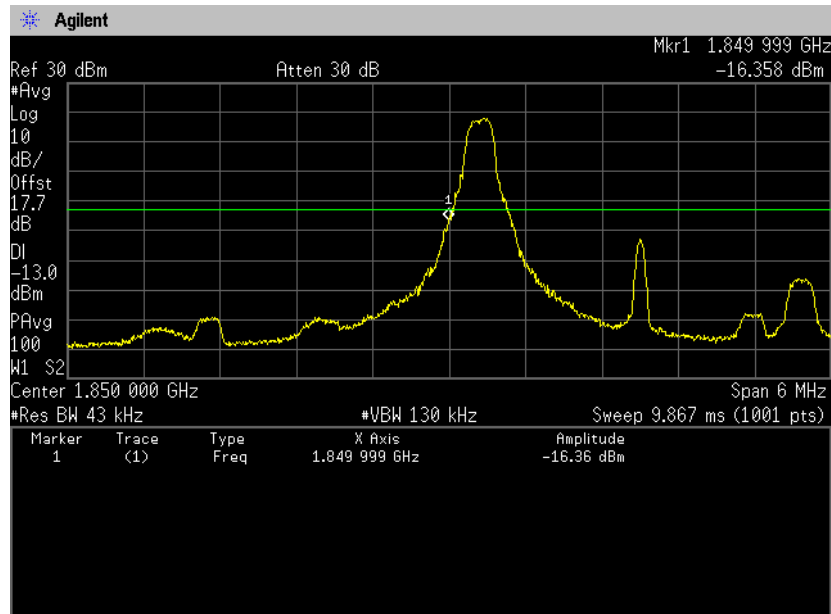


**QPSK, BW 3MHz, RB1-14**  
**Channel: High**

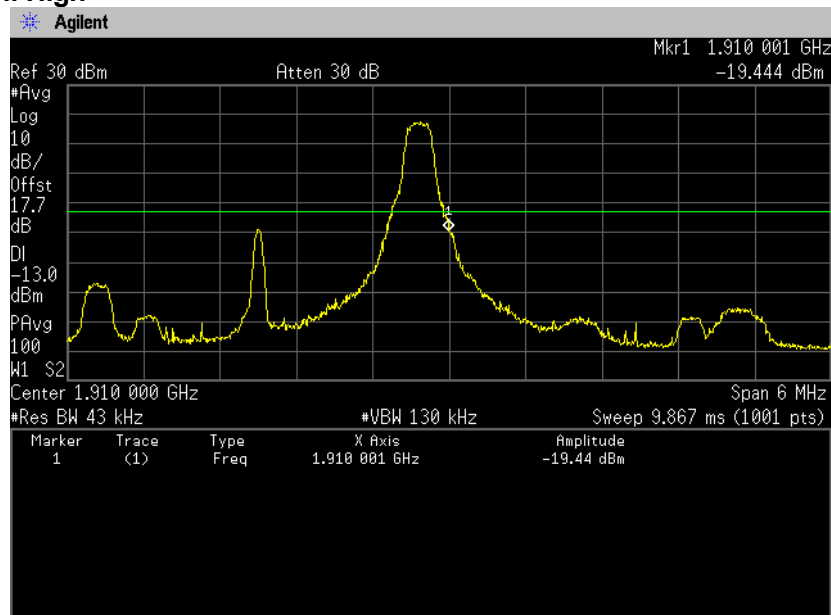


**QPSK, BW 3MHz, RB15-0**  
**Channel: Low**

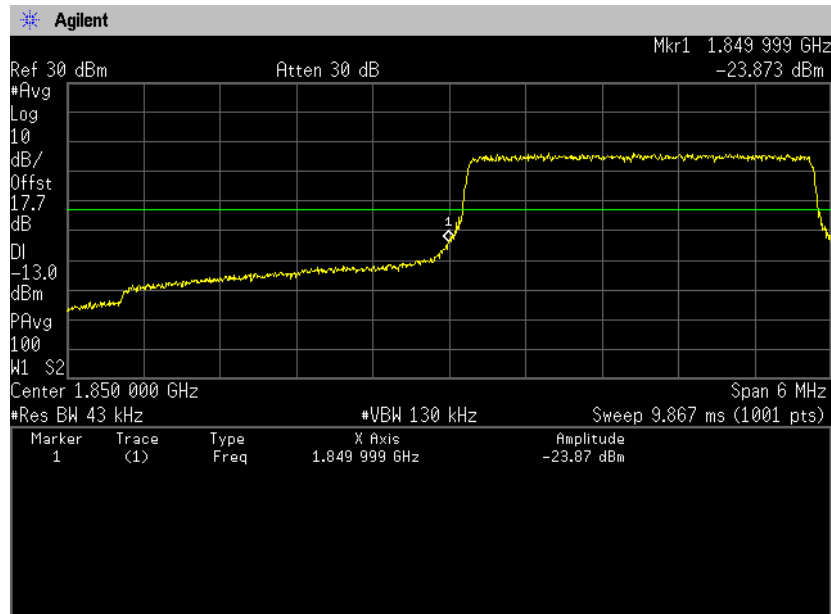


**QPSK, BW 3MHz, RB15-0**  
**Channel: High**

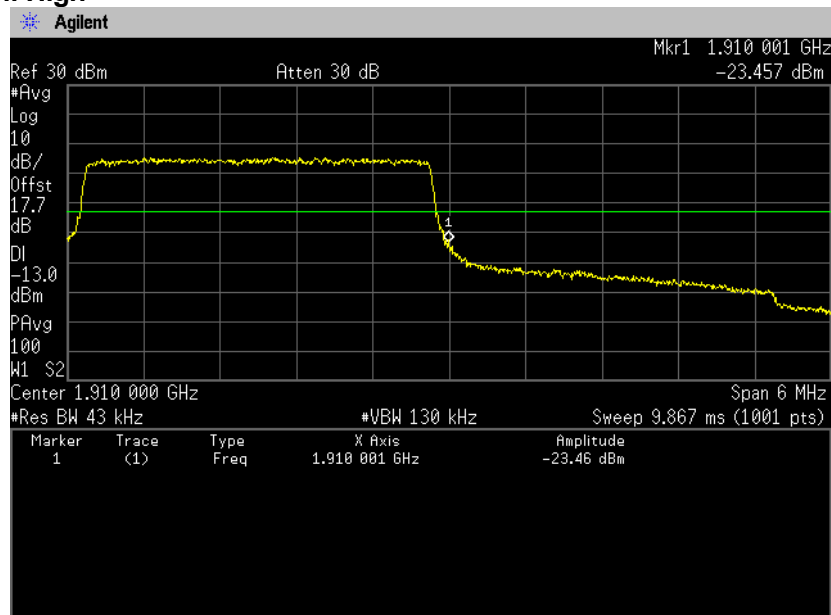


**16QAM, BW 3MHz, RB1-0**  
**Channel: Low**

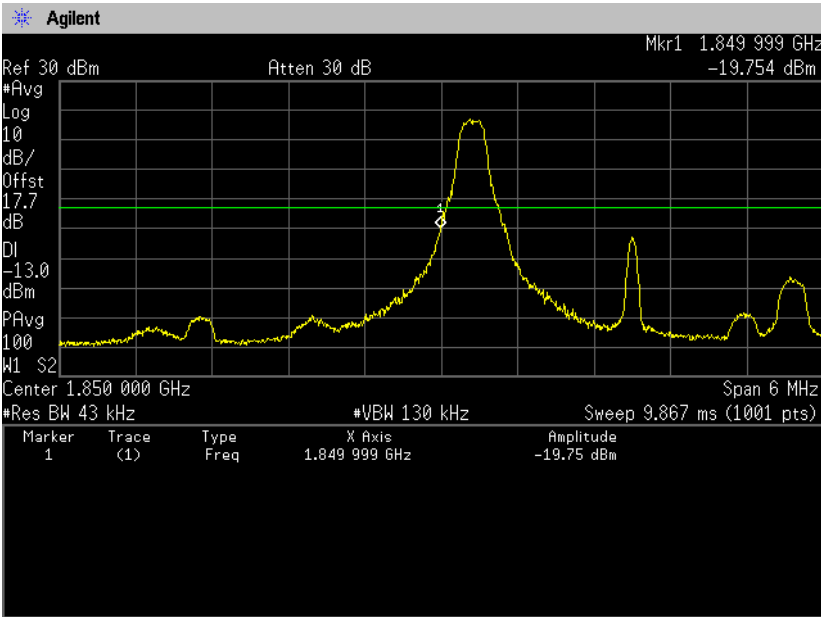


**16QAM, BW 3MHz, RB1-14**  
**Channel: High**

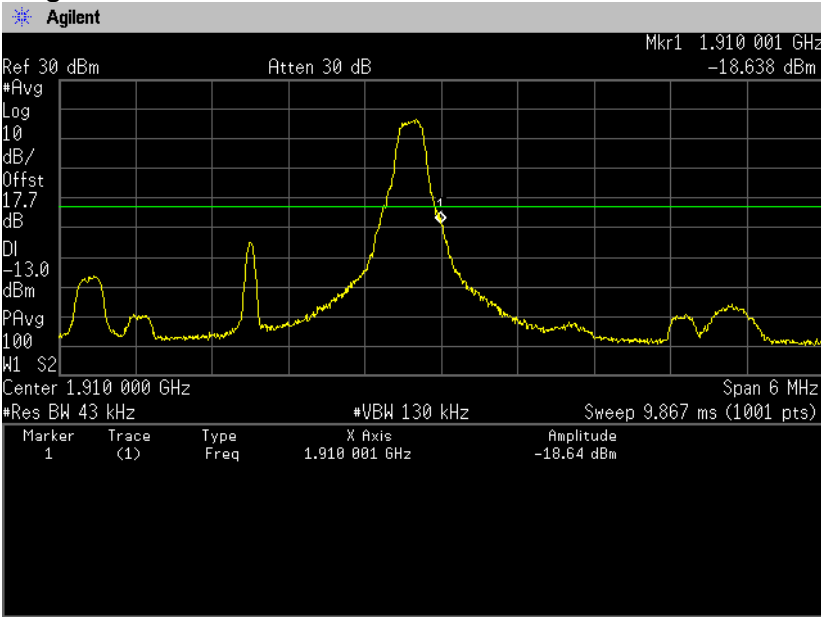

**16QAM, BW 3MHz, RB15-0**  
**Channel: Low**

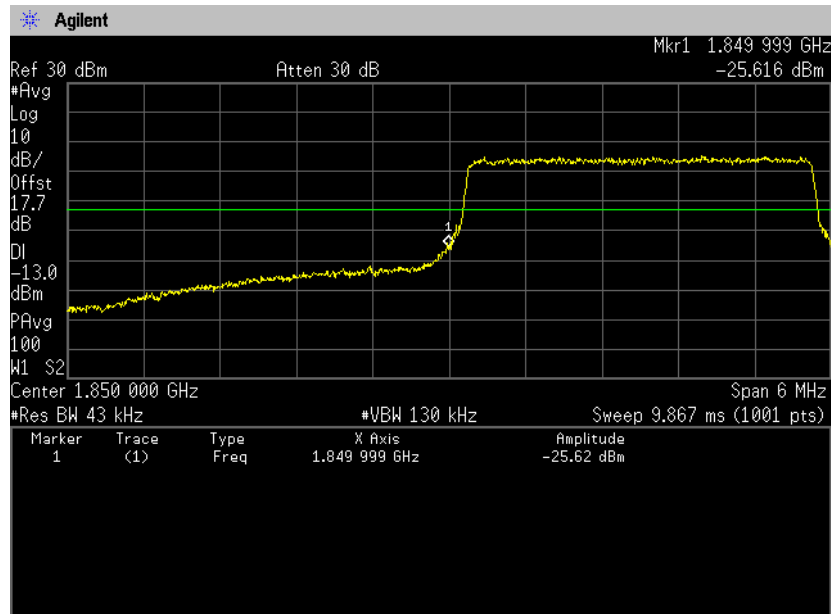


**16QAM, BW 3MHz, RB15-0**  
**Channel: High**

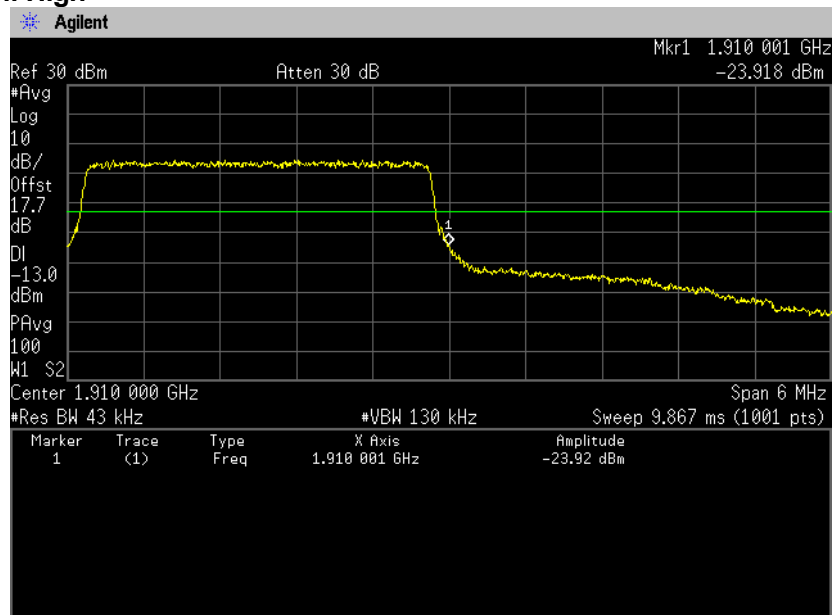





**QPSK, BW 5MHz, RB1-0**  
**Channel: Low**

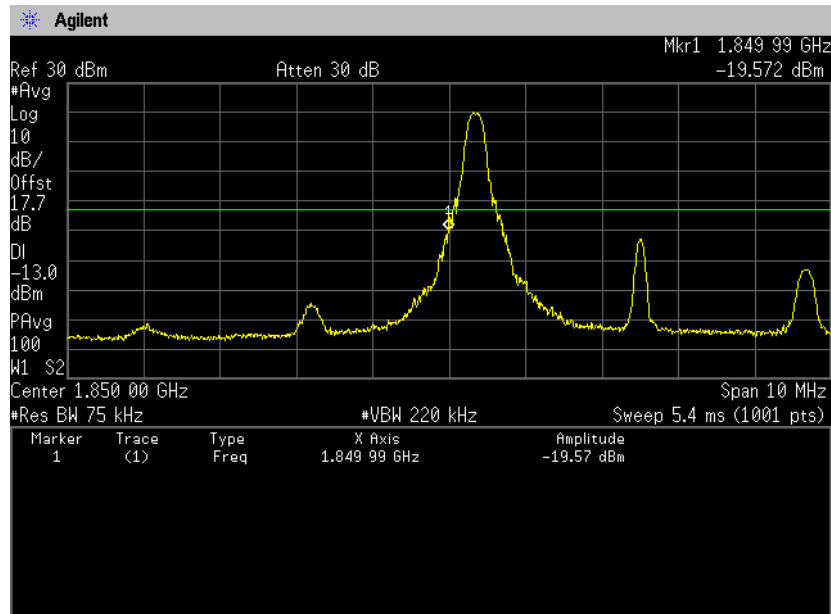


**QPSK, BW 5MHz, RB1-24**  
**Channel: High**

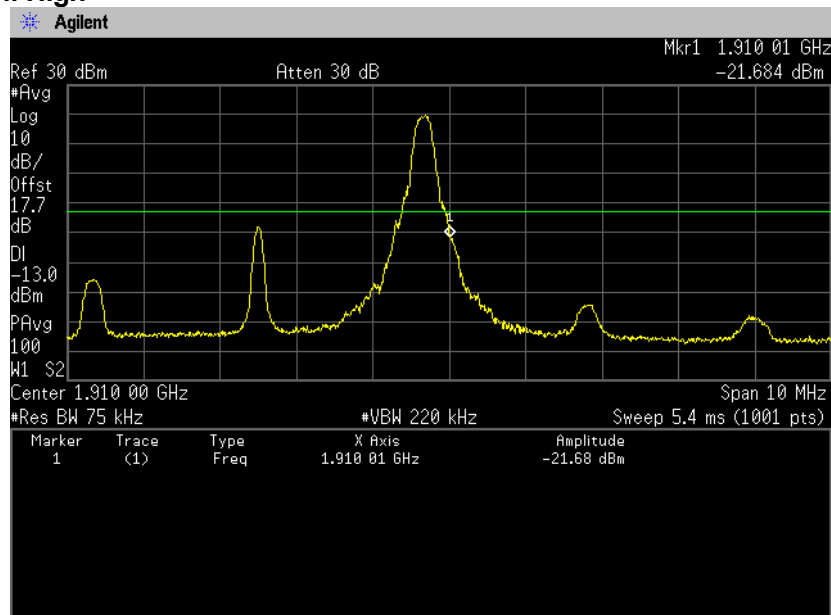


**QPSK, BW 5MHz, RB25-0**  
**Channel: Low**

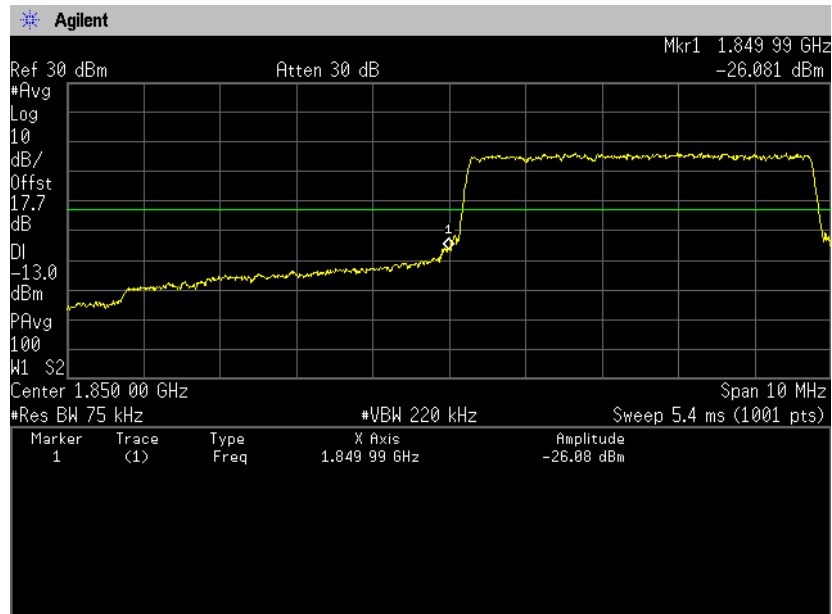


**QPSK, BW 5MHz, RB25-0**  
**Channel: High**

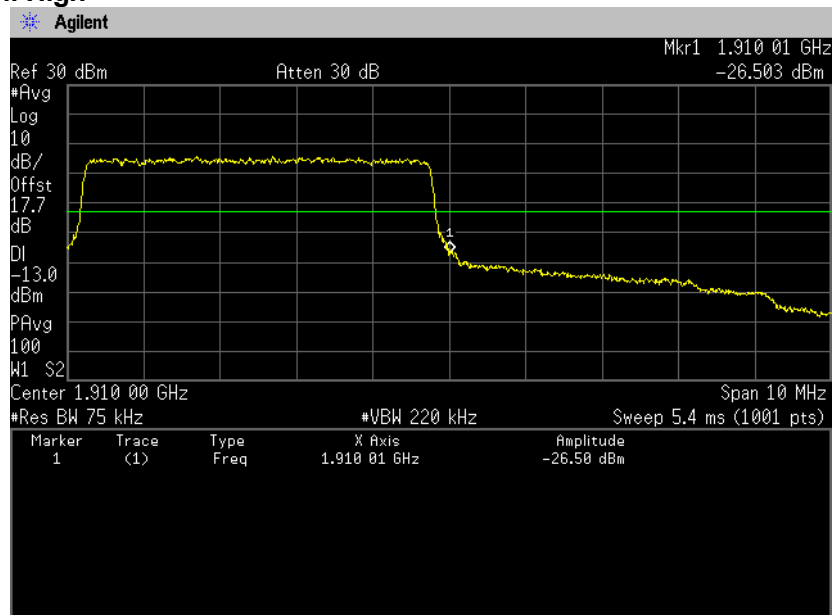


**16QAM, BW 5MHz, RB1-0**  
**Channel: Low**

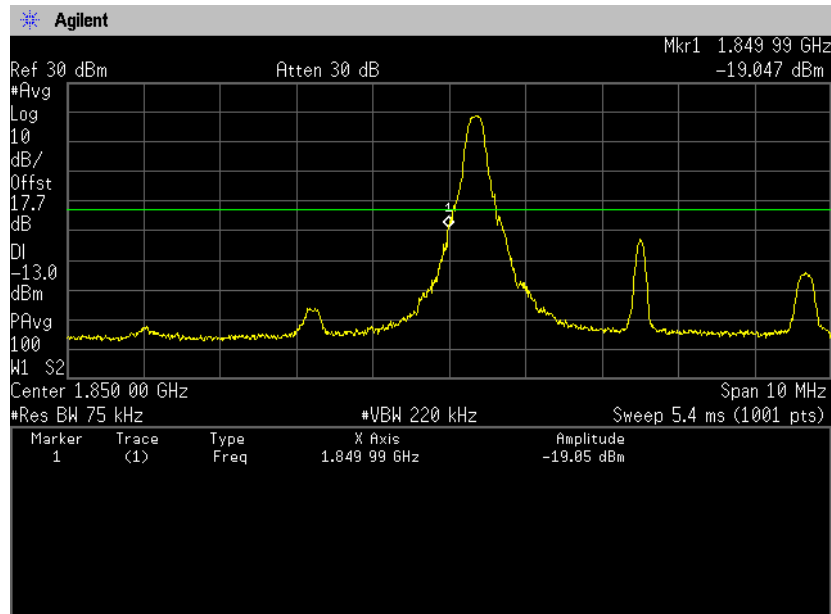


**16QAM, BW 5MHz, RB1-24**  
**Channel: High**

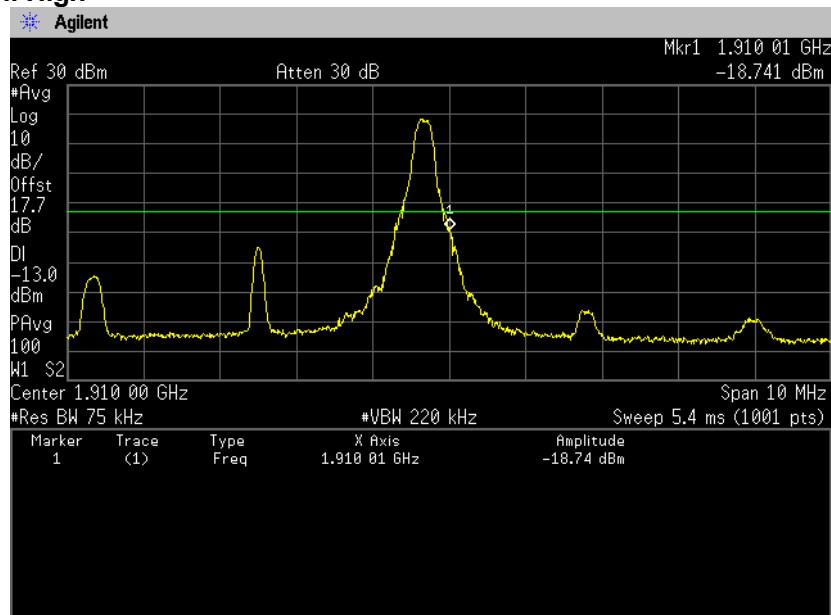


**16QAM, BW 5MHz, RB25-0**  
**Channel: Low**

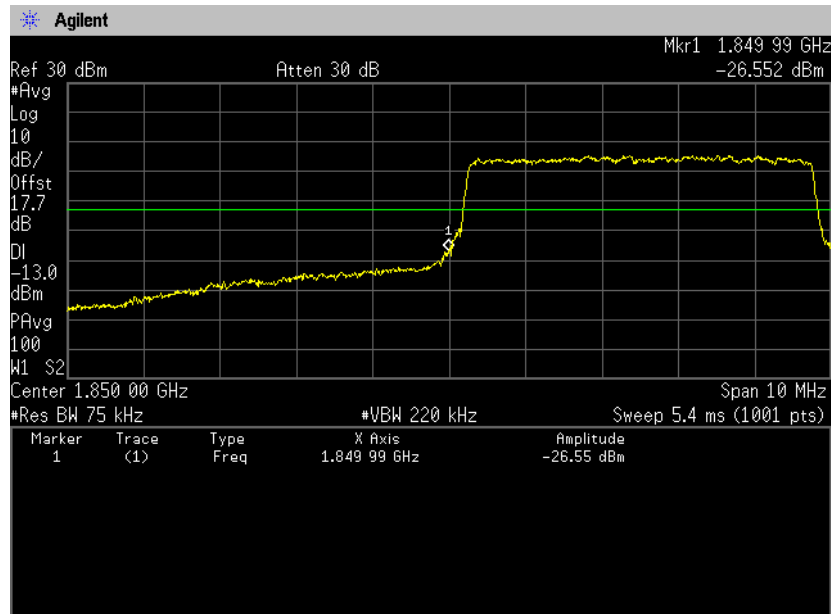


**16QAM, BW 5MHz, RB25-0**  
**Channel: High**

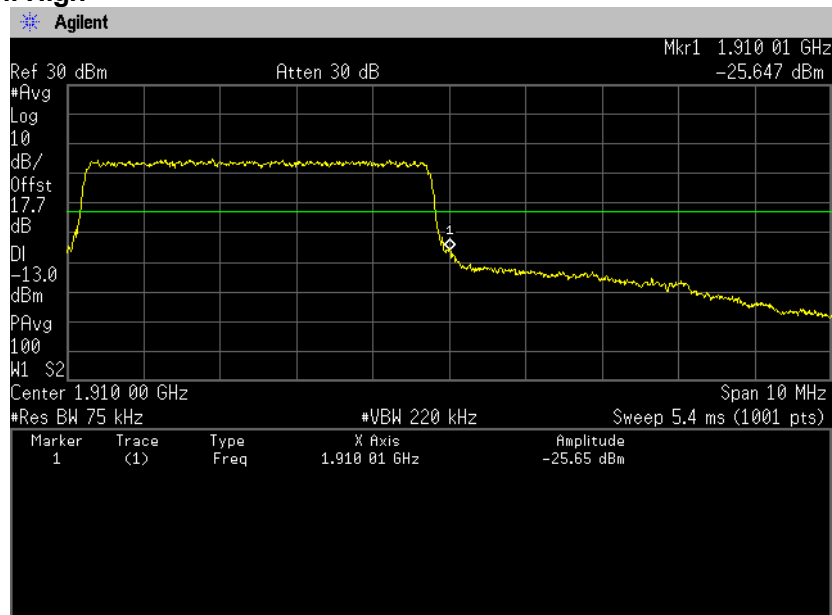


**QPSK, BW 10MHz, RB1-0**  
**Channel: Low**

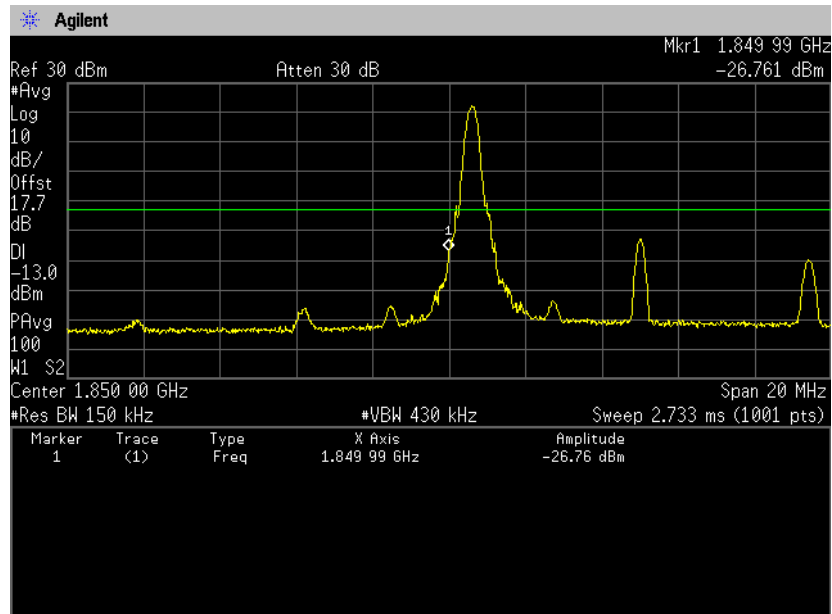


**QPSK, BW 10MHz, RB1-49**  
**Channel: High**

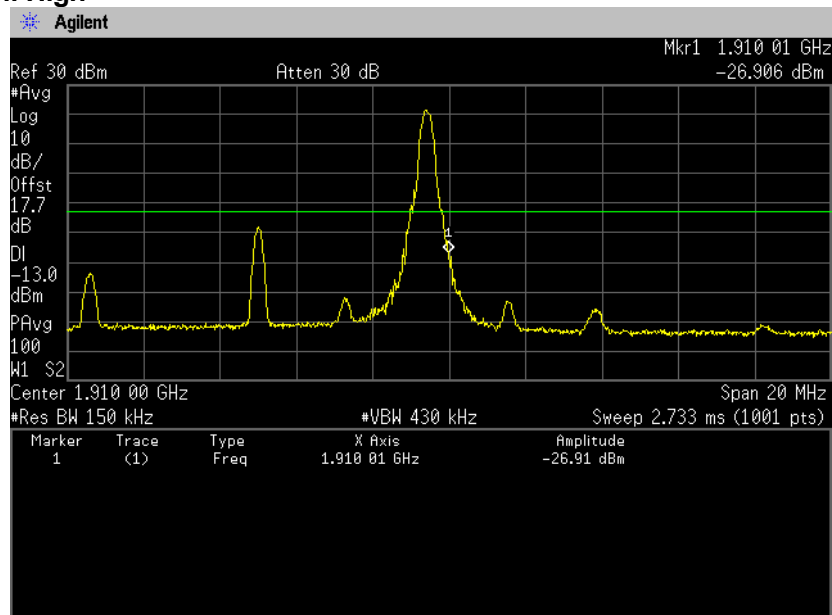


**QPSK, BW 10MHz, RB50-0**  
**Channel: Low**

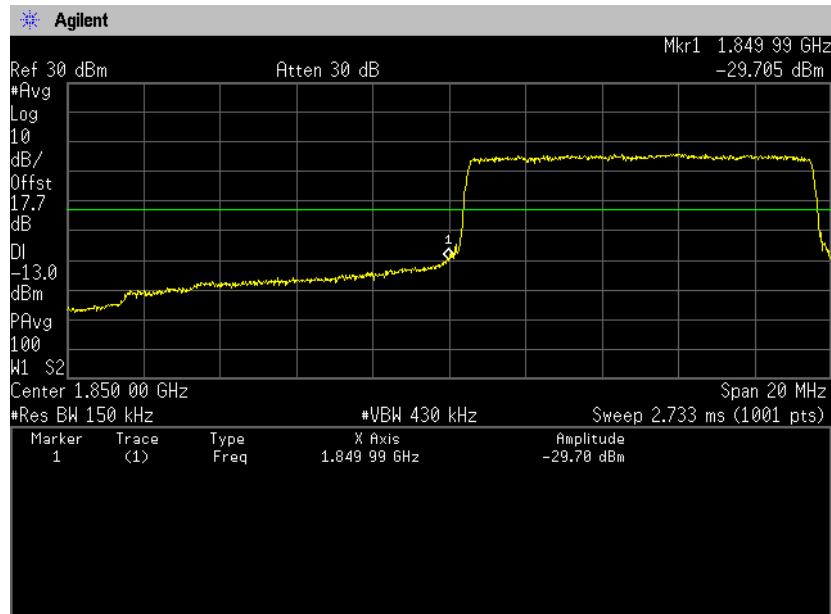


**QPSK, BW 10MHz, RB50-0**  
**Channel: High**

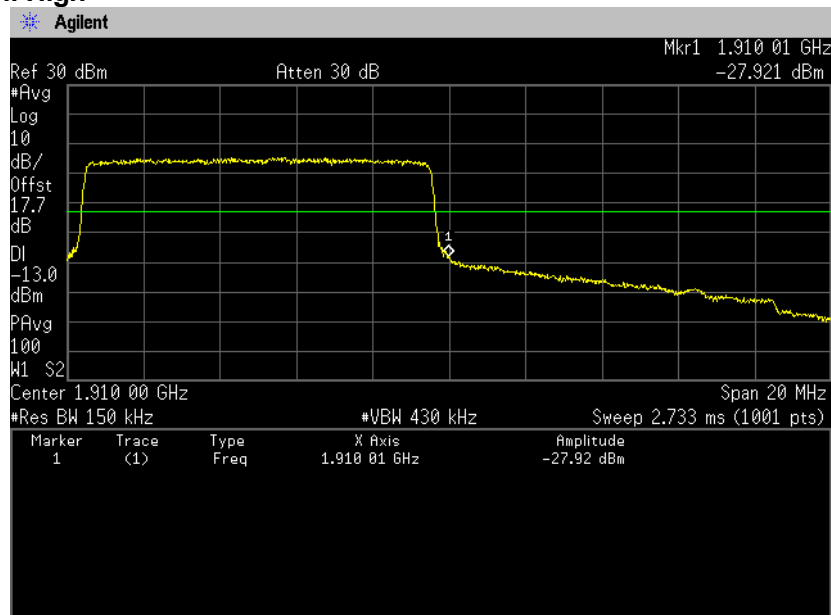


**16QAM, BW 10MHz, RB1-0**  
**Channel: Low**

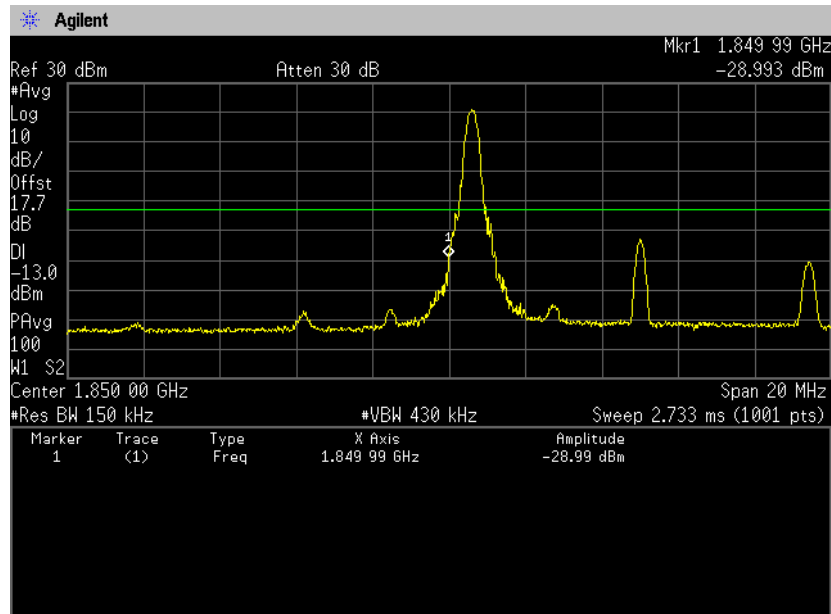


**16QAM, BW 10MHz, RB1-49**  
**Channel: High**

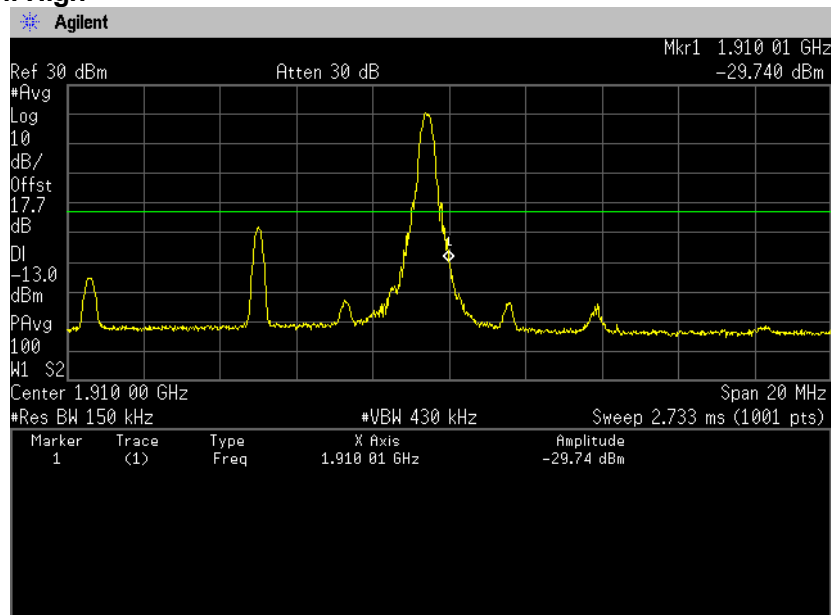

**16QAM, BW 10MHz, RB50-0**  
**Channel: Low**

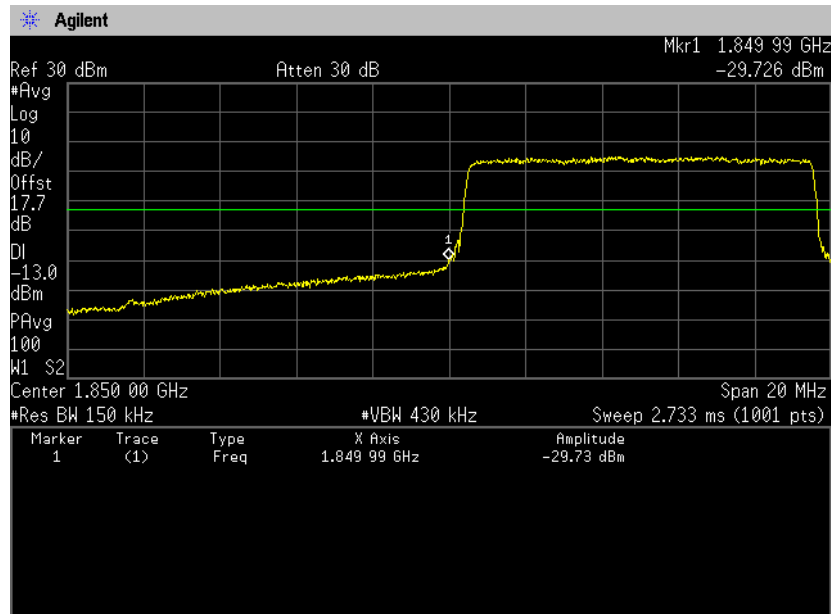


**16QAM, BW 10MHz, RB50-0**  
**Channel: High**

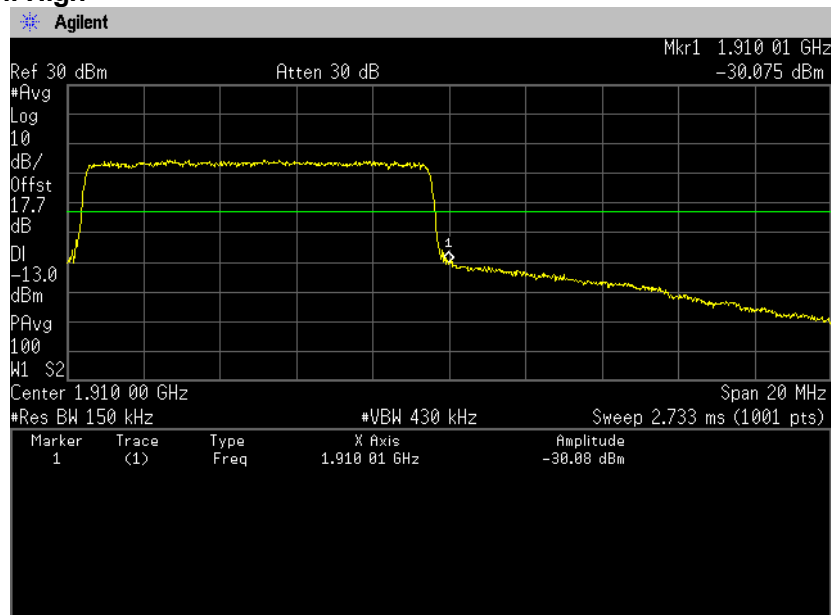





**QPSK, BW 15MHz, RB1-0**  
**Channel: Low**

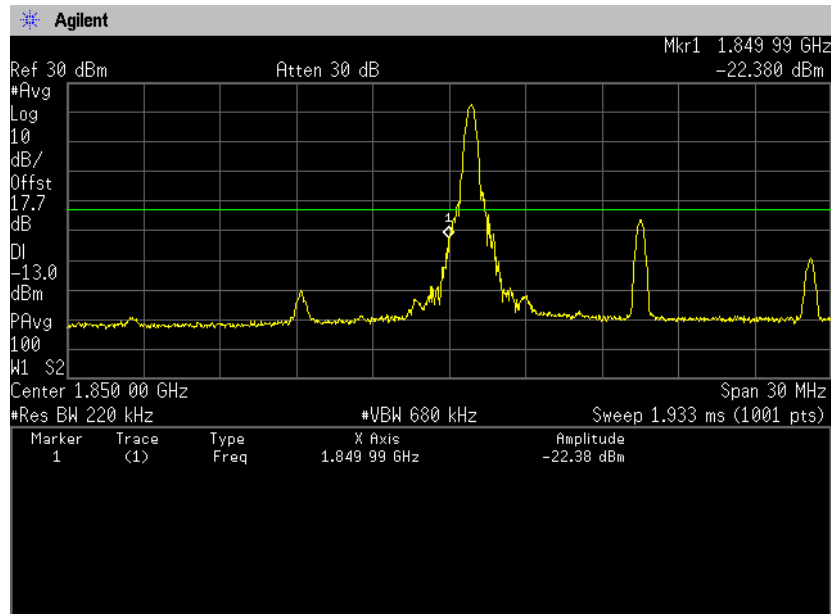


**QPSK, BW 15MHz, RB1-74**  
**Channel: High**

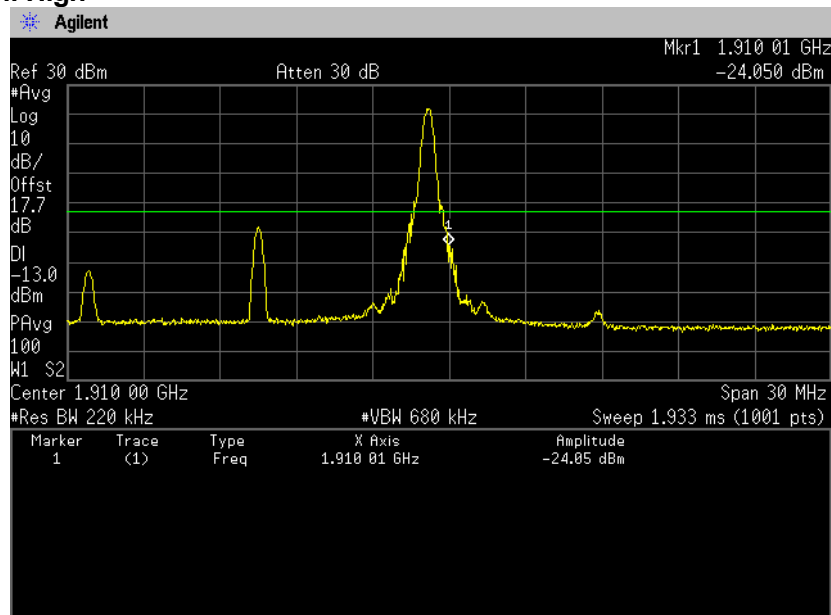


**QPSK, BW 15MHz, RB75-0**  
**Channel: Low**

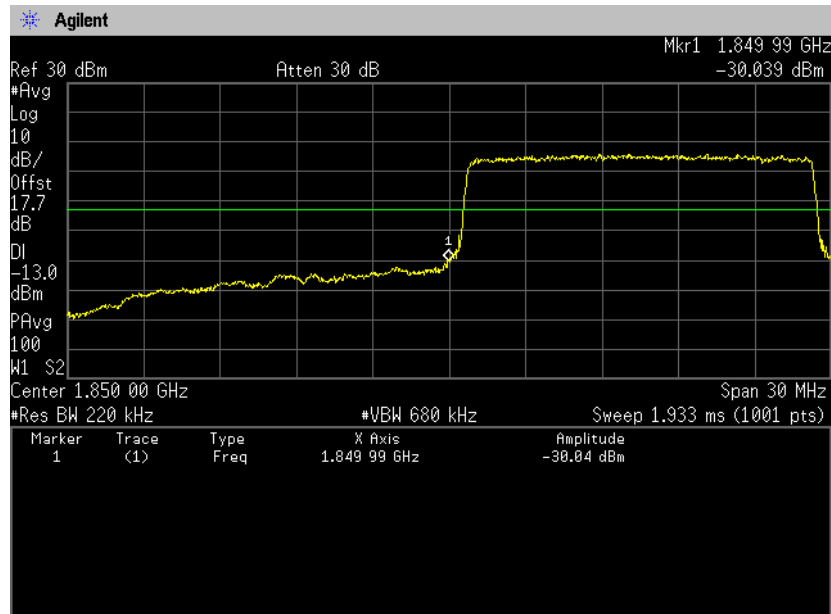


**QPSK, BW 15MHz, RB75-0**  
**Channel: High**

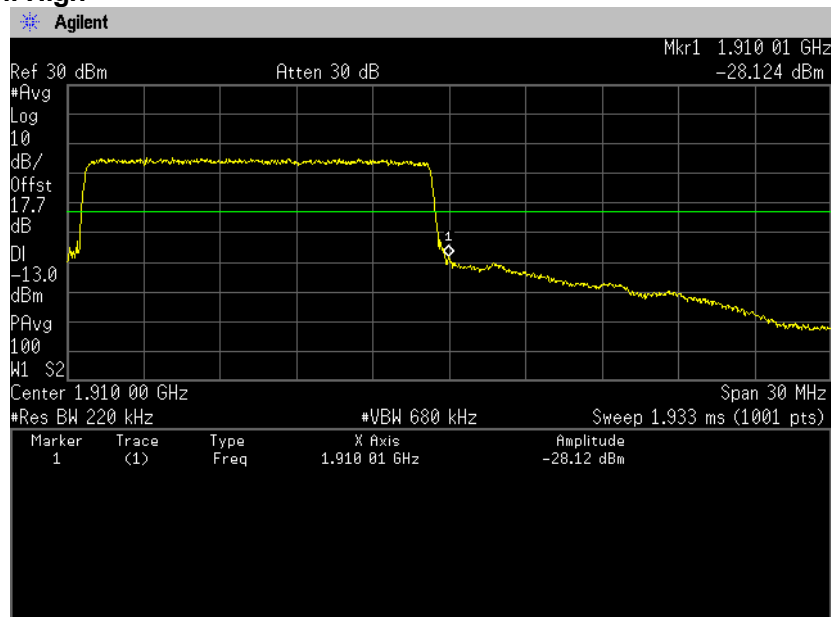


**16QAM, BW 15MHz, RB1-0**  
**Channel: Low**

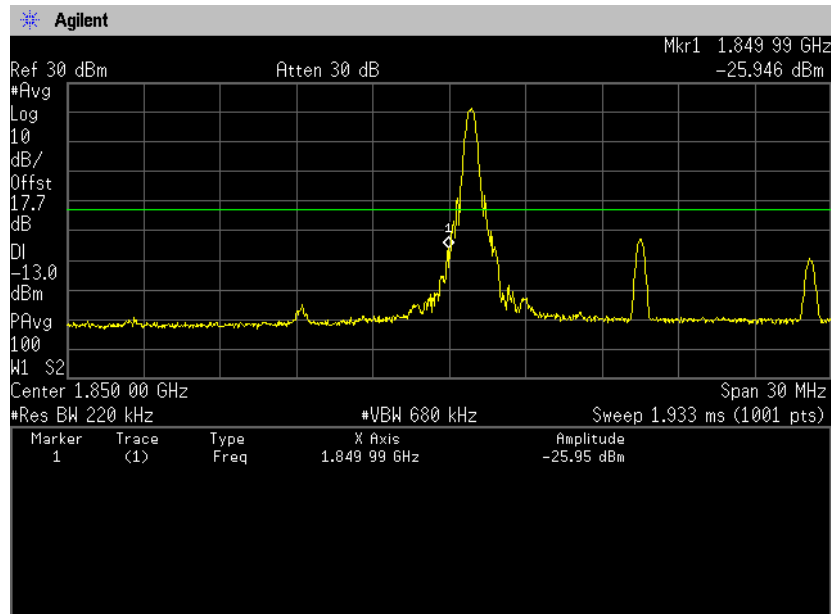


**16QAM, BW 15MHz, RB1-74**  
**Channel: High**

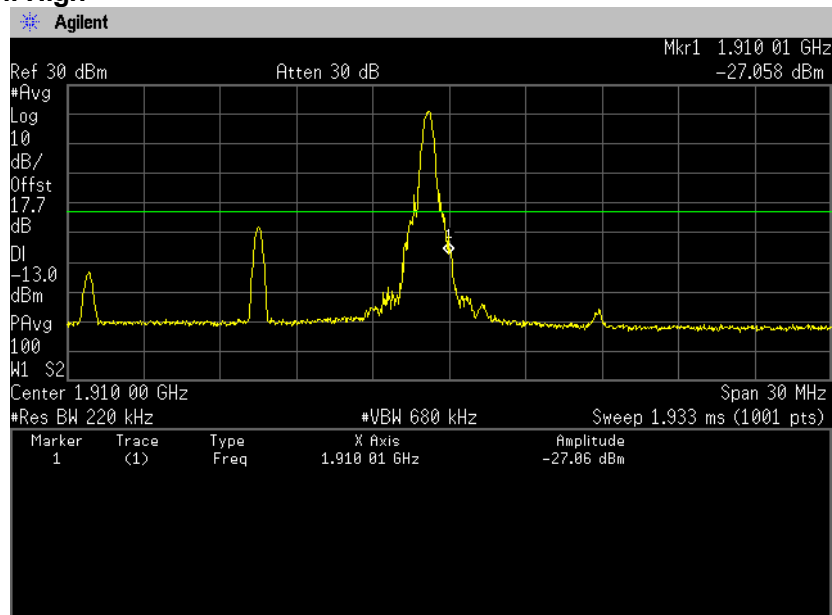


**16QAM, BW 15MHz, RB75-0**  
**Channel: Low**

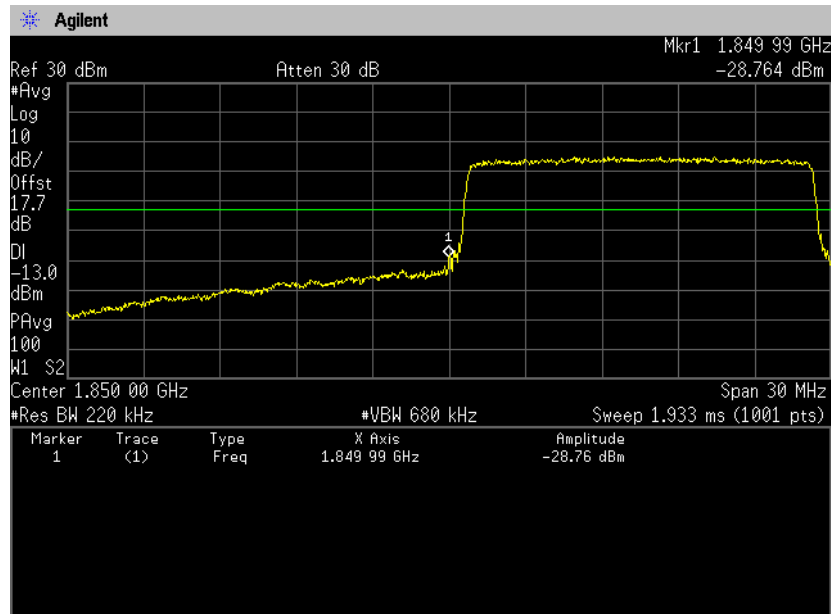


**16QAM, BW 15MHz, RB75-0**  
**Channel: High**

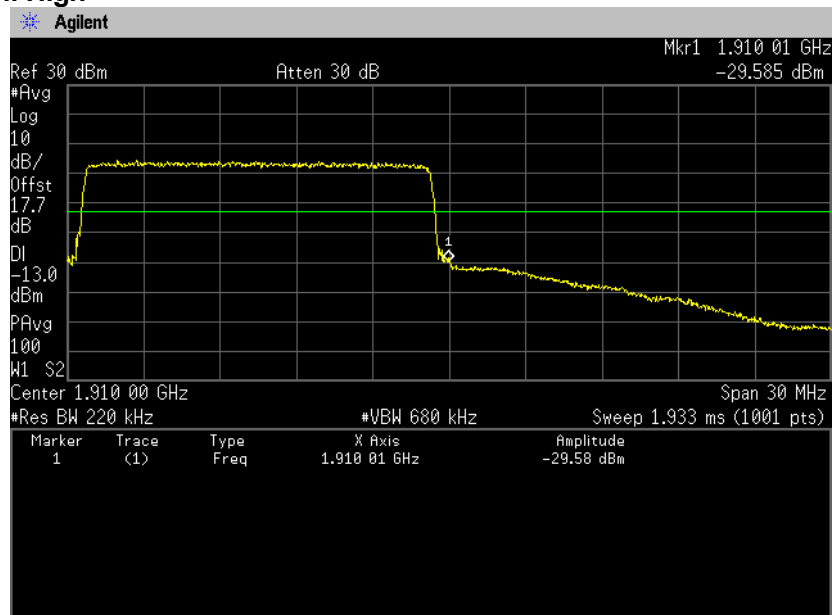


**QPSK, BW 20MHz, RB1-0**  
**Channel: Low**

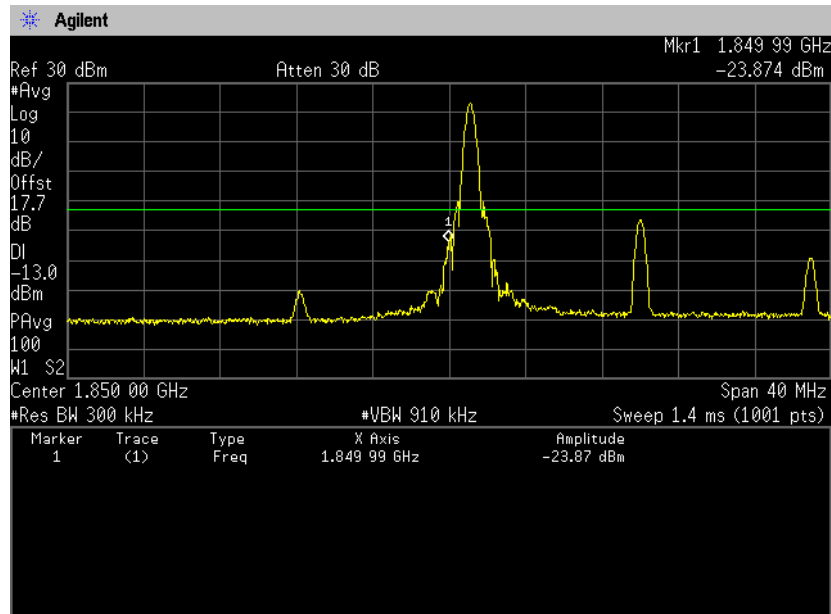


**QPSK, BW 20MHz, RB1-99**  
**Channel: High**

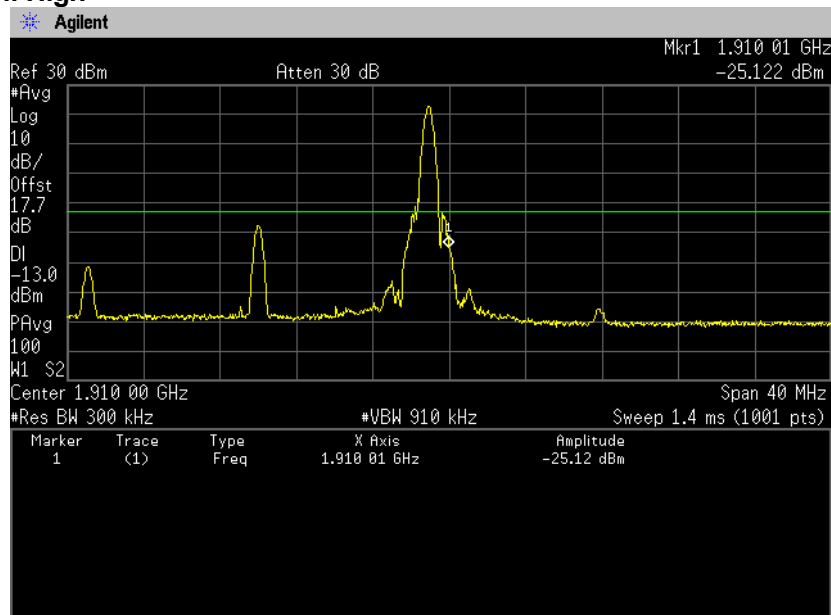


**QPSK, BW 20MHz, RB100-0**  
**Channel: Low**

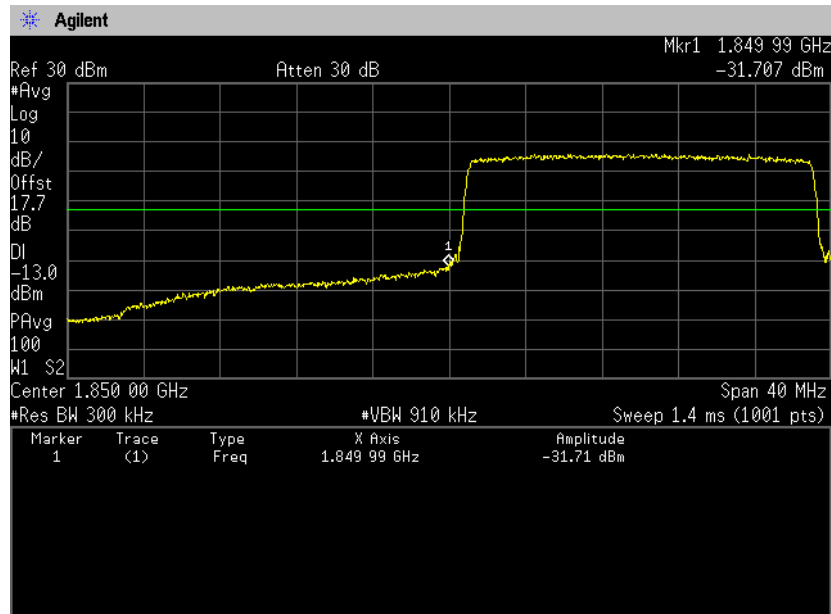


**QPSK, BW 20MHz, RB100-0**  
**Channel: High**

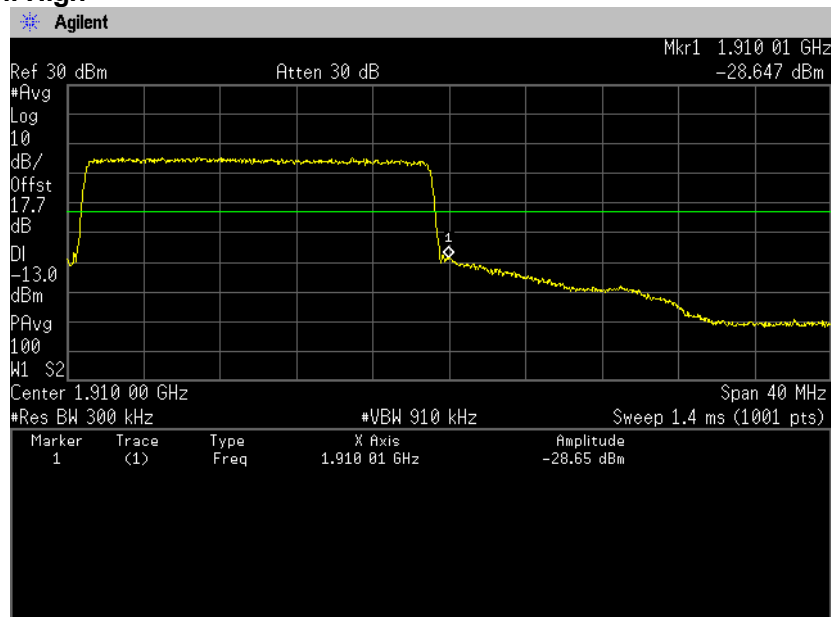


**16QAM, BW 20MHz, RB1-0**  
**Channel: Low**

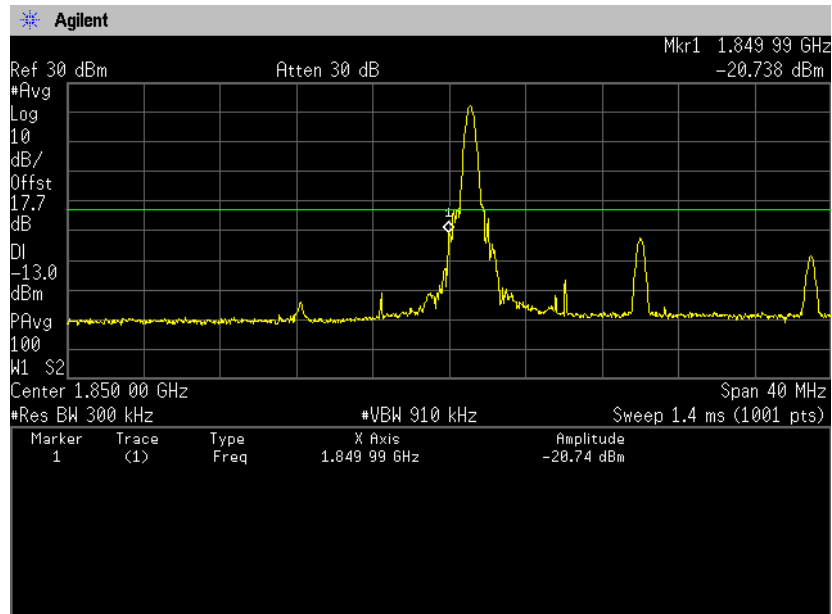


**16QAM, BW 20MHz, RB1-99**  
**Channel: High**

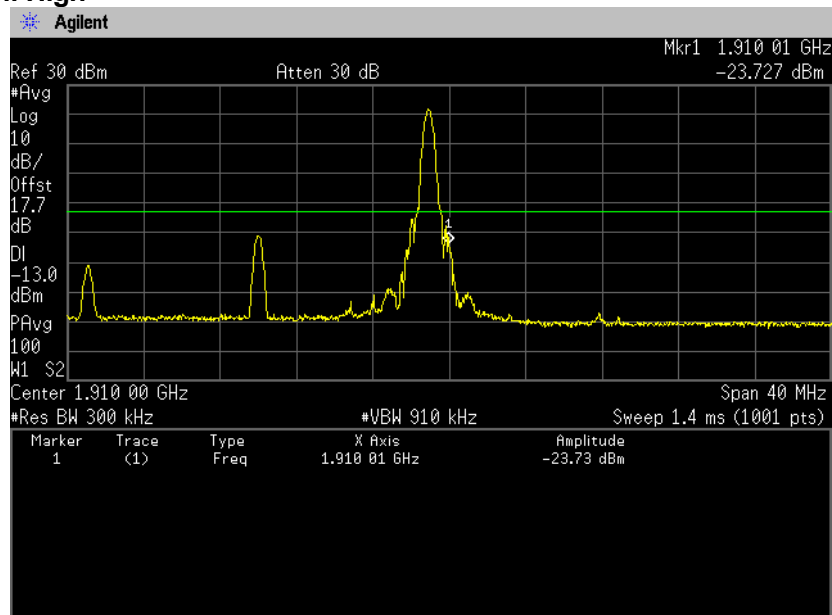

**16QAM, BW 20MHz, RB100-0**  
**Channel: Low**

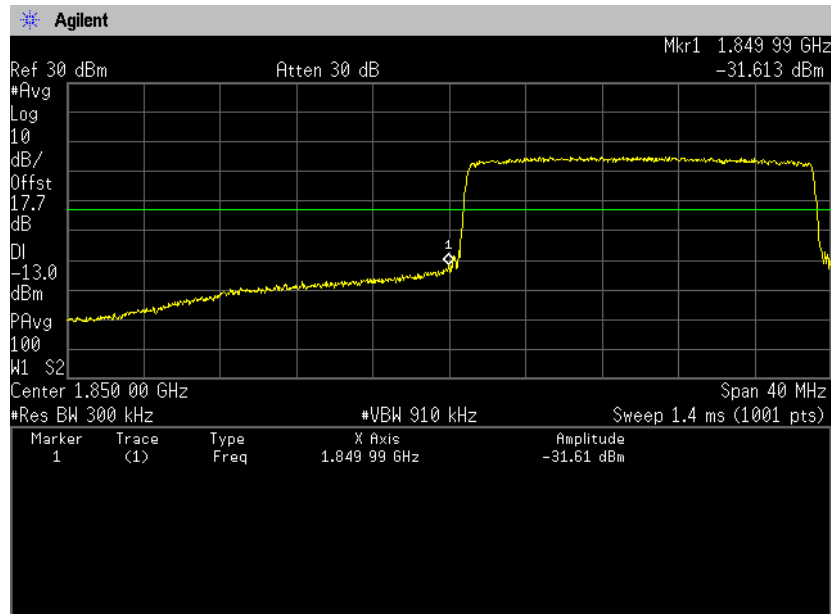

**16QAM, BW 20MHz, RB100-0**  
**Channel: High**


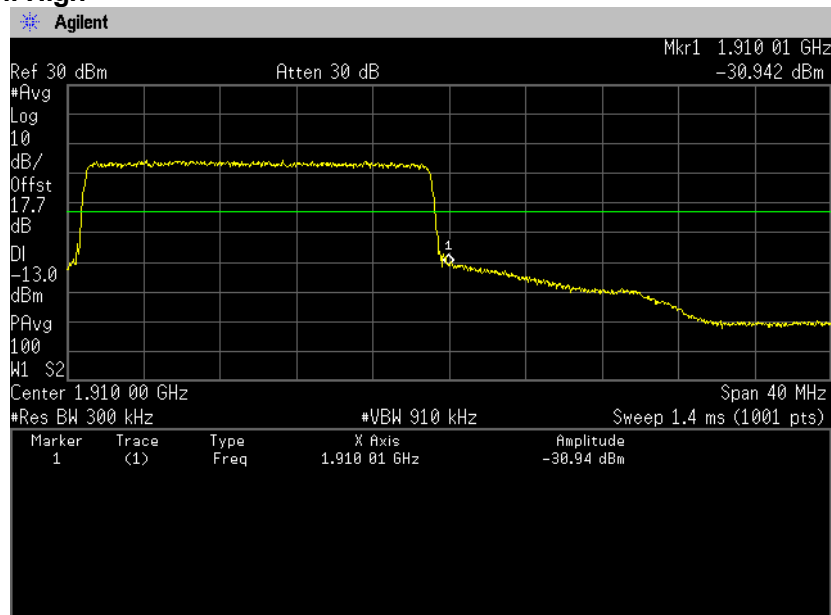





**(Spurious Emissions)**

Note: Conducted spurious test was measured in the worst case of conducted output power.


**QPSK, BW 10MHz, RB1-25**  
**Channel: 18650**  
**30MHz-5GHz**

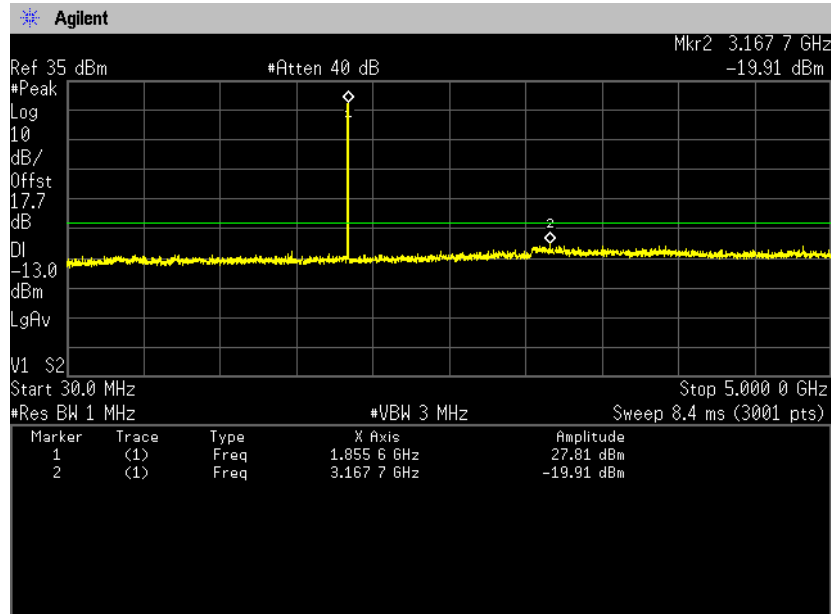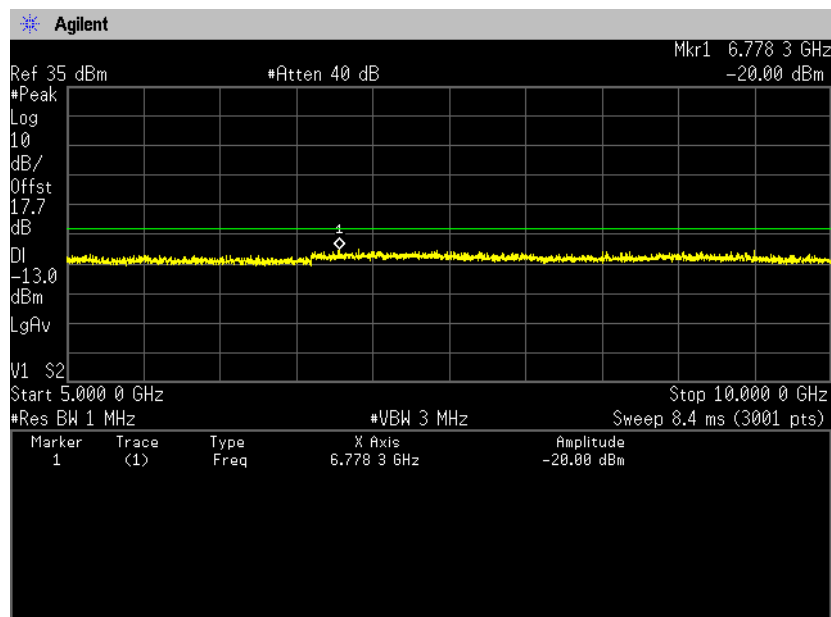**5GHz-10GHz**


10GHz-15GHz

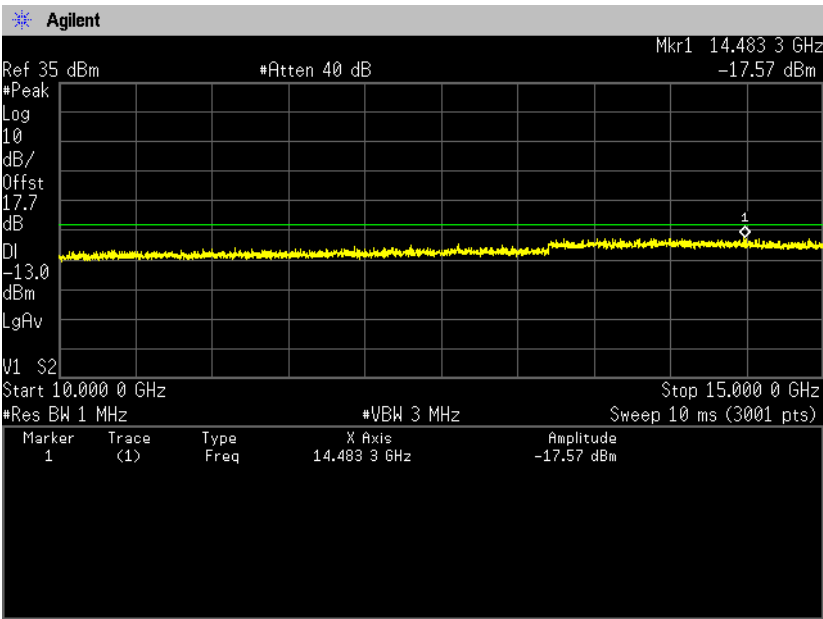


15GHz-20GHz

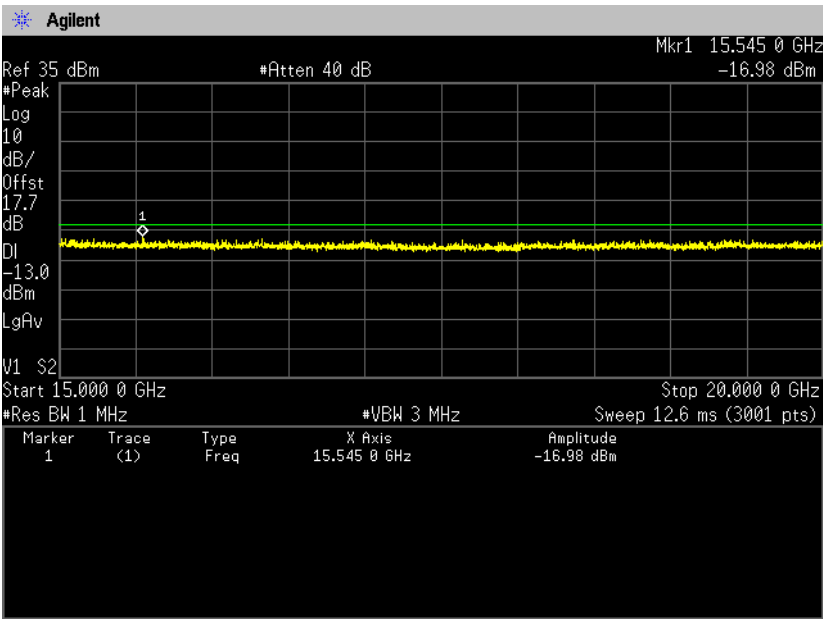


Channel: 18900  
30MHz-5GHz

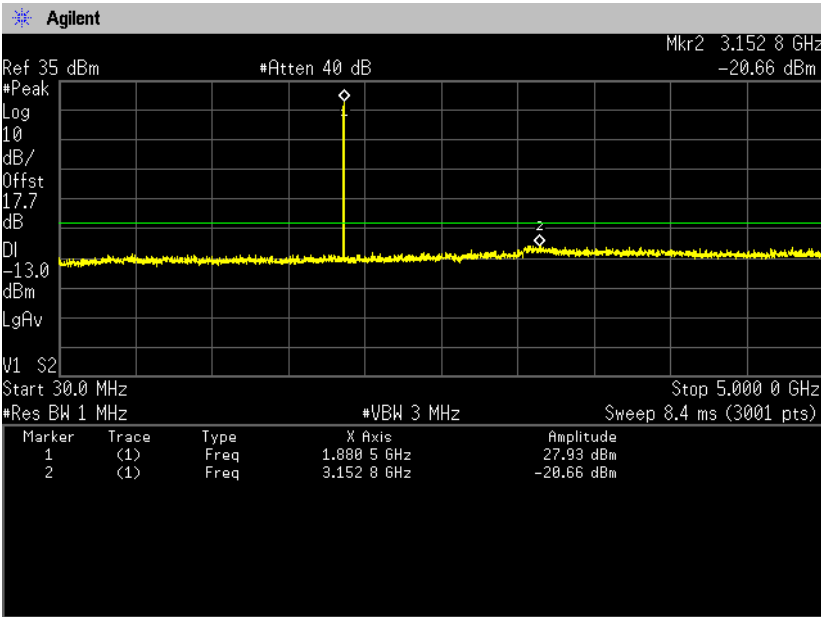


5GHz-10GHz

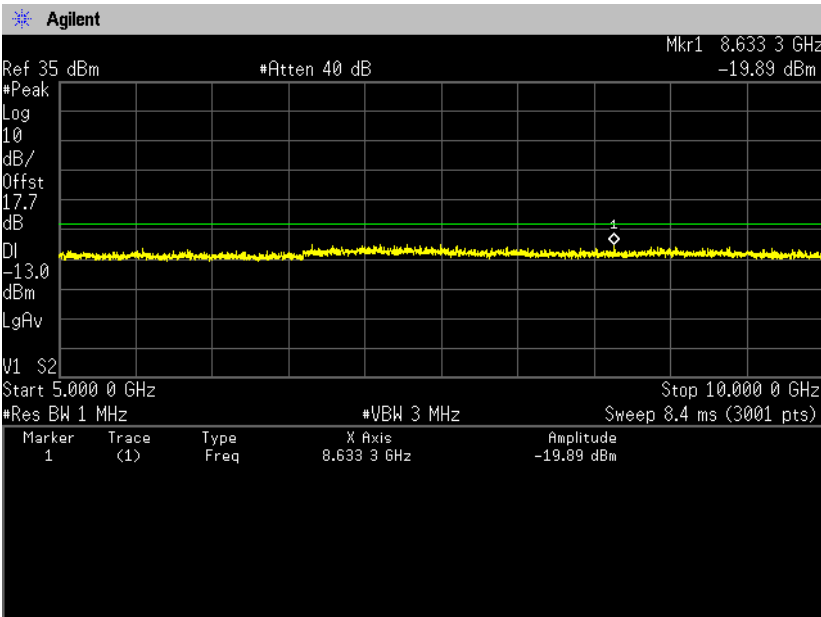


10GHz-15GHz

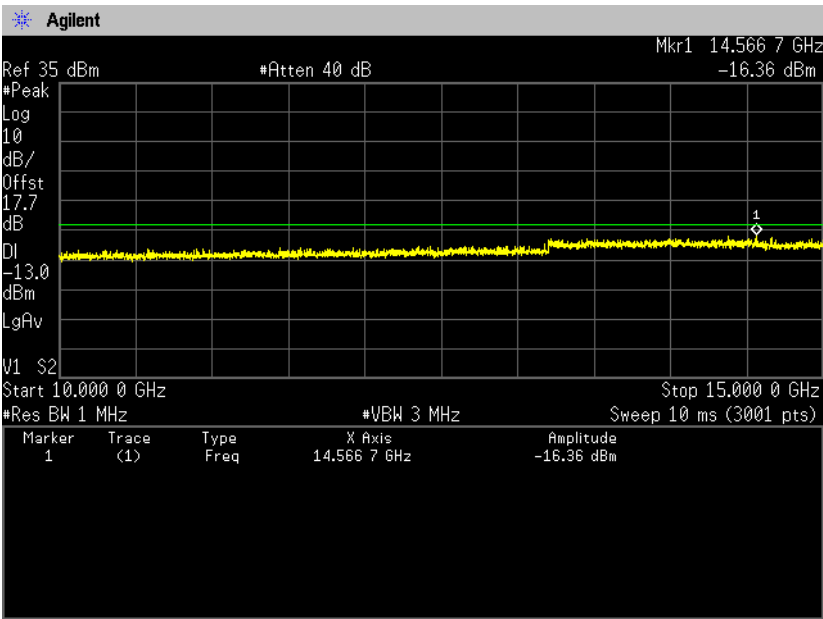


15GHz-20GHz

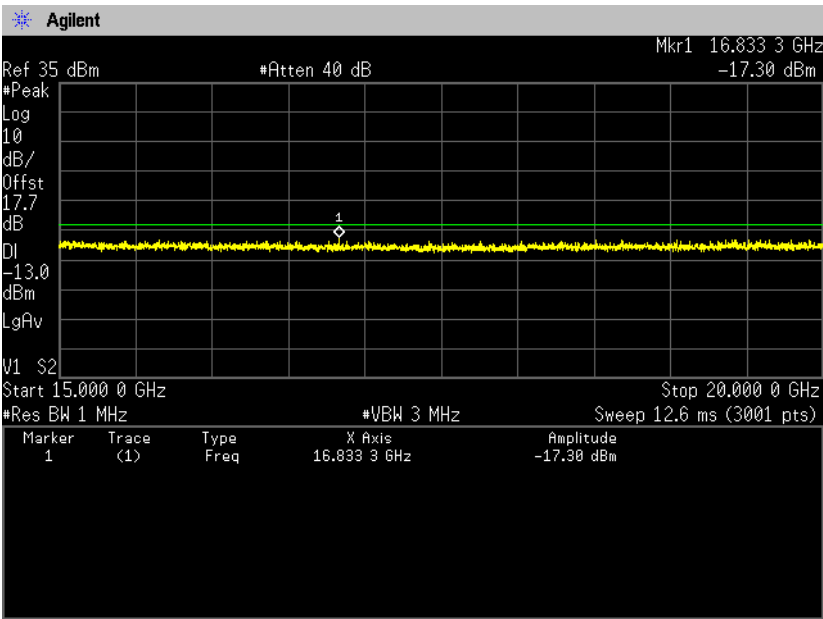


### Channel: 19150 30MHz-5GHz

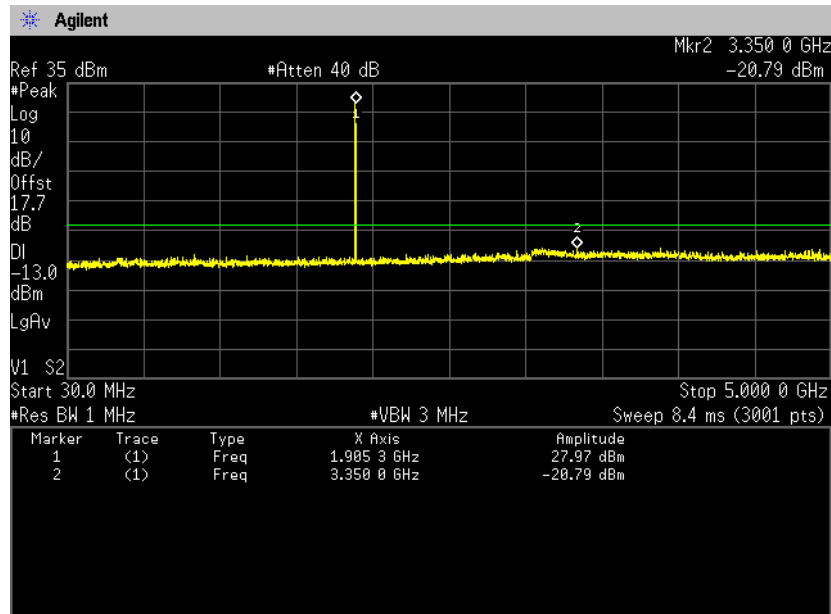


### 5GHz-10GHz

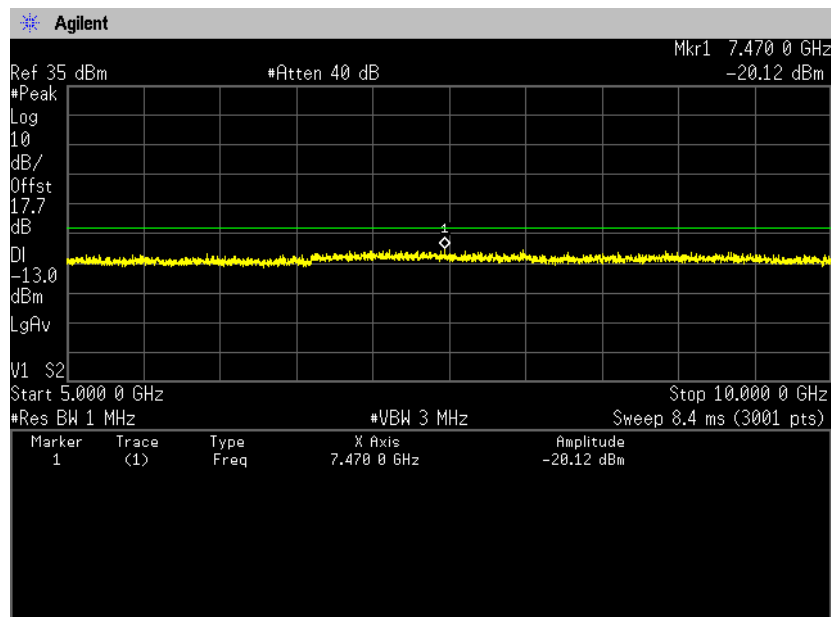


10GHz-15GHz

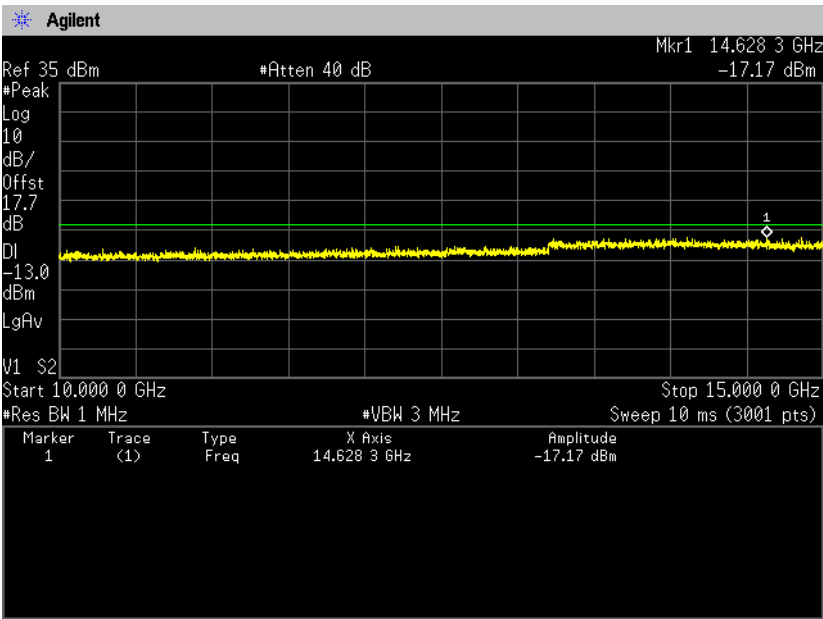


15GHz-20GHz


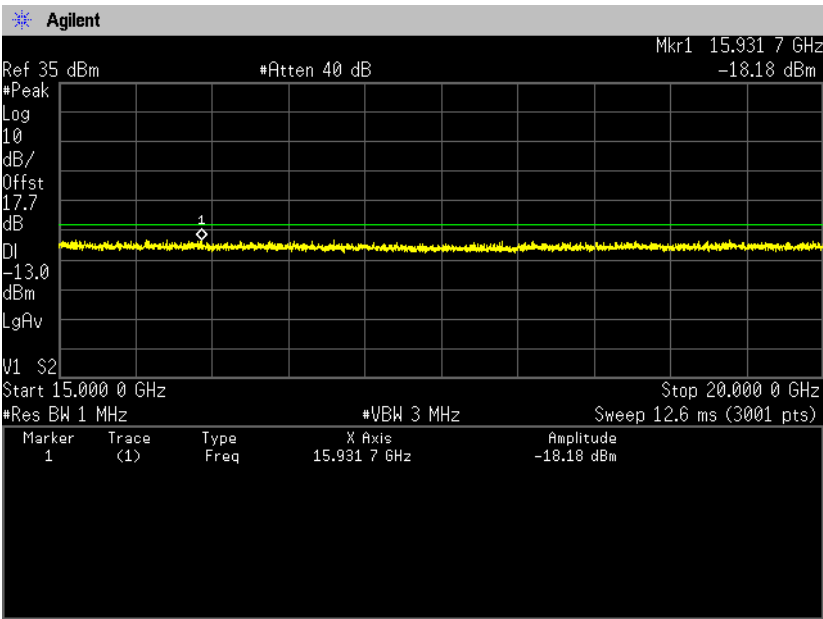


**16QAM, BW 5MHz, RB1-24**  
**Channel: 18625**  
**30MHz-5GHz**

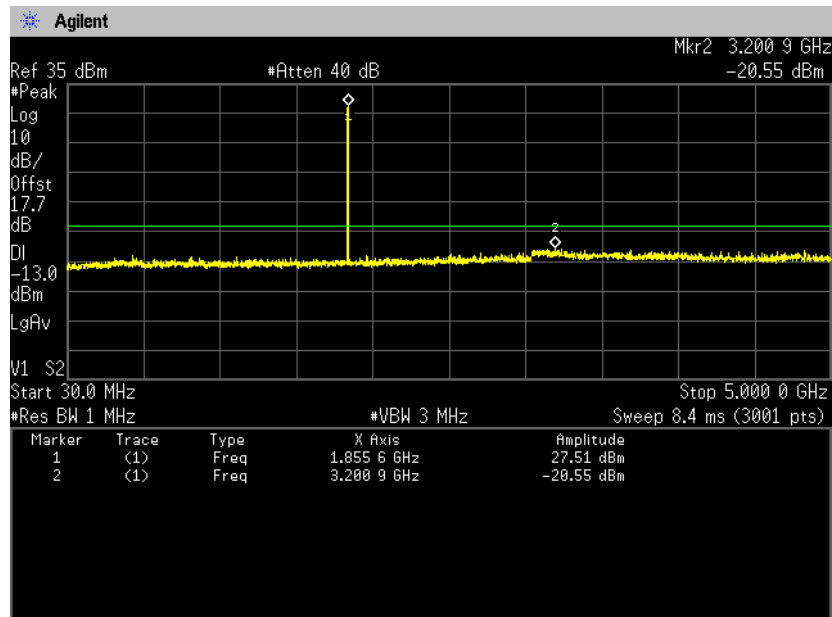


**5GHz-10GHz**

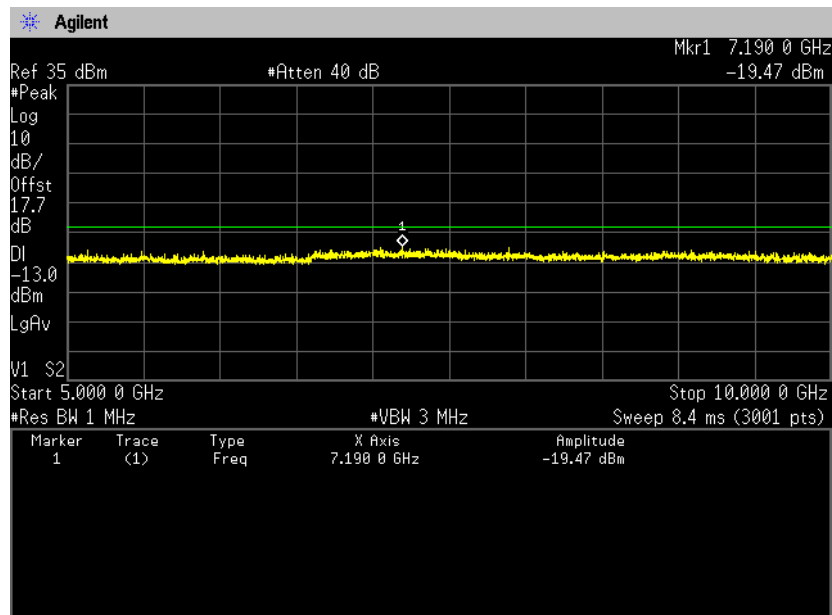

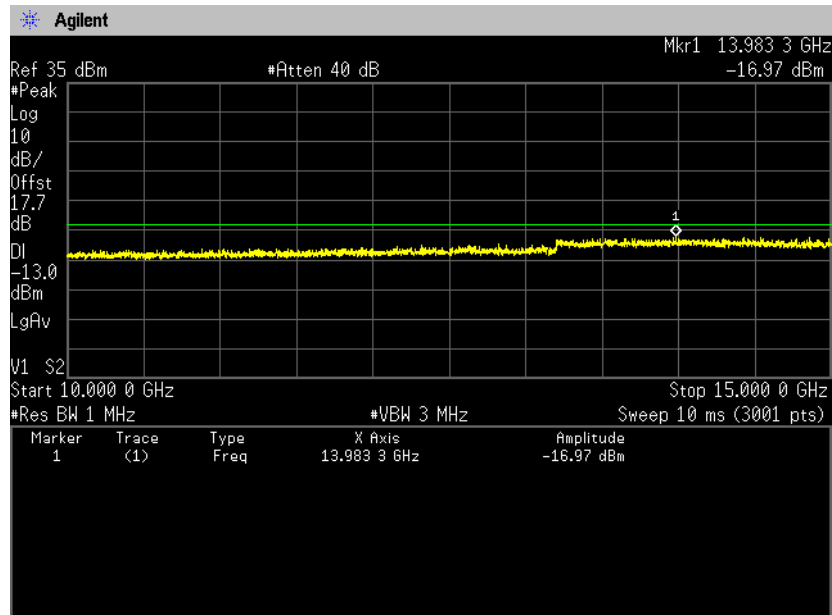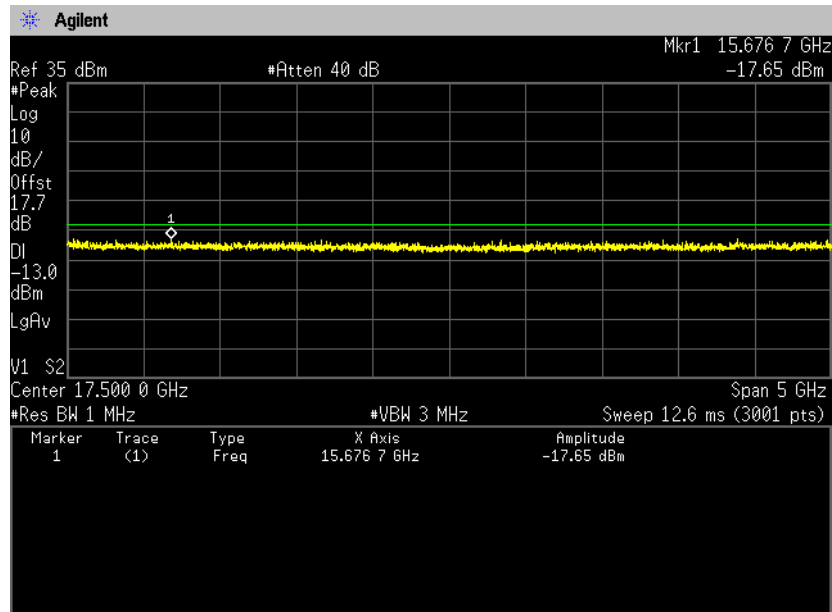
**10GHz-15GHz****15GHz-20GHz**





**Channel: 18900  
30MHz-5GHz**

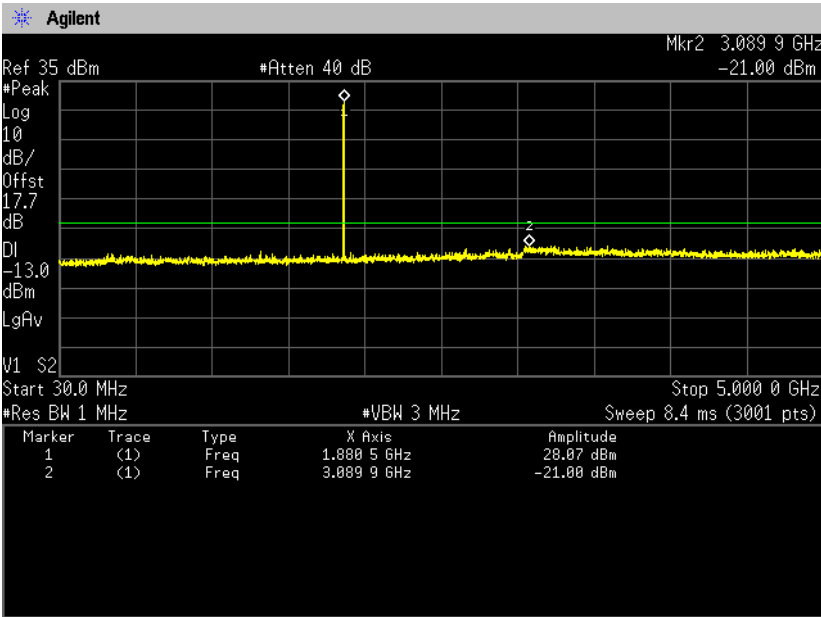


**5GHz-10GHz**

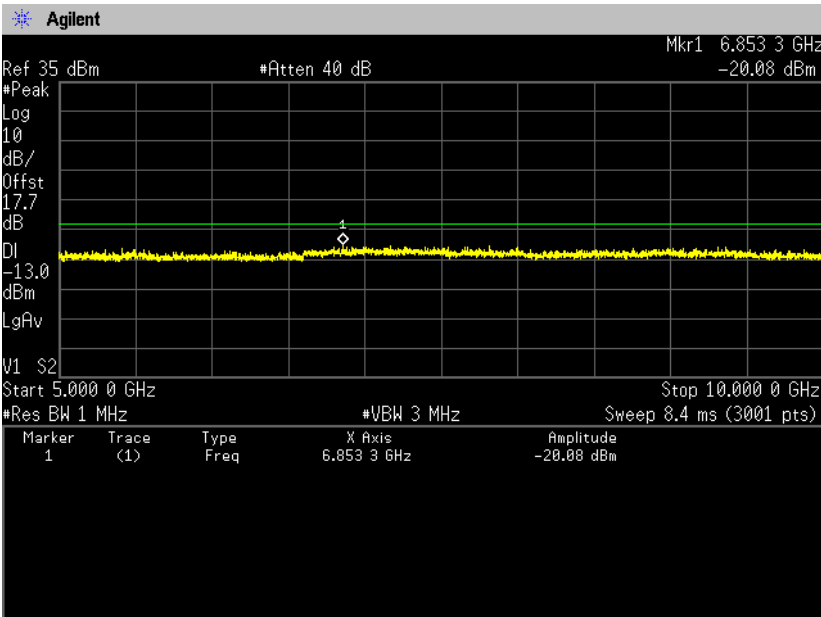


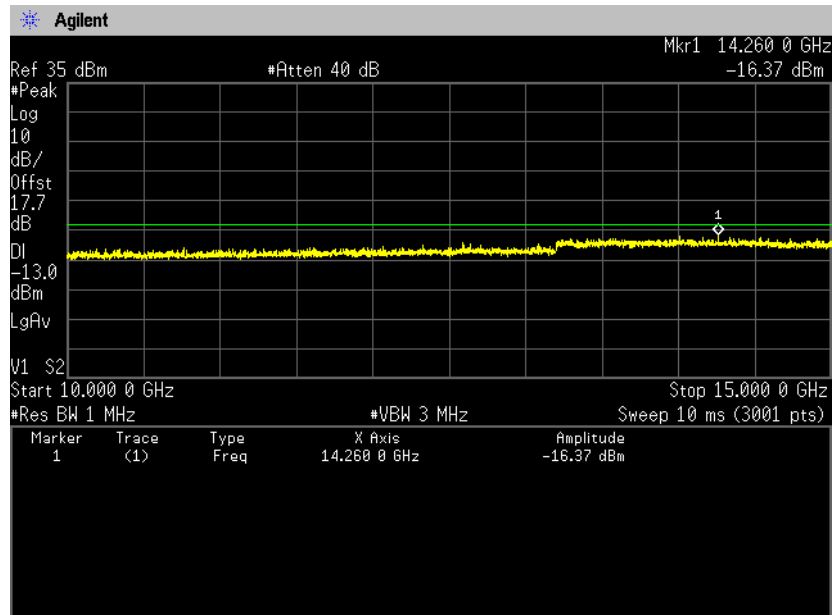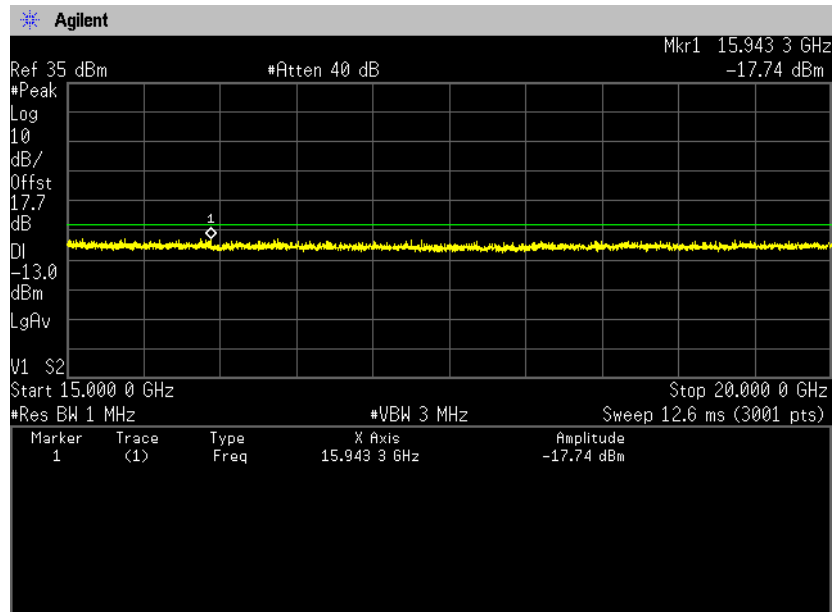**10GHz-15GHz****15GHz-20GHz**


**Channel: 19175**  
**30MHz-5GHz**

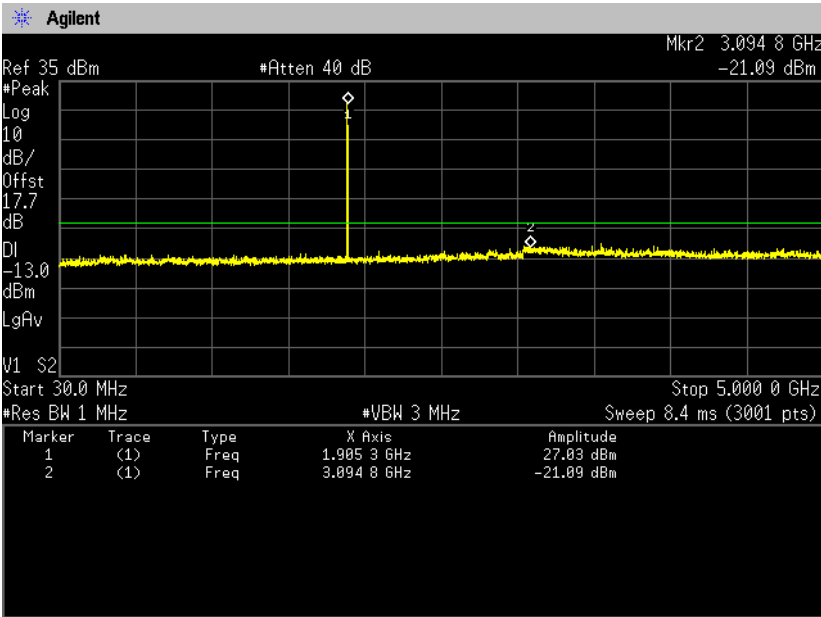


**5GHz-10GHz**

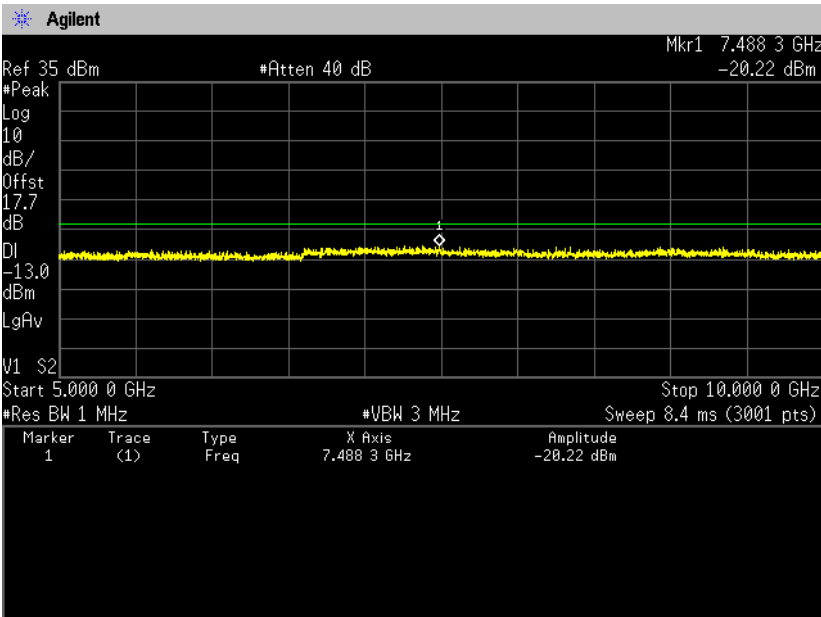

10GHz-15GHz

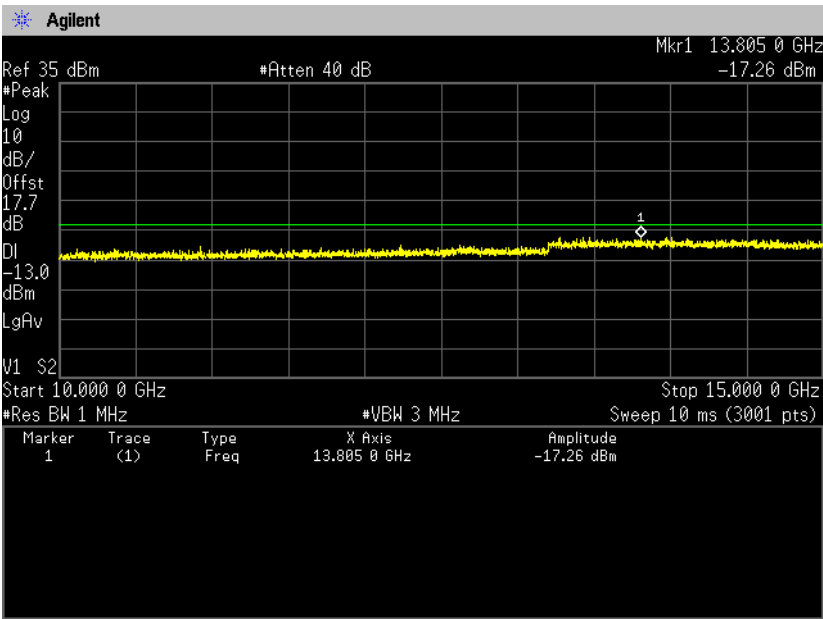

15GHz-20GHz

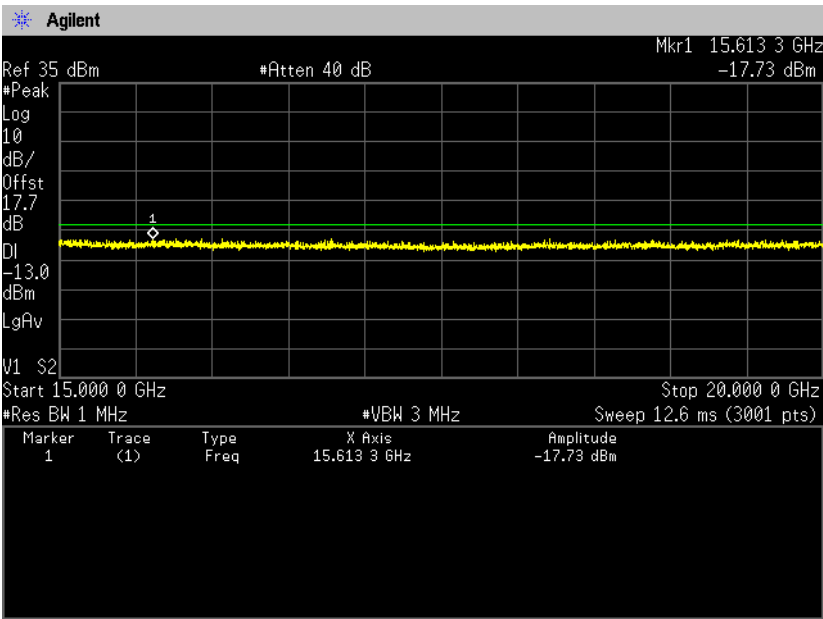

## 9. Radiated Emissions and Harmonic Emissions

### 9.1 Measurement procedure

[FCC 24.238(a), 2.1053, IC RSS-133 6.5.1]

#### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

#### Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration

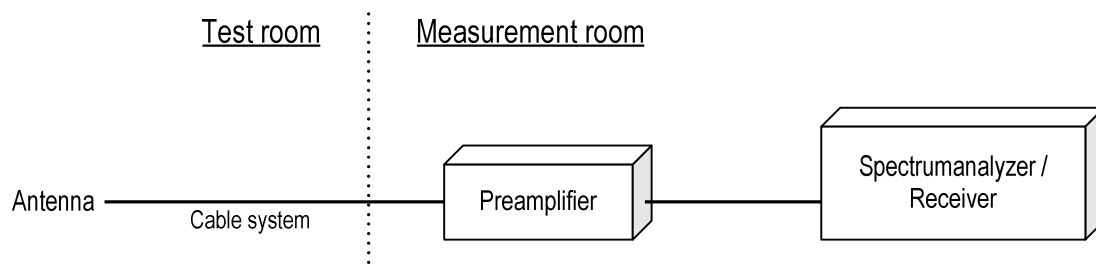

### 9.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3757.5MHz : -13.0dBm

S.G Reading = -54.3dBm Cable loss = 1.6dB Ant. Gain = 9.2dBi

Result = -54.3 – 1.6 + 9.2 = -46.7dBm

Margin = -13.0 - (-46.7) = 33.7dB

### 9.3 Limit

-13dBm or less

## 9.4 Test data

|             |                            |               |   |                |
|-------------|----------------------------|---------------|---|----------------|
| Date        | : June 23, 2015            | Test engineer | : |                |
| Temperature | : 24.4 [°C]                |               |   |                |
| Humidity    | : 62.1 [%]                 |               |   |                |
| Test place  | : 3m Semi-anechoic chamber |               |   |                |
|             |                            |               |   | Taiki Watanabe |
| Date        | : June 24, 2015            | Test engineer | : |                |
| Temperature | : 24.5 [°C]                |               |   |                |
| Humidity    | : 62.2 [%]                 |               |   |                |
| Test place  | : 3m Semi-anechoic chamber |               |   |                |
|             |                            |               |   | Hikaru Shibata |
| Date        | : July 1, 2015             | Test engineer | : |                |
| Temperature | : 24.4 [°C]                |               |   |                |
| Humidity    | : 61.9 [%]                 |               |   |                |
| Test place  | : 3m Semi-anechoic chamber |               |   |                |
|             |                            |               |   | Taiki Watanabe |
| Date        | : July 2, 2015             | Test engineer | : |                |
| Temperature | : 24.1 [°C]                |               |   |                |
| Humidity    | : 59.5 [%]                 |               |   |                |
| Test place  | : 3m Semi-anechoic chamber |               |   |                |
|             |                            |               |   | Hikaru Shibata |
| Date        | : July 3, 2015             | Test engineer | : |                |
| Temperature | : 24.8 [°C]                |               |   |                |
| Humidity    | : 63.6 [%]                 |               |   |                |
| Test place  | : 3m Semi-anechoic chamber |               |   |                |
|             |                            |               |   | Hikaru Shibata |

## [WCDMA Band II]

### Channel: 9262

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3707.0          | -53.0             | -48.5             | 1.6             | 9.4            | -40.7        | -13.0       | 27.7        |
| V   | 3707.0          | -54.4             | -48.5             | 1.6             | 9.4            | -40.7        | -13.0       | 27.7        |
| H   | 5561.0          | -48.8             | -42.3             | 2.0             | 11.0           | -33.3        | -13.0       | 20.3        |
| V   | 5561.0          | -56.2             | -49.3             | 2.0             | 8.8            | -42.5        | -13.0       | 29.5        |

### Channel: 9400

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3757.5          | -60.2             | -54.3             | 1.6             | 9.2            | -46.7        | -13.0       | 33.7        |
| V   | 3757.5          | -62.3             | -55.9             | 1.6             | 9.2            | -48.3        | -13.0       | 35.3        |

### Channel: 9538

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3813.5          | -62.1             | -56.2             | 1.6             | 9.3            | -48.5        | -13.0       | 35.5        |
| V   | 3813.5          | -61.5             | -55.1             | 1.6             | 9.3            | -47.4        | -13.0       | 34.4        |
| V   | 5720.0          | -62.5             | -54.8             | 2.0             | 11.5           | -45.3        | -13.0       | 32.3        |

**[LTE Band II]**  
**QPSK, BW 1.4MHz**  
**Channel: 18607**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3702.3          | -37.1             | -32.6             | 1.6             | 9.4            | -24.8        | -13.0       | 11.8        |
| V   | 3702.3          | -41.1             | -35.2             | 1.6             | 9.4            | -27.4        | -13.0       | 14.4        |
| H   | 5554.0          | -32.1             | -24.7             | 2.0             | 11.0           | -15.7        | -13.0       | 2.7         |
| V   | 5554.0          | -33.2             | -25.7             | 2.0             | 11.0           | -16.7        | -13.0       | 3.7         |
| H   | 7405.0          | -59.2             | -43.4             | 2.3             | 10.8           | -34.8        | -13.0       | 21.8        |
| V   | 7405.0          | -60.5             | -47.6             | 2.3             | 10.8           | -39.0        | -13.0       | 26.0        |
| H   | 9256.0          | -59.9             | -40.6             | 2.6             | 11.9           | -31.3        | -13.0       | 18.3        |
| V   | 9256.0          | -59.5             | -41.6             | 2.6             | 11.9           | -32.3        | -13.0       | 19.3        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3761.0          | -34.0             | -28.1             | 1.6             | 9.2            | -20.5        | -13.0       | 7.5         |
| V   | 3761.0          | -40.8             | -34.4             | 1.6             | 9.2            | -26.8        | -13.0       | 13.8        |
| H   | 5641.0          | -33.8             | -25.3             | 2.0             | 11.3           | -16.0        | -13.0       | 3.0         |
| V   | 5641.0          | -43.3             | -33.2             | 2.0             | 11.3           | -23.9        | -13.0       | 10.9        |
| H   | 7252.0          | -57.4             | -41.3             | 2.3             | 11.2           | -32.4        | -13.0       | 19.4        |
| V   | 7252.0          | -60.1             | -46.3             | 2.3             | 11.2           | -37.4        | -13.0       | 24.4        |
| H   | 9402.0          | -53.5             | -34.2             | 2.6             | 11.7           | -25.1        | -13.0       | 12.1        |
| V   | 9402.0          | -57.0             | -40.7             | 2.6             | 11.7           | -31.6        | -13.0       | 18.6        |

**Channel: 19193**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3819.6          | -39.1             | -33.2             | 1.6             | 9.3            | -25.5        | -13.0       | 12.5        |
| V   | 3818.5          | -43.9             | -37.5             | 1.6             | 9.3            | -29.8        | -13.0       | 16.8        |
| H   | 5729.0          | -37.0             | -28.3             | 2.0             | 11.5           | -18.8        | -13.0       | 5.8         |
| V   | 5729.0          | -55.5             | -47.8             | 2.0             | 11.5           | -38.3        | -13.0       | 25.3        |
| H   | 7369.0          | -56.2             | -40.8             | 2.3             | 11.0           | -32.1        | -13.0       | 19.1        |
| V   | 7369.0          | -58.0             | -44.8             | 2.3             | 11.0           | -36.1        | -13.0       | 23.1        |
| H   | 9549.0          | -56.9             | -37.7             | 2.6             | 12.0           | -28.3        | -13.0       | 15.3        |
| V   | 9549.0          | -62.4             | -45.4             | 2.6             | 12.0           | -36.1        | -13.0       | 23.1        |

**16QAM, BW 1.4MHz**  
**Channel: 18607**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3702.3          | -32.2             | -27.7             | 1.6             | 9.4            | -19.9        | -13.0       | 6.9         |
| V   | 3702.3          | -43.4             | -37.5             | 1.6             | 9.4            | -29.7        | -13.0       | 16.7        |
| H   | 5554.0          | -29.7             | -22.3             | 2.0             | 11.0           | -13.3        | -13.0       | 0.3         |
| V   | 5554.0          | -36.7             | -29.2             | 2.0             | 11.0           | -20.2        | -13.0       | 7.2         |
| H   | 7405.0          | -58.8             | -43.0             | 2.3             | 10.8           | -34.4        | -13.0       | 21.4        |
| V   | 7405.0          | -62.0             | -49.1             | 2.3             | 10.8           | -40.5        | -13.0       | 27.5        |
| H   | 9256.0          | -61.3             | -42.0             | 2.6             | 11.9           | -32.7        | -13.0       | 19.7        |
| V   | 9256.0          | -61.2             | -43.3             | 2.6             | 11.9           | -34.0        | -13.0       | 21.0        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3760.9          | -33.8             | -27.9             | 1.6             | 9.2            | -20.3        | -13.0       | 7.3         |
| V   | 3760.9          | -40.3             | -33.9             | 1.6             | 9.2            | -26.3        | -13.0       | 13.3        |
| H   | 5641.0          | -31.5             | -23.0             | 2.0             | 11.3           | -13.7        | -13.0       | 0.7         |
| V   | 5642.0          | -39.6             | -29.5             | 2.0             | 11.3           | -20.2        | -13.0       | 7.2         |
| H   | 7522.0          | -57.9             | -41.8             | 2.3             | 11.2           | -32.9        | -13.0       | 19.9        |
| V   | 7522.0          | -61.5             | -47.7             | 2.3             | 11.2           | -38.8        | -13.0       | 25.8        |
| H   | 9402.0          | -54.2             | -34.9             | 2.6             | 11.7           | -25.8        | -13.0       | 12.8        |
| V   | 9402.0          | -56.0             | -39.7             | 2.6             | 11.7           | -30.6        | -13.0       | 17.6        |

**Channel: 19193**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3819.5          | -36.7             | -30.8             | 1.6             | 9.3            | -23.1        | -13.0       | 10.1        |
| V   | 3819.5          | -42.7             | -36.3             | 1.6             | 9.3            | -28.6        | -13.0       | 15.6        |
| H   | 5729.0          | -37.0             | -28.3             | 2.0             | 11.5           | -18.8        | -13.0       | 5.8         |
| V   | 5729.0          | -48.7             | -41.0             | 2.0             | 11.5           | -31.5        | -13.0       | 18.5        |
| H   | 7639.0          | -55.1             | -39.7             | 2.3             | 11.5           | -30.6        | -13.0       | 17.6        |
| V   | 7639.0          | -58.7             | -45.5             | 2.3             | 11.5           | -36.4        | -13.0       | 23.4        |
| H   | 9549.0          | -57.0             | -37.8             | 2.6             | 12.0           | -28.4        | -13.0       | 15.4        |
| V   | 9549.0          | -61.3             | -44.3             | 2.6             | 12.0           | -35.0        | -13.0       | 22.0        |



**QPSK, BW 3MHz**  
**Channel: 18615**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3705.5          | -37.4             | -32.9             | 1.6             | 9.4            | -25.1        | -13.0       | 12.1        |
| V   | 3705.6          | -41.4             | -35.5             | 1.6             | 9.4            | -27.7        | -13.0       | 14.7        |
| H   | 5558.0          | -29.4             | -22.9             | 2.0             | 11.0           | -13.9        | -13.0       | 0.9         |
| V   | 5558.0          | -34.8             | -27.3             | 2.0             | 11.0           | -18.3        | -13.0       | 5.3         |
| H   | 7411.0          | -60.1             | -44.3             | 2.3             | 10.9           | -35.7        | -13.0       | 22.7        |
| V   | 7411.0          | -63.3             | -50.4             | 2.3             | 10.9           | -41.8        | -13.0       | 28.8        |
| H   | 9264.0          | -59.6             | -40.3             | 2.6             | 11.8           | -31.0        | -13.0       | 18.0        |
| V   | 9264.0          | -61.8             | -43.9             | 2.6             | 11.8           | -34.7        | -13.0       | 21.7        |
| H   | 11120.0         | -61.3             | -47.2             | 2.8             | 12.8           | -37.3        | -13.0       | 24.3        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3762.6          | -36.0             | -30.1             | 1.6             | 9.2            | -22.5        | -13.0       | 9.5         |
| V   | 3762.6          | -40.6             | -34.2             | 1.6             | 9.2            | -26.6        | -13.0       | 13.6        |
| H   | 5644.0          | -34.4             | -25.9             | 2.0             | 11.3           | -16.6        | -13.0       | 3.6         |
| V   | 5644.0          | -39.6             | -29.5             | 2.0             | 11.3           | -20.2        | -13.0       | 7.2         |
| H   | 7525.0          | -56.9             | -40.8             | 2.3             | 11.2           | -31.9        | -13.0       | 18.9        |
| V   | 7525.0          | -59.7             | -45.9             | 2.3             | 11.2           | -37.0        | -13.0       | 24.0        |
| H   | 9406.0          | -52.8             | -33.5             | 2.6             | 11.8           | -24.4        | -13.0       | 11.4        |
| V   | 9406.0          | -57.3             | -41.0             | 2.6             | 11.8           | -31.8        | -13.0       | 18.8        |
| H   | 13170.0         | -64.8             | -49.3             | 3.1             | 12.8           | -39.7        | -13.0       | 26.7        |

**Channel: 19185**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3819.6          | -35.5             | -29.6             | 1.6             | 9.3            | -21.9        | -13.0       | 8.9         |
| V   | 3819.6          | -42.6             | -36.2             | 1.6             | 9.3            | -28.5        | -13.0       | 15.5        |
| H   | 5729.0          | -38.8             | -30.1             | 2.0             | 11.5           | -20.6        | -13.0       | 7.6         |
| V   | 5729.0          | -43.6             | -36.2             | 2.0             | 11.5           | -26.7        | -13.0       | 13.7        |
| H   | 7369.0          | -54.7             | -39.3             | 2.3             | 11.0           | -30.6        | -13.0       | 17.6        |
| V   | 7369.0          | -60.1             | -46.9             | 2.3             | 11.0           | -38.2        | -13.0       | 25.2        |
| H   | 9549.0          | -56.9             | -37.7             | 2.6             | 12.0           | -28.3        | -13.0       | 15.3        |
| V   | 9549.0          | -63.0             | -46.0             | 2.6             | 12.0           | -36.7        | -13.0       | 23.7        |

**16QAM, BW 3MHz**  
**Channel: 18615**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3705.6          | -35.5             | -31.0             | 1.6             | 9.4            | -23.2        | -13.0       | 10.2        |
| V   | 3705.5          | -38.8             | -32.9             | 1.6             | 9.4            | -25.1        | -13.0       | 12.1        |
| H   | 5558.0          | -27.8             | -23.4             | 2.0             | 11.0           | -14.4        | -13.0       | 1.4         |
| V   | 5558.0          | -32.5             | -28.0             | 2.0             | 11.0           | -19.0        | -13.0       | 6.0         |
| H   | 7411.0          | -60.8             | -45.0             | 2.3             | 10.9           | -36.4        | -13.0       | 23.4        |
| V   | 7411.0          | -63.2             | -50.3             | 2.3             | 10.9           | -41.7        | -13.0       | 28.7        |
| H   | 9264.0          | -60.9             | -41.6             | 2.6             | 11.8           | -32.3        | -13.0       | 19.3        |
| V   | 9264.0          | -61.2             | -43.3             | 2.6             | 11.8           | -34.1        | -13.0       | 21.1        |
| H   | 11120.0         | -61.4             | -46.2             | 2.8             | 12.8           | -36.3        | -13.0       | 23.3        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3762.5          | -36.2             | -30.3             | 1.6             | 9.2            | -22.7        | -13.0       | 9.7         |
| V   | 3762.5          | -40.2             | -33.8             | 1.6             | 9.2            | -26.2        | -13.0       | 13.2        |
| H   | 5644.0          | -31.6             | -23.1             | 2.0             | 11.3           | -13.8        | -13.0       | 0.8         |
| V   | 5644.0          | -41.3             | -31.2             | 2.0             | 11.3           | -21.9        | -13.0       | 8.9         |
| H   | 7525.0          | -58.0             | -41.9             | 2.3             | 11.2           | -33.0        | -13.0       | 20.0        |
| V   | 7525.0          | -61.4             | -47.6             | 2.3             | 11.2           | -38.7        | -13.0       | 25.7        |
| H   | 9406.0          | -53.1             | -33.8             | 2.6             | 11.8           | -24.7        | -13.0       | 11.7        |
| V   | 9406.0          | -57.8             | -41.5             | 2.6             | 11.8           | -32.3        | -13.0       | 19.3        |
| H   | 13170.0         | -64.8             | -48.3             | 3.1             | 12.8           | -38.7        | -13.0       | 25.7        |

**Channel: 19185**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3819.6          | -36.3             | -30.4             | 1.6             | 9.3            | -22.7        | -13.0       | 9.7         |
| V   | 3819.6          | -42.4             | -36.0             | 1.6             | 9.3            | -28.3        | -13.0       | 15.3        |
| H   | 5729.0          | -38.5             | -29.8             | 2.0             | 11.5           | -20.3        | -13.0       | 7.3         |
| V   | 5729.0          | -45.6             | -37.9             | 2.0             | 11.5           | -28.4        | -13.0       | 15.4        |
| H   | 7369.0          | -53.8             | -38.4             | 2.3             | 11.0           | -29.7        | -13.0       | 16.7        |
| V   | 7369.0          | -58.9             | -45.7             | 2.3             | 11.0           | -37.0        | -13.0       | 24.0        |
| H   | 9549.0          | -56.6             | -37.4             | 2.6             | 12.0           | -28.0        | -13.0       | 15.0        |
| V   | 9549.0          | -63.0             | -46.0             | 2.6             | 12.0           | -36.7        | -13.0       | 23.7        |

**QPSK, BW 5MHz**  
**Channel: 18625**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3709.3          | -37.9             | -33.4             | 1.6             | 9.4            | -25.6        | -13.0       | 12.6        |
| V   | 3709.3          | -43.7             | -37.8             | 1.6             | 9.4            | -30.0        | -13.0       | 17.0        |
| H   | 5564.0          | -30.6             | -24.1             | 2.0             | 11.0           | -15.1        | -13.0       | 2.1         |
| V   | 5564.0          | -39.5             | -32.6             | 2.0             | 11.0           | -23.6        | -13.0       | 10.6        |
| H   | 7419.0          | -61.4             | -45.4             | 2.3             | 10.9           | -36.7        | -13.0       | 23.7        |
| V   | 7419.0          | -64.1             | -50.1             | 2.3             | 10.9           | -41.4        | -13.0       | 28.4        |
| H   | 9273.0          | -63.2             | -44.1             | 2.6             | 11.8           | -34.9        | -13.0       | 21.9        |
| V   | 9273.0          | -65.0             | -47.4             | 2.6             | 11.8           | -38.1        | -13.0       | 25.1        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3764.4          | -32.6             | -26.7             | 1.6             | 9.2            | -19.1        | -13.0       | 6.1         |
| V   | 3764.3          | -43.7             | -37.3             | 1.6             | 9.2            | -29.7        | -13.0       | 16.7        |
| H   | 5647.0          | -34.1             | -25.6             | 2.0             | 11.3           | -16.3        | -13.0       | 3.3         |
| V   | 5647.0          | -44.4             | -34.3             | 2.0             | 11.3           | -25.0        | -13.0       | 12.0        |
| H   | 7529.0          | -56.8             | -41.3             | 2.3             | 11.3           | -32.4        | -13.0       | 19.4        |
| V   | 7529.0          | -61.5             | -47.9             | 2.3             | 11.3           | -38.9        | -13.0       | 25.9        |
| H   | 9411.0          | -54.8             | -36.5             | 2.6             | 11.8           | -27.4        | -13.0       | 14.4        |
| V   | 9411.0          | -60.2             | -43.1             | 2.6             | 11.8           | -33.9        | -13.0       | 20.9        |

**Channel: 19175**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3819.3          | -39.1             | -33.2             | 1.6             | 9.3            | -25.5        | -13.0       | 12.5        |
| V   | 3819.3          | -46.9             | -40.5             | 1.6             | 9.3            | -32.8        | -13.0       | 19.8        |
| H   | 5729.0          | -44.7             | -36.0             | 2.0             | 11.5           | -26.5        | -13.0       | 13.5        |
| V   | 5729.0          | -52.5             | -44.8             | 2.0             | 11.5           | -35.3        | -13.0       | 22.3        |
| H   | 7369.0          | -59.1             | -43.6             | 2.3             | 11.0           | -34.9        | -13.0       | 21.9        |
| V   | 7369.0          | -61.0             | -46.8             | 2.3             | 11.0           | -38.1        | -13.0       | 25.1        |
| H   | 9548.0          | -60.7             | -41.7             | 2.6             | 12.0           | -32.4        | -13.0       | 19.4        |

**16QAM, BW 5MHz**  
**Channel: 18625**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3705.0          | -32.4             | -27.9             | 1.6             | 9.4            | -20.1        | -13.0       | 7.1         |
| V   | 3705.0          | -43.1             | -37.2             | 1.6             | 9.4            | -29.4        | -13.0       | 16.4        |
| H   | 5558.0          | -28.8             | -22.3             | 2.0             | 11.0           | -13.3        | -13.0       | 0.3         |
| V   | 5558.0          | -39.5             | -32.0             | 2.0             | 11.0           | -23.0        | -13.0       | 10.0        |
| H   | 7410.0          | -60.4             | -44.6             | 2.3             | 10.9           | -36.0        | -13.0       | 23.0        |
| V   | 7410.0          | -64.9             | -52.0             | 2.3             | 10.9           | -43.4        | -13.0       | 30.4        |
| H   | 9262.0          | -61.8             | -38.7             | 2.6             | 11.8           | -29.4        | -13.0       | 16.4        |
| V   | 9262.0          | -63.5             | -45.6             | 2.6             | 11.8           | -36.4        | -13.0       | 23.4        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3760.1          | -33.3             | -27.4             | 1.6             | 9.2            | -19.9        | -13.0       | 6.9         |
| V   | 3760.1          | -43.5             | -37.1             | 1.6             | 9.2            | -29.5        | -13.0       | 16.5        |
| H   | 5640.0          | -33.2             | -24.7             | 2.0             | 11.3           | -15.4        | -13.0       | 2.4         |
| V   | 5640.0          | -46.0             | -35.9             | 2.0             | 11.3           | -26.6        | -13.0       | 13.6        |
| H   | 7520.0          | -58.8             | -42.7             | 2.3             | 11.2           | -33.8        | -13.0       | 20.8        |
| V   | 7520.0          | -63.1             | -49.3             | 2.3             | 11.2           | -40.4        | -13.0       | 27.4        |
| H   | 9400.0          | -55.2             | -35.9             | 2.6             | 11.7           | -26.8        | -13.0       | 13.8        |
| V   | 9400.0          | -60.0             | -43.7             | 2.6             | 11.7           | -34.6        | -13.0       | 21.6        |

**Channel: 19175**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3815.0          | -37.8             | -31.9             | 1.6             | 9.3            | -24.2        | -13.0       | 11.2        |
| V   | 3815.0          | -48.0             | -41.6             | 1.6             | 9.3            | -33.9        | -13.0       | 20.9        |
| H   | 5723.0          | -41.1             | -32.4             | 2.0             | 11.5           | -22.9        | -13.0       | 9.9         |
| V   | 5723.0          | -53.2             | -45.5             | 2.0             | 11.5           | -36.0        | -13.0       | 23.0        |
| H   | 7630.0          | -59.8             | -44.4             | 2.3             | 11.4           | -35.3        | -13.0       | 22.3        |
| V   | 7630.0          | -63.1             | -49.9             | 2.3             | 11.4           | -40.8        | -13.0       | 27.8        |
| H   | 9538.0          | -63.7             | -44.5             | 2.6             | 12.0           | -35.1        | -13.0       | 22.1        |

**QPSK, BW 10MHz**  
**Channel: 18650**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3710.2          | -32.4             | -27.9             | 1.6             | 9.4            | -20.1        | -13.0       | 7.1         |
| V   | 3710.2          | -43.9             | -38.0             | 1.6             | 9.4            | -30.2        | -13.0       | 17.2        |
| H   | 5565.0          | -26.9             | -23.4             | 2.0             | 11.0           | -14.4        | -13.0       | 1.4         |
| V   | 5565.0          | -35.7             | -28.8             | 2.0             | 11.0           | -19.8        | -13.0       | 6.8         |
| H   | 7420.0          | -62.3             | -46.3             | 2.3             | 10.9           | -37.6        | -13.0       | 24.6        |
| V   | 7420.0          | -64.2             | -50.2             | 2.3             | 10.9           | -41.5        | -13.0       | 28.5        |
| H   | 9276.0          | -63.8             | -44.7             | 2.6             | 11.8           | -35.5        | -13.0       | 22.5        |
| V   | 9276.0          | -63.3             | -45.7             | 2.6             | 11.8           | -36.4        | -13.0       | 23.4        |
| H   | 11130.0         | -62.3             | -50.0             | 2.8             | 12.8           | -40.1        | -13.0       | 27.1        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3760.2          | -34.0             | -28.1             | 1.6             | 9.2            | -20.6        | -13.0       | 7.6         |
| V   | 3760.2          | -44.1             | -37.7             | 1.6             | 9.2            | -30.1        | -13.0       | 17.1        |
| H   | 5640.0          | -33.7             | -25.2             | 2.0             | 11.3           | -15.9        | -13.0       | 2.9         |
| V   | 5640.0          | -44.6             | -34.5             | 2.0             | 11.3           | -25.2        | -13.0       | 12.2        |
| H   | 7520.0          | -58.8             | -43.3             | 2.3             | 11.2           | -34.4        | -13.0       | 21.4        |
| V   | 7520.0          | -61.4             | -47.8             | 2.3             | 11.2           | -38.9        | -13.0       | 25.9        |
| H   | 9401.0          | -54.7             | -36.4             | 2.6             | 11.7           | -27.3        | -13.0       | 14.3        |
| V   | 9401.0          | -59.3             | -42.2             | 2.6             | 11.7           | -33.0        | -13.0       | 20.0        |
| H   | 13160.0         | -65.3             | -49.1             | 3.1             | 12.8           | -39.4        | -13.0       | 26.4        |

**Channel: 19150**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3810.2          | -35.8             | -29.9             | 1.6             | 9.4            | -22.2        | -13.0       | 9.2         |
| V   | 3810.1          | -45.0             | -38.6             | 1.6             | 9.4            | -30.9        | -13.0       | 17.9        |
| H   | 5715.0          | -39.0             | -30.3             | 2.0             | 11.5           | -20.8        | -13.0       | 7.8         |
| V   | 5715.0          | -48.1             | -40.4             | 2.0             | 11.5           | -30.9        | -13.0       | 17.9        |
| H   | 7620.0          | -56.1             | -40.6             | 2.3             | 11.4           | -31.5        | -13.0       | 18.5        |
| V   | 7620.0          | -62.9             | -48.7             | 2.3             | 11.4           | -39.6        | -13.0       | 26.6        |
| H   | 9525.0          | -61.9             | -42.9             | 2.6             | 12.0           | -33.6        | -13.0       | 20.6        |
| V   | 9525.0          | -65.3             | -46.7             | 2.6             | 12.0           | -37.4        | -13.0       | 24.4        |

**16QAM, BW 10MHz**  
**Channel: 18650**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3710.2          | -32.6             | -28.1             | 1.6             | 9.4            | -20.3        | -13.0       | 7.3         |
| V   | 3710.2          | -43.8             | -37.9             | 1.6             | 9.4            | -30.1        | -13.0       | 17.1        |
| H   | 5565.0          | -28.2             | -24.7             | 2.0             | 11.0           | -15.7        | -13.0       | 2.7         |
| V   | 5565.0          | -38.2             | -31.3             | 2.0             | 11.0           | -22.3        | -13.0       | 9.3         |
| H   | 7420.0          | -61.5             | -45.5             | 2.3             | 10.9           | -36.8        | -13.0       | 23.8        |
| V   | 7420.0          | -65.3             | -51.3             | 2.3             | 10.9           | -42.6        | -13.0       | 29.6        |
| H   | 9275.0          | -62.5             | -43.4             | 2.6             | 11.8           | -34.2        | -13.0       | 21.2        |
| V   | 9275.0          | -62.4             | -44.8             | 2.6             | 11.8           | -35.5        | -13.0       | 22.5        |
| H   | 11130.0         | -63.1             | -50.8             | 2.8             | 12.8           | -40.9        | -13.0       | 27.9        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3760.2          | -33.3             | -27.4             | 1.6             | 9.2            | -19.9        | -13.0       | 6.9         |
| V   | 3760.2          | -53.0             | -46.6             | 1.6             | 9.2            | -39.0        | -13.0       | 26.0        |
| H   | 5640.0          | -33.9             | -25.4             | 2.0             | 11.3           | -16.1        | -13.0       | 3.1         |
| V   | 5640.0          | -42.7             | -32.6             | 2.0             | 11.3           | -23.3        | -13.0       | 10.3        |
| H   | 7521.0          | -61.2             | -45.7             | 2.3             | 11.2           | -36.8        | -13.0       | 23.8        |
| V   | 7521.0          | -61.7             | -48.1             | 2.3             | 11.2           | -39.2        | -13.0       | 26.2        |
| H   | 9401.0          | -54.6             | -36.3             | 2.6             | 11.7           | -27.2        | -13.0       | 14.2        |
| V   | 9401.0          | -62.5             | -45.4             | 2.6             | 11.7           | -36.2        | -13.0       | 23.2        |
| H   | 13160.0         | -64.7             | -48.5             | 3.1             | 12.8           | -38.8        | -13.0       | 25.8        |

**Channel: 19150**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3810.2          | -36.4             | -30.5             | 1.6             | 9.4            | -22.8        | -13.0       | 9.8         |
| V   | 3810.2          | -46.6             | -40.2             | 1.6             | 9.4            | -32.5        | -13.0       | 19.5        |
| H   | 5715.0          | -42.1             | -33.4             | 2.0             | 11.5           | -23.9        | -13.0       | 10.9        |
| V   | 5715.0          | -52.3             | -44.6             | 2.0             | 11.5           | -35.1        | -13.0       | 22.1        |
| H   | 7620.0          | -57.8             | -42.3             | 2.3             | 11.4           | -33.2        | -13.0       | 20.2        |
| V   | 7620.0          | -60.5             | -46.3             | 2.3             | 11.4           | -37.2        | -13.0       | 24.2        |
| H   | 9526.0          | -59.8             | -40.8             | 2.6             | 12.0           | -31.5        | -13.0       | 18.5        |
| V   | 9525.0          | -66.1             | -47.5             | 2.6             | 12.0           | -38.2        | -13.0       | 25.2        |

**QPSK, BW 15MHz**  
**Channel: 18675**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3715.0          | -32.9             | -28.4             | 1.6             | 9.4            | -20.6        | -13.0       | 7.6         |
| V   | 3715.0          | -42.0             | -36.1             | 1.6             | 9.4            | -28.3        | -13.0       | 15.3        |
| H   | 5573.0          | -36.7             | -33.2             | 2.0             | 11.0           | -24.1        | -13.0       | 11.1        |
| V   | 5573.0          | -37.5             | -30.6             | 2.0             | 11.0           | -21.5        | -13.0       | 8.5         |
| H   | 7430.0          | -63.2             | -47.2             | 2.3             | 11.0           | -38.5        | -13.0       | 25.5        |
| V   | 7430.0          | -64.7             | -50.7             | 2.3             | 11.0           | -41.9        | -13.0       | 28.9        |
| H   | 9288.0          | -60.1             | -41.0             | 2.6             | 11.8           | -31.8        | -13.0       | 18.8        |
| V   | 9288.0          | -62.4             | -44.8             | 2.6             | 11.8           | -35.6        | -13.0       | 22.6        |
| H   | 11150.0         | -63.8             | -51.5             | 2.8             | 12.7           | -41.6        | -13.0       | 28.6        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3760.0          | -40.5             | -34.6             | 1.6             | 9.2            | -27.1        | -13.0       | 14.1        |
| V   | 3760.1          | -42.3             | -35.9             | 1.6             | 9.2            | -28.3        | -13.0       | 15.3        |
| H   | 5640.0          | -33.7             | -25.2             | 2.0             | 11.3           | -15.9        | -13.0       | 2.9         |
| V   | 5640.0          | -43.5             | -33.4             | 2.0             | 11.3           | -24.1        | -13.0       | 11.1        |
| H   | 7520.0          | -58.8             | -43.3             | 2.3             | 11.2           | -34.4        | -13.0       | 21.4        |
| V   | 7520.0          | -61.3             | -47.7             | 2.3             | 11.2           | -38.8        | -13.0       | 25.8        |
| H   | 9400.0          | -55.8             | -37.5             | 2.6             | 11.7           | -28.4        | -13.0       | 15.4        |
| V   | 9400.0          | -59.0             | -41.9             | 2.6             | 11.7           | -32.7        | -13.0       | 19.7        |

**Channel: 19125**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3805.1          | -36.8             | -30.9             | 1.6             | 9.4            | -23.2        | -13.0       | 10.2        |
| V   | 3805.1          | -45.7             | -39.3             | 1.6             | 9.4            | -31.6        | -13.0       | 18.6        |
| H   | 5708.0          | -39.6             | -30.9             | 2.0             | 11.5           | -21.4        | -13.0       | 8.4         |
| V   | 5708.0          | -48.7             | -41.0             | 2.0             | 11.5           | -31.5        | -13.0       | 18.5        |
| H   | 7610.0          | -57.3             | -41.8             | 2.3             | 9.2            | -34.9        | -13.0       | 21.9        |
| V   | 7610.0          | -64.4             | -50.2             | 2.3             | 9.2            | -43.3        | -13.0       | 30.3        |
| H   | 9513.0          | -61.0             | -42.0             | 2.6             | 9.8            | -34.9        | -13.0       | 21.9        |
| V   | 9513.0          | -65.5             | -46.9             | 2.6             | 9.8            | -39.8        | -13.0       | 26.8        |

**16QAM, BW 15MHz**  
**Channel: 18675**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3701.7          | -34.0             | -29.5             | 1.6             | 9.4            | -21.7        | -13.0       | 8.7         |
| V   | 3701.6          | -40.1             | -34.2             | 1.6             | 9.4            | -26.4        | -13.0       | 13.4        |
| H   | 5553.0          | -27.4             | -22.9             | 2.0             | 11.0           | -13.9        | -13.0       | 0.9         |
| V   | 5553.0          | -40.0             | -32.5             | 2.0             | 11.0           | -23.5        | -13.0       | 10.5        |
| H   | 7403.0          | -60.9             | -45.1             | 2.3             | 10.8           | -36.5        | -13.0       | 23.5        |
| V   | 7403.0          | -62.0             | -49.1             | 2.3             | 10.8           | -40.5        | -13.0       | 27.5        |
| H   | 9254.0          | -61.5             | -42.2             | 2.6             | 11.9           | -32.9        | -13.0       | 19.9        |
| V   | 9254.0          | -63.9             | -46.0             | 2.6             | 11.9           | -36.7        | -13.0       | 23.7        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3746.7          | -32.6             | -26.7             | 1.6             | 9.2            | -19.2        | -13.0       | 6.2         |
| V   | 3746.7          | -43.0             | -36.6             | 1.6             | 9.2            | -29.0        | -13.0       | 16.0        |
| H   | 5620.0          | -31.9             | -23.4             | 2.0             | 11.2           | -14.2        | -13.0       | 1.2         |
| V   | 5620.0          | -40.9             | -30.8             | 2.0             | 11.2           | -21.6        | -13.0       | 8.6         |
| H   | 7493.0          | -59.7             | -43.6             | 2.3             | 11.1           | -34.8        | -13.0       | 21.8        |
| V   | 7493.0          | -63.2             | -49.4             | 2.3             | 11.1           | -40.6        | -13.0       | 27.6        |
| H   | 9367.0          | -53.9             | -34.6             | 2.6             | 11.8           | -25.5        | -13.0       | 12.5        |
| V   | 9367.0          | -59.0             | -42.7             | 2.6             | 11.8           | -33.5        | -13.0       | 20.5        |

**Channel: 19125**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3791.7          | -36.0             | -30.1             | 1.6             | 9.3            | -22.4        | -13.0       | 9.4         |
| V   | 3791.7          | -48.4             | -42.0             | 1.6             | 9.3            | -34.3        | -13.0       | 21.3        |
| H   | 5688.0          | -38.2             | -29.5             | 2.0             | 11.4           | -20.1        | -13.0       | 7.1         |
| V   | 5688.0          | -47.7             | -40.0             | 2.0             | 11.4           | -30.6        | -13.0       | 17.6        |
| H   | 7583.0          | -57.1             | -41.7             | 2.3             | 11.4           | -32.7        | -13.0       | 19.7        |
| V   | 7583.0          | -63.7             | -50.5             | 2.3             | 11.4           | -41.5        | -13.0       | 28.5        |
| H   | 9479.0          | -61.9             | -42.7             | 2.6             | 11.9           | -33.4        | -13.0       | 20.4        |
| V   | 9479.0          | -64.9             | -47.9             | 2.6             | 11.9           | -38.6        | -13.0       | 25.6        |



**QPSK, BW 20MHz**  
**Channel: 18700**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3702.2          | -32.6             | -28.1             | 1.6             | 9.4            | -20.3        | -13.0       | 7.3         |
| V   | 3702.2          | -42.1             | -36.2             | 1.6             | 9.4            | -28.4        | -13.0       | 15.4        |
| H   | 5553.0          | -27.4             | -23.0             | 2.0             | 11.0           | -14.0        | -13.0       | 1.0         |
| V   | 5553.0          | -37.3             | -28.1             | 2.0             | 11.0           | -19.1        | -13.0       | 6.1         |
| H   | 7404.0          | -58.9             | -43.2             | 2.3             | 10.8           | -34.6        | -13.0       | 21.6        |
| V   | 7404.0          | -62.4             | -48.4             | 2.3             | 10.8           | -39.8        | -13.0       | 26.8        |
| H   | 9255.0          | -63.1             | -44.2             | 2.6             | 11.9           | -34.9        | -13.0       | 21.9        |
| V   | 9255.0          | -61.0             | -44.0             | 2.6             | 11.9           | -34.7        | -13.0       | 21.7        |
| H   | 11110.0         | -64.2             | -42.8             | 2.8             | 12.8           | -32.8        | -13.0       | 19.8        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3742.2          | -32.2             | -31.0             | 1.6             | 9.2            | -23.4        | -13.0       | 10.4        |
| V   | 3742.2          | -42.9             | -40.3             | 1.6             | 9.2            | -32.7        | -13.0       | 19.7        |
| H   | 5613.0          | -31.3             | -24.1             | 2.0             | 11.2           | -14.9        | -13.0       | 1.9         |
| V   | 5613.0          | -42.3             | -36.3             | 2.0             | 9.0            | -29.3        | -13.0       | 16.3        |
| H   | 7484.0          | -62.6             | -46.9             | 2.3             | 8.9            | -40.3        | -13.0       | 27.3        |
| V   | 7484.0          | -62.0             | -48.0             | 2.3             | 8.9            | -41.3        | -13.0       | 28.3        |
| H   | 9356.0          | -53.8             | -35.5             | 2.6             | 9.6            | -28.5        | -13.0       | 15.5        |
| V   | 9356.0          | -60.4             | -43.3             | 2.6             | 9.6            | -36.3        | -13.0       | 23.3        |

**Channel: 19100**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3782.2          | -37.1             | -35.4             | 1.6             | 9.3            | -27.7        | -13.0       | 14.7        |
| V   | 3782.3          | -46.9             | -44.7             | 1.6             | 9.3            | -37.0        | -13.0       | 24.0        |
| H   | 5673.0          | -37.6             | -30.0             | 2.0             | 11.4           | -20.6        | -13.0       | 7.6         |
| V   | 5673.0          | -46.2             | -40.0             | 2.0             | 11.4           | -30.6        | -13.0       | 17.6        |
| H   | 7564.0          | -56.3             | -41.0             | 2.3             | 9.1            | -34.1        | -13.0       | 21.1        |
| V   | 7564.0          | -61.6             | -47.8             | 2.3             | 9.1            | -41.0        | -13.0       | 28.0        |
| H   | 9456.0          | -60.8             | -42.7             | 2.6             | 9.7            | -35.6        | -13.0       | 22.6        |
| V   | 9455.0          | -62.9             | -45.6             | 2.6             | 9.7            | -38.6        | -13.0       | 25.6        |

**16QAM, BW 20MHz**  
**Channel: 18700**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3697.2          | -33.7             | -29.2             | 1.6             | 9.5            | -21.3        | -13.0       | 8.3         |
| V   | 3697.2          | -42.3             | -36.4             | 1.6             | 9.5            | -28.5        | -13.0       | 15.5        |
| H   | 5546.0          | -28.4             | -24.0             | 2.0             | 10.9           | -15.0        | -13.0       | 2.0         |
| V   | 5546.0          | -40.9             | -31.7             | 2.0             | 10.9           | -22.7        | -13.0       | 9.7         |
| H   | 7394.0          | -59.1             | -43.4             | 2.3             | 10.8           | -34.8        | -13.0       | 21.8        |
| V   | 7394.0          | -63.2             | -49.2             | 2.3             | 10.8           | -40.6        | -13.0       | 27.6        |
| H   | 9243.0          | -61.6             | -42.7             | 2.6             | 11.9           | -33.4        | -13.0       | 20.4        |
| V   | 9243.0          | -62.8             | -45.8             | 2.6             | 11.9           | -36.5        | -13.0       | 23.5        |

**Channel: 18900**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3742.2          | -32.9             | -31.7             | 1.6             | 9.2            | -24.1        | -13.0       | 11.1        |
| V   | 3742.2          | -42.6             | -40.0             | 1.6             | 9.2            | -32.4        | -13.0       | 19.4        |
| H   | 5613.0          | -30.7             | -23.5             | 2.0             | 11.2           | -14.3        | -13.0       | 1.3         |
| V   | 5613.0          | -44.8             | -38.8             | 2.0             | 11.2           | -29.6        | -13.0       | 16.6        |
| H   | 7485.0          | -59.8             | -44.1             | 2.3             | 11.1           | -35.3        | -13.0       | 22.3        |
| V   | 7485.0          | -65.7             | -51.7             | 2.3             | 11.1           | -42.8        | -13.0       | 29.8        |
| H   | 9355.0          | -55.3             | -37.0             | 2.6             | 11.8           | -27.8        | -13.0       | 14.8        |
| V   | 9356.0          | -57.9             | -40.8             | 2.6             | 11.8           | -31.6        | -13.0       | 18.6        |

**Channel: 19100**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 3782.2          | -35.0             | -33.3             | 1.6             | 9.3            | -25.6        | -13.0       | 12.6        |
| V   | 3782.3          | -46.9             | -44.7             | 1.6             | 9.3            | -37.0        | -13.0       | 24.0        |
| H   | 5673.0          | -37.1             | -29.5             | 2.0             | 11.4           | -20.1        | -13.0       | 7.1         |
| V   | 5673.0          | -45.8             | -39.6             | 2.0             | 11.4           | -30.2        | -13.0       | 17.2        |
| H   | 7564.0          | -59.0             | -43.7             | 2.3             | 11.3           | -34.6        | -13.0       | 21.6        |
| V   | 7564.0          | -62.3             | -48.5             | 2.3             | 11.3           | -39.5        | -13.0       | 26.5        |
| H   | 9456.0          | -60.2             | -42.1             | 2.6             | 11.9           | -32.8        | -13.0       | 19.8        |
| V   | 9455.0          | -64.5             | -47.2             | 2.6             | 11.9           | -38.0        | -13.0       | 25.0        |


## 10. Frequency Stability

### 10.1 Measurement procedure

[FCC 24.235, 2.1055, IC RSS-133 6.3]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

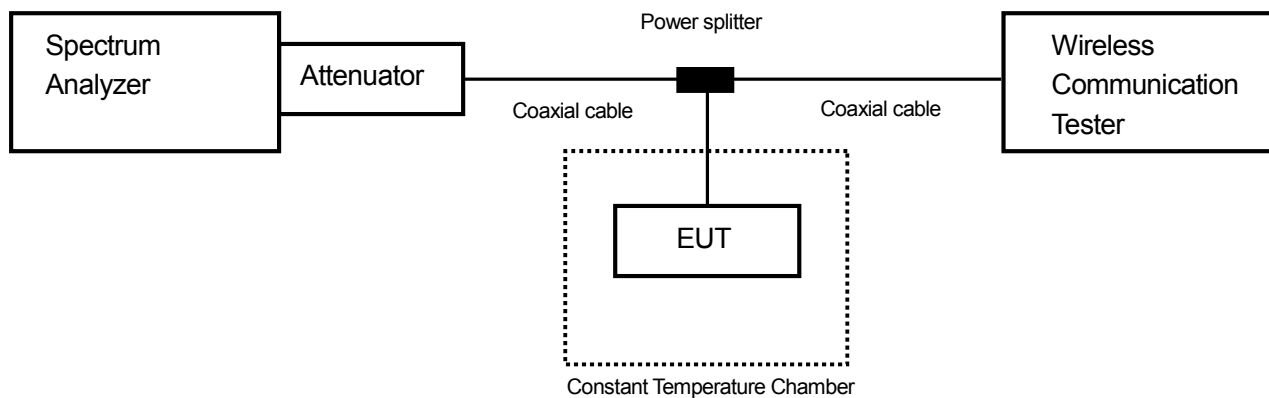

### 10.2 Limit

$\pm 2.5\text{ppm}$

### 10.3 Measurement result

Date : June 24, 2015  
 Temperature : 26.1 [°C]  
 Humidity : 59.9 [%]  
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Date : June 25, 2015  
 Temperature : 27.4 [°C]  
 Humidity : 52.3 [%]  
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

#### [WCDMA Band II] (Channel: 9400)

| Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$ |                     |                                |                              |                |        |
|--------------------------------------------|---------------------|--------------------------------|------------------------------|----------------|--------|
| Power Supply<br>[V]                        | Temperature<br>[°C] | Measurements Frequency<br>[Hz] | Frequency Tolerance<br>[ppm] | Limit<br>[ppm] | Result |
| 3.90                                       | 25(Ref.)            | 1,879,997,620                  | 0.00000                      | ±2.5           | Pass   |
|                                            | 50                  | 1,879,998,126                  | 0.26915                      | ±2.5           | Pass   |
|                                            | 40                  | 1,879,996,624                  | -0.52979                     | ±2.5           | Pass   |
|                                            | 30                  | 1,879,997,846                  | 0.12021                      | ±2.5           | Pass   |
|                                            | 20                  | 1,879,998,501                  | 0.46862                      | ±2.5           | Pass   |
|                                            | 10                  | 1,879,996,401                  | -0.64841                     | ±2.5           | Pass   |
|                                            | 0                   | 1,879,995,458                  | -1.15000                     | ±2.5           | Pass   |
|                                            | -10                 | 1,879,994,083                  | -1.88139                     | ±2.5           | Pass   |
|                                            | -20                 | 1,879,994,596                  | -1.60851                     | ±2.5           | Pass   |
|                                            | -30                 | 1,879,996,818                  | -0.42660                     | ±2.5           | Pass   |
| 3.315                                      | 25                  | 1,879,999,749                  | 1.13262                      | ±2.5           | Pass   |
| 4.485                                      | 25                  | 1,879,996,581                  | -0.55266                     | ±2.5           | Pass   |

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

**[LTE Band II]**  
**(Channel: 18900)**

| Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$ |                     |                                |                              |                |        |
|--------------------------------------------|---------------------|--------------------------------|------------------------------|----------------|--------|
| Power Supply<br>[V]                        | Temperature<br>[°C] | Measurements Frequency<br>[Hz] | Frequency Tolerance<br>[ppm] | Limit<br>[ppm] | Result |
| 3.90                                       | 25(Ref.)            | 1,880,000,669                  | 0.00000                      | $\pm 2.5$      | Pass   |
|                                            | 50                  | 1,879,999,734                  | -0.49715                     | $\pm 2.5$      | Pass   |
|                                            | 40                  | 1,880,000,276                  | -0.20882                     | $\pm 2.5$      | Pass   |
|                                            | 30                  | 1,879,999,105                  | -0.83159                     | $\pm 2.5$      | Pass   |
|                                            | 20                  | 1,879,999,458                  | -0.64391                     | $\pm 2.5$      | Pass   |
|                                            | 10                  | 1,879,998,419                  | -1.19655                     | $\pm 2.5$      | Pass   |
|                                            | 0                   | 1,879,996,856                  | -2.02793                     | $\pm 2.5$      | Pass   |
|                                            | -10                 | 1,879,998,419                  | -1.19655                     | $\pm 2.5$      | Pass   |
|                                            | -20                 | 1,880,000,694                  | 0.01356                      | $\pm 2.5$      | Pass   |
|                                            | -30                 | 1,879,997,267                  | -1.80931                     | $\pm 2.5$      | Pass   |
| 3.315                                      | 25                  | 1,880,000,105                  | -0.29958                     | $\pm 2.5$      | Pass   |
| 4.485                                      | 25                  | 1,880,000,719                  | 0.02710                      | $\pm 2.5$      | Pass   |

Calculation;

Frequency Tolerance (ppm) =  $\frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$

## 11. Uncertainty of measurement

---

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

| Test item                           | Measurement uncertainty |
|-------------------------------------|-------------------------|
| Conducted emission at mains port    | $\pm 3.0\text{dB}$      |
| Radiated emission (9kHz – 30MHz)    | $\pm 4.4\text{dB}$      |
| Radiated emission (30MHz – 1000MHz) | $\pm 4.5\text{dB}$      |
| Radiated emission (1000MHz – 26GHz) | $\pm 3.9\text{dB}$      |

## 12. Laboratory description

### 1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

### 2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

| Site name                      | Radiated emission | Conducted emission for mains port | Conducted emission for telecom port | Radiated emission (CMAD) | Expiry Date  |
|--------------------------------|-------------------|-----------------------------------|-------------------------------------|--------------------------|--------------|
| 3m Semi-anechoic chamber       | VLAC-013          | VLAC-013                          | VLAC-013                            | -                        | Jul. 3, 2017 |
| 10m Semi-anechoic chamber No.1 |                   |                                   |                                     | VLAC-013                 |              |
| 10m Semi-anechoic chamber No.2 |                   |                                   |                                     | VLAC-013                 |              |
| Shielded room No.1             | -                 | VLAC-013                          | -                                   | -                        |              |

3) FCC filing:

| Site name                      | Registration Number | Expiry Date   |
|--------------------------------|---------------------|---------------|
| Site 3                         | 91065               | Oct. 1, 2017  |
| 3m Semi-anechoic chamber       | 540072              | Feb. 20, 2017 |
| 10m Semi-anechoic chamber No.1 |                     |               |
| 10m Semi-anechoic chamber No.2 |                     |               |
| Shielded room No.1             |                     |               |

4) Industry Canada Oats site filing:

| Site name                      | Sites on file: Oats 3m/10m | Expiry Date   |
|--------------------------------|----------------------------|---------------|
| Site 3                         | 4224A-3                    | Dec. 3, 2017  |
| 3m Semi-anechoic chamber       | 4224A-4                    |               |
| 10m Semi-anechoic chamber No.1 | 4224A-5                    |               |
| 10m Semi-anechoic chamber No.2 | 4224A-6                    | Jan. 15, 2017 |

5) VCCI site filing:

| Site name                      | Radiated emission | Conducted emission for mains port | Conducted emission for telecom port | Expiry Date   |
|--------------------------------|-------------------|-----------------------------------|-------------------------------------|---------------|
| Site 3                         | R-138             | C-134                             | T-1222                              | Nov. 16, 2017 |
| 3m Semi-anechoic chamber       | A-0166            | A-0166                            | A-0166                              | Jul. 3, 2017  |
| 10m Semi-anechoic chamber No.1 |                   |                                   |                                     |               |
| 10m Semi-anechoic chamber No.2 |                   |                                   |                                     |               |
| Shielded room No.1             | -                 | A-0166                            |                                     |               |

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

## Appendix A. Test equipment

### Antenna port conducted test

| Equipment                                  | Company              | Model No.        | Serial No. | Cal. due      | Cal. date     |
|--------------------------------------------|----------------------|------------------|------------|---------------|---------------|
| Spectrum analyzer                          | Agilent Technologies | E4440A           | US44302655 | Jun. 30, 2016 | Jun. 11, 2015 |
| Microwave cable                            | RS                   | YH20_S1          | N/A (S389) | Aug. 31, 2015 | Aug. 30, 2014 |
| Attenuator                                 | Weinschel            | 56-10            | J4180      | Nov. 30, 2015 | Nov. 12, 2014 |
| Microwave cable                            | SUHNER               | SUCOFLEX104/1.5m | 199121/4   | Oct. 31, 2015 | Oct. 7, 2014  |
| Microwave cable                            | SUHNER               | SUCOFLEX104/1.5m | 322086/4   | Jul. 31, 2015 | Jul. 30, 2014 |
| Power splitter                             | ANRITSU              | K240B            | 020205     | Jul. 31, 2015 | Jul. 12, 2014 |
| Wideband radio frequency tester            | ROHDE&SCHWARZ        | CMW500           | 116338     | Apr. 30, 2016 | Apr. 2, 2015  |
| Operation type temperature controlled bath | Espec                | PL1KP            | 14007261   | Jan. 31, 2016 | Jan. 9, 2015  |

### Radiated emission

| Equipment                       | Company              | Model No.         | Serial No.       | Cal. Due      | Cal. Date     |
|---------------------------------|----------------------|-------------------|------------------|---------------|---------------|
| EMI Receiver                    | ROHDE&SCHWARZ        | ESCI              | 100451           | Dec. 31, 2015 | Dec. 25, 2014 |
| Preamplifier                    | ANRITSU              | MH648A            | M96057           | Jun. 30, 2016 | Jun. 12, 2015 |
| Biconical antenna               | Schwarzbeck          | VHA9103/BBA9106   | 2125             | Jun. 30, 2016 | Jun. 4, 2015  |
| Log periodic antenna            | Schwarzbeck          | UHALP9108A        | 0560             | Jun. 30, 2016 | Jun. 4, 2015  |
| Attenuator                      | TME                  | CFA-01NPJ-6       | N/A (S275)       | Jun. 30, 2016 | Jun. 23, 2015 |
| Attenuator                      | TME                  | CFA-01NPJ-3       | N/A (S272)       | Jun. 30, 2016 | Jun. 23, 2015 |
| Spectrum analyzer               | Agilent Technologies | E4440A            | US44302655       | Jun. 30, 2016 | Jun. 11, 2015 |
| Preamplifier                    | TSJ                  | MLA-100M18-B02-40 | 1929118          | May 31, 2016  | May 1, 2015   |
| Attenuator                      | AEROFLEX             | 26A-10            | 081217-08        | Mar. 31, 2016 | Mar. 12, 2015 |
| Dipole antenna                  | Schwarzbeck          | VHAP              | 1020             | Sep. 30, 2015 | Sep. 5, 2014  |
| Dipole antenna                  | Schwarzbeck          | UHAP              | 994              | Sep. 30, 2015 | Sep. 5, 2014  |
| Double ridged guide antenna     | EMCO                 | 3115              | 5205             | Feb. 29, 2016 | Feb. 16, 2015 |
| Attenuator                      | Agilent Technologies | 8491B             | MY39268633       | Feb. 29, 2016 | Feb. 1, 2015  |
| Double ridged guide antenna     | EMCO                 | 3115              | 000058532        | Oct. 31, 2015 | Oct. 14, 2014 |
| Signal generator                | ROHDE&SCHWARZ        | SMB100A           | 177525           | Jun. 30, 2016 | Jun. 19, 2015 |
| Power amplifier                 | R&K                  | CGA020M602-2633R  | B40240           | Mar.31, 2016  | Mar. 23, 2015 |
| Microwave cable                 | SUHNER               | SUCOFELX102/2m    | 31648/2          | Mar. 28, 2016 | Mar. 10, 2015 |
| High pass filter                | Micro-Tronics        | HPM50115          | 004              | Jul. 31, 2015 | Jul. 12, 2014 |
| High pass filter                | Wainwright           | WHKX2.8/18G-6SS   | 1                | Jul. 31, 2015 | Jul. 17, 2014 |
| Wideband radio frequency tester | ROHDE&SCHWARZ        | CMW500            | 126079           | Aug. 31, 2015 | Aug. 28, 2014 |
| Microwave cable                 | SUHNER               | SUCOFLEX104/9m    | 346316/4         | Oct. 31, 2015 | Oct. 31, 2014 |
|                                 |                      | SUCOFLEX104/1m    | 322084/4         | Oct. 31, 2015 | Oct. 31, 2014 |
|                                 |                      | SUCOFLEX104/1.5m  | 317226/4         | Oct. 31, 2015 | Oct. 31, 2014 |
|                                 |                      | SUCOFLEX104/7m    | 41625/6          | Oct. 31, 2015 | Oct. 31, 2014 |
| PC                              | DELL                 | DIMENSION E521    | 75465BX          | N/A           | N/A           |
| Software                        | TOYO Corporation     | EP5/RE-AJ         | 0611193/V5.3.61  | N/A           | N/A           |
| 3m Semi-anechoic chamber        | TOKIN                | N/A               | N/A (9002-NSA)   | Apr. 30, 2016 | Apr. 27, 2015 |
| 3m Semi-anechoic chamber        | TOKIN                | N/A               | N/A (9002-SVSWR) | Apr. 30, 2016 | Apr. 27, 2015 |

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.