


Power measurement connection diagram:

The power measurement for 2G/3G/LTE/5G FR1/UL and DL CA is to establish a connection between device and call box, and via call box to configure Bands, channel, BWs, RB size, carrier aggregation of CA, frequency channels, SCS and maximum output power. Hereunder is screenshot call box connection information for 2G/3G/LTE/5G FR1/UL and DL CA.


<GSM>

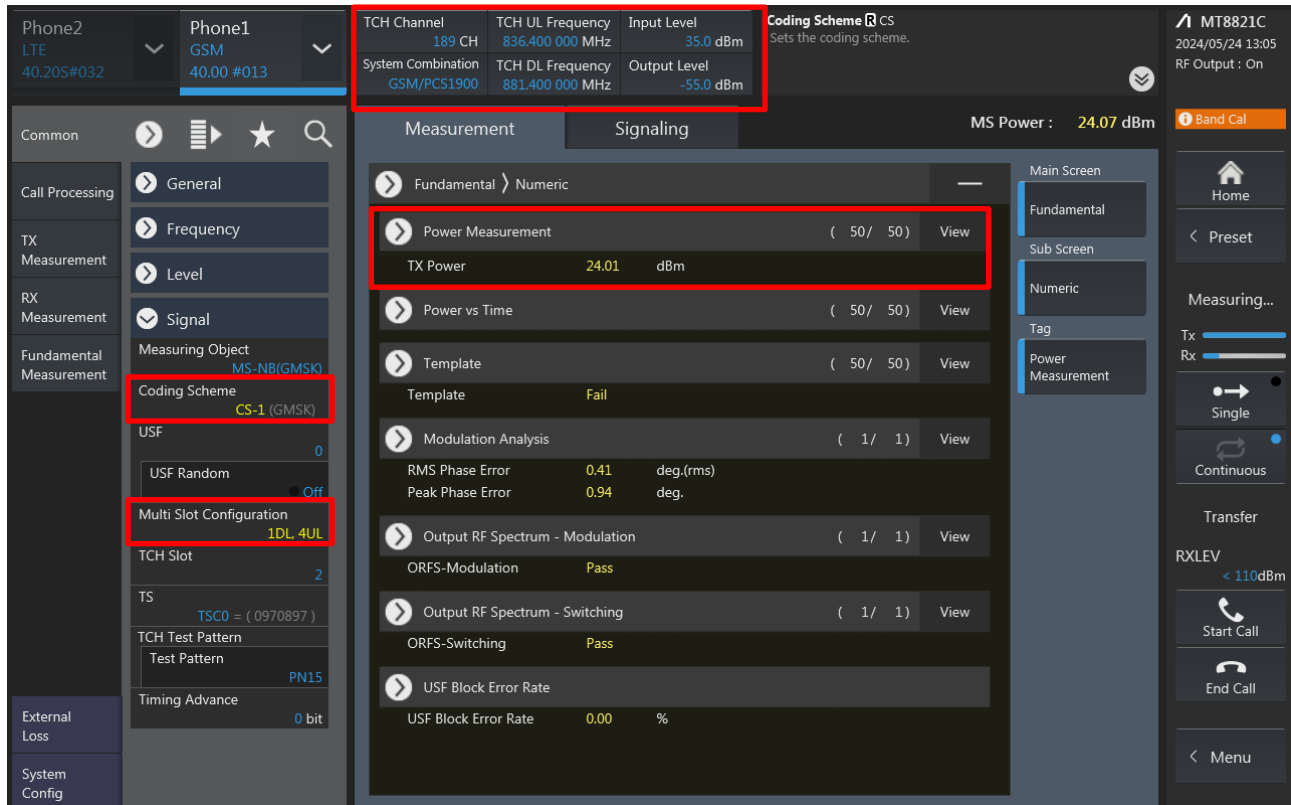

The screenshot displays the SPORTON LAB. software interface for GSM power measurement. The interface is divided into several sections:


- Top Bar:** Shows Phone2 (LTE, 40.205#032) and Phone1 (GSM, 40.00 #013). The TCH Channel is 189 CH, TCH UL Frequency is 836.400 000 MHz, Input Level is 35.0 dBm, and TCH DL Frequency is 881.400 000 MHz. The Coding Scheme is CS.
- Left Sidebar:** Contains navigation options like Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, and External Loss.
- Main Panel:** Displays measurement results under the 'Measurement' tab. The 'Fundamental' section shows 'Power Measurement' with a value of 24.01 dBm. Other sections include 'Power vs Time', 'Template', 'Modulation Analysis', 'Output RF Spectrum - Modulation', 'Output RF Spectrum - Switching', and 'USF Block Error Rate'.
- Right Sidebar:** Includes a 'Main Screen' section with 'Fundamental', 'Sub Screen', 'Numeric', and 'Tag' options. It also shows 'MT8821C' with a date/time of 2024/05/24 13:05 and 'RF Output : On'.

<WCDMA>

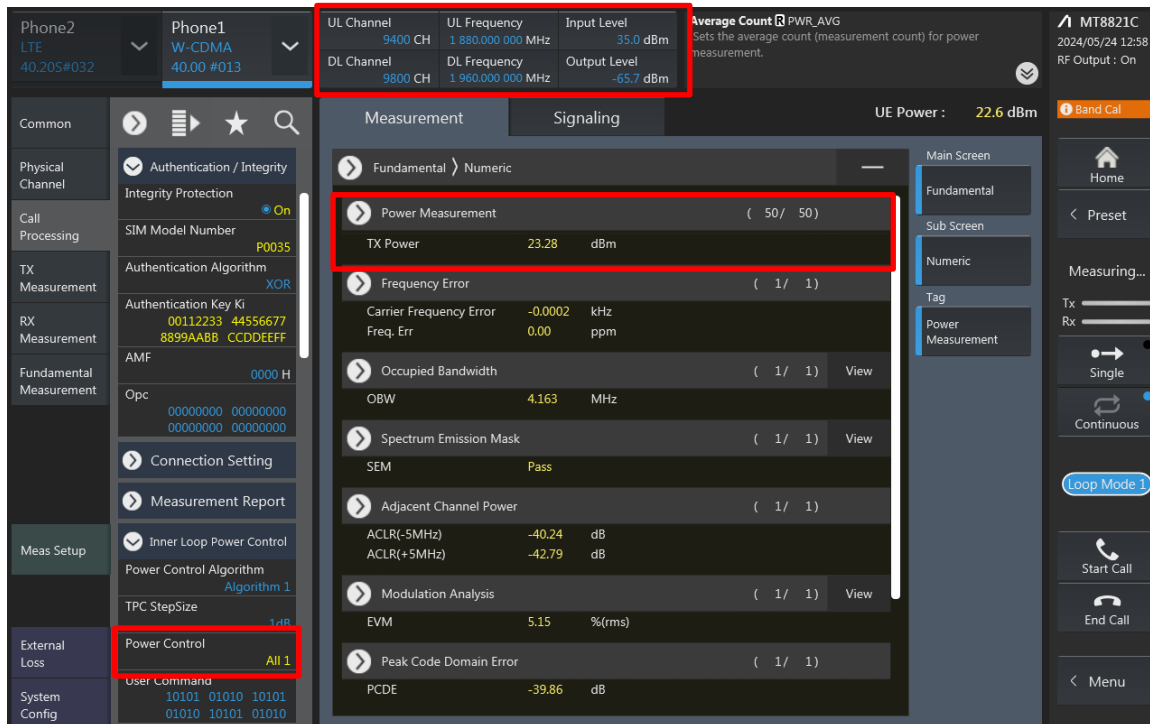


The screenshot shows the WCDMA measurement interface. The top bar displays 'Phone2 LTE 40.20S#032' and 'Phone1 W-CDMA 40.00 #013'. The 'Measurement' tab is active, showing 'Fundamental' and 'Numeric' views. The 'Power Measurement' section is highlighted with a red box, showing 'TX Power' at 23.28 dBm. The 'Occupied Bandwidth' section shows 'OBW' at 4.163 MHz. The 'Adjacent Channel Power' section shows 'ACLR(-5MHz)' at -40.24 dB and 'ACLR(+5MHz)' at -42.79 dB. The 'Modulation Analysis' section shows 'EVM' at 5.15 % (rms). The 'Peak Code Domain Error' section shows 'PCDE' at -39.86 dB. The 'UE Power' is 22.6 dBm. The 'Band Cal' button is visible on the right. The 'Meas Setup' section on the left shows 'Power Control' set to 'All 1'.

<LTE>

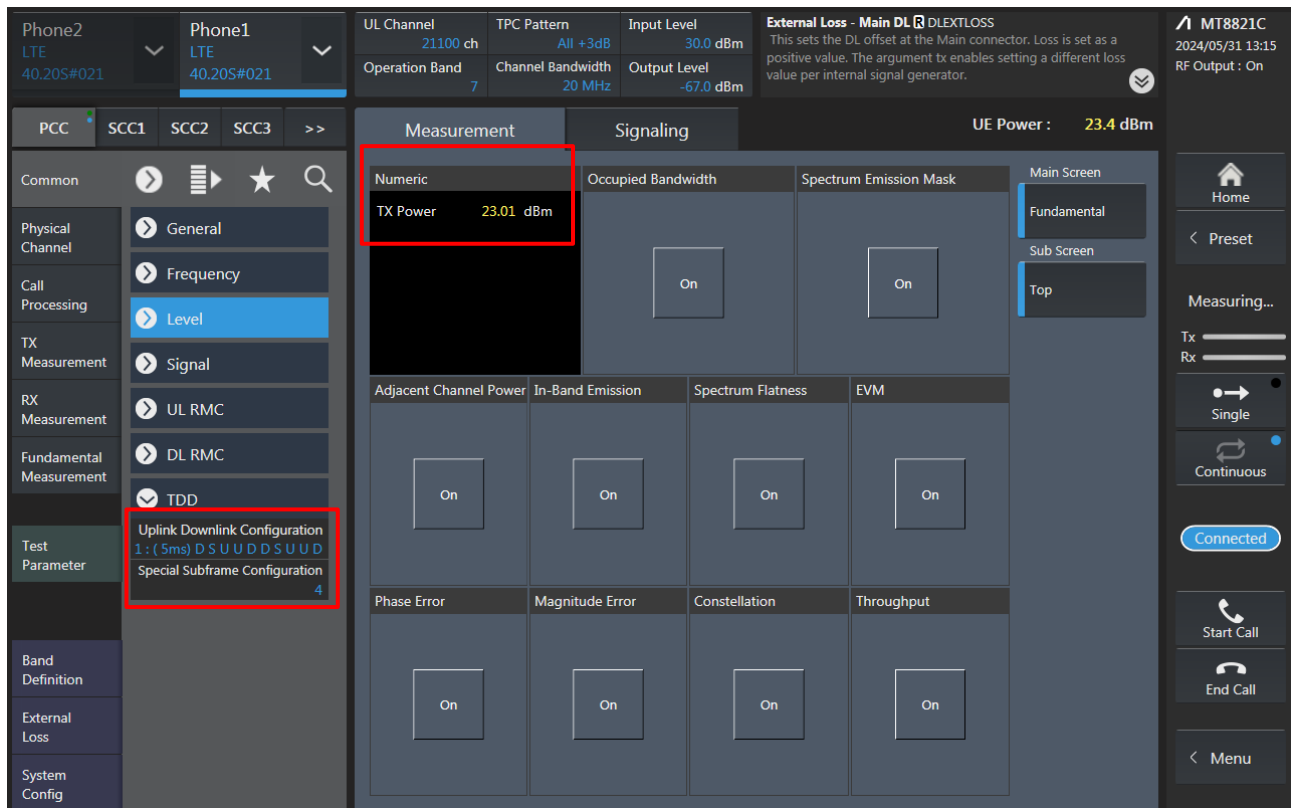

The screenshot shows the LTE measurement interface. The top bar displays 'Phone2 LTE 40.20S#021' and 'Phone1 LTE 40.20S#021'. The 'Measurement' tab is active, showing 'Numeric' and 'Occupied Bandwidth' views. The 'Power Measurement' section is highlighted with a red box, showing 'TX Power' at 23.01 dBm. The 'Occupied Bandwidth' section shows 'OBW' at 20 MHz. The 'Adjacent Channel Power' section shows 'ACLR(-5MHz)' at -40.24 dB and 'ACLR(+5MHz)' at -42.79 dB. The 'Modulation Analysis' section shows 'EVM' at 5.15 % (rms). The 'Peak Code Domain Error' section shows 'PCDE' at -39.86 dB. The 'UE Power' is 23.4 dBm. The 'Band Cal' button is visible on the right. The 'Meas Setup' section on the left shows 'Uplink Downlink Configuration' set to '1: (5ms) D S U U D D S U U D' and 'Special Subframe Configuration' set to '4'.

<LTE TDD Power class 3>

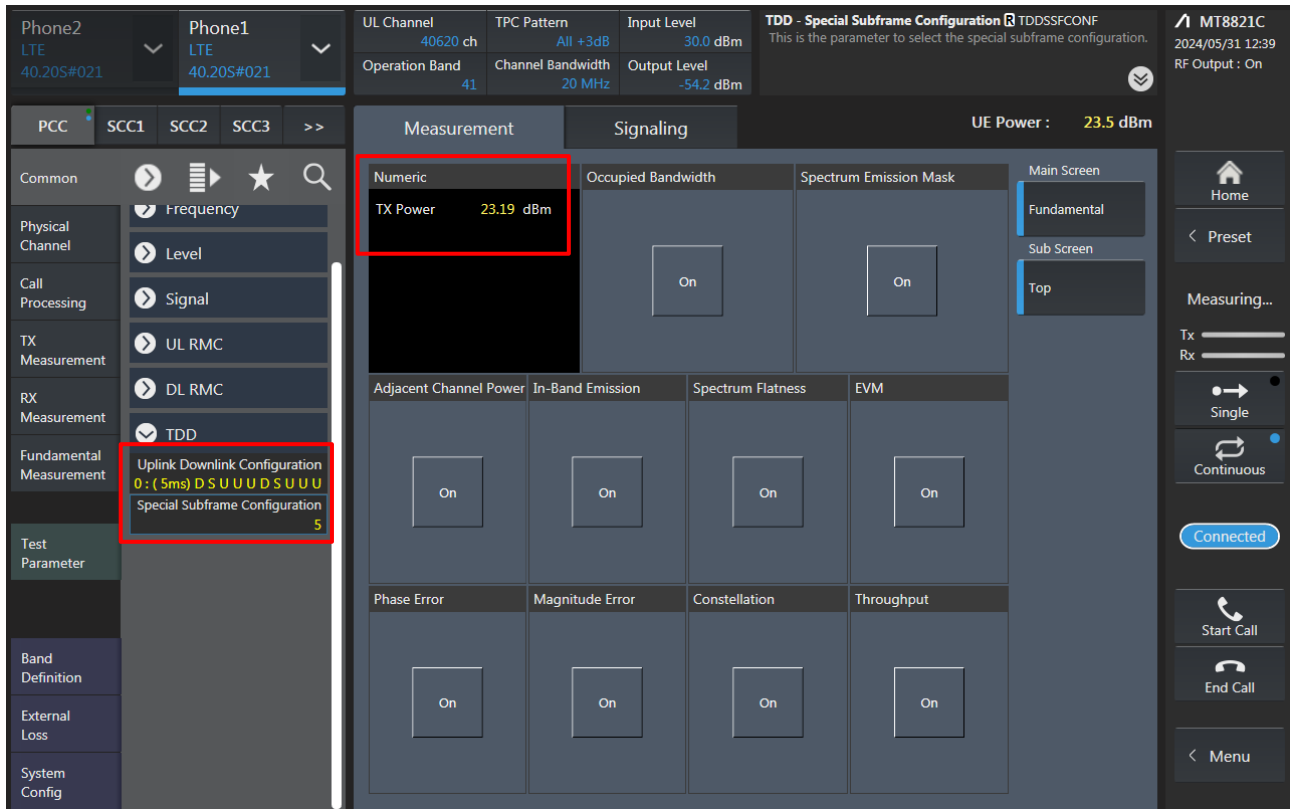

Phone2 LTE 40.20S#021 Phone1 LTE 40.20S#021

UL Channel 40620 ch TPC Pattern All +3dB Input Level 30.0 dBm

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

TDD - Special Subframe Configuration TDDSSFCNF This is the parameter to select the special subframe configuration.

MT8821C 2024/05/31 12:39 RF Output : On

UE Power : 23.5 dBm

Measurement

Numeric TX Power 23.19 dBm

Occupied Bandwidth

Spectrum Emission Mask

Main Screen

Fundamental

Sub Screen

Top

Adjacent Channel Power

In-Band Emission

Spectrum Flatness

EVM

Phase Error

Magnitude Error

Constellation

Throughput

Common

Physical Channel

Call Processing

TX Measurement

RX Measurement

Fundamental Measurement

Test Parameter

Band Definition

External Loss

System Config

Frequency

Level

Signal

UL RMC

DL RMC

TDD

Uplink Downlink Configuration 0: (5ms) D S U U D S U U U

Special Subframe Configuration 5

Home

Preset

Measuring...

Tx

Rx

Single

Continuous


Connected

Start Call

End Call

Menu

<LTE TDD Power class 2>

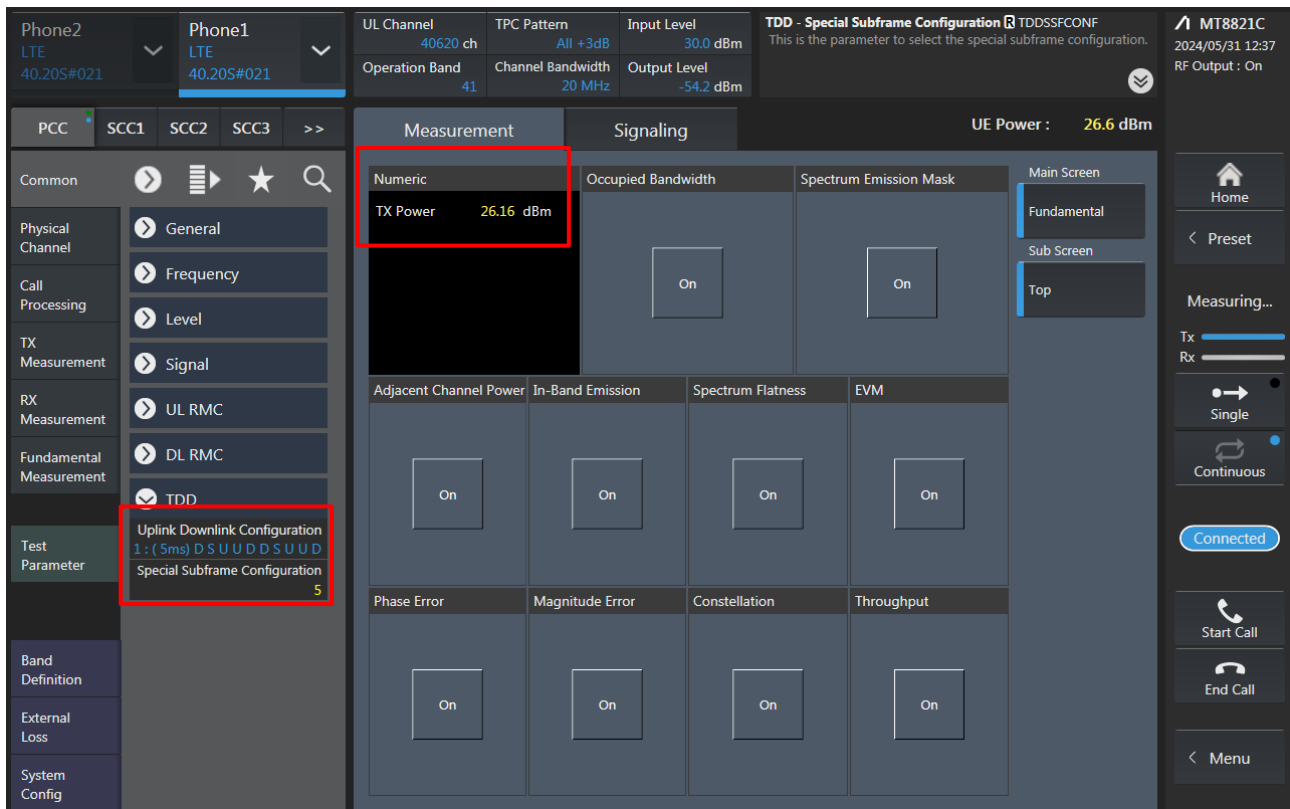

Phone2 LTE 40.20S#021 Phone1 LTE 40.20S#021

UL Channel 40620 ch TPC Pattern All +3dB Input Level 30.0 dBm

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

TDD - Special Subframe Configuration TDDSSFCNF This is the parameter to select the special subframe configuration.

MT8821C 2024/05/31 12:37 RF Output : On

UE Power : 26.6 dBm

Measurement

Numeric TX Power 26.16 dBm

Occupied Bandwidth

Spectrum Emission Mask

Main Screen

Fundamental

Sub Screen

Top

Adjacent Channel Power

In-Band Emission

Spectrum Flatness

EVM

Phase Error

Magnitude Error

Constellation

Throughput

Common

Physical Channel

Call Processing

TX Measurement

RX Measurement

Fundamental Measurement

Test Parameter

Band Definition

External Loss

System Config

General

Frequency

Level

Signal

UL RMC

DL RMC

TDD

Uplink Downlink Configuration 1: (5ms) D S U U D D S U U D

Special Subframe Configuration 5

Home

Preset

Measuring...

Tx

Rx

Single


Continuous

Connected

Start Call

End Call

Menu

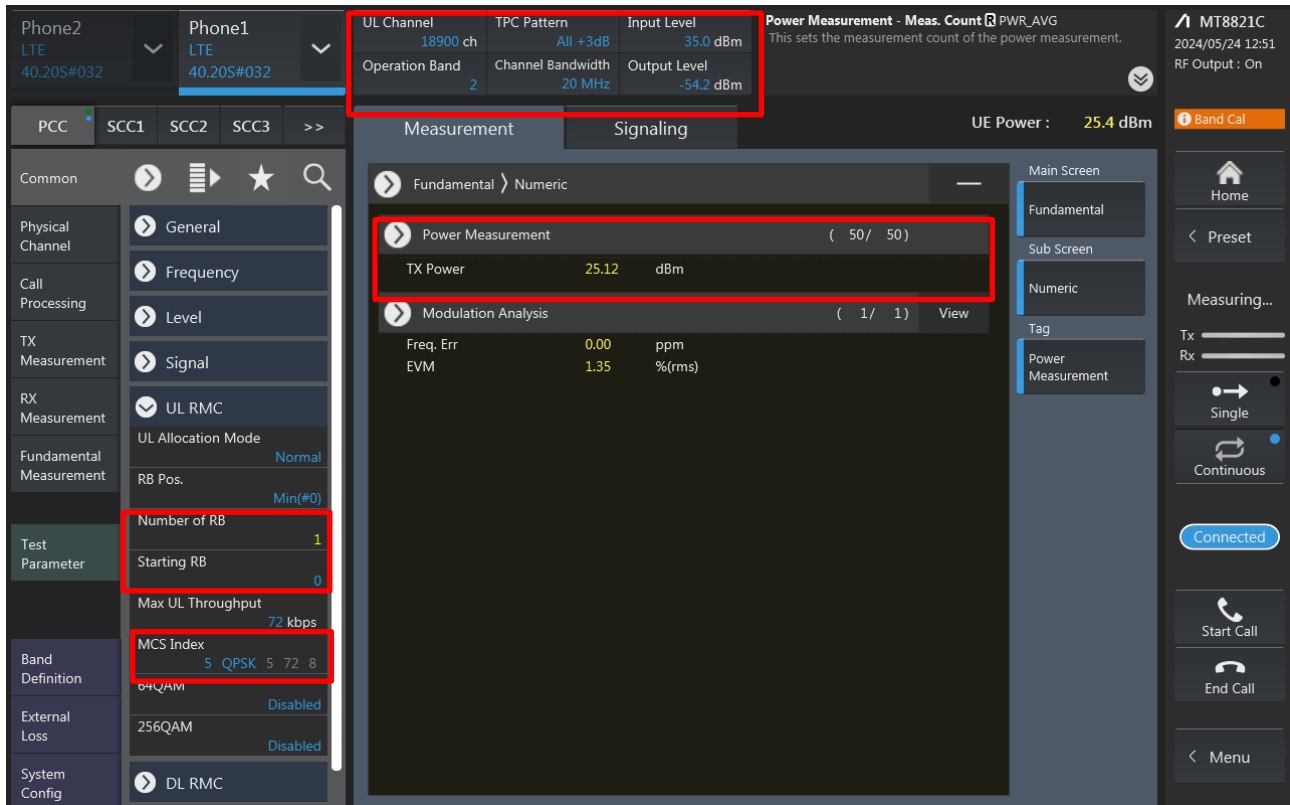

Phone2 LTE 40.20S#032

Phone1 LTE 40.20S#032

UL Channel 18900 ch

TPC Pattern All +3dB

Input Level 35.0 dBm

Operation Band 2

Channel Bandwidth 20 MHz

Output Level -54.2 dBm

Power Measurement - Meas. Count PWR_AVG

This sets the measurement count of the power measurement.

MT8821C 2024/05/24 12:51 RF Output : On

Measurement **Signaling** **UE Power :** 25.4 dBm

Common **Physical Channel** **Call Processing** **TX Measurement** **RX Measurement** **Fundamental Measurement** **Test Parameter** **Band Definition** **External Loss** **System Config**


General **Frequency** **Level** **Signal** **UL RMC** **UL Allocation Mode** Normal **RB Pos.** Min(#0) **Number of RB** 1 **Starting RB** 0 **Max UL Throughput** 72 kbps **MCS Index** 5 QPSK 5 72 8 **DL RMC**

Fundamental **Numeric** **Power Measurement** (50 / 50) **TX Power** 25.12 dBm **Modulation Analysis** (1 / 1) **View** **Freq. Err** 0.00 ppm **EVM** 1.35 %(rms)

Main Screen **Fundamental** **Sub Screen** **Numeric** **Tag** **Power Measurement**

Home **Preset** **Measuring...** **Tx** **Rx** **Single** **Continuous** **Connected** **Start Call** **End Call** **Menu**

<5G NR FR1>

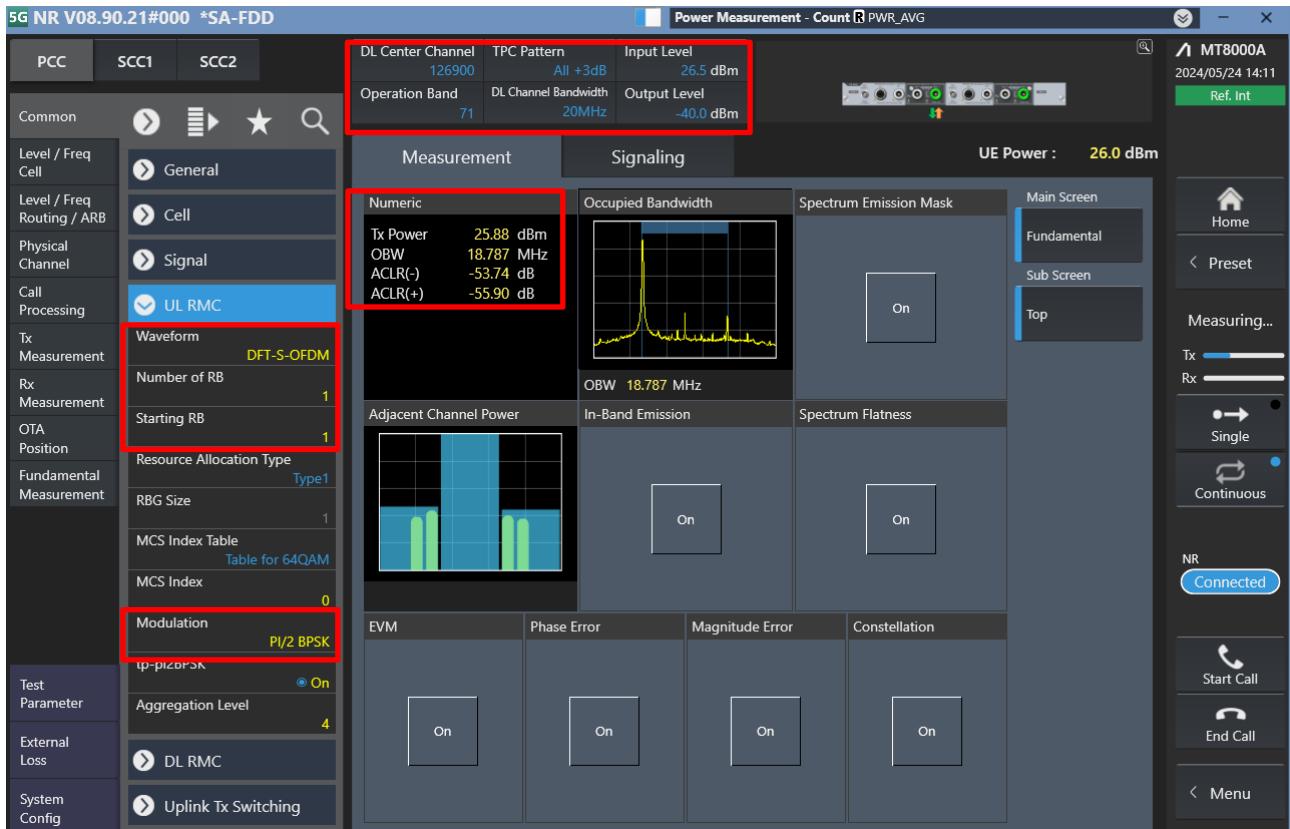

5G NR V08.90.21#000 *SA-FDD **Power Measurement - Count** PWR_AVG

DL Center Channel 126900

TPC Pattern All +3dB

Input Level 26.5 dBm

Operation Band 71

DL Channel Bandwidth 20MHz

Output Level -40.0 dBm

MT8000A 2024/05/24 14:11 Ref. Int

Measurement **Signaling** **UE Power :** 26.0 dBm

Common **Level / Freq Cell** **Level / Freq Routing / ARB** **Physical Channel** **Call Processing** **UL RMC** **Waveform** DFT-S-OFDM **Number of RB** 1 **Starting RB** 1 **Resource Allocation Type** Type1 **RBG Size** 1 **MCS Index Table** Table for 64QAM **MCS Index** 0 **Modulation** PL/2 BPSK **Aggregation Level** 4 **DL RMC** **Uplink Tx Switching**

Numeric **Tx Power** 25.88 dBm **OBW** 18.787 MHz **ACLR(-)** -53.74 dB **ACLR(+)** -55.90 dB

Occupied Bandwidth **OBW** 18.787 MHz

Spectrum Emission Mask **On**



Adjacent Channel Power **On**

In-Band Emission **On**

Spectrum Flatness **On**


EVM **Phase Error** **Magnitude Error** **Constellation** **On** **On** **On** **On**

Home **Preset** **Measuring...** **Tx** **Rx** **Single** **Continuous** **Connected** **Start Call** **End Call** **Menu**

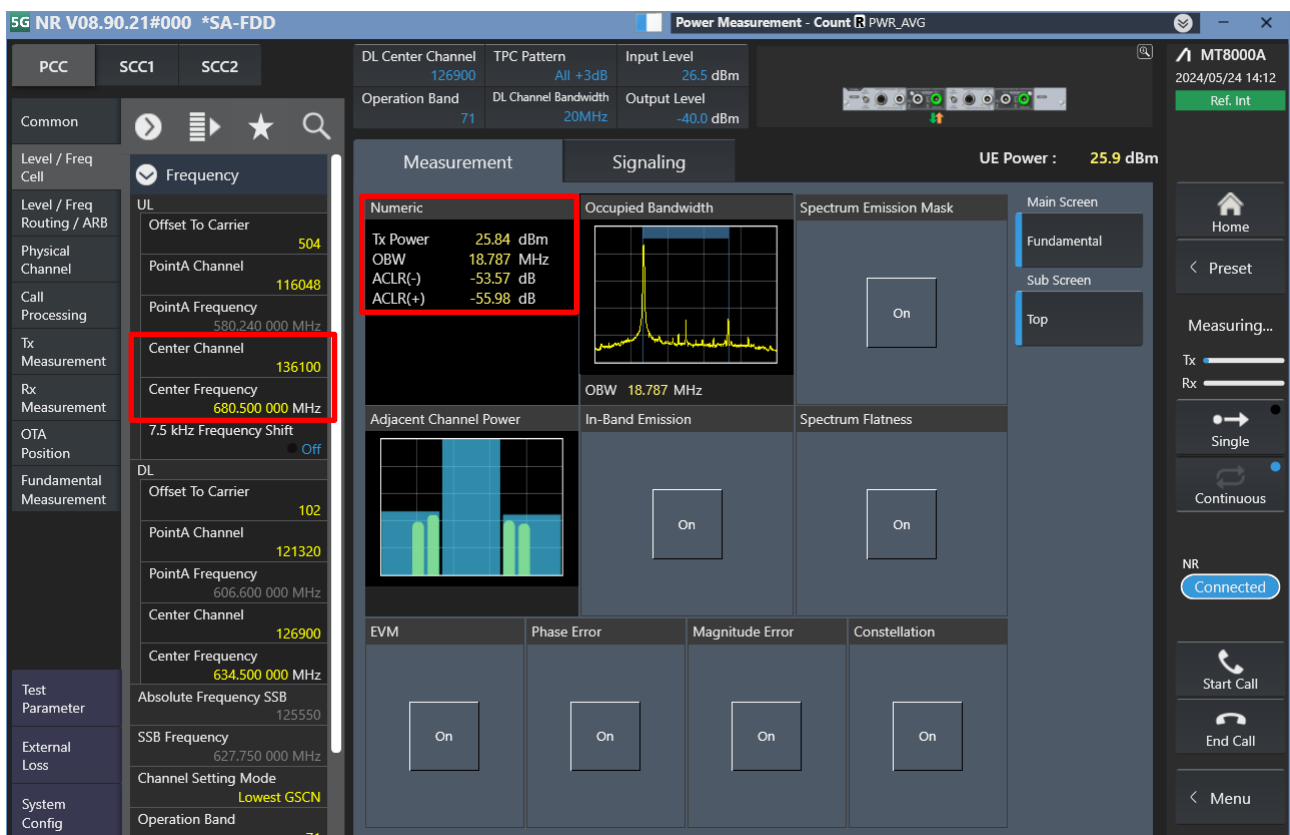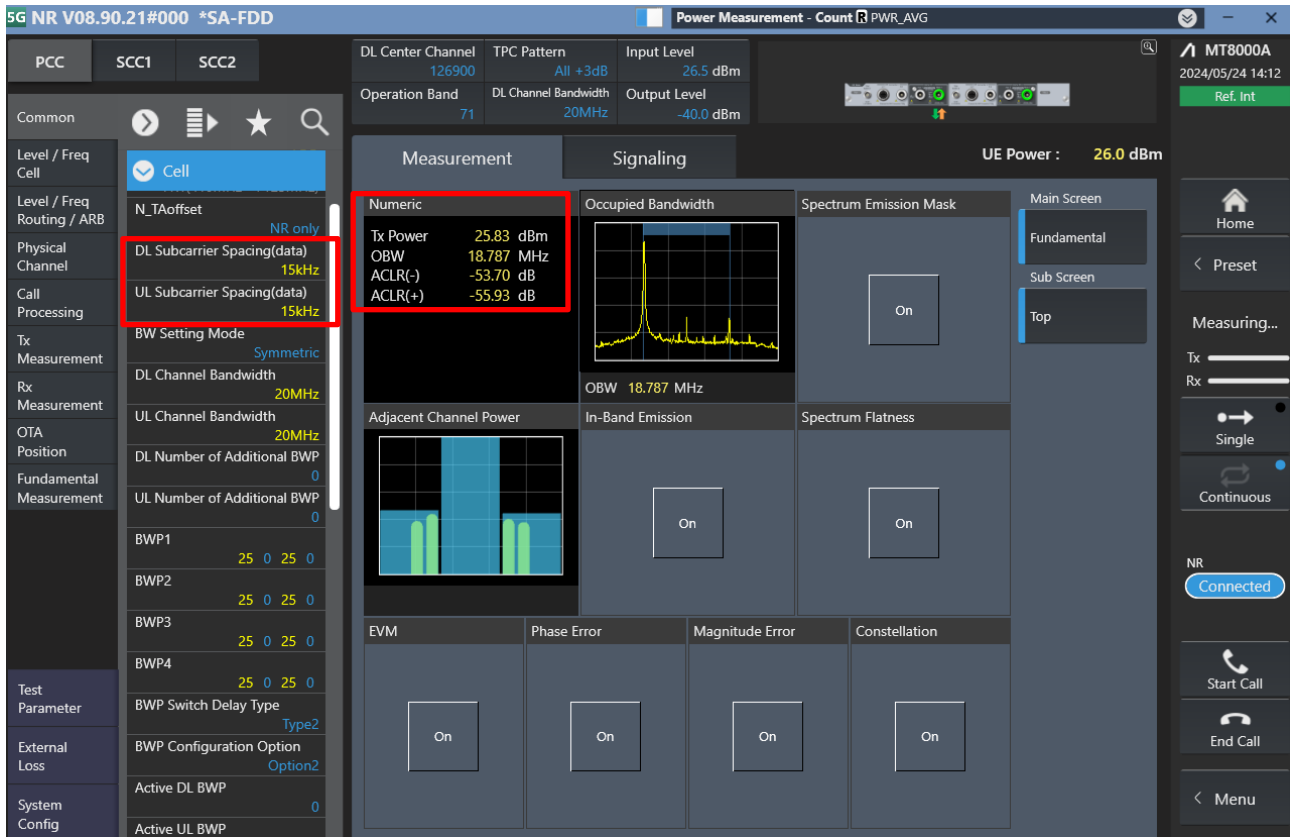

LTE Uplink and Downlink Carrier Aggregation configurations:


1. Change the Scenario in the Configuration of Phone1 LTE Signaling and Preset.

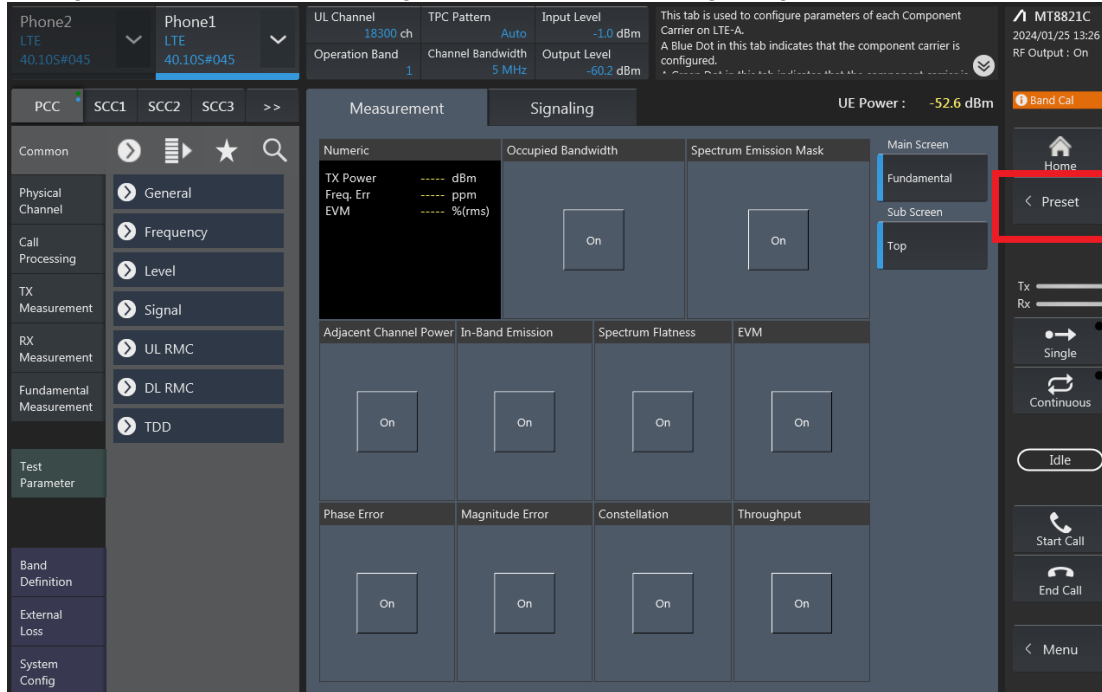


2. If Select "RMC (DL/UL CA)" for Uplink Carrier Aggregation;
If Select "RMC (DL CA)" for Downlink Carrier Aggregation.

For example, Uplink Carrier Aggregation:

Detailed operation: PCC → Common → Signal → Channel Coding → Select 【RMC (DL/UL CA)】

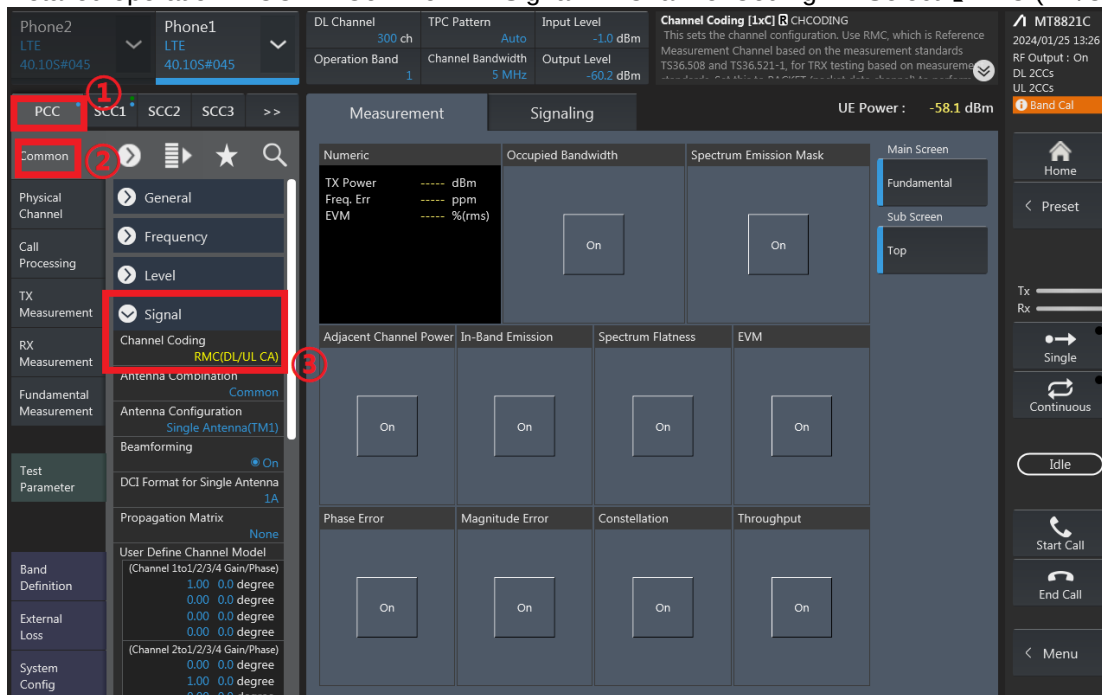

3. PCC parameter Settings: on the screen, and then select the PCC tab and Set operating band, BW, channel and RB configurations for PCC;

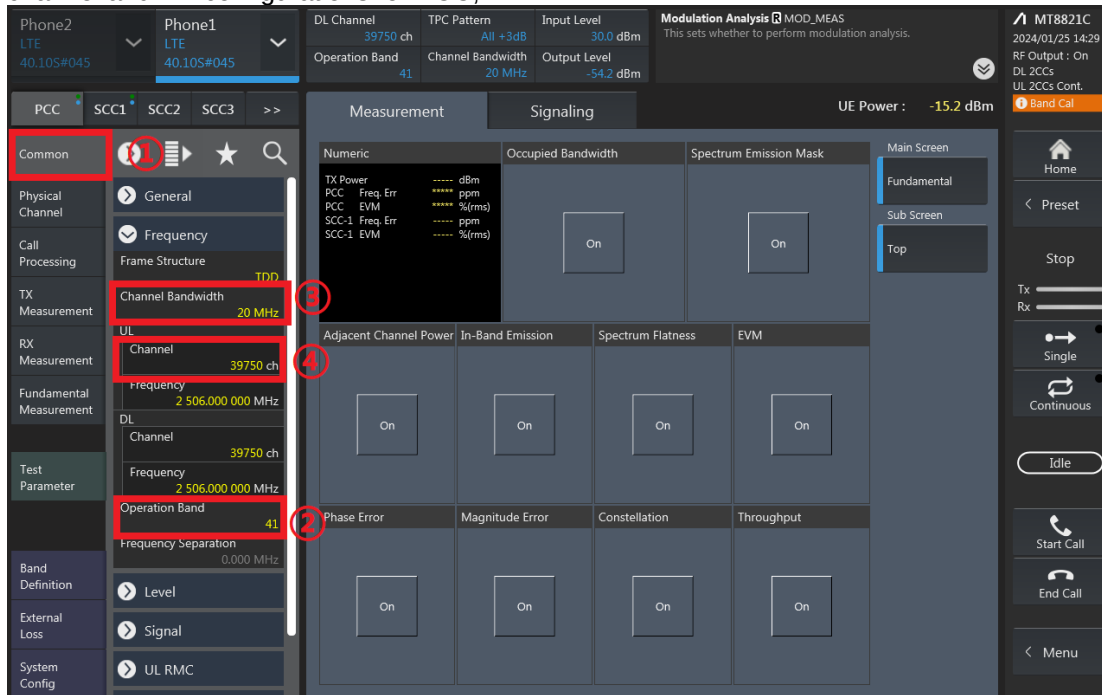

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

DL Channel 39750 ch TPC Pattern All +3dB Input Level 30.0 dBm Modulation Analysis MOD_MEAS This sets whether to perform modulation analysis.

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

MT8821C 2024/01/25 14:29 RF Output : On DL 2CCs UL 2CCs Cont.

PCC SCC1 SCC2 SCC3 >>

Measurement Signaling UE Power : -15.2 dBm

Common

Physical Channel General

Call Processing Frequency

TX Measurement Channel Bandwidth 20 MHz

RX Measurement Channel 39750 ch

Fundamental Measurement Frequency 2 506.000 000 MHz

Test Parameter Channel 39750 ch Frequency 2 506.000 000 MHz Operation Band 41 Frequency Separation 0.000 MHz

Band Definition Level

External Loss Signal

System Config UL RMC

Numeric Occupied Bandwidth Spectrum Emission Mask

TX Power PCC Freq. Err. dBm PCC EVM ppm PCC-1 Freq. Err. ppm PCC-1 EVM ppm


Adjacent Channel Power In-Band Emission Spectrum Flatness EVM

Phase Error Magnitude Error Constellation Throughput

Main Screen Fundamental Sub Screen Top

Home Preset Stop Tx Rx Single Continuous Idle Start Call End Call Menu

RB configurations (Number of RB / Starting RB) for PCC;

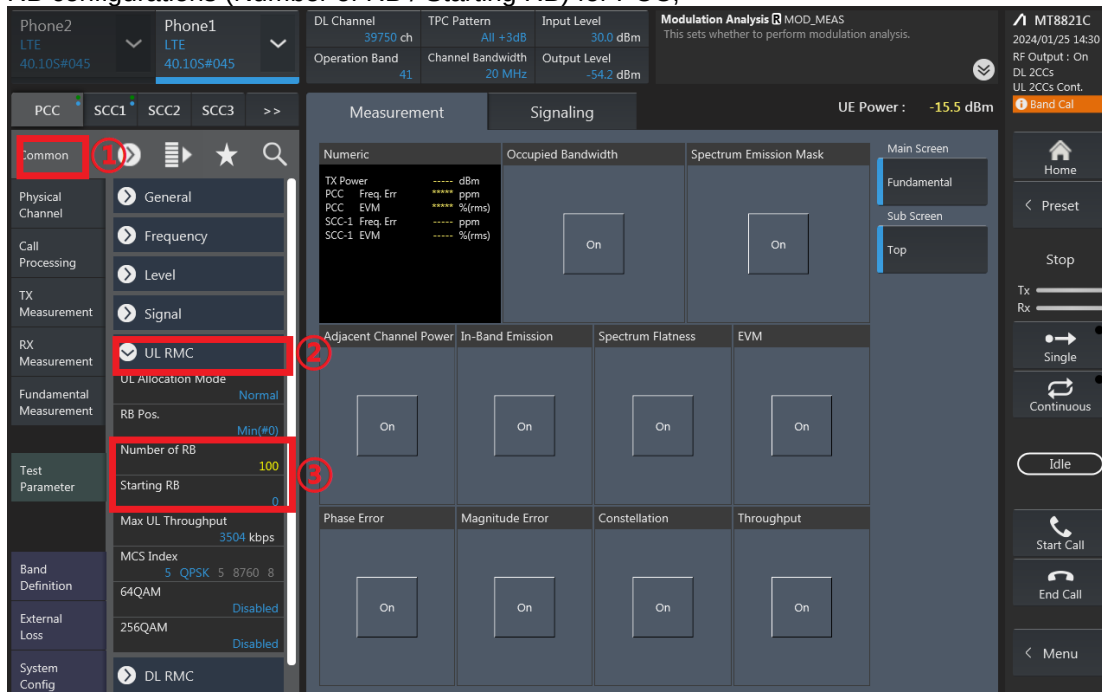

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

DL Channel 39750 ch TPC Pattern All +3dB Input Level 30.0 dBm Modulation Analysis MOD_MEAS This sets whether to perform modulation analysis.

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

MT8821C 2024/01/25 14:30 RF Output : On DL 2CCs UL 2CCs Cont.

PCC SCC1 SCC2 SCC3 >>

Measurement Signaling UE Power : -15.5 dBm

Common

Physical Channel General

Call Processing Frequency

TX Measurement Level

RX Measurement Signal

Fundamental Measurement UL RMC

Test Parameter UL Allocation Mode Normal RB Pos. Min(#0) Number of RB 100 Starting RB 0 Max UL Throughput 3504 kbps MCS Index 5 QPSK 5 8760 8 64QAM 256QAM Disabled Disabled

Band Definition DL RMC

Numeric Occupied Bandwidth Spectrum Emission Mask

TX Power PCC Freq. Err. dBm PCC EVM ppm PCC-1 Freq. Err. ppm PCC-1 EVM ppm


Adjacent Channel Power In-Band Emission Spectrum Flatness EVM

Phase Error Magnitude Error Constellation Throughput


Main Screen Fundamental Sub Screen Top

Home Preset Stop Tx Rx Single Continuous Idle Start Call End Call Menu


4. SCC parameter Settings: Select the SCC1 tab, Set operating band, BW, channel, and RB configurations for SCC1;

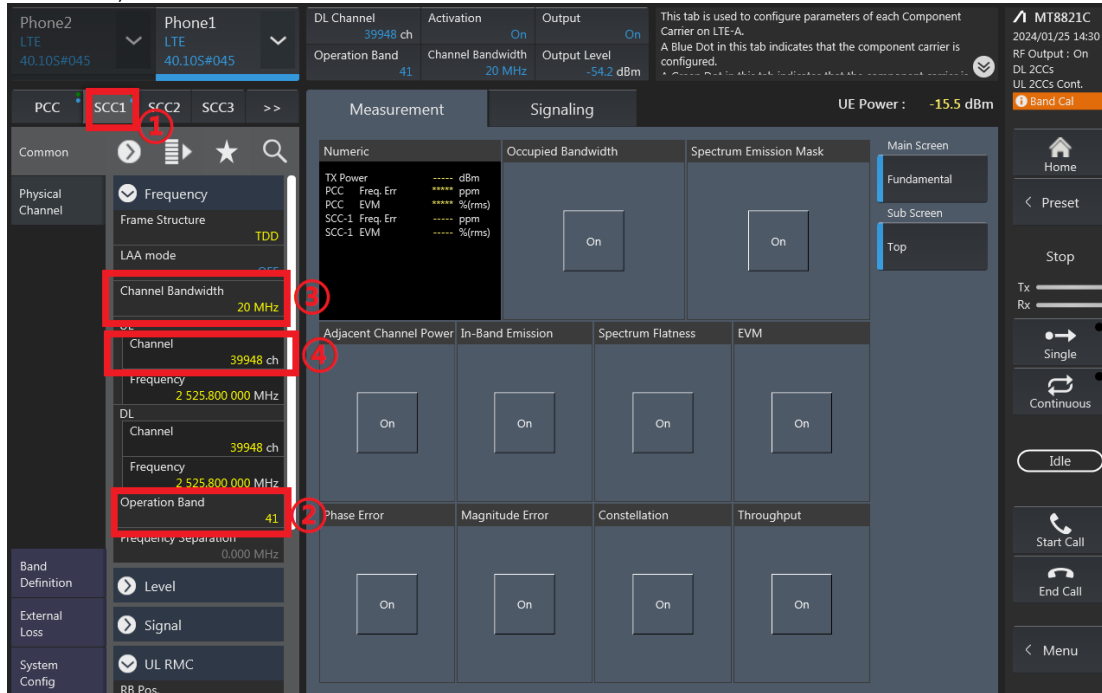


RB configurations (Number of RB / Starting RB) for SCC1;

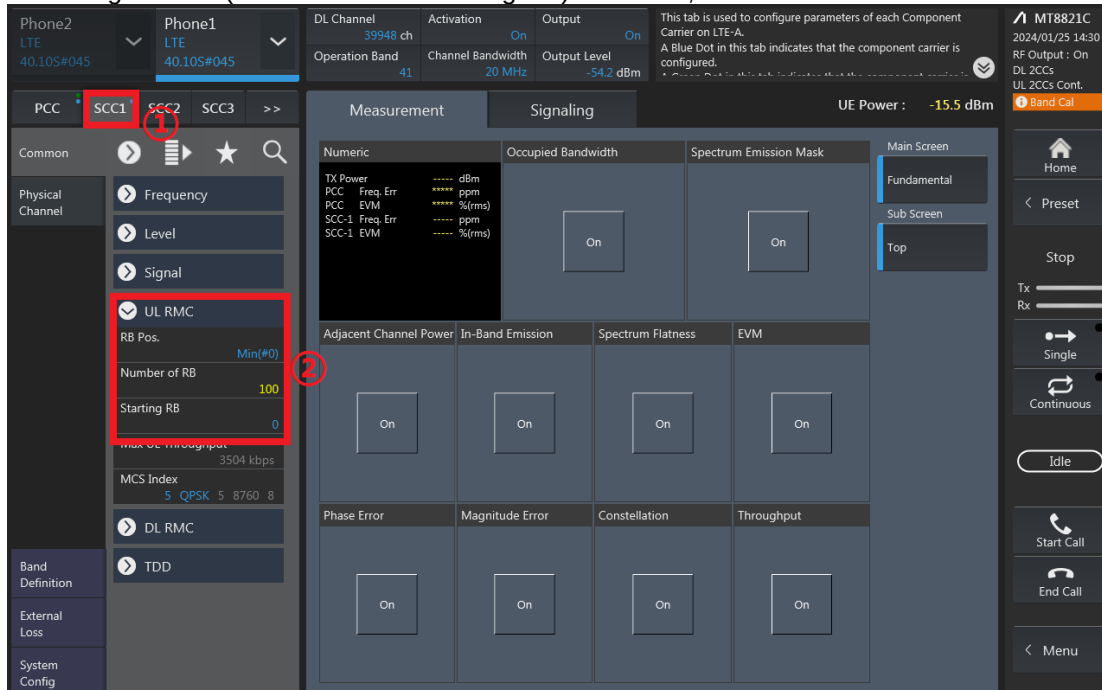

5. Select the PCC tab, then set “SIM Model Number” and select max power;

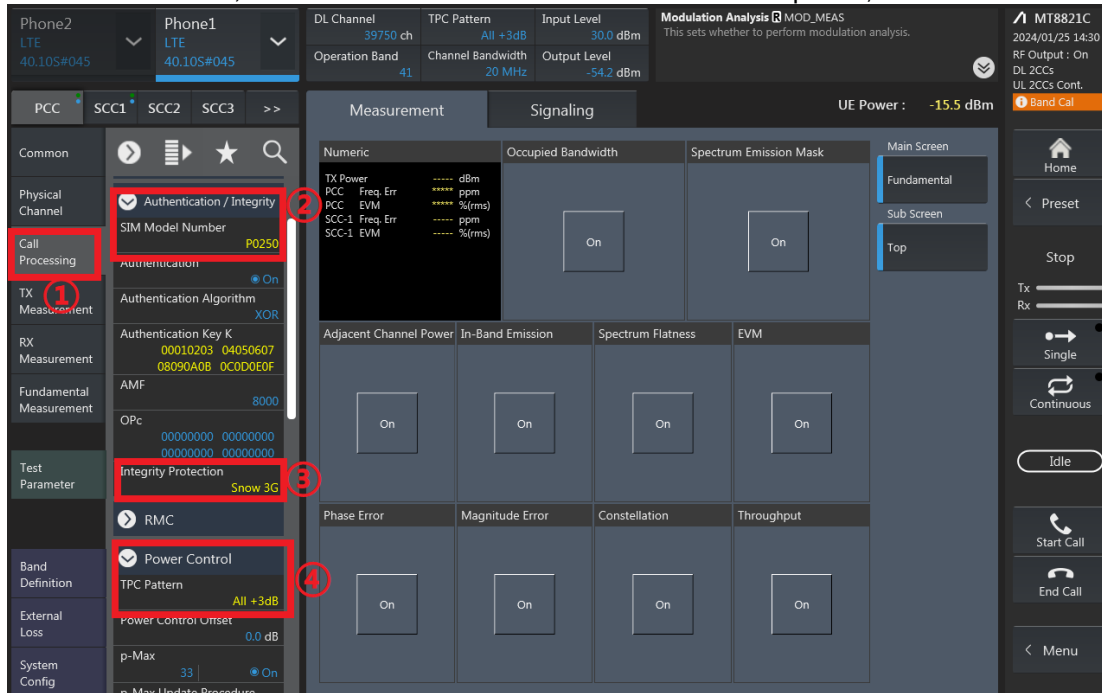

6. Click the “Connect” button at the Right of the screen, if necessary, turn the Airplane mode on/off in the DUT

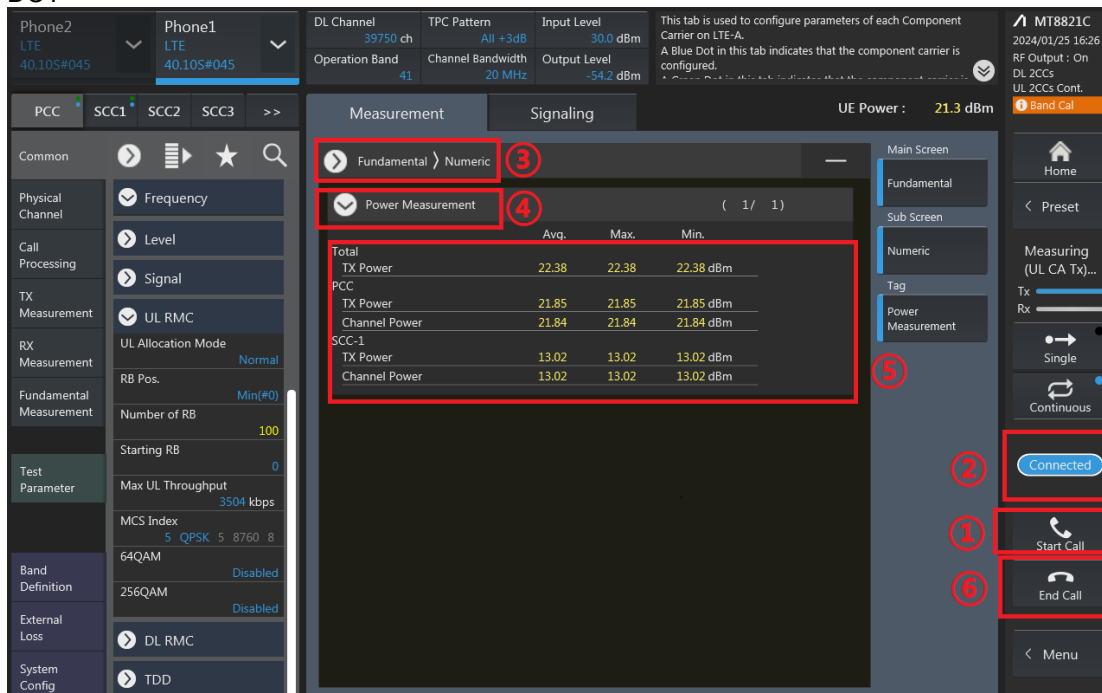

7. The inter-band ULCA test method is similar to intra-band ULCA, and DLCA test method is similar to intra-band ULCA too.

Uplink CA Power

CA_5B Ant0 Default								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	22.61	24.00
20476	20575	QPSK	1	49	1	0	22.75	24.00
20600	20501	QPSK	1	0	1	49	22.63	24.00

CA_5B Ant1 Default								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	22.51	24.00
20476	20575	QPSK	1	49	1	0	22.62	24.00
20600	20501	QPSK	1	0	1	49	22.55	24.00

CA_38C Ant9 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	23.21	24.00
37901	38099	QPSK	1	99	1	0	23.29	24.00
38150	37952	QPSK	1	0	1	99	23.16	24.00

CA_38C Ant1 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.50	24.00
37901	38099	QPSK	1	99	1	0	22.55	24.00
38150	37952	QPSK	1	0	1	99	22.51	24.00

CA_41C Ant9 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	22.59	24.00
40185	40383	QPSK	1	99	1	0	22.54	24.00
40620	40818	QPSK	1	99	1	0	22.87	24.00
41055	41253	QPSK	1	99	1	0	22.64	24.00
41490	41292	QPSK	1	0	1	99	22.54	24.00

CA_41C HPUE Ant9 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	25.82	27.00
40185	40383	QPSK	1	99	1	0	25.86	27.00
40620	40818	QPSK	1	99	1	0	25.98	27.00
41055	41253	QPSK	1	99	1	0	25.81	27.00
41490	41292	QPSK	1	0	1	99	25.83	27.00

CA_41C Ant1 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	22.59	24.00
40185	40383	QPSK	1	99	1	0	22.49	24.00
40620	40818	QPSK	1	99	1	0	22.66	24.00
41055	41253	QPSK	1	99	1	0	22.57	24.00
41490	41292	QPSK	1	0	1	99	22.51	24.00

CA_41C HPUE Ant1 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	25.68	27.00
40185	40383	QPSK	1	99	1	0	25.51	27.00
40620	40818	QPSK	1	99	1	0	25.74	27.00
41055	41253	QPSK	1	99	1	0	25.63	27.00
41490	41292	QPSK	1	0	1	99	25.55	27.00

CA_41C Ant6 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	21.35	23.00
40185	40383	QPSK	1	99	1	0	21.41	23.00
40620	40818	QPSK	1	99	1	0	21.48	23.00
41055	41253	QPSK	1	99	1	0	21.25	23.00
41490	41292	QPSK	1	0	1	99	21.41	23.00

CA_41C HPUE Ant6 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	24.42	26.00
40185	40383	QPSK	1	99	1	0	24.33	26.00
40620	40818	QPSK	1	99	1	0	24.56	26.00
41055	41253	QPSK	1	99	1	0	24.38	26.00
41490	41292	QPSK	1	0	1	99	24.46	26.00

CA_41C Ant3 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.75	20.00
40185	40383	QPSK	1	99	1	0	18.68	20.00
40620	40818	QPSK	1	99	1	0	18.88	20.00
41055	41253	QPSK	1	99	1	0	18.85	20.00
41490	41292	QPSK	1	0	1	99	18.76	20.00

CA_41C HPUE Ant3 Default								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	22.28	23.00
40185	40383	QPSK	1	99	1	0	22.29	23.00
40620	40818	QPSK	1	99	1	0	22.35	23.00
41055	41253	QPSK	1	99	1	0	22.17	23.00
41490	41292	QPSK	1	0	1	99	22.24	23.00

CA_48C Ant7 Default								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.09	23.50
55830	56028	QPSK	1	99	1	0	22.26	23.50
56150	56348	QPSK	1	99	1	0	22.20	23.50
56640	56442	QPSK	1	0	1	99	22.09	23.50

CA_48C Ant4 Default								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.32	24.00
55830	56028	QPSK	1	99	1	0	22.49	24.00
56150	56348	QPSK	1	99	1	0	22.33	24.00
56640	56442	QPSK	1	0	1	99	22.27	24.00

CA_48C Ant8 Default								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.11	23.00
55830	56028	QPSK	1	99	1	0	22.29	23.00
56150	56348	QPSK	1	99	1	0	22.07	23.00
56640	56442	QPSK	1	0	1	99	22.14	23.00

CA_48C Ant9 Default								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.88	24.00
55830	56028	QPSK	1	99	1	0	23.07	24.00
56150	56348	QPSK	1	99	1	0	22.89	24.00
56640	56442	QPSK	1	0	1	99	22.93	24.00

CA_48B Ant7 Default								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	21.88	23.50
55820	55913	QPSK	1	74	1	0	22.02	23.50
56160	56253	QPSK	1	74	1	0	21.98	23.50
56665	56572	QPSK	1	0	1	24	21.85	23.50

CA_48B Ant4 Default								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	22.11	24.00
55820	55913	QPSK	1	74	1	0	22.28	24.00
56160	56253	QPSK	1	74	1	0	22.09	24.00
56665	56572	QPSK	1	0	1	24	22.09	24.00

CA_48B Ant8 Default								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	21.77	23.00
55820	55913	QPSK	1	74	1	0	22.02	23.00
56160	56253	QPSK	1	74	1	0	21.79	23.00
56665	56572	QPSK	1	0	1	24	21.86	23.00

CA_48B Ant9 Default								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	22.6	24.00
55820	55913	QPSK	1	74	1	0	22.76	24.00
56160	56253	QPSK	1	74	1	0	22.57	24.00
56665	56572	QPSK	1	0	1	24	22.6	24.00

CA_41C Ant3 DSI2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	16.72	18.00
40185	40383	QPSK	1	99	1	0	16.75	18.00
40620	40818	QPSK	1	99	1	0	16.83	18.00
41055	41253	QPSK	1	99	1	0	16.72	18.00
41490	41292	QPSK	1	0	1	99	16.77	18.00

CA_41C HPUE Ant3 DSI2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.32	19.60
40185	40383	QPSK	1	99	1	0	18.37	19.60
40620	40818	QPSK	1	99	1	0	18.56	19.60
41055	41253	QPSK	1	99	1	0	18.49	19.60
41490	41292	QPSK	1	0	1	99	18.35	19.60

CA_48C Ant7 DSI2								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	16.22	16.50
55830	56028	QPSK	1	99	1	0	16.32	16.50
56150	56348	QPSK	1	99	1	0	16.19	16.50
56640	56442	QPSK	1	0	1	99	16.22	16.50

CA_48C Ant4 DSI2								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.32	24.00
55830	56028	QPSK	1	99	1	0	22.49	24.00
56150	56348	QPSK	1	99	1	0	22.33	24.00
56640	56442	QPSK	1	0	1	99	22.27	24.00

CA_48C Ant8 DSI2								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	15.22	16.50
55830	56028	QPSK	1	99	1	0	15.24	16.50
56150	56348	QPSK	1	99	1	0	15.31	16.50
56640	56442	QPSK	1	0	1	99	15.29	16.50

CA_48C Ant9 DSI2								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.88	24.00
55830	56028	QPSK	1	99	1	0	23.07	24.00
56150	56348	QPSK	1	99	1	0	22.89	24.00
56640	56442	QPSK	1	0	1	99	22.93	24.00

CA_48B Ant7 DSI2								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	15.9	16.50
55820	55913	QPSK	1	74	1	0	16.04	16.50
56160	56253	QPSK	1	74	1	0	15.85	16.50
56665	56572	QPSK	1	0	1	24	15.89	16.50

CA_48B Ant4 DSI2								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	22.11	24.00
55820	55913	QPSK	1	74	1	0	22.28	24.00
56160	56253	QPSK	1	74	1	0	22.09	24.00
56665	56572	QPSK	1	0	1	24	22.09	24.00

CA_48B Ant8 DSI2								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	14.86	16.50
55820	55913	QPSK	1	74	1	0	14.98	16.50
56160	56253	QPSK	1	74	1	0	14.99	16.50
56665	56572	QPSK	1	0	1	24	15.01	16.50

CA_48B Ant9 DSI2								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	22.6	24.00
55820	55913	QPSK	1	74	1	0	22.76	24.00
56160	56253	QPSK	1	74	1	0	22.57	24.00
56665	56572	QPSK	1	0	1	24	22.6	24.00

CA_41C Ant3 DSI3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.75	20.00
40185	40383	QPSK	1	99	1	0	18.68	20.00
40620	40818	QPSK	1	99	1	0	18.88	20.00
41055	41253	QPSK	1	99	1	0	18.85	20.00
41490	41292	QPSK	1	0	1	99	18.76	20.00

CA_41C HPUE Ant3 DSI3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	20.11	21.70
40185	40383	QPSK	1	99	1	0	20.09	21.70
40620	40818	QPSK	1	99	1	0	20.28	21.70
41055	41253	QPSK	1	99	1	0	20.21	21.70
41490	41292	QPSK	1	0	1	99	20.15	21.70

CA_48C Ant7 DSI3								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	17.21	18.60
55830	56028	QPSK	1	99	1	0	17.32	18.60
56150	56348	QPSK	1	99	1	0	17.26	18.60
56640	56442	QPSK	1	0	1	99	17.24	18.60

CA_48C Ant4 DSI3								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	16.12	17.30
55830	56028	QPSK	1	99	1	0	16.45	17.30
56150	56348	QPSK	1	99	1	0	16.21	17.30
56640	56442	QPSK	1	0	1	99	16.12	17.30

CA_48C Ant8 DSI3								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	15.88	17.10
55830	56028	QPSK	1	99	1	0	16.01	17.10
56150	56348	QPSK	1	99	1	0	15.72	17.10
56640	56442	QPSK	1	0	1	99	15.84	17.10

CA_48C Ant9 DSI3								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.15	23.50
55830	56028	QPSK	1	99	1	0	22.38	23.50
56150	56348	QPSK	1	99	1	0	22.17	23.50
56640	56442	QPSK	1	0	1	99	22.14	23.50

CA_5B Ant0 DSI7								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	22.61	24.00
20476	20575	QPSK	1	49	1	0	22.75	24.00
20600	20501	QPSK	1	0	1	49	22.63	24.00

CA_5B Ant1 DSI7								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	20.55	22.30
20476	20575	QPSK	1	49	1	0	20.65	22.30
20600	20501	QPSK	1	0	1	49	20.49	22.30

CA_38C Ant9 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	21.25	22.30
37901	38099	QPSK	1	99	1	0	21.32	22.30
38150	37952	QPSK	1	0	1	99	21.12	22.30

CA_38C Ant1 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	11.54	12.00
37901	38099	QPSK	1	99	1	0	11.69	12.00
38150	37952	QPSK	1	0	1	99	11.52	12.00

CA_41C Ant9 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	21.35	22.30
40185	40383	QPSK	1	99	1	0	21.51	22.30
40620	40818	QPSK	1	99	1	0	21.62	22.30
41055	41253	QPSK	1	99	1	0	21.49	22.30
41490	41292	QPSK	1	0	1	99	21.35	22.30

CA_41C HPUE Ant9 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	23.05	23.90
40185	40383	QPSK	1	99	1	0	23.06	23.90
40620	40818	QPSK	1	99	1	0	23.15	23.90
41055	41253	QPSK	1	99	1	0	23.13	23.90
41490	41292	QPSK	1	0	1	99	23.07	23.90

CA_41C Ant1 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	11.62	12.00
40185	40383	QPSK	1	99	1	0	11.71	12.00
40620	40818	QPSK	1	99	1	0	11.75	12.00
41055	41253	QPSK	1	99	1	0	11.62	12.00
41490	41292	QPSK	1	0	1	99	11.54	12.00

CA_41C HPUE Ant1 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	13.21	13.60
40185	40383	QPSK	1	99	1	0	13.32	13.60
40620	40818	QPSK	1	99	1	0	13.35	13.60
41055	41253	QPSK	1	99	1	0	13.27	13.60
41490	41292	QPSK	1	0	1	99	13.26	13.60

CA_41C Ant6 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.71	20.20
40185	40383	QPSK	1	99	1	0	18.82	20.20
40620	40818	QPSK	1	99	1	0	18.84	20.20
41055	41253	QPSK	1	99	1	0	18.79	20.20
41490	41292	QPSK	1	0	1	99	18.54	20.20

CA_41C HPUE Ant6 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	20.33	21.80
40185	40383	QPSK	1	99	1	0	20.41	21.80
40620	40818	QPSK	1	99	1	0	20.53	21.80
41055	41253	QPSK	1	99	1	0	20.37	21.80
41490	41292	QPSK	1	0	1	99	20.12	21.80

CA_5B Ant0 DSI6								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	22.61	24.00
20476	20575	QPSK	1	49	1	0	22.75	24.00
20600	20501	QPSK	1	0	1	49	22.63	24.00

CA_5B Ant1 DSI6								
Combination 10MHz+10MHz (50RB+50RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20450	20549	QPSK	1	49	1	0	22.51	24.00
20476	20575	QPSK	1	49	1	0	22.62	24.00
20600	20501	QPSK	1	0	1	49	22.55	24.00

CA_38C Ant9 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	23.21	24.00
37901	38099	QPSK	1	99	1	0	23.29	24.00
38150	37952	QPSK	1	0	1	99	23.16	24.00

CA_38C Ant1 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	19.91	21.10
37901	38099	QPSK	1	99	1	0	20.01	21.10
38150	37952	QPSK	1	0	1	99	19.75	21.10

CA_41C Ant9 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	22.59	24.00
40185	40383	QPSK	1	99	1	0	22.54	24.00
40620	40818	QPSK	1	99	1	0	22.87	24.00
41055	41253	QPSK	1	99	1	0	22.64	24.00
41490	41292	QPSK	1	0	1	99	22.54	24.00

CA_41C HPUE Ant9 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	24.62	25.60
40185	40383	QPSK	1	99	1	0	24.71	25.60
40620	40818	QPSK	1	99	1	0	24.63	25.60
41055	41253	QPSK	1	99	1	0	24.59	25.60
41490	41292	QPSK	1	0	1	99	24.55	25.60

CA_41C Ant3 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	16.68	18.30
40185	40383	QPSK	1	99	1	0	16.92	18.30
40620	40818	QPSK	1	99	1	0	17.05	18.30
41055	41253	QPSK	1	99	1	0	16.84	18.30
41490	41292	QPSK	1	0	1	99	16.74	18.30

CA_41C HPUE Ant3 DSI7								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.35	19.90
40185	40383	QPSK	1	99	1	0	18.51	19.90
40620	40818	QPSK	1	99	1	0	18.62	19.90
41055	41253	QPSK	1	99	1	0	18.44	19.90
41490	41292	QPSK	1	0	1	99	18.32	19.90

CA_48C Ant7 DSI7								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	12.71	14.70
55830	56028	QPSK	1	99	1	0	12.89	14.70
56150	56348	QPSK	1	99	1	0	12.79	14.70
56640	56442	QPSK	1	0	1	99	12.85	14.70

CA_48C Ant4 DSI7								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	15.22	16.40
55830	56028	QPSK	1	99	1	0	15.32	16.40
56150	56348	QPSK	1	99	1	0	15.16	16.40
56640	56442	QPSK	1	0	1	99	15.11	16.40

CA_48C Ant8 DSI7								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	13.23	14.00
55830	56028	QPSK	1	99	1	0	13.32	14.00
56150	56348	QPSK	1	99	1	0	13.15	14.00
56640	56442	QPSK	1	0	1	99	13.21	14.00

CA_48C Ant9 DSI7								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	22.15	23.50
55830	56028	QPSK	1	99	1	0	22.38	23.50
56150	56348	QPSK	1	99	1	0	22.17	23.50
56640	56442	QPSK	1	0	1	99	22.14	23.50

CA_48B Ant7 DSI7								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	12.74	14.70
55820	55913	QPSK	1	74	1	0	12.73	14.70
56160	56253	QPSK	1	74	1	0	12.78	14.70
56665	56572	QPSK	1	0	1	24	12.75	14.70

CA_48B Ant4 DSI7								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	14.95	16.40
55820	55913	QPSK	1	74	1	0	15.02	16.40
56160	56253	QPSK	1	74	1	0	14.83	16.40
56665	56572	QPSK	1	0	1	24	14.75	16.40

CA_48B Ant8 DSI7								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	12.91	14.00
55820	55913	QPSK	1	74	1	0	13.02	14.00
56160	56253	QPSK	1	74	1	0	12.83	14.00
56665	56572	QPSK	1	0	1	24	12.89	14.00

CA_48B Ant9 DSI7								
Combination 15MHz+5MHz (75RB+25RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55315	55408	QPSK	1	74	1	0	21.82	23.50
55820	55913	QPSK	1	74	1	0	22.08	23.50
56160	56253	QPSK	1	74	1	0	21.89	23.50
56665	56572	QPSK	1	0	1	24	21.82	23.50

CA_41C Ant3 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	18.75	20.00
40185	40383	QPSK	1	99	1	0	18.68	20.00
40620	40818	QPSK	1	99	1	0	18.88	20.00
41055	41253	QPSK	1	99	1	0	18.85	20.00
41490	41292	QPSK	1	0	1	99	18.76	20.00

CA_41C HPUE Ant3 DSI6								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
39750	39948	QPSK	1	99	1	0	22.28	23.00
40185	40383	QPSK	1	99	1	0	22.29	23.00
40620	40818	QPSK	1	99	1	0	22.35	23.00
41055	41253	QPSK	1	99	1	0	22.17	23.00
41490	41292	QPSK	1	0	1	99	22.24	23.00

CA_48C Ant7 DSI6								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	18.44	20.20
55830	56028	QPSK	1	99	1	0	18.56	20.20
56150	56348	QPSK	1	99	1	0	18.51	20.20
56640	56442	QPSK	1	0	1	99	18.38	20.20

CA_48C Ant4 DSI6								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	20.71	22.20
55830	56028	QPSK	1	99	1	0	20.83	22.20
56150	56348	QPSK	1	99	1	0	20.72	22.20
56640	56442	QPSK	1	0	1	99	20.68	22.20

CA_48C Ant8 DSI6								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55538	QPSK	1	99	1	0	21.26	22.60
55830	56028	QPSK	1	99	1	0	21.31	22.60
56150	56348	QPSK	1	99	1	0	21.19	22.60
56640	56442	QPSK	1	0	1	99	21.06	22.60

CA_48C Ant9 DSI6								
Combination 20MHz+20MHz (1RB+99RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
55340	55338	QPSK	1	99	1	0	22.02	23.40
55830	56028	QPSK	1	99	1	0	22.03	23.40
56150	56348	QPSK	1	99	1	0	22.01	23.40
56640	56442	QPSK	1	0	1	99	21.95	23.40