

# **MEASUREMENT REPORT**

## **of**

### ***802.11b Wireless LAN Access Point***

**Applicant** : CAMEO COMMUNICATIONS, INC.  
**Product Name** : 802.11b Wireless LAN Access Point  
**Model Name** : as Appendix A  
**FCC ID** : NHPWLB2000  
**Report No.** : C5115149

**Tested by :**

***Training Research Co., Ltd.***

**TEL : 886-2-26935155      FAX : 886-2-26934440**

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

## CERTIFICATION


**We here by verify that:**

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

**Applicant** : CAMEO COMMUNICATIONS, INC.  
**Applicant address** : 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan  
**Product Name** : 802.11b Wireless LAN Access Point  
**Model Name** : as Appendix A  
**FCC ID** : NHPWLB2000  
**Report No.** : C5115149  
**Test Date** : March 17, 2003

Prepared by:   
Jack Tsai

Approved by:   
Frank Tsai

**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

★ NVLAP LAB CODE: 200174-0

## ***Federal Communications Commission***

### **Declaration of Conformity (DoC)**

*For the Following Equipment:*

**Product name :** 802.11b Wireless LAN Access Point

**Model name :** as Appendix A

**Trade name :** as Appendix A

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the **report number: C5115149**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,  
including interference that may cause undesired operation

<i><b>Manufacturer</b></i>	<i><b>USA local representative</b></i>
<b>Company name:</b> CAMEO COMMUNICATIONS, INC.	To be determined
<b>Computer address:</b> 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan	
<b>ZIP / Postal code</b> 221	
<b>Contact person:</b> Jason Chang	
<b>Title:</b> Wireless Comm RD Dept Manager	
<b>Internet e-mail address:</b> jason_chang@mail.cameo.com.tw	
<b>Tel / Fax:</b> 886-2-26499800 / 886-2-26499984	

## ***Tables of Contents***

<b>Declaration of Conformity (DoC)</b>	3
<b>I. GENERAL</b>	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Description of Support Equipment	6
1.4 Test method	8
1.5 Configuration of System Under Test	9
1.6 Verify the Frequency and Channel	11
1.7 Test Procedure	12
1.8 Location of the Test Site	12
1.9 General Test Condition	12
<b>II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators</b>	13
<b>III. Section 15.203 : Antenna Requirement</b>	14
<b>IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units</b>	15
4.1 Test Condition & Setup	15
4.2 List of Test Instruments	15
4.3 Test Result of Conducted Emissions	16
Table 1 EUT Ant. Undetachable, Channel 01	16
Table 2 EUT Ant. Undetachable, Channel 06	17
Table 3 EUT Ant. Undetachable, Channel 11	17
Table 4 EUT Ant. Detachable, Standby mode	18
Table 5 EUT Ant. Detachable, Channel 01	18
Table 6 EUT Ant. Detachable, Channel 06	19
Table 7 EUT Ant. Detachable, Channel 11	19
Table 8 EUT Ant. Detachable, Standby mode	20
<b>V. Section 15.247(a) : Technical Description of the EUT</b>	21
<b>VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System</b>	22
6.1 Test Condition & Setup	22
6.2 Test Instruments Configuration	22
6.3 List of Test Instruments	22
6.4 Test Result of Bandwidth	23
Channel 01	24
Channel 06	25
Channel 11	26

<b>VII. Section 15.247(b) : Power Output</b>	27
7.1 Test Condition & Setup	27
7.2 List of Test Instruments	27
7.3 Test Result	28
<b>VIII. Section 15.247(c) : Spurious Emissions (Radiated)</b>	29
8.1 Test Condition & Setup	29
8.2 List of Test Instruments	31
8.3 Test Result of Spurious Radiated Emissions	32
Table 9 Horizontal of Undetachable for 30MHz to 1GHz	32
Table 10 Vertical of Undetachable for 30MHz to 1GHz	32
Table 11 Horizontal of Detachable for 30MHz to 1GHz	33
Table 12 Vertical of Detachable for 30MHz to 1GHz	33
Table 13 Horizontal of CH1 of Undetachable for 1GHz to 25GHz	34
Table 14 Vertical of CH1 of Undetachable for 1GHz to 25GHz	34
Table 15 Horizontal of CH6 of Undetachable for 1GHz to 25GHz	35
Table 16 Vertical of CH6 of Undetachable for 1GHz to 25GHz	35
Table 17 Horizontal of CH11 of Undetachable for 1GHz to 25GHz	36
Table 18 Vertical of CH11 of Undetachable for 1GHz to 25GHz	36
Table 19 Horizontal of CH1 of Detachable for 1GHz to 25GHz	37
Table 20 Vertical of CH1 of Detachable for 1GHz to 25GHz	37
Table 21 Horizontal of CH6 of Detachable for 1GHz to 25GHz	38
Table 22 Vertical of CH6 of Detachable for 1GHz to 25GHz	38
Table 23 Horizontal of CH11 of Detachable for 1GHz to 25GHz	39
Table 24 Vertical of CH11 of Detachable for 1GHz to 25GHz	39
8.4 Test Result of Bandedge	40
<b>IX. Section 15.247(d) : Power Spectral Density</b>	45
9.1 Test Condition & Setup	45
9.2 Test Instruments Configuration	45
9.3 List of Test Instruments	45
9.4 Test Result of Power Spectral Density	46
Channel 01	47
Channel 06	48
Channel 11	49
<b>Appendix A: Brand name and Modem name List</b>	50

## **. GENERAL**

### **1.1 Introduction**

The following measurement report is submitted on behalf of applicant in support that the *cable gateway* certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

### **1.2 Description of EUT**

**Product Name** : 802.11b Wireless LAN Access Point  
**Model Name** : as Appendix A  
**Granted FCC ID** : NHPWLB2000  
**Frequency Range** : 2.412 GHz ~ 2.462GHz  
**Support Channel** : 11 Channel  
**Modulation Skill** : DBPSK, DQPSK, CCK  
**Power Type** : By the Power adaptor  
M/N: DSA-0151A-05 A  
I/P: 100-120Vac, 50-60Hz, 40VA ; O/P: +5VDC, 2.4A

### **1.3 Description of Support Equipment**

In order to construct the minimum testing, following equipment were used as the support units.

**Notebook** : **IBM Think Pad X20**  
Type No. : 2662-11T  
Serial No. : FX-11922 00/09  
FCC ID : Doc Approved  
**檢磁** : 3892B565  
**AC Adaptor** : **IBM**  
Model No. : PA2450U  
Serial No. : 02K6654  
FCC ID : Doc Approved  
Power Core : Non-shielded, 180cm long, Plastic hoods, with ferrite bead  
Power type : 100 ~ 240VAC, 50 ~ 60Hz, 0.5A ~ 1.2A / 16Vdc, 4.5A

**Printer : HP**  
Model No. : C6464A  
Serial No. : TH16LEB5PK  
FCC ID : N/A, DoC Approved  
檢磁 : 3892H381  
Power type : Switching adaptor  
Power cord : Non-shield, 173cm long, No ferrite core (between adaptor and AC source)  
Non-shielded, 180cm long, with ferrite core (between printer and adaptor)  
Data cable : Shielded, 1.70m long, No ferrite core  
**Fax/Modem : Aceex**  
Model No. : DM-1414  
Serial No. : 9010582  
FCC ID : IFAXDM1414  
Power type : 110 VAC / 50 ~ 60 Hz, Switching  
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead  
Data Cable : RS-232 Shielded, 1.30m long, Metal hoods , No bead  
RJ-11Cx2 Non-shielded, 7' long, Plastic hoods, No bead  
**USB Gamepad : Rockfire**  
Model No. : QF-337UV  
Serial No. : KR91379759  
FCC ID : None (CE approval)  
Data cable : Shielded, 1.80m long, No ferrite core  
**PS/2 Mouse : HP**  
Model No. : M-S34  
Serial No. : LZB90714106  
FCC ID : DZL211029  
檢磁 : 4862A011  
Power type : By PC  
Power cord : Non-shielded, 1.88m long, No ferrite core  
**HUB : D-Link**  
Model No. : DGS-1008T  
FCC ID : N/A, DoC Approved  
Power type : I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.7A  
Power cord : Non-shielded, no ferrite core, 1.90m long

**Notebook** : **ASUSTek Computer**  
Model No. : AB00F  
Serial No. : 24NP016361  
FCC ID : DoC Approved  
BSMI : 41016012  
Power type : 100 ~ 240VAC, 1A 50/60 Hz, Switching

**Adaptor of**

**Notebook** : **LITE-ON Electronics, Inc.**  
Model No. : PA-1530-01  
Serial No. : 00151184  
FCC ID : Doc Approved  
檢磁 : 3882B259  
Power cable : Non-shielded, 1.72m length, Plastic hood, No ferrite core  
(Between power adaptor and AC power source)  
Power cable : Shielded, 1.48m length, Plastic hood, with ferrite core  
(Between power adaptor and notebook)


#### **1.4 Test method**

- 1 Connect the EUT with the notebook computer through the LAN card. Using the LAN port of computer and software to control the EUT.
- 2 Using the notebook computer and software provided by the manufacturer to control the EUT in the continuous transmission mode, the test is performed under those specific conditions.
- 3 Then making EUT to the mode of continuous transmission and set different channel being tested and repeat the procedures above.
  - (a) Radiated for intentional test:  
making EUT to the mode of continuous transmission
  - (b) Conducted and Radiated for unintentional test:  
making EUT to the linking (Rx/Tx) mode with far support equipments



## 1.5 Configuration of System Under Test

(Conducted and Radiated for unintentional)

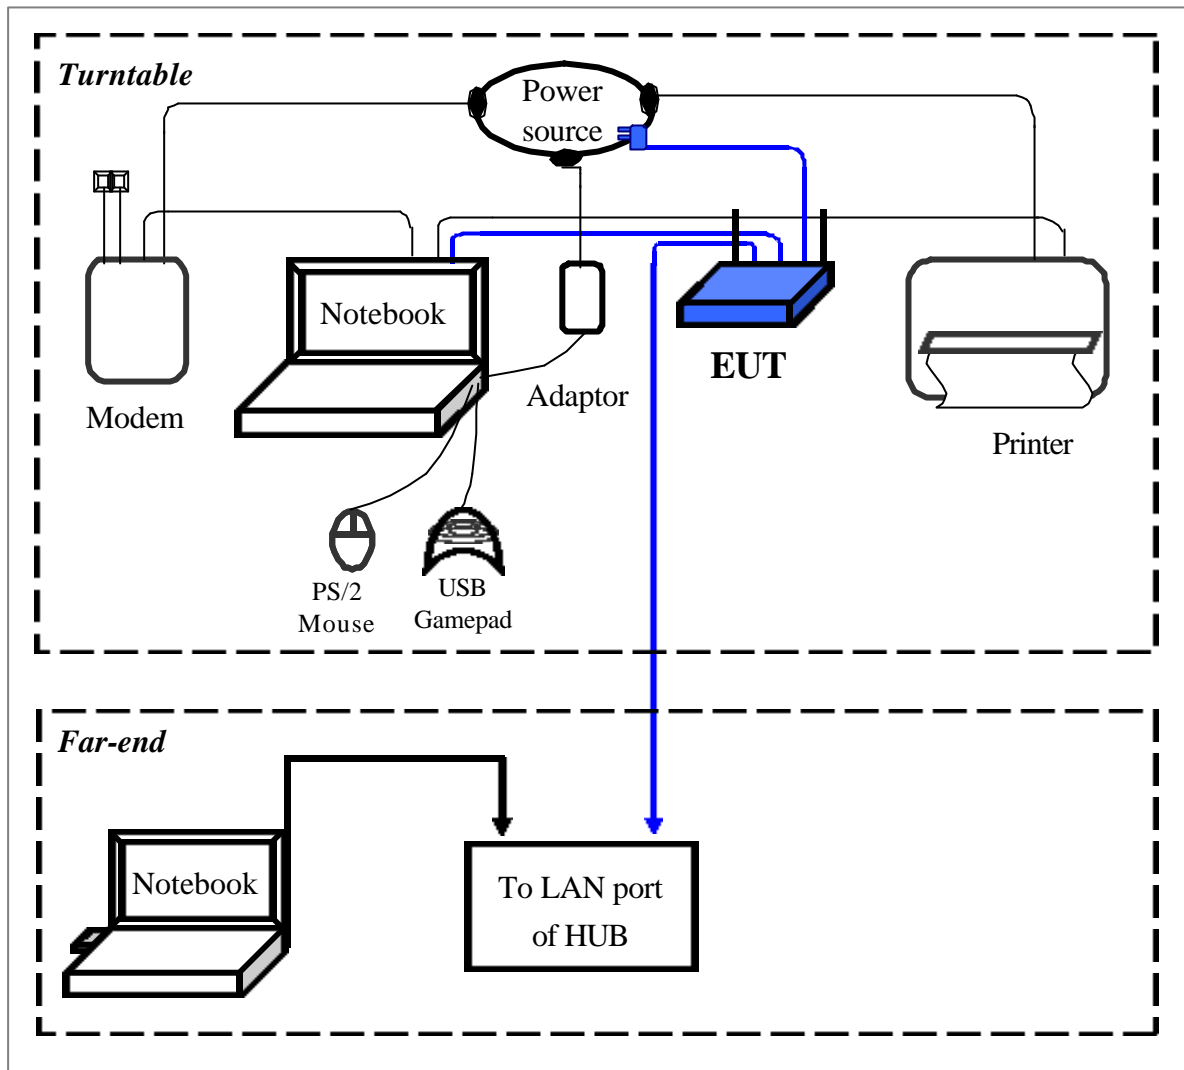

### Connections of Equipment


**Adaptor :**

- \*Manufacturer --- DVE
- \*Model --- DSA-0151A-05A
- \*Input --- 100-120Vac, 50-60Hz, 40VA
- \*Output --- +5VDC, 2.4A
- \*Power cable --- 108cm long, non-shielded, no ferrite core

**WLAN AP :**

- \*USB cable \*1 --- 185cm long, shielded, no ferrite core
- \*RJ45 cable \*2 --- 30m long, non-shielded, no ferrite core

(Radiated of intentional)

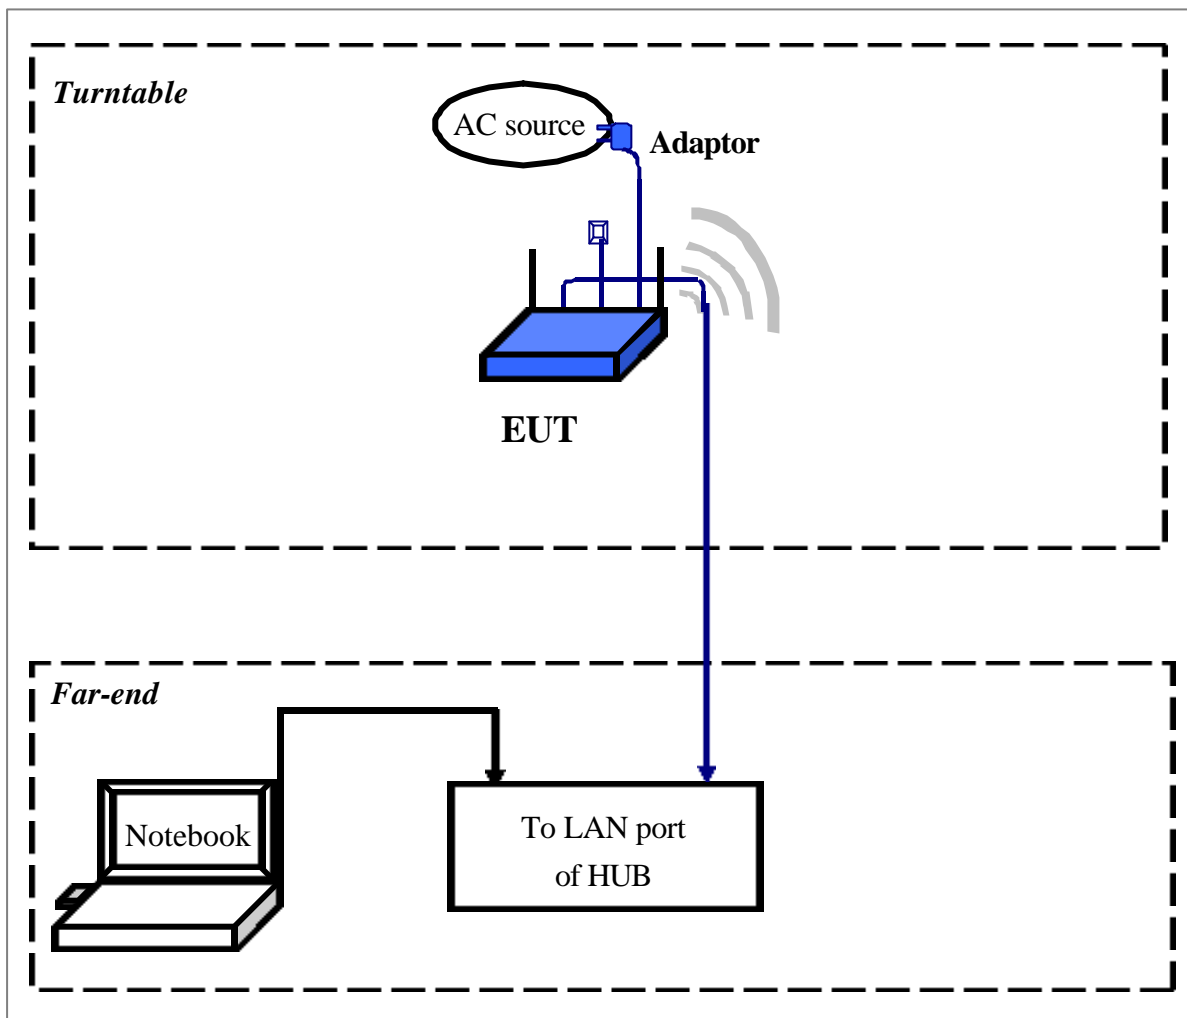

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by notebook computer.

The setting up procedure was recorded in 1.4 test method.

**1.6 Verify the Frequency and Channel**

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.  
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:  
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

### **1.7 Test Procedure**

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.4 test method, the detail setup was written on each test item.

### **1.8 Location of the Test Site**

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

### **1.9 General Test Condition**

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.4 test method.

## **II. Section 15.101(a): Equipment authorization of unintentional radiators**

The EUT equipped with a USB bus interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

### **III. Section 15.203: Antenna requirement**

The EUT can be equipped with two kinds of antennas. Besides, it has an integral (Undetachable) antenna, and the detachable antenna. **The detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector.**

The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

## **IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units**

### **4.1 Test Condition & Setup**

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as <1.4>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

### **4.2 List of Test Instruments**

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
LISN (EUT)	LISN-01	TRC	9912-03,04	06/04/02	06/04/03
LISN (Support E.)	LISN-01	TRC	9912-05	07/15/02	07/15/03
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(< 30MHz)					

The level of confidence of 95%, the uncertainty of measurement of conducted emission is  $\pm 2.02$  dB.

#### 4.3 Test Result of Power Line Conducted Emissions

##### EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. The worst case to show as follows.

Test Conditions: Temperature : 20.2 °C Humidity : 58.8 % RH

**Table 1 Test mode: EUT Antenna Undetachable, Channel 1**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	359.000	38.40	---	---	60.03	50.03	-11.63
	547.000	36.19	---	---	56.00	46.00	-9.81
	1256.000	39.88	---	---	56.00	46.00	-6.12
	1464.000	39.81	---	---	56.00	46.00	-6.19
	2029.000	42.16	---	---	56.00	46.00	-3.84
	5160.000	41.24	---	---	60.00	50.00	-8.76
Line 2	180.000	52.11	---	---	65.14	55.14	-3.03
	359.000	37.05	---	---	60.03	50.03	-12.98
	902.000	38.18	---	---	56.00	46.00	-7.82
	1243.000	41.17	---	---	56.00	46.00	-4.83
	4053.000	42.02	---	---	56.00	46.00	-3.98
	5160.000	39.76	---	---	60.00	50.00	-10.24

NOTE:

(1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.

(2)A "+" sign in the margin column means the emission is OVER the Class B Limit  
and "-" sign of means UNDER the Class B limit



**Table 2 Test mode: EUT Antenna Undetachable, Channel 6**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	370.000	38.27	---	---	59.71	49.71	-11.44
	731.000	36.79	---	---	56.00	46.00	-9.21
	1256.000	39.85	---	---	56.00	46.00	-6.15
	1477.000	40.04	---	---	56.00	46.00	-5.96
	2029.000	41.95	---	---	56.00	46.00	-4.05
	4905.000	41.29	---	---	56.00	46.00	-4.71
Line 2	182.000	51.74	---	---	65.09	55.09	-3.35
	370.000	36.72	---	---	59.71	49.71	-12.99
	724.000	39.67	---	---	56.00	46.00	-6.33
	928.000	39.14	---	---	56.00	46.00	-6.86
	1269.000	41.85	---	---	56.00	46.00	-4.15
	2029.000	42.82	---	---	56.00	46.00	-3.18

**Table 3 Test mode: EUT Antenna Undetachable, Channel 11**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	363.000	38.37	---	---	59.91	49.91	-11.54
	731.000	38.04	---	---	56.00	46.00	-7.96
	1269.000	40.74	---	---	56.00	46.00	-5.26
	1477.000	40.32	---	---	56.00	46.00	-5.68
	3780.000	41.74	---	---	56.00	46.00	-4.26
	4905.000	41.88	---	---	56.00	46.00	-4.12
Line 2	187.000	51.11	---	---	64.94	54.94	-3.83
	370.000	38.01	---	---	59.71	49.71	-11.70
	745.000	39.88	---	---	56.00	46.00	-6.12
	911.000	39.28	---	---	56.00	46.00	-6.72
	1282.000	42.13	---	---	56.00	46.00	-3.87
	4905.000	40.43	---	---	56.00	46.00	-5.57

**Table 4 Test mode: EUT Antenna Undetachable, Standby**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	203.000	48.10	---	---	64.49	54.49	-6.39
	240.000	50.78	---	---	63.43	53.43	-2.65
	405.000	41.97	---	---	58.71	48.71	-6.74
	504.000	35.03	---	---	56.00	46.00	-10.97
	724.000	33.28	---	---	56.00	46.00	-12.72
	1198.000	31.89	---	---	56.00	46.00	-14.11
Line 2	206.000	48.34	---	---	64.40	54.40	-6.06
	220.000	50.32	---	---	64.00	54.00	-3.68
	233.000	51.18	---	---	63.63	53.63	-2.45
	405.000	43.33	---	---	58.71	48.71	-5.38
	717.000	36.70	---	---	56.00	46.00	-9.30
	2372.000	35.01	---	---	56.00	46.00	-10.99

**Table 5 Test mode: EUT Antenna Detachable, Channel 1**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	180.000	48.03	---	---	65.14	55.14	-7.11
	1801.000	36.40	---	---	56.00	46.00	-9.60
	2029.000	38.29	---	---	56.00	46.00	-7.71
	2872.000	39.00	---	---	56.00	46.00	-7.00
	3445.000	37.52	---	---	56.00	46.00	-8.48
	4857.000	36.93	---	---	56.00	46.00	-9.07
Line 2	181.970	53.38	---	---	65.14	55.14	-1.76
	370.000	40.96	---	---	59.71	49.71	-8.75
	1265.270	44.44	---	---	56.00	46.00	-1.56
	1812.010	44.37	---	---	56.00	46.00	-1.63
	2043.230	45.72	44.70	26.33	56.00	46.00	-11.30
	2903.660	45.53	45.68	28.12	56.00	46.00	-10.32

**Table 6 Test mode: EUT Antenna Detachable, Channel 6**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	182.000	47.96	---	---	65.09	55.09	-7.13
	1801.000	36.98	---	---	56.00	46.00	-9.02
	2351.000	43.78	---	---	56.00	46.00	-2.22
	2899.000	39.97	---	---	56.00	46.00	-6.03
	3510.000	39.35	---	---	56.00	46.00	-6.65
	4905.000	36.70	---	---	56.00	46.00	-9.30
Line 2	370.000	40.87	---	---	59.71	49.71	-8.84
	738.000	42.82	---	---	56.00	46.00	-3.18
	1271.360	44.67	---	---	56.00	46.00	-1.33
	2903.130	45.60	---	---	56.00	46.00	-0.40
	3524.050	44.67	---	---	56.00	46.00	-1.33
	4866.150	44.89	---	---	56.00	46.00	-1.11

**Table 7 Test mode: EUT Antenna Detachable, Channel 11**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBmV)</b>	<b>QP (dBmV)</b>	<b>Average (dBmV)</b>	<b>QP-limit (dBmV)</b>	<b>AVG-limit (dBmV)</b>	<b>Margin (dB)</b>
Line 1	182.000	48.08	---	---	65.09	55.09	-7.01
	1801.000	36.58	---	---	56.00	46.00	-9.42
	2012.000	38.37	---	---	56.00	46.00	-7.63
	2899.000	40.30	---	---	56.00	46.00	-5.70
	3780.000	39.28	---	---	56.00	46.00	-6.72
	4905.000	36.33	---	---	56.00	46.00	-9.67
Line 2	724.000	42.76	---	---	56.00	46.00	-3.24
	1270.000	44.62	44.05	32.07	56.00	46.00	-11.95
	1812.290	44.44	43.80	29.87	56.00	46.00	-12.20
	2898.090	45.29	45.56	27.89	56.00	46.00	-10.44
	3524.200	45.83	43.71	23.52	56.00	46.00	-12.29
	4857.000	43.42	---	---	56.00	46.00	-2.58

**Table 8 Test mode: EUT Antenna Detachable, Standby**

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBmV)</i>	<i>QP (dBmV)</i>	<i>Average (dBmV)</i>	<i>QP-limit (dBmV)</i>	<i>AVG-limit (dBmV)</i>	<i>Margin (dB)</i>
Line 1	243.000	50.31	---	---	63.34	53.34	-3.03
	405.000	44.86	---	---	58.71	48.71	-3.85
	456.000	38.51	---	---	57.26	47.26	-8.75
	1208.000	32.62	---	---	56.00	46.00	-13.38
	1566.000	30.28	---	---	56.00	46.00	-15.72
	2158.000	30.23	---	---	56.00	46.00	-15.77
Line 2	405.000	42.68	---	---	58.71	48.71	-6.03
	724.000	37.91	---	---	56.00	46.00	-8.09
	1102.000	36.05	---	---	56.00	46.00	-9.95
	1208.000	37.02	---	---	56.00	46.00	-8.98
	1566.000	33.88	---	---	56.00	46.00	-12.12
	2394.000	34.88	---	---	56.00	46.00	-11.12

## **V. Section 15.247 (a): Technical description of the EUT**


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

## VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

### 6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

### 6.2 Test Instruments Configuration

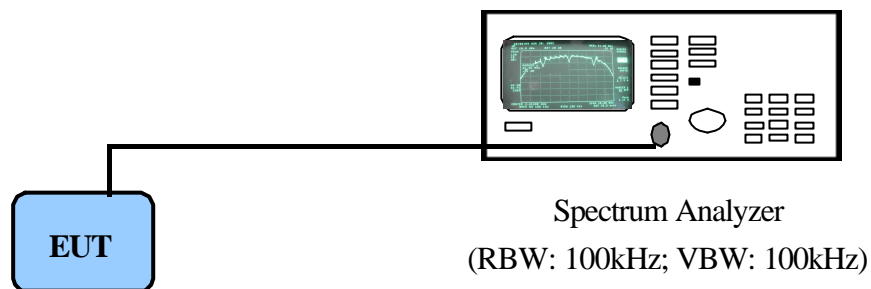

*P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit*

### 6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03

#### **6.4 Test Result of Bandwidth**

##### **Bandwidth of Channel 1**

Bandwidth : 10.13 MHz  
The min. 6dB BW at least : 500 KHz

##### **Bandwidth of Channel 6**

Bandwidth : 10.17 MHz  
The min. 6dB BW at least : 500 KHz


##### **Bandwidth of Channel 11**

Bandwidth : 10.13 MHz  
The min. 6dB BW at least : 500 KHz

Note:


1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ( $RBW$ )= $100kHz$  and set the  $span \gg RBW$ . The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.

Bandwidth of Channel 1: 10.13 MHz

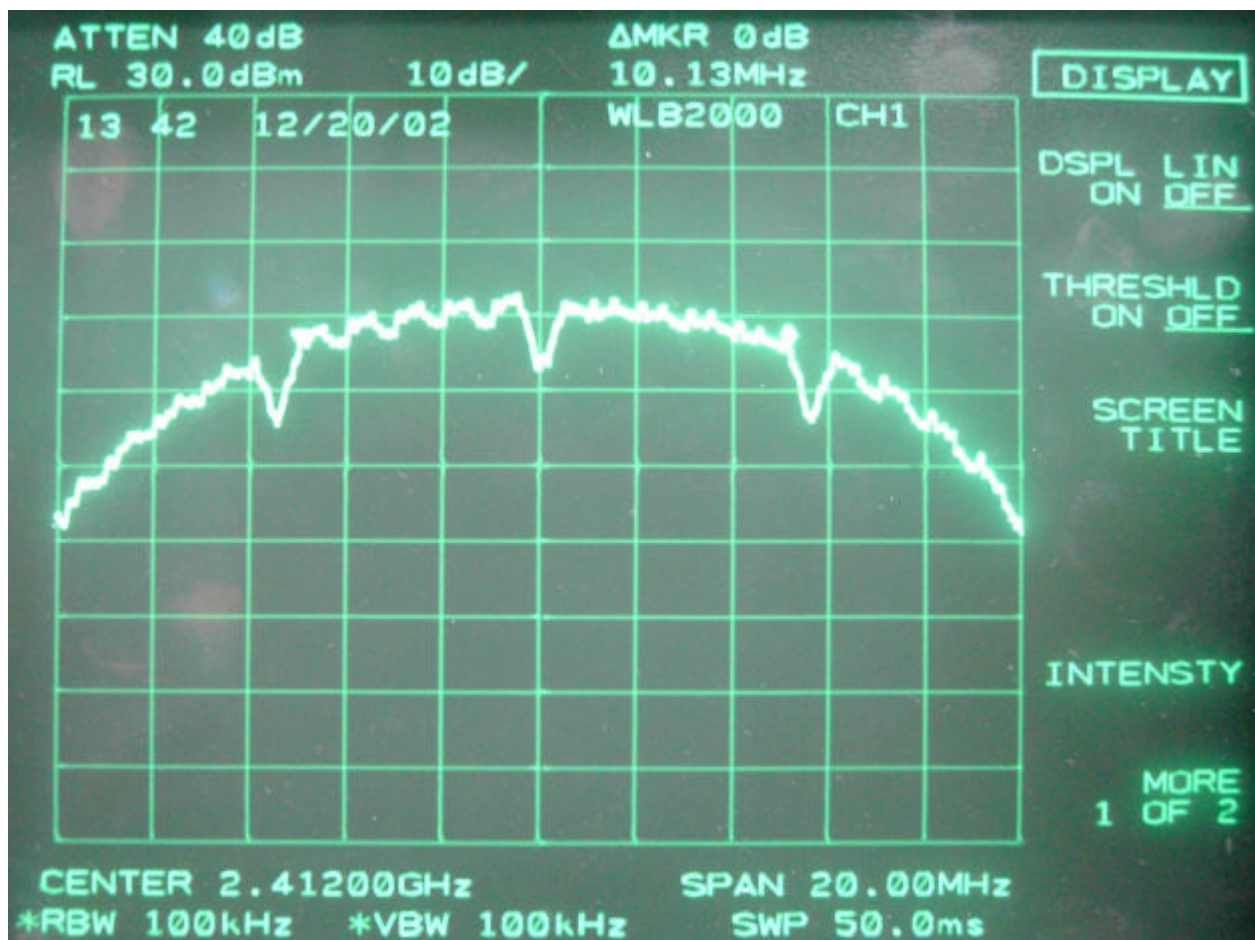




Bandwidth of Channel 6: 10.17 MHz

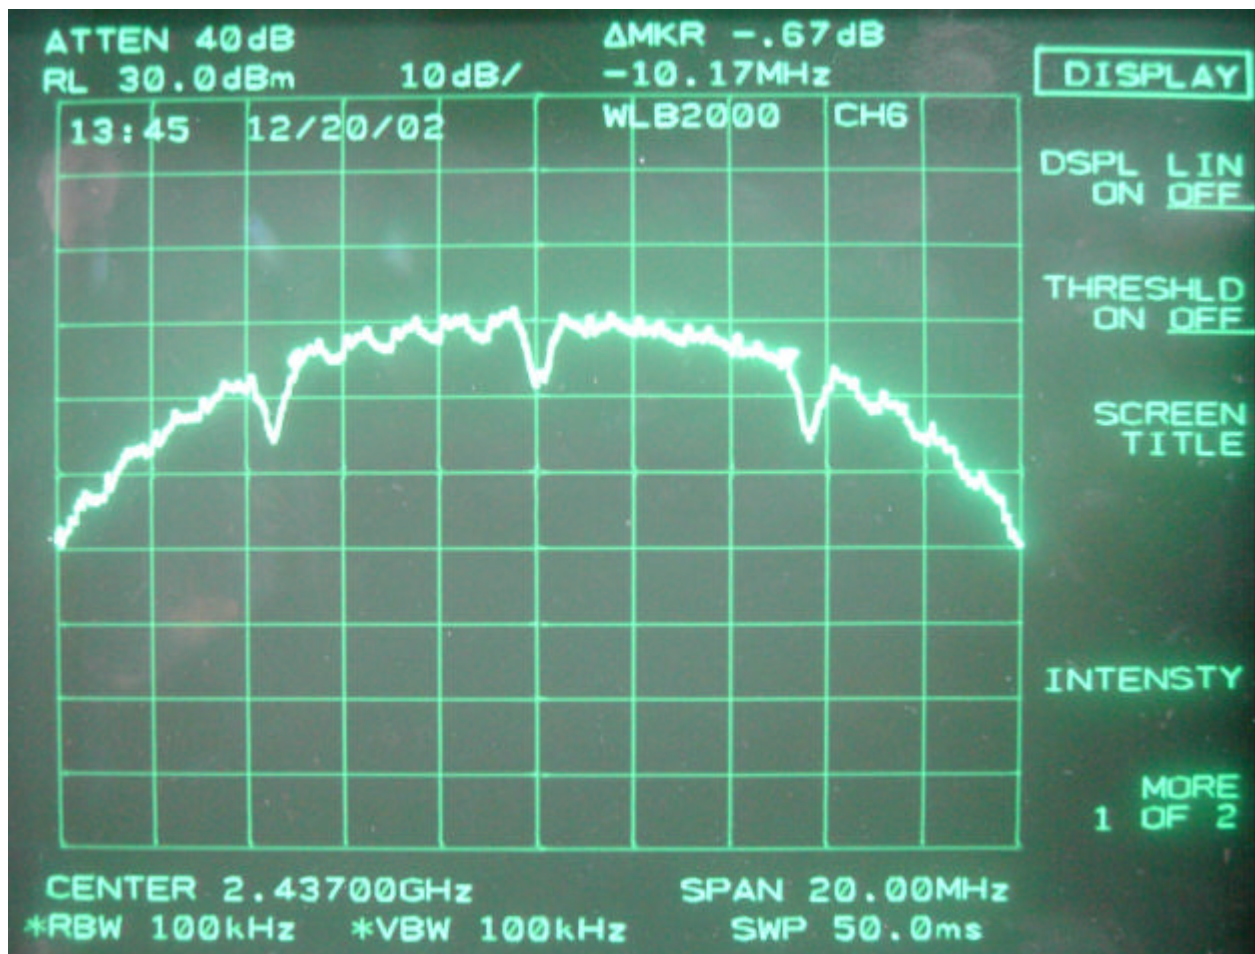

Bandwidth of Channel 11: 10.13 MHz

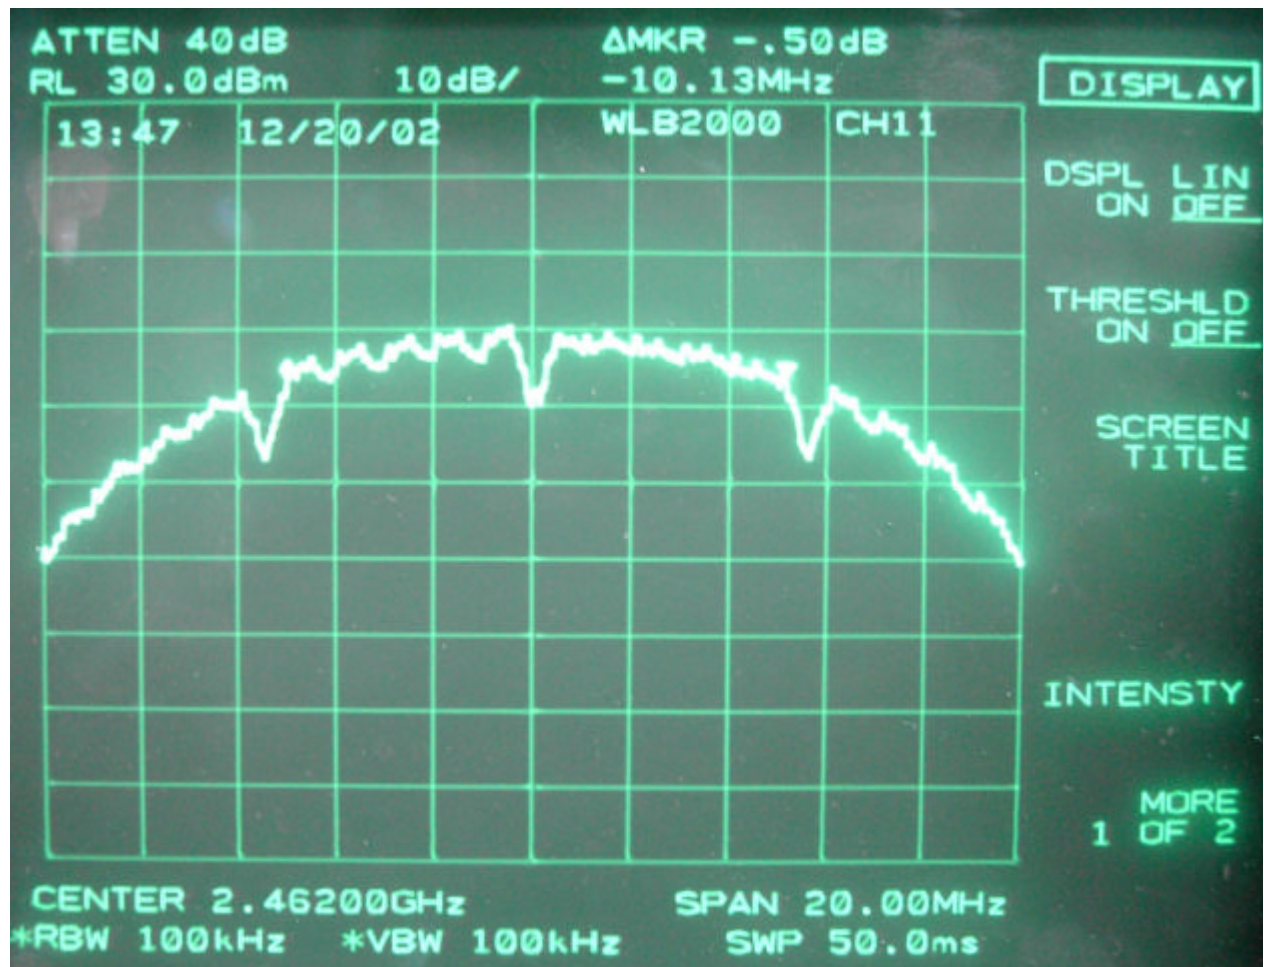

## **VII. Section 15.247(b): Power Output**

### **7.1 Test Condition & Setup**



1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every tests. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

### **7.2 List of Test Instruments**

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

### 7.3 Test Result

**Formula:**

Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Limit	Output peak power	
	dBm	dBm	(DTS)	dBm	mW
CH 1	16.36	0.70	100mW	17.06	50.816
CH 6	15.03	0.70	100mW	15.73	37.411
CH 11	13.78	0.70	100mW	14.48	28.055

Note:

The limit is vary according to the equipment class, listed below:

1. Digital Transmission System (DTS): 100mW
2. Spread Spectrum Transmitter (DSS): 1W

## **VIII. Section 15.247 (C): Spurious Emissions (Radiated)**

### **8.1 Test Condition & Setup**

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, Schwarzeck whole range Small Biconical antenna (Model No.: BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition apply in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.4>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

**For frequency between 30MHz to 1000MHz**

$$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dBμV)} + \text{Correction Factors}$$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

**For frequency between 1GHz to 25GHz**

$$F_{Ia} \text{ (dBμV/m)} = F_{Ir} \text{ (dBμV)} + \text{Correction Factor}$$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

**8.2 List of Test Instruments**

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
Small Biconical Antenna and Balun	BBVU9135 UBAA9114	Schwarzeck	127	05/07/02	05/07/03
Switch/Control Unit (>30MHz)	3488A	HP	N/A	11/20/02	11/20/03
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03
Microwave Preamplifier	83051A	HP	3232A00347	08/01/02	08/01/03
Horn Antenna	3115	EMCO	9704 – 5178	08/01/02	08/01/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/02	05/20/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm 3.44\text{dB}$  .

### 8.3 Test Result of Spurious Radiated Emissions

#### EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 19.6 ° C Humidity : 58.8 % RH

**Table 9 Radiated Emissions of 30MHz to 1GHz for Ant Horizontal [EUT Ant. Undetachable]**

<b>Radiated Emission</b>				<b>Correction Factors</b>	<b>Corrected Amplitude</b>	<b>FCC Class B ( 3 m )</b>	
<b>Frequency (MHz)</b>	<b>Amplitude (dBmV)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>			<b>Limit (dBmV/m)</b>	<b>Margin (dB)</b>
144.00	33.67	1.62	146	2.10	35.77	43.50	-7.73
180.00	33.10	1.00	142	1.67	34.77	43.50	-8.73
216.00	31.37	1.00	161	1.58	32.95	43.50	-10.55
250.01	37.28	1.00	263	1.42	38.70	46.00	-7.30
377.00	33.01	1.00	99	4.18	37.19	46.00	-8.81
441.04	27.85	1.00	285	6.89	34.74	46.00	-11.26

**Table 10 Radiated Emissions of 30MHz to 1GHz for Ant Vertical [EUT Ant. Undetachable]**

<b>Radiated Emission</b>				<b>Correction Factors</b>	<b>Corrected Amplitude</b>	<b>FCC Class B ( 3 m )</b>	
<b>Frequency (MHz)</b>	<b>Amplitude (dBmV)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>			<b>Limit (dBmV/m)</b>	<b>Margin (dB)</b>
72.00	29.46	1.00	157	5.79	35.25	40.00	-4.75
182.77	30.53	1.00	260	1.69	32.22	43.50	-11.28
217.94	27.36	1.00	172	1.58	28.94	46.00	-17.06
253.10	32.65	1.00	311	1.43	34.08	46.00	-11.92
377.99	28.29	1.00	198	4.22	32.51	46.00	-13.49
500.02	28.66	1.07	221	8.81	37.47	46.00	-8.53



**Table 11 Radiated Emissions of 30MHz to 1GHz for Ant Horizontal [EUT Ant. Detachable]**

<b>Radiated Emission</b>				<b>Correction Factors</b>	<b>Corrected Amplitude</b>	<b>FCC Class B ( 3 m )</b>	
<b>Frequency (MHz)</b>	<b>Amplitude (dBmV)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>			<b>Limit (dBmV/m)</b>	<b>Margin (dB)</b>
72.00	30.54	1.00	282	5.79	36.33	40.00	-3.67
114.87	30.86	1.00	168	2.71	33.57	43.50	-9.93
144.00	33.52	1.00	157	2.10	35.62	43.50	-7.88
182.77	32.61	1.00	130	1.69	34.30	43.50	-9.20
217.94	35.01	1.00	141	1.58	36.59	46.00	-9.41
250.01	36.34	1.00	164	1.42	37.76	46.00	-8.24

**Table 12 Radiated Emissions of 30MHz to 1GHz for Ant Vertical [EUT Ant. Detachable]**

<b>Radiated Emission</b>				<b>Correction Factors</b>	<b>Corrected Amplitude</b>	<b>FCC Class B ( 3 m )</b>	
<b>Frequency (MHz)</b>	<b>Amplitude (dBmV)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>			<b>Limit (dBmV/m)</b>	<b>Margin (dB)</b>
72.00	31.11	1.00	99	5.79	36.90	40.00	-3.10
146.40	26.86	1.00	342	2.03	28.89	43.50	-14.61
182.77	26.83	1.00	280	1.69	28.52	43.50	-14.98
217.94	27.79	1.00	141	1.58	29.37	46.00	-16.63
380.41	25.81	1.00	213	4.32	30.13	46.00	-15.87
500.02	27.93	1.00	226	8.81	36.74	46.00	-9.26

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)

Table13 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal [EUT Ant Undetachable, CH 1]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2579.17	1.00	51	3.60	50.77	---	74.00	54.00	-3.23
4823.93	1.00	149	3.76	52.37	48.37	74.00	54.00	-5.63
7235.20	1.00	178	10.08	54.70	51.02	74.00	54.00	-2.98

Table 14 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant Undetachable, CH 1]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2579.97	1.00	89	3.61	56.77	52.11	74.00	54.00	-1.89
4823.92	1.00	258	3.76	53.04	49.53	74.00	54.00	-4.47
7236.64	1.00	179	10.09	55.04	51.03	74.00	54.00	-2.97

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

**Table15 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal [EUT Ant Undetachable, CH 6]**

<b>Radiated Emission</b>				<b>Corrected Amplitude</b>		<b>FCC Class B ( 3m )</b>		
<b>Frequency (MHz)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>	<b>Correction Factors (dB)</b>	<b>(dBμV/m)</b>		<b>Limit (dBμV/m)</b>		<b>Margin (dB)</b>
				<b>Peak</b>	<b>Average</b>	<b>Peak</b>	<b>Ave.</b>	
4873.97	1.00	295	3.96	52.23	48.40	74.00	54.00	-5.60
7311.65	1.00	37	10.30	53.57	49.57	74.00	54.00	-4.43

**Table 16 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant Undetachable, CH 6]**

<b>Radiated Emission</b>				<b>Corrected Amplitude</b>		<b>FCC Class B ( 3m )</b>		
<b>Frequency (MHz)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>	<b>Correction Factors (dB)</b>	<b>(dBμV/m)</b>		<b>Limit (dBμV/m)</b>		<b>Margin (dB)</b>
				<b>Peak</b>	<b>Average</b>	<b>Peak</b>	<b>Ave.</b>	
2629.97	1.00	54	3.67	52.67	47.67	74.00	54.00	-6.33
4873.94	1.00	179	3.96	54.56	50.07	74.00	54.00	-3.93
7311.64	1.00	228	10.30	54.40	49.91	74.00	54.00	-4.09

Table17 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal[EUT Ant Undetachable,CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4923.97	1.00	49	4.12	52.07	48.39	74.00	54.00	-5.61
7386.58	1.00	128	10.42	52.69	49.03	74.00	54.00	-4.97

Table18 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant Undetachable, CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4923.94	1.00	109	4.12	54.40	51.23	74.00	54.00	-2.77
7386.64	1.00	241	10.42	54.19	50.03	74.00	54.00	-3.97

**Table 19 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal [EUT Ant detachable, CH 1]**

<b>Radiated Emission</b>				<b>Corrected Amplitude</b>		<b>FCC Class B ( 3m )</b>		
<b>Frequency (MHz)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>	<b>Correction Factors (dB)</b>	<b>(dBμV/m)</b>		<b>Limit (dBμV/m)</b>		<b>Margin (dB)</b>
				<b>Peak</b>	<b>Average</b>	<b>Peak</b>	<b>Ave.</b>	
4943.98	1.00	52	4.19	54.30	50.46	74.00	54.00	-3.54
7415.00	1.00	163	10.37	48.65	---	74.00	54.00	-5.35

**Table 20 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant detachable, CH 1]**

<b>Radiated Emission</b>				<b>Corrected Amplitude</b>		<b>FCC Class B ( 3m )</b>		
<b>Frequency (MHz)</b>	<b>Ant. H. (m)</b>	<b>Table ( ° )</b>	<b>Correction Factors (dB)</b>	<b>(dBμV/m)</b>		<b>Limit (dBμV/m)</b>		<b>Margin (dB)</b>
				<b>Peak</b>	<b>Average</b>	<b>Peak</b>	<b>Ave.</b>	
2579.99	1.00	37	3.61	52.44	48.78	74.00	54.00	-5.22
4823.98	1.00	190	3.76	52.70	50.20	74.00	54.00	-3.80
7236.65	1.00	112	10.09	54.51	51.03	74.00	54.00	-2.97

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 21 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal [EUT Ant detachable, CH 6]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4871.46	1.00	125	3.95	51.05	---	74.00	54.00	-2.95
7312.29	1.00	224	10.30	50.07	---	74.00	54.00	-3.93

Table 22 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant detachable, CH 6]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2629.17	1.00	208	3.67	48.67	---	74.00	54.00	-5.33
4874.00	1.00	46	3.96	53.55	50.40	74.00	54.00	-3.60
7311.69	1.00	193	10.30	53.41	49.41	74.00	54.00	-4.59

Table 23 Radiated Emissions of 1GHz to 25GHz for Ant Horizontal [EUT Ant detachable, CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4923.91	1.00	341	4.12	51.57	50.89	74.00	54.00	-3.11
7384.79	1.00	24	10.42	48.86	---	74.00	54.00	-5.14

Table 24 Radiated Emissions of 1GHz to 25GHz for Ant Vertical [EUT Ant detachable, CH 11]

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4923.95	1.00	226	4.12	55.74	52.73	74.00	54.00	-1.27
7383.69	1.00	38	10.43	51.70	48.37	74.00	54.00	-5.63

#### **8.4 Test Result of the Bandedge**

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a),*


We perform this section by the *conducted* manner, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10<sup>th</sup> harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a).* (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >



**EUT Antenna Undetachable, Channel 1**

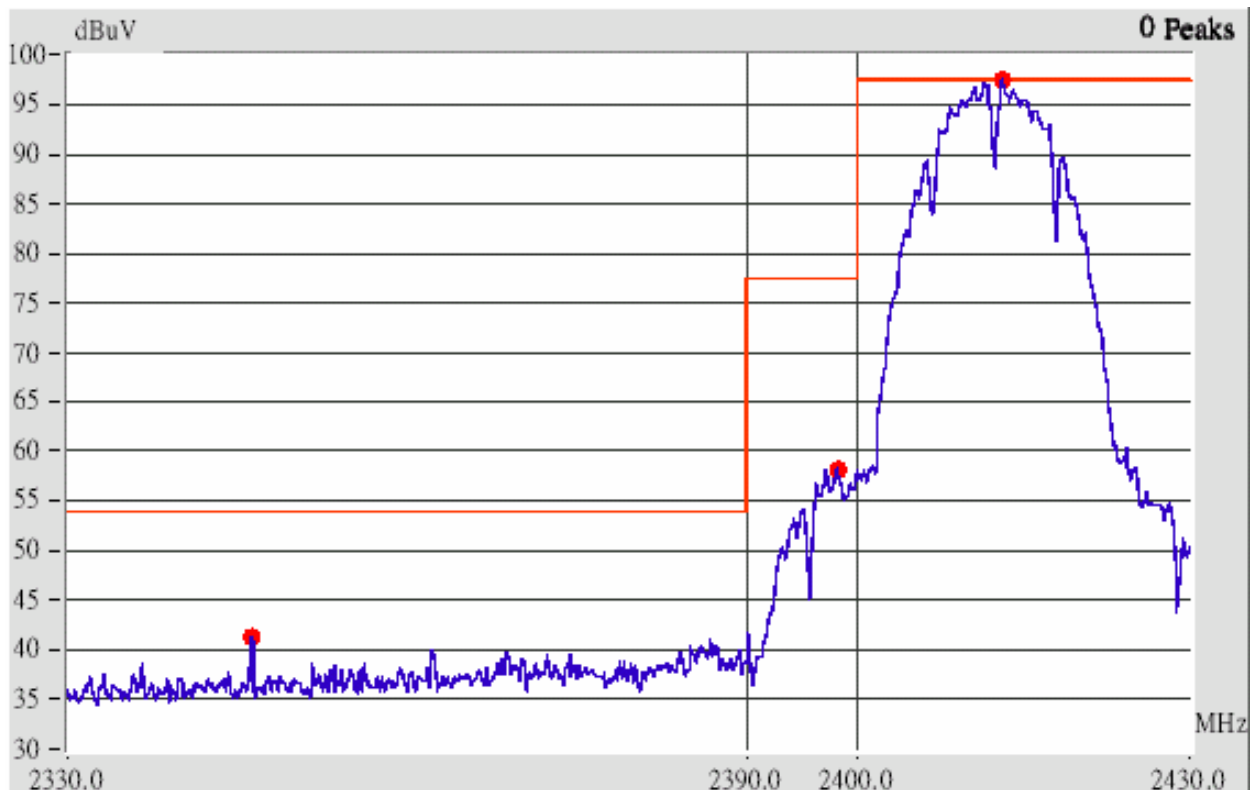


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBuV/m)</i>		<i>Limit (dBuV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2346.06	Hor	1.00	98	2.99	47.49	---	74.00	53.96	-6.47
2377.59	Hor	1.00	175	3.09	46.76	---	74.00	53.96	-7.20
2346.01	Ver	1.00	226	2.99	49.82	---	74.00	53.96	-4.14
2375.50	Ver	1.00	26	3.09	50.75	---	74.00	53.96	-3.21
2390.07	Ver	1.00	28	3.14	49.97	---	74.00	53.96	-3.99

**EUT Antenna Undetachable, Channel 11**

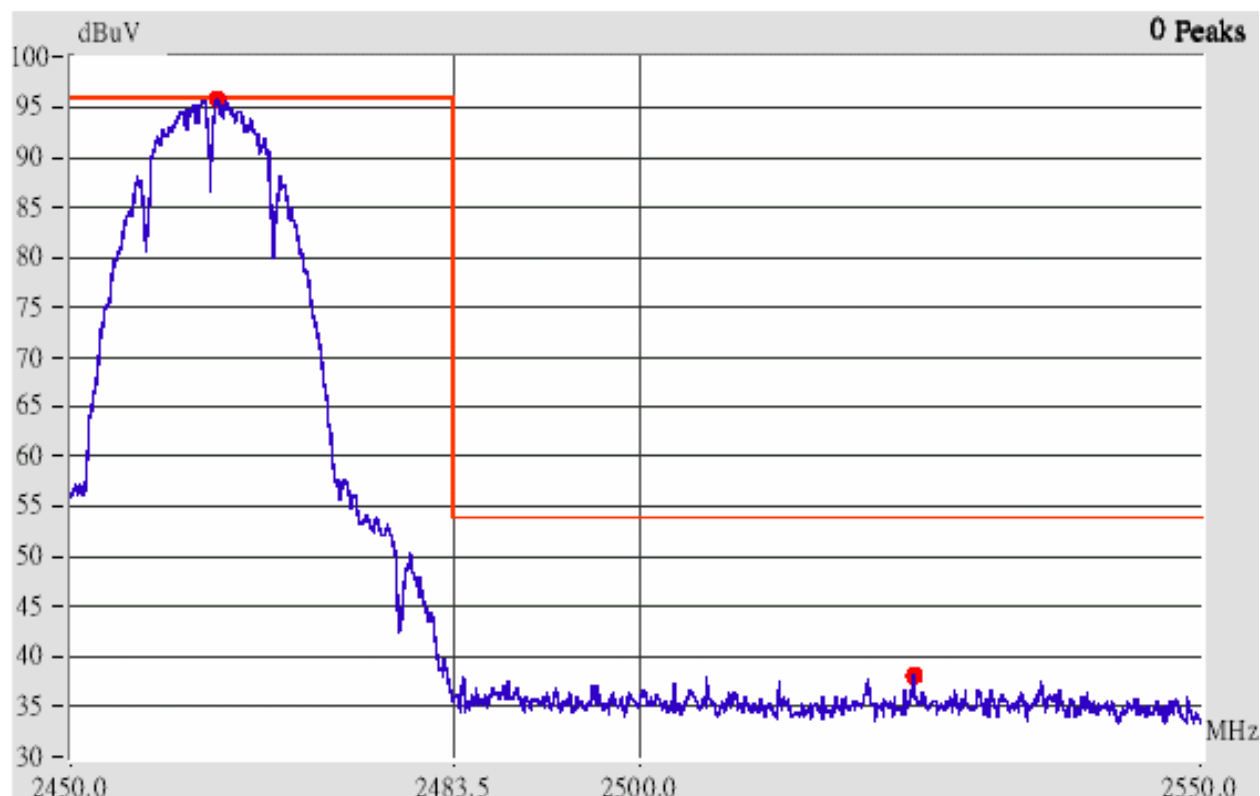


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2492.89	Hor	1.00	336	3.48	47.14	---	74.00	53.96	-6.82
2517.71	Hor	1.00	24	3.52	46.86	---	74.00	53.96	-7.10
2488.60	Vor	1.00	148	3.46	48.63	---	74.00	53.96	-5.33
2500.10	Ver	1.00	250	3.50	48.83	---	74.00	53.96	-5.13
2529.73	Ver	1.00	259	3.54	50.37	---	74.00	53.96	-3.59

**EUT Antenna Detachable, Channel 1**

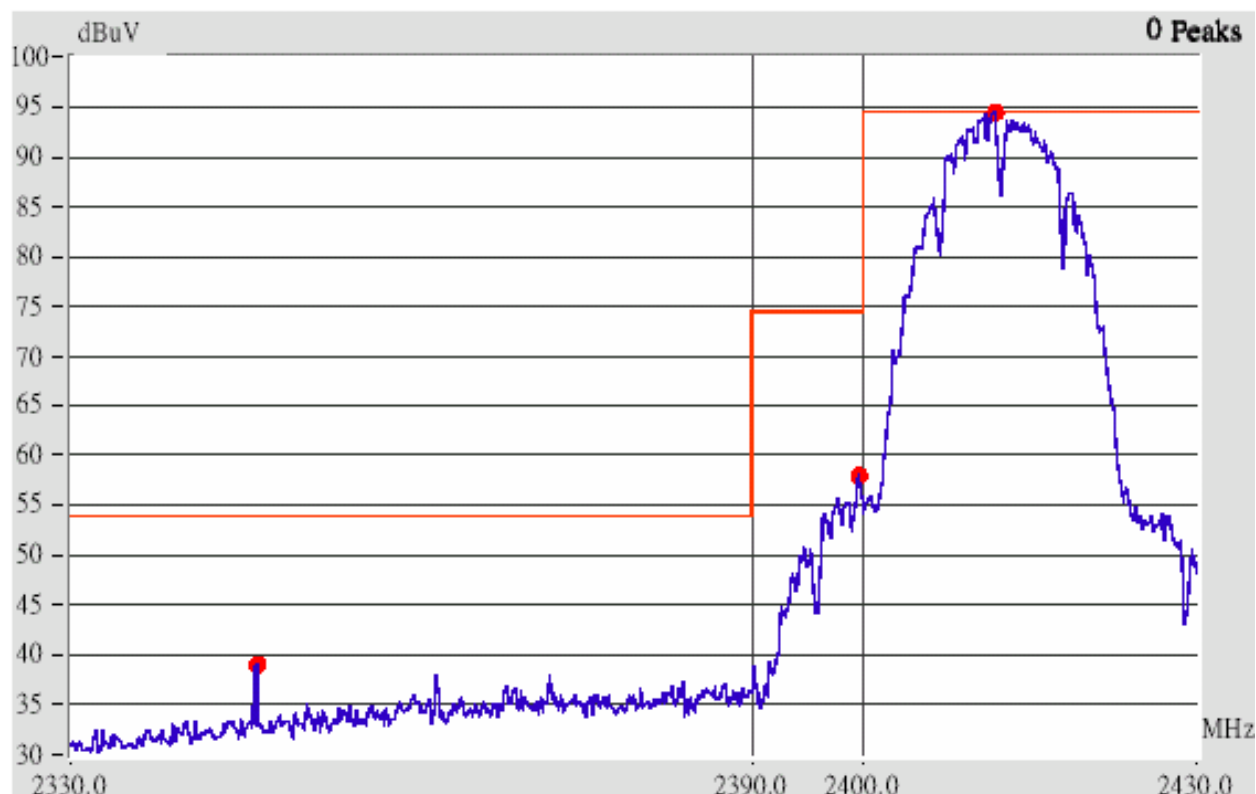

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2346.11	Hor	1.00	89	2.99	43.99	---	74.00	53.96	-9.97
2386.39	Hor	1.00	145	3.12	44.46	---	74.00	53.96	-9.50
2390.07	Hor	1.00	189	3.14	42.47	---	74.00	53.96	-11.49
2346.03	Ver	1.00	125	2.99	46.16	---	74.00	53.96	-7.80
1368.05	Ver	1.00	359	3.06	47.56	---	74.00	53.96	-6.40
2390.07	Ver	1.00	42	3.14	46.64	---	74.00	53.96	-7.32

**EUT Antenna Detachable, Channel 11**



This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2486.21	Hor	1.00	3	3.45	43.12	---	74.00	53.96	-10.84
2505.64	Hor	1.00	120	3.51	42.01	---	74.00	53.96	-11.95
2483.50	Vor	1.00	208	3.45	43.95	---	74.00	53.96	-10.01
2485.25	Ver	1.00	195	3.45	45.28	---	74.00	53.96	-8.68
2542.82	Ver	1.00	44	3.56	44.39	---	74.00	53.96	-9.57

## IX. Section 15.247(d): Power Spectral Density

### 9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

### 9.2 Test Instruments Configuration

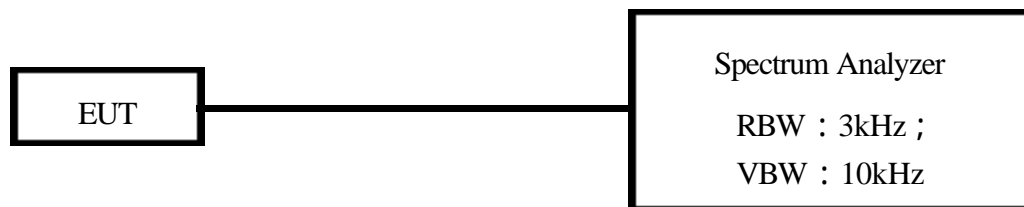

*P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit*

### 9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03

#### 9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

<i>Channel</i>	<i>Frequency (GHz)</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	2.412	-9.83	1.80	-8.03	8.00	-16.03
CH 06	2.437	-11.17	1.85	-9.32	8.00	-17.32
CH 11	2.462	-12.50	1.93	-10.57	8.00	-18.57

Note:


1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),  
Ppq: actual peak power density in the spread spectrum band.
3.  $Ppq = Ppr + |\text{Cable Loss}|$

Channel 01

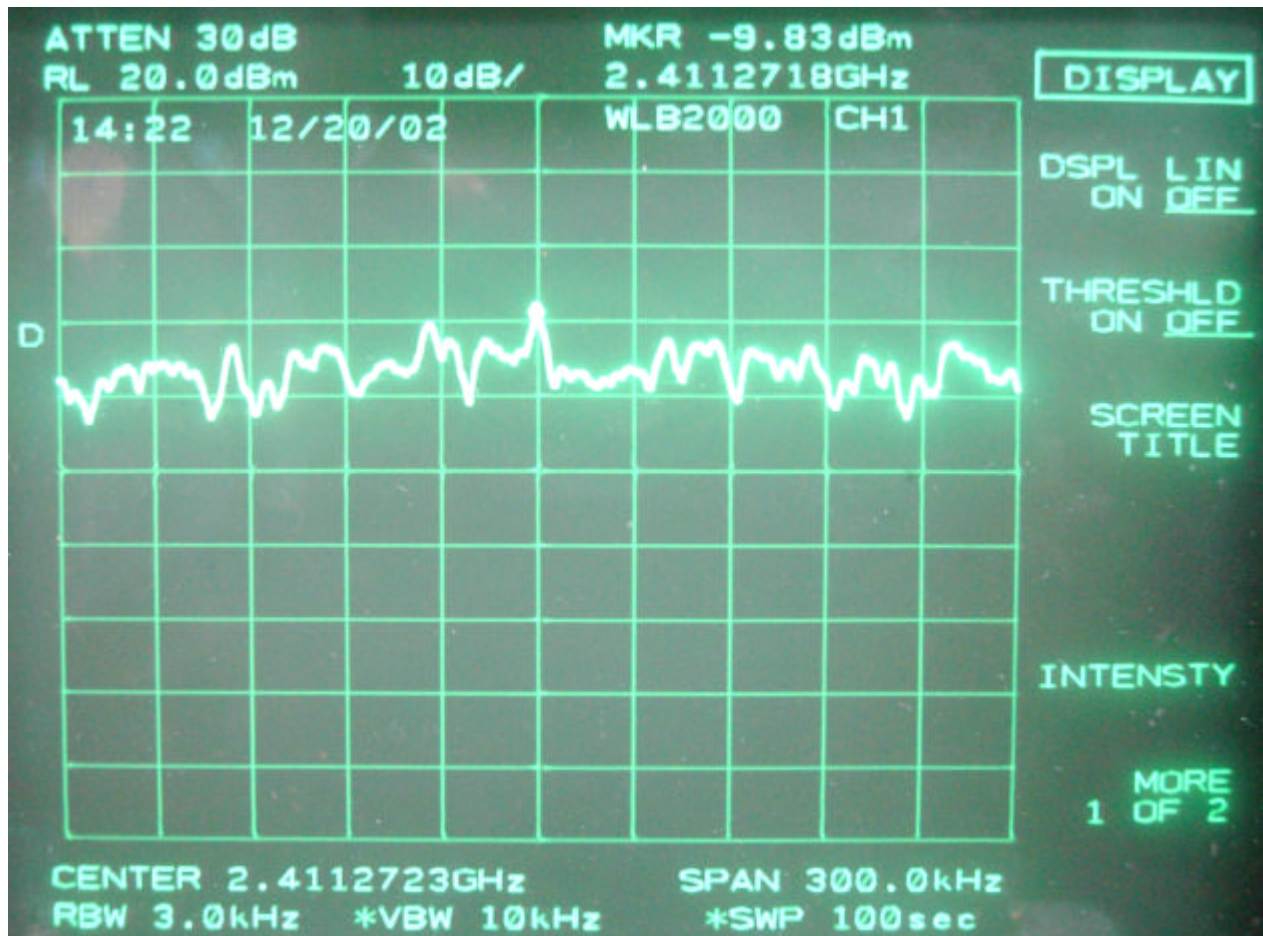




Channel 06

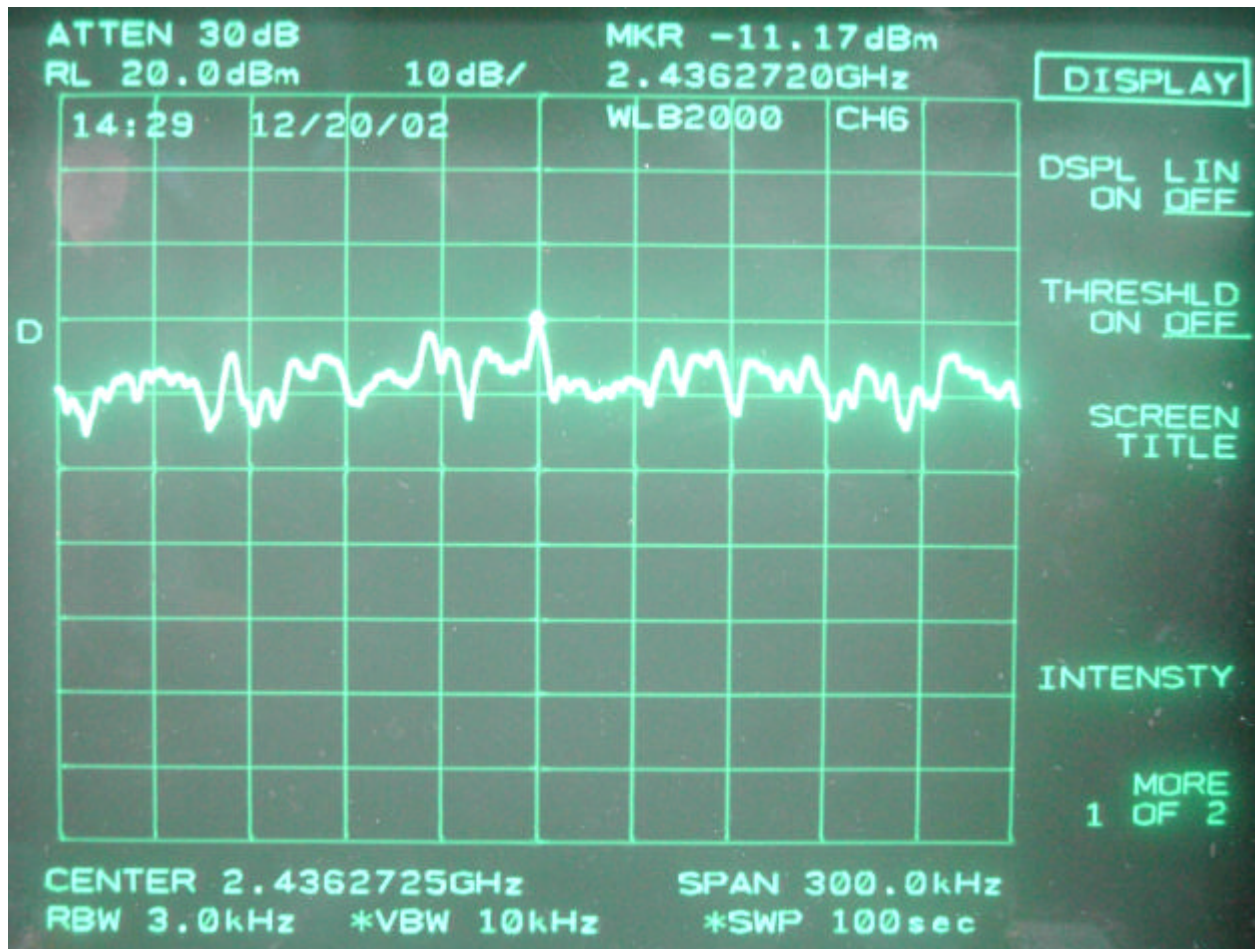



Channel 11

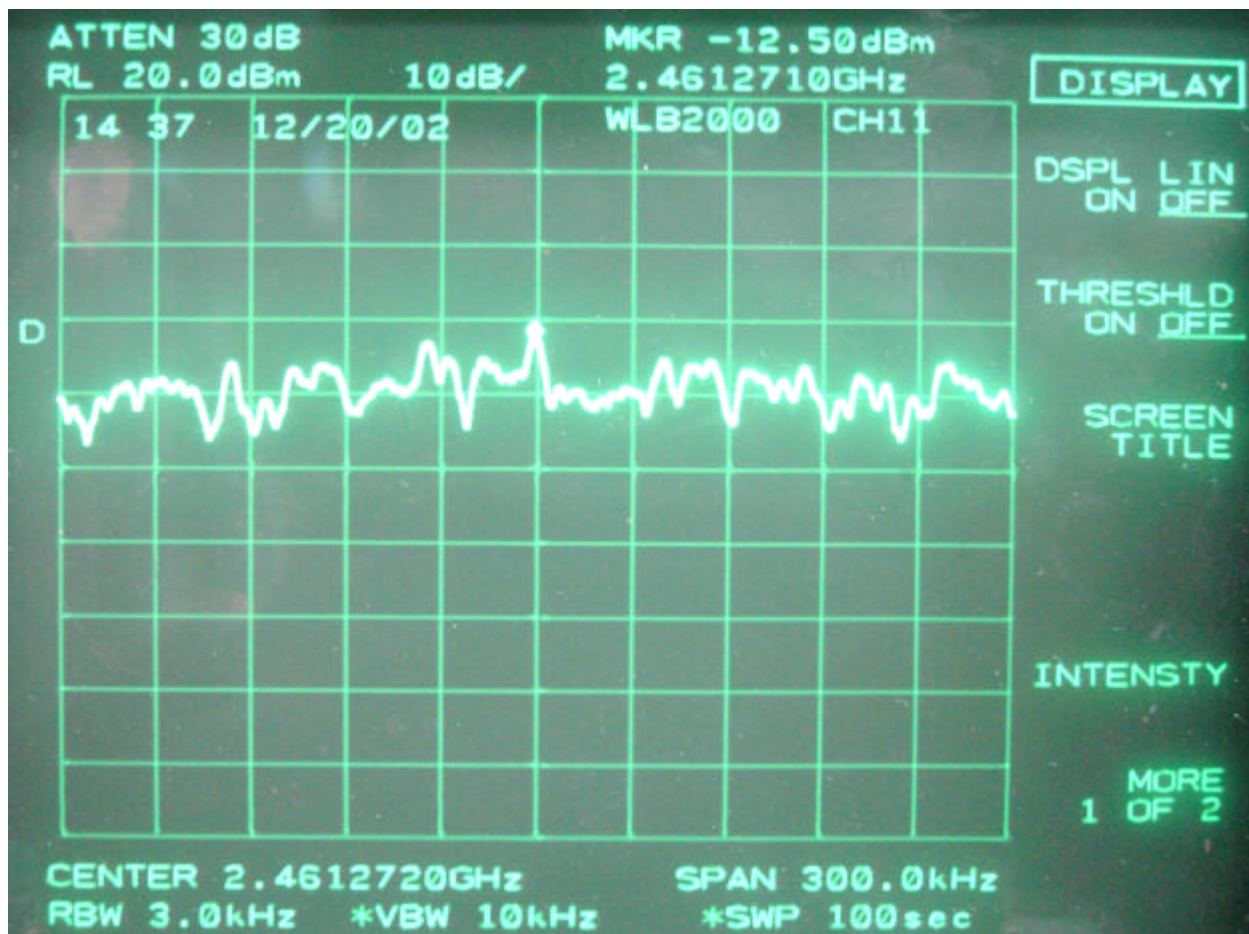

## **Appendix A**

### **Brand Name and Model Name List:**

<b><u>Brand Name:</u></b>	<b><u>Model Name:</u></b>
<b>CAMEO COMMUNICATIONS, INC.</b>	<b>WLB-2000 ; WLB-2001</b>
<b>ALLNET GmbH</b>	<b>ALL0197A ; ALL0185 ; S21195R</b>
<b>SVEC</b>	<b>FD1811 ; FD1811-A</b>
<b>NetComm;</b>	<b>NP6800</b>
<b>X-Net</b>	<b>EWLAP</b>
<b>MRI</b>	<b>MRI-WL003</b>
<b>KYE Systems Corp.</b>	<b>GW-7100AP</b>
<b>KOBIAN Hong Kong Limited</b>	<b>KOB WL460</b>
<b>TARGET INTERNATIONAL BV.</b>	<b>24212</b>
<b>BONA COMPUTER CO.; LTD.</b>	<b>WLAP</b>
<b>Halotek Inc.</b>	<b>WL-XI-1450 ; NB-1000A</b>
<b>Godot Technology Inc.</b>	<b>WL101-BU</b>
<b>Lantech Advance Corp.</b>	<b>WL-790</b>
<b>TRENDware</b>	<b>TEW-230APB ; TEW-230APBX</b>
<b>Starnet</b>	<b>STB 2103</b>
<b>LG CNS Ltd.</b>	<b>LW2110AP ; LW2115AP</b>