

EA230 UAV SDR & Bluetooth Antenna Datasheet



目录

1.	UAV SDR Antenna0 ~ Antenna 7	3
	DJI Antenna Datasheet Ant1	3
	DJI Antenna Datasheet Ant4	7
	DJI Antenna Datasheet Ant5	10
	DJI Antenna Datasheet Ant2	14
	DJI Antenna Datasheet Ant3	17
	DJI Antenna Datasheet Ant4	21
	DJI Antenna Datasheet Ant7	25
	DJI Antenna Datasheet Ant0	29
2.	Bluetooth Antenna.....	32

Revision history

Version	Change notes	Modifier	Date
V1.0		Alaan.he	2024.11.1



1.UAV SDR Antenna0 ~ Antenna 7

DJI Antenna Datasheet Ant1

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant1</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.7dBi@2.4~2.483GHz 1.3dBi@5.2GHz 2.0dBi@5.725~5.875GHz		
7	Efficiency	$\geq 45\%$		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	-		



11	Weight	-		
12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain


Frequency	Efficiency()	E Total. dB(dB)
2400MHz	47%	2.7
2410MHz	45%	2.3
2420MHz	45%	2.4
2430MHz	48%	2.3
2440MHz	51%	2.1
2450MHz	50%	1.8
2460MHz	50%	1.7
2470MHz	53%	1.6
2480MHz	56%	1.5
5150MHz	55%	1.3
5200MHz	46%	0.6
5250MHz	43%	1.1
5725MHz	44%	0.6
5750MHz	45%	0.7
5775MHz	46%	1.1
5800MHz	49%	1.6
5825MHz	51%	2
5850MHz	51%	1.8

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

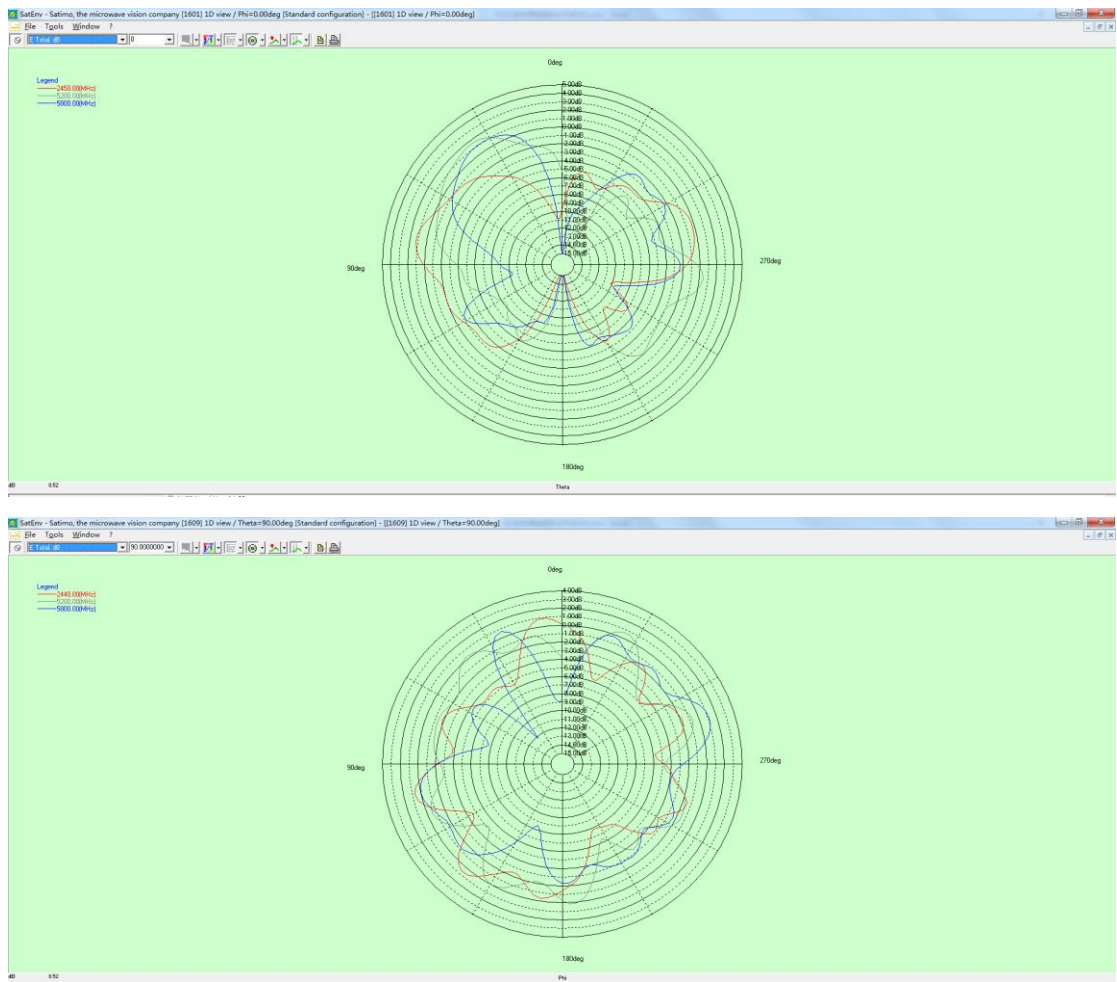

4、 Antenna drawing



DJI Antenna Datasheet Ant4

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant4</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.0 dBi@2.4~2.483GHz 2.5 dBi@5.2GHz 2.7 dBi@5.725~5.875GHz		
7	Efficiency	$\geq 45\%$ SDR		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	-		
11	Weight	-		



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain



Frequency	Efficiency()	E Total. dB(dB)
2400MHz	36%	1. 1
2410MHz	37%	0. 6
2420MHz	38%	0. 4
2430MHz	41%	0. 8
2440MHz	45%	1. 2
2450MHz	45%	1. 6
2460MHz	44%	1. 7
2470MHz	45%	2
2480MHz	46%	2. 4
5150MHz	49%	2. 5
5200MHz	44%	2. 3
5250MHz	44%	1. 6
5725MHz	47%	2. 2
5750MHz	48%	2. 7
5775MHz	46%	2. 6
5800MHz	45%	2. 6
5825MHz	43%	2. 5
5850MHz	43%	2. 5

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

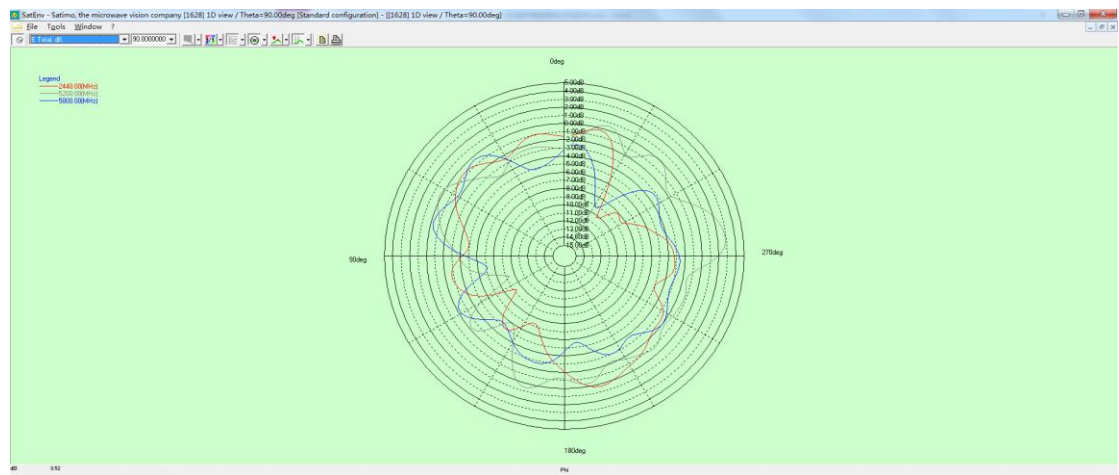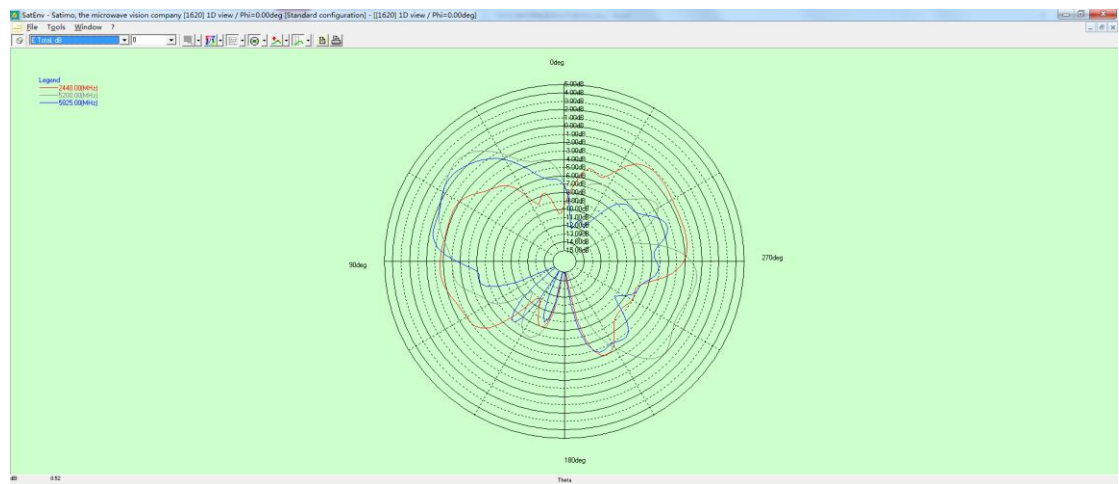

4、 Antenna drawing



DJI Antenna Datasheet Ant5

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant5</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.8dBi@2.4~2.483GHz 1.7dBi@5.2GHz 2.0dBi@5.725~5.875GHz		
7	Efficiency	≥45% SDR		
8	VSWR	≤2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	-		
11	Weight	-		



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain


Frequency	Efficiency()	E Total. dB(dB)
2400MHz	65%	2.3
2410MHz	63%	2.5
2420MHz	61%	2.5
2430MHz	64%	2.8
2440MHz	66%	2.5
2450MHz	63%	2.8
2460MHz	60%	2.5
2470MHz	64%	2.7
2480MHz	66%	3.2
5150MHz	56%	1.6
5200MHz	51%	1.5
5250MHz	55%	1.7
5725MHz	56%	1.8
5750MHz	56%	2.1
5775MHz	56%	2
5800MHz	57%	1.8
5825MHz	56%	1.7
5850MHz	55%	1.7

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

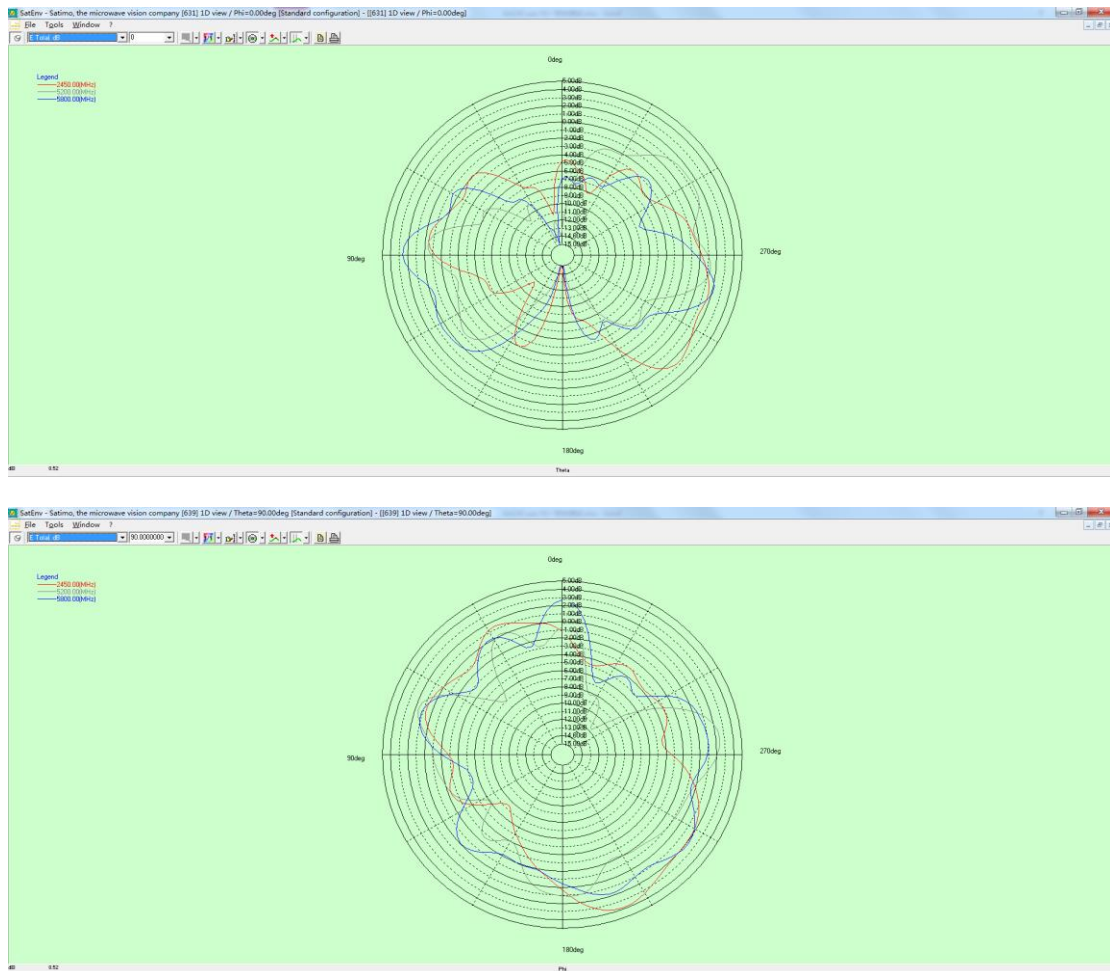

4、 Antenna drawing



DJI Antenna Datasheet Ant2

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant2</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.2dBi@2.4~2.483GHz 2.5dBi@5.2GHz 1.7dBi@5.725~5.875GHz		
7	Efficiency	≥45 % SDR		
8	VSWR	≤2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	-		
11	Weight	-		



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain


Frequency	Efficiency()	E Total. dB(dB)
2400MHz	65%	2.2
2410MHz	61%	1.8
2420MHz	58%	1.4
2430MHz	60%	1.7
2440MHz	62%	2.2
2450MHz	59%	2
2460MHz	57%	1.8
2470MHz	60%	2.1
2480MHz	60%	2.1
5150MHz	57%	2.5
5200MHz	52%	1.7
5250MHz	53%	2.3
5725MHz	49%	1.5
5750MHz	49%	1.7
5775MHz	49%	1.7
5800MHz	49%	1.7
5825MHz	48%	1.5
5850MHz	47%	1.4

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

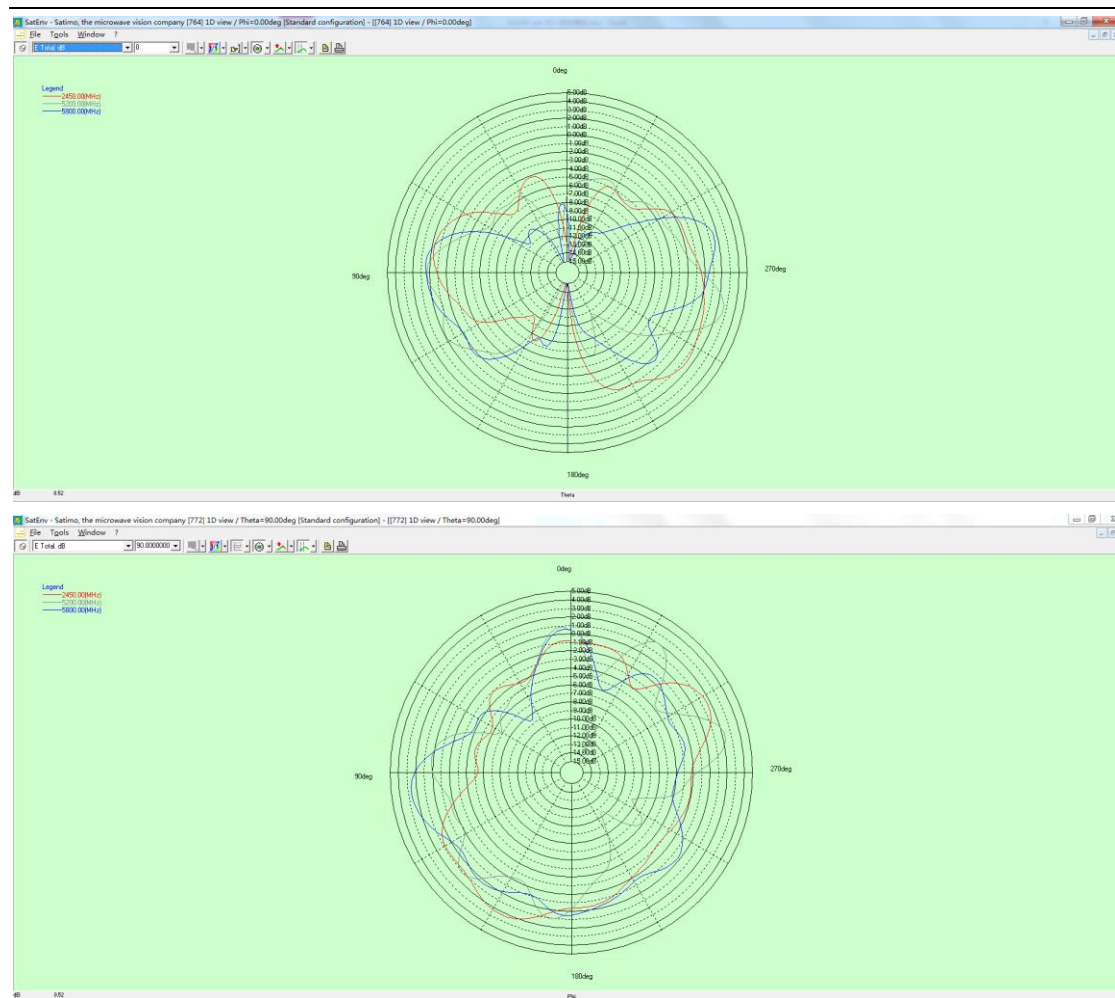

4、 Antenna drawing



DJI Antenna Datasheet Ant3

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant3</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.5dBi@2.4~2.483GHz 2.5dbi@5.2GHz 3.5dBi@5.725~5.875GHz		
7	Efficiency	$\geq 50\%$ SDR		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	-		
11	Weight	-		



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain



Frequency	Efficiency	Gain(dBi)
2400MHz	49%	2.5
2410MHz	50%	2.2
2420MHz	50%	2.1
2450MHz	51%	2.4
2470MHz	50%	2.5
2483MHz	49%	2.4
5150MHz	48%	2.5
5200MHz	49%	2.5
5725MHz	55%	3.5
5775MHz	57%	3.3
5800MHz	55%	3.1
5825MHz	53%	3
5850MHz	52%	3

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

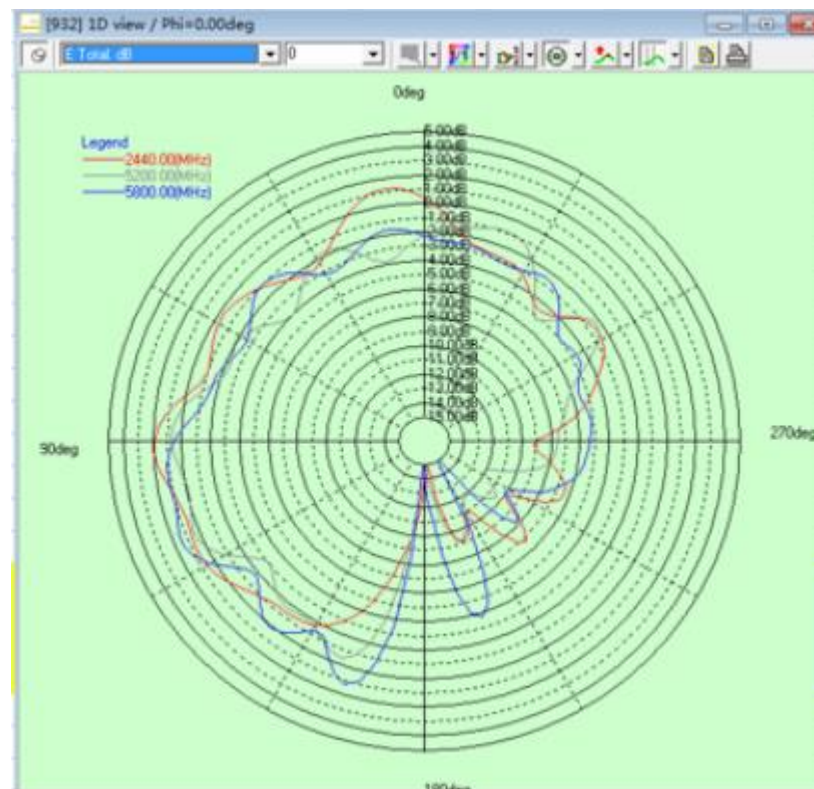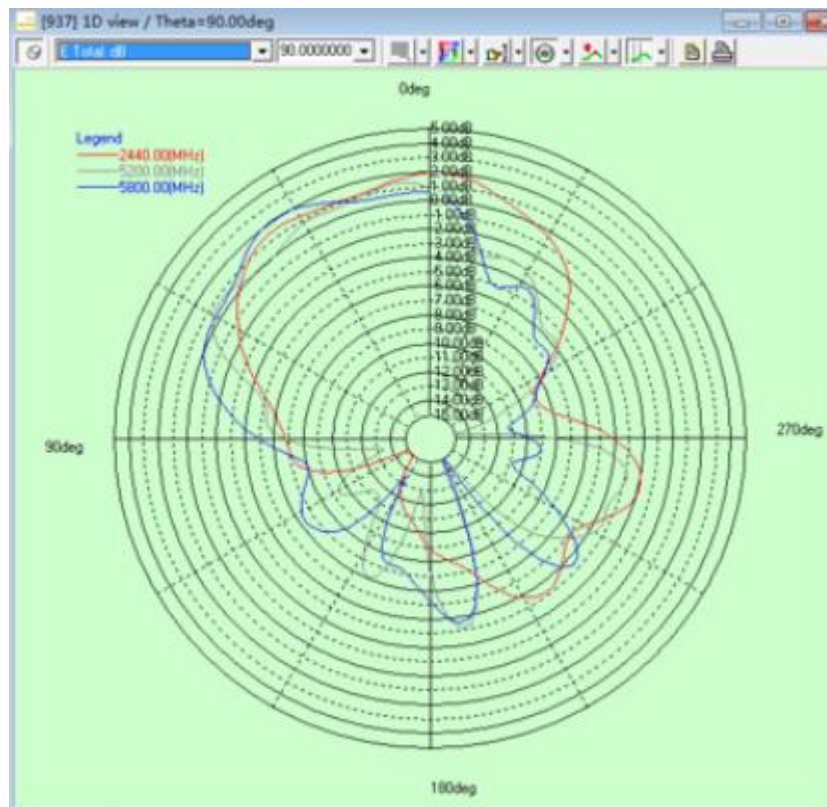



4、 Antenna drawing



DJI Antenna Datasheet Ant6

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant6</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.8dBi@2.4~2.483GHz 2.4dbi@5.2GHz 3.8dBi@5.725~5.875GHz		
7	Efficiency	≥48% SDR		
8	VSWR	≤2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional horizon		
11	Weight			



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain



Frequency	Efficiency	Gain(dBi)
2400MHz	55%	2.8
2410MHz	54%	2.7
2420MHz	52%	2.5
2450MHz	54%	2.6
2470MHz	53%	2.4
2483MHz	52%	2.3
5150MHz	47%	1.4
5200MHz	48%	1.7
5725MHz	53%	3.5
5775MHz	54%	3.5
5800MHz	55%	3.7
5825MHz	57%	3.8
5850MHz	55%	3.7

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

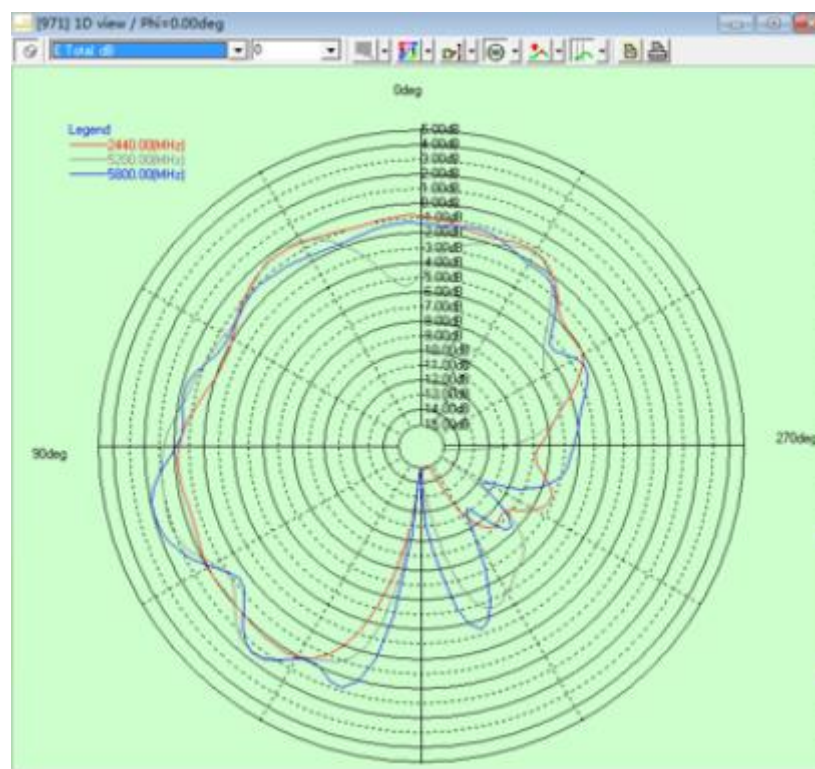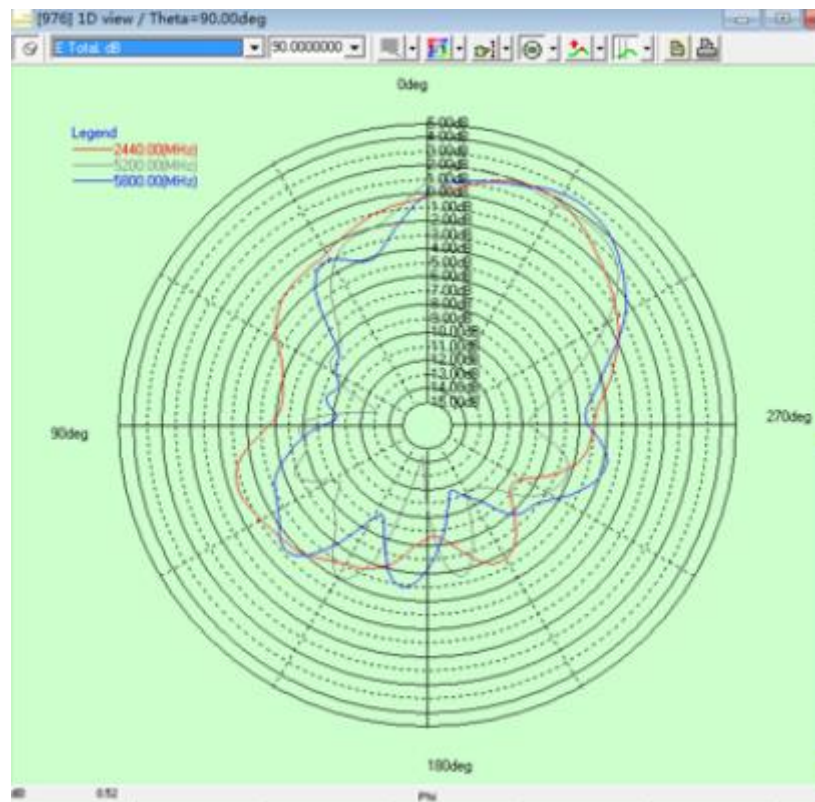



4、 Antenna drawing



DJI Antenna Datasheet Ant7

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant7</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	2.5dBi@2.4~2.483GHz 3.5dbi@5.2GHz 4dBi@5.725~5.875GHz		
7	Efficiency	$\geq 55\%$ SDR		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional horizon		
11	Weight			



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain



Frequency	Efficiency	Gain(dBi)
2400MHz	62%	2.4
2410MHz	64%	2.2
2420MHz	62%	2.4
2450MHz	58%	2.4
2470MHz	60%	2.5
2483MHz	61%	2.4
5150MHz	64%	3.4
5200MHz	62%	3.5
5725MHz	66%	3.8
5775MHz	67%	3.7
5800MHz	66%	4
5825MHz	65%	3.9
5850MHz	65%	3.8

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

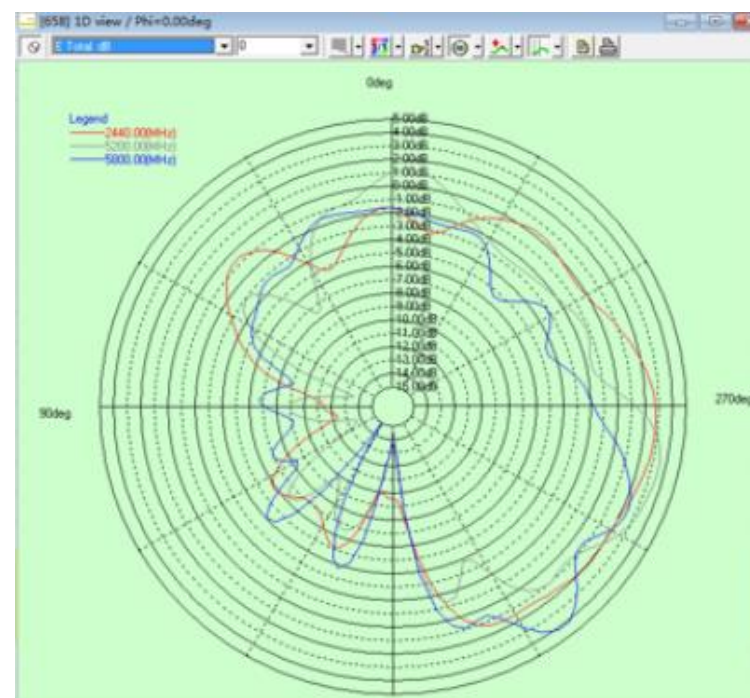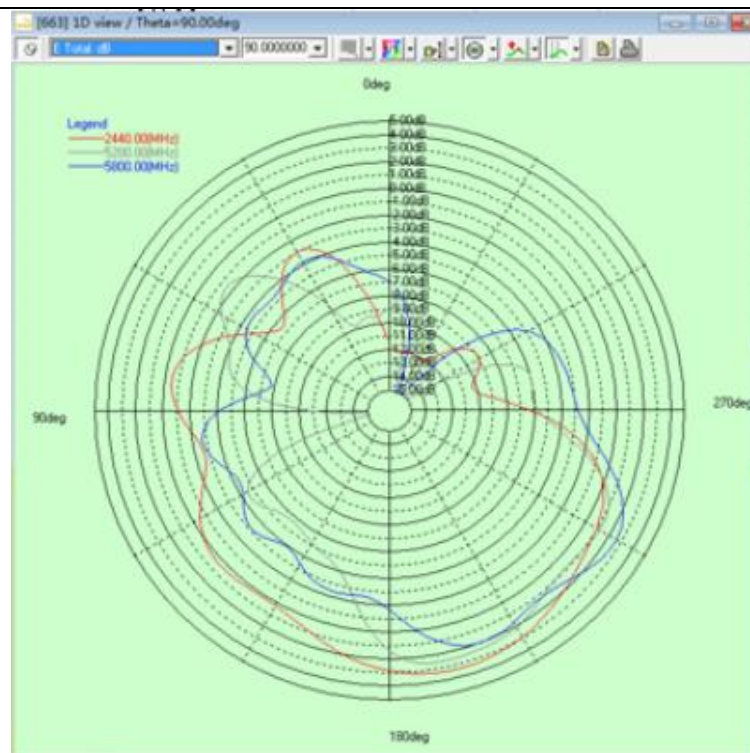



4、 Antenna drawing



DJI Antenna Datasheet Ant0

1、 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	<u>EA230 SDR Ant0</u>		
2	Brand	<u>DJI</u>		
3	Operation Frequency	<u>2.4~2.483GHz;</u> <u>5.125-5.25GHz;</u> <u>5.725~5.85GHz</u>		
4	Connector Type	lpex-1		
5	Impedance	50ohm		
6	Gain	3dbi@2.4~2.483GHz 4dbi@5.2GHz 4dbi@5.725~5.875GHz		
7	Efficiency	≥55% SDR		
8	VSWR	≤2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional horizon		
11	Weight			



12	Antenna type	Dipole		
13	Manufacturer	睿翔		

2、 Antenna Gain


Frequency	Efficiency	Gain(dBi)
2400MHz	53%	2.8
2410MHz	51%	2.7
2420MHz	51%	3
2450MHz	53%	2.8
2470MHz	52%	2.6
2483MHz	50%	2.4
5150MHz	46%	4
5200MHz	48%	4
5725MHz	52%	3.9
5775MHz	53%	3.9
5800MHz	51%	4
5825MHz	50%	4
5850MHz	50%	4

3、 Antenna Pattern

Measurement System: Satimo

Reference Position

Antenna Pattern:

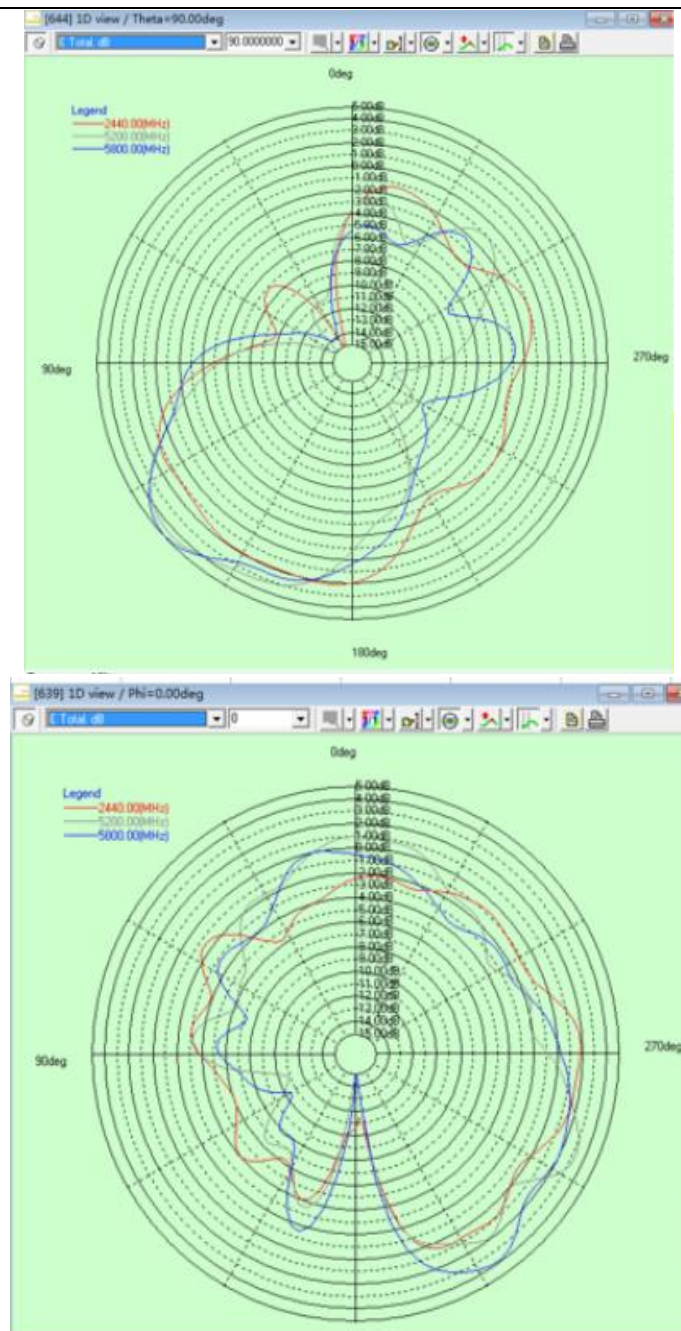

4、 Antenna Structure



2. Bluetooth Antenna

2.1 Basic Specifications

No.	Specification	Descriptions	Notes
1	Antenna Name	EA230 uav BT	
2	Manufacturer	睿翔	
3	Operation Frequency	2.4~2.483GHz;	
4	Connector Type	IpexI	
5	Impedance	50ohm	




6	Gain (MAX)	3.3dBi@2.4~2.483GHz	
7	Efficiency	$\geq 40\%$	
8	VSWR	≤ 2	
9	Antenna Type	Linear polarization Dipole	
10	3dB Beamwidth	Omnidirectional horizon	
11	Weight (with cable)	1g	


2.2 Antenna Gain

Frequency	E Total. dB(dBm)
2400MHz	3
2440MHz	3.3
2480MHz	2.9
2500MHz	2.8

2.3 radiation pattern

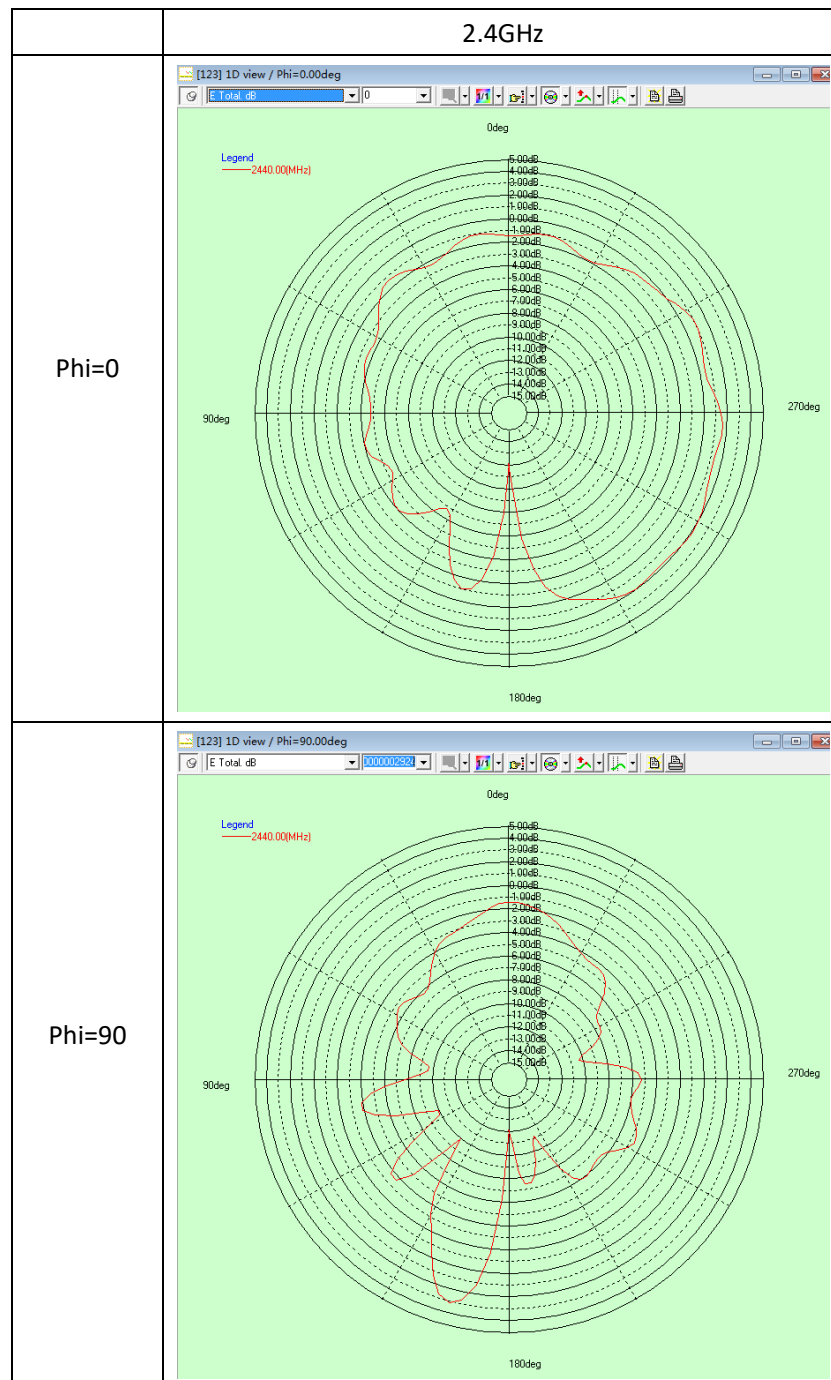

Theta=90

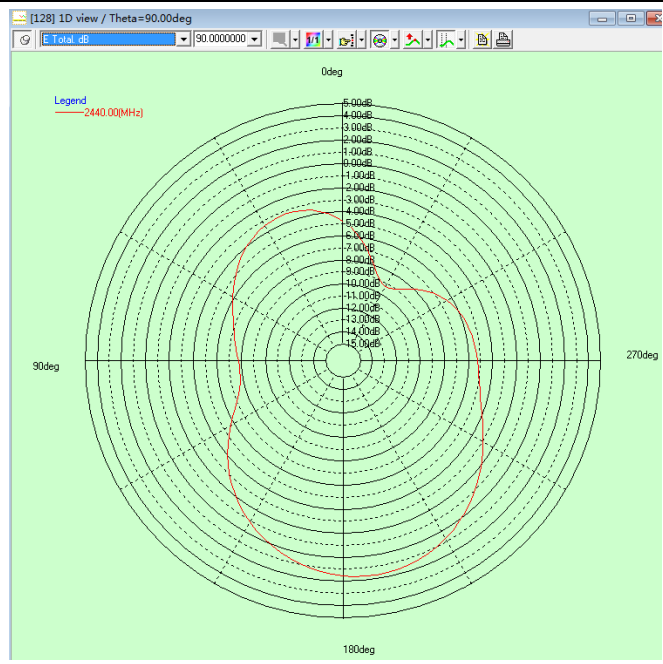

2.4 Structure drawing