



8 0 5 5 T

USER MANUAL

DBTEL is a registered trademark of DBTEL Incorporated.

Copyright © 2001 DBTEL Incorporated. All rights reserved.

No part of this publication may be reproduced or distributed in any form or by any means, or stored in a database or retrieval system, without the prior written permission of the publisher.

DBTEL Incorporated reserves the right to make changes in technical and product specifications without provisional notification.

Address: No.29, Tzu Chiang St, Tu-Cheng, Taipei, Taiwan.

Website: <http://www.dbtel.com.tw>

Warning: Use only approved accessories and battery. Do not connect to any incompatible products; otherwise, it will invalidate the recognition or warranty applying to your mobile phone.

The font type of the legend, graphics and icons in the user manual may differ from that shown on the hand.

Notice

To reduce exposure to electromagnetic radiation, use it with properly.

SAR Radiation Limit: 1.6 W/Kg

Tested SAR Rating: 0.485 W/Kg

Safety Guarantee

DBTEL handset is the first Specific Absorption Rate(SAR) compliance in Taiwan.

Safety Is The First

Product safety is always the first priority of DBTEL Incorporated. With the SAR Safety Certificate, the persistence we insist on has been proved that to be right, again. Customer's safety is of paramount importance to us, there is no exception.

A declaration of conformity to the essential requirements.

Identification of the North America in which the equipment is intended to be used.

Identification of the public telecommunication network to which the equipment is intended to be connected.

“ Hereby, we <DBTEL Inc.>, declares that this **8055T** is in compliance with the essential requirements and other relevant provisions of “FCC Part2(Section2 1093) & FCC OET Bulletin 65”.

Quick & Easy

This page provides some of the basic operations for using your phone. For more detailed information, refer to relevant function show.

1. Remove the battery and insert your SIM card, then re-install and charge the battery. For more details, please refer to “Installation”.
2. Press and hold  to turn on your phone. Wait until the name of the network operator appears on the screen.

Making calls

In idle mode, key in the area code, the phone number and press  to make a call.

Answering calls

Press  or  (Accept) to answer a call. Alternatively, simply open the phone cover to answer a call if the handset cover is closed (if “Flip answer” is activated).

Terminating calls

Press  or  (End) to end the active call. Alternatively, simply close the phone cover to end.

Refusing calls

Press  or  (Reject) or simply close the handset cover to refuse an

incoming call.

Emergency calls

In idle mode, key in 112 and press  to contact the emergency services center.

Clear screen

Press and hold  to clear an editing entry.

Adjusting the earpiece volume

You can adjust the earpiece volume when calling using  (louder) or  (lower) to increase or decrease the earpiece volume.

Add new phone number

The easy operating steps of new added telephone numbers.

1. In idle mode, key in the phone number and press  (Save).
2. Select “name” or “number”, edit and press  (save).
3. If “Save To SIM” is selected. Press  (save). If “Save To Handset” is selected. Press  (enter) to the group setting. Select the desired group and press  (save).

- Scroll to the required fields with .
- Switch between the input methods by pressing .
- For information on how to enter the characters, please refer to “Input text” in “Call Functions”.

Menu Map


1. CAMERA



Photo Album	
photo Size	Large Medium
Photo Quality	High Normal Low
Photo Effect	Normal Brown
Self Timer	Disabled 10 Seconds 15 Seconds 30 Seconds
Night Mode	Disable Enabled
Profiles	mode(60Hz) mode(50Hz)
Settings	Photo Flash Capture Sound Auto Off

Menu Map

2. Phone book

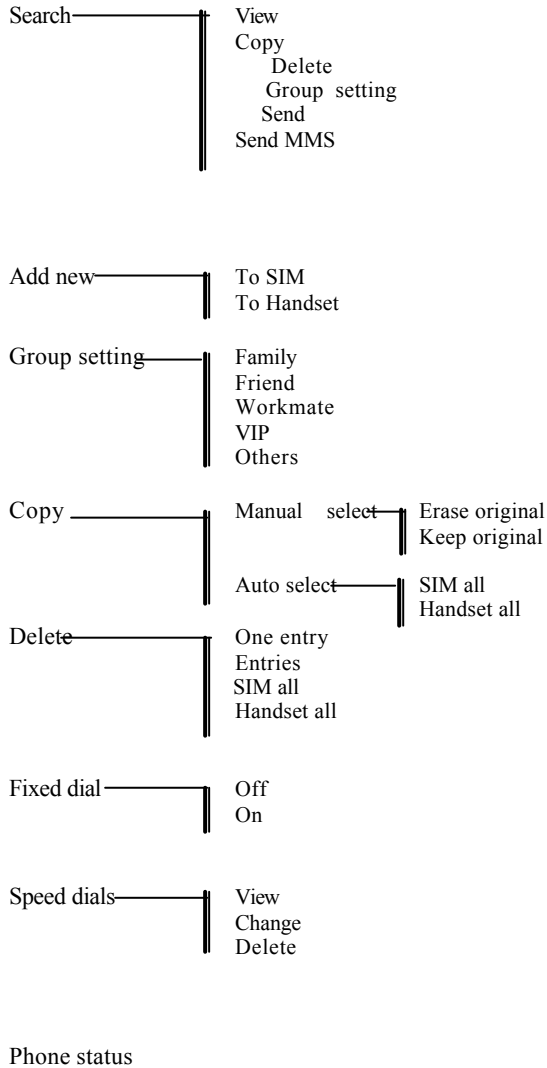


Menu Map

3. Messages




SMS	Inbox	Delete Extract number Text reply Voice reply Text forward
	Outbox	Delete Extract number Change Text forward
	Write message	Send Save Send & save Send to many
	Draftbox	Send Send to many Change Delete
	Delete message	Select Delete Inbox Outbox Draftbox Delete all message
	Voice box	Listen to voice Number
	Cell broadcast	Broadcast Channel
	Message settings	SMS validity SMS center SMS Report AudSMS Frequency

Menu Map

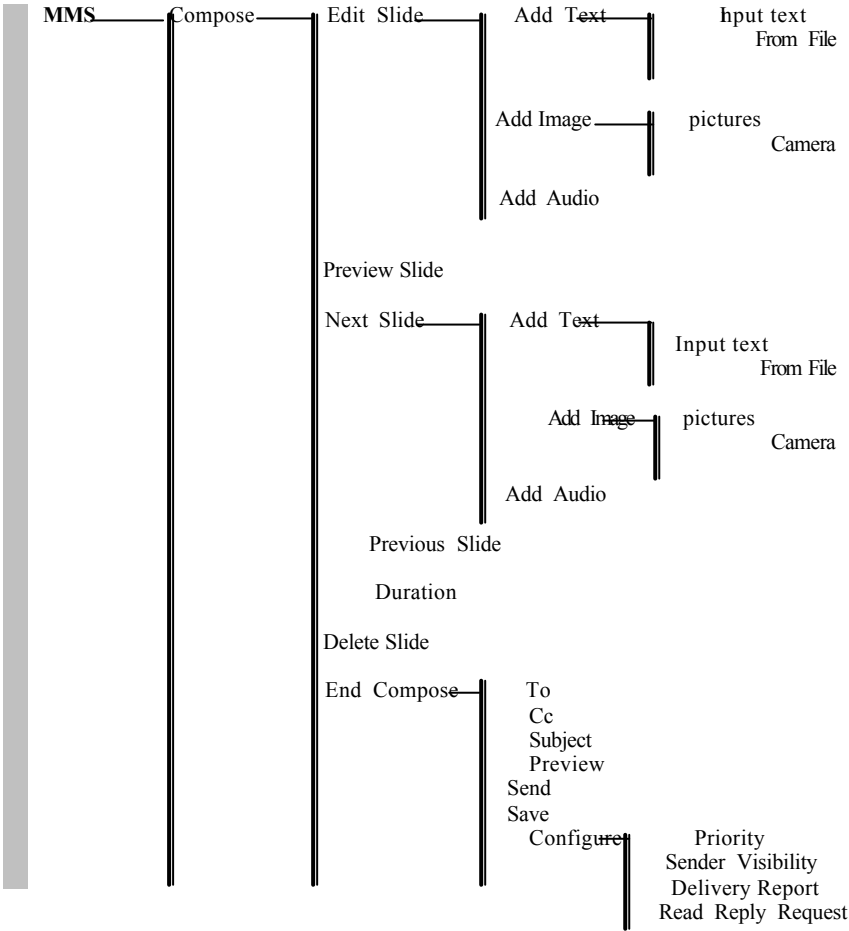


Menu Map

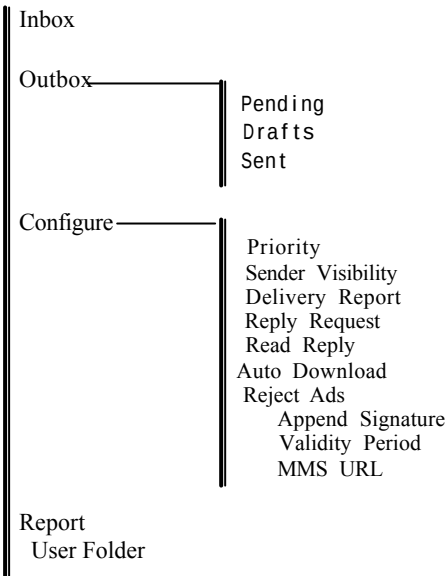

Menu Map

4. Call meters



Missed	Save Delete Delete all
Received	Save Delete Delete all
Dialled	Save Delete Delete all
Last call time	Off On
Call alert	Off 1 minute 3 minutes 6 minutes 10 minutes
Show call duration	Outgoing Incoming Lifetime
During call	Off Time Cost Time & cost
Charge rate	
Total cost	

Menu Map

5. Profiles



- General
 - Activate Settings
 - Incoming call alert
 - Incoming ringer
 - Alarm, ringer
 - SMS ringer
 - Volume level
 - Keytone
 - Keypad Volume
- Silent
- Outdoor
- Economic
- Restore

Menu Map


6. Date & Time



Alarm	Off Once Everyday
Calendar	
Date & Time	
Display mode	No display Date only Time only Date & Time
Power off	Off Once Everyday
Format	Date format YYYY/MM/DD DD/MM/YYYY MM/DD/YYYY
	Time format 12 hour 24 hour
Stop watch	
Time Different	
Count down	
Alarm at hour	

Menu Map

7.Settings

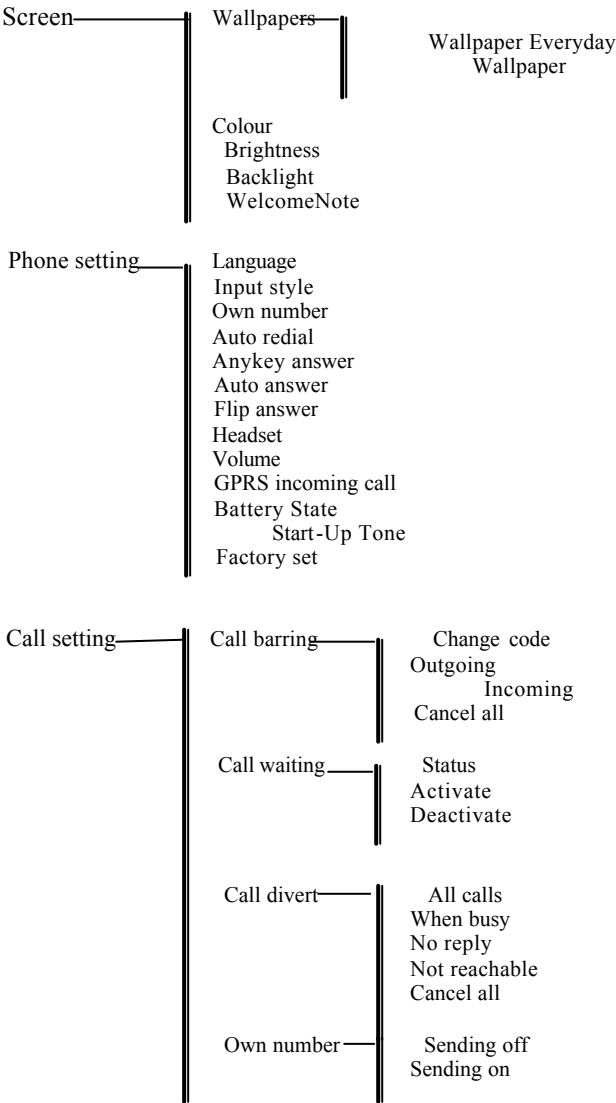

Menu Map

