




Model:MD1001

FCC ID: 2ARI5-MD1001



MagDock User Manual

Contents

Welcome & Intro	1
Package Includes	2
Features	3
Compatibility	4
Parts & Specifications	5
Specs	6
Quick Setup	7
LED Lighting Indicator & Buttons	20
Warranty	21
Exclusions & Limitations	22
Important	23
Customer Service	24
Legal	25
FCC WARNING	27

Welcome & Intro

Thank you for purchasing the PITAKA MagDock. The PITAKA MagDock is an all-in-one wireless charging dock for your phone, Apple Watch, or other Qi-supported devices. With the magnets embedded, the MagDock holds, aligns and charges your devices instantly on contact. Featuring a cylindrical design with a twistable top, the MagDock charges multiple devices with a minimum space needed while allows you to swivel the dock' s top for the best viewing angle.

1

Package Includes

- MagDock Charging Stand x 1
- AC 30W Charger x 1
- Type-C to Type-C/Lighting charging cable, 1m/3ft" length, x 1
- Apple Watch Ledge x 4
- Apple Watch Band Locker x 1
- Nano Gel Base x 1
- Metal Plate x 1
- Alignment Film x 1
- MagPad Charging Pad x 1 (optional.)
- Traveling Pouch x 1 (optional.)
- User' s Manual x 1

2

Features

- Charges multiple devices. The MagDock can charge up to 3 of your Qi-supported devices, including an Apple Watch all at once.
- Twistable top. You can swivel the dock' s top so that you can easily view your phone while seated.
- Stable and secure. The magnetic design ensures the devices would be held and charged stably and securely once you place them on the charging spot.
- Minimum space needed. The compact cylindrical design allows you to use it wherever you want, for office, home or traveling.

3


Compatibility

The PITAKA MagDock is optimized to work with iPhone 8, iPhone 8 Plus, iPhone X, iPhone XR, iPhone Xs, iPhone Xs Max using a relevant MagCase or affixing metal plates. It also charges other devices with Qi wireless technology using a relevant MagCase or affixing metal plates.

- The MagDock delivers up to 7.5W of fast charging to the iPhone when using iOS 11.2 or later.
- Do not wireless charge any devices that are NOT Qi-compatible with MagDock.

4

Parts & Specifications



5

Specs


Items	Specification
Input Voltage	DC 5V/9V
Input Current	3.0A
Output Power (Phone)	10W
Output Power (Apple Watch)	2.5W
Transmission Distance	≤5mm
Transmission Efficiency (Phone)	About 72%
Transmission Efficiency (Apple Watch)	About 58%
Charging Port	Type C
Color	White
Materials	PC
Weight	380g
Size	H*Φ = 92.5*89.7mm
Operating Temperature	-10~30°C
Storage Temperature	-20~50°C

6

Quick Setup

I. Charge a phone on the twistable top

1. Connect the supplied AC wall adapter to the MagDock and to the wall outlet.

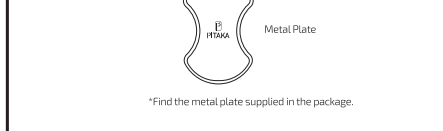


2. Get your phones ready.

- 1). If you are a MagCase user, put on your relevant MagCase to your phone and it is ready to use.



7

2). If you are not using a MagCase, following the next steps to affix the metal plates before using MagDock:




*Find the metal plate supplied in the package.



*Stick it on the back of the phone properly on the correct position with the help of the alignment film.

8

3. Swivel the MagDock' s top for the best angle needed.




4. Place the wireless charging compatible device on the wireless charging area as shown in the illustration below.



9


5. Make sure the proper position of the device is aligned over the center of the charging area. Charging will begin on contact.



10

II. Charge an Apple Watch on MagDock

1. Connect the supplied AC wall adapter to the MagDock and to the wall outlet.



11

2. Set up the proper Apple Watch ledge. Make sure the ledge size matches your watch size.



*You can find your watch size information on the back of the watch.

12

3. Get your Apple Watch ready.

- 1). If your Apple Watch has a linked loop band, e.g. the sports loop, the Milanese loop band, the stainless steel link bracelet band, just unfold the strap band to a proper size, slid it from the top of the MagDock until the watch sits on the ledge stably. Make sure the crown button is up-sided.



13

